

FCC TEST REPORT

REPORT NO.: RF940414L04A

MODEL NO.: WLH3015 (refer to page 6 for other model)

RECEIVED: Dec. 20, 2005

TESTED: Dec. 20, 2005 ~ Jan. 02, 2006

ISSUED: Jan. 06, 2006

APPLICANT: ASKEY COMPUTER CORP.

ADDRESS: 10F, No.119, Chien Kang Rd., Chung-Ho,
Taipei, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Kueishan, Taoyuan,
Taiwan, R.O.C.

This test report consists of 74 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	7
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	8
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	10
3.4	DESCRIPTION OF SUPPORT UNITS	10
4	TEST TYPES AND RESULTS	11
4.1	CONDUCTED EMISSION MEASUREMENT	11
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	11
4.1.2	TEST INSTRUMENTS	11
4.1.3	TEST PROCEDURES	12
4.1.4	DEVIATION FROM TEST STANDARD	12
4.1.5	TEST SETUP	13
4.1.6	EUT OPERATING CONDITIONS	13
4.1.7	TEST RESULTS	14
4.2	RADIATED EMISSION MEASUREMENT	20
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	20
4.2.2	TEST INSTRUMENTS	21
4.2.3	TEST PROCEDURES	22
4.2.4	DEVIATION FROM TEST STANDARD	22
4.2.5	TEST SETUP	23
4.2.6	EUT OPERATING CONDITIONS	23
4.2.7	TEST RESULTS	24
4.3	6dB BANDWIDTH MEASUREMENT	33
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	33
4.3.2	TEST INSTRUMENTS	33
4.3.3	TEST PROCEDURE	34
4.3.4	DEVIATION FROM TEST STANDARD	34
4.3.5	TEST SETUP	34
4.3.6	EUT OPERATING CONDITIONS	34
4.3.7	TEST RESULTS	35
4.4	MAXIMUM PEAK OUTPUT POWER	43
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	43
4.4.2	TEST INSTRUMENTS	43
4.4.3	TEST PROCEDURES	44
4.4.4	DEVIATION FROM TEST STANDARD	44



4.4.5	TEST SETUP	44
4.4.6	EUT OPERATING CONDITIONS	44
4.4.7	TEST RESULTS	45
4.5	POWER SPECTRAL DENSITY MEASUREMENT	47
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	47
4.5.2	TEST INSTRUMENTS.....	47
4.5.3	TEST PROCEDURE.....	48
4.5.4	DEVIATION FROM TEST STANDARD	48
4.5.5	TEST SETUP	48
4.5.6	EUT OPERATING CONDITIONS	48
4.5.7	TEST RESULTS	49
4.6	BAND EDGES MEASUREMENT.....	57
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	57
4.6.2	TEST INSTRUMENTS.....	57
4.6.3	TEST PROCEDURE.....	57
4.6.4	DEVIATION FROM TEST STANDARD	57
4.6.5	EUT OPERATING CONDITION	57
4.6.6	TEST RESULTS	58
4.7	ANTENNA REQUIREMENT	70
4.7.1	STANDARD APPLICABLE	70
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	70
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	71
6	INFORMATION ON THE TESTING LABORATORIES	73
	APPENDIX-A.....	A-1

1 CERTIFICATION

PRODUCT : Wireless LAN PCI Card
MODEL NO.: WLH3015 (refer to page 6 for other model)
BRAND: Askey
(refer to page 6 for other brand)
APPLICANT : ASKEY COMPUTER CORP.
TESTED: Dec. 20, 2005 ~ Jan. 02, 2006
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS : FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Windy Chou , **DATE:** Jan. 06, 2006
Windy Chou

TECHNICAL
ACCEPTANCE : Long Chen , **DATE:** Jan. 06, 2006
Responsible for RF Long Chen

APPROVED BY : Gary Chang , **DATE:** Jan. 06, 2006
Gary Chang / Supervisor

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -15.53dB at 0.693MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -4.16dB at 1641.00MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.55 dB
	200MHz ~1000MHz	3.58 dB
	1GHz ~ 18GHz	1.10 dB
	18GHz ~ 40GHz	0.91 dB

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless LAN PCI Card
MODEL NO.	WLH3015
POWER SUPPLY	3.3Vdc from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps (Turbo mode: up to 125bps *see Note 5)
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11 for Normal mode 1 for turbo mode
MAXIMUM OUTPUT POWER	32.961mW
ANTENNA TYPE	Dipole antenna with 2dBi gain
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. This report is issued as a supplementary report of ADT report no.: RF940414L04.
2. This report is prepared for FCC class II permissive change. Please refer to the information as below for the difference compared with the original design.

Original	Class II Change
Antenna without antenna connector	Antenna with antenna connector
Original PCB layout	Modified PCB layout
Leaded components	Lead-free components
Original PA	Modified PA

3. The EUT complies with IEEE 802.11g standards and backwards compatible with IEEE 802.11b products.
4. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
5. This EUT is capable of providing data rates of up to 125Mbps in Turbo Mode depending upon reception quality.
6. The models as below are identical to each other expect for their brand name.

Model Name	Brand	Description
F5D7001	Belkin	With turbo mode

7. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES


For 802.11b/g: Eleven channels are provided to this EUT for normal mode.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

For 802.11g: One channel is provided to this EUT for turbo mode.

Channel	Frequency
6	2437 MHz

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

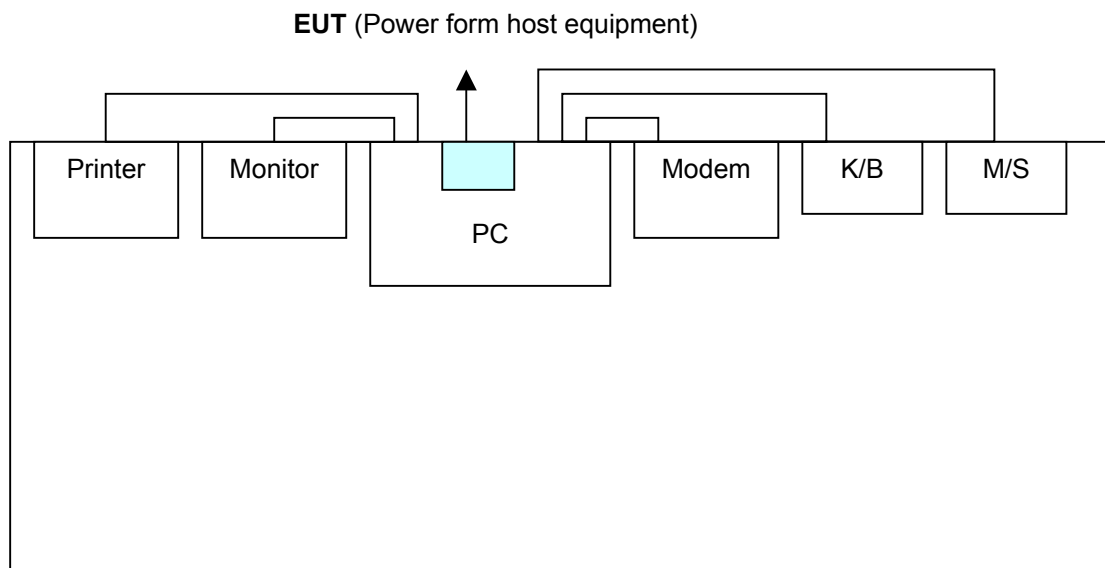

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE<1G	RE≥1G	APCM	
-	√	√	√	√	NA

Where **PLC**: Power Line Conducted Emission
RE≥1G: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz
APCM: Antenna Port Conducted Measurement

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6
802.11g Turbo	6	6	OFDM	BPSK	12

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11g Turbo	6	6	OFDM	BPSK	12

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	DSSS	CCK	11
802.11g	1 to 11	1, 11	OFDM	BPSK	6
802.11g Turbo	6	6	OFDM	BPSK	12

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11g Turbo	6	6	OFDM	BPSK	12

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is an Wireless LAN PCI Card. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)
ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PERSONAL COMPUTER	SoftStar	Hetis 865G	380125734	FCC DoC Approved
2	LCD MONITOR	ACER	AL1721	ET.L0408.01040 4001F9PK00	FCC DoC Approved
3	USB KEYBOARD	BTC	5200U	G09302046421	E5XKB5122U
4	MOUSE	HP	M-S69	M4-010569	INZ211443
5	PRINTER	EPSON	LQ-300+	DCGY047265	FCC DoC Approved
6	MODEM	ACEEX	1414V/3	0401008248	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA
3	1.5m shielded cable.
4	1.8m shielded cable.
5	1.2m shielded cable.
6	1.2m shielded cable.

NOTE: All power cords of the above support units are non shielded (1.8m).

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 11, 2006
RF signal cable Woken	5D-FB	Cable-HYC01-01	Jan. 09, 2006
LISN SCHWARZBECK	NNBL 8226-2	8226-142	May 02, 2006
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Feb. 15, 2006
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under Limit - 20dB was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

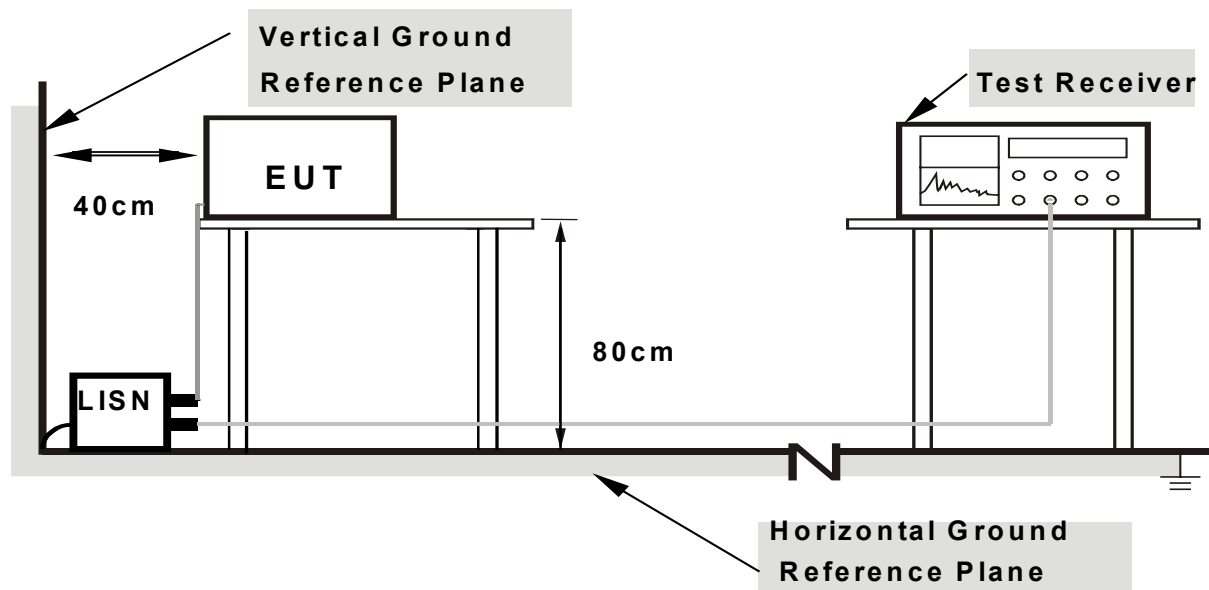

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Plug the EUT to a Computer system placed on a testing table.
- b. The Computer ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The computer system show "H" messages on its screen.
- d. The computer system show "H" messages to modem.
- e. The computer system sent "H" messages to printer, and the printer prints them on paper.
- f. Repeated c ~e.


4.1.7 TEST RESULTS

Conducted Worst-Case Data

EUT	Wireless LAN PCI Card	MEASUREMENT DETAIL	
MODEL	WLH3015	PHASE	Line 1
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.11	46.11	-	46.22	-	64.08	54.08	-17.86	-
2	0.255	0.11	41.00	-	41.11	-	61.61	51.61	-20.50	-
3	0.564	0.15	34.36	-	34.51	-	56.00	46.00	-21.49	-
4	1.762	0.26	33.25	-	33.51	-	56.00	46.00	-22.49	-
5	2.324	0.28	34.01	-	34.29	-	56.00	46.00	-21.71	-
6	3.457	0.35	35.19	-	35.54	-	56.00	46.00	-20.46	-
7	23.021	1.22	41.77	-	42.99	-	60.00	50.00	-17.01	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

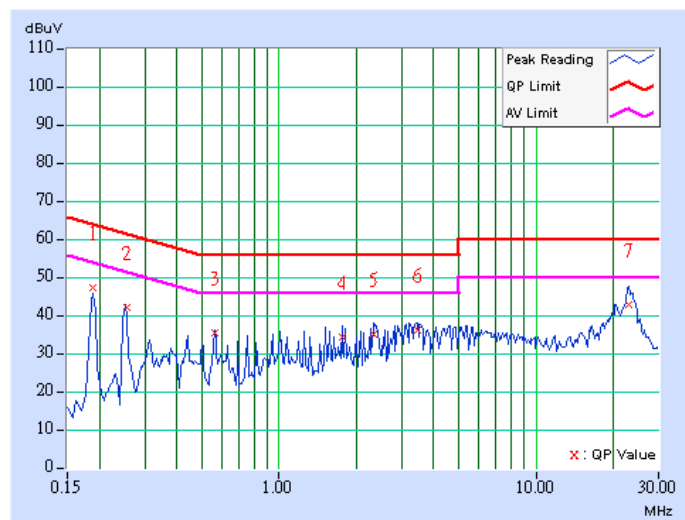

EUT	Wireless LAN PCI Card	MEASUREMENT DETAIL	
MODEL	WLH3015	PHASE	Line 2
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.11	44.70	-	44.81	-	64.08	54.08	-19.27	-
2	0.252	0.11	41.30	-	41.41	-	61.71	51.71	-20.30	-
3	0.314	0.11	40.50	-	40.61	-	59.86	49.86	-19.25	-
4	0.377	0.11	40.30	-	40.41	-	58.35	48.35	-17.94	-
5	0.377	0.11	40.20	-	40.31	-	58.35	48.35	-18.04	-
6	0.693	0.17	40.11	-	40.28	-	56.00	46.00	-15.72	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

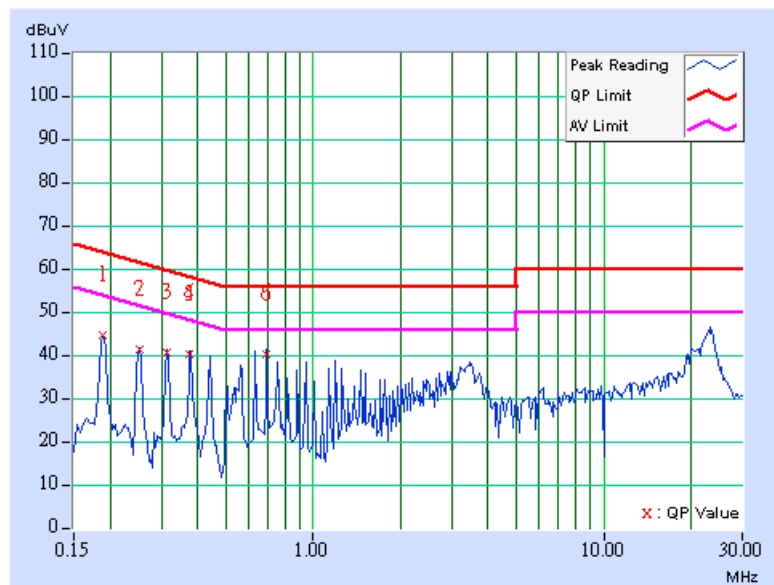

EUT	Wireless LAN PCI Card	MEASUREMENT DETAIL	
MODEL	WLH3015	PHASE	Line 1
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.11	45.80	-	45.91	-	64.08	54.08	-18.17	-
2	0.252	0.11	41.65	-	41.76	-	61.71	51.71	-19.95	-
3	0.443	0.12	32.82	-	32.94	-	57.01	47.01	-24.07	-
4	1.832	0.26	36.25	-	36.51	-	56.00	46.00	-19.49	-
5	3.281	0.34	35.45	-	35.79	-	56.00	46.00	-20.21	-
6	23.426	1.25	41.04	-	42.29	-	60.00	50.00	-17.71	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

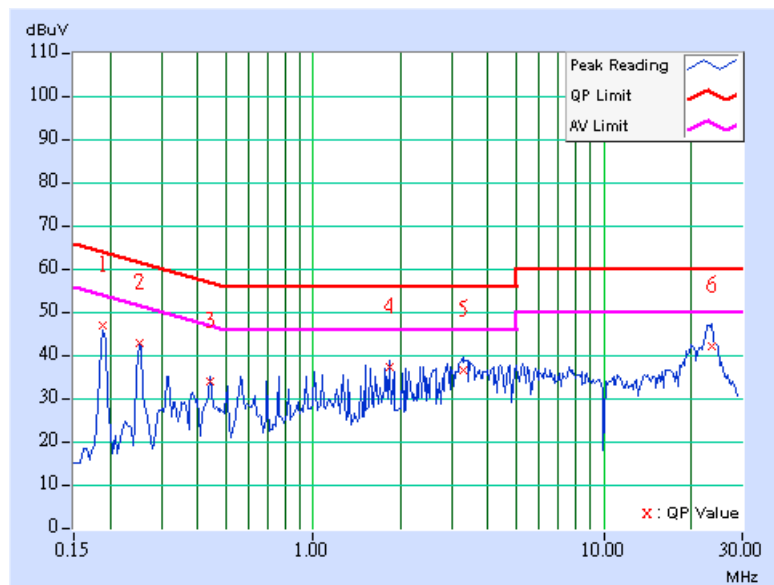

EUT	Wireless LAN PCI Card	MEASUREMENT DETAIL	
MODEL	WLH3015	PHASE	Line 2
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.11	44.32	-	44.43	-	64.08	54.08	-19.65	-
2	0.252	0.11	41.01	-	41.12	-	61.71	51.71	-20.59	-
3	0.314	0.11	40.50	-	40.61	-	59.86	49.86	-19.25	-
4	0.380	0.11	40.80	-	40.91	-	58.27	48.27	-17.36	-
5	0.693	0.17	40.30	-	40.47	-	56.00	46.00	-15.53	-
6	22.904	0.80	38.25	-	39.05	-	60.00	50.00	-20.95	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

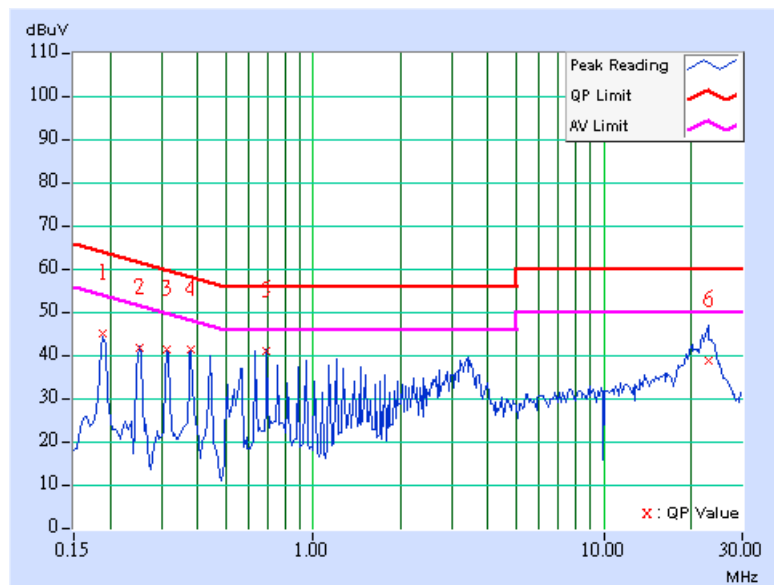

EUT	Wireless LAN PCI Card	MEASUREMENT DETAIL	
MODEL	WLH3015	PHASE	Line 1
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.11	45.27	-	45.38	-	64.08	54.08	-18.70	-
2	0.252	0.11	41.17	-	41.28	-	61.71	51.71	-20.43	-
3	0.318	0.11	33.23	-	33.34	-	59.76	49.76	-26.42	-
4	0.568	0.15	32.83	-	32.98	-	56.00	46.00	-23.02	-
5	1.832	0.26	35.32	-	35.58	-	56.00	46.00	-20.42	-
6	22.883	1.21	35.95	-	37.16	-	60.00	50.00	-22.84	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

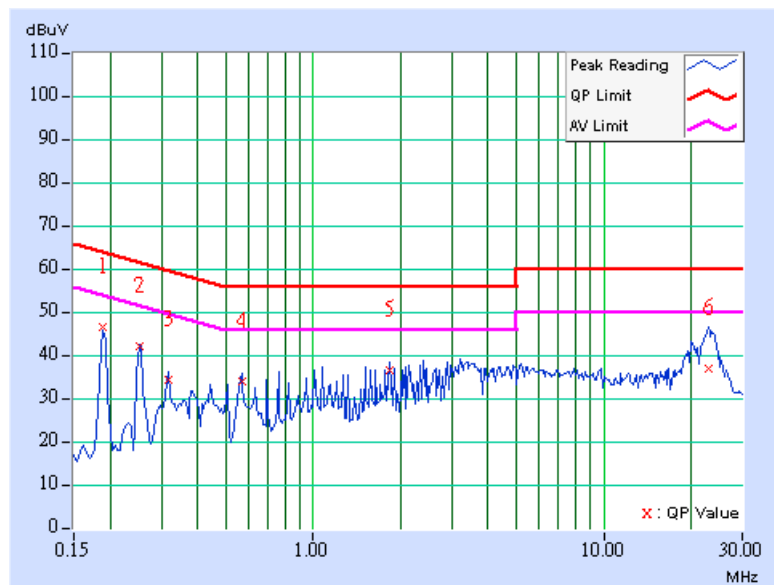

EUT	Wireless LAN PCI Card	MEASUREMENT DETAIL	
MODEL	WLH3015	PHASE	Line 2
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.11	44.00	-	44.11	-	64.08	54.08	-19.97	-
2	0.252	0.11	40.80	-	40.91	-	61.71	51.71	-20.80	-
3	0.380	0.11	41.33	-	41.44	-	58.27	48.27	-16.83	-
4	0.443	0.12	40.20	-	40.32	-	57.01	47.01	-16.69	-
5	3.480	0.36	36.19	-	36.55	-	56.00	46.00	-19.45	-
6	22.906	0.80	39.60	-	40.40	-	60.00	50.00	-19.60	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

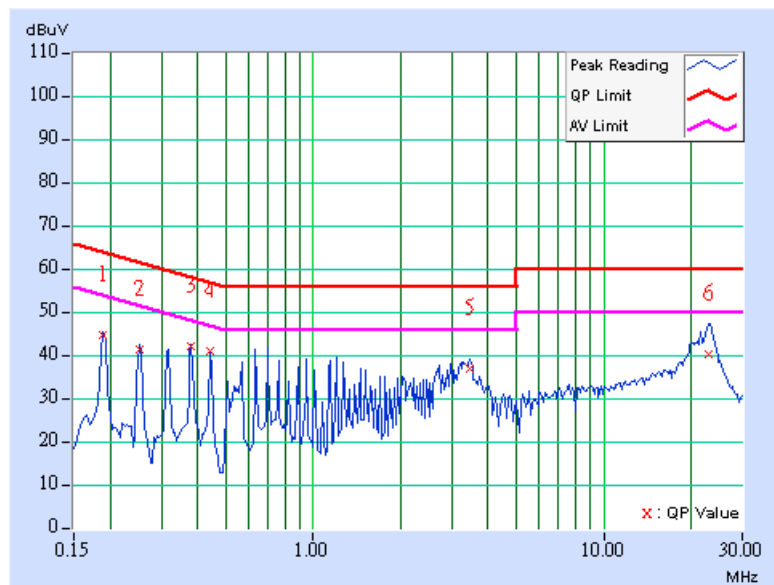

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	$2400/F(\text{kHz})$	300
0.490-1.705	$24000/F(\text{kHz})$	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 \log$ Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	100033	May. 19, 2006
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100025	Dec. 05, 2006
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Jun. 01, 2006
HORN Antenna SCHWARZBECK	9120D	9120D-408	Jan. 17, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Jan. 23, 2006
Preamplifier Agilent	8447D	2944A10633	Nov. 04, 2006
Preamplifier Agilent	8449B	3008A01964	Oct. 30, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218183/4	Jan. 26, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218195/4	Jan. 26, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA
Turn Table ADT.	TT100.	TT93021703	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 2.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The VCCI Site Registration No. is R-237.
5. The IC Site Registration No. is IC4924-3.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1kHz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

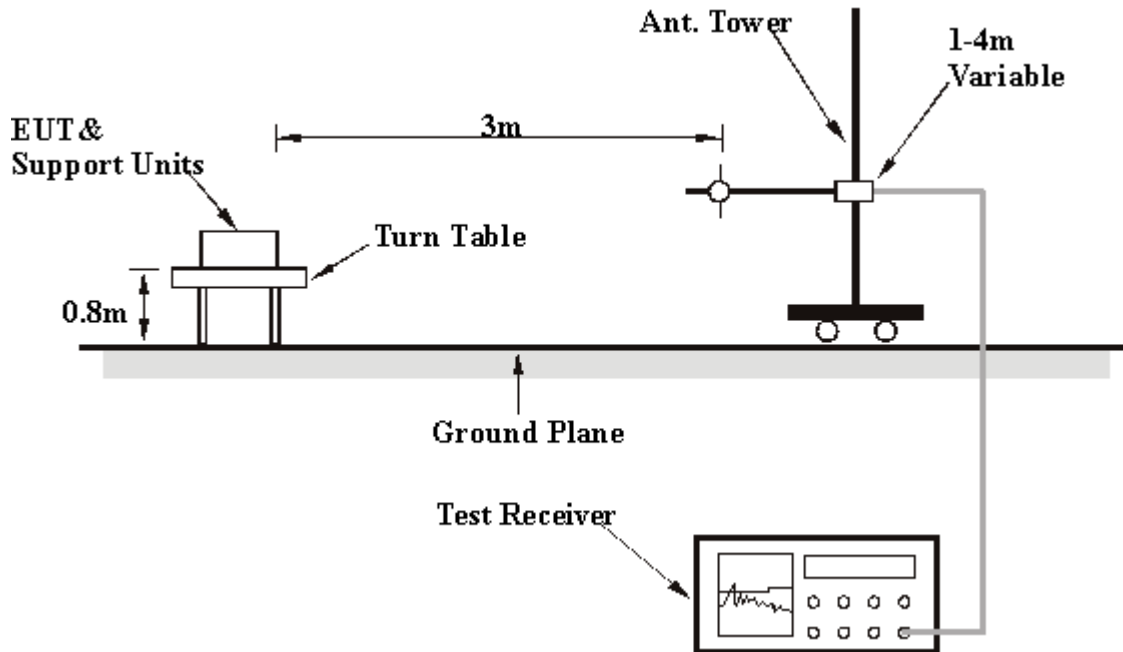

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

Below 1GHz Worst-Case Data – 802.11g OFDM modulation

EUT	Wireless LAN PCI Card	MEASUREMENT DETAIL	
MODEL	WLH3015	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 58%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	168.02	31.67 QP	43.50	-11.83	2.00 H	112	18.53	13.14
2	304.09	37.54 QP	46.00	-8.46	2.00 H	175	21.59	15.95
3	580.12	37.95 QP	46.00	-8.05	2.50 H	4	15.51	22.44
4	739.52	34.48 QP	46.00	-11.52	2.00 H	85	8.60	25.87
5	799.78	34.92 QP	46.00	-11.08	2.50 H	10	8.25	26.67
6	825.05	39.29 QP	46.00	-6.71	2.00 H	175	12.39	26.90
7	908.64	41.65 QP	46.00	-4.35	1.00 H	178	13.93	27.71

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.66	21.95 QP	40.00	-18.05	1.50 V	139	7.40	14.55
2	166.07	25.56 QP	43.50	-17.94	1.00 V	241	12.26	13.31
3	304.09	35.55 QP	46.00	-10.45	1.50 V	148	19.59	15.95
4	403.23	36.96 QP	46.00	-9.04	1.50 V	148	18.61	18.36
5	580.12	39.54 QP	46.00	-6.46	1.50 V	91	17.10	22.44
6	595.67	35.73 QP	46.00	-10.27	1.00 V	16	12.73	23.00
7	751.18	34.19 QP	46.00	-11.81	1.00 V	22	7.89	26.30
8	782.28	35.16 QP	46.00	-10.84	1.00 V	22	8.63	26.54
9	834.77	40.09 QP	46.00	-5.91	2.00 V	154	13.10	26.99
10	933.91	36.87 QP	46.00	-9.13	1.00 V	175	8.78	28.10
11	947.52	35.79 QP	46.00	-10.21	1.00 V	169	7.48	28.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

802.11g Turbo OFDM modulation

EUT	Wireless LAN PCI Card	MEASUREMENT DETAIL	
MODEL	WLH3015	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 58%RH, 991hPa
TRANSFER RATE	12Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	304.09	35.26 QP	46.00	-10.74	1.00 H	271	19.31	15.95
2	576.23	31.64 QP	46.00	-14.36	1.00 H	28	9.34	22.30
3	603.45	33.47 QP	46.00	-12.53	1.00 H	16	10.29	23.18
4	743.41	35.19 QP	46.00	-10.81	1.00 H	352	9.16	26.03
5	758.96	33.16 QP	46.00	-12.84	1.00 H	271	6.81	26.36
6	836.71	39.12 QP	46.00	-6.88	1.00 H	352	12.11	27.01

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	399.34	34.54 QP	46.00	-11.46	1.25 V	190	16.26	18.28
2	510.14	33.42 QP	46.00	-12.58	1.00 V	193	12.77	20.65
3	539.30	32.66 QP	46.00	-13.34	1.50 V	193	11.49	21.17
4	595.67	38.27 QP	46.00	-7.73	1.00 V	82	15.27	23.00
5	644.27	33.75 QP	46.00	-12.25	1.00 V	145	10.25	23.50
6	675.37	33.52 QP	46.00	-12.48	1.00 V	193	9.58	23.93
7	782.28	32.53 QP	46.00	-13.47	1.00 V	202	6.00	26.54
8	807.56	32.77 QP	46.00	-13.23	1.00 V	217	6.03	26.74
9	836.71	41.75 QP	46.00	-4.25	1.25 V	97	14.74	27.01
10	933.91	37.25 QP	46.00	-8.75	1.00 V	118	9.16	28.10
11	947.52	34.93 QP	46.00	-11.07	1.00 V	190	6.63	28.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

802.11b DSSS modulation

EUT	Wireless LAN PCI Card	MEASUREMENT DETAIL	
MODEL	WLH3015	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	22deg. C, 58%RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	55.02 PK	74.00	-18.98	1.22 H	33	25.53	29.49
1	1608.00	48.45 AV	54.00	-5.55	1.22 H	33	18.96	29.49
2	2390.00	52.33 PK	74.00	-21.67	1.08 H	269	19.98	32.35
2	2390.00	43.65 AV	54.00	-10.35	1.08 H	269	11.30	32.35
3	*2412.00	107.68 PK			1.08 H	269	75.19	32.49
3	*2412.00	100.45 AV			1.08 H	269	67.96	32.49
4	3216.00	49.72 PK	87.68	-37.96	1.05 H	329	15.47	34.25
4	3216.00	42.55 AV	80.45	-37.90	1.05 H	329	8.30	34.25
5	4824.00	50.33 PK	74.00	-23.67	1.15 H	335	12.08	38.25
5	4824.00	39.45 AV	54.00	-14.55	1.15 H	335	1.20	38.25

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	55.88 PK	74.00	-18.12	1.05 V	312	26.39	29.49
1	1608.00	49.75 AV	54.00	-4.25	1.05 V	312	20.26	29.49
2	2390.00	57.03 PK	74.00	-16.97	1.15 V	307	24.68	32.35
2	2390.00	48.23 AV	54.00	-5.77	1.15 V	307	15.88	32.35
3	*2412.00	112.91 PK			1.15 V	307	80.42	32.49
3	*2412.00	105.76 AV			1.15 V	307	73.27	32.49
4	3216.00	50.05 PK	92.91	-42.86	1.25 V	315	15.80	34.25
4	3216.00	43.78 AV	85.76	-41.98	1.25 V	315	9.53	34.25
5	4824.00	51.53 PK	74.00	-22.47	1.08 V	32	13.28	38.25
5	4824.00	40.53 AV	54.00	-13.47	1.08 V	32	2.28	38.25

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT	Wireless LAN PCI Card	MEASUREMENT DETAIL	
MODEL	WLH3015	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	22deg. C, 58%RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	54.98 PK	74.00	-19.02	1.16 H	325	25.47	29.51
1	1624.00	48.32 AV	54.00	-5.68	1.16 H	325	18.81	29.51
2	*2437.00	107.41 PK			1.05 H	268	74.76	32.65
2	*2437.00	100.21 AV			1.05 H	268	67.56	32.65
3	3248.00	49.55 PK	87.41	-37.86	1.05 H	315	15.24	34.31
3	3248.00	42.12 AV	80.21	-38.09	1.05 H	315	7.81	34.31
4	4874.00	50.11 PK	74.00	-23.89	1.09 H	355	11.84	38.27
4	4874.00	39.18 AV	54.00	-14.82	1.09 H	355	0.91	38.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	55.88 PK	74.00	-18.12	1.05 V	315	26.37	29.51
1	1624.00	49.68 AV	54.00	-4.32	1.05 V	315	20.17	29.51
2	*2437.00	112.32 PK			1.28 V	326	79.67	32.65
2	*2437.00	105.11 AV			1.28 V	326	72.46	32.65
3	3248.00	50.33 PK	92.32	-41.99	1.15 V	345	16.02	34.31
3	3248.00	43.75 AV	85.11	-41.36	1.15 V	345	9.44	34.31
4	4874.00	51.68 PK	74.00	-22.32	1.22 V	341	13.41	38.27
4	4874.00	41.52 AV	54.00	-12.48	1.22 V	341	3.25	38.27

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT	Wireless LAN PCI Card	MEASUREMENT DETAIL	
MODEL	WLH3015	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	22deg. C, 58%RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	54.95 PK	87.55	-32.60	1.05 H	321	25.41	29.54
1	1641.00	48.36 AV	80.32	-31.96	1.05 H	321	18.82	29.54
2	*2462.00	107.55 PK			1.05 H	315	74.74	32.81
2	*2462.00	100.32 AV			1.05 H	315	67.51	32.81
3	2483.50	52.98 PK	74.00	-21.02	1.05 H	315	20.03	32.95
3	2483.50	44.33 AV	54.00	-9.67	1.05 H	315	11.38	32.95
4	3282.00	49.85 PK	87.55	-37.70	1.01 H	254	15.48	34.37
4	3282.00	42.61 AV	80.32	-37.71	1.01 H	254	8.24	34.37
5	4924.00	50.11 PK	74.00	-23.89	1.09 H	322	11.81	38.30
5	4924.00	39.21 AV	54.00	-14.79	1.09 H	322	0.91	38.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	55.95 PK	92.75	-36.80	1.08 V	321	26.41	29.54
1	1641.00	49.84 AV	85.52	-35.68	1.08 V	321	20.30	29.54
2	*2462.00	112.75 PK			1.26 V	311	79.94	32.81
2	*2462.00	105.52 AV			1.26 V	311	72.71	32.81
3	2483.50	57.55 PK	74.00	-16.45	1.26 V	311	24.60	32.95
3	2483.50	48.75 AV	54.00	-5.25	1.26 V	311	15.80	32.95
4	3282.00	50.01 PK	92.75	-42.74	1.05 V	326	15.64	34.37
4	3282.00	43.68 AV	85.52	-41.84	1.05 V	326	9.31	34.37
5	4924.00	51.58 PK	74.00	-22.42	1.26 V	336	13.28	38.30
5	4924.00	41.35 AV	54.00	-12.65	1.26 V	336	3.05	38.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

802.11g OFDM modulation

EUT	Wireless LAN PCI Card	MEASUREMENT DETAIL	
MODEL	WLH3015	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 58%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	55.17 PK	74.00	-18.83	1.27 H	46	25.68	29.49
1	1608.00	48.59 AV	54.00	-5.41	1.27 H	46	19.10	29.49
2	2390.00	53.78 PK	74.00	-20.22	1.00 H	44	21.43	32.35
2	2390.00	43.98 AV	54.00	-10.02	1.00 H	44	11.63	32.35
3	*2412.00	103.82 PK			1.00 H	44	71.33	32.49
3	*2412.00	93.88 AV			1.00 H	44	61.39	32.49
4	3216.00	49.75 PK	83.82	-34.07	1.08 H	325	15.50	34.25
4	3216.00	42.65 AV	73.88	-31.32	1.08 H	325	8.40	34.25
5	4824.00	47.98 PK	74.00	-26.02	1.05 H	352	9.73	38.25
5	4824.00	35.85 AV	54.00	-18.15	1.05 H	352	-2.40	38.25

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	55.63 PK	74.00	-18.37	1.50 V	333	26.14	29.49
1	1608.00	49.61 AV	54.00	-4.39	1.50 V	333	20.12	29.49
2	2390.00	61.93 PK	74.00	-12.07	1.11 V	338	29.58	32.35
2	2390.00	48.68 AV	54.00	-5.32	1.11 V	338	16.33	32.35
3	*2412.00	109.77 PK			1.19 V	358	77.28	32.49
3	*2412.00	99.82 AV			1.19 V	358	67.33	32.49
4	3216.00	50.11 PK	89.77	-39.66	1.44 V	351	15.86	34.25
4	3216.00	43.99 AV	79.82	-35.83	1.44 V	351	9.74	34.25
5	4824.00	48.51 PK	74.00	-25.49	1.32 V	319	10.26	38.25
5	4824.00	36.17 AV	54.00	-17.83	1.32 V	319	-2.08	38.25

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT	Wireless LAN PCI Card	MEASUREMENT DETAIL	
MODEL	WLH3015	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 58%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	55.12 PK	83.85	28.73	1.03 H	31	25.61	29.51
1	1624.00	48.51 AV	73.79	-25.28	1.03 H	31	19.00	29.51
2	*2437.00	103.85 PK			1.05 H	12	71.20	32.65
2	*2437.00	93.79 AV			1.05 H	12	61.14	32.65
3	3248.00	49.68 PK	83.85	-34.17	1.08 H	311	15.37	34.31
3	3248.00	42.74 AV	73.79	-31.05	1.08 H	311	8.43	34.31
4	4874.00	48.02 PK	74.00	-25.98	1.05 H	315	9.75	38.27
4	4874.00	35.85 AV	54.00	-18.15	1.05 H	315	-2.42	38.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	55.78 PK	89.44	-33.66	1.39 V	318	26.27	29.51
1	1624.00	49.75 AV	79.51	-29.76	1.39 V	318	20.24	29.51
2	*2437.00	109.44 PK			1.22 V	345	76.79	32.65
2	*2437.00	99.51 AV			1.22 V	345	66.86	32.65
3	3248.00	50.33 PK	89.44	-39.11	1.09 V	15	16.02	34.31
3	3248.00	44.05 AV	79.51	-35.46	1.09 V	15	9.74	34.31
4	4874.00	48.95 PK	74.00	-25.05	1.12 V	328	10.68	38.27
4	4874.00	36.35 AV	54.00	-17.65	1.12 V	328	-1.92	38.27

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.

EUT	Wireless LAN PCI Card	MEASUREMENT DETAIL	
MODEL	WLH3015	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 58%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	55.02 PK	83.98	-28.96	1.09 H	33	25.48	29.54
1	1641.00	48.45 AV	73.95	-25.50	1.09 H	33	18.91	29.54
2	*2462.00	103.98 PK			1.02 H	36	71.17	32.81
2	*2462.00	93.95 AV			1.02 H	36	61.14	32.81
3	2483.50	53.98 PK	74.00	-20.02	1.02 H	36	21.03	32.95
3	2483.50	44.11 AV	54.00	-9.89	1.02 H	36	11.16	32.95
4	3282.00	49.88 PK	83.98	-34.08	1.05 H	321	15.51	34.37
4	3282.00	42.98 AV	73.95	-30.97	1.05 H	321	8.61	34.37
5	4924.00	48.11 PK	74.00	-25.89	1.05 H	322	9.81	38.30
5	4924.00	35.89 AV	54.00	-18.11	1.05 H	322	-2.41	38.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	55.88 PK	89.75	-33.87	1.43 V	325	26.34	29.54
1	1641.00	49.59 AV	79.91	-30.32	1.43 V	325	20.05	29.54
2	*2462.00	109.75 PK			1.13 V	339	76.94	32.81
2	*2462.00	99.91 AV			1.13 V	339	67.10	32.81
3	2483.50	62.11 PK	74.00	-11.89	1.13 V	339	29.16	32.95
3	2483.50	48.98 AV	54.00	-5.02	1.13 V	339	16.03	32.95
4	3282.00	50.35 PK	89.75	-39.40	1.35 V	326	15.98	34.37
4	3282.00	43.89 AV	79.91	-36.02	1.35 V	326	9.52	34.37
5	4924.00	48.74 PK	74.00	-25.26	1.28 V	322	10.44	38.30
5	4924.00	36.22 AV	54.00	-17.78	1.28 V	322	-2.08	38.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

802.11g Turbo OFDM modulation

EUT	Wireless LAN PCI Card	MEASUREMENT DETAIL	
MODEL	WLH3015	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 58%RH, 991hPa
TRANSFER RATE	12Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	55.01 PK	82.78	-27.77	1.22 H	33	25.50	29.51
1	1624.00	48.42 AV	72.68	-24.26	1.22 H	33	18.91	29.51
2	2390.00	52.88 PK	74.00	-21.12	1.00 H	32	20.53	32.35
2	2390.00	42.95 AV	54.00	-11.05	1.00 H	32	10.60	32.35
3	*2437.00	102.78 PK			1.00 H	45	70.13	32.65
3	*2437.00	92.68 AV			1.00 H	45	60.03	32.65
4	2483.50	53.22 PK	74.00	-20.78	1.00 H	26	20.27	32.95
4	2483.50	43.35 AV	54.00	-10.65	1.00 H	26	10.40	32.95
5	4874.00	47.89 PK	74.00	-26.11	1.06 H	321	9.62	38.27
5	4874.00	35.74 AV	54.00	-18.26	1.06 H	321	-2.53	38.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	55.32 PK	88.11	-32.79	1.44 V	321	25.81	29.51
1	1624.00	49.26 AV	78.21	-28.95	1.44 V	321	19.75	29.51
2	2390.00	58.35 PK	74.00	-15.65	1.05 V	322	26.00	32.35
2	2390.00	46.55 AV	54.00	-7.45	1.05 V	322	14.20	32.35
3	*2437.00	108.11 PK			1.26 V	321	75.46	32.65
3	*2437.00	98.21 AV			1.26 V	321	65.56	32.65
4	2483.50	59.55 PK	74.00	-14.45	1.22 V	320	26.60	32.95
4	2483.50	47.68 AV	54.00	-6.32	1.22 V	320	14.73	32.95
5	3248.00	49.88 PK	88.11	-38.23	1.19 V	352	15.57	34.31
5	3248.00	42.79 AV	78.21	-35.42	1.19 V	352	8.48	34.31
6	4874.00	48.09 PK	74.00	-25.91	1.23 V	325	9.82	38.27
6	4874.00	36.01 AV	54.00	-17.99	1.23 V	325	-2.26	38.27

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK 30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS

802.11b DSSS modulation


EUT	Wireless LAN PCI Card	MODEL	WLH3015
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 63%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	10.68	0.5	PASS
6	2437	10.84	0.5	PASS
11	2462	10.60	0.5	PASS


CH1

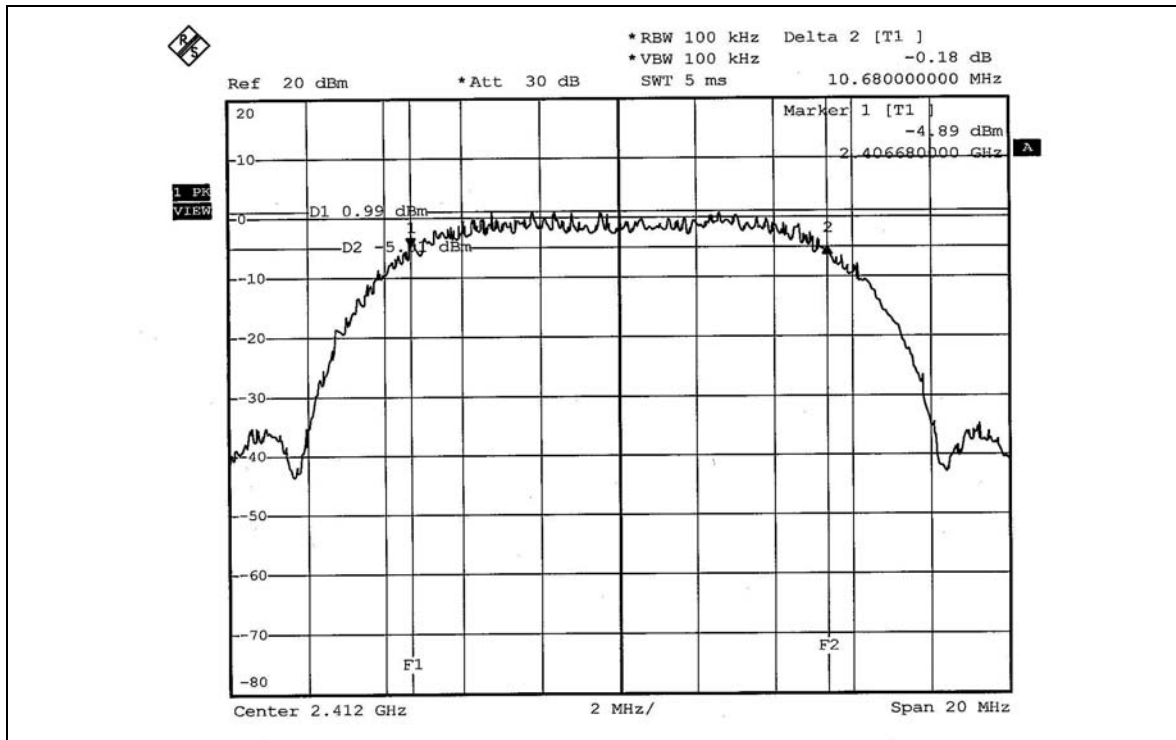

CH6

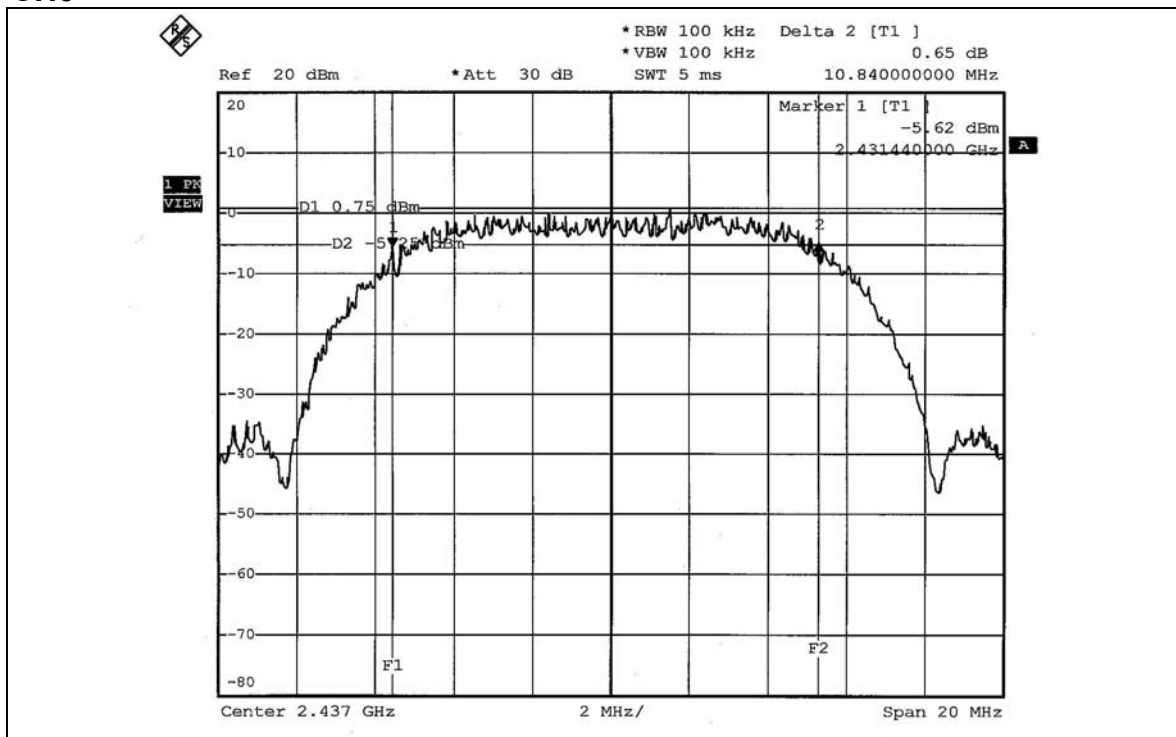

CH11

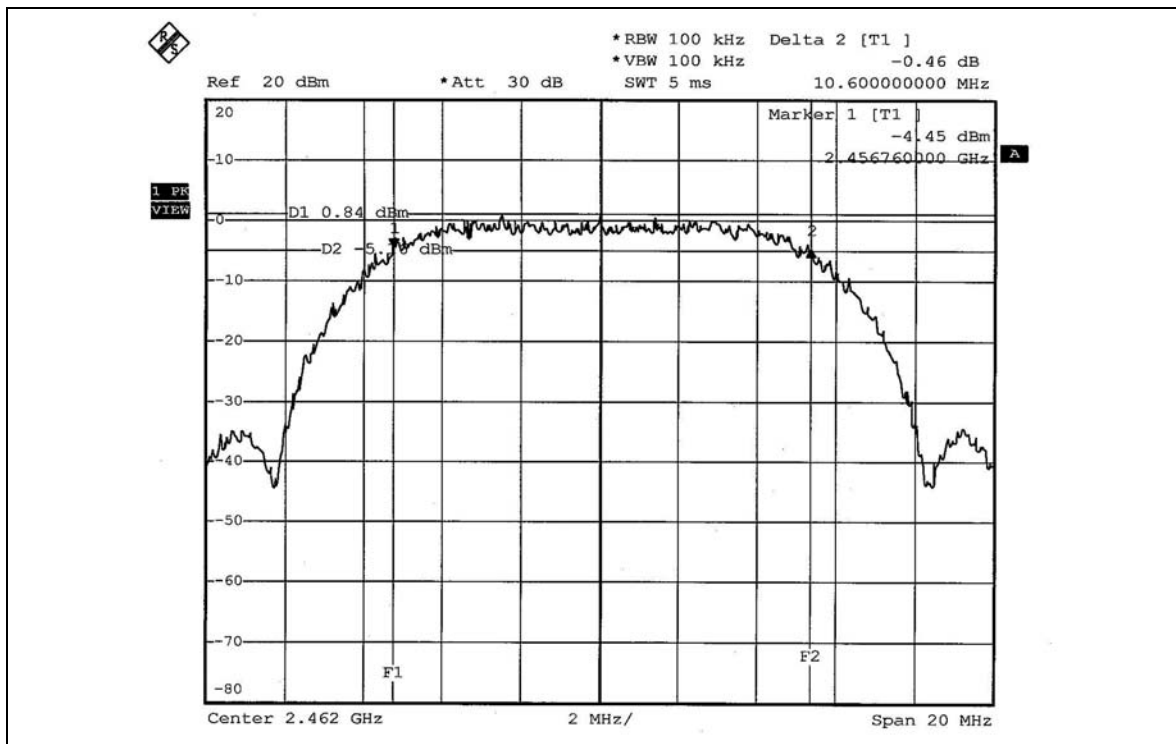


802.11g OFDM modulation


EUT	Wireless LAN PCI Card	MODEL	WLH3015
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 63%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.24	0.5	PASS
6	2437	16.36	0.5	PASS
11	2462	16.40	0.5	PASS


CH1

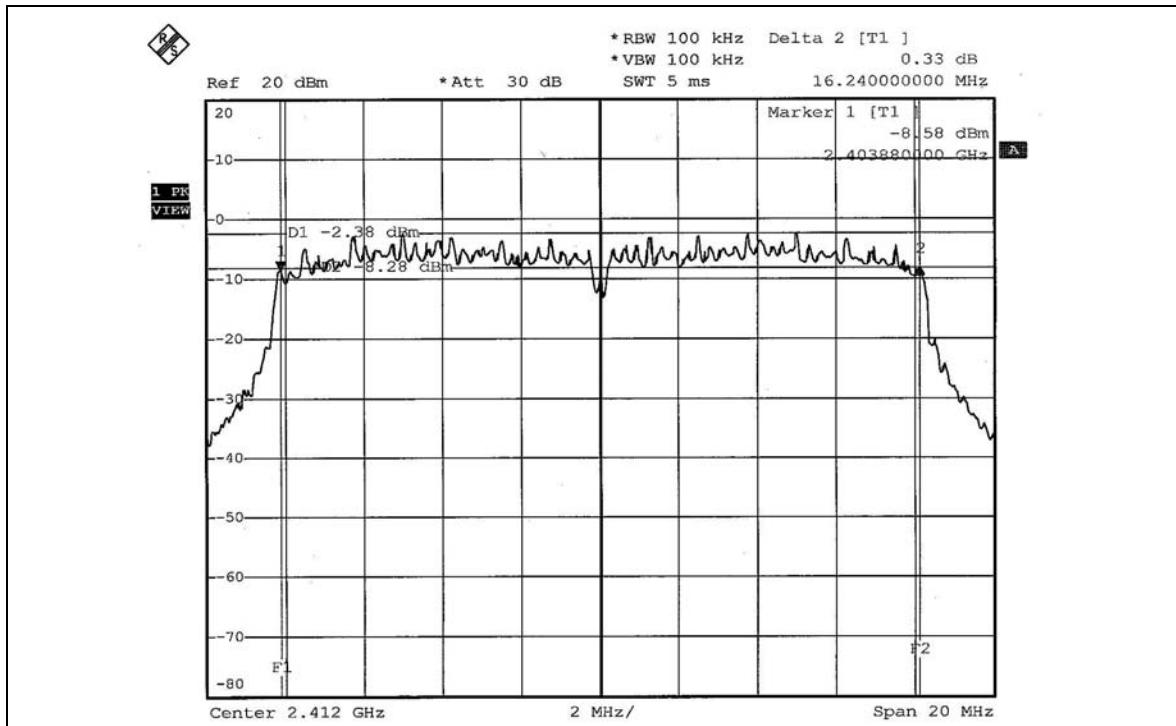

CH6

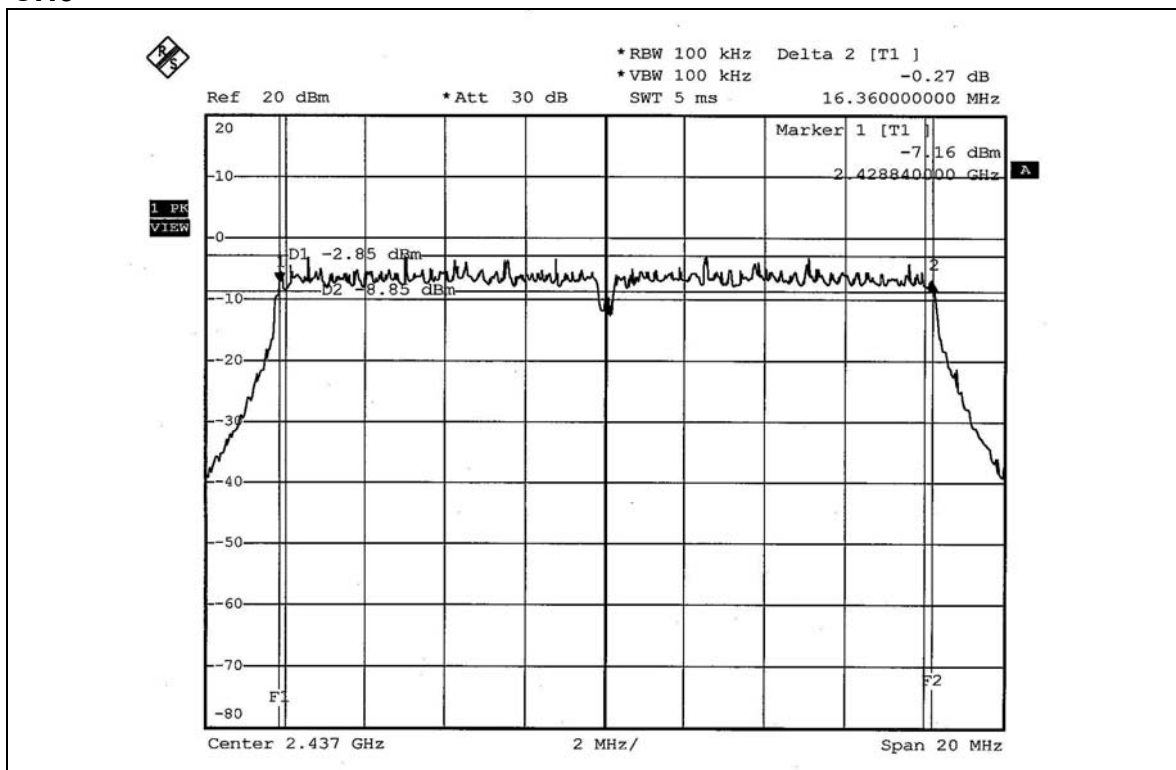

CH11

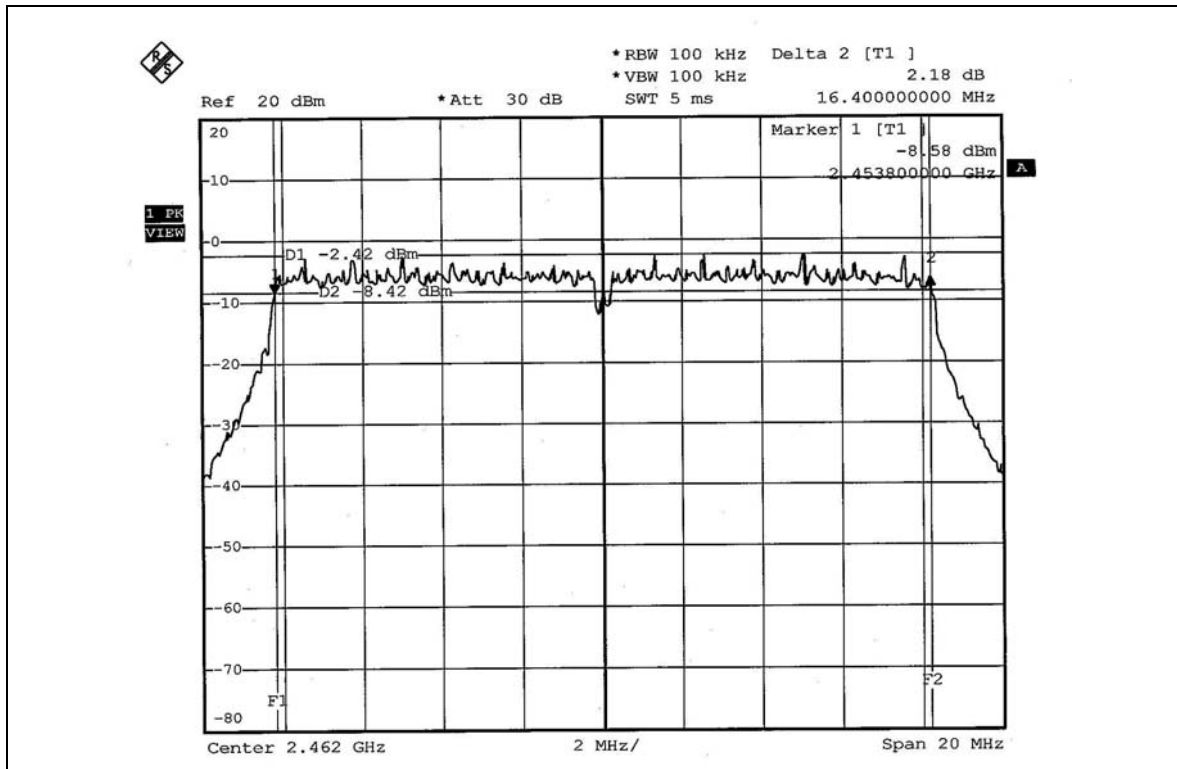


802.11g Turbo OFDM modulation

EUT	Wireless LAN PCI Card	MODEL	WLH3015
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 63%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
6	2437	16.40	0.5	PASS

CH6

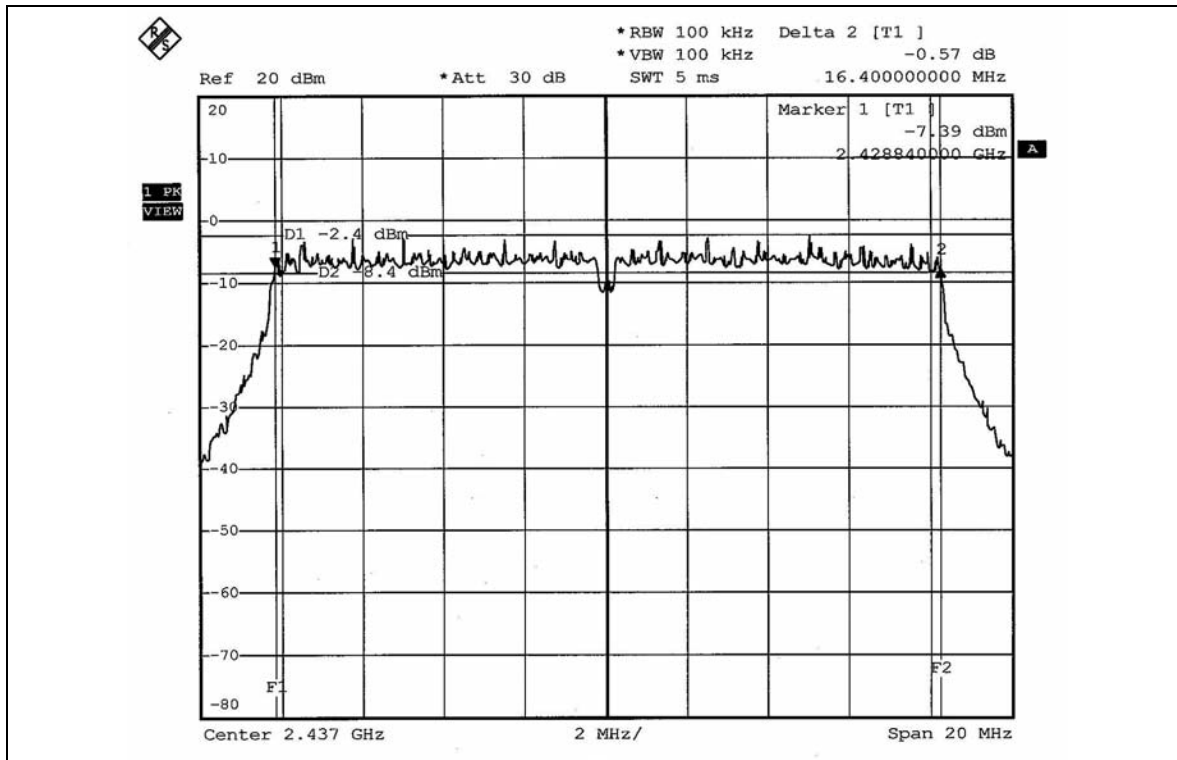

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm. .

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 07, 2006
DIGITAL RT OSCILLOSCOPE	TDS1012	C037299	Nov. 28, 2006
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to peak the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS

802.11b DSSS modulation

EUT	Wireless LAN PCI Card	MODEL	WLH3015
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 63%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	32.509	15.12	30	PASS
6	2437	32.961	15.18	30	PASS
11	2462	32.137	15.07	30	PASS

802.11g OFDM modulation

EUT	Wireless LAN PCI Card	MODEL	WLH3015
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 63%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	32.211	15.08	30	PASS
6	2437	32.734	15.15	30	PASS
11	2462	31.915	15.04	30	PASS

802.11g Turbo OFDM modulation

EUT	Wireless LAN PCI Card	MODEL	WLH3015
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 63%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
6	2437	32.359	15.10	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6


4.5.7 TEST RESULTS

802.11b DSSS modulation


EUT	Wireless LAN PCI Card	MODEL	WLH3015
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 63%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-10.34	8	PASS
6	2437	-10.45	8	PASS
11	2462	-10.69	8	PASS


CH1

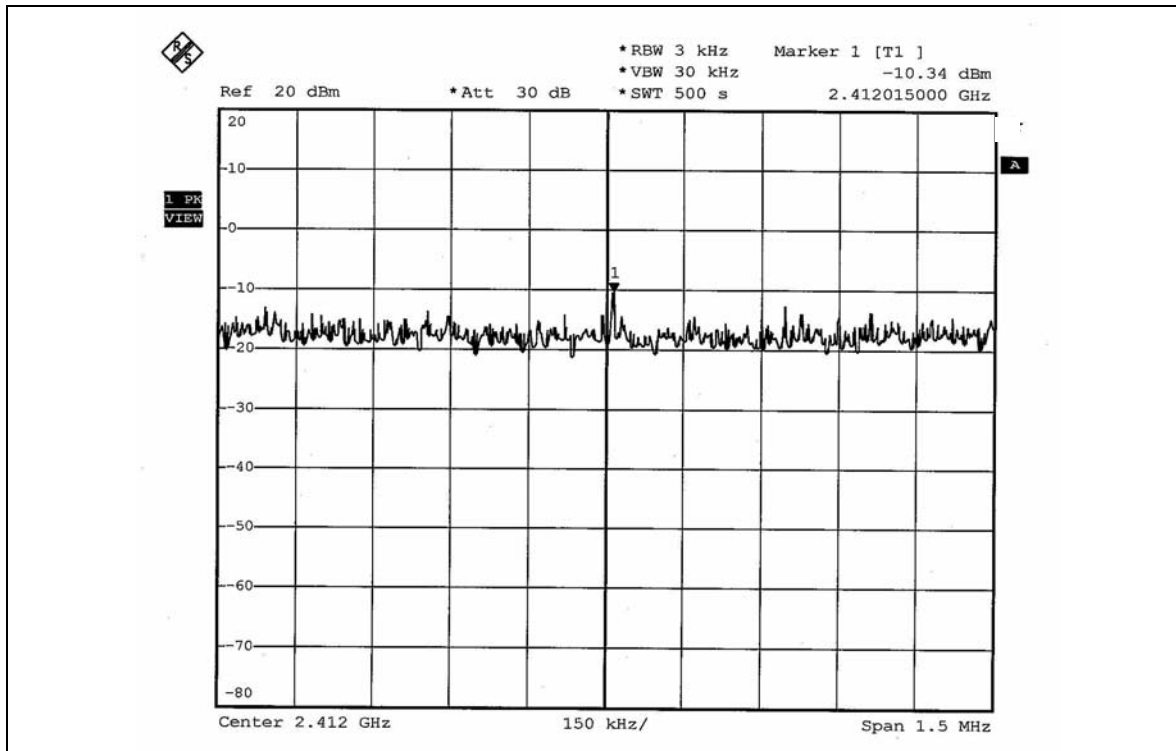

CH6

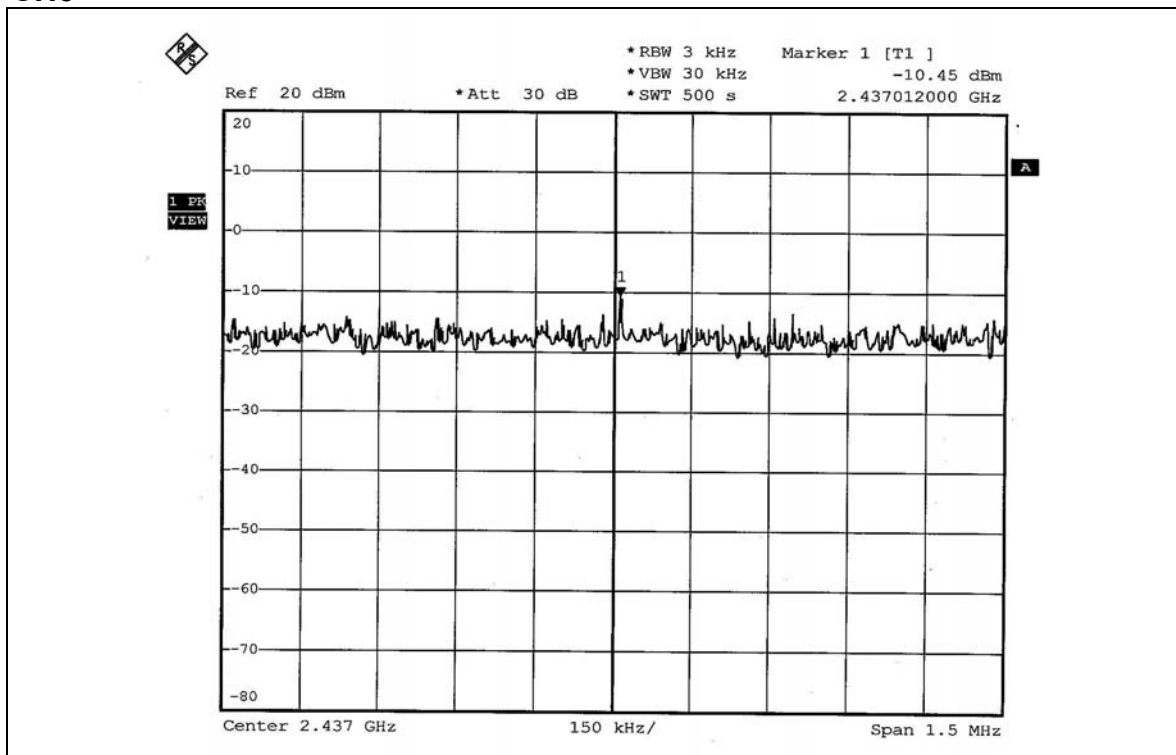

CH11

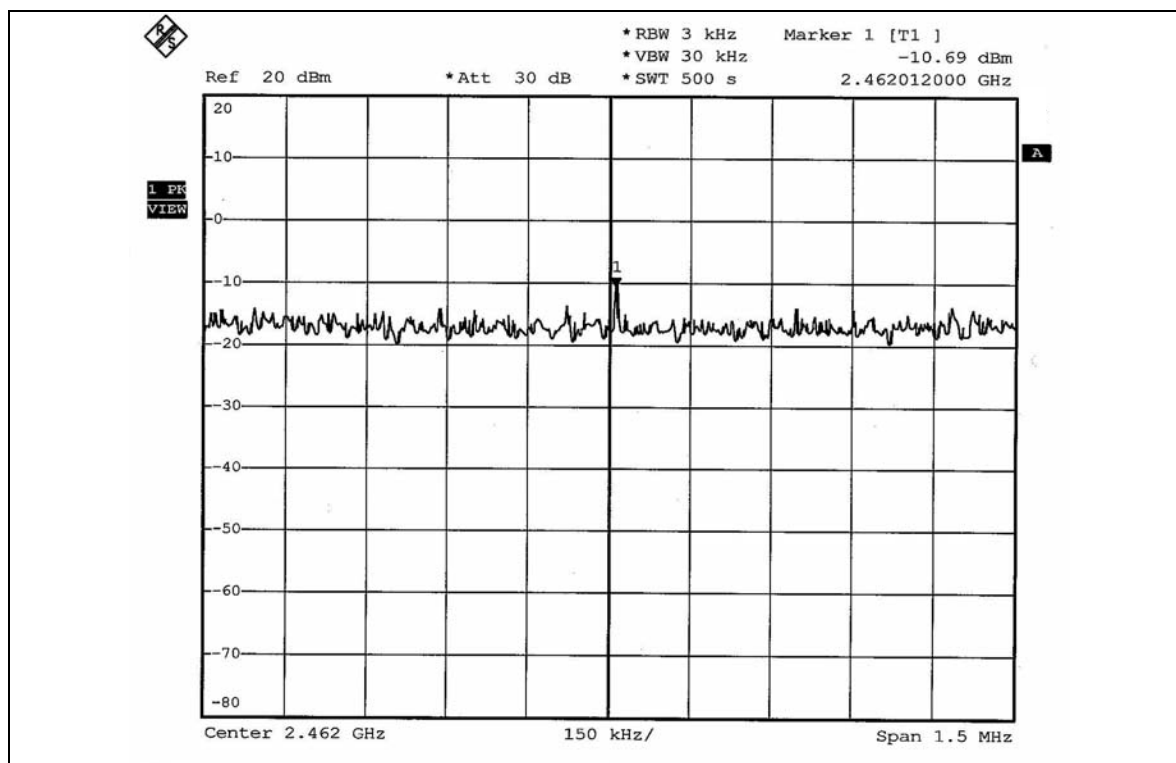


802.11g OFDM modulation


EUT	Wireless LAN PCI Card	MODEL	WLH3015
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 63%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-15.19	8	PASS
6	2437	-15.27	8	PASS
11	2462	-14.98	8	PASS


CH1

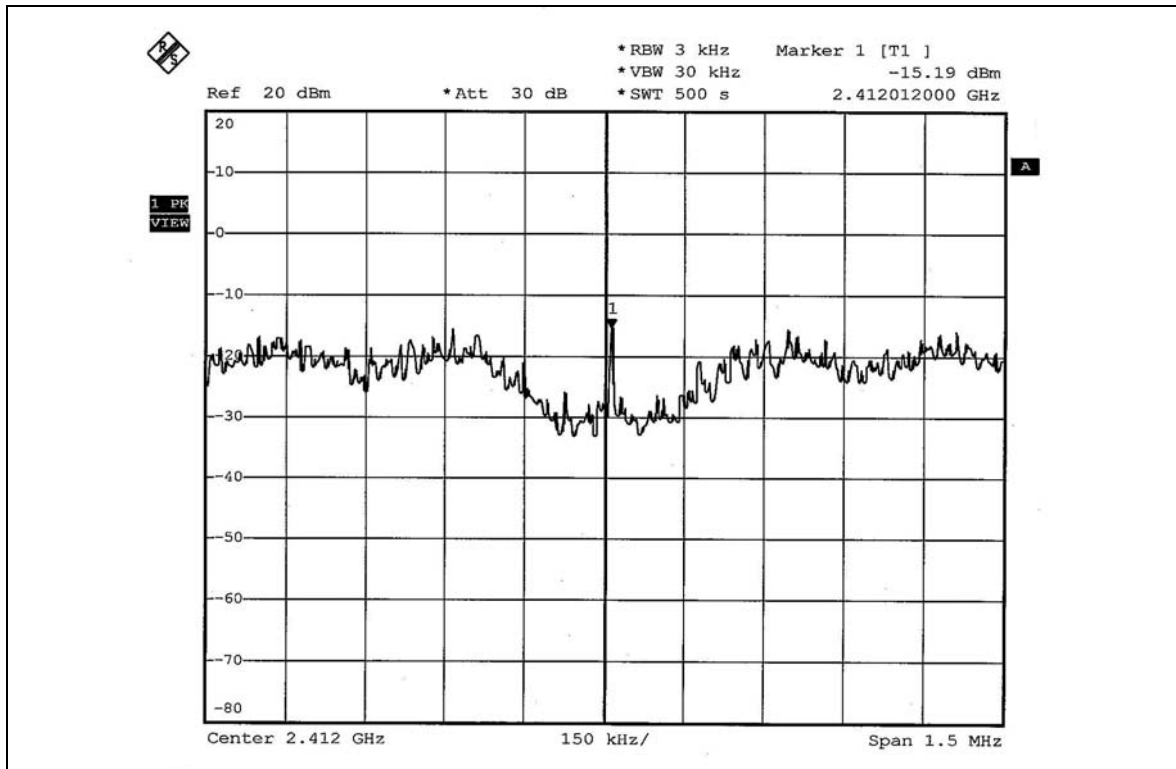

CH6

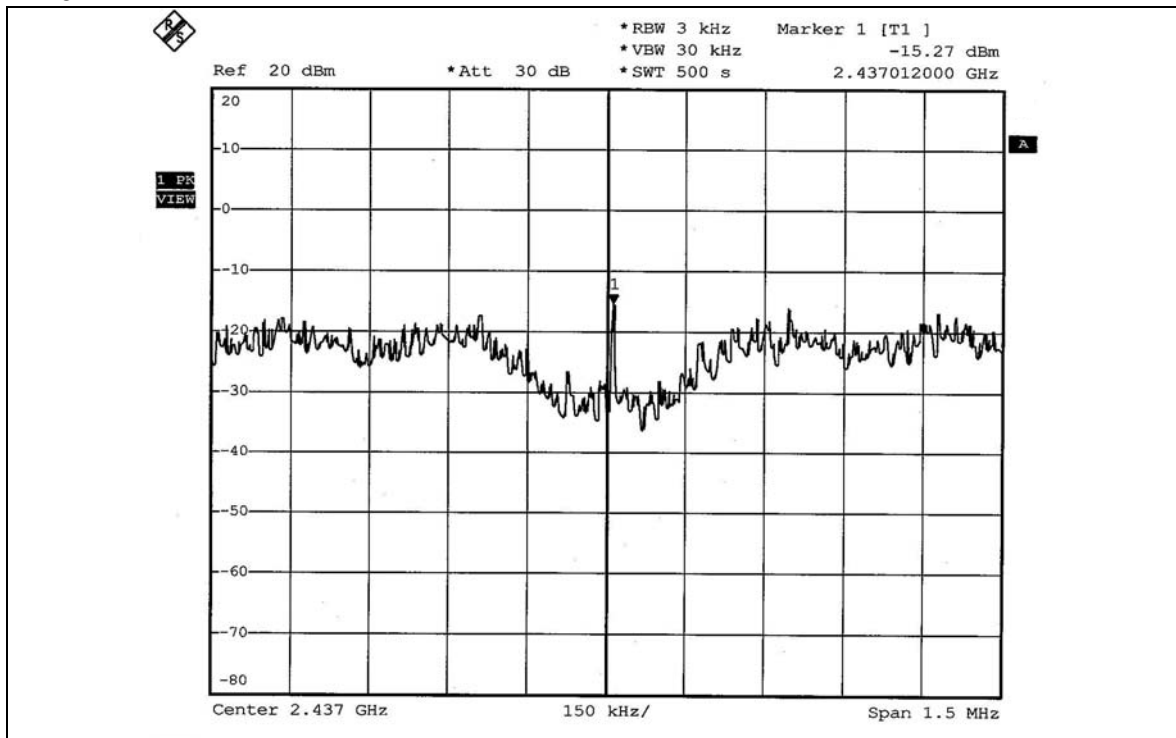

CH11

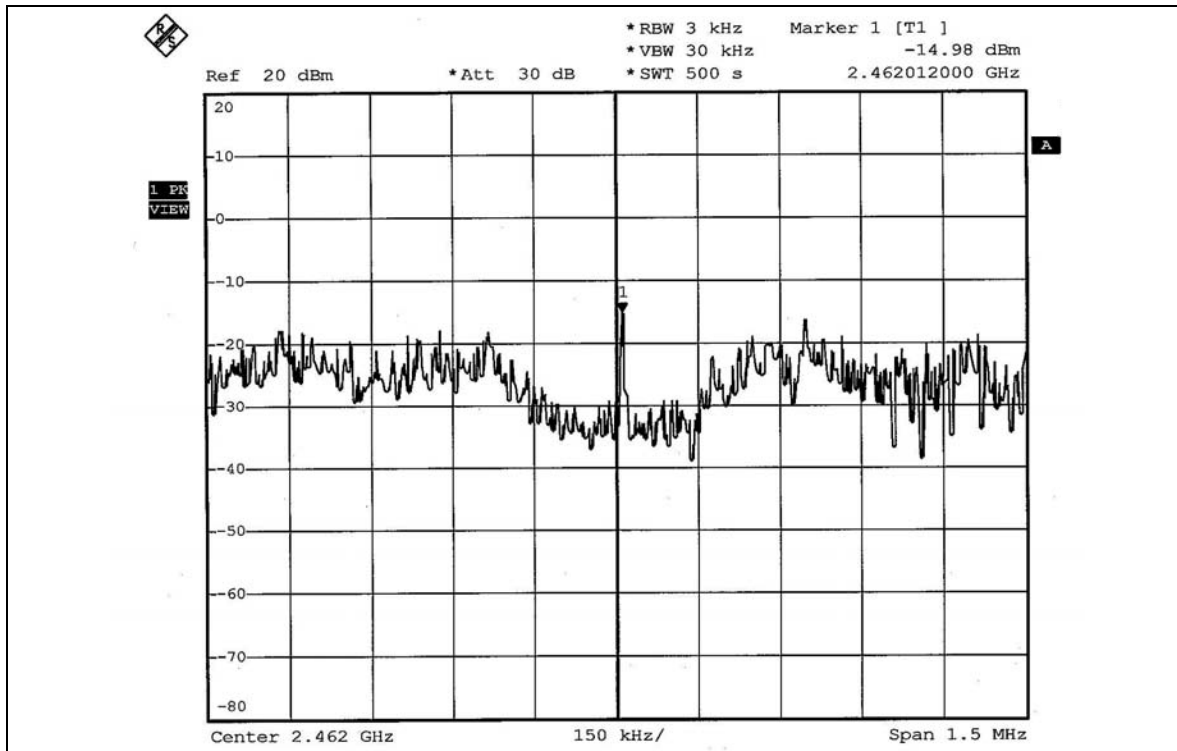


802.11g Turbo OFDM modulation

EUT	Wireless LAN PCI Card	MODEL	WLH3015
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 63%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
6	2437	-16.46	8	PASS

CH6

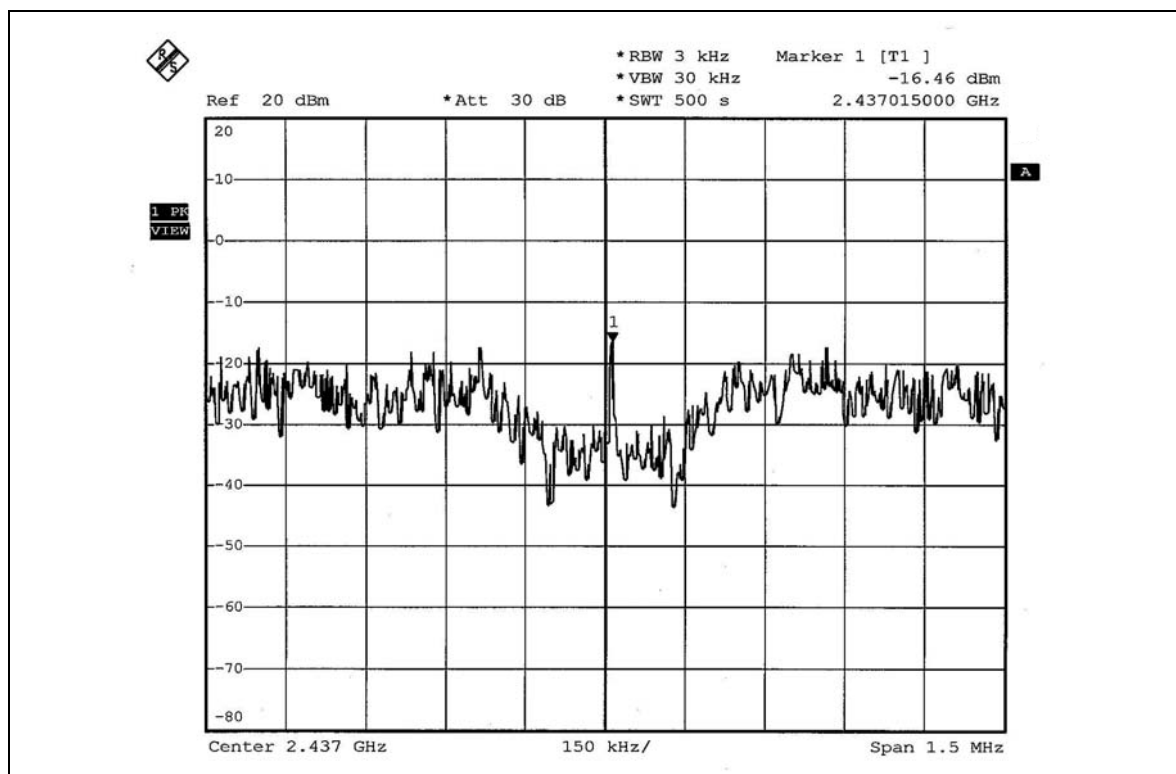

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded. The spectrum plots (Peak RBW=VBW=100kHz ; Average RBW=1MHz, VBW=1kHz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6



4.6.6 TEST RESULTS

The spectrum plots are attached on the following 18 images. D2 line indicates the highest level, and D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(d).



802.11b DSSS modulation



NOTE 1: The band edge emission plot of DSSS technique on page 59 shows 49.61dBc between carrier maximum power and local maximum emission in restrict band (2.3870GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.8 is 112.91dBuV/m (Peak), so the maximum field strength in restrict band is $112.91 - 49.61 = 63.30$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of DSSS technique on page 59 shows 61.20dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.8 is 105.76dBuV/m (Average), so the maximum field strength in restrict band is $105.76 - 61.20 = 44.56$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot of DSSS technique on page 60 shows 50.35dBc between carrier maximum power and local maximum emission in restrict band (2.4895GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.8 is 112.75dBuV/m (Peak), so the maximum field strength in restrict band is $112.75 - 50.35 = 62.40$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot of DSSS technique on page 61 shows 60.64dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.8 is 105.52dBuV/m (Average), so the maximum field strength in restrict band is $105.52 - 60.64 = 44.88$ dBuV/m which is under 54dBuV/m limit.

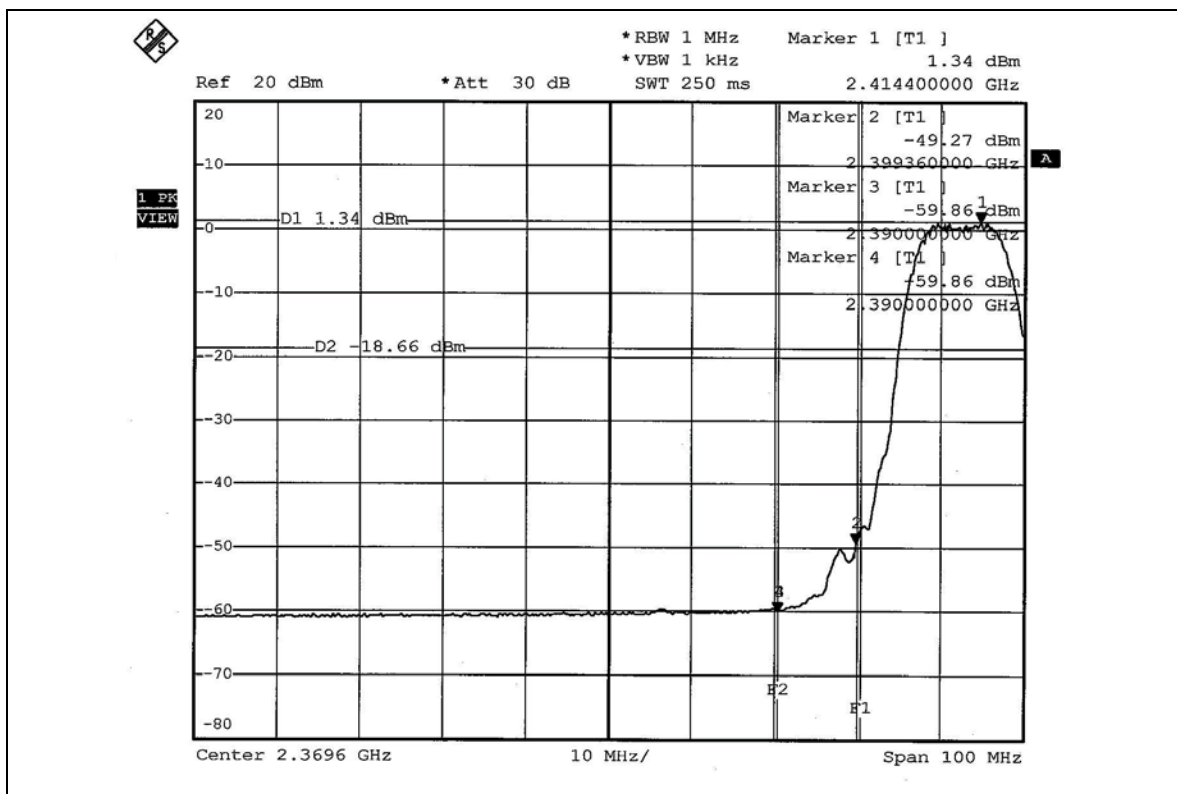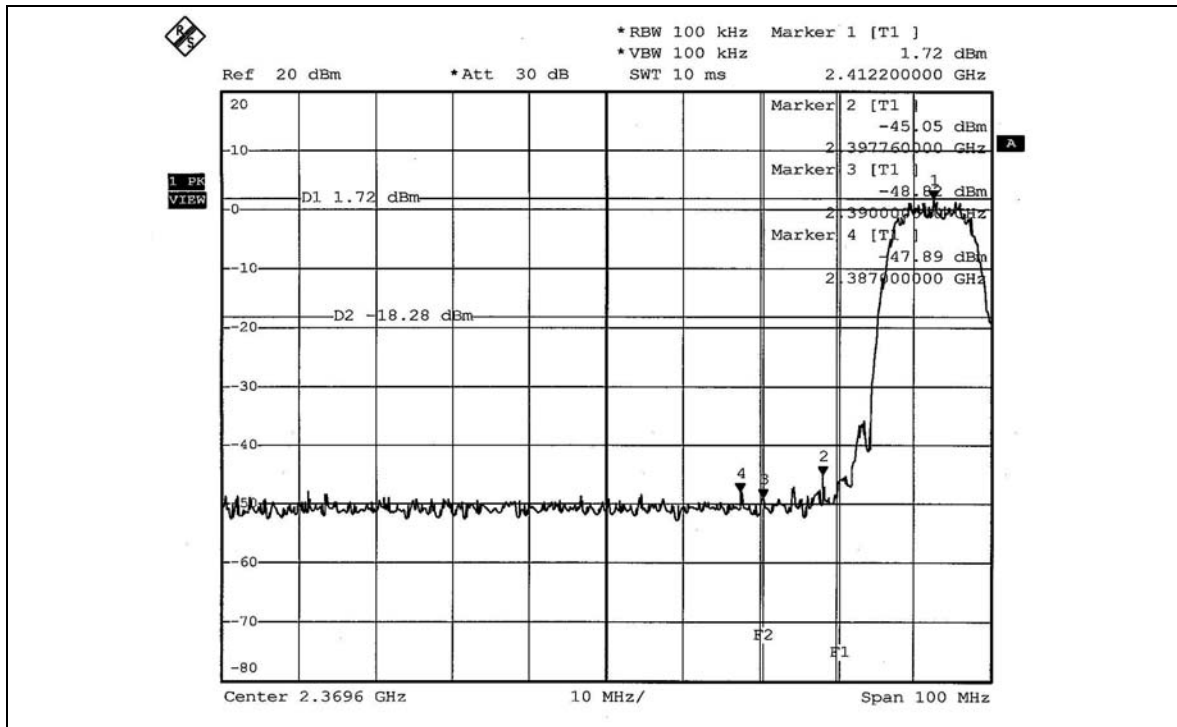802.11b DSSS modulation

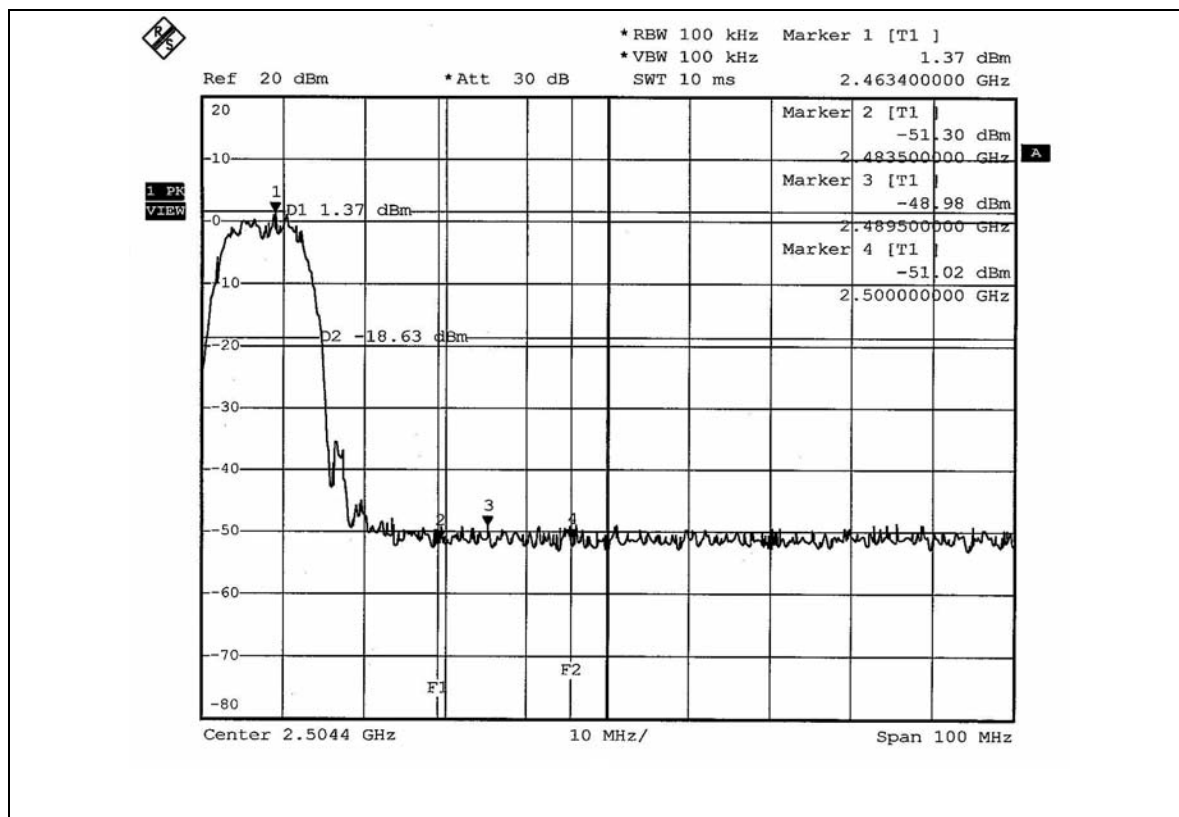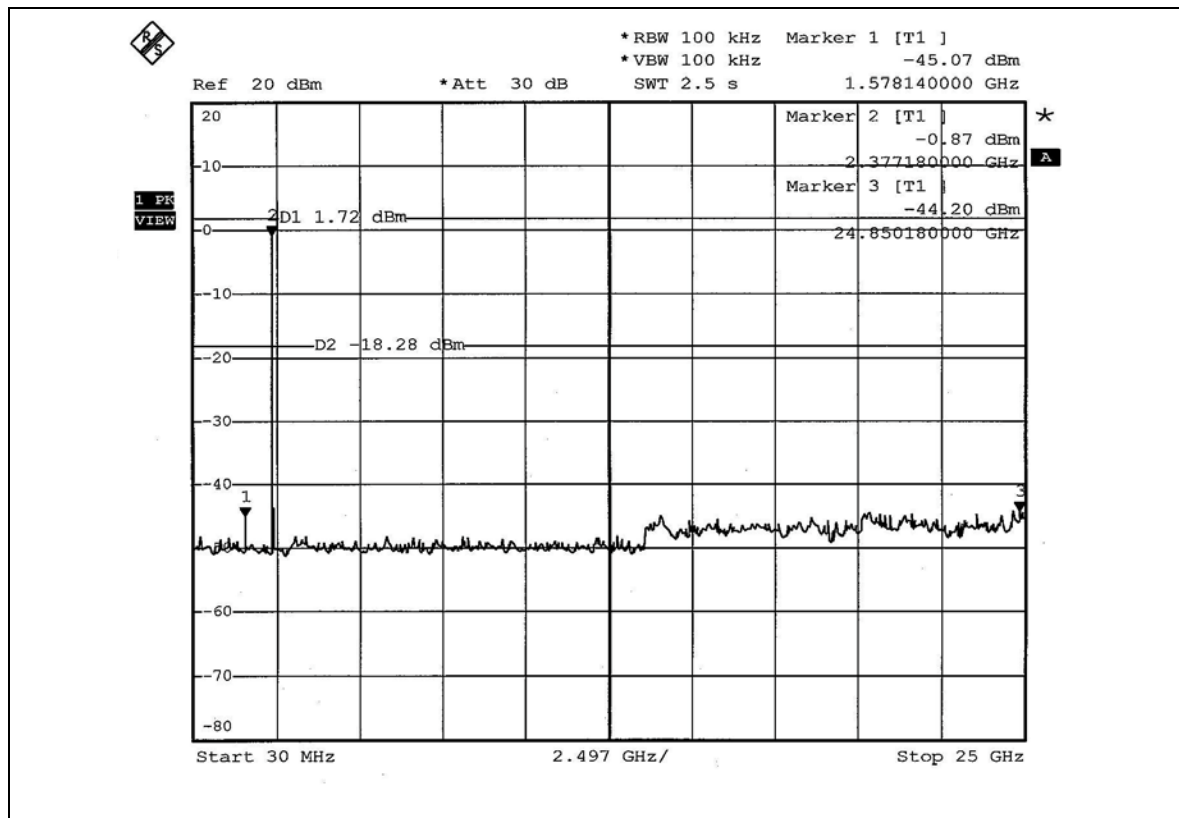

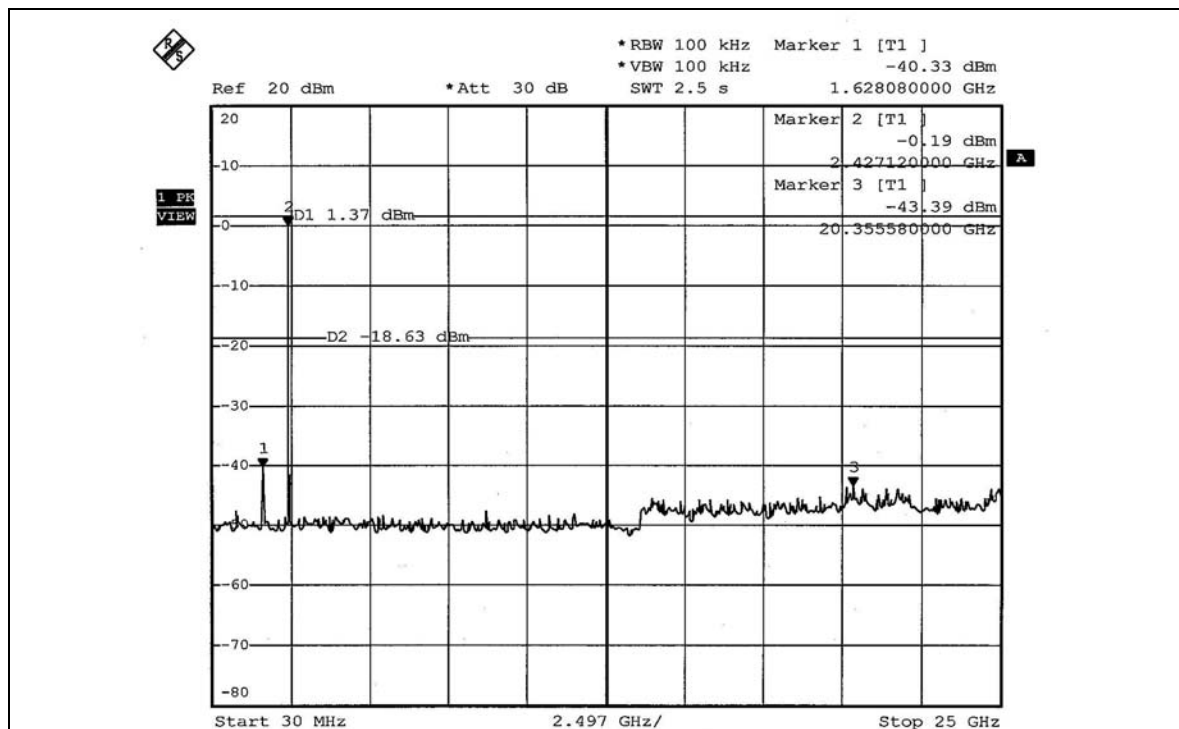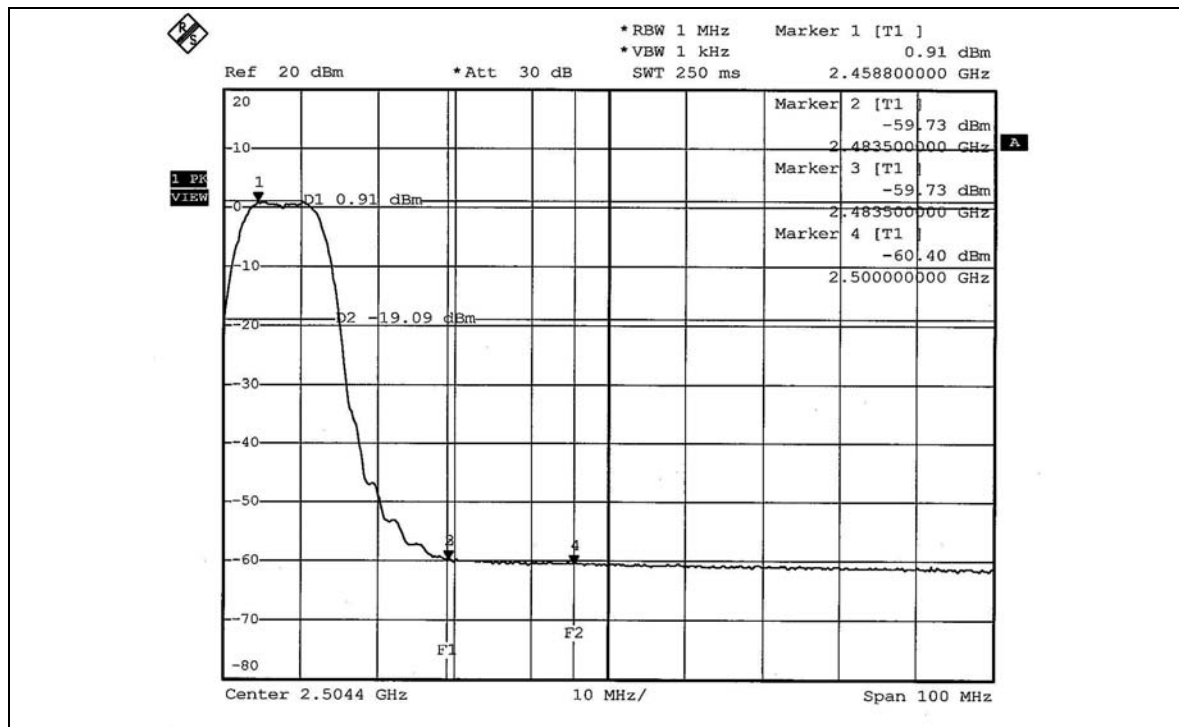



802.11g OFDM modulation



NOTE 1: The band edge emission plot of OFDM technique on page 63 shows 45.85dBc between carrier maximum power and local maximum emission in restrict band (2.3682GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.9 is 109.77dBuV/m (Peak), so the maximum field strength in restrict band is $109.77 - 45.85 = 63.92$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of OFDM technique on page 63 shows 53.55dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.9 is 99.82dBuV/m (Average), so the maximum field strength in restrict band is $99.82 - 53.55 = 46.27$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot of OFDM technique on page 64 shows 45.56dBc between carrier maximum power and local maximum emission in restrict band (2.4877GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.9 is 109.75dBuV/m (Peak), so the maximum field strength in restrict band is $109.75 - 45.56 = 64.19$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot of OFDM technique on page 65 shows 53.86dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.9 is 99.91dBuV/m (Average), so the maximum field strength in restrict band is $99.91 - 53.86 = 46.05$ dBuV/m which is under 54dBuV/m limit.

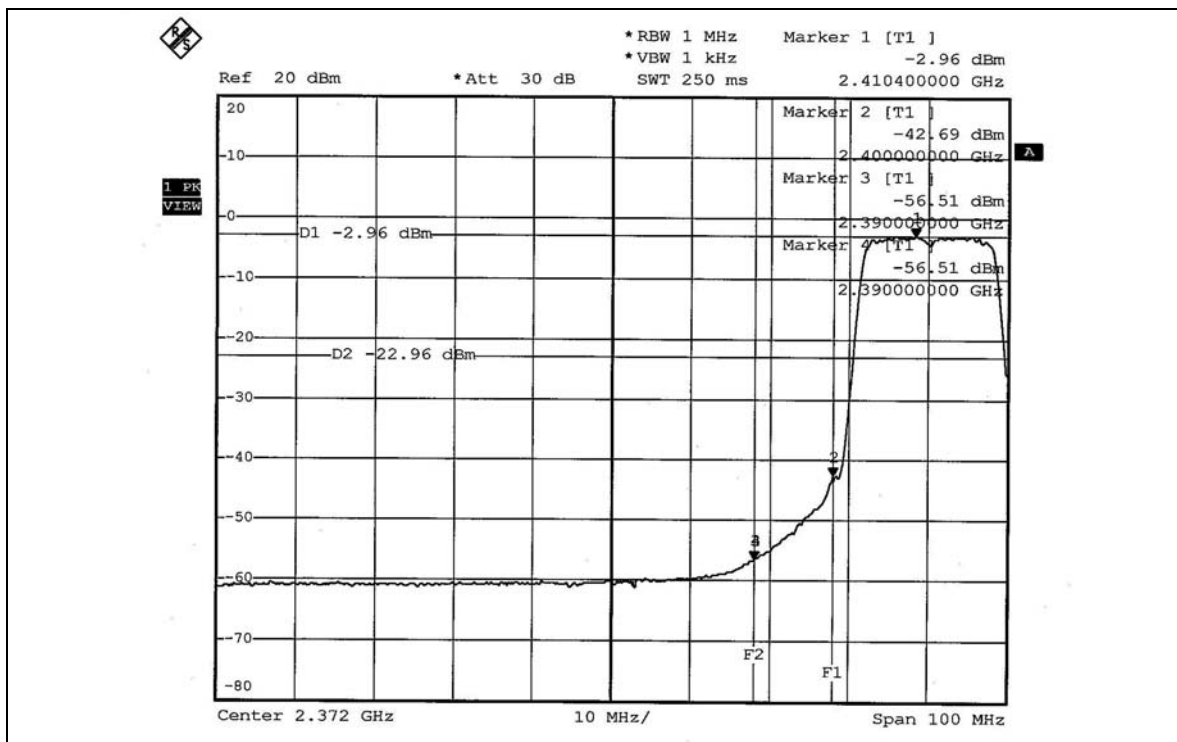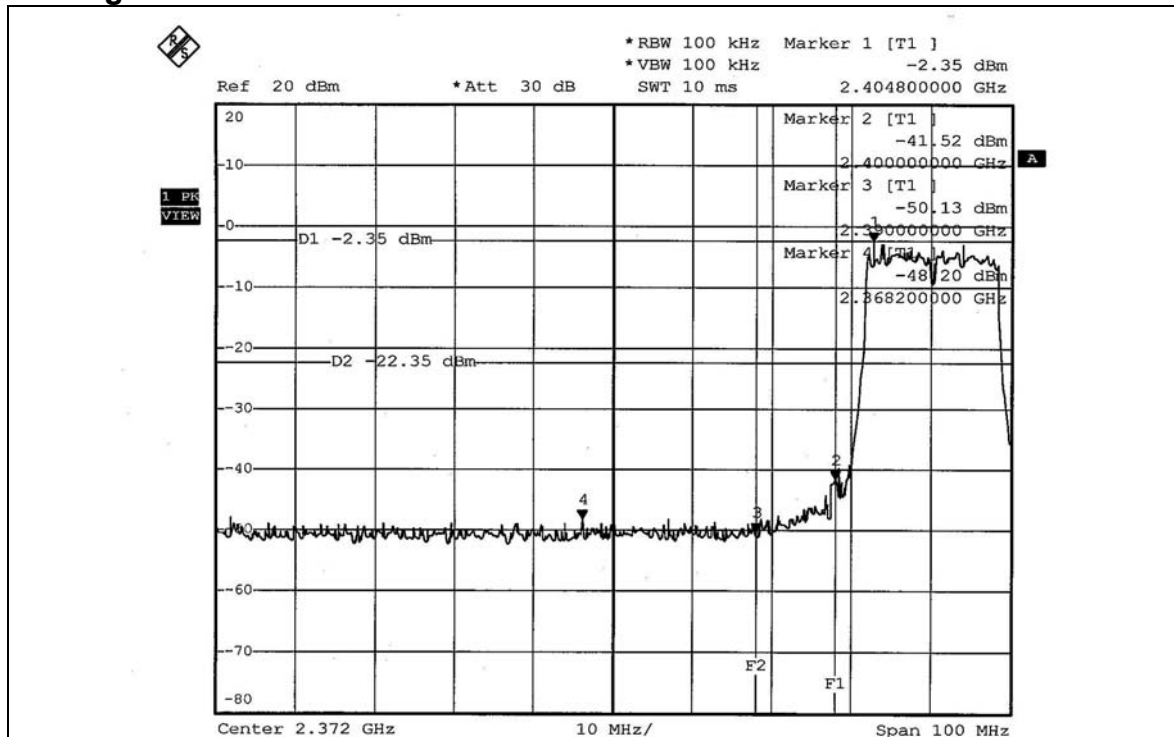802.11g OFDM modulation

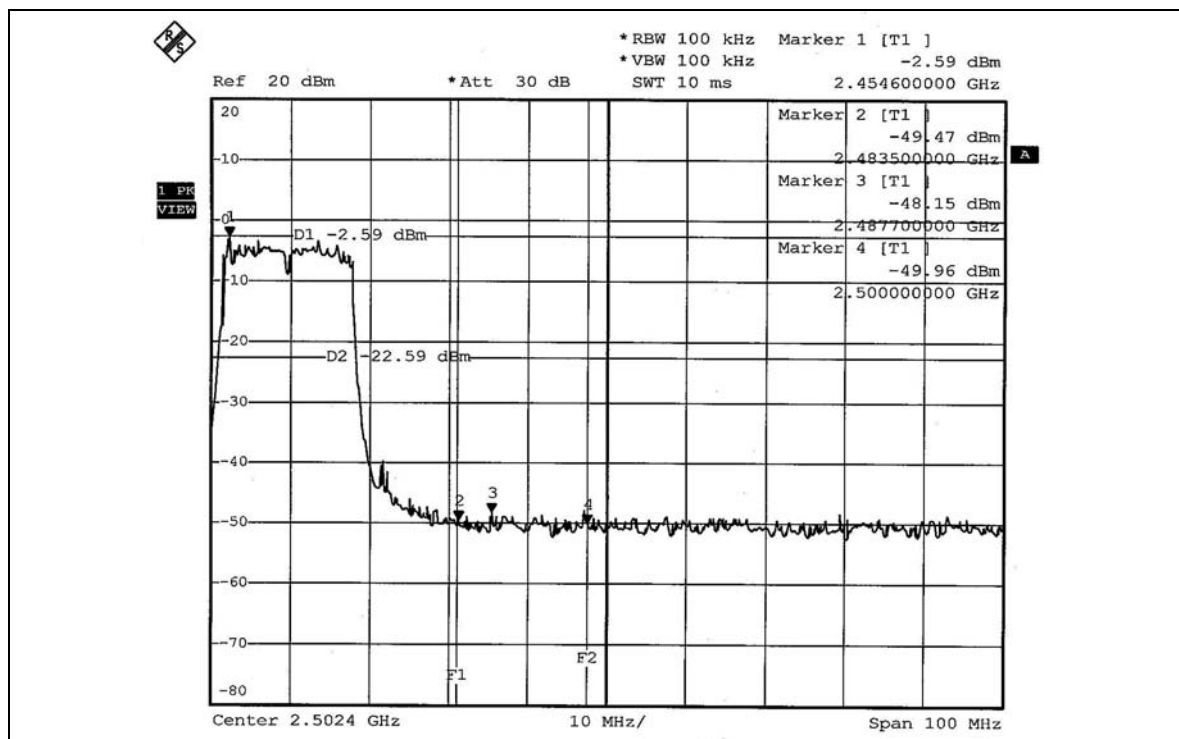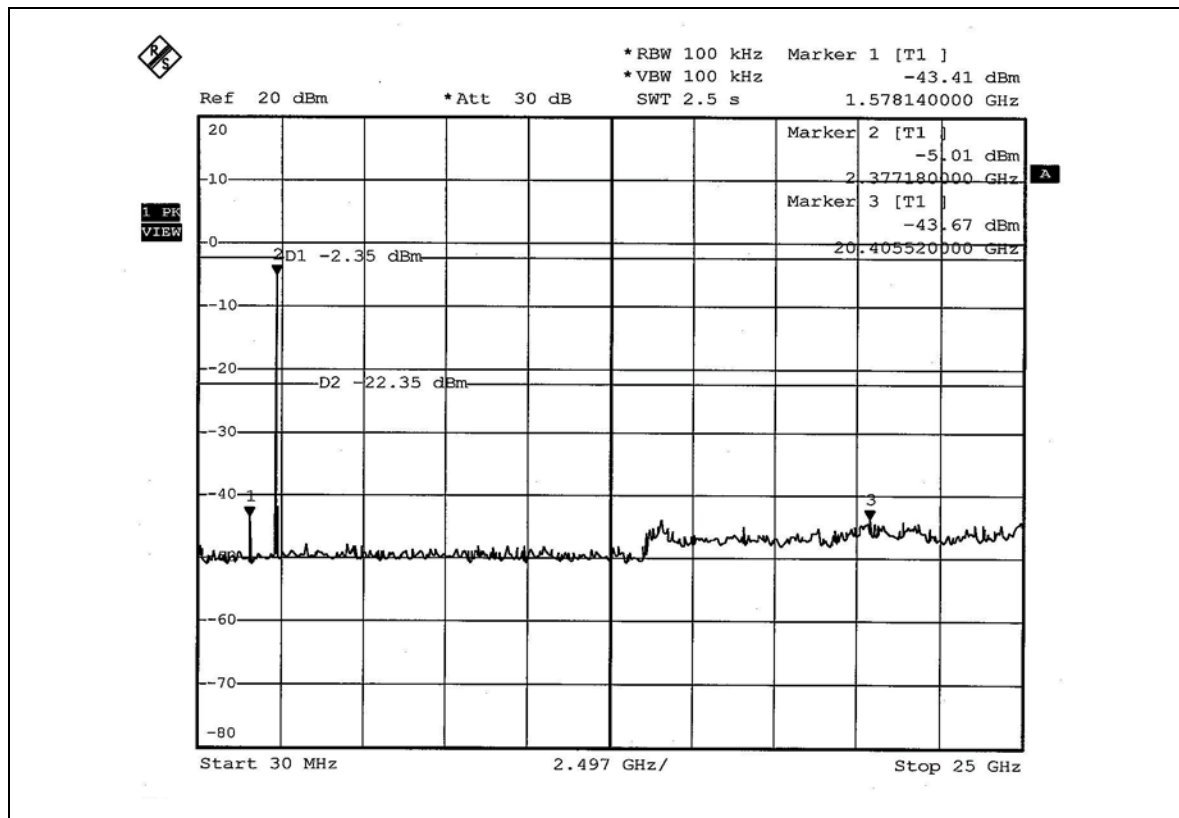

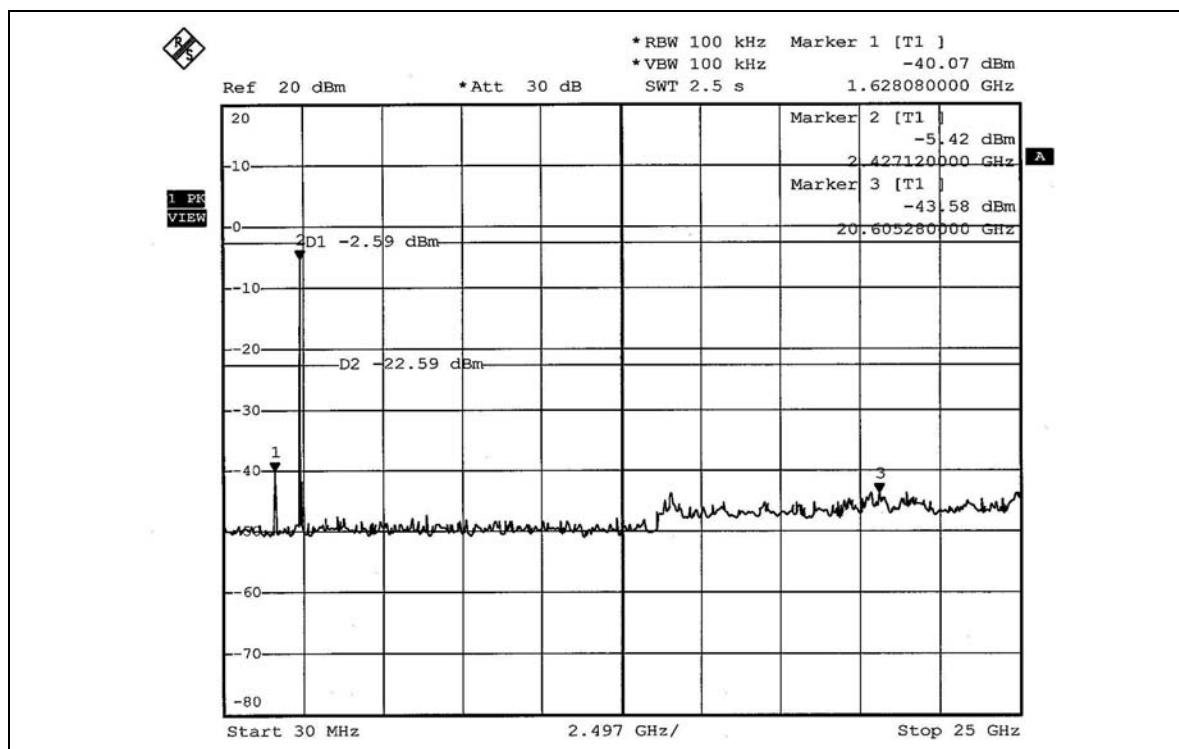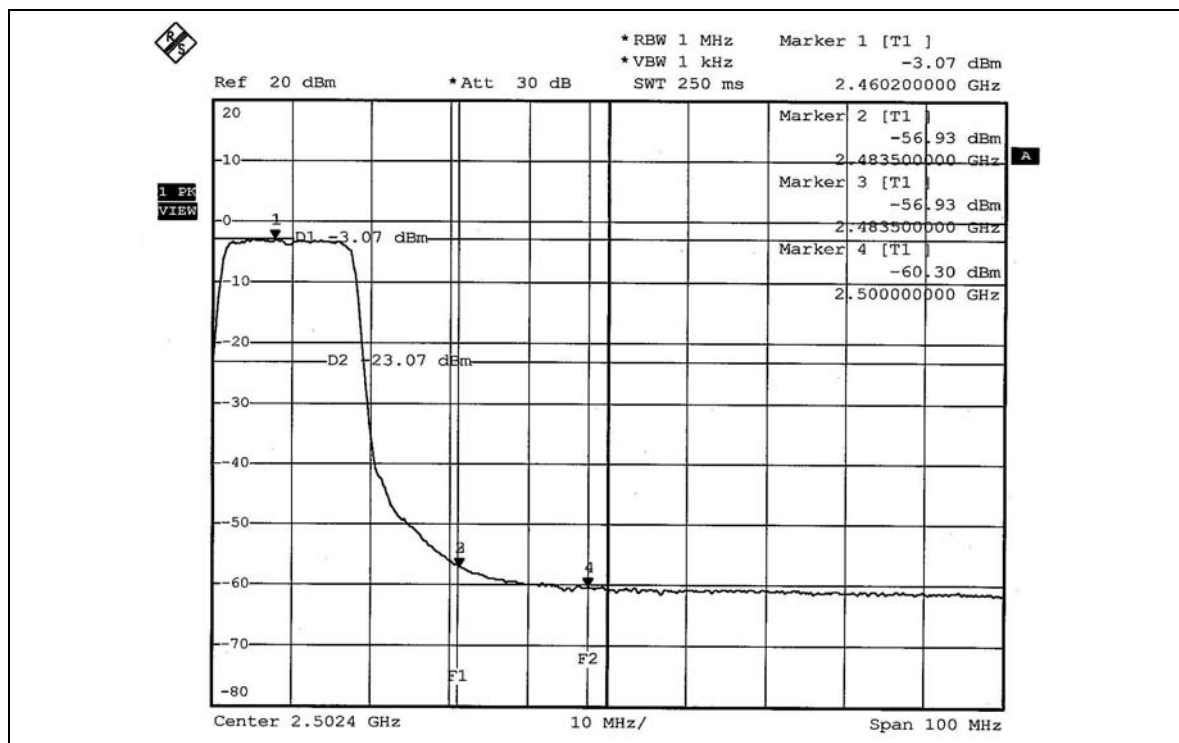



**802.11g Turbo OFDM modulation**



NOTE 1: The band edge emission plot of OFDM technique on page 67 shows 45.19dBc between carrier maximum power and local maximum emission in restrict band (2.3700GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.9 is 108.11dBuV/m (Peak), so the maximum field strength in restrict band is $108.11 - 45.19 = 62.92$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of OFDM technique on page 67 shows 57.07dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.9 is 98.21dBuV/m (Average), so the maximum field strength in restrict band is $98.21 - 57.07 = 41.14$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot of OFDM technique on page 68 shows 46.46dBc between carrier maximum power and local maximum emission in restrict band (2.4859GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.9 is 108.11dBuV/m (Peak), so the maximum field strength in restrict band is $108.11 - 46.46 = 61.65$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot of OFDM technique on page 69 shows 57.44dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.9 is 98.21dBuV/m (Average), so the maximum field strength in restrict band is $98.21 - 57.44 = 40.77$ dBuV/m which is under 54dBuV/m limit.

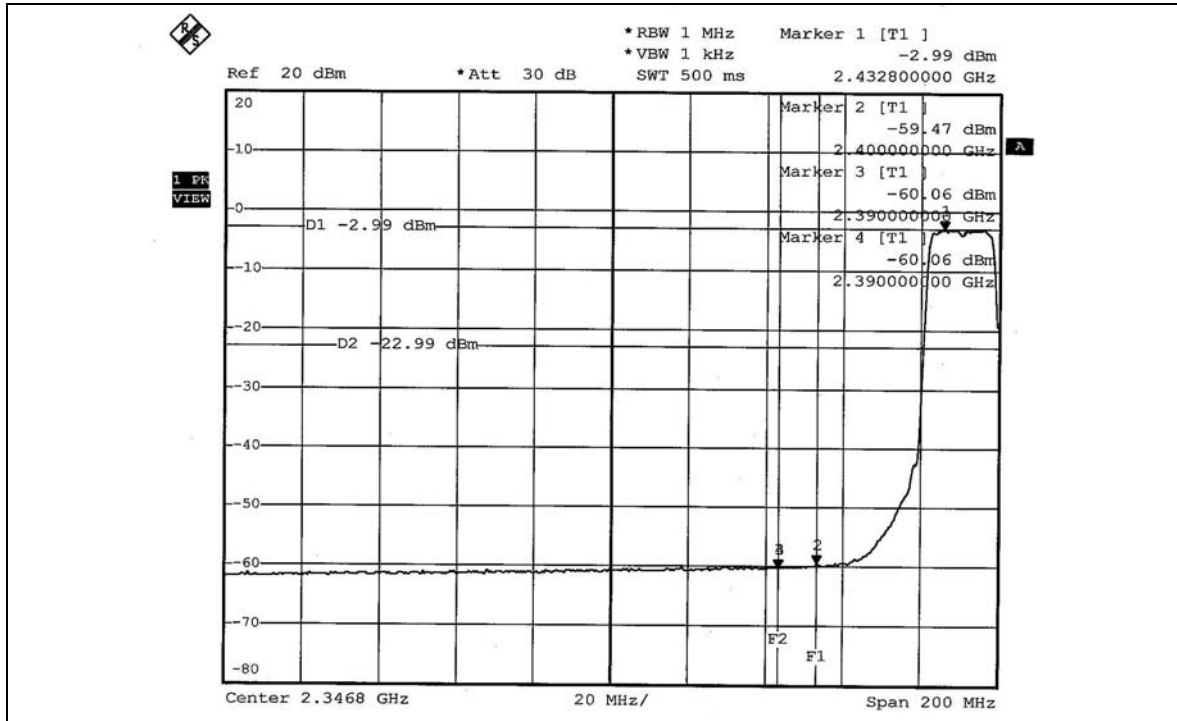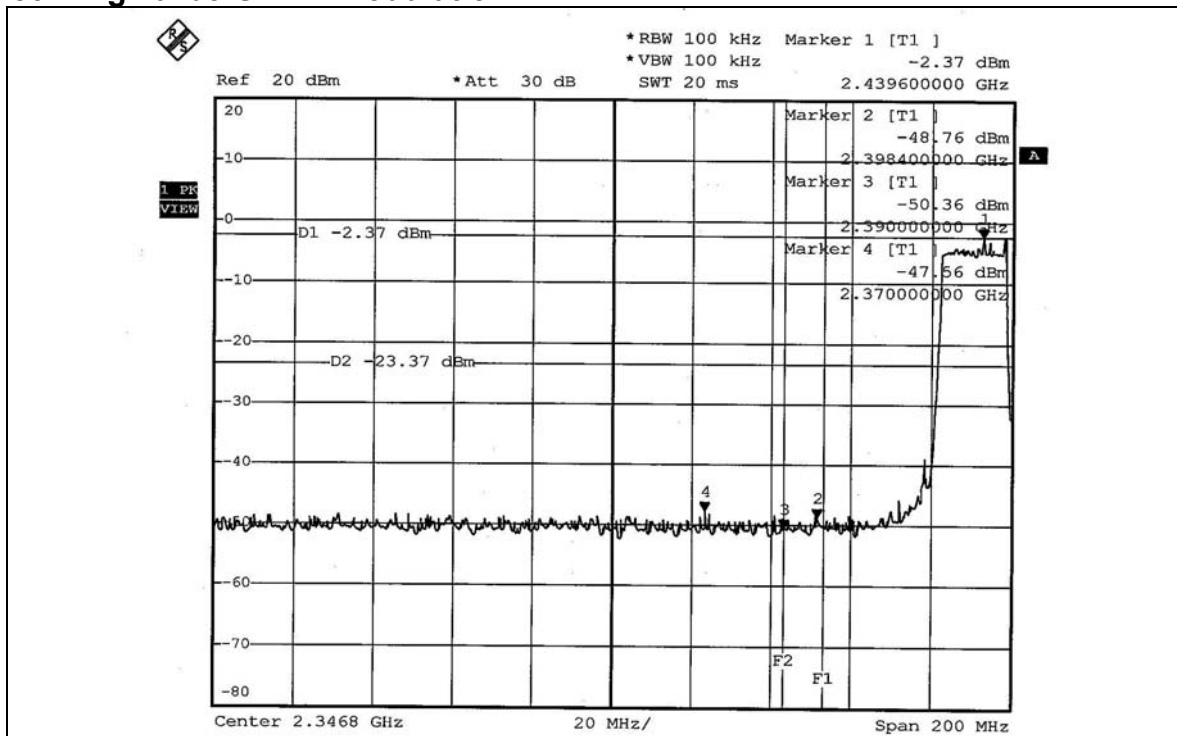802.11g Turbo OFDM modulation

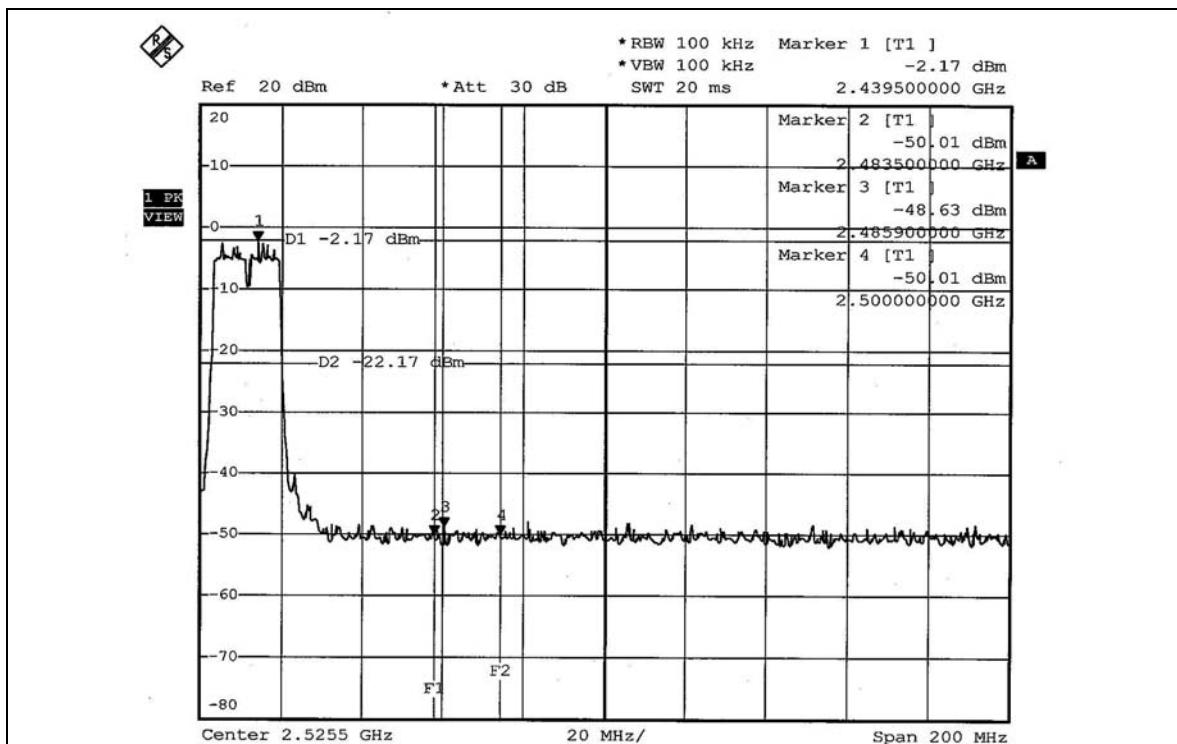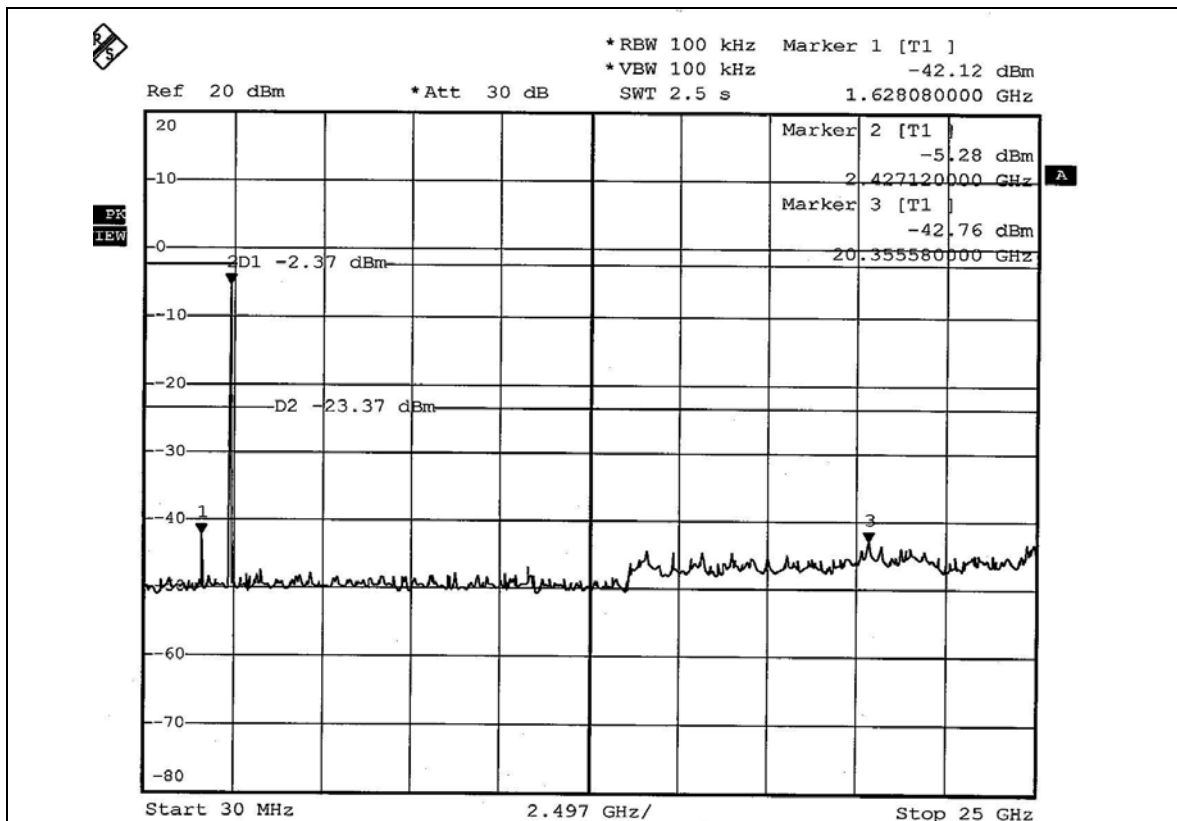

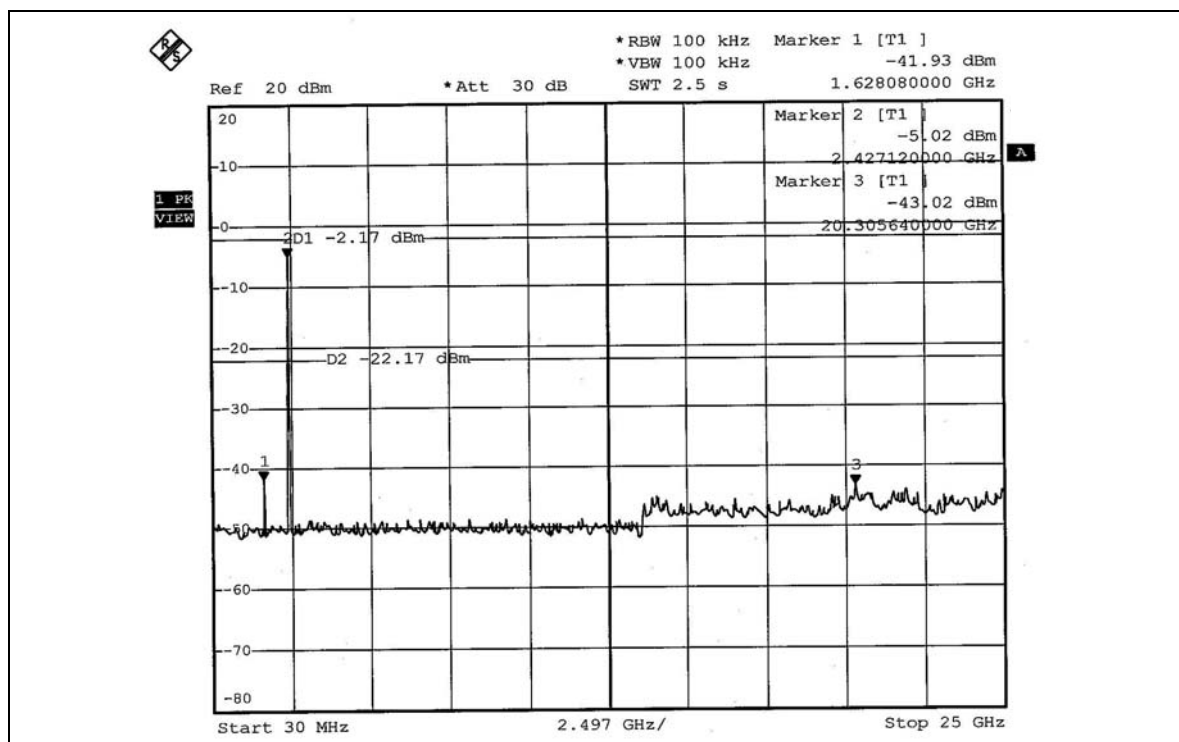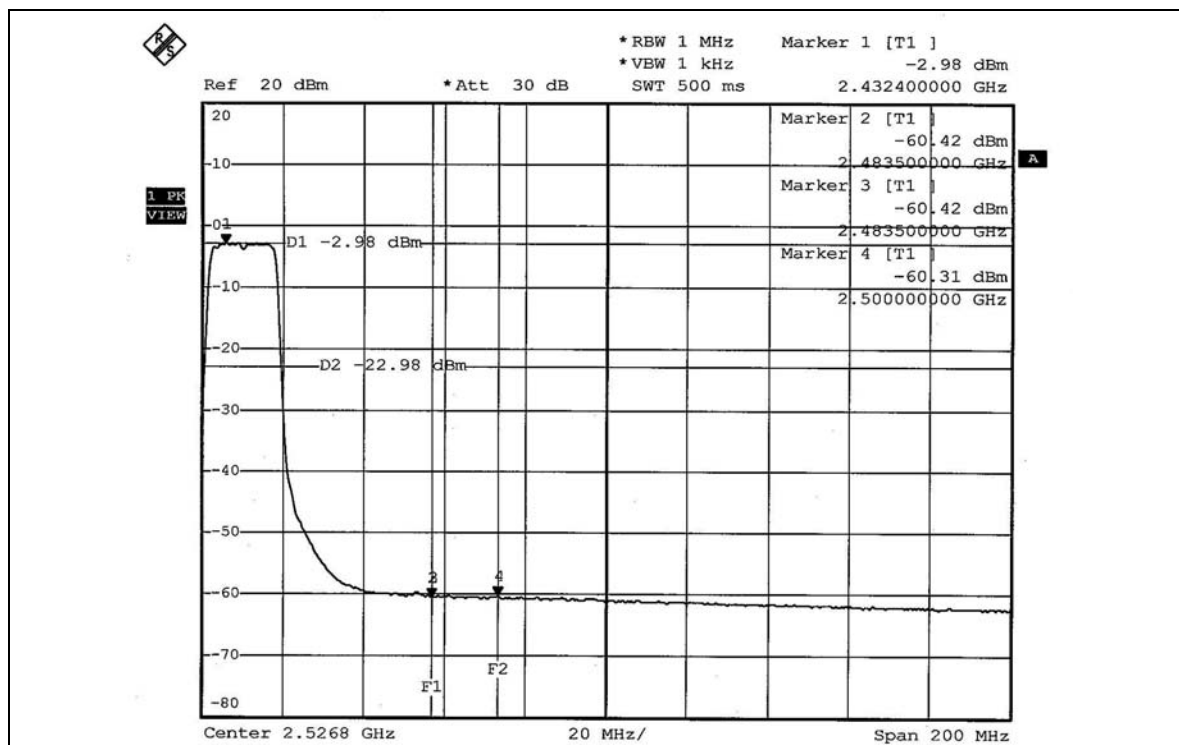



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION


The antenna type used in this product is Dipole antenna with RSMA antenna connector. The maximum Gain of this antenna is only 2dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST

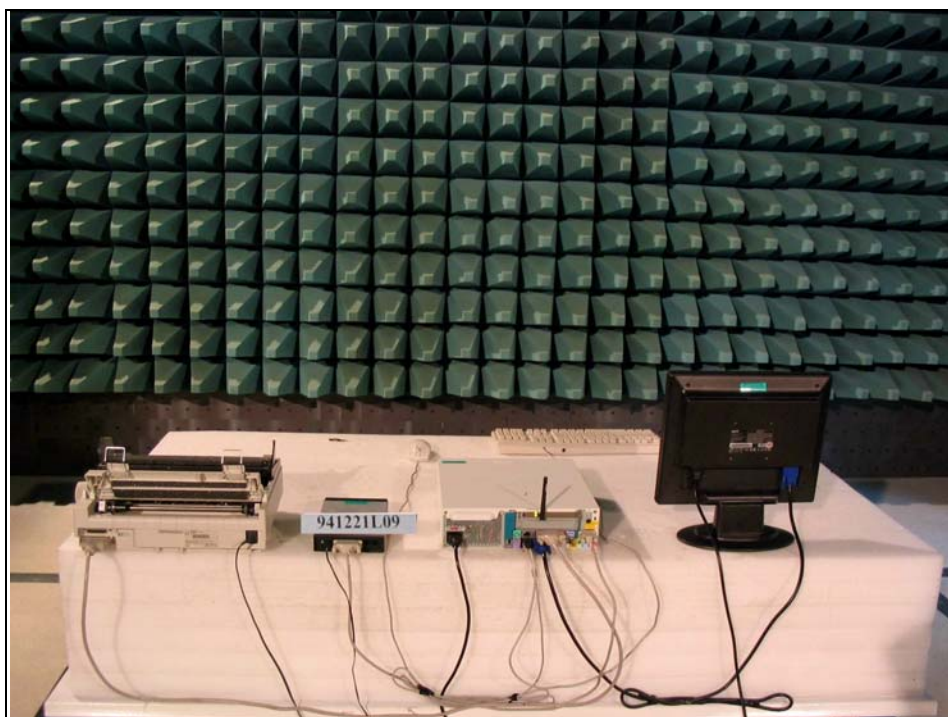

6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025

USA	FCC, NVLAP, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.