

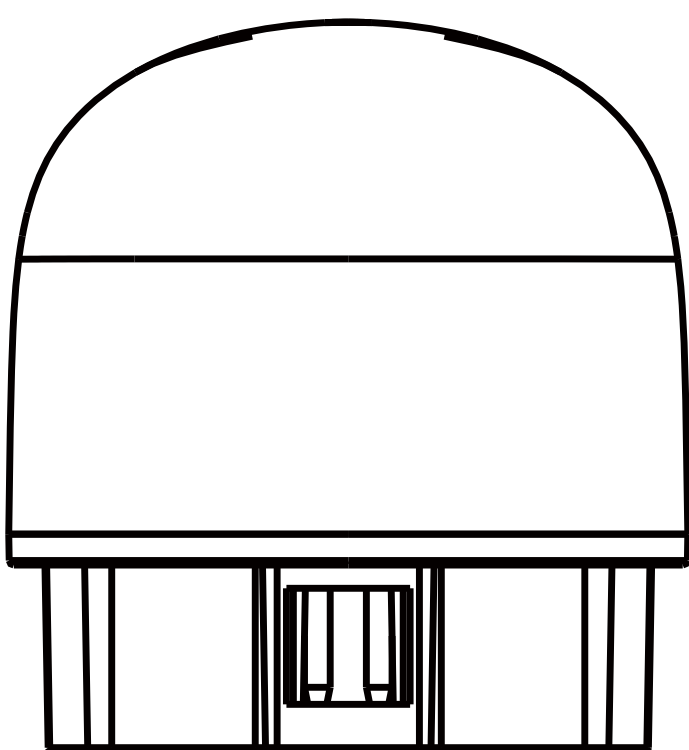


Advancer



Start your smart OBD2 car life

AD10 User Manual





How to use:

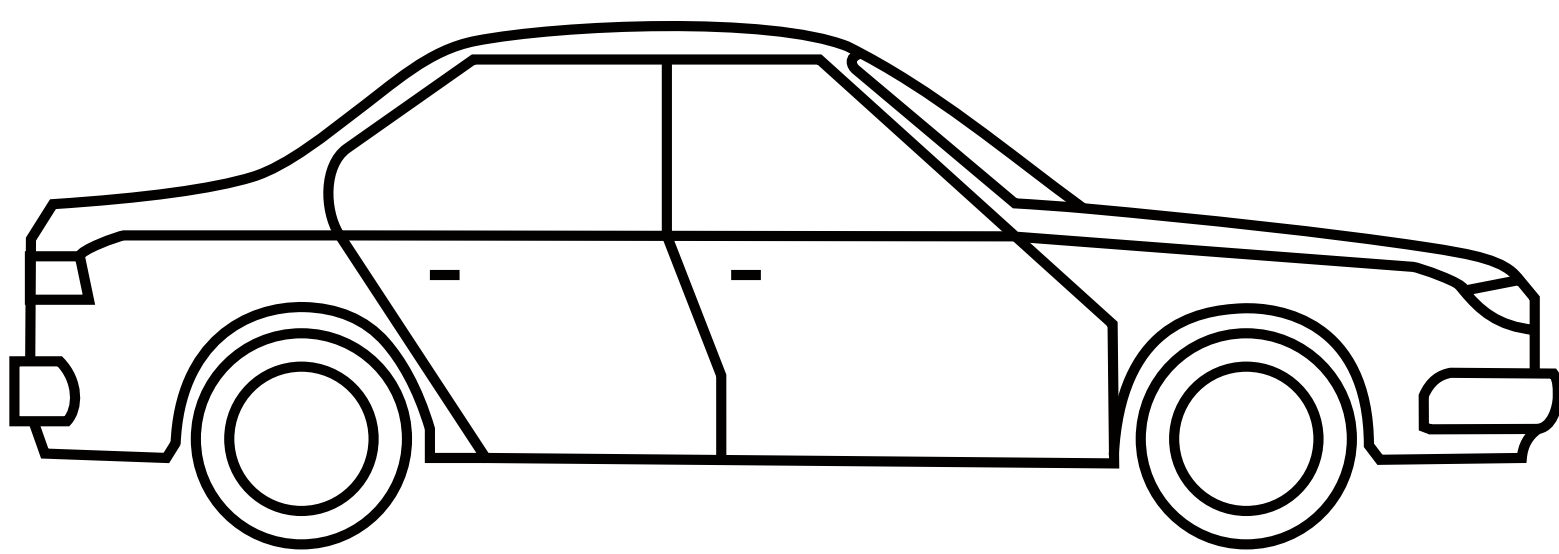

1.Product Appearance

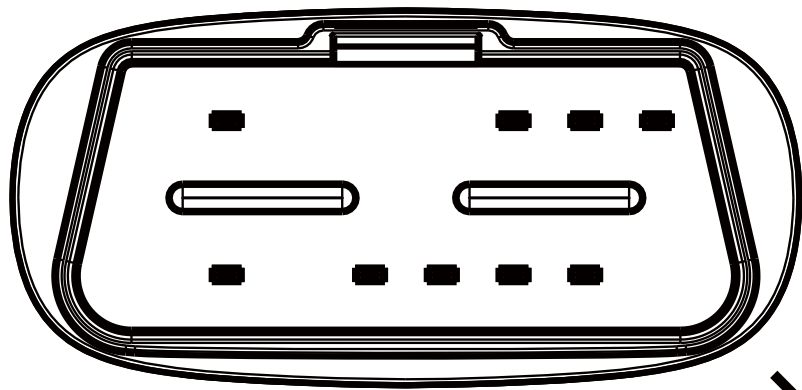

OBDII Interface

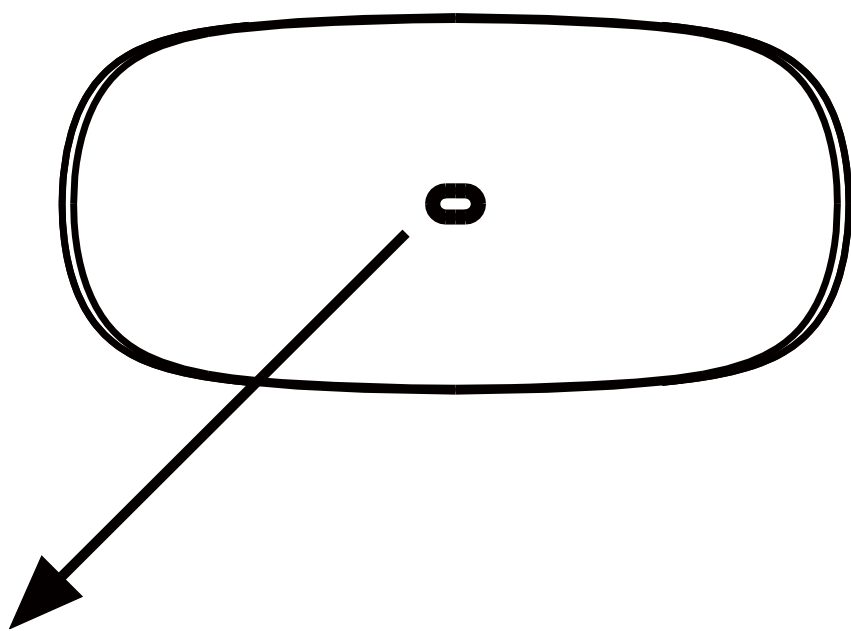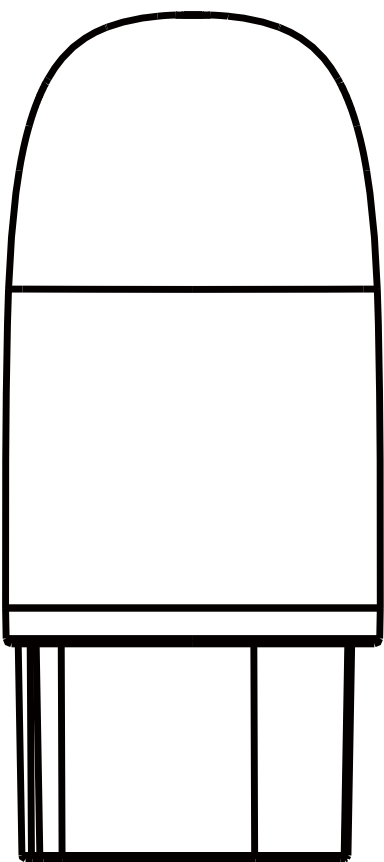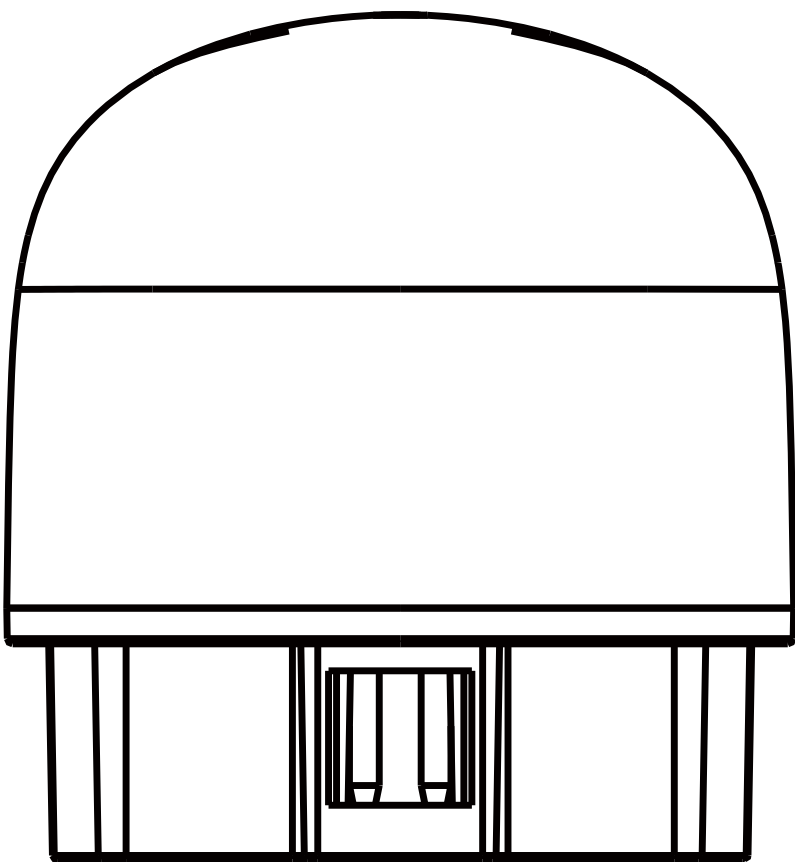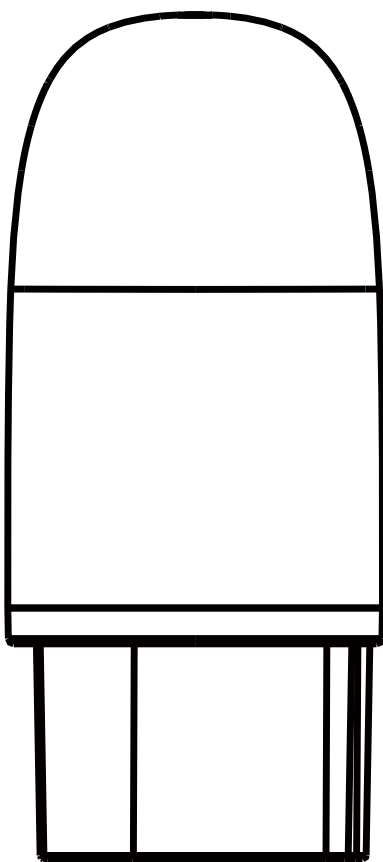

LED Indicator

Flashing: Bluetooth is disconnected

Solid Light: Bluetooth is connected

Light Off: Device is in sleep mode

2.Product Parameter

Processor	ARM Cortex-M0
Interface	OBDII Standard Interface
Bluetooth	BLE 4.2
Supported Protocols	CAN_BUS, K_LINE, L_LINE, SAE-J1580-VPW SAE-J1580-PWM
Supply Power	DC 9V-28V
Consumption	≤ 1 W
Working Temperature	-20~+ 60 C°
Storage Temperature	-40~+85C°

3.Product Functions

- 1.Vehicles OBD Diagnosis
- 2.Personalized Dashboard
- 3.HUD Display
- 4.DTC Warning Display
- 5.Smog Check
- 6.DIY Mode
- 7.Vehicles Performance Test
- 8.Big Data Ranking

APP QR Code:



FCC Warning

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Radiation Exposure Statement

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.