

# FCC TEST REPORT

**Report No.:** ARFR-ESH-P2004211473B-3

**Product:** Smart Zigbee Gateway

**Test Model:** THP10-Z

**Received:** Apr.21, 2020

**ISSUED:** May.23, 2020

**Applicant:** Hangzhou Tuya Information Technology Co., Ltd

**Address:** Room701, Building3, More Center, No.87 GuDun Road, Hangzhou, Zhejiang, China

**Issued By:** BUREAU VERITAS ADT (Shanghai) Corporation

**Lab Location:** No. 829, Xinzhuang Road, Shanghai, P.R.China (201612)

This test report consists of 22 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by A2LA, CNAS, or any government agency. The test results in the report only apply to the tested item. The test results in this report are traceable to the national or international standards.




# Contents

|  |           |
|--|-----------|
| <b>1. TEST PROGRAM.....</b>                                | <b>3</b>  |
| <b>2. Summary of Test Procedure and Test Results .....</b> | <b>4</b>  |
| <b>3. Test Configuration of Equipment under Test .....</b> | <b>5</b>  |
| 3.1 Manufacturer information.....                          | 5         |
| 3.2 Feature of Equipment under Test.....                   | 5         |
| 3.3 Description of support units .....                     | 5         |
| 3.4 Measurement Uncertainty .....                          | 6         |
| <b>4 Test of Conducted Emission .....</b>                  | <b>7</b>  |
| 4.1 Test Limit .....                                       | 7         |
| 4.2 Test Procedures .....                                  | 8         |
| 4.3 Typical Test Setup .....                               | 8         |
| 4.4 Measurement Equipment .....                            | 9         |
| 4.5 Test Result and Data .....                             | 10        |
| 4.6 Test Photographs .....                                 | 14        |
| <b>5 Test of Radiated Emission .....</b>                   | <b>15</b> |
| 5.1 Test Limit .....                                       | 15        |
| 5.2 Test Procedures .....                                  | 16        |
| 5.3 Typical Test Setup .....                               | 16        |
| 5.4 Measurement Equipment .....                            | 17        |
| 5.5 Test Result and Data (30MHz ~ 1GHz).....               | 18        |
| 5.6 Test Result and Data (1GHz ~ 18GHz) .....              | 20        |
| 5.7 Test Photographs (30MHz ~ 1000MHz) .....               | 22        |
| 5.8 Test Photographs (1000MHz ~ 18000MHz) .....            | 23        |
| <b>6 Photographs of EUT .....</b>                          | <b>24</b> |

## 1. TEST PROGRAM

**PRODUCT:** Smart Zigbee Gateway  
**TEST MODEL:** THP10-Z  
**APPLICANT:** Hangzhou Tuya Information Technology Co., Ltd  
**TESTED:** Apr.25 to May.12, 2020  
**STANDARDS:** 47 CFR FCC Part15, Subpart B, Class B  
ANSI C63.4:2014

We, BUREAU VERITAS ADT (Shanghai) Corporation, declare that the equipment above has been tested and found compliance with the requirement limits of applicable standards. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate under the standards herein specified.

**PREPARED BY :**  , **DATE:** May.23, 2020  
Will YAN  
Project Engineer

**APPROVED BY :**  , **DATE:** May.23, 2020  
Daniel Sun  
EMC Lab Manager



## 2. Summary of Test Procedure and Test Results

| EMISSION (47 CFR FCC Part15, Subpart B) |                                     |                                |
|---|-------------------------------------|--------------------------------|
| Test Item                               | Normative References                | Test Result                    |
| Conducted Emission                      | 47 CFR FCC Part15, Subpart B 15.107 | Meets the Class B requirements |
| Radiated Emission                       | 47 CFR FCC Part15, Subpart B 15.109 | Meets the Class B requirements |

### 3. Test Configuration of Equipment under Test

#### 3.1 Manufacturer information

Manufacturer : Hangzhou Tuya Information Technology Co., Ltd

Address : Room701, Building3, More Center, No.87 GuDun Road, Hangzhou, Zhejiang,  
China

#### 3.2 Feature of Equipment under Test

|                          |   |
|--------------------------|---|
| <b>Product Name:</b>     | Smart Zigbee Gateway                      |
| <b>Test Model:</b>       | THP10-Z                                   |
| <b>EUT Power Rating:</b> | 5VDC/1A with adaptor 100-240Vac~, 50/60Hz |

Note: 1. Please refer to user manual.

#### 3.3 Description of support units

| NO. | PRODUCT      | BRAND | MODEL NO.      |
|-----|--------------|-------|----------------|
| 1   | AC adapter   | --    | KA25-0501000US |
| 2   | Mobile Phone | Vivo  | --             |

### 3.4 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

This listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

| Measurement         |               | Value   |
|---------------------|---------------|---------|
| Conducted emissions |               | 2.55 dB |
| Radiated emissions  | 30 MHz ~ 1GHz | 3.22 dB |
|                     | Above 1GHz    | 2.89 dB |

## 4 Test of Conducted Emission

### 4.1 Test Limit

**TEST STANDARD:**

**CFR 47 FCC Part 15, Subpart B (Section: 15.107)**


| FREQUENCY (MHz) | Class A (dBμV) |         | Class B (dBμV) |         |
|-----------------|----------------|---------|----------------|---------|
|                 | Quasi-peak     | Average | Quasi-peak     | Average |
| 0.15 - 0.5      | 79             | 66      | 66 - 56        | 56 - 46 |
| 0.50 - 5.0      | 73             | 60      | 56             | 46      |
| 5.0 - 30.0      | 73             | 60      | 60             | 50      |

- NOTES:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

## 4.2 Test Procedures

1. The EUT was placed on a desk 0.8 meters height from the metal ground plane and 0.4 meter from the conducting wall of the shielding room and it was kept at least 0.8 meters from any other grounded conducting surface.
2. Connect EUT to the power mains through a Artificial Mains Network (AMN).
3. All the support units are connecting to the other AMN.
4. The AMN provides 50 ohm coupling impedance for the measuring instrument.
5. The CISPR states that a 50 ohm, 50 micro-Henry AMN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched
8. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

## 4.3 Typical Test Setup

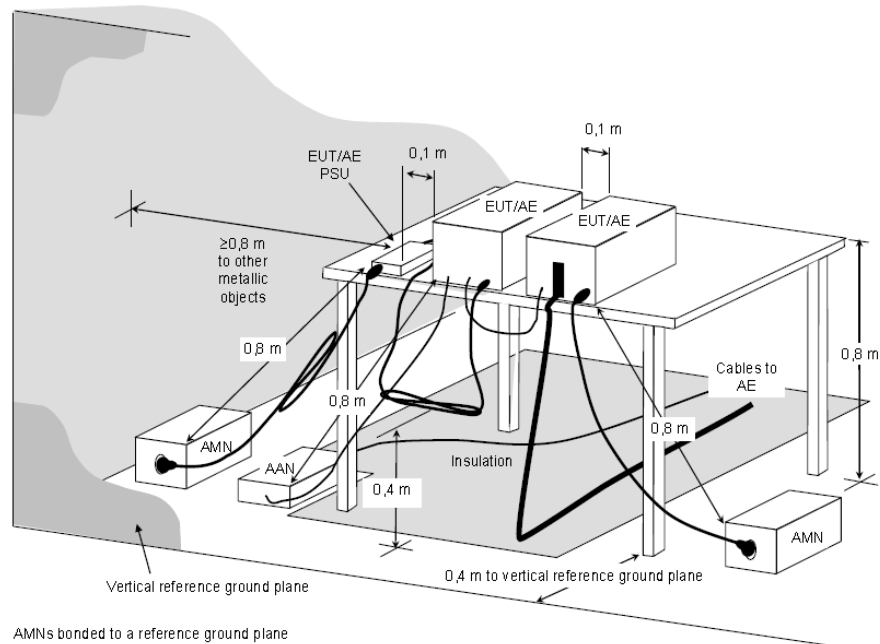

NOTE The 0.8 m distance specified between EUT/AE/PSU and AMN/AAN, is applicable only to the EUT being measured. If the device is AE then it shall be  $\geq 0.8$  m.

**Figure D.2 – Example measurement arrangement for table-top EUT  
(Conducted emission measurement – alternative 1)**



#### 4.4 Measurement Equipment

| DESCRIPTION & MANUFACTURER       | MODEL NO.       | SERIAL NO. | CALIBRATED UNTIL |
|----------------------------------|-----------------|------------|------------------|
| Test Receiver<br>ROHDE & SCHWARZ | ESCS30          | E1R1001    | Mar.03, 2021     |
| LISN<br>ROHDE & SCHWARZ          | ENV216          | E1L1011    | Jul.17, 2020     |
| Software<br>ADT                  | ADT_Cond_V7.3.0 | N/A        | N/A              |

## 4.5 Test Result and Data

### a. Conducted Emission Test Data

120Vac/60Hz

Phase : LINE

Location: Conduction 1

Date: 5/5/2020


Time: 2:33:25 PM

Phase L1

Temperatuer (C): 19

Humidity (%): 53

Approved by:

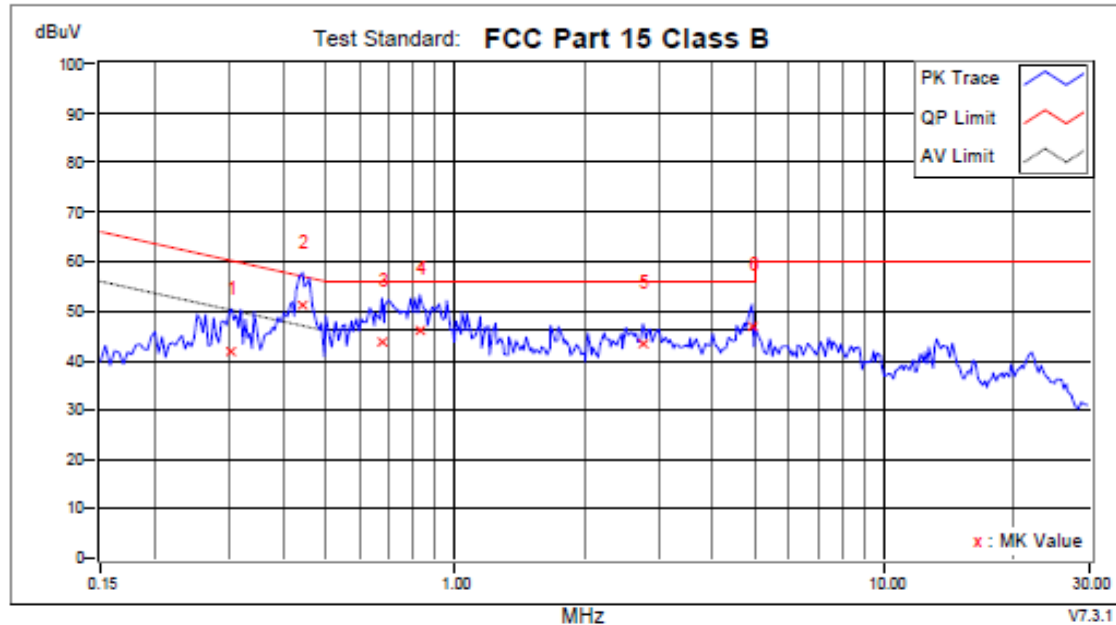

| No. | Frequency<br>MHz | Corr.<br>Factor<br>dB | Reading<br>dBuV |       | Emission<br>dBuV |       | Limit<br>dBuV |       | Margins<br>dB |        | Notes |
|-----|------------------|-----------------------|-----------------|-------|------------------|-------|---------------|-------|---------------|--------|-------|
|     |                  |                       | QP              | AV    | QP               | AV    | QP            | AV    | QP            | AV     |       |
| 1   | 0.30249          | 9.70                  | 31.99           | 19.74 | 41.69            | 29.44 | 60.17         | 50.17 | -18.48        | -20.73 |       |
| +2  | 0.44325          | 9.72                  | 41.30           | 30.56 | 51.02            | 40.28 | 57.00         | 47.00 | -5.98         | -6.72  |       |
| 3   | 0.67785          | 9.61                  | 34.25           | 23.92 | 43.86            | 33.53 | 56.00         | 46.00 | -12.14        | -12.47 |       |
| 4   | 0.83034          | 9.59                  | 36.44           | 24.45 | 46.03            | 34.04 | 56.00         | 46.00 | -9.97         | -11.96 |       |
| 5   | 2.74386          | 9.84                  | 33.51           | 24.76 | 43.35            | 34.60 | 56.00         | 46.00 | -12.65        | -11.40 |       |
| 6   | 4.92564          | 10.04                 | 36.93           | 28.48 | 46.97            | 38.52 | 56.00         | 46.00 | -9.03         | -7.48  |       |

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Phase : NEUTRAL

Location: Conduction 1

Date: 5/5/2020


Time: 2:31:31 PM

Phase N

Temperatuer (C): 19

Humidity (%): 53

Approved by:

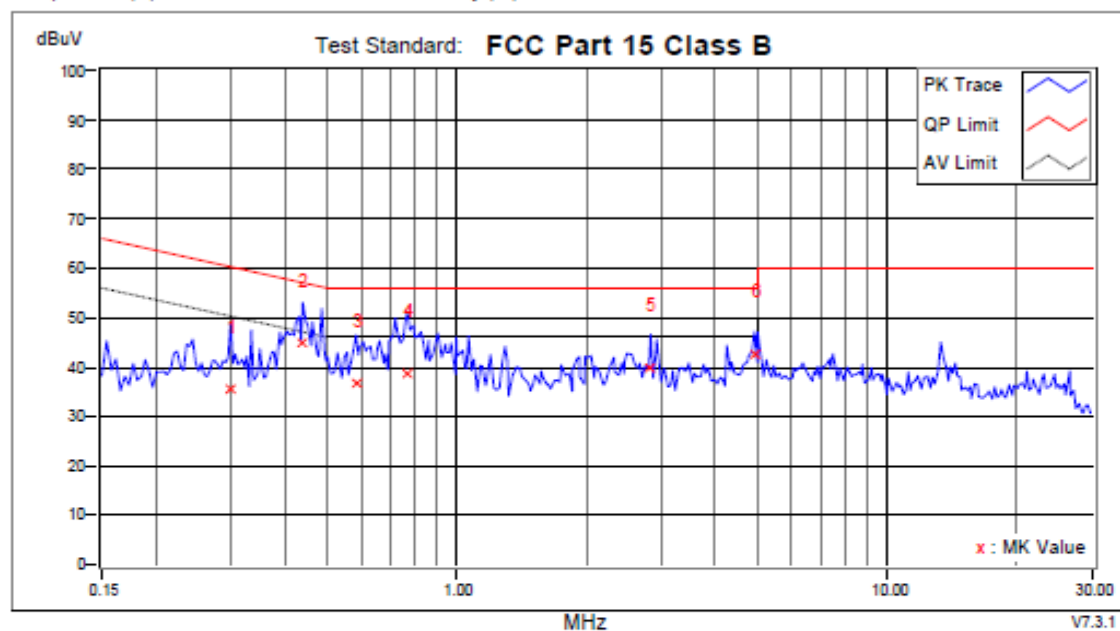

| No. | Frequency | Corr. Factor | Reading dBuV |       | Emission dBuV |       | Limit dBuV |       | Margins dB |        | Notes |
|-----|-----------|--------------|--------------|-------|---------------|-------|------------|-------|------------|--------|-------|
|     | MHz       | dB           | QP           | AV    | QP            | AV    | QP         | AV    | QP         | AV     |       |
| 1   | 0.29858   | 9.87         | 25.65        | 12.61 | 35.52         | 22.48 | 60.28      | 50.28 | -24.76     | -27.80 |       |
| 2   | 0.43934   | 9.86         | 35.02        | 22.20 | 44.88         | 32.06 | 57.07      | 47.07 | -12.20     | -15.02 |       |
| 3   | 0.58401   | 9.83         | 26.90        | 15.56 | 36.73         | 25.39 | 56.00      | 46.00 | -19.27     | -20.61 |       |
| 4   | 0.76778   | 9.86         | 29.00        | 17.44 | 38.86         | 27.30 | 56.00      | 46.00 | -17.14     | -18.70 |       |
| 5   | 2.82597   | 10.02        | 29.90        | 24.27 | 39.92         | 34.29 | 56.00      | 46.00 | -16.08     | -11.71 |       |
| +6  | 4.92564   | 9.72         | 32.89        | 25.93 | 42.61         | 35.65 | 56.00      | 46.00 | -13.39     | -10.35 |       |

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

240Vac/50Hz

Phase: LINE

Location: Conduction 1

Date: 5/5/2020


Time: 2:43:25 PM

Phase L1

Temperature (C): 19

Humidity (%): 53

Approved by:

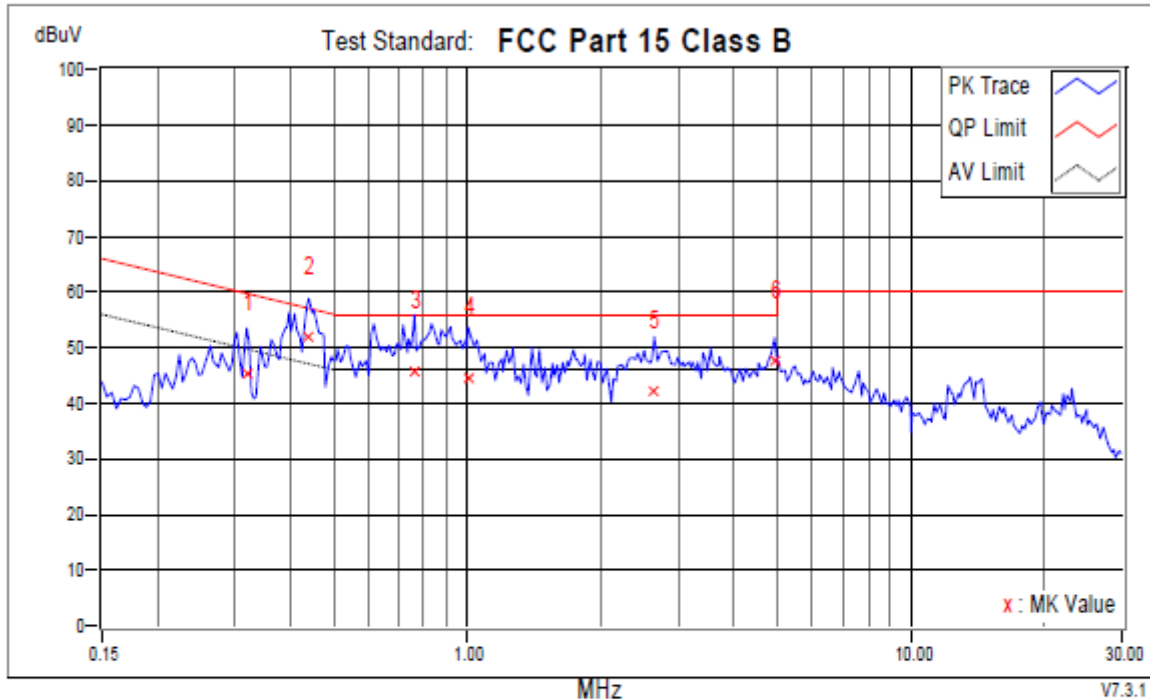

| No. | Frequency<br>MHz | Corr.<br>Factor<br>dB | Reading<br>dBuV |       | Emission<br>dBuV |       | Limit<br>dBuV |       | Margins<br>dB |        | Notes |
|-----|------------------|-----------------------|-----------------|-------|------------------|-------|---------------|-------|---------------|--------|-------|
|     |                  |                       | QP              | AV    | QP               | AV    | QP            | AV    | QP            | AV     |       |
| 1   | 0.31813          | 9.70                  | 35.58           | 22.92 | 45.28            | 32.62 | 59.76         | 49.76 | -14.47        | -17.13 |       |
| +2  | 0.43934          | 9.72                  | 42.31           | 28.50 | 52.03            | 38.22 | 57.07         | 47.07 | -5.04         | -8.85  |       |
| 3   | 0.75996          | 9.59                  | 35.98           | 23.92 | 45.57            | 33.51 | 56.00         | 46.00 | -10.43        | -12.49 |       |
| 4   | 1.00391          | 9.59                  | 34.85           | 24.42 | 44.44            | 34.01 | 56.00         | 46.00 | -11.56        | -11.99 |       |
| 5   | 2.63829          | 9.83                  | 32.20           | 22.18 | 42.03            | 32.01 | 56.00         | 46.00 | -13.97        | -13.99 |       |
| 6   | 4.92564          | 10.04                 | 37.60           | 29.15 | 47.64            | 39.19 | 56.00         | 46.00 | -8.36         | -6.81  |       |

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Phase: NEUTRAL

Location: Conduction 1

Date: 5/5/2020


Time: 2:46:11 PM

Phase N

Temperatuer (C): 19

Humidity (%): 53

Approved by:

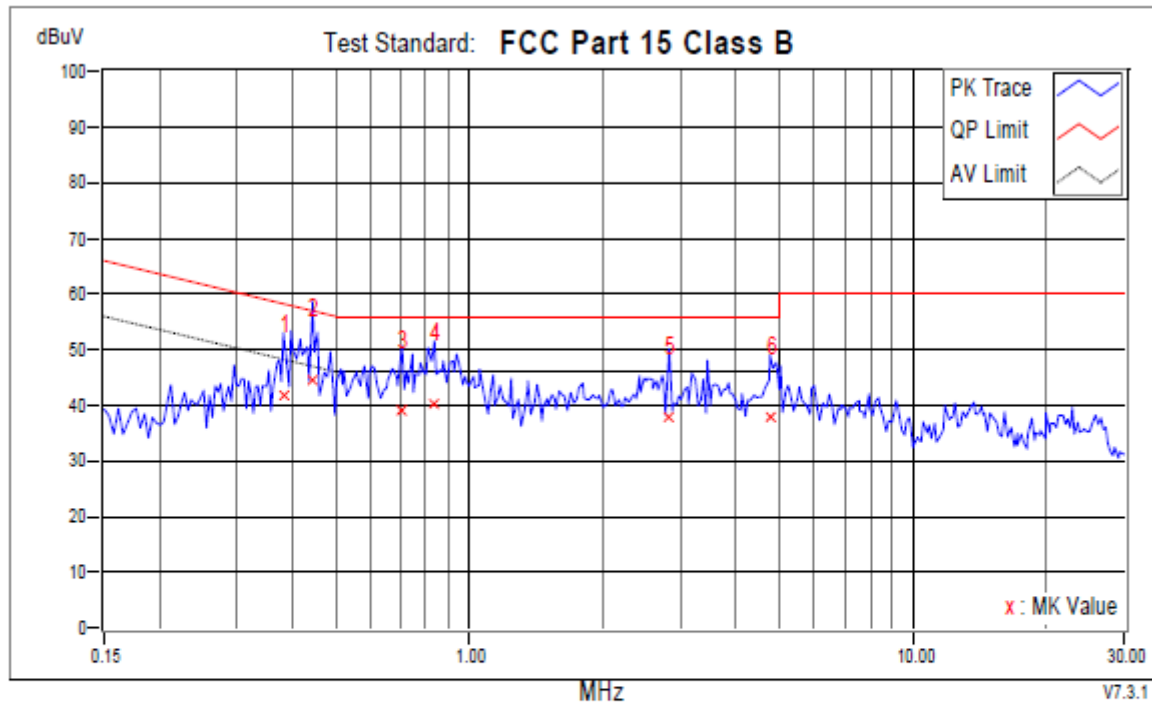


| No. | Frequency | Corr. Factor | Reading dBuV |       | Emission dBuV |       | Limit dBuV |       | Margins dB |        | Notes |
|-----|-----------|--------------|--------------|-------|---------------|-------|------------|-------|------------|--------|-------|
|     | MHz       | dB           | QP           | AV    | QP            | AV    | QP         | AV    | QP         | AV     |       |
| 1   | 0.38069   | 9.87         | 32.03        | 19.76 | 41.90         | 29.63 | 58.26      | 48.26 | -16.37     | -18.64 |       |
| +2  | 0.44325   | 9.85         | 34.84        | 21.92 | 44.69         | 31.77 | 57.00      | 47.00 | -12.31     | -15.23 |       |
| 3   | 0.70522   | 9.81         | 29.06        | 16.84 | 38.87         | 26.65 | 56.00      | 46.00 | -17.13     | -19.35 |       |
| 4   | 0.83425   | 9.89         | 30.29        | 17.38 | 40.18         | 27.27 | 56.00      | 46.00 | -15.82     | -18.73 |       |
| 5   | 2.82206   | 10.01        | 28.05        | 20.39 | 38.06         | 30.40 | 56.00      | 46.00 | -17.94     | -15.60 |       |
| 6   | 4.76533   | 9.75         | 28.29        | 20.27 | 38.04         | 30.02 | 56.00      | 46.00 | -17.96     | -15.98 |       |

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

#### 4.6 Test Photographs

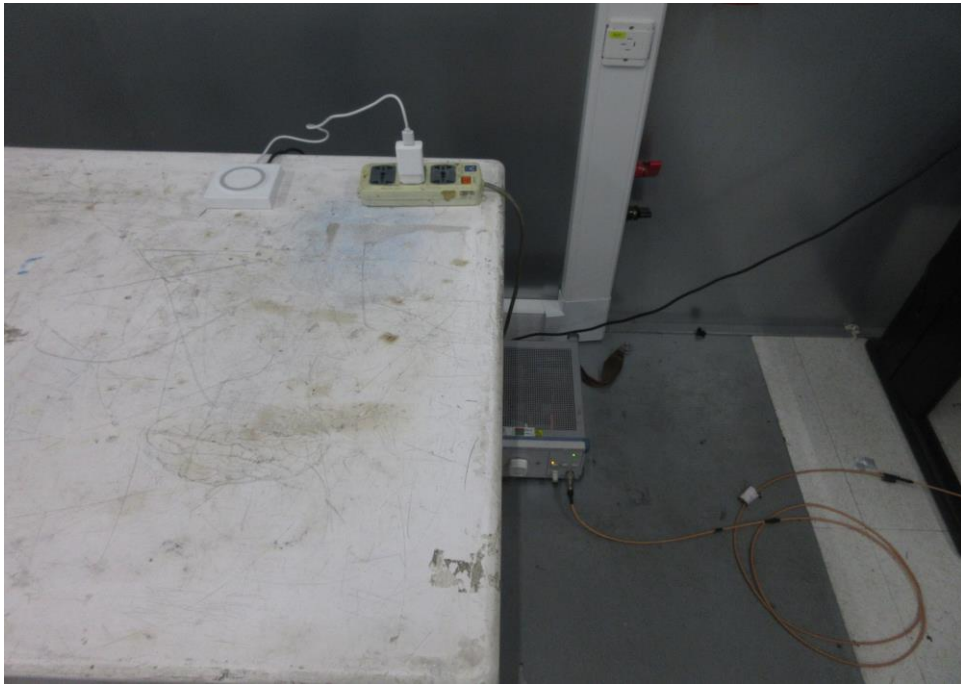

## 5 Test of Radiated Emission

### 5.1 Test Limit

**TEST STANDARD:**

**CFR 47 FCC Part 15, Subpart B (Section: 15.109)**

### FOR FREQUENCY BELOW 1000 MHz

| FREQUENCY (MHz) | Class A (at 10m) |                          | Class B (at 3m) |                          |
|-----------------|------------------|--------------------------|-----------------|--------------------------|
|                 | $\mu\text{V/m}$  | $\text{dB}\mu\text{V/m}$ | $\mu\text{V/m}$ | $\text{dB}\mu\text{V/m}$ |
| 30 – 88         | 90               | 39.1                     | 100             | 40.0                     |
| 88 – 216        | 150              | 43.5                     | 150             | 43.5                     |
| 216 – 960       | 210              | 46.4                     | 200             | 46.0                     |
| 960 – 1000      | 300              | 49.5                     | 500             | 54.0                     |

### LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz


| FREQUENCY (MHz) | Class A ( $\text{dB}\mu\text{V/m}$ ) (at 3m) |         | Class B ( $\text{dB}\mu\text{V/m}$ ) (at 3m) |         |
|-----------------|--|---------|--|---------|
|                 | PEAK   | AVERAGE | PEAK   | AVERAGE |
| Above 1000      | 80.0   | 60.0    | 74.0   | 54.0    |

- Note:**
1. The lower limit shall apply at the transition frequencies.
  2. Emission level ( $\text{dB}\mu\text{V/m}$ ) =  $20 \log$  Emission level ( $\mu\text{V/m}$ ).
  3. All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

## 5.2 Test Procedures

1. The EUT was placed on a rotatable table top 0.8 meter above ground.
2. The EUT was set 3/10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
5. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.

## 5.3 Typical Test Setup

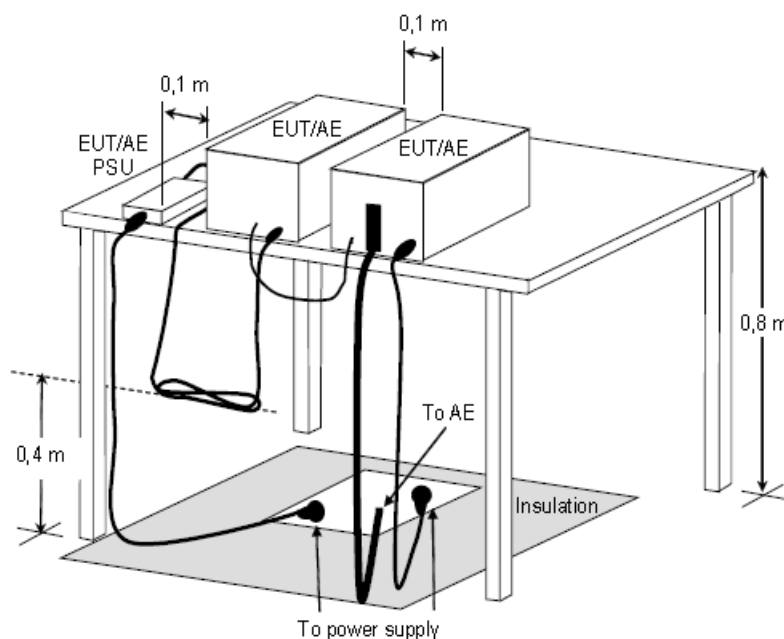

**Figure D.8 – Example measurement arrangement for table-top EUT  
(Radiated emission measurement)**




#### 5.4 Measurement Equipment

| DESCRIPTION & MANUFACTURER                             | MODEL NO.   | SERIAL NO. | CALIBRATED UNTIL |
|--|-------------|------------|------------------|
| EMI Test Spectrum<br>ROHDE & SCHWARZ                   | ESR7        | E1R1005    | Dec.02, 2020     |
| Spectrum Analyzer<br>Keysight                          | N9030B      | E1S1003    | Jul.22, 2020     |
| Broad-Band Antenna<br>Schwarzbeck                      | VULB9168    | E1A1012    | Aug.25, 2020     |
| Double Riaged Vroadband Horn<br>Antenna<br>Schwarzbeck | BBHA9120D   | E1A1017    | Jan.25, 2021     |
| Preamplifier<br>Agilent                                | 8447D       | E1A2001    | Oct.13, 2020     |
| Preamplifier<br>Agilent                                | EMC051845SE | E1A2009    | Jul.18, 2020     |

## 5.5 Test Result and Data (30MHz ~ 1GHz)

Position: Horizontal

**Test Graph**

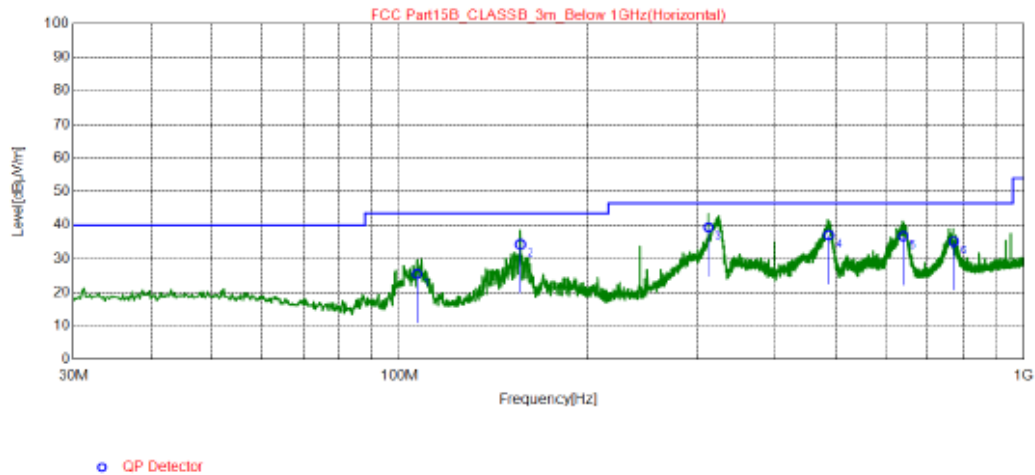


| NO. | Freq. [MHz] | QP Reading [dBuV/m] | Factor [dB] | QP Value [dBuV/m] | QP Limit [dBuV/m] | QP Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-------------|---------------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| 1   | 106.6       | 37.98               | -12.55      | 25.43             | 43.50             | 18.07          | 200         | 190       | Horizontal |
| 2   | 156.1       | 43.35               | -9.08       | 34.27             | 43.50             | 9.23           | 200         | 221       | Horizontal |
| 3   | 312.4       | 48.16               | -8.85       | 39.31             | 46.50             | 7.19           | 100         | 312       | Horizontal |
| 4   | 486.8       | 42.7                | -5.71       | 36.99             | 46.50             | 9.51           | 200         | 152       | Horizontal |
| 5   | 640.7       | 39.92               | -3.25       | 36.67             | 46.50             | 9.83           | 100         | 170       | Horizontal |
| 6   | 772.0       | 36.53               | -1.43       | 35.10             | 46.50             | 11.40          | 100         | 139       | Horizontal |

### REMARKS:

1. Q.P. is abbreviation of quasi-peak individually.
2. The emission levels of other frequencies were very low against the limit.
3. QP Margin value = QP Limit value – QP value.
4. Factor = Antenna Factor + Amplifier Factor + Cable loss.
5. QP value = Factor + Reading Value.

Position: Vertical

### Test Graph

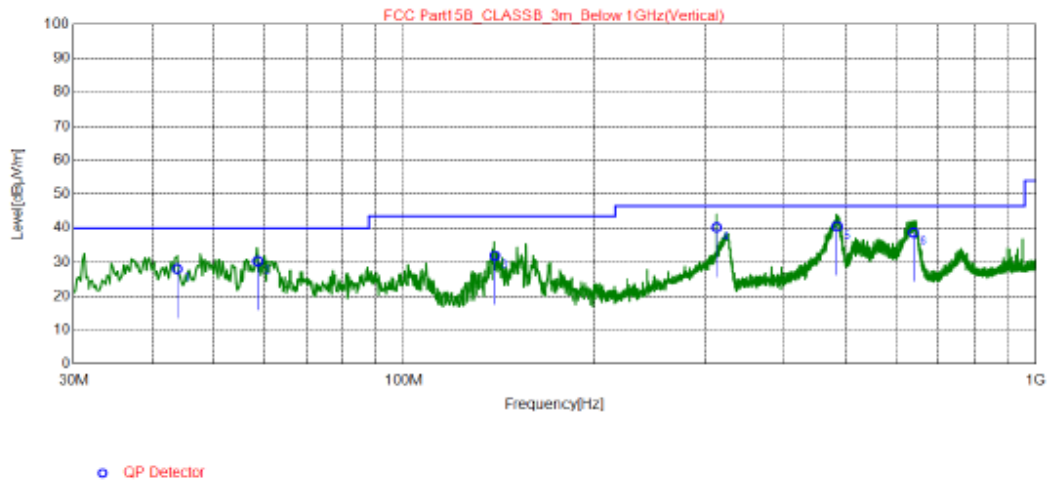

| NO. | Freq. [MHz] | QP Reading [dBμV/m] | Factor [dB] | QP Value [dBμV/m] | QP Limit [dBμV/m] | QP Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-------------|---------------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| 1   | 43.77       | 37.52               | -9.55       | 27.97             | 40.00             | 12.03          | 100         | 197       | Vertical |
| 2   | 58.71       | 40.72               | -10.44      | 30.28             | 40.00             | 9.72           | 100         | 21        | Vertical |
| 3   | 139.2       | 42.15               | -10.22      | 31.93             | 43.50             | 11.57          | 100         | 163       | Vertical |
| 4   | 312.4       | 49                  | -8.85       | 40.15             | 46.50             | 6.35           | 200         | 289       | Vertical |
| 5   | 484.9       | 46.17               | -5.69       | 40.48             | 46.50             | 6.02           | 100         | 228       | Vertical |
| 6   | 640.1       | 41.97               | -3.25       | 38.72             | 46.50             | 7.78           | 100         | 10        | Vertical |


### REMARKS:

1. Q.P. is abbreviation of quasi-peak individually.
2. The emission levels of other frequencies were very low against the limit.
3. QP Margin value = QP Limit value – QP value
4. Factor = Antenna Factor + Amplifier Factor + Cable loss
5. QP value = Factor + Reading Value.

## 5.6 Test Result and Data (1GHz ~ 18GHz)

Position: Horizontal

Test Graph

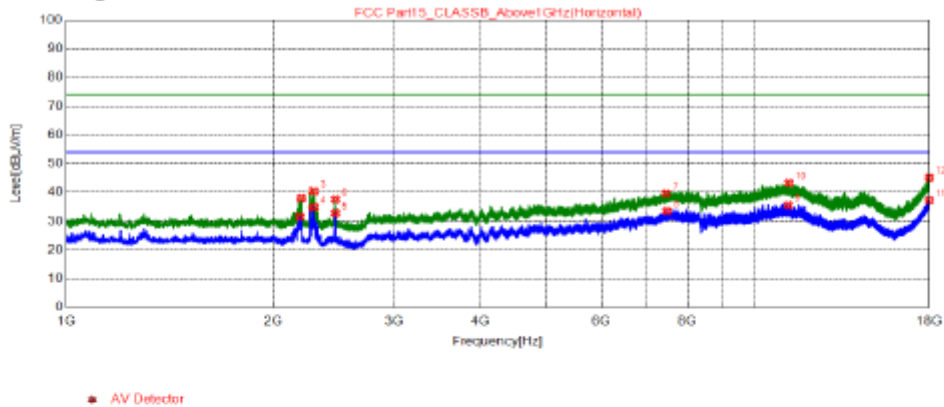

| NO. | Freq.<br>[MHz] | Reading<br>[dBμV/m] | Level<br>[dBμV/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[°] | Polarity   | Detector |
|-----|----------------|---------------------|-------------------|-------------------|----------------|----------------|--------------|------------|----------|
| 1   | 2187.4500      | 47.99               | 31.60             | 54.00             | 22.40          | 155            | 302          | Horizontal | AV       |
| 2   | 2198.5000      | 54.35               | 37.99             | 74.00             | 36.01          | 155            | 302          | Horizontal | PK       |
| 3   | 2294.5500      | 56.53               | 40.36             | 74.00             | 33.64          | 155            | 334          | Horizontal | PK       |
| 4   | 2295.4000      | 51.04               | 34.88             | 54.00             | 19.12          | 155            | 302          | Horizontal | AV       |
| 5   | 2463.7000      | 48.70               | 32.87             | 54.00             | 21.13          | 155            | 302          | Horizontal | AV       |
| 6   | 2463.7000      | 53.37               | 37.54             | 74.00             | 36.46          | 155            | 334          | Horizontal | PK       |
| 7   | 7454.9000      | 43.54               | 39.57             | 74.00             | 34.43          | 155            | 334          | Horizontal | PK       |
| 8   | 7475.3000      | 37.41               | 33.50             | 54.00             | 20.50          | 155            | 145          | Horizontal | AV       |
| 9   | 11209.3500     | 33.87               | 35.53             | 54.00             | 18.47          | 155            | 208          | Horizontal | AV       |
| 10  | 11240.8000     | 41.54               | 43.21             | 74.00             | 30.79          | 155            | 334          | Horizontal | PK       |
| 11  | 17977.0500     | 25.44               | 37.19             | 54.00             | 16.81          | 155            | 113          | Horizontal | AV       |
| 12  | 17978.7500     | 33.28               | 45.05             | 74.00             | 28.95          | 155            | 17           | Horizontal | PK       |

### REMARKS:


1. The emission levels of other frequencies were very low against the limit.
2. Margin = Limit – Level



**BUREAU  
VERITAS**

Position: Vertical

### Test Graph

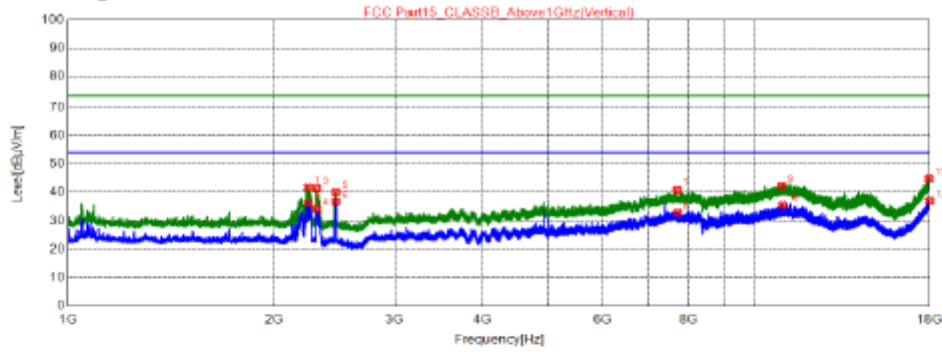


★ AV Detector

| NO. | Freq.<br>[MHz] | Reading<br>[dBV/m] | Level<br>[dBV/m] | Limit<br>[dBV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[°] | Polarity | Detector |
|-----|----------------|--------------------|------------------|------------------|----------------|----------------|--------------|----------|----------|
| 1   | 2241.8500      | 57.99              | 41.72            | 74.00            | 32.28          | 155            | 311          | Vertical | PK       |
| 2   | 2242.7000      | 52.52              | 36.25            | 54.00            | 17.75          | 155            | 343          | Vertical | AV       |
| 3   | 2308.1500      | 57.61              | 41.47            | 74.00            | 32.53          | 155            | 185          | Vertical | PK       |
| 4   | 2309.0000      | 50.19              | 34.05            | 54.00            | 19.95          | 155            | 185          | Vertical | AV       |
| 5   | 2462.8500      | 55.92              | 40.09            | 74.00            | 33.91          | 155            | 154          | Vertical | PK       |
| 6   | 2463.7000      | 52.47              | 36.64            | 54.00            | 17.36          | 155            | 90           | Vertical | AV       |
| 7   | 7698.8500      | 44.25              | 40.79            | 74.00            | 33.21          | 155            | 185          | Vertical | PK       |
| 8   | 7709.0500      | 36.30              | 32.86            | 54.00            | 21.14          | 155            | 90           | Vertical | AV       |
| 9   | 10945.8500     | 41.03              | 42.28            | 74.00            | 31.72          | 155            | 59           | Vertical | PK       |
| 10  | 10974.7500     | 34.25              | 35.57            | 54.00            | 18.43          | 155            | 154          | Vertical | AV       |
| 11  | 17944.7500     | 33.44              | 44.91            | 74.00            | 29.09          | 155            | 280          | Vertical | PK       |
| 12  | 17991.5000     | 25.11              | 36.99            | 54.00            | 17.01          | 155            | 248          | Vertical | AV       |


### REMARKS:

1. The emission levels of other frequencies were very low against the limit.
2. Margin = Limit –Level


## 5.7 Test Photographs (30MHz ~ 1000MHz)

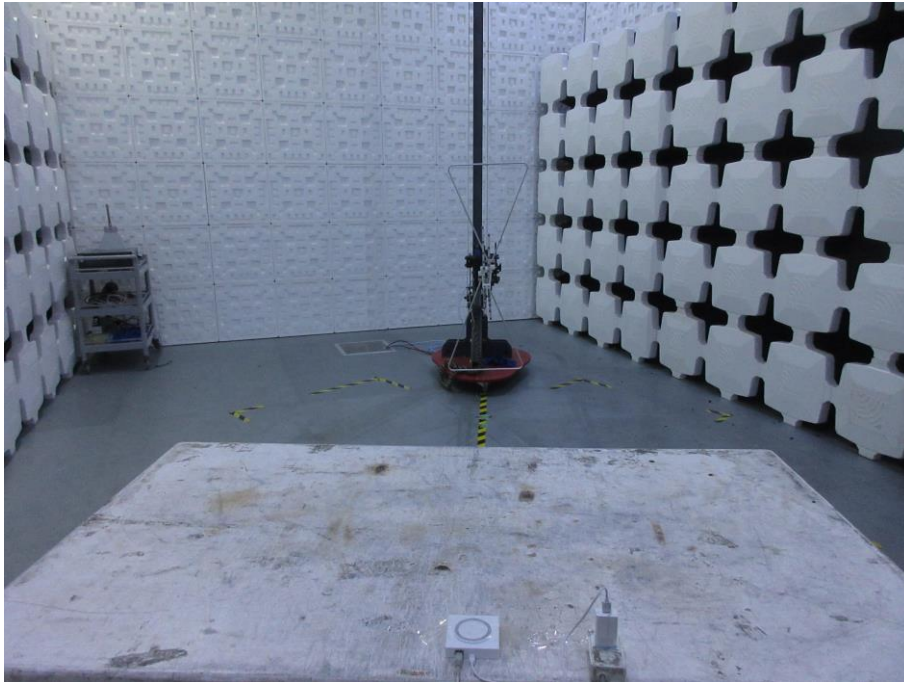

## 5.8 Test Photographs (1000MHz ~ 18000MHz)

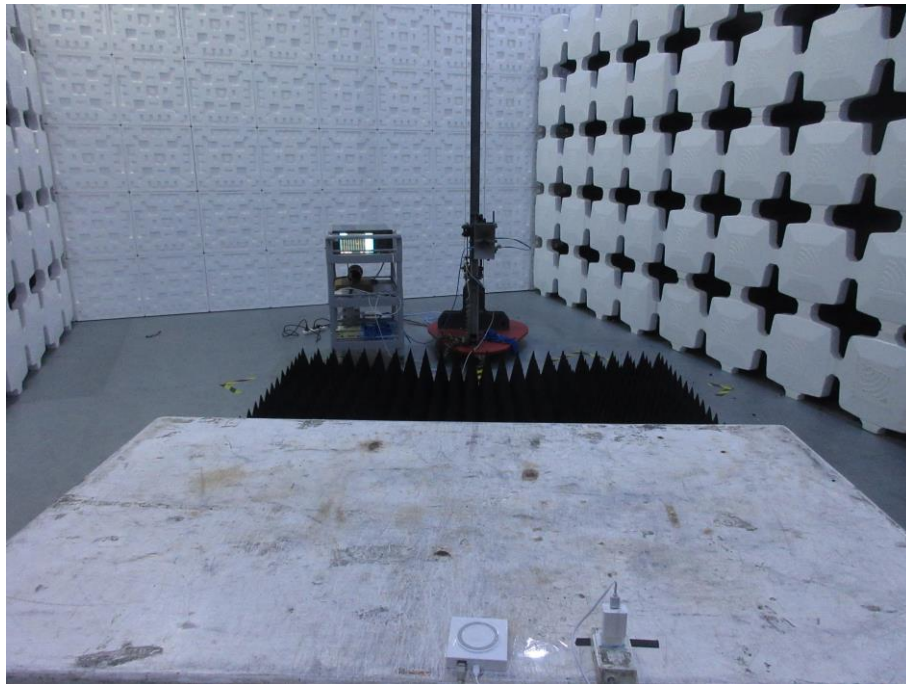

## 6 Photographs of EUT

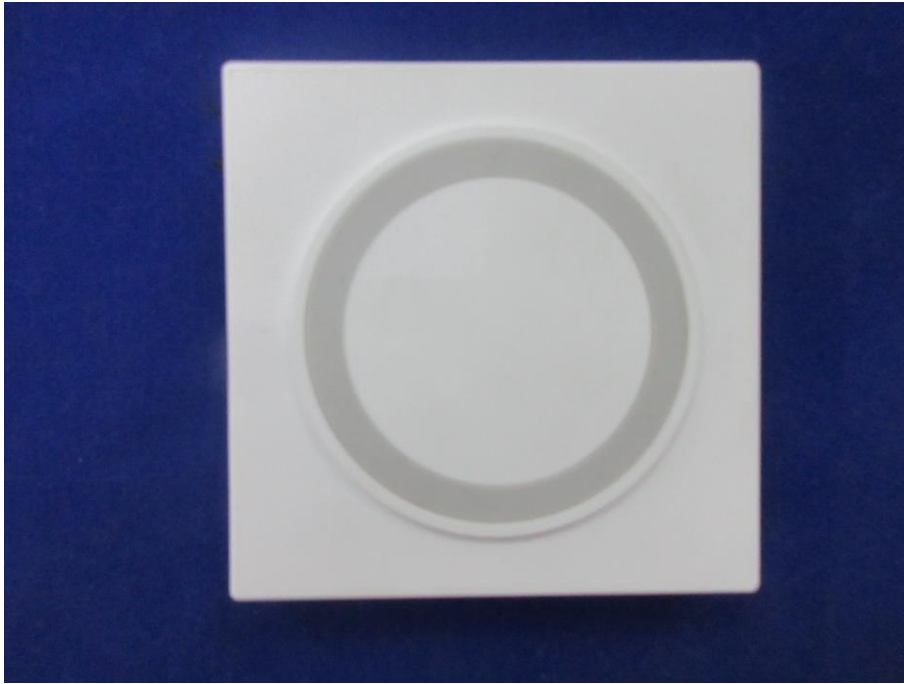

--- END ---