



ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR FCC CERTIFICATION

Test Report No. : E052R-058

Applicant : KI RYUNG ELECTRONICS CO., LTD.

Address : 219-6, Gasan-Dong, Kumchun-Gu, Seoul, 153-023, Korea

Manufacturer : KI RYUNG ELECTRONICS CO., LTD.

Address : 219-6, Gasan-Dong, Kumchun-Gu, Seoul, 153-023, Korea

Type of Equipment : Navigation System (FM Transmitter)

FCC ID. : P3HNICE

Model Name : N.I.C.E

Serial number : N/A

Total page of Report : 19 pages (including this page)


Date of Incoming : January 25, 2005

Date of Issuing : February 23, 2005

SUMMARY

The equipment complies with the regulation of *FCC CRF 47 PART 15, SUBPART C, SECTION 15.239*.

This test report contains only the results of a single test of the sample supplied for the examination. It is not a general valid assessment of the features of the respective products of the mass-production.

Prepared by: 
Sue-Young, Lee / Test Engineer
EMC Div.
ONETECH Corp.

Reviewed by: 
Gea-Won, Lee / Chief Engineer
EMC Div.
ONETECH Corp.



CONTENTS

	PAGE
1. VERIFICATION OF COMPLIANCE.....	3
2. GENERAL INFORMATION.....	4
2.1 PRODUCT DESCRIPTION.....	4
2.2 MODEL DIFFERENCES.....	4
2.3 RELATED SUBMITTAL(S) / GRANT(S)	4
2.4 TEST SYSTEM DETAILS	4
2.5 TEST METHODOLOGY	5
2.6 TEST FACILITY	5
3. SYSTEM TEST CONFIGURATION.....	6
3.1 JUSTIFICATION	6
3.2 EUT EXERCISE SOFTWARE.....	6
3.3 CABLE DESCRIPTION	7
3.4 NOISE SUPPRESSION PARTS ON CABLE	7
3.5 EQUIPMENT MODIFICATIONS	8
3.6 CONFIGURATION OF TEST SYSTEM.....	8
3.7 ANTENNA REQUIREMENT	8
4. PRELIMINARY TEST.....	9
4.1 AC POWER LINE CONDUCTED EMISSION TEST	9
4.2 RADIATED EMISSION TEST	9
5. FINAL RESULT OF MEASUREMENT	10
5.1 CONDUCTED EMISSION TEST.....	10
5.2 RADIATED EMISSION TEST (WITHIN THE PERMITTED 200 KHZ BAND).....	12
5.3 RADIATED EMISSION TEST (OUTSIDE OF THE SPECIFIED 200 KHZ BAND).....	13
5.4 BANDWIDTH OF THE OPERATING FREQUENCY	14
6. FIELD STRENGTH CALCULATION	18
7. LIST OF TEST EQUIPMENT.....	19

**1. VERIFICATION OF COMPLIANCE**

- APPLICANT : KI RYUNG ELECTRONICS CO., LTD.
- ADDRESS : 219-6, Gasan-Dong, Kumchun-Gu, Seoul, 153-023, Korea
- CONTACT PERSON : Mr. In-Kyoung, Kim / Q.C Assistant Manager
- TELEPHONE NO : +82-2-3282-2264
- FCC ID : P3HNICE
- MODEL NO/NAME : N.I.C.E
- SERIAL NUMBER : N/A
- DATE : February 23, 2005

DEVICE TYPE	Low Power Communication Device Transmitter
E.U.T. DESCRIPTION	Navigation System (FM Transmitter)
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	Charter 7 and 13 of ANSI C63.4: 2001
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SECTION 15.239
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

- This device has shown compliance with the conducted emissions limits in 15.107 adopted under FCC 02-107 (ET Docket 98-80). The device may be marketed after July 11, 2005 affected by the 15.37(j) transition provisions.
- The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.



2. GENERAL INFORMATION

2.1 Product Description

The KI RYUNG ELECTRONICS CO., LTD., Model N.I.C.E (referred to as the EUT in this report) is Navigation System that has the FM transmitter from 88.1 MHz to 107.9 MHz for audio signal of FM radio receiver. Product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Metal
TRANSMITTING FREQUENCY	88.1, 88.9, 106.7 and 107.9MHz
LIST OF EACH OSC. or CRY. FREQ.(FREQ.>=1MHz)	200 MHz, 7.3728MHz, 24.576MHz, 30MHz, 7.6MHz and 24.5535 MHz
NUMBER OF LAYERS	Main Board: 8 Layers, GPS Board: 6 Layers Sub A (Power Board), Sub B (USB & FM Transmitter Board) and HDD Board: 4 Layers
EXTERNAL CONNECTOR	Power (DC 9V-16V), EXT. I/O, A/V In, Video In, Audio Output, USB 1.1, USB 2.0, External GPS Antenna Input

2.2 Model Differences

-. The difference(s) compared to the EUT is as follows: none

2.3 Related Submittal(s) / Grant(s)

-. Original submittal only

2.4 Test System Details

The model numbers for all the equipments which were used in the tested system is:

Model	Manufacturer	FCC ID	Description	Connected to
N.I.C.E	KI RYUNG ELECTRONICS CO., LTD.	P3HNICE	Navigation System (EUT)	-
NL20-120200-11	I.T.E	N/A	AC/DC Adaptor	EUT
LT416	Leader Electronics	N/A	Pattern Generator	EUT



2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in chapter 7, 13 of ANSI C63.4: 2001. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

2.6 Test Facility

The open area test site and conducted measurement facilities are located on at 307-51 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do 464-080 Korea. Description details of test facilities were submitted to the Commission on April 04, 2003. (Registration Number: 340658)



3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
MAIN BOARD	N/A	TMX200	N/A
SUB A BOARD	N/A	TMX200 SUBA	N/A
SUB B BOARD	N/A	TMX200 SUBB	N/A
F01 BOARD	N/A	LTC 700W V_F01_EX128	N/A
HDD BOARD	N/A	TMX200HDD	N/A
HDD	HITACHI	HEJ423020F9AT00	N/A
LCD	N/A	LTC700WV-F01	N/A
SMPS BOARD	N/A	N/A	N/A

3.2 EUT exercise Software

The EUT is included a FM transmitter designed to transmit audio signal on frequency range in 88.1 ~ 107.9 MHz. The EUT has audio input port, so the input port was connected to an audio generator and the generator supplied the audio signal with 1 kHz modulation and then the EUT was transmitted with maximum audio level. Also the EUT transmitted MP3 audio signal stored into the EUT.

88.1 MHz was measured as the highest output power. Data from this channel was determined to be worst case.

**3.3 Cable Description**

	Power Cord Shielded (Y/N)	I/O cable Shielded (Y/N)	Length (M)
Navigation System (EUT)	N	Y	1.2(P), 1.2(D)
AC/DC Adaptor	N	N	1.2(D)
Audio Out	N	N	1.2(D)
AV In	N	N	1.5(D)
Video In	N	N	1.2(D)
EXI I/O	N	N	1.2(D)
Pattern Generator	N	N	1.2(D)

* The marked “(D)” means the Data Cable and “(P)” means the Power Cable.

3.4 Noise Suppression Parts on Cable

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
Navigation System (EUT)	N	N/A	N	N/A
AC/DC Adaptor	N	N/A	N	N/A
Audio Out	N	N/A	Y	BOTH END
AV In	N	N/A	N	N/A
Video In	N	N/A	N	N/A
EXI I/O	N	N/A	N	N/A
Pattern Generator	N	N/A	N	N/A



3.5 Equipment Modifications

To achieve compliance to FCC part 15 rules, the following change(s) was made by ONETECH Corp. during compliance testing:

“There were no Modified items during EMI test”

3.6 Configuration of Test System

Line Conducted Test: The EUT was connected to AC/DC adaptor and AC/DC adaptor was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4: 2001 7.2.3 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.4: 2001 8.3.1.1 and 13.1.4.1 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter open area test site.

Occupied Bandwidth Measurement:

This measurement is performed with the antenna located close enough to give a full-scale deflection of the modulated carrier on the spectrum analyzer.

3.7 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

FM transmitter antenna of the EUT is fixed inside the EUT, no consideration of replacement by the user.



4. PRELIMINARY TEST

4.1 AC Power line Conducted Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmit the RF Signal continuously	X

4.2 Radiated Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmit the RF Signal continuously	X



5. FINAL RESULT OF MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level

5.1 Conducted Emission Test

Humidity Level : 50 % Temperature: 18 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.207 (a)
 Type of Test : Low Power Communication Device Transmitter
 Result : PASSED BY -6.74 dB at 7.725 MHz under average detector mode

EUT : Navigation System Date: January 25, 2005
 Operating Condition : Transmit RF signal.
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)


Frequency (MHz)	Line	Peak (dBuV)		Margin (dB)
		Emission level	Q.P Limits	
0.195	N	43.57	63.82	-20.25
0.520	H	35.60	56.00	-20.40
3.180	H	42.96	56.00	-13.04
7.725	H	48.77	60.00	-11.23
9.350	H	51.53	60.00	-8.47
13.505	N	42.64	60.00	-17.36
Frequency (MHz)	Line	Average (dBuV)		Margin (dB)
		Emission level	Limits	
0.520	H	32.97	46.00	-13.03
3.180	H	34.61	46.00	-11.39
7.725	H	43.26	50.00	-6.74
9.350	H	42.94	50.00	-7.06

Line Conducted Emission Tabulated Data


Remark : "H": Hot Line, "N": Neutral line

See next page for an overview sweep performed with peak and average detector.

Tested by: Sue-Young, Lee/ Test Engineer

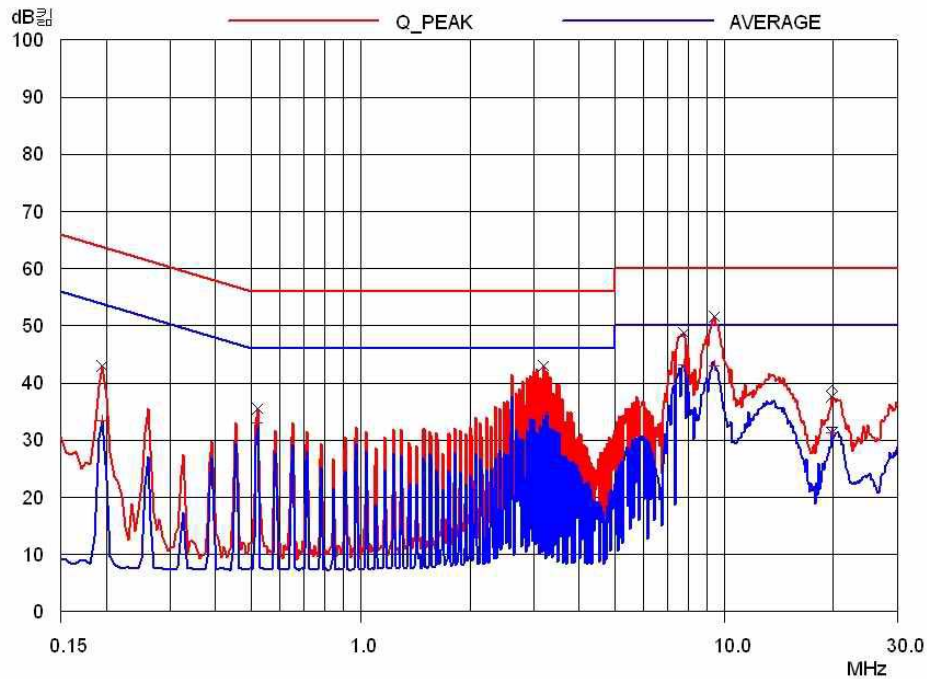

HOT LINE

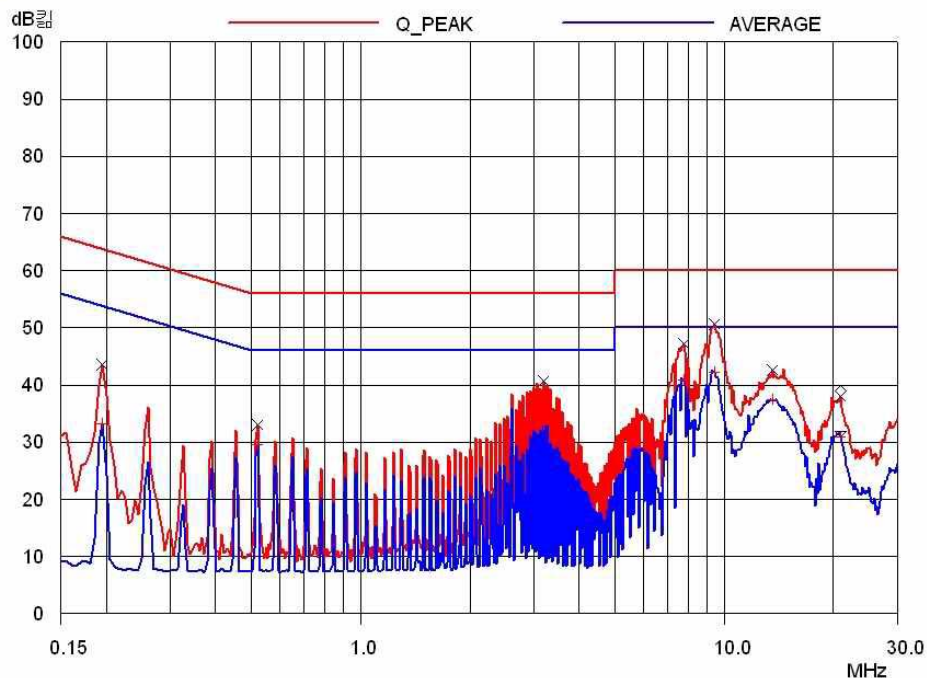

NEUTRAL LINE



5.2 Radiated Emission Test (Within the permitted 200 kHz band)

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 42 % Temperature: 18 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.239 (b)
 Type of Test : Low Power Communication Device Transmitter
 Result : PASSED BY – 4.24 dB at 88.10 MHz

EUT : Navigation System Date: February 17, 2005
 Operating Condition : Transmit the RF signal.
 Distance : 3 Meter

Radiated Emission			Ant	Correction Factors		Total	Limit (dBuV/m)	Margin (dB)
Freq. (MHz)	Amp. (dBuV)	Detect Mode	Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)		
88.10	34.50	Peak	H	7.72	1.54	43.76	48.00	-4.24
88.10	24.00	Peak	V	7.72	1.54	33.26	48.00	-14.74
88.90	33.20	Peak	H	7.96	1.52	42.68	48.00	-5.32
88.90	30.40	Peak	V	7.96	1.52	39.88	48.00	-8.12
107.90	25.60	Peak	H	12.89	1.76	40.25	48.00	-7.75
107.90	20.70	Peak	V	12.89	1.76	35.35	48.00	-12.65

Radiated Emission Tabulated Data

Remark: The EUT's frequency range is not more than 1 MHz, only middle channel was tested according to the Section 15.31(m), but middle and high frequencies were observed.

Average detector mode was not measured, because peak emission values were under average limit.

Tested by: Sue-Young, Lee/ Test Engineer

**5.3 Radiated Emission Test (Outside of the specified 200 kHz band)**

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 48 % Temperature: 18 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.209 (a)
 Type of Test : Low Power Communication Device Transmitter
 Result : PASSED BY -3.43dB at 258.69MHz

EUT : Navigation System Date: February 17, 2005
 Operating Condition : Transmit the RF signal.
 Frequency range : 30MHz – 1000MHz
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)
 Distance : 3 Meter
 Remark : Other emissions

Radiated Emission		Ant	Correction Factors		Total	FCC	
Freq. (MHz)	Amp. (dBuV)	Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
83.30	24.14	V	6.70	1.53	32.37	40.00	-7.63
141.44	21.54	H	12.77	2.06	36.37	43.50	-7.13
258.69	27.32	H	12.45	2.80	42.57	46.00	-3.43
312.96	22.61	H	14.81	2.90	40.32	46.00	-5.68
374.01	20.89	H	15.28	3.59	39.76	46.00	-6.24
499.01	17.26	V	17.78	4.10	39.14	46.00	-6.86
626.92	14.52	V	19.03	4.55	38.10	46.00	-7.90

Tested by: Sue-Young, Lee/ Test Engineer





5.4 Bandwidth of the operating frequency


Humidity Level : 48 % Temperature: 19 °C
Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.239 (a)
Result : PASSED

EUT : Navigation System Date: February 17, 2005
Operating Condition : Transmit the RF signal.
Minimum Resolution
Bandwidth : 10 kHz
Remark : Refer to test data in next page.

Tested by: Sue-Young, Lee/ Test Engineer

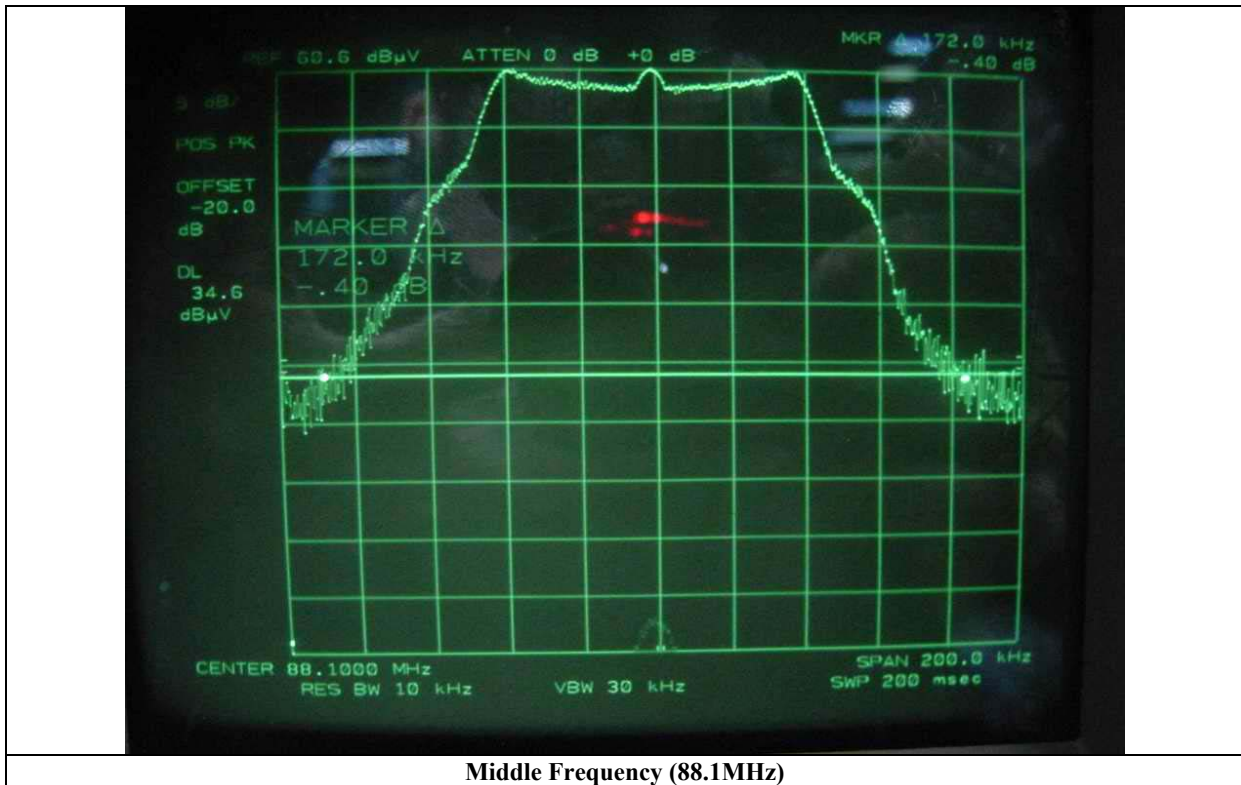

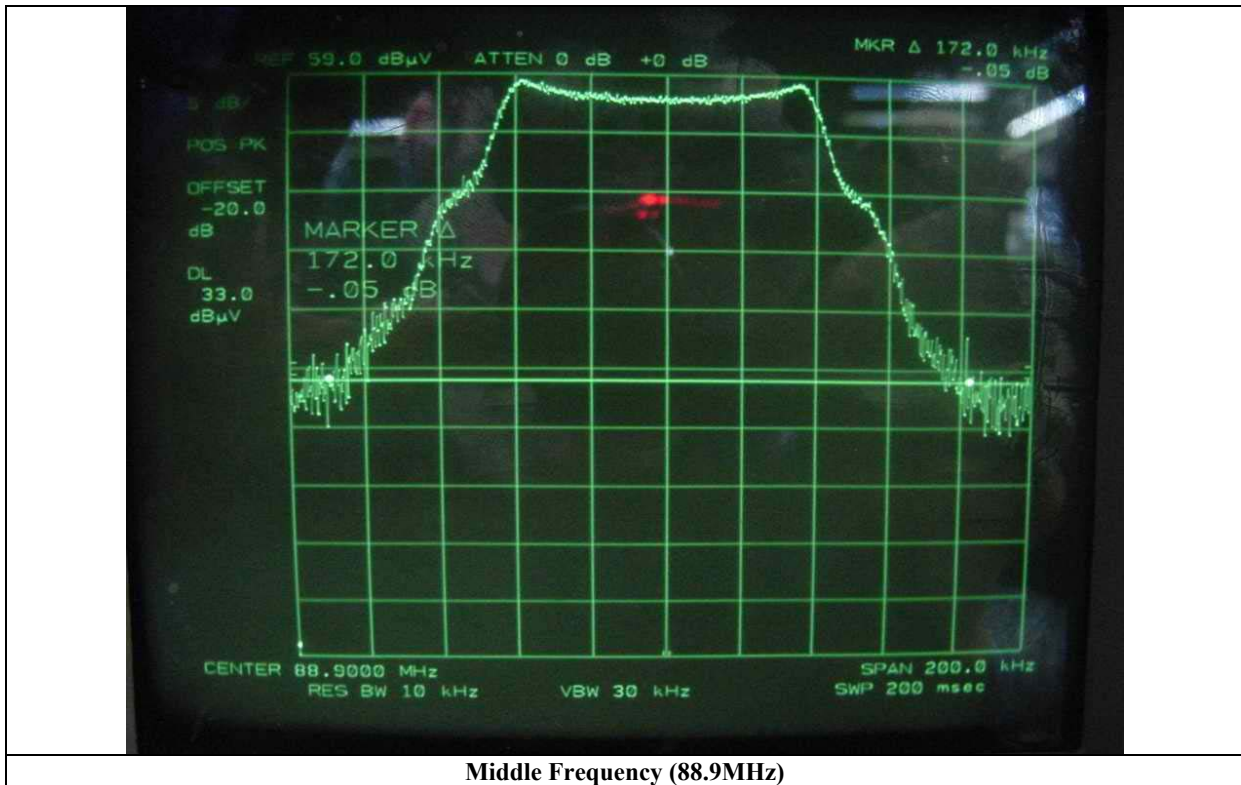

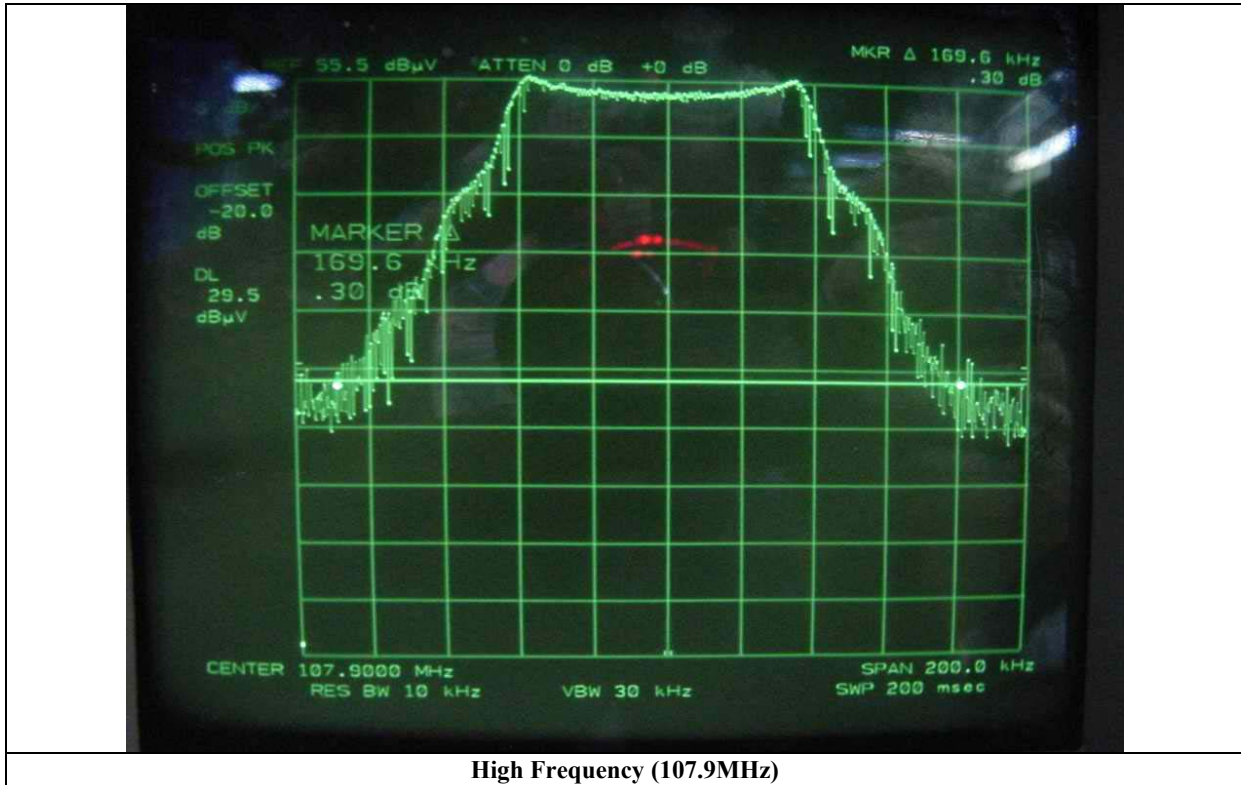



6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)

**7. LIST OF TEST EQUIPMENT**

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVS10	827864/005	DEC/04	12MONTH	■
2.	Test receiver	R/S	ESHS10	834467/007	MAY/04	12MONTH	■
3.	Spectrum analyzer	HP	8566B	3407A08547	JUL/04	12MONTH	■
4.	Spectrum analyzer	HP	8568B	3109A05456	JUL/04	12MONTH	■
5.	RF preselector	HP	85685A	3107A01264	APR/04	12MONTH	■
6.	Quasi-Peak Adapter	HP	85650A	3107A01542	JUL/04	12MONTH	■
7.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	VULB9163 166	FEB/04	12MONTH	
8.	Biconical antenna	EMCO	3104C	9109-4443	MAY/04	12MONTH	
		Schwarzbeck	VHA9103	91031852	JAN/05		■
9.	Log Periodic antenna	EMCO	3146	9109-3213	FEB/04	12MONTH	
				9109-3217	MAY/04		
		Schwarzbeck	9108-A(494)	62281001	FEB/05		■
10.	LISN	EMCO	3825/2	9109-1867	JUL/04	12MONTH	■
				9109-1869	OCT/04		■
11.	Position Controller	HD GmbH	HD100	N/A	N/A	N/A	■
12.	Turn Table	HD GmbH	DS420S	N/A	N/A	N/A	■
13.	Antenna Master	HD GmbH	MA240	N/A	N/A	N/A	■
14.	Pattern Generator	Leader	LT416	3347622	N/A	N/A	■