

FCC SAR Test Report

Report No. : SA180628W003-1

Applicant : Sonim Technologies, Inc.

Address : 1875 S. Grant St., Suite 750., San Mateo, CA, 94402

Product : Mobile Phone

FCC ID : WYPPG2212

Brand : Sonim

Model No. : XP3800

Standards : FCC 47 CFR Part 2 (2.1093) / IEEE C95.1:1992 / IEEE 1528:2013
KDB 865664 D01 v01r04 / KDB 865664 D02 v01r02
KDB 248227 D01 v02r02 / KDB 447498 D01 v06
/ KDB 648474 D04 v01r03 / KDB 941225 D01 v03r01
/ KDB 941225 D05 v02r05 / KDB 941225 D06 v02r01

Sample Received Date : Sep. 12, 2018

Date of Testing : Sep. 18, 2018 ~ Oct. 11, 2018

CERTIFICATION: The above equipment have been tested by **BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD.**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's SAR characteristics under the conditions specified in this report. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by A2LA or any government agencies.

Prepared By :

Wiky Zhang / Engineer

Approved By :

Luke Lu / Manager



This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1. Summary of Maximum SAR Value	4
2. Description of Equipment Under Test	5
3. SAR Measurement System	6
3.1 Definition of Specific Absorption Rate (SAR)	6
3.2 COMOSAR System.....	6
3.2.1 Measurement System Diagram	6
3.2.2 Robot.....	7
3.2.3 E-Field Probes	8
3.2.4 Phantoms.....	9
3.2.5 Device Holder.....	10
3.2.6 System Validation Dipoles.....	11
3.2.7 Tissue Simulating Liquids.....	11
3.3 SAR System Verification	14
3.4 SAR Measurement Procedure	15
3.4.1 Area & Zoom Scan Procedure	15
3.4.2 Volume Scan Procedure.....	15
3.4.3 Power Drift Monitoring.....	16
3.4.4 Spatial Peak SAR Evaluation.....	16
3.4.5 SAR Averaged Methods	16
4. SAR Measurement Evaluation.....	17
4.1 EUT Configuration and Setting.....	17
4.2 EUT Testing Position.....	23
4.2.1 Head Exposure Conditions.....	23
4.2.2 Body-worn Accessory Exposure Conditions.....	25
4.2.3 Hotspot Mode Exposure Conditions.....	26
4.2.4 SAR Test Exclusion Evaluations	26
4.2.5 Simultaneous Transmission Possibilities.....	27
4.3 Tissue Verification	28
4.4 System Validation.....	28
4.5 System Verification.....	29
4.6 Maximum Output Power.....	30
4.6.1 Maximum Conducted Power	30
4.6.2 Measured Conducted Power Result.....	31
4.7 SAR Testing Results	45
4.7.1 SAR Test Reduction Considerations	45
4.7.2 SAR Results for Head Exposure Condition.....	47
4.7.3 SAR Results for Body-worn Exposure Condition (Separation Distance is 1.0 cm Gap).....	50
4.7.4 SAR Results for Hotspot Exposure Condition (Separation Distance is 1.0 cm Gap).....	53
4.7.5 SAR Measurement Variability.....	58
4.7.6 Simultaneous Multi-band Transmission Evaluation.....	59
5. Calibration of Test Equipment.....	82
6. Measurement Uncertainty.....	83
7. Information on the Testing Laboratories.....	84
Appendix A. SAR Plots of System Verification	
Appendix B. SAR Plots of SAR Measurement	
Appendix C. Calibration Certificate for Probe and Dipole	
Appendix D. Photographs of EUT and Setup	



Release Control Record

Report No.	Reason for Change	Date Issued
SA180628W003-1	Initial release	Oct. 29, 2018

FCC SAR Test Report

1. Summary of Maximum SAR Value

Equipment Class	Mode	Highest Reported Head SAR _{1g} (W/kg)	Highest Reported Body-worn SAR _{1g} (1.0 cm Gap) (W/kg)	Highest Reported Hotspot SAR _{1g} (1.0 cm Gap) (W/kg)
PCE	GSM850	0.49	1.03	1.03
	GSM1900	0.32	1.10	1.10
	WCDMA II	0.46	1.37	1.37
	WCDMA IV	0.73	1.28	1.28
	WCDMA V	0.68	1.31	1.31
	LTE 2	0.29	0.94	0.94
	LTE 4	0.60	1.42	1.42
	LTE 5	1.15	1.18	1.18
	LTE 7	0.44	0.37	0.37
	LTE 12	0.53	1.38	1.38
	LTE 13	0.90	0.95	0.95
	LTE 14	0.99	0.84	0.84
	LTE 26	1.11	1.42	1.42
	LTE 30	0.31	0.48	0.48
	LTE 66	0.59	1.38	1.38
DTS	2.4G WLAN	0.10	0.14	0.14
NII	5.2G WLAN	N/A	N/A	0.14
	5.3G WLAN	0.12	0.14	N/A
	5.6G WLAN	0.28	0.17	N/A
	5.8G WLAN	0.35	0.17	0.17
DSS	Bluetooth	N/A	N/A	N/A
Highest Simultaneous Transmission SAR		Head (W/kg)	Body-worn (W/kg)	Hotspot (W/kg)
PCE + DTS		1.25	1.56	1.56
PCE + NII		1.50	1.59	1.59
PCE + DSS		N/A	1.58	N/A

Note:

- The SAR limit (**Head & Body: SAR_{1g} 1.6 W/kg**) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992

2. Description of Equipment Under Test

EUT Type	Mobile Phone
FCC ID	WYPPG2212
Brand Name	Sonim
Model Name	XP3800
Type Number	PG2212
IMEI Code	001080002484500
HW Version	A
SW Version	3A.0.0-00-8.1.0-00.09.01
Tx Frequency Bands (Unit: MHz)	GSM850 : 824.2 ~ 848.8 GSM1900 : 1850.2 ~ 1909.8 WCDMA Band II : 1852.4 ~ 1907.6 WCDMA Band IV : 1712.4 ~ 1752.6 WCDMA Band V : 826.4 ~ 846.6 LTE Band 2 : 1850.7 ~ 1909.3 (1.4M), 1851.5 ~ 1908.5 (3M), 1852.5 ~ 1907.5 (5M), 1855 ~ 1905 (10M), 1857.5 ~ 1902.5 (15M), 1860 ~ 1900 (20M) LTE Band 4 : 1710.7 ~ 1754.3 (1.4M), 1711.5 ~ 1753.5 (3M), 1712.5 ~ 1752.5 (5M), 1715 ~ 1750 (10M), 1717.5 ~ 1747.5 (15M), 1720 ~ 1745 (20M) LTE Band 5 : 824.7 ~ 848.3 (1.4M), 825.5 ~ 847.5 (3M), 826.5 ~ 846.5 (5M), 829 ~ 844 (10M) LTE Band 7 : 2502.5 ~ 2567.5 (5M), 2505 ~ 2565 (10M), 2507.5 ~ 2562.5 (15M), 2510 ~ 2560 (20M) LTE Band 12 : 699.7 ~ 715.3 (1.4M), 700.5 ~ 714.5 (3M), 701.5 ~ 713.5 (5M), 704 ~ 711 (10M) LTE Band 13 : 779.5 ~ 784.5 (5M), 782 (10M) LTE Band 14 : 790.5 ~ 795.5 (5M), 793 (10M) LTE Band 26 : 814.7 ~ 848.3 (1.4M), 815.5 ~ 847.5 (3M), 816.5 ~ 846.5 (5M), 819 ~ 844 (10M), 821.5 ~ 841.5 (15M) LTE Band 30 : 2307.5 ~ 2312.5 (5M), 2310 (10M) LTE Band 66 : 1710.7 ~ 1779.3 (1.4M), 1711.5 ~ 1778.5 (3M), 1712.5 ~ 1777.5 (5M), 1715 ~ 1775 (10M), 1717.5 ~ 1772.5 (15M), 1720 ~ 1770 (20M) WLAN : 2412 ~ 2462, 5180 ~ 5240, 5260 ~ 5320, 5500 ~ 5700, 5745 ~ 5825 Bluetooth : 2402 ~ 2480
Uplink Modulations	GSM & GPRS : GMSK EDGE : 8PSK WCDMA : QPSK LTE : QPSK, 16QAM, 64QAM 802.11b : DSSS 802.11a/g/n : OFDM Bluetooth : GFSK, $\pi/4$ -DQPSK, 8-DPSK, LE
Maximum Tune-up Conducted Power (Unit: dBm)	Please refer to section 4.6.1 of this report.
Antenna Type	WLAN: PIFA Antenna WWAN: Fixed Internal Antenna
EUT Stage	Production Unit

Note:

- The above EUT information is declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.

List of Accessory:

Battery	Brand Name	Sonim
	Model Name	BAT-01500-01S
	Power Rating	3.7Vdc, 1500mAh
	Type	Li-ion

FCC SAR Test Report

3. SAR Measurement System

3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)


SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 COMOSAR System

3.2.1 Measurement System Diagram

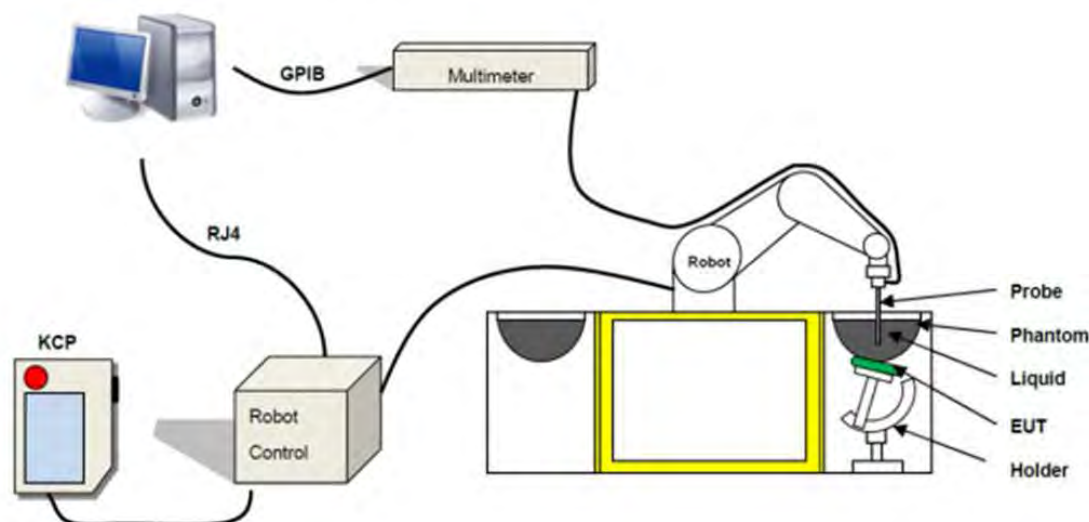

These measurements were performed with the automated near-field scanning system COMOSAR from SATIMO. The system is based on a high precision robot (working range: 850 mm), which positions the probes with a positional repeatability of better than ± 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit.

FCC SAR Test Report

The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure described in SAR standard with accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated with the procedure described in SAR standard and found to be better than ± 0.25 dB. The phantom used was the SAM Phantom as described in FCC supplement C, IEEE P1528.

3.2.2 Robot

The COMOSAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA-KRC2sr) from KUKA is used. The KUKA robot series have many features that are important for our application:

- High precision (repeatability ± 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Fig-3.2 KUKA KR5

FCC SAR Test Report

3.2.3 E-Field Probes


The SAR measurement is conducted with the dosimetric probe. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency.



Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Model	SSE2
Frequency	100 MHz to 6 GHz
Directivity	±0.25 dB in brain tissue (rotation around probe axis) ±0.5 dB in brain tissue (rotation normal probe axis)
Dynamic Range	0.001W/kg to > 100W/kg
Probe Linearity	± 0.25 dB
Dimensions	Overall length: 330 mm Tip diameter: 2.5 mm Distance from probe tip to dipole centers: <1.5 mm

E-Field Probe Calibration Process

Probe calibration is realized, in compliance with EN/IEC 62209-1/-2 and IEEE 1528 std, with CALISAR, SATIMO proprietary calibration system. The calibration is performed with the technique using reference waveguide.

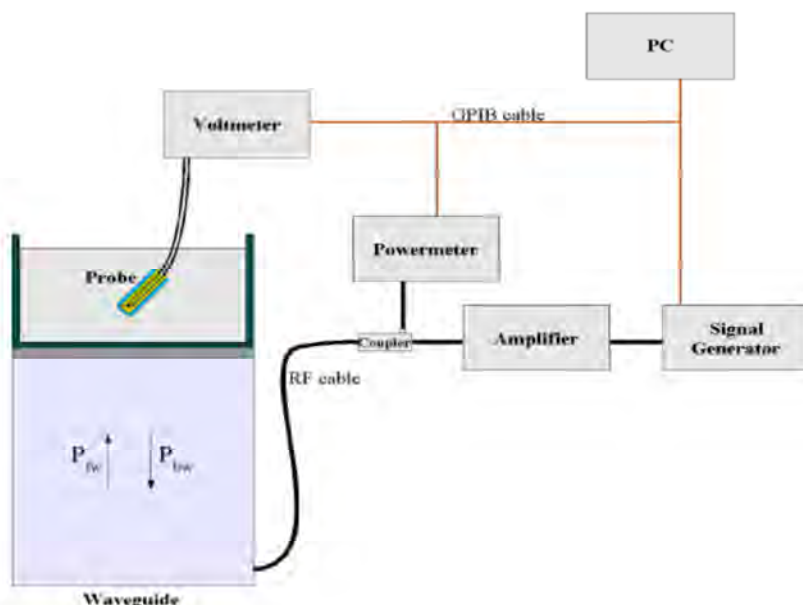

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-(2z/\delta)}$$

FCC SAR Test Report

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\sigma} \cos^2 \left(\pi \frac{y}{a} \right) e^{(2\pi/\sigma)}$$

Where :

- P_{fw} = Forward Power
- P_{bw} = Backward Power
- a and b = Waveguide Dimensions
- l = Skin Depth

Keithley configuration

Rate=Medium; Filter=ON; RDGS=10; FILTER TYPE=MOVING AVERAGE; RANGE AUTO

After each calibration, a SAR measurement performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The Calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N) = SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearized output voltage V_{lin}(N) is obtained from the displayed output voltage V(N) using

$$V_{lin}(N) = V(N) * (1 + V(N)/DCP(N)) \quad N=1,2,3$$

Where the DCP is the dipole compression point in mV

3.2.4 Phantoms

The phantom developed by SATIMO is produced in accordance with the specified in the standards. It has been designed to fit the COMOSAR phantom tables and is delivered with a plastic cover to prevent liquid evaporation.

Model	SAM Phantom	
Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching reference points with the robot.	
Material	The material is resistant to Glycol and offers high rigidity composite material based on fiberglass).	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions	Length: 1000 mm Width: 500 mm Height: 200 mm	
Filling Volume	approx. 27 liters	

FCC SAR Test Report

Model	Elliptic Phantom	
Construction	Elliptic Phantom for compliance testing of handheld and body-mounted wireless devices. Elliptic Phantom is fully compatible with the IEC/EN 62209-2 standard and all known tissue simulating liquids. Elliptic Phantom has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching reference points.	
Material	The material is resistant to Glycol and offers high rigidity composite material based on fiberglass).	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Length: 600 mm Width: 400 mm Height: 200 mm	
Filling Volume	approx. 25 liters	

3.2.5 Device Holder


The positioning system is made of an extremely stable material, which ensures easy handling and reproducible positioning. It also allows correct positioning of the dipoles referenced by the IEEE, ANSI and IEC.

Model	Handset Positioning System	
Material properties	The positioning system is made of PETP. This material offers a low permittivity of 3.2 and low loss, with a loss tangent of 0.005 to minimize the influence of the DUT on measurement results.	
Mechanical properties	The positioning system developed by SATIMO allows a positioning resolution better than 1 mm. The system is fixed on a bottom rail "x axis" so that the positioning system can be quickly moved from the right to the left part of the phantom. In addition, it can be moved on a perpendicular "y axis" and the height can be adapted. The system is also composed of three rotation points for accurate positioning of the device's acoustical output.	
Accuracy and precision	A curved rail on the top part allows the fast switch from the cheek to the tilt position. The required 15° angle for the tilt position can be easily checked thanks to a printed scale on the curved rail with a tolerance of ± 1°	

Model	Device Positioning System	
Material properties	The positioning system is made of PETP. This material offers a low permittivity of 3.2 and low loss, with a loss tangent of 0.005 to minimize the influence of the DUT on measurement results.	
Mechanical properties	2 rows of rail to cover easily the surface of the phantom. The fixing plate is perfectly adapted to larger devices, such as a PC which can be positioned in all configurations.	
Accuracy and precision	Graduated scale available on each axis. The DUT is fixed with a specific adaptable grip.	

FCC SAR Test Report

3.2.6 System Validation Dipoles

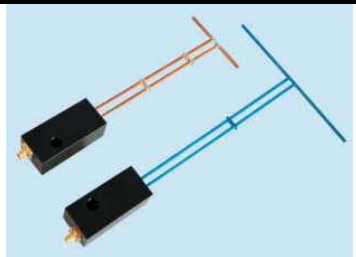Model	D-Serial	
Construction	Symmetrical dipole with $\lambda/4$ ablaun. Enables measurement of feed point impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions.	
Frequency	300 MHz to 6000 MHz	
Return Loss	> 20 dB	
Adaptation	S11 < -20 dB in specified validation Position	

3.2.7 Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in Table-3.1.



The dielectric properties of the head tissue simulating liquids are defined in IEEE 1528, and KDB 865664 D01 Appendix A. For the body tissue simulating liquids, the dielectric properties are defined in KDB 865664 D01 Appendix A. The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using a dielectric assessment kit and a network analyzer.

FCC SAR Test Report

Table-3.1 Targets of Tissue Simulating Liquid

Frequency (MHz)	Target Permittivity	Range of $\pm 5\%$	Target Conductivity	Range of $\pm 5\%$
For Head				
750	41.9	39.8 ~ 44.0	0.89	0.85 ~ 0.93
835	41.5	39.4 ~ 43.6	0.90	0.86 ~ 0.95
900	41.5	39.4 ~ 43.6	0.97	0.92 ~ 1.02
1450	40.5	38.5 ~ 42.5	1.20	1.14 ~ 1.26
1640	40.3	38.3 ~ 42.3	1.29	1.23 ~ 1.35
1750	40.1	38.1 ~ 42.1	1.37	1.30 ~ 1.44
1800	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
1900	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
2000	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
2300	39.5	37.5 ~ 41.5	1.67	1.59 ~ 1.75
2450	39.2	37.2 ~ 41.2	1.80	1.71 ~ 1.89
2600	39.0	37.1 ~ 41.0	1.96	1.86 ~ 2.06
3500	37.9	36.0 ~ 39.8	2.91	2.76 ~ 3.06
5200	36.0	34.2 ~ 37.8	4.66	4.43 ~ 4.89
5300	35.9	34.1 ~ 37.7	4.76	4.52 ~ 5.00
5500	35.6	33.8 ~ 37.4	4.96	4.71 ~ 5.21
5600	35.5	33.7 ~ 37.3	5.07	4.82 ~ 5.32
5800	35.3	33.5 ~ 37.1	5.27	5.01 ~ 5.53
For Body				
750	55.5	52.7 ~ 58.3	0.96	0.91 ~ 1.01
835	55.2	52.4 ~ 58.0	0.97	0.92 ~ 1.02
900	55.0	52.3 ~ 57.8	1.05	1.00 ~ 1.10
1450	54.0	51.3 ~ 56.7	1.30	1.24 ~ 1.37
1640	53.8	51.1 ~ 56.5	1.40	1.33 ~ 1.47
1750	53.4	50.7 ~ 56.1	1.49	1.42 ~ 1.56
1800	53.3	50.6 ~ 56.0	1.52	1.44 ~ 1.60
1900	53.3	50.6 ~ 56.0	1.52	1.44 ~ 1.60
2000	53.3	50.6 ~ 56.0	1.52	1.44 ~ 1.60
2300	52.9	50.3 ~ 55.5	1.81	1.72 ~ 1.90
2450	52.7	50.1 ~ 55.3	1.95	1.85 ~ 2.05
2600	52.5	49.9 ~ 55.1	2.16	2.05 ~ 2.27
3500	51.3	48.7 ~ 53.9	3.31	3.14 ~ 3.48
5200	49.0	46.6 ~ 51.5	5.30	5.04 ~ 5.57
5300	48.9	46.5 ~ 51.3	5.42	5.15 ~ 5.69
5500	48.6	46.2 ~ 51.0	5.65	5.37 ~ 5.93
5600	48.5	46.1 ~ 50.9	5.77	5.48 ~ 6.06
5800	48.2	45.8 ~ 50.6	6.00	5.70 ~ 6.30

FCC SAR Test Report

The following table gives the recipes for tissue simulating liquids.

Table-3.2 Recipes of Tissue Simulating Liquid

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
H750	0.2	-	0.2	1.5	56.0	-	42.1	-
H835	0.2	-	0.2	1.5	57.0	-	41.1	-
H900	0.2	-	0.2	1.4	58.0	-	40.2	-
H1450	-	43.3	-	0.6	-	-	56.1	-
H1640	-	45.8	-	0.5	-	-	53.7	-
H1750	-	47.0	-	0.4	-	-	52.6	-
H1800	-	44.5	-	0.3	-	-	55.2	-
H1900	-	44.5	-	0.2	-	-	55.3	-
H2000	-	44.5	-	0.1	-	-	55.4	-
H2300	-	44.9	-	0.1	-	-	55.0	-
H2450	-	45.0	-	0.1	-	-	54.9	-
H2600	-	45.1	-	0.1	-	-	54.8	-
H3500	-	8.0	-	0.2	-	20.0	71.8	-
H5G	-	-	-	-	-	17.2	65.5	17.3
B750	0.2	-	0.2	0.8	48.8	-	50.0	-
B835	0.2	-	0.2	0.9	48.5	-	50.2	-
B900	0.2	-	0.2	0.9	48.2	-	50.5	-
B1450	-	34.0	-	0.3	-	-	65.7	-
B1640	-	32.5	-	0.3	-	-	67.2	-
B1750	-	31.0	-	0.2	-	-	68.8	-
B1800	-	29.5	-	0.4	-	-	70.1	-
B1900	-	29.5	-	0.3	-	-	70.2	-
B2000	-	30.0	-	0.2	-	-	69.8	-
B2300	-	31.0	-	0.1	-	-	68.9	-
B2450	-	31.4	-	0.1	-	-	68.5	-
B2600	-	31.8	-	0.1	-	-	68.1	-
B3500	-	28.8	-	0.1	-	-	71.1	-
B5G	-	-	-	-	-	10.7	78.6	10.7

3.3 SAR System Verification

The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

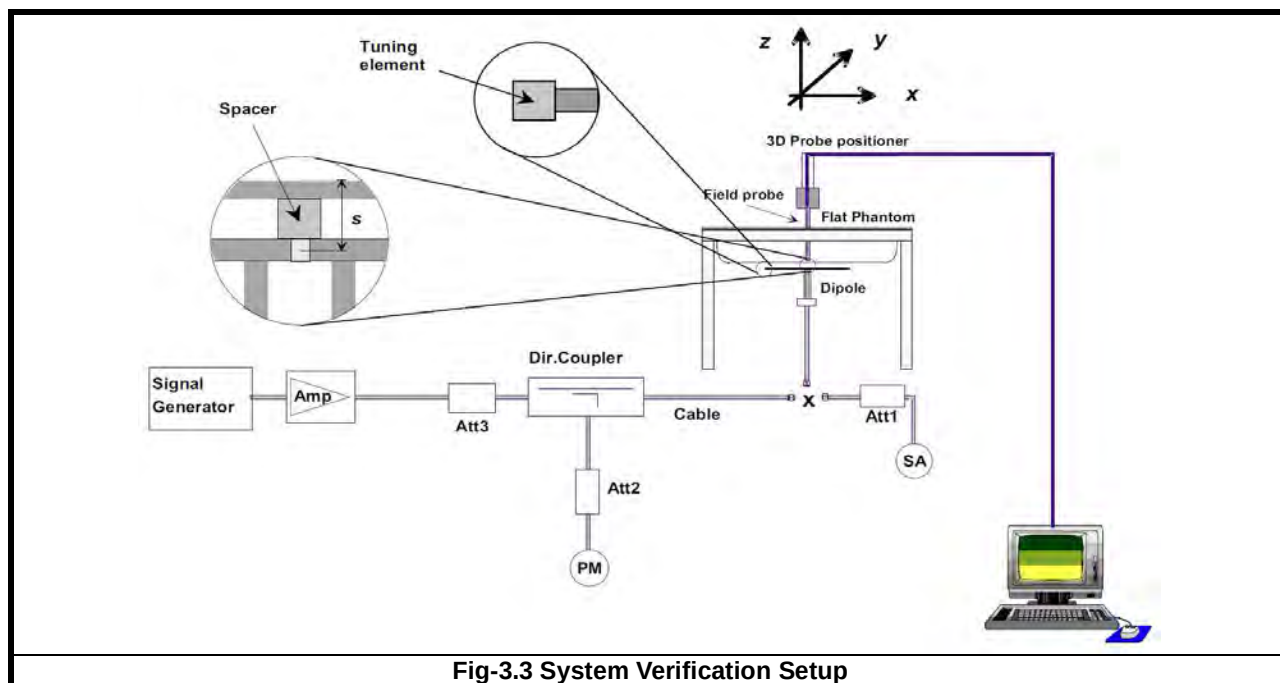


Fig.3.3 System Verification Setup

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The spectrum analyzer measures the forward power at the location of the system check dipole connector. The signal generator is adjusted for the desired forward power at the dipole connector and the power meter is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter.

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

FCC SAR Test Report

3.4 SAR Measurement Procedure

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Area scan
- Zoom scan
- Power drift measurement

The SAR measurement procedures for each of test conditions are as follows:

- Make EUT to transmit maximum output power
- Measure conducted output power through RF cable
- Place the EUT in the specific position of phantom
- Perform SAR testing steps on the COMOSAR system
- Record the SAR value

3.4.1 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. According to KDB 865664 D01, the resolution for Area and Zoom scan is specified in the table below.

Items	<= 2 GHz	2-3 GHz	3-4 GHz	4-5 GHz	5-6 GHz
Area Scan ($\Delta x, \Delta y$)	<= 15 mm	<= 12 mm	<= 12 mm	<= 10 mm	<= 10 mm
Zoom Scan ($\Delta x, \Delta y$)	<= 8 mm	<= 5 mm	<= 5 mm	<= 4 mm	<= 4 mm
Zoom Scan (Δz)	<= 5 mm	<= 5 mm	<= 4 mm	<= 3 mm	<= 2 mm
Zoom Scan Volume	>= 30 mm	>= 30 mm	>= 28 mm	>= 25 mm	>= 22 mm

Note:

When zoom scan is required and report SAR is <= 1.4 W/kg, the zoom scan resolution of $\Delta x / \Delta y$ (2-3GHz: <= 8 mm, 3-4GHz: <= 7 mm, 4-6GHz: <= 5 mm) may be applied.

3.4.2 Volume Scan Procedure

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software can combine and subsequently superpose these measurement data to calculating the multiband SAR.

FCC SAR Test Report

3.4.3 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In COMOSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. If the power drift more than 5%, the SAR will be retested.

3.4.4 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The OPENSAR software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

3.4.5 SAR Averaged Methods

In COMOSAR System, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

4. SAR Measurement Evaluation

4.1 EUT Configuration and Setting

<Connections between EUT and System Simulator>

For WWAN SAR testing, the EUT was linked and controlled by base station emulator (Agilent E5515C is used for GSM/WCDMA, and Anritsu MT8820C is used for LTE). Communication between the EUT and the emulator was established by air link. The distance between the EUT and the communicating antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during SAR testing.

<Considerations Related to GSM / GPRS / EDGE for Setup and Testing>

The maximum multi-slot capability supported by this device is as below.

1. This EUT is class B device
2. This EUT supports GPRS multi-slot class 33 (max. uplink: 4, max. downlink: 5, total timeslots: 6)
3. This EUT supports EDGE multi-slot class 33 (max. uplink: 4, max. downlink: 5, total timeslots: 6)

For GSM850 frequency band, the power control level is set to 5 for GSM mode and GPRS (GMSK: CS1), and set to 8 for EDGE (GMSK: MCS1, 8PSK: MCS9). For GSM1900 frequency band, the power control level is set to 0 for GSM mode and GPRS (GMSK: CS1), and set to 2 for EDGE (GMSK: MCS1, 8PSK: MCS9).

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

<Considerations Related to WCDMA for Setup and Testing>

WCDMA Handsets Head SAR

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode.

WCDMA Handsets Body-worn SAR

SAR for body-worn configurations is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH_n configurations supported by the handset with 12.2 kbps RMC as the primary mode.

Handsets with Release 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body-worn configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures in the "Release 5 HSDPA Data Devices", for the highest reported SAR body-worn exposure configuration in 12.2 kbps RMC. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

FCC SAR Test Report

Handsets with Release 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body-worn configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures in the "Release 6 HSPA Data Devices", for the highest reported body-worn exposure SAR configuration in 12.2 kbps RMC. When VOIP is applicable for next to the ear head exposure in HSPA, the 3G SAR test reduction procedure is applied to HSPA with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body-worn measurements is tested for next to the ear head exposure.

Release 5 HSDPA Data Devices

The 3G SAR test reduction procedure is applied to body SAR with 12.2 kbps RMC as the primary mode. Otherwise, body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. HSDPA is configured according to the applicable UE category of a test device. The number of HS-DSCH / HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms and a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors (β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) are set according to values indicated in below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾	MPR
1	2 / 15	15 / 15	64	2 / 15	4 / 15	0.0	0
2	12 / 15 ⁽³⁾	15 / 15 ⁽³⁾	64	12 / 15 ⁽³⁾	24 / 15	1.0	0
3	15 / 15	8 / 15	64	15 / 8	30 / 15	1.5	0.5
4	15 / 15	4 / 15	64	15 / 4	30 / 15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs} / \beta_c = 30 / 15 \Leftrightarrow \beta_{hs} = 30 / 15 * \beta_c$.
Note 2: CM = 1 for $\beta_c / \beta_d = 12 / 15$, $\beta_{hs} / \beta_c = 24 / 15$.
Note 3: For subtest 2 the β_c / β_d ratio of 12 / 15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11 / 15$ and $\beta_d = 15 / 15$.

Release 6 HSUPA Data Devices

The 3G SAR test reduction procedure is applied to body SAR with 12.2 kbps RMC as the primary mode. Otherwise, body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode. Otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing. Due to inner loop power control requirements in HSPA, a communication test set is required for output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the β values indicated in below.

FCC SAR Test Report

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11 / 15 ⁽³⁾	15 / 15 ⁽³⁾	64	11 / 15 ⁽³⁾	22 / 15	209 / 225	1039 / 225	4	1	1.0	0.0	20	75
2	6 / 15	15 / 15	64	6 / 15	12 / 15	12 / 15	94 / 75	4	1	3.0	2.0	12	67
3	15 / 15	9 / 15	64	15 / 9	30 / 15	30 / 15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2 / 15	15 / 15	64	2 / 15	4 / 15	2 / 15	56 / 75	4	1	3.0	2.0	17	71
5	15 / 15 ⁽⁴⁾	15 / 15 ⁽⁴⁾	64	15 / 15 ⁽⁴⁾	30 / 15	24 / 15	134 / 15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs} / \beta_c = 30 / 15 \Leftrightarrow \beta_{hs} = 30 / 15 * \beta_c$.
Note 2: CM = 1 for $\beta_c / \beta_d = 12 / 15$, $\beta_{hs} / \beta_c = 24 / 15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.
Note 3: For subtest 1 the β_c / β_d ratio of 11 / 15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10 / 15$ and $\beta_d = 15 / 15$.
Note 4: For subtest 5 the β_c / β_d ratio of 15 / 15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14 / 15$ and $\beta_d = 15 / 15$.
Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.
Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

<Considerations Related to LTE for Setup and Testing>

This device contains LTE transmitter which follows 3GPP standards, is category 3, supports both QPSK and 16QAM modulations, and supported LTE band and channel bandwidth is listed in below. The output power was tested per 3GPP TS 36.521-1 maximum transmit procedures for both QPSK and 16QAM modulation. The results please refer to section 4.6 of this report.

EUT Supported LTE Band and Channel Bandwidth						
LTE Band	BW 1.4 MHz	BW 3 MHz	BW 5 MHz	BW 10 MHz	BW 15 MHz	BW 20 MHz
2	V	V	V	V	V	V
4	V	V	V	V	V	V
5	V	V	V	V		
7			V	V	V	V
12	V	V	V	V		
13			V	V		
14			V	V		
26	V	V	V	V	V	
30			V	V		
66	V	V	V	V	V	V

The LTE maximum power reduction (MPR) in accordance with 3GPP TS 36.101 is active all times during LTE operation. The allowed MPR for the maximum output power is specified in below.

Modulation	Channel Bandwidth / RB Configurations						LTE MPR Setting (dB)
	BW 1.4 MHz	BW 3 MHz	BW 5 MHz	BW 10 MHz	BW 15 MHz	BW 20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1
16QAM	<= 5	<= 4	<= 8	<= 12	<= 16	<= 18	1
16QAM	> 5	> 4	> 8	> 12	> 16	> 18	2


Note: MPR is according to the standard and implemented in the circuit (mandatory).

In addition, the device is compliant with additional maximum power reduction (A-MPR) requirements defined in 3GPP TS 36.101 section 6.2.4 that was disabled for all FCC compliance testing.

FCC SAR Test Report

During LTE SAR testing, the related parameters of operating band, channel bandwidth, uplink channel number, modulation type, and RB was set in base station simulator. When the EUT has registered and communicated to base station simulator, the simulator set to make EUT transmitting the maximum radiated power.

According to KDB 941225 D05, SAR testing for TDD-LTE device must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP TDD-LTE configurations. The TDD-LTE of this device supports frame structure type 2 defined in 3GPP TS 36.211 section 4.2, and the frame structure configuration can be referred to below.

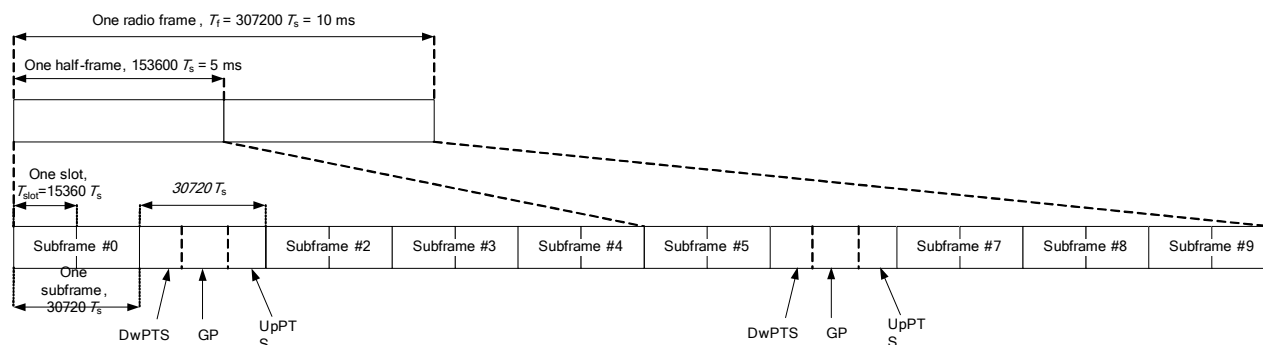

3GPP TS 36.211 Figure 4.2-1: Frame Structure Type 2

Special Subframe Configuration	Normal Cyclic Prefix in Downlink			Extended Cyclic Prefix in Downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal Cyclic Prefix in Uplink	Extended Cyclic Prefix in Uplink		Normal Cyclic Prefix in Uplink	Extended Cyclic Prefix in Uplink
0	6592 · Ts	2192 · Ts	2560 · Ts	7680 · Ts	2192 · Ts	2560 · Ts
1	19760 · Ts			20480 · Ts		
2	21952 · Ts			23040 · Ts		
3	24144 · Ts			25600 · Ts		
4	26336 · Ts	4384 · Ts	5120 · Ts	7680 · Ts	4384 · Ts	5120 · Ts
5	6592 · Ts			20480 · Ts		
6	19760 · Ts			23040 · Ts		
7	21952 · Ts			12800 · Ts		
8	24144 · Ts	-	-	-	-	-
9	13168 · Ts			-		

3GPP TS 36.211 Table 4.2-1: Configuration of Special Subframe

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-Point Periodicity	Subframe Number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

3GPP TS 36.211 Table 4.2-2: Uplink-Downlink Configurations

FCC SAR Test Report

The variety of different TD-LTE uplink-downlink configurations allows a network operator to allocate the network's capacity between uplink and downlink traffic to meet the needs of the network. The uplink duty cycle of these seven configurations can readily be computed and shown in below.

UL-DL Configuration	0	1	2	3	4	5	6
Highest Duty-Cycle	63.33%	43.33%	23.33%	31.67%	21.67%	11.67%	53.33%

<Considerations Related to WLAN for Setup and Testing>

In general, various vendor specific external test software and chipset based internal test modes are typically used for SAR measurement. These chipset based test mode utilities are generally hardware and manufacturer dependent, and often include substantial flexibility to reconfigure or reprogram a device. A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement. The test frequencies established using test mode must correspond to the actual channel frequencies. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. In addition, a periodic transmission duty factor is required for current generation SAR systems to measure SAR correctly. The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

According to KDB 248227 D01, this device has installed WLAN engineering testing software which can provide continuous transmitting RF signal. During WLAN SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

Initial Test Configuration

An initial test configuration is determined for OFDM transmission modes in 2.4 GHz and 5 GHz bands according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

Subsequent Test Configuration

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. Additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. When the highest reported SAR for the initial test configuration according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.

FCC SAR Test Report

SAR Test Configuration and Channel Selection

When multiple channel bandwidth configurations in a frequency band have the same specified maximum output power, the initial test configuration is using largest channel bandwidth, lowest order modulation, lowest data rate, and lowest order 802.11 mode (i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n). After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following.

- 1) The channel closest to mid-band frequency is selected for SAR measurement.
- 2) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

Test Reduction for U-NII-1 (5.2 GHz) and U-NII-2A (5.3 GHz) Bands

For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following.

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition).
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

4.2 EUT Testing Position

According to KDB 648474 D04, handsets are tested for SAR compliance in head, body-worn accessory and other use configurations described in the following subsections.

4.2.1 Head Exposure Conditions

Head exposure is limited to next to the ear voice mode operations. Head SAR compliance is tested according to the test positions defined in IEEE Std 1528-2013 using the SAM phantom illustrated as below.

1. Define two imaginary lines on the handset
 - (a) The vertical centerline passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
 - (b) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
 - (c) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

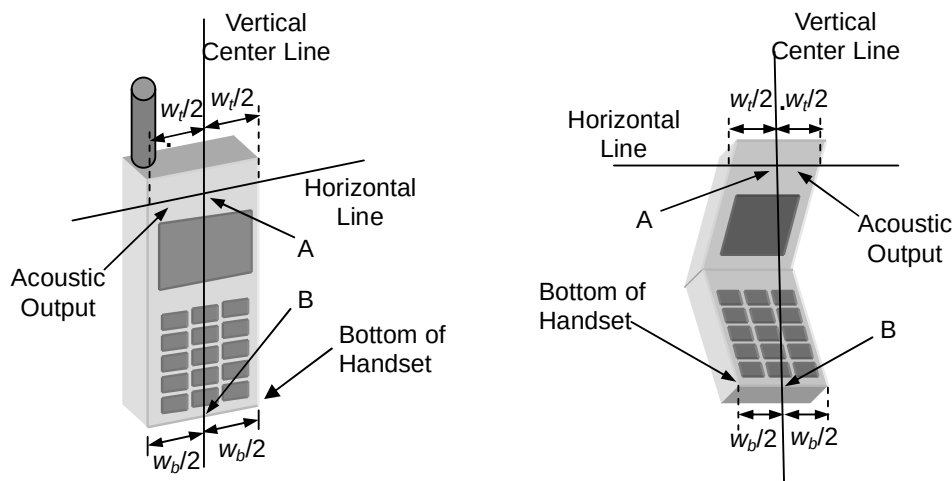


Fig-4.1 Illustration for Handset Vertical and Horizontal Reference Lines

FCC SAR Test Report

2. Cheek Position

- To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig-4.2).

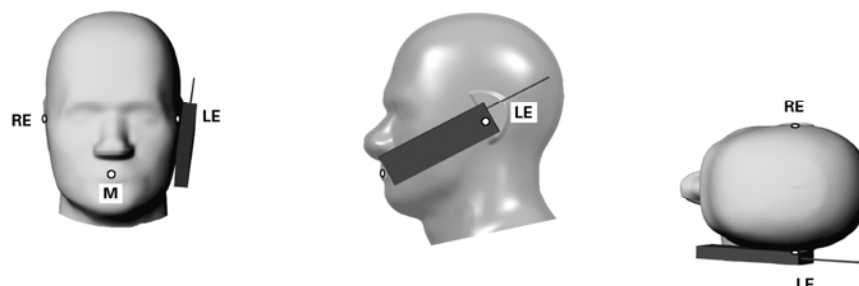


Fig-4.2 Illustration for Cheek Position

3. Tilted Position

- To position the device in the “cheek” position described above.
- While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig-4.3).

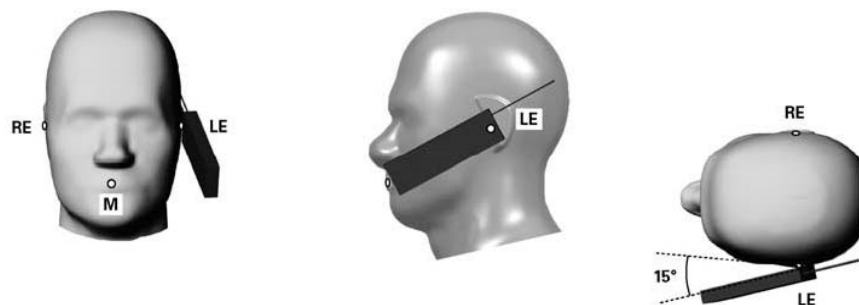


Fig-4.3 Illustration for Tilted Position

4.2.2 Body-worn Accessory Exposure Conditions

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB 447498 are used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Body-worn accessories that do not contain metallic or conductive components may be tested according to worst-case exposure configurations, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics. All body-worn accessories containing metallic components are tested in conjunction with the host device.

Body-worn accessory SAR compliance is based on a single minimum test separation distance for all wireless and operating modes applicable to each body-worn accessory used by the host, and according to the relevant voice and/or data mode transmissions and operations. If a body-worn accessory supports voice only operations in its normal and expected use conditions, testing of data mode for body-worn compliance is not required.

A conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be acquired by users of consumer handsets is used to test for body-worn accessory SAR compliance. This distance is determined by the handset manufacturer, according to the requirements of Supplement C 01-01. Devices that are designed to operate on the body of users using lanyards and straps, or without requiring additional body-worn accessories, will be tested using a conservative minimum test separation distance $\leq 5 \text{ mm}$ to support compliance.


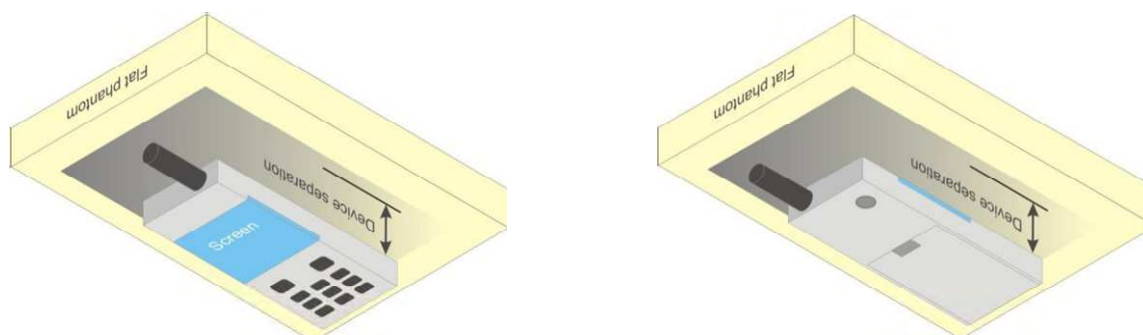


Fig-4.4 Illustration for Body Worn Position

FCC SAR Test Report

4.2.3 Hotspot Mode Exposure Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225 D06. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

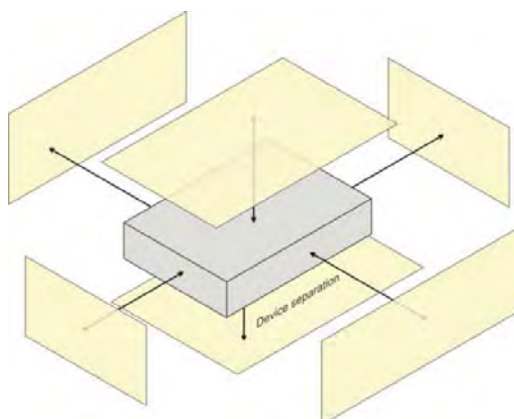

Based on the antenna location shown on appendix D of this report, the SAR testing required for hotspot mode is listed as below.

Antenna	Front Face	Rear Face	Left Side	Right Side	Top Side	Bottom Side
WWAN Ant-0	V	V	V	V		V
WLAN / BT	V	V	V	V	V	

4.2.4 SAR Test Exclusion Evaluations

According to KDB 447498 D01, the SAR test exclusion condition is based on source-based time-averaged maximum conducted output power, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions. The SAR exclusion threshold is determined by the following.

Mode	Max. Tune-up Power (dBm)	Max. Tune-up Power (mW)	Body-Worn		
			Ant. to Surface (mm)	Calculated Result	Require SAR Testing?
BT (2.48 GHz)	11.5	14.13	10	2.2	No

FCC SAR Test Report

4.2.5 Simultaneous Transmission Possibilities

The simultaneous transmission possibilities for this device are listed as below.

Simultaneous TX Combination	Capable Transmit Configurations	Head (Voice / VoIP)	Body-worn (Voice / VoIP)	Hotspot (Data)
1	GSM850 (Voice / Data) + WLAN (Data)	Yes	Yes	Yes
2	GSM1900 (Voice / Data) + WLAN (Data)	Yes	Yes	Yes
3	WCDMA II (Voice / Data) + WLAN (Data)	Yes	Yes	Yes
4	WCDMA IV (Voice / Data) + WLAN (Data)	Yes	Yes	Yes
5	WCDMA V (Voice / Data) + WLAN (Data)	Yes	Yes	Yes
6	LTE 2 (Data) + WLAN (Data)	Yes	Yes	Yes
7	LTE 4 (Data) + WLAN (Data)	Yes	Yes	Yes
8	LTE 5 (Data) + WLAN (Data)	Yes	Yes	Yes
9	LTE 7 (Data) + WLAN (Data)	Yes	Yes	Yes
10	LTE 12 (Data) + WLAN (Data)	Yes	Yes	Yes
11	LTE 13 (Data) + WLAN (Data)	Yes	Yes	Yes
12	LTE 14 (Data) + WLAN (Data)	Yes	Yes	Yes
13	LTE 26 (Data) + WLAN (Data)	Yes	Yes	Yes
14	LTE 30 (Data) + WLAN (Data)	Yes	Yes	Yes
15	LTE 66 (Data) + WLAN (Data)	Yes	Yes	Yes
16	GSM850 (Voice / Data) + BT (Data)	No	Yes	No
17	GSM1900 (Voice / Data) + BT (Data)	No	Yes	No
18	WCDMA II (Voice / Data) + BT (Data)	No	Yes	No
19	WCDMA IV (Voice / Data) + BT (Data)	No	Yes	No
20	WCDMA V (Voice / Data) + BT (Data)	No	Yes	No
21	LTE 2 (Data) + BT (Data)	No	Yes	No
22	LTE 4 (Data) + BT (Data)	No	Yes	No
23	LTE 5 (Data) + BT (Data)	No	Yes	No
24	LTE 7 (Data) + BT (Data)	No	Yes	No
25	LTE 12 (Data) + BT (Data)	No	Yes	No
26	LTE 13 (Data) + BT (Data)	No	Yes	No
27	LTE 14 (Data) + BT (Data)	No	Yes	No
28	LTE 26 (Data) + BT (Data)	No	Yes	No
29	LTE 30 (Data) + BT (Data)	No	Yes	No
30	LTE 66 (Data) + BT (Data)	No	Yes	No

Note :

1. The 2.4G WLAN and 5G WLAN cannot transmit simultaneously.
2. The WLAN and Bluetooth cannot transmit simultaneously, so there is no co-location test requirement for WLAN and Bluetooth.
3. Only 2.4G WLAN (802.11b/g/n) and 5G WLAN (802.11a/n) Band1/4 supports wireless hotspot capability. 5G WLAN (802.11a/n) Band2/3 does not support wireless hotspot mode.

FCC SAR Test Report

4.3 Tissue Verification

The measuring results for tissue simulating liquid are shown as below.

Test Date	Tissue Type	Frequency (MHz)	Liquid Temp. (°C)	Measured Conductivity (σ)	Measured Permittivity (ϵ_r)	Target Conductivity (σ)	Target Permittivity (ϵ_r)	Conductivity Deviation (%)	Permittivity Deviation (%)
Sep. 18, 2018	HL750	750	21.3	0.86	41.92	0.89	41.90	-3.37	0.05
Sep. 20, 2018	HL850	835	21.5	0.93	41.13	0.90	41.50	3.33	-0.89
Sep. 26, 2018	HL1800	1800	21.3	1.42	40.24	1.40	40.00	1.43	0.60
Sep. 28, 2018	HL1900	1900	21.3	1.37	39.88	1.40	40.00	-2.14	-0.30
Sep. 30, 2018	HL2450	2450	21.0	1.84	38.85	1.80	39.20	2.22	-0.89
Oct. 08, 2018	HL2600	2600	21.4	1.94	38.91	1.96	39.00	-1.02	-0.23
Oct. 09, 2018	HL5G	5200	21.6	4.56	36.11	4.66	36.00	-2.15	0.31
Oct. 10, 2018	HL5G	5600	21.4	5.17	35.56	5.07	35.50	1.97	0.17
Oct. 11, 2018	HL5G	5800	21.1	5.23	35.26	5.27	35.30	-0.76	-0.11
Sep. 18, 2018	BL750	750	21.3	0.97	56.52	1.00	56.80	-3.00	-0.49
Sep. 20, 2018	BL850	835	21.5	0.95	55.43	0.97	55.20	-2.06	0.42
Sep. 26, 2018	BL1800	1800	21.3	1.56	53.62	1.52	53.30	2.63	0.60
Sep. 28, 2018	BL1900	1900	21.3	1.55	53.11	1.52	53.30	1.97	-0.36
Sep. 30, 2018	BL2450	2450	21.0	1.96	52.22	1.95	52.70	0.51	-0.91
Oct. 08, 2018	BL2600	2600	21.4	2.14	52.00	2.16	52.50	-0.93	-0.95
Oct. 09, 2018	BL5G	5200	21.6	5.61	48.61	5.51	48.64	1.81	-0.06
Oct. 10, 2018	BL5G	5600	21.4	5.62	46.89	5.77	46.79	-2.60	0.21
Oct. 11, 2018	BL5G	5800	21.1	6.17	47.64	6.10	47.04	1.15	1.28

Note:

1. The dielectric properties of the tissue simulating liquid must be measured within 24 hours before the SAR testing and within $\pm 5\%$ of the target values. Liquid temperature during the SAR testing must be within $\pm 2^\circ\text{C}$.
2. Since the maximum deviation of dielectric properties of the tissue simulating liquid is within 5%, SAR correction is evaluated in the measurement uncertainty shown on section 6 of this report.

4.4 System Validation

The SAR measurement system was validated according to procedures in KDB 865664 D01. The validation status in tabulated summary is as below.

Test Date	Probe S/N	Calibration Point		Measured Conductivity (σ)	Measured Permittivity (ϵ_r)	Validation for CW			Validation for Modulation		
						Sensitivity Range	Probe Linearity	Probe Isotropy	Modulation Type	Duty Factor	PAR
Sep. 18, 2018	SN 27/15 EPGO262	Head	750	0.86	41.92	Pass	Pass	Pass	N/A	N/A	N/A
Sep. 20, 2018	SN 27/15 EPGO262	Head	835	0.93	41.13	Pass	Pass	Pass	GMSK	Pass	N/A
Sep. 26, 2018	SN 27/15 EPGO262	Head	1800	1.42	40.24	Pass	Pass	Pass	GMSK	Pass	N/A
Sep. 28, 2018	SN 27/15 EPGO262	Head	1900	1.37	39.88	Pass	Pass	Pass	GMSK	Pass	N/A
Sep. 30, 2018	SN 27/15 EPGO262	Head	2450	1.84	38.85	Pass	Pass	Pass	OFDM	N/A	Pass
Oct. 08, 2018	SN 27/15 EPGO262	Head	2600	1.94	38.91	Pass	Pass	Pass	N/A	N/A	N/A
Oct. 09, 2018	SN 27/15 EPGO262	Head	5200	4.56	36.11	Pass	Pass	Pass	OFDM	N/A	Pass
Oct. 10, 2018	SN 27/15 EPGO262	Head	5600	5.17	35.56	Pass	Pass	Pass	OFDM	N/A	Pass
Oct. 11, 2018	SN 27/15 EPGO262	Head	5800	5.23	35.26	Pass	Pass	Pass	OFDM	N/A	Pass
Sep. 18, 2018	SN 27/15 EPGO262	Body	750	0.97	56.52	Pass	Pass	Pass	N/A	N/A	N/A
Sep. 20, 2018	SN 27/15 EPGO262	Body	835	0.95	55.43	Pass	Pass	Pass	GMSK	Pass	N/A
Sep. 26, 2018	SN 27/15 EPGO262	Body	1800	1.56	53.62	Pass	Pass	Pass	GMSK	Pass	N/A
Sep. 28, 2018	SN 27/15 EPGO262	Body	1900	1.55	53.11	Pass	Pass	Pass	GMSK	Pass	N/A
Sep. 30, 2018	SN 27/15 EPGO262	Body	2450	1.96	52.22	Pass	Pass	Pass	OFDM	N/A	Pass
Oct. 08, 2018	SN 27/15 EPGO262	Body	2600	2.14	52.00	Pass	Pass	Pass	N/A	N/A	N/A
Oct. 09, 2018	SN 27/15 EPGO262	Body	5200	5.61	48.61	Pass	Pass	Pass	OFDM	N/A	Pass
Oct. 10, 2018	SN 27/15 EPGO262	Body	5600	5.62	46.89	Pass	Pass	Pass	OFDM	N/A	Pass
Oct. 11, 2018	SN 27/15 EPGO262	Body	5800	6.17	47.64	Pass	Pass	Pass	OFDM	N/A	Pass

FCC SAR Test Report

4.5 System Verification

The measuring result for system verification is tabulated as below.

Test Date	Mode	Frequency (MHz)	1W Target SAR-1g (W/kg)	Measured SAR-1g (W/kg)	Normalized to 1W SAR-1g (W/kg)	Deviation (%)	Dipole S/N	Probe S/N	DAE S/N
Sep. 18, 2018	Head	750	8.55	0.84	8.37	-2.11	SN 26/14 DIP0G750-325	SN 27/15 EPGO262	1331865
Sep. 20, 2018	Head	835	9.64	0.98	9.78	1.45	SN 18/11 DIP150	SN 27/15 EPGO262	1331865
Sep. 26, 2018	Head	1800	37.99	3.65	36.52	-3.87	SN 18/11 DIPF152	SN 27/15 EPGO262	1331865
Sep. 28, 2018	Head	1900	39.88	3.78	37.83	-5.14	SN 18/11 DIPG153	SN 27/15 EPGO262	1331865
Sep. 30, 2018	Head	2450	53.18	5.23	52.33	-1.60	SN 18/11 DIPJ155	SN 27/15 EPGO262	1331865
Oct. 08, 2018	Head	2600	54.89	5.31	53.07	-3.32	SN 26/14 DIP2G600-326	SN 27/15 EPGO262	1331865
Oct. 09, 2018	Head	5200	158.70	15.59	155.87	-1.78	SN 24/11/ WGA16	SN 27/15 EPGO262	1331865
Oct. 10, 2018	Head	5600	175.47	16.87	168.69	-3.86	SN 24/11/ WGA16	SN 27/15 EPGO262	1331865
Oct. 11, 2018	Head	5800	183.93	17.66	176.62	-3.97	SN 24/11/ WGA16	SN 27/15 EPGO262	1331865
Sep. 18, 2018	Body	750	8.75	0.90	9.02	3.09	SN 26/14 DIP0G750-325	SN 27/15 EPGO262	1331865
Sep. 20, 2018	Body	835	9.96	0.96	9.64	-3.21	SN 18/11 DIP150	SN 27/15 EPGO262	1331865
Sep. 26, 2018	Body	1800	39.62	4.05	40.52	2.27	SN 18/11 DIPF152	SN 27/15 EPGO262	1331865
Sep. 28, 2018	Body	1900	40.38	4.16	41.61	3.05	SN 18/11 DIPG153	SN 27/15 EPGO262	1331865
Sep. 30, 2018	Body	2450	52.73	5.12	51.24	-2.83	SN 18/11 DIPJ155	SN 27/15 EPGO262	1331865
Oct. 08, 2018	Body	2600	54.23	5.64	56.44	4.08	SN 26/14 DIP2G600-326	SN 27/15 EPGO262	1331865
Oct. 09, 2018	Body	5200	152.11	14.56	145.56	-4.31	SN 24/11/ WGA16	SN 27/15 EPGO262	1331865
Oct. 10, 2018	Body	5600	169.48	17.19	171.89	1.42	SN 24/11/ WGA16	SN 27/15 EPGO262	1331865
Oct. 11, 2018	Body	5800	175.88	17.36	173.56	-1.32	SN 24/11/ WGA16	SN 27/15 EPGO262	1331865

Note:

Comparing to the reference SAR value provided by MVG, the validation data should be within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots can be referred to Appendix A of this report.

FCC SAR Test Report

4.6 Maximum Output Power

4.6.1 Maximum Conducted Power

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.

Mode	GSM850	GSM1900
GSM (GMSK, 1Tx-slot)	33.2	30.8
GPRS (GMSK, 1Tx-slot)	33.2	30.8
GPRS (GMSK, 2Tx-slot)	31.0	29.0
GPRS (GMSK, 3Tx-slot)	29.5	27.5
GPRS (GMSK, 4Tx-slot)	28.5	26.5
EDGE (8PSK, 1Tx-slot)	26.5	26.0
EDGE (8PSK, 2Tx-slot)	26.5	25.5
EDGE (8PSK, 3Tx-slot)	25.0	24.5
EDGE (8PSK, 4Tx-slot)	24.0	23.0

Mode	WCDMA Band II	WCDMA Band IV	WCDMA Band V
RMC 12.2K	25.0	24.0	25.0
HSDPA	24.0	22.5	24.0
HSUPA	23.5	22.0	23.5

Mode	LTE 2	LTE 4	LTE 5	LTE 7
QPSK / 16QAM / 64QAM	24.0 / 24.0 / 23.0	24.0 / 23.0 / 23.0	24.0 / 23.0 / 23.0	24.0 / 23.0 / 23.0

Mode	LTE 12	LTE 13	LTE 14	LTE 26
QPSK / 16QAM / 64QAM	24.0 / 23.0 / 23.0	24.0 / 23.0 / 23.0	24.0 / 23.0 / 23.0	24.0 / 23.0 / 22.0

Mode	LTE 30	LTE 66
QPSK / 16QAM / 64QAM	24.0 / 23.0 / 23.0	24.0 / 23.0 / 22.5

Mode	2.4G WLAN	5.2G WLAN	5.3G WLAN	5.6G WLAN	5.8G WLAN
802.11b	16.0	N/A	N/A	N/A	N/A
802.11g	16.0	N/A	N/A	N/A	N/A
802.11a	N/A	16.5	16.5	16.5	16.5
802.11n HT20	16.0	16.5	16.5	16.5	16.5
802.11n HT40	13.0	14.0	14.0	14.0	14.5

Mode	2.4G Bluetooth
GFSK	CH0-38: 10.0; CH39: 11.5; CH40-78: 10.0
$\pi/4$ -DQPSK	CH0-38: 8.0; CH39: 9.5; CH40-78: 8.0
8-DPSK	CH0-38: 8.0; CH39: 9.5; CH40-78: 8.0
LE	CH0-18: 1.0; CH19: 2.0; CH20-39: 1.0

FCC SAR Test Report

4.6.2 Measured Conducted Power Result

The measuring conducted average power (Unit: dBm) is shown as below.

Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
Maximum Burst-Averaged Output Power						
GSM (GMSK, 1Tx-slot)	32.65	32.77	32.40	29.87	29.75	29.66
GPRS (GMSK, 1Tx-slot)	32.61	32.73	32.36	29.79	29.67	29.58
GPRS (GMSK, 2Tx-slot)	30.73	30.85	30.48	28.57	28.45	28.36
GPRS (GMSK, 3Tx-slot)	29.31	29.43	29.06	27.36	27.24	27.15
GPRS (GMSK, 4Tx-slot)	28.06	28.18	27.81	26.01	25.89	25.80
EDGE (8PSK, 1Tx-slot)	26.22	26.34	25.97	25.44	25.32	25.23
EDGE (8PSK, 2Tx-slot)	26.00	26.12	25.75	25.26	25.14	25.05
EDGE (8PSK, 3Tx-slot)	24.70	24.82	24.45	24.05	23.93	23.84
EDGE (8PSK, 4Tx-slot)	23.43	23.55	23.18	22.76	22.64	22.55
Maximum Frame-Averaged Output Power						
GSM (GMSK, 1Tx-slot)	23.65	23.77	23.40	20.87	20.75	20.66
GPRS (GMSK, 1Tx-slot)	23.61	23.73	23.36	20.79	20.67	20.58
GPRS (GMSK, 2Tx-slot)	24.73	24.85	24.48	22.57	22.45	22.36
GPRS (GMSK, 3Tx-slot)	25.05	25.17	24.80	23.10	22.98	22.89
GPRS (GMSK, 4Tx-slot)	25.06	25.18	24.81	23.01	22.89	22.80
EDGE (8PSK, 1Tx-slot)	17.22	17.34	16.97	16.44	16.32	16.23
EDGE (8PSK, 2Tx-slot)	20.00	20.12	19.75	19.26	19.14	19.05
EDGE (8PSK, 3Tx-slot)	20.44	20.56	20.19	19.79	19.67	19.58
EDGE (8PSK, 4Tx-slot)	20.43	20.55	20.18	19.76	19.64	19.55

Note:

- SAR testing was performed on the maximum frame-averaged power mode.
- The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:
Frame-averaged power = 10 x log (Burst-averaged power mW x Slot used / 8)
- The configuration of time-slot for GSM has transmitting signal in one time-slot during one frame (8 time-slots).

Band	WCDMA Band II			WCDMA Band IV			WCDMA Band V			3GPP MPR (dB)
Channel	9262	9400	9538	1312	1413	1513	4132	4182	4233	
Frequency (MHz)	1852.4	1880.0	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6	
RMC 12.2K	23.85	24.10	24.20	23.40	23.41	23.38	24.30	24.28	24.38	-
HSDPA Subtest-1	22.78	23.03	23.13	22.33	22.34	22.31	23.23	23.21	23.31	0
HSDPA Subtest-2	22.63	22.88	22.98	22.18	22.19	22.16	23.08	23.06	23.16	0
HSDPA Subtest-3	22.05	22.30	22.40	21.60	21.61	21.58	22.50	22.48	22.58	0.5
HSDPA Subtest-4	22.02	22.27	22.37	21.57	21.58	21.55	22.47	22.45	22.55	0.5
HSUPA Subtest-1	22.15	22.40	22.50	21.70	21.71	21.68	22.60	22.58	22.68	0
HSUPA Subtest-2	20.49	20.74	20.84	20.04	20.05	20.02	20.94	20.92	21.02	2
HSUPA Subtest-3	21.36	21.61	21.71	20.91	20.92	20.89	21.81	21.79	21.89	1
HSUPA Subtest-4	20.38	20.63	20.73	19.93	19.94	19.91	20.83	20.81	20.91	2
HSUPA Subtest-5	22.31	22.56	22.66	21.86	21.87	21.84	22.76	22.74	22.84	0

FCC SAR Test Report

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 18607	Mid CH 18900	High CH 19193		Low CH 18607	Mid CH 18900	High CH 19193		Low CH 18607	Mid CH 18900	High CH 19193	
			1850.7 MHz	1880.0 MHz	1909.3 MHz		1850.7 MHz	1880.0 MHz	1909.3 MHz		1850.7 MHz	1880.0 MHz	1909.3 MHz	
2 / 1.4M	1	0	23.70	23.62	23.56	0	23.14	23.06	23.00	1	21.78	21.70	21.64	2
	1	2	23.79	23.71	23.65	0	22.38	22.30	22.24	1	21.45	21.37	21.31	2
	1	5	23.63	23.55	23.49	0	22.09	22.01	21.95	1	21.31	21.23	21.17	2
	3	0	22.67	22.59	22.53	0	21.76	21.68	21.62	1	21.76	21.68	21.62	3
	3	1	22.58	22.50	22.44	0	21.80	21.72	21.66	1	21.43	21.35	21.29	3
	3	3	22.54	22.46	22.40	0	21.55	21.47	21.41	1	21.29	21.21	21.15	3
	6	0	22.62	22.54	22.48	1	21.72	21.64	21.58	2	20.74	20.66	20.60	3

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 18615	Mid CH 18900	High CH 19185		Low CH 18615	Mid CH 18900	High CH 19185		Low CH 18615	Mid CH 18900	High CH 19185	
			1851.5 MHz	1880.0 MHz	1908.5 MHz		1851.5 MHz	1880.0 MHz	1908.5 MHz		1851.5 MHz	1880.0 MHz	1908.5 MHz	
2 / 3M	1	0	23.73	23.65	23.59	0	23.17	23.09	23.03	1	21.81	21.73	21.67	2
	1	7	23.82	23.74	23.68	0	22.41	22.33	22.27	1	21.48	21.40	21.34	2
	1	14	23.66	23.58	23.52	0	22.12	22.04	21.98	1	21.34	21.26	21.20	2
	8	0	22.68	22.60	22.54	1	21.78	21.70	21.64	1	20.81	20.73	20.67	3
	8	3	22.59	22.51	22.45	1	21.82	21.74	21.68	1	20.75	20.67	20.61	3
	8	7	22.55	22.47	22.41	1	21.57	21.49	21.43	1	20.62	20.54	20.48	3
	15	0	22.63	22.55	22.49	1	21.74	21.66	21.60	2	20.77	20.69	20.63	3

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 18625	Mid CH 18900	High CH 19175		Low CH 18625	Mid CH 18900	High CH 19175		Low CH 18625	Mid CH 18900	High CH 19175	
			1852.5 MHz	1880.0 MHz	1907.5 MHz		1852.5 MHz	1880.0 MHz	1907.5 MHz		1852.5 MHz	1880.0 MHz	1907.5 MHz	
2 / 5M	1	0	23.76	23.68	23.62	0	23.20	23.12	23.06	1	21.84	21.76	21.70	2
	1	12	23.85	23.77	23.71	0	22.44	22.36	22.30	1	21.51	21.43	21.37	2
	1	24	23.69	23.61	23.55	0	22.15	22.07	22.01	1	21.37	21.29	21.23	2
	12	0	22.71	22.63	22.57	0	21.81	21.73	21.67	1	20.84	20.76	20.70	3
	12	6	22.62	22.54	22.48	0	21.85	21.77	21.71	1	20.78	20.70	20.64	3
	12	13	22.58	22.50	22.44	0	21.60	21.52	21.46	1	20.65	20.57	20.51	3
	25	0	22.66	22.58	22.52	1	21.77	21.69	21.63	2	20.80	20.72	20.66	3

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 18650	Mid CH 18900	High CH 19150		Low CH 18650	Mid CH 18900	High CH 19150		Low CH 18650	Mid CH 18900	High CH 19150	
			1855.0 MHz	1880.0 MHz	1905.0 MHz		1855.0 MHz	1880.0 MHz	1905.0 MHz		1855.0 MHz	1880.0 MHz	1905.0 MHz	
2 / 10M	1	0	23.78	23.70	23.64	0	23.22	23.14	23.08	1	21.86	21.78	21.72	2
	1	24	23.87	23.79	23.73	0	22.46	22.38	22.32	1	21.53	21.45	21.39	2
	1	49	23.71	23.63	23.57	0	22.17	22.09	22.03	1	21.39	21.31	21.25	2
	25	0	22.73	22.65	22.59	0	21.83	21.75	21.69	1	20.86	20.78	20.72	3
	25	12	22.64	22.56	22.50	0	21.87	21.79	21.73	1	20.80	20.72	20.66	3
	25	25	22.60	22.52	22.46	0	21.62	21.54	21.48	1	20.67	20.59	20.53	3
	50	0	22.68	22.60	22.54	1	21.79	21.71	21.65	2	20.82	20.74	20.68	3

FCC SAR Test Report

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 18675	Mid CH 18900	High CH 19125		Low CH 18675	Mid CH 18900	High CH 19125		Low CH 18675	Mid CH 18900	High CH 19125	
			1857.5 MHz	1880.0 MHz	1902.5 MHz		1857.5 MHz	1880.0 MHz	1902.5 MHz		1857.5 MHz	1880.0 MHz	1902.5 MHz	
2 / 15M	1	0	23.81	23.73	23.67	0	23.25	23.17	23.11	1	21.89	21.81	21.75	2
	1	37	23.90	23.82	23.76	0	22.49	22.41	22.35	1	21.56	21.48	21.42	2
	1	74	23.74	23.66	23.60	0	22.20	22.12	22.06	1	21.42	21.34	21.28	2
	36	0	22.76	22.68	22.62	1	21.86	21.78	21.72	1	20.89	20.81	20.75	3
	36	19	22.67	22.59	22.53	1	21.90	21.82	21.76	1	20.83	20.75	20.69	3
	36	39	22.63	22.55	22.49	1	21.65	21.57	21.51	1	20.70	20.62	20.56	3
	75	0	22.71	22.63	22.57	1	21.82	21.74	21.68	2	20.85	20.77	20.71	3

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 18700	Mid CH 18900	High CH 19100		Low CH 18700	Mid CH 18900	High CH 19100		Low CH 18700	Mid CH 18900	High CH 19100	
			1860.0 MHz	1880.0 MHz	1900.0 MHz		1860.0 MHz	1880.0 MHz	1900.0 MHz		1860.0 MHz	1880.0 MHz	1900.0 MHz	
2 / 20M	1	0	23.86	23.78	23.72	0	23.30	23.22	23.16	1	21.94	21.86	21.80	2
	1	50	23.95	23.87	23.81	0	22.54	22.46	22.40	1	21.61	21.53	21.47	2
	1	99	23.79	23.71	23.65	0	22.25	22.17	22.11	1	21.47	21.39	21.33	2
	50	0	22.81	22.73	22.67	1	21.91	21.83	21.77	1	20.94	20.86	20.80	3
	50	25	22.72	22.64	22.58	1	21.95	21.87	21.81	1	20.88	20.80	20.74	3
	50	50	22.68	22.60	22.54	1	21.70	21.62	21.56	1	20.75	20.67	20.61	3
	100	0	22.76	22.68	22.62	1	21.87	21.79	21.73	2	20.90	20.82	20.76	3

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 19957	Mid CH 20175	High CH 19193		Low CH 19957	Mid CH 20175	High CH 19193		Low CH 19957	Mid CH 20175	High CH 19193	
			1710.7 MHz	1732.5 MHz	1754.3 MHz		1710.7 MHz	1732.5 MHz	1754.3 MHz		1710.7 MHz	1732.5 MHz	1754.3 MHz	
4 / 1.4M	1	0	23.04	23.30	23.37	0	21.44	21.70	21.77	1	21.01	21.27	21.34	2
	1	2	23.05	23.31	23.38	0	22.13	22.39	22.46	1	20.84	21.10	21.17	2
	1	5	22.81	23.07	23.14	0	21.53	21.79	21.86	1	20.87	21.13	21.20	2
	3	0	21.89	22.15	22.22	0	20.82	21.08	21.15	1	20.02	20.28	20.35	3
	3	1	21.85	22.11	22.18	0	20.81	21.07	21.14	1	19.99	20.25	20.32	3
	3	3	21.87	22.13	22.20	0	20.64	20.90	20.97	1	19.96	20.22	20.29	3
	6	0	21.72	21.98	22.05	1	20.75	21.01	21.08	2	19.85	20.11	20.18	3

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 19965	Mid CH 20175	High CH 20385		Low CH 19965	Mid CH 20175	High CH 20385		Low CH 19965	Mid CH 20175	High CH 20385	
			1711.5 MHz	1732.5 MHz	1753.5 MHz		1711.5 MHz	1732.5 MHz	1753.5 MHz		1711.5 MHz	1732.5 MHz	1753.5 MHz	
4 / 3M	1	0	23.05	23.31	23.38	0	21.45	21.71	21.78	1	21.02	21.28	21.35	2
	1	7	23.06	23.32	23.39	0	22.14	22.40	22.47	1	20.85	21.11	21.18	2
	1	14	22.82	23.08	23.15	0	21.54	21.80	21.87	1	20.88	21.14	21.21	2
	8	0	21.91	22.17	22.24	0	20.83	21.09	21.16	1	20.03	20.29	20.36	3
	8	3	21.87	22.13	22.20	0	20.82	21.08	21.15	1	20.00	20.26	20.33	3
	8	7	21.89	22.15	22.22	0	20.65	20.91	20.98	1	19.97	20.23	20.30	3
	15	0	21.74	22.00	22.07	1	20.76	21.02	21.09	2	19.86	20.12	20.19	3

FCC SAR Test Report

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 19975	Mid CH 20175	High CH 20375		Low CH 19975	Mid CH 20175	High CH 20375		Low CH 19975	Mid CH 20175	High CH 20375	
			1712.5 MHz	1732.5 MHz	1752.5 MHz		1712.5 MHz	1732.5 MHz	1752.5 MHz		1712.5 MHz	1732.5 MHz	1752.5 MHz	
4 / 5M	1	0	23.08	23.34	23.41	0	21.48	21.74	21.81	1	21.05	21.31	21.38	2
	1	12	23.09	23.35	23.42	0	22.17	22.43	22.50	1	20.88	21.14	21.21	2
	1	24	22.85	23.11	23.18	0	21.57	21.83	21.90	1	20.91	21.17	21.24	2
	12	0	21.94	22.20	22.27	0	20.86	21.12	21.19	1	20.06	20.32	20.39	3
	12	6	21.90	22.16	22.23	0	20.85	21.11	21.18	1	20.03	20.29	20.36	3
	12	13	21.92	22.18	22.25	0	20.68	20.94	21.01	1	20.00	20.26	20.33	3
	25	0	21.77	22.03	22.10	1	20.79	21.05	21.12	2	19.89	20.15	20.22	3

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 20000	Mid CH 20175	High CH 20350		Low CH 20000	Mid CH 20175	High CH 20350		Low CH 20000	Mid CH 20175	High CH 20350	
			1715.0 MHz	1732.5 MHz	1750.0 MHz		1715.0 MHz	1732.5 MHz	1750.0 MHz		1715.0 MHz	1732.5 MHz	1750.0 MHz	
4 / 10M	1	0	23.12	23.38	23.45	0	21.52	21.78	21.85	1	21.09	21.35	21.42	2
	1	24	23.13	23.39	23.46	0	22.21	22.47	22.54	1	20.92	21.18	21.25	2
	1	49	22.89	23.15	23.22	0	21.61	21.87	21.94	1	20.95	21.21	21.28	2
	25	0	21.98	22.24	22.31	0	20.90	21.16	21.23	1	20.10	20.36	20.43	3
	25	12	21.94	22.20	22.27	0	20.89	21.15	21.22	1	20.07	20.33	20.40	3
	25	25	21.96	22.22	22.29	0	20.72	20.98	21.05	1	20.04	20.30	20.37	3
	50	0	21.81	22.07	22.14	1	20.83	21.09	21.16	2	19.93	20.19	20.26	3

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 20025	Mid CH 20175	High CH 20325		Low CH 20025	Mid CH 20175	High CH 20325		Low CH 20025	Mid CH 20175	High CH 20325	
			1717.5 MHz	1732.5 MHz	1747.5 MHz		1717.5 MHz	1732.5 MHz	1747.5 MHz		1717.5 MHz	1732.5 MHz	1747.5 MHz	
4 / 15M	1	0	23.18	23.44	23.51	0	21.58	21.84	21.91	1	21.15	21.41	21.48	2
	1	37	23.19	23.45	23.52	0	22.27	22.53	22.60	1	20.98	21.24	21.31	2
	1	74	22.95	23.21	23.28	0	21.67	21.93	22.00	1	21.01	21.27	21.34	2
	36	0	22.04	22.30	22.37	0	20.96	21.22	21.29	1	20.16	20.42	20.49	3
	36	19	22.00	22.26	22.33	0	20.95	21.21	21.28	1	20.13	20.39	20.46	3
	36	39	22.02	22.28	22.35	0	20.78	21.04	21.11	1	20.10	20.36	20.43	3
	75	0	21.87	22.13	22.20	1	20.89	21.15	21.22	2	19.99	20.25	20.32	3

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 20050	Mid CH 20175	High CH 20300		Low CH 20050	Mid CH 20175	High CH 20300		Low CH 20050	Mid CH 20175	High CH 20300	
			1720.0 MHz	1732.5 MHz	1745.0 MHz		1720.0 MHz	1732.5 MHz	1745.0 MHz		1720.0 MHz	1732.5 MHz	1745.0 MHz	
4 / 20M	1	0	23.21	23.47	23.54	0	21.61	21.87	21.94	1	21.18	21.44	21.51	2
	1	50	23.22	23.48	23.55	0	22.30	22.56	22.63	1	21.01	21.27	21.34	2
	1	99	22.98	23.24	23.31	0	21.70	21.96	22.03	1	21.04	21.30	21.37	2
	50	0	22.07	22.33	22.40	0	20.99	21.25	21.32	1	20.19	20.45	20.52	3
	50	25	22.03	22.29	22.36	0	20.98	21.24	21.31	1	20.16	20.42	20.49	3
	50	50	22.05	22.31	22.38	0	20.81	21.07	21.14	1	20.13	20.39	20.46	3
	100	0	21.90	22.16	22.23	1	20.92	21.18	21.25	2	20.02	20.28	20.35	3

FCC SAR Test Report

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 20407	Mid CH 20525	High CH 20643		Low CH 20407	Mid CH 20525	High CH 20643		Low CH 20407	Mid CH 20525	High CH 20643	
			824.7 MHz	836.5 MHz	848.3 MHz		824.7 MHz	836.5 MHz	848.3 MHz		824.7 MHz	836.5 MHz	848.3 MHz	
5 / 1.4M	1	0	23.06	23.14	23.11	0	21.34	21.42	21.39	1	20.92	21.00	20.97	2
	1	2	23.26	23.34	23.31	0	21.73	21.81	21.78	1	20.95	21.03	21.00	2
	1	5	22.93	23.01	22.98	0	21.60	21.68	21.65	1	20.70	20.78	20.75	2
	3	0	22.09	22.17	22.14	0	21.76	21.84	21.81	1	20.12	20.20	20.17	3
	3	1	22.04	22.12	22.09	0	21.72	21.80	21.77	1	20.09	20.17	20.14	3
	3	3	21.95	22.03	22.00	0	21.71	21.79	21.76	1	19.99	20.07	20.04	3
	6	0	21.96	22.04	22.01	1	21.70	21.78	21.75	2	20.04	20.12	20.09	3

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 20415	Mid CH 20525	High CH 20635		Low CH 20415	Mid CH 20525	High CH 20635		Low CH 20415	Mid CH 20525	High CH 20635	
			825.5 MHz	836.5 MHz	847.5 MHz		825.5 MHz	836.5 MHz	847.5 MHz		825.5 MHz	836.5 MHz	847.5 MHz	
5 / 3M	1	0	23.10	23.18	23.15	0	21.38	21.46	21.43	1	20.96	21.04	21.01	2
	1	7	23.30	23.38	23.35	0	21.77	21.85	21.82	1	20.99	21.07	21.04	2
	1	14	22.97	23.05	23.02	0	21.64	21.72	21.69	1	20.74	20.82	20.79	2
	8	0	22.11	22.19	22.16	0	21.77	21.85	21.82	1	20.13	20.21	20.18	3
	8	3	22.06	22.14	22.11	0	21.73	21.81	21.78	1	20.10	20.18	20.15	3
	8	7	21.97	22.05	22.02	0	21.72	21.80	21.77	1	20.00	20.08	20.05	3
	15	0	21.98	22.06	22.03	1	21.71	21.79	21.76	2	20.05	20.13	20.10	3

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 20425	Mid CH 20525	High CH 20625		Low CH 20425	Mid CH 20525	High CH 20625		Low CH 20425	Mid CH 20525	High CH 20625	
			826.5 MHz	836.5 MHz	846.5 MHz		826.5 MHz	836.5 MHz	846.5 MHz		826.5 MHz	836.5 MHz	846.5 MHz	
5 / 5M	1	0	23.16	23.24	23.21	0	21.44	21.52	21.49	1	21.02	21.10	21.07	2
	1	12	23.36	23.44	23.41	0	21.83	21.91	21.88	1	21.05	21.13	21.10	2
	1	24	23.03	23.11	23.08	0	21.70	21.78	21.75	1	20.80	20.88	20.85	2
	12	0	22.17	22.25	22.22	0	21.83	21.91	21.88	1	20.19	20.27	20.24	3
	12	6	22.12	22.20	22.17	0	21.79	21.87	21.84	1	20.16	20.24	20.21	3
	12	13	22.03	22.11	22.08	0	21.78	21.86	21.83	1	20.06	20.14	20.11	3
	25	0	22.04	22.12	22.09	1	21.77	21.85	21.82	2	20.11	20.19	20.16	3

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 20450	Mid CH 20525	High CH 20600		Low CH 20450	Mid CH 20525	High CH 20600		Low CH 20450	Mid CH 20525	High CH 20600	
			829.0 MHz	836.5 MHz	844.0 MHz		829.0 MHz	836.5 MHz	844.0 MHz		829.0 MHz	836.5 MHz	844.0 MHz	
5 / 10M	1	0	23.19	23.27	23.24	0	21.47	21.55	21.52	1	21.05	21.13	21.10	2
	1	24	23.39	23.47	23.44	0	21.86	21.94	21.91	1	21.08	21.16	21.13	2
	1	49	23.06	23.14	23.11	0	21.73	21.81	21.78	1	20.83	20.91	20.88	2
	25	0	22.20	22.28	22.25	0	21.86	21.94	21.91	1	20.22	20.30	20.27	3
	25	12	22.15	22.23	22.20	0	21.82	21.90	21.87	1	20.19	20.27	20.24	3
	25	25	22.06	22.14	22.11	0	21.81	21.89	21.86	1	20.09	20.17	20.14	3
	50	0	22.07	22.15	22.12	1	21.80	21.88	21.85	2	20.14	20.22	20.19	3

FCC SAR Test Report

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 20775	Mid CH 21100	High CH 21425		Low CH 20775	Mid CH 21100	High CH 21425		Low CH 20775	Mid CH 21100	High CH 21425	
			2502.5 MHz	2535.0 MHz	2567.5 MHz		2502.5 MHz	2535.0 MHz	2567.5 MHz		2502.5 MHz	2535.0 MHz	2567.5 MHz	
7 / 5M	1	0	23.19	23.29	23.12	0	21.93	22.03	21.86	1	21.29	21.39	21.22	2
	1	12	23.54	23.64	23.47	0	22.68	22.78	22.61	1	21.41	21.51	21.34	2
	1	24	23.33	23.43	23.26	0	22.27	22.37	22.20	1	21.29	21.39	21.22	2
	12	0	22.34	22.44	22.27	0	21.45	21.55	21.38	1	20.55	20.65	20.48	3
	12	6	22.34	22.44	22.27	0	21.45	21.55	21.38	1	20.55	20.65	20.48	3
	12	13	22.33	22.43	22.26	0	21.46	21.56	21.39	1	20.45	20.55	20.38	3
	25	0	22.28	22.38	22.21	1	21.46	21.56	21.39	2	20.40	20.50	20.33	3

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 20800	Mid CH 21100	High CH 21400		Low CH 20800	Mid CH 21100	High CH 21400		Low CH 20800	Mid CH 21100	High CH 21400	
			2505.0 MHz	2535.0 MHz	2565.0 MHz		2505.0 MHz	2535.0 MHz	2565.0 MHz		2505.0 MHz	2535.0 MHz	2565.0 MHz	
7 / 10M	1	0	23.23	23.33	23.16	0	21.97	22.07	21.90	1	21.33	21.43	21.26	2
	1	24	23.58	23.68	23.51	0	22.72	22.82	22.65	1	21.45	21.55	21.38	2
	1	49	23.37	23.47	23.30	0	22.31	22.41	22.24	1	21.33	21.43	21.26	2
	25	0	22.38	22.48	22.31	0	21.49	21.59	21.42	1	20.59	20.69	20.52	3
	25	12	22.38	22.48	22.31	0	21.49	21.59	21.42	1	20.59	20.69	20.52	3
	25	25	22.37	22.47	22.30	0	21.50	21.60	21.43	1	20.49	20.59	20.42	3
	50	0	22.32	22.42	22.25	1	21.50	21.60	21.43	2	20.44	20.54	20.37	3

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 20825	Mid CH 21100	High CH 21375		Low CH 20825	Mid CH 21100	High CH 21375		Low CH 20825	Mid CH 21100	High CH 21375	
			2507.5 MHz	2535.0 MHz	2562.5 MHz		2507.5 MHz	2535.0 MHz	2562.5 MHz		2507.5 MHz	2535.0 MHz	2562.5 MHz	
7 / 15M	1	0	23.29	23.39	23.22	0	22.03	22.13	21.96	1	21.39	21.49	21.32	2
	1	37	23.64	23.74	23.57	0	22.78	22.88	22.71	1	21.51	21.61	21.44	2
	1	74	23.43	23.53	23.36	0	22.37	22.47	22.30	1	21.39	21.49	21.32	2
	36	0	22.44	22.54	22.37	0	21.55	21.65	21.48	1	20.65	20.75	20.58	3
	36	19	22.44	22.54	22.37	0	21.55	21.65	21.48	1	20.65	20.75	20.58	3
	36	39	22.43	22.53	22.36	0	21.56	21.66	21.49	1	20.55	20.65	20.48	3
	75	0	22.38	22.48	22.31	1	21.56	21.66	21.49	2	20.50	20.60	20.43	3

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 20850	Mid CH 21100	High CH 21350		Low CH 20850	Mid CH 21100	High CH 21350		Low CH 20850	Mid CH 21100	High CH 21350	
			2510.0 MHz	2535.0 MHz	2560.0 MHz		2510.0 MHz	2535.0 MHz	2560.0 MHz		2510.0 MHz	2535.0 MHz	2560.0 MHz	
7 / 20M	1	0	23.32	23.42	23.25	0	22.06	22.16	21.99	1	21.42	21.52	21.35	2
	1	50	23.67	23.77	23.60	0	22.81	22.91	22.74	1	21.54	21.64	21.47	2
	1	99	23.46	23.56	23.39	0	22.40	22.50	22.33	1	21.42	21.52	21.35	2
	50	0	22.47	22.57	22.40	0	21.58	21.68	21.51	1	20.68	20.78	20.61	3
	50	25	22.47	22.57	22.40	0	21.58	21.68	21.51	1	20.68	20.78	20.61	3
	50	50	22.46	22.56	22.39	0	21.59	21.69	21.52	1	20.58	20.68	20.51	3
	100	0	22.41	22.51	22.34	1	21.59	21.69	21.52	2	20.53	20.63	20.46	3

FCC SAR Test Report

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 23017	Mid CH 23095	High CH 23173		Low CH 23017	Mid CH 23095	High CH 23173		Low CH 23017	Mid CH 23095	High CH 23173	
			699.7 MHz	707.5 MHz	715.3 MHz		699.7 MHz	707.5 MHz	715.3 MHz		699.7 MHz	707.5 MHz	715.3 MHz	
12 / 1.4M	1	0	23.51	23.55	23.63	0	21.96	22.00	22.08	1	21.14	21.18	21.26	2
	1	2	23.74	23.78	23.86	0	22.29	22.33	22.41	1	21.73	21.77	21.85	2
	1	5	23.56	23.60	23.68	0	22.05	22.09	22.17	1	21.24	21.28	21.36	2
	3	0	22.31	22.35	22.43	0	21.56	21.60	21.68	1	20.47	20.51	20.59	3
	3	1	22.40	22.44	22.52	0	21.67	21.71	21.79	1	20.53	20.57	20.65	3
	3	3	22.31	22.35	22.43	0	21.55	21.59	21.67	1	20.48	20.52	20.60	3
	6	0	22.36	22.40	22.48	1	21.36	21.40	21.48	2	20.40	20.44	20.52	3

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 23025	Mid CH 23095	High CH 23165		Low CH 23025	Mid CH 23095	High CH 23165		Low CH 23025	Mid CH 23095	High CH 23165	
			700.5 MHz	707.5 MHz	714.5 MHz		700.5 MHz	707.5 MHz	714.5 MHz		700.5 MHz	707.5 MHz	714.5 MHz	
12 / 3M	1	0	23.55	23.59	23.67	0	22.00	22.04	22.12	1	21.18	21.22	21.30	2
	1	7	23.78	23.82	23.90	0	22.33	22.37	22.45	1	21.77	21.81	21.89	2
	1	14	23.60	23.64	23.72	0	22.09	22.13	22.21	1	21.28	21.32	21.40	2
	8	0	22.33	22.37	22.45	0	21.57	21.61	21.69	1	20.48	20.52	20.60	3
	8	3	22.42	22.46	22.54	0	21.68	21.72	21.80	1	20.54	20.58	20.66	3
	8	7	22.33	22.37	22.45	0	21.56	21.60	21.68	1	20.49	20.53	20.61	3
	15	0	22.38	22.42	22.50	1	21.37	21.41	21.49	2	20.41	20.45	20.53	3

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 23035	Mid CH 23095	High CH 23155		Low CH 23035	Mid CH 23095	High CH 23155		Low CH 23035	Mid CH 23095	High CH 23155	
			701.5 MHz	707.5 MHz	713.5 MHz		701.5 MHz	707.5 MHz	713.5 MHz		701.5 MHz	707.5 MHz	713.5 MHz	
12 / 5M	1	0	23.61	23.65	23.73	0	22.06	22.10	22.18	1	21.24	21.28	21.36	2
	1	12	23.84	23.88	23.96	0	22.39	22.43	22.51	1	21.83	21.87	21.95	2
	1	24	23.66	23.70	23.78	0	22.15	22.19	22.27	1	21.34	21.38	21.46	2
	12	0	22.39	22.43	22.51	0	21.63	21.67	21.75	1	20.54	20.58	20.66	3
	12	6	22.48	22.52	22.60	0	21.74	21.78	21.86	1	20.60	20.64	20.72	3
	12	13	22.39	22.43	22.51	0	21.62	21.66	21.74	1	20.55	20.59	20.67	3
	25	0	22.44	22.48	22.56	1	21.43	21.47	21.55	2	20.47	20.51	20.59	3

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 23060	Mid CH 23095	High CH 23130		Low CH 23060	Mid CH 23095	High CH 23130		Low CH 23060	Mid CH 23095	High CH 23130	
			704.0 MHz	707.5 MHz	711.0 MHz		704.0 MHz	707.5 MHz	711.0 MHz		704.0 MHz	707.5 MHz	711.0 MHz	
12 / 10M	1	0	23.64	23.68	23.76	0	22.09	22.13	22.21	1	21.27	21.31	21.39	2
	1	24	23.87	23.91	23.99	0	22.42	22.46	22.54	1	21.86	21.90	21.98	2
	1	49	23.69	23.73	23.81	0	22.18	22.22	22.30	1	21.37	21.41	21.49	2
	25	0	22.42	22.46	22.54	0	21.66	21.70	21.78	1	20.57	20.61	20.69	3
	25	12	22.51	22.55	22.63	0	21.77	21.81	21.89	1	20.63	20.67	20.75	3
	25	25	22.42	22.46	22.54	0	21.65	21.69	21.77	1	20.58	20.62	20.70	3
	50	0	22.47	22.51	22.59	1	21.46	21.50	21.58	2	20.50	20.54	20.62	3

FCC SAR Test Report

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 23205	Mid CH 23230	High CH 23255		Low CH 23205	Mid CH 23230	High CH 23255		Low CH 23205	Mid CH 23230	High CH 23255	
			779.5 MHz	782.0 MHz	784.5 MHz		779.5 MHz	782.0 MHz	784.5 MHz		779.5 MHz	782.0 MHz	784.5 MHz	
13 / 5M	1	0	23.29	23.42	23.37	0	22.74	22.87	22.82	1	21.05	21.18	21.13	2
	1	12	23.68	23.81	23.76	0	22.68	22.81	22.76	1	21.54	21.67	21.62	2
	1	24	23.42	23.55	23.50	0	21.77	21.90	21.85	1	21.31	21.44	21.39	2
	12	0	22.27	22.40	22.35	0	21.47	21.60	21.55	1	20.45	20.58	20.53	3
	12	6	22.36	22.49	22.44	0	21.51	21.64	21.59	1	20.42	20.55	20.50	3
	12	13	22.25	22.38	22.33	0	21.45	21.58	21.53	1	20.38	20.51	20.46	3
	25	0	22.23	22.36	22.31	1	21.25	21.38	21.33	2	20.36	20.49	20.44	3

LTE Band / BW	RB Size	RB Offset	QPSK	3GPP MPR (dB)	16QAM	3GPP MPR (dB)	64QAM	3GPP MPR (dB)
			Mid CH 23230		Mid CH 23230		Mid CH 23230	
			782.0 MHz		782.0 MHz		782.0 MHz	
13 / 10M	1	0	23.45	0	22.90	1	21.21	2
	1	24	23.84	0	22.84	1	21.70	2
	1	49	23.58	0	21.93	1	21.47	2
	25	0	22.43	0	21.63	1	20.61	3
	25	12	22.52	0	21.67	1	20.58	3
	25	25	22.41	0	21.61	1	20.54	3
	50	0	22.39	1	21.41	2	20.52	3

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 23305	Mid CH 23330	High CH 23355		Low CH 23305	Mid CH 23330	High CH 23355		Low CH 23305	Mid CH 23330	High CH 23355	
			790.5 MHz	793.0 MHz	795.5 MHz		790.5 MHz	793.0 MHz	795.5 MHz		790.5 MHz	793.0 MHz	795.5 MHz	
14 / 5M	1	0	22.63	22.67	22.58	0	21.47	21.51	21.42	1	20.53	20.57	20.48	2
	1	12	23.15	23.19	23.10	0	21.53	21.57	21.48	1	20.72	20.76	20.67	2
	1	24	22.87	22.91	22.82	0	21.34	21.38	21.29	1	20.83	20.87	20.78	2
	12	0	21.77	21.81	21.72	0	20.68	20.72	20.63	1	19.94	19.98	19.89	3
	12	6	21.69	21.73	21.64	0	20.75	20.79	20.70	1	19.87	19.91	19.82	3
	12	13	21.68	21.72	21.63	0	20.67	20.71	20.62	1	19.77	19.81	19.72	3
	25	0	21.68	21.72	21.63	1	20.77	20.81	20.72	2	19.78	19.82	19.73	3

LTE Band / BW	RB Size	RB Offset	QPSK	3GPP MPR (dB)	16QAM	3GPP MPR (dB)	64QAM	3GPP MPR (dB)
			Mid CH 23330		Mid CH 23330		Mid CH 23330	
			793.0 MHz		793.0 MHz		793.0 MHz	
14 / 10M	1	0	22.70	0	21.54	1	20.60	2
	1	24	23.22	0	21.60	1	20.79	2
	1	49	22.94	0	21.41	1	20.90	2
	25	0	21.84	0	20.75	1	20.01	3
	25	12	21.76	0	20.82	1	19.94	3
	25	25	21.75	0	20.74	1	19.84	3
	50	0	21.75	1	20.84	2	19.85	3

FCC SAR Test Report

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 26697	Mid CH 26865	High CH 27033		Low CH 26697	Mid CH 26865	High CH 27033		Low CH 26697	Mid CH 26865	High CH 27033	
			814.7 MHz	831.5 MHz	848.3 MHz		814.7 MHz	831.5 MHz	848.3 MHz		814.7 MHz	831.5 MHz	848.3 MHz	
26 / 1.4M	1	0	23.41	23.16	23.30	0	22.51	22.20	22.37	1	21.83	21.56	21.74	2
	1	2	23.40	23.08	23.27	0	22.40	22.05	22.26	1	21.63	21.40	21.52	2
	1	5	23.45	23.11	23.28	0	22.46	22.14	22.36	1	21.77	21.42	21.63	2
	3	0	23.44	23.13	23.34	0	22.37	22.07	22.22	1	21.38	21.11	21.24	3
	3	1	23.44	23.14	23.23	0	22.28	22.06	22.17	1	21.28	21.03	21.14	3
	3	3	23.38	23.06	23.23	0	22.44	22.14	22.33	1	21.39	21.07	21.29	3
	6	0	22.54	22.20	22.39	1	21.45	21.20	21.32	2	20.33	20.03	20.18	3

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 26705	Mid CH 26865	High CH 27025		Low CH 26705	Mid CH 26865	High CH 27025		Low CH 26705	Mid CH 26865	High CH 27025	
			815.5 MHz	831.5 MHz	847.5 MHz		815.5 MHz	831.5 MHz	847.5 MHz		815.5 MHz	831.5 MHz	847.5 MHz	
26 / 3M	1	0	23.43	23.18	23.29	0	22.48	22.26	22.40	1	21.89	21.59	21.68	2
	1	7	23.36	23.09	23.27	0	22.37	22.08	22.24	1	21.66	21.34	21.51	2
	1	14	23.41	23.11	23.28	0	22.49	22.14	22.36	1	21.78	21.44	21.63	2
	8	0	22.43	22.16	22.34	0	21.33	21.08	21.22	1	20.41	20.15	20.25	3
	8	3	22.37	22.14	22.25	0	21.33	21.01	21.20	1	20.32	19.97	20.19	3
	8	7	22.35	22.13	22.27	0	21.46	21.12	21.29	1	20.36	20.11	20.25	3
	15	0	22.51	22.21	22.33	1	21.45	21.14	21.35	2	20.35	20.00	20.22	3

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 26715	Mid CH 26865	High CH 27015		Low CH 26715	Mid CH 26865	High CH 27015		Low CH 26715	Mid CH 26865	High CH 27015	
			816.5 MHz	831.5 MHz	846.5 MHz		816.5 MHz	831.5 MHz	846.5 MHz		816.5 MHz	831.5 MHz	846.5 MHz	
26 / 5M	1	0	23.44	23.13	23.30	0	22.49	22.22	22.40	1	21.83	21.56	21.74	2
	1	12	23.41	23.06	23.27	0	22.34	22.11	22.23	1	21.63	21.40	21.51	2
	1	24	23.42	23.10	23.32	0	22.49	22.14	22.35	1	21.71	21.49	21.63	2
	12	0	22.46	22.16	22.31	0	21.33	21.06	21.19	1	20.42	20.12	20.24	3
	12	6	22.37	22.15	22.26	0	21.30	21.05	21.16	1	20.26	20.04	20.18	3
	12	13	22.39	22.09	22.28	0	21.41	21.14	21.32	1	20.40	20.10	20.22	3
	25	0	22.49	22.24	22.36	1	21.45	21.15	21.32	2	20.31	20.06	20.20	3

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 26740	Mid CH 26865	High CH 26990		Low CH 26740	Mid CH 26865	High CH 26990		Low CH 26740	Mid CH 26865	High CH 26990	
			819.0 MHz	831.5 MHz	844.0 MHz		819.0 MHz	831.5 MHz	844.0 MHz		819.0 MHz	831.5 MHz	844.0 MHz	
26 / 10M	1	0	23.41	23.16	23.30	0	22.49	22.19	22.36	1	21.82	21.57	21.71	2
	1	24	23.41	23.06	23.28	0	22.39	22.07	22.26	1	21.68	21.36	21.55	2
	1	49	23.39	23.14	23.28	0	22.49	22.15	22.32	1	21.77	21.43	21.60	2
	25	0	22.47	22.15	22.34	0	21.35	21.04	21.25	1	20.40	20.09	20.30	3
	25	12	22.43	22.09	22.26	0	21.34	20.99	21.21	1	20.33	20.03	20.12	3
	25	25	22.37	22.06	22.27	0	21.40	21.15	21.29	1	20.39	20.07	20.24	3
	50	0	22.54	22.24	22.33	1	21.49	21.14	21.36	2	20.36	20.02	20.21	3

FCC SAR Test Report

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 26765	Mid CH 26865	High CH 26965		Low CH 26765	Mid CH 26865	High CH 26965		Low CH 26765	Mid CH 26865	High CH 26965	
			821.5 MHz	831.5 MHz	841.5 MHz		821.5 MHz	831.5 MHz	841.5 MHz		821.5 MHz	831.5 MHz	841.5 MHz	
26 / 15M	1	0	23.49	23.20	23.35	0	22.56	22.27	22.42	1	21.90	21.61	21.76	2
	1	37	23.43	23.14	23.29	0	22.42	22.13	22.28	1	21.71	21.42	21.57	2
	1	74	23.47	23.18	23.33	0	22.51	22.22	22.37	1	21.79	21.50	21.65	2
	36	0	22.50	22.21	22.36	0	21.41	21.12	21.27	1	20.46	20.17	20.32	3
	36	19	22.45	22.16	22.31	0	21.36	21.07	21.22	1	20.34	20.05	20.20	3
	36	39	22.43	22.14	22.29	0	21.48	21.19	21.34	1	20.44	20.15	20.30	3
	75	0	22.55	22.26	22.41	1	21.51	21.22	21.37	2	20.37	20.08	20.23	3

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 27685	Mid CH 27710	High CH 27735		Low CH 27685	Mid CH 27710	High CH 27735		Low CH 27685	Mid CH 27710	High CH 27735	
			2307.5 MHz	2310.0 MHz	2312.5 MHz		2307.5 MHz	2310.0 MHz	2312.5 MHz		2307.5 MHz	2310.0 MHz	2312.5 MHz	
30 / 5M	1	0	23.19	23.58	23.38	0	21.92	22.31	22.11	1	21.10	21.49	21.29	2
	1	12	23.06	23.45	23.25	0	21.85	22.24	22.04	1	21.00	21.39	21.19	2
	1	24	23.05	23.44	23.24	0	21.40	21.79	21.59	1	20.99	21.38	21.18	2
	12	0	22.16	22.55	22.35	0	21.15	21.54	21.34	1	20.14	20.53	20.33	3
	12	6	22.05	22.44	22.24	0	21.11	21.50	21.30	1	20.06	20.45	20.25	3
	12	13	22.01	22.40	22.20	0	21.01	21.40	21.20	1	19.84	20.23	20.03	3
	25	0	22.13	22.52	22.32	1	21.14	21.53	21.33	2	20.09	20.48	20.28	3

LTE Band / BW	RB Size	RB Offset	QPSK	3GPP MPR (dB)	16QAM	3GPP MPR (dB)	64QAM	3GPP MPR (dB)
			Mid CH 27710		Mid CH 27710		Mid CH 27710	
			2310.0 MHz		2310.0 MHz		2310.0 MHz	
30 / 10M	1	0	23.61	0	22.34	1	21.52	2
	1	24	23.48	0	22.27	1	21.42	2
	1	49	23.47	0	21.82	1	21.41	2
	25	0	22.58	0	21.57	1	20.56	3
	25	12	22.47	0	21.53	1	20.48	3
	25	25	22.43	0	21.43	1	20.26	3
	50	0	22.55	1	21.56	2	20.51	3

FCC SAR Test Report

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 131979	Mid CH 132322	High CH 132665		Low CH 131979	Mid CH 132322	High CH 132665		Low CH 131979	Mid CH 132322	High CH 132665	
			1710.7 MHz	1745.0 MHz	1779.3 MHz		1710.7 MHz	1745.0 MHz	1779.3 MHz		1710.7 MHz	1745.0 MHz	1779.3 MHz	
66 / 1.4M	1	0	22.85	22.95	22.88	0	21.59	21.69	21.62	1	20.75	20.85	20.78	2
	1	2	22.69	22.79	22.72	0	21.71	21.81	21.74	1	20.72	20.82	20.75	2
	1	5	22.66	22.76	22.69	0	21.05	21.15	21.08	1	20.35	20.45	20.38	2
	3	0	22.84	22.94	22.87	0	21.57	21.67	21.60	1	20.73	20.83	20.76	3
	3	1	22.68	22.78	22.71	0	21.69	21.79	21.72	1	20.70	20.80	20.73	3
	3	3	22.65	22.75	22.68	0	21.03	21.13	21.06	1	20.33	20.43	20.36	3
	6	0	21.65	21.75	21.68	1	20.67	20.77	20.70	2	19.68	19.78	19.71	3

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 131987	Mid CH 132322	High CH 132657		Low CH 131987	Mid CH 132322	High CH 132657		Low CH 131987	Mid CH 132322	High CH 132657	
			1711.5 MHz	1745.0 MHz	1778.5 MHz		1711.5 MHz	1745.0 MHz	1778.5 MHz		1711.5 MHz	1745.0 MHz	1778.5 MHz	
66 / 3M	1	0	22.88	22.98	22.91	0	21.62	21.72	21.65	1	20.78	20.88	20.81	2
	1	7	22.72	22.82	22.75	0	21.74	21.84	21.77	1	20.75	20.85	20.78	2
	1	14	22.69	22.79	22.72	0	21.08	21.18	21.11	1	20.38	20.48	20.41	2
	8	0	21.87	21.97	21.90	0	20.86	20.96	20.89	1	19.79	19.89	19.82	3
	8	3	21.78	21.88	21.81	0	20.80	20.90	20.83	1	19.78	19.88	19.81	3
	8	7	21.55	21.65	21.58	0	20.56	20.66	20.59	1	19.57	19.67	19.60	3
	15	0	21.68	21.78	21.71	1	20.70	20.80	20.73	2	19.71	19.81	19.74	3

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 131997	Mid CH 132322	High CH 132647		Low CH 131997	Mid CH 132322	High CH 132647		Low CH 131997	Mid CH 132322	High CH 132647	
			1712.5 MHz	1745.0 MHz	1777.5 MHz		1712.5 MHz	1745.0 MHz	1777.5 MHz		1712.5 MHz	1745.0 MHz	1777.5 MHz	
66 / 5M	1	0	22.91	23.01	22.94	0	21.65	21.75	21.68	1	20.81	20.91	20.84	2
	1	12	22.75	22.85	22.78	0	21.77	21.87	21.80	1	20.78	20.88	20.81	2
	1	24	22.72	22.82	22.75	0	21.11	21.21	21.14	1	20.41	20.51	20.44	2
	12	0	21.90	22.00	21.93	0	20.89	20.99	20.92	1	19.82	19.92	19.85	3
	12	6	21.81	21.91	21.84	0	20.83	20.93	20.86	1	19.81	19.91	19.84	3
	12	13	21.58	21.68	21.61	0	20.59	20.69	20.62	1	19.60	19.70	19.63	3
	25	0	21.71	21.81	21.74	1	20.73	20.83	20.76	2	19.74	19.84	19.77	3

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 132022	Mid CH 132322	High CH 132622		Low CH 132022	Mid CH 132322	High CH 132622		Low CH 132022	Mid CH 132322	High CH 132622	
			1715.0 MHz	1745.0 MHz	1775.0 MHz		1715.0 MHz	1745.0 MHz	1775.0 MHz		1715.0 MHz	1745.0 MHz	1775.0 MHz	
66 / 10M	1	0	22.93	23.03	22.96	0	21.67	21.77	21.70	1	20.83	20.93	20.86	2
	1	24	22.77	22.87	22.80	0	21.79	21.89	21.82	1	20.80	20.90	20.83	2
	1	49	22.74	22.84	22.77	0	21.13	21.23	21.16	1	20.43	20.53	20.46	2
	25	0	21.92	22.02	21.95	0	20.91	21.01	20.94	1	19.84	19.94	19.87	3
	25	12	21.83	21.93	21.86	0	20.85	20.95	20.88	1	19.83	19.93	19.86	3
	25	25	21.60	21.70	21.63	0	20.61	20.71	20.64	1	19.62	19.72	19.65	3
	50	0	21.73	21.83	21.76	1	20.75	20.85	20.78	2	19.76	19.86	19.79	3

FCC SAR Test Report

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 132047	Mid CH 132322	High CH 132597		Low CH 132047	Mid CH 132322	High CH 132597		Low CH 132047	Mid CH 132322	High CH 132597	
			1717.5 MHz	1745.0 MHz	1772.5 MHz		1717.5 MHz	1745.0 MHz	1772.5 MHz		1717.5 MHz	1745.0 MHz	1772.5 MHz	
66 / 15M	1	0	22.96	23.06	22.99	0	21.70	21.80	21.73	1	20.86	20.96	20.89	2
	1	37	22.80	22.90	22.83	0	21.82	21.92	21.85	1	20.83	20.93	20.86	2
	1	74	22.77	22.87	22.80	0	21.16	21.26	21.19	1	20.46	20.56	20.49	2
	36	0	21.95	22.05	21.98	0	20.94	21.04	20.97	1	19.87	19.97	19.90	3
	36	19	21.86	21.96	21.89	0	20.88	20.98	20.91	1	19.86	19.96	19.89	3
	36	39	21.63	21.73	21.66	0	20.64	20.74	20.67	1	19.65	19.75	19.68	3
	75	0	21.76	21.86	21.79	1	20.78	20.88	20.81	2	19.79	19.89	19.82	3

LTE Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)	64QAM			3GPP MPR (dB)
			Low CH 132072	Mid CH 132322	High CH 132572		Low CH 132072	Mid CH 132322	High CH 132572		Low CH 132072	Mid CH 132322	High CH 132572	
			1720.0 MHz	1745.0 MHz	1770.0 MHz		1720.0 MHz	1745.0 MHz	1770.0 MHz		1720.0 MHz	1745.0 MHz	1770.0 MHz	
66 / 20M	1	0	23.01	23.11	23.04	0	21.75	21.85	21.78	1	20.91	21.01	20.94	2
	1	50	22.85	22.95	22.88	0	21.87	21.97	21.90	1	20.88	20.98	20.91	2
	1	99	22.82	22.92	22.85	0	21.21	21.31	21.24	1	20.51	20.61	20.54	2
	50	0	22.00	22.10	22.03	0	20.99	21.09	21.02	1	19.92	20.02	19.95	3
	50	25	21.91	22.01	21.94	0	20.93	21.03	20.96	1	19.91	20.01	19.94	3
	50	50	21.68	21.78	21.71	0	20.69	20.79	20.72	1	19.70	19.80	19.73	3
	100	0	21.81	21.91	21.84	1	20.83	20.93	20.86	2	19.84	19.94	19.87	3

FCC SAR Test Report

<WLAN 2.4G>

Mode	802.11b		
Channel / Frequency (MHz)	1 (2412)	6 (2437)	11 (2462)
Average Power	15.51	15.37	15.11
Mode	802.11g		
Channel / Frequency (MHz)	1 (2412)	6 (2437)	11 (2462)
Average Power	15.27	15.34	15.12
Mode	802.11n (HT20)		
Channel / Frequency (MHz)	1 (2412)	6 (2437)	11 (2462)
Average Power	15.34	15.45	15.28
Mode	802.11n (HT40)		
Channel / Frequency (MHz)	3 (2422)	6 (2437)	9 (2452)
Average Power	11.91	12.55	12.54

<WLAN 5.2G>

Mode	802.11a			
Channel / Frequency (MHz)	36 (5180)	40 (5200)	44 (5220)	48 (5240)
Average Power	16.27	16.30	16.21	16.44
Mode	802.11n (HT20)			
Channel / Frequency (MHz)	36 (5180)	40 (5200)	44 (5220)	48 (5240)
Average Power	15.93	15.83	15.77	15.89
Mode	802.11n (HT40)			
Channel / Frequency (MHz)	38 (5190)	46 (5230)		
Average Power	13.84	13.25		

<WLAN 5.3G>

Mode	802.11a			
Channel / Frequency (MHz)	52 (5260)	56 (5280)	60 (5300)	64 (5320)
Average Power	16.39	16.30	16.42	16.36
Mode	802.11n (HT20)			
Channel / Frequency (MHz)	52 (5260)	56 (5280)	60 (5300)	64 (5320)
Average Power	15.96	15.92	16.09	16.07
Mode	802.11n (HT40)			
Channel / Frequency (MHz)	54 (5270)	62 (5310)		
Average Power	13.66	13.83		

FCC SAR Test Report

<WLAN 5.6G>

Mode	802.11a							
Channel / Frequency (MHz)	100 (5500)	104 (5520)	108 (5540)	112 (5560)	116 (5580)	132 (5660)	136 (5680)	140 (5700)
Average Power	16.30	16.25	16.21	16.24	16.32	16.20	16.19	16.28
Mode	802.11n (HT20)							
Channel / Frequency (MHz)	100 (5500)	104 (5520)	108 (5540)	112 (5560)	116 (5580)	132 (5660)	136 (5680)	140 (5700)
Average Power	16.09	16.02	16.04	16.08	16.10	16.01	16.01	16.03
Mode	802.11n (HT40)							
Channel / Frequency (MHz)	102 (5510)				134 (5670)			
Average Power	13.62				13.35			

<WLAN 5.8G>

Mode	802.11a				
Channel / Frequency (MHz)	149 (5745)	153 (5765)	157 (5785)	161 (5805)	165 (5825)
Average Power	15.90	15.89	16.19	15.84	15.95
Mode	802.11n (HT20)				
Channel / Frequency (MHz)	149 (5745)	153 (5765)	157 (5785)	161 (5805)	165 (5825)
Average Power	16.37	16.20	16.36	16.21	16.23
Mode	802.11n (HT40)				
Channel / Frequency (MHz)	151 (5755)		159 (5795)		
Average Power	13.91		13.78		

<Bluetooth>

Mode	Bluetooth GFSK		
Channel / Frequency (MHz)	0 (2402)	39 (2441)	78 (2480)
Average Power	9.82	11.39	8.62
Mode	Bluetooth $\pi/4$ -DQPSK		
Channel / Frequency (MHz)	0 (2402)	39 (2441)	78 (2480)
Average Power	7.82	9.39	6.43
Mode	Bluetooth 8-DPSK		
Channel / Frequency (MHz)	0 (2402)	39 (2441)	78 (2480)
Average Power	7.78	9.46	6.49
Mode	Bluetooth LE		
Channel / Frequency (MHz)	0 (2402)	19 (2440)	39 (2480)
Average Power	0.44	1.68	-0.66

FCC SAR Test Report

4.7 SAR Testing Results

4.7.1 SAR Test Reduction Considerations

<KDB 447498 D01, General RF Exposure Guidance>

Testing of other required channels within the operating mode of a frequency band is not required when the reported SAR for the mid-band or highest output power channel is:

- (1) ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- (2) ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- (3) ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

<KDB 941225 D01, 3G SAR Measurement Procedures>

The mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

<KDB 941225 D05, SAR Evaluation Considerations for LTE Devices>

- (1) QPSK with 1 RB and 50% RB allocation

Start with the largest channel bandwidth and measure SAR, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

- (2) QPSK with 100% RB allocation

SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

- (3) Higher order modulations

SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> 1/2$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

- (4) Other channel bandwidth

SAR is required when the highest maximum output power of the smaller channel bandwidth is $> 1/2$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

FCC SAR Test Report

<KDB 248227 D01, SAR Guidance for Wi-Fi Transmitters>

- (1) For handsets operating next to ear, hotspot mode or mini-tablet configurations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When the reported SAR of initial test position is ≤ 0.4 W/kg, SAR testing for remaining test positions is not required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
- (2) For WLAN 2.4 GHz, the highest measured maximum output power channel for DSSS was selected for SAR measurement. When the reported SAR is ≤ 0.8 W/kg, no further SAR testing is required. Otherwise, SAR is evaluated at the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel. For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is ≤ 1.2 W/kg.
- (3) For WLAN 5 GHz, the initial test configuration was selected according to the transmission mode with the highest maximum output power. When the reported SAR of initial test configuration is > 0.8 W/kg, SAR is required for the subsequent highest measured output power channel until the reported SAR result is ≤ 1.2 W/kg or all required channels are measured. For other transmission modes, SAR is not required when the highest reported SAR for initial test configuration is adjusted by the ratio of subsequent test configuration to initial test configuration specified maximum output power and it is ≤ 1.2 W/kg.

FCC SAR Test Report

4.7.2 SAR Results for Head Exposure Condition

Plot No.	Band	Mode	Test Position	Ch.	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)
	GSM850	GPRS12	Right Cheek	189	28.5	28.18	-0.36	0.407	1.08	0.44
	GSM850	GPRS12	Right Tilted	189	28.5	28.18	-0.43	0.239	1.08	0.26
#1	GSM850	GPRS12	Left Cheek	189	28.5	28.18	3.51	0.454	1.08	0.49
	GSM850	GPRS12	Left Tilted	189	28.5	28.18	-0.05	0.231	1.08	0.25
#2	GSM1900	GPRS11	Right Cheek	512	27.5	27.36	0.3	0.307	1.03	0.32
	GSM1900	GPRS11	Right Tilted	512	27.5	27.36	0.22	0.122	1.03	0.13
	GSM1900	GPRS11	Left Cheek	512	27.5	27.36	0	0.286	1.03	0.30
	GSM1900	GPRS11	Left Tilted	512	27.5	27.36	0.78	0.109	1.03	0.11
	WCDMA II	RMC12.2K	Right Cheek	9538	25.0	24.20	0.13	0.295	1.20	0.35
	WCDMA II	RMC12.2K	Right Tilted	9538	25.0	24.20	0.07	0.157	1.20	0.19
#3	WCDMA II	RMC12.2K	Left Cheek	9538	25.0	24.20	0.07	0.385	1.20	0.46
	WCDMA II	RMC12.2K	Left Tilted	9538	25.0	24.20	0.04	0.119	1.20	0.14
	WCDMA IV	RMC12.2K	Right Cheek	1413	24.0	23.41	0.00	0.489	1.15	0.56
	WCDMA IV	RMC12.2K	Right Tilted	1413	24.0	23.41	0.81	0.248	1.15	0.28
#4	WCDMA IV	RMC12.2K	Left Cheek	1413	24.0	23.41	-1.13	0.635	1.15	0.73
	WCDMA IV	RMC12.2K	Left Tilted	1413	24.0	23.41	0.33	0.187	1.15	0.21
	WCDMA V	RMC12.2K	Right Cheek	4233	25.0	24.38	1.21	0.513	1.15	0.59
	WCDMA V	RMC12.2K	Right Tilted	4233	25.0	24.38	-1.11	0.282	1.15	0.33
#5	WCDMA V	RMC12.2K	Left Cheek	4233	25.0	24.38	0.66	0.586	1.15	0.68
	WCDMA V	RMC12.2K	Left Tilted	4233	25.0	24.38	0	0.282	1.15	0.33

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)
	LTE 2	QPSK20M	Right Cheek	18700	1	50	24.0	23.95	-0.31	0.224	1.01	0.23
	LTE 2	QPSK20M	Right Tilted	18700	1	50	24.0	23.95	0.25	0.089	1.01	0.09
#6	LTE 2	QPSK20M	Left Cheek	18700	1	50	24.0	23.95	-0.36	0.288	1.01	0.29
	LTE 2	QPSK20M	Left Tilted	18700	1	50	24.0	23.95	0.46	0.126	1.01	0.13
	LTE 2	QPSK20M	Right Cheek	18700	50	0	23.0	22.81	-0.35	0.155	1.04	0.16
	LTE 2	QPSK20M	Right Tilted	18700	50	0	23.0	22.81	0.83	0.064	1.04	0.07
	LTE 2	QPSK20M	Left Cheek	18700	50	0	23.0	22.81	1.15	0.212	1.04	0.22
	LTE 2	QPSK20M	Left Tilted	18700	50	0	23.0	22.81	0.37	0.105	1.04	0.11
	LTE 4	QPSK20M	Right Cheek	20300	1	50	24.0	23.55	-0.67	0.354	1.11	0.39
	LTE 4	QPSK20M	Right Tilted	20300	1	50	24.0	23.55	0.3	0.191	1.11	0.21
#7	LTE 4	QPSK20M	Left Cheek	20300	1	50	24.0	23.55	-4.16	0.542	1.11	0.60
	LTE 4	QPSK20M	Left Tilted	20300	1	50	24.0	23.55	0.47	0.312	1.11	0.35
	LTE 4	QPSK20M	Right Cheek	20300	50	0	23.0	22.40	-0.96	0.301	1.15	0.35
	LTE 4	QPSK20M	Right Tilted	20300	50	0	23.0	22.40	0.66	0.146	1.15	0.17
	LTE 4	QPSK20M	Left Cheek	20300	50	0	23.0	22.40	0.18	0.485	1.15	0.56
	LTE 4	QPSK20M	Left Tilted	20300	50	0	23.0	22.40	0.48	0.257	1.15	0.30

FCC SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)
#8	LTE 5	QPSK10M	Right Cheek	20525	1	24	24.0	23.47	0.3	0.643	1.13	0.73
	LTE 5	QPSK10M	Right Tilted	20525	1	24	24.0	23.47	-1.27	0.286	1.13	0.32
	LTE 5	QPSK10M	Left Cheek	20525	1	24	24.0	23.47	4.62	1.015	1.13	1.15
	LTE 5	QPSK10M	Left Tilted	20525	1	24	24.0	23.47	-1.43	0.697	1.13	0.79
	LTE 5	QPSK10M	Right Cheek	20525	25	0	23.0	22.28	0.17	0.788	1.18	0.93
	LTE 5	QPSK10M	Right Tilted	20525	25	0	23.0	22.28	-1.14	0.442	1.18	0.52
	LTE 5	QPSK10M	Left Cheek	20525	25	0	23.0	22.28	1.06	0.803	1.18	0.95
	LTE 5	QPSK10M	Left Tilted	20525	25	0	23.0	22.28	-0.59	0.538	1.18	0.64
	LTE 5	QPSK10M	Left Cheek	20450	1	24	24.0	23.39	0.42	0.956	1.15	1.10
	LTE 5	QPSK10M	Left Cheek	20600	1	24	24.0	23.44	1.22	0.934	1.14	1.06
#9	LTE 5	QPSK10M	Right Cheek	20450	25	0	23.0	22.20	0.12	0.722	1.20	0.87
	LTE 5	QPSK10M	Right Cheek	20600	25	0	23.0	22.25	0.16	0.718	1.19	0.85
	LTE 5	QPSK10M	Left Cheek	20450	25	0	23.0	22.20	-1.22	0.765	1.20	0.92
	LTE 5	QPSK10M	Left Cheek	20600	25	0	23.0	22.25	1.32	0.781	1.19	0.93
	LTE 5	QPSK10M	Left Cheek	20525	1	24	24.0	23.47	0.22	0.974	1.13	1.10
	LTE 7	QPSK20M	Right Cheek	21100	1	50	24.0	23.77	-0.25	0.327	1.05	0.34
	LTE 7	QPSK20M	Right Tilted	21100	1	50	24.0	23.77	0.56	0.036	1.05	0.04
	LTE 7	QPSK20M	Left Cheek	21100	1	50	24.0	23.77	-4.19	0.414	1.05	0.44
	LTE 7	QPSK20M	Left Tilted	21100	1	50	24.0	23.77	1.89	0.028	1.05	0.03
	LTE 7	QPSK20M	Right Cheek	21100	50	0	23.0	22.57	-0.09	0.273	1.10	0.30
#10	LTE 7	QPSK20M	Right Tilted	21100	50	0	23.0	22.57	2.22	0.029	1.10	0.03
	LTE 7	QPSK20M	Left Cheek	21100	50	0	23.0	22.57	-0.19	0.218	1.10	0.24
	LTE 7	QPSK20M	Left Tilted	21100	50	0	23.0	22.57	-1.72	0.024	1.10	0.03
	LTE 12	QPSK10M	Right Cheek	23130	1	24	24.0	23.79	0.76	0.44	1.05	0.46
	LTE 12	QPSK10M	Right Tilted	23130	1	24	24.0	23.79	3.42	0.207	1.05	0.22
	LTE 12	QPSK10M	Left Cheek	23130	1	24	24.0	23.79	-4.02	0.505	1.05	0.53
	LTE 12	QPSK10M	Left Tilted	23130	1	24	24.0	23.79	-3.92	0.221	1.05	0.23
	LTE 12	QPSK10M	Right Cheek	23130	25	12	23.0	22.63	-0.1	0.361	1.09	0.39
	LTE 12	QPSK10M	Right Tilted	23130	25	12	23.0	22.63	1.22	0.166	1.09	0.18
	LTE 12	QPSK10M	Left Cheek	23130	25	12	23.0	22.63	0.01	0.394	1.09	0.43
#11	LTE 12	QPSK10M	Left Tilted	23130	25	12	23.0	22.63	-0.23	0.187	1.09	0.20
	LTE 13	QPSK10M	Right Cheek	23230	1	24	24.0	23.84	4.14	0.865	1.04	0.90
	LTE 13	QPSK10M	Right Tilted	23230	1	24	24.0	23.84	1.28	0.426	1.04	0.44
	LTE 13	QPSK10M	Left Cheek	23230	1	24	24.0	23.84	1.92	0.802	1.04	0.83
	LTE 13	QPSK10M	Left Tilted	23230	1	24	24.0	23.84	-0.74	0.455	1.04	0.47
	LTE 13	QPSK10M	Right Cheek	23230	25	12	23.0	22.52	1.84	0.629	1.12	0.70
	LTE 13	QPSK10M	Right Tilted	23230	25	12	23.0	22.52	-0.83	0.329	1.12	0.37
	LTE 13	QPSK10M	Left Cheek	23230	25	12	23.0	22.52	1.04	0.568	1.12	0.63
	LTE 13	QPSK10M	Left Tilted	23230	25	12	23.0	22.52	-0.11	0.313	1.12	0.35
	LTE 13	QPSK10M	Right Cheek	23230	1	24	24.0	23.84	2.12	0.854	1.04	0.89
#12	LTE 14	QPSK10M	Right Cheek	23330	1	24	24.0	23.22	0.57	0.827	1.20	0.99
	LTE 14	QPSK10M	Right Tilted	23330	1	24	24.0	23.22	-3.16	0.385	1.20	0.46
	LTE 14	QPSK10M	Left Cheek	23330	1	24	24.0	23.22	0.99	0.738	1.20	0.88
	LTE 14	QPSK10M	Left Tilted	23330	1	24	24.0	23.22	-1.63	0.433	1.20	0.52
	LTE 14	QPSK10M	Right Cheek	23330	25	0	23.0	21.84	-0.37	0.599	1.31	0.78
	LTE 14	QPSK10M	Right Tilted	23330	25	0	23.0	21.84	-1.04	0.317	1.31	0.41
	LTE 14	QPSK10M	Left Cheek	23330	25	0	23.0	21.84	-1.33	0.495	1.31	0.65
	LTE 14	QPSK10M	Left Tilted	23330	25	0	23.0	21.84	-3.01	0.237	1.31	0.31
	LTE 14	QPSK10M	Right Cheek	23330	1	24	24.0	23.22	0.34	0.812	1.20	0.97

FCC SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)
	LTE 26	QPSK15M	Right Cheek	26765	1	0	24.0	23.49	0.03	0.623	1.12	0.70
	LTE 26	QPSK15M	Right Tilted	26765	1	0	24.0	23.49	-0.23	0.277	1.12	0.31
#13	LTE 26	QPSK15M	Left Cheek	26765	1	0	24.0	23.49	4.85	0.986	1.12	1.11
	LTE 26	QPSK15M	Left Tilted	26765	1	0	24.0	23.49	-2.43	0.676	1.12	0.76
	LTE 26	QPSK15M	Right Cheek	26765	36	0	23.0	22.50	1.28	0.7	1.12	0.79
	LTE 26	QPSK15M	Right Tilted	26765	36	0	23.0	22.50	0.04	0.428	1.12	0.48
	LTE 26	QPSK15M	Left Cheek	26765	36	0	23.0	22.50	1.41	0.782	1.12	0.88
	LTE 26	QPSK15M	Left Tilted	26765	36	0	23.0	22.50	-1.46	0.521	1.12	0.58
	LTE 26	QPSK15M	Left Cheek	26865	1	0	24.0	23.20	0.05	0.894	1.20	1.07
	LTE 26	QPSK15M	Left Cheek	26965	1	0	24.0	23.35	-2.85	0.873	1.16	1.01
	LTE 26	QPSK15M	Left Cheek	26865	36	0	23.0	22.21	0.46	0.711	1.20	0.85
	LTE 26	QPSK15M	Left Cheek	26965	36	0	23.0	22.36	-0.51	0.742	1.16	0.86
	LTE 26	QPSK15M	Left Cheek	26765	1	0	24.0	23.49	2.83	0.974	1.12	1.10
#14	LTE 30	QPSK10M	Right Cheek	27710	1	0	24.0	23.61	2.27	0.279	1.09	0.31
	LTE 30	QPSK10M	Right Tilted	27710	1	0	24.0	23.61	-1.78	0.071	1.09	0.08
	LTE 30	QPSK10M	Left Cheek	27710	1	0	24.0	23.61	0.09	0.23	1.09	0.25
	LTE 30	QPSK10M	Left Tilted	27710	1	0	24.0	23.61	1.89	0.059	1.09	0.06
	LTE 30	QPSK10M	Right Cheek	27710	25	0	23.0	22.58	-2.26	0.21	1.10	0.23
	LTE 30	QPSK10M	Right Tilted	27710	25	0	23.0	22.58	0.89	0.056	1.10	0.06
	LTE 30	QPSK10M	Left Cheek	27710	25	0	23.0	22.58	2.45	0.19	1.10	0.21
	LTE 30	QPSK10M	Left Tilted	27710	25	0	23.0	22.58	3.86	0.049	1.10	0.05
	LTE 66	QPSK20M	Right Cheek	132422	1	0	24.0	23.31	-3.48	0.294	1.17	0.34
	LTE 66	QPSK20M	Right Tilted	132422	1	0	24.0	23.31	0.34	0.137	1.17	0.16
#15	LTE 66	QPSK20M	Left Cheek	132422	1	0	24.0	23.31	-4.3	0.501	1.17	0.59
	LTE 66	QPSK20M	Left Tilted	132422	1	0	24.0	23.31	0.34	0.278	1.17	0.33
	LTE 66	QPSK20M	Right Cheek	132422	50	0	23.0	22.10	0.19	0.204	1.23	0.25
	LTE 66	QPSK20M	Right Tilted	132422	50	0	23.0	22.10	0.35	0.117	1.23	0.14
	LTE 66	QPSK20M	Left Cheek	132422	50	0	23.0	22.10	-3.92	0.374	1.23	0.46
	LTE 66	QPSK20M	Left Tilted	132422	50	0	23.0	22.10	-1.27	0.189	1.23	0.23

Plot No.	Band	Mode	Test Position	Ch.	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)
	802.11b	-	Right Cheek	1	16.0	15.51	0.12	0.057	1.12	0.06
	802.11b	-	Right Tilted	1	16.0	15.51	0.12	0.025	1.12	0.03
#16	802.11b	-	Left Cheek	1	16.0	15.51	-0.2	0.085	1.12	0.10
	802.11b	-	Left Tilted	1	16.0	15.51	0.1	0.037	1.12	0.04
	802.11a	-	Right Cheek	60	16.5	16.42	0	0.061	1.02	0.06
	802.11a	-	Right Tilted	60	16.5	16.42	-1.01	0.035	1.02	0.04
#17	802.11a	-	Left Cheek	60	16.5	16.42	0	0.118	1.02	0.12
	802.11a	-	Left Tilted	60	16.5	16.42	-0.43	0.008	1.02	0.01
	802.11a	-	Right Cheek	116	16.5	16.32	0	0.133	1.04	0.14
	802.11a	-	Right Tilted	116	16.5	16.32	-4.58	0.017	1.04	0.02
#18	802.11a	-	Left Cheek	116	16.5	16.32	0	0.264	1.04	0.28
	802.11a	-	Left Tilted	116	16.5	16.32	0	0.046	1.04	0.05
	802.11a	-	Right Cheek	157	16.5	16.19	-0.43	0.173	1.07	0.19
	802.11a	-	Right Tilted	157	16.5	16.19	-0.05	0.052	1.07	0.06
#19	802.11a	-	Left Cheek	157	16.5	16.19	0	0.327	1.07	0.35
	802.11a	-	Left Tilted	157	16.5	16.19	0	0.074	1.07	0.08

FCC SAR Test Report

4.7.3 SAR Results for Body-worn Exposure Condition (Separation Distance is 1.0 cm Gap)

Plot No.	Band	Mode	Test Position	Ch.	Earphone	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)
	GSM850	GPRS12	Front Face	189	-	28.5	28.18	-1.8	0.551	1.08	0.59
	GSM850	GPRS12	Rear Face	189	-	28.5	28.18	-1.73	0.773	1.08	0.83
#20	GSM850	GPRS12	Rear Face	128	-	28.5	28.06	0.57	0.933	1.11	1.03
	GSM850	GPRS12	Rear Face	251	-	28.5	27.81	-0.7	0.699	1.17	0.82
	GSM850	GPRS12	Rear Face	128	-	28.5	28.06	0.34	0.925	1.11	1.02
	GSM1900	GPRS11	Front Face	512	-	27.5	27.36	1.03	0.388	1.03	0.40
#21	GSM1900	GPRS11	Rear Face	512	-	27.5	27.36	0.01	1.062	1.03	1.10
	GSM1900	GPRS11	Rear Face	661	-	27.5	27.24	0.52	1.031	1.06	1.09
	GSM1900	GPRS11	Rear Face	810	-	27.5	27.15	-1.31	0.996	1.08	1.08
	GSM1900	GPRS11	Rear Face	512	-	27.5	27.36	0.22	1.042	1.03	1.08
	WCDMA II	RMC12.2K	Front Face	9538	-	25.0	24.20	-2.66	0.467	1.20	0.56
#22	WCDMA II	RMC12.2K	Rear Face	9538	-	25.0	24.20	-1.48	1.14	1.20	1.37
	WCDMA II	RMC12.2K	Rear Face	9262	-	25.0	23.85	-1.38	1.02	1.30	1.33
	WCDMA II	RMC12.2K	Rear Face	9400	-	25.0	24.10	-1.44	0.987	1.23	1.21
	WCDMA II	RMC12.2K	Rear Face	9538	V	25.0	24.20	1.21	1.12	1.20	1.35
	WCDMA II	RMC12.2K	Rear Face	9262	V	25.0	23.85	0.32	1	1.30	1.30
	WCDMA II	RMC12.2K	Rear Face	9400	V	25.0	24.10	-1.22	0.976	1.23	1.20
	WCDMA II	RMC12.2K	Rear Face	9538	-	25.0	24.20	-1.21	1.11	1.20	1.33
	WCDMA IV	RMC12.2K	Front Face	1413	-	24.0	23.41	1.52	0.513	1.15	0.59
#23	WCDMA IV	RMC12.2K	Rear Face	1413	-	24.0	23.41	0.54	1.118	1.15	1.28
	WCDMA IV	RMC12.2K	Rear Face	1312	-	24.0	23.40	0.52	1.1	1.15	1.26
	WCDMA IV	RMC12.2K	Rear Face	1513	-	24.0	23.38	-0.34	1.01	1.15	1.16
	WCDMA IV	RMC12.2K	Rear Face	1413	V	24.0	23.41	0.14	1.102	1.15	1.26
	WCDMA IV	RMC12.2K	Rear Face	1312	V	24.0	23.40	0.53	1.05	1.15	1.21
	WCDMA IV	RMC12.2K	Rear Face	1413	-	24.0	23.41	0.14	1.11	1.15	1.27
	WCDMA V	RMC12.2K	Front Face	4233	-	25.0	24.38	0.92	0.643	1.15	0.74
	WCDMA V	RMC12.2K	Rear Face	4233	-	25.0	24.38	0.23	1.012	1.15	1.17
#24	WCDMA V	RMC12.2K	Rear Face	4132	-	25.0	24.30	1.31	1.112	1.17	1.31
	WCDMA V	RMC12.2K	Rear Face	4182	-	25.0	24.28	-0.38	1.051	1.18	1.24
	WCDMA V	RMC12.2K	Rear Face	4132	V	25.0	24.30	1.55	1.1	1.17	1.29
	WCDMA V	RMC12.2K	Rear Face	4182	V	25.0	24.28	-0.61	1.033	1.18	1.22
	WCDMA V	RMC12.2K	Rear Face	4132	-	25.0	24.30	1.13	1.105	1.17	1.30

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Earphone	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)
	LTE 2	QPSK20M	Front Face	18700	-	1	50	24.0	23.95	-4.13	0.293	1.01	0.30
#25	LTE 2	QPSK20M	Rear Face	18700	-	1	50	24.0	23.95	1.86	0.934	1.01	0.94
	LTE 2	QPSK20M	Front Face	18700	-	50	0	23.0	22.81	-0.08	0.219	1.04	0.23
	LTE 2	QPSK20M	Rear Face	18700	-	50	0	23.0	22.81	0.22	0.806	1.04	0.84
	LTE 2	QPSK20M	Rear Face	18900	-	1	50	24.0	23.87	1.26	0.894	1.03	0.92
	LTE 2	QPSK20M	Rear Face	19100	-	1	50	24.0	23.81	1.84	0.877	1.04	0.92
	LTE 2	QPSK20M	Rear Face	18900	-	50	0	23.0	22.73	0.32	0.766	1.06	0.82
	LTE 2	QPSK20M	Rear Face	19100	-	50	0	23.0	22.67	0.26	0.751	1.08	0.81
	LTE 2	QPSK20M	Rear Face	18700	-	1	50	24.0	23.95	1.12	0.923	1.01	0.93

FCC SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Earphone	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)
#26	LTE 4	QPSK20M	Front Face	20300	-	1	50	24.0	23.55	-0.68	0.517	1.11	0.57
	LTE 4	QPSK20M	Rear Face	20300	-	1	50	24.0	23.55	-1.36	1.279	1.11	1.42
	LTE 4	QPSK20M	Front Face	20300	-	50	0	23.0	22.40	-0.31	0.403	1.15	0.46
	LTE 4	QPSK20M	Rear Face	20300	-	50	0	23.0	22.40	-1.59	1.095	1.15	1.26
	LTE 4	QPSK20M	Rear Face	20050	-	1	50	24.0	23.22	-0.35	1.17	1.20	1.40
	LTE 4	QPSK20M	Rear Face	20175	-	1	50	24.0	23.48	-1.86	1.105	1.13	1.25
	LTE 4	QPSK20M	Rear Face	20050	-	50	0	23.0	22.07	-1.71	1.013	1.24	1.25
	LTE 4	QPSK20M	Rear Face	20175	-	50	0	23.0	22.33	-1.56	1.045	1.17	1.22
	LTE 4	QPSK20M	Rear Face	20300	V	1	50	24.0	23.55	0.21	1.266	1.11	1.40
	LTE 4	QPSK20M	Rear Face	20300	V	50	0	23.0	22.40	1.53	1.087	1.15	1.25
	LTE 4	QPSK20M	Rear Face	20050	V	1	50	24.0	23.22	-0.25	1.13	1.20	1.35
	LTE 4	QPSK20M	Rear Face	20175	V	1	50	24.0	23.48	1.16	1.1	1.13	1.24
	LTE 4	QPSK20M	Rear Face	20050	V	50	0	23.0	22.07	-1.01	1.003	1.24	1.24
	LTE 4	QPSK20M	Rear Face	20175	V	50	0	23.0	22.33	1.76	1.032	1.17	1.20
	LTE 4	QPSK20M	Rear Face	20300	-	1	50	24.0	23.55	-1.42	1.265	1.11	1.40
#27	LTE 5	QPSK10M	Front Face	20525	-	1	24	24.0	23.47	1.27	0.62	1.13	0.70
	LTE 5	QPSK10M	Rear Face	20525	-	1	24	24.0	23.47	0.22	1.045	1.13	1.18
	LTE 5	QPSK10M	Front Face	20525	-	25	0	23.0	22.28	-0.62	0.516	1.18	0.61
	LTE 5	QPSK10M	Rear Face	20525	-	25	0	23.0	22.28	-0.29	0.803	1.18	0.95
	LTE 5	QPSK10M	Rear Face	20450	-	1	24	24.0	23.39	0.12	0.945	1.15	1.09
	LTE 5	QPSK10M	Rear Face	20600	-	1	24	24.0	23.44	0.25	0.912	1.14	1.04
	LTE 5	QPSK10M	Rear Face	20450	-	25	0	23.0	22.20	-0.33	0.763	1.20	0.92
	LTE 5	QPSK10M	Rear Face	20600	-	25	0	23.0	22.25	-0.21	0.723	1.19	0.86
	LTE 5	QPSK10M	Rear Face	20525	-	1	24	24.0	23.47	0.32	1.023	1.13	1.16
#28	LTE 7	QPSK20M	Front Face	21100	-	1	50	24.0	23.77	-1.5	0.082	1.05	0.09
	LTE 7	QPSK20M	Rear Face	21100	-	1	50	24.0	23.77	-3.94	0.315	1.05	0.33
	LTE 7	QPSK20M	Front Face	21100	-	50	0	23.0	22.57	-1.06	0.066	1.10	0.07
	LTE 7	QPSK20M	Rear Face	21100	-	50	0	23.0	22.57	-2.16	0.235	1.10	0.26
#29	LTE 12	QPSK10M	Front Face	23130	-	1	24	24.0	23.79	-1.06	0.512	1.05	0.54
	LTE 12	QPSK10M	Rear Face	23130	-	1	24	24.0	23.79	4.07	1.319	1.05	1.38
	LTE 12	QPSK10M	Front Face	23130	-	25	12	23.0	22.63	-0.63	0.384	1.09	0.42
	LTE 12	QPSK10M	Rear Face	23130	-	25	12	23.0	22.63	-0.36	1.007	1.09	1.10
	LTE 12	QPSK10M	Rear Face	23060	-	1	24	24.0	23.87	2.11	1.2	1.03	1.24
	LTE 12	QPSK10M	Rear Face	23095	-	1	24	24.0	23.91	2.27	1.209	1.02	1.23
	LTE 12	QPSK10M	Rear Face	23060	-	25	12	23.0	22.51	-0.22	0.956	1.12	1.07
	LTE 12	QPSK10M	Rear Face	23095	-	25	12	23.0	22.55	-0.65	0.923	1.11	1.02
	LTE 12	QPSK10M	Rear Face	23130	V	1	24	24.0	23.79	2.01	1.29	1.05	1.35
	LTE 12	QPSK10M	Rear Face	23060	V	1	24	24.0	23.87	-1.12	1.176	1.03	1.21
	LTE 12	QPSK10M	Rear Face	23095	V	1	24	24.0	23.91	0.23	1.184	1.02	1.21
	LTE 12	QPSK10M	Rear Face	23130	-	1	24	24.0	23.79	1.02	1.305	1.05	1.37
#30	LTE 13	QPSK10M	Front Face	23230	-	1	24	24.0	23.84	-2.24	0.557	1.04	0.58
	LTE 13	QPSK10M	Rear Face	23230	-	1	24	24.0	23.84	-2.15	0.915	1.04	0.95
	LTE 13	QPSK10M	Front Face	23230	-	25	12	23.0	22.52	0.77	0.439	1.12	0.49
	LTE 13	QPSK10M	Rear Face	23230	-	25	12	23.0	22.52	-1.03	0.693	1.12	0.77
	LTE 13	QPSK10M	Rear Face	23230	-	1	24	24.0	23.84	-3.12	0.894	1.04	0.93
#31	LTE 14	QPSK10M	Front Face	23330	-	1	24	24.0	23.22	-0.43	0.697	1.20	0.83
	LTE 14	QPSK10M	Rear Face	23330	-	1	24	24.0	23.22	-0.76	0.701	1.20	0.84
	LTE 14	QPSK10M	Front Face	23330	-	25	0	23.0	21.84	-0.92	0.431	1.31	0.56
	LTE 14	QPSK10M	Rear Face	23330	-	25	0	23.0	21.84	-0.9	0.535	1.31	0.70

FCC SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Earphone	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)
#32	LTE 26	QPSK15M	Front Face	26765	-	1	0	24.0	23.49	-2.71	0.88	1.12	0.99
	LTE 26	QPSK15M	Rear Face	26765	-	1	0	24.0	23.49	1.23	1.265	1.12	1.42
	LTE 26	QPSK15M	Front Face	26765	-	36	0	23.0	22.50	-0.39	0.693	1.12	0.78
	LTE 26	QPSK15M	Rear Face	26765	-	36	0	23.0	22.50	-1.11	0.974	1.12	1.09
	LTE 26	QPSK15M	Front Face	26865	-	1	0	24.0	23.20	-0.72	0.78	1.20	0.94
	LTE 26	QPSK15M	Front Face	26965	-	1	0	24.0	23.35	-2.21	0.8	1.16	0.93
	LTE 26	QPSK15M	Rear Face	26865	-	1	0	24.0	23.20	0.23	1.145	1.20	1.38
	LTE 26	QPSK15M	Rear Face	26965	-	1	0	24.0	23.35	1.52	1.131	1.16	1.31
	LTE 26	QPSK15M	Rear Face	26865	-	36	0	23.0	22.21	-1.48	0.9	1.20	1.08
	LTE 26	QPSK15M	Rear Face	26965	-	36	0	23.0	22.36	-1.32	0.934	1.16	1.08
	LTE 26	QPSK15M	Rear Face	26765	V	1	0	24.0	23.49	1.24	1.239	1.12	1.39
	LTE 26	QPSK15M	Rear Face	26865	V	1	0	24.0	23.20	0.43	1.122	1.20	1.35
#33	LTE 26	QPSK15M	Rear Face	26965	V	1	0	24.0	23.35	1.62	1.108	1.16	1.29
	LTE 26	QPSK15M	Rear Face	26765	-	1	0	24.0	23.49	1.14	1.254	1.12	1.41
	LTE 30	QPSK10M	Front Face	27710	-	1	0	24.0	23.61	0.52	0.12	1.09	0.13
	LTE 30	QPSK10M	Rear Face	27710	-	1	0	24.0	23.61	-0.8	0.438	1.09	0.48
#34	LTE 30	QPSK10M	Front Face	27710	-	25	0	23.0	22.58	-0.07	0.146	1.10	0.16
	LTE 30	QPSK10M	Rear Face	27710	-	25	0	23.0	22.58	-0.92	0.383	1.10	0.42
	LTE 66	QPSK20M	Front Face	132422	-	1	0	24.0	23.31	-0.76	0.475	1.17	0.56
	LTE 66	QPSK20M	Rear Face	132422	-	1	0	24.0	23.31	-3.89	1.178	1.17	1.38
	LTE 66	QPSK20M	Front Face	132422	-	50	0	23.0	22.10	-1.78	0.357	1.23	0.44
	LTE 66	QPSK20M	Rear Face	132422	-	50	0	23.0	22.10	-1.48	1.005	1.23	1.24
	LTE 66	QPSK20M	Rear Face	132072	-	1	0	24.0	23.01	-1.39	1.021	1.26	1.28
	LTE 66	QPSK20M	Rear Face	132572	-	1	0	24.0	23.04	-0.53	1.032	1.25	1.29
	LTE 66	QPSK20M	Rear Face	132072	-	50	0	23.0	22.00	-1.23	0.945	1.26	1.19
	LTE 66	QPSK20M	Rear Face	132572	-	50	0	23.0	22.03	-1.55	0.926	1.25	1.16
	LTE 66	QPSK20M	Rear Face	132422	V	1	0	24.0	23.31	-2.83	1.154	1.17	1.35
	LTE 66	QPSK20M	Rear Face	132422	V	50	0	23.0	22.10	-1.21	0.984	1.23	1.21
#38	LTE 66	QPSK20M	Rear Face	132072	V	1	0	24.0	23.01	-1.02	1	1.26	1.26
	LTE 66	QPSK20M	Rear Face	132572	V	1	0	24.0	23.04	-0.13	1.011	1.25	1.26
	LTE 66	QPSK20M	Rear Face	132422	-	1	0	24.0	23.31	-2.31	1.163	1.17	1.36

Plot No.	Band	Mode	Test Position	Ch.	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)
#35	802.11b	-	Front Face	1	16.0	15.51	-0.72	0.002	1.12	0.00
	802.11b	-	Rear Face	1	16.0	15.51	-2.2	0.125	1.12	0.14
#36	802.11a	-	Front Face	60	16.5	16.42	-0.83	0.028	1.02	0.03
	802.11a	-	Rear Face	60	16.5	16.42	-0.05	0.139	1.02	0.14
#37	802.11a	-	Front Face	116	16.5	16.32	-0.53	0.038	1.04	0.04
	802.11a	-	Rear Face	116	16.5	16.32	-1.85	0.164	1.04	0.17
#38	802.11a	-	Front Face	157	16.5	16.19	-0.01	0.031	1.07	0.03
	802.11a	-	Rear Face	157	16.5	16.19	1.25	0.155	1.07	0.17

FCC SAR Test Report

4.7.4 SAR Results for Hotspot Exposure Condition (Separation Distance is 1.0 cm Gap)

Plot No.	Band	Mode	Test Position	Ch.	Earphone	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)
	GSM850	GPRS12	Front Face	189	-	28.5	28.18	-1.8	0.551	1.08	0.59
	GSM850	GPRS12	Rear Face	189	-	28.5	28.18	-1.73	0.773	1.08	0.83
	GSM850	GPRS12	Left Side	189	-	28.5	28.18	-0.89	0.505	1.08	0.54
	GSM850	GPRS12	Right Side	189	-	28.5	28.18	-0.25	0.54	1.08	0.58
	GSM850	GPRS12	Bottom Side	189	-	28.5	28.18	-2.41	0.108	1.08	0.12
20	GSM850	GPRS12	Rear Face	128	-	28.5	28.06	0.57	0.933	1.11	1.03
	GSM850	GPRS12	Rear Face	251	-	28.5	27.81	-0.7	0.699	1.17	0.82
	GSM850	GPRS12	Rear Face	128	-	28.5	28.06	0.34	0.925	1.11	1.02
	GSM1900	GPRS11	Front Face	512	-	27.5	27.36	1.03	0.388	1.03	0.40
21	GSM1900	GPRS11	Rear Face	512	-	27.5	27.36	0.01	1.062	1.03	1.10
	GSM1900	GPRS11	Left Side	512	-	27.5	27.36	1.1	0.132	1.03	0.14
	GSM1900	GPRS11	Right Side	512	-	27.5	27.36	1.53	0.673	1.03	0.70
	GSM1900	GPRS11	Bottom Side	512	-	27.5	27.36	-0.27	0.291	1.03	0.30
	GSM1900	GPRS11	Rear Face	661	-	27.5	27.24	0.52	1.031	1.06	1.09
	GSM1900	GPRS11	Rear Face	810	-	27.5	27.15	-1.31	0.996	1.08	1.08
	GSM1900	GPRS11	Rear Face	512	-	27.5	27.36	0.22	1.042	1.03	1.08
	WCDMA II	RMC12.2K	Front Face	9538	-	25.0	24.20	-2.66	0.467	1.20	0.56
22	WCDMA II	RMC12.2K	Rear Face	9538	-	25.0	24.20	-1.48	1.14	1.20	1.37
	WCDMA II	RMC12.2K	Left Side	9538	-	25.0	24.20	-2.88	0.155	1.20	0.19
	WCDMA II	RMC12.2K	Right Side	9538	-	25.0	24.20	2.2	0.718	1.20	0.86
	WCDMA II	RMC12.2K	Bottom Side	9538	-	25.0	24.20	-2.52	0.251	1.20	0.30
	WCDMA II	RMC12.2K	Rear Face	9262	-	25.0	23.85	-1.38	1.02	1.30	1.33
	WCDMA II	RMC12.2K	Rear Face	9400	-	25.0	24.10	-1.44	0.987	1.23	1.21
	WCDMA II	RMC12.2K	Rear Face	9538	-	25.0	24.20	-1.21	1.11	1.20	1.33
	WCDMA IV	RMC12.2K	Front Face	1413	-	24.0	23.41	1.52	0.513	1.15	0.59
23	WCDMA IV	RMC12.2K	Rear Face	1413	-	24.0	23.41	0.54	1.118	1.15	1.28
	WCDMA IV	RMC12.2K	Left Side	1413	-	24.0	23.41	-1.43	0.217	1.15	0.25
	WCDMA IV	RMC12.2K	Right Side	1413	-	24.0	23.41	-0.21	0.716	1.15	0.82
	WCDMA IV	RMC12.2K	Bottom Side	1413	-	24.0	23.41	-1.67	0.529	1.15	0.61
	WCDMA IV	RMC12.2K	Rear Face	1312	-	24.0	23.40	0.52	1.1	1.15	1.26
	WCDMA IV	RMC12.2K	Rear Face	1513	-	24.0	23.38	-0.34	1.01	1.15	1.16
	WCDMA IV	RMC12.2K	Rear Face	1413	-	24.0	23.41	0.14	1.11	1.15	1.27
	WCDMA V	RMC12.2K	Front Face	4233	-	25.0	24.38	0.92	0.643	1.15	0.74
	WCDMA V	RMC12.2K	Rear Face	4233	-	25.0	24.38	0.23	1.012	1.15	1.17
	WCDMA V	RMC12.2K	Left Side	4233	-	25.0	24.38	0.24	0.631	1.15	0.73
	WCDMA V	RMC12.2K	Right Side	4233	-	25.0	24.38	0.5	0.688	1.15	0.79
	WCDMA V	RMC12.2K	Bottom Side	4233	-	25.0	24.38	0.05	0.123	1.15	0.14
24	WCDMA V	RMC12.2K	Rear Face	4132	-	25.0	24.30	1.31	1.112	1.17	1.31
	WCDMA V	RMC12.2K	Rear Face	4182	-	25.0	24.28	-0.38	1.051	1.18	1.24
	WCDMA V	RMC12.2K	Rear Face	4132	-	25.0	24.30	1.13	1.105	1.17	1.30

FCC SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Earphone	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)
25	LTE 2	QPSK20M	Front Face	18700	-	1	50	24.0	23.95	-4.13	0.293	1.01	0.30
	LTE 2	QPSK20M	Rear Face	18700	-	1	50	24.0	23.95	1.86	0.934	1.01	0.94
	LTE 2	QPSK20M	Left Side	18700	-	1	50	24.0	23.95	-2.71	0.165	1.01	0.17
	LTE 2	QPSK20M	Right Side	18700	-	1	50	24.0	23.95	-0.8	0.546	1.01	0.55
	LTE 2	QPSK20M	Bottom Side	18700	-	1	50	24.0	23.95	1.7	0.262	1.01	0.27
	LTE 2	QPSK20M	Front Face	18700	-	50	0	23.0	22.81	-0.08	0.219	1.04	0.23
	LTE 2	QPSK20M	Rear Face	18700	-	50	0	23.0	22.81	0.22	0.806	1.04	0.84
	LTE 2	QPSK20M	Left Side	18700	-	50	0	23.0	22.81	1.92	0.117	1.04	0.12
	LTE 2	QPSK20M	Right Side	18700	-	50	0	23.0	22.81	-1.09	0.41	1.04	0.43
	LTE 2	QPSK20M	Bottom Side	18700	-	50	0	23.0	22.81	-0.46	0.209	1.04	0.22
	LTE 2	QPSK20M	Rear Face	18900	-	1	50	24.0	23.87	1.26	0.894	1.03	0.92
	LTE 2	QPSK20M	Rear Face	19100	-	1	50	24.0	23.81	1.84	0.877	1.04	0.92
	LTE 2	QPSK20M	Rear Face	18900	-	50	0	23.0	22.73	0.32	0.766	1.06	0.82
	LTE 2	QPSK20M	Rear Face	19100	-	50	0	23.0	22.67	0.26	0.751	1.08	0.81
	LTE 2	QPSK20M	Rear Face	18700	-	1	50	24.0	23.95	1.12	0.923	1.01	0.93
26	LTE 4	QPSK20M	Front Face	20300	-	1	50	24.0	23.55	-0.68	0.517	1.11	0.57
	LTE 4	QPSK20M	Rear Face	20300	-	1	50	24.0	23.55	-1.36	1.279	1.11	1.42
	LTE 4	QPSK20M	Left Side	20300	-	1	50	24.0	23.55	-1.06	0.231	1.11	0.26
	LTE 4	QPSK20M	Right Side	20300	-	1	50	24.0	23.55	0.29	0.712	1.11	0.79
	LTE 4	QPSK20M	Bottom Side	20300	-	1	50	24.0	23.55	-2.14	0.556	1.11	0.62
	LTE 4	QPSK20M	Front Face	20300	-	50	0	23.0	22.40	-0.31	0.403	1.15	0.46
	LTE 4	QPSK20M	Rear Face	20300	-	50	0	23.0	22.40	-1.59	1.095	1.15	1.26
	LTE 4	QPSK20M	Left Side	20300	-	50	0	23.0	22.40	4.57	0.179	1.15	0.21
	LTE 4	QPSK20M	Right Side	20300	-	50	0	23.0	22.40	-1.54	0.557	1.15	0.64
	LTE 4	QPSK20M	Bottom Side	20300	-	50	0	23.0	22.40	0.04	0.449	1.15	0.52
	LTE 4	QPSK20M	Rear Face	20050	-	1	50	24.0	23.22	-0.35	1.17	1.20	1.40
	LTE 4	QPSK20M	Rear Face	20175	-	1	50	24.0	23.48	-1.86	1.105	1.13	1.25
	LTE 4	QPSK20M	Rear Face	20050	-	50	0	23.0	22.07	-1.71	1.013	1.24	1.25
	LTE 4	QPSK20M	Rear Face	20175	-	50	0	23.0	22.33	-1.56	1.045	1.17	1.22
	LTE 4	QPSK20M	Rear Face	20300	-	1	50	24.0	23.55	-1.42	1.265	1.11	1.40
27	LTE 5	QPSK10M	Front Face	20525	-	1	24	24.0	23.47	1.27	0.62	1.13	0.70
	LTE 5	QPSK10M	Rear Face	20525	-	1	24	24.0	23.47	0.22	1.045	1.13	1.18
	LTE 5	QPSK10M	Left Side	20525	-	1	24	24.0	23.47	1.21	0.572	1.13	0.65
	LTE 5	QPSK10M	Right Side	20525	-	1	24	24.0	23.47	3.25	0.748	1.13	0.85
	LTE 5	QPSK10M	Bottom Side	20525	-	1	24	24.0	23.47	1.51	0.113	1.13	0.13
	LTE 5	QPSK10M	Front Face	20525	-	25	0	23.0	22.28	-0.62	0.516	1.18	0.61
	LTE 5	QPSK10M	Rear Face	20525	-	25	0	23.0	22.28	-0.29	0.803	1.18	0.95
	LTE 5	QPSK10M	Left Side	20525	-	25	0	23.0	22.28	-0.38	0.444	1.18	0.52
	LTE 5	QPSK10M	Right Side	20525	-	25	0	23.0	22.28	0.8	0.572	1.18	0.68
	LTE 5	QPSK10M	Bottom Side	20525	-	25	0	23.0	22.28	-1.27	0.085	1.18	0.10
	LTE 5	QPSK10M	Rear Face	20450	-	1	24	24.0	23.39	0.12	0.945	1.15	1.09
	LTE 5	QPSK10M	Rear Face	20600	-	1	24	24.0	23.44	0.25	0.912	1.14	1.04
	LTE 5	QPSK10M	Right Side	20450	-	1	24	24.0	23.39	0.22	0.702	1.15	0.81
	LTE 5	QPSK10M	Right Side	20600	-	1	24	24.0	23.44	1.24	0.721	1.14	0.82
	LTE 5	QPSK10M	Rear Face	20450	-	25	0	23.0	22.20	-0.33	0.763	1.20	0.92
	LTE 5	QPSK10M	Rear Face	20600	-	25	0	23.0	22.25	-0.21	0.723	1.19	0.86
	LTE 5	QPSK10M	Rear Face	20525	-	1	24	24.0	23.47	0.32	1.023	1.13	1.16

FCC SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Earphone	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)
	LTE 7	QPSK20M	Front Face	21100	-	1	50	24.0	23.77	-1.5	0.082	1.05	0.09
	LTE 7	QPSK20M	Rear Face	21100	-	1	50	24.0	23.77	-3.94	0.315	1.05	0.33
	LTE 7	QPSK20M	Left Side	21100	-	1	50	24.0	23.77	0.52	0.056	1.05	0.06
	LTE 7	QPSK20M	Right Side	21100	-	1	50	24.0	23.77	-0.94	0.256	1.05	0.27
28	LTE 7	QPSK20M	Bottom Side	21100	-	1	50	24.0	23.77	-3.02	0.353	1.05	0.37
	LTE 7	QPSK20M	Front Face	21100	-	50	0	23.0	22.57	-1.06	0.066	1.10	0.07
	LTE 7	QPSK20M	Rear Face	21100	-	50	0	23.0	22.57	-2.16	0.235	1.10	0.26
	LTE 7	QPSK20M	Left Side	21100	-	50	0	23.0	22.57	-1.27	0.037	1.10	0.04
	LTE 7	QPSK20M	Right Side	21100	-	50	0	23.0	22.57	-2.99	0.208	1.10	0.23
	LTE 7	QPSK20M	Bottom Side	21100	-	50	0	23.0	22.57	-3.57	0.319	1.10	0.35
	LTE 12	QPSK10M	Front Face	23130	-	1	24	24.0	23.79	-1.06	0.512	1.05	0.54
29	LTE 12	QPSK10M	Rear Face	23130	-	1	24	24.0	23.79	4.07	1.319	1.05	1.38
	LTE 12	QPSK10M	Left Side	23130	-	1	24	24.0	23.79	0.15	0.378	1.05	0.40
	LTE 12	QPSK10M	Right Side	23130	-	1	24	24.0	23.79	-1.95	0.695	1.05	0.73
	LTE 12	QPSK10M	Bottom Side	23130	-	1	24	24.0	23.79	-0.42	0.16	1.05	0.17
	LTE 12	QPSK10M	Front Face	23130	-	25	12	23.0	22.63	-0.63	0.384	1.09	0.42
	LTE 12	QPSK10M	Rear Face	23130	-	25	12	23.0	22.63	-0.36	1.007	1.09	1.10
	LTE 12	QPSK10M	Left Side	23130	-	25	12	23.0	22.63	-0.66	0.288	1.09	0.31
	LTE 12	QPSK10M	Right Side	23130	-	25	12	23.0	22.63	-1.73	0.507	1.09	0.55
	LTE 12	QPSK10M	Bottom Side	23130	-	25	12	23.0	22.63	-1.87	0.122	1.09	0.13
	LTE 12	QPSK10M	Rear Face	23060	-	1	24	24.0	23.87	2.11	1.2	1.03	1.24
	LTE 12	QPSK10M	Rear Face	23095	-	1	24	24.0	23.91	2.27	1.209	1.02	1.23
	LTE 12	QPSK10M	Rear Face	23060	-	25	12	23.0	22.51	-0.22	0.956	1.12	1.07
	LTE 12	QPSK10M	Rear Face	23095	-	25	12	23.0	22.55	-0.65	0.923	1.11	1.02
	LTE 12	QPSK10M	Rear Face	23130	-	1	24	24.0	23.79	1.02	1.305	1.05	1.37
	LTE 13	QPSK10M	Front Face	23230	-	1	24	24.0	23.84	-2.24	0.557	1.04	0.58
30	LTE 13	QPSK10M	Rear Face	23230	-	1	24	24.0	23.84	-2.15	0.915	1.04	0.95
	LTE 13	QPSK10M	Left Side	23230	-	1	24	24.0	23.84	0.29	0.429	1.04	0.45
	LTE 13	QPSK10M	Right Side	23230	-	1	24	24.0	23.84	-2.9	0.516	1.04	0.54
	LTE 13	QPSK10M	Bottom Side	23230	-	1	24	24.0	23.84	-1.68	0.092	1.04	0.10
	LTE 13	QPSK10M	Front Face	23230	-	25	12	23.0	22.52	0.77	0.439	1.12	0.49
	LTE 13	QPSK10M	Rear Face	23230	-	25	12	23.0	22.52	-1.03	0.693	1.12	0.77
	LTE 13	QPSK10M	Left Side	23230	-	25	12	23.0	22.52	-0.69	0.339	1.12	0.38
	LTE 13	QPSK10M	Right Side	23230	-	25	12	23.0	22.52	-2.34	0.367	1.12	0.41
	LTE 13	QPSK10M	Bottom Side	23230	-	25	12	23.0	22.52	-0.78	0.069	1.12	0.08
	LTE 13	QPSK10M	Rear Face	23230	-	1	24	24.0	23.84	-3.12	0.894	1.04	0.93
	LTE 14	QPSK10M	Front Face	23330	-	1	24	24.0	23.22	-0.43	0.697	1.20	0.83
31	LTE 14	QPSK10M	Rear Face	23330	-	1	24	24.0	23.22	-0.76	0.701	1.20	0.84
	LTE 14	QPSK10M	Left Side	23330	-	1	24	24.0	23.22	1.63	0.471	1.20	0.56
	LTE 14	QPSK10M	Right Side	23330	-	1	24	24.0	23.22	-4.74	0.354	1.20	0.42
	LTE 14	QPSK10M	Bottom Side	23330	-	1	24	24.0	23.22	-2.88	0.09	1.20	0.11
	LTE 14	QPSK10M	Front Face	23330	-	25	0	23.0	21.84	-0.92	0.431	1.31	0.56
	LTE 14	QPSK10M	Rear Face	23330	-	25	0	23.0	21.84	-0.9	0.535	1.31	0.70
	LTE 14	QPSK10M	Left Side	23330	-	25	0	23.0	21.84	0.23	0.357	1.31	0.47
	LTE 14	QPSK10M	Right Side	23330	-	25	0	23.0	21.84	-1.24	0.285	1.31	0.37
	LTE 14	QPSK10M	Bottom Side	23330	-	25	0	23.0	21.84	-1.66	0.069	1.31	0.09

FCC SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	RB#	RB Offset	Earphone	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)
32	LTE 26	QPSK15M	Front Face	26765	-	1	0	24.0	23.49	-2.71	0.88	1.12	0.99
	LTE 26	QPSK15M	Rear Face	26765	-	1	0	24.0	23.49	1.23	1.265	1.12	1.42
	LTE 26	QPSK15M	Left Side	26765	-	1	0	24.0	23.49	-1.36	0.695	1.12	0.78
	LTE 26	QPSK15M	Right Side	26765	-	1	0	24.0	23.49	-3.17	0.689	1.12	0.77
	LTE 26	QPSK15M	Bottom Side	26765	-	1	0	24.0	23.49	-0.23	0.144	1.12	0.16
	LTE 26	QPSK15M	Front Face	26765	-	36	0	23.0	22.50	-0.39	0.693	1.12	0.78
	LTE 26	QPSK15M	Rear Face	26765	-	36	0	23.0	22.50	-1.11	0.974	1.12	1.09
	LTE 26	QPSK15M	Left Side	26765	-	36	0	23.0	22.50	0.26	0.552	1.12	0.62
	LTE 26	QPSK15M	Right Side	26765	-	36	0	23.0	22.50	-1.02	0.617	1.12	0.69
	LTE 26	QPSK15M	Bottom Side	26765	-	36	0	23.0	22.50	-0.41	0.115	1.12	0.13
	LTE 26	QPSK15M	Front Face	26865	-	1	0	24.0	23.20	-0.72	0.78	1.20	0.94
	LTE 26	QPSK15M	Front Face	26965	-	1	0	24.0	23.35	-2.21	0.8	1.16	0.93
	LTE 26	QPSK15M	Rear Face	26865	-	1	0	24.0	23.20	0.23	1.145	1.20	1.38
	LTE 26	QPSK15M	Rear Face	26965	-	1	0	24.0	23.35	1.52	1.131	1.16	1.31
	LTE 26	QPSK15M	Rear Face	26865	-	36	0	23.0	22.21	-1.48	0.9	1.20	1.08
	LTE 26	QPSK15M	Rear Face	26965	-	36	0	23.0	22.36	-1.32	0.934	1.16	1.08
	LTE 26	QPSK15M	Rear Face	26765	-	1	0	24.0	23.49	1.14	1.254	1.12	1.41
33	LTE 30	QPSK10M	Front Face	27710	-	1	0	24.0	23.61	0.52	0.12	1.09	0.13
	LTE 30	QPSK10M	Rear Face	27710	-	1	0	24.0	23.61	-0.8	0.438	1.09	0.48
	LTE 30	QPSK10M	Left Side	27710	-	1	0	24.0	23.61	-1.05	0.087	1.09	0.10
	LTE 30	QPSK10M	Right Side	27710	-	1	0	24.0	23.61	-0.73	0.128	1.09	0.14
	LTE 30	QPSK10M	Bottom Side	27710	-	1	0	24.0	23.61	-3.88	0.23	1.09	0.25
	LTE 30	QPSK10M	Front Face	27710	-	25	0	23.0	22.58	-0.07	0.146	1.10	0.16
	LTE 30	QPSK10M	Rear Face	27710	-	25	0	23.0	22.58	-0.92	0.383	1.10	0.42
	LTE 30	QPSK10M	Left Side	27710	-	25	0	23.0	22.58	0.16	0.075	1.10	0.08
	LTE 30	QPSK10M	Right Side	27710	-	25	0	23.0	22.58	-4.07	0.166	1.10	0.18
	LTE 30	QPSK10M	Bottom Side	27710	-	25	0	23.0	22.58	2.13	0.195	1.10	0.21
34	LTE 66	QPSK20M	Front Face	132422	-	1	0	24.0	23.31	-0.76	0.475	1.17	0.56
	LTE 66	QPSK20M	Rear Face	132422	-	1	0	24.0	23.31	-3.89	1.178	1.17	1.38
	LTE 66	QPSK20M	Left Side	132422	-	1	0	24.0	23.31	0.54	0.263	1.17	0.31
	LTE 66	QPSK20M	Right Side	132422	-	1	0	24.0	23.31	0.75	0.682	1.17	0.80
	LTE 66	QPSK20M	Bottom Side	132422	-	1	0	24.0	23.31	0.67	0.521	1.17	0.61
	LTE 66	QPSK20M	Front Face	132422	-	50	0	23.0	22.10	-1.78	0.357	1.23	0.44
	LTE 66	QPSK20M	Rear Face	132422	-	50	0	23.0	22.10	-1.48	1.005	1.23	1.24
	LTE 66	QPSK20M	Left Side	132422	-	50	0	23.0	22.10	-0.54	0.204	1.23	0.25
	LTE 66	QPSK20M	Right Side	132422	-	50	0	23.0	22.10	-0.74	0.529	1.23	0.65
	LTE 66	QPSK20M	Bottom Side	132422	-	50	0	23.0	22.10	-0.78	0.383	1.23	0.47
	LTE 66	QPSK20M	Rear Face	132072	-	1	0	24.0	23.01	-1.39	1.021	1.26	1.28
	LTE 66	QPSK20M	Rear Face	132572	-	1	0	24.0	23.04	-0.53	1.032	1.25	1.29
	LTE 66	QPSK20M	Rear Face	132072	-	50	0	23.0	22.00	-1.23	0.945	1.26	1.19
	LTE 66	QPSK20M	Rear Face	132572	-	50	0	23.0	22.03	-1.55	0.926	1.25	1.16
	LTE 66	QPSK20M	Rear Face	132422	-	1	0	24.0	23.31	-2.31	1.163	1.17	1.36

FCC SAR Test Report

Plot No.	Band	Mode	Test Position	Ch.	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)
	802.11b	-	Front Face	1	16.0	15.51	-0.72	0.002	1.12	0.00
35	802.11b	-	Rear Face	1	16.0	15.51	-2.2	0.125	1.12	0.14
	802.11b	-	Left Side	1	16.0	15.51	0.69	0.051	1.12	0.06
	802.11b	-	Right Side	1	16.0	15.51	3.39	0.002	1.12	0.00
	802.11b	-	Top Side	1	16.0	15.51	-0.31	0.022	1.12	0.02
	802.11a	-	Front Face	48	16.5	16.44	-0.52	0.027	1.01	0.03
#39	802.11a	-	Rear Face	48	16.5	16.44	-0.16	0.141	1.01	0.14
	802.11a	-	Left Side	48	16.5	16.44	-0.17	0.057	1.01	0.06
	802.11a	-	Right Side	48	16.5	16.44	0.04	0.007	1.01	0.01
	802.11a	-	Top Side	48	16.5	16.44	0.24	0.014	1.01	0.01
	802.11a	-	Front Face	157	16.5	16.19	-0.01	0.031	1.07	0.03
38	802.11a	-	Rear Face	157	16.5	16.19	1.25	0.155	1.07	0.17
	802.11a	-	Left Side	157	16.5	16.19	0.43	0.063	1.07	0.07
	802.11a	-	Right Side	157	16.5	16.19	-0.18	0.007	1.07	0.01
	802.11a	-	Top Side	157	16.5	16.19	-1.34	0.015	1.07	0.02

FCC SAR Test Report

4.7.5 SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are ≤ 1.45 W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is ≤ 1.10 , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is < 0.80 W/kg, repeated measurement is not required.
2. When the highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 , or when the original or repeated measurement is ≥ 1.45 W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 , and the original, first or second repeated measurement is ≥ 1.5 W/kg, perform a third repeated measurement.

Band	Mode	Test Position	Ch.	Original Measured SAR-1g (W/kg)	1st Repeated SAR-1g (W/kg)	L/S Ratio	2nd Repeated SAR-1g (W/kg)	L/S Ratio	3rd Repeated SAR-1g (W/kg)	L/S Ratio
GSM850	GPRS12	Rear Face	128	0.933	0.925	1.01	N/A	N/A	N/A	N/A
GSM1900	GPRS11	Rear Face	512	1.062	1.042	1.02	N/A	N/A	N/A	N/A
WCDMA II	RMC12.2K	Rear Face	9538	1.14	1.11	1.03	N/A	N/A	N/A	N/A
WCDMA IV	RMC12.2K	Rear Face	1413	1.118	1.11	1.01	N/A	N/A	N/A	N/A
WCDMA V	RMC12.2K	Rear Face	4132	1.112	1.105	1.01	N/A	N/A	N/A	N/A
LTE 2	QPSK20M	Rear Face	18700	0.934	0.923	1.01	N/A	N/A	N/A	N/A
LTE 4	QPSK20M	Rear Face	20300	1.279	1.265	1.01	N/A	N/A	N/A	N/A
LTE 5	QPSK10M	Left Cheek	20525	1.015	0.974	1.04	N/A	N/A	N/A	N/A
LTE 12	QPSK10M	Rear Face	23130	1.319	1.305	1.01	N/A	N/A	N/A	N/A
LTE 13	QPSK10M	Right Cheek	23230	0.865	0.854	1.01	N/A	N/A	N/A	N/A
LTE 14	QPSK10M	Right Cheek	23330	0.827	0.812	1.02	N/A	N/A	N/A	N/A
LTE 26	QPSK15M	Left Cheek	26765	0.986	0.974	1.01	N/A	N/A	N/A	N/A
LTE 66	QPSK20M	Rear Face	132422	1.178	1.163	1.01	N/A	N/A	N/A	N/A

FCC SAR Test Report

4.7.6 Simultaneous Multi-band Transmission Evaluation

<Estimated SAR Calculation>

According to KDB 447498 D01, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR was estimated according to following formula to result in substantially conservative SAR values of ≤ 0.4 W/kg to determine simultaneous transmission SAR test exclusion.

$$\text{Estimated SAR} = \frac{\text{Max. Tune up Power}_{(\text{mW})}}{\text{Min. Test Separation Distance}_{(\text{mm})}} \times \frac{\sqrt{f_{(\text{GHz})}}}{7.5}$$

If the minimum test separation distance is < 5 mm, a distance of 5 mm is used for estimated SAR calculation. When the test separation distance is > 50 mm, the 0.4 W/kg is used for SAR-1g.

Mode / Band	Frequency (GHz)	Max. Tune-up Power (dBm)	Test Position	Separation Distance (mm)	Estimated SAR (W/kg)
BT (DSS)	2.48	11.5	Body-worn	10	0.30

Note:

1. The separation distance is determined from the outer housing of the tablet to the user.
2. When standalone SAR testing is not required, an estimated SAR can be applied to determine simultaneous transmission SAR test exclusion.

FCC SAR Test Report

<SAR Summation Analysis>

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR_{1g} of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR_{1g} 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR_{1g} is greater than the SAR limit (SAR_{1g} 1.6 W/kg), SAR test exclusion is determined by the SPLSR.

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
1	GSM850 + WLAN (DTS)	Head	Right Cheek	0.44	0.06	0.50	ΣSAR < 1.6, Not required
			Right Tilted	0.26	0.03	0.29	ΣSAR < 1.6, Not required
			Left Cheek	0.49	0.10	0.59	ΣSAR < 1.6, Not required
			Left Tilted	0.25	0.04	0.29	ΣSAR < 1.6, Not required
		Body-Worn	Front Face	0.59	0.00	0.59	ΣSAR < 1.6, Not required
			Rear Face	1.03	0.14	1.17	ΣSAR < 1.6, Not required
		Hotspot	Front Face	0.59	0.00	0.59	ΣSAR < 1.6, Not required
			Rear Face	1.03	0.14	1.17	ΣSAR < 1.6, Not required
			Left Side	0.54	0.06	0.60	ΣSAR < 1.6, Not required
			Right Side	0.58	0.00	0.58	ΣSAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	ΣSAR < 1.6, Not required
			Bottom Side	0.12	0.00	0.12	ΣSAR < 1.6, Not required
2	GSM850 + WLAN (NII)	Head	Right Cheek	0.44	0.19	0.63	ΣSAR < 1.6, Not required
			Right Tilted	0.26	0.06	0.32	ΣSAR < 1.6, Not required
			Left Cheek	0.49	0.35	0.84	ΣSAR < 1.6, Not required
			Left Tilted	0.25	0.08	0.33	ΣSAR < 1.6, Not required
		Body-Worn	Front Face	0.59	0.04	0.63	ΣSAR < 1.6, Not required
			Rear Face	1.03	0.17	1.20	ΣSAR < 1.6, Not required
		Hotspot	Front Face	0.59	0.03	0.62	ΣSAR < 1.6, Not required
			Rear Face	1.03	0.17	1.20	ΣSAR < 1.6, Not required
			Left Side	0.54	0.07	0.61	ΣSAR < 1.6, Not required
			Right Side	0.58	0.01	0.59	ΣSAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	ΣSAR < 1.6, Not required
			Bottom Side	0.12	0.00	0.12	ΣSAR < 1.6, Not required
3	GSM 850 + BT (DSS)	Body-Worn	Front Face	0.59	0.30	0.89	ΣSAR < 1.6, Not required
			Rear Face	1.03	0.30	1.33	ΣSAR < 1.6, Not required

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
4	GSM1900 + WLAN (DTS)	Head	Right Cheek	0.32	0.06	0.38	Σ SAR < 1.6, Not required
			Right Tilted	0.13	0.03	0.16	Σ SAR < 1.6, Not required
			Left Cheek	0.30	0.10	0.40	Σ SAR < 1.6, Not required
			Left Tilted	0.11	0.04	0.15	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.40	0.00	0.40	Σ SAR < 1.6, Not required
			Rear Face	1.10	0.14	1.24	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.40	0.00	0.40	Σ SAR < 1.6, Not required
			Rear Face	1.10	0.14	1.24	Σ SAR < 1.6, Not required
			Left Side	0.14	0.06	0.20	Σ SAR < 1.6, Not required
			Right Side	0.70	0.00	0.70	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.30	0.00	0.30	Σ SAR < 1.6, Not required
5	GSM1900 + WLAN (NII)	Head	Right Cheek	0.32	0.19	0.51	Σ SAR < 1.6, Not required
			Right Tilted	0.13	0.06	0.19	Σ SAR < 1.6, Not required
			Left Cheek	0.30	0.35	0.65	Σ SAR < 1.6, Not required
			Left Tilted	0.11	0.08	0.19	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.40	0.04	0.44	Σ SAR < 1.6, Not required
			Rear Face	1.10	0.17	1.27	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.40	0.03	0.43	Σ SAR < 1.6, Not required
			Rear Face	1.10	0.17	1.27	Σ SAR < 1.6, Not required
			Left Side	0.14	0.07	0.21	Σ SAR < 1.6, Not required
			Right Side	0.70	0.01	0.71	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.30	0.00	0.30	Σ SAR < 1.6, Not required
6	GSM1900 + BT (DSS)	Body-Worn	Front Face	0.40	0.30	0.70	Σ SAR < 1.6, Not required
			Rear Face	1.10	0.30	1.40	Σ SAR < 1.6, Not required

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
7	WCDMA II + WLAN (DTS)	Head	Right Cheek	0.35	0.06	0.41	Σ SAR < 1.6, Not required
			Right Tilted	0.19	0.03	0.22	Σ SAR < 1.6, Not required
			Left Cheek	0.46	0.10	0.56	Σ SAR < 1.6, Not required
			Left Tilted	0.14	0.04	0.18	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.56	0.00	0.56	Σ SAR < 1.6, Not required
			Rear Face	1.37	0.14	1.51	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.56	0.00	0.56	Σ SAR < 1.6, Not required
			Rear Face	1.37	0.14	1.51	Σ SAR < 1.6, Not required
			Left Side	0.19	0.06	0.25	Σ SAR < 1.6, Not required
			Right Side	0.86	0.00	0.86	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.30	0.00	0.30	Σ SAR < 1.6, Not required
8	WCDMA II + WLAN (NII)	Head	Right Cheek	0.35	0.19	0.54	Σ SAR < 1.6, Not required
			Right Tilted	0.19	0.06	0.25	Σ SAR < 1.6, Not required
			Left Cheek	0.46	0.35	0.81	Σ SAR < 1.6, Not required
			Left Tilted	0.14	0.08	0.22	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.56	0.04	0.60	Σ SAR < 1.6, Not required
			Rear Face	1.37	0.17	1.54	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.56	0.03	0.59	Σ SAR < 1.6, Not required
			Rear Face	1.37	0.17	1.54	Σ SAR < 1.6, Not required
			Left Side	0.19	0.07	0.26	Σ SAR < 1.6, Not required
			Right Side	0.86	0.01	0.87	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.30	0.00	0.30	Σ SAR < 1.6, Not required
9	WCDMA II + BT (DSS)	Body-Worn	Front Face	0.56	0.30	0.86	Σ SAR < 1.6, Not required
			Rear Face	1.37	0.30	1.67	Analyzed as below

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
10	WCDMA IV + WLAN (DTS)	Head	Right Cheek	0.56	0.06	0.62	Σ SAR < 1.6, Not required
			Right Tilted	0.28	0.03	0.31	Σ SAR < 1.6, Not required
			Left Cheek	0.73	0.10	0.83	Σ SAR < 1.6, Not required
			Left Tilted	0.21	0.04	0.25	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.59	0.00	0.59	Σ SAR < 1.6, Not required
			Rear Face	1.28	0.14	1.42	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.59	0.00	0.59	Σ SAR < 1.6, Not required
			Rear Face	1.28	0.14	1.42	Σ SAR < 1.6, Not required
			Left Side	0.25	0.06	0.31	Σ SAR < 1.6, Not required
			Right Side	0.82	0.00	0.82	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.61	0.00	0.61	Σ SAR < 1.6, Not required
11	WCDMA IV + WLAN (NII)	Head	Right Cheek	0.56	0.19	0.75	Σ SAR < 1.6, Not required
			Right Tilted	0.28	0.06	0.34	Σ SAR < 1.6, Not required
			Left Cheek	0.73	0.35	1.08	Σ SAR < 1.6, Not required
			Left Tilted	0.21	0.08	0.29	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.59	0.04	0.63	Σ SAR < 1.6, Not required
			Rear Face	1.28	0.17	1.45	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.59	0.03	0.62	Σ SAR < 1.6, Not required
			Rear Face	1.28	0.17	1.45	Σ SAR < 1.6, Not required
			Left Side	0.25	0.07	0.32	Σ SAR < 1.6, Not required
			Right Side	0.82	0.01	0.83	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.61	0.00	0.61	Σ SAR < 1.6, Not required
12	WCDMA IV + BT (DSS)	Body-Worn	Front Face	0.59	0.30	0.89	Σ SAR < 1.6, Not required
			Rear Face	1.28	0.30	1.58	Σ SAR < 1.6, Not required

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
13	WCDMA V + WLAN (DTS)	Head	Right Cheek	0.59	0.06	0.65	Σ SAR < 1.6, Not required
			Right Tilted	0.33	0.03	0.36	Σ SAR < 1.6, Not required
			Left Cheek	0.68	0.10	0.78	Σ SAR < 1.6, Not required
			Left Tilted	0.33	0.04	0.37	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.74	0.00	0.74	Σ SAR < 1.6, Not required
			Rear Face	1.31	0.14	1.45	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.74	0.00	0.74	Σ SAR < 1.6, Not required
			Rear Face	1.31	0.14	1.45	Σ SAR < 1.6, Not required
			Left Side	0.73	0.06	0.79	Σ SAR < 1.6, Not required
			Right Side	0.79	0.00	0.79	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.14	0.00	0.14	Σ SAR < 1.6, Not required
14	WCDMA V + WLAN (NII)	Head	Right Cheek	0.59	0.19	0.78	Σ SAR < 1.6, Not required
			Right Tilted	0.33	0.06	0.39	Σ SAR < 1.6, Not required
			Left Cheek	0.68	0.35	1.03	Σ SAR < 1.6, Not required
			Left Tilted	0.33	0.08	0.41	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.74	0.04	0.78	Σ SAR < 1.6, Not required
			Rear Face	1.31	0.17	1.48	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.74	0.03	0.77	Σ SAR < 1.6, Not required
			Rear Face	1.31	0.17	1.48	Σ SAR < 1.6, Not required
			Left Side	0.73	0.07	0.80	Σ SAR < 1.6, Not required
			Right Side	0.79	0.01	0.80	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.14	0.00	0.14	Σ SAR < 1.6, Not required
15	WCDMA V + BT (DSS)	Body-Worn	Front Face	0.74	0.30	1.04	Σ SAR < 1.6, Not required
			Rear Face	1.31	0.30	1.61	Analyzed as below

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
16	LTE 2 + WLAN (DTS)	Head	Right Cheek	0.23	0.06	0.29	Σ SAR < 1.6, Not required
			Right Tilted	0.09	0.03	0.12	Σ SAR < 1.6, Not required
			Left Cheek	0.29	0.10	0.39	Σ SAR < 1.6, Not required
			Left Tilted	0.13	0.04	0.17	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.30	0.00	0.30	Σ SAR < 1.6, Not required
			Rear Face	0.94	0.14	1.08	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.30	0.00	0.30	Σ SAR < 1.6, Not required
			Rear Face	0.94	0.14	1.08	Σ SAR < 1.6, Not required
			Left Side	0.17	0.06	0.23	Σ SAR < 1.6, Not required
			Right Side	0.55	0.00	0.55	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.27	0.00	0.27	Σ SAR < 1.6, Not required
17	LTE 2 + WLAN (NII)	Head	Right Cheek	0.23	0.19	0.42	Σ SAR < 1.6, Not required
			Right Tilted	0.09	0.06	0.15	Σ SAR < 1.6, Not required
			Left Cheek	0.29	0.35	0.64	Σ SAR < 1.6, Not required
			Left Tilted	0.13	0.08	0.21	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.30	0.04	0.34	Σ SAR < 1.6, Not required
			Rear Face	0.94	0.17	1.11	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.30	0.03	0.33	Σ SAR < 1.6, Not required
			Rear Face	0.94	0.17	1.11	Σ SAR < 1.6, Not required
			Left Side	0.17	0.07	0.24	Σ SAR < 1.6, Not required
			Right Side	0.55	0.01	0.56	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.27	0.00	0.27	Σ SAR < 1.6, Not required
18	LTE 2 + BT (DSS)	Body-Worn	Front Face	0.30	0.30	0.60	Σ SAR < 1.6, Not required
			Rear Face	0.94	0.30	1.24	Σ SAR < 1.6, Not required

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
19	LTE 4 + WLAN (DTS)	Head	Right Cheek	0.39	0.06	0.45	Σ SAR < 1.6, Not required
			Right Tilted	0.21	0.03	0.24	Σ SAR < 1.6, Not required
			Left Cheek	0.60	0.10	0.70	Σ SAR < 1.6, Not required
			Left Tilted	0.35	0.04	0.39	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.57	0.00	0.57	Σ SAR < 1.6, Not required
			Rear Face	1.42	0.14	1.56	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.57	0.00	0.57	Σ SAR < 1.6, Not required
			Rear Face	1.42	0.14	1.56	Σ SAR < 1.6, Not required
			Left Side	0.26	0.06	0.32	Σ SAR < 1.6, Not required
			Right Side	0.79	0.00	0.79	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.62	0.00	0.62	Σ SAR < 1.6, Not required
20	LTE 4 + WLAN (NII)	Head	Right Cheek	0.39	0.19	0.58	Σ SAR < 1.6, Not required
			Right Tilted	0.21	0.06	0.27	Σ SAR < 1.6, Not required
			Left Cheek	0.60	0.35	0.95	Σ SAR < 1.6, Not required
			Left Tilted	0.35	0.08	0.43	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.57	0.04	0.61	Σ SAR < 1.6, Not required
			Rear Face	1.42	0.17	1.59	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.57	0.03	0.60	Σ SAR < 1.6, Not required
			Rear Face	1.42	0.17	1.59	Σ SAR < 1.6, Not required
			Left Side	0.26	0.07	0.33	Σ SAR < 1.6, Not required
			Right Side	0.79	0.01	0.80	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.62	0.00	0.62	Σ SAR < 1.6, Not required
21	LTE 4 + BT (DSS)	Body-Worn	Front Face	0.57	0.30	0.87	Σ SAR < 1.6, Not required
			Rear Face	1.42	0.30	1.72	Analyzed as below

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
22	LTE 5 + WLAN (DTS)	Head	Right Cheek	0.93	0.06	0.99	Σ SAR < 1.6, Not required
			Right Tilted	0.52	0.03	0.55	Σ SAR < 1.6, Not required
			Left Cheek	1.15	0.10	1.25	Σ SAR < 1.6, Not required
			Left Tilted	0.79	0.04	0.83	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.70	0.00	0.70	Σ SAR < 1.6, Not required
			Rear Face	1.18	0.14	1.32	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.70	0.00	0.70	Σ SAR < 1.6, Not required
			Rear Face	1.18	0.14	1.32	Σ SAR < 1.6, Not required
			Left Side	0.65	0.06	0.71	Σ SAR < 1.6, Not required
			Right Side	0.85	0.00	0.85	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.13	0.00	0.13	Σ SAR < 1.6, Not required
23	LTE 5 + WLAN (NII)	Head	Right Cheek	0.93	0.19	1.12	Σ SAR < 1.6, Not required
			Right Tilted	0.52	0.06	0.58	Σ SAR < 1.6, Not required
			Left Cheek	1.15	0.35	1.50	Σ SAR < 1.6, Not required
			Left Tilted	0.79	0.08	0.87	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.70	0.04	0.74	Σ SAR < 1.6, Not required
			Rear Face	1.18	0.17	1.35	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.70	0.03	0.73	Σ SAR < 1.6, Not required
			Rear Face	1.18	0.17	1.35	Σ SAR < 1.6, Not required
			Left Side	0.65	0.07	0.72	Σ SAR < 1.6, Not required
			Right Side	0.85	0.01	0.86	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.13	0.00	0.13	Σ SAR < 1.6, Not required
24	LTE 5 + BT (DSS)	Body-Worn	Front Face	0.70	0.30	1.00	Σ SAR < 1.6, Not required
			Rear Face	1.18	0.30	1.48	Σ SAR < 1.6, Not required

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
25	LTE 7 + WLAN (DTS)	Head	Right Cheek	0.34	0.06	0.40	Σ SAR < 1.6, Not required
			Right Tilted	0.04	0.03	0.07	Σ SAR < 1.6, Not required
			Left Cheek	0.44	0.10	0.54	Σ SAR < 1.6, Not required
			Left Tilted	0.03	0.04	0.07	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.09	0.00	0.09	Σ SAR < 1.6, Not required
			Rear Face	0.33	0.14	0.47	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.09	0.00	0.09	Σ SAR < 1.6, Not required
			Rear Face	0.33	0.14	0.47	Σ SAR < 1.6, Not required
			Left Side	0.07	0.06	0.13	Σ SAR < 1.6, Not required
			Right Side	0.27	0.00	0.27	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.37	0.00	0.37	Σ SAR < 1.6, Not required
26	LTE 7 + WLAN (NII)	Head	Right Cheek	0.34	0.19	0.53	Σ SAR < 1.6, Not required
			Right Tilted	0.04	0.06	0.10	Σ SAR < 1.6, Not required
			Left Cheek	0.44	0.35	0.79	Σ SAR < 1.6, Not required
			Left Tilted	0.03	0.08	0.11	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.09	0.04	0.13	Σ SAR < 1.6, Not required
			Rear Face	0.33	0.17	0.50	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.09	0.03	0.12	Σ SAR < 1.6, Not required
			Rear Face	0.33	0.17	0.50	Σ SAR < 1.6, Not required
			Left Side	0.07	0.07	0.14	Σ SAR < 1.6, Not required
			Right Side	0.27	0.01	0.28	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.37	0.00	0.37	Σ SAR < 1.6, Not required
27	LTE 7 + BT (DSS)	Body-Worn	Front Face	0.09	0.30	0.39	Σ SAR < 1.6, Not required
			Rear Face	0.33	0.30	0.63	Σ SAR < 1.6, Not required

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
28	LTE 12 + WLAN (DTS)	Head	Right Cheek	0.46	0.06	0.52	Σ SAR < 1.6, Not required
			Right Tilted	0.22	0.03	0.25	Σ SAR < 1.6, Not required
			Left Cheek	0.53	0.10	0.63	Σ SAR < 1.6, Not required
			Left Tilted	0.23	0.04	0.27	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.54	0.00	0.54	Σ SAR < 1.6, Not required
			Rear Face	1.38	0.14	1.52	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.54	0.00	0.54	Σ SAR < 1.6, Not required
			Rear Face	1.38	0.14	1.52	Σ SAR < 1.6, Not required
			Left Side	0.40	0.06	0.46	Σ SAR < 1.6, Not required
			Right Side	0.73	0.00	0.73	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.17	0.00	0.17	Σ SAR < 1.6, Not required
29	LTE 12 + WLAN (NII)	Head	Right Cheek	0.46	0.19	0.65	Σ SAR < 1.6, Not required
			Right Tilted	0.22	0.06	0.28	Σ SAR < 1.6, Not required
			Left Cheek	0.53	0.35	0.88	Σ SAR < 1.6, Not required
			Left Tilted	0.23	0.08	0.31	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.54	0.04	0.58	Σ SAR < 1.6, Not required
			Rear Face	1.38	0.17	1.55	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.54	0.03	0.57	Σ SAR < 1.6, Not required
			Rear Face	1.38	0.17	1.55	Σ SAR < 1.6, Not required
			Left Side	0.40	0.07	0.47	Σ SAR < 1.6, Not required
			Right Side	0.73	0.01	0.74	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.17	0.00	0.17	Σ SAR < 1.6, Not required
30	LTE 12 + BT (DSS)	Body-Worn	Front Face	0.54	0.30	0.84	Σ SAR < 1.6, Not required
			Rear Face	1.38	0.30	1.68	Analyzed as below

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
31	LTE 13 + WLAN (DTS)	Head	Right Cheek	0.90	0.06	0.96	Σ SAR < 1.6, Not required
			Right Tilted	0.44	0.03	0.47	Σ SAR < 1.6, Not required
			Left Cheek	0.83	0.10	0.93	Σ SAR < 1.6, Not required
			Left Tilted	0.47	0.04	0.51	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.58	0.00	0.58	Σ SAR < 1.6, Not required
			Rear Face	0.95	0.14	1.09	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.58	0.00	0.58	Σ SAR < 1.6, Not required
			Rear Face	0.95	0.14	1.09	Σ SAR < 1.6, Not required
			Left Side	0.45	0.06	0.51	Σ SAR < 1.6, Not required
			Right Side	0.54	0.00	0.54	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.10	0.00	0.10	Σ SAR < 1.6, Not required
32	LTE 13 + WLAN (NII)	Head	Right Cheek	0.90	0.19	1.09	Σ SAR < 1.6, Not required
			Right Tilted	0.44	0.06	0.50	Σ SAR < 1.6, Not required
			Left Cheek	0.83	0.35	1.18	Σ SAR < 1.6, Not required
			Left Tilted	0.47	0.08	0.55	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.58	0.04	0.62	Σ SAR < 1.6, Not required
			Rear Face	0.95	0.17	1.12	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.58	0.03	0.61	Σ SAR < 1.6, Not required
			Rear Face	0.95	0.17	1.12	Σ SAR < 1.6, Not required
			Left Side	0.45	0.07	0.52	Σ SAR < 1.6, Not required
			Right Side	0.54	0.01	0.55	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.10	0.00	0.10	Σ SAR < 1.6, Not required
33	LTE 13 + BT (DSS)	Body-Worn	Front Face	0.58	0.30	0.88	Σ SAR < 1.6, Not required
			Rear Face	0.95	0.30	1.25	Σ SAR < 1.6, Not required

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
34	LTE 14 + WLAN (DTS)	Head	Right Cheek	0.99	0.06	1.05	Σ SAR < 1.6, Not required
			Right Tilted	0.46	0.03	0.49	Σ SAR < 1.6, Not required
			Left Cheek	0.88	0.10	0.98	Σ SAR < 1.6, Not required
			Left Tilted	0.52	0.04	0.56	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.83	0.00	0.83	Σ SAR < 1.6, Not required
			Rear Face	0.84	0.14	0.98	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.83	0.00	0.83	Σ SAR < 1.6, Not required
			Rear Face	0.84	0.14	0.98	Σ SAR < 1.6, Not required
			Left Side	0.56	0.06	0.62	Σ SAR < 1.6, Not required
			Right Side	0.42	0.00	0.42	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.11	0.00	0.11	Σ SAR < 1.6, Not required
35	LTE 14 + WLAN (NII)	Head	Right Cheek	0.99	0.19	1.18	Σ SAR < 1.6, Not required
			Right Tilted	0.46	0.06	0.52	Σ SAR < 1.6, Not required
			Left Cheek	0.88	0.35	1.23	Σ SAR < 1.6, Not required
			Left Tilted	0.52	0.08	0.60	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.83	0.04	0.87	Σ SAR < 1.6, Not required
			Rear Face	0.84	0.17	1.01	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.83	0.03	0.86	Σ SAR < 1.6, Not required
			Rear Face	0.84	0.17	1.01	Σ SAR < 1.6, Not required
			Left Side	0.56	0.07	0.63	Σ SAR < 1.6, Not required
			Right Side	0.42	0.01	0.43	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.11	0.00	0.11	Σ SAR < 1.6, Not required
36	LTE 14 + BT (DSS)	Body-Worn	Front Face	0.83	0.30	1.13	Σ SAR < 1.6, Not required
			Rear Face	0.84	0.30	1.14	Σ SAR < 1.6, Not required

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
37	LTE 26 + WLAN (DTS)	Head	Right Cheek	0.79	0.06	0.85	Σ SAR < 1.6, Not required
			Right Tilted	0.48	0.03	0.51	Σ SAR < 1.6, Not required
			Left Cheek	1.11	0.10	1.21	Σ SAR < 1.6, Not required
			Left Tilted	0.76	0.04	0.80	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.99	0.00	0.99	Σ SAR < 1.6, Not required
			Rear Face	1.42	0.14	1.56	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.99	0.00	0.99	Σ SAR < 1.6, Not required
			Rear Face	1.42	0.14	1.56	Σ SAR < 1.6, Not required
			Left Side	0.78	0.06	0.84	Σ SAR < 1.6, Not required
			Right Side	0.77	0.00	0.77	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.16	0.00	0.16	Σ SAR < 1.6, Not required
38	LTE 26 + WLAN (NII)	Head	Right Cheek	0.79	0.19	0.98	Σ SAR < 1.6, Not required
			Right Tilted	0.48	0.06	0.54	Σ SAR < 1.6, Not required
			Left Cheek	1.11	0.35	1.46	Σ SAR < 1.6, Not required
			Left Tilted	0.76	0.08	0.84	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.99	0.04	1.03	Σ SAR < 1.6, Not required
			Rear Face	1.42	0.17	1.59	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.99	0.03	1.02	Σ SAR < 1.6, Not required
			Rear Face	1.42	0.17	1.59	Σ SAR < 1.6, Not required
			Left Side	0.78	0.07	0.85	Σ SAR < 1.6, Not required
			Right Side	0.77	0.01	0.78	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.16	0.00	0.16	Σ SAR < 1.6, Not required
39	LTE 26 + BT (DSS)	Body-Worn	Front Face	0.99	0.30	1.29	Σ SAR < 1.6, Not required
			Rear Face	1.42	0.30	1.72	Analyzed as below

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
40	LTE 30 + WLAN (DTS)	Head	Right Cheek	0.31	0.06	0.37	Σ SAR < 1.6, Not required
			Right Tilted	0.08	0.03	0.11	Σ SAR < 1.6, Not required
			Left Cheek	0.25	0.10	0.35	Σ SAR < 1.6, Not required
			Left Tilted	0.06	0.04	0.10	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.13	0.00	0.13	Σ SAR < 1.6, Not required
			Rear Face	0.48	0.14	0.62	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.13	0.00	0.13	Σ SAR < 1.6, Not required
			Rear Face	0.48	0.14	0.62	Σ SAR < 1.6, Not required
			Left Side	0.10	0.06	0.16	Σ SAR < 1.6, Not required
			Right Side	0.18	0.00	0.18	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.25	0.00	0.25	Σ SAR < 1.6, Not required
41	LTE 30 + WLAN (NII)	Head	Right Cheek	0.31	0.19	0.50	Σ SAR < 1.6, Not required
			Right Tilted	0.08	0.06	0.14	Σ SAR < 1.6, Not required
			Left Cheek	0.25	0.35	0.60	Σ SAR < 1.6, Not required
			Left Tilted	0.06	0.08	0.14	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.13	0.04	0.17	Σ SAR < 1.6, Not required
			Rear Face	0.48	0.17	0.65	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.13	0.03	0.16	Σ SAR < 1.6, Not required
			Rear Face	0.48	0.17	0.65	Σ SAR < 1.6, Not required
			Left Side	0.10	0.07	0.17	Σ SAR < 1.6, Not required
			Right Side	0.18	0.01	0.19	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.25	0.00	0.25	Σ SAR < 1.6, Not required
42	LTE 30 + BT (DSS)	Body-Worn	Front Face	0.13	0.30	0.43	Σ SAR < 1.6, Not required
			Rear Face	0.48	0.30	0.78	Σ SAR < 1.6, Not required

FCC SAR Test Report

No.	Conditions (SAR1 + SAR2)	Exposure Condition	Test Position	Max. SAR1	Max. SAR2	SAR Summation	SPLSR Analysis
43	LTE 66 + WLAN (DTS)	Head	Right Cheek	0.34	0.06	0.40	Σ SAR < 1.6, Not required
			Right Tilted	0.16	0.03	0.19	Σ SAR < 1.6, Not required
			Left Cheek	0.59	0.10	0.69	Σ SAR < 1.6, Not required
			Left Tilted	0.33	0.04	0.37	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.56	0.00	0.56	Σ SAR < 1.6, Not required
			Rear Face	1.38	0.14	1.52	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.56	0.00	0.56	Σ SAR < 1.6, Not required
			Rear Face	1.38	0.14	1.52	Σ SAR < 1.6, Not required
			Left Side	0.31	0.06	0.37	Σ SAR < 1.6, Not required
			Right Side	0.80	0.00	0.80	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.61	0.00	0.61	Σ SAR < 1.6, Not required
44	LTE 66 + WLAN (NII)	Head	Right Cheek	0.34	0.19	0.53	Σ SAR < 1.6, Not required
			Right Tilted	0.16	0.06	0.22	Σ SAR < 1.6, Not required
			Left Cheek	0.59	0.35	0.94	Σ SAR < 1.6, Not required
			Left Tilted	0.33	0.08	0.41	Σ SAR < 1.6, Not required
		Body-Worn	Front Face	0.56	0.04	0.60	Σ SAR < 1.6, Not required
			Rear Face	1.38	0.17	1.55	Σ SAR < 1.6, Not required
		Hotspot	Front Face	0.56	0.03	0.59	Σ SAR < 1.6, Not required
			Rear Face	1.38	0.17	1.55	Σ SAR < 1.6, Not required
			Left Side	0.31	0.07	0.38	Σ SAR < 1.6, Not required
			Right Side	0.80	0.01	0.81	Σ SAR < 1.6, Not required
			Top Side	0.00	0.02	0.02	Σ SAR < 1.6, Not required
			Bottom Side	0.61	0.00	0.61	Σ SAR < 1.6, Not required
45	LTE 66 + BT (DSS)	Body-Worn	Front Face	0.56	0.30	0.86	Σ SAR < 1.6, Not required
			Rear Face	1.38	0.30	1.68	Analyzed as below

FCC SAR Test Report

<SAR to Peak Location Separation Ratio Analysis>

The simultaneous transmitting antennas in each operating mode and exposure condition combination are considered one pair at a time to determine the SPLSR. When SAR is measured for both antennas in the pair, the peak location separation distance is computed by the following formula.

$$\text{Peak Location Separation Distance} = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

Where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the area or zoom scans.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna. Due to curvatures on the SAM phantom, when SAR is estimated for one of the antennas in an antenna pair, the measured peak SAR location will be translated onto the test device to determine the peak location separation for the antenna pair.

The SPLSR is determined by the following formula.

$$\text{SPLSR} = \frac{(\text{SAR}_1 + \text{SAR}_2)^{1.5}}{R_i}$$

Where SAR_1 and SAR_2 are the highest reported or estimated SAR for each antenna in the pair, and R_i is the separation distance between the peak SAR locations for the antenna pair in mm.

When the SPLSR is ≤ 0.04 , the simultaneous transmission SAR is not required. Otherwise, the enlarged zoom scan and volume scan post-processing procedures will be performed.

FCC SAR Test Report

1						
Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
WCDMA II Ch9538	Body	Rear Face	1.37	62.0	0.035	SPLSR < 0.04, Not required
BT			0.30			

Top Side

Left Side


Right Side

Bottom Side

GPS/BT / WLAN-0 Antenna


WWAN-0 Antenna

62mm

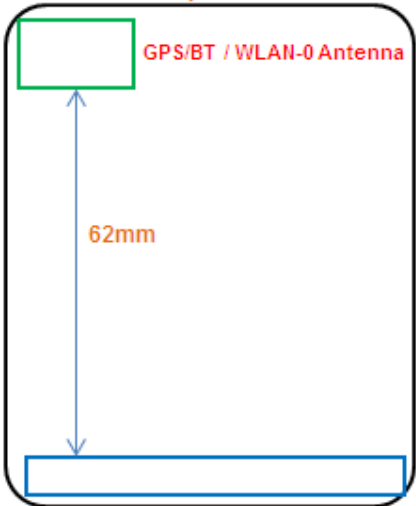


FCC SAR Test Report

2						
Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
WCDMA V Ch4132	Body	Rear Face	1.31	62.0	0.033	SPLSR < 0.04, Not required
BT			0.30			

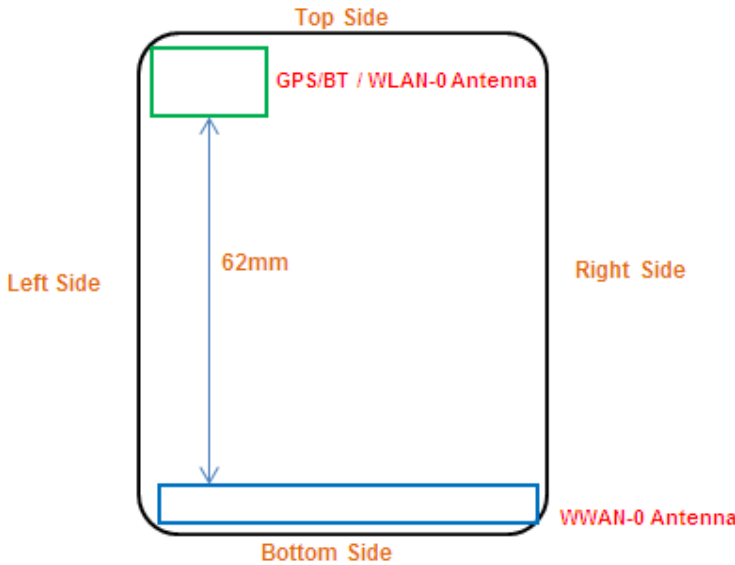


FCC SAR Test Report

3						
Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
LTE 4 Ch20300	Body	Rear Face	1.42	62.0	0.036	SPLSR < 0.04, Not required
BT			0.30			

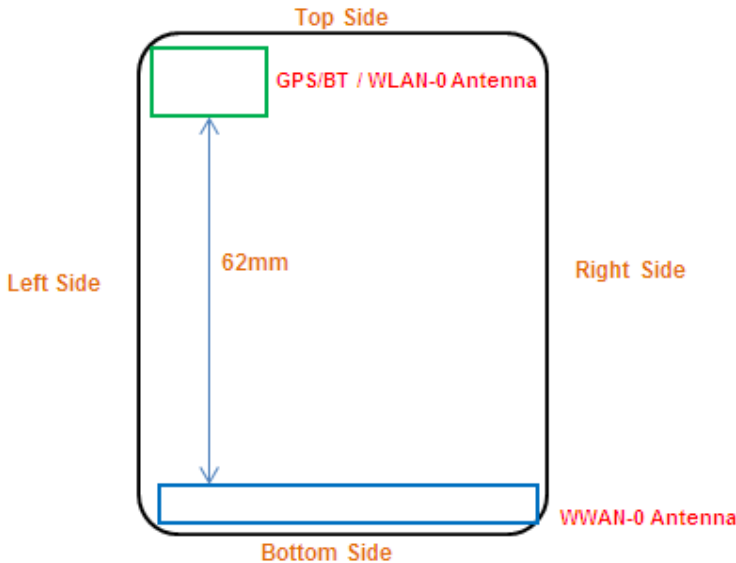

FCC SAR Test Report

4						
Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
LTE 12 Ch23130	Body	Rear Face	1.38	62.0	0.035	SPLSR < 0.04, Not required
BT			0.30			

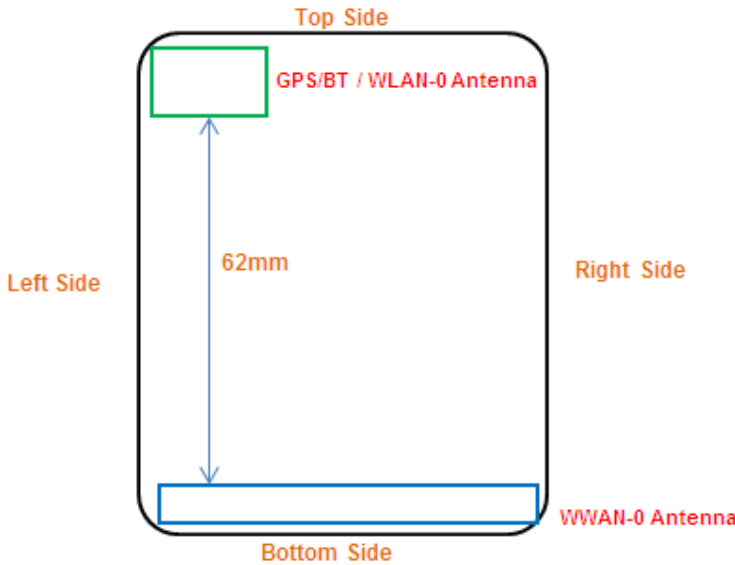

FCC SAR Test Report

5						
Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
LTE 26 Ch26765	Body	Rear Face	1.42	62.0	0.036	SPLSR < 0.04, Not required
BT			0.30			

Top Side

Left Side

Right Side

Bottom Side


GPS/BT / WLAN-0 Antenna

62mm

WWAN-0 Antenna

FCC SAR Test Report

6						
Conditions	Exposure Condition	Test Position	SAR Value (W/kg)	Peak Location Separation Distance (R _i , mm)	SPLSR	Simultaneous Transmission SAR Test
LTE 66 Ch132422	Body	Rear Face	1.38	62.0	0.035	SPLSR < 0.04, Not required
BT			0.30			

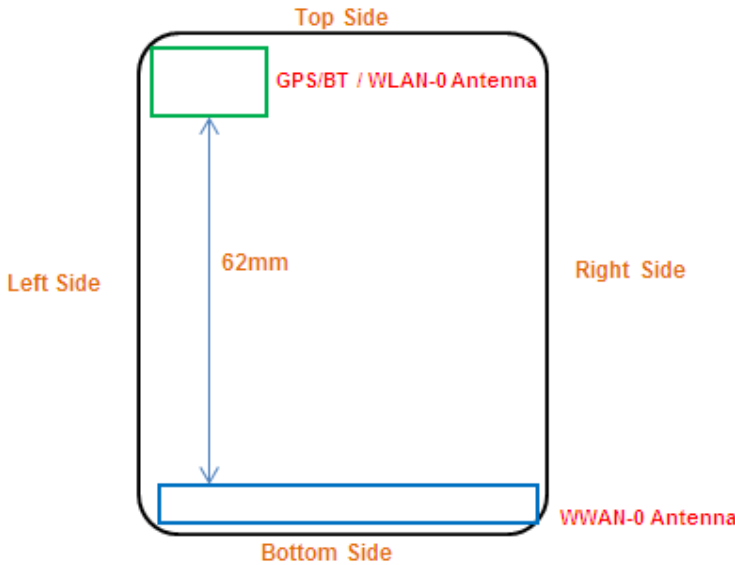

Test Engineer : Wiky Zhang, and York Liu

FCC SAR Test Report

5. Calibration of Test Equipment

Equipment	Manufacturer	Model	SN	Cal. Date	Cal. Interval
System Validation Dipole	SATIMO	DID750	SN 26/14 DIP0G750-325	Jun. 08, 2017	2 Years
System Validation Dipole	SATIMO	SID835	SN 18/11 DIPC 150	Jun. 08, 2017	2 Years
System Validation Dipole	SATIMO	SID1800	SN 18/11 DIPF 152	Jun. 08, 2017	2 Years
System Validation Dipole	SATIMO	SID1900	SN 18/11 DIPG 153	Jun. 08, 2017	2 Years
System Validation Dipole	SATIMO	SID2450	SN 18/11 DIPJ155	Jun. 08, 2017	2 Years
System Validation Dipole	SATIMO	SID2600	SN 26/14 DIP2G600-326	Jun. 08, 2017	2 Years
System Validation Dipole	SATIMO	SWG5500	SN 24/11/ WGA16	Jun. 08, 2017	2 Years
E-Field Probe	MVG	SSE2	SN 27/15 EPGO262	Jun. 07, 2018	1 Year
MultiMeter	Keithley	Multimate 2000	1331865	Jun. 21, 2018	1 Year
Radio Communication Analyzer	ANRITSU	MT8820C	6201300717	Jul. 24, 2018	1 Year
Wireless Communication Test Set	Agilent	E5515C	MY50260600	Jun. 28, 2018	1 Year
ENA Series Network Analyzer	Agilent	E5071C	MY46214638	Jul. 24, 2018	1 Year
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510355	Jun. 27, 2018	1Year
MXG Analog Signal Generator	KEYSIGHT	N5183A	MY50143024	Mar. 01, 2018	1 Year
Power Meter	Agilent	N1914A	MY52180044	Aug. 12, 2016	2 Years
Power Sensor	Agilent	E9304A H18	MY52050011	Jan. 04, 2018	1 Year
Power Meter	Agilent	ML2495A	1506002	Mar. 01, 2018	1 Year
Power Sensor	Agilent	MA2411B	1339353	Mar. 01, 2018	1 Year
Temp. & Humi. Recorder	CLOCK	HTC-1	157248	Jul. 26, 2018	1 Year
Electronic Thermometer	YONGFA	YF-160A	120100323	Sep. 22, 2017	1 Year
Coupler	Woken	0110A056020-10	COM27RW1A3	Sep. 20, 2017	1 Year

FCC SAR Test Report

6. Measurement Uncertainty

Source of Uncertainty	Tolerance (± %)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)	Vi Veff
Measurement System								
Probe Calibration	6.0	N	1	1	1	6.0	6.0	∞
Axial Isotropy	5.9	R	1.732	0.7	0.7	2.4	2.4	∞
Hemispherical Isotropy	12.2	R	1.732	0.7	0.7	4.9	4.9	∞
Boundary Effects	1.0	R	1.732	1	1	0.6	0.6	∞
Linearity	5.9	R	1.732	1	1	3.4	3.4	∞
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6	∞
Readout Electronics	1.0	N	1	1	1	1.0	1.0	∞
Response Time	0.0	R	1.732	1	1	0.0	0.0	∞
Integration Time	2.6	R	1.732	1	1	1.5	1.5	∞
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7	∞
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7	∞
Probe Positioner	1.4	R	1.732	1	1	0.8	0.8	∞
Probe Positioning	1.4	R	1.732	1	1	0.8	0.8	∞
Max. SAR Eval.	2.3	R	1.732	1	1	1.3	1.3	∞
Test Sample Related								
Device Positioning	2.3	N	1	1	1	2.3	2.3	35
Device Holder	2.7	N	1	1	1	2.7	2.7	12
Power Drift	5.0	R	1.732	1	1	2.9	2.9	∞
Power Scaling	0.0	R	1.732	1	1	0.0	0.0	∞
Phantom and Setup								
Phantom Uncertainty	4.0	R	1.732	1	1	2.3	2.3	∞
SAR correction	1.2	R	1.732	1	0.84	0.7	0.6	∞
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0	∞
Liquid Conductivity (mea.)	4.1	R	1.732	0.78	0.71	1.8	1.7	∞
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4	∞
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8	∞
Liquid Permittivity (mea.)	5.0	R	1.732	0.23	0.26	0.7	0.8	∞
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1	∞
Combined Standard Uncertainty (K = 1)						± 11.4 %	± 11.3 %	2923
Expanded Uncertainty (K = 2)						± 22.7 %	± 22.6 %	

FCC SAR Test Report

7. Information on the Testing Laboratories

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Add: No. B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industry Park, Nanshan District, Shenzhen, Guangdong, China

Tel: 86-755-8869-6566

Fax: 86-755-8869-6577

Email: customerservice.dg@cn.bureauveritas.com

Web Site: www.bureauveritas.com

The road map of all our labs can be found in our web site also.

---END---

Appendix A. SAR Plots of System Verification

The plots for system verification with largest deviation for each SAR system combination are shown as follows.

System Verification Plots




Product Description: Dipole

Model: SID750

Test Date: Sep 18, 2018

Ambient Temperature: 22.7°C; Liquid Temperature: 21.3°C

Medium(liquid type)	HL750
Frequency (MHz)	750.000000
Relative permittivity (real part)	41.92
Conductivity (S/m)	0.86
Input power	100mW
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	1.74
Sensor-surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	0.450000
SAR 10g (W/Kg)	0.574668
SAR 1g (W/Kg)	0.837214

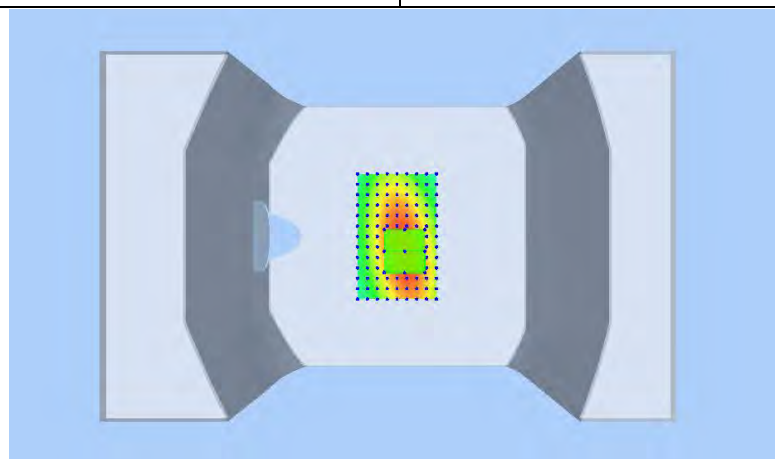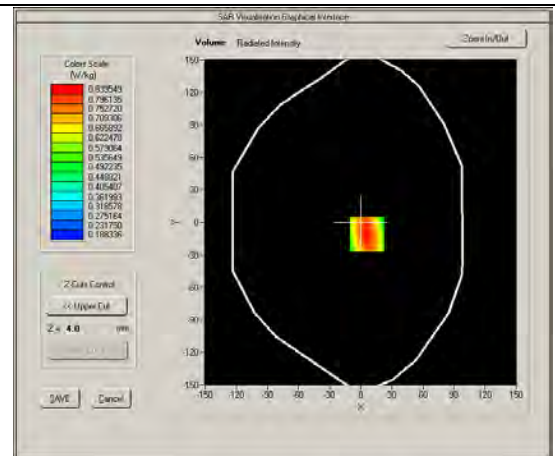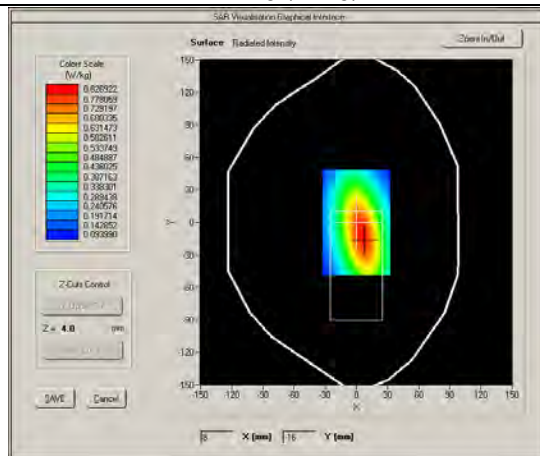




Product Description: Dipole

Model: SID750

Test Date: Sep 18, 2018

Ambient Temperature: 22.7°C; Liquid Temperature: 21.3°C

Medium(liquid type)	BL750
Frequency (MHz)	750.000000
Relative permittivity (real part)	56.52
Conductivity (S/m)	0.97
Input power	100mW
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	1.81
Sensor-surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-0.120000
SAR 10g (W/Kg)	0.617568
SAR 1g (W/Kg)	0.901559

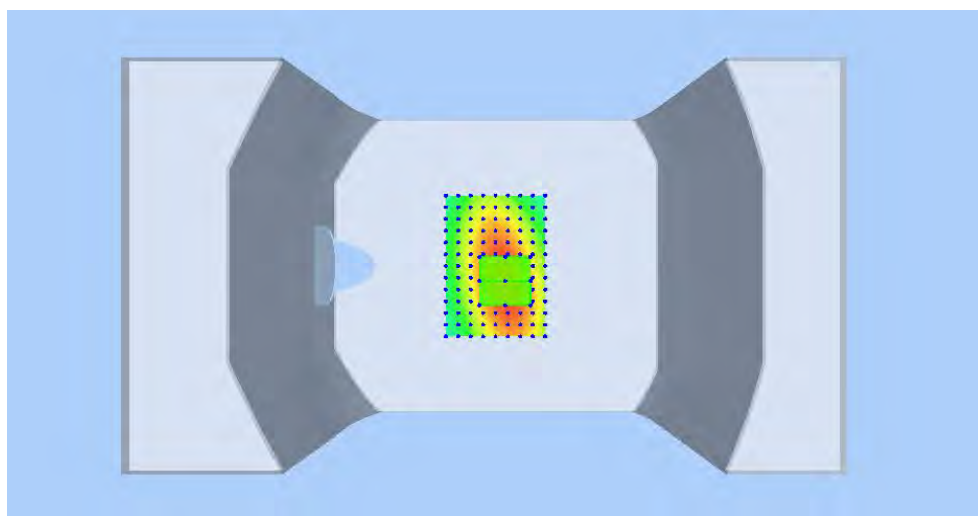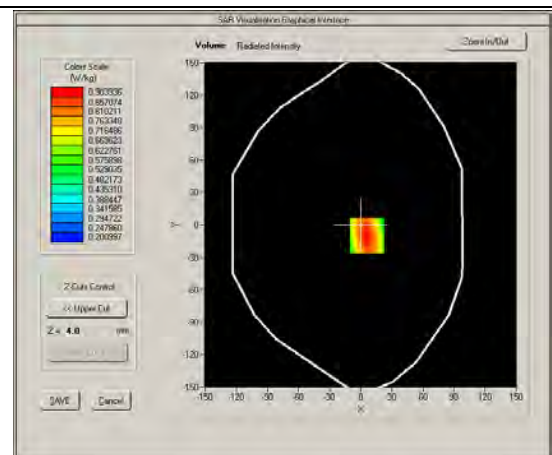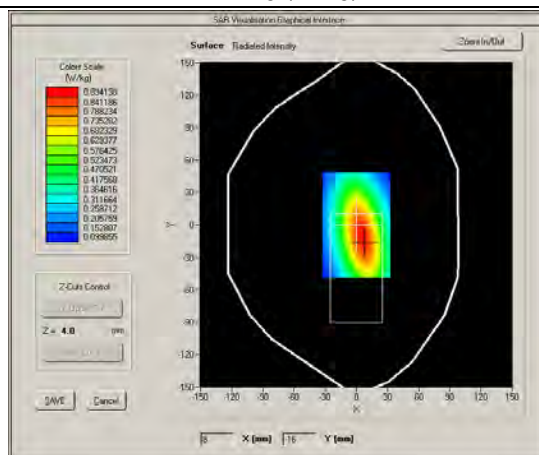




Product Description: Dipole

Model: SID835

Test Date: Sep 20, 2018

Ambient Temperature: 22.7°C; Liquid Temperature: 21.5°C

Medium(liquid type)	HL835
Frequency (MHz)	835.000000
Relative permittivity (real part)	41.13
Conductivity (S/m)	0.93
Input power	100mW
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	1.74
Sensor-surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	0.340000
SAR 10g (W/Kg)	0.656424
SAR 1g (W/Kg)	0.978189

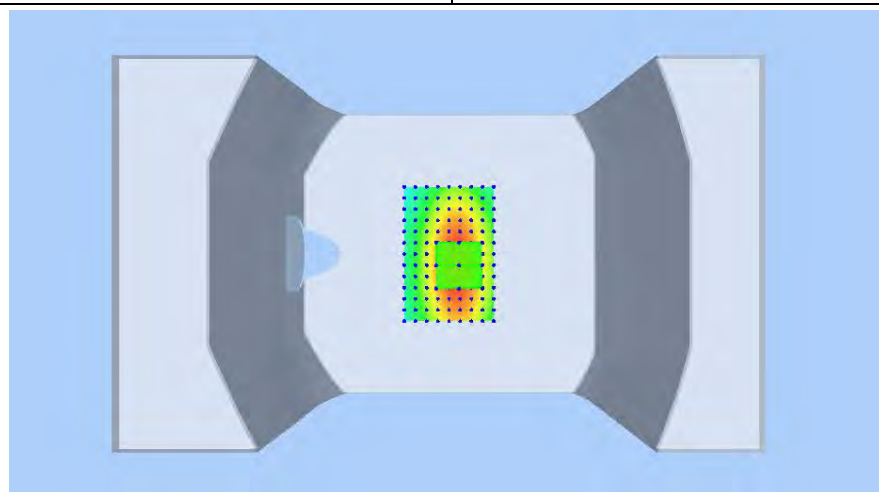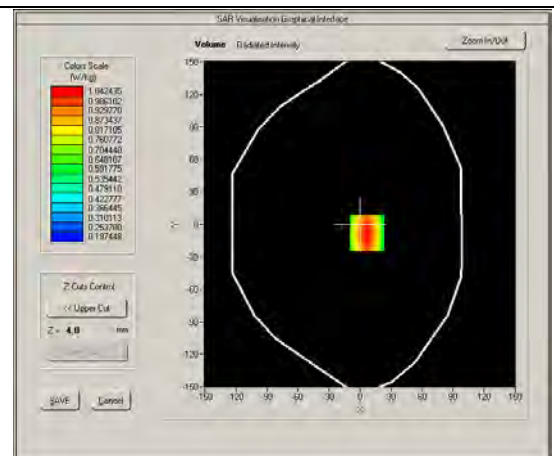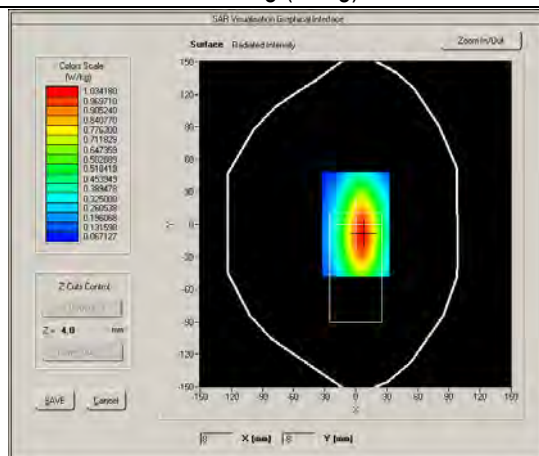




Product Description: Dipole

Model: SID835

Test Date: Sep 20, 2018

Ambient Temperature: 22.7°C; Liquid Temperature: 21.5°C

Medium(liquid type)	BL835
Frequency (MHz)	835.000000
Relative permittivity (real part)	55.43
Conductivity (S/m)	0.95
Input power	100mW
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	1.81
Sensor-surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-0.520000
SAR 10g (W/Kg)	0.642325
SAR 1g (W/Kg)	0.964004

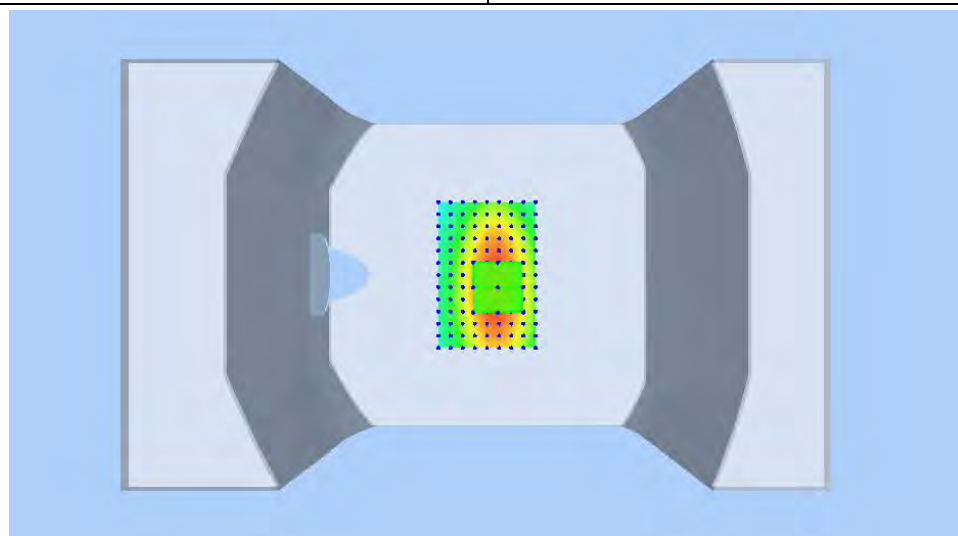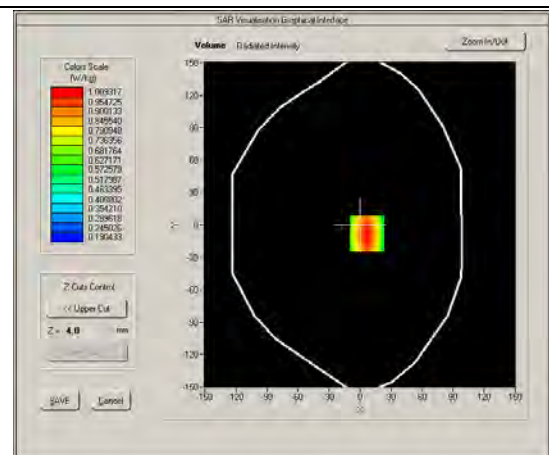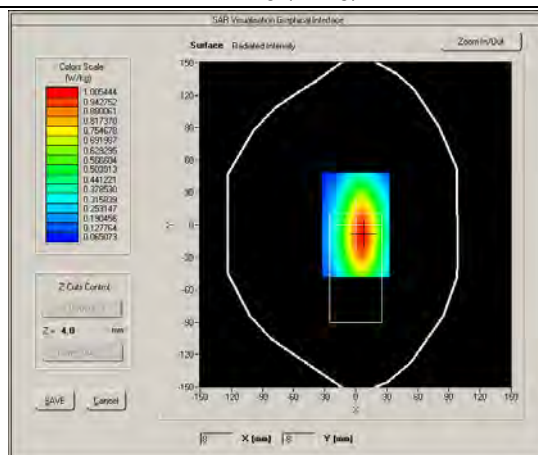




Product Description: Dipole

Model: SID1800

Test Date: Sep 26, 2018

Ambient Temperature: 22.5°C; Liquid Temperature: 21.3°C

Medium(liquid type)	HL1800
Frequency (MHz)	1800.000
Relative permittivity (real part)	40.24
Conductivity (S/m)	1.42
Input power	100mW
E-Field Probe	SN 27/15 EPG0262
Crest factor	1.0
Conversion Factor	2.01
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-0.540000
SAR 10g (W/Kg)	1.973467
SAR 1g (W/Kg)	3.652235

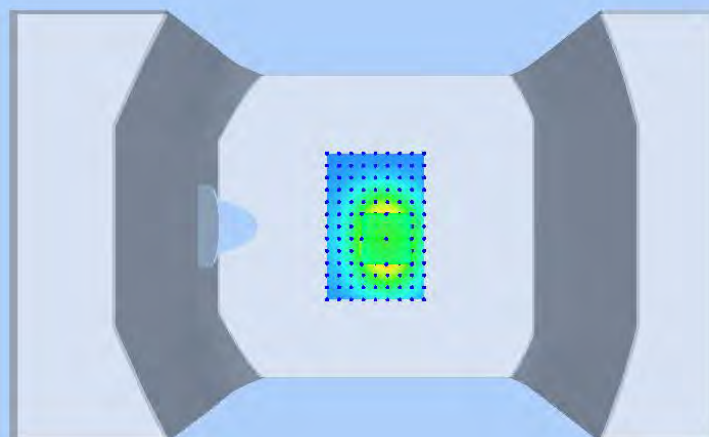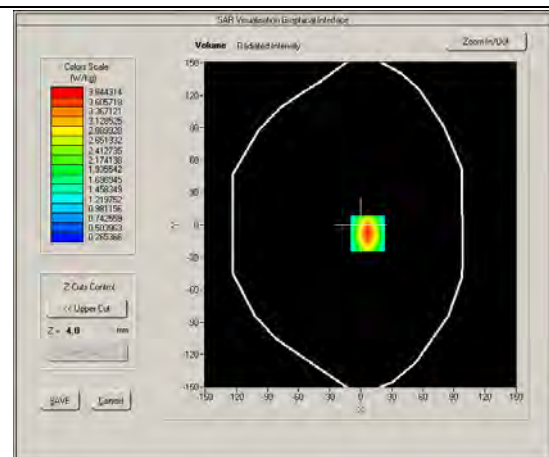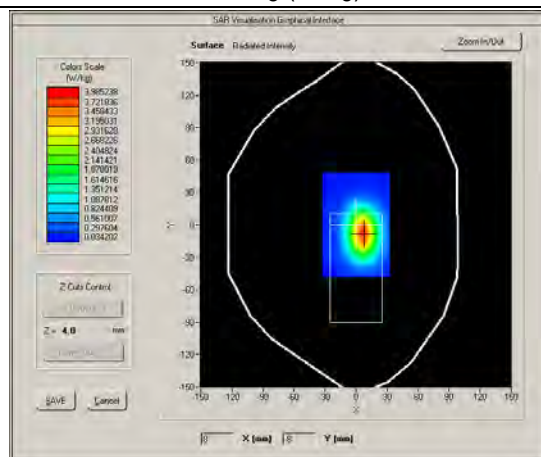




Product Description: Dipole

Model: SID1800

Test Date: Sep 26, 2018

Ambient Temperature: 22.5°C; Liquid Temperature: 21.3°C

Medium(liquid type)	BL1800
Frequency (MHz)	1800.000
Relative permittivity (real part)	55.62
Conductivity (S/m)	1.56
Input power	100mW
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	2.05
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-1.030000
SAR 10g (W/Kg)	2.112376
SAR 1g (W/Kg)	4.052274

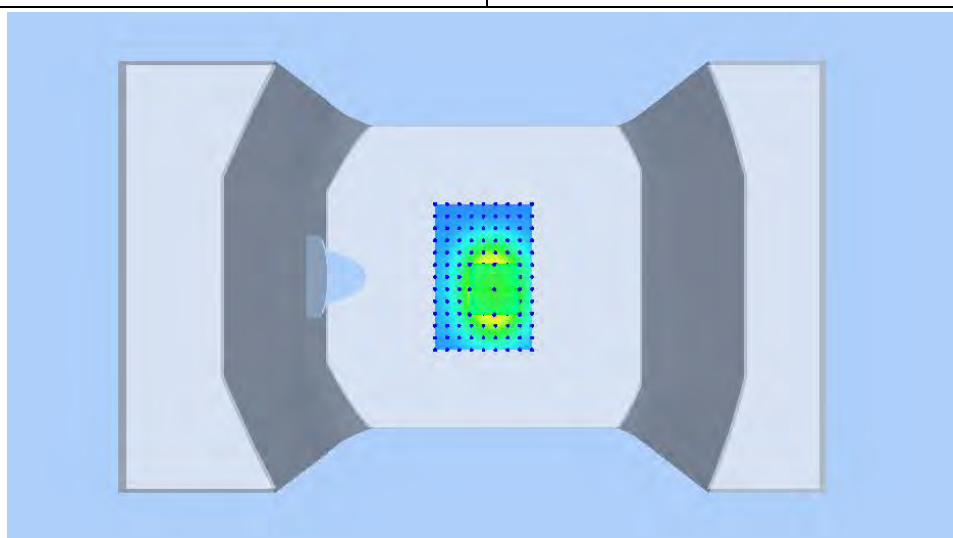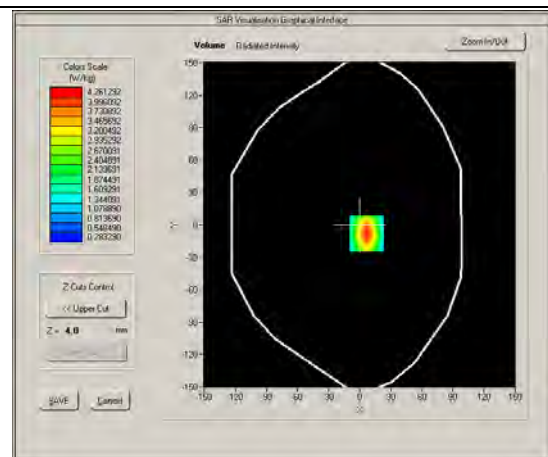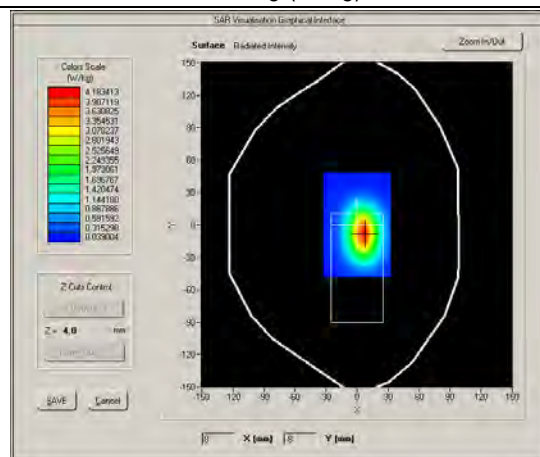




Product Description: Dipole

Model: SID1900

Test Date: Sep 28, 2018

Ambient Temperature: 22.5°C; Liquid Temperature: 21.3°C

Medium(liquid type)	HL1900
Frequency (MHz)	1900.000
Relative permittivity (real part)	39.88
Conductivity (S/m)	1.37
Input power	100mW
E-Field Probe	SN 27/15 EPG0262
Crest factor	1.0
Conversion Factor	2.01
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-1.210000
SAR 10g (W/Kg)	1.984678
SAR 1g (W/Kg)	3.783263

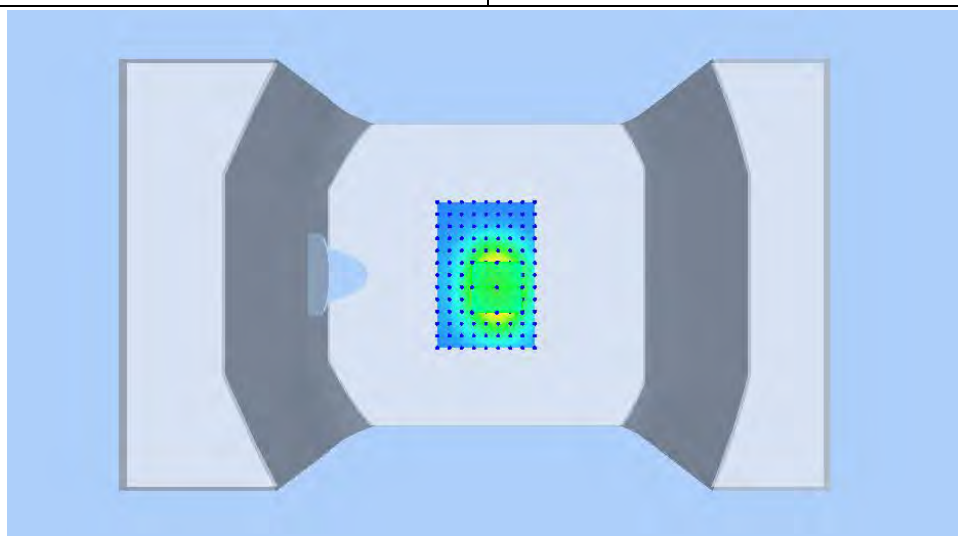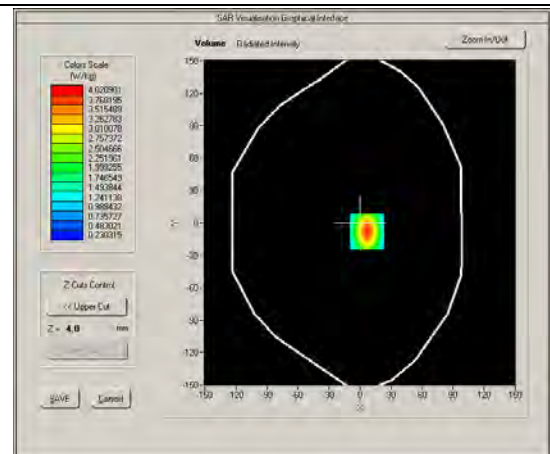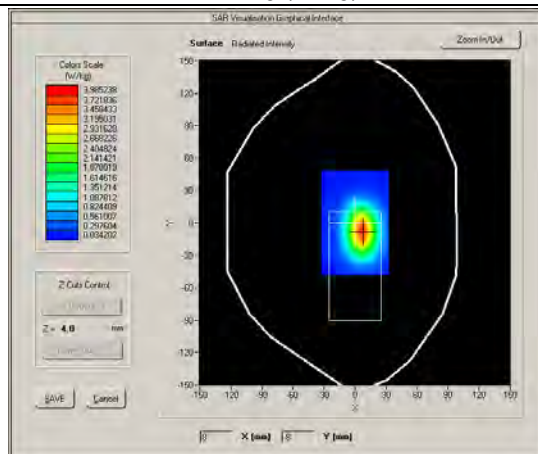




Product Description: Dipole

Model: SID1900

Test Date: Sep 28, 2018

Ambient Temperature: 22.5°C; Liquid Temperature: 21.3°C

Medium(liquid type)	BL1900
Frequency (MHz)	1900.000
Relative permittivity (real part)	53.11
Conductivity (S/m)	1.55
Input power	100mW
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	2.05
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-1.560000
SAR 10g (W/Kg)	2.144235
SAR 1g (W/Kg)	4.161185

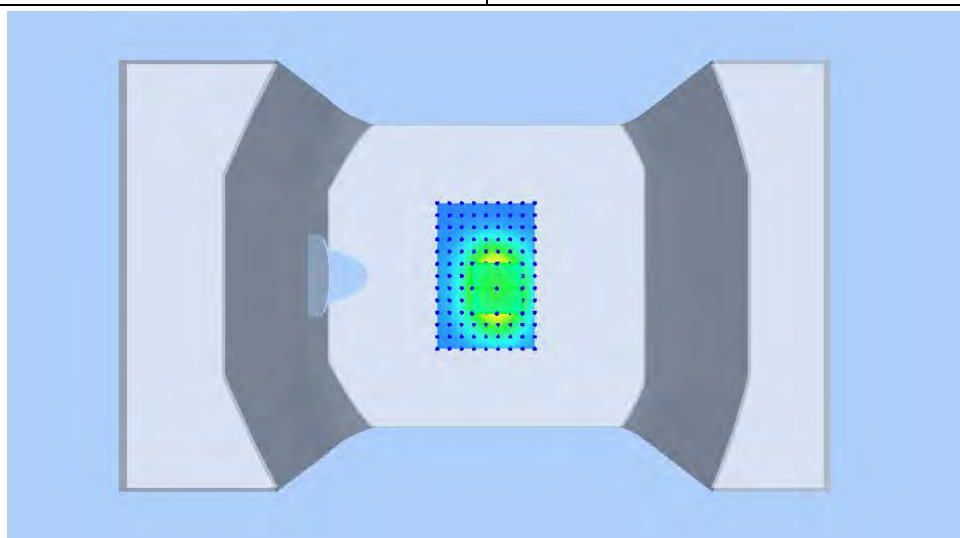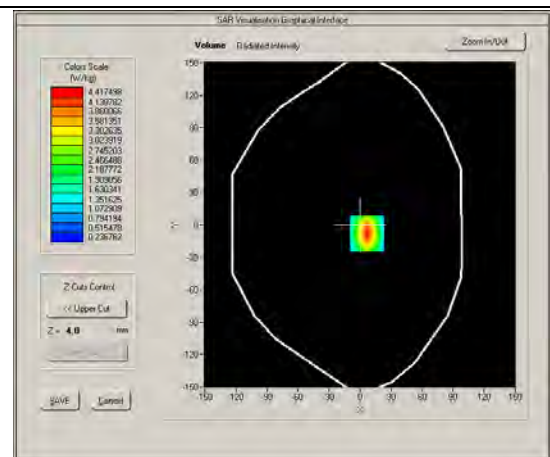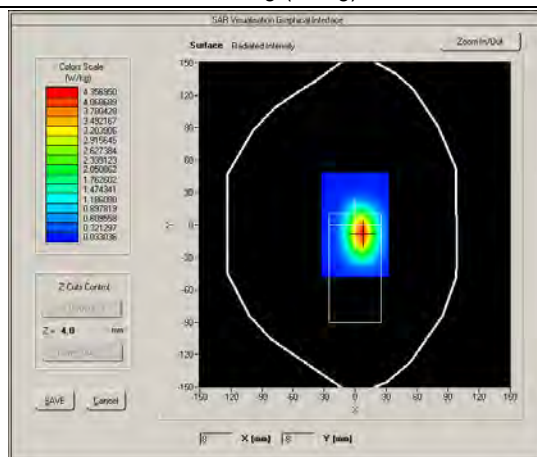




Product Description: Dipole

Model: SID2450

Test Date: Sep 30, 2018

Ambient Temperature: 22.3°C; Liquid Temperature: 21.0°C

Medium(liquid type)	HL_2450
Frequency (MHz)	2450.000
Relative permittivity (real part)	38.85
Conductivity (S/m)	1.84
Input power	100mW
Crest factor	1.0
E-Field Probe	SN 27/15 EPGO262
Conversion Factor	2.04
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Variation (%)	-1.260000
SAR 10g (W/Kg)	2.534732
SAR 1g (W/Kg)	5.233384

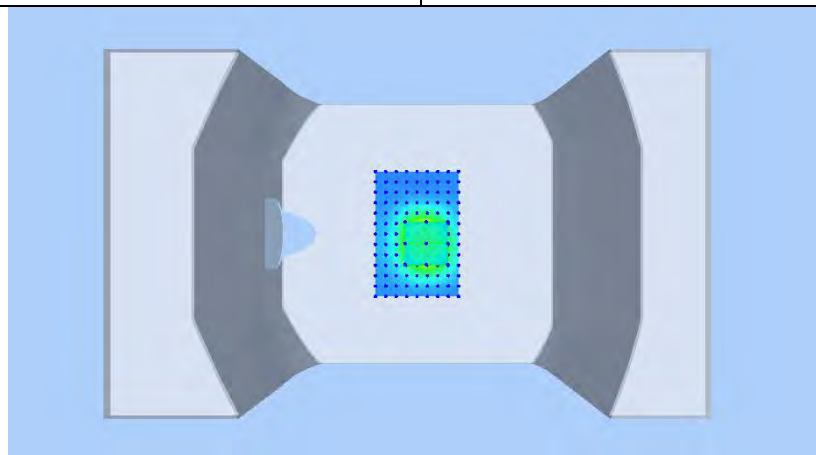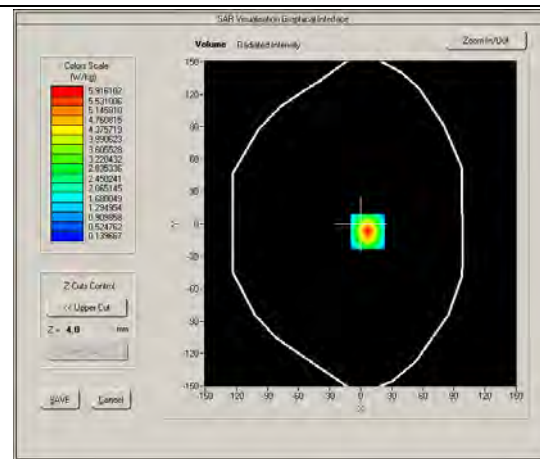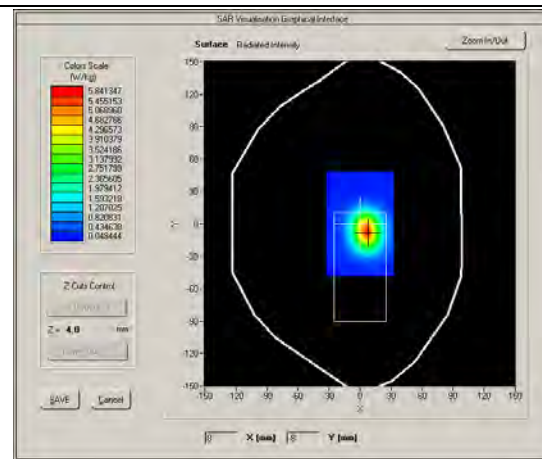



Product Description: Dipole

Model: SID2450

Test Date: Sep 30, 2018

Ambient Temperature: 22.3°C; Liquid Temperature: 21.0°C

Medium(liquid type)	BL_2450
Frequency (MHz)	2450
Relative permittivity (real part)	52.22
Conductivity (S/m)	1.96
Input power	100mW
Crest factor	1.0
E-Field Probe	SN 27/15 EPGO262
Conversion Factor	2.12
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Variation (%)	-1.160000
SAR 10g (W/Kg)	2.403774
SAR 1g (W/Kg)	5.124238

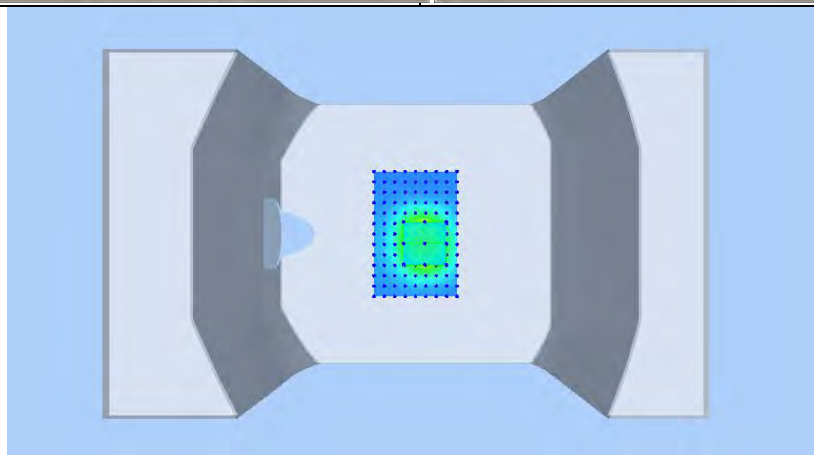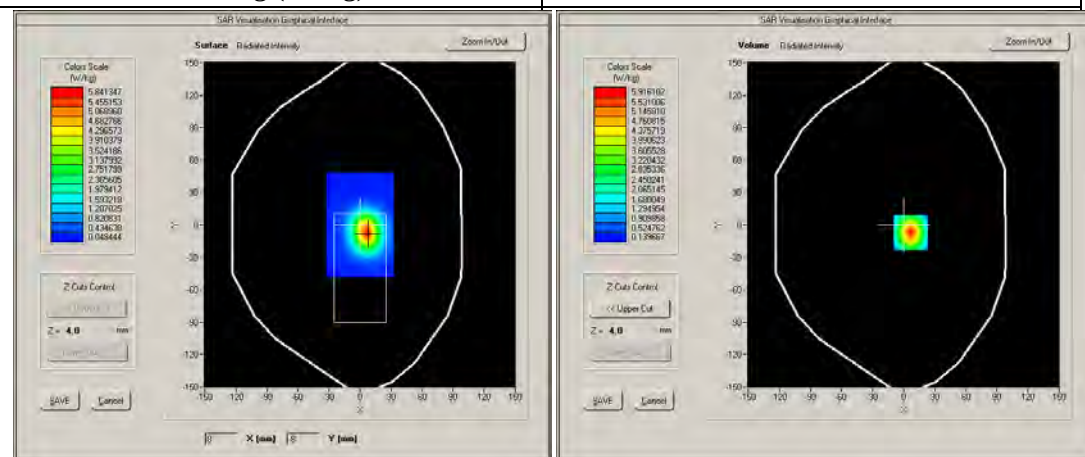




Product Description: Dipole

Model: SID2600

Test Date: Oct 8, 2018

Ambient Temperature: 22.2°C; Liquid Temperature: 21.4°C

Medium(liquid type)	HSL_2600
Frequency (MHz)	2600.000
Relative permittivity (real part)	38.91
Conductivity (S/m)	1.94
Input power	100mW
E-Field Probe	SN 27/15 EPG0262
Crest factor	1.0
Conversion Factor	2.28
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Variation (%)	-0.230000
SAR 10g (W/Kg)	2.426654
SAR 1g (W/Kg)	5.306629

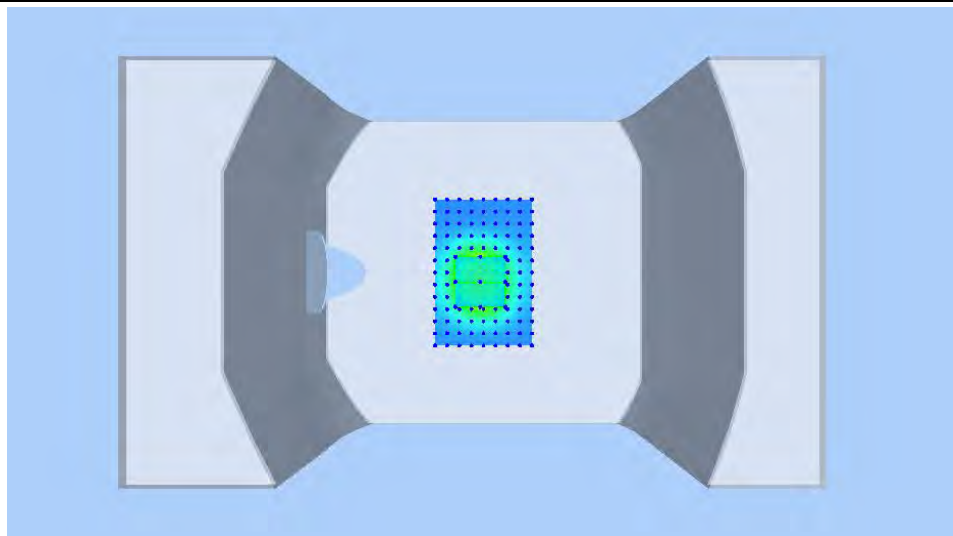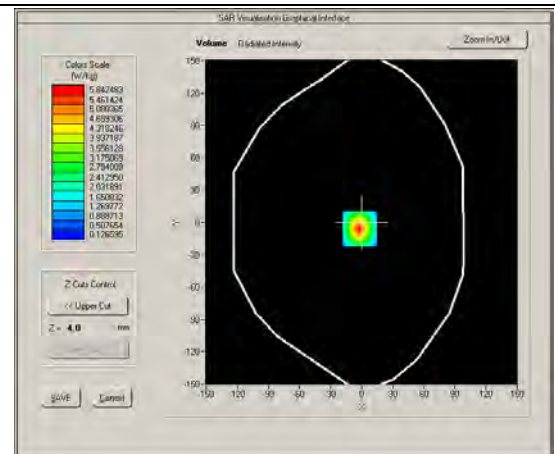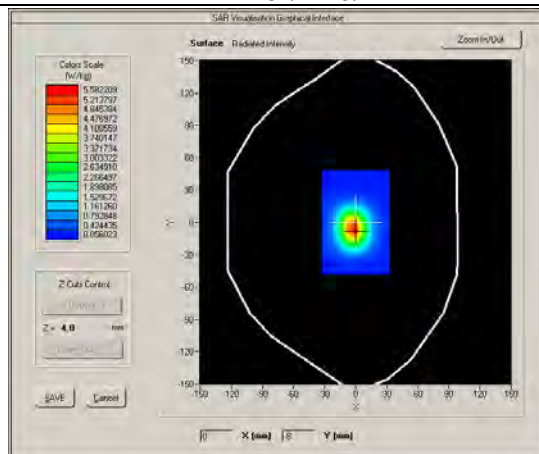




Product Description: Dipole

Model: SID2600

Test Date: Oct 8, 2018

Ambient Temperature: 22.2°C; Liquid Temperature: 21.4°C

Medium(liquid type)	MSL_2600
Frequency (MHz)	2600.000
Relative permittivity (real part)	52.00
Conductivity (S/m)	2.14
Input power	100mW
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	2.34
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Variation (%)	-0.380000
SAR 10g (W/Kg)	2.582572
SAR 1g (W/Kg)	5.643956

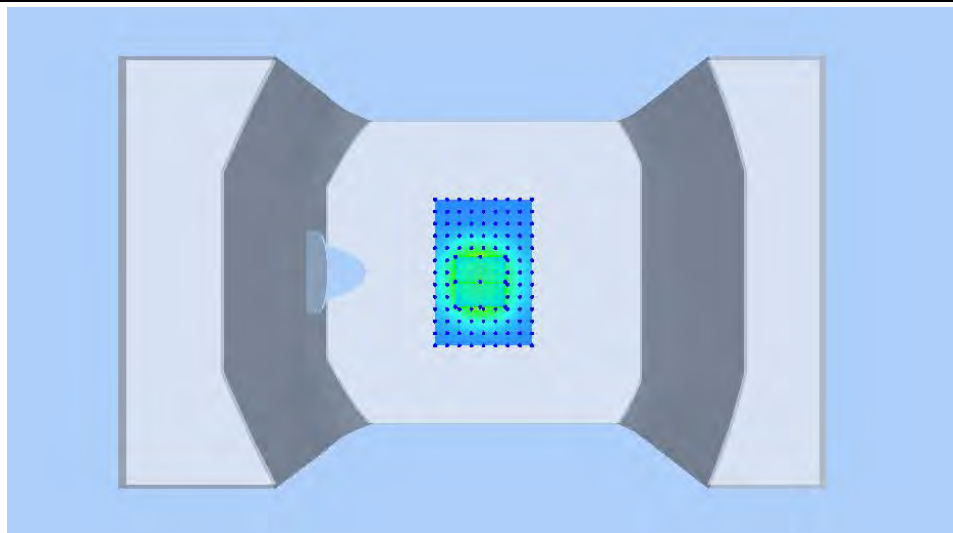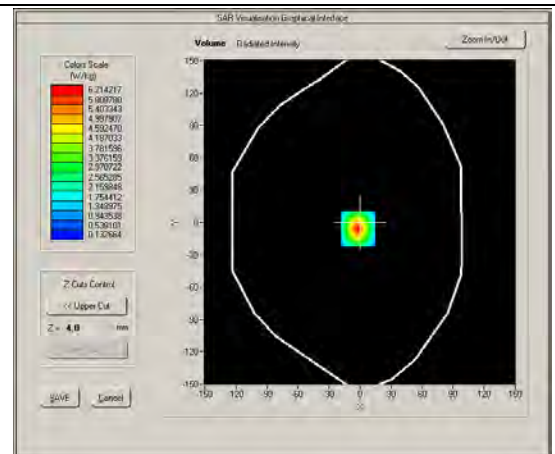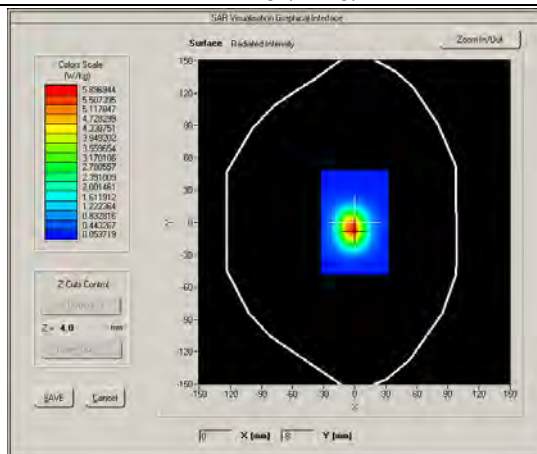




Product Description: Dipole

Model: SWG5500

Test Date: Oct 9, 2018

Ambient Temperature: 22.6°C; Liquid Temperature: 21.6°C

Medium(liquid type)	HL5200
Frequency (MHz)	5200.000
Relative permittivity (real part)	36.11
Conductivity (S/m)	4.56
Input power	100mW
Crest factor	1.0
E-Field Probe	SN 27/15 EPGO262
Conversion Factor	1.51
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Variation (%)	-1.13000
SAR 10g (W/Kg)	5.726557
SAR 1g (W/Kg)	15.58702

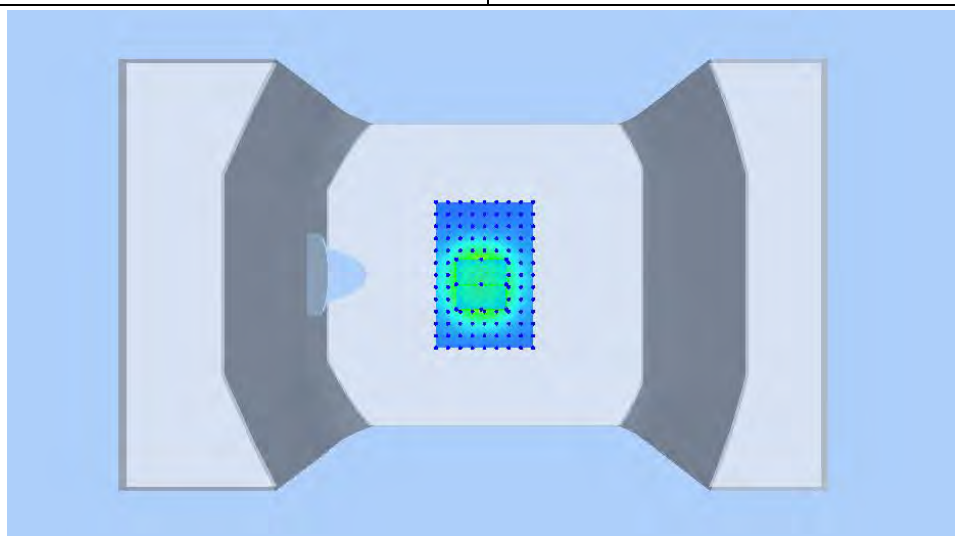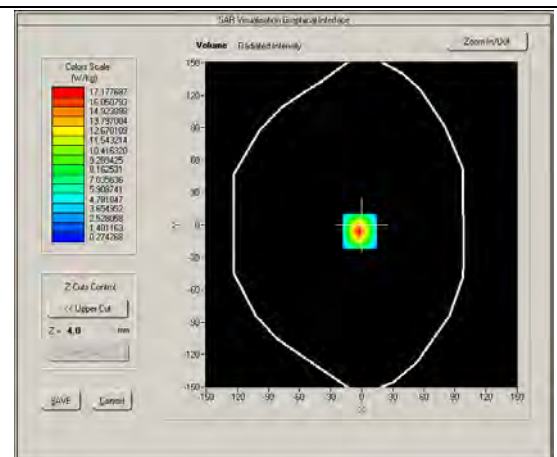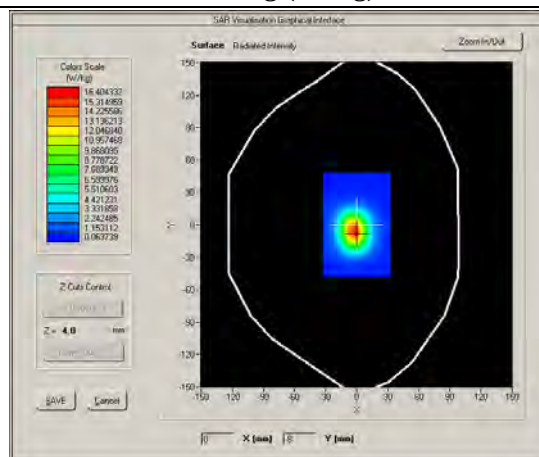




Product Description: Dipole

Model: SWG5500

Test Date: Oct 9, 2018

Ambient Temperature: 22.6°C; Liquid Temperature: 21.6°C

Medium(liquid type)	BL5200
Frequency (MHz)	5200.000
Relative permittivity (real part)	48.61
Conductivity (S/m)	5.61
Input power	100mW
Crest factor	1.0
E-Field Probe	SN 27/15 EPGO262
Conversion Factor	1.51
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Variation (%)	-1.10000
SAR 10g (W/Kg)	5.598688
SAR 1g (W/Kg)	14.556045

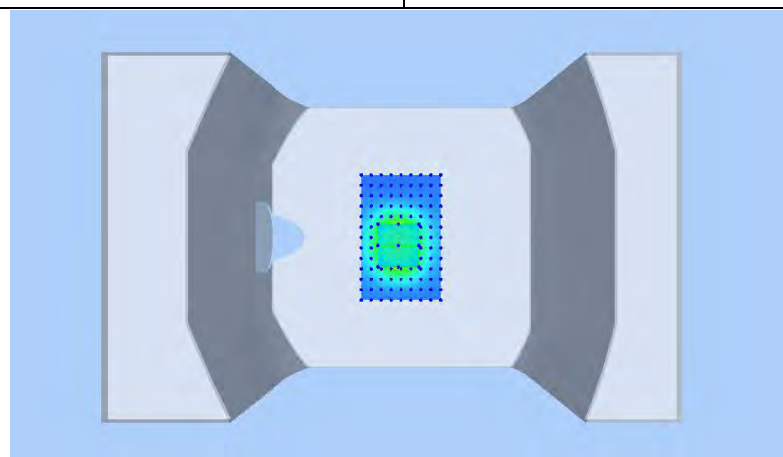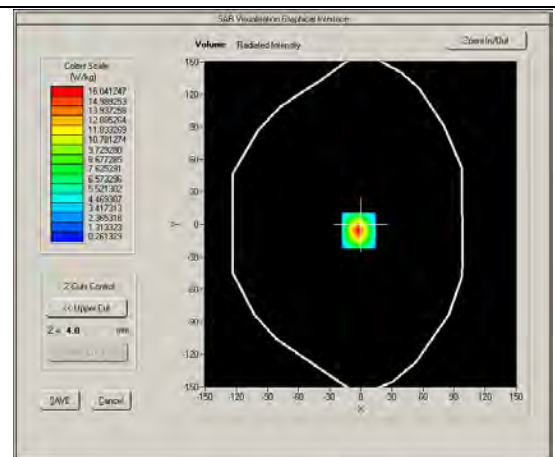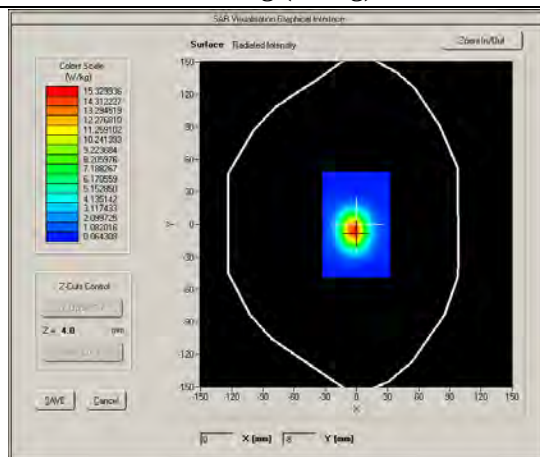




Product Description: Dipole

Model: SWG5500

Test Date: Oct 10, 2018

Ambient Temperature: 22.4°C; Liquid Temperature: 21.4°C

Medium(liquid type)	HL5600
Frequency (MHz)	5600.000
Relative permittivity (real part)	35.56
Conductivity (S/m)	5.17
Input power	100mW
Crest factor	1.0
E-Field Probe	SN 27/15 EPGO262
Conversion Factor	1.55
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Variation (%)	-0.270000
SAR 10g (W/Kg)	6.832385
SAR 1g (W/Kg)	16.869352

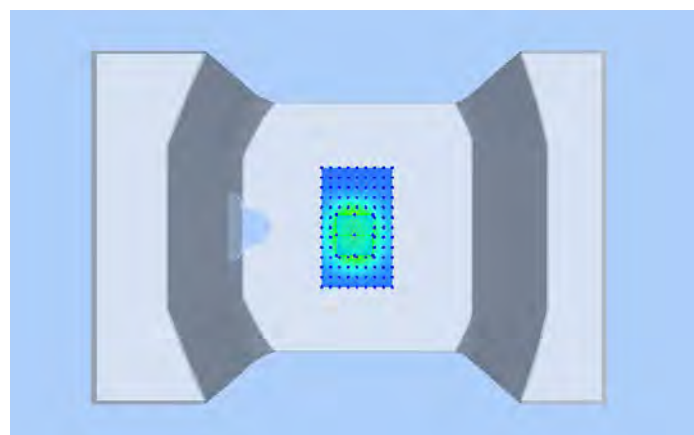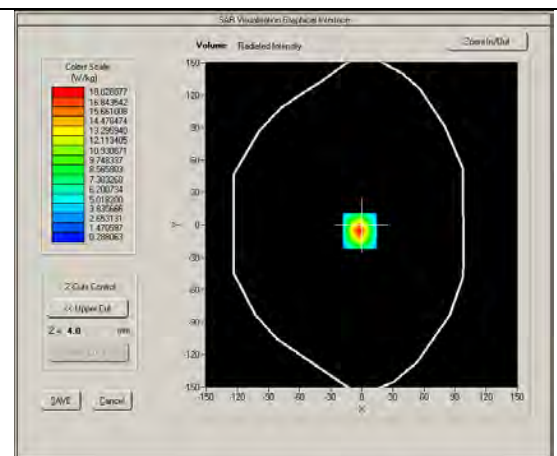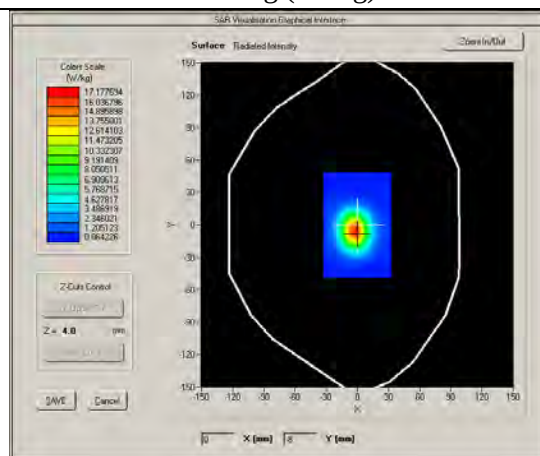




Product Description: Dipole

Model: SWG5500

Test Date: Oct 10, 2018

Ambient Temperature: 22.4°C; Liquid Temperature: 21.4°C

Medium(liquid type)	BL5600
Frequency (MHz)	5600.000
Relative permittivity (real part)	46.89
Conductivity (S/m)	5.62
Input power	100mW
Crest factor	1.0
E-Field Probe	SN 27/15 EPGO262
Conversion Factor	1.55
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Variation (%)	-0.350000
SAR 10g (W/Kg)	8.142952
SAR 1g (W/Kg)	17.189115

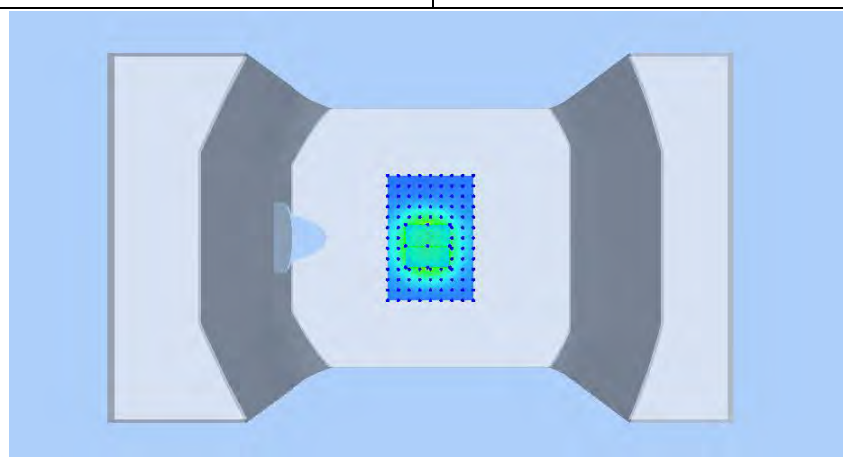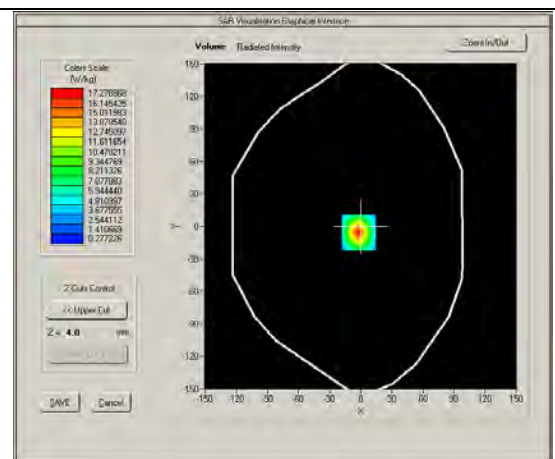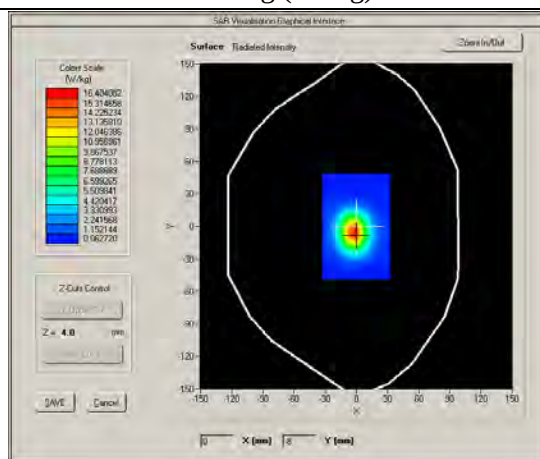




Product Description: Dipole

Model: SWG5500

Test Date: Oct 11, 2018

Ambient Temperature: 22.8°C; Liquid Temperature: 21.1°C

Medium(liquid type)	HL5800
Frequency (MHz)	5800.000
Relative permittivity (real part)	35.26
Conductivity (S/m)	5.23
Input power	100mW
Crest factor	1.0
E-Field Probe	SN 27/15 EPGO262
Conversion Factor	1.44
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Variation (%)	-0.750000
SAR 10g (W/Kg)	6.975739
SAR 1g (W/Kg)	17.662545

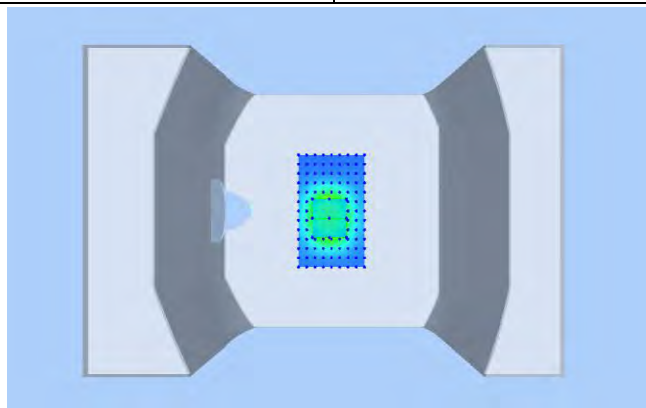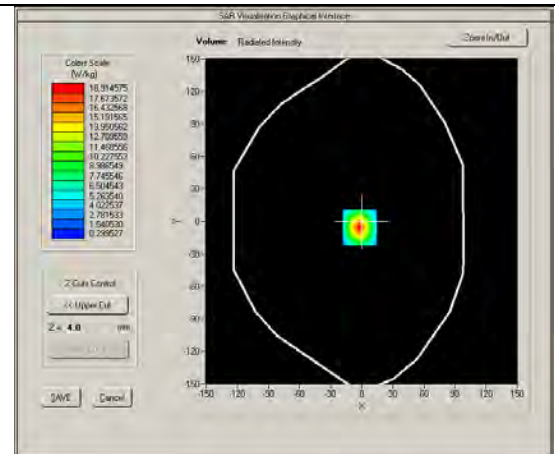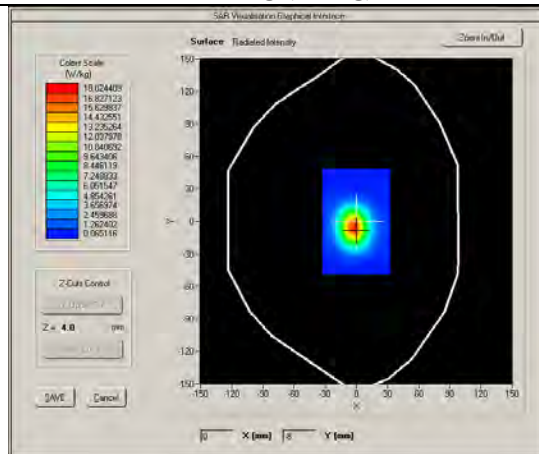




Product Description: Dipole

Model: SWG5500

Test Date: Oct 11, 2018

Ambient Temperature: 22.8°C; Liquid Temperature: 21.1°C

Medium(liquid type)	BL5800
Frequency (MHz)	5800.000
Relative permittivity (real part)	47.64
Conductivity (S/m)	6.17
Input power	100mW
Crest factor	1.0
E-Field Probe	SN 27/15 EPGO262
Conversion Factor	1.44
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Variation (%)	-1.760000
SAR 10g (W/Kg)	7.408943
SAR 1g (W/Kg)	17.356394

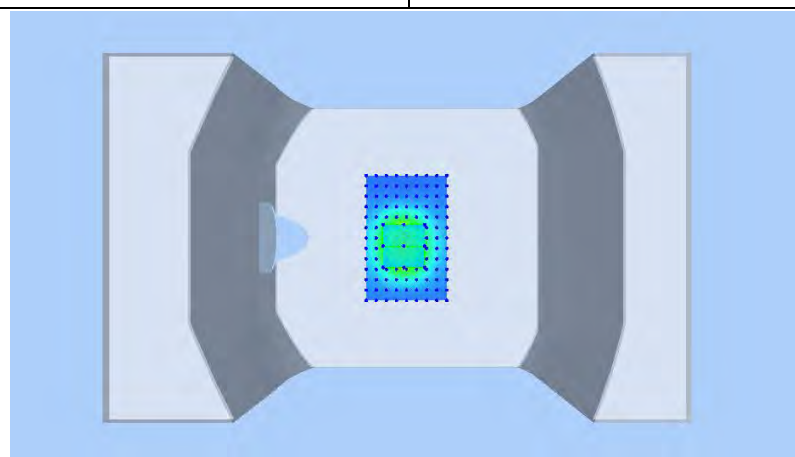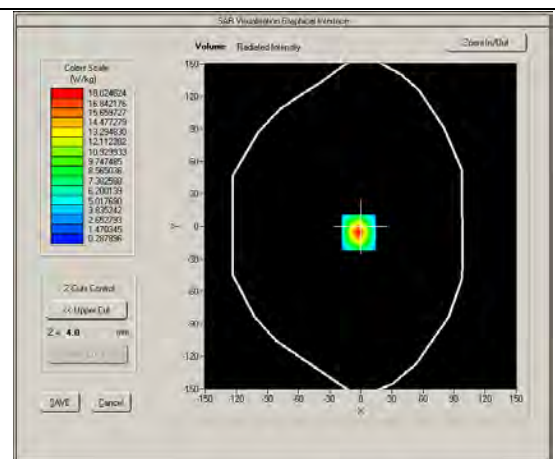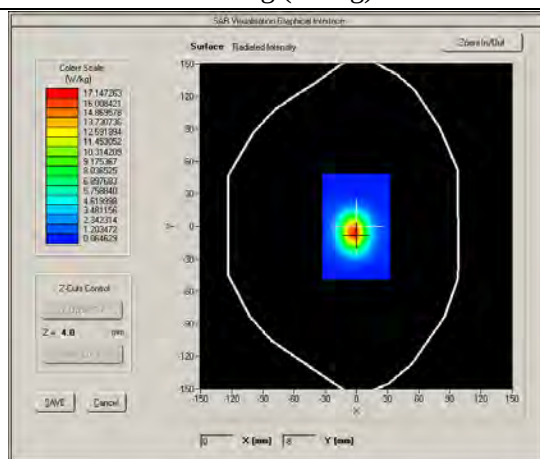

FCC SAR Test Report

Appendix B. SAR Plots of SAR Measurement

The SAR plots for highest measured SAR in each exposure configuration, wireless mode and frequency band combination, and measured SAR > 1.5 W/kg are shown as follows.

Maximum SAR measurement Plots




1# GSM850_GPRS 12_Left Cheek_Ch189

DUT:180628W003

Test Date: Sep 20, 2018

Ambient Temperature: 22.7°C; Liquid Temperature: 21.5°C

Medium(liquid type)	HL835
Frequency (MHz)	836.4
Relative permittivity (real part)	41.13
Conductivity (S/m)	0.93
E-Field Probe	SN 27/15 EPGO262
Crest factor	2.0
Conversion Factor	1.74
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	3.510000
SAR 10g (W/Kg)	0.317526
SAR 1g (W/Kg)	0.454157
SURFACE SAR	VOLUME SAR

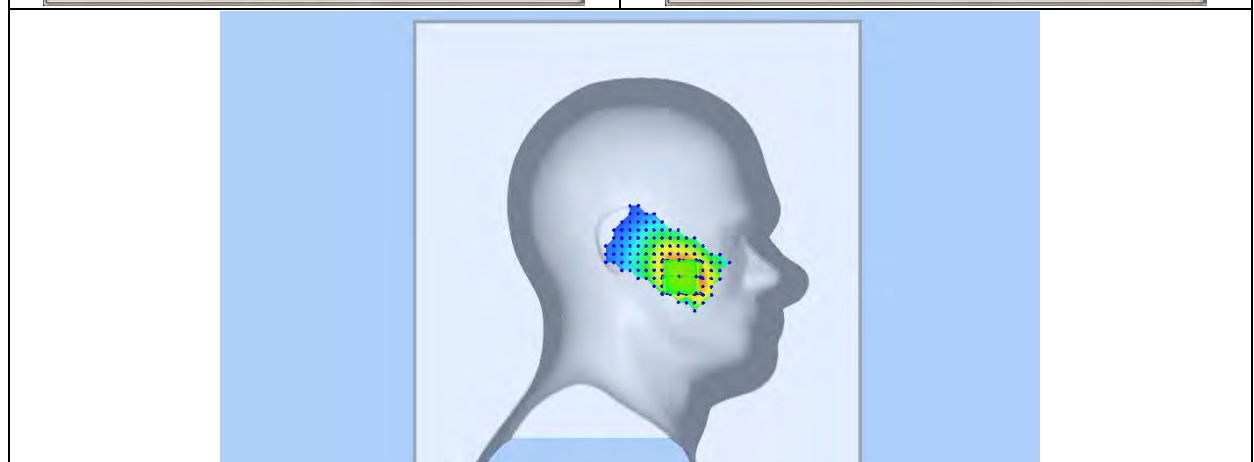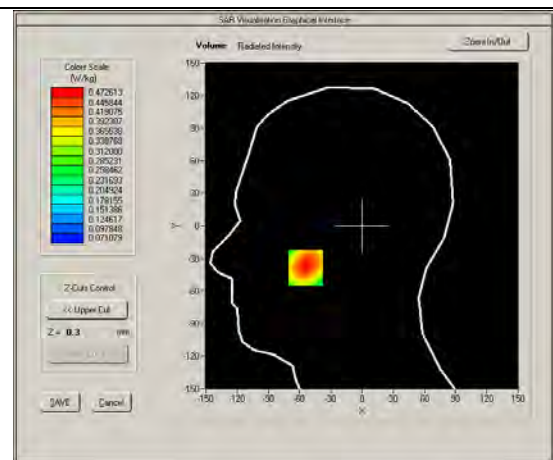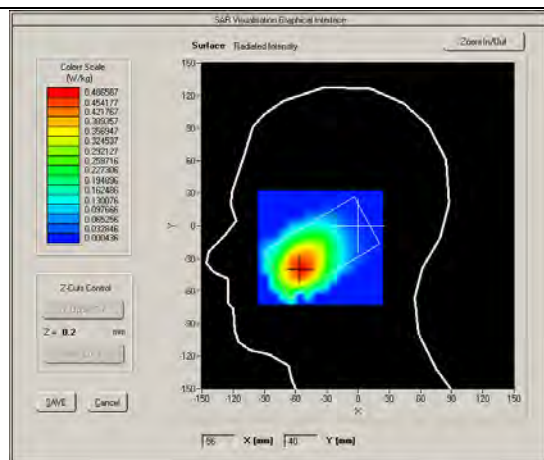

2# GSM1900_GPRS11_Right Cheek_Ch512


DUT:180628W003

Test Date: Sep 28, 2018



Ambient Temperature: 22.5°C; Liquid Temperature: 21.3°C

Medium(liquid type)	HL1900
Frequency (MHz)	1850.2
Relative permittivity (real part)	39.88
Conductivity (S/m)	1.37
E-Field Probe	SN 27/15 EPGO262
Crest factor	2.66
Conversion Factor	2.01
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	0.300000
SAR 10g (W/Kg)	0.191845
SAR 1g (W/Kg)	0.306570

SURFACE SAR

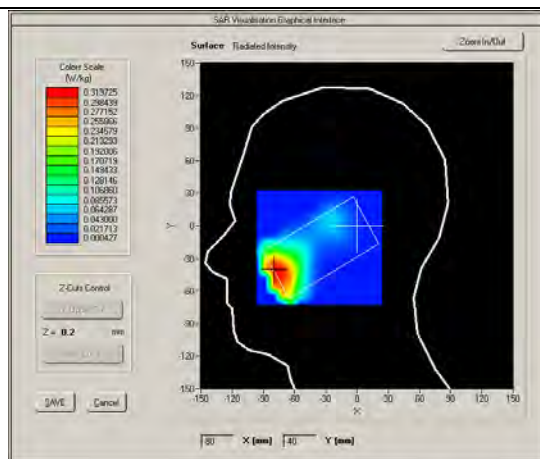

VOLUME SAR

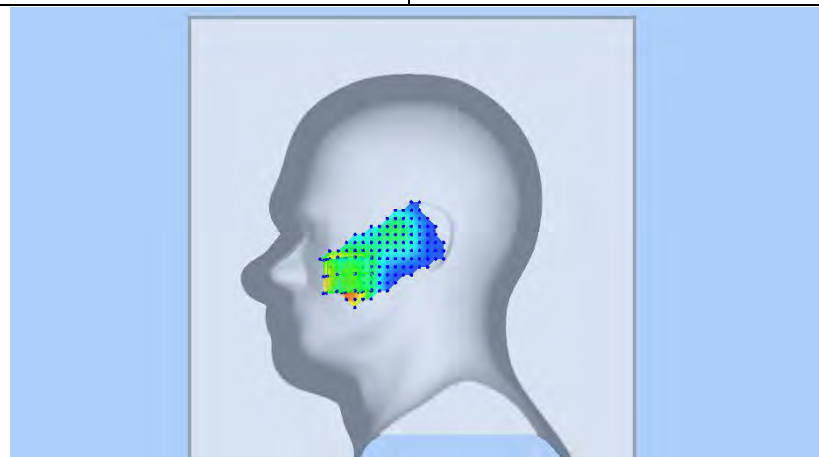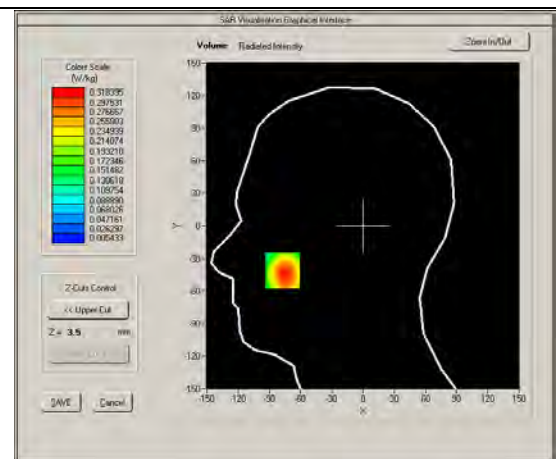




3# WCDMA Band II _ RMC12.2K _ Left Cheek _ Ch9538

DUT:180628W003

Test Date: Sep 28, 2018

Ambient Temperature: 22.5°C; Liquid Temperature: 21.3°C

Medium(liquid type)	HL1900
Frequency (MHz)	1907.6
Relative permittivity (real part)	39.88
Conductivity (S/m)	1.37
E-Field Probe	SN 27/15 EPG0262
Crest factor	1.0
Conversion Factor	2.01
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	0.070000
SAR 10g (W/Kg)	0.202605
SAR 1g (W/Kg)	0.385485
SURFACE SAR	VOLUME SAR

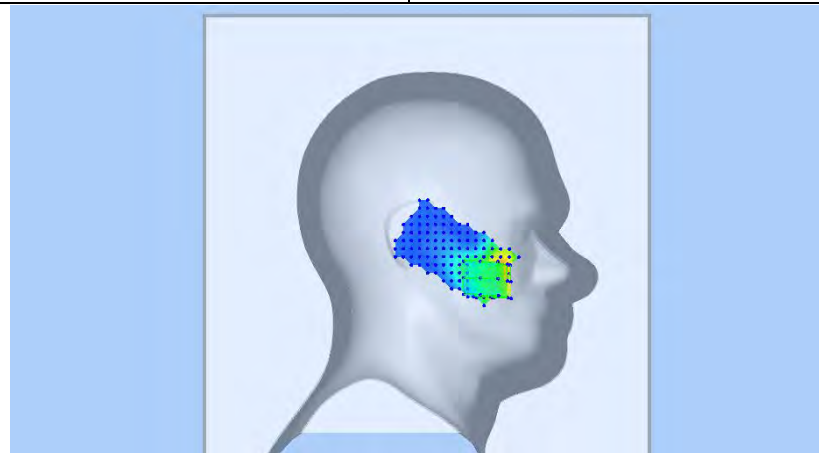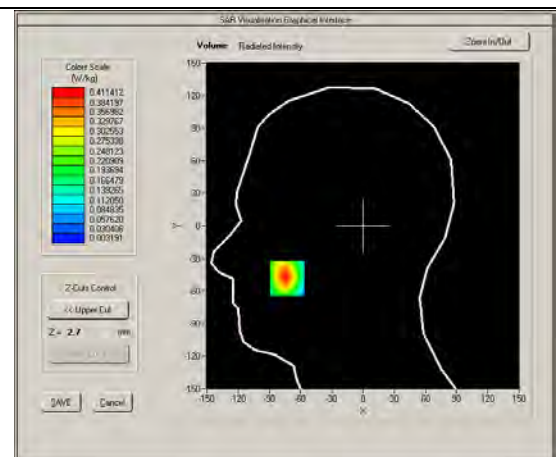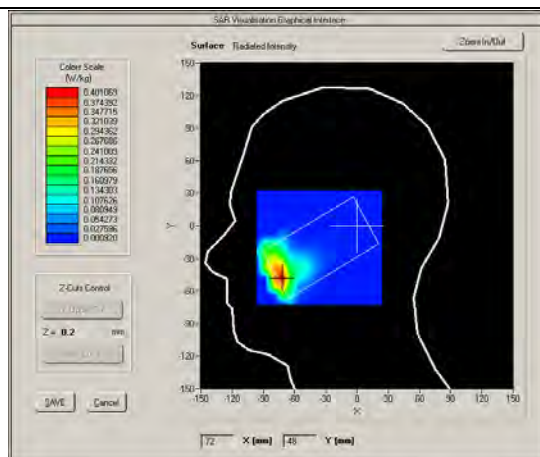




4# WCDMA Band IV_RMC12.2K_Left Cheek_Ch1413

DUT:180628W003

Test Date: Sep 26, 2018

Ambient Temperature: 22.5°C; Liquid Temperature: 21.3°C

Medium(liquid type)	HL1800
Frequency (MHz)	1732.6
Relative permittivity (real part)	40.24
Conductivity (S/m)	1.42
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	2.01
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-1.130000
SAR 10g (W/Kg)	0.386953
SAR 1g (W/Kg)	0.635409
SURFACE SAR	VOLUME SAR

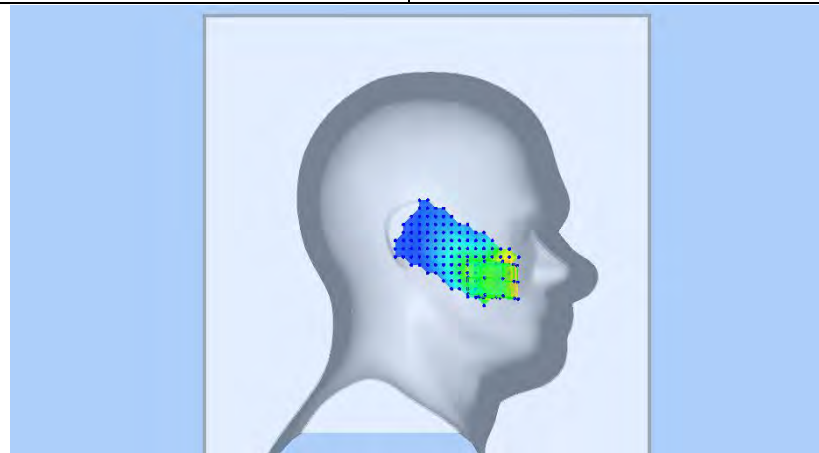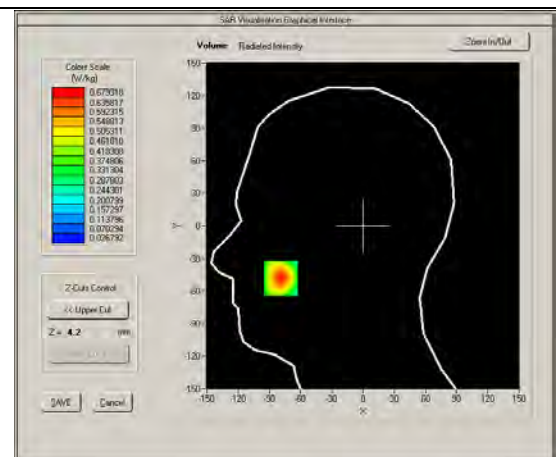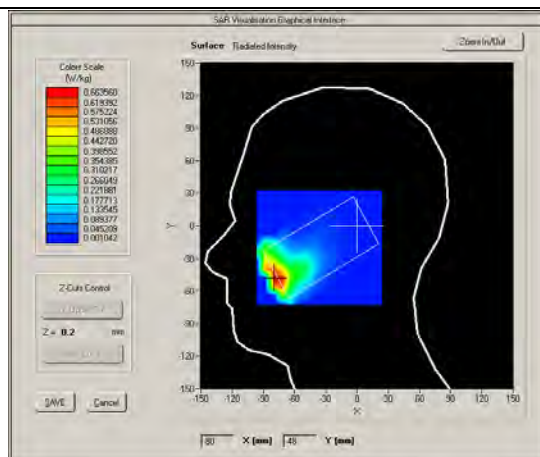




5# WCDMA Band V _ RMC12.2K _ Left Cheek _ Ch4233

DUT:180628W003

Test Date: Sep 20, 2018

Ambient Temperature: 22.7°C; Liquid Temperature: 21.5°C

Medium(liquid type)	HL835
Frequency (MHz)	846.6
Relative permittivity (real part)	41.13
Conductivity (S/m)	0.93
E-Field Probe	SN 27/15 EPG0262
Crest factor	1.0
Conversion Factor	1.74
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	0.660000
SAR 10g (W/Kg)	0.397807
SAR 1g (W/Kg)	0.586342
SURFACE SAR	VOLUME SAR

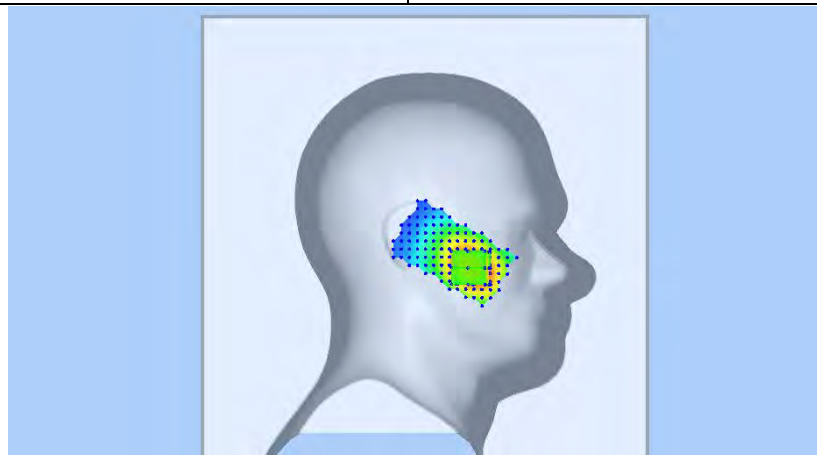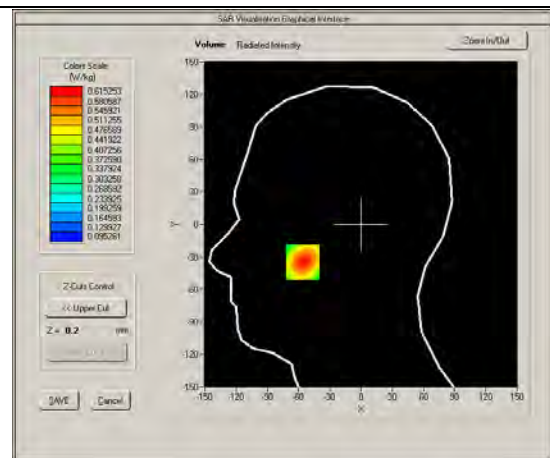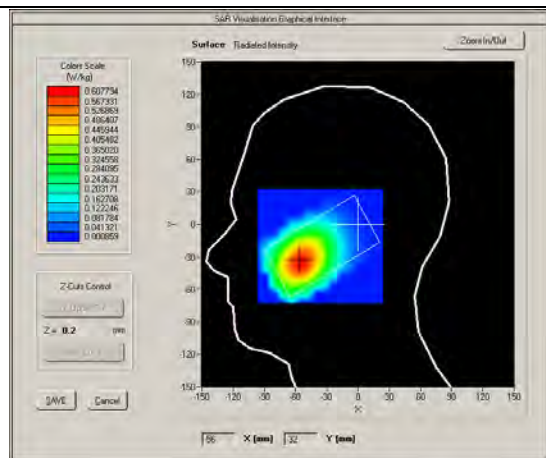

6# LTE BAND 2_QPSK20M_Left Cheek_Ch18700_1RB_OS50

DUT:180628W003




Test Date: Sep 28, 2018

Ambient Temperature: 22.5°C; Liquid Temperature: 21.3°C

Medium(liquid type)	HSL_1900
Frequency (MHz)	1860.0000
Relative permittivity (real part)	39.88
Conductivity (S/m)	1.37
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	2.01
Sensor-Surface	4mm
Bandwidth(MHz)	20
RB Allocation	1
RB Offset	50
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-0.360000
SAR 10g (W/Kg)	0.160991
SAR 1g (W/Kg)	0.288290

SURFACE SAR

VOLUME SAR

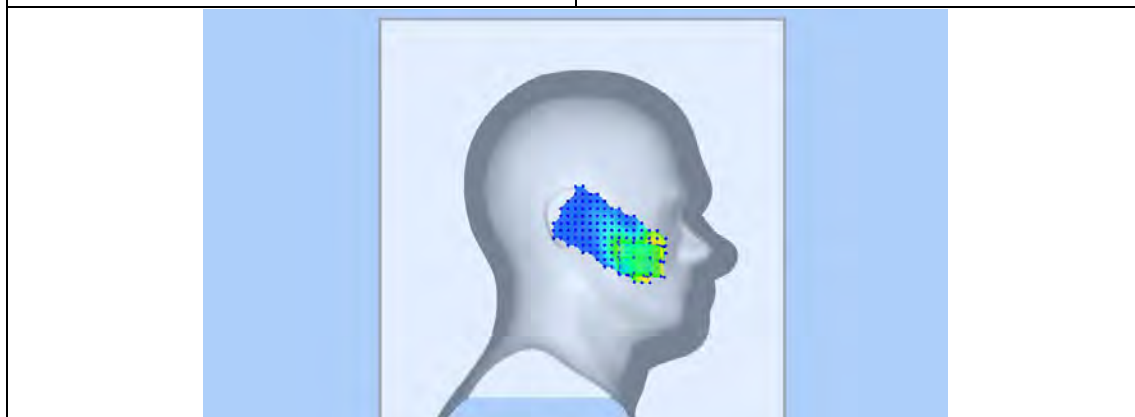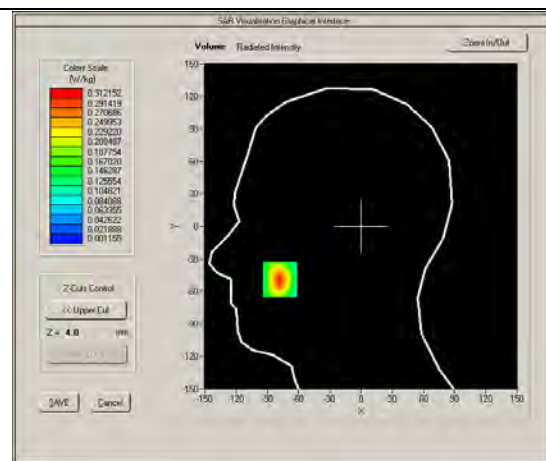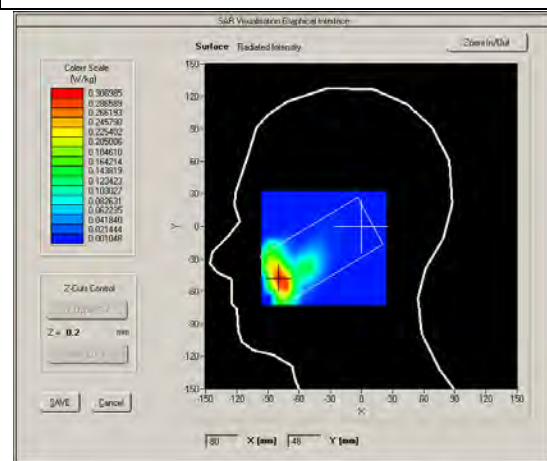

7# LTE BAND 4_QPSK20M_Left Cheek_Ch20300_1RB_OS50

DUT:180628W003




Test Date: Sep 26, 2018

Ambient Temperature: 22.5°C; Liquid Temperature: 21.3°C

Medium(liquid type)	HSL_1800
Frequency (MHz)	1745.0000
Relative permittivity (real part)	40.24
Conductivity (S/m)	1.42
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	1.81
Sensor-Surface	4mm
Bandwidth(MHz)	20
RB Allocation	1
RB Offset	50
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-4.160000
SAR 10g (W/Kg)	0.308863
SAR 1g (W/Kg)	0.541917

SURFACE SAR

VOLUME SAR

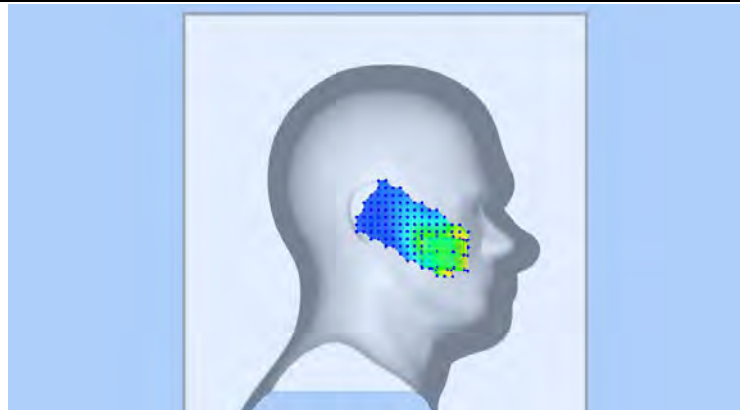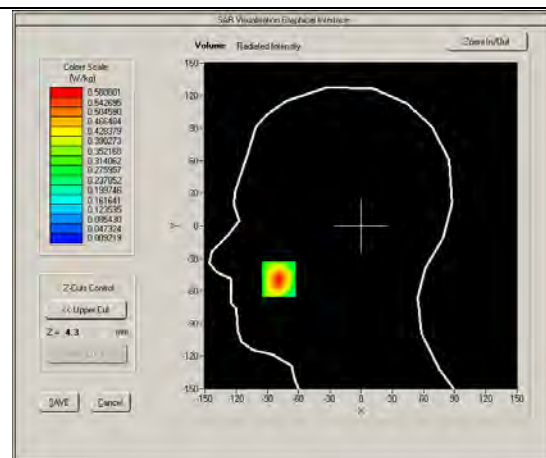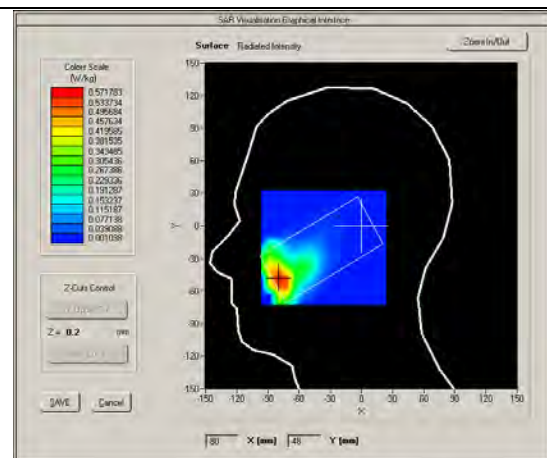

8# LTE BAND 5_QPSK10M_Left Cheek_Ch20525_1RB_OS24


DUT:180628W003

Test Date: Sep 20, 2018



Ambient Temperature: 22.7°C; Liquid Temperature: 21.5°C

Medium(liquid type)	HSL_835
Frequency (MHz)	836.5000
Relative permittivity (real part)	41.13
Conductivity (S/m)	0.93
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	1.74
Sensor-Surface	4mm
Bandwidth(MHz)	10
RB Allocation	1
RB Offset	0
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	4.620000
SAR 10g (W/Kg)	0.696187
SAR 1g (W/Kg)	1.014806

SURFACE SAR

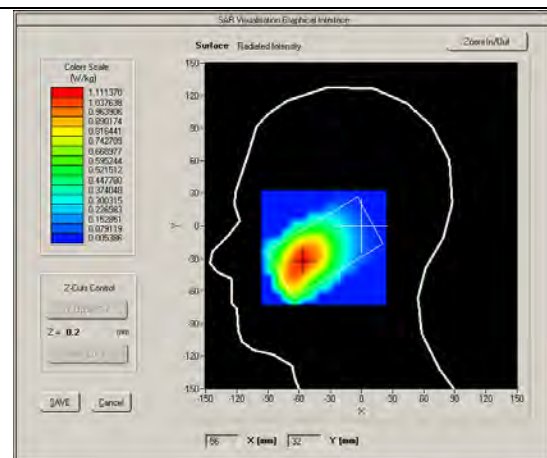

VOLUME SAR

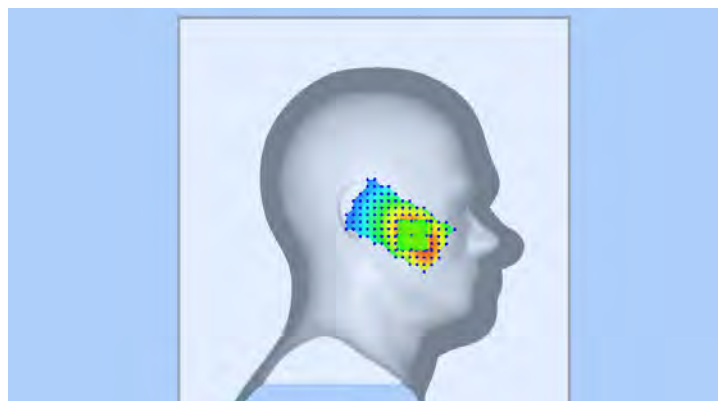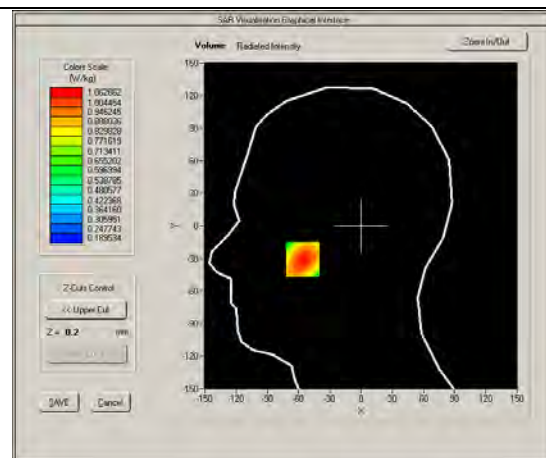

9# LTE BAND 7_QPSK20M_ Left Cheek_Ch21100_1RB_OS50


DUT:180628W003

Test Date: Oct 8, 2018



Ambient Temperature: 22.2°C; Liquid Temperature: 21.4°C

Medium(liquid type)	HSL_2600
Frequency (MHz)	2535.0000
Relative permittivity (real part)	38.91
Conductivity (S/m)	1.94
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	2.05
Sensor-Surface	4mm
Bandwidth(MHz)	20
RB Allocation	1
RB Offset	0
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Variation (%)	-4.190000
SAR 10g (W/Kg)	0.144218
SAR 1g (W/Kg)	0.414096

SURFACE SAR

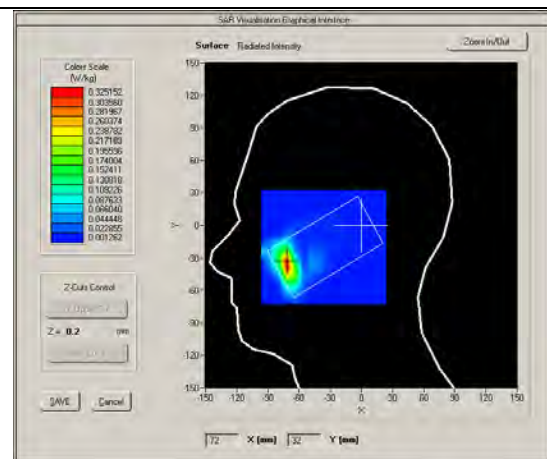

VOLUME SAR

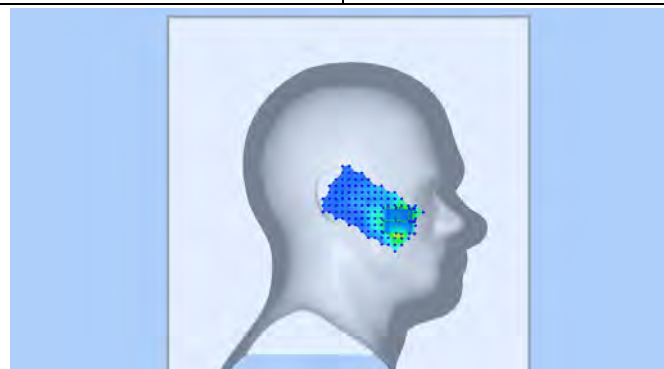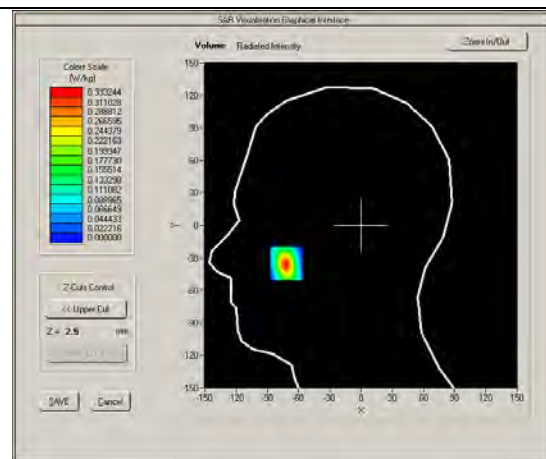

10# LTE BAND 12_QPSK10M_Left Cheek_Ch23130_1RB_OS24

DUT:180628W003




Test Date: Sep 18, 2018

Ambient Temperature: 22.5°C; Liquid Temperature: 21.3°C

Medium(liquid type)	HSL_750
Frequency (MHz)	711.0000
Relative permittivity (real part)	41.92
Conductivity (S/m)	0.86
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	2.01
Sensor-Surface	4mm
Bandwidth(MHz)	10
RB Allocation	1
RB Offset	24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-4.020000
SAR 10g (W/Kg)	0.347464
SAR 1g (W/Kg)	0.504703

SURFACE SAR

VOLUME SAR

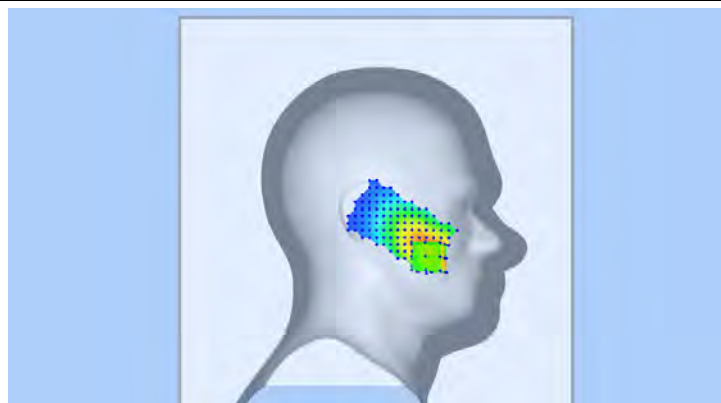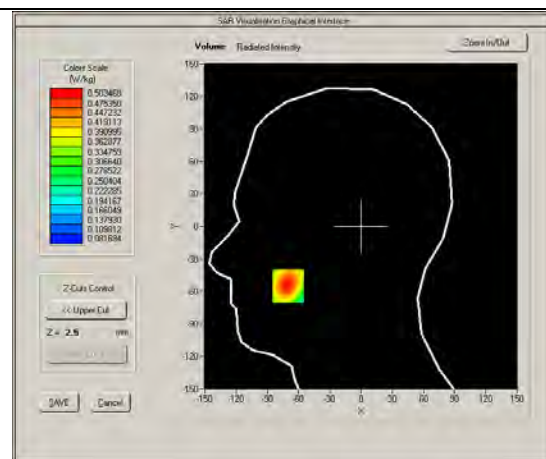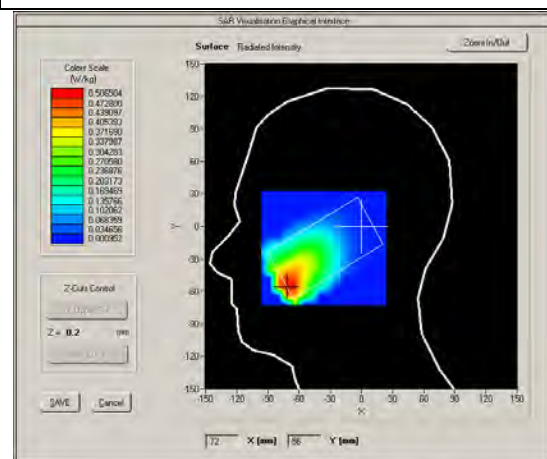

11# LTE BAND 13_QPSK10M_Right Cheek_Ch23230_1RB_OS24

DUT:180628W003




Test Date: Sep 18, 2018

Ambient Temperature: 22.5°C; Liquid Temperature: 21.3°C

Medium(liquid type)	HSL_750
Frequency (MHz)	782.0000
Relative permittivity (real part)	41.92
Conductivity (S/m)	0.86
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	1.81
Sensor-Surface	4mm
Bandwidth(MHz)	10
RB Allocation	1
RB Offset	24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	4.140000
SAR 10g (W/Kg)	0.599142
SAR 1g (W/Kg)	0.865281

SURFACE SAR

VOLUME SAR

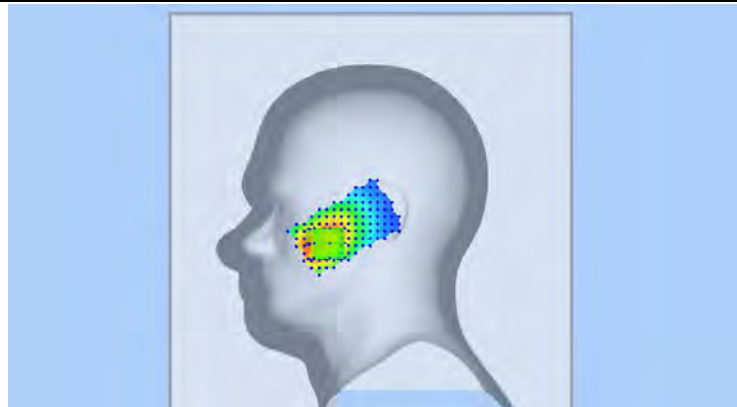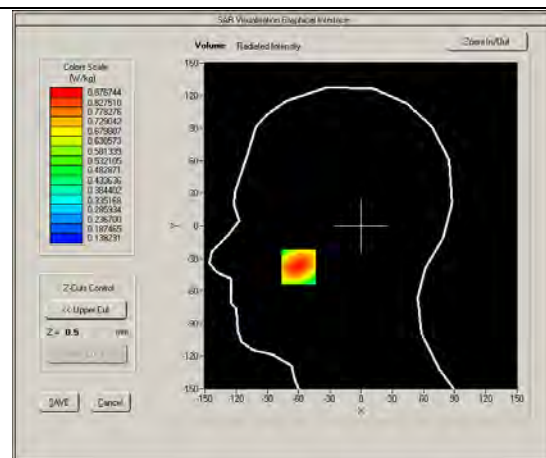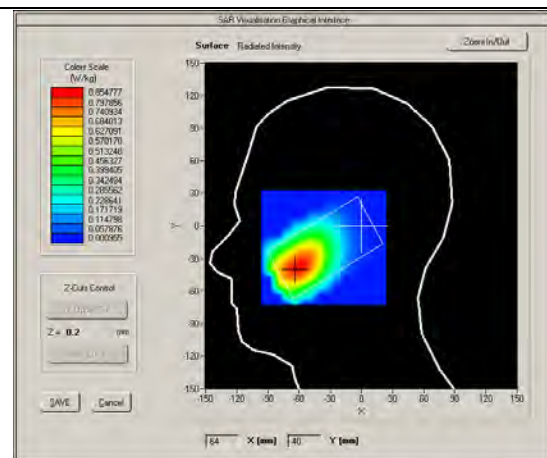

12# LTE BAND 14_QPSK10M_Right Cheek_Ch23330_1RB_OS24


DUT:180628W003

Test Date: Sep 18, 2018



Ambient Temperature: 22.7°C; Liquid Temperature: 21.5°C

Medium(liquid type)	HSL_750
Frequency (MHz)	793.0000
Relative permittivity (real part)	41.92
Conductivity (S/m)	0.86
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	1.74
Sensor-Surface	4mm
Bandwidth(MHz)	10
RB Allocation	1
RB Offset	24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	0.570000
SAR 10g (W/Kg)	0.565891
SAR 1g (W/Kg)	0.826512

SURFACE SAR

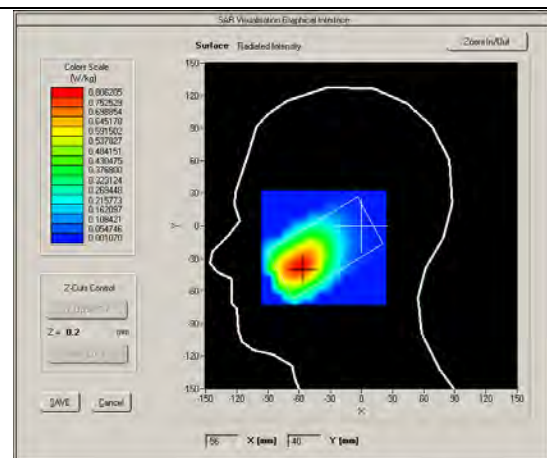

VOLUME SAR


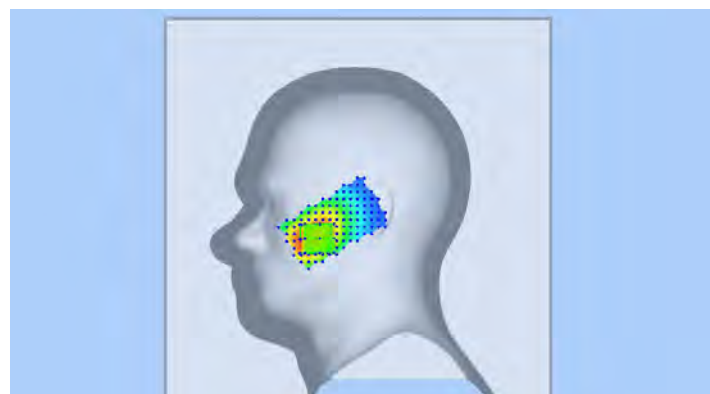
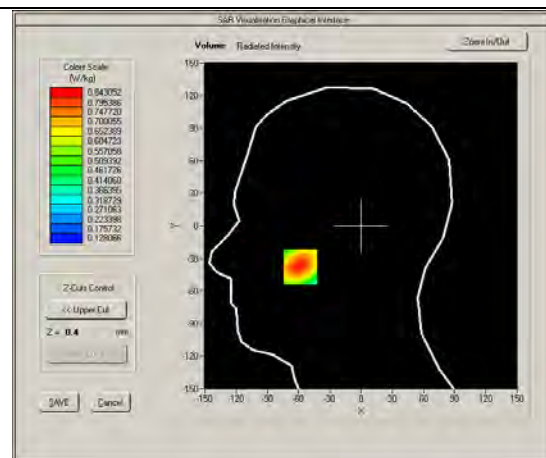


13# LTE BAND 26_QPSK15M_Left Cheek_Ch26765_1RB_OS0

DUT:180628W003

Test Date: Sep 20, 2018

Ambient Temperature: 22.2°C; Liquid Temperature: 21.4°C

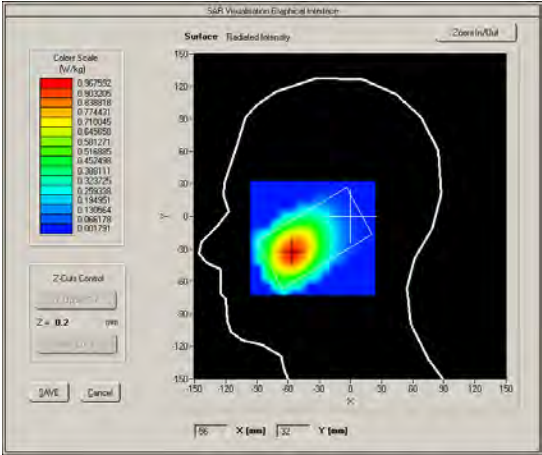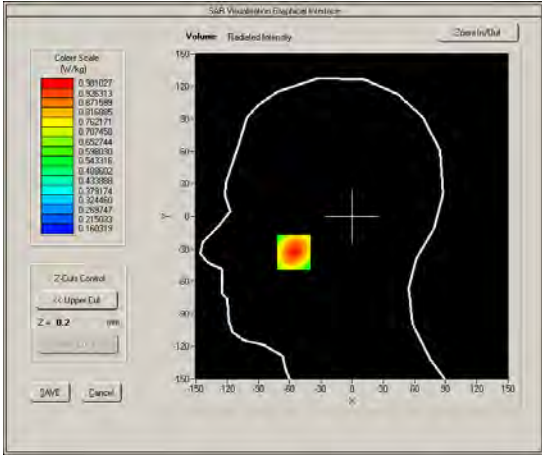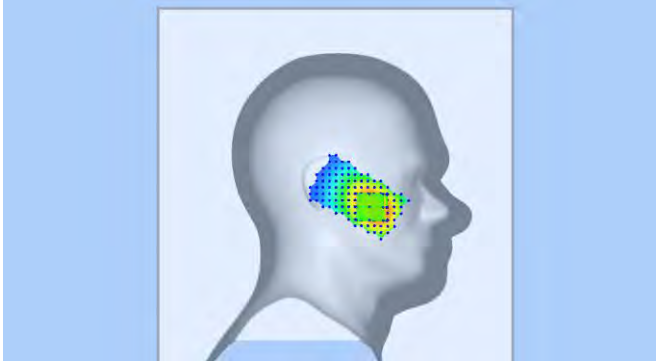Medium(liquid type)	HSL_835
Frequency (MHz)	821.50000
Relative permittivity (real part)	41.13
Conductivity (S/m)	0.93
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	2.05
Sensor-Surface	4mm
Bandwidth(MHz)	15
RB Allocation	1
RB Offset	0
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	4.850000
SAR 10g (W/Kg)	0.671783
SAR 1g (W/Kg)	0.985900
SURFACE SAR	VOLUME SAR
	
	

14# LTE BAND 30_QPSK10M_Right Cheek_Ch27710_1RB_OS0


DUT:180628W003

Test Date: Sep 30, 2018



Ambient Temperature: 22.5°C; Liquid Temperature: 21.3°C

Medium(liquid type)	HSL_2450
Frequency (MHz)	2310.0000
Relative permittivity (real part)	38.85
Conductivity (S/m)	1.84
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	2.01
Sensor-Surface	4mm
Bandwidth(MHz)	10
RB Allocation	1
RB Offset	0
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Variation (%)	2.270000
SAR 10g (W/Kg)	0.141516
SAR 1g (W/Kg)	0.278628

SURFACE SAR

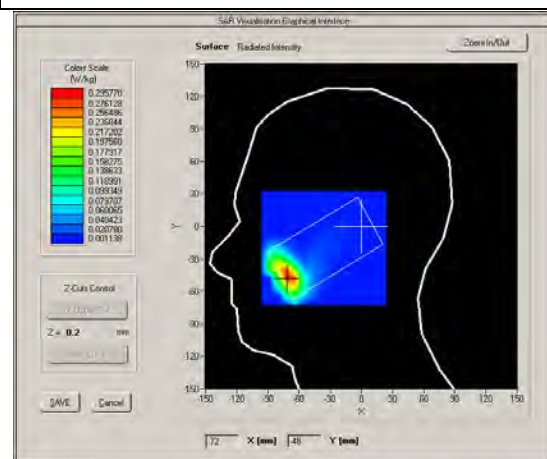

VOLUME SAR

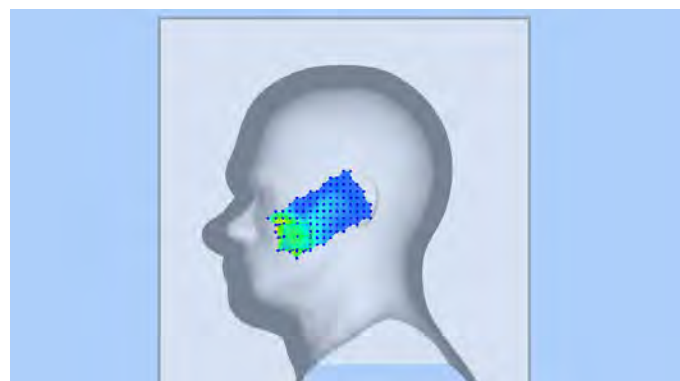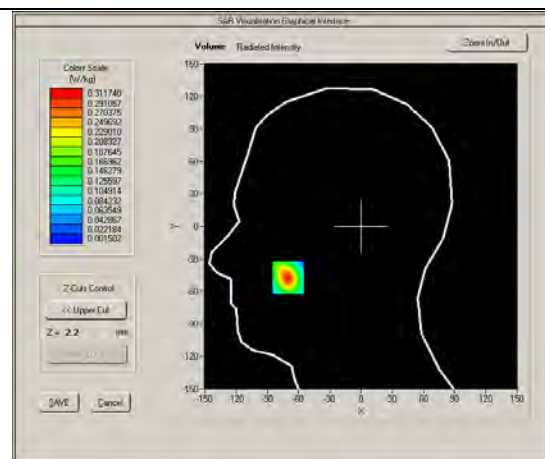

15# LTE BAND 66_QPSK20M_ Left Cheek_Ch132422_1RB_OS0

DUT:180628W003




Test Date: Sep 26, 2018

Ambient Temperature: 22.5°C; Liquid Temperature: 21.3°C

Medium(liquid type)	HSL_1800
Frequency (MHz)	1755.0000
Relative permittivity (real part)	40.24
Conductivity (S/m)	1.42
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	1.81
Sensor-Surface	4mm
Bandwidth(MHz)	20
RB Allocation	1
RB Offset	0
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-4.300000
SAR 10g (W/Kg)	0.285060
SAR 1g (W/Kg)	0.500759

SURFACE SAR

VOLUME SAR

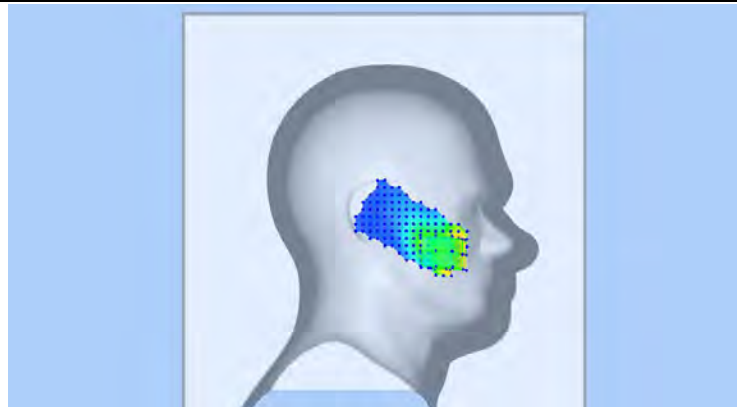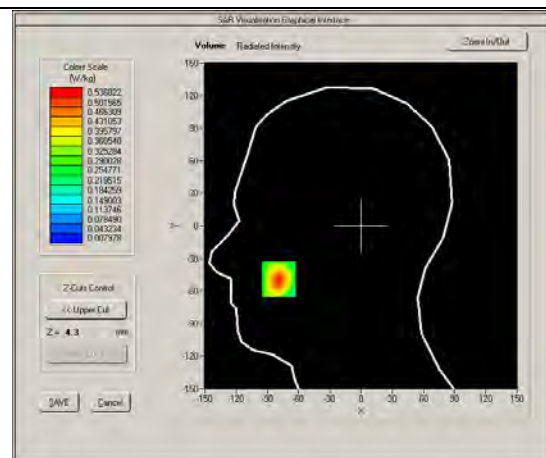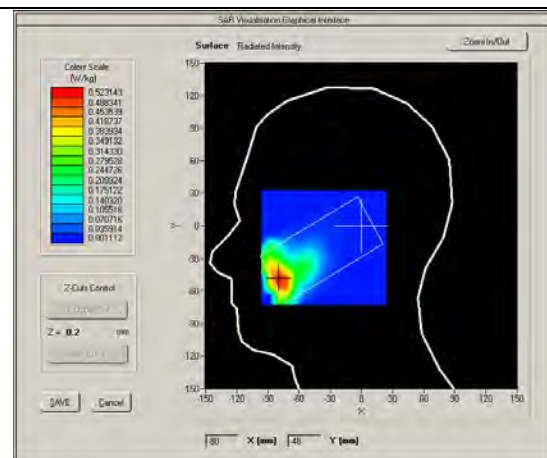




16# 802.11b_Left Cheek Ch 1

DUT:180628W003

Test Date: Sep 30, 2018

Ambient Temperature: 22.3°C; Liquid Temperature: 21.0°C

Medium(liquid type)	HL_2450
Frequency (MHz)	2412.000
Relative permittivity (real part)	38.85
Conductivity (S/m)	1.84
Crest factor	1.0
E-Field Probe	SN 27/15 EPGO262
Conversion Factor	2.04
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Variation (%)	-0.200000
SAR 10g (W/Kg)	0.042696
SAR 1g (W/Kg)	0.084913

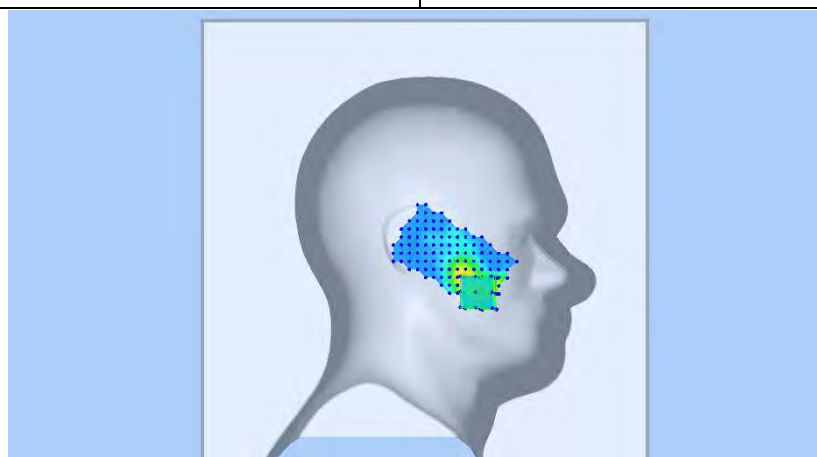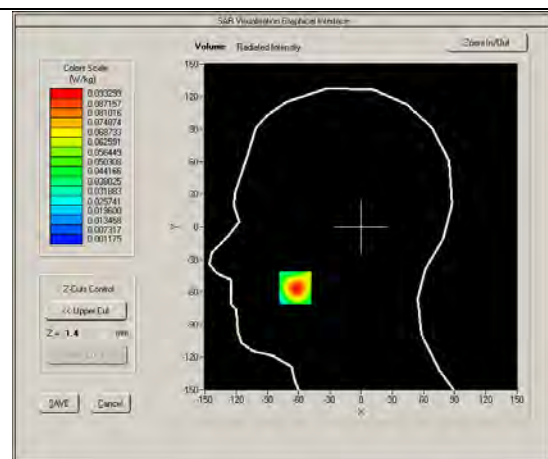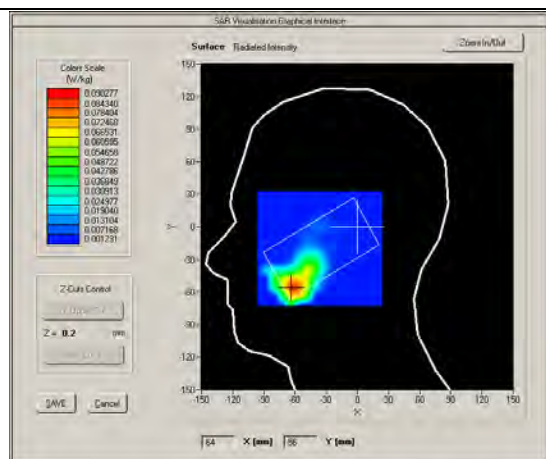




17# 802.11a_Left Cheek Ch 60

DUT:180628W003

Test Date: Oct 9, 2018

Ambient Temperature: 22.3°C; Liquid Temperature: 21.0°C

Medium(liquid type)	HL_5200
Frequency (MHz)	5300.000
Relative permittivity (real part)	36.11
Conductivity (S/m)	4.56
Crest factor	1.0
E-Field Probe	SN 27/15 EPGO262
Conversion Factor	2.04
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Variation (%)	0.00000
SAR 10g (W/Kg)	0.040858
SAR 1g (W/Kg)	0.118179

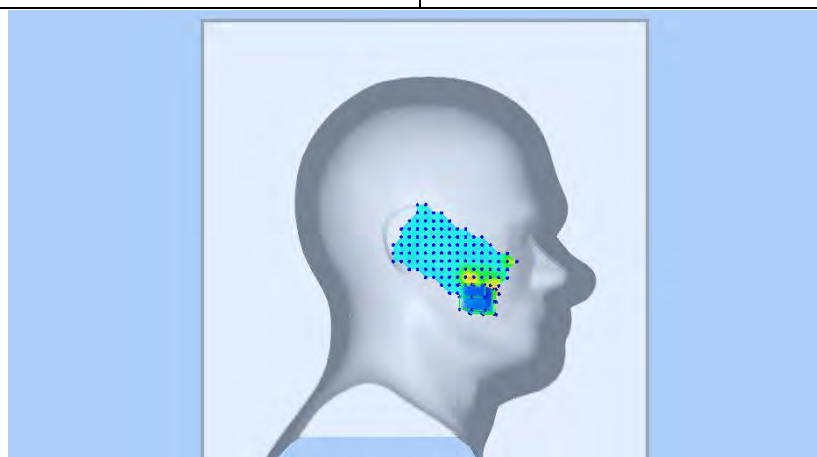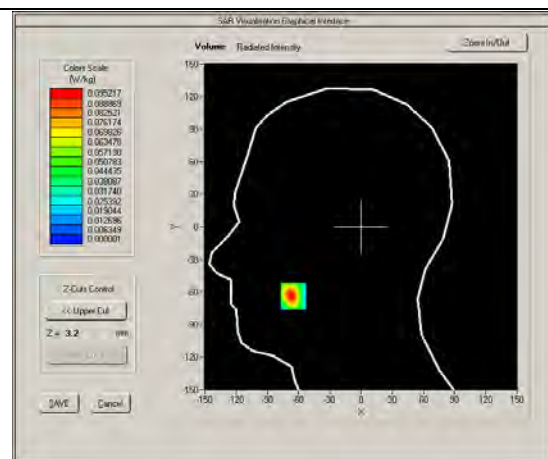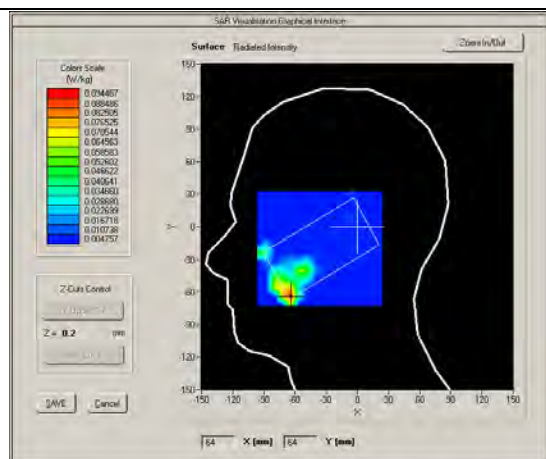




18# 802.11a_Left Cheek Ch 116

DUT:180628W003

Test Date: Oct 10, 2018

Ambient Temperature: 22.3°C; Liquid Temperature: 21.0°C

Medium(liquid type)	HL_5600
Frequency (MHz)	5580.000
Relative permittivity (real part)	35.56
Conductivity (S/m)	5.17
Crest factor	1.0
E-Field Probe	SN 27/15 EPGO262
Conversion Factor	2.04
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Variation (%)	0.00000
SAR 10g (W/Kg)	0.088327
SAR 1g (W/Kg)	0.264319

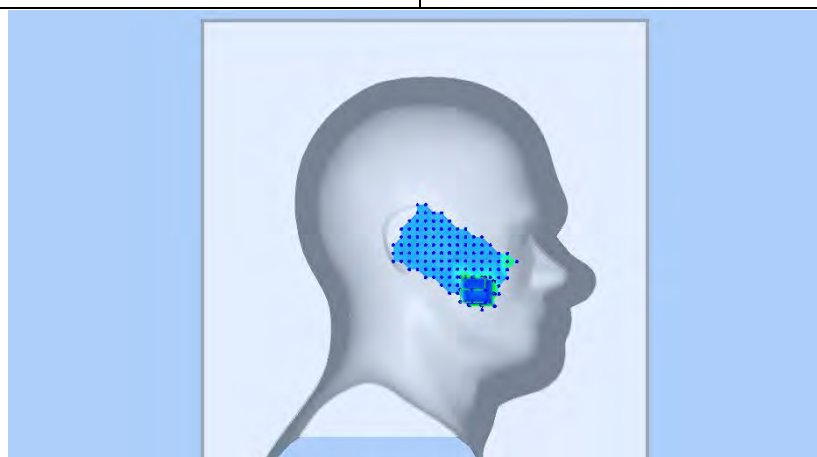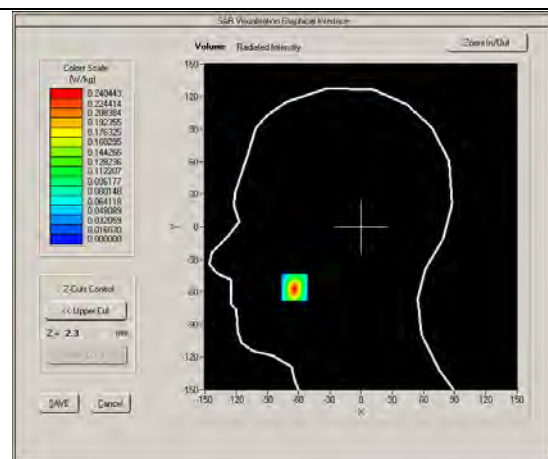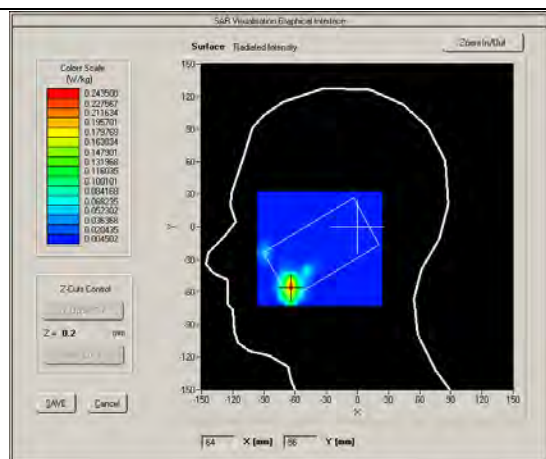




19# 802.11a_Left Cheek Ch 157

DUT:180628W003

Test Date: Oct 11, 2018

Ambient Temperature: 22.3°C; Liquid Temperature: 21.0°C

Medium(liquid type)	HL_5800
Frequency (MHz)	5785.000
Relative permittivity (real part)	35.26
Conductivity (S/m)	5.23
Crest factor	1.0
E-Field Probe	SN 27/15 EPGO262
Conversion Factor	2.04
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Variation (%)	0.00000
SAR 10g (W/Kg)	0.102086
SAR 1g (W/Kg)	0.326916

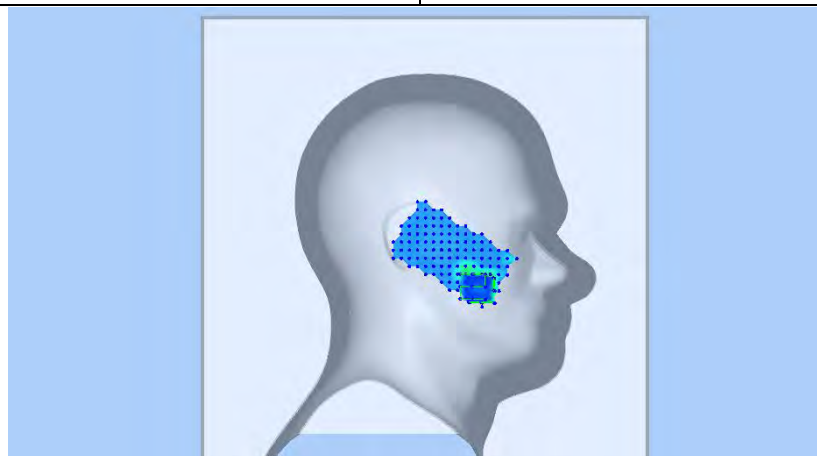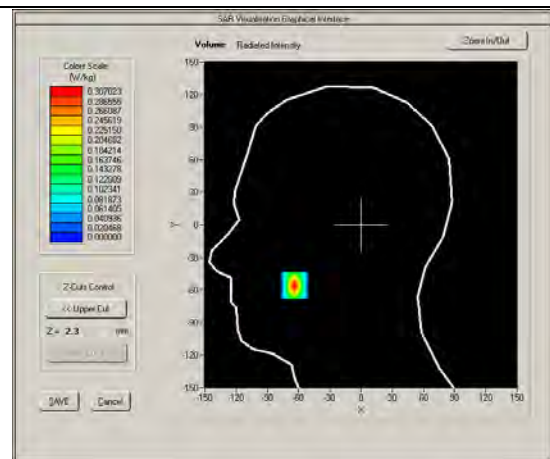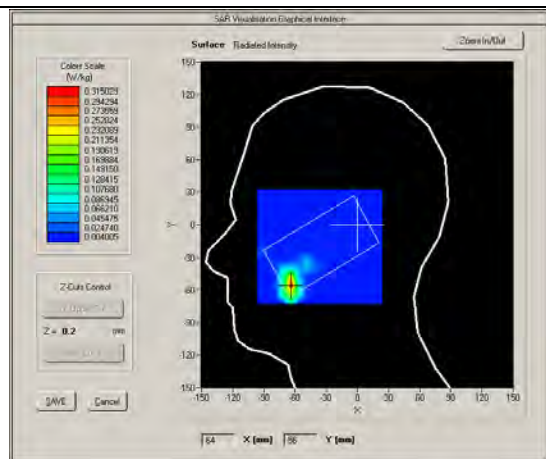

20# GSM850_GPRS12_Rear Face_1.0cm_Ch128


DUT:180628W003

Test Date: Sep 20, 2018



Ambient Temperature: 22.7°C; Liquid Temperature: 21.5°C

Medium(liquid type)	BL835
Frequency (MHz)	824.2
Relative permittivity (real part)	55.43
Conductivity (S/m)	0.95
E-Field Probe	SN 27/15 EPGO262
Crest factor	2.0
Conversion Factor	1.81
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	0.570000
SAR 10g (W/Kg)	0.635781
SAR 1g (W/Kg)	0.932522

SURFACE SAR

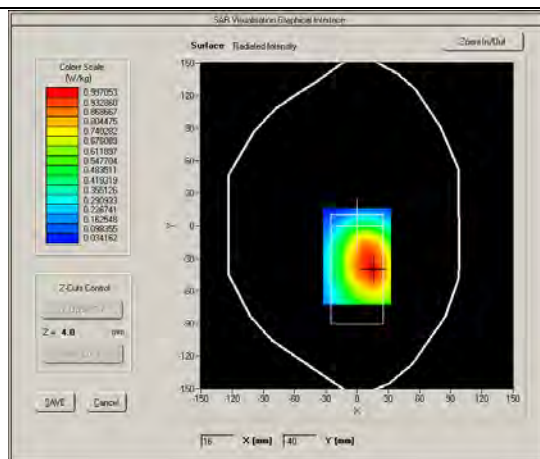

VOLUME SAR

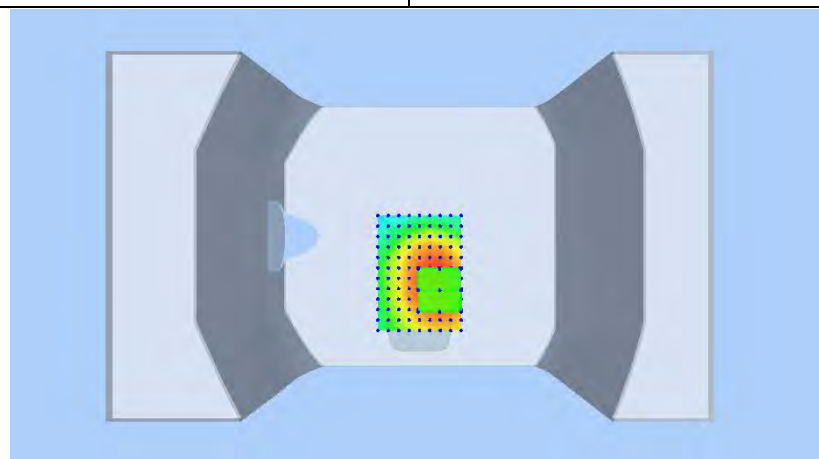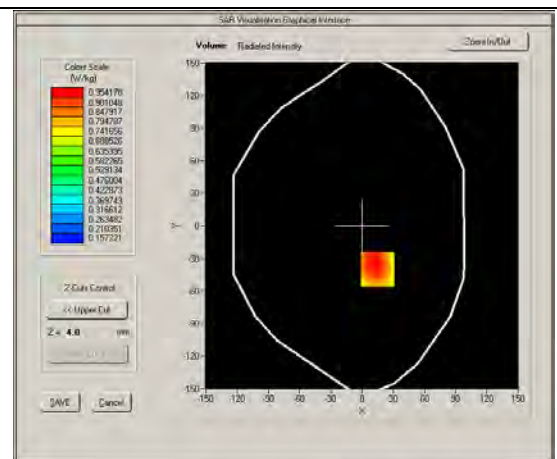

21# GSM1900_GPRS11_Rear Face_1.0cm_Ch512


DUT:180628W003

Test Date: Sep 28, 2018



Ambient Temperature: 22.5°C; Liquid Temperature: 21.3°C

Medium(liquid type)	BL1900
Frequency (MHz)	1850.2
Relative permittivity (real part)	53.11
Conductivity (S/m)	1.55
E-Field Probe	SN 27/15 EPGO262
Crest factor	2.0
Conversion Factor	2.05
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	0.010000
SAR 10g (W/Kg)	0.603878
SAR 1g (W/Kg)	1.062228

SURFACE SAR

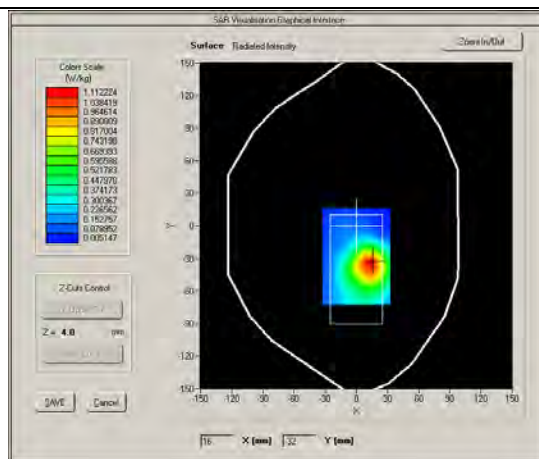

VOLUME SAR

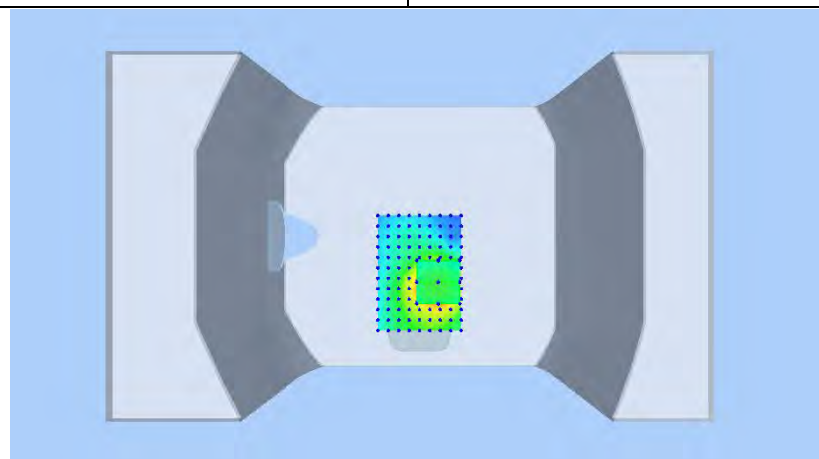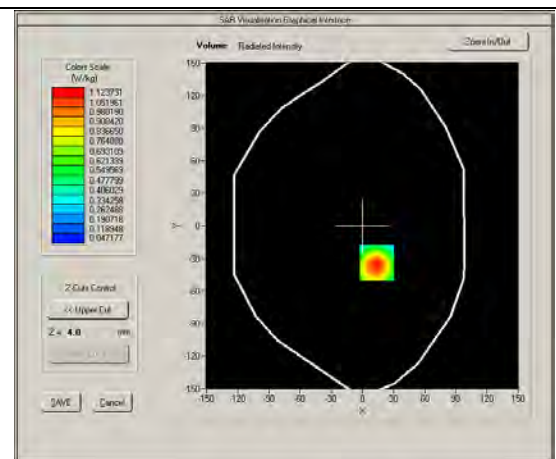

22# WCDMA Band II _RMC12.2K_Rear Face_1.0cm_Ch9538


DUT:180628W003

Test Date: Sep 28, 2018



Ambient Temperature: 22.5°C; Liquid Temperature: 21.3°C

Medium(liquid type)	BL1900
Frequency (MHz)	1907.6
Relative permittivity (real part)	53.11
Conductivity (S/m)	1.55
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	2.05
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-1.480000
SAR 10g (W/Kg)	0.648366
SAR 1g (W/Kg)	1.139752

SURFACE SAR

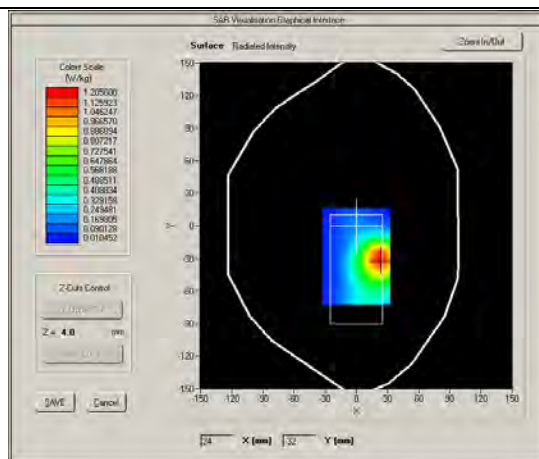

VOLUME SAR

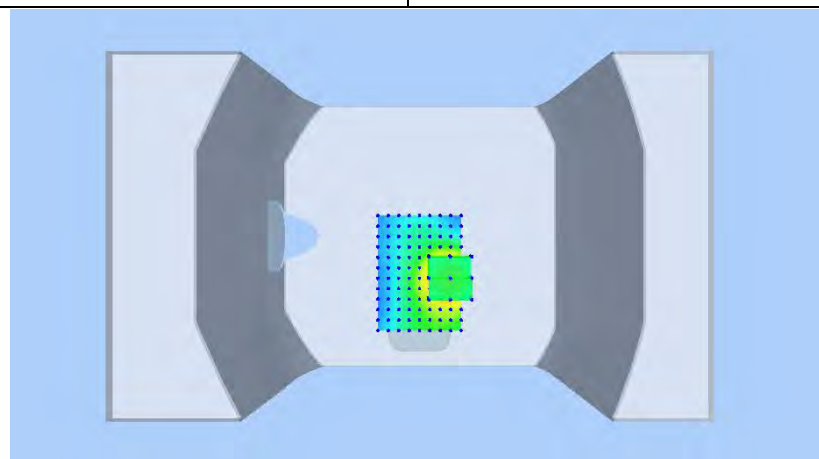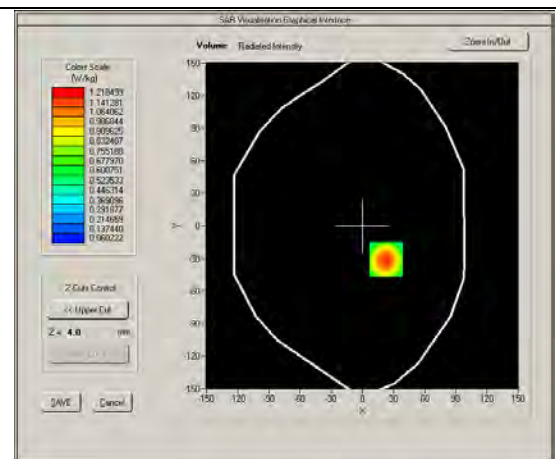

23# WCDMA Band IV_RMC12.2K_Rear Face_1.0cm_Ch1413

DUT:180628W003




Test Date: Sep 26, 2018

Ambient Temperature: 22.5°C; Liquid Temperature: 21.3°C

Medium(liquid type)	BL1800
Frequency (MHz)	1732.6
Relative permittivity (real part)	53.62
Conductivity (S/m)	1.56
E-Field Probe	SN 27/15 EPG0262
Crest factor	1.0
Conversion Factor	2.05
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	0.540000
SAR 10g (W/Kg)	0.644951
SAR 1g (W/Kg)	1.118432

SURFACE SAR

VOLUME SAR

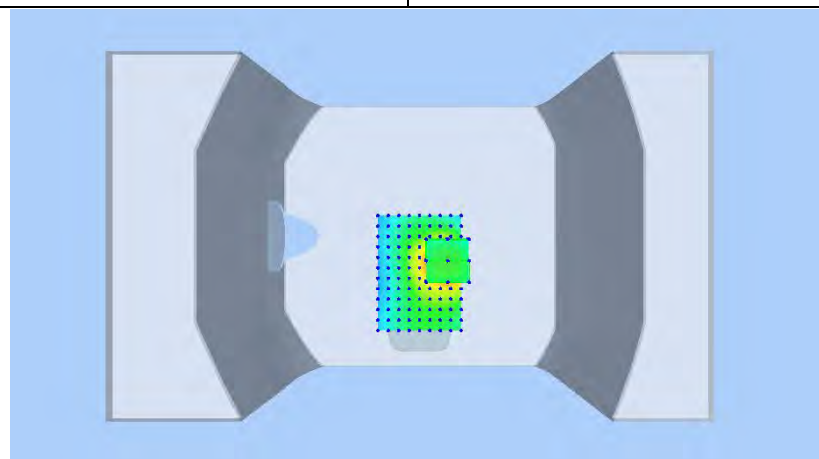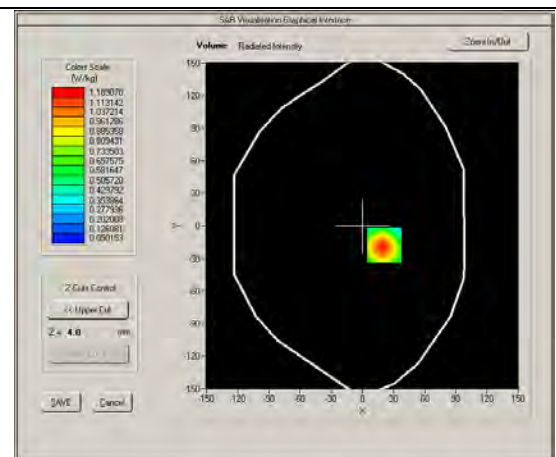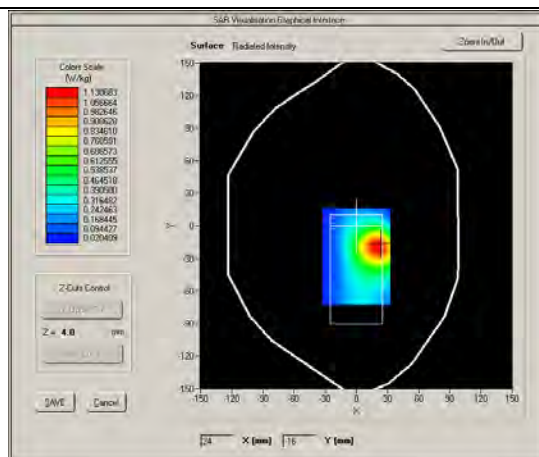

24# WCDMA Band V _RMC12.2K_Rear Face_1.0cm_Ch4132

DUT:180628W003




Test Date: Sep 20, 2018

Ambient Temperature: 22.7°C; Liquid Temperature: 21.5°C

Medium(liquid type)	BL835
Frequency (MHz)	846.6
Relative permittivity (real part)	55.43
Conductivity (S/m)	0.95
E-Field Probe	SN 27/15 EPG0262
Crest factor	1.0
Conversion Factor	1.81
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	1.310000
SAR 10g (W/Kg)	0.770565
SAR 1g (W/Kg)	1.111984

SURFACE SAR

VOLUME SAR

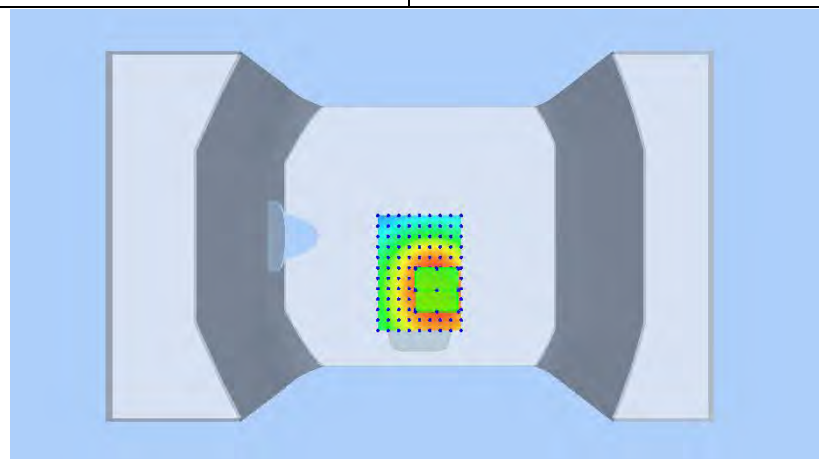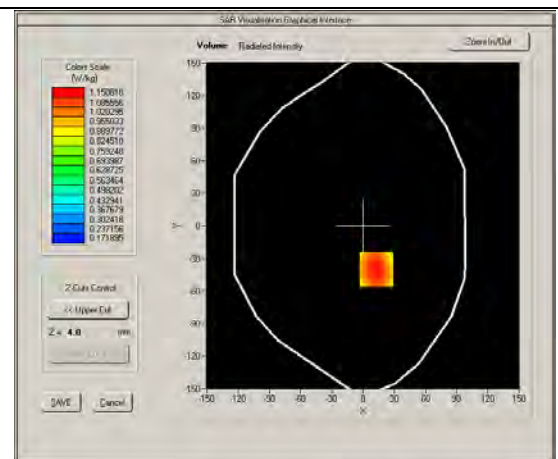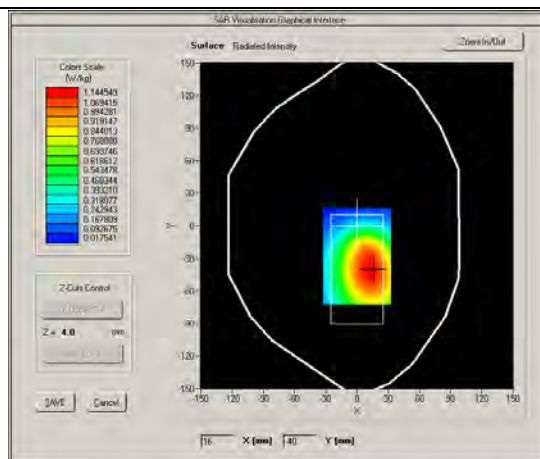

25# LTE BAND 2_QPSK20M_Rear Face_1cm_Ch18700_1RB_OS50


DUT:180628W003

Test Date: Sep 28, 2018



Ambient Temperature: 22.5°C; Liquid Temperature: 21.3°C

Medium(liquid type)	MSL_1900
Frequency (MHz)	1860.0000
Relative permittivity (real part)	53.11
Conductivity (S/m)	1.55
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	2.05
Sensor-Surface	4mm
Bandwidth(MHz)	20
RB Allocation	1
RB Offset	50
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	1.860000
SAR 10g (W/Kg)	0.527594
SAR 1g (W/Kg)	0.934186

SURFACE SAR

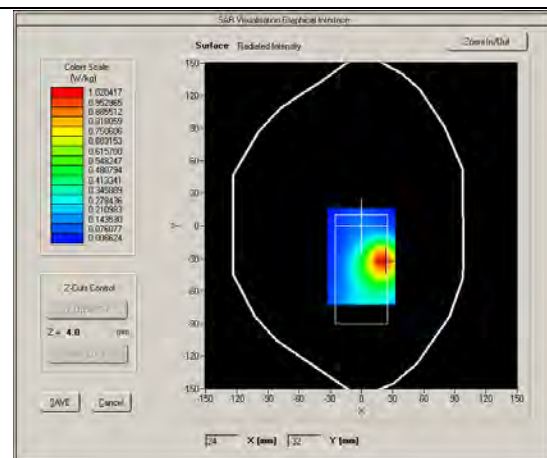

VOLUME SAR

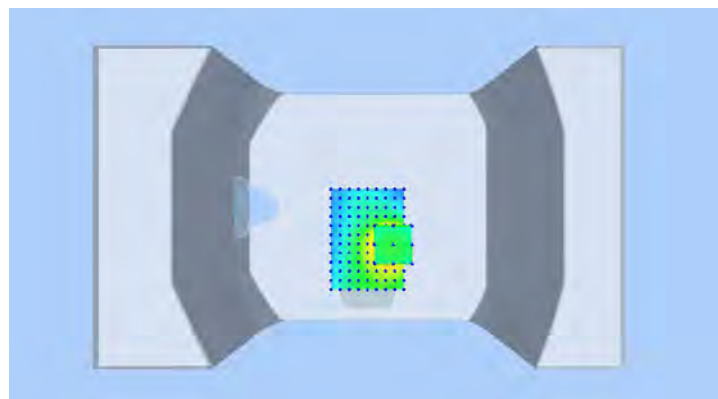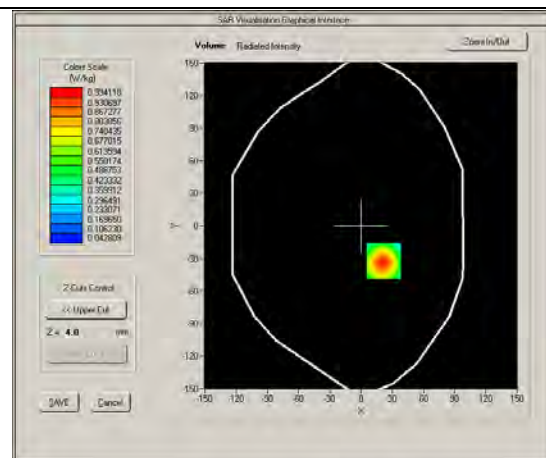

26# LTE BAND 4_QPSK20M_Rear Face_1cm_Ch20300_1RB_OS50

DUT:180628W003




Test Date: Sep 26, 2018

Ambient Temperature: 22.5°C; Liquid Temperature: 21.3°C

Medium(liquid type)	MSL_1800
Frequency (MHz)	1745.0000
Relative permittivity (real part)	53.62
Conductivity (S/m)	1.56
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	1.87
Sensor-Surface	4mm
Bandwidth(MHz)	20
RB Allocation	1
RB Offset	50
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-1.360000
SAR 10g (W/Kg)	0.732573
SAR 1g (W/Kg)	1.279375

SURFACE SAR

VOLUME SAR

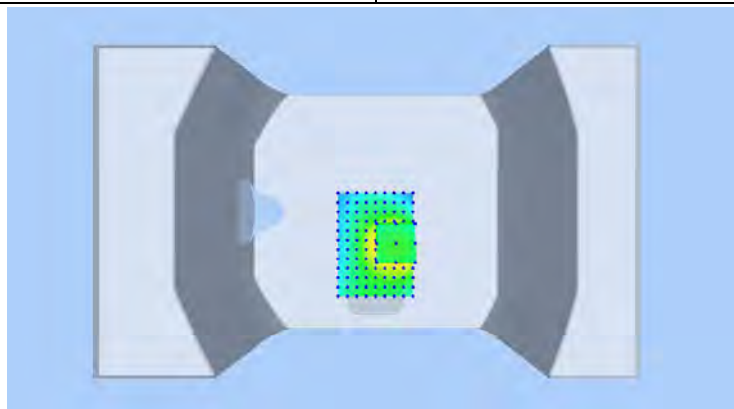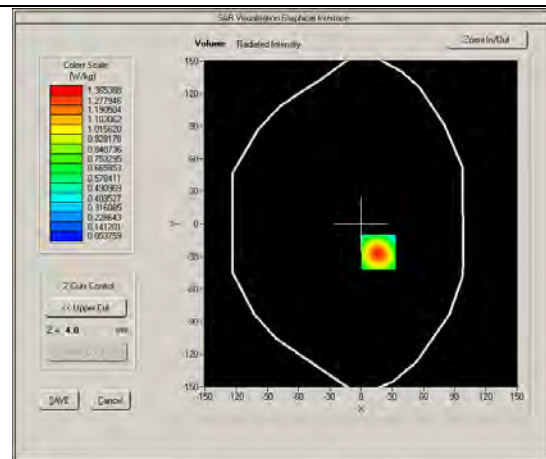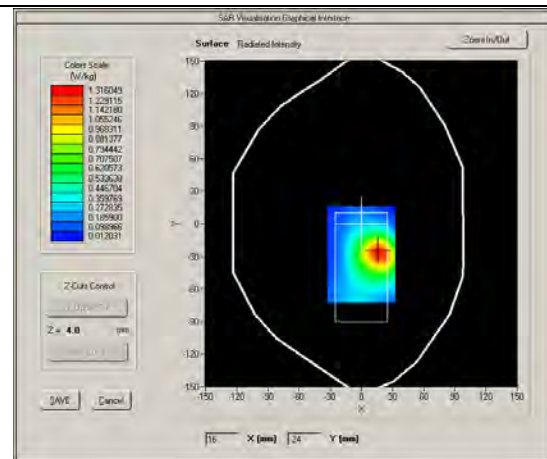

27# LTE BAND 5_QPSK10M_Rear Face_1cm_Ch20525_1RB_OS24


DUT:180628W003

Test Date: Sep 20, 2018



Ambient Temperature: 22.5°C; Liquid Temperature: 21.3°C

Medium(liquid type)	MSL_835
Frequency (MHz)	836.5000
Relative permittivity (real part)	55.43
Conductivity (S/m)	0.95
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	1.81
Sensor-Surface	4mm
Bandwidth(MHz)	10
RB Allocation	1
RB Offset	24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	0.220000
SAR 10g (W/Kg)	0.721276
SAR 1g (W/Kg)	1.045136

SURFACE SAR

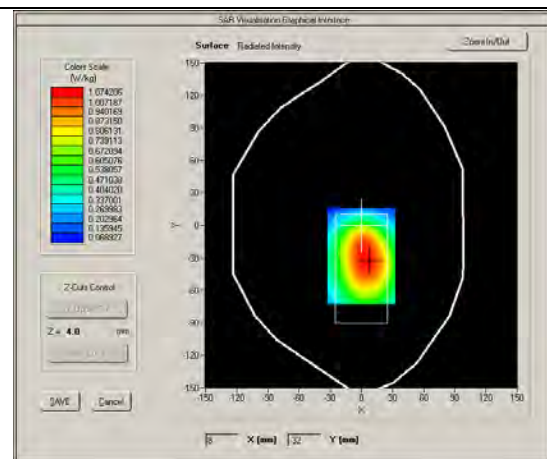

VOLUME SAR

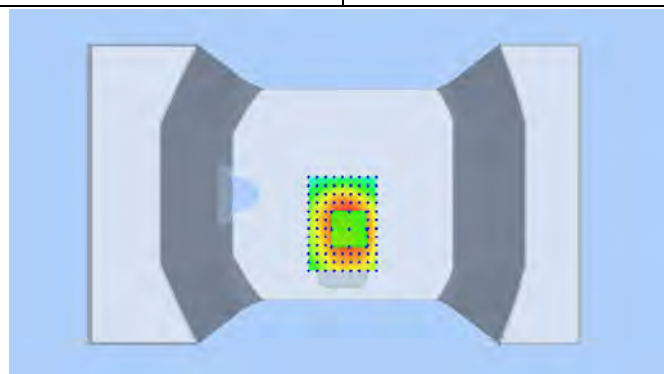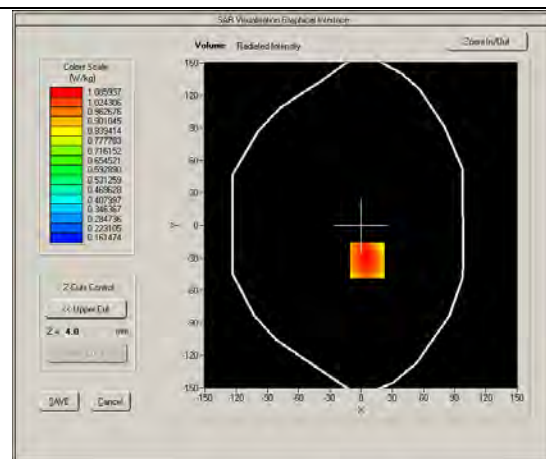

28# LTE BAND 7_QPSK20M_Rear Face_1cm_Ch21100_1RB_OS50


DUT:180628W003

Test Date: Oct 8, 2018



Ambient Temperature: 22.2°C; Liquid Temperature: 21.4°C

Medium(liquid type)	MSL_2600
Frequency (MHz)	2535.0000
Relative permittivity (real part)	52.00
Conductivity (S/m)	2.14
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	2.12
Sensor-Surface	4mm
Bandwidth(MHz)	20
RB Allocation	1
RB Offset	50
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Variation (%)	-3.940000
SAR 10g (W/Kg)	0.166905
SAR 1g (W/Kg)	0.314864

SURFACE SAR

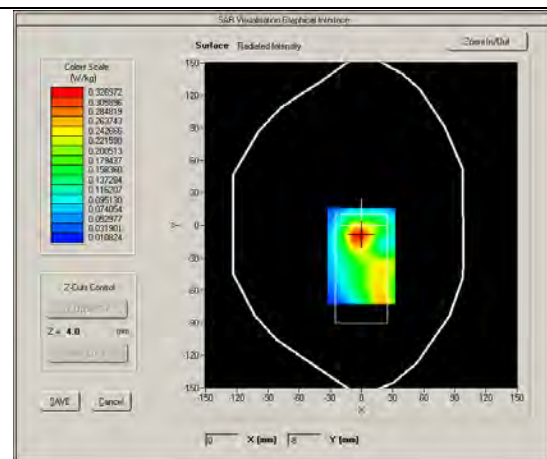

VOLUME SAR


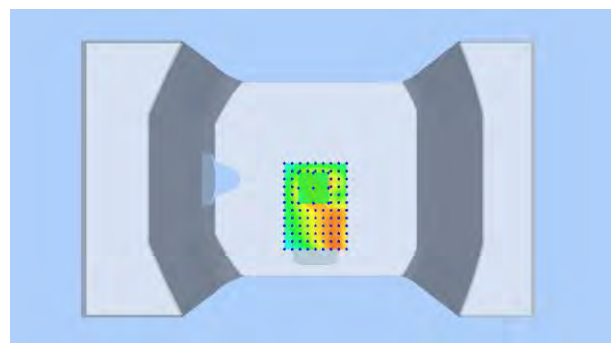
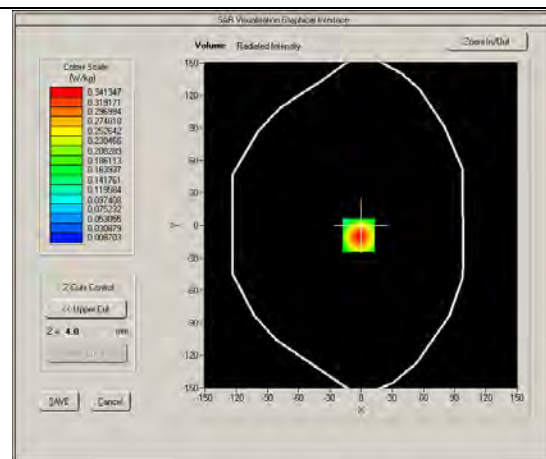


29# LTE BAND 12_QPSK10M_Rear Face _1cm_Ch23130_1RB_OS24

DUT:180628W003

Test Date: Sep 18, 2018

Ambient Temperature: 22.5°C; Liquid Temperature: 21.3°C

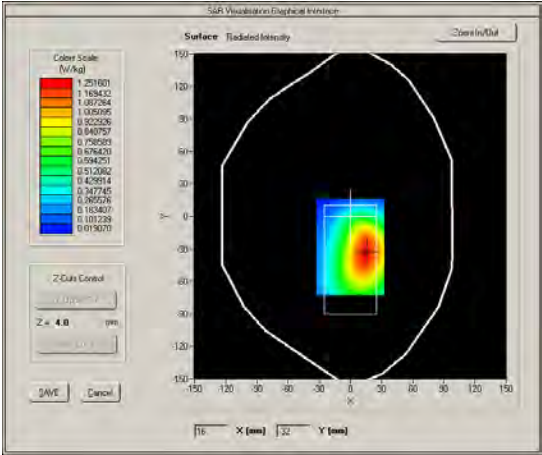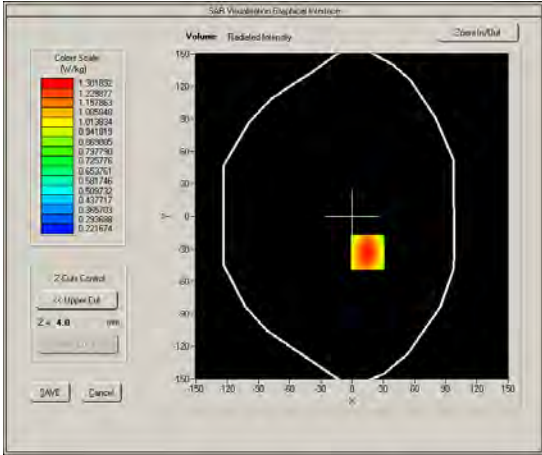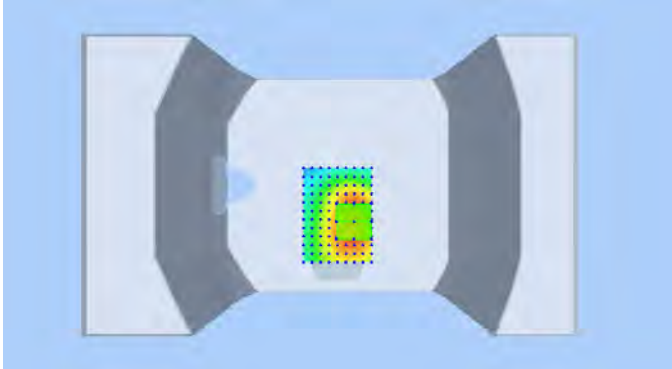Medium(liquid type)	MSL_750
Frequency (MHz)	711.0
Relative permittivity (real part)	56.52
Conductivity (S/m)	0.97
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	2.05
Sensor-Surface	4mm
Bandwidth(MHz)	10
RB Allocation	1
RB Offset	24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	4.070000
SAR 10g (W/Kg)	0.931961
SAR 1g (W/Kg)	1.319038
SURFACE SAR	VOLUME SAR
	
	

30# LTE BAND 13_QPSK10M_Rear Face_1cm_Ch23230_1RB_OS24


DUT:180628W003

Test Date: Sep 18, 2018



Ambient Temperature: 22.5°C; Liquid Temperature: 21.3°C

Medium(liquid type)	MSL_750
Frequency (MHz)	782.0000
Relative permittivity (real part)	56.52
Conductivity (S/m)	0.97
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	1.87
Sensor-Surface	4mm
Bandwidth(MHz)	10
RB Allocation	1
RB Offset	24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-2.150000
SAR 10g (W/Kg)	0.653896
SAR 1g (W/Kg)	0.914714

SURFACE SAR

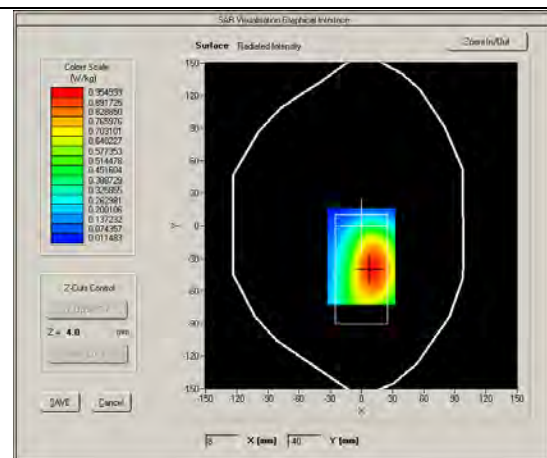

VOLUME SAR

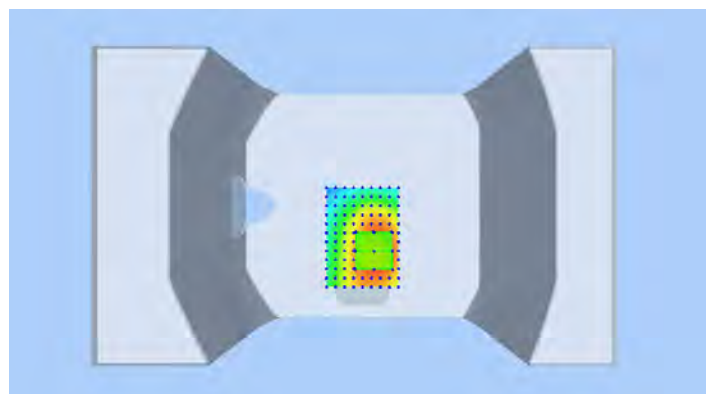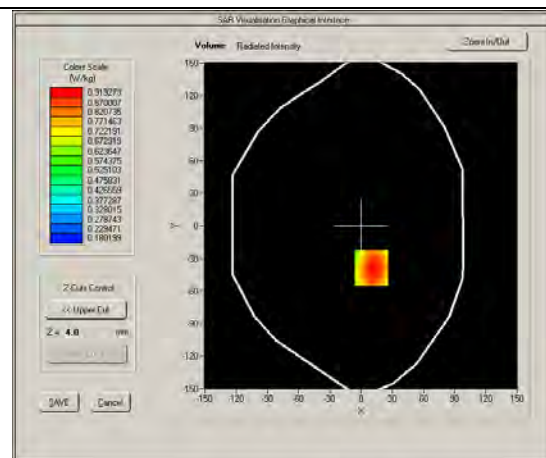

31# LTE BAND 14_QPSK10M_Rear Face_1cm_Ch23330_1RB_OS24


DUT:180628W003

Test Date: Sep 18, 2018



Ambient Temperature: 22.5°C; Liquid Temperature: 21.3°C

Medium(liquid type)	MSL_750
Frequency (MHz)	793.0000
Relative permittivity (real part)	56.52
Conductivity (S/m)	0.97
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	1.81
Sensor-Surface	4mm
Bandwidth(MHz)	10
RB Allocation	1
RB Offset	24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-0.760000
SAR 10g (W/Kg)	0.499571
SAR 1g (W/Kg)	0.700802

SURFACE SAR

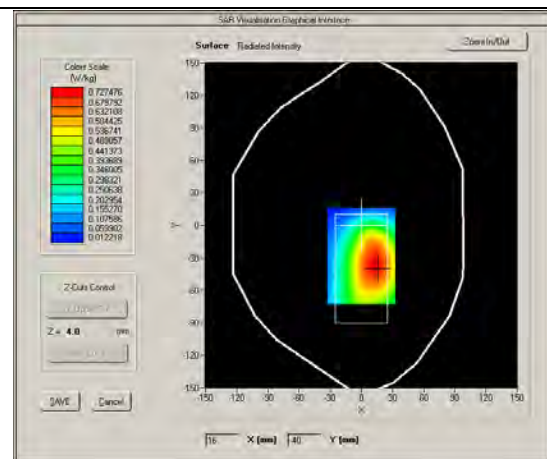

VOLUME SAR


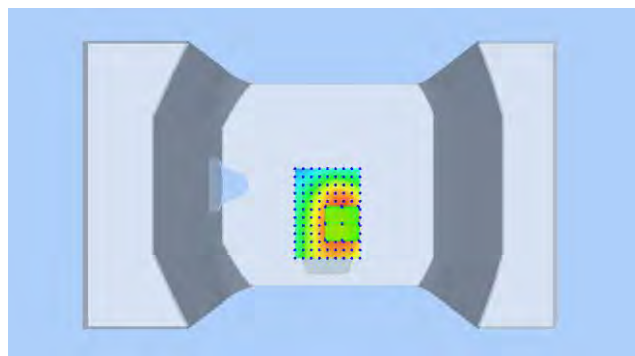
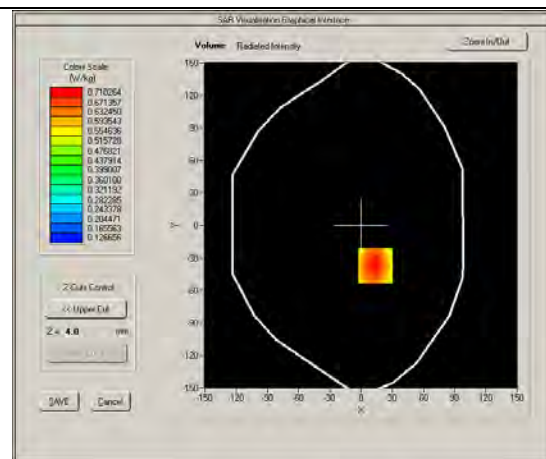


32# LTE BAND 26_QPSK15M_Rear Face_1cm_Ch26765_1RB_OS0

DUT:180628W003

Test Date: Sep 20, 2018

Ambient Temperature: 22.2°C; Liquid Temperature: 21.4°C

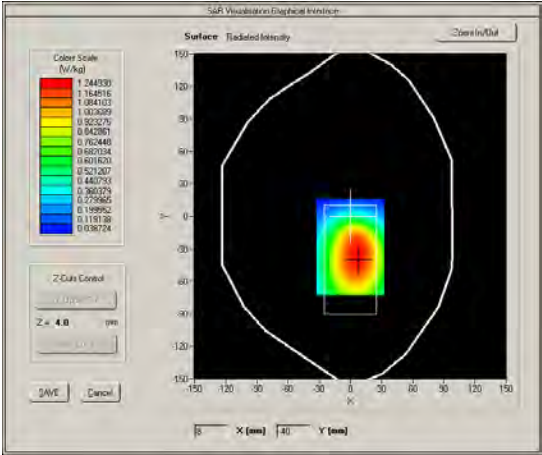
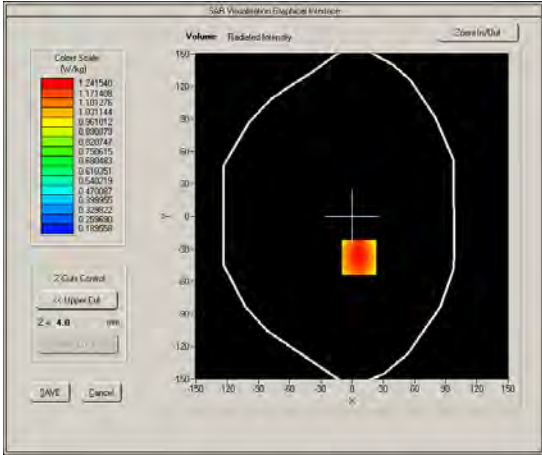
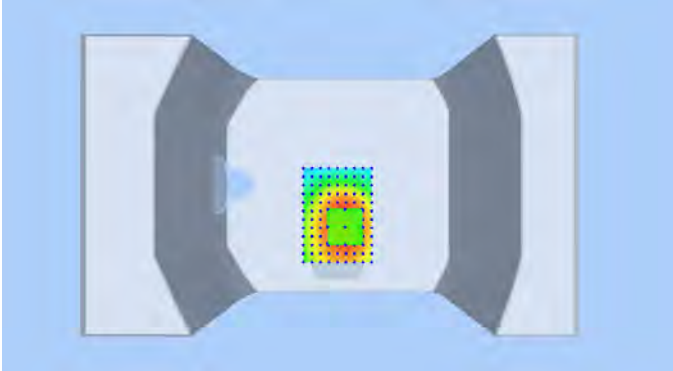
Medium(liquid type)	MSL_835
Frequency (MHz)	821.5000
Relative permittivity (real part)	55.43
Conductivity (S/m)	0.95
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	2.12
Sensor-Surface	4mm
Bandwidth(MHz)	15
RB Allocation	1
RB Offset	0
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	1.230000
SAR 10g (W/Kg)	0.865537
SAR 1g (W/Kg)	1.265236
SURFACE SAR	VOLUME SAR
	
	

33# LTE BAND 30_QPSK10M_Rear Face_1cm_Ch27710_1RB_OS0

DUT:180628W003

Test Date: Sep 30, 2018

Ambient Temperature: 22.5°C; Liquid Temperature: 21.3°C

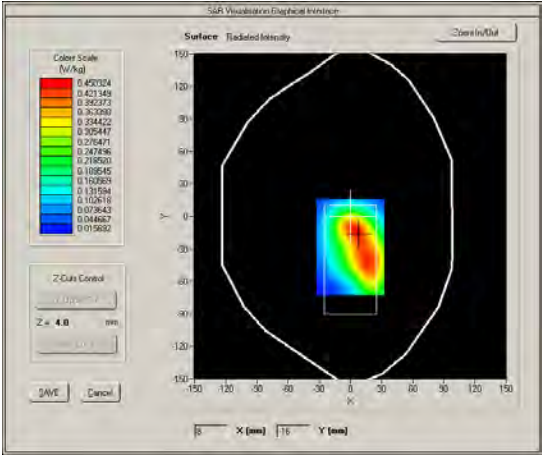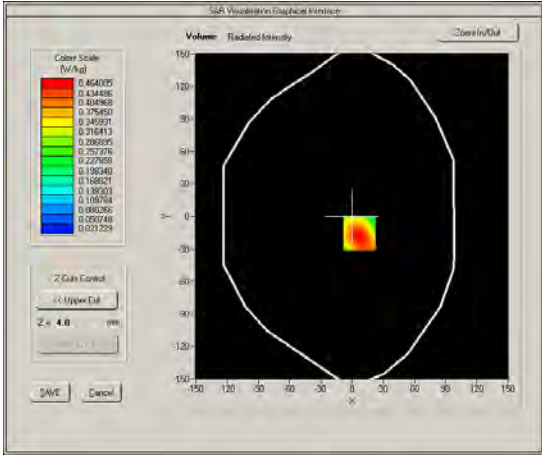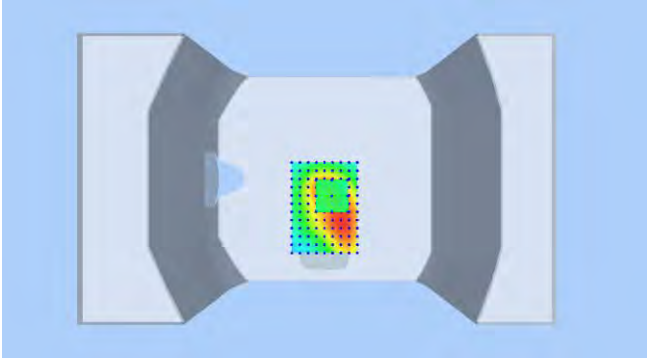Medium(liquid type)	MSL_2450
Frequency (MHz)	2310.0000
Relative permittivity (real part)	55.22
Conductivity (S/m)	1.96
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	2.05
Sensor-Surface	4mm
Bandwidth(MHz)	10
RB Allocation	1
RB Offset	0
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Variation (%)	-0.800000
SAR 10g (W/Kg)	0.257291
SAR 1g (W/Kg)	0.438289
SURFACE SAR	VOLUME SAR
	
	

34# LTE BAND 66_QPSK20M_Rear Face_1cm_Ch132422_1RB_OS0


DUT:180628W003

Test Date: Sep 26, 2018



Ambient Temperature: 22.5°C; Liquid Temperature: 21.3°C

Medium(liquid type)	MSL_1800
Frequency (MHz)	1755.0000
Relative permittivity (real part)	53.62
Conductivity (S/m)	1.56
E-Field Probe	SN 27/15 EPGO262
Crest factor	1.0
Conversion Factor	1.87
Sensor-Surface	4mm
Bandwidth(MHz)	20
RB Allocation	1
RB Offset	0
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-3.890000
SAR 10g (W/Kg)	0.670956
SAR 1g (W/Kg)	1.177601

SURFACE SAR

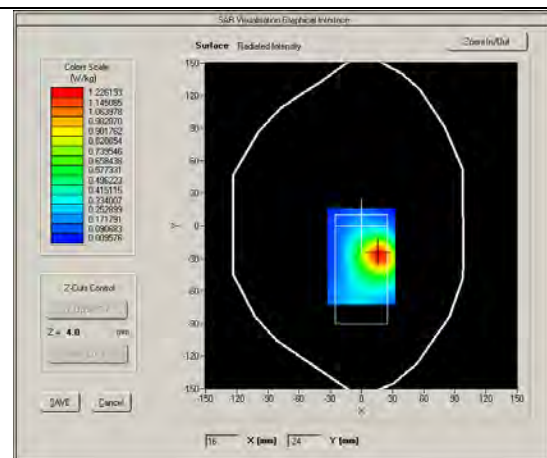

VOLUME SAR

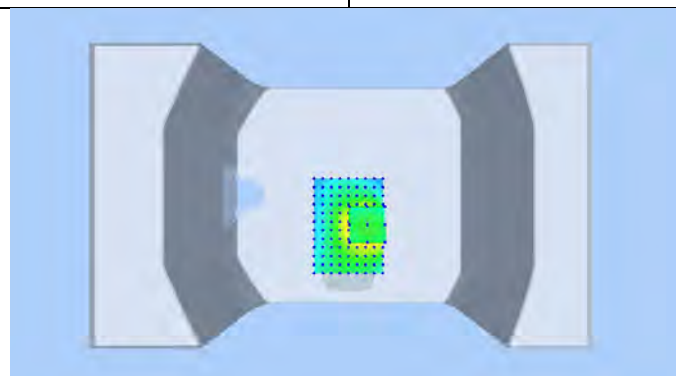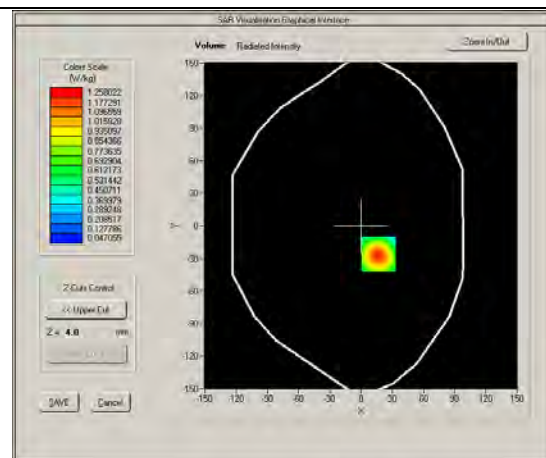




35# 802.11b_Rear Face_1cm_Ch 1

DUT:180628W003

Test Date: Sep 30, 2018

Ambient Temperature: 22.3°C; Liquid Temperature: 21.0°C

Medium(liquid type)	BL_2450
Frequency (MHz)	2437
Relative permittivity (real part)	52.22
Conductivity (S/m)	1.96
Crest factor	1.0
E-Field Probe	SN 27/15 EPG0262
Conversion Factor	2.12
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Variation (%)	-2.22000
SAR 10g (W/Kg)	0.066858
SAR 1g (W/Kg)	0.125136

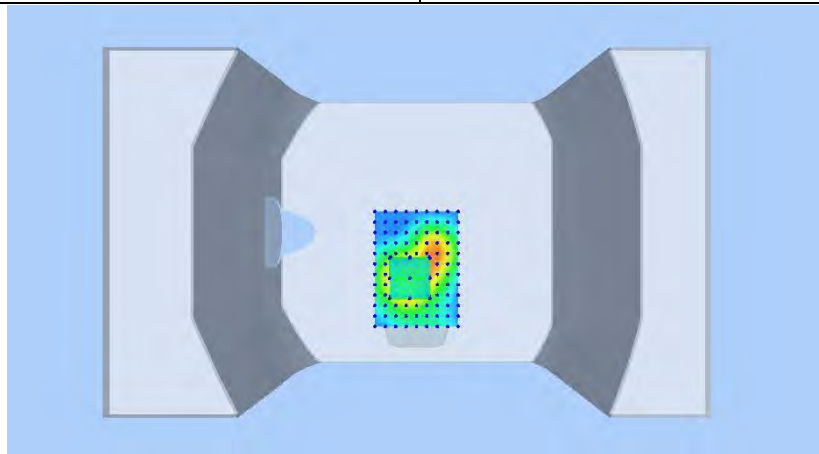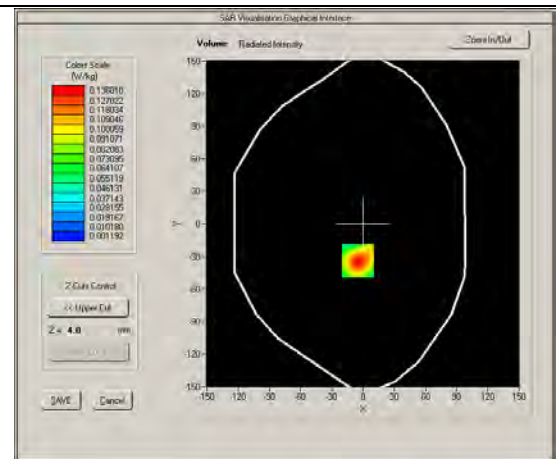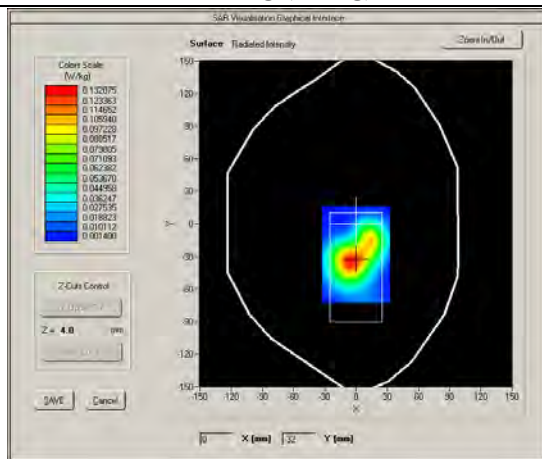




36# 802.11a_Rear Face_1cm_Ch 60

DUT:180628W003

Test Date: Oct 9, 2018

Ambient Temperature: 22.3°C; Liquid Temperature: 21.0°C

Medium(liquid type)	BL_5200
Frequency (MHz)	5300
Relative permittivity (real part)	48.61
Conductivity (S/m)	5.61
Crest factor	1.0
E-Field Probe	SN 27/15 EPGO262
Conversion Factor	2.12
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Variation (%)	-0.05000
SAR 10g (W/Kg)	0.047797
SAR 1g (W/Kg)	0.138999

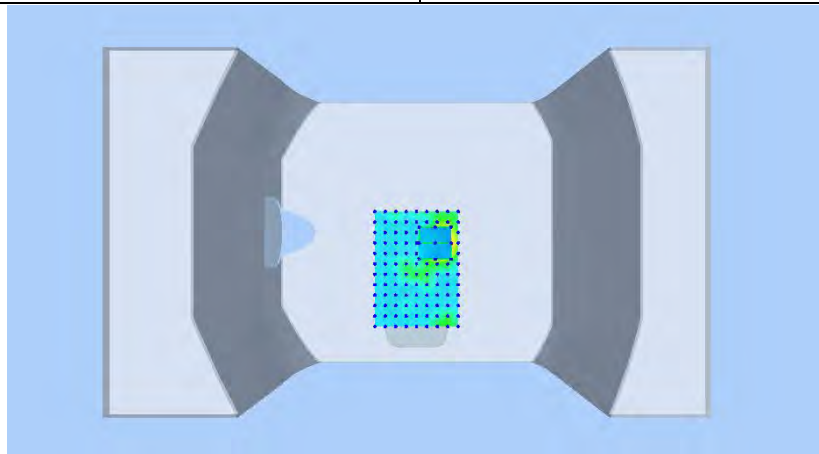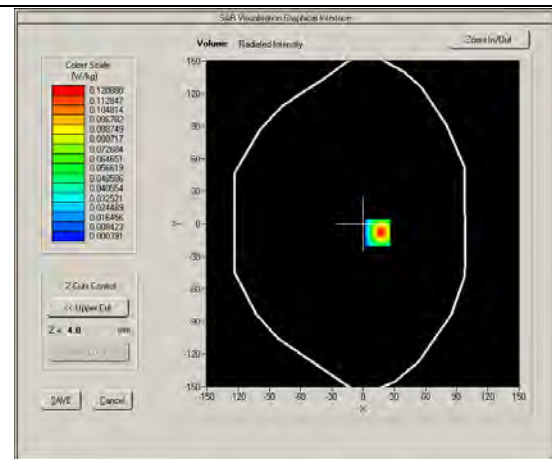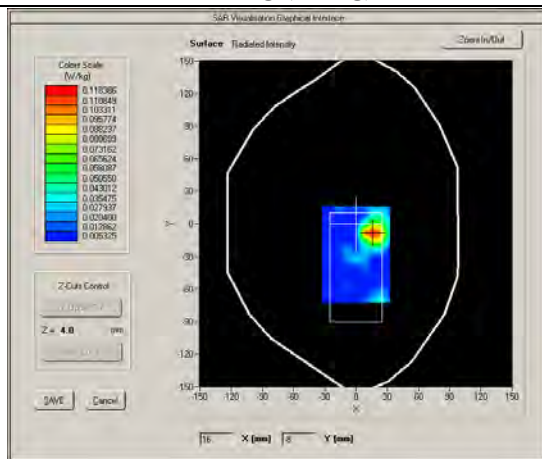




37# 802.11a_Rear Face_1cm_Ch 116

DUT:180628W003

Test Date: Oct 10, 2018

Ambient Temperature: 22.3°C; Liquid Temperature: 21.0°C

Medium(liquid type)	BL_5600
Frequency (MHz)	5580
Relative permittivity (real part)	46.89
Conductivity (S/m)	5.62
Crest factor	1.0
E-Field Probe	SN 27/15 EPGO262
Conversion Factor	2.12
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Variation (%)	-1.850000
SAR 10g (W/Kg)	0.056314
SAR 1g (W/Kg)	0.163826

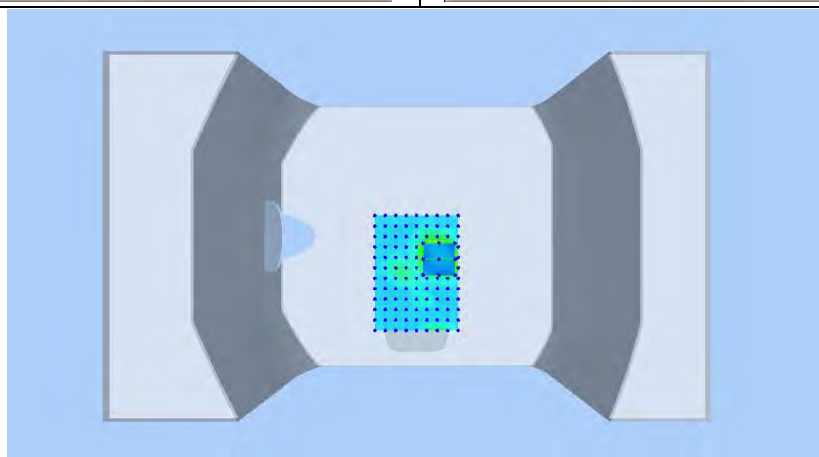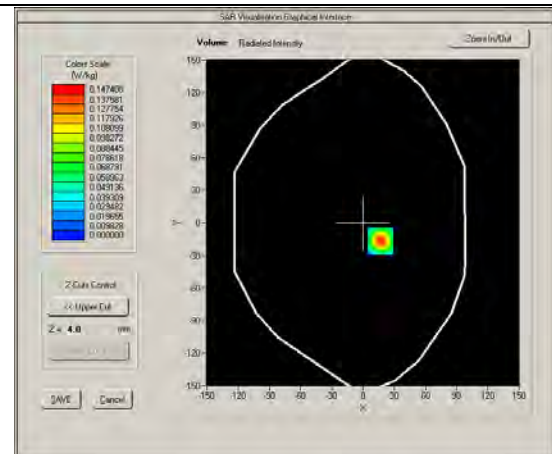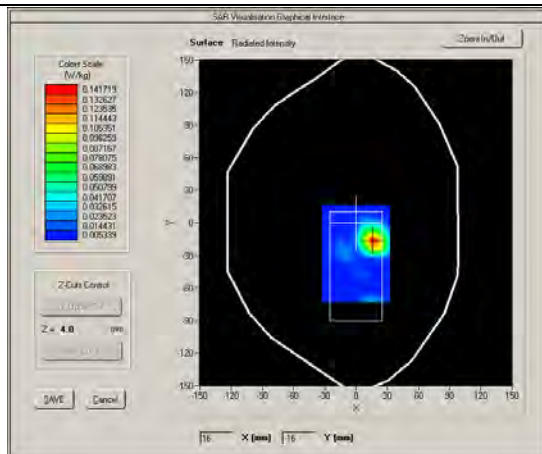




38# 802.11a_Rear Face_1cm_Ch 157

DUT:180628W003

Test Date: Oct 11, 2018

Ambient Temperature: 22.3°C; Liquid Temperature: 21.0°C

Medium(liquid type)	BL_5800
Frequency (MHz)	5785
Relative permittivity (real part)	47.64
Conductivity (S/m)	6.17
Crest factor	1.0
E-Field Probe	SN 27/15 EPGO262
Conversion Factor	2.12
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Variation (%)	1.250000
SAR 10g (W/Kg)	0.054552
SAR 1g (W/Kg)	0.155476

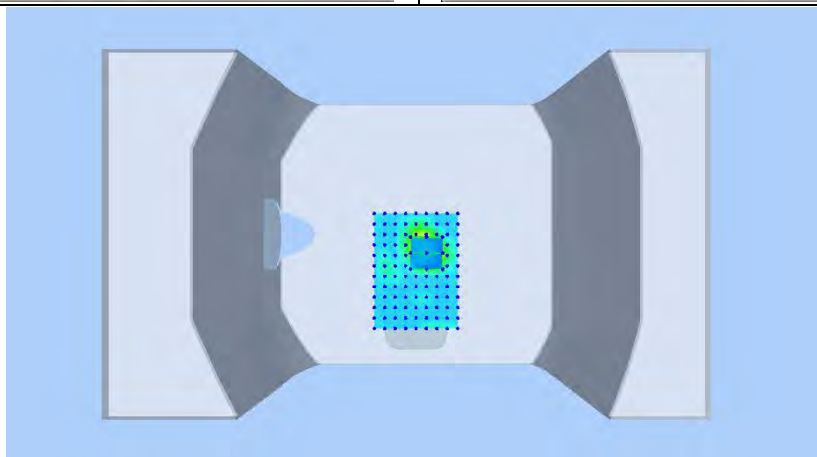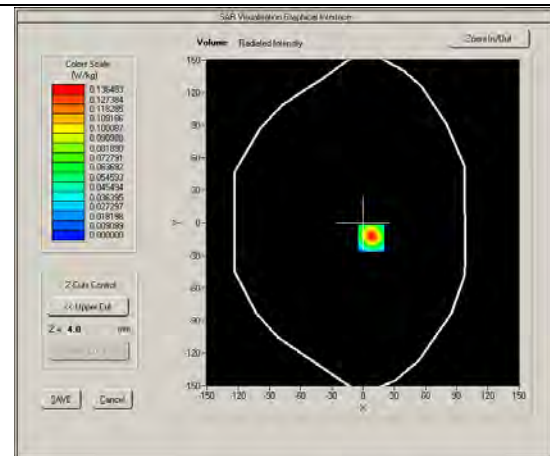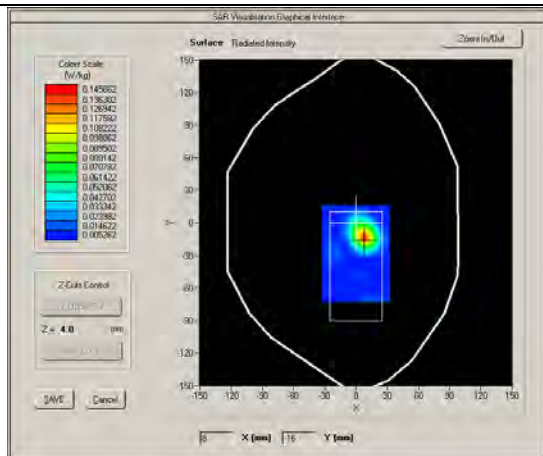




39# 802.11a_Rear Face_1cm_Ch 48

DUT:180628W003

Test Date: Oct 9, 2018

Ambient Temperature: 22.3°C; Liquid Temperature: 21.0°C

Medium(liquid type)	BL_5200
Frequency (MHz)	5240
Relative permittivity (real part)	48.61
Conductivity (S/m)	5.61
Crest factor	1.0
E-Field Probe	SN 27/15 EPG0262
Conversion Factor	2.12
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Variation (%)	-0.16000
SAR 10g (W/Kg)	0.048576
SAR 1g (W/Kg)	0.141426

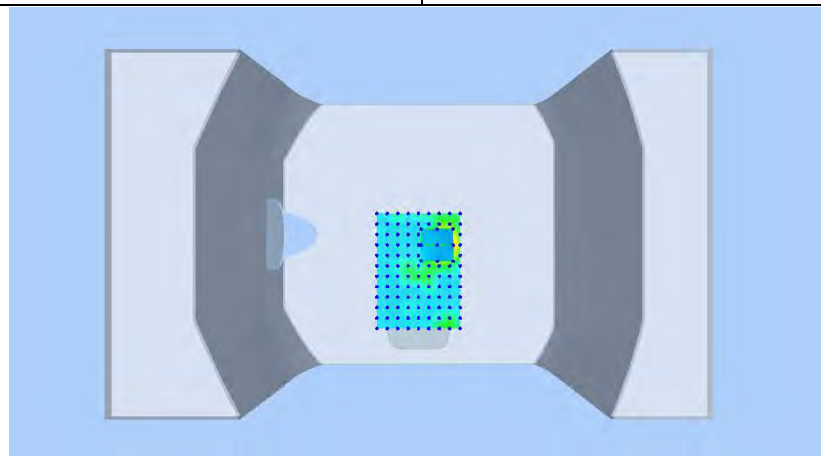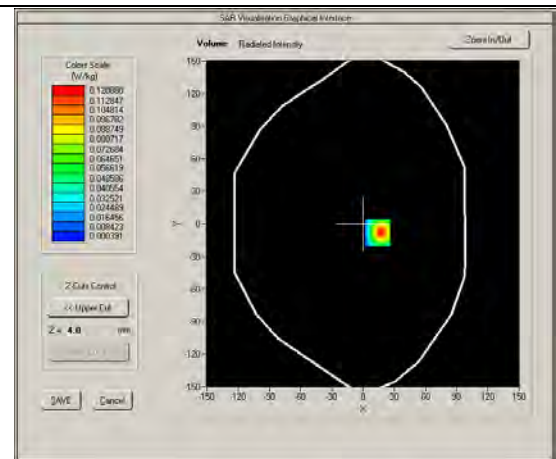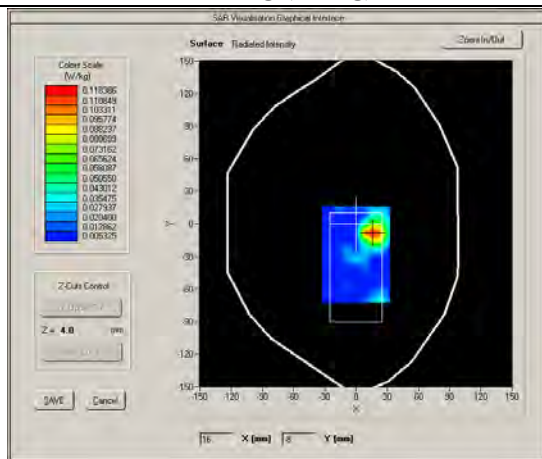



FCC SAR Test Report

Appendix C. Calibration Certificate for Probe and Dipole

The MVG calibration certificates are shown as follows.

Appendix C CALIBRATION REPORTS



COMOSAR E-Field Probe Calibration Report

Ref : ACR.158.1.18.SATU.A

**BV 7LAYERS COMMUNICATIONS
TECHNOLOGY (SHENZHEN) CO. LTD**
NO.B102, DAZU CHUANGXIN MANSION,NORTH OF
BEIHUAN AVENUE,NORTH AREA,
HI-TECH INDUSTRIAL PARK,NANSHAN
DISTRICT,SHENZHEN, CHINA
MVG COMOSAR DOSIMETRIC E-FIELD PROBE
SERIAL NO.: SN 27/15 EPG0262

Calibrated at MVG US
2105 Barrett Park Dr. - Kennesaw, GA 30144



Calibration Date: 06/07/2018

Summary:

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed in MVG USA using the CALISAR / CALIBAIR test bench, for use with a COMOSAR system only. All calibration results are traceable to national metrology institutions.



	<i>Name</i>	<i>Function</i>	<i>Date</i>	<i>Signature</i>
<i>Prepared by :</i>	Jérôme LUC	Product Manager	6 7 2018	
<i>Checked by :</i>	Jérôme LUC	Product Manager	6 7 2018	
<i>Approved by :</i>	Kim RUTKOWSKI	Quality Manager	6 7 2018	

	<i>Customer Name</i>
<i>Distribution :</i>	BV 7Layers Communications Technology (Shenzhen) Co. Ltd

<i>Issue</i>	<i>Date</i>	<i>Modifications</i>
A	6 7 2018	Initial release



TABLE OF CONTENTS

1	Device Under Test	4
2	Product Description	4
2.1	General Information	4
3	Measurement Method	4
3.1	Linearity	4
3.2	Sensitivity	5
3.3	Lower Detection Limit	5
3.4	Isotropy	5
3.5	Boundary Effect	5
4	Measurement Uncertainty.....	5
5	Calibration Measurement Results.....	6
5.1	Sensitivity in air	6
5.2	Linearity	7
5.3	Sensitivity in liquid	7
5.4	Isotropy	8
6	List of Equipment	10



1 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	MVG
Model	SSE2
Serial Number	SN 27/15 EPGO262
Product Condition (new / used)	Used
Frequency Range of Probe	0.7 GHz-6GHz
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.222 MΩ Dipole 2: R2=0.200 MΩ Dipole 3: R3=0.200 MΩ

A yearly calibration interval is recommended.

2 PRODUCT DESCRIPTION

2.1 GENERAL INFORMATION

MVG's COMOSAR E field Probes are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards.



Figure 1 – MVG COMOSAR Dosimetric E field Dipole

Probe Length	330 mm
Length of Individual Dipoles	2 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	2.5 mm
Distance between dipoles / probe extremity	1 mm

3 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

3.1 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.

Page: 4/10

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

3.3 LOWER DETECTION LIMIT

The lower detection limit was assessed using the same measurement set up as used for the linearity measurement. The required lower detection limit is 10 mW/kg.

3.4 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 - 360 degrees in 15 degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

3.5 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEIIEC 62209 standards were followed to generate the measurement uncertainty associated with an E-field probe calibration using the waveguide technique. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

Uncertainty analysis of the probe calibration in waveguide					
ERROR SOURCES	Uncertainty value (%)	Probability Distribution	Divisor	ci	Standard Uncertainty (%)
Incident or forward power	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Reflected power	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Liquid conductivity	5.00%	Rectangular	$\sqrt{3}$	1	2.887%
Liquid permittivity	4.00%	Rectangular	$\sqrt{3}$	1	2.309%
Field homogeneity	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Field probe positioning	5.00%	Rectangular	$\sqrt{3}$	1	2.887%



Field probe linearity	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Combined standard uncertainty					5.831%
Expanded uncertainty 95 % confidence level k = 2					12.0%

5 CALIBRATION MEASUREMENT RESULTS

Calibration Parameters	
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %


5.1 SENSITIVITY IN AIR

Normx dipole 1 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normy dipole 2 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normz dipole 3 ($\mu\text{V}/(\text{V}/\text{m})^2$)
0.76	0.67	0.67

DCP dipole 1 (mV)	DCP dipole 2 (mV)	DCP dipole 3 (mV)
90	93	91

Calibration curves $e_i=f(V)$ ($i=1,2,3$) allow to obtain H-field value using the formula:

$$E = \sqrt{E_1^2 + E_2^2 + E_3^2}$$

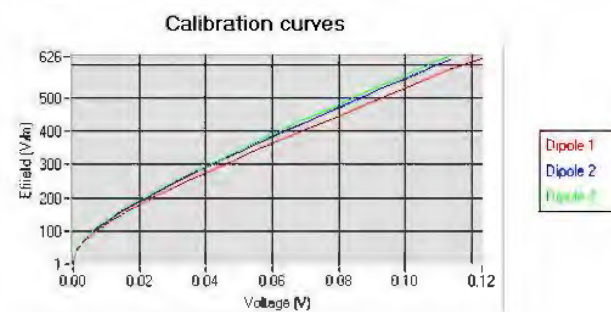


Page: 6/10

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



5.2 LINEARITY

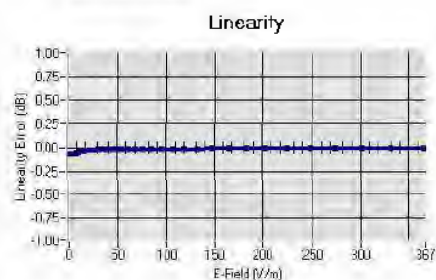

Linearity: $\pm 1.39\%$ (± 0.06 dB)

5.3 SENSITIVITY IN LIQUID

Liquid	Frequency (MHz $\pm$ 100MHz)	Permittivity	Epsilon (S/m)	ConvF
HL750	750	40.03	0.93	1.71
BL750	750	56.83	1.00	1.76
HL850	855	42.19	0.90	1.79
BL850	835	54.67	1.01	1.86
HL900	900	42.08	1.01	1.84
HL1450	1450	40.64	1.18	1.87
BL1450	1450	53.01	1.33	1.93
HL1750	1750	41.01	1.45	1.88
BL1750	1750	53.50	1.50	1.95
HL1900	1900	38.45	1.45	2.14
BL1900	1900	53.32	1.56	2.20
HL2000	2000	38.26	1.38	2.02
HL2300	2300	39.44	1.62	2.24
BL2300	2300	54.52	1.77	2.32
HL2450	2450	37.50	1.80	2.25
BL2450	2450	53.22	1.89	2.31
HL2600	2600	39.80	1.99	2.16
BL2600	2600	52.52	2.23	2.21
HL5200	5250	35.85	4.74	1.70
BL5200	5250	48.01	5.40	1.76
HL5600	5600	36.66	5.17	1.69
BL5600	5600	46.79	5.77	1.75
HL5800	5800	35.31	5.31	1.71
BL5800	5800	47.04	6.10	1.74


LOWER DETECTION LIMIT: 9mW/kg



5.4 ISOTROPY


HL900 MHz

- Axial isotropy: 0.04 dB
- Hemispherical isotropy: 0.07 dB




HL1800 MHz

- Axial isotropy: 0.06 dB
- Hemispherical isotropy: 0.08 dB



HL5600 MHz

- Axial isotropy: 0.06 dB
- Hemispherical isotropy: 0.08 dB





6 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
Flat Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2016	02/2019
Reference Probe	MVG	EP 94 SN 37/08	10/2017	10/2018
Multimeter	Keithley 2000	1188656	01/2017	01/2020
Signal Generator	Agilent E4438C	MY49070581	01/2017	01/2020
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	01/2017	01/2020
Power Sensor	HP ECP-E26A	US37181460	01/2017	01/2020
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Waveguide	Mega Industries	069Y7-158-13-712	Validated. No cal required.	Validated. No cal required.
Waveguide Transition	Mega Industries	069Y7-158-13-701	Validated. No cal required.	Validated. No cal required.
Waveguide Termination	Mega Industries	069Y7-158-13-701	Validated. No cal required.	Validated. No cal required.
Temperature / Humidity Sensor	Control Company	150798832	11/2017	11/2020



SAR Reference Dipole Calibration Report

Ref : ACR.165.1.17.SATU.A

SIEMIC TESTING AND CERTIFICATION SERVICES

ZONE A,FLOOR 1,BUILDING 2,WAN YE LONG
TECHNOLOGY PARK,SOUTH SIDE OF ZHOUSHI ROAD,
SHIYAN STREET,BAO'AN DISTRICT, SHENZHEN 518108 ,
GUANGDONG , P.R.C.

MVG COMOSAR REFERENCE DIPOLE

FREQUENCY: 750 MHZ

SERIAL NO.: SN 26/14 DIP0G750-325

Calibrated at MVG US

2105 Barrett Park Dr. - Kennesaw, GA 30144



Calibration Date: 06/8/2017

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	5
4.1	Return Loss Requirements	5
4.2	Mechanical Requirements	5
5	Measurement Uncertainty.....	5
5.1	Return Loss	5
5.2	Dimension Measurement	5
5.3	Validation Measurement	5
6	Calibration Measurement Results.....	6
6.1	Return Loss and Impedance In Head Liquid	6
6.2	Return Loss and Impedance In Body Liquid	6
6.3	Mechanical Dimensions	6
7	Validation measurement	7
7.1	Head Liquid Measurement	7
7.2	SAR Measurement Result With Head Liquid	8
7.3	Body Liquid Measurement	9
7.4	SAR Measurement Result With Body Liquid	10
8	List of Equipment	11



1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 750 MHz REFERENCE DIPOLE
Manufacturer	MVG
Model	SID750
Serial Number	SN 26/14 DIP0G750-325
Product Condition (new / used)	Used

A yearly calibration interval is recommended.

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole



4 MEASUREMENT METHOD

The IEEE 1528, FCC KDBs and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards.

4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Frequency band	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, FCC KDBs, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Scan Volume	Expanded Uncertainty
1 g	20.3 %




10 g

20.1 %


6 CALIBRATION MEASUREMENT RESULTS

6.1 RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

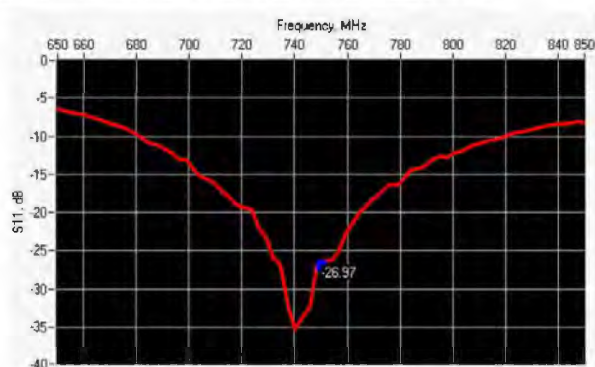

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
750	-26.97	-20	$54.4 \Omega - 1.4 j\Omega$

6.2 RETURN LOSS AND IMPEDANCE IN BODY LIQUID

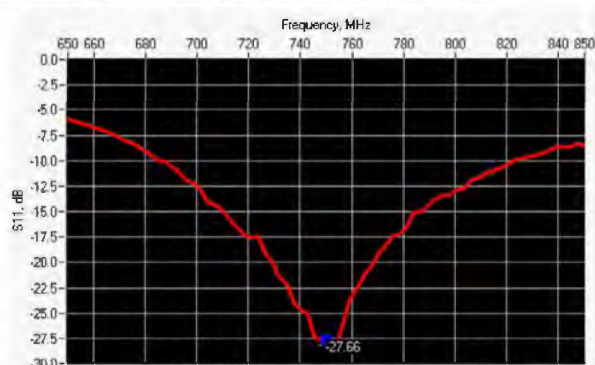

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
750	-27.66	-20	$53.5 \Omega + 2.5 j\Omega$

6.3 MECHANICAL DIMENSIONS

Frequency MHz	L mm		h mm		d mm	
	required	measured	required	measured	required	measured
300	$420.0 \pm 1 \%$		$250.0 \pm 1 \%$		$6.35 \pm 1 \%$	

Page: 6/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



450	290.0 ±1 %.		166.7 ±1 %.		6.35 ±1 %.	
750	176.0 ±1 %.	PASS	100.0 ±1 %.	PASS	6.35 ±1 %.	PASS
835	161.0 ±1 %.		89.8 ±1 %.		3.6 ±1 %.	
900	149.0 ±1 %.		83.3 ±1 %.		3.6 ±1 %.	
1450	89.1 ±1 %.		51.7 ±1 %.		3.6 ±1 %.	
1500	80.5 ±1 %.		50.0 ±1 %.		3.6 ±1 %.	
1640	79.0 ±1 %.		45.7 ±1 %.		3.6 ±1 %.	
1750	75.2 ±1 %.		42.9 ±1 %.		3.6 ±1 %.	
1800	72.0 ±1 %.		41.7 ±1 %.		3.6 ±1 %.	
1900	68.0 ±1 %.		39.5 ±1 %.		3.6 ±1 %.	
1950	66.3 ±1 %.		38.5 ±1 %.		3.6 ±1 %.	
2000	64.5 ±1 %.		37.5 ±1 %.		3.6 ±1 %.	
2100	61.0 ±1 %.		35.7 ±1 %.		3.6 ±1 %.	
2300	55.5 ±1 %.		32.6 ±1 %.		3.6 ±1 %.	
2450	51.5 ±1 %.		30.4 ±1 %.		3.6 ±1 %.	
2600	48.5 ±1 %.		28.8 ±1 %.		3.6 ±1 %.	
3000	41.5 ±1 %.		25.0 ±1 %.		3.6 ±1 %.	
3500	37.0 ±1 %.		26.4 ±1 %.		3.6 ±1 %.	
3700	34.7 ±1 %.		26.4 ±1 %.		3.6 ±1 %.	

7 VALIDATION MEASUREMENT

The IEEE Std. 1528, FCC KDBs and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

7.1 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r)		Conductivity (σ) S/m	
	required	measured	required	measured
300	45.3 ±5 %		0.87 ±5 %	
450	43.5 ±5 %		0.87 ±5 %	
750	41.9 ±5 %	PASS	0.89 ±5 %	PASS
835	41.5 ±5 %		0.90 ±5 %	
900	41.5 ±5 %		0.97 ±5 %	
1450	40.5 ±5 %		1.20 ±5 %	
1500	40.4 ±5 %		1.23 ±5 %	
1640	40.2 ±5 %		1.31 ±5 %	
1750	40.1 ±5 %		1.37 ±5 %	

Page: 7/11

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



1800	40.0 $\pm$ 5 %		1.40 $\pm$ 5 %	
1900	40.0 $\pm$ 5 %		1.40 $\pm$ 5 %	
1950	40.0 $\pm$ 5 %		1.40 $\pm$ 5 %	
2000	40.0 $\pm$ 5 %		1.40 $\pm$ 5 %	
2100	39.8 $\pm$ 5 %		1.49 $\pm$ 5 %	
2300	39.5 $\pm$ 5 %		1.67 $\pm$ 5 %	
2450	39.2 $\pm$ 5 %		1.80 $\pm$ 5 %	
2600	39.0 $\pm$ 5 %		1.96 $\pm$ 5 %	
3000	38.5 $\pm$ 5 %		2.40 $\pm$ 5 %	
3500	37.9 $\pm$ 5 %		2.91 $\pm$ 5 %	

7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID


The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Head Liquid Values: ϵ ps' : 40.0 sigma : 0.93
Distance between dipole center and liquid	15.0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=8mm/dy=8mm/dz=5mm
Frequency	750 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)		10 g SAR (W/kg/W)	
	required	measured	required	measured
300	2.85		1.94	
450	4.58		3.06	
750	8.49	8.55 (0.85)	5.55	5.62 (0.56)
835	9.56		6.22	
900	10.9		6.99	
1450	29		16	
1500	30.5		16.8	
1640	34.2		18.4	
1750	36.4		19.3	
1800	38.4		20.1	



1900	39.7		20.5	
1950	40.5		20.9	
2000	41.1		21.1	
2100	43.6		21.9	
2300	48.7		23.3	
2450	52.4		24	
2600	55.3		24.6	
3000	63.8		25.7	
3500	67.1		25	
3700	67.4		24.2	

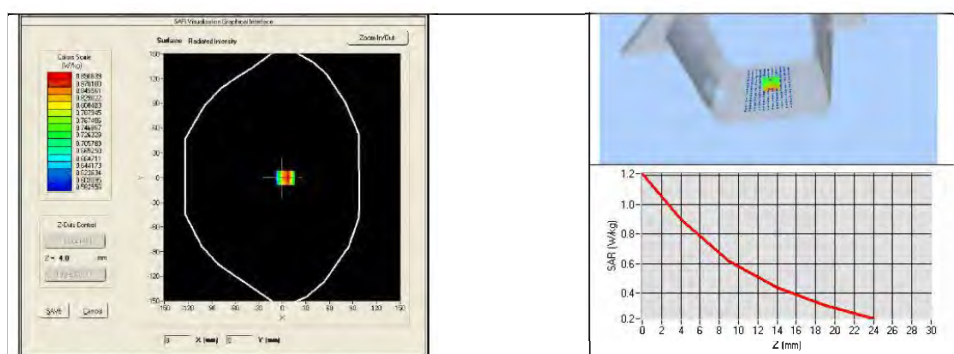

7.3 BODY LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r')		Conductivity (σ) S/m	
	required	measured	required	measured
150	61.9 $\pm$ 5 %		0.80 $\pm$ 5 %	
300	58.2 $\pm$ 5 %		0.92 $\pm$ 5 %	
450	56.7 $\pm$ 5 %		0.94 $\pm$ 5 %	
750	55.5 $\pm$ 5 %	PASS	0.96 $\pm$ 5 %	PASS
835	55.2 $\pm$ 5 %		0.97 $\pm$ 5 %	
900	55.0 $\pm$ 5 %		1.05 $\pm$ 5 %	
915	55.0 $\pm$ 5 %		1.06 $\pm$ 5 %	
1450	54.0 $\pm$ 5 %		1.30 $\pm$ 5 %	
1610	53.8 $\pm$ 5 %		1.40 $\pm$ 5 %	
1800	53.3 $\pm$ 5 %		1.52 $\pm$ 5 %	
1900	53.3 $\pm$ 5 %		1.52 $\pm$ 5 %	
2000	53.3 $\pm$ 5 %		1.52 $\pm$ 5 %	
2100	53.2 $\pm$ 5 %		1.62 $\pm$ 5 %	




2300	52.9 ±5 %		1.81 ±5 %	
2450	52.7 ±5 %		1.95 ±5 %	
2600	52.5 ±5 %		2.16 ±5 %	
3000	52.0 ±5 %		2.73 ±5 %	
3500	51.3 ±5 %		3.31 ±5 %	
3700	51.0 ±5 %		3.55 ±5 %	
5200	49.0 ±10 %		5.30 ±10 %	
5300	48.9 ±10 %		5.42 ±10 %	
5400	48.7 ±10 %		5.53 ±10 %	
5500	48.6 ±10 %		5.65 ±10 %	
5600	48.5 ±10 %		5.77 ±10 %	
5800	48.2 ±10 %		6.00 ±10 %	

7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Body Liquid Values: ϵ_{ps} : 56.8 sigma : 1.00
Distance between dipole center and liquid	15.0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=8mm/dy=8mm/dz=5mm
Frequency	750 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)	10 g SAR (W/kg/W)
	measured	measured
750	8.75 (0.88)	5.83 (0.58)

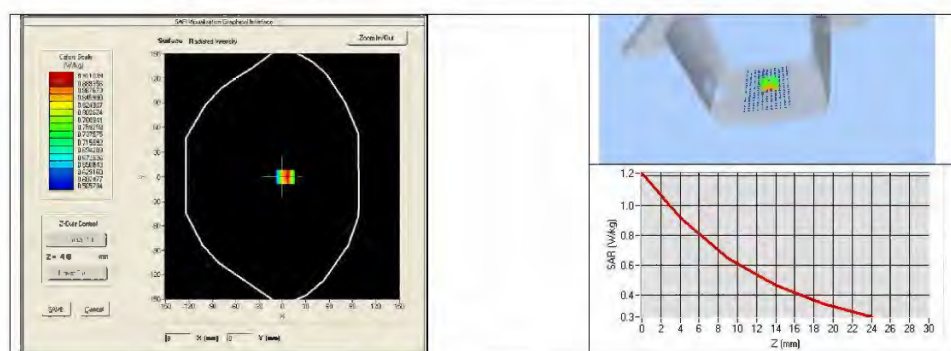

Page: 10/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



8 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
SAM Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2016	02/2019
Calipers	Carrera	CALIPER-01	01/2017	01/2020
Reference Probe	MVG	EPG122 SN 18/11	10/2016	10/2017
Multimeter	Keithley 2000	1188656	01/2017	01/2020
Signal Generator	Agilent E4438C	MY49070581	01/2017	01/2020
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	01/2017	01/2020
Power Sensor	HP ECP-E26A	US37181460	01/2017	01/2020
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature and Humidity Sensor	Control Company	150798832	10/2015	10/2017



SAR Reference Dipole Calibration Report

Ref : ACR.165.2.17.SATU.A

SIEMIC TESTING AND CERTIFICATION SERVICES

**ZONE A,FLOOR 1,BUILDING 2,WAN YE LONG
TECHNOLOGY PARK,SOUTH SIDE OF ZHOUSHI ROAD,
SHIYAN STREET,BAO'AN DISTRICT, SHENZHEN 518108 ,
GUANGDONG , P.R.C.**

MVG COMOSAR REFERENCE DIPOLE

FREQUENCY: 835 MHZ

SERIAL NO.: SN 18/11 DIPCI50

Calibrated at MVG US

2105 Barrett Park Dr. - Kennesaw, GA 30144



Calibration Date: 06/8/2017

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



	<i>Name</i>	<i>Function</i>	<i>Date</i>	<i>Signature</i>
<i>Prepared by :</i>	Jérôme LUC	Product Manager	6/14/2017	<i>JS</i>
<i>Checked by :</i>	Jérôme LUC	Product Manager	6/14/2017	<i>JS</i>
<i>Approved by :</i>	Kim RUTKOWSKI	Quality Manager	6/14/2017	<i>Kim Rutkowski</i>

	<i>Customer Name</i>
<i>Distribution :</i>	SIEMIC Testing and Certification Services

<i>Issue</i>	<i>Date</i>	<i>Modifications</i>
A	6/14/2017	Initial release



TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	5
4.1	Return Loss Requirements	5
4.2	Mechanical Requirements	5
5	Measurement Uncertainty	5
5.1	Return Loss	5
5.2	Dimension Measurement	5
5.3	Validation Measurement	5
6	Calibration Measurement Results	6
6.1	Return Loss and Impedance In Head Liquid	6
6.2	Return Loss and Impedance In Body Liquid	6
6.3	Mechanical Dimensions	6
7	Validation measurement	7
7.1	Head Liquid Measurement	7
7.2	SAR Measurement Result With Head Liquid	8
7.3	Body Liquid Measurement	9
7.4	SAR Measurement Result With Body Liquid	10
8	List of Equipment	11



1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 835 MHz REFERENCE DIPOLE
Manufacturer	MVG
Model	SID835
Serial Number	SN 18/11 DIPC150
Product Condition (new / used)	Used

A yearly calibration interval is recommended.

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole



4 MEASUREMENT METHOD

The IEEE 1528, FCC KDBs and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards.

4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Frequency band	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, FCC KDBs, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Scan Volume	Expanded Uncertainty
1 g	20.3 %




10 g

20.1 %


6 CALIBRATION MEASUREMENT RESULTS

6.1 RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

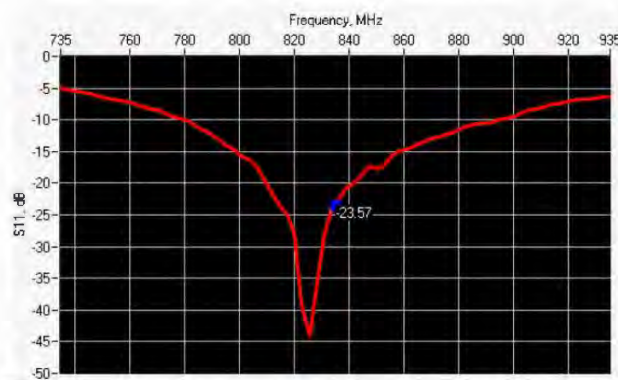

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
835	-23.57	-20	$57.0 \Omega + 1.2 j\Omega$

6.2 RETURN LOSS AND IMPEDANCE IN BODY LIQUID

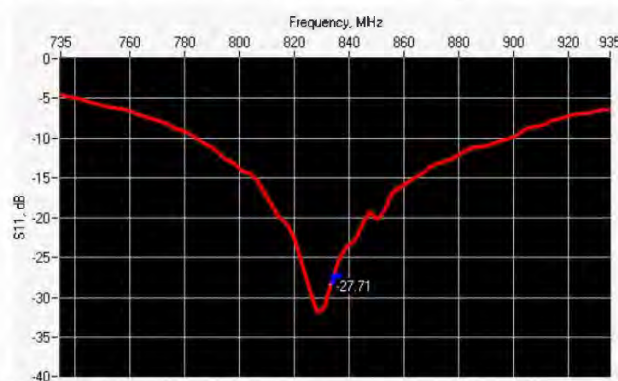

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
835	-27.71	-20	$52.9 \Omega + 3.1 j\Omega$

6.3 MECHANICAL DIMENSIONS

Frequency MHz	L mm		h mm		d mm	
	required	measured	required	measured	required	measured
300	420.0 $\pm$ 1 %		250.0 $\pm$ 1 %		6.35 $\pm$ 1 %	



450	290.0 ±1 %		166.7 ±1 %		6.35 ±1 %	
750	176.0 ±1 %		100.0 ±1 %		6.35 ±1 %	
835	161.0 ±1 %	PASS	89.8 ±1 %	PASS	3.6 ±1 %	PASS
900	149.0 ±1 %		83.3 ±1 %		3.6 ±1 %	
1450	89.1 ±1 %		51.7 ±1 %		3.6 ±1 %	
1500	80.5 ±1 %		50.0 ±1 %		3.6 ±1 %	
1640	79.0 ±1 %		45.7 ±1 %		3.6 ±1 %	
1750	75.2 ±1 %		42.9 ±1 %		3.6 ±1 %	
1800	72.0 ±1 %		41.7 ±1 %		3.6 ±1 %	
1900	68.0 ±1 %		39.5 ±1 %		3.6 ±1 %	
1950	66.3 ±1 %		38.5 ±1 %		3.6 ±1 %	
2000	64.5 ±1 %		37.5 ±1 %		3.6 ±1 %	
2100	61.0 ±1 %		35.7 ±1 %		3.6 ±1 %	
2300	55.5 ±1 %		32.6 ±1 %		3.6 ±1 %	
2450	51.5 ±1 %		30.4 ±1 %		3.6 ±1 %	
2600	48.5 ±1 %		28.8 ±1 %		3.6 ±1 %	
3000	41.5 ±1 %		25.0 ±1 %		3.6 ±1 %	
3500	37.0 ±1 %		26.4 ±1 %		3.6 ±1 %	
3700	34.7 ±1 %		26.4 ±1 %		3.6 ±1 %	

7 VALIDATION MEASUREMENT

The IEEE Std. 1528, FCC KDBs and CE/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

7.1 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r)		Conductivity (σ) S/m	
	required	measured	required	measured
300	45.3 ±5 %		0.87 ±5 %	
450	43.5 ±5 %		0.87 ±5 %	
750	41.9 ±5 %		0.89 ±5 %	
835	41.5 ±5 %	PASS	0.90 ±5 %	PASS
900	41.5 ±5 %		0.97 ±5 %	
1450	40.5 ±5 %		1.20 ±5 %	
1500	40.4 ±5 %		1.23 ±5 %	
1640	40.2 ±5 %		1.31 ±5 %	
1750	40.1 ±5 %		1.37 ±5 %	

Page: 7/11

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



1800	40.0 ±5 %		1.40 ±5 %	
1900	40.0 ±5 %		1.40 ±5 %	
1950	40.0 ±5 %		1.40 ±5 %	
2000	40.0 ±5 %		1.40 ±5 %	
2100	39.8 ±5 %		1.49 ±5 %	
2300	39.5 ±5 %		1.67 ±5 %	
2450	39.2 ±5 %		1.80 ±5 %	
2600	39.0 ±5 %		1.96 ±5 %	
3000	38.5 ±5 %		2.40 ±5 %	
3500	37.9 ±5 %		2.91 ±5 %	

7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID


The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Head Liquid Values: ϵ_r : 40.0 σ : 0.90
Distance between dipole center and liquid	15.0 mm
Area scan resolution	$dx=8mm/dy=8mm$
Zoon Scan Resolution	$dx=8mm/dy=8mm/dz=5mm$
Frequency	835 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)		10 g SAR (W/kg/W)	
	required	measured	required	measured
300	2.85		1.94	
450	4.58		3.06	
750	8.49		5.55	
835	9.56	9.64 (0.96)	6.22	6.20 (0.62)
900	10.9		6.99	
1450	29		16	
1500	30.5		16.8	
1640	34.2		18.4	
1750	36.4		19.3	
1800	38.4		20.1	



1900	39.7		20.5	
1950	40.5		20.9	
2000	41.1		21.1	
2100	43.6		21.9	
2300	48.7		23.3	
2450	52.4		24	
2600	55.3		24.6	
3000	63.8		25.7	
3500	67.1		25	
3700	67.4		24.2	

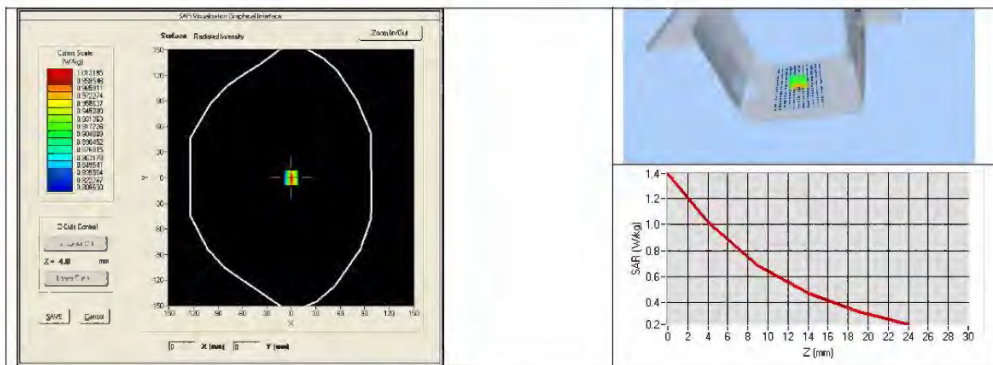

7.3 BODY LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r')		Conductivity (σ) S/m	
	required	measured	required	measured
150	61.9 $\pm$ 5 %		0.80 $\pm$ 5 %	
300	58.2 $\pm$ 5 %		0.92 $\pm$ 5 %	
450	56.7 $\pm$ 5 %		0.94 $\pm$ 5 %	
750	55.5 $\pm$ 5 %		0.96 $\pm$ 5 %	
835	55.2 $\pm$ 5 %	PASS	0.97 $\pm$ 5 %	PASS
900	55.0 $\pm$ 5 %		1.05 $\pm$ 5 %	
915	55.0 $\pm$ 5 %		1.06 $\pm$ 5 %	
1450	54.0 $\pm$ 5 %		1.30 $\pm$ 5 %	
1610	53.8 $\pm$ 5 %		1.40 $\pm$ 5 %	
1800	53.3 $\pm$ 5 %		1.52 $\pm$ 5 %	
1900	53.3 $\pm$ 5 %		1.52 $\pm$ 5 %	
2000	53.3 $\pm$ 5 %		1.52 $\pm$ 5 %	
2100	53.2 $\pm$ 5 %		1.62 $\pm$ 5 %	




2300	52.9 ±5 %		1.81 ±5 %	
2450	52.7 ±5 %		1.95 ±5 %	
2600	52.5 ±5 %		2.16 ±5 %	
3000	52.0 ±5 %		2.73 ±5 %	
3500	51.3 ±5 %		3.31 ±5 %	
3700	51.0 ±5 %		3.55 ±5 %	
5200	49.0 ±10 %		5.30 ±10 %	
5300	48.9 ±10 %		5.42 ±10 %	
5400	48.7 ±10 %		5.53 ±10 %	
5500	48.6 ±10 %		5.65 ±10 %	
5600	48.5 ±10 %		5.77 ±10 %	
5800	48.2 ±10 %		6.00 ±10 %	

7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Body Liquid Values: eps' : 57.5 sigma : 0.96
Distance between dipole center and liquid	15.0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=8mm/dy=8mm/dz=5mm
Frequency	835 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)	10 g SAR (W/kg/W)
	measured	measured
835	9.96 (1.00)	6.53 (0.65)

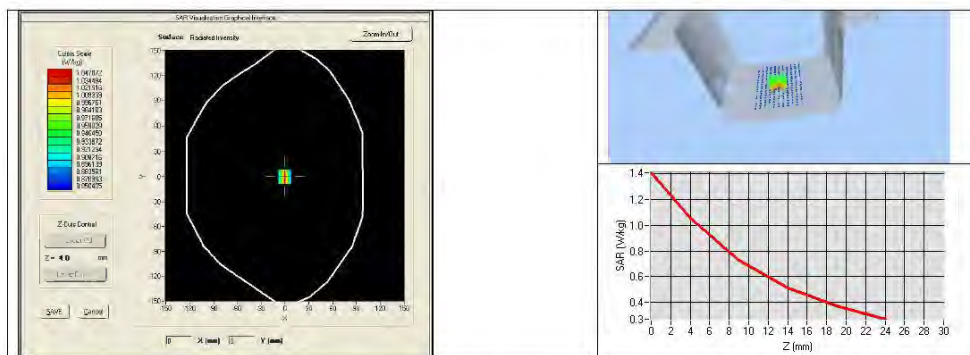

**8 LIST OF EQUIPMENT**

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
SAM Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2016	02/2019
Calipers	Carrera	CALIPER-01	01/2017	01/2020
Reference Probe	MVG	EPG122 SN 18/11	10/2016	10/2017
Multimeter	Keithley 2000	1188656	01/2017	01/2020
Signal Generator	Agilent E4438C	MY49070581	01/2017	01/2020
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	01/2017	01/2020
Power Sensor	HP ECP-E26A	US37181460	01/2017	01/2020
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature and Humidity Sensor	Control Company	150798832	10/2015	10/2017