



Total Quality. Assured.

Intertek
731 Enterprise Drive
Lexington, KY 40510

Tel 859 226 1000
Fax 859 226 1040

www.intertek.com

The Boeing Co. MPE REPORT

SCOPE OF WORK

MPE CALCULATION
ON THE CELLULAR MODULE

REPORT NUMBER

104056598LEX-017

ISSUE DATE

11/18/2020

PAGES

14

DOCUMENT CONTROL NUMBER

Non-Specific EMC Report Shell Rev. December 2017
© 2017 INTERTEK



MPE TEST REPORT

Report Number: 104056598LEX-017
Project Number: G104056598

Report Issue Date: 11/18/2020

Product Name: Cellular Module

Standards: FCC Part 1.1310 Limits for Maximum
Permissible Exposure (MPE)

**RSS-102 Issue 5 RF Field Strength Limits for
Devices Used by the General Public**

Tested by:
Intertek Testing Services NA, Inc.
731 Enterprise Drive
Lexington, KY 40510
USA

Client:
The Boeing Co.
Spectrum Management, MC 1K-105
P.O. Box 3707
Seattle, WA 98124-2207
USA

Report prepared by



Bryan Taylor, Team Leader

Report reviewed by



Brian Lackey, Staff Engineer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.





Table of Contents

1	<i>Introduction and Conclusion</i>	4
2	<i>Test Summary</i>	4
3	<i>Client Information</i>	5
4	<i>Description of Equipment under Test and Variant Models</i>	6
5	<i>Antenna Gains:</i>	7
6	<i>Output Power:</i>	8
7	<i>FCC Limits</i>	10
8	<i>RSS-102 Issue 5 Exposure Limits:</i>	11
9	<i>Test Procedure</i>	12
10	<i>Results:</i>	13
11	<i>Revision History</i>	14



1 Introduction and Conclusion

The tests indicated in section 2.0 were performed on the product constructed as described in section 4.0. The remaining test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test Method, a list of the actual Test Equipment Used, documentation Photos, Results and raw Data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded the product tested **complies** with the requirements of the standard(s) indicated. The results obtained in this test report pertain only to the item(s) tested. Intertek does not make any claims of compliance for samples or variants which were not tested.

2 Test Summary

Section	Test full name	Result
10	FCC Part 1.1310 Limits for Maximum Permissible Exposure (MPE) (Limits for General Population / Uncontrolled Exposure)	Pass
	RSS-102 Issue 5 RF Field Strength Limits (For Devices Used by the General Public)	Pass



3 Client Information

This product was tested at the request of the following:

Client Information	
Client Name:	The Boeing Co.
Address:	Spectrum Management, MC 1K-105 P.O. Box 3707 Seattle, WA 98124-2207 USA
Contact:	Joel Thorsheim
Email:	joel.d.thorsheim@boeing.com
Manufacturer Information	
Manufacturer Name:	The Boeing Co.
Manufacturer Address:	Spectrum Management, MC 1K-105 P.O. Box 3707 Seattle, WA 98124-2207 USA



4 Description of Equipment under Test and Variant Models

Equipment Under Test	
Product Name	Cellular Module
Supported Transmit Bands	LTE – B1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B18, B19, B20, B26, B28, B29, B30, B32, B41, B46, B66 WCDMA – B1,2,4,5,6,8,9,19
Embedded Module	Sierra Wireless EM7565
Embedded Module hardware Version	1.0
Embedded Module Firmware Version	SWI9X50C_01.08.04.00 08 SWI9X50C_01.07.02.00
Receive Date	11/10/2019
Test Start Date	11/11/2019
Test End Date	11/18/2019
Device Received Condition	Good
Test Sample Type	Production
Rated Voltage	3.3V
Rated Current	1.5A
Rated Frequency	DC
Number of Phases	NA
Description of Equipment Under Test (provided by client)	
Cellular Module	


4.1 Variant Models:

There were no variant models covered by this evaluation.



5 Antenna Gains:

The Antenna used was model AT3000-17. It was used for the MPE calculations since it had the highest overall gain of the antennas proposed for use by The Boeing Co. The AT3000-18 antenna may also be used since it has lower gain in the 700 – 1500MHz Band

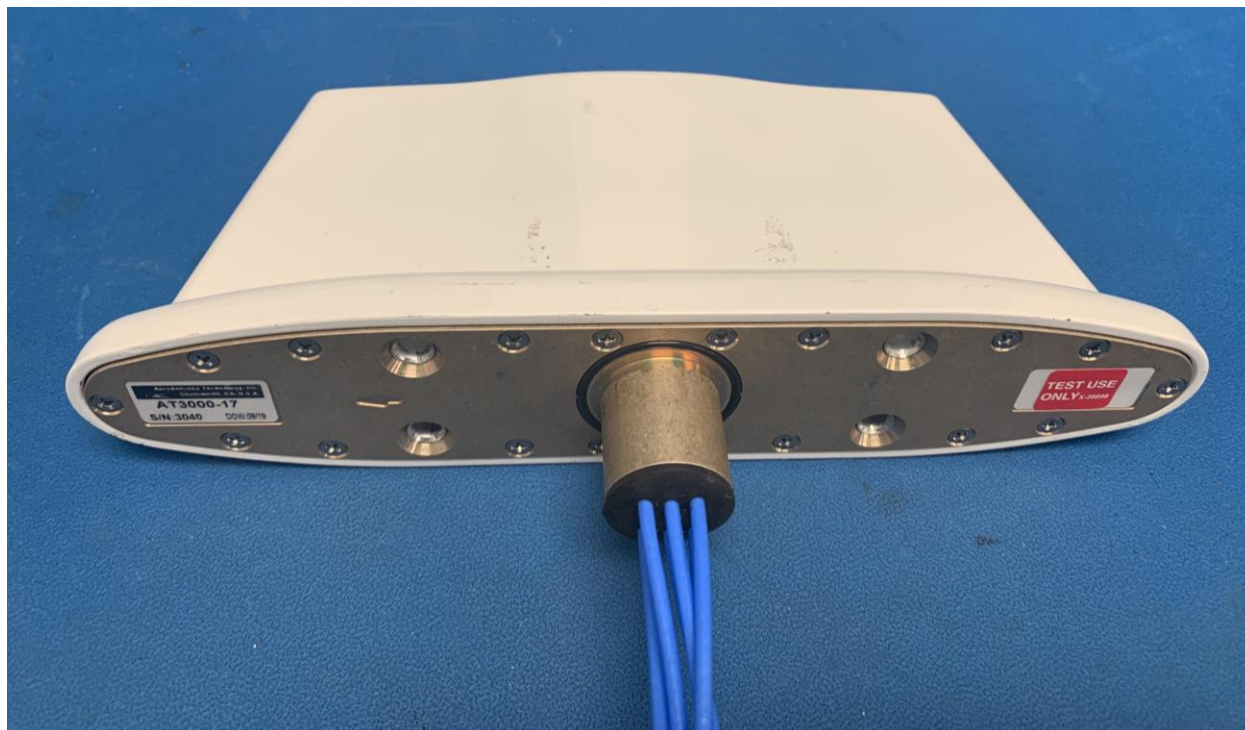

Antenna p/n	Function	Frequency (MHz)	Max Gain (dBi)	Min Cable Loss (dB)
AT3000-17	WiFi	2400-2500	4	0.5
		5100-5900	5	0.5
	Cellular	700-1500	6	0.5
		1700-2700	4	0.5
AT3000-18	WiFi	2400-2500	4	0.5
		5100-5900	5	0.5
	Cellular	700-1500	4	0.5
		1700-2700	4	0.5

Note: these antennas gains were provided by the client and used in the MPE calculations. Their values could impact results.




6 Output Power:

The maximum output power used for the MPE calculations was taken from the MPE on file with the FCC for the Sierra Wireless EM7565 module. These output power values could impact results.



6.1 EUT Photo

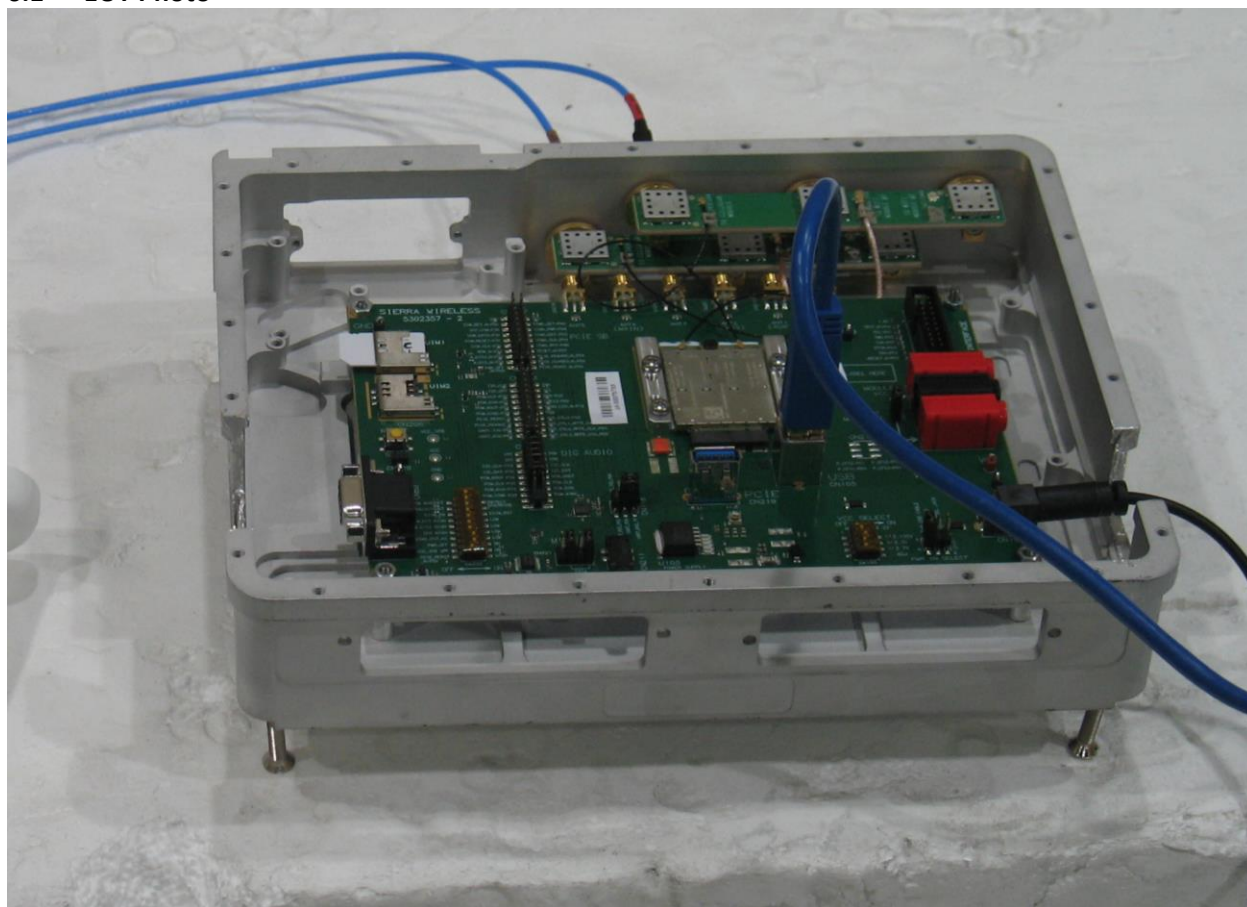

**7 FCC Limits**

§ 1.1310: The criteria listed in table 1 shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

Part 1.1310 Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

**8 RSS-102 Issue 5 Exposure Limits:**

Table 4: RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment)				
Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m ²)	Reference Period (minutes)
0.003-10 ²¹	83	90	-	Instantaneous*
0.1-10	-	0.73/ f	-	6**
1.1-10	87/ $f^{0.5}$	-	-	6**
10-20	27.46	0.0728	-2	6
20-48	58.07/ $f^{0.25}$	0.1540/ $f^{0.25}$	8.944/ $f^{0.5}$	6
48-300	22.06	0.05852	1.291	6
300-6000	3.142 $f^{0.3417}$	0.008335 $f^{0.3417}$	0.02619 $f^{0.6834}$	6
6000-15000	61.4	0.163	10	6
15000-150000	61.4	0.163	10	616000/ $f^{1.2}$
150000-300000	0.158 $f^{0.5}$	4.21 x 10 ⁻⁴ $f^{0.5}$	6.67 x 10 ⁻⁵ f	616000/ $f^{1.2}$
<p>Note: f is frequency in MHz.</p> <p>* Based on nerve stimulation (NS).</p> <p>** Based on specific absorption rate (SAR).</p>				



9 Test Procedure

An MPE evaluation for was performed in order to show that the device was compliant with the general population exposure limits from FCC §2.1091 and RSS-102 Issue 5. The maximum power density was calculated for each transmitter band at a separation distance of 20cm using the maximum declared output power including tune up tolerance.

For each transmitter the maximum RF exposure at a 20 cm distance using the formula:

$$ConductedPower_{mW} = 10^{ConductedPower(dBm)/10}$$

$$PowerDensity = \frac{ConductedPower_{mW} \times Ant.Gain}{4\pi \times (20_{cm})^2}$$

For transmitters that could operate simultaneously, the MPE to limit ratio for each was calculated and then summed. If the sum of the MPE to limit ratios was less than 1, that specific combination of transmitters was deemed to comply.

**10 Results:**

The calculated maximum power density at 20cm distance was equal to or less than the required limits for general population exposure for FCC Part 1.1310 and RSS-102 Issue 5.

FCC MPE Data

Duty Cycle	100 (%)							
Separation Dist.	20 (cm)							
Operating Mode	Frequency (MHz)	Declared Max Cond. Power (Inc. Tolerance) (dBm)	Duty Cycle Adjusted Cond. Output Power (dBm)	Antenna Gain (dB)	MPE Value (mW/cm ²)	MPE Limit (mW/cm ²)	Margin to Limit (mW/cm ²)	MPE / Limit Ratio (for Co-Location)
WCDMA Band II	1850	24	24	3.5	0.1119	1.00	0.8881	0.1119
WCDMA Band IV	1710	24	24	3.5	0.1119	1.00	0.8881	0.1119
WCDMA Band V	824	24	24	5.5	0.1773	0.55	0.3720	0.3228
LTE Band 2	1850	24	24	3.5	0.1119	1.00	0.8881	0.1119
LTE Band 4	1710	24	24	3.5	0.1119	1.00	0.8881	0.1119
LTE Band 5	824	24	24	5.5	0.1773	0.55	0.3720	0.3228
LTE Band 7	2500	23.8	23.8	3.5	0.1068	1.00	0.8932	0.1068
LTE Band 12	699	24	24	5.5	0.1773	0.47	0.2887	0.3805
LTE Band 13	777	24	24	5.5	0.1773	0.52	0.3407	0.3423
LTE Band 26	814	24	24	5.5	0.1773	0.54	0.3654	0.3267
LTE Band 30	2305	23	23	3.5	0.0889	1.00	0.9111	0.0889
LTE Band 41	2496	23.8	23.8	3.5	0.1068	1.00	0.8932	0.1068
LTE Band 66	1710	24	24	3.5	0.1119	1.00	0.8881	0.1119

RSS-102 Issue 5 MPE Data

Duty Cycle	100 (%)							
Separation Dist.	20 (cm)							
Operating Mode	Frequency (MHz)	Declared Max Cond. Power (Inc. Tolerance) (dBm)	Duty Cycle Adjusted Cond. Output Power (dBm)	Antenna Gain (dB)	MPE Value (W/m ²)	MPE Limit (W/m ²)	Margin to Limit (W/m ²)	MPE / Limit Ratio (for Co-Location)
WCDMA Band II	1850	24	24	3.5	1.1187	4.48	3.3576	0.249925
WCDMA Band IV	1710	24	24	3.5	1.1187	4.24	3.1232	0.263733
WCDMA Band V	824	24	24	5.5	1.7731	2.58	0.8025	0.688414
LTE Band 2	1850	24	24	3.5	1.1187	4.48	3.3576	0.249925
LTE Band 4	1710	24	24	3.5	1.1187	4.24	3.1232	0.263733
LTE Band 5	824	24	24	5.5	1.7731	2.58	0.8025	1.202073
LTE Band 7	2500	23.8	23.8	3.5	1.0684	5.50	4.4307	0.194286
LTE Band 12	699	24	24	5.5	1.7731	2.30	0.5286	0.770334
LTE Band 13	777	24	24	5.5	1.7731	2.47	0.7012	0.716607
LTE Band 26	814	24	24	5.5	1.7731	2.55	0.7811	0.694183
LTE Band 30	2305	23	23	3.5	0.8886	5.20	4.3135	0.170823
LTE Band 41	2496	23.8	23.8	3.5	1.0684	5.49	4.4246	0.194499
LTE Band 66	1710	24	24	3.5	1.1187	4.24	3.1232	0.263733

**11 Revision History**

Revision Level	Date	Report Number	Prepared By	Reviewed By	Notes
0	11/18/2020	104056598LEX-017	BCT	BZ	Original Issue