



Test Mode	IEEE 802.11n 40 MHz/ 5795 MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Band Edge	Test Date	May 11, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

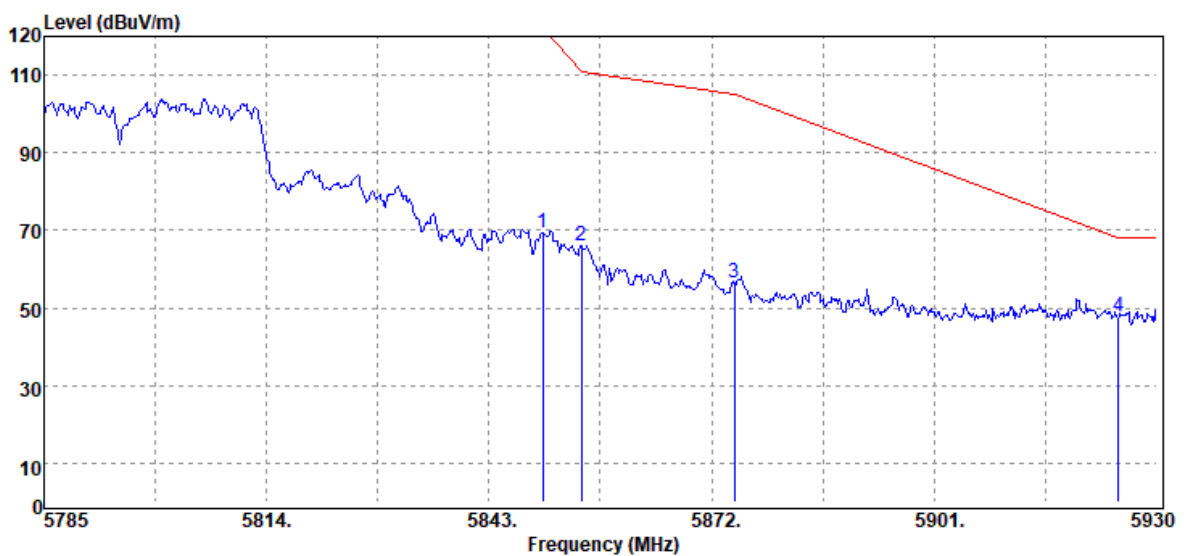


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5850.00	Peak	62.07	7.18	69.25	122.20	-52.95
5855.00	Peak	58.71	7.18	65.89	110.80	-44.91
5875.00	Peak	49.19	7.19	56.38	105.20	-48.82
5925.00	Peak	40.46	7.23	47.69	68.20	-20.51

Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Band Edge	Test Date	May 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

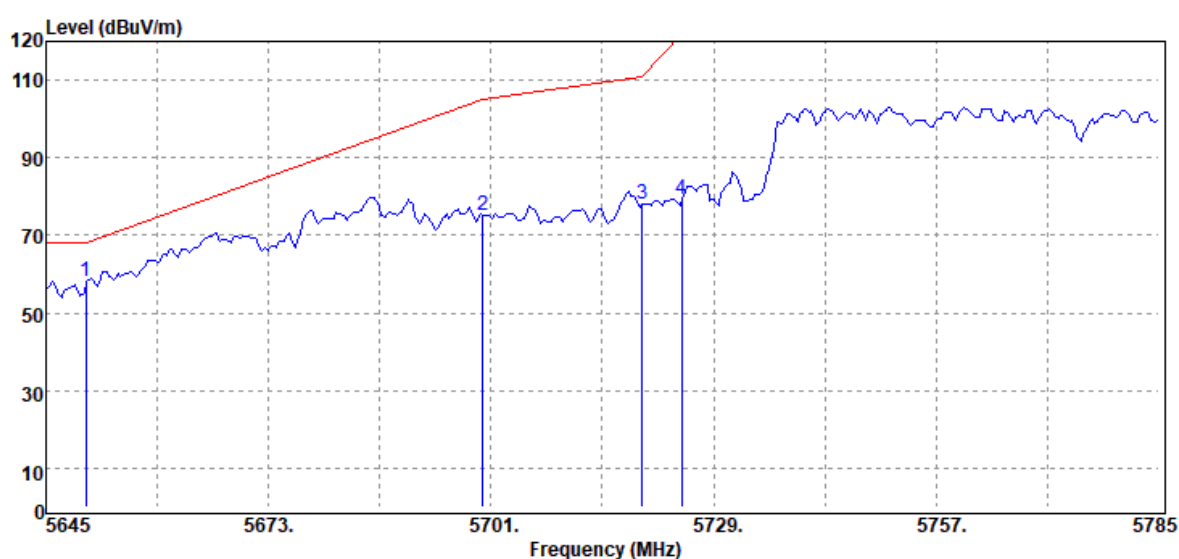


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5650.00	Peak	51.43	6.72	58.15	68.20	-10.05
5700.00	Peak	68.25	7.05	75.30	105.20	-29.90
5720.00	Peak	71.14	7.12	78.26	110.80	-32.54
5725.00	Peak	72.27	7.13	79.40	122.20	-42.80

Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Band Edge	Test Date	May 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

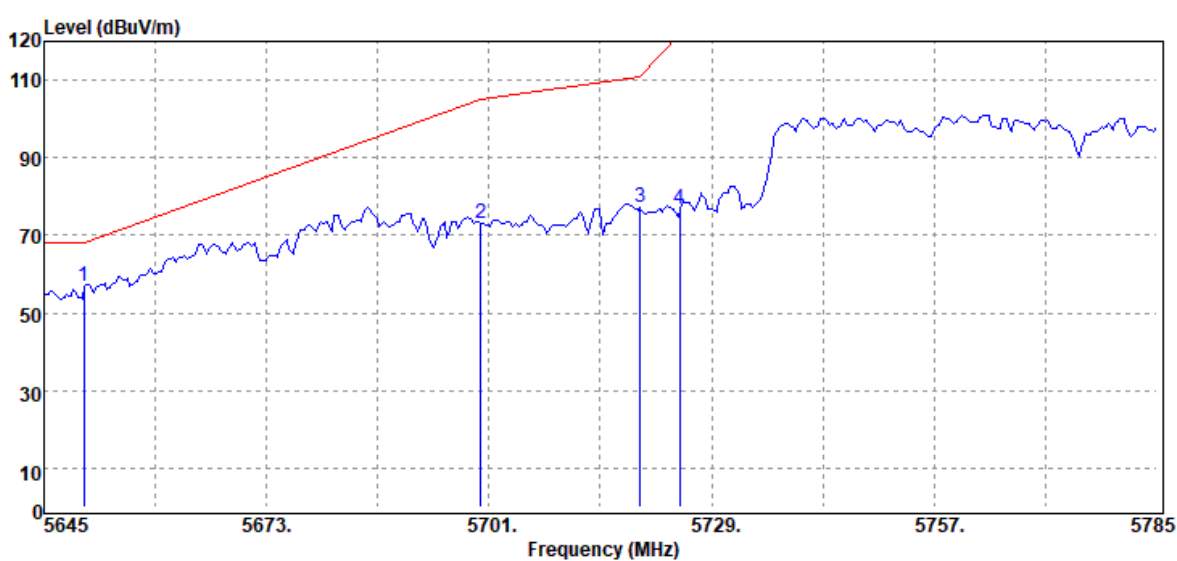

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5650.00	Peak	50.22	6.72	56.94	68.20	-11.26
5700.00	Peak	65.91	7.05	72.96	105.20	-32.24
5720.00	Peak	70.18	7.12	77.30	110.80	-33.50
5725.00	Peak	69.80	7.13	76.93	122.20	-45.27


Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Band Edge	Test Date	May 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

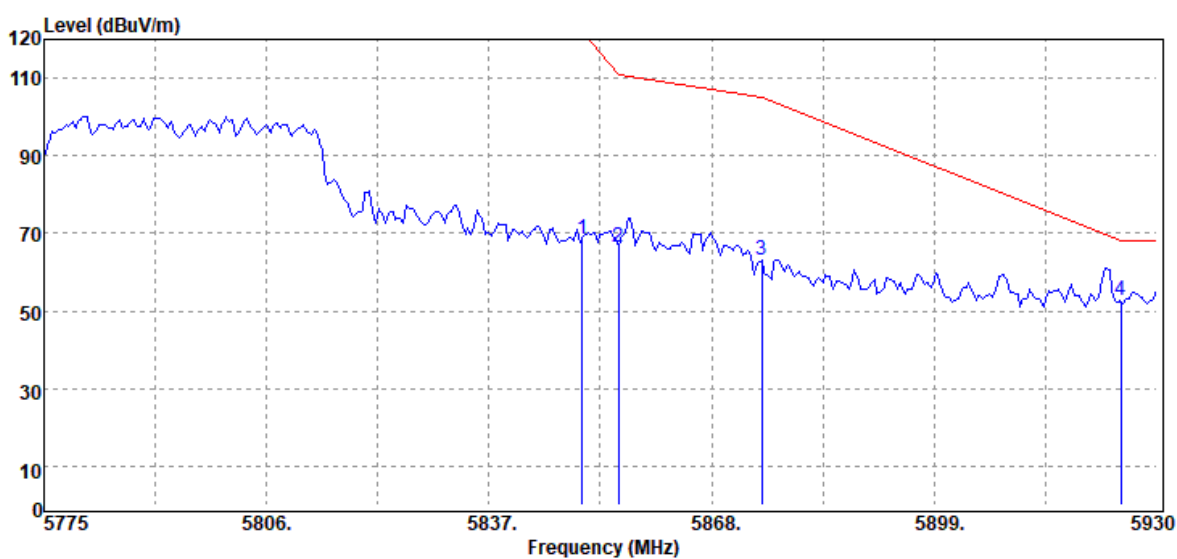

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5850.00	Peak	61.29	7.18	68.47	122.20	-53.73
5855.00	Peak	59.30	7.18	66.48	110.80	-44.32
5875.00	Peak	55.89	7.19	63.08	105.20	-42.12
5925.00	Peak	45.32	7.23	52.55	68.20	-15.65


Report No.: T210319W02-RP2

Test Mode	IEEE 802.11ac VHT80 / 5775 MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Band Edge	Test Date	May 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

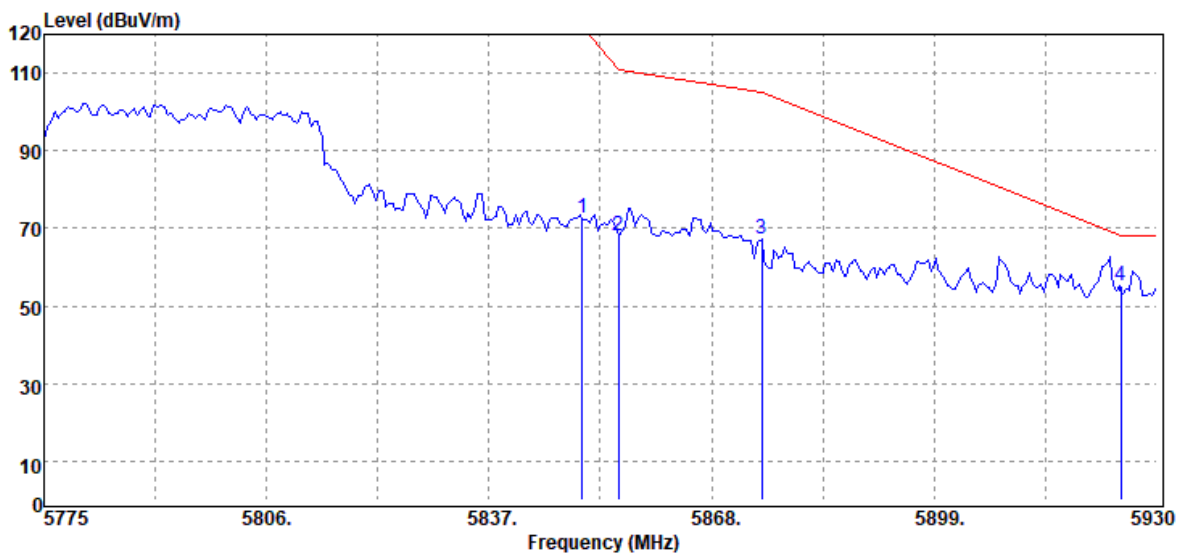


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5850.00	Peak	65.61	7.18	72.79	122.20	-49.41
5855.00	Peak	61.01	7.18	68.19	110.80	-42.61
5875.00	Peak	60.13	7.19	67.32	105.20	-37.88
5925.00	Peak	48.06	7.23	55.29	68.20	-12.91

Test Mode	IEEE 802.11ax 20 / 5745MHz 26/0	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	May 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

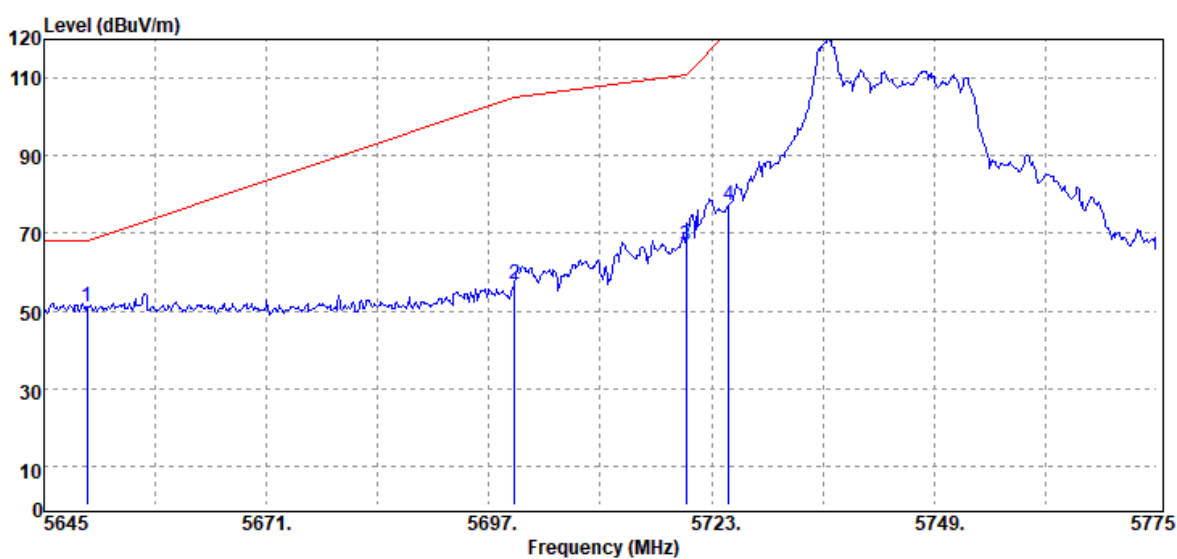


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5650.00	Peak	44.20	6.72	50.92	68.20	-17.28
5700.00	Peak	49.93	7.05	56.98	105.20	-48.22
5720.00	Peak	59.68	7.12	66.80	110.80	-44.00
5725.00	Peak	70.17	7.13	77.30	122.20	-44.90

Test Mode	IEEE 802.11ax 20 / 5745MHz 26/0	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	May 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

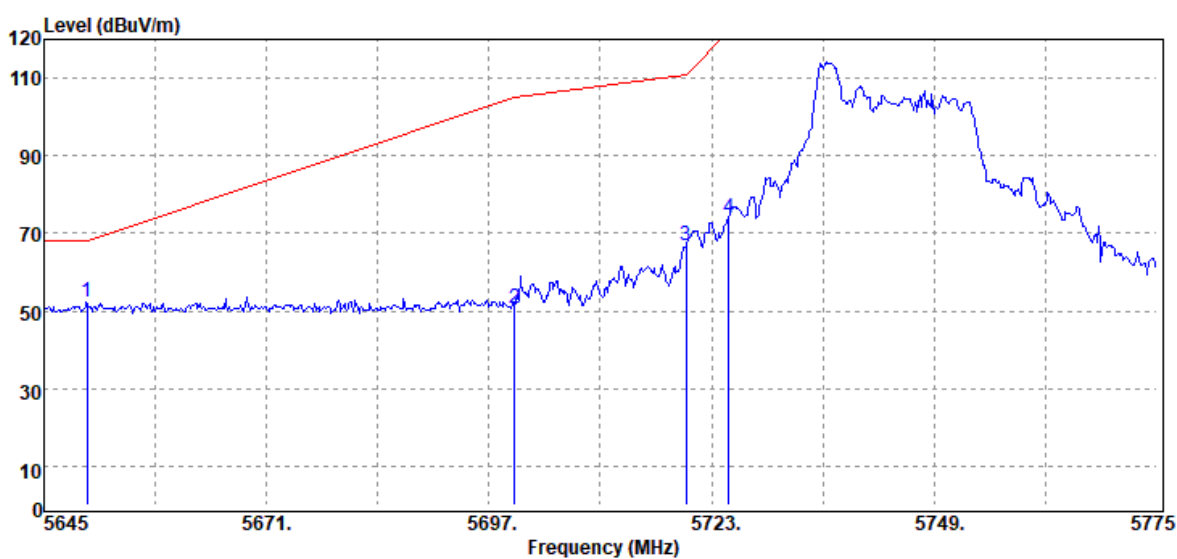


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5650.00	Peak	45.78	6.72	52.50	68.20	-15.70
5700.00	Peak	43.41	7.05	50.46	105.20	-54.74
5720.00	Peak	59.55	7.12	66.67	110.80	-44.13
5725.00	Peak	66.80	7.13	73.93	122.20	-48.27

Test Mode	IEEE 802.11ax 20 / 5745MHz 52/37	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	May 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

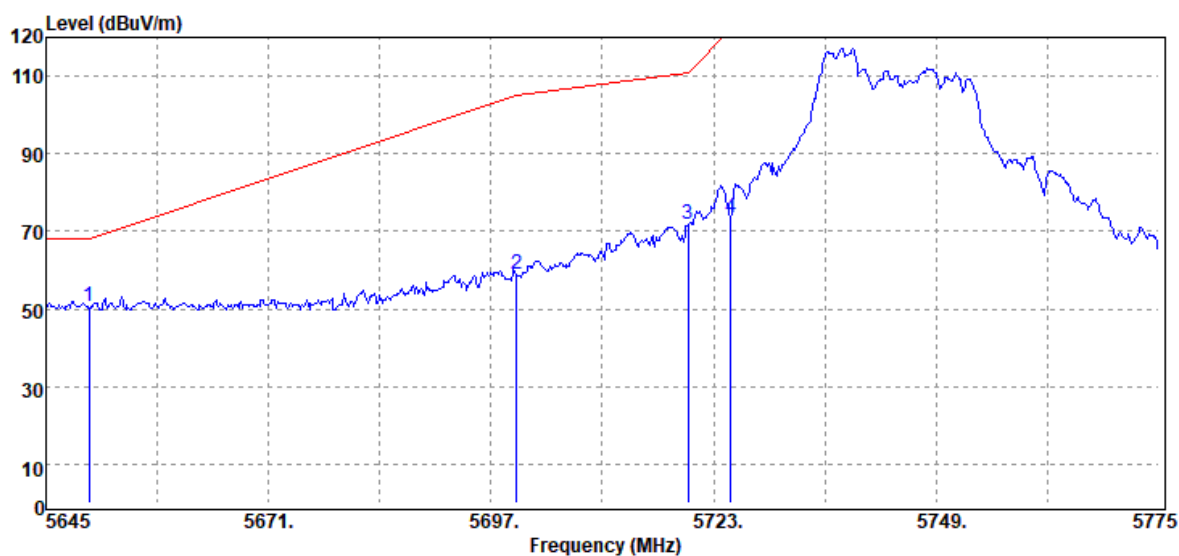


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5650.00	Peak	43.76	6.72	50.48	68.20	-17.72
5700.00	Peak	51.74	7.05	58.79	105.20	-46.41
5720.00	Peak	64.73	7.12	71.85	110.80	-38.95
5725.00	Peak	66.47	7.13	73.60	122.20	-48.60

Test Mode	IEEE 802.11ax 20 / 5745MHz 52/37	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	May 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

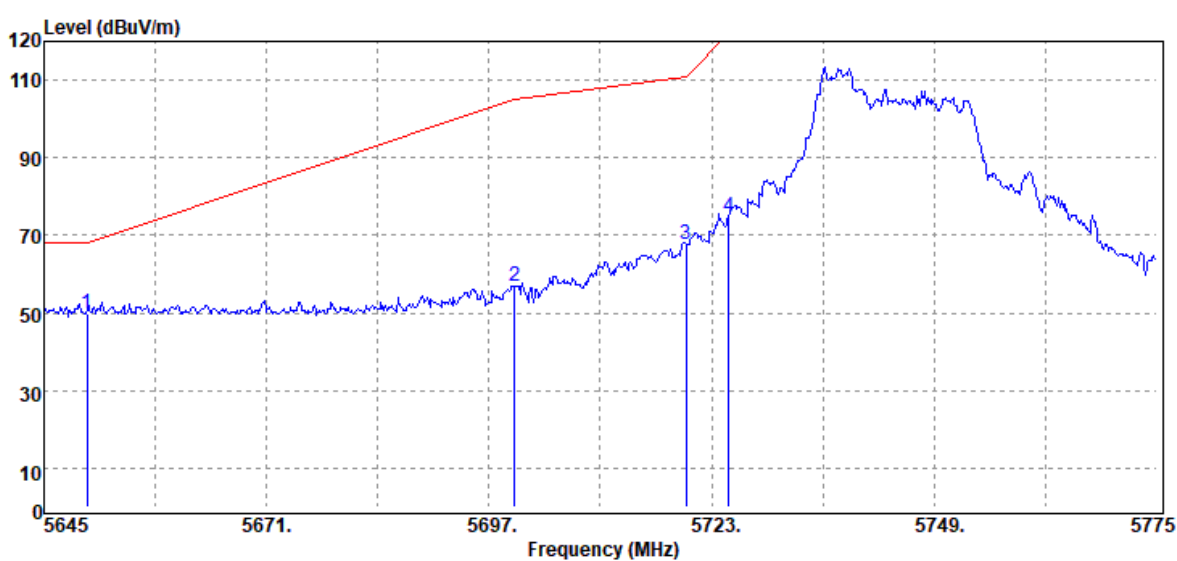


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5650.00	Peak	43.20	6.72	49.92	68.20	-18.28
5700.00	Peak	49.82	7.05	56.87	105.20	-48.33
5720.00	Peak	60.69	7.12	67.81	110.80	-42.99
5725.00	Peak	67.79	7.13	74.92	122.20	-47.28

Test Mode	IEEE 802.11ax 20 / 5745MHz_106/53	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	May 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

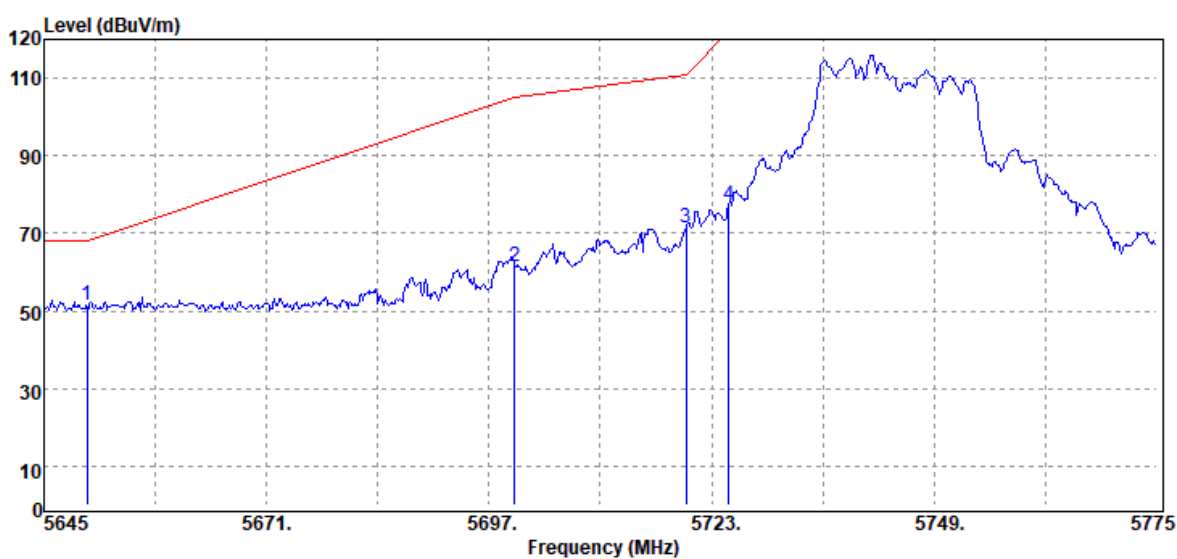


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5650.00	Peak	44.88	6.72	51.60	68.20	-16.60
5700.00	Peak	54.56	7.05	61.61	105.20	-43.59
5720.00	Peak	64.20	7.12	71.32	110.80	-39.48
5725.00	Peak	70.29	7.13	77.42	122.20	-44.78

Test Mode	IEEE 802.11ax 20 / 5745MHz 106/53	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	May 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

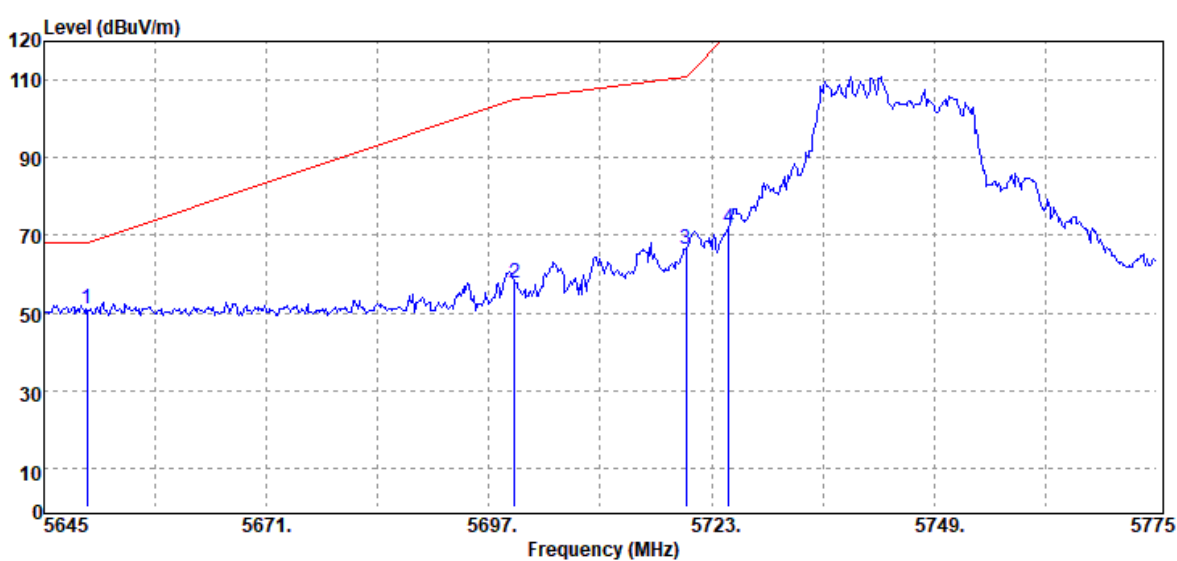


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5650.00	Peak	44.17	6.72	50.89	68.20	-17.31
5700.00	Peak	50.78	7.05	57.83	105.20	-47.37
5720.00	Peak	59.34	7.12	66.46	110.80	-44.34
5725.00	Peak	64.74	7.13	71.87	122.20	-50.33

Test Mode	IEEE 802.11ax 20 / 5825MHz 26/8	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	May 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

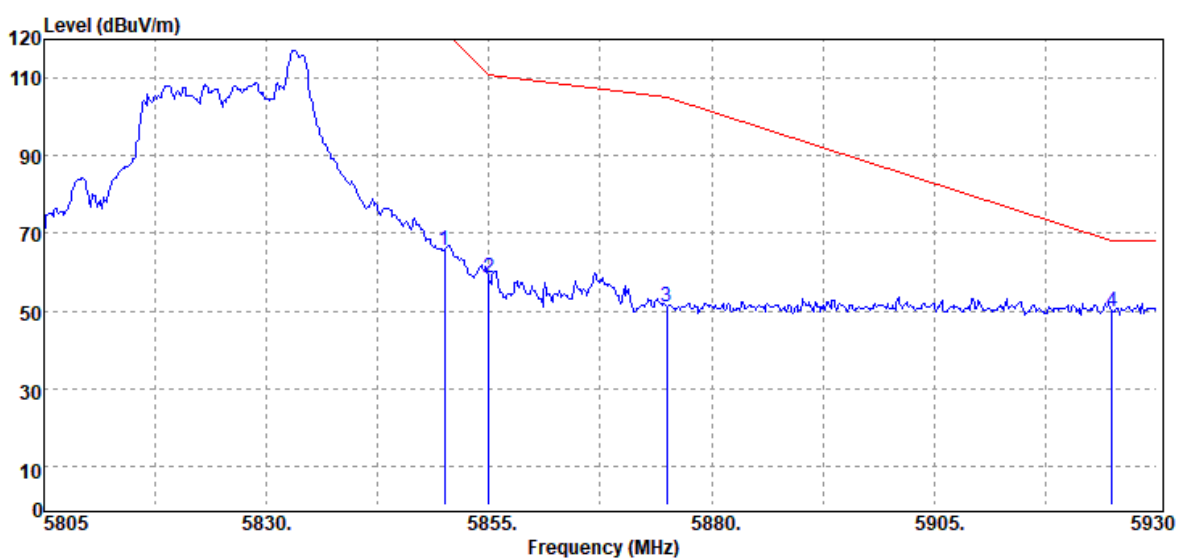


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5850.00	Peak	58.31	7.18	65.49	122.20	-56.71
5855.00	Peak	51.39	7.18	58.57	110.80	-52.23
5875.00	Peak	44.09	7.19	51.28	105.20	-53.92
5925.00	Peak	42.72	7.23	49.95	68.20	-18.25

Test Mode	IEEE 802.11ax 20 / 5825MHz 26/8	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	May 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

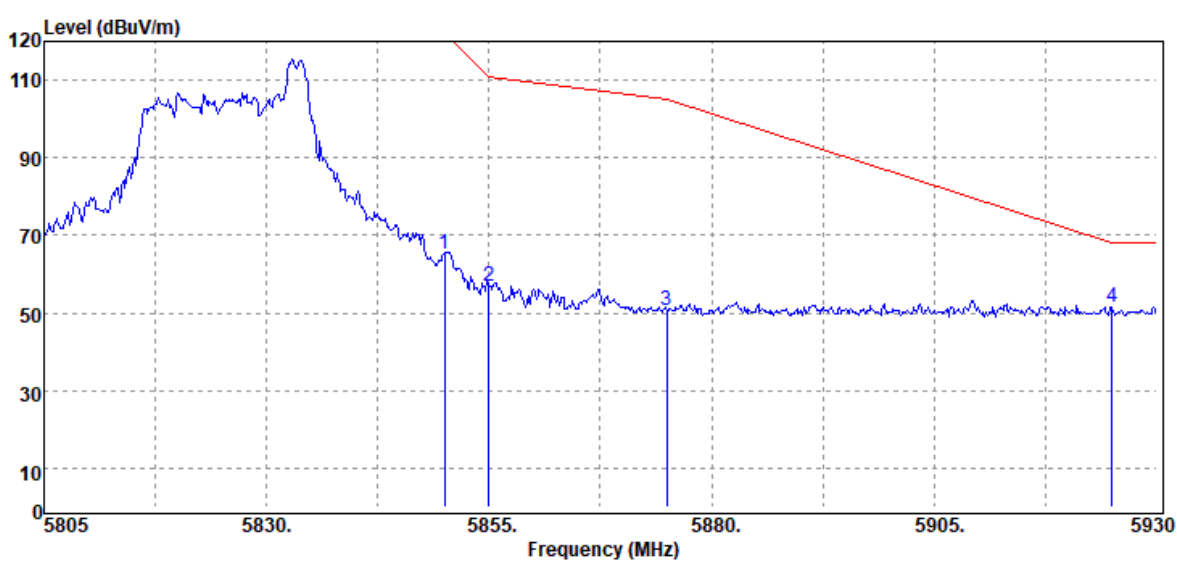


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5850.00	Peak	58.15	7.18	65.33	122.20	-56.87
5855.00	Peak	49.80	7.18	56.98	110.80	-53.82
5875.00	Peak	43.51	7.19	50.70	105.20	-54.50
5925.00	Peak	44.39	7.23	51.62	68.20	-16.58

Test Mode	IEEE 802.11ax 20 / 5825MHz 52/40	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	May 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

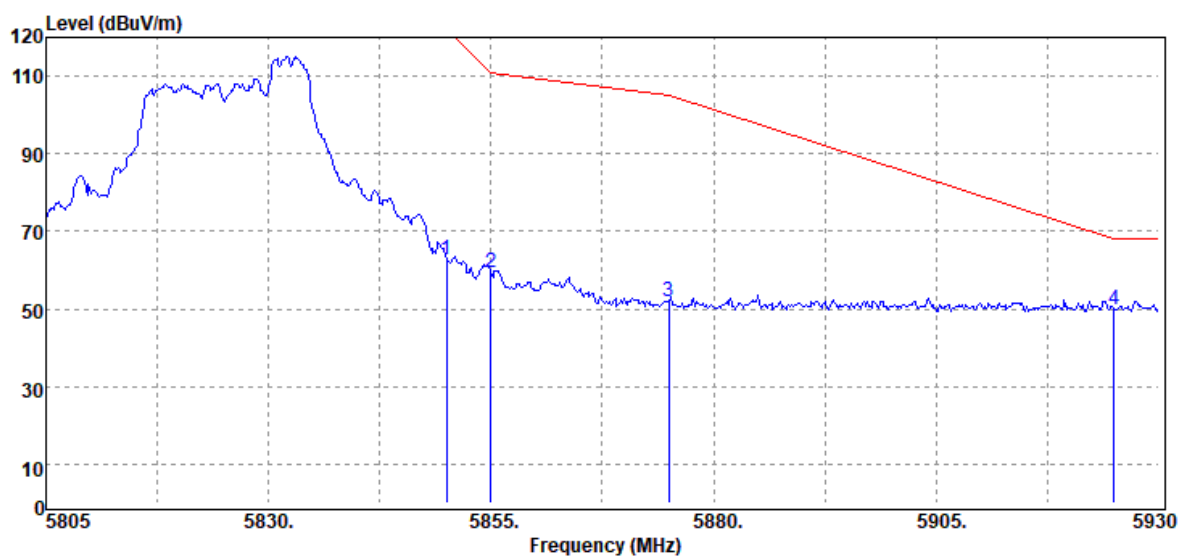


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5850.00	Peak	55.67	7.18	62.85	122.20	-59.35
5855.00	Peak	52.28	7.18	59.46	110.80	-51.34
5875.00	Peak	44.85	7.19	52.04	105.20	-53.16
5925.00	Peak	42.54	7.23	49.77	68.20	-18.43

Test Mode	IEEE 802.11ax 20 / 5825MHz 52/40	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	May 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

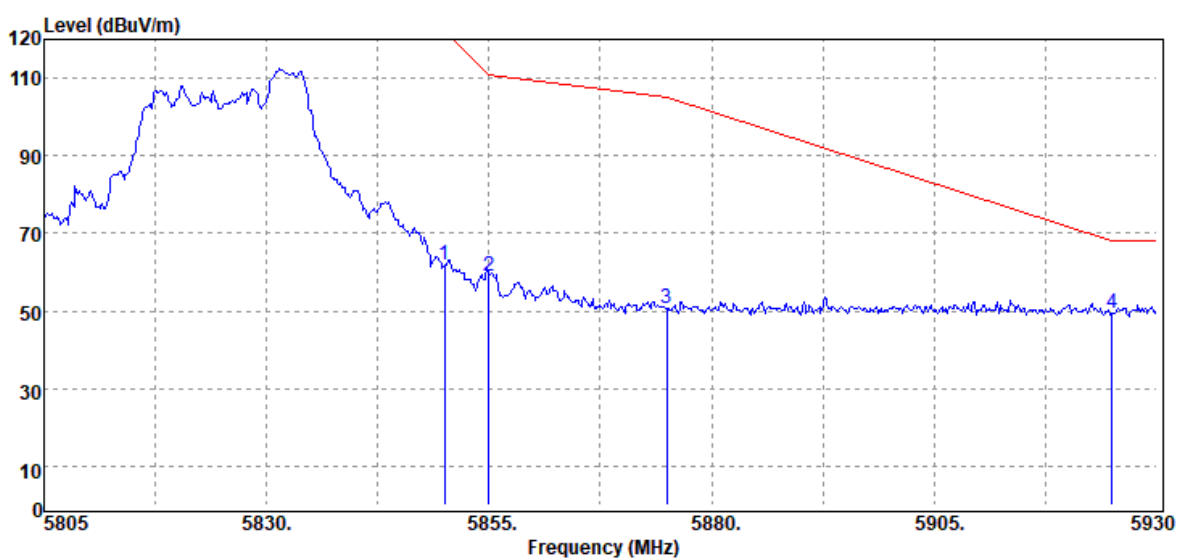


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5850.00	Peak	54.64	7.18	61.82	122.20	-60.38
5855.00	Peak	51.81	7.18	58.99	110.80	-51.81
5875.00	Peak	43.47	7.19	50.66	105.20	-54.54
5925.00	Peak	41.98	7.23	49.21	68.20	-18.99

Test Mode	IEEE 802.11ax 20 / 5825MHz_106/54	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	May 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

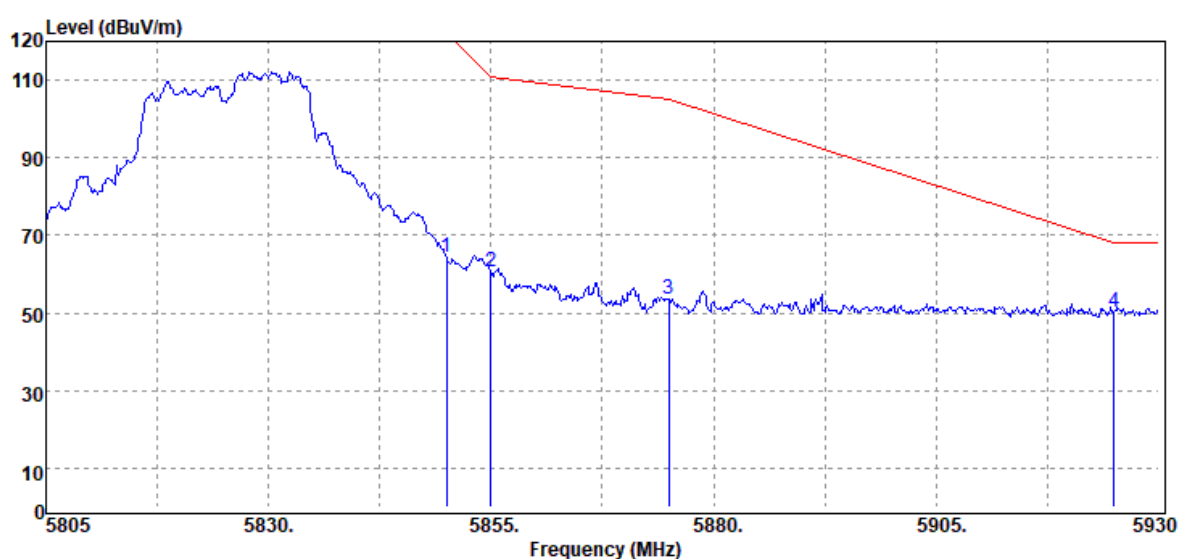


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5850.00	Peak	57.38	7.18	64.56	122.20	-57.64
5855.00	Peak	53.45	7.18	60.63	110.80	-50.17
5875.00	Peak	46.57	7.19	53.76	105.20	-51.44
5925.00	Peak	42.92	7.23	50.15	68.20	-18.05

Test Mode	IEEE 802.11ax 20 / 5825MHz 106/54	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	May 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

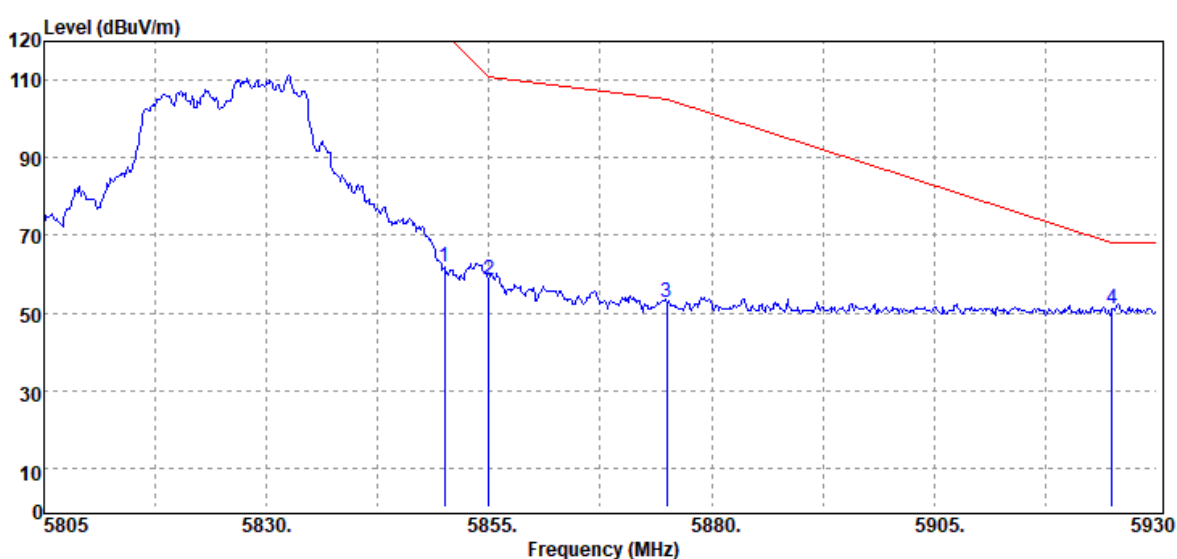


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5850.00	Peak	54.82	7.18	62.00	122.20	-60.20
5855.00	Peak	51.48	7.18	58.66	110.80	-52.14
5875.00	Peak	45.71	7.19	52.90	105.20	-52.30
5925.00	Peak	43.71	7.23	50.94	68.20	-17.26

Test Mode	IEEE 802.11ax 40 / 5755MHz_106/53	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	May 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

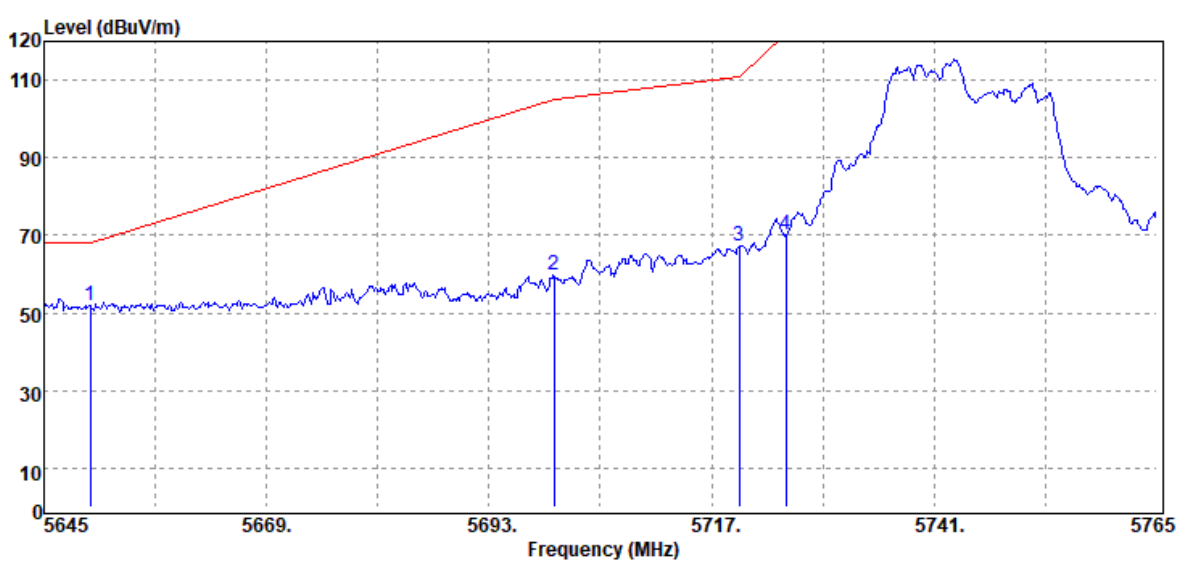


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5650.00	Peak	45.04	6.72	51.76	68.20	-16.44
5700.00	Peak	52.56	7.05	59.61	105.20	-45.59
5720.00	Peak	60.01	7.12	67.13	110.80	-43.67
5725.00	Peak	62.97	7.13	70.10	122.20	-52.10

Test Mode	IEEE 802.11ax 40 / 5755MHz 106/53	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	May 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

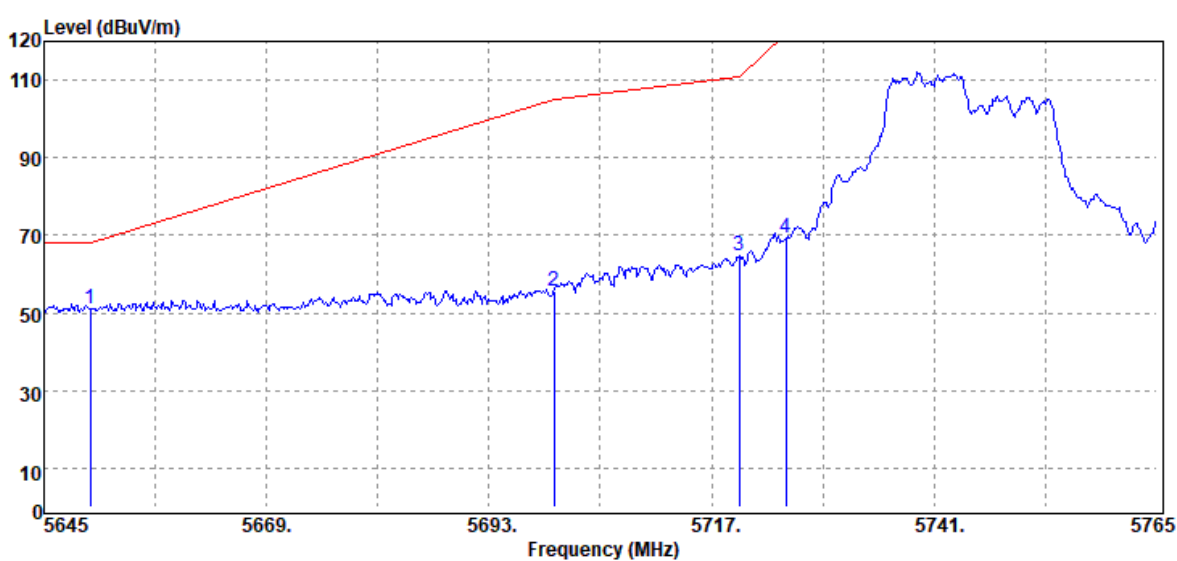


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5650.00	Peak	44.54	6.72	51.26	68.20	-16.94
5700.00	Peak	48.67	7.05	55.72	105.20	-49.48
5720.00	Peak	57.54	7.12	64.66	110.80	-46.14
5725.00	Peak	62.17	7.13	69.30	122.20	-52.90

Test Mode	IEEE 802.11ax 40 / 5795MHz_106/56	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	May 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

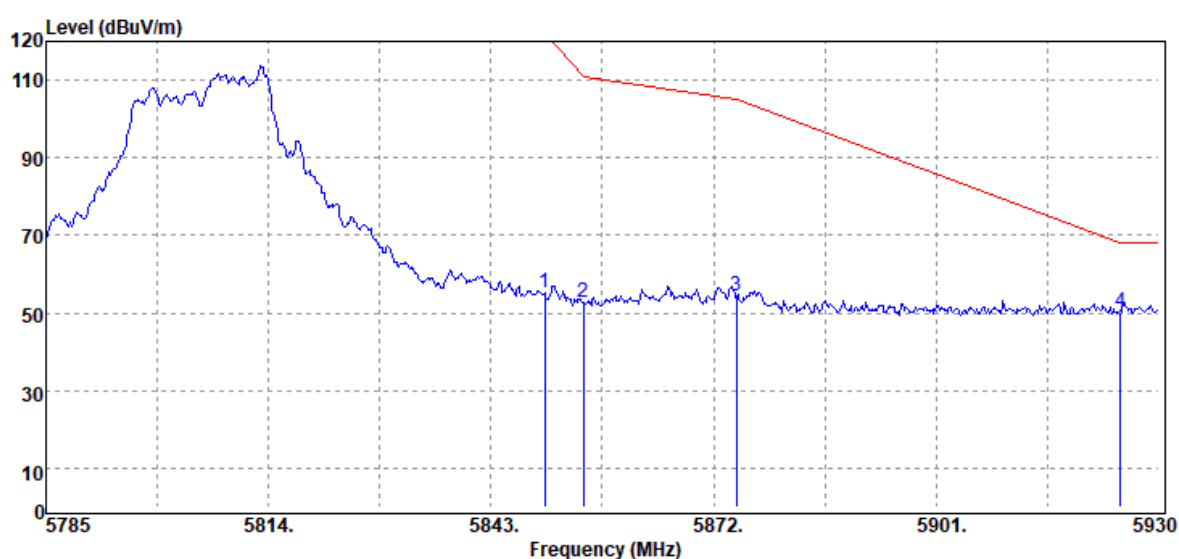


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5850.00	Peak	47.86	7.18	55.04	122.20	-67.16
5855.00	Peak	45.52	7.18	52.70	110.80	-58.10
5875.00	Peak	47.18	7.19	54.37	105.20	-50.83
5925.00	Peak	43.09	7.23	50.32	68.20	-17.88

Test Mode	IEEE 802.11ax 40 / 5795MHz_106/56	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	May 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

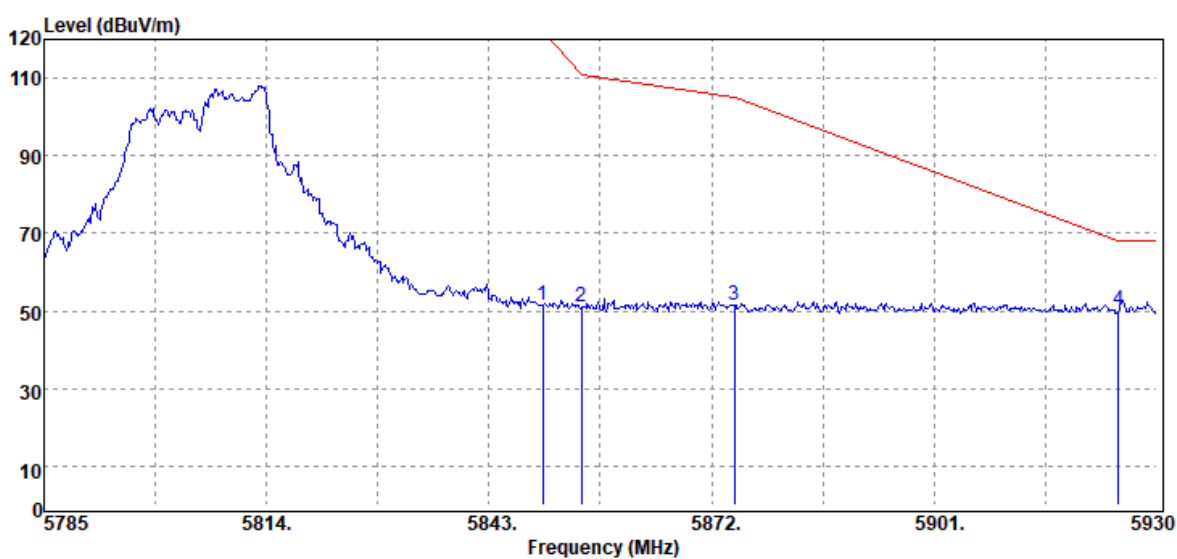


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5850.00	Peak	44.19	7.18	51.37	122.20	-70.83
5855.00	Peak	43.90	7.18	51.08	110.80	-59.72
5875.00	Peak	44.18	7.19	51.37	105.20	-53.83
5925.00	Peak	42.85	7.23	50.08	68.20	-18.12

Test Mode	IEEE 802.11ax 80 / 5775MHz_106/53	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	May 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

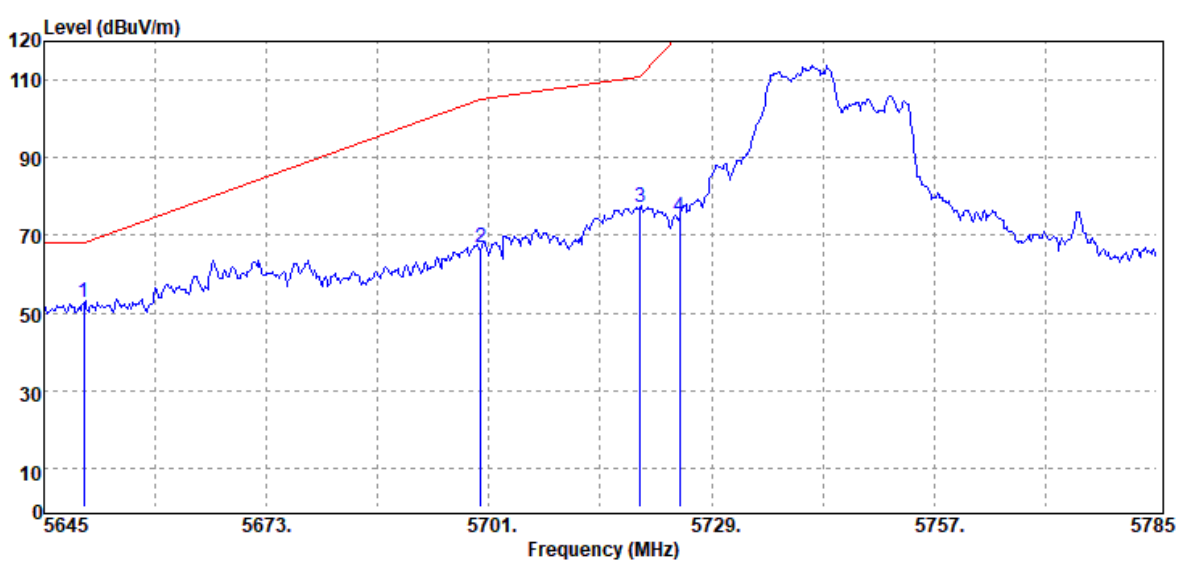


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5650.00	Peak	45.88	6.72	52.60	68.20	-15.60
5700.00	Peak	59.96	7.05	67.01	105.20	-38.19
5720.00	Peak	70.12	7.12	77.24	110.80	-33.56
5725.00	Peak	67.61	7.13	74.74	122.20	-47.46

Test Mode	IEEE 802.11ax 80 / 5775MHz 106/53	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	May 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

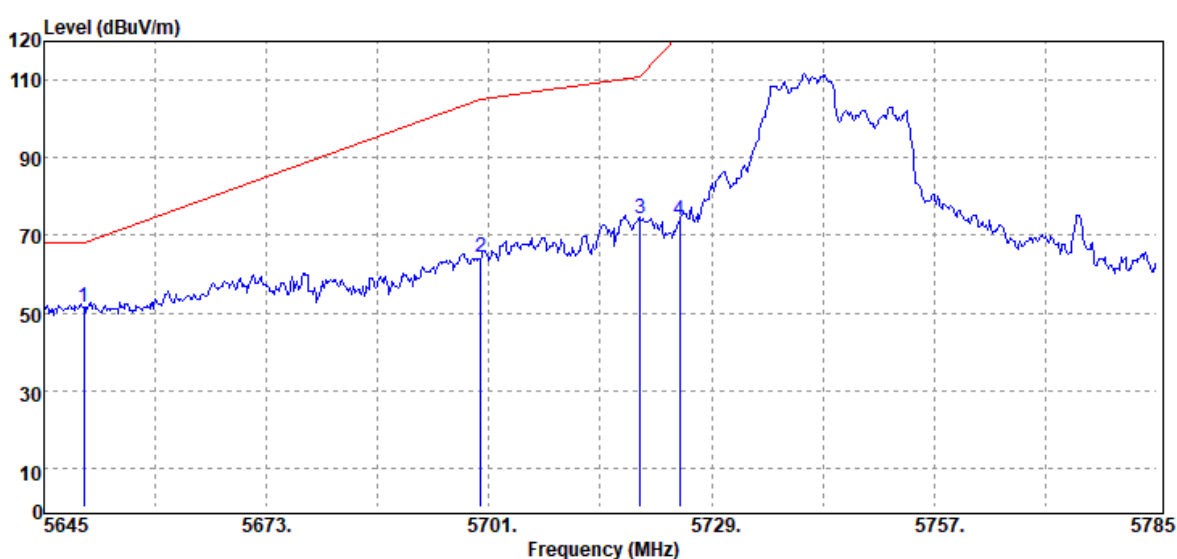


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5650.00	Peak	44.69	6.72	51.41	68.20	-16.79
5700.00	Peak	57.15	7.05	64.20	105.20	-41.00
5720.00	Peak	67.07	7.12	74.19	110.80	-36.61
5725.00	Peak	66.90	7.13	74.03	122.20	-48.17

Test Mode	IEEE 802.11ax 80 / 5775MHz_106/60	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	May 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

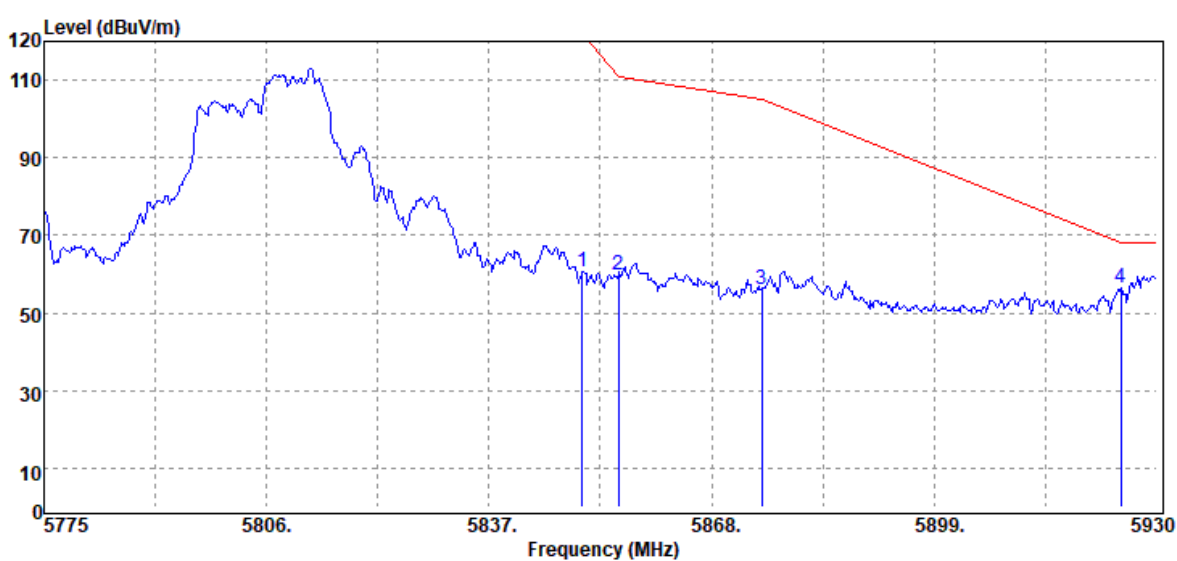

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5850.00	Peak	53.28	7.18	60.46	122.20	-61.74
5855.00	Peak	52.60	7.18	59.78	110.80	-51.02
5875.00	Peak	48.75	7.19	55.94	105.20	-49.26
5925.00	Peak	49.05	7.23	56.28	68.20	-11.92


Test Mode	IEEE 802.11ax 80 / 5775MHz 106/60	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	May 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

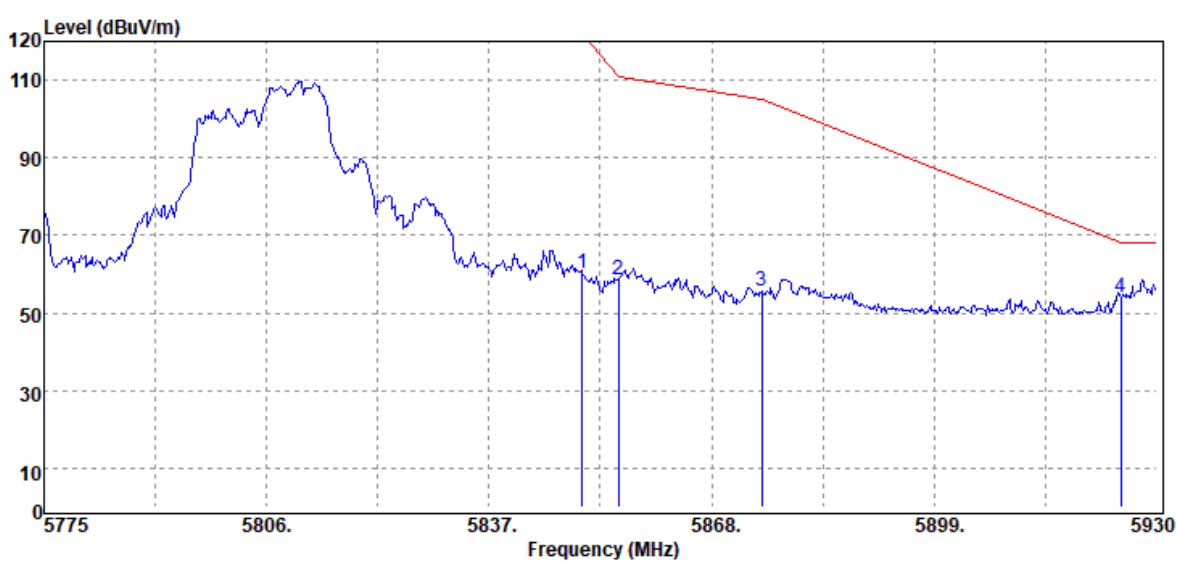

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5850.00	Peak	53.13	7.18	60.31	122.20	-61.89
5855.00	Peak	51.34	7.18	58.52	110.80	-52.28
5875.00	Peak	48.26	7.19	55.45	105.20	-49.75
5925.00	Peak	46.86	7.23	54.09	68.20	-14.11

Below 1G Test Data


Test Mode	Mode 1	Temp/Hum	22.4(°C)/ 60%RH
Test Item	30MHz-1GHz	Test Date	May 14, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

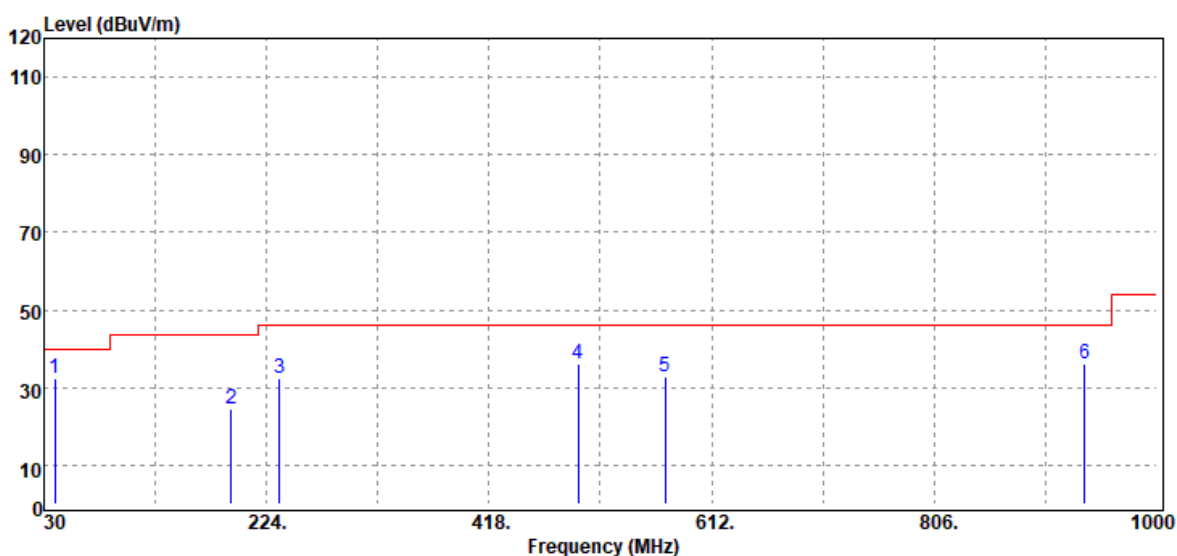

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
39.70	Peak	42.19	-9.65	32.54	40.00	-7.46
192.96	Peak	35.29	-10.61	24.68	43.50	-18.82
235.64	Peak	43.26	-10.94	32.32	46.00	-13.68
495.60	Peak	39.45	-3.29	36.16	46.00	-9.84
571.26	Peak	34.85	-2.04	32.81	46.00	-13.19
936.95	Peak	32.55	3.57	36.12	46.00	-9.88

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	Mode 1	Temp/Hum	22.4(°C)/ 60%RH
Test Item	30MHz-1GHz	Test Date	May 14, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

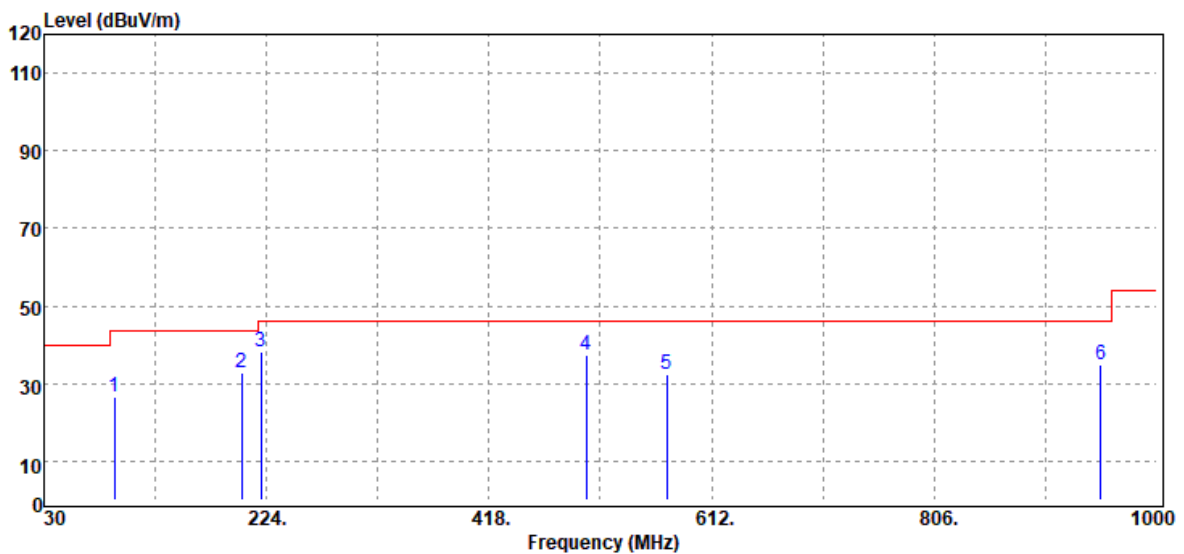


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
91.11	Peak	41.83	-15.43	26.40	43.50	-17.10
202.66	Peak	43.45	-10.67	32.78	43.50	-10.72
219.15	Peak	49.87	-11.76	38.11	46.00	-7.89
502.39	Peak	40.69	-3.28	37.41	46.00	-8.59
573.20	Peak	34.40	-2.02	32.38	46.00	-13.62
951.50	Peak	30.41	4.30	34.71	46.00	-11.29

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Above 1G**Test Data for UNII-1**

Test Mode	IEEE 802.11a / 5180MHZ	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

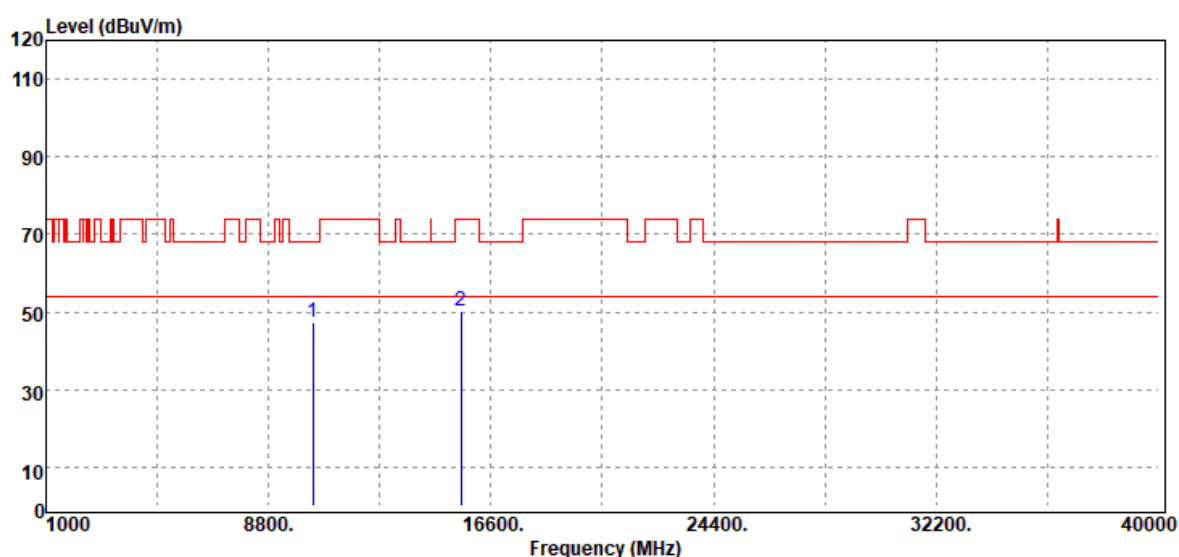

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10360.00	Peak	32.19	15.08	47.27	68.20	-20.93
15540.00	Peak	30.90	19.24	50.14	74.00	-23.86
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5180MHZ	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		




Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10360.00	Peak	31.36	15.08	46.44	68.20	-21.76
15540.00	Peak	31.24	19.24	50.48	74.00	-23.52
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5220 MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonics	Test Date	May 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

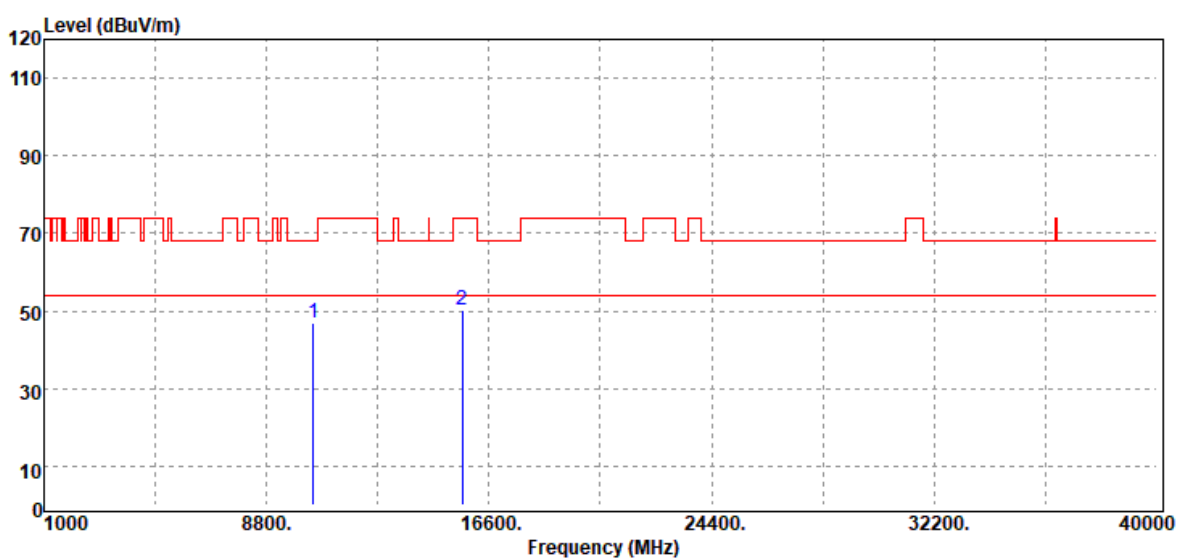


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10440.00	Peak	31.27	15.75	47.02	68.20	-21.18
15660.00	Peak	30.70	19.45	50.15	74.00	-23.85
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5220 MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

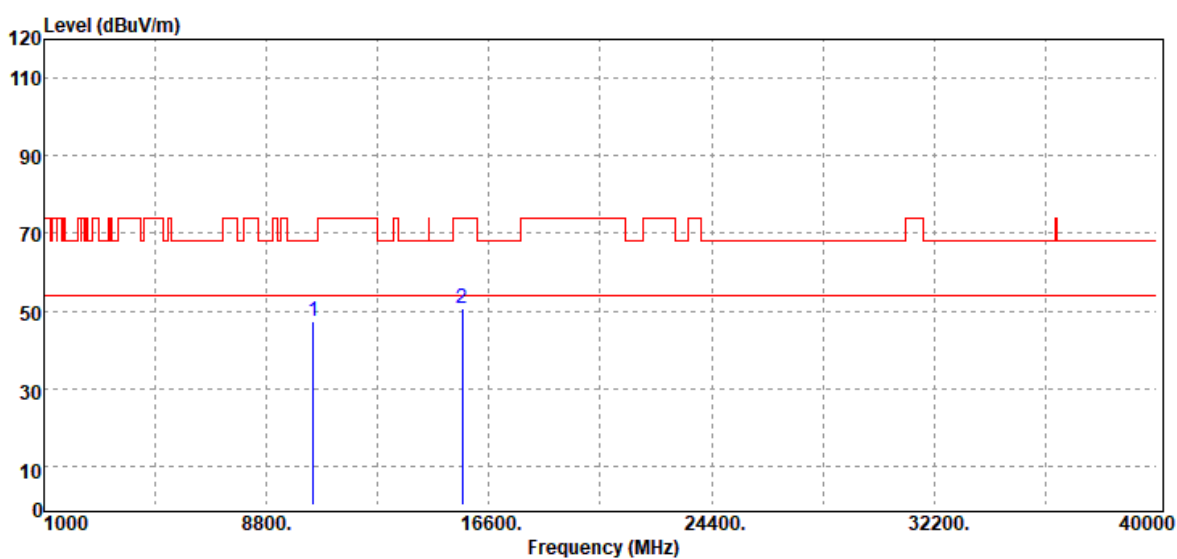


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10440.00	Peak	31.57	15.75	47.32	68.20	-20.88
15660.00	Peak	31.27	19.45	50.72	74.00	-23.28
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5240MHZ	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

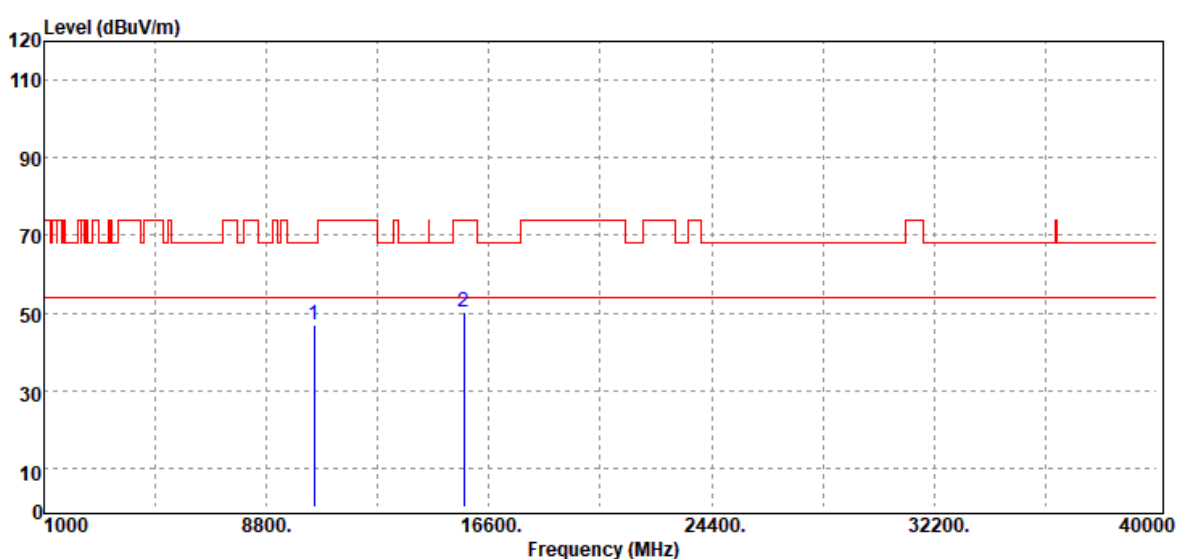


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10480.00	Peak	30.60	16.25	46.85	68.20	-21.35
15720.00	Peak	30.90	19.52	50.42	74.00	-23.58
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5240MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

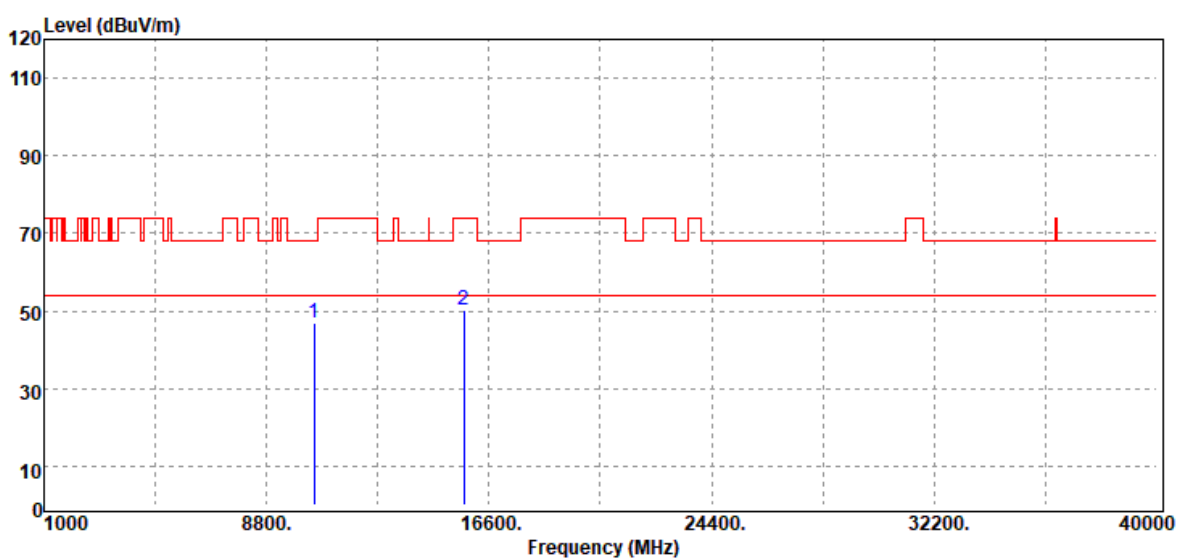


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10480.00	Peak	30.56	16.25	46.81	68.20	-21.39
15720.00	Peak	30.89	19.52	50.41	74.00	-23.59
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5180MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

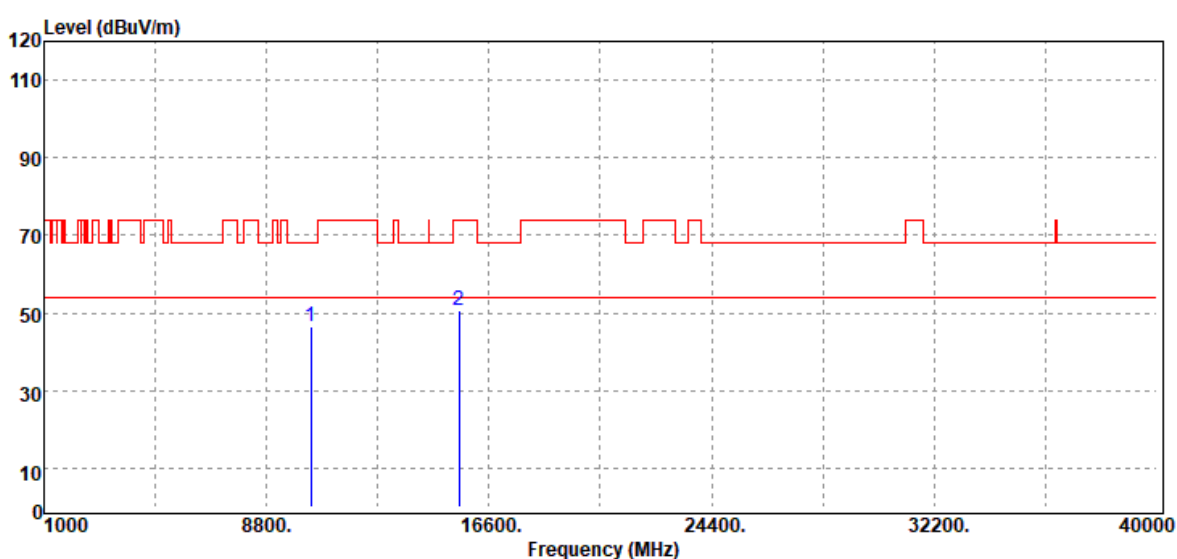

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10360.00	Peak	31.27	15.08	46.35	68.20	-21.85
15540.00	Peak	31.59	19.24	50.83	74.00	-23.17
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz/ 5180MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		




Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10360.00	Peak	31.56	15.08	46.64	68.20	-21.56
15540.00	Peak	31.91	19.24	51.15	74.00	-22.85
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5220MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

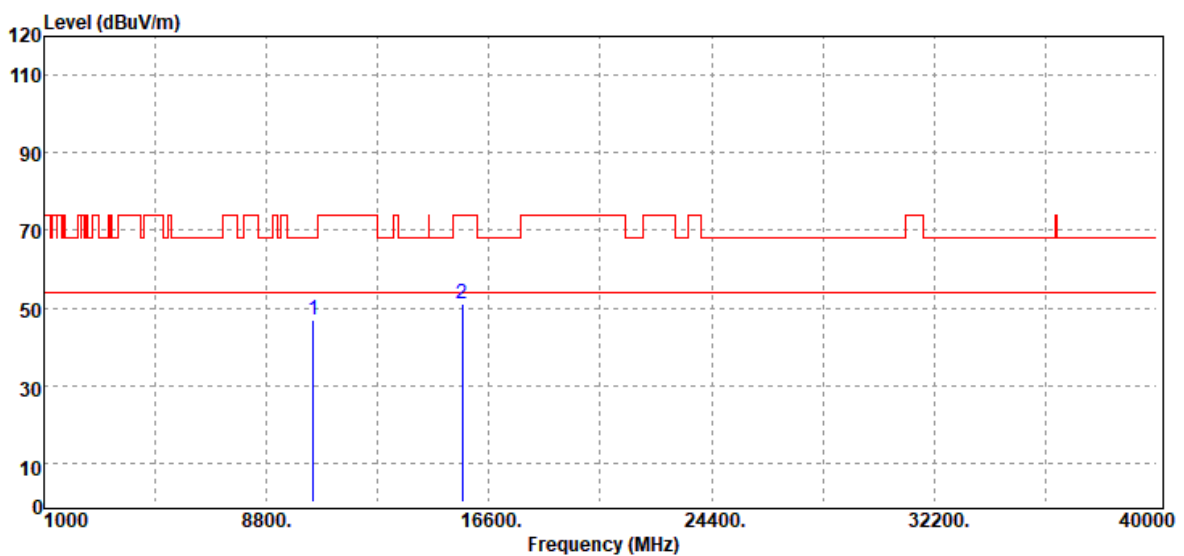


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10440.00	Peak	31.14	15.75	46.89	68.20	-21.31
15660.00	Peak	31.51	19.45	50.96	74.00	-23.04
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5220MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

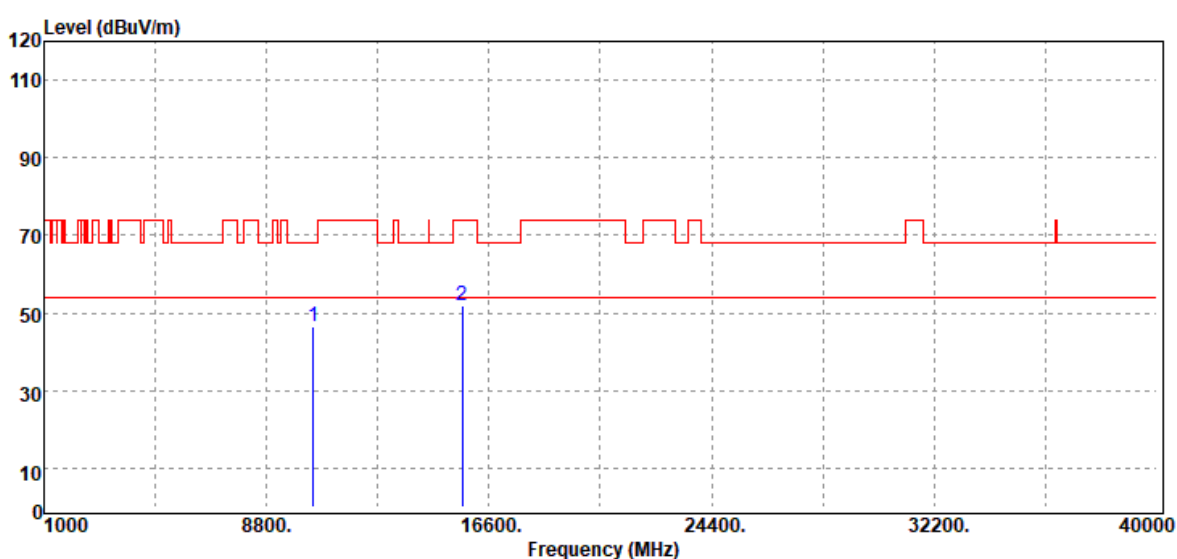


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10440.00	Peak	30.71	15.75	46.46	68.20	-21.74
15660.00	Peak	32.38	19.45	51.83	74.00	-22.17
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5240MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

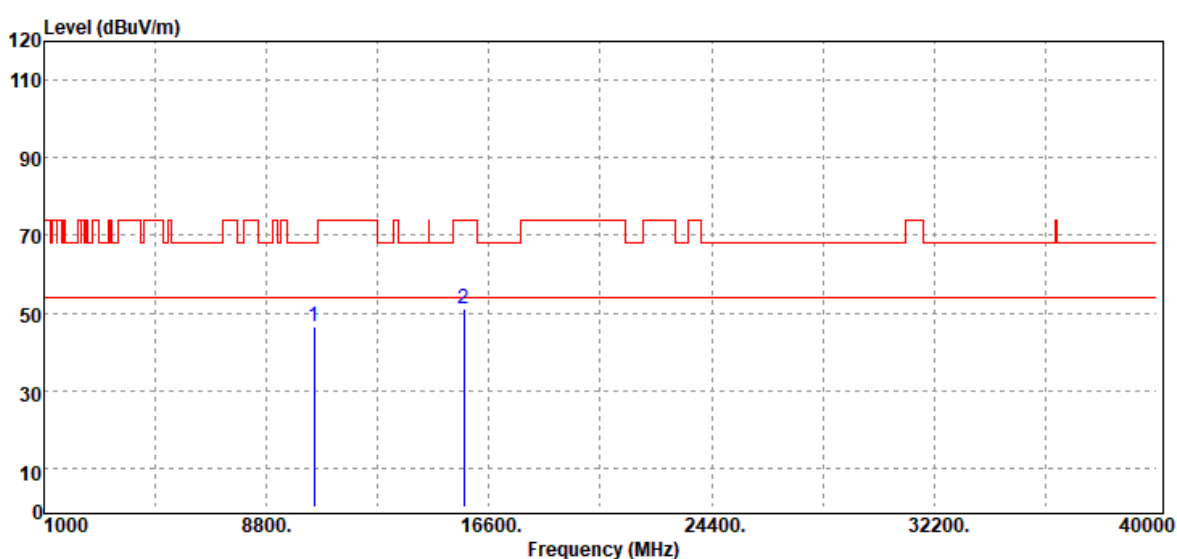


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10480.00	Peak	30.34	16.25	46.59	68.20	-21.61
15720.00	Peak	31.48	19.52	51.00	74.00	-23.00
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5240MHZ	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

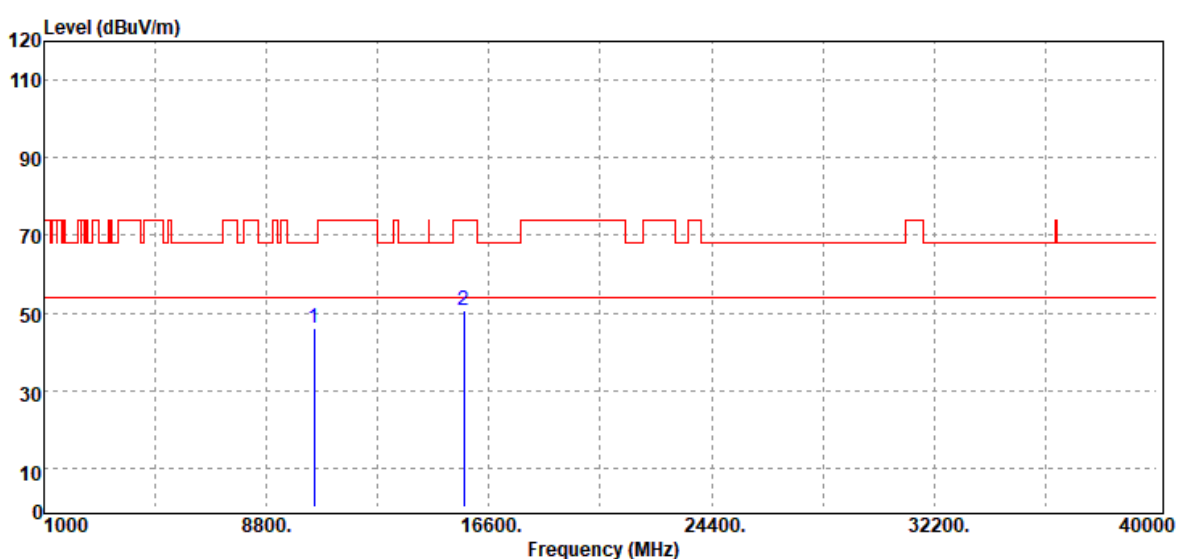


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10480.00	Peak	29.85	16.25	46.10	68.20	-22.10
15720.00	Peak	31.34	19.52	50.86	74.00	-23.14
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 40 MHz / 5190MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

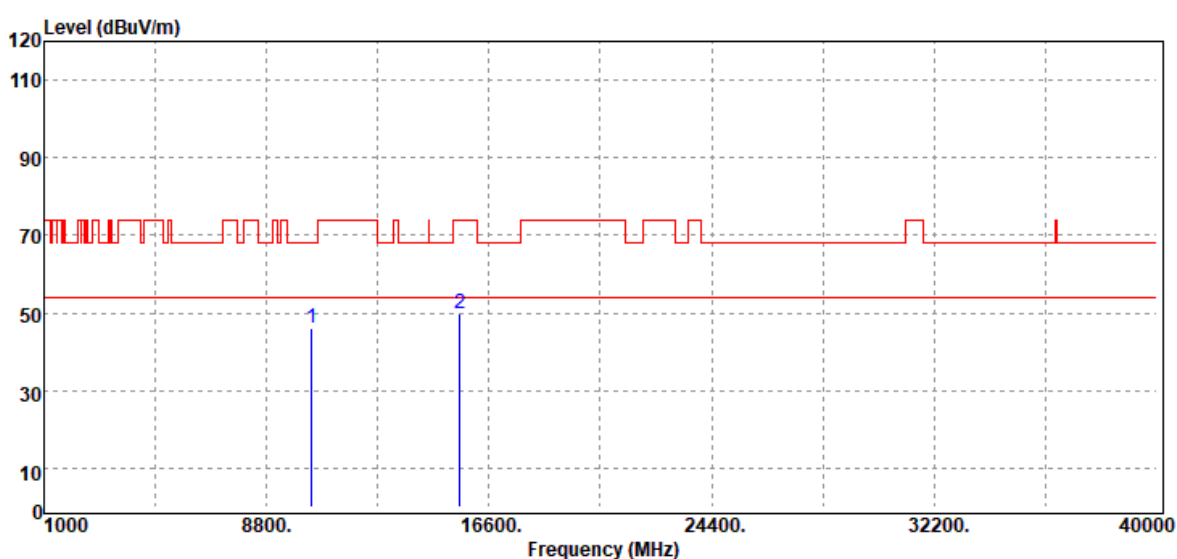


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10380.00	Peak	30.83	15.19	46.02	68.20	-22.18
15570.00	Peak	30.70	19.11	49.81	74.00	-24.19
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 40 MHz / 5190MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

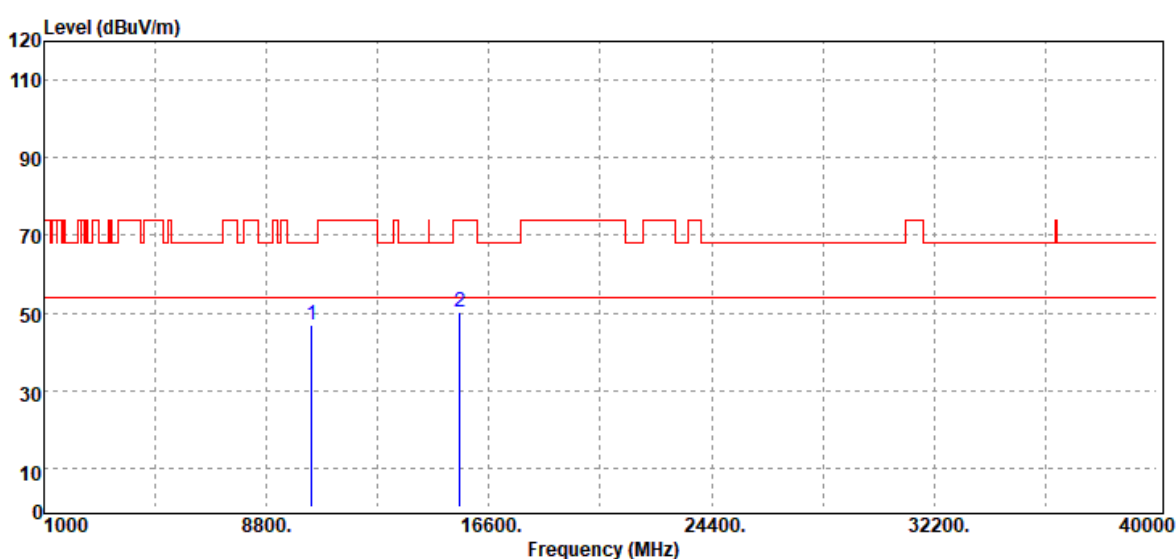


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10380.00	Peak	31.67	15.19	46.86	68.20	-21.34
15570.00	Peak	30.97	19.11	50.08	74.00	-23.92
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 40 MHz / 5230MHZ	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

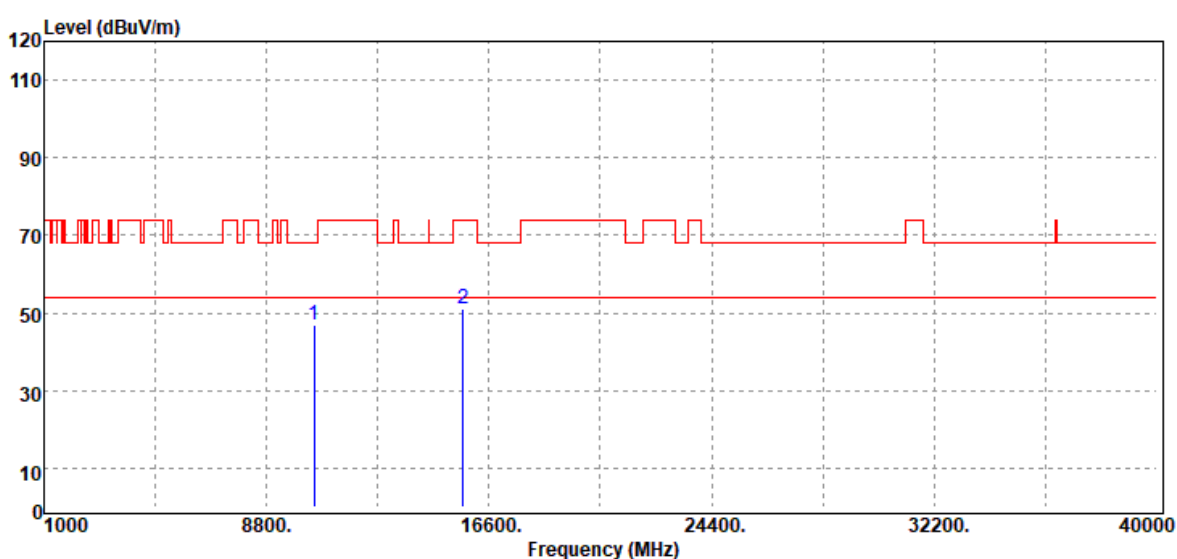


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10460.00	Peak	30.98	16.02	47.00	68.20	-21.20
15690.00	Peak	31.45	19.53	50.98	74.00	-23.02
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 40 MHz / 5230MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

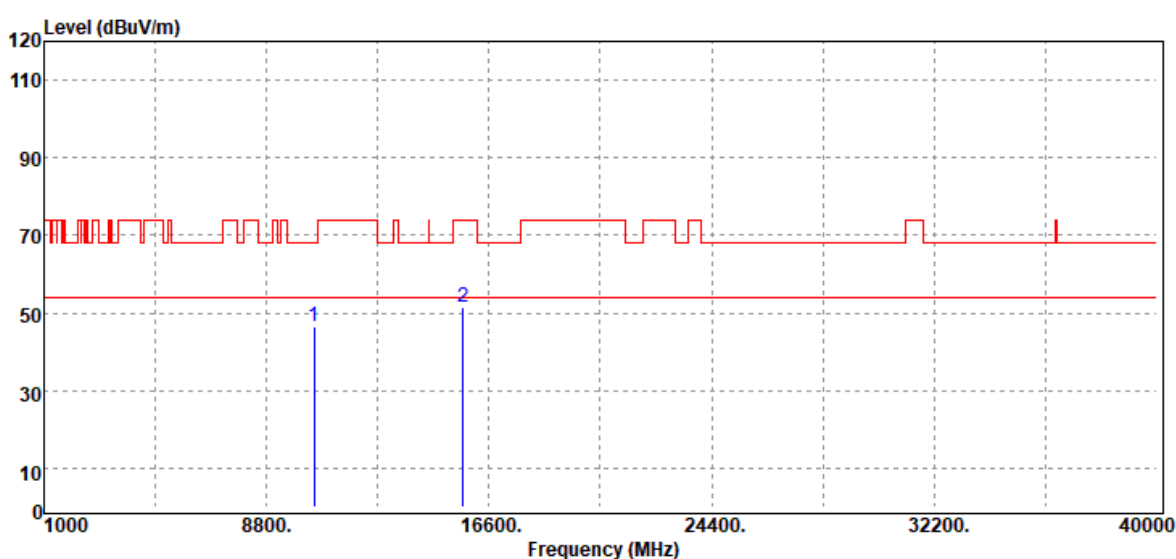


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10460.00	Peak	30.49	16.02	46.51	68.20	-21.69
15690.00	Peak	31.79	19.53	51.32	74.00	-22.68
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ac VHT80 / 5210MHZ	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

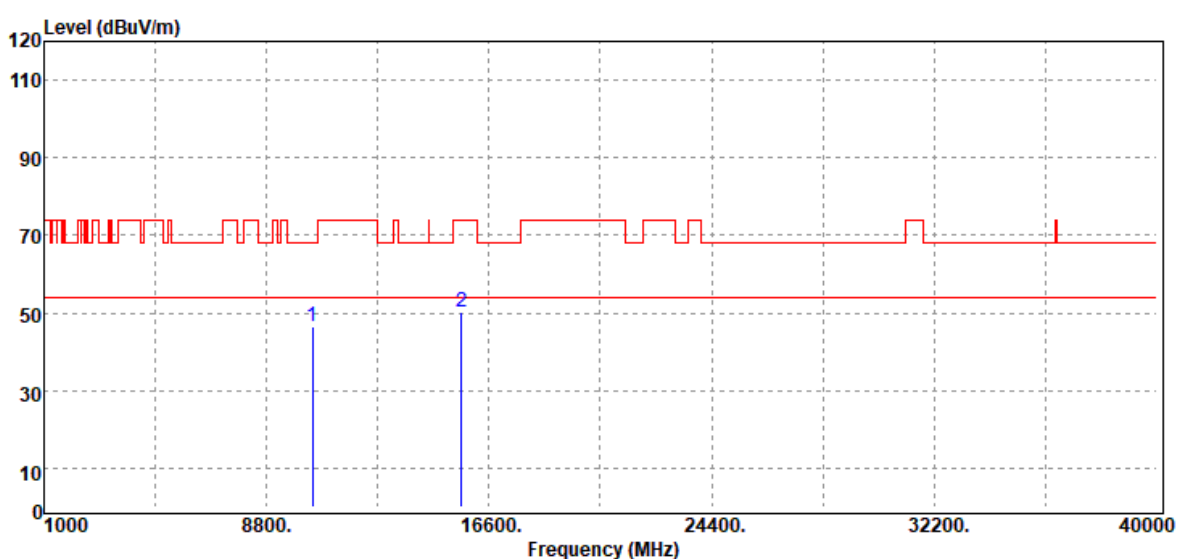


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10420.00	Peak	31.21	15.44	46.65	68.20	-21.55
15630.00	Peak	30.95	19.41	50.36	74.00	-23.64
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ac VHT80 / 5210MHZ	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

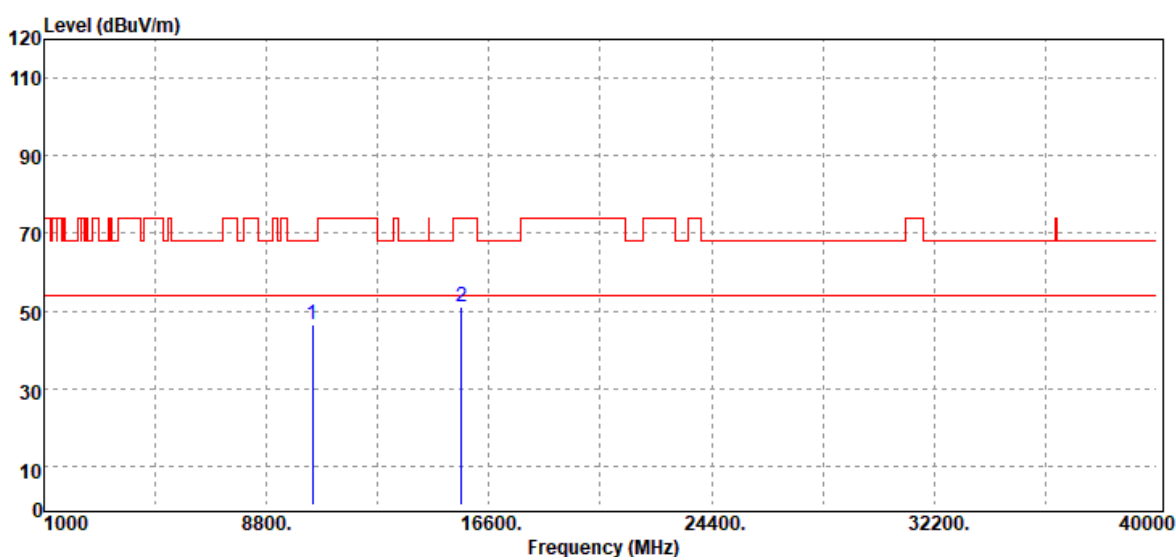


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10420.00	Peak	30.93	15.44	46.37	68.20	-21.83
15630.00	Peak	31.61	19.41	51.02	74.00	-22.98
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 20 / 5180MHz 26/0	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 14, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

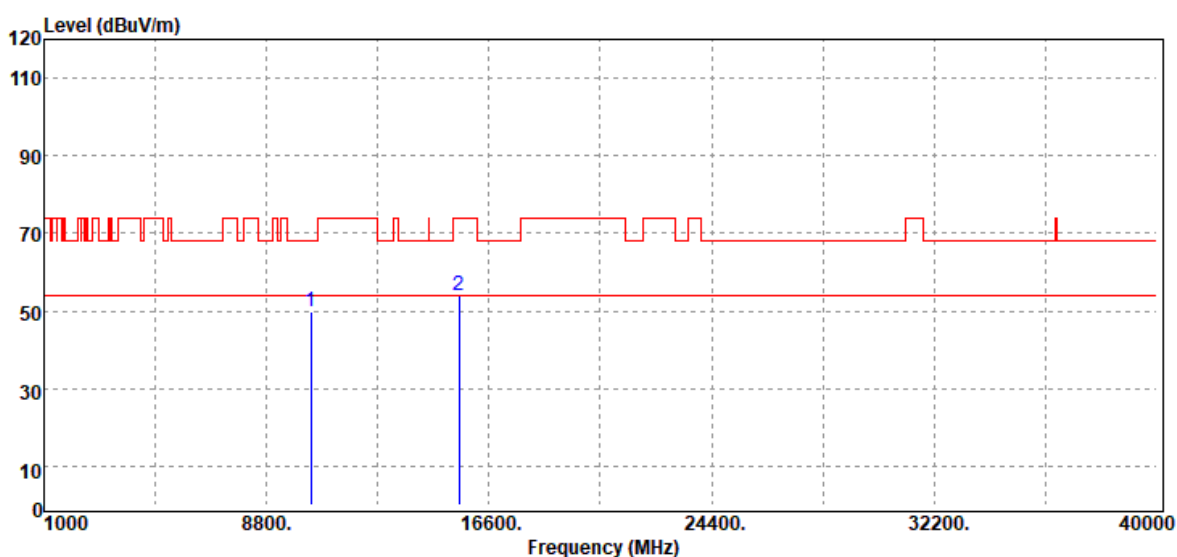


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10360.00	Peak	31.63	18.16	49.79	68.20	-18.41
15540.00	Peak	31.42	22.44	53.86	74.00	-20.14
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 20 / 5180MHz 26/0	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 14, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

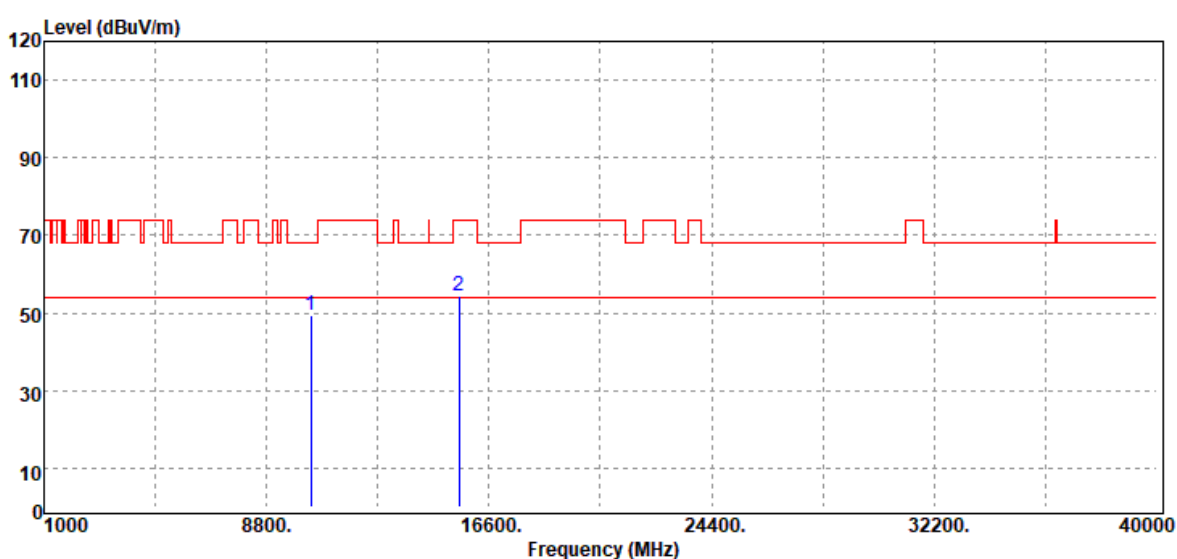


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10360.00	Peak	31.22	18.16	49.38	68.20	-18.82
15540.00	Peak	32.06	22.44	54.50	74.00	-19.50
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 20 / 5180MHz 52/37	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 14, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

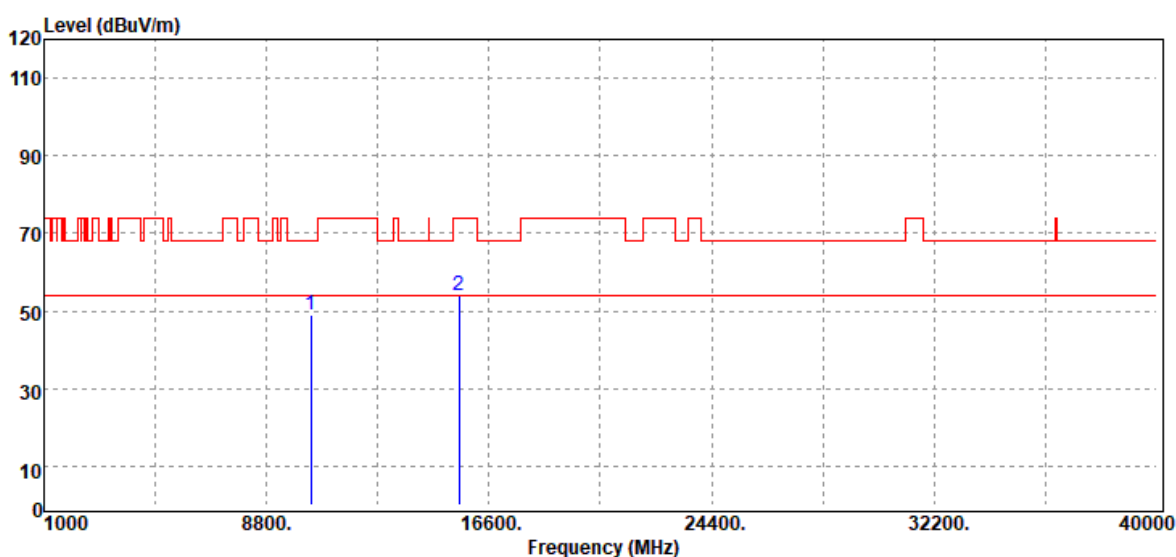


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10360.00	Peak	31.03	18.16	49.19	68.20	-19.01
15540.00	Peak	31.51	22.44	53.95	74.00	-20.05
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 20 / 5180MHz 52/37	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 14, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

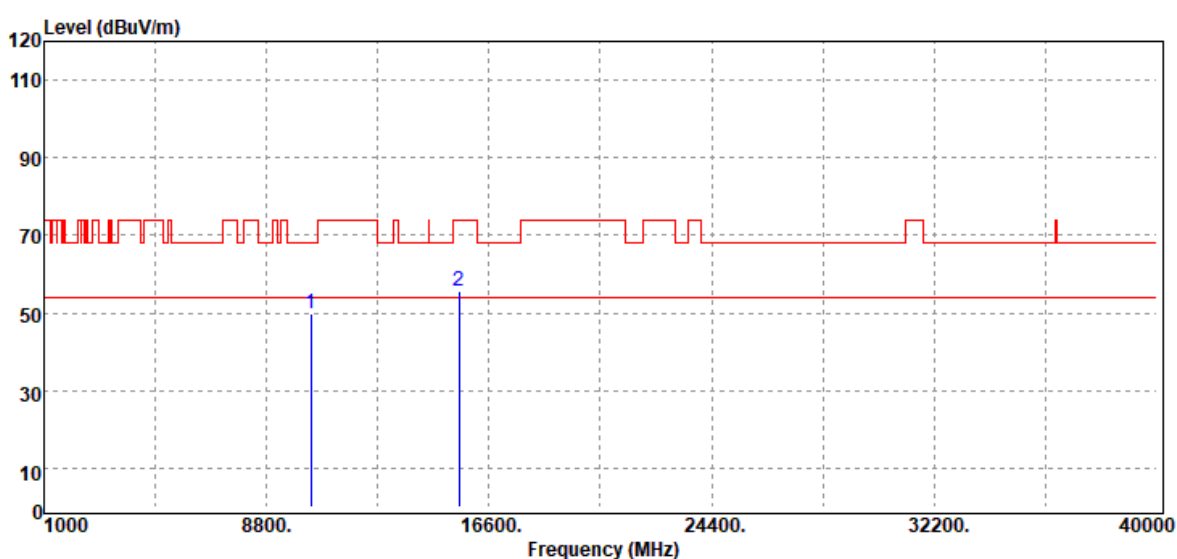


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10360.00	Peak	31.57	18.16	49.73	68.20	-18.47
15540.00	Peak	33.03	22.44	55.47	74.00	-18.53
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 20 / 5180MHz 106/53	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 14, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

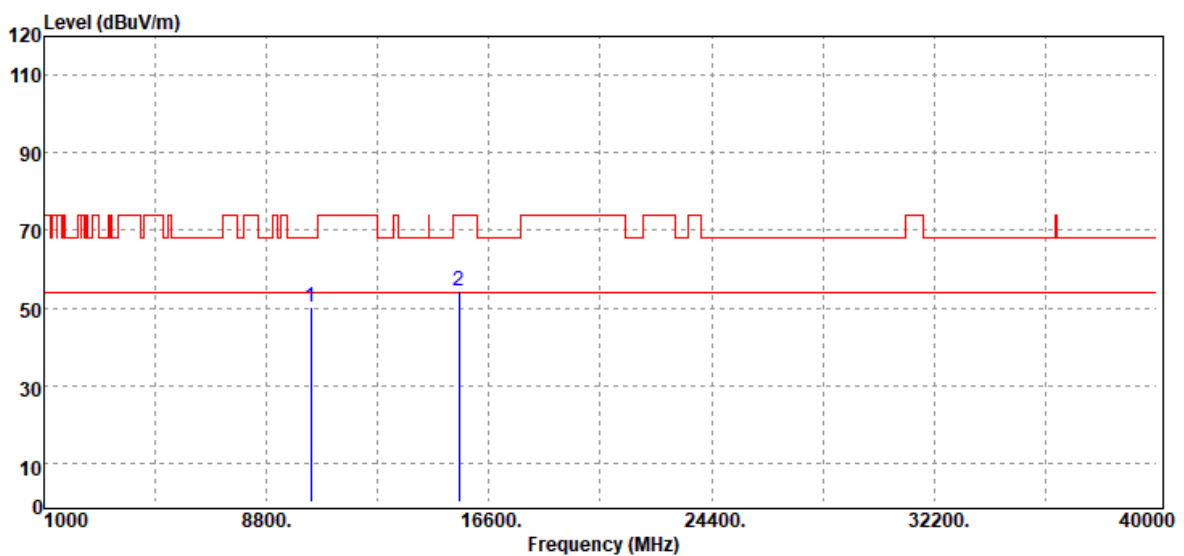


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10440.00	Peak	31.99	18.29	50.28	68.20	-17.92
15660.00	Peak	33.21	22.86	56.07	74.00	-17.93
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 20 / 5180MHz 106/53	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 14, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

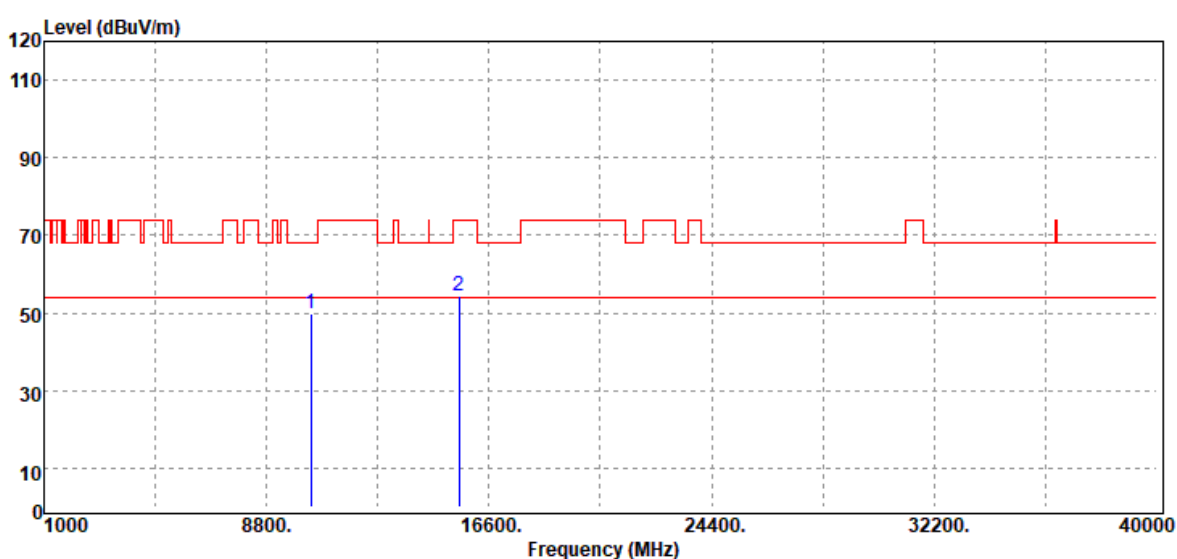


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10360.00	Peak	31.67	18.16	49.83	68.20	-18.37
15540.00	Peak	31.80	22.44	54.24	74.00	-19.76
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 20 / 5220MHz 106/53	Temp/Hum	22.9(°C)/ 47%RH
Test Item	Harmonic	Test Date	May 31, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

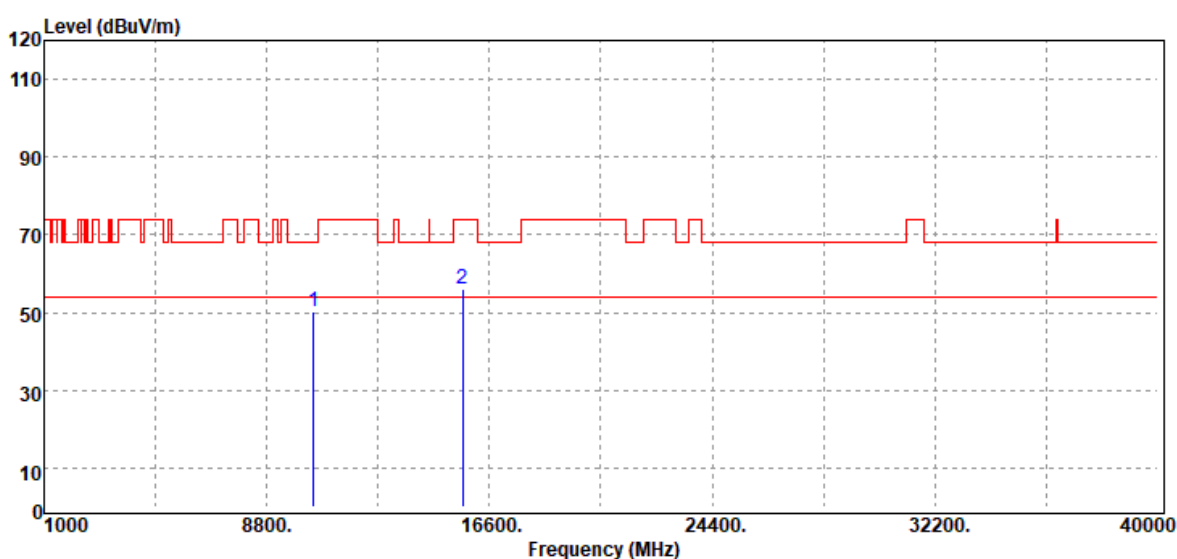


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10440.00	Peak	31.99	18.29	50.28	68.20	-17.92
15660.00	Peak	33.21	22.86	56.07	74.00	-17.93
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 20 / 5220MHz_106/53	Temp/Hum	22.9(°C)/ 47%RH
Test Item	Harmonic	Test Date	May 31, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

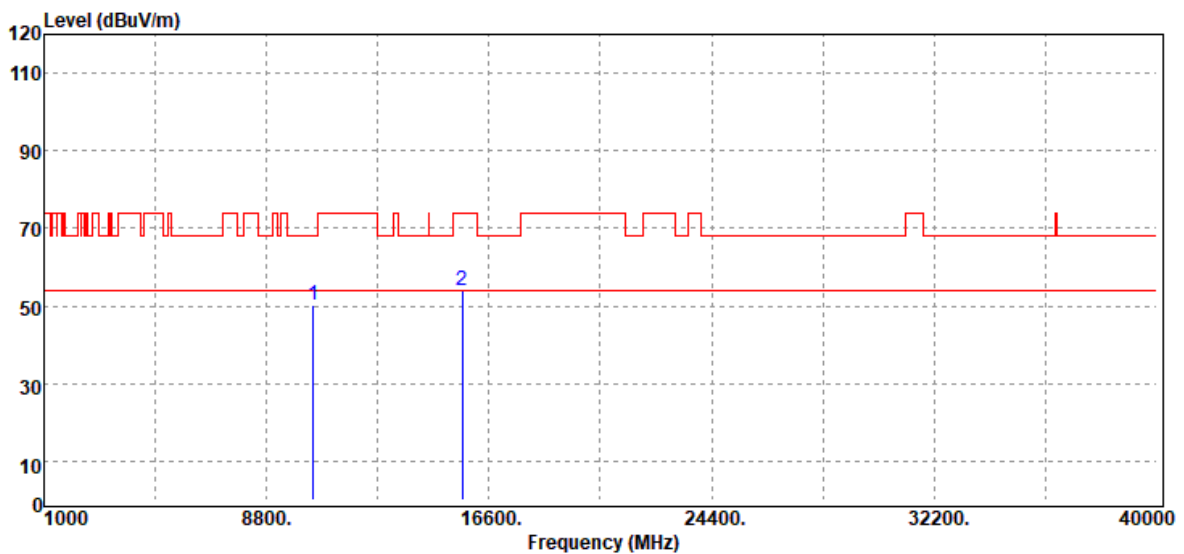


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10440.00	Peak	31.92	18.29	50.21	68.20	-17.99
15660.00	Peak	31.28	22.86	54.14	74.00	-19.86
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 20 / 5240MHz 106/53	Temp/Hum	22.9(°C)/ 47%RH
Test Item	Harmonic	Test Date	May 31, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

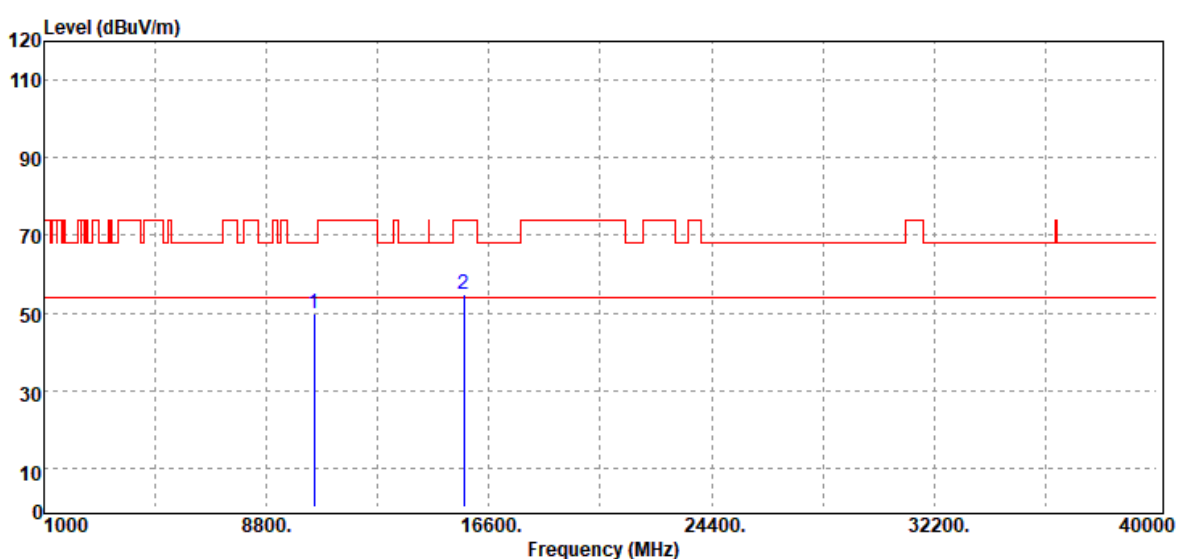


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10480.00	Peak	31.67	18.28	49.95	68.20	-18.25
15720.00	Peak	31.50	23.15	54.65	74.00	-19.35
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 20 / 5240MHz_106/53	Temp/Hum	22.9(°C)/ 47%RH
Test Item	Harmonic	Test Date	May 31, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

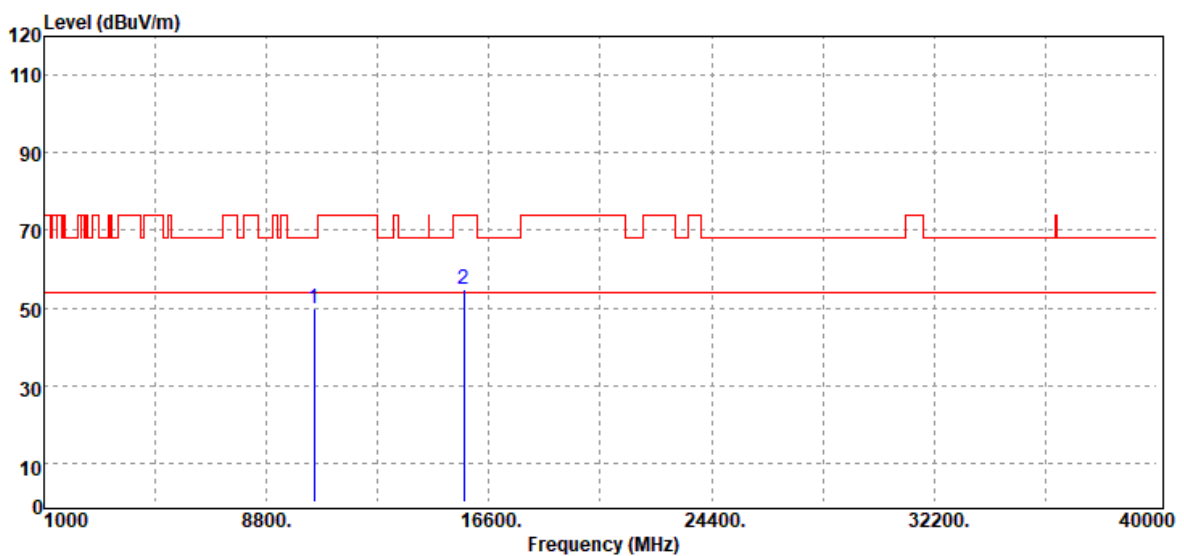


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10480.00	Peak	31.54	18.28	49.82	68.20	-18.38
15720.00	Peak	31.48	23.15	54.63	74.00	-19.37
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 40 / 5190MHz_106/53	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 14, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

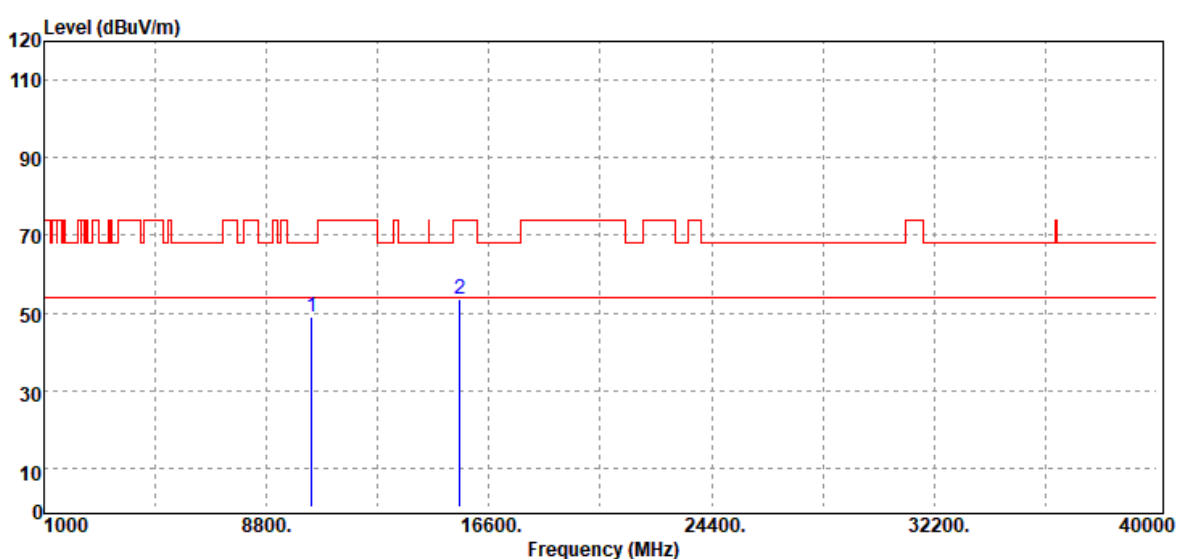


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10380.00	Peak	30.81	18.17	48.98	68.20	-19.22
15570.00	Peak	31.16	22.55	53.71	74.00	-20.29
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 40 / 5190MHz 106/53	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 14, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

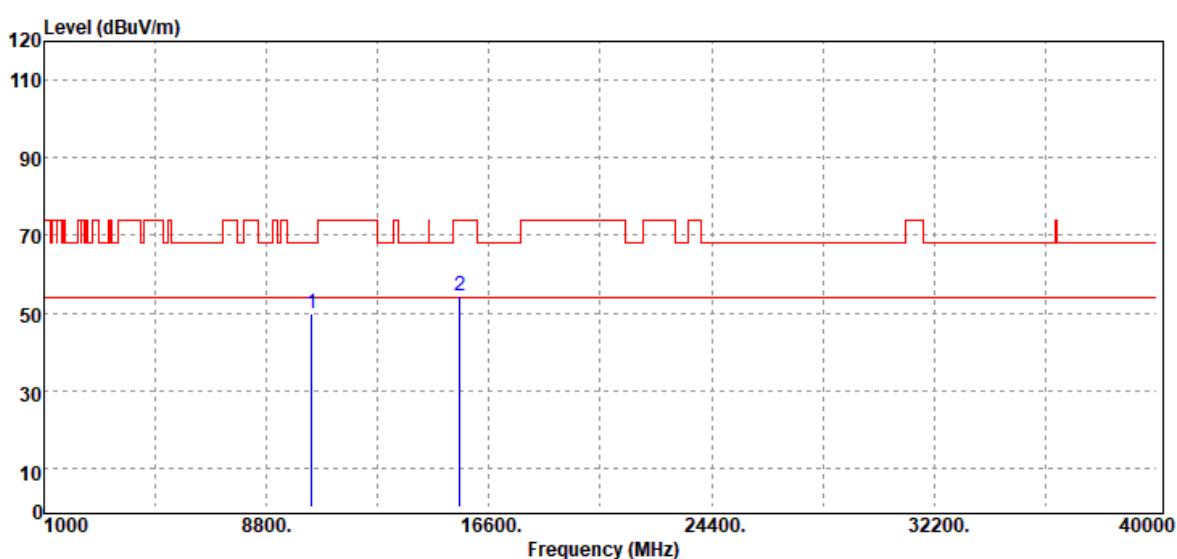


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10380.00	Peak	31.75	18.17	49.92	68.20	-18.28
15570.00	Peak	31.82	22.55	54.37	74.00	-19.63
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 40 / 5230MHz 106/53	Temp/Hum	22.9(°C)/ 47%RH
Test Item	Harmonic	Test Date	May 31, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

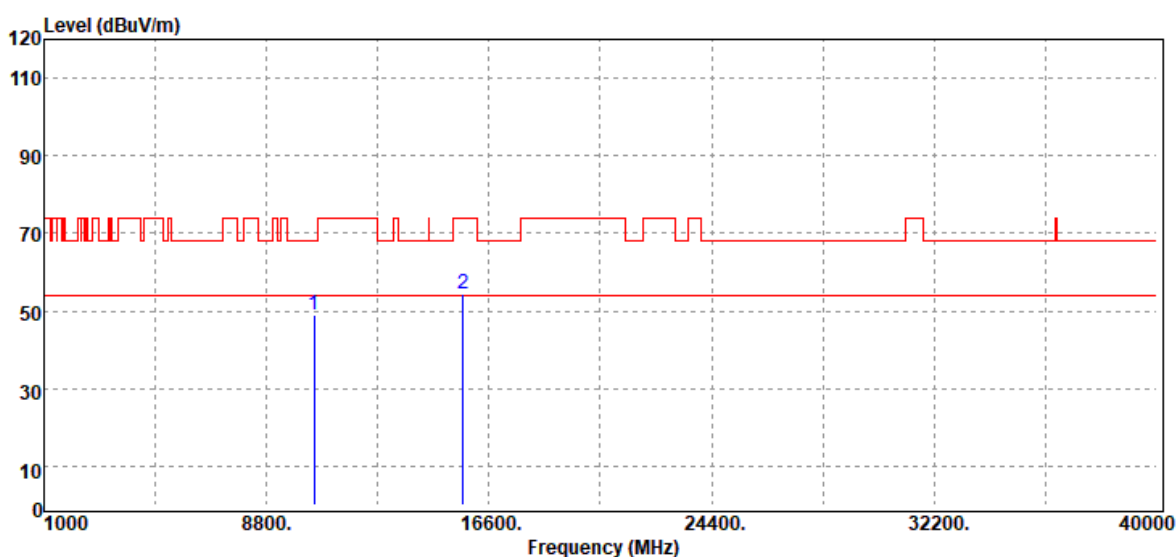


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10460.00	Peak	30.52	18.31	48.83	68.20	-19.37
15690.00	Peak	31.21	23.09	54.30	74.00	-19.70
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 40 / 5230MHz_106/53	Temp/Hum	22.9(°C)/ 47%RH
Test Item	Harmonic	Test Date	May 31, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

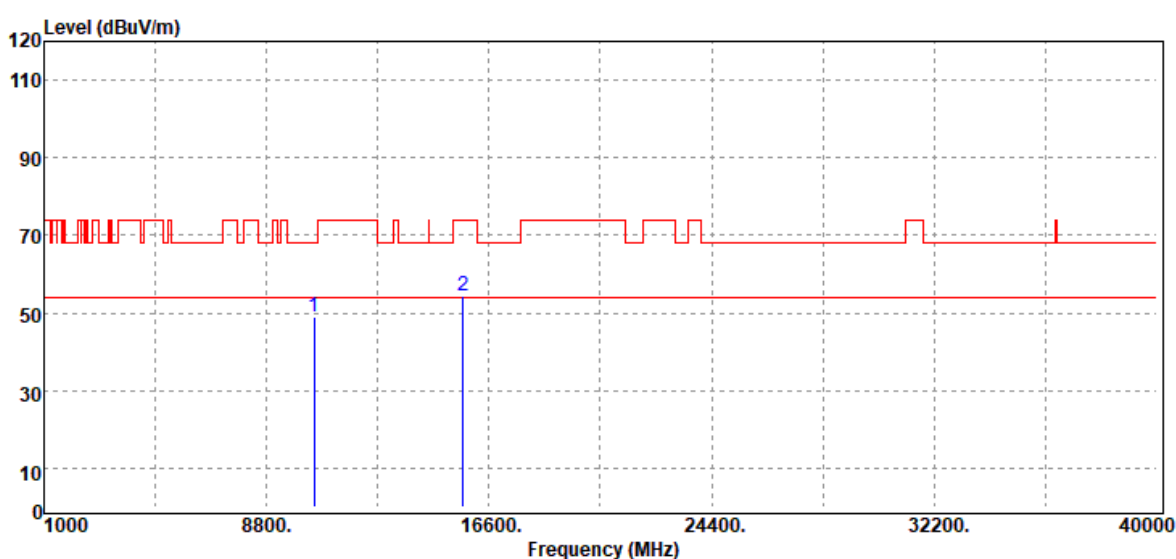


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10460.00	Peak	30.62	18.31	48.93	68.20	-19.27
15690.00	Peak	31.21	23.09	54.30	74.00	-19.70
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 80 / 5210MHz 106/53	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 15, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

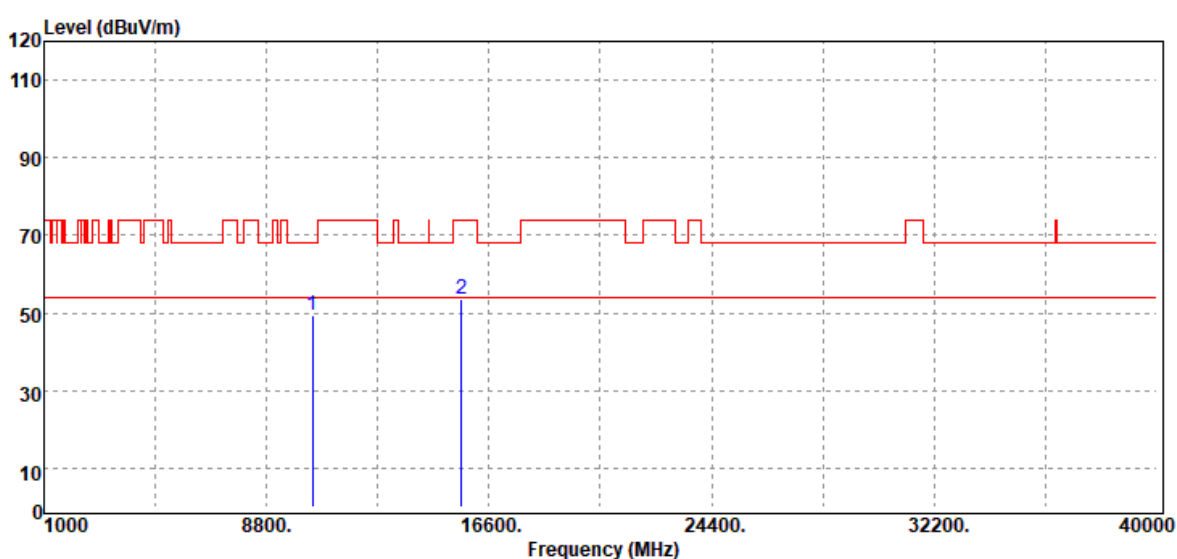


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10420.00	Peak	31.06	18.23	49.29	68.20	-18.91
15630.00	Peak	30.89	22.74	53.63	74.00	-20.37
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 80 / 5210MHz_106/53	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 15, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

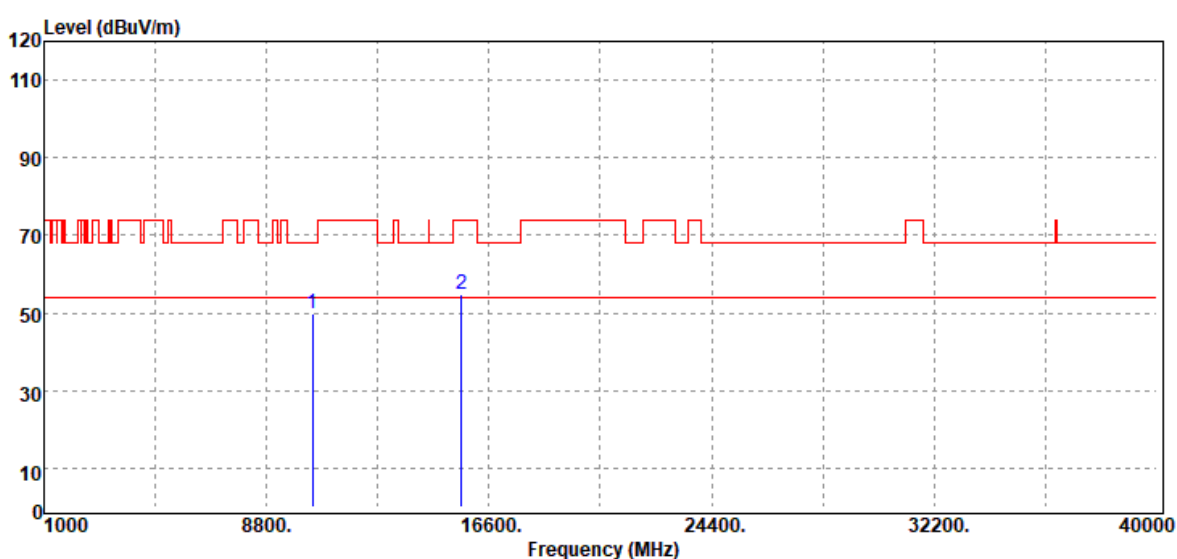

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10420.00	Peak	31.56	18.23	49.79	68.20	-18.41
15630.00	Peak	31.91	22.74	54.65	74.00	-19.35
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T210319W02-RP2

Test Data for UNII-3

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

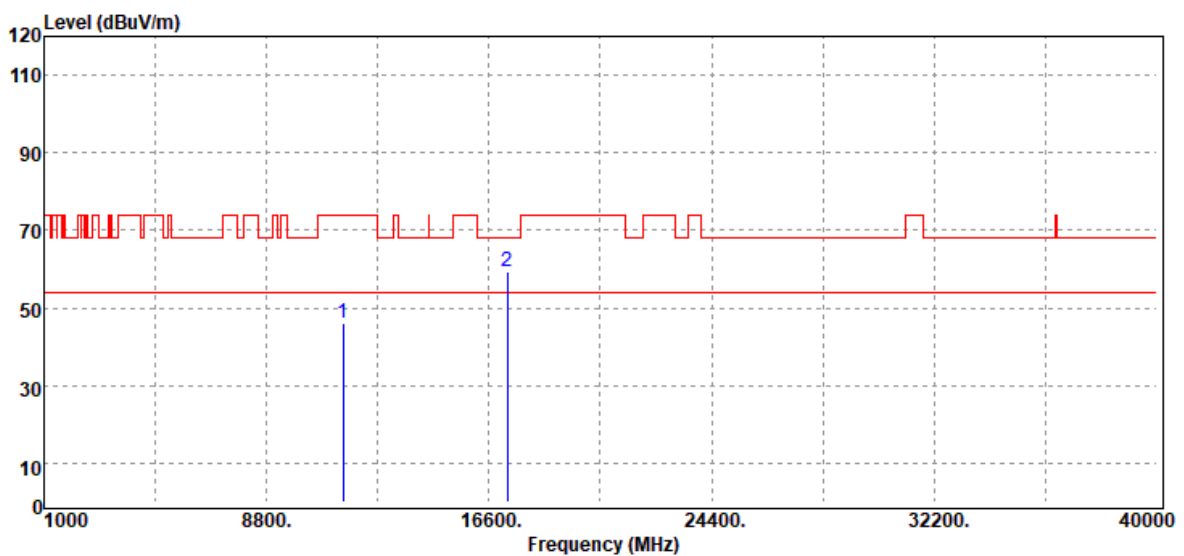


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11490.00	Peak	30.36	15.79	46.15	74.00	-27.85
17235.00	Peak	30.67	28.52	59.19	68.20	-9.01
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

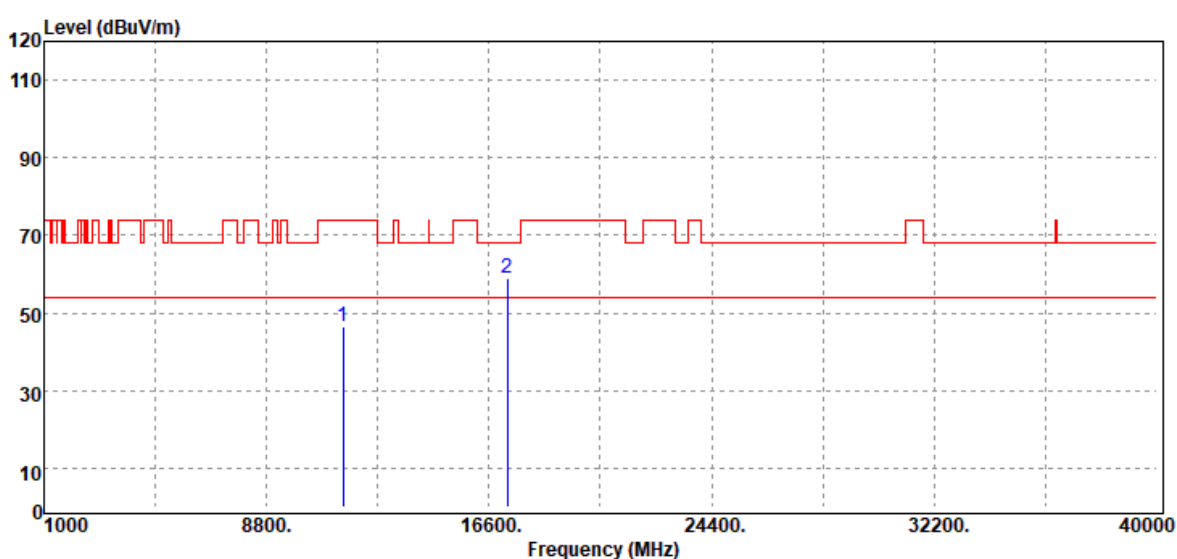


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11490.00	Peak	30.81	15.79	46.60	74.00	-27.40
17235.00	Peak	30.50	28.52	59.02	68.20	-9.18
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11a / 5785 MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

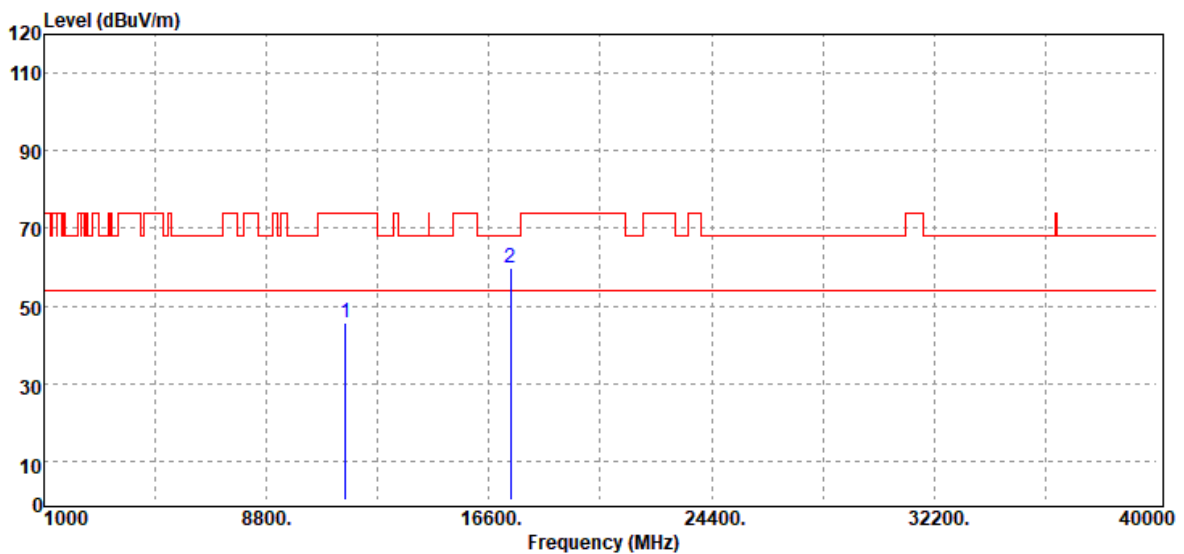


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11570.00	Peak	29.51	16.34	45.85	74.00	-28.15
17355.00	Peak	30.35	29.49	59.84	68.20	-8.36
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11a / 5785 MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

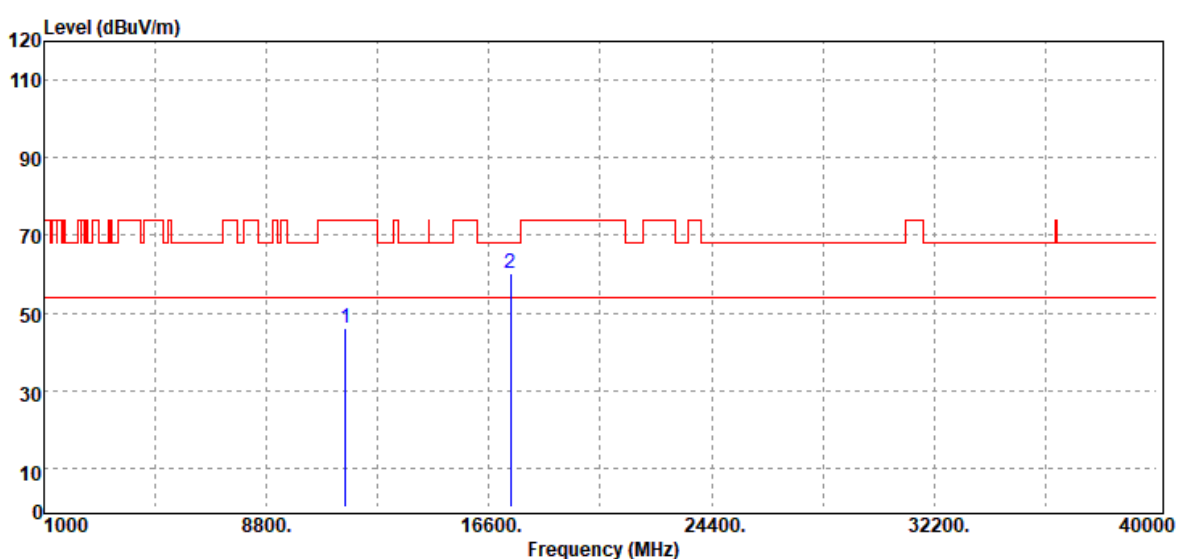


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11570.00	Peak	29.78	16.34	46.12	74.00	-27.88
17355.00	Peak	30.64	29.49	60.13	68.20	-8.07
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 12, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

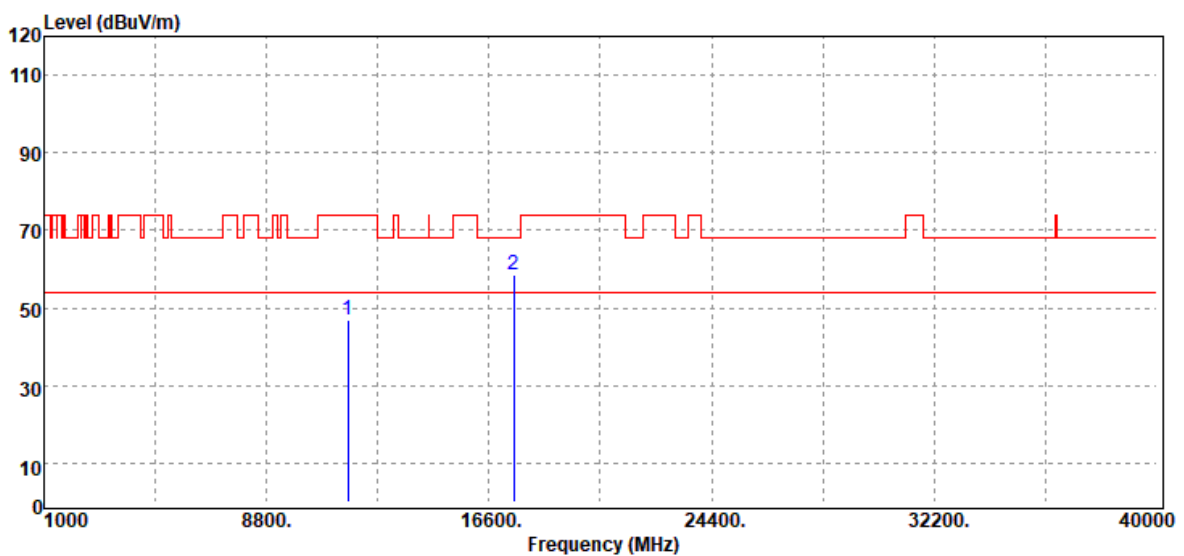


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11650.00	Peak	30.26	16.52	46.78	74.00	-27.22
17475.00	Peak	29.24	29.32	58.56	68.20	-9.64
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 12, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

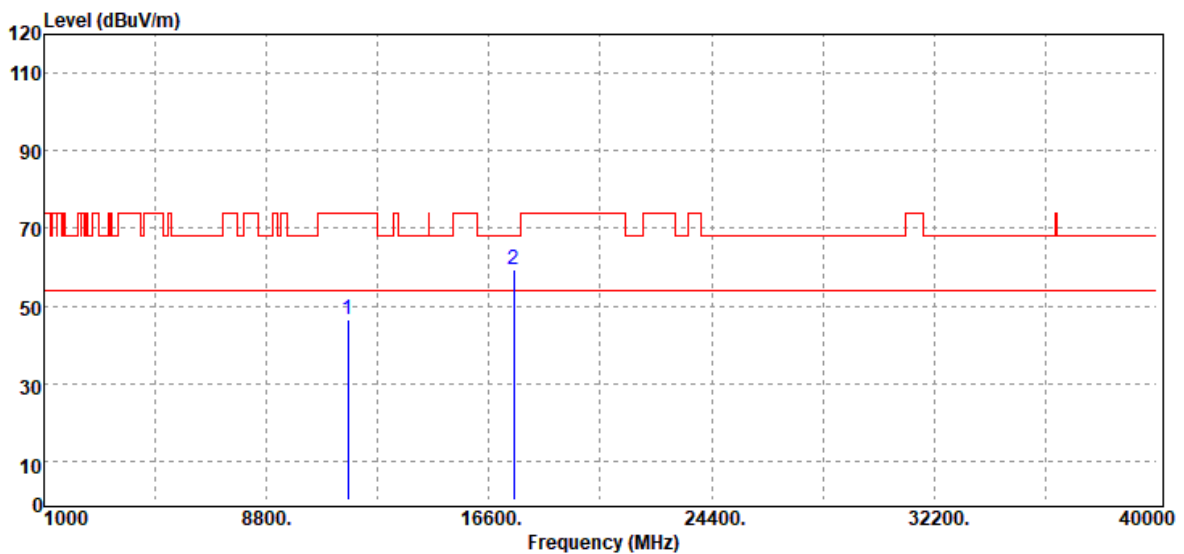


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11650.00	Peak	30.02	16.52	46.54	74.00	-27.46
17475.00	Peak	29.94	29.32	59.26	68.20	-8.94
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11n 20 MHz / 5745 MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 13, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

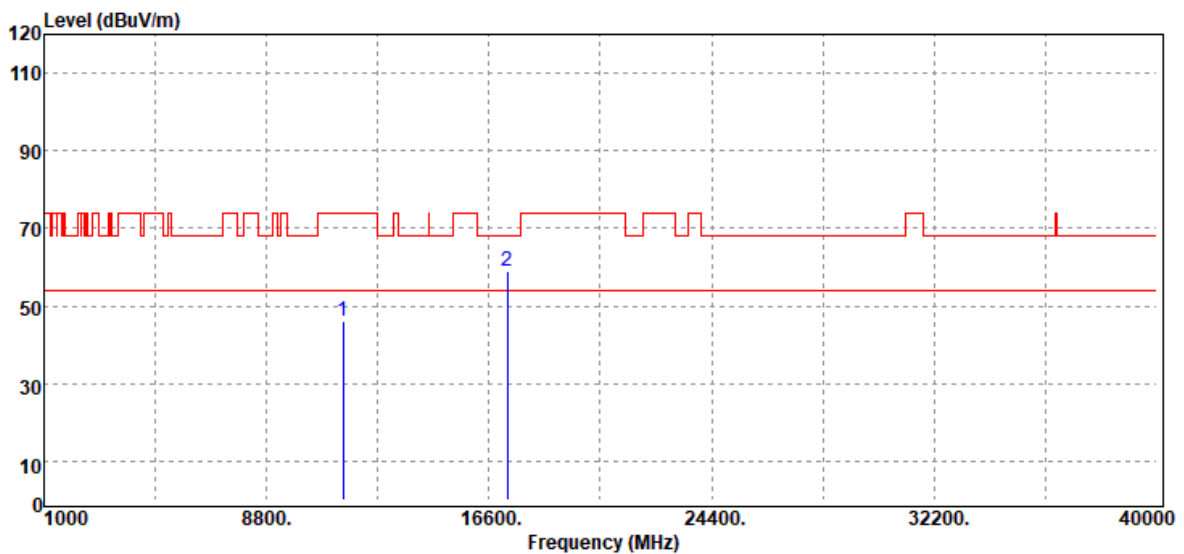


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11490.00	Peak	30.19	15.79	45.98	74.00	-28.02
17235.00	Peak	30.28	28.52	58.80	68.20	-9.40
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11n 20 MHz / 5745 MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 13, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

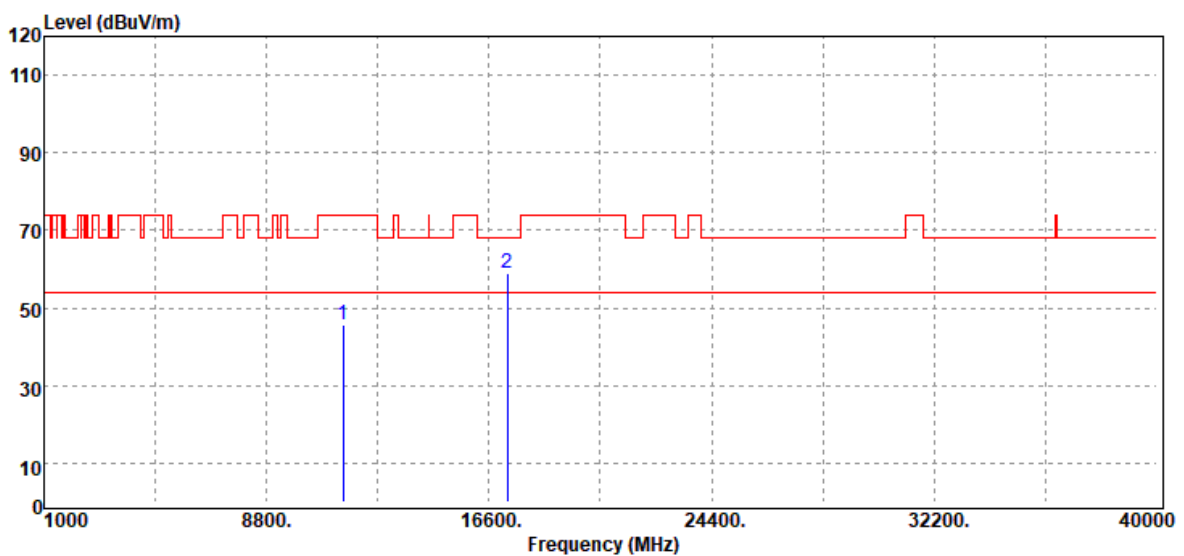


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11490.00	Peak	30.05	15.79	45.84	74.00	-28.16
17235.00	Peak	30.49	28.52	59.01	68.20	-9.19
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11n 20 MHz/ 5785 MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 13, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

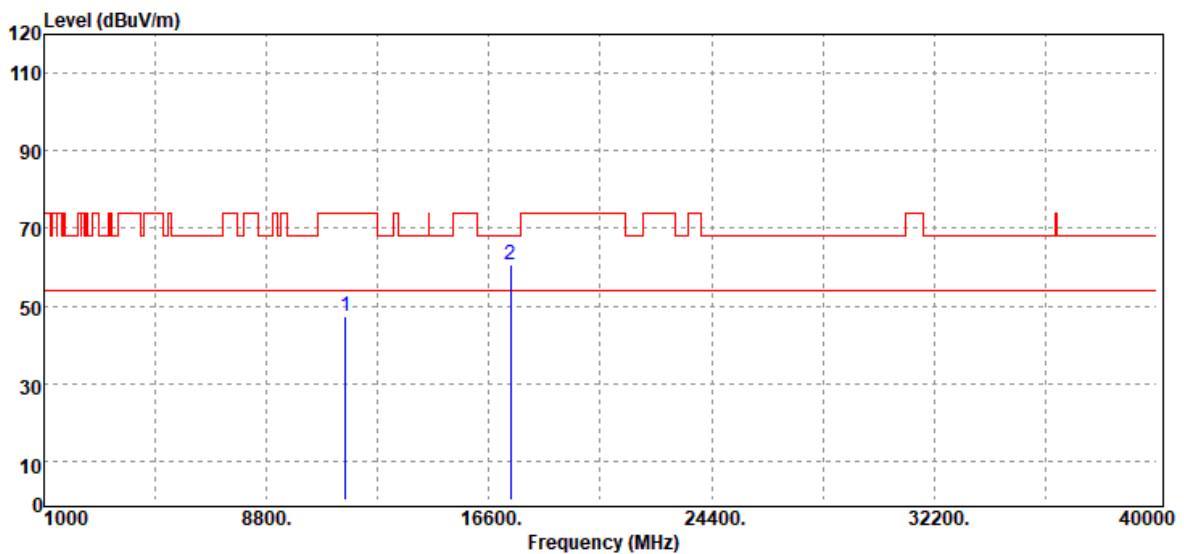


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11570.00	Peak	31.16	16.34	47.50	74.00	-26.50
17355.00	Peak	31.09	29.49	60.58	68.20	-7.62
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11n 20 MHz/ 5785 MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 13, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

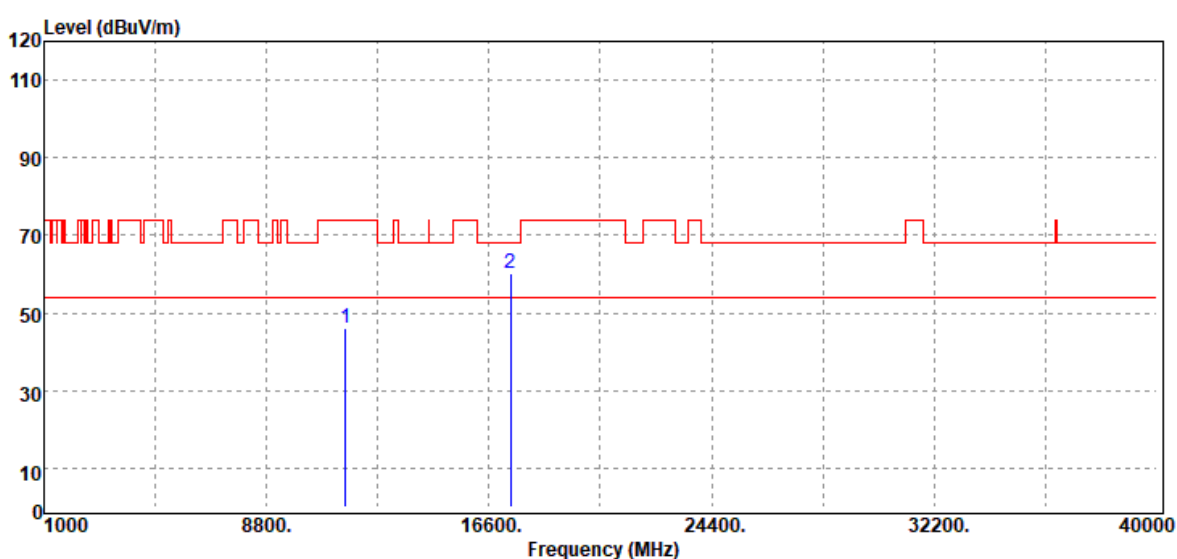


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11570.00	Peak	29.83	16.34	46.17	74.00	-27.83
17355.00	Peak	30.80	29.49	60.29	68.20	-7.91
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11n 20 MHz/ 5825 MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 13, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

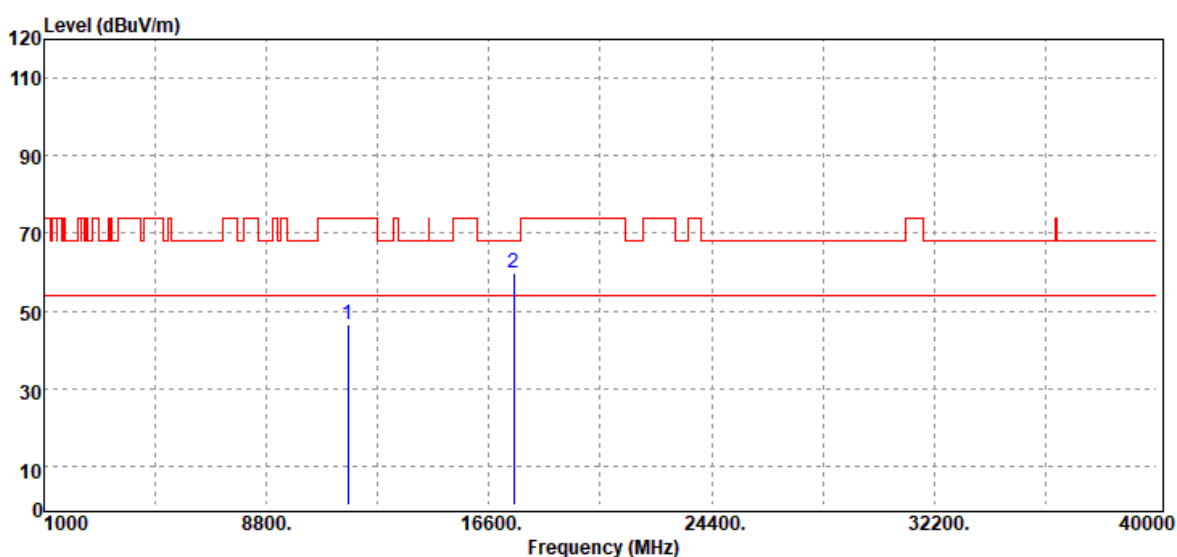


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11650.00	Peak	29.86	16.52	46.38	74.00	-27.62
17475.00	Peak	30.28	29.32	59.60	68.20	-8.60
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11n 20 MHz/ 5825 MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 13, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

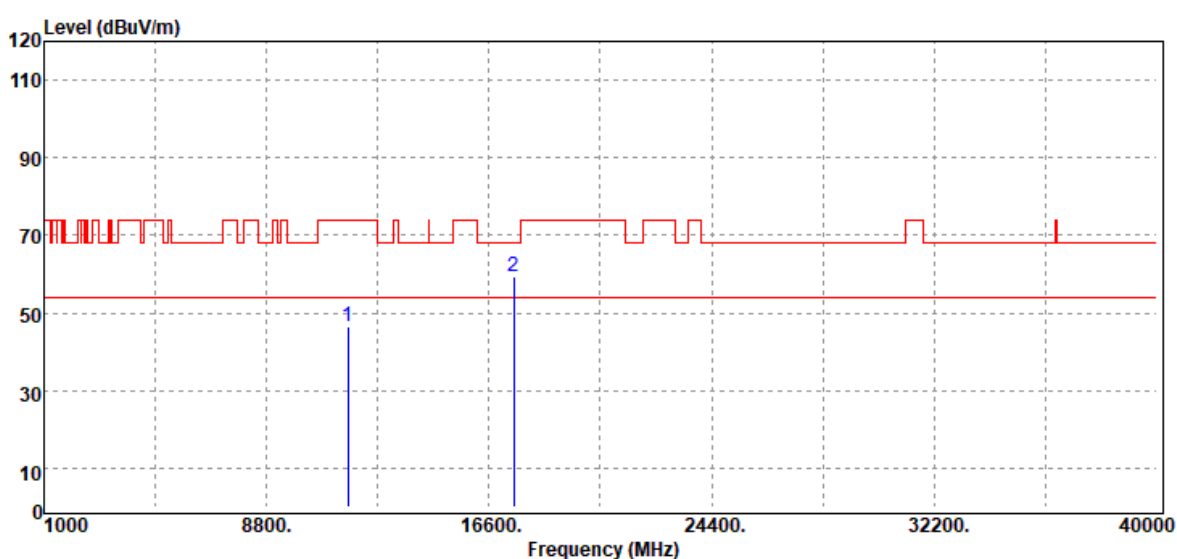


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11650.00	Peak	30.01	16.52	46.53	74.00	-27.47
17475.00	Peak	30.00	29.32	59.32	68.20	-8.88
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11n 40 MHz/ 5755 MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 13, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

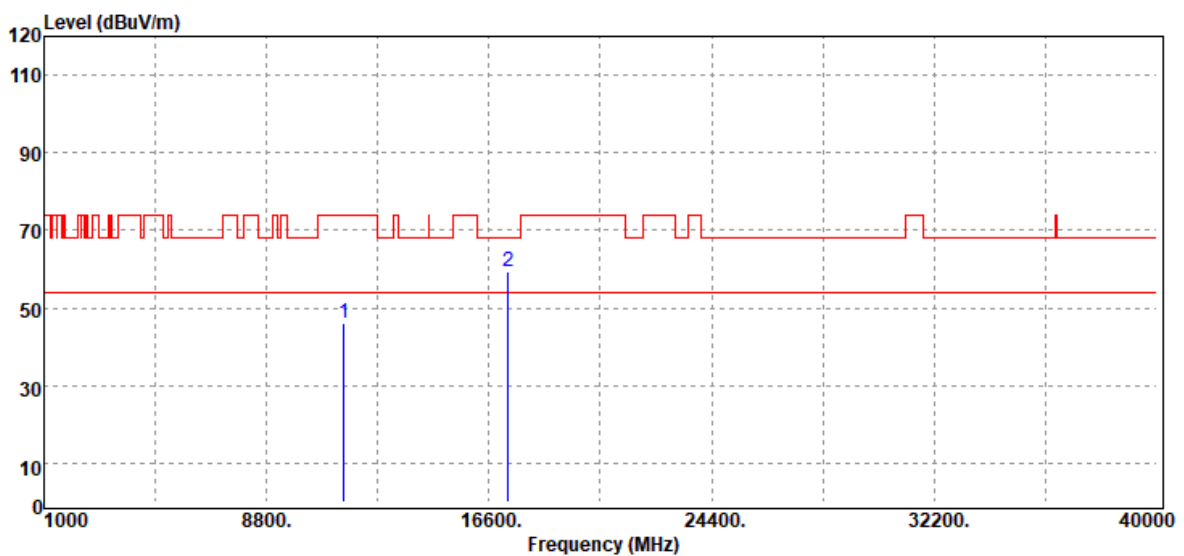


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11510.00	Peak	30.26	15.78	46.04	74.00	-27.96
17265.00	Peak	30.31	29.04	59.35	68.20	-8.85
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11n 40 MHz/ 5755 MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 13, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

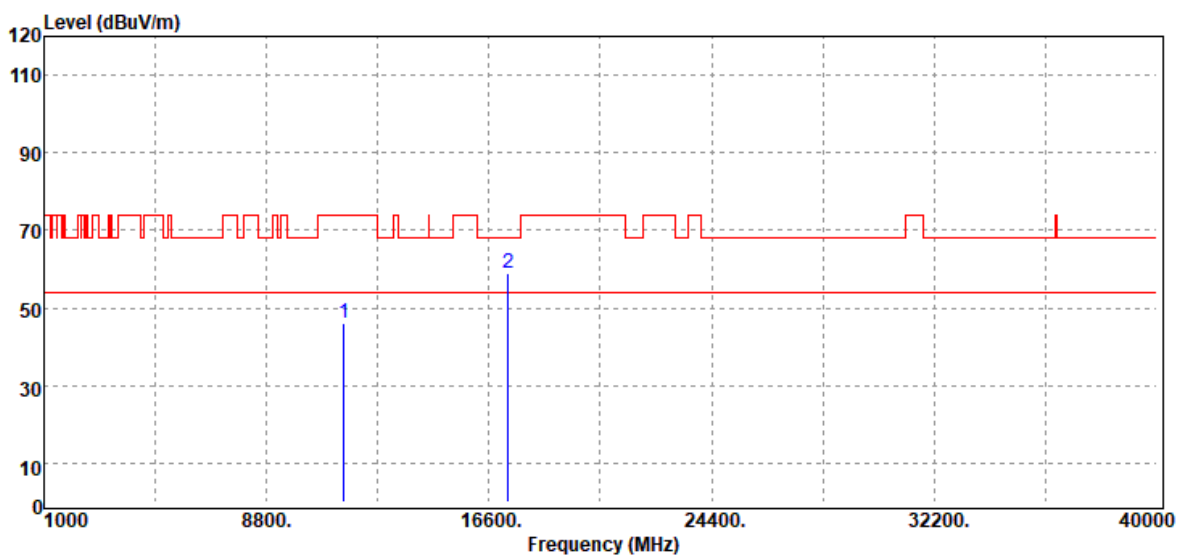


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11510.00	Peak	30.33	15.78	46.11	74.00	-27.89
17265.00	Peak	30.00	29.04	59.04	68.20	-9.16
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11n 40 MHz/ 5795 MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 13, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

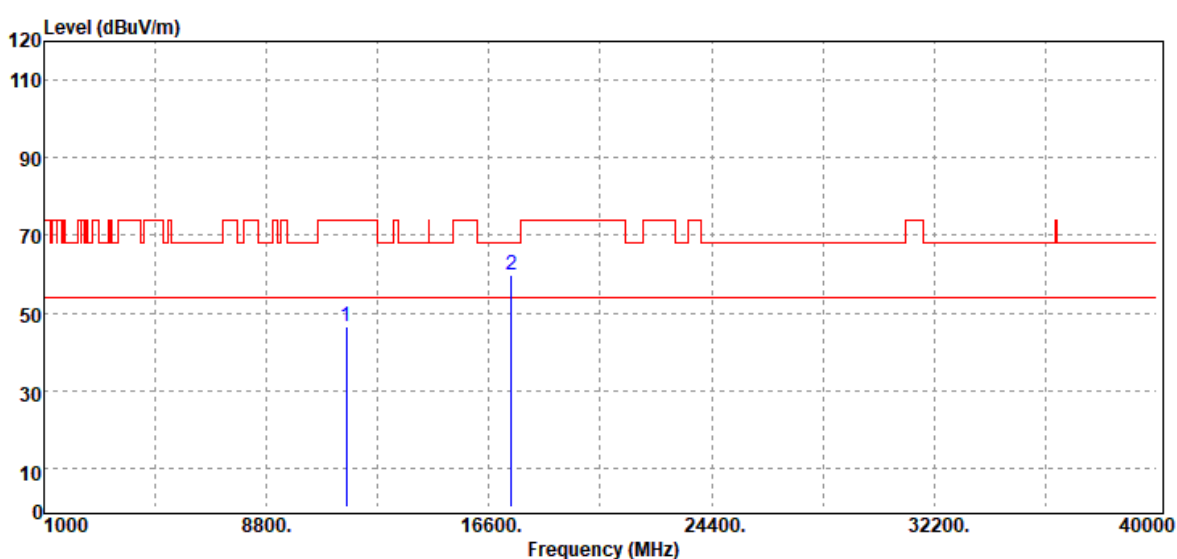


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11590.00	Peak	30.05	16.38	46.43	74.00	-27.57
17385.00	Peak	30.57	29.12	59.69	68.20	-8.51
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11n 40 MHz/ 5795 MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 13, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

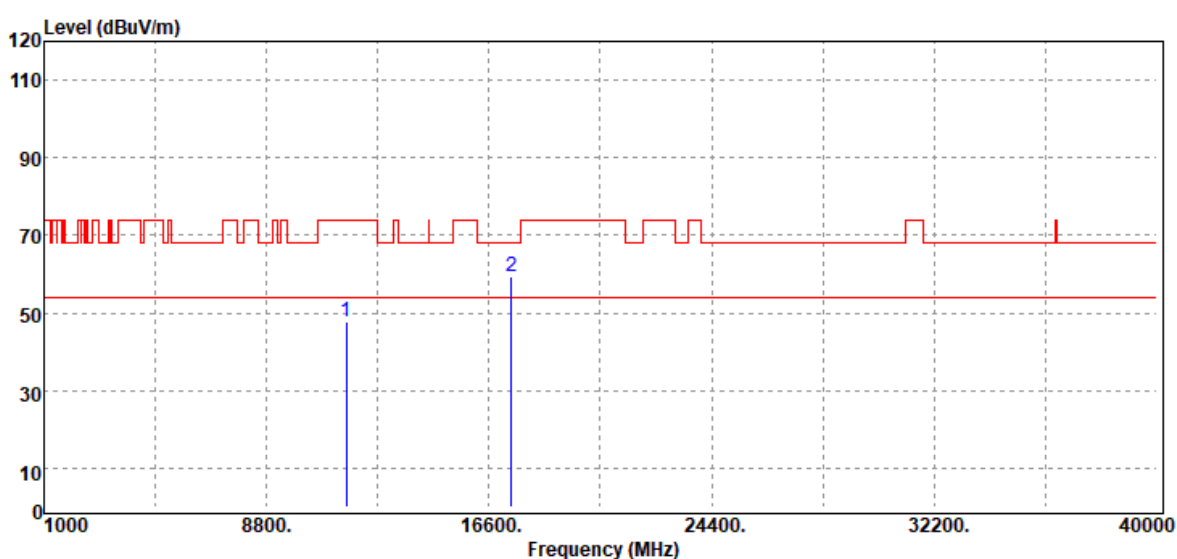


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11590.00	Peak	31.38	16.38	47.76	74.00	-26.24
17385.00	Peak	30.20	29.12	59.32	68.20	-8.88
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11ac VHT80/ 5775 MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 14, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

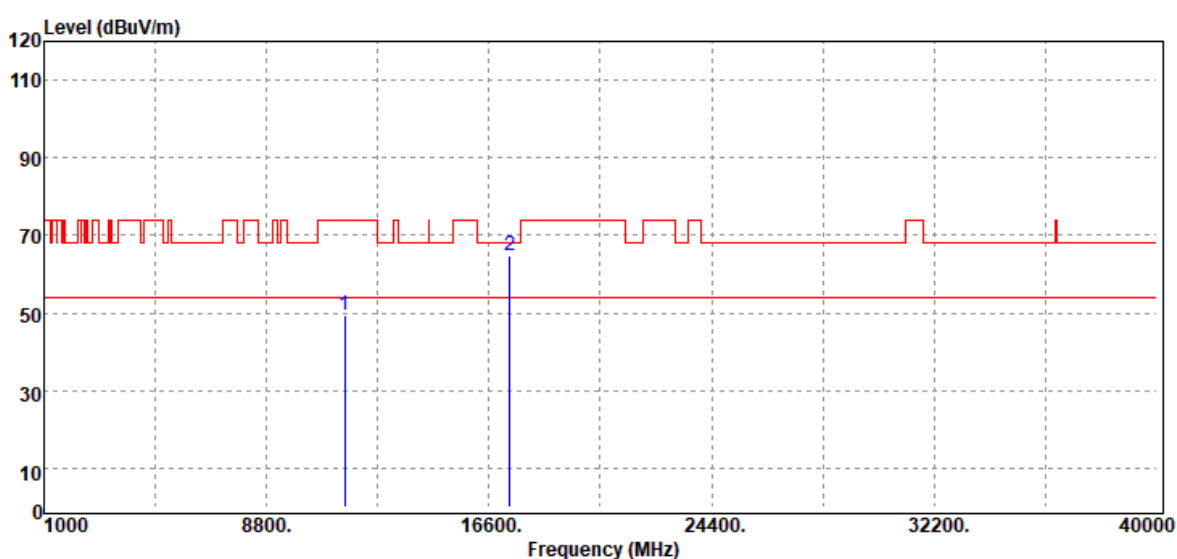

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11550.00	Peak	30.39	19.09	49.48	74.00	-24.52
17325.00	Peak	30.42	34.24	64.66	68.20	-3.54
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11ac VHT80/ 5775 MHz	Temp/Hum	23.9(°C)/ 48%RH
Test Item	Harmonic	Test Date	May 14, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11550.00	Peak	30.80	19.09	49.89	74.00	-24.11
17325.00	Peak	30.52	34.24	64.76	68.20	-3.44
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11ax 20 / 5745MHz 26/0	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 14, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11490.00	Peak	30.64	19.13	49.77	74.00	-24.23
17235.00	Peak	30.74	33.97	64.71	68.20	-3.49
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 20 / 5745MHz 26/0	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 14, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11490.00	Peak	30.22	19.13	49.35	74.00	-24.65
17235.00	Peak	30.83	33.97	64.80	68.20	-3.40
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 20 / 5745MHz 52/37	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 14, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		




Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11490.00	Peak	30.48	19.13	49.61	74.00	-24.39
17235.00	Peak	30.63	33.97	64.60	68.20	-3.60
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 20 / 5745MHz 52/37	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 14, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

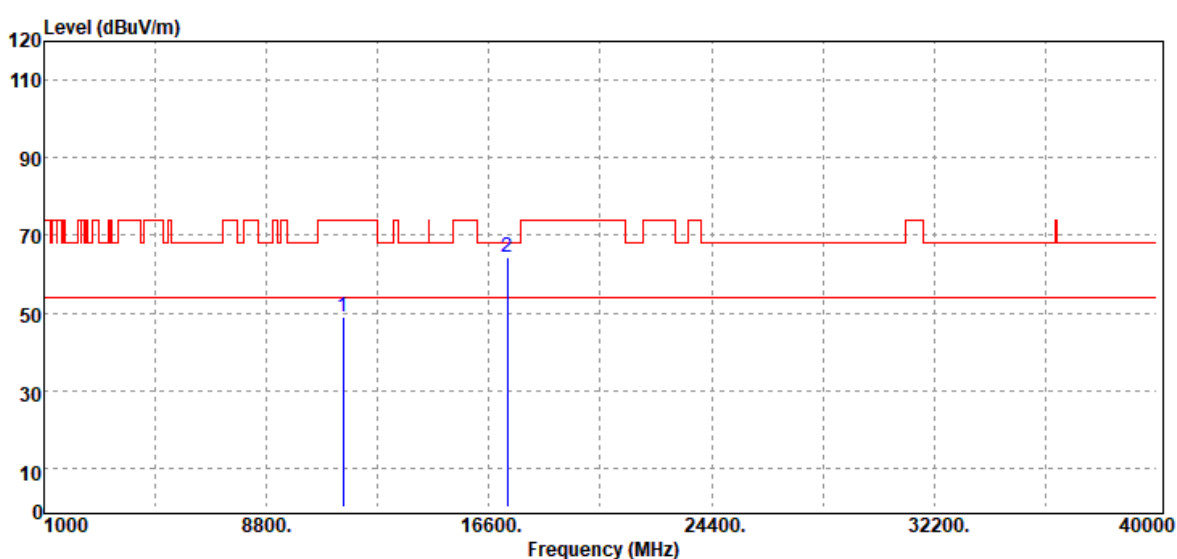


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11490.00	Peak	29.74	19.13	48.87	74.00	-25.13
17235.00	Peak	30.51	33.97	64.48	68.20	-3.72
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 20 / 5745MHz_106/53	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 14, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

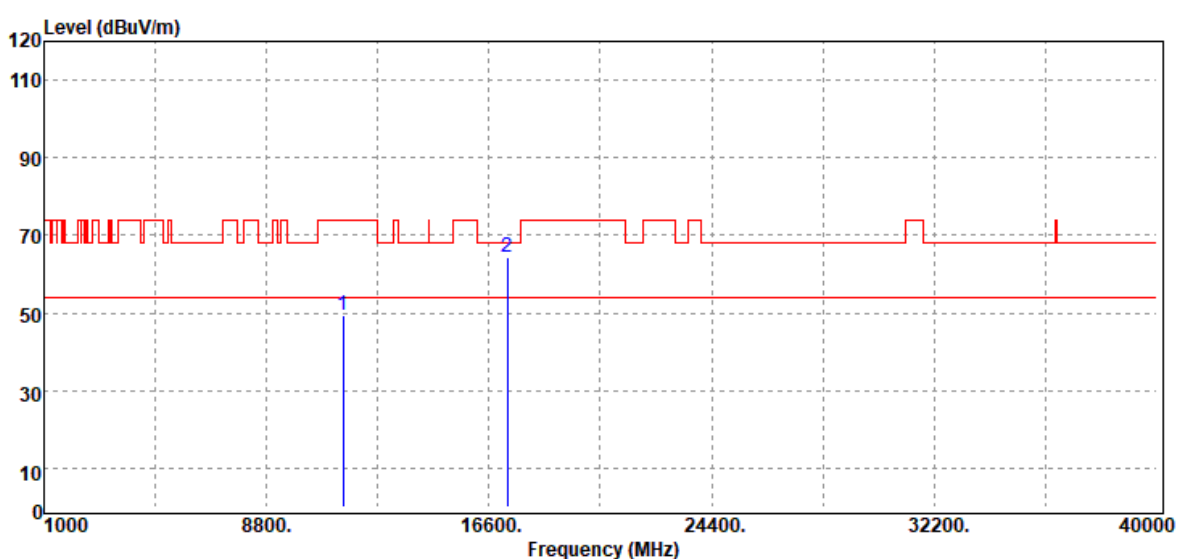

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11490.00	Peak	30.45	19.13	49.58	74.00	-24.42
17235.00	Peak	30.43	33.97	64.40	68.20	-3.80
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 20 / 5745MHz 106/53	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 14, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		




Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11490.00	Peak	30.81	19.13	49.94	74.00	-24.06
17235.00	Peak	30.57	33.97	64.54	68.20	-3.66
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 20 / 5785MHz 106/53	Temp/Hum	22.9(°C)/ 47%RH
Test Item	Harmonic	Test Date	May 31, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

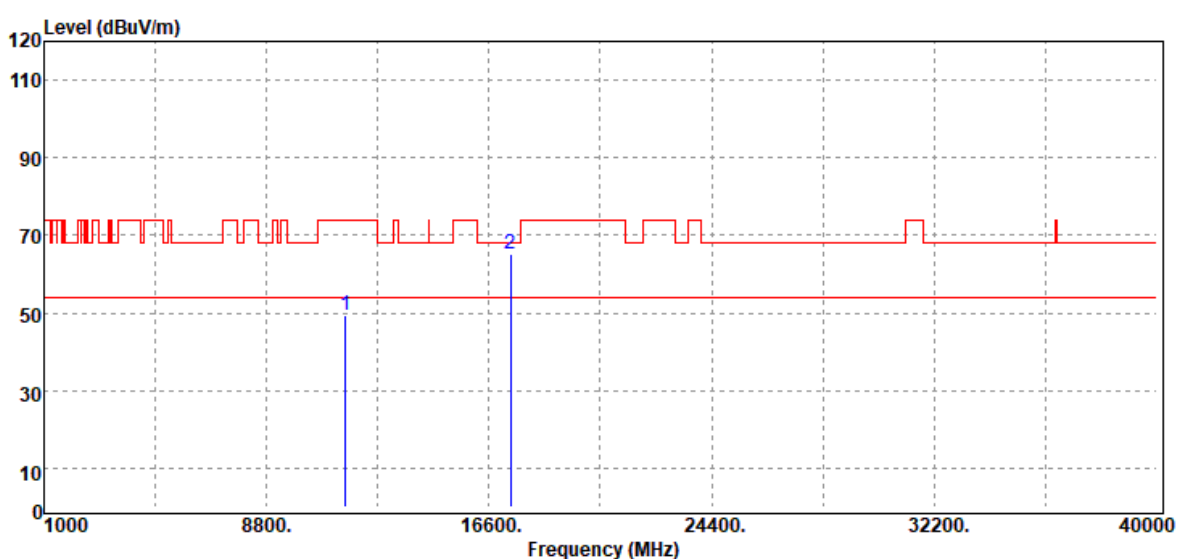


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11570.00	Peak	30.40	19.04	49.44	74.00	-24.56
17355.00	Peak	30.86	34.47	65.33	68.20	-2.87
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 20 / 5785MHz 106/53	Temp/Hum	22.9(°C)/ 47%RH
Test Item	Harmonic	Test Date	May 31, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

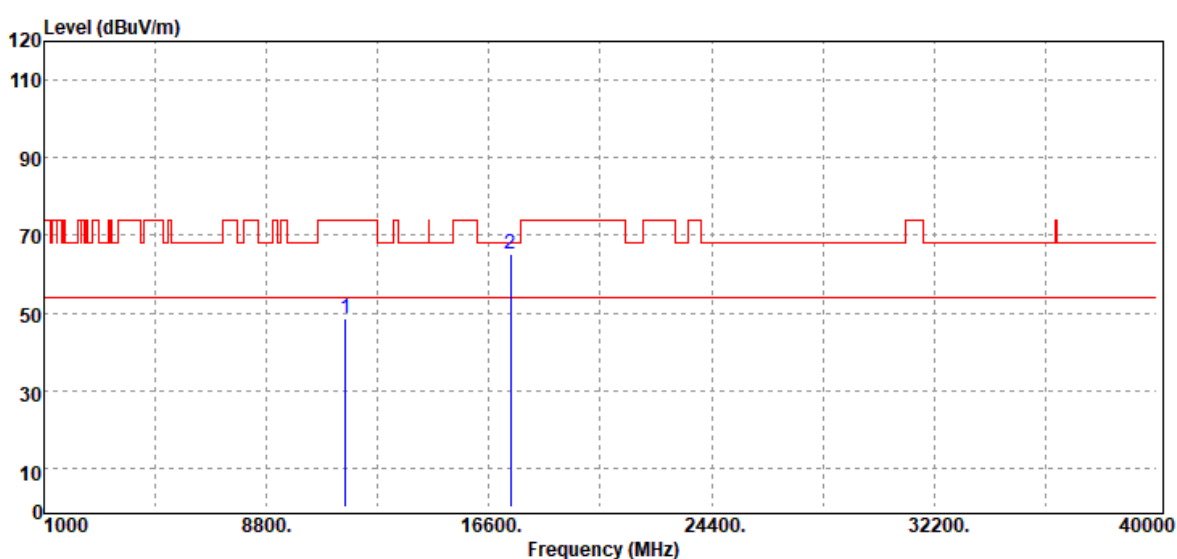

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11570.00	Peak	29.40	19.04	48.44	74.00	-25.56
17355.00	Peak	30.63	34.47	65.10	68.20	-3.10
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 20 / 5825MHz 26/8	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 14, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		




Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11650.00	Peak	29.51	19.14	48.65	74.00	-25.35
17475.00	Peak	30.08	34.30	64.38	68.20	-3.82
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 20 / 5825MHz 26/8	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 14, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

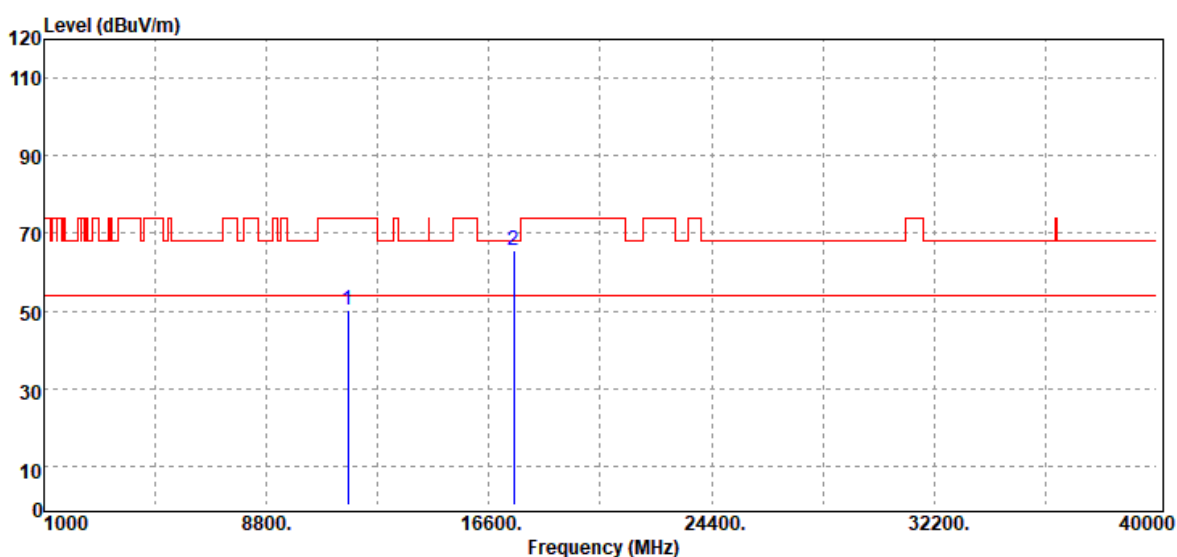

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11650.00	Peak	30.93	19.14	50.07	74.00	-23.93
17475.00	Peak	31.18	34.30	65.48	68.20	-2.72
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 20 / 5825MHz 52/40	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 14, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		




Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11650.00	Peak	30.33	19.14	49.47	74.00	-24.53
17475.00	Peak	29.51	34.30	63.81	68.20	-4.39
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 20 / 5825MHz 52/40	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 14, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

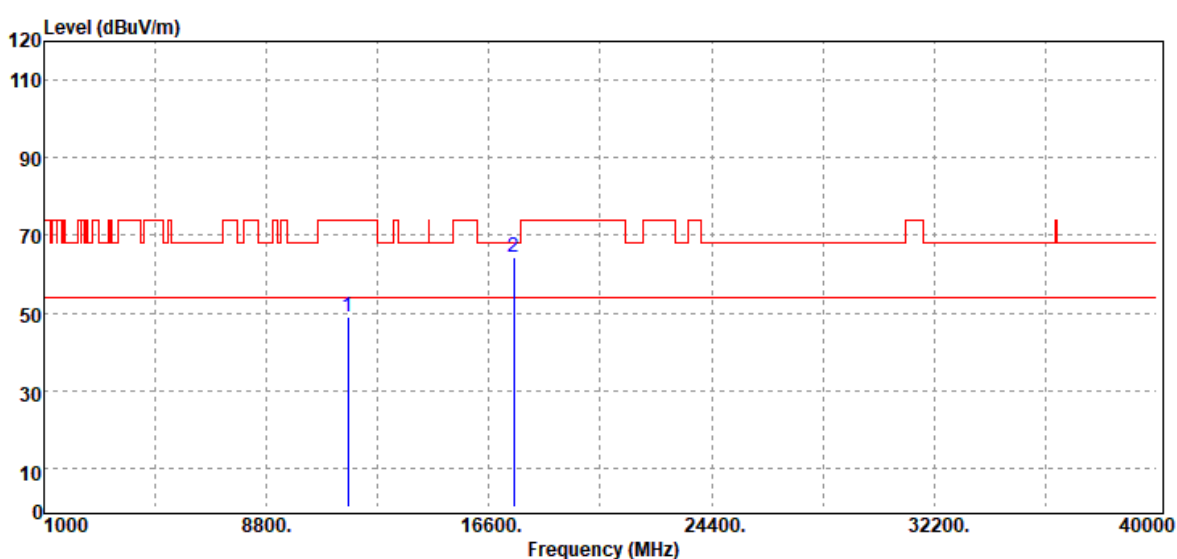

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11650.00	Peak	29.70	19.14	48.84	74.00	-25.16
17475.00	Peak	29.86	34.30	64.16	68.20	-4.04
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 20 / 5825MHz_106/54	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 14, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		




Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11650.00	Peak	30.15	19.14	49.29	74.00	-24.71
17475.00	Peak	29.63	34.30	63.93	68.20	-4.27
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 20 / 5825MHz 106/54	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 14, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

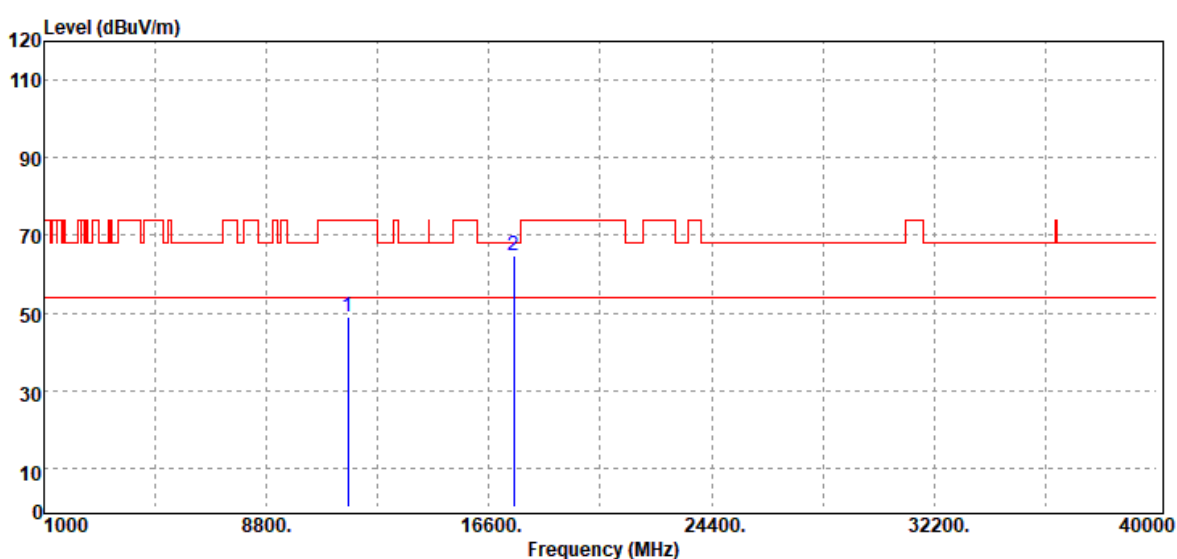


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11650.00	Peak	29.77	19.14	48.91	74.00	-25.09
17475.00	Peak	30.62	34.30	64.92	68.20	-3.28
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 40 / 5755MHz_106/53	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 15, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

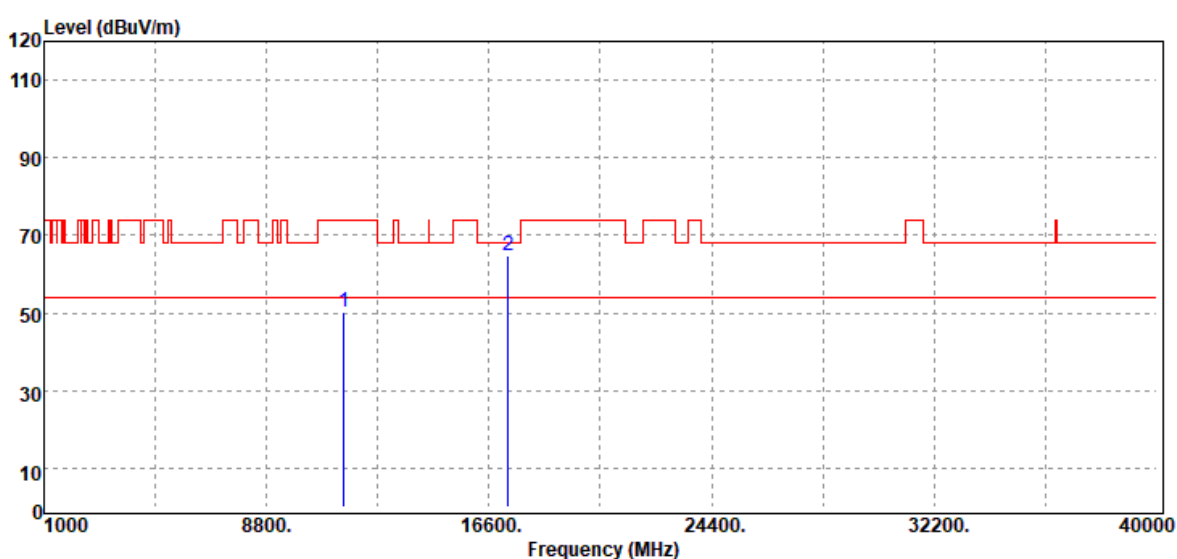


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11510.00	Peak	31.08	19.13	50.21	74.00	-23.79
17265.00	Peak	30.76	33.98	64.74	68.20	-3.46
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 40 / 5755MHz 106/53	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 15, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

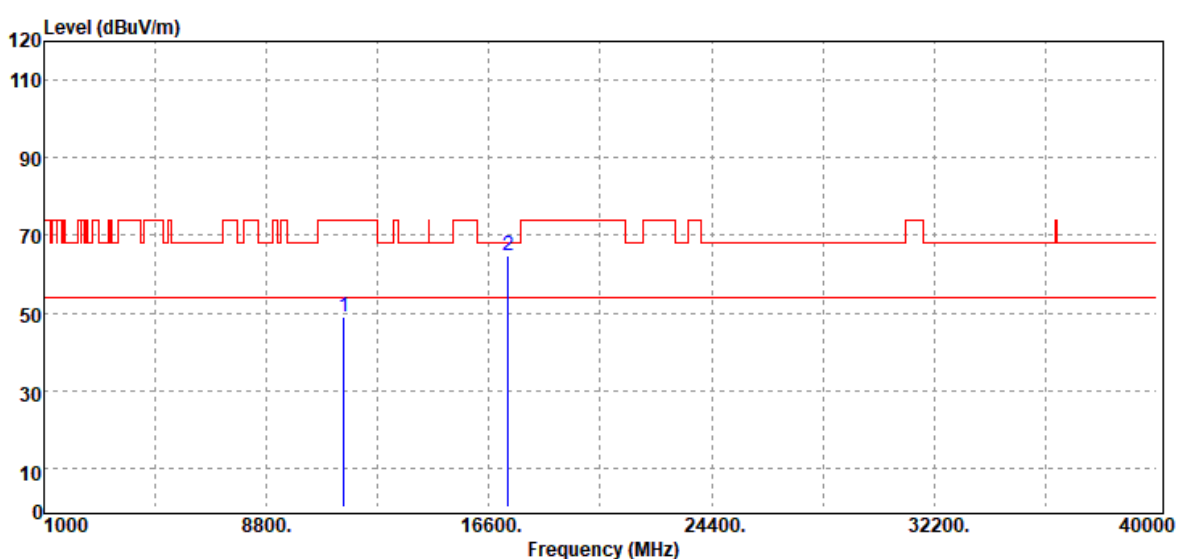


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11510.00	Peak	30.00	19.13	49.13	74.00	-24.87
17265.00	Peak	30.74	33.98	64.72	68.20	-3.48
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 40 / 5795MHz_106/56	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 15, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

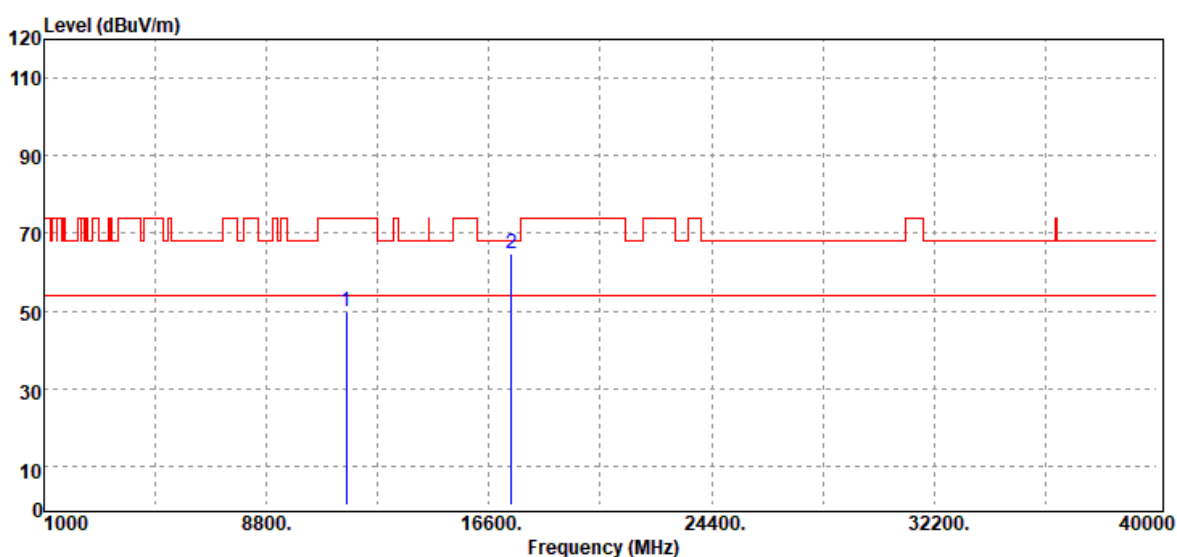


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11590.00	Peak	31.01	19.00	50.01	74.00	-23.99
17385.00	Peak	30.22	34.60	64.82	68.20	-3.38
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 40 / 5795MHz_106/56	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 15, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

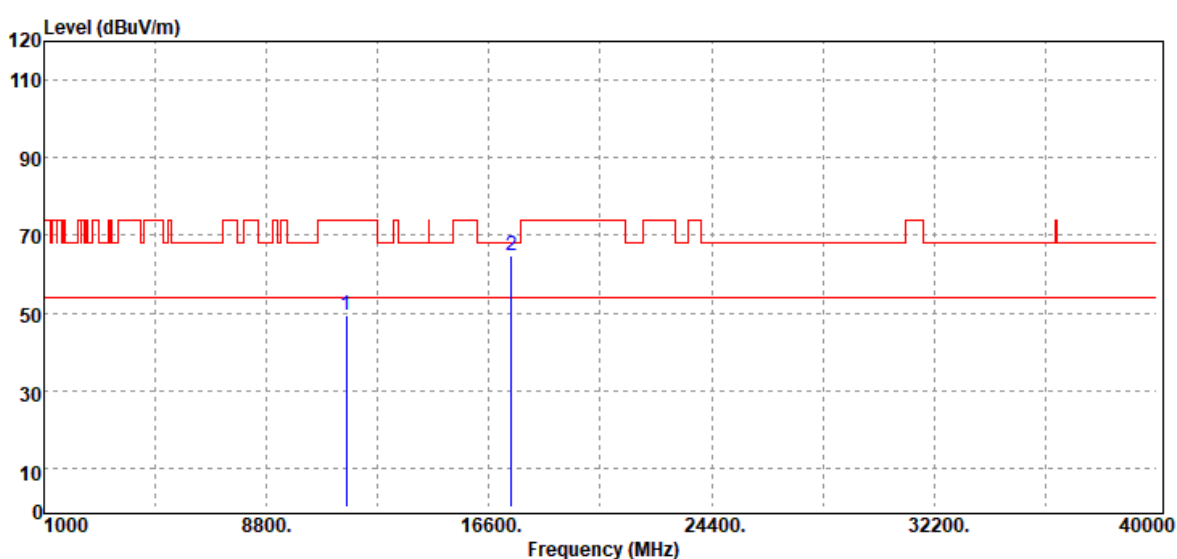


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11590.00	Peak	30.49	19.00	49.49	74.00	-24.51
17385.00	Peak	30.15	34.60	64.75	68.20	-3.45
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 80 / 5775MHz 106/53	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 15, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

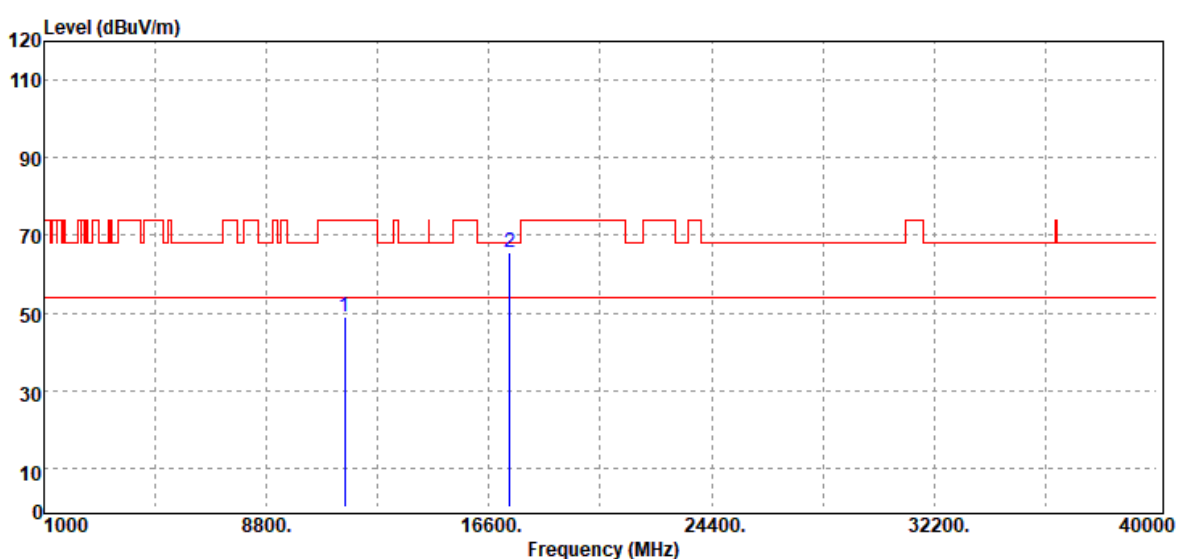


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11550.00	Peak	29.92	19.09	49.01	74.00	-24.99
17325.00	Peak	31.38	34.24	65.62	68.20	-2.58
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 80 / 5775MHz 106/53	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 15, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

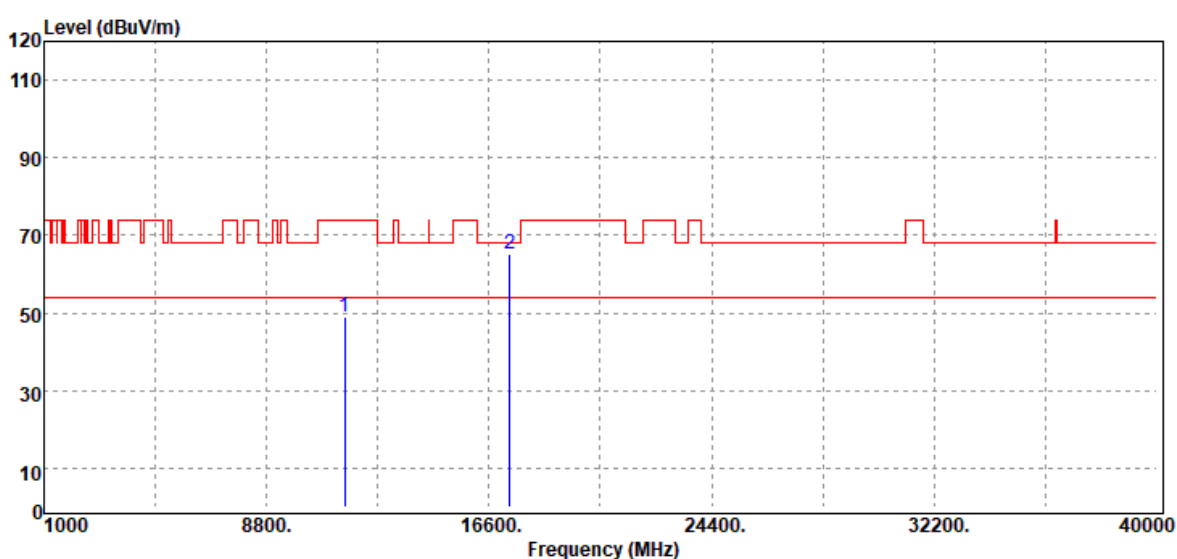

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11550.00	Peak	30.06	19.09	49.15	74.00	-24.85
17325.00	Peak	30.85	34.24	65.09	68.20	-3.11
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 80 / 5775MHz 106/60	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 15, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		




Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11550.00	Peak	29.84	19.09	48.93	74.00	-25.07
17325.00	Peak	30.18	34.24	64.42	68.20	-3.78
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11ax 80 / 5775MHz_106/60	Temp/Hum	23.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	May 15, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

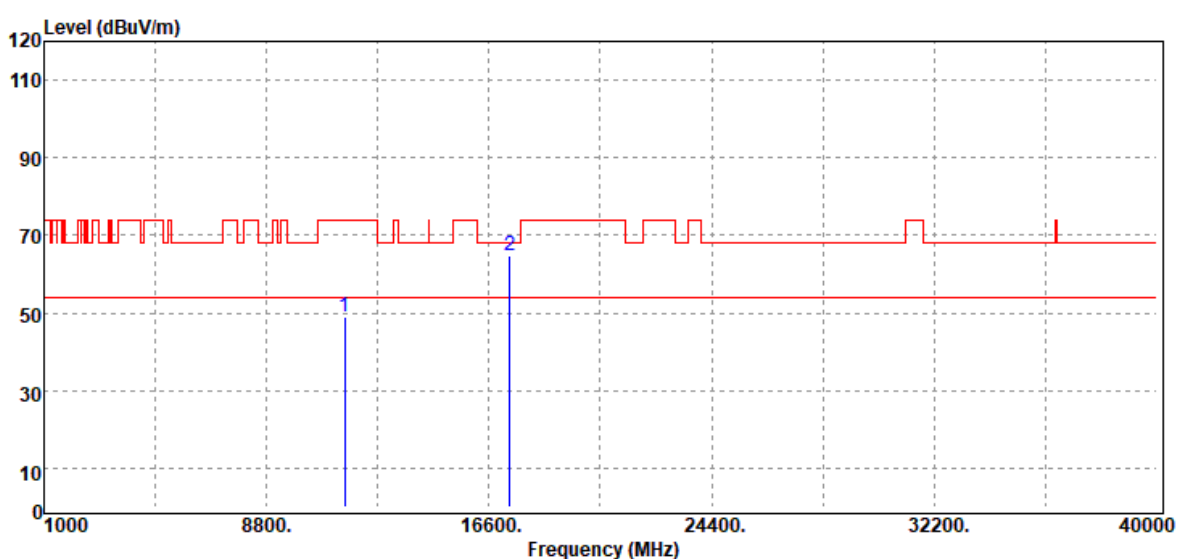

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11550.00	Peak	29.87	19.09	48.96	74.00	-25.04
17325.00	Peak	30.43	34.24	64.67	68.20	-3.53
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

-- End of Test Report --