

26_WLAN5GHz_802.11a 6Mbps_Left Tilted_0mm_Ch157

Communication System: WLAN 5GHz; Frequency: 5785.000

Medium: HSL. Medium parameters used: $f = 5785.000$ MHz; $\sigma = 5.16$ S/m; $\epsilon_r = 34.0$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.57, 5.57, 5.57); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2023-02-21
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.777 W/kg; SAR (10g) = 0.228 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.02 dB

SAR (1g) = 0.752 W/kg; SAR (10g) = 0.217 W/kg;

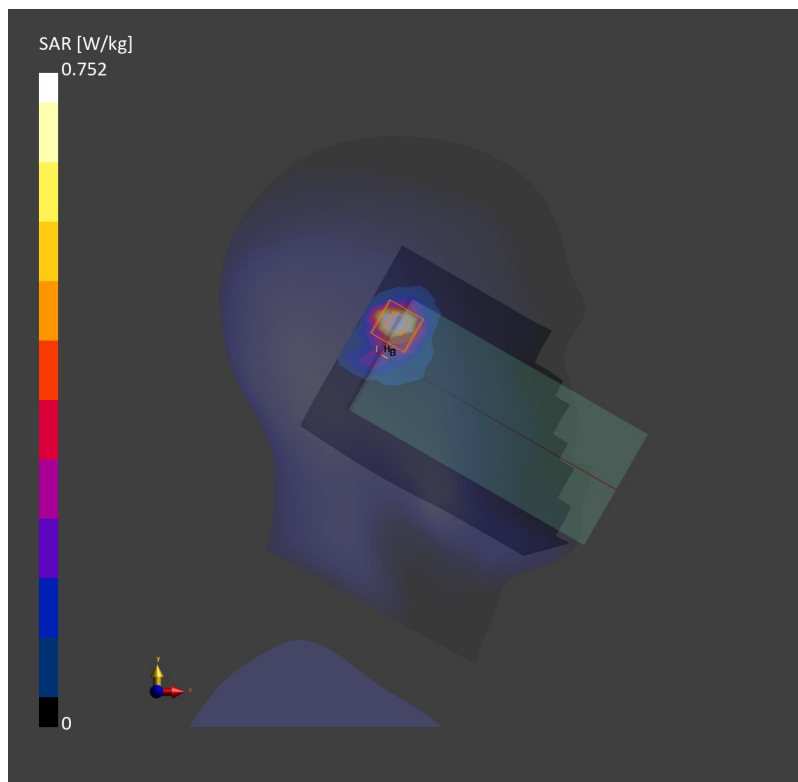

Date: 2023-07-02

27_LTE Band 13_10M_QPSK_1RB_0Offset_Back_5mm_Ch23230

Communication System: Band 13; Frequency: 782.000

Medium: HSL. Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.97, 10.97, 10.97); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2023-02-21
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.960 W/kg; SAR (10g) = 0.577 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.947 W/kg; SAR (10g) = 0.491 W/kg;

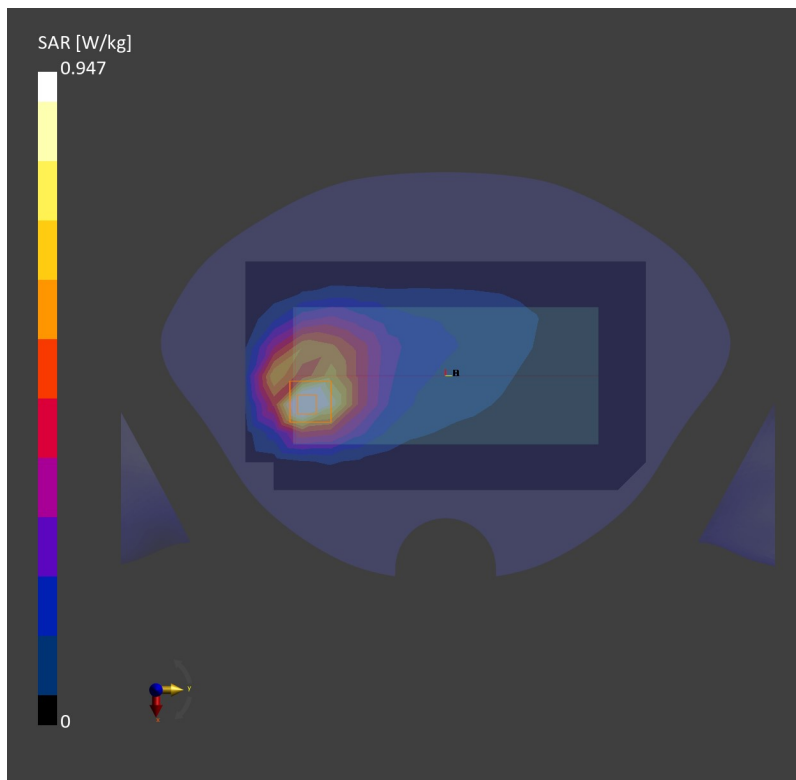

28_LTE Band 12_10M_QPSK_1RB_0Offset_Back_5mm_Ch23095

Communication System: Band 12; Frequency: 707.500

Medium: HSL. Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.97, 10.97, 10.97); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2023-02-21
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.419 W/kg; SAR (10g) = 0.243 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.433 W/kg; SAR (10g) = 0.215 W/kg;

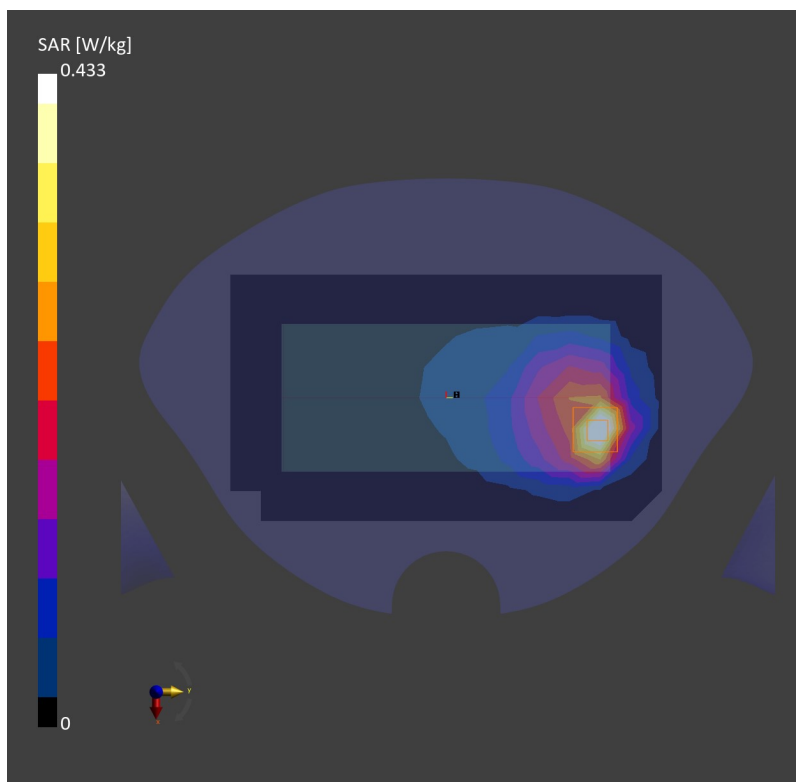

29_GSM850_GPRS (4 Tx slots)_Back_5mm_Ch189

Communication System: GSM 850; Frequency: 836.400

Medium: HSL. Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 41.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2023-02-21
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.09 W/kg; SAR (10g) = 0.693 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 1.03 W/kg; SAR (10g) = 0.577 W/kg;

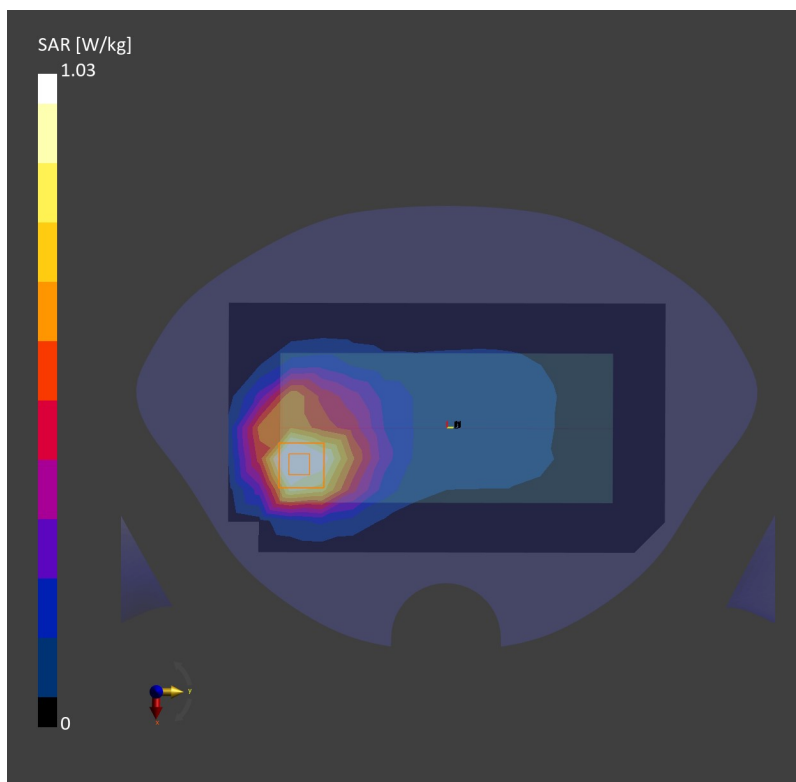

30_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4182

Communication System: Band 5; Frequency: 836.400

Medium: HSL. Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 41.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2023-02-21
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.08 W/kg; SAR (10g) = 0.697 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.575 W/kg;

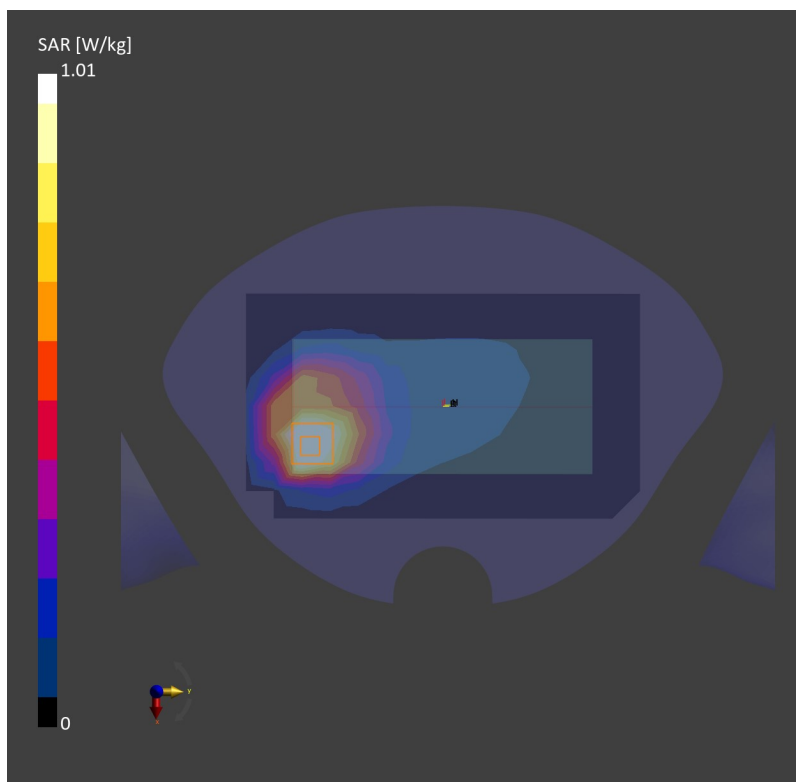

31_LTE Band 26_15M_QPSK_1RB_0Offset_Back_5mm_Ch26865

Communication System: Band 26; Frequency: 831.500

Medium: HSL. Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2023-02-21
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.03 W/kg; SAR (10g) = 0.666 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 1.03 W/kg; SAR (10g) = 0.548 W/kg;

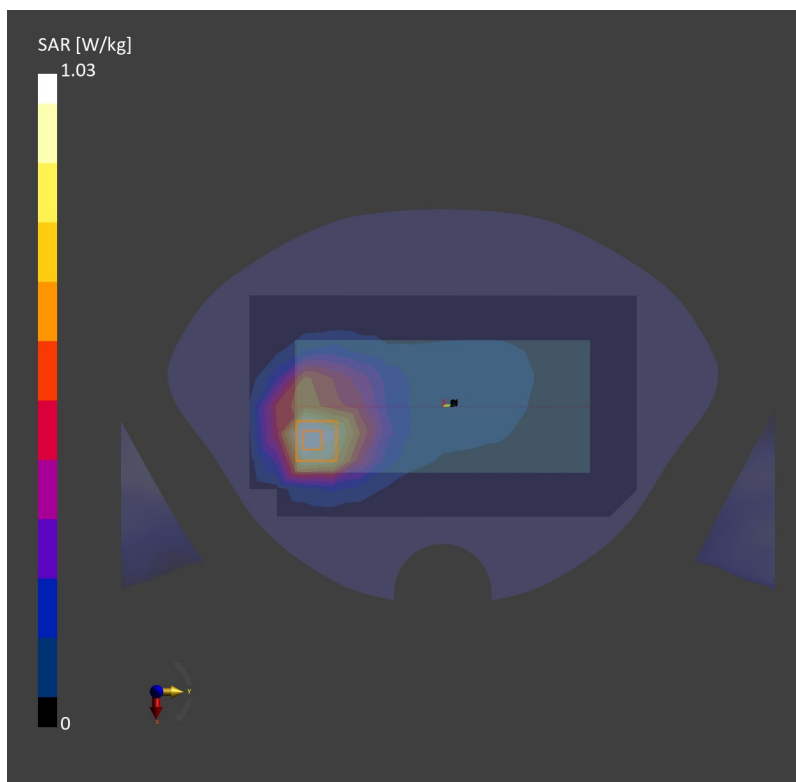

Date: 2023-08-04

32_FR1 n5_25M_QPSK_64RB_33Offset_Back_5mm_Ch167300

Communication System: Band n5; Frequency: 836.500

Medium: HSL. Medium parameters used: $f = 836.500$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 41.9$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2023-02-21
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.936 W/kg; SAR (10g) = 0.585 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.905 W/kg; SAR (10g) = 0.477 W/kg;

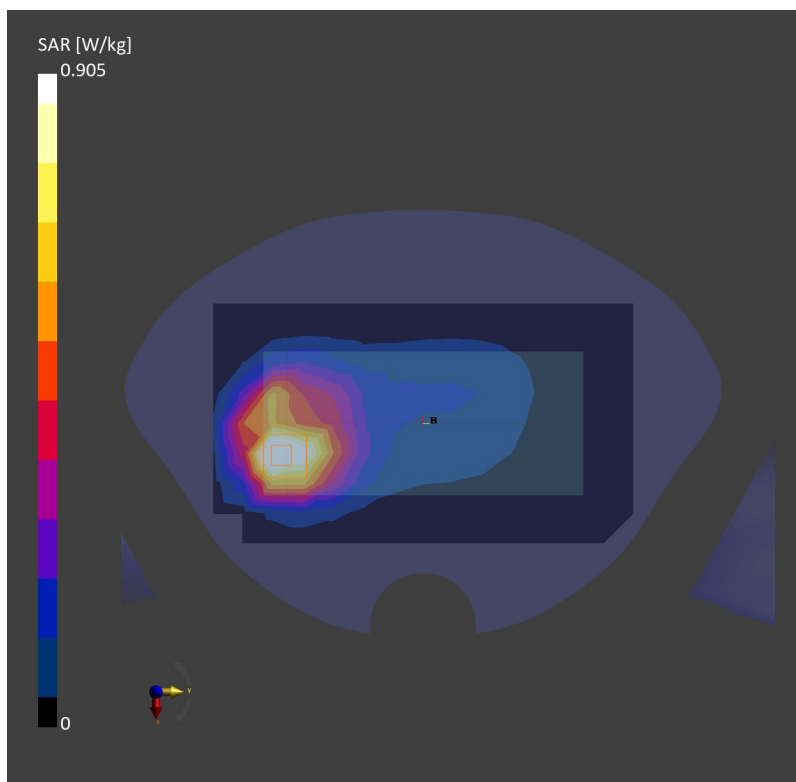

33_WCDMA IV_RMC 12.2Kbps_Bottom Side_5mm_Ch1312

Communication System: Band 4; Frequency: 1712.400

Medium: HSL. Medium parameters used: $f = 1712.400$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.31, 9.31, 9.31); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2023-02-21
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.868 W/kg; SAR (10g) = 0.387 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.10 dB

SAR (1g) = 0.958 W/kg; SAR (10g) = 0.392 W/kg;

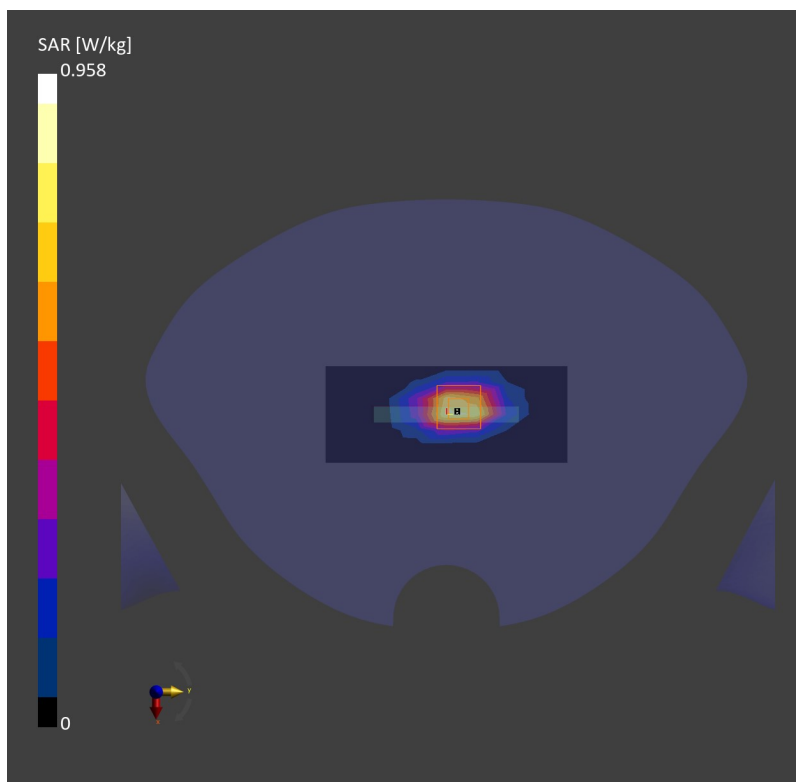

34_LTE Band 66_20M_QPSK_1RB_0Offset_Bottom Side_5mm_Ch132322

Communication System: Band 66; Frequency: 1745.000

Medium: HSL. Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.31, 9.31, 9.31); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2023-02-21
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.858 W/kg; SAR (10g) = 0.431 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.972 W/kg; SAR (10g) = 0.454 W/kg;

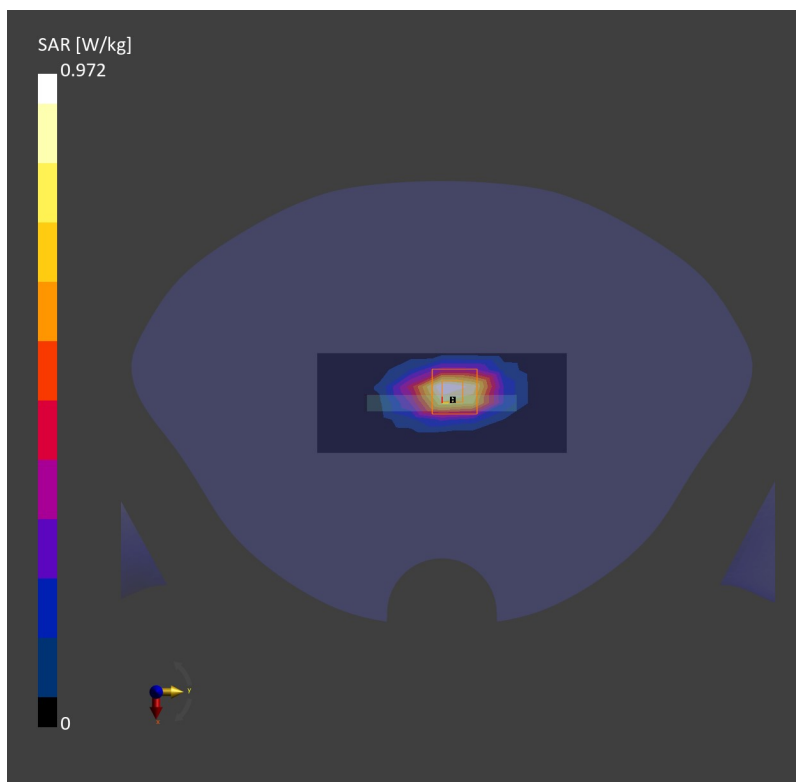

Date: 2023-07-06

35_FR1 n66_40M_QPSK_108RB_54Offset_Bottom Side_5mm_Ch349000

Communication System: Band n66; Frequency: 1745.000

Medium: HSL. Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.31, 9.31, 9.31); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2023-02-21
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.770 W/kg; SAR (10g) = 0.388 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.968 W/kg; SAR (10g) = 0.405 W/kg;

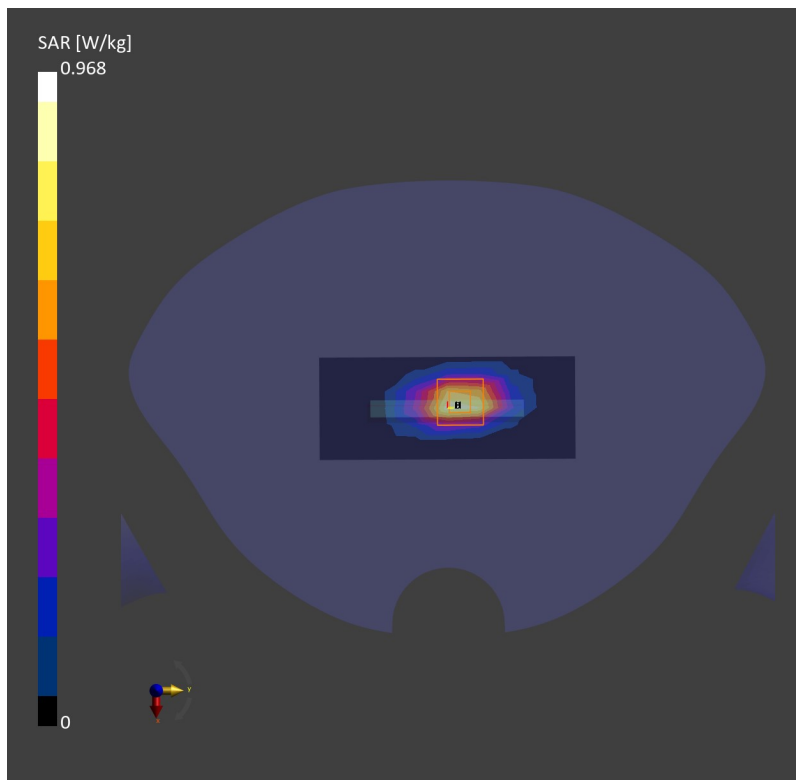

36_GSM1900_GPRS (4 Tx slots)_Bottom Side_5mm_Ch661

Communication System: PCS 1900; Frequency: 1880.000

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2023-02-21
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.984 W/kg; SAR (10g) = 0.470 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 1.09 W/kg; SAR (10g) = 0.495 W/kg;

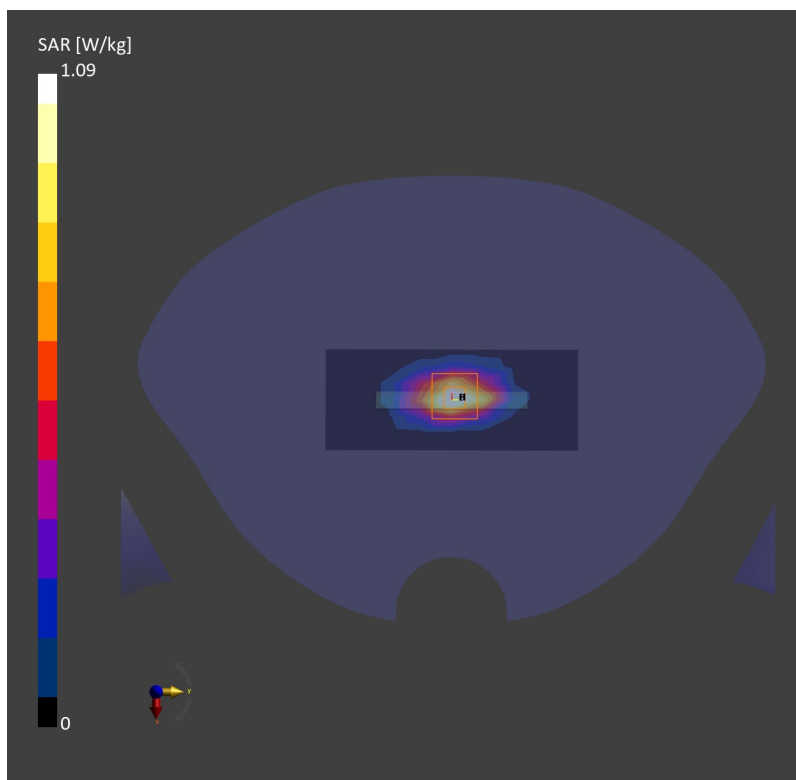

Date: 2023-07-08

37_WCDMA II_RMC 12.2Kbps_Bottom Side_5mm_Ch9400

Communication System: Band 2; Frequency: 1880.000

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2023-02-21
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.811 W/kg; SAR (10g) = 0.402 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.928 W/kg; SAR (10g) = 0.423 W/kg;

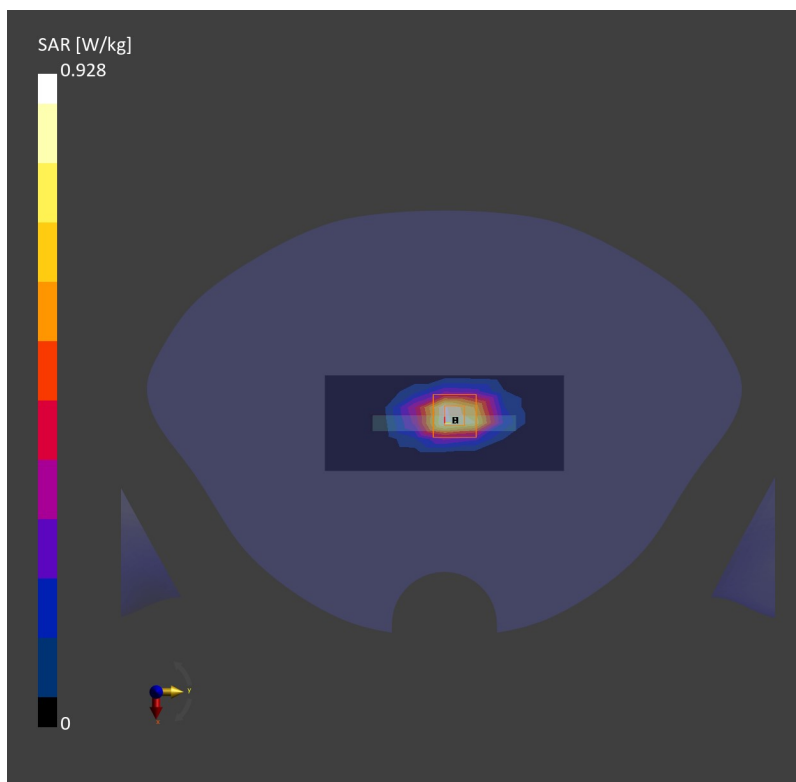

38_LTE Band 2_20M_QPSK_1RB_0Offset_Bottom Side_5mm_Ch18900

Communication System: Band 2; Frequency: 1880.000

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2023-02-21
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.903 W/kg; SAR (10g) = 0.448 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 1.03 W/kg; SAR (10g) = 0.466 W/kg;

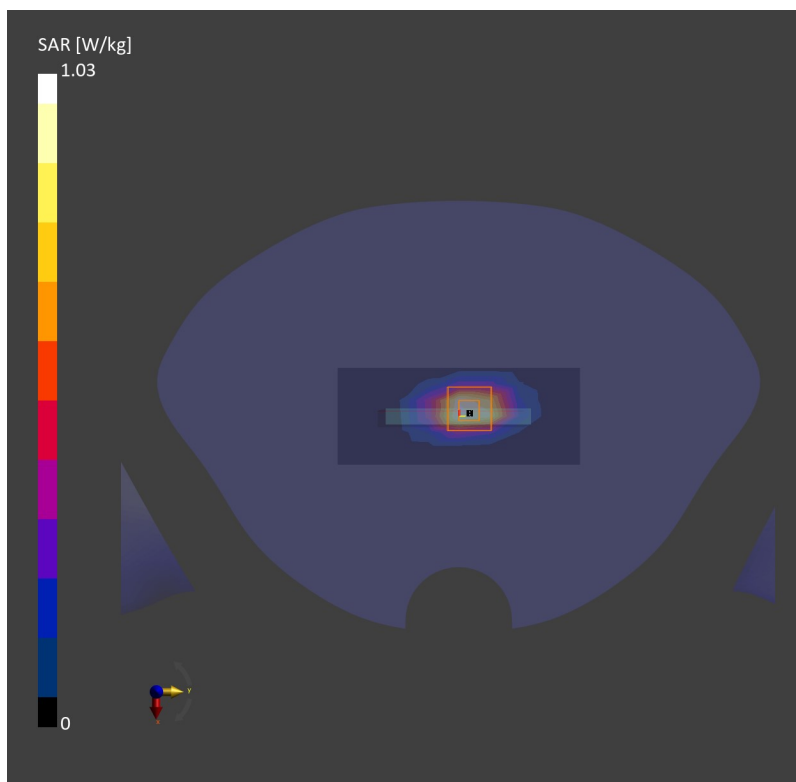

Date: 2023-07-08

39_FR1 n2_50M_QPSK_135RB_68Offset_Bottom Side_5mm_Ch376000

Communication System: Band n2; Frequency: 1880.000

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2023-02-21
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.818 W/kg; SAR (10g) = 0.402 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.950 W/kg; SAR (10g) = 0.428 W/kg;

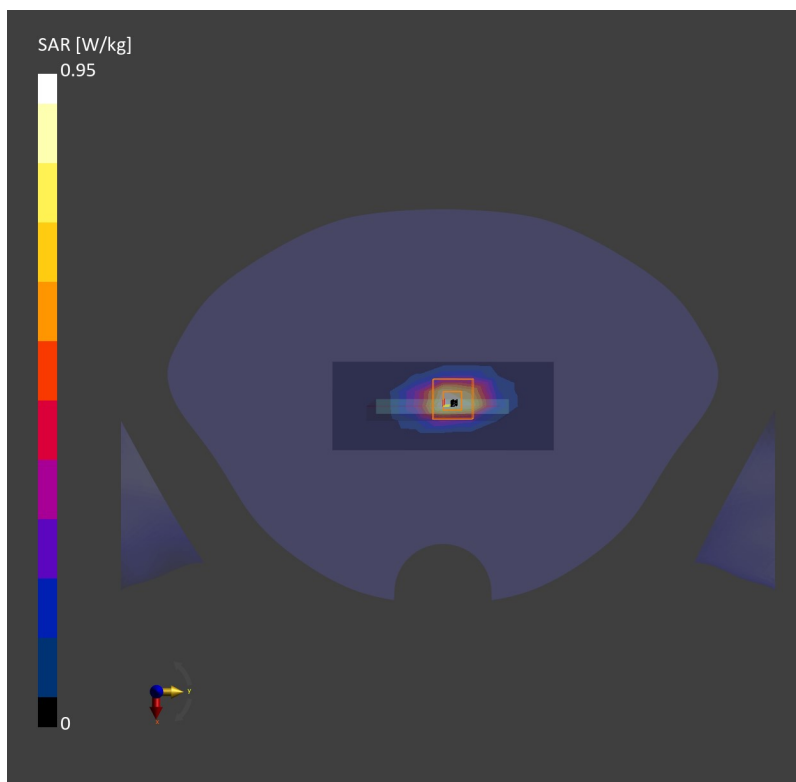

Date: 2023-07-12

40_LTE Band 7_20M_QPSK_1RB_0Offset_Bottom Side_5mm_Ch21100

Communication System: Band 7; Frequency: 2535.000

Medium: HSL. Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2023-02-21
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.937 W/kg; SAR (10g) = 0.405 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 1.06 W/kg; SAR (10g) = 0.428 W/kg;

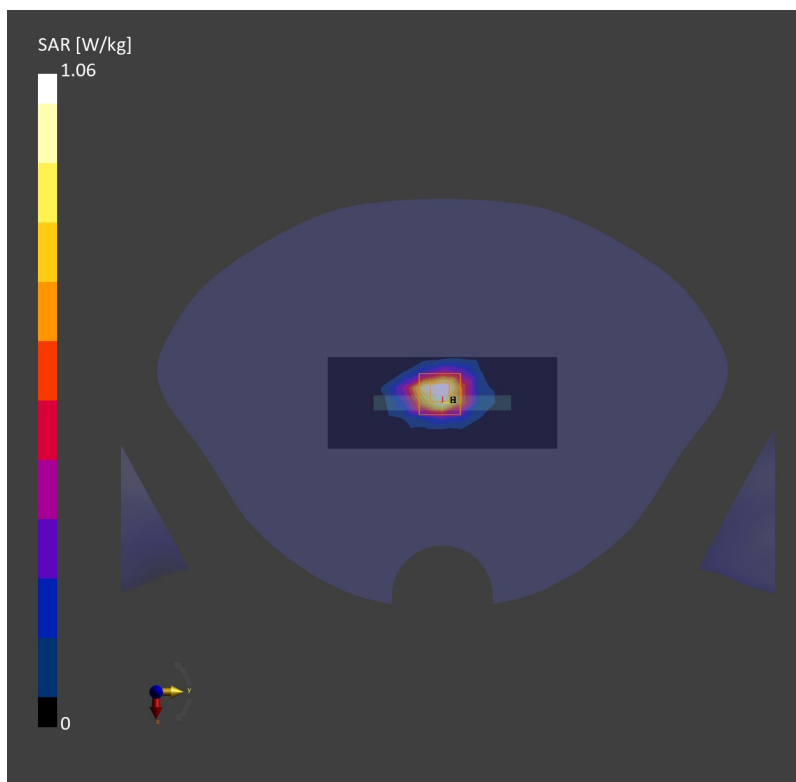

Date: 2023-07-12

41_LTE Band 38_20M_QPSK_1RB_0Offset_Bottom Side_5mm_Ch38000

Communication System: Band 38; Frequency: 2595.000

Medium: HSL. Medium parameters used: $f = 2595.000$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2023-02-21
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.958 W/kg; SAR (10g) = 0.407 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.396 W/kg;

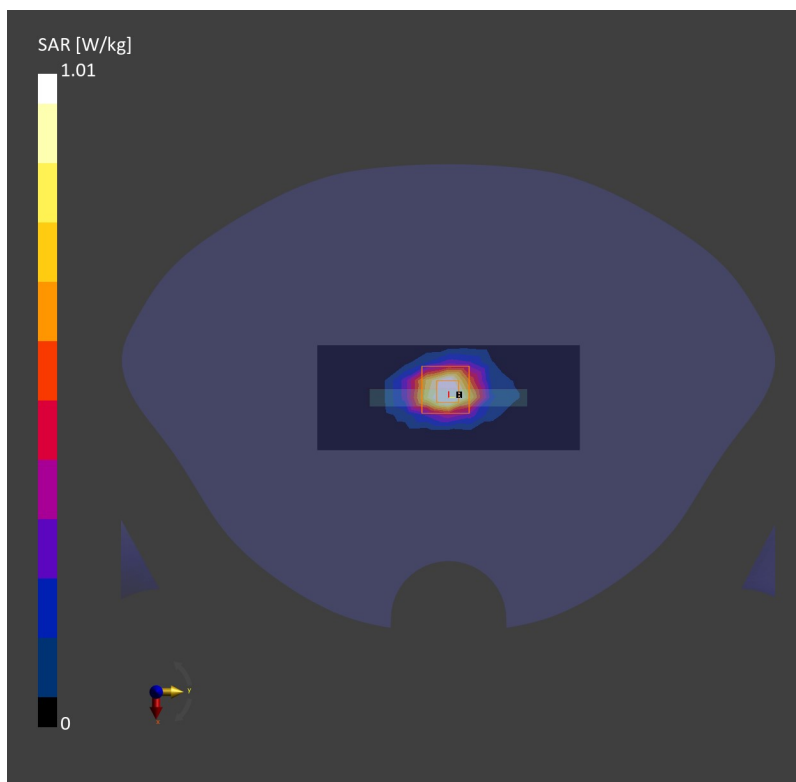

Date: 2023-07-12

42_LTE Band 41 HPUE_20M_QPSK_1RB_0Offset_Bottom Side_5mm_Ch40620

Communication System: Band 41; Frequency: 2593.000

Medium: HSL. Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2023-02-21
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 1.07 W/kg; SAR (10g) = 0.459 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 1.04 W/kg; SAR (10g) = 0.416 W/kg;

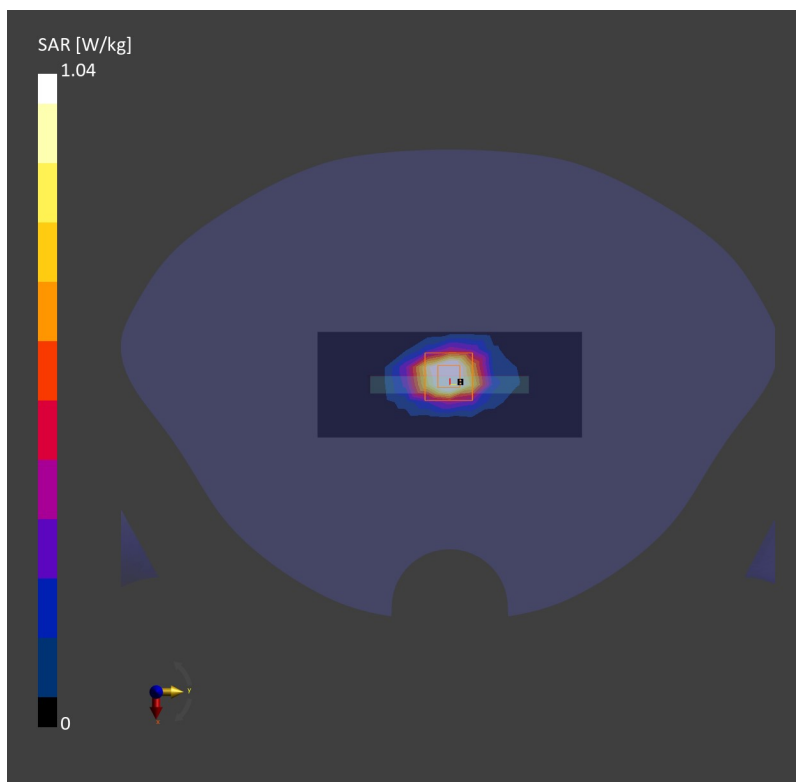

Date: 2023-07-12

43_FR1 n7_50M_QPSK_1RB_1Offset_Bottom Side_5mm_Ch507000

Communication System: Band n7; Frequency: 2535.000

Medium: HSL. Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2023-02-21
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.927 W/kg; SAR (10g) = 0.411 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.438 W/kg;

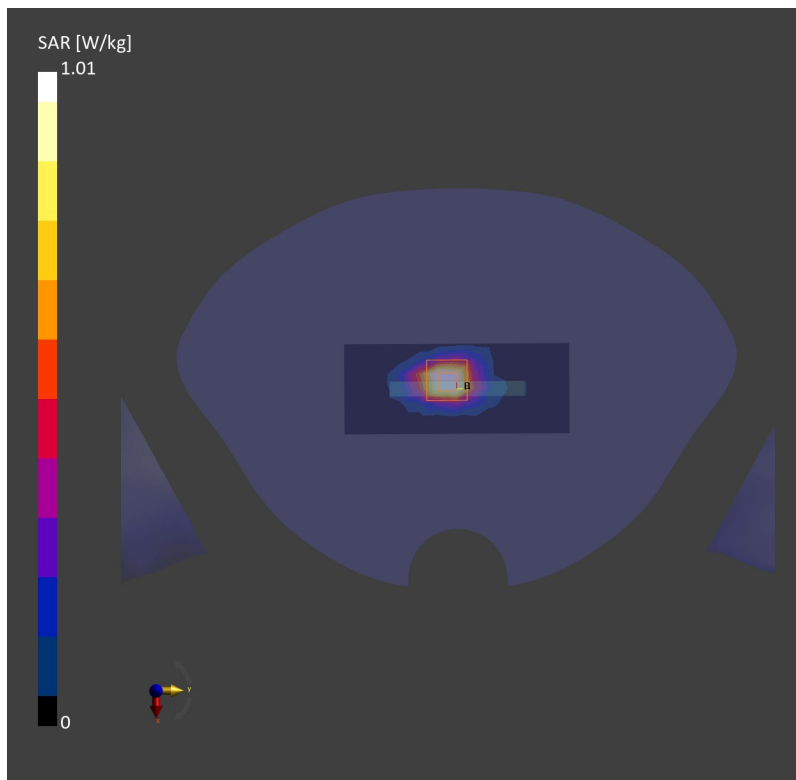

44_FR1 n41_100M_QPSK_1RB_1Offset_Bottom Side_5mm_Ch518598

Communication System: Band n41; Frequency: 2592.990

Medium: HSL. Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2023-02-21
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.425 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 1.02 W/kg; SAR (10g) = 0.446 W/kg;

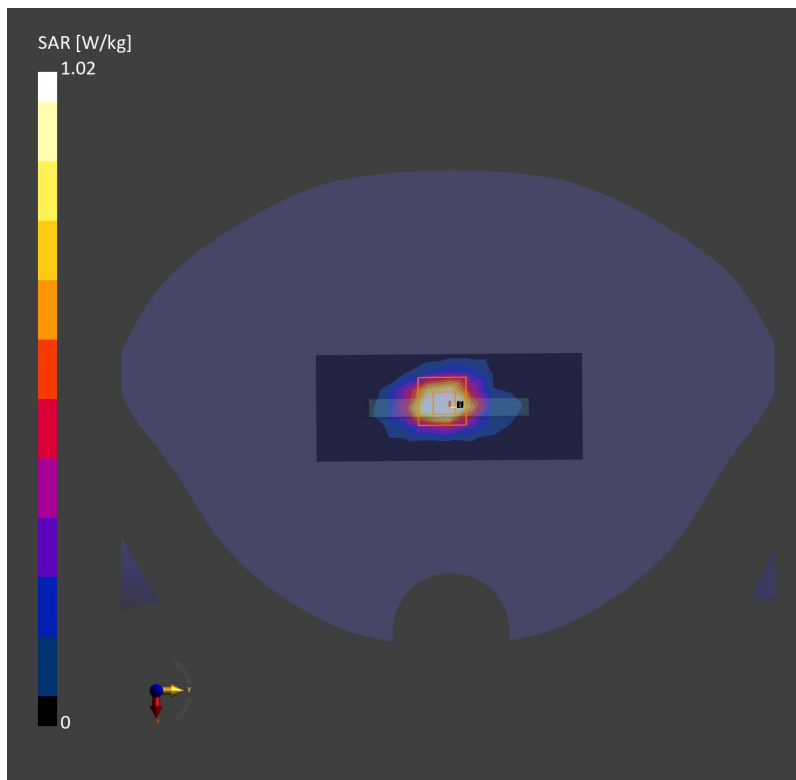

45_FR1 n38_40M_QPSK_108RB_54Offset_Left Side_5mm_Ch519000

Communication System: Band n38; Frequency: 2595.000

Medium: HSL. Medium parameters used: $f = 2595.000$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2023-02-21
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.999 W/kg; SAR (10g) = 0.442 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 1.03 W/kg; SAR (10g) = 0.444 W/kg;

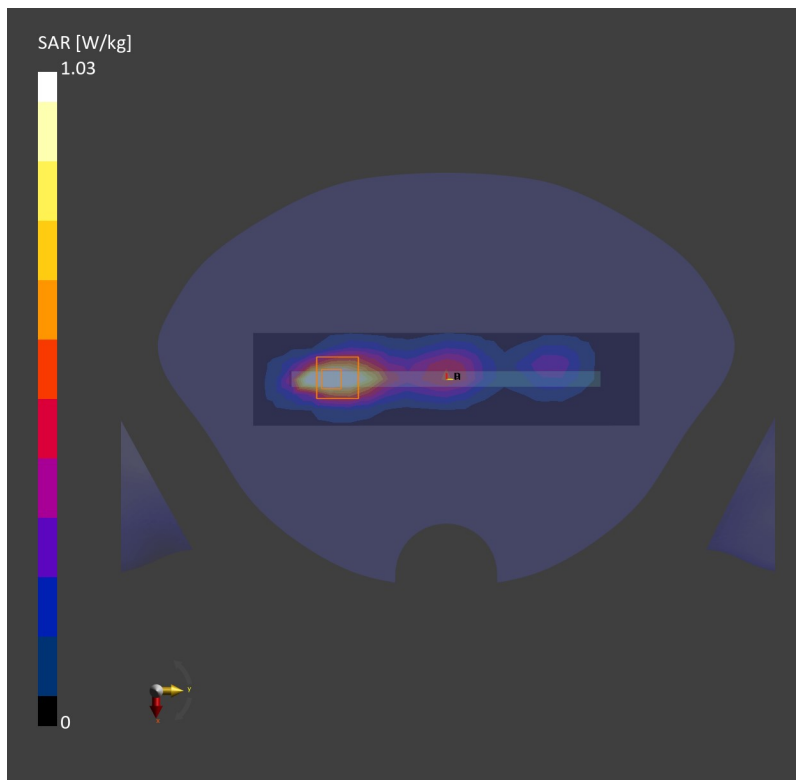

46_LTE Band 42_20M_QPSK_1RB_0Offset_Left Side_5mm_Ch42190

Communication System: Band 42; Frequency: 3460.000

Medium: HSL. Medium parameters used: $f = 3460.000$ MHz; $\sigma = 2.77$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.68, 7.68, 7.68); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2023-02-21
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.789 W/kg; SAR (10g) = 0.323 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.03 dB

SAR (1g) = 0.872 W/kg; SAR (10g) = 0.331 W/kg;

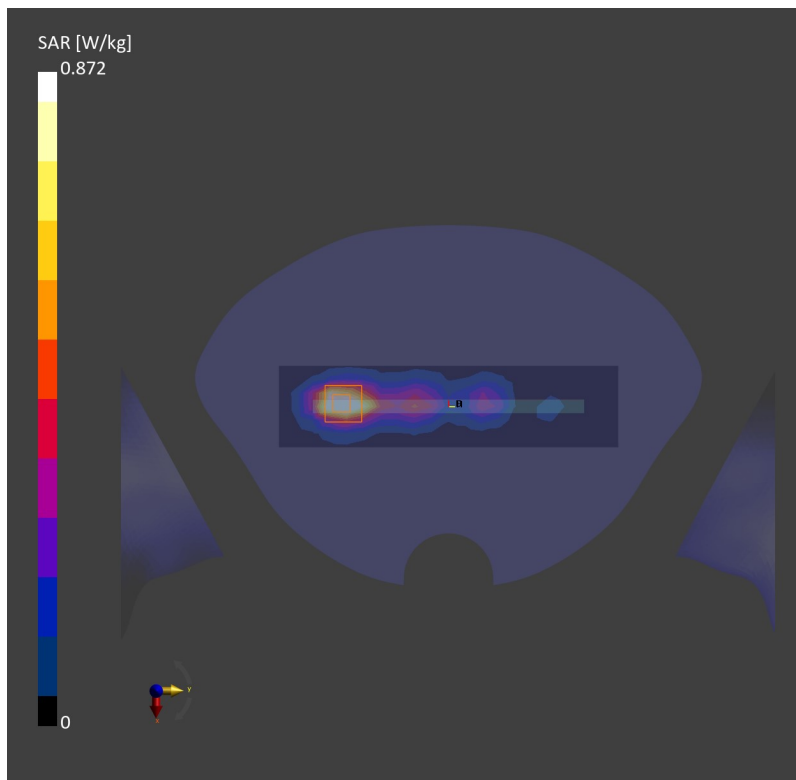

Date: 2023-07-16

47_FR1 n77 Part27O_100M_QPSK_135RB_69Offset_Left Side_5mm_Ch656000

Communication System: Band n77; Frequency: 3840.000

Medium: HSL. Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.22$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.31, 7.31, 7.31); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2023-02-21
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.847 W/kg; SAR (10g) = 0.328 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.09 dB

SAR (1g) = 0.971 W/kg; SAR (10g) = 0.331 W/kg;

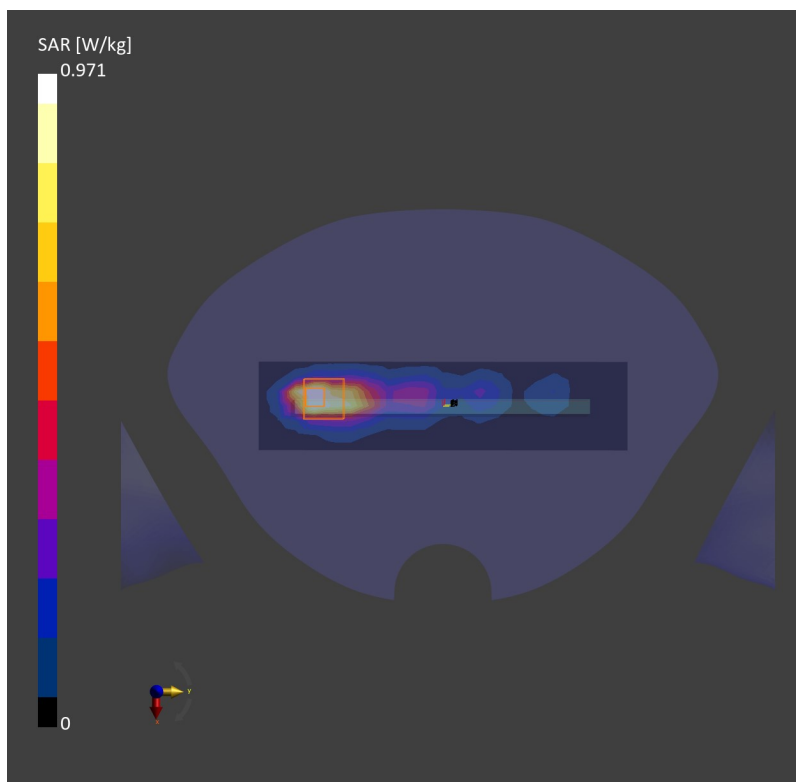

Date: 2023-07-10

48_WLAN2.4GHz_802.11b 1Mbps_Right Side_5mm_Ch1

Communication System: WLAN 2.4GHz; Frequency: 2412.000

Medium: HSL. Medium parameters used: $f = 2412.000$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 38.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.38, 8.38, 8.38); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2023-02-21
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.457 W/kg; SAR (10g) = 0.215 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.506 W/kg; SAR (10g) = 0.215 W/kg;

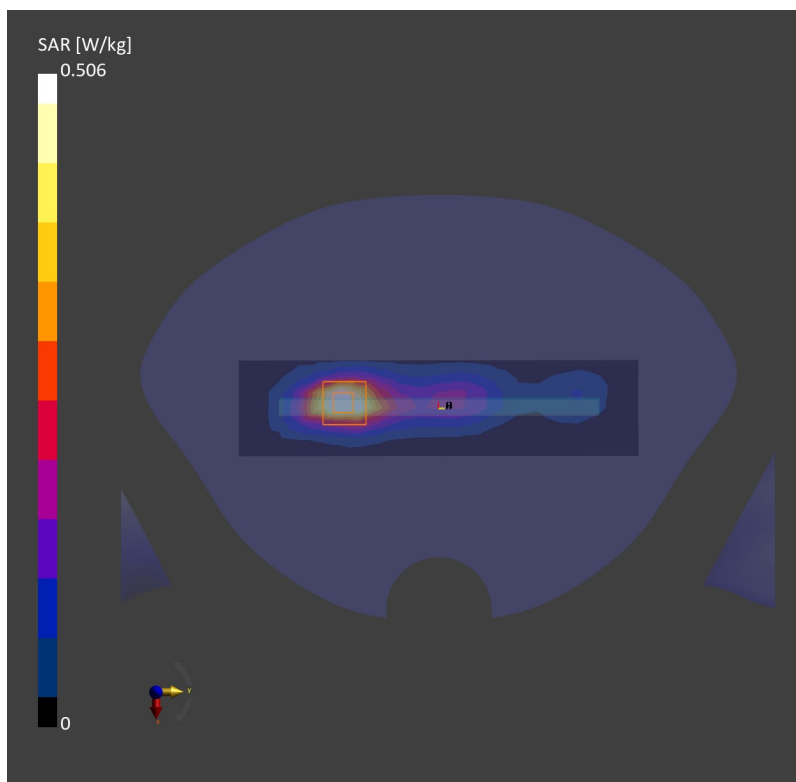

49_Bluetooth_1Mbps_Top Side_5mm_Ch39

Communication System: ISM 2.4 GHz Band; Frequency: 2441.000

Medium: HSL. Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.38, 8.38, 8.38); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2023-02-21
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.423 W/kg; SAR (10g) = 0.204 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.08 dB

SAR (1g) = 0.467 W/kg; SAR (10g) = 0.209 W/kg;

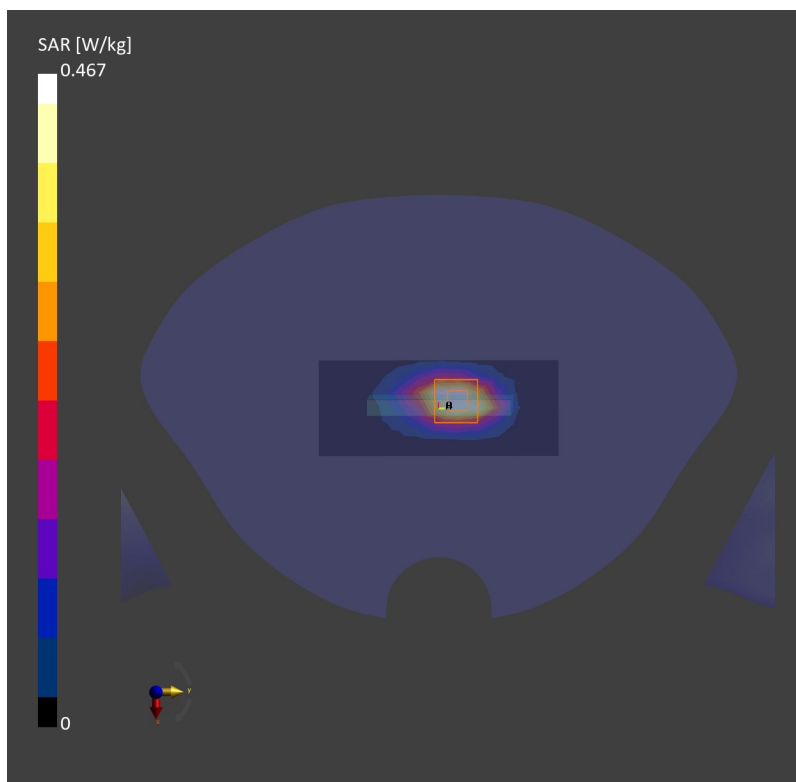

Date: 2023-07-18

50_WLAN5GHz_802.11n-HT40 MCS0_Back_5mm_Ch46

Communication System: WLAN 5GHz; Frequency: 5230.000

Medium: HSL. Medium parameters used: $f = 5230.000$ MHz; $\sigma = 4.71$ S/m; $\epsilon_r = 36.0$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.18, 6.18, 6.18); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2023-02-21
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.386 W/kg; SAR (10g) = 0.140 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.437 W/kg; SAR (10g) = 0.139 W/kg;

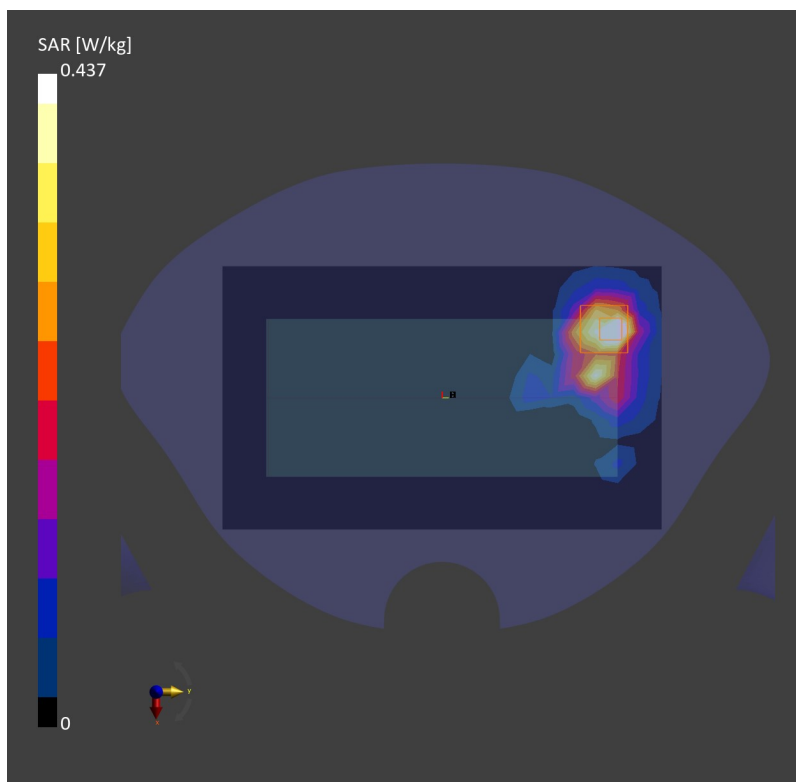

Date: 2023-07-19

51_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch155

Communication System: WLAN 5GHz; Frequency: 5775.000

Medium: HSL. Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.35$ S/m; $\epsilon_r = 35.0$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.57, 5.57, 5.57); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2023-02-21
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.378 W/kg; SAR (10g) = 0.133 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.08 dB

SAR (1g) = 0.423 W/kg; SAR (10g) = 0.118 W/kg;

