

## TEST REPORT

On behalf of

Savant Technologies LLC, dba GE Lighting, a Savant company

Product Name: Downlight

Model No.: CFIXRSCR6CRVD@

FCC ID: PUU-CFIXRSCR6C

Prepared For: Savant Technologies LLC, dba GE Lighting, a Savant company  
1975 Noble Road Cleveland, Ohio United States 44112

Prepared By: Audix Technology (Shanghai) Co., Ltd.  
3F, Building 34, No. 680 Guiping Rd.,  
Caohejing, Hi-Tech Park,  
Shanghai 200233, China

Tel: +86-21-64955500



File No. : C1D2309030  
Report No. : ACI-F23170  
Date of Test : 2023.04.28-09.02  
Date of Report : 2023.09.18

The statement is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

## TABLE OF CONTENTS

	Page
<b>1 SUMMARY OF STANDARDS AND RESULTS.....</b>	<b>5</b>
1.1 Description of Standards and Results.....	5
<b>2 GENERAL INFORMATION.....</b>	<b>6</b>
2.1 Description of Equipment Under Test.....	6
2.2 EUT Specifications Assessed in Current Report.....	7
2.3 Test Information .....	7
2.4 Duty Cycle Check .....	7
2.5 Sample Description .....	8
2.6 Supported equipment.....	8
2.7 Description of Test Facility .....	8
<b>3 CONDUCTED EMISSION TEST .....</b>	<b>9</b>
3.1 Test Equipment.....	9
3.2 Block Diagram of Test Setup .....	9
3.3 Conducted Emission Limits (§15.207).....	10
3.4 Test Configuration.....	10
3.5 Operating Condition of EUT .....	10
3.6 Test Procedures .....	10
3.7 Test Results .....	11
<b>4 RADIATED EMISSION TEST.....</b>	<b>14</b>
4.1 Test Equipment.....	14
4.2 Block Diagram of Test Setup .....	15
4.3 Radiated Emission Limit (§15.209) .....	16
4.4 Test Configuration.....	16
4.5 Operating Condition of EUT .....	16
4.6 Test Procedures .....	16
4.7 Test Results .....	18
<b>5 6 DB BANDWIDTH MEASUREMENT .....</b>	<b>31</b>
5.1 Test Equipment.....	31
5.2 Block Diagram of Test Setup .....	31
5.3 Specification Limits (§15.247(a)(2)).....	31
5.4 Operating Condition of EUT .....	31
5.5 Test Procedure .....	31
5.6 Test Results .....	32
<b>6 MAXIMUM PEAK OUTPUT POWER MEASUREMENT.....</b>	<b>34</b>
6.1 Test Equipment.....	34
6.2 Block Diagram of Test Setup .....	34
6.3 Specification Limits ((§15.247(b)(3)) .....	34
6.4 Operating Condition of EUT .....	34
6.5 Test Procedure .....	34
6.6 Test Results .....	35
<b>7 EMISSION LIMITATIONS MEASUREMENT.....</b>	<b>37</b>
7.1 Test Equipment.....	37
7.2 Block Diagram of Test Setup .....	37

- 7.3 Specification Limits (§15.247(d)) ..... 37
- 7.4 Operating Condition of EUT ..... 37
- 7.5 Test Procedure..... 37
- 7.6 Test Results ..... 39
- 8 POWER SPECTRAL DENSITY MEASUREMENT ..... 43**
  - 8.1 Test Equipment..... 43
  - 8.2 Block Diagram of Test Setup ..... 43
  - 8.3 Specification Limits (§15.247(e)) ..... 43
  - 8.4 Operating Condition of EUT ..... 43
  - 8.5 Test Procedure..... 43
  - 8.6 Test Results ..... 44
- 9 ANTENNA REQUIREMENT ..... 46**
  - 9.1 Specification Limits (§15.203)..... 46
  - 9.2 Result..... 46
- 10 MEASUREMENT UNCERTAINTY LIST ..... 47**
- APPENDIX I PHOTOGRAPHS OF TEST
- APPENDIX II PHOTOGRAPHS OF EUT

## TEST REPORT

Applicant : Savant Technologies LLC, dba GE Lighting, a Savant company  
EUT Description : Downlight  
(A) Model No. : Refer to Sec.2.1  
(B) Power Supply : 120V AC 60Hz  
(C) Test Voltage : 120V/60Hz

### Test Procedure Used:

#### *FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10-2013*


The device described above is tested by Audix Technology (Shanghai) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits.


The test results are contained in this test report and Audix Technology (Shanghai) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. This report also shows that the EUT (M/N: Refer to Sec2.1), which was tested is technically compliance with the FCC limits.

This report applies to above tested Sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shanghai) Co., Ltd.


***The test results for EUT's WIFI function are contained in No.ACI-F23171 report.***

Date of Test : 2023.04.28-09.02 Date of Report : 2023.09.18

Producer :   
JAREY LU / Deputy Assistant Manager

Review :   
BYRON WU / Deputy Assistant Manager

 For and on behalf of  
Audix Technology (Shanghai) Co., Ltd.

  
Signatory :  
Authorized Signature(s) KAMP CHEN / Manager

# 1 SUMMARY OF STANDARDS AND RESULTS

## 1.1 Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Description / Test Item	Test Standard	Results	Meets Limit
<b>EMISSION</b>			
Conducted Emission	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2013	Pass	15.207
Radiated Emission	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2013	Pass	15.209(a) 15.205(a)(c)
6 dB Bandwidth Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2013	Pass	15.247(a)(2)
Maximum Peak Output Power Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2013	Pass	15.247(b)(3)
Emission Limitations Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2013	Pass	15.247(d)
Band Edge Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2013	Pass	15.247(d)
Power Spectral Density Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2013	Pass	15.247(e)
Antenna Requirement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2013	Pass	15.203
N/A is an abbreviation for Not Applicable.			

## 2 GENERAL INFORMATION

### 2.1 Description of Equipment Under Test

Description : Downlight

Type of EUT : ☒ Production ☐ Pre-product ☐ Pro-type

Model Number : CFIXRSCR6CRVD@

Note : @ Can be represented by any letters, numbers, or symbols, which means CRI, CCT, product color, packaging, or internal identification.

Test Model : CFIXRSCR6CRVD

Radio Tech : BLE 4.2;  
IEEE 802.11 b/g/n.

Channel Freq. : BLE: 2402MHz-2480MHz;  
802.11b/g/n20: 2412MHz-2462MHz;

Modulation : BLE: GFSK;  
802.11b: DSSS (CCK, DQPSK, DBPSK);  
802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK).

Antenna Info. : Antenna Type: PCB Antenna  
Antenna Gain: 0.5 dBi

Applicant : Savant Technologies LLC, dba GE Lighting, a Savant company  
1975 Noble Road Cleveland, Ohio United States 44112

Manufacturer : same as Applicant

Factory : Foshan Electrical and Lighting Co., Ltd. Gaoming Branch  
19 Hengchang road, Fuwan Industrial Zone,  
Hecheng Street, Gaoming District, Foshan, China

## 2.2 EUT Specifications Assessed in Current Report

Mode	Modulation	Data Rate(Mbps)
BLE	GFSK	1

Channel List			
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
...	...	...	...
...	...	...	...
...	...	...	...
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480


## 2.3 Test Information

The test software “sscom5.13.1.exe” was used to control EUT work in TX mode, Power Setting and select test channel.

Mode	data rate (Mbps)	Power Setting	Test Channel		Frequency (MHz)
BLE	1	11	Low:	00	2402
		11	Middle:	20	2442
		11	High:	39	2480

## 2.4 Duty Cycle Check

Mode	Transmission Duration (ms)	Transmission Period (ms)	Duty Cycle (%)
BLE	10	10	100

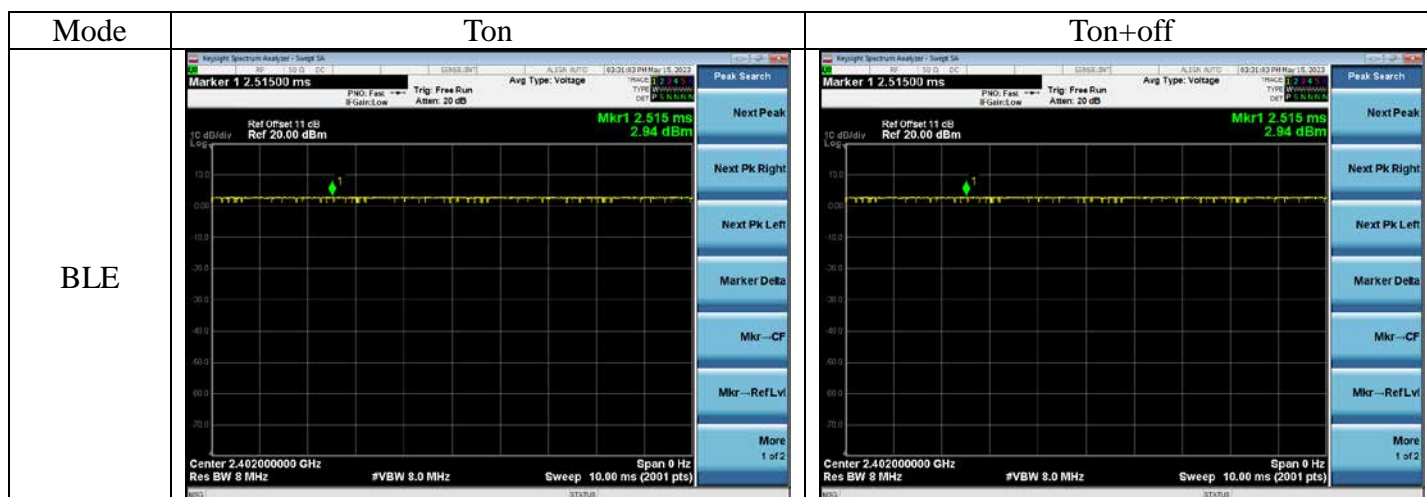

## 2.5 Sample Description

Test Item	Model Number	Sample Number	Date of receipted
Conducted Emission	CFIXRSCR6CRVD	E2304369a-01/03	2023.04.20
Radiated Emission	CFIXRSCR6CRVD	E2304369a-02/03	2023.04.20
Conducted RF Test	CFIXRSCR6CRVD	E2304369a-03/03	2023.04.20

## 2.6 Supported equipment

Brand : Acer  
Product Name: : Notebook PC  
Model Name : TravelMate P238 series  
Model Number : N15W8

Product Name : Test Fixture  
Product Function : USB to TTL

## 2.7 Description of Test Facility

Name of Firm : Audix Technology (Shanghai) Co., Ltd.  
Site Location : 3F, Building 34, No. 680 Guiping Rd.,  
Caohejing, Hi-Tech Park,  
Shanghai 200233, China  
Accredited by NVLAP, Lab Code : 200371-0  
FCC Designation Number : CN5027  
Test Firm Registration Number : 954668



### 3 CONDUCTED EMISSION TEST


#### 3.1 Test Equipment

The following test equipments are used during the conducted emission test in a shielded room:

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Test Receiver	R&S	ESCI	101302	2023.02.22	1 Year
2.	Artificial Mains Network (AMN)	R&S	ESH2-Z5	843890/011	2022.09.23	1 Year
3.	Fixed Attenuator	SHYL	TTS-1	001	2023.02.22	1 Year
4.	50Ω Coaxial Switch	ANRITSU	MP59B	6200655086	2023.02.22	1 Year
5.	Coaxial Cable	HANWEI	RG223/U	KJ09052	2023.02.22	1 Year
6.	Software	Audix	e3	210616	--	--

#### 3.2 Block Diagram of Test Setup

##### 3.2.1 Conducted Disturbance Test Setup

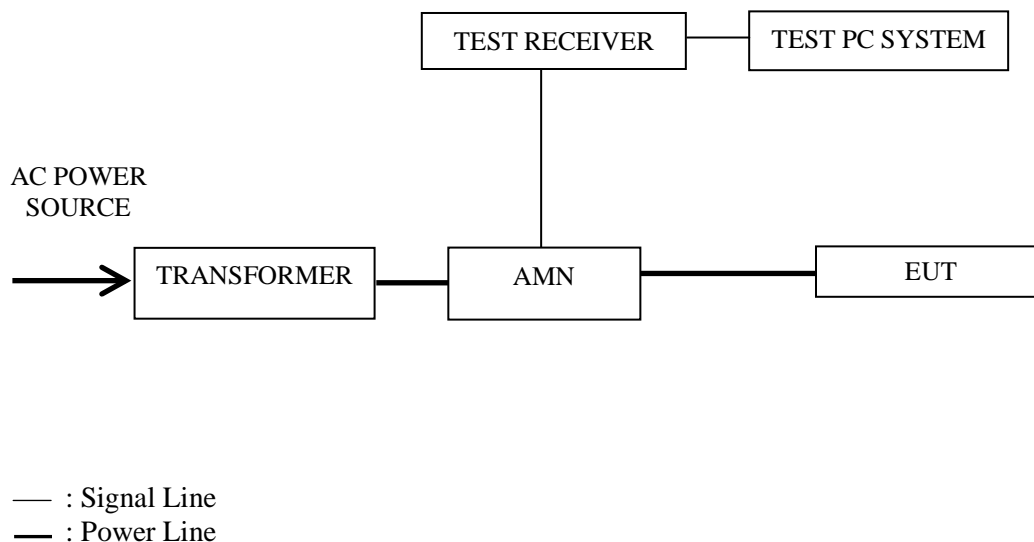

### 3.3 Conducted Emission Limits (§15.207)

Frequency Range (MHz)	Limits dB(μV)	
	Quasi-peak	Average
0.15 ~ 0.5	66~56	56~46
0.5 ~ 5	56	46
5 ~ 30	60	50
NOTE 1 – The lower limit shall apply at the transition frequencies. NOTE 2 – The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz~0.50 MHz		

### 3.4 Test Configuration

The EUT (listed in Sec.2.1) was installed as shown on Sec.3.2 to meet FCC requirement and operating in a manner which tends to maximize its emission level in a normal application.

### 3.5 Operating Condition of EUT

3.5.1 Setup the EUT as shown in Sec. 3.2.

3.5.2 Turn on the power of all equipment.

3.5.3 Turn the EUT on the test mode, and then test.

### 3.6 Test Procedures

The EUT was placed upon a non-metallic table, which is 0.8 m above the horizontal conducting ground plane and 0.4 m from a vertical reference plane. The EUT was connected to the power mains through an Artificial Mains Network (AMN) to provide a 50 Ω coupling impedance for the measuring equipment. Both sides of AC line (Line & Neutral) were checked to find out the maximum conducted emission according to FCC Part 15 Subpart C and ANSI C63.10: 2013 requirements during conducted disturbance test.

The I.F. bandwidth of Test Receiver ESCI was set at 9 kHz.

The frequency range from 150 kHz to 30 MHz was checked.

Test with a dummy load in lieu of the antenna to determine compliance with Section 15.207 limits within the transmitter's fundamental emission band. (According to KDB 174176 D01 Line Conducted FAQ)

The test modes were done on conducted disturbance test and all the test results are listed in Sec. 3.7

### 3.7 Test Results

< **PASS** >

The frequency and amplitude of the highest conducted emission relative the limit is reported. All the emissions not reported below are too low against the FCC limit.

Worst case emission:

No.	Operation	Mode	Channel	Frequency (MHz)	Data Page
1.	Transmitting	BLE	00	2402	P12-13


NOTE 1 – Emission Level = Read Level + AMN Factor + Aux Factor + Cable Loss  
Margin = Limits - Emission Level

NOTE 2 – “QP” means “Quasi-Peak” values

NOTE 3 – The emission levels which not reported are too low against the official limit.


**Worst case emission**

Test Date:	2023.04.28	Temp./Hum.:	22°C/51%RH	Test By:	Jarey
------------	------------	-------------	------------	----------	-------

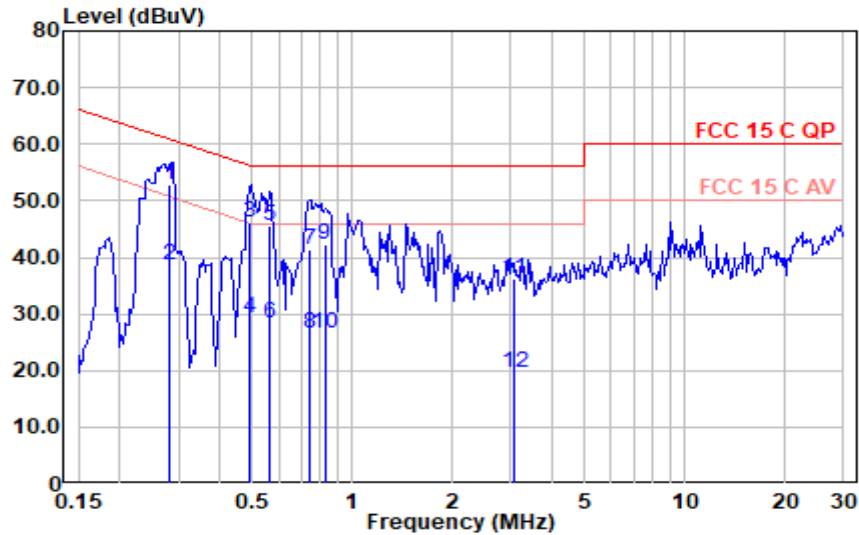**Mode: BLE CH2402****Polarization at Line**

Frequency (MHz)	Meter Reading dB (μV)	AMN Factor (dB)	Aux Factor (dB)	Cable Loss (dB)	Emission Level dB (μV)	Limits dB (μV)	Margin (dB)	Remark
0.28	43.32	0.10	9.49	0.00	52.91	60.80	7.89	QP
0.28	29.09	0.10	9.49	0.00	38.68	50.80	12.13	Average
0.49	36.53	0.19	9.49	0.00	46.22	56.15	9.94	QP
0.49	19.69	0.19	9.49	0.00	29.38	46.15	16.78	Average
0.56	35.79	0.20	9.49	0.02	45.50	56.00	10.50	QP
0.56	18.60	0.20	9.49	0.02	28.30	46.00	17.70	Average
0.74	31.63	0.20	9.49	0.06	41.38	56.00	14.62	QP
0.74	16.80	0.20	9.49	0.06	26.54	46.00	19.46	Average
0.83	32.49	0.20	9.49	0.07	42.26	56.00	13.74	QP
0.83	16.77	0.20	9.49	0.07	26.53	46.00	19.47	Average
3.05	26.34	0.30	9.49	0.10	36.23	56.00	19.77	QP
3.05	9.74	0.30	9.49	0.10	19.63	46.00	26.37	Average

**Mode: BLE CH2402**

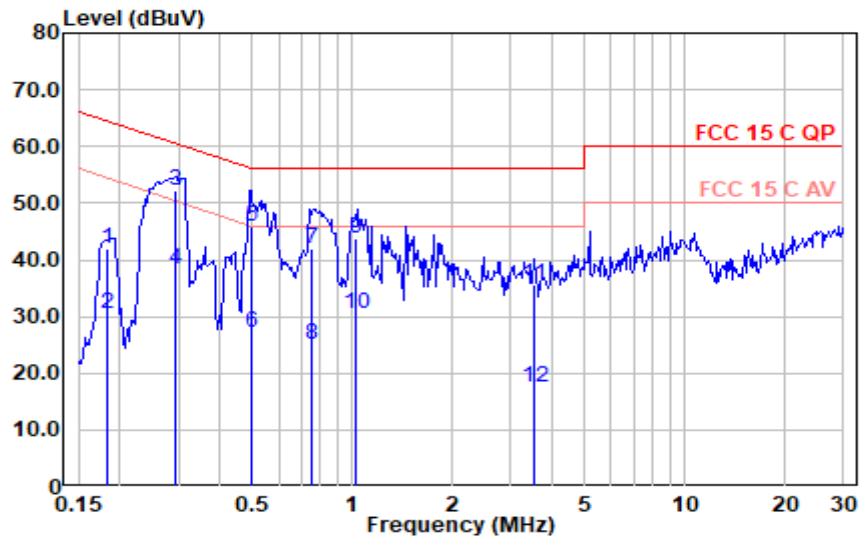

**Polarization at Neutral**

Frequency (MHz)	Meter Reading dB (μV)	AMN Factor (dB)	Aux Factor (dB)	Cable Loss (dB)	Emission Level dB (μV)	Limits dB (μV)	Margin (dB)	Remark
0.18	32.25	0.10	9.49	0.00	41.84	64.38	22.54	QP
0.18	20.79	0.10	9.49	0.00	30.38	54.38	24.00	Average
0.29	42.62	0.10	9.49	0.00	52.21	60.48	8.27	QP
0.29	28.63	0.10	9.49	0.00	38.22	50.48	12.26	Average
0.50	36.19	0.10	9.49	0.00	45.78	56.04	10.26	QP
0.50	17.50	0.10	9.49	0.00	27.09	46.04	18.95	Average
0.76	32.22	0.10	9.49	0.06	41.87	56.00	14.13	QP
0.76	15.34	0.10	9.49	0.06	24.99	46.00	21.01	Average
1.03	34.00	0.20	9.49	0.10	43.79	56.00	12.21	QP
1.03	20.61	0.20	9.49	0.10	30.40	46.00	15.60	Average
3.50	25.73	0.25	9.49	0.10	35.58	56.00	20.42	QP
3.50	7.56	0.25	9.49	0.10	17.40	46.00	28.60	Average

## 4 RADIATED EMISSION TEST

### 4.1 Test Equipment

The following test equipment are used during the radiated emission test in a semi-anechoic chamber:


Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Preamplifier	Agilent	8447D	2944A10548	2023.02.22	1 Year
2.	Preamplifier	HP	8449B	3008A00864	2023.02.22	1 Year
3.	Spectrum Analyzer	Agilent	N9010A	MY52221182	2022.09.15	1 Year
4.	Test Receiver	R&S	ESCI	101303	2023.02.22	1 Year
5.	Bilog Antenna+6dB Attenuator	Schwarz beck	VULB 9168+EMCI-N-6-06	708+AT-N0638	2023.02.07	1 Year
6.	Horn Antenna	EMCO	3115	96074878	2022.09.20	1 Year
7.	Horn Antenna	EMCO	3116	00062643	2023.01.30	2 Year
8.	Cavity Band Rejection Filter	Microwave	WT-A3882-R10	WT200312-1-1	2023.02.22	1 Year
9.	Coaxial Switch	Anritsu	MP59B	6200655086	2023.02.22	1 Year
10.	Coaxial Cable	SCHAFFNER	RG 212U-MIL C 17+N1K50-E W0630-N1K50-15m-1	RE-10m-001/ RE-15m-002	2023.02.22	1 Year
11.	Software	Audix	e3	210616	--	--

4.2 Block Diagram of Test Setup


4.2.1 EUT & Peripherals



4.2.2 Below 1GHz

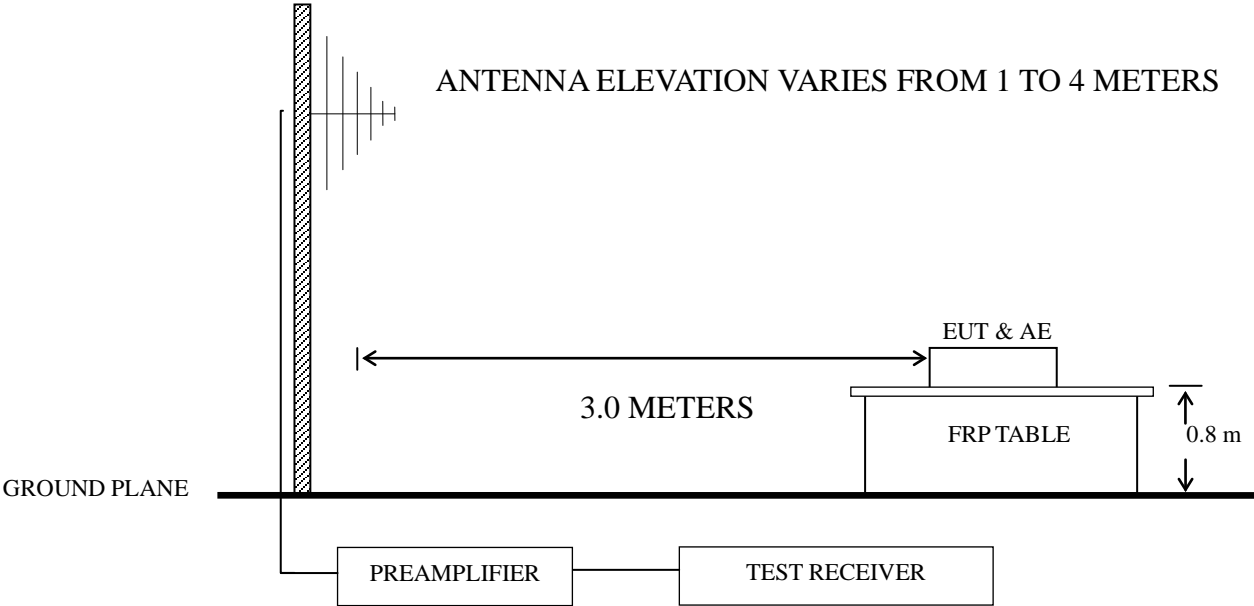

4.2.3 Above 1GHz

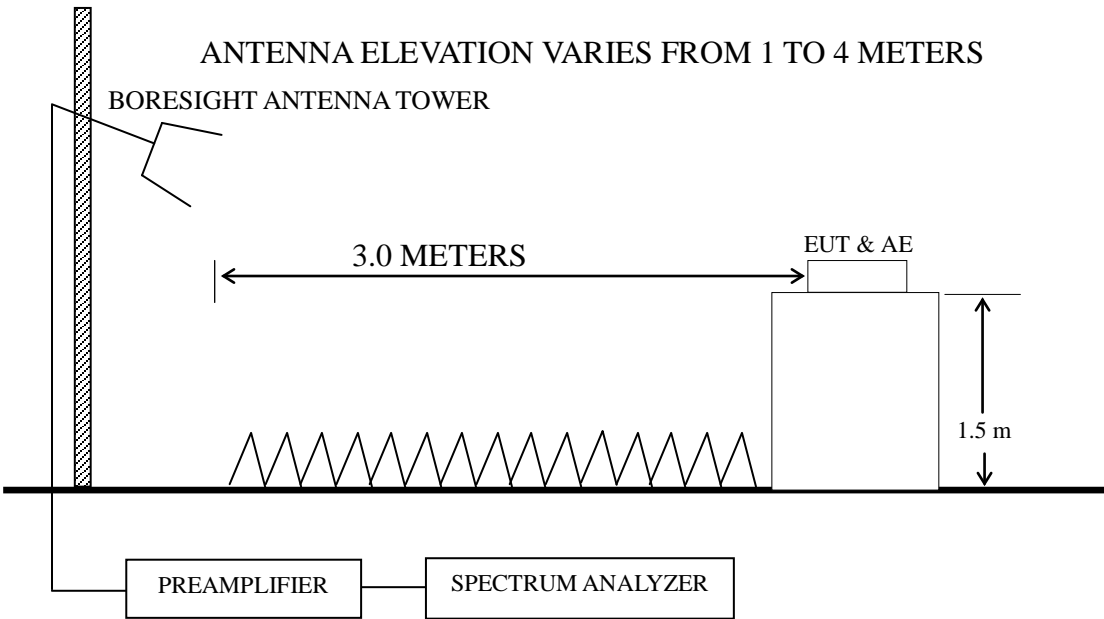

### 4.3 Radiated Emission Limit (§15.209)

Frequency (MHz)	Distance (m)	Field strength limits (μV/m)	
		(μV/m)	dB(μV/m)
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0
<p>NOTE 1 - Emission Level dB (μV/m) = 20 log Emission Level (μV/m)</p> <p>NOTE 2 - The tighter limit applies at the band edges.</p> <p>NOTE 3 - Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.</p> <p>NOTE 4 - The limits shown are based on Quasi-peak value detector below or equal to 1GHz and Average value detector above 1GHz.</p> <p>NOTE 5 - Above 1 GHz, the limit on peak emission is 20 dB above the maximum permitted average emission limit applicable to the EUT</p>			

### 4.4 Test Configuration

The EUT (listed in Sec.2.1) and the simulators (listed in Sec.2.2) were installed as shown on Sec.4.2 to meet FCC requirements and operating in a manner that tends to maximize its emission level in a normal application.

### 4.5 Operating Condition of EUT

4.5.1 Setup the EUT as shown in Sec. 4.2.

4.5.2 Turn the EUT on.

4.5.3 Connect the EUT and the TTL terminal of Test Fixture through three HCI cables of EUT, as follows (TX to RXD, RX to TXD, GND to GND). Plug the USB terminal of Test Fixture to the USB port of Notebook PC.

4.5.4 Use the software as section 2.3 to select the test mode, then disconnect the Test Fixture from EUT, remove the Test Fixture and Notebook PC, then test.

4.5.5 Repeat step 4.5.3 and 4.5.4, until the test of all modes finished.

### 4.6 Test Procedures

Radiated emission test applies to harmonics/spurs that fall in the restricted bands listed in Section 15.205. The maximum permitted average field strength is listed in Section 15.209. A pre-amp is necessary for this measurement. For measurement above 1 GHz, set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.

The EUT was placed on a turntable. Below 1 GHz, the table height is 80 cm above the reference ground plane. Above 1 GHz, the table height is 1.5 m. The turntable rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna, which was mounted on an antenna tower. The antenna moved up and down



between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (Calibrated Bilog Antenna) or Horn antenna was used as receiving antenna. Both horizontal and vertical polarizations of the antenna were set on measurement. In order to find the maximum emission, all of the interference cables were manipulated according to ANSI C63.10: 2013 requirements during radiated emission test.

The bandwidth of Test Receiver R&S ESCI was set at 120 kHz from 30MHz to 1000MHz.

The bandwidth of Agilent N9010A was set at 1MHz for above 1GHz.

The frequency range from 30 MHz to 25 GHz (Up to 10<sup>th</sup> harmonics from fundamental frequency) was checked.

All the test results are listed in Sec.4.7.

## 4.7 Test Results

### <PASS>

The frequency and amplitude of the highest radiated emission relative the limit is reported. All the emissions not reported below are too low against the FCC limit.

Frequency range: below 1GHz (Worst case emission)

No.	Operation	Mode	Channel	Frequency	Data Page
1.	Transmitting	BLE	39	2480 MHz	P19-20

Frequency range: above 1GHz

No.	Operation	Mode	Channel	Frequency	Data Page
1.	Transmitting	BLE	00	2402 MHz	P21-22
2.			20	2442 MHz	P23-24
3.			39	2480 MHz	P25-26

Band-Edge and Restricted bands:

No.	Operation	Mode	Channel	Frequency	Data Page
1.	Transmitting	BLE	00	2402 MHz	P27-28
2.			39	2480 MHz	P29-30

NOTE 1 – Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor  
Margin = Limits - Emission Level.

NOTE 2 – “QP” means “Quasi-Peak” values.

NOTE 3 – 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

NOTE 4 – The emission levels which not reported are too low against the official limit.

NOTE 5 – The emission levels recorded below is data of EUT configured in Standing direction, for this direction was the maximum emission direction during the test. The data of Side & Lying direction are too low against the official limit to be reported.

NOTE 6 – All reading are Quasi-Peak values below or equal to 1GHz, Peak and Average values above 1GHz.


For above 1GHz test, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.

NOTE 7 – The frequency range 2310-2390MHz & 2483.5-2500MHz were tested for Restricted bands.

## Radiated emission < 1GHz


Test Date:	2023.09.02	Temp./Hum.:	22°C/51%RH	Test By:	Jarey
------------	------------	-------------	------------	----------	-------

### Mode: BLE CH2402MHz

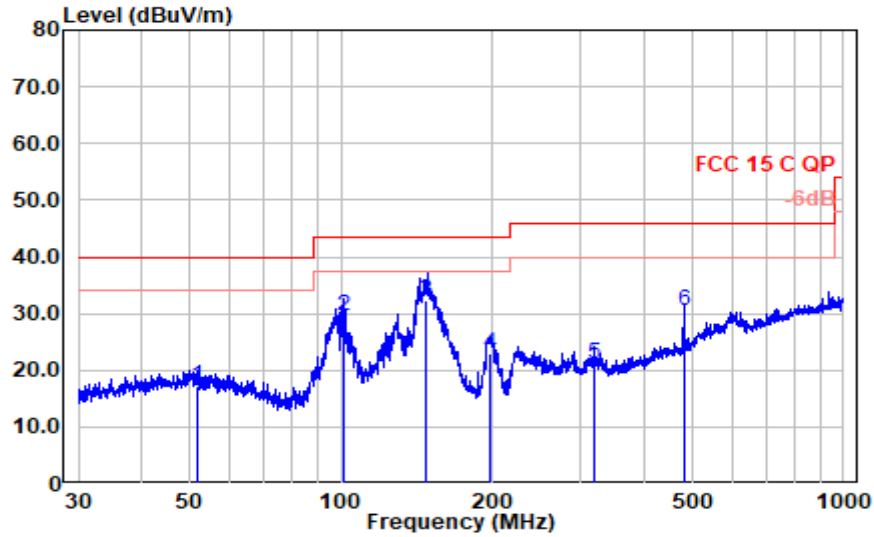

### Polarization at Horizontal

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
51.843	26.38	19.80	0.78	29.89	17.07	40.00	22.93	QP
100.934	43.25	14.81	1.17	29.69	29.53	43.50	13.97	QP
147.088	41.37	19.11	1.33	29.42	32.39	43.50	11.11	QP
198.588	35.13	15.64	1.59	29.30	23.06	43.50	20.44	QP
319.937	28.08	20.00	1.96	28.78	21.25	46.00	24.75	QP
480.528	34.15	23.21	2.44	29.42	30.38	46.00	15.62	QP


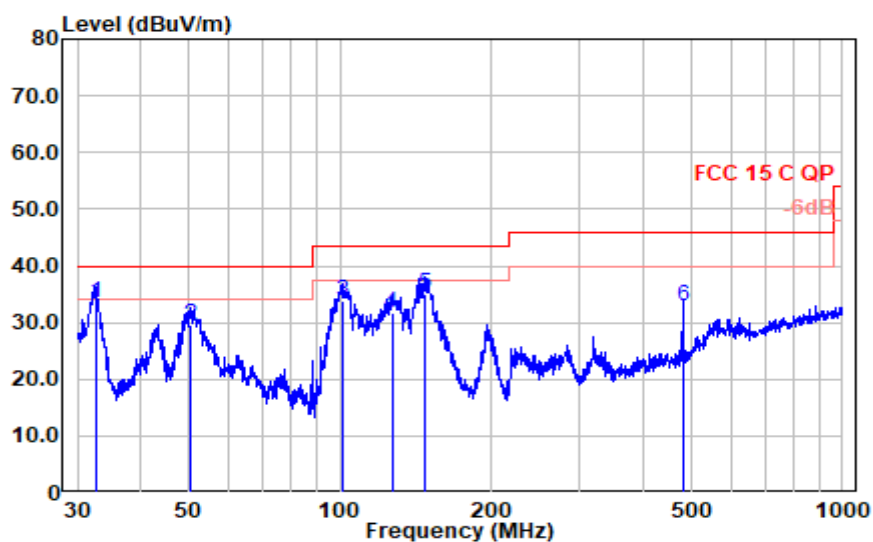
**Mode: BLE CH2402MHz****Polarization at Vertical**

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
32.590	44.51	18.32	0.62	29.90	33.55	40.00	6.45	QP
50.144	38.95	19.80	0.77	29.90	29.62	40.00	10.38	QP
101.111	47.43	14.81	1.17	29.69	33.72	43.50	9.78	QP
126.772	42.93	17.18	1.24	29.55	31.80	43.50	11.70	QP
147.145	44.05	19.11	1.33	29.42	35.08	43.50	8.42	QP
480.528	36.65	23.21	2.44	29.42	32.88	46.00	13.12	QP

## Radiated Emission > 1GHz

Test Date:	2023.09.02	Temp./Hum.:	22°C/51%RH	Test By:	Jarey
------------	------------	-------------	------------	----------	-------



Mode: BLE CH2402MHz

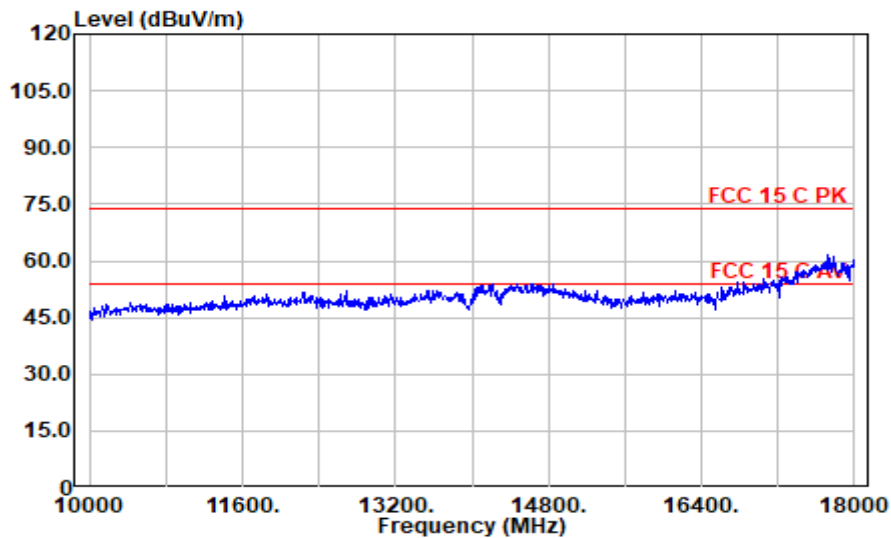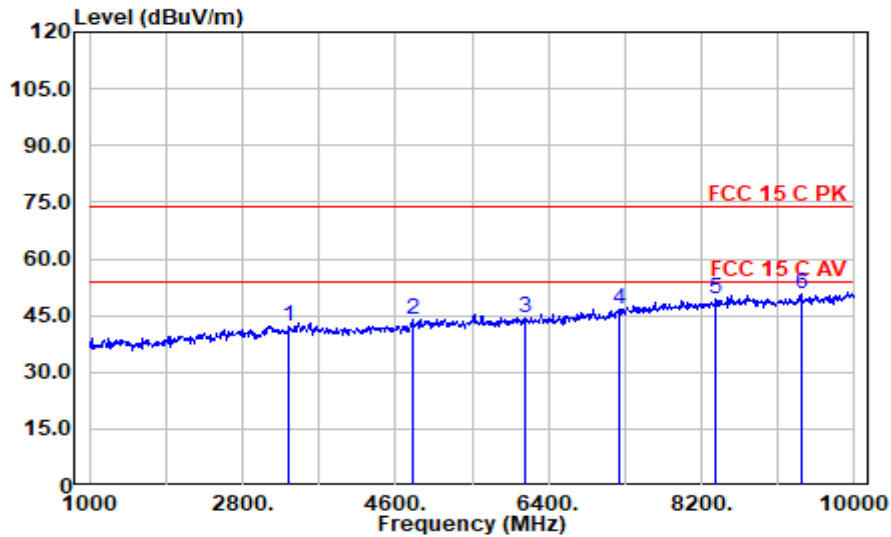

Polarization at Horizontal

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
3340.000	39.96	31.20	6.20	35.25	42.11	74.00	31.89	Peak
4798.000	37.95	32.87	7.61	34.67	43.76	74.00	30.24	Peak
6121.000	35.95	34.38	8.53	34.60	44.26	74.00	29.74	Peak
7228.000	35.53	36.37	9.50	34.67	46.73	74.00	27.27	Peak
8371.000	35.32	38.26	10.43	34.82	49.19	74.00	24.81	Peak
9370.000	36.29	38.21	10.94	34.66	50.79	74.00	23.21	Peak



**Mode: BLE CH2402MHz**

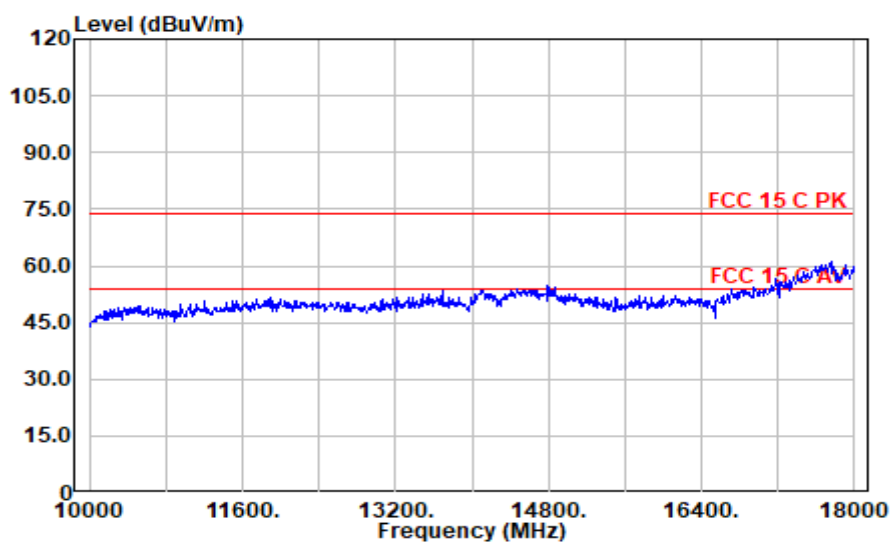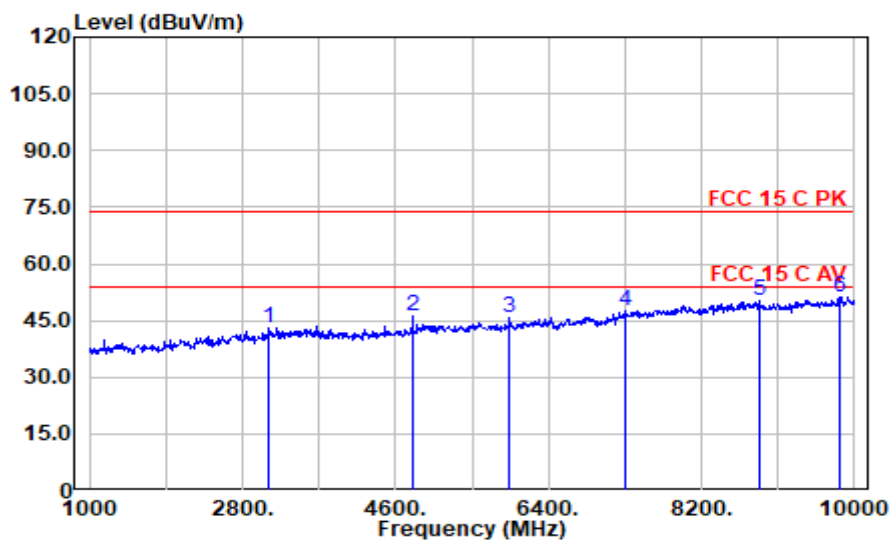

**Polarization at Vertical**



Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
3115.000	41.71	30.64	5.99	35.35	42.98	74.00	31.02	Peak
4807.000	40.15	32.91	7.62	34.67	46.01	74.00	27.99	Peak
5941.000	37.87	34.07	8.39	34.60	45.72	74.00	28.28	Peak
7309.000	35.81	36.73	9.59	34.70	47.44	74.00	26.56	Peak
8875.000	36.01	38.33	10.59	34.72	50.21	74.00	23.79	Peak
9838.000	36.25	38.30	11.32	34.62	51.25	74.00	22.75	Peak

# Mode: BLE CH2442MHz

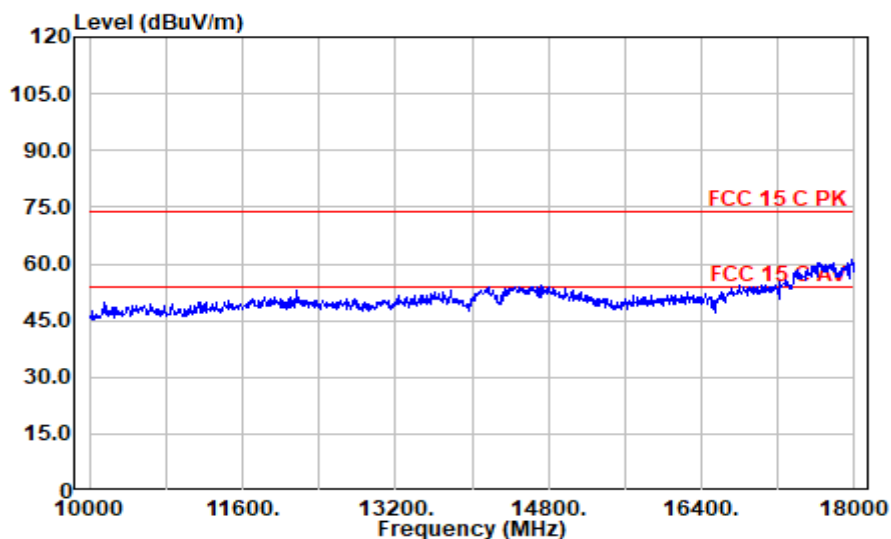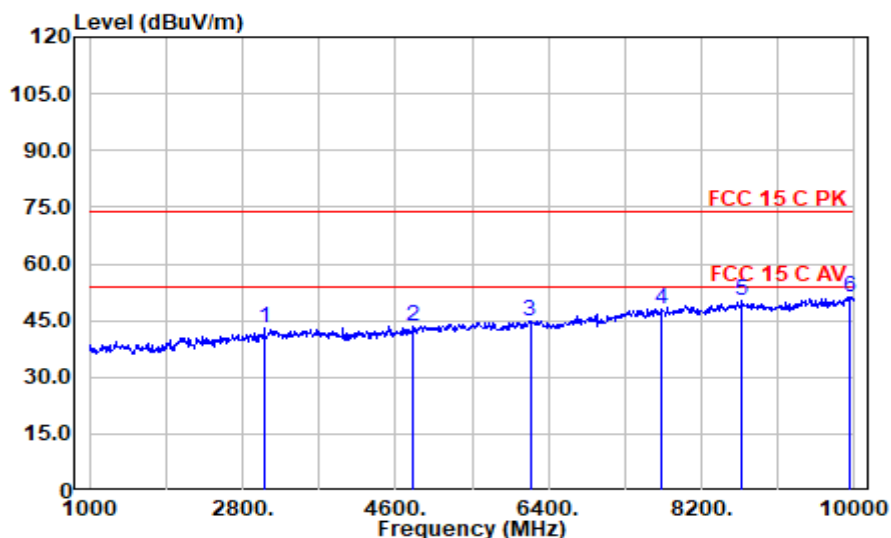

## Polarization at Horizontal



Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
3061.000	41.93	30.44	5.93	35.37	42.93	74.00	31.07	Peak
4807.000	37.73	32.91	7.62	34.67	43.59	74.00	30.41	Peak
6184.000	36.24	34.58	8.58	34.60	44.80	74.00	29.20	Peak
7723.000	35.94	37.06	10.03	34.82	48.21	74.00	25.79	Peak
8677.000	36.14	38.42	10.53	34.76	50.33	74.00	23.67	Peak
9937.000	35.97	38.40	11.40	34.61	51.17	74.00	22.83	Peak

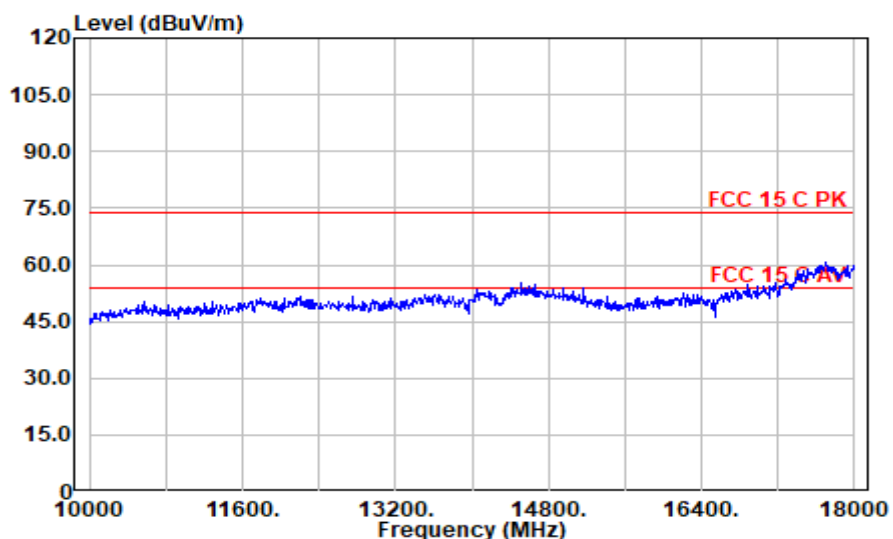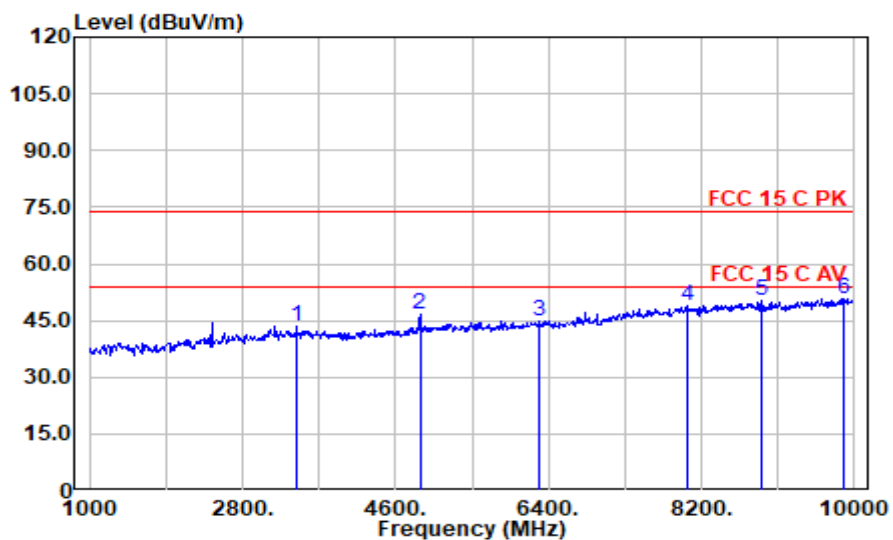**Mode: BLE CH2442MHz****Polarization at Vertical**

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
3439.000	41.48	31.11	6.29	35.21	43.67	74.00	30.33	Peak
4888.000	40.38	33.15	7.70	34.64	46.59	74.00	27.41	Peak
6301.000	36.14	34.60	8.68	34.60	44.82	74.00	29.18	Peak
8029.000	35.70	37.64	10.32	34.89	48.77	74.00	25.23	Peak
8911.000	36.03	38.30	10.60	34.72	50.21	74.00	23.79	Peak
9874.000	35.66	38.36	11.35	34.61	50.76	74.00	23.24	Peak





**Mode: BLE CH2480MHz**

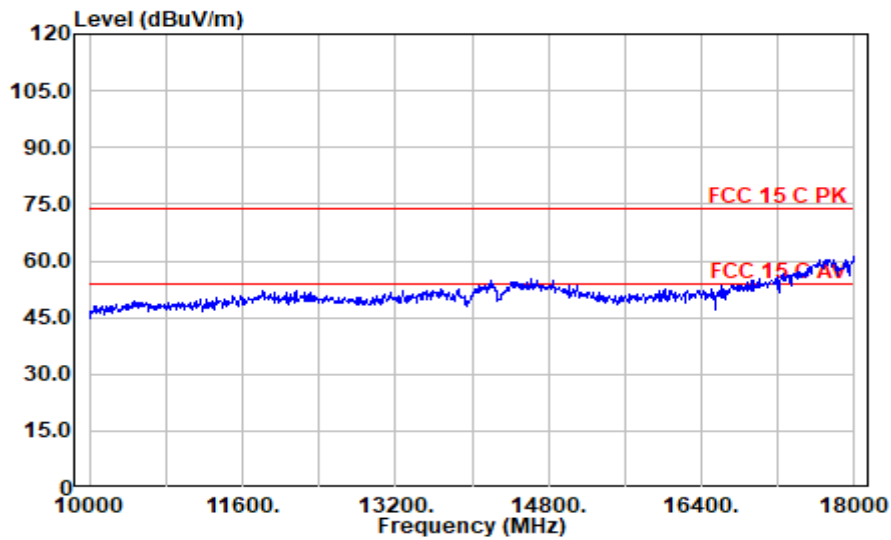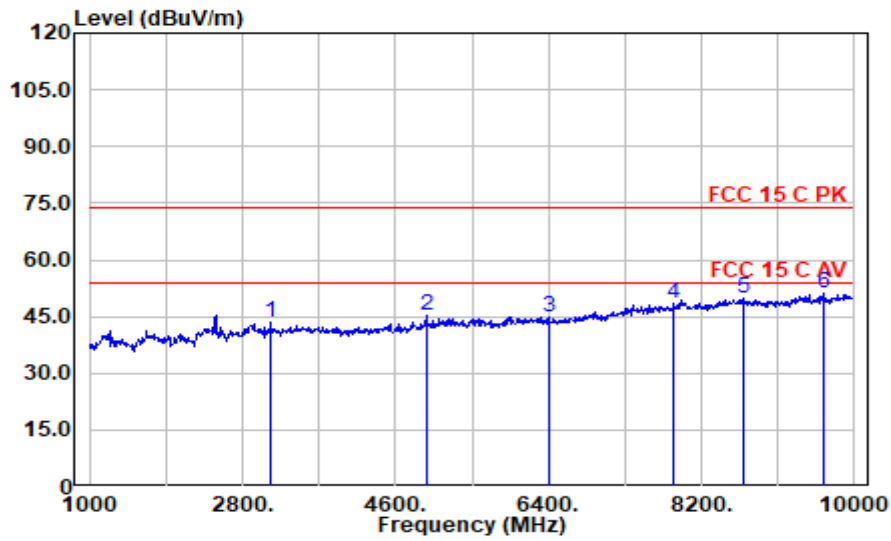

**Polarization at Horizontal**

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
3133.000	42.06	30.67	6.00	35.34	43.39	74.00	30.61	Peak
4960.000	38.89	33.33	7.77	34.61	45.37	74.00	28.63	Peak
6400.000	36.25	34.49	8.77	34.60	44.91	74.00	29.09	Peak
7867.000	35.80	37.43	10.18	34.86	48.55	74.00	25.45	Peak
8704.000	35.41	38.43	10.54	34.76	49.63	74.00	24.37	Peak
9631.000	36.38	38.34	11.16	34.64	51.24	74.00	22.76	Peak

**Mode: BLE CH2480MHz**

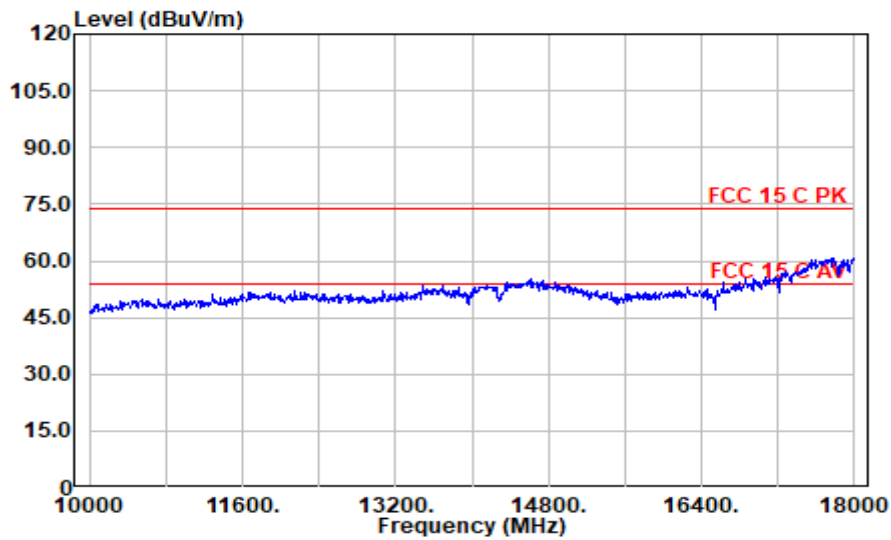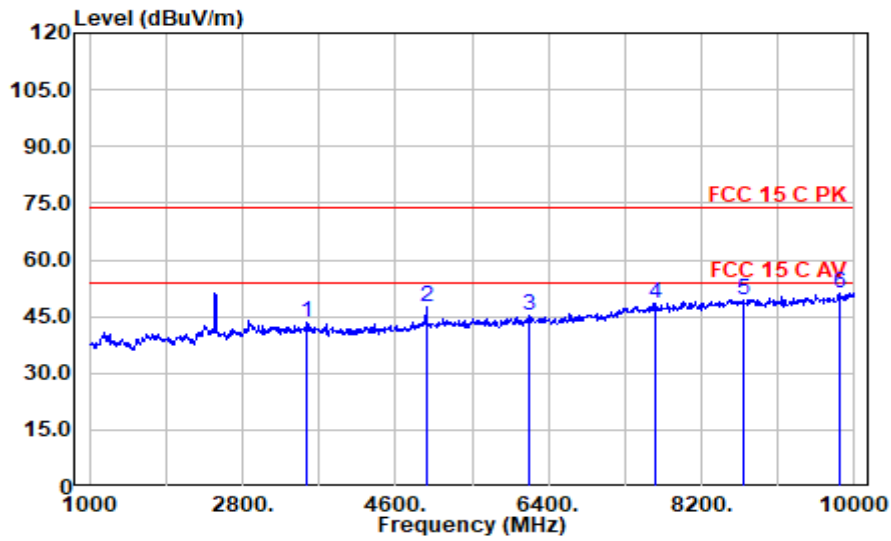


**Polarization at Vertical**

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
3556.000	40.84	31.36	6.39	35.16	43.42	74.00	30.58	Peak
4960.000	41.25	33.33	7.77	34.61	47.74	74.00	26.26	Peak
6166.000	36.61	34.54	8.57	34.60	45.13	74.00	28.87	Peak
7669.000	36.37	37.06	9.97	34.81	48.60	74.00	25.40	Peak
8704.000	35.15	38.43	10.54	34.76	49.36	74.00	24.64	Peak
9820.000	35.96	38.30	11.31	34.62	50.95	74.00	23.05	Peak


**Band-Edge and Restricted bands:**

Test Date:	2023.09.02	Temp./Hum.:	22°C/51%RH	Test By:	Jarey
------------	------------	-------------	------------	----------	-------

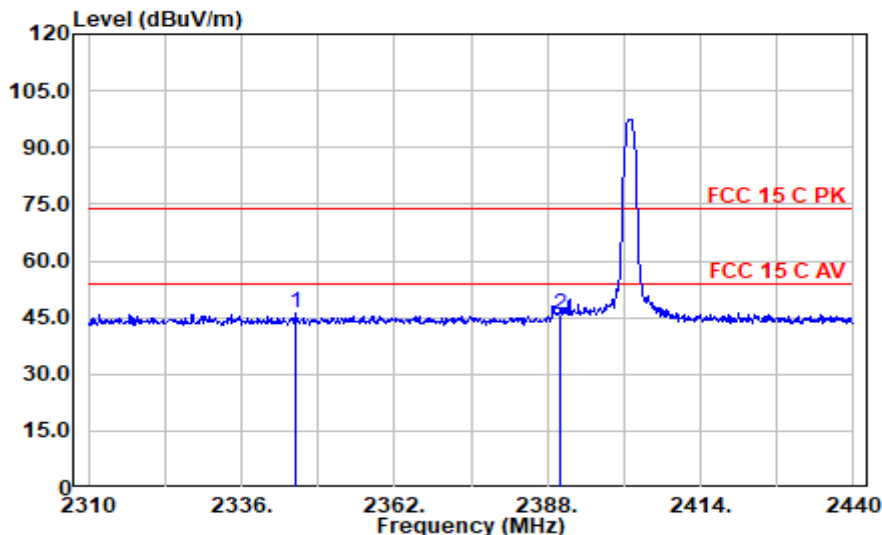**Mode: BLE CH2402MHz**


## Polarization at Horizontal

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2345.100	48.56	28.36	5.35	36.07	46.20	74.00	27.80	Peak
2390.000	47.74	28.40	5.39	36.02	45.51	74.00	28.49	Peak

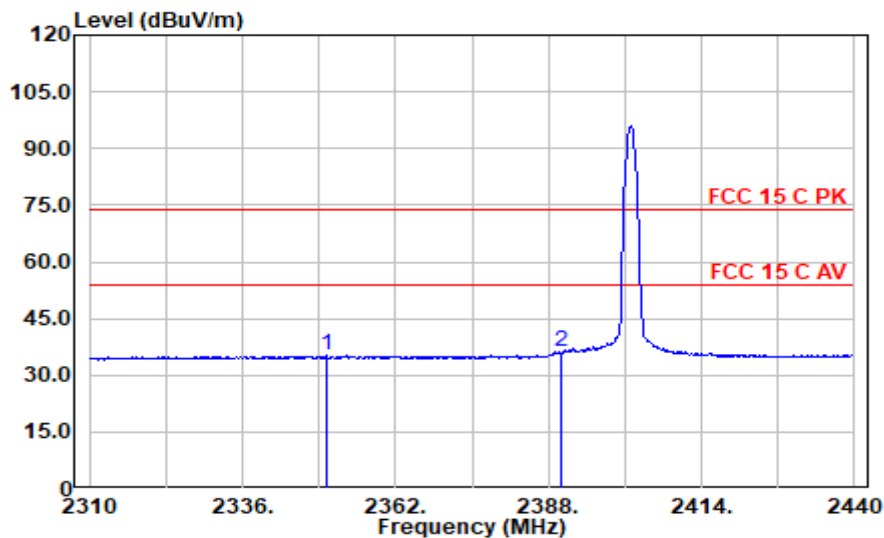


## Polarization at Horizontal

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2350.430	37.79	28.39	5.35	36.06	35.47	54.00	18.53	Average
2390.000	38.34	28.40	5.39	36.02	36.11	54.00	17.89	Average

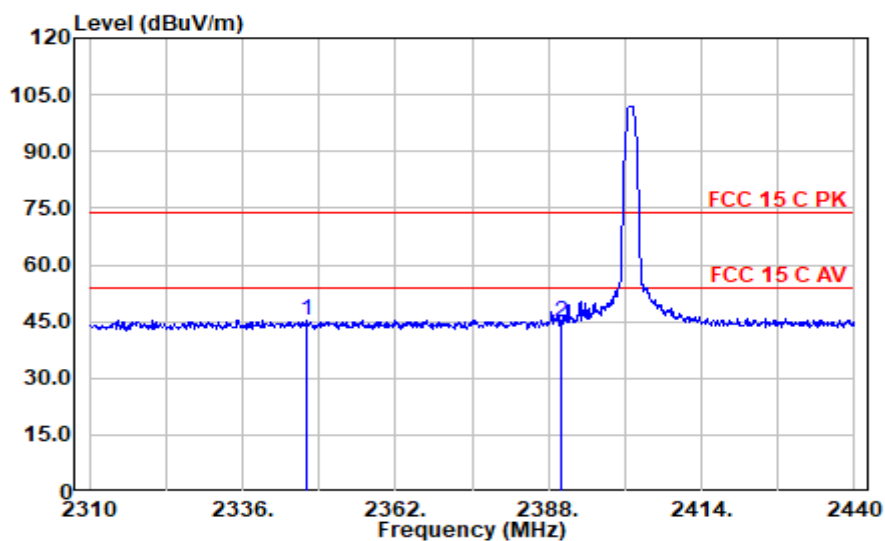**Mode: BLE CH2402MHz**


## Polarization at Vertical

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2346.920	47.69	28.37	5.35	36.07	45.34	74.00	28.66	Peak
2390.000	47.13	28.40	5.39	36.02	44.90	74.00	29.10	Peak

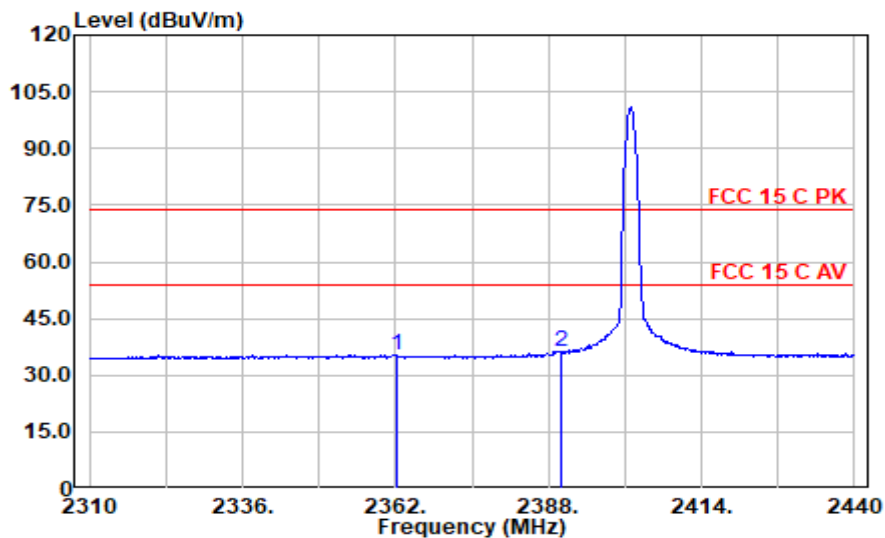


## Polarization at Vertical

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2362.260	37.78	28.40	5.36	36.05	35.50	54.00	18.50	Average
2390.000	38.34	28.40	5.39	36.02	36.11	54.00	17.89	Average

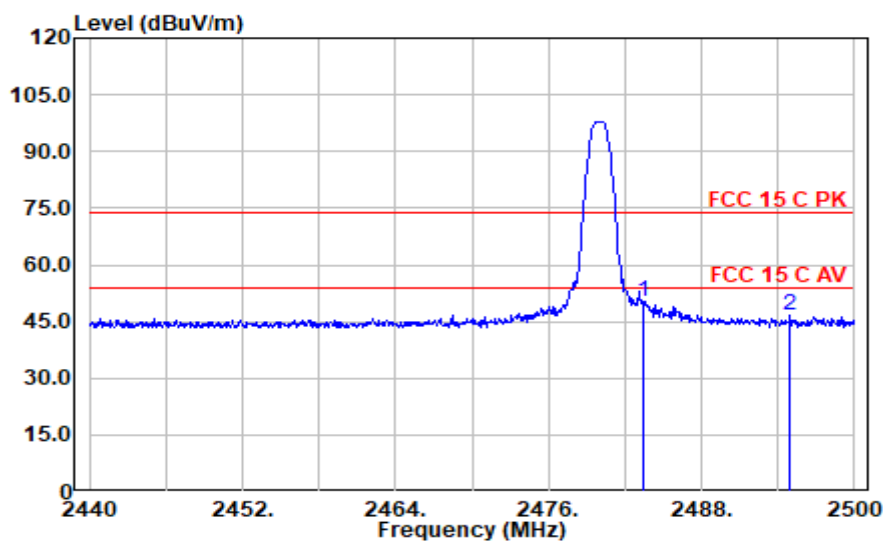**Mode: BLE CH2480MHz**


## Polarization at Horizontal

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2483.500	52.35	28.43	5.47	35.91	50.35	74.00	23.65	Peak
2494.960	48.63	28.48	5.48	35.90	46.69	74.00	27.31	Peak

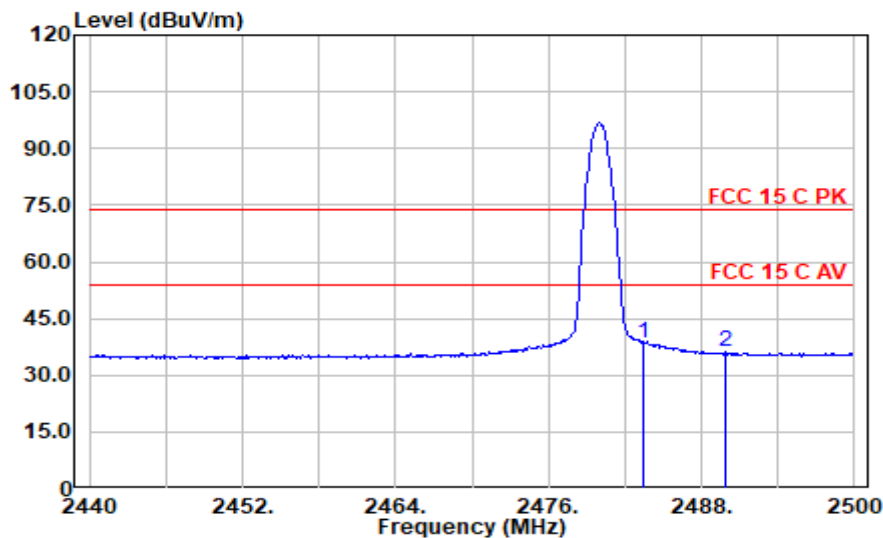


## Polarization at Horizontal

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2483.500	40.59	28.43	5.47	35.91	38.58	54.00	15.42	Average
2489.860	38.07	28.46	5.47	35.91	36.10	54.00	17.90	Average

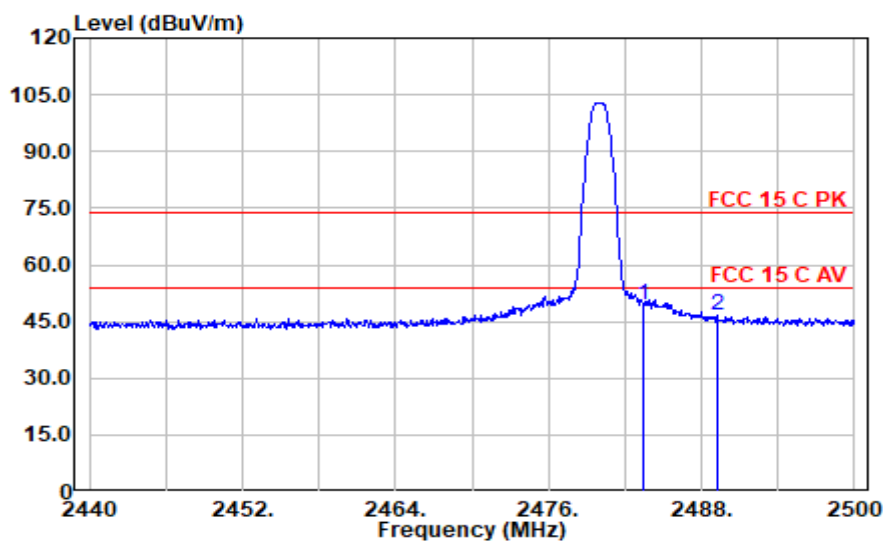**Mode: BLE CH2480MHz**

## Polarization at Vertical

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2483.500	51.58	28.43	5.47	35.91	49.57	74.00	24.43	Peak
2489.200	48.56	28.46	5.47	35.91	46.59	74.00	27.41	Peak

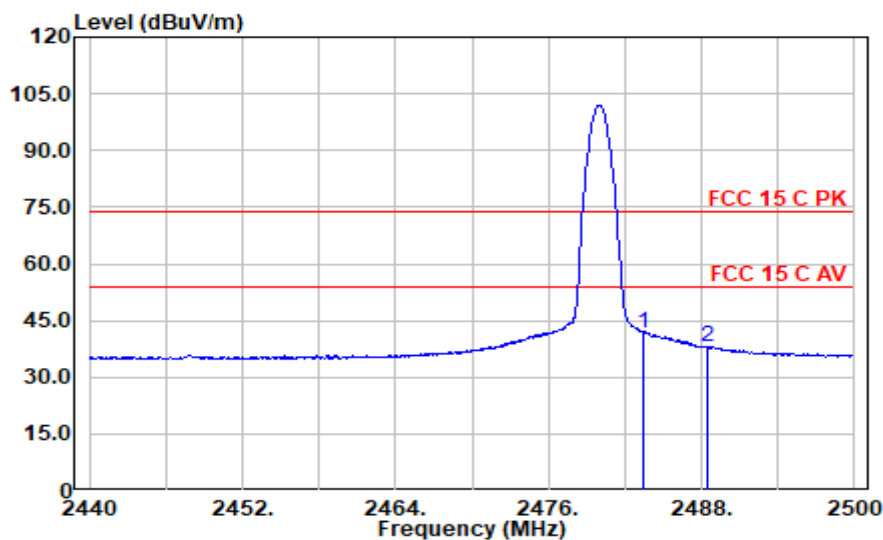

## Polarization at Vertical

Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
2483.500	43.84	28.43	5.47	35.91	41.83	54.00	12.17	Average
2488.540	40.16	28.46	5.47	35.91	38.18	54.00	15.82	Average


## 5 6 dB BANDWIDTH MEASUREMENT

### 5.1 Test Equipment

The following test equipment was used during the Emission Bandwidth measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A	MY52221182	2022.09.15	1 Year
2.	RF Cable	Mini-Circuits	FLC-3FT-SM SM+	22022838	2022.09.21	1 Year
3.	10 dB Attenuator	Mini-Circuits	BW-S10W2+	001	2022.09.21	1 Year

### 5.2 Block Diagram of Test Setup



### 5.3 Specification Limits (§15.247(a)(2))

The minimum 6 dB bandwidth shall be at least 500 kHz.

### 5.4 Operating Condition of EUT

The software as section 2.3 was used to enable the EUT to change the test mode one by one.

### 5.5 Test Procedure

The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measure by spectrum analyzer with settings: RBW = 100kHz, VBW  $\geq 3 \times$  RBW.

The 6 dB bandwidth is defined as the total spectrum the power of which is lower than peak power minus 6 dB .

The test procedure is defined in ANSI C63.10-2013 (the 11.8.2 Measurement Procedure “Option 2” was used).

## 5.6 Test Results

### **PASSED.**

All the test results are attached in next pages.

(Test Date: 2023.09.01 Temperature: 23°C Humidity: 51 %)

Mode	Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit
BLE	00	2402	<b>679.6</b>	500 kHz
	20	2442	<b>665.7</b>	500 kHz
	39	2480	<b>673.7</b>	500 kHz



## BLE

## CH2402



## CH2442



## CH2480



## 6 MAXIMUM PEAK OUTPUT POWER MEASUREMENT

### 6.1 Test Equipment

The following test equipment was used during the maximum peak output power measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A	MY52221182	2022.09.15	1 Year
2.	RF Cable	Mini-Circuits	FLC-3FT-SM SM+	22022838	2022.09.21	1 Year
3.	10 dB Attenuator	Mini-Circuits	BW-S10W2+	001	2022.09.21	1 Year

### 6.2 Block Diagram of Test Setup

The Same as Section. 5.2.

### 6.3 Specification Limits ((§15.247(b)(3))

The Limits of maximum Peak Output Power for digital modulation in 2400-2483.5 MHz is: 1 Watt. (30 dBm)

### 6.4 Operating Condition of EUT

The software as section 2.3 was used to enable the EUT to change the test mode one by one.

### 6.5 Test Procedure

The transmitter output was connected to the spectrum analyzer.

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- a)  $RBW \geq DTS \text{ Bandwidth}$ .
- b)  $VBW \geq [3 \times RBW]$ .
- c)  $Span \geq [3 \times RBW]$ .
- d) Sweep time = auto.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

The test procedure is defined in ANSI C63.10-2013 ( 11.9.1.1 Measurement Procedure “  $RBW \geq DTS \text{ bandwidth}$ ” was used).

## 6.6 Test Results

### **PASSED.**

All the test results are listed below.

(Test Date: 2023.09.01 Temperature: 23°C Humidity: 51 %)

Mode	Channel	Frequency (MHz)	Peak Output Power (dBm)	Limit
BLE	00	2402	<b>8.549</b>	30 dBm
	20	2442	<b>8.646</b>	30 dBm
	39	2480	<b>8.787</b>	30 dBm

BLE


CH2402



CH2442



CH2480



## 7 EMISSION LIMITATIONS MEASUREMENT

### 7.1 Test Equipment

The following test equipment was used during the emission limitations test:

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A	MY52221182	2022.09.15	1 Year
2.	RF Cable	Mini-Circuits	FLC-3FT-SM SM+	22022838	2022.09.21	1 Year
3.	10 dB Attenuator	Mini-Circuits	BW-S10W2+	001	2022.09.21	1 Year

### 7.2 Block Diagram of Test Setup

The Same as Section. 5.2.

### 7.3 Specification Limits (§15.247(d))

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). (※This test result attaching to Section. 3.7)

### 7.4 Operating Condition of EUT

The software as section 2.3 was used to enable the EUT to change the test mode one by one.

### 7.5 Test Procedure

The transmitter output was connected to the spectrum analyzer.

Establish a reference level by using the following procedure:

- Set instrument center frequency to DTS channel center frequency.
- Set the span to  $\geq 1.5$  times the DTS bandwidth.
- Set the RBW = 100 kHz.
- Set the VBW  $\geq [3 \times \text{RBW}]$ .
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to

establish the reference level.

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

Scan up through 10<sup>th</sup> harmonic.

The test procedure is defined in ANSI C63.10-2013 (11.11.2 Reference level measurement and 11.11.3 Emission level measurement was used).

## 7.6 Test Results

### **PASSED.**

The test data was attached in the next pages.

(Test Date: 2023.09.01 Temperature: 23°C Humidity: 51 %)

Mode	Channel	Frequency (MHz)	Data Page
BLE	00	2402	P40
	20	2442	P41
	39	2480	P42


# BLE

## CH2402



### Reference Level



### Lower Edge

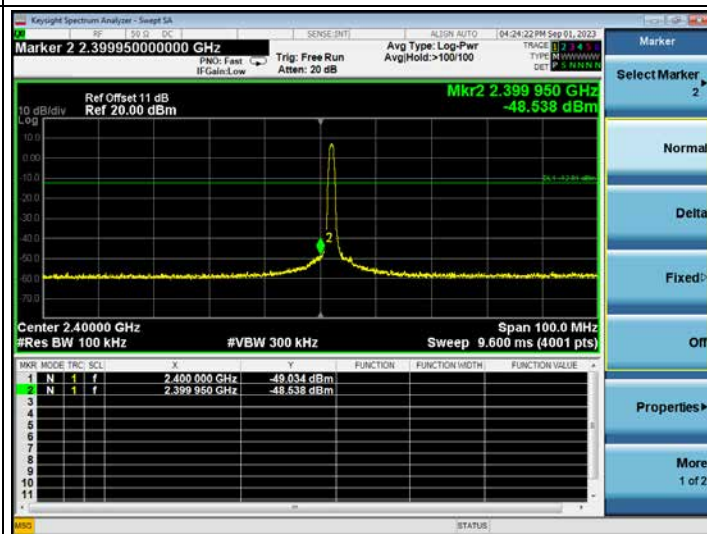

### Emission Level

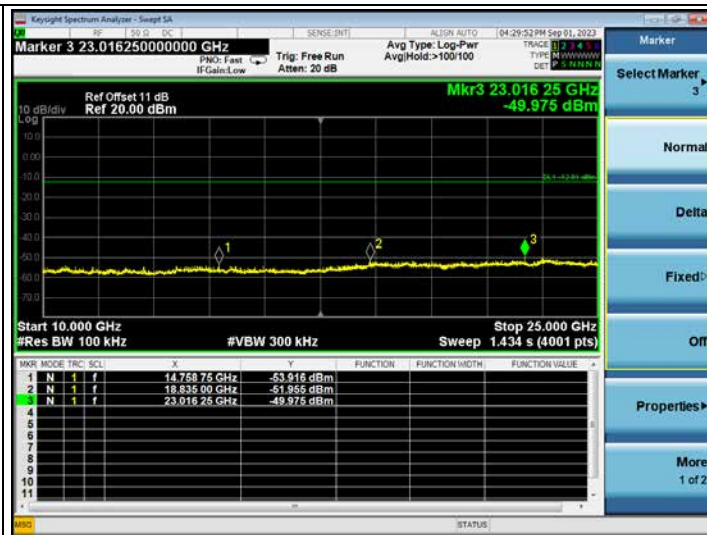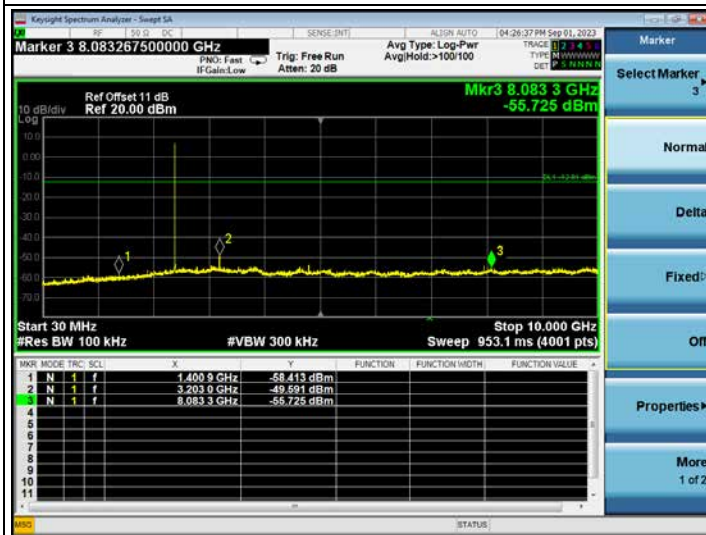





BLE

CH2442

Reference Level



Emission Level

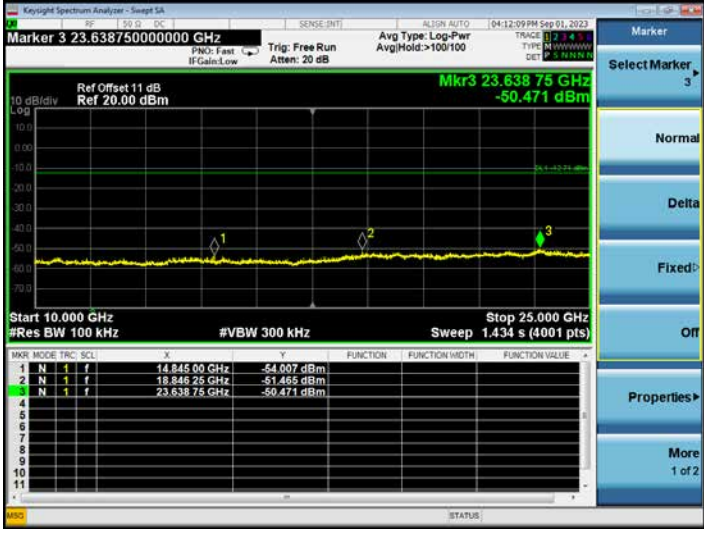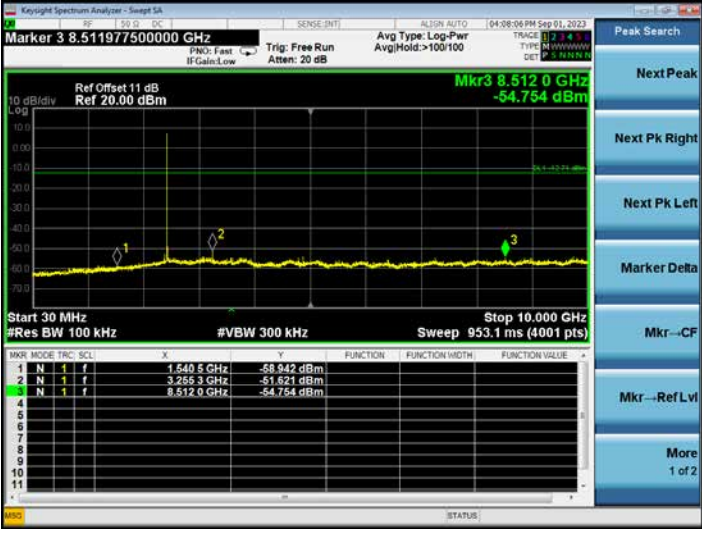


## BLE

## CH2480



## Reference Level



## Higher Edge

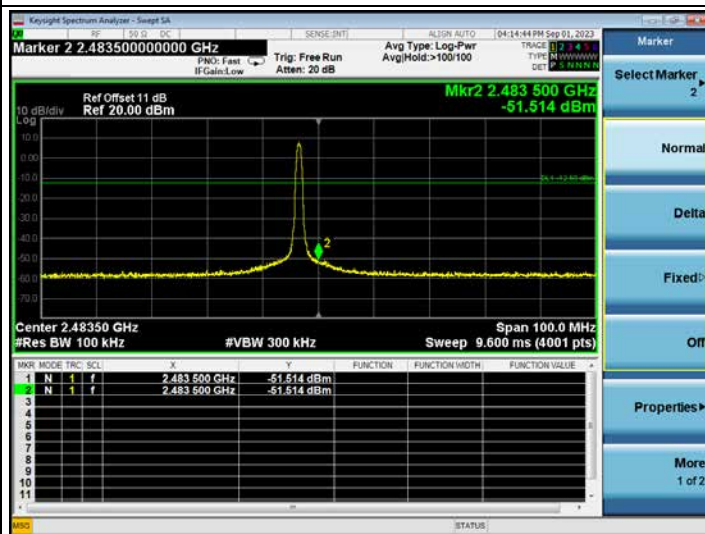

## Emission Level

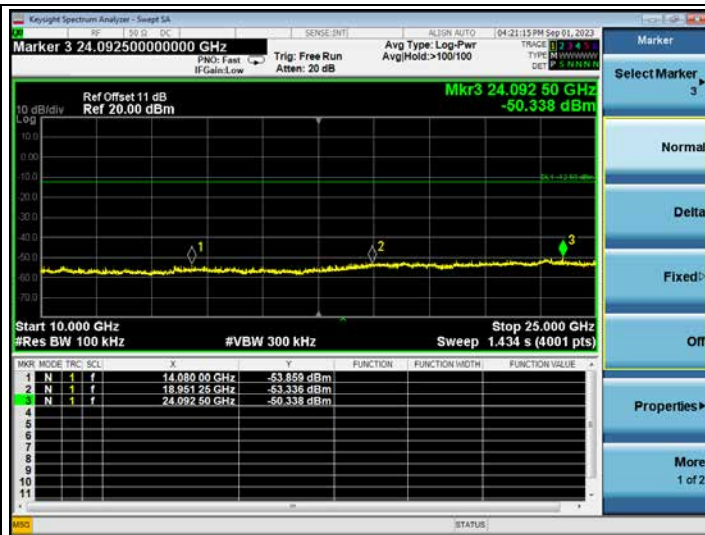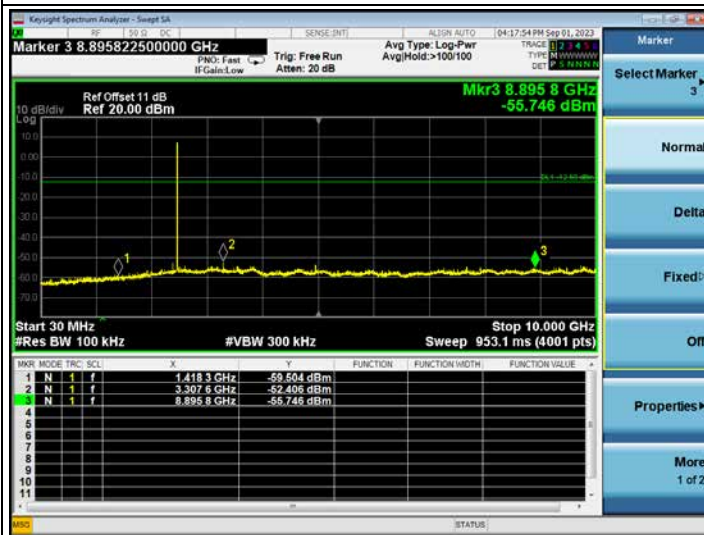

## 8 POWER SPECTRAL DENSITY MEASUREMENT

### 8.1 Test Equipment

The following test equipment was used during the power spectral density measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A	MY52221182	2022.09.15	1 Year
2.	RF Cable	Mini-Circuits	FLC-3FT-SM SM+	22022838	2022.09.21	1 Year
3.	10 dB Attenuator	Mini-Circuits	BW-S10W2+	001	2022.09.21	1 Year

### 8.2 Block Diagram of Test Setup

The Same as section 5.2.

### 8.3 Specification Limits (§15.247(e))

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band.

### 8.4 Operating Condition of EUT

The software as section 2.3 was used to enable the EUT to change the test mode one by one.

### 8.5 Test Procedure

The transmitter output was connected to the spectrum analyzer.

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set the VBW  $\geq [3 \times \text{RBW}]$ .
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

The test procedure is defined in ANSI C63.10-2013 ( 11.10.2 Measurement Procedure “Method PKPSD (peak PSD)” was used).

## 8.6 Test Results

### **PASSED.**

All the test results are attached in next pages.

(Test Date: 2023.09.01 Temperature: 23°C Humidity: 51 %)

Mode	Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limit
BLE	00	2402	<b>-7.803</b>	8 dBm
	20	2442	<b>-7.609</b>	8 dBm
	39	2480	<b>-7.506</b>	8 dBm

BLE

CH2402



CH2442



CH2480



## 9 ANTENNA REQUIREMENT

### 9.1 Specification Limits (§15.203)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 9.2 Result

According to KDB 353028 D1, the following describes the three ways that can be used to demonstrate compliance to Section 15.203:

- a) Antenna permanently attached.
- b) Unique (non-standard) antenna connector.
- c) Professional installation.

For this product, the antenna is:

- ☒ Antenna permanently attached
- ☐ Unique (non-standard) antenna connector
- ☐ Professional installation
- ☐ not meet any of ways list above

that

- ☒ compliant
- ☐ not compliant

with the requirement of Section 15.203.

## 10 MEASUREMENT UNCERTAINTY LIST

The measurement uncertainty was estimated for test on the EUT according to CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage of K=2.

The uncertainties value is not used in determining the PASS/FAIL results.

Test Items/Facilities	Frequency/Equipment/Unit	Uncertainty
Conducted Emission No.1 Shielded Room	9kHz~150kHz	±3.1 dB
	150kHz~30MHz	±2.6 dB
Conducted Emission No.3 Shielded Room	9kHz~150kHz	±3.1 dB
	150kHz~30MHz	±2.6 dB
Radiated Emission	30MHz~200MHz, Horizontal	±3.8 dB
	30MHz~200MHz, Vertical	±4.1 dB
	200MHz~1000MHz, Horizontal	±3.6 dB
	200MHz~1000MHz, Vertical	±5.1 dB
	1GHz~6GHz	±5.3 dB
	6GHz~18GHz	±5.3 dB
	18GHz~40GHz	±3.5 dB
Output Power Test	50MHz~18GHz	0.77 dB
Power Density Test	9kHz~6GHz	1.08 dB
RF Frequency Test	9kHz~40GHz	$6 \times 10^{-4}$
Bandwidth Test	9kHz~6GHz	$1.5 \times 10^{-3}$
RF Radiated Power Test	30MHz~1000MHz	3.06 dB
Conducted Output Power Test	50MHz~18GHz	0.83 dB
AC Voltage(<10kHz) Test	120V~230V	0.04 %
DC Power Test	0V~30V	0.4 %
Temperature	-40°C~+100°C	0.52 °C
Humidity	30%~95%	2.6 %