



## FCC TEST REPORT

## FOR

Brivo Systems LLC

Brivo Gateway

Test Model: B-Gateway V5-M2

Prepared for : Brivo Systems LLC  
Address : 7700 Old Georgetown Rd #300, Bethesda, MD 20814.

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei,  
Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : September 08, 2023  
Number of tested samples : 2  
Sample No. : A09073082-1, A09073082-2  
Serial number : Prototype  
Date of Test : September 08, 2023 ~ January 04, 2024  
Date of Report : January 04, 2024



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



FCC TEST REPORT	
FCC CFR 47 PART 15 C (15.249)	
Report Reference No. ....	: LCSA09073082ED
Date of Issue.....	: January 04, 2024
Testing Laboratory Name .....	: Shenzhen LCS Compliance Testing Laboratory Ltd..
Address.....	: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Testing Location Procedure.....	: Full application of Harmonised standards ■ Partial application of Harmonised standards □ Other standard testing method □
Applicant's Name.....	: Brivo Systems LLC
Address.....	: 7700 Old Georgetown Rd #300, Bethesda, MD 20814.
Standard .....	: FCC CFR 47 PART 15 C (15.249) ANSI C63.10: 2013
Test Report Form No.....	: LCSEMC-1.0
TRF Originator .....	: Shenzhen LCS Compliance Testing Laboratory Ltd.
Master TRF .....	: Dated 2011-03
<b>Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.</b> This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
Test Item Description.....	: Brivo Gateway
Trade Mark .....	: BRIVO
Test Model .....	: B-Gateway V5-M2
Ratings.....	: Input: 5V~3A or Battery:3.7V~3200mAh Adapter Input: 100-240V~, 50/60Hz, 0.4A Adapter Output: 5V~3A
Result .....	: Positive

Compiled by:

Vera Deng Administrator

Supervised by:

Cary Luo Technique principal

Approved by:

Gavin Liang Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity

**FCC -- TEST REPORT**

<b>Test Report No. :</b> LCSA09073082ED	<u>January 04, 2024</u> Date of issue
-----------------------------------------	------------------------------------------

Test Model.....	: B-Gateway V5-M2
EUT.....	: Brivo Gateway
<b>Applicant.....</b>	<b>: Brivo Systems LLC</b>
Address.....	: 7700 Old Georgetown Rd #300, Bethesda, MD 20814.
<b>Manufacturer.....</b>	<b>: Brivo Systems LLC</b>
Address.....	: 7700 Old Georgetown Rd #300, Bethesda, MD 20814.

<b>Test Result</b>	<b>Positive</b>
--------------------	-----------------

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



Revision History

Report Version	Issue Date	Revision Content	Revised By
000	January 04, 2024	Initial Issue	---



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>6</b>
1.1 Description of Device (EUT) .....	6
1.2. Support Equipment List .....	7
1.3. External IO .....	7
1.4. Description of Test Facility .....	7
1.5. Statement of the measurement uncertainty .....	7
1.6. Measurement Uncertainty .....	8
1.7. Description of Test Modes .....	8
<b>2. TEST METHODOLOGY .....</b>	<b>9</b>
2.1. EUT Configuration .....	9
2.2. EUT Exercise .....	9
2.3. General Test Procedures .....	9
2.4. Test Sample .....	9
<b>3. CONNECTION DIAGRAM OF TEST SYSTEM .....</b>	<b>10</b>
3.1. Justification .....	10
3.2. EUT Exercise Software .....	10
3.3. Special Accessories .....	10
3.4. Block Diagram & Schematics .....	10
3.5. Equipment Modifications .....	10
3.6. Test Setup .....	10
<b>4. SUMMARY OF TEST RESULTS .....</b>	<b>11</b>
<b>5. ANTENNA REQUIREMENT .....</b>	<b>12</b>
<b>6. POWER LINE CONDUCTED EMISSIONS .....</b>	<b>13</b>
<b>7. RADIATED EMISSION MEASUREMENT .....</b>	<b>17</b>
<b>8. RESULTS FOR BAND EDGE TESTING .....</b>	<b>26</b>
<b>9. 99% OCCUPIED BANDWIDTH AND 20 DB BANDWIDTH MEASUREMENT .....</b>	<b>32</b>
<b>10. LIST OF MEASURING EQUIPMENT .....</b>	<b>34</b>
<b>11. TEST SETUP PHOTOGRAPHS OF THE EUT .....</b>	<b>35</b>
<b>12. EXTERIOR PHOTOGRAPHS OF THE EUT .....</b>	<b>35</b>
<b>13. INTERIOR PHOTOGRAPHS OF THE EUT .....</b>	<b>35</b>





## 1. GENERAL INFORMATION

### 1.1 Description of Device (EUT)

EUT	: Brivo Gateway
Test Model	: B-Gateway V5-M2
Power Supply	: Input: 5V $\overline{=}$ 3A or Battery:3.7V $\overline{=}$ 3200mAh Adapter Input: 100-240V~, 50/60Hz, 0.4A Adapter Output: 5V $\overline{=}$ 3A
Hardware Version	: V2.4
Software Version	: V1.4.0

#### Bluetooth

Frequency Range	: 2402MHz-2480MHz
Bluetooth Channel Number	: 40 channels for Bluetooth V4.2 (DTS)
Bluetooth Channel Spacing	: 2MHz for Bluetooth V4.2 (DTS)
Bluetooth Modulation Type	: GFSK for Bluetooth V4.2 (DTS)
Bluetooth Version	: V4.2
Antenna Description	: PCB Antenna with UFL Connector & Cable, 3.0dBi(Max.)

#### 2.4G WLAN

Frequency Range	: 2412MHz-2462MHz
Channel Number	: 11 Channels for 20MHz bandwidth (2412~2462MHz)
Channel Spacing	: 5MHz
Modulation Type	: IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna Description	: PCB Antenna with UFL Connector & Cable, 3.0dBi(Max.)

#### Zigbee

Frequency Range	: 2405MHz-2480MHz
Channel Spacing	: 5MHz
Channel Number	: 16 Channels
Modulation Type	: O-QPSK
Antenna Description	: Chip Antenna, 1.86dBi(Max.)

#### Z-Wave

Frequency Range	: 908.4MHz,908.42MHz, 916MHz
Channel Number	: 3
Modulation Type	: (908.4MHz,908.42MHz) FSK (916MHz) GFSK
Antenna Description	: PCB Trace Antenna, 0dBi(Max)

#### Z-Wave

Frequency Range	: 912MHz,920MHz
-----------------	-----------------





Channel Number : 2  
Modulation Type : OQPSK  
Antenna Description : PCB Trace Antenna, 0dBi(Max)

## 1.2. Support Equipment List

Manufacturer	Description	Model	Serial Number	Certificate
Y&L ELECTRONICS(HK) CO.,LIMITED	Power Adapter	YL121-0503000VU	--	FCC

## 1.3. External IO

IO Port Description	Quantity	Cable
Ethernet Port	1	--
AC IN Port	1	--
MICRO SIM Port	1	--
MICRO USB Port	1	--

## 1.4. Description of Test Facility

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.

Test Firm Registration Number: 254912.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

## 1.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.







### 1.6. Measurement Uncertainty

Test Item		Frequency Range	Uncertainty	Note
Radiation Uncertainty	:	9KHz~30MHz	±3.10dB	(1)
	:	30MHz~200MHz	±2.96dB	(1)
	:	200MHz~1000MHz	±3.10dB	(1)
	:	1GHz~26.5GHz	±3.80dB	(1)
	:	26.5GHz~40GHz	±3.90dB	(1)
Conduction Uncertainty	:	150kHz~30MHz	±1.63dB	(1)
Power disturbance	:	30MHz~300MHz	±1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 1.7. Description of Test Modes

Operates in the unlicensed Band at 908.4MHz~916MHz. With basic data rate feature, by modulating the RF carrier using ASK techniques. The EUT works in the X-axis, Y-axis, Z-axis. The following operating modes were applied for the related test items. All test modes were tested, only the result of the worst case was recorded in the report.

Mode of Operations	Frequency Range (MHz)	Data Rate (Mbps)
FSK	908.4, 908.42	
GFSK	916	
For Conducted Emission		
Test Mode		TX Mode
For Radiated Emission		
Test Mode		TX Mode

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be TX.

AC conducted emission pre-test at both at AC 120V/60Hz and AC 240V/50Hz modes, recorded worst case at AC120V/60Hz;







## 2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10: 2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd.

### 2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.249 under the FCC Rules Part 15 Subpart C.

### 2.3. General Test Procedures

#### 2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### 2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz and 1.5 m above ground plane above 1GHz. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013.

### 2.4. Test Sample

The application provides 2 samples to meet requirement;

Sample Number	Description
Sample 1(A09073082-1)	Engineer sample – continuous transmit
Sample 2(A09073082-2)	Normal sample – Intermittent transmit





### 3. CONNECTION DIAGRAM OF TEST SYSTEM

#### 3.1. Justification

The system was configured for testing in a continuous transmit condition. Continuous transmitting was pre-programmed. It'll keep transmitting with modulated signal at the lowest channel by installing the batter. When press the "up" button, it'll move to the next channel. Repeat press "up" button, it'll transmitting at each of the channel used.

#### 3.2. EUT Exercise Software

Press the Page Up button.

#### 3.3. Special Accessories

NA

#### 3.4. Block Diagram & Schematics

Please refer to the related document

#### 3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

#### 3.6. Test Setup

Please refer to the test setup photo.





#### 4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart C §15.249		
FCC Rules	Description Of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207(a)	Power Line Conducted Emissions	Compliant
§15.205(a), §15.209(a), §15.249(a), §15.249(c)	Radiated Emissions Measurement	Compliant
§15.249 (d)	Band Edges Measurement	Compliant
§2.1049	99% and 20 dB Bandwidth	Compliant





## 5. ANTENNA REQUIREMENT

### 5.1. Standard Applicable

According to § 15.203 and RSS-Gen, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 5.2. Antenna Connected Construction

The EUT use PCB Trace Antenna and maximum antenna gain is 0dBi, antenna cannot replacement, meets FCC Part §15.203 antenna requirement. Please see EUT photo for details.

### 5.3. Results

Compliance





## 6. POWER LINE CONDUCTED EMISSIONS


### 6.1. Standard Applicable

According to §15.207 (a) & RSS-Gen § 8.8: For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

\* Decreasing linearly with the logarithm of the frequency

### 6.2. Block Diagram of Test Setup

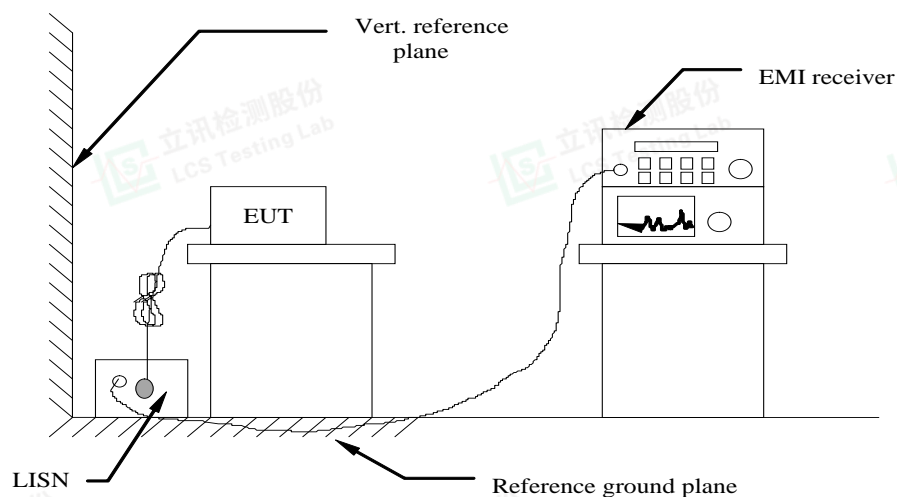

### 6.3. Disturbance Calculation

The AC mains conducted disturbance is calculated by adding the 10dB Pulse Limiter and Cable Factor and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$CD \text{ (dB}\mu\text{V)} = RA \text{ (dB}\mu\text{V)} + PL \text{ (dB)} + CL \text{ (dB)}$$

Where CD = Conducted Disturbance	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	PL = 10 dB Pulse Limiter Factor

### 6.4. Test Results





Temperature	24.5°C	Humidity	53.6%
Test Engineer	Taylor Hu	Configurations	


**PASS.**

The test data please refer to following page.



**AC Conducted Emission @ AC 120V60Hz (worst case)**

Line

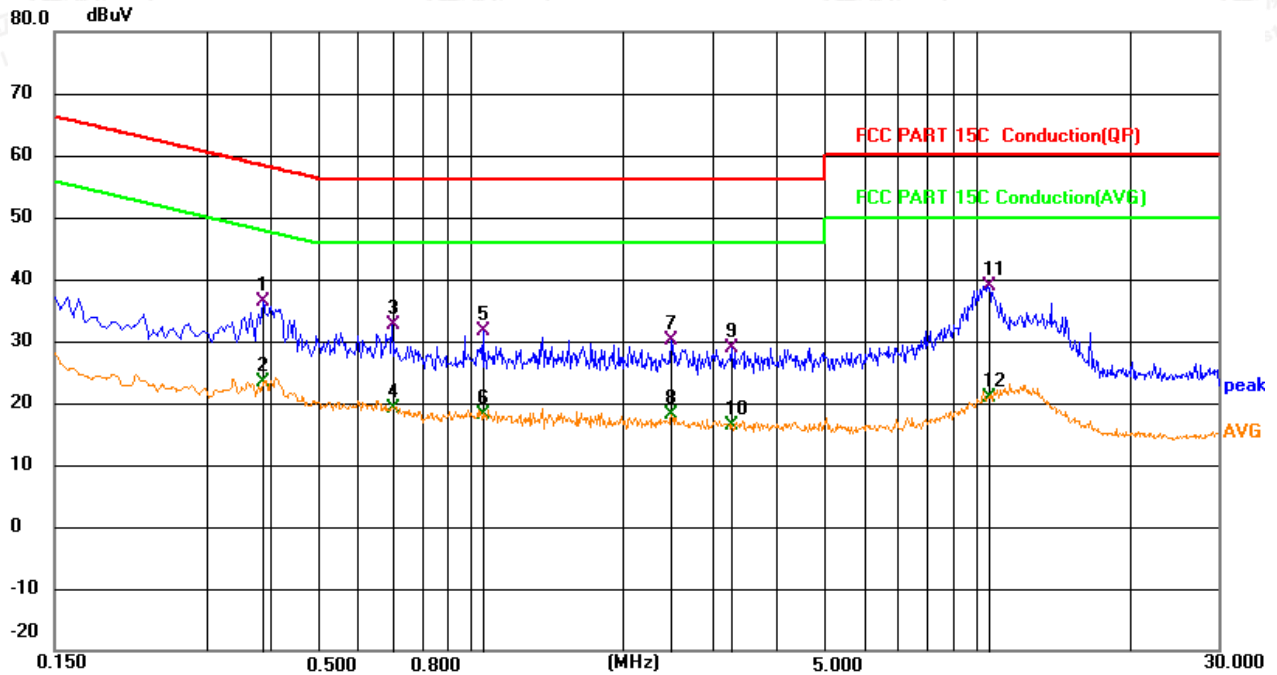

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.3886	16.81	19.63	36.44	58.09	-21.65	QP
2		0.3886	3.73	19.63	23.36	48.09	-24.73	AVG
3		0.6990	12.91	19.65	32.56	56.00	-23.44	QP
4		0.7035	-0.42	19.65	19.23	46.00	-26.77	AVG
5		1.0545	11.88	19.65	31.53	56.00	-24.47	QP
6		1.0545	-1.40	19.65	18.25	46.00	-27.75	AVG
7		2.4946	10.43	19.68	30.11	56.00	-25.89	QP
8		2.4946	-1.61	19.68	18.07	46.00	-27.93	AVG
9		3.2911	9.14	19.70	28.84	56.00	-27.16	QP
10		3.2911	-3.23	19.70	16.47	46.00	-29.53	AVG
11	*	10.5496	19.16	19.84	39.00	60.00	-21.00	QP
12		10.5496	1.11	19.84	20.95	50.00	-29.05	AVG



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





Neutral

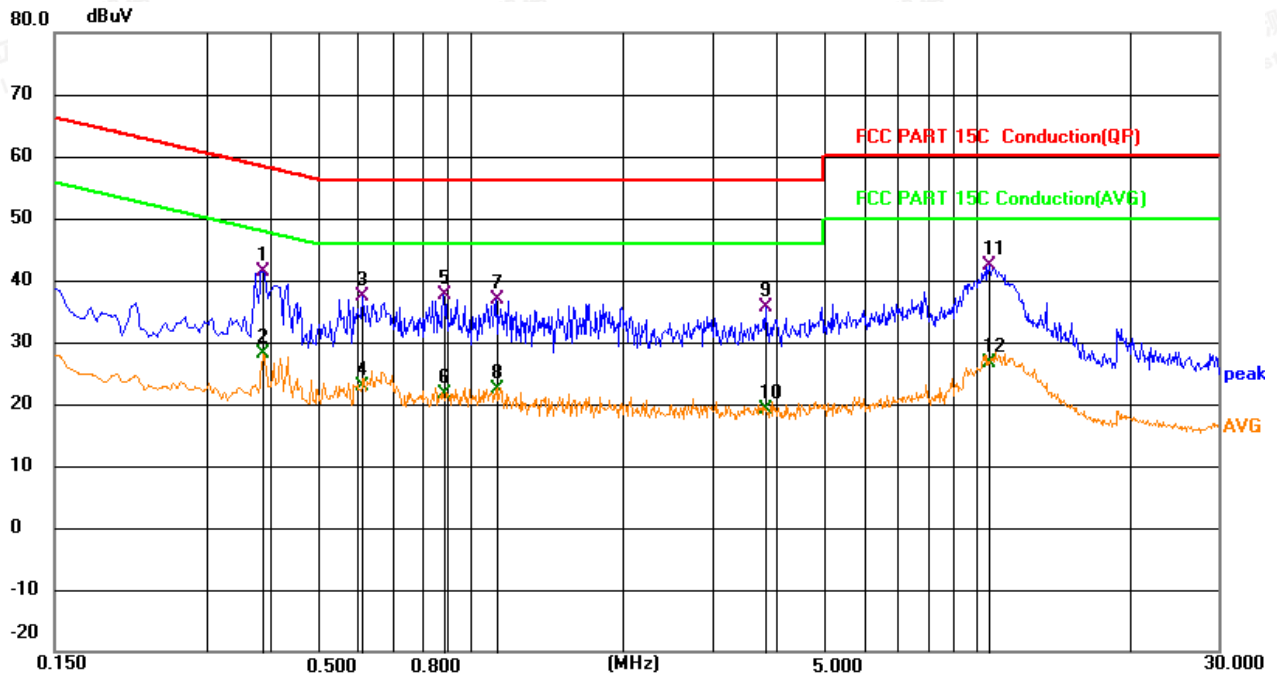

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
		MHz	dBuV	Factor	ment	dBuV	dB	Detector
1	*	0.3886	21.74	19.63	41.37	58.09	-16.72	QP
2		0.3886	8.56	19.63	28.19	48.09	-19.90	AVG
3		0.6091	17.68	19.66	37.34	56.00	-18.66	QP
4		0.6091	3.29	19.66	22.95	46.00	-23.05	AVG
5		0.8836	17.90	19.64	37.54	56.00	-18.46	QP
6		0.8836	2.03	19.64	21.67	46.00	-24.33	AVG
7		1.1176	17.12	19.65	36.77	56.00	-19.23	QP
8		1.1176	2.75	19.65	22.40	46.00	-23.60	AVG
9		3.8221	15.77	19.79	35.56	56.00	-20.44	QP
10		3.8221	-0.71	19.79	19.08	46.00	-26.92	AVG
11		10.6036	22.63	19.84	42.47	60.00	-17.53	QP
12		10.6036	6.72	19.84	26.56	50.00	-23.44	AVG

\*\*\*Note: Pre-scan all modes and recorded the worst case results in this report.  
Measurement = Reading + Correct Factor, Margin = Measurement - Limit,  
Correct Factor=Lisn Factor+Cable Factor.





## 7. RADIATED EMISSION MEASUREMENT

### 7.1. Standard Applicable

According to FCC § 15.249: Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) and 15.249 limit in the table below has to be followed.

Fundamental Frequency	Field Strength of fundamental (millivoltmeter)	Field Strength of harmonics (microvoltmeter)
902-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Frequencies (MHz)	Field Strength (microvoltmeter)	Measurement Distance (meters)
0.009~0.490	2400F(KHz)	300
0.490~1.705	24000F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

According to RSS-210 B.10:

The field strength of fundamental and harmonic emissions, measured at 3 m, shall not exceed 50 mV/m and 0.5 mV/m respectively.

The field strength limits shall be measured using an average detector, except for the fundamental emission in the frequency band 902-928 MHz, which is based on measurements using an International Special Committee on Radio Interference (CISPR) quasi-peak detector.

Emissions radiated outside of the specified frequency bands, except for harmonic emissions, shall be attenuated by at least 50 dB below the level of the fundamental emissions or to the general field strength limits listed in RSS-Gen, whichever is less stringent.

### 7.2. Instruments Setting

Please refer to equipment list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 <sup>th</sup> carrier harmonic
RB VB (Emission in restricted band)	1MHz 1MHz for Peak, 1 MHz 1B kHz for Average
RB VB (Emission in non-restricted band)	1MHz 1MHz for Peak, 1 MHz 1B kHz for Average



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz RBVB 200Hz1KHz for QPAVG
Start ~ Stop Frequency	150kHz~30MHz RBVB 9kHz30KHz for QPAVG
Start ~ Stop Frequency	30MHz~1000MHz RBVB 120kHz1MHz for QP
Start ~ Stop Frequency	1GHz~10GHz RBVB 1MHz3MHz for PK 1MHz10Hz for AV

### 7.3. Test Procedure

#### 1) Sequence of testing 9 kHz to 30 MHz

##### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

##### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.0 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

##### Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.





## 2) Sequence of testing 30 MHz to 1 GHz

### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.





### 3) Sequence of testing 1 GHz to 18 GHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.


#### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.







#### 7.4. Block Diagram of Test Setup

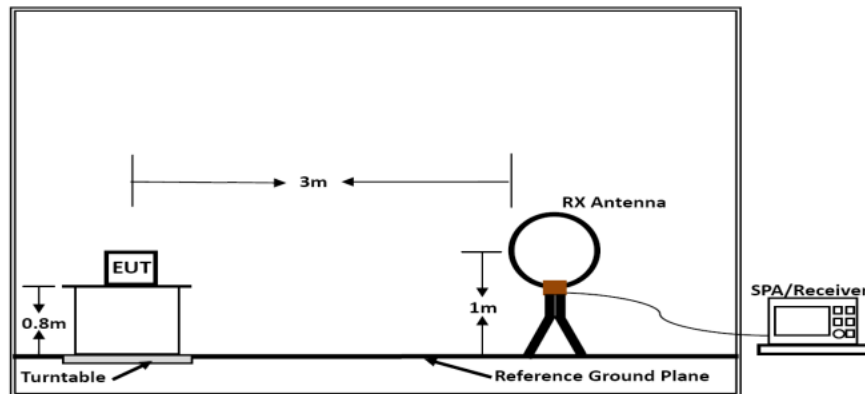

Below 30MHz

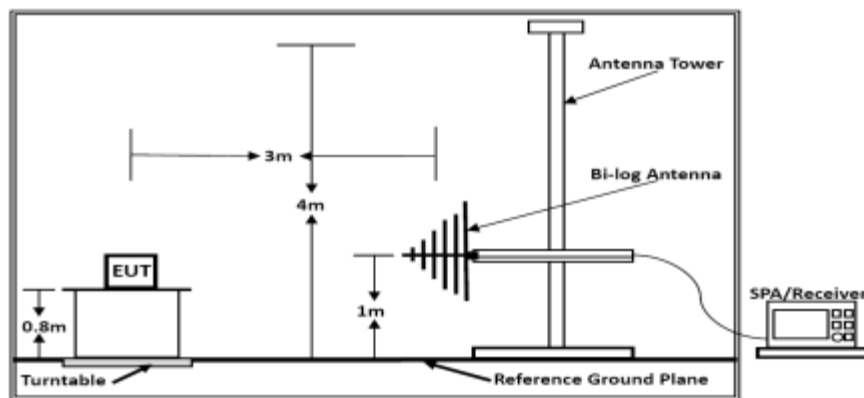

Below 1GHz

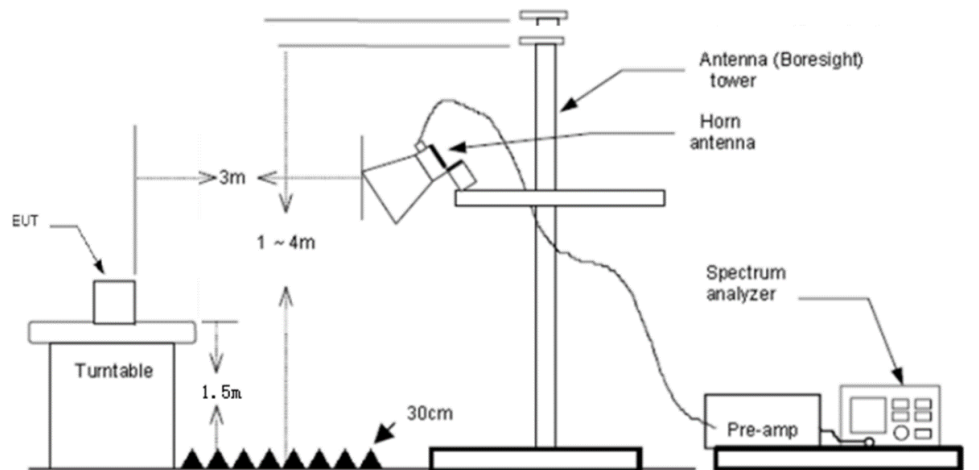

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB decade from 3m to 1m.

#### 7.5 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.







## 7.6. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS \text{ (dBuV/m)} = RA \text{ (dBuV)} + AF \text{ (dB/m)} + CL \text{ (dB)} - AG \text{ (dB)}$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

## 7.7. Test Results of Radiated Emissions (9 KHz~30 MHz)

Temperature	23.8℃	Humidity	52.1%
Test Engineer	Taylor Hu		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

### Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log$  (specific distance test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

## 7.8. Test Results of Radiated Emissions (30 MHz – 1000 MHz)


Temperature	23.8℃	Humidity	52.1%
Test Engineer	Taylor Hu		







## Horizontal

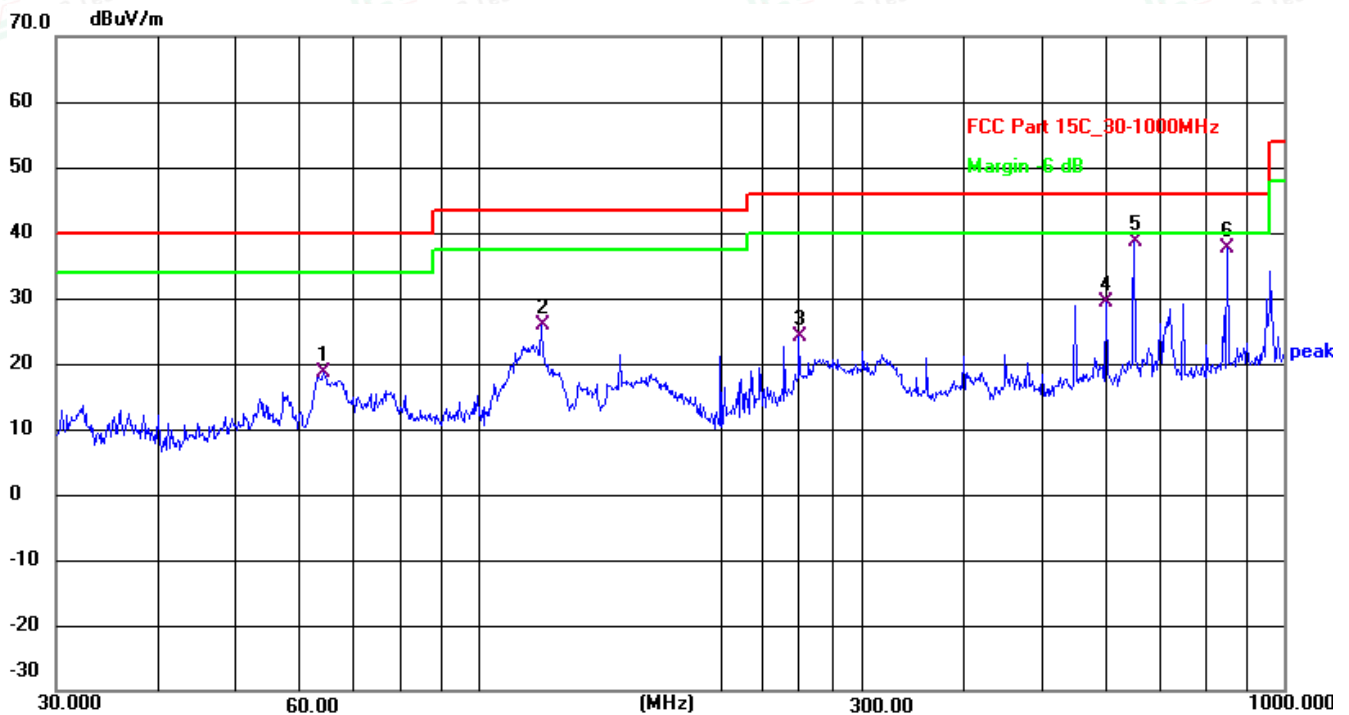

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	64.4330	37.78	-19.13	18.65	40.00	-21.35	QP
2	119.8556	45.85	-19.93	25.92	43.50	-17.58	QP
3	250.3011	39.62	-15.61	24.01	46.00	-21.99	QP
4	601.4265	39.93	-10.47	29.46	46.00	-16.54	QP
5	651.9417	49.72	-11.02	38.70	46.00	-7.30	QP
6	851.0353	46.55	-8.97	37.58	46.00	-8.42	QP



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Vertical

70.0 dBuV/m

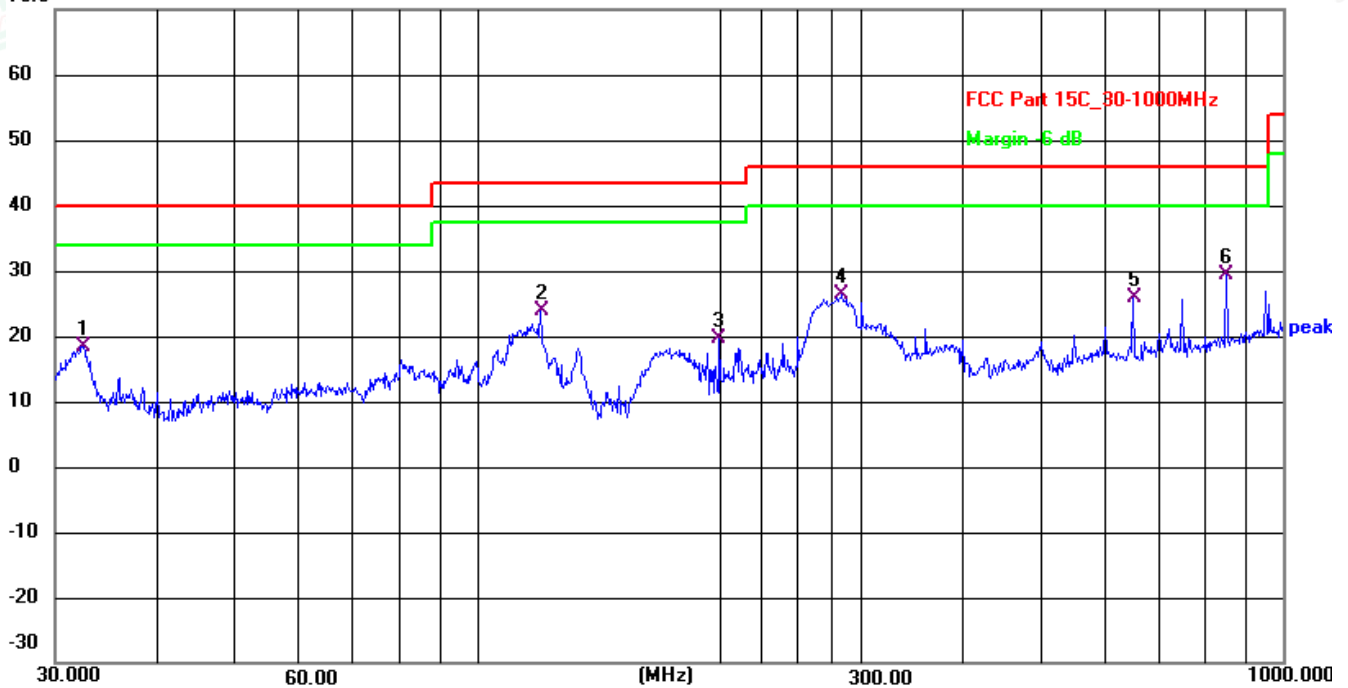

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	32.5197	36.60	-18.12	18.48	40.00	-21.52	QP
2	119.8556	43.90	-19.93	23.97	43.50	-19.53	QP
3	199.9855	37.14	-17.39	19.75	43.50	-23.75	QP
4	283.9791	41.78	-15.46	26.32	46.00	-19.68	QP
5	651.9417	36.98	-11.02	25.96	46.00	-20.04	QP
6	851.0353	38.24	-8.97	29.27	46.00	-16.73	QP

Note:

- 1). Pre-scan all modes and recorded the worst case results in this report (Low Channel).
- 2). Emission level (dBuVm) = 20 log Emission level (uVm).
- 3). Level = Reading + Factor, Margin = Level – Limit,  
Factor = Antenna Factor + Cable Loss - Preamp Factor





## 7.9. Results for Radiated Emissions (1 – 10 GHz)

## 908.4MHz

Freq. MHz	Reading Level dBuV	Ant. Fac. dBm	Pre. Fac. dB	Cab. Loss dB	Measured dBuVm	Limit dBuVm	Margin dB	Remark	Pol.
1816.80	57.48	33.06	35.04	3.94	59.44	74.00	-14.56	Peak	Horizontal
1816.80	41.48	33.06	35.04	3.94	43.44	54.00	-10.56	Average	Horizontal
1816.80	60.28	33.06	35.04	3.94	62.24	74.00	-11.76	Peak	Vertical
1816.80	45.39	33.06	35.04	3.94	47.35	54.00	-6.65	Average	Vertical

## 916MHz

Freq. MHz	Reading Level dBuV	Ant. Fac. dBm	Pre. Fac. dB	Cab. Loss dB	Measured dBuVm	Limit dBuVm	Margin dB	Remark	Pol.
1832.00	60.42	33.06	35.04	3.94	62.38	74.00	-11.62	Peak	Horizontal
1832.00	42.59	33.06	35.04	3.94	44.55	54.00	-9.45	Average	Horizontal
1832.00	60.03	33.06	35.04	3.94	61.99	74.00	-12.01	Peak	Vertical
1832.00	45.38	33.06	35.04	3.94	47.34	54.00	-6.66	Average	Vertical

Notes:

- 1). Measuring frequencies from 9 KHz - 10<sup>th</sup> harmonic (ex. 10GHz), No emission found between lowest internal used generated frequency to 30 MHz.
- 2). Radiated emissions measured in frequency range from 9 KHz - 10<sup>th</sup> harmonic (ex. 10GHz) were made with an instrument using Peak detector mode.
- 3).  $\text{Margin} = \text{Reading level} + \text{Cab loss} + \text{Ant Fac} - \text{Pre Fac} - \text{Limit}$ .






## 8. RESULTS FOR BAND EDGE TESTING

### 8.1. Standard Applicable

According to FCC §15.249 (d): Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

According to RSS-210 B.10 (b): Emissions radiated outside of the specified frequency bands, except for harmonic emissions, shall be attenuated by at least 50 dB below the level of the fundamental emissions or to the general field strength limits listed in RSS-Gen, whichever is less stringent.

### 8.2. Test Setup Layout

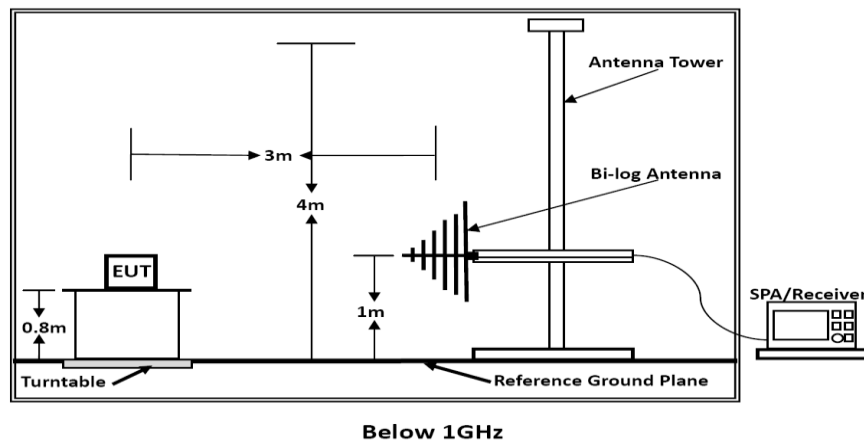

### 8.3. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of Spectrum Analyzer.

### 8.4. Test Procedures

#### 3) Sequence of testing 30MHz to 1000 MHz

##### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.





--- The EUT was set into operation.

#### Premeasurement:

--- The turntable rotates from 0° to 315° using 45° steps.

--- The antenna is polarized vertical and horizontal.

--- The antenna height changes from 1 to 3 meter.

--- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

#### Final measurement:

--- The final measurement will be performed with minimum the six highest peaks.

--- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.

--- The final measurement will be done with QP detector with an EMI receiver.

--- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

### 8.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS \text{ (dBuV/m)} = RA \text{ (dBuV)} + AF \text{ (dB/m)} + CL \text{ (dB)} - AG \text{ (dB)}$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

### 8.6. Measuring Instruments and Setting

Temperature	23.8°C	Humidity	52.5%
Test Engineer	Taylor Hu		

PASS

#### Remark:

The other emission levels were very low against the limit.

Detector PK is setting spectrum / receiver. RBW=100KHzVBW=300KHzSweep time=Auto Detector=Peak;


Please refer to following test plots;





908.4 MHz

Vertical

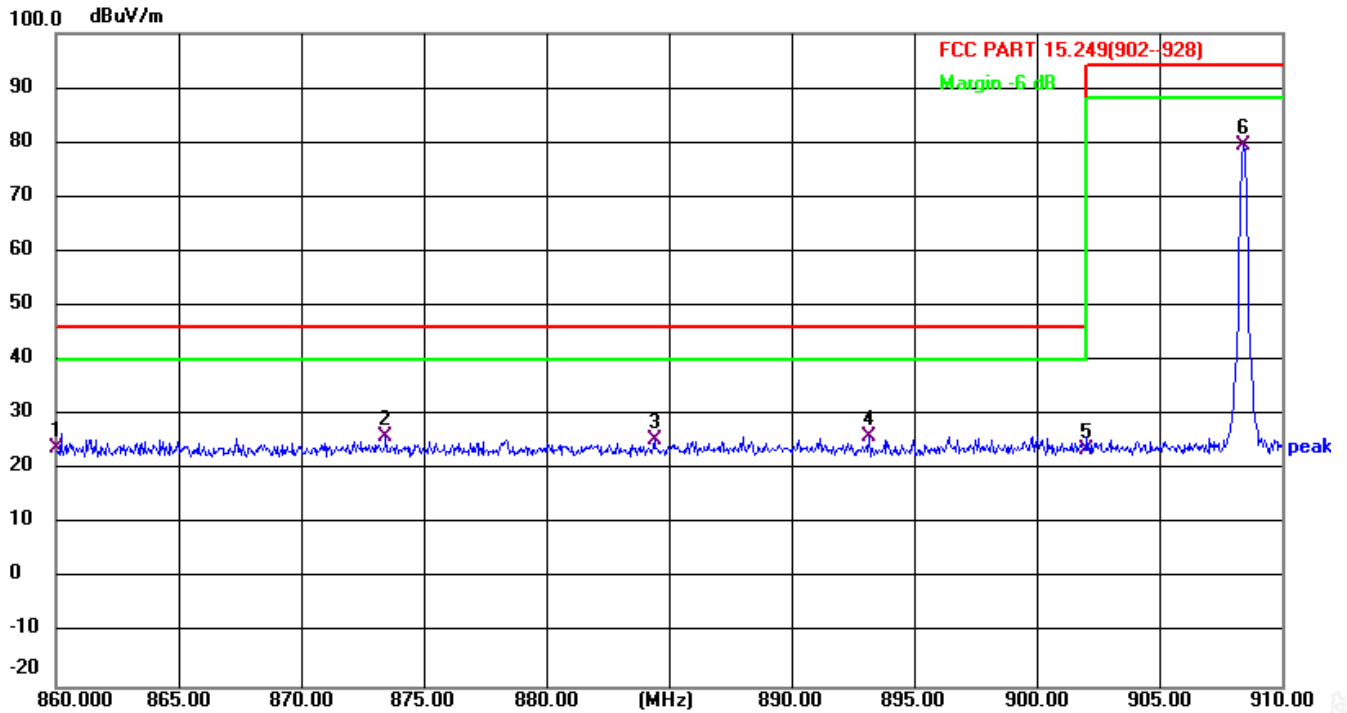

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	860.0000	32.80	-8.86	23.94	46.00	-22.06	QP
2	873.4500	34.63	-8.71	25.92	46.00	-20.08	QP
3	884.4000	34.09	-8.54	25.55	46.00	-20.45	QP
4	893.1500	34.41	-8.41	26.00	46.00	-20.00	QP
5	902.0000	32.00	-8.27	23.73	46.00	-22.27	QP
6	908.4000	87.58	-8.17	79.41	94.00	-14.59	QP



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





## Horizontal

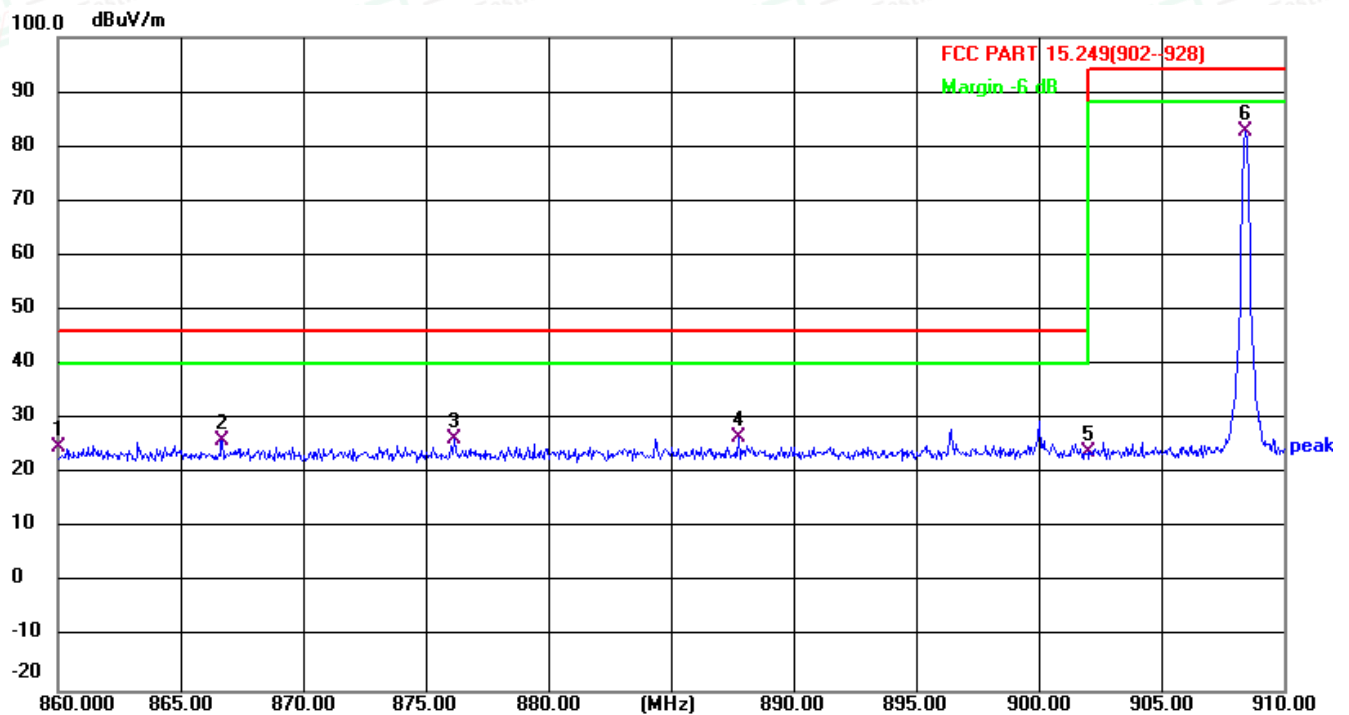

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	860.0000	33.59	-8.86	24.73	46.00	-21.27	QP
2	866.7000	34.86	-8.78	26.08	46.00	-19.92	QP
3	876.1500	35.14	-8.67	26.47	46.00	-19.53	QP
4	887.7500	35.14	-8.49	26.65	46.00	-19.35	QP
5	902.0000	32.12	-8.27	23.85	46.00	-22.15	QP
6	908.4000	90.79	-8.17	82.62	94.00	-11.38	QP



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity





916 MHz

Vertical

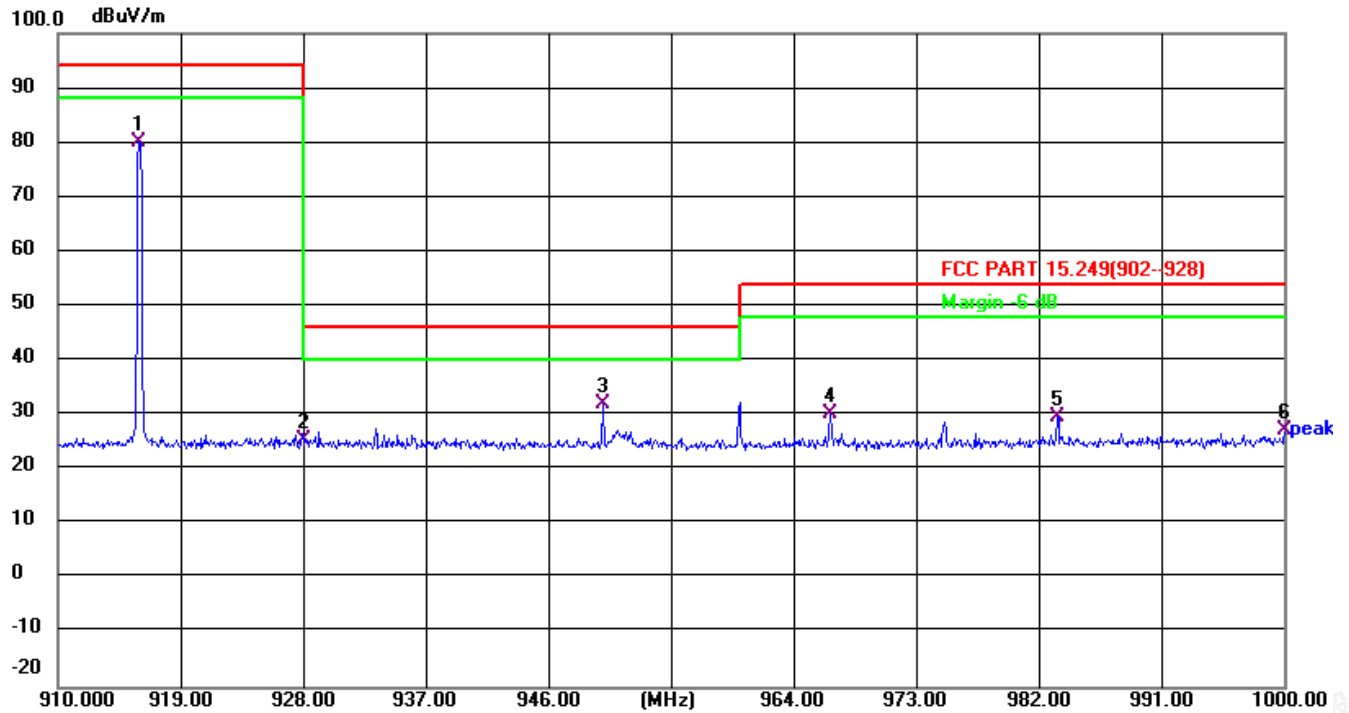

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	915.9400	88.04	-8.07	79.97	94.00	-14.03	QP
2	928.0000	33.27	-7.96	25.31	46.00	-20.69	QP
3	949.9600	40.29	-8.16	32.13	46.00	-13.87	QP
4	966.7000	38.19	-7.91	30.28	54.00	-23.72	QP
5	983.3500	37.34	-7.59	29.75	54.00	-24.25	QP
6	1000.0000	34.37	-7.22	27.15	54.00	-26.85	QP



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## Horizontal

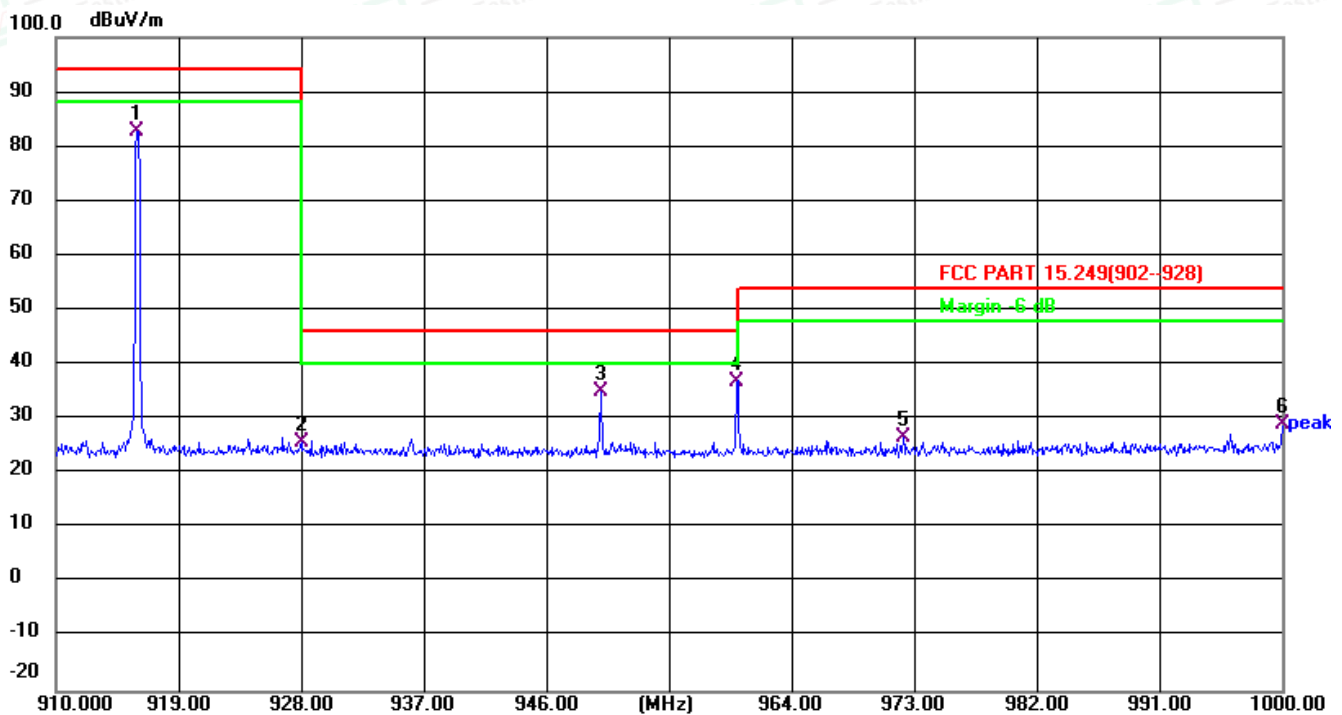

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	915.9400	90.83	-8.07	82.76	94.00	-11.24	QP
2	928.0000	33.66	-7.92	25.74	46.00	-20.26	QP
3	949.9600	42.85	-7.86	34.99	46.00	-11.01	QP
4	959.9500	44.53	-7.73	36.80	46.00	-9.20	QP
5	972.1900	34.15	-7.58	26.57	54.00	-27.43	QP
6	1000.0000	36.30	-7.22	29.08	54.00	-24.92	QP

## Notes:

- 1) Level (dBuV/m) = Reading + Factor;
- 2) Margin (dB) = Level - Limit;
- 3) Factor = Ant Fac - Pre Fac + Cab Loss.






## 9. 99% OCCUPIED BANDWIDTH AND 20 DB BANDWIDTH MEASUREMENT

### 9.1. Standard Applicable

According to § 2.1049 and RSS-Gen section 6.7 “The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.”

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

### 9.2. Block Diagram of Test Setup

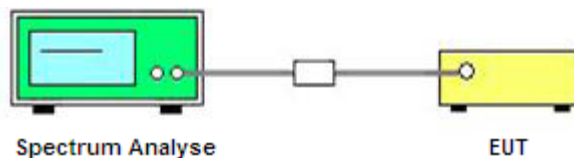

### 9.3. Test Procedure

Use the following spectrum analyzer settings:

Span = 200 kHz

RBW = 10 KHz

VBW = 30 KHz

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).






## 9.4. Test Results

Temperature	24.6°C	Humidity	54.1%
Test Engineer	Taylor Hu		

Test Result of 99% and 20dB Bandwidth Measurement			
Test Frequency (MHz)	20dB Bandwidth (KHz)	99% Bandwidth (KHz)	Limit (MHz)
908.4	80.93	91.592	Non-Specified
916	122.4	112.58	Non-Specified

Remark:

1. Test results including cable loss;
2. Please refer following test plots;

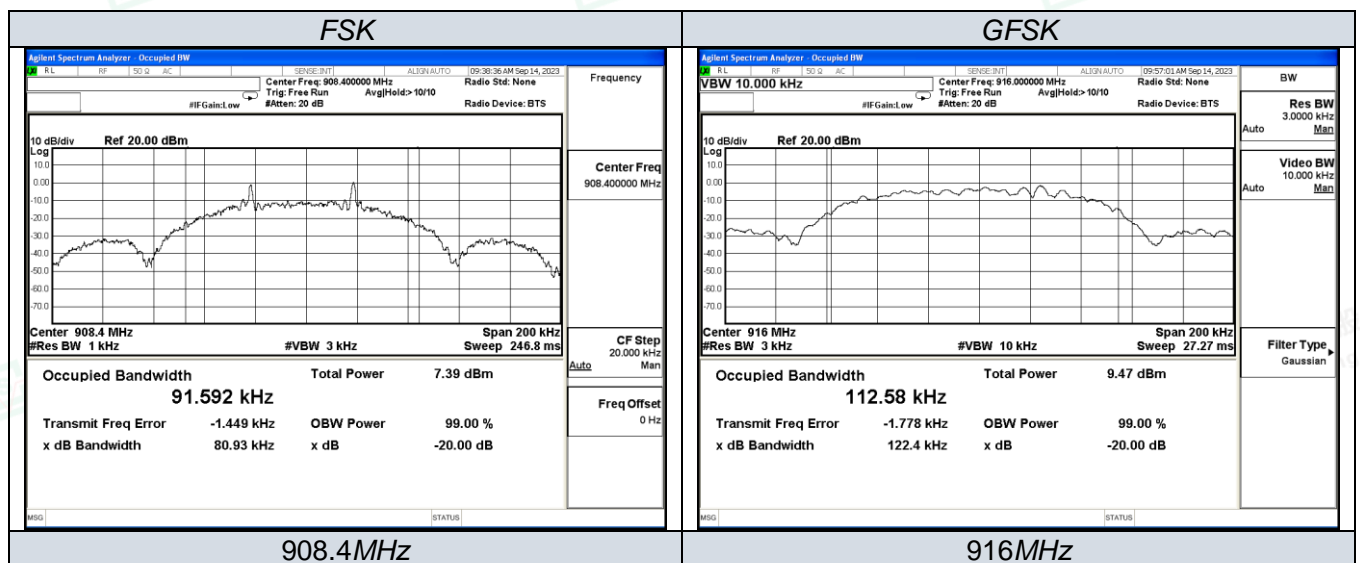



## 10. LIST OF MEASURING EQUIPMENT

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2022-10-29	2023-10-28
2	DC Power Supply	Agilent	E3642A	NA	2022-10-29	2023-10-28
3	Temperature & Humidity Chamber	GUANGZHOU GOGNWEN	GDS-100	70932	2022-10-06	2023-10-05
4	EMI Test Software	AUDIX	E3		NA	NA
5	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2023-06-09	2024-06-08
6	Positioning Controller	Max-Full	MF7802BS	MF780208586	NA	NA
7	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2021-08-29	2024-08-28
8	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2021-09-12	2024-09-11
9	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2021-09-05	2024-09-04
10	EMI Test Receiver	R&S	ESR 7	101181	2023-06-09	2024-06-08
11	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2022-10-29	2023-10-28
12	Broadband Preamplifier		BP-01M18G	P190501	2023-06-09	2024-06-08
13	EMI Test Receiver	R&S	ESPI	101940	2023-08-15	2024-08-14
14	Artificial Mains	R&S	ENV216	101288	2023-06-09	2024-06-08
15	10dB Attenuator	SCHWARZBECK	MTS-IMP-136	261115-001-0032	2023-06-09	2024-06-08
16	EMI Test Software	Farad	EZ		NA	NA
17	Antenna Mast	Max-Full	MFA-5158BSN	1308572	NA	NA





## 11. TEST SETUP PHOTOGRAPHS OF THE EUT

Please refer to separated files for LCSA09073082EA of the EUT.

## 12. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for LCSA09073082EA of the EUT.

## 13. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for LCSA09073082EA of the EUT.

-----THE END OF REPORT-----

