



11. Radiated Spurious Emission

11.1 Measurement Limit

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

NOTE:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Applicable to		Limit			
Restricted	789033 D02 General UNII Test	Field strength at 3m (dBuV/m)			
bands	Procedures New Rules v02r01	PK: 74	AV: 54		
	Applicable to	EIRP Limit (dBm/MHz)	Equivalent field Strength at 3m (dBuV/m)		
Out of the	FCC 15.407(b)(1)				
restricted bands	15.407(b)(2)	PK: -27	PK: 68.2		
	15.407(b)(3)				
	15.407(b)(4)	See Note 2			

Note 1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30 P}}{3} \mu V/m, \text{ where P is the eirp (Watts).}$$

Note 2: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



11.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting	
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP	
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP	
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP	

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.Section G) Unwanted emissions measurement.

<u>Procedure for Unwanted Emissions Measurements Below 1000MHz:</u>

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

<u>Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz:</u>

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

• Procedures for Average Unwanted Emissions Measurements Above 1000MHz:

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.


• VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

- <u>Procedures for Average Unwanted Emissions Measurements Above 1000MHz:</u>
 - RBW = 1 MHz
 - VBW = 3 MHz Detector = power averaging (rms), set span/(# of points in sweep) \geq RBW/2.
 - Averaging type = power averaging (RMS)
 - The correction factor shall be offset is $10 \log (1/x)$, where x is the duty cycle.




11.3 Measurement Setup (Block Diagram of Configuration)


Radiated Emission Test Setup 9kHz-30MHz

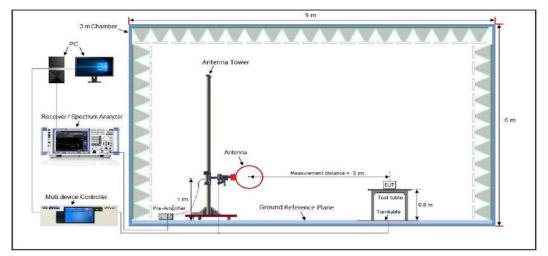

Radiated Emission Test Setup 30MHz-1000MHz

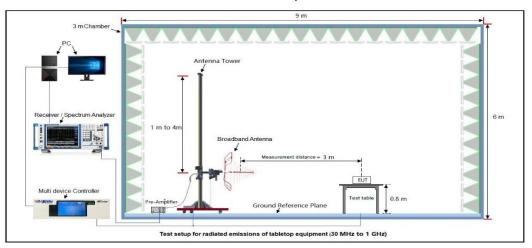

Radiated Emission Test Setup Above 1000MHz

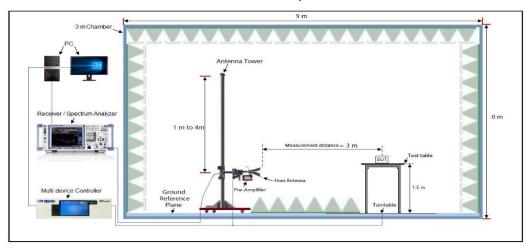

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com



11.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Radiated Emission Test Results at 30MHz-1GHz						
EUT Name	GPON WiFi6 2+2		Model Nar	ne	SG00	06D2VA
Temperature	19.4°C		Relative Humidity		49.5%	, 0
Pressure	960hPa		Test Volta	ge	DC 12	2V
Test Mode	802.11a_5260MHz		Antenna		Horizo	ontal
72.0 dBu∀/m						
32 8		handled medicated and the				in:
30.000 40	50 60 70 80	(MHz)	300	400 50	0 600 7	00 1000.000
No. Mk.	Freq. Reading Freq. Level	Correct Factor	Measure- ment dBuV/m	Limit (dBuV/m	Dver dB [Detector
1 2	78.0668 22.96	14.89	37.85	46.00 -	8.15	peak
2 3	11.0867 23.17	16.50	39.67	46.00 -	6.33	peak
3 * 3	38.4001 25.84	17.05	42.89	46.00 -	3.11	peak
4 4	38.6554 10.31	24.81	35.12	46.00 -1	0.88	peak
5 5	22.7180 11.24	25.02	36.26	46.00 -	9.74	peak
6 8	93.8567 6.05	31.03	37.08	46.00 -	8.92	peak

Radiated Emission Test Results at 30MHz-1GHz

Result: Pass



EUT Name	GPON WiFi6 2+2		Model Name)	SG0006D2\	/A
Temperature	19.4°C		Relative Humidity		49.5%	
Pressure	960hPa		Test Voltage)	DC 12V	
Test Mode	802.11a_5260MHz		Antenna		Vertical	
72.0 dBuV/m 32 -8 30.000 40 50		3 4 4 (MH 2)	300	5 5 400 500	Limit: Margin: 	.000
2 5 3 12 4 * 29 5 34	Freq.Reading LevelMHzdBuV42.899714.6457.999214.5523.698410.9490.017222.1349.250019.3341.74258.46	Factor	dBuV/m dBu 31.57 40. 31.63 40. 28.73 43. 40.78 46. 39.67 46.	uV/m d .00 -8. .00 -8. .50 -14 .00 -5. .00 -6.	ver B Detector 43 peak 37 peak 37 peak 22 peak 33 peak .52 peak	· · ·

Result: Pass

Note:

- 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.
- 2. All test modes had been pre-tested, Refer to Chapter 5 of the report for details.



EUT Name	GPON WiFi6 2+2	Model Name	SG0006D2VA
Temperature	19.4°C	Relative Humidity	49.5%
Pressure	960hPa	Test Voltage	DC 12V
Test Mode	802.11a_5180MHz	Antenna	Horizontal/Vertical

Radiated Emission Above 1GHz–Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type	
10360.042	48.61	9.14	57.75	68.20	-10.45	peak	
15540.063	42.56	10.22	52.78	74.00	-21.22	peak	
15540.063	31.35	10.22	41.57	54.00	-12.43	AVG	
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

Radiated Emission Above 1GHz–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10360.042	47.49	9.14	56.63	68.20	-11.57	peak
15540.063	41.53	10.22	51.75	74.00	-22.25	peak
15540.063	32.35	10.22	42.57	54.00	-11.43	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Result: Pass



EUT Name	GPON WiFi6 2+2	Model Name	SG0006D2VA			
Temperature	19.4°C	Relative Humidity	49.5%			
Pressure	960hPa	Test Voltage	DC 12V			
Test Mode	802.11a_5200MHz	Antenna	Horizontal/Vertical			

Radiated Emission Above 1GHz–Horizontal

Value Type						
peak						
pean						
peak						
AVG						
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Radiated Emission Above 1GHz–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10400.042	46.98	9.14	56.12	68.20	-12.08	peak
15600.063	40.35	10.22	50.57	74.00	-23.43	peak
15600.063	31.57	10.22	41.79	54.00	-12.21	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Result: Pass



EUT Name	GPON WiFi6 2+2	Model Name	SG0006D2VA				
Temperature	19.4°C	Relative Humidity	49.5%				
Pressure	960hPa	Test Voltage	DC 12V				
Test Mode	802.11a_5240MHz	Antenna	Horizontal/Vertical				

Radiated Emission Above 1GHz–Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin				
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- Value Type			
10480.042	48.24	9.27	57.51	68.20	-10.69	peak			
15720.063	42.97	10.38	53.35	74.00	-20.65	peak			
15720.063	32.56	10.38	42.94	54.00	-11.06	AVG			
Remark:	Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.									

Radiated Emission Above 1GHz–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin				
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- Value Type			
10480.042	48.33	9.27	57.60	68.20	-10.60	peak			
15720.063	42.89	10.38	53.27	74.00	-20.73	peak			
15720.063	31.94	10.38	42.32	54.00	-11.68	AVG			
Remark:									
Factor = Antenna Factor + Cable Loss – Pre-amplifier.									

Result: Pass



EUT Name	GPON WiFi6 2+2	Model Name	SG0006D2VA					
Temperature	19.4°C	Relative Humidity	49.5%					
Pressure	960hPa	Test Voltage	DC 12V					
Test Mode	802.11a_5260MHz	Antenna	Horizontal/Vertical					

Radiated Emission Above 1GHz–Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
10520.022	48.61	9.14	57.75	68.20	-10.45	peak		
15780.054	42.37	10.22	52.59	74.00	-21.41	peak		
15780.054	31.56	10.22	41.78	54.00	-12.22	AVG		
Remark:								
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

Radiated Emission Above 1GHz–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
10520.022	47.56	9.14	56.70	68.20	-11.50	peak			
15780.054	41.09	10.22	51.31	74.00	-22.69	peak			
15780.054	32.33	10.22	42.55	54.00	-11.45	AVG			
Remark:	Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.									

Result: Pass



EUT Name	GPON WiFi6 2+2	Model Name	SG0006D2VA						
Temperature	19.4°C	Relative Humidity	49.5%						
Pressure	960hPa	Test Voltage	DC 12V						
Test Mode	802.11a_5300MHz	Antenna	Horizontal/Vertical						

Radiated Emission Above 1GHz–Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
10600.022	47.56	9.14	56.70	74.00	-17.30	peak		
10600.022	37.52	9.14	46.66	54.00	-7.34	AVG		
15900.045	42.16	10.22	52.38	74.00	-21.62	peak		
15900.045	31.35	10.22	41.57	54.00	-12.43	AVG		
Remark:								
actor = Anter	na Factor + Cabl	e Loss – Pre-	amplifier.					

Radiated Emission Above 1GHz–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10600.022	47.59	9.14	56.73	74.00	-17.27	peak
10600.022	37.54	9.14	46.68	54.00	-7.32	AVG
15900.045	41.26	10.22	51.48	74.00	-22.52	peak
15900.045	31.58	10.22	41.80	54.00	-12.20	AVG
Domorki						
Remark:						
actor = Anter	na Factor + Cabl	e Loss – Pre-a	amplifier.			

Result: Pass



EUT Name	GPON WiFi6 2+2	Model Name	SG0006D2VA
Temperature	19.4°C	Relative Humidity	49.5%
Pressure	960hPa	Test Voltage	DC 12V
Test Mode	802.11a_5320MHz	Antenna	Horizontal/Vertical

Radiated Emission Above 1GHz–Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
10640.015	47.49	9.14	56.63	74.00	-17.37	peak		
10640.015	37.53	9.14	46.67	54.00	-7.33	AVG		
15900.045	41.36	10.22	51.58	74.00	-22.42	peak		
15900.045	31.52	10.22	41.74	54.00	-12.26	AVG		
Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

Radiated Emission Above 1GHz–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10640.015	47.61	9.14	56.75	74.00	-17.25	peak
10640.015	32.54	9.14	41.68	54.00	-12.32	AVG
15900.045	41.35	10.22	51.57	74.00	-22.43	peak
15900.045	32.36	10.22	42.58	54.00	-11.42	AVG
Remark:						
actor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.			

Result: Pass



EUT Name	GPON WiFi6 2+2	Model Name	SG0006D2VA
Temperature	19.4°C	Relative Humidity	49.5%
Pressure	960hPa	Test Voltage	DC 12V
Test Mode	802.11a_5500MHz	Antenna	Horizontal/Vertical

Radiated Emission Above 1GHz–Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
11000.056	48.61	9.14	57.75	74.00	-16.25	peak
11000.056	36.91	9.14	46.05	54.00	-7.95	AVG
16500.023	41.58	10.22	51.80	68.20	-16.40	peak
Remark:						
	nna Factor + Cable	e Loss – Pre-	amplifier.			

Radiated Emission Above 1GHz–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
11000.056	47.65	9.14	56.79	74.00	-17.21	peak		
11000.056	36.24	9.14	45.38	54.00	-8.62	AVG		
16500.023	41.98	10.22	52.20	68.20	-16.00	peak		
Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

Result: Pass



EUT Name	GPON WiFi6 2+2	Model Name	SG0006D2VA
Temperature	19.4°C	Relative Humidity	49.5%
Pressure	960hPa	Test Voltage	DC 12V
Test Mode	802.11a_5600MHz	Antenna	Horizontal/Vertical

Radiated Emission Above 1GHz–Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
11200.022	47.62	9.14	56.76	74.00	-17.24	peak			
11200.022	37.51	9.14	46.65	54.00	-7.35	AVG			
16800.025	42.19	10.22	52.41	68.20	-15.79	peak			
Pomork:									
	Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.									

Radiated Emission Above 1GHz–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
11200.022	47.59	9.14	56.73	74.00	-17.27	peak		
11200.022	31.24	9.14	40.38	54.00	-13.62	AVG		
16800.025	41.58	10.22	51.80	68.20	-16.40	peak		
Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

Result: Pass



EUT Name	GPON WiFi6 2+2	Model Name	SG0006D2VA				
Temperature	19.4°C	Relative Humidity	49.5%				
Pressure	960hPa	Test Voltage	DC 12V				
Test Mode	802.11a_5700MHz	Antenna	Horizontal/Vertical				

Radiated Emission Above 1GHz–Horizontal

	Factor	Emission Level	Limits	Margin	Value Type
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
47.16	9.14	56.30	74.00	-17.70	peak
36.97	9.14	46.11	54.00	-7.89	AVG
42.34	10.22	52.56	68.20	-15.64	peak
	D				
Factor + Cable	Loss – Pre-a	ampillier.			
	47.16 36.97 42.34	47.16 9.14 36.97 9.14 42.34 10.22	47.16 9.14 56.30 36.97 9.14 46.11	47.16 9.14 56.30 74.00 36.97 9.14 46.11 54.00 42.34 10.22 52.56 68.20	47.16 9.14 56.30 74.00 -17.70 36.97 9.14 46.11 54.00 -7.89 42.34 10.22 52.56 68.20 -15.64

Radiated Emission Above 1GHz–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
11400.025	47.98	9.14	57.12	74.00	-16.88	peak		
11400.025	37.54	9.14	46.68	54.00	-7.32	AVG		
17100.056	41.35	10.22	51.57	68.20	-16.63	peak		
Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

Result: Pass



EUT Name	GPON WiFi6 2+2	Model Name	SG0006D2VA				
Temperature	19.4°C	Relative Humidity	49.5%				
Pressure	960hPa	Test Voltage	DC 12V				
Test Mode	802.11a_5745MHz	Antenna	Horizontal/Vertical				

Radiated Emission Above 1GHz–Horizontal

Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
48.61	9.42	58.03	74.00	-15.97	peak
37.52	9.42	46.94	54.00	-7.06	AVG
41.65	10.51	52.16	68.20	-16.04	peak
ma Fastar I Cabla		a na mlifi a m			
ina Factor + Cable	e Loss – Pre-	ampillier.			
	(dBµV) 48.61 37.52 41.65	(dBµV) (dB) 48.61 9.42 37.52 9.42 41.65 10.51	(dBµV) (dB) (dBµV/m) 48.61 9.42 58.03 37.52 9.42 46.94	(dBµV) (dB) (dBµV/m) (dBµV/m) 48.61 9.42 58.03 74.00 37.52 9.42 46.94 54.00 41.65 10.51 52.16 68.20	(dBµV) (dB) (dBµV/m) (dBµV/m) (dB) 48.61 9.42 58.03 74.00 -15.97 37.52 9.42 46.94 54.00 -7.06 41.65 10.51 52.16 68.20 -16.04

Radiated Emission Above 1GHz–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
11490.042	47.65	9.42	57.07	74.00	-16.93	peak			
11490.042	38.51	9.42	47.93	54.00	-6.07	AVG			
17235.063	42.61	10.51	53.12	68.20	-15.08	peak			
Remark:	Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.									

Result: Pass



EUT Name	GPON WiFi6 2+2	Model Name	SG0006D2VA				
Temperature	19.4°C	Relative Humidity	49.5%				
Pressure	960hPa	Test Voltage	DC 12V				
Test Mode	802.11a_5785MHz	Antenna	Horizontal/Vertical				

Radiated Emission Above 1GHz–Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11570.042	47.95	9.42	57.37	74.00	-16.63	peak
11570.042	38.62	9.42	48.04	54.00	-5.96	AVG
17355.063	42.34	10.51	52.85	68.20	-15.35	peak
Domorly						
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Radiated Emission Above 1GHz–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11570.042	48.62	9.42	58.04	74.00	-15.96	peak
11570.042	37.53	9.42	46.95	54.00	-7.05	AVG
17355.063	41.95	10.51	52.46	68.20	-15.74	peak
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Result: Pass



EUT Name	GPON WiFi6 2+2	Model Name	SG0006D2VA
Temperature	19.4°C	Relative Humidity	49.5%
Pressure	960hPa	Test Voltage	DC 12V
Test Mode	802.11a_5825MHz	Antenna	Horizontal/Vertical

Radiated Emission Above 1GHz–Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11650.042	47.62	9.62	57.24	74.00	-16.76	peak
11650.042	38.54	9.62	48.16	54.00	-5.84	AVG
17475.063	41.06	10.75	51.81	68.20	-16.39	peak
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Radiated Emission Above 1GHz–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11650.042	48.62	9.62	58.24	74.00	-15.76	peak
11650.042	37.54	9.62	47.16	54.00	-6.84	AVG
17475.063	42.35	10.75	53.10	68.20	-15.10	peak
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Result: Pass

Note:

- 1. The amplitude of other spurious emissions from 1GHz to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Amplifier gain, Margin=Measure Result-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.
- 4. All test modes had been pre-tested. Refer to Chapter 5 of the report for details.




EUT Name	GPON WiFi6 2+2	Model Name	SG0006D2VA	
Temperature	20.8°C	Relative Humidity	37.4%	
Pressure	960hPa	Test Voltage	DC 12V	
Test Mode	802.11a_5180MHz	Antenna	Horizontal	

Test Result for Band edge Emission at Restricted bands

Test Graph for Peak Measurement



Test Graph for Average Measurement

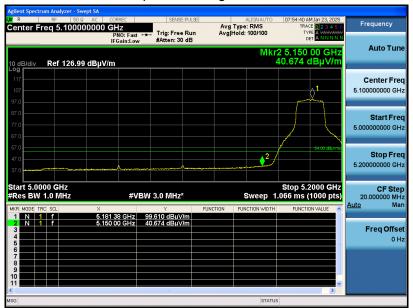

Result: Pass




EUT Name	GPON WiFi6 2+2	Model Name	SG0006D2VA
Temperature	20.8°C	Relative Humidity	37.4%
Pressure	960hPa	Test Voltage	DC 12V
Test Mode	802.11a_5180MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

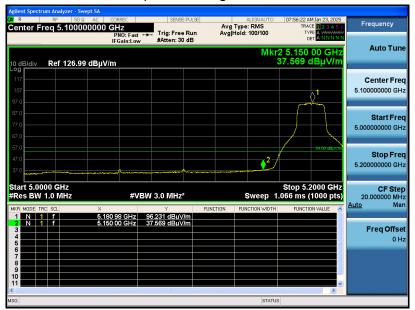

Result: Pass




EUT Name	GPON WiFi6 2+2	Model Name	SG0006D2VA		
Temperature	20.8°C	Relative Humidity	37.4%		
Pressure	960hPa	Test Voltage	DC 12V		
Test Mode	802.11n40_5190MHz	Antenna	Horizontal		

Test Result for Band edge Emission at Restricted bands

Test Graph for Peak Measurement



Test Graph for Average Measurement

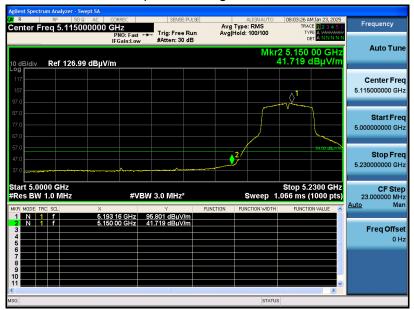

Result: Pass




EUT Name	GPON WiFi6 2+2	Model Name	SG0006D2VA
Temperature	20.8°C	Relative Humidity	37.4%
Pressure	960hPa	Test Voltage	DC 12V
Test Mode	802.11n40_5190MHz	Antenna	Vertical

Test Result for Band edge Emission at Restricted bands

Test Graph for Peak Measurement



Test Graph for Average Measurement

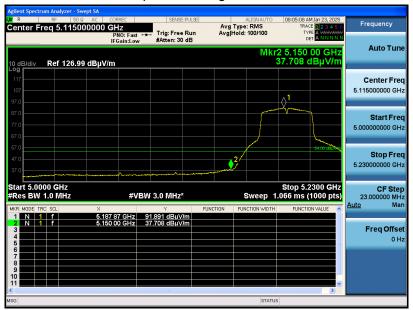

Result: Pass




EUT Name	GPON WiFi6 2+2	Model Name	SG0006D2VA
Temperature	20.8°C	Relative Humidity	37.4%
Pressure	960hPa	Test Voltage	DC 12V
Test Mode	802.11ac80_5210MHz	Antenna	Horizontal

If fan Dawyl a dwa Englanian of Daafniafad haw da

Test Graph for Peak Measurement



Test Graph for Average Measurement

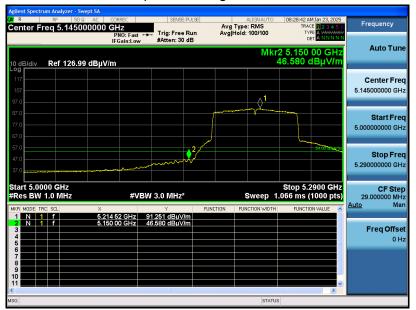

Result: Pass



EUT Name	GPON WiFi6 2+2	Model Name	SG0006D2VA
Temperature	20.8°C	Relative Humidity	37.4%
Pressure	960hPa	Test Voltage	DC 12V
Test Mode	802.11ac80_5210MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



Result: Pass