


# TEST REPORT

Report No.....: **CHEW21050010** Report Verification: 

Project No.....: **SHT2104078804EW**

FCC ID.....: **2ASNSRT48**

Applicant's name.....: **Shenzhen Retevis Technology Co., Ltd.**

Address.....: Room 700, 7/F, 13-C, Zhonghaixin Science&Technology Park,  
No.12 Ganli 6th Road, Jihua Street, Longgang District, Shenzhen,  
China

Test item description.....: **Walkie Talkie**

Trade Mark.....: RETEVIS

Model/Type reference.....: RT48

Listed Model(s).....: -

Standard.....: **FCC CFR Title 47 Part 15 Subpart B**

Date of receipt of test sample.....: Apr.22, 2021

Date of testing.....: Apr.22, 2021- May 06, 2021

Date of issue.....: May 07, 2021

Result.....: **PASS**

Compiled by  
( position+printed name+signature)...: File administrators Echo Wei

*Echo Wei*

Supervised by  
( position+printed name+signature)...: Project Engineer Cheng Xiao

*Cheng Xiao*

Approved by  
( position+printed name+signature)...: RF Manager Hans Hu

*Hans Hu*

Testing Laboratory Name .....: **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address.....: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao,  
Gongming, Shenzhen, China

**Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

*The test report merely corresponds to the test sample.*

## Contents

<b><u>1.</u></b>	<b><u>TEST STANDARDS AND REPORT VERSION.....</u></b>	<b><u>3</u></b>
1.1.	Test Standards	3
1.2.	Report version	3
<b><u>2.</u></b>	<b><u>TEST DESCRIPTION .....</u></b>	<b><u>4</u></b>
<b><u>3.</u></b>	<b><u>SUMMARY .....</u></b>	<b><u>5</u></b>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Radio Specification Description	5
3.4.	Testing Laboratory Information	6
<b><u>4.</u></b>	<b><u>TEST CONFIGURATION .....</u></b>	<b><u>7</u></b>
4.1.	EUT operation mode	7
4.2.	Support unit used in test configuration	7
4.3.	Environmental conditions	7
4.4.	Statement of the measurement uncertainty	7
4.5.	Equipments Used during the Test	8
<b><u>5.</u></b>	<b><u>TEST CONDITIONS AND RESULTS .....</u></b>	<b><u>9</u></b>
5.1.	Conducted Emissions	9
5.2.	Radiated Emissions	12
5.3.	Antenna conducted power for reciver	16
5.4.	Sanning receivers and frequency converters used with sanning receviers	18
<b><u>6.</u></b>	<b><u>TEST SETUP PHOTOS OF THE EUT .....</u></b>	<b><u>19</u></b>
<b><u>7.</u></b>	<b><u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT .....</u></b>	<b><u>20</u></b>

## 1. TEST STANDARDS AND REPORT VERSION

### 1.1. Test Standards

The tests were performed according to following standards:

[FCC CFR Title 47 Part 15 Subpart B](#) - Unintentional Radiators

[ANSI C63.4: 2014](#) – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz

### 1.2. Report version

Revision No.	Date of issue	Description
N/A	2021-05-07	Original

## 2. TEST DESCRIPTION

Test Item	Section in CFR 47	Result	Test Engineer
Conducted Emissions	15.107(a)	Pass	Quanhai Deng
Radiated Emissions	15.109(a)	Pass	Hongtao Meng
Antenna conducted power for receiver	15.111	Pass	Zijian Li
Scanning receivers and frequency converters used with scanning receivers	15.121(b)	N/A <sup>#1</sup>	-

Note:

1. The measurement uncertainty is not included in the test result.

#1, The scanning receive frequency range of this EUT is from 462.5500MHz to 462.7250MHz, not in the cellular radiotelephone service frequency bands, so this item is not applicable.

### 3. SUMMARY

#### 3.1. Client Information

Applicant:	Shenzhen Retevis Technology Co., Ltd.
Address:	Room 700, 7/F, 13-C, Zhonghaixin Science&Technology Park, No.12 Ganli 6th Road, Jihua Street, Longgang District, Shenzhen, China
Manufacturer:	Shenzhen Retevis Technology Co., Ltd.
Address:	Room 700, 7/F, 13-C, Zhonghaixin Science&Technology Park, No.12 Ganli 6th Road, Jihua Street, Longgang District, Shenzhen, China

#### 3.2. Product Description

Main unit	
Name of EUT:	Walkie Talkie
Trade Mark:	RETEVIS
Model/Type reference:	RT48
Listed Model(s)	-
Power supply:	DC 3.7V
Hardware version:	KA2U-2001-V1.1
Software version:	S198_9V2A.hex
Ancillary unit	
Battery information:	Model: BL48 DC 3.7V 1200mAh(4.44Wh)
Rapid charger information:	Model: DC48 Input: DC5V 1A Output: DC4.2V 500mA
Adapter information:	Model: DSA-5PF07-05 FUS 050100 Input: 100-240Va.c.,50/60Hz 0.2A Output:5Vd.c.,1A

#### 3.3. Radio Specification Description

Support Frequency Range:	462.5500MHz-462.7250MHz
Modulation Type:	FM
Emission Designator:	11K0F3E
Antenna Type:	Integral
Antenna Gain:	2.15dBi

### 3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	
Connect information:	Tel: 86-755-26715499 E-mail: <a href="mailto:cs@szhtw.com.cn">cs@szhtw.com.cn</a> <a href="http://www.szhtw.com.cn">http://www.szhtw.com.cn</a>	
Qualifications	Type	Accreditation Number
	FCC	762235

## 4. TEST CONFIGURATION

### 4.1. EUT operation mode

Test mode	Describe
Charging mode	Keep the EUT in charging mode, but the EUT shut down.
Scan receive mode	Scanning stopped, receiving signal at 462.6375MHz

Test item	Test mode
Conducted emissions	Charging mode
Radiated emissions	Charging mode, scan receive mode
Antenna conducted power for receiver	scan receive mode
Scanning receivers and frequency converters used with scanning receivers	scan receive mode

Only show the test data for worse case mode on the test report.

### 4.2. Support unit used in test configuration

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?					
No					
Item	Equipment	Trade Name	Model No.	FCC ID	Power cord
1					
2					

### 4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

### 4.4. Statement of the measurement uncertainty

Test	Frequency range	Measurement uncertainty
Radiated Emission	30~1000MHz	4.90 dB
Radiated Emission	1~18GHz	4.96 dB
Conducted Disturbance	0.15~30MHz	3.02 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

#### 4.5. Equipments Used during the Test

● Conducted Emission							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Shielded Room	Albatross projects	HTWE0114	N/A	N/A	2018/09/28	2023/09/27
●	EMI Test Receiver	R&S	HTWE0111	ESCI	101247	2020/10/19	2021/10/18
●	Artificial Mains	SCHWARZBECK	HTWE0113	NNLK 8121	573	2020/10/15	2021/10/14
●	Pulse Limiter	R&S	HTWE0033	ESH3-Z2	100499	2020/10/15	2021/10/14
●	RF Connection Cable	HUBER+SUHNER	HTWE0113-02	ENVIROFLEX_142	EF-NM-BNCM-2M	2020/10/15	2021/10/14
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated Emission-6th test site							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2018/09/30	2021/09/29
●	EMI Test Receiver	R&S	HTWE0099	ESCI	100900	2020/10/19	2021/10/18
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0119	VULB9163	546	2020/04/28	2023/04/27
●	Pre-Amplifier	SCHWARZBECK	HTWE0295	BBV 9742	N/A	2020/11/13	2021/11/12
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-01	N/A	N/A	2020/05/27	2021/05/26
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-02	SUCOFLEX104	501184/4	2020/05/27	2021/05/26
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated emission-7th test site							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	N/A	2018/09/27	2021/09/26
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2020/10/20	2021/10/19
●	Horn Antenna	SCHWARZBECK	HTWE0126	9120D	1011	2020/04/01	2023/03/31
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2020/05/23	2021/05/22
●	RF Connection Cable	HUBER+SUHNER	HTWE0121-01	RE-7-FH	N/A	2021/05/09	2022/05/08
●	Test Software	Audix	N/A	E3	N/A	N/A	N/A



## 5. TEST CONDITIONS AND RESULTS

### 5.1. Conducted Emissions


#### LIMIT

FCC CFR Title 47 Part 15 Subpart B Section 15.107:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

#### TEST CONFIGURATION

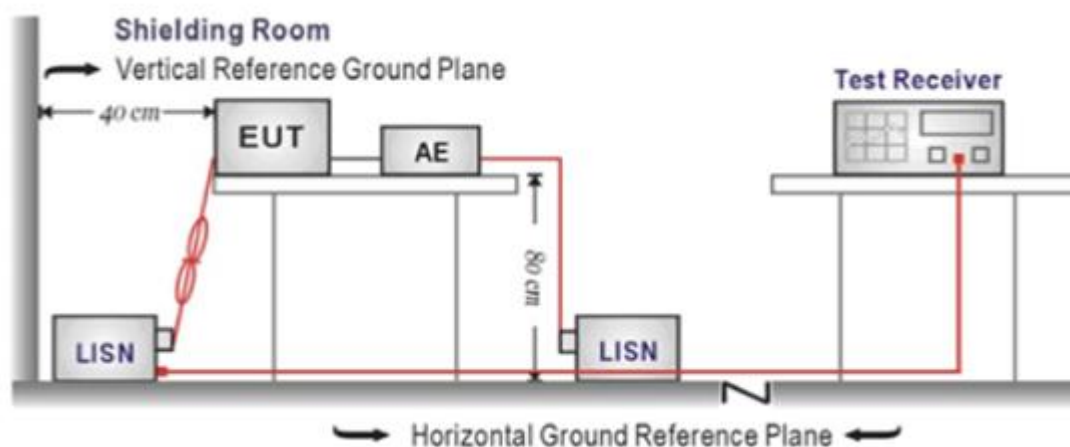

#### TEST PROCEDURE

1. The EUT was setup according to ANSI C63.4:2014
2. The EUT was placed on a plat form of nominal size, 1 m by 1.5 m, raised 10 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 10 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50ohm / 50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

#### TEST MODE:


Please refer to the clause 4.1

#### TEST RESULTS

☒ Passed ☐ Not Applicable

Test Line:

L

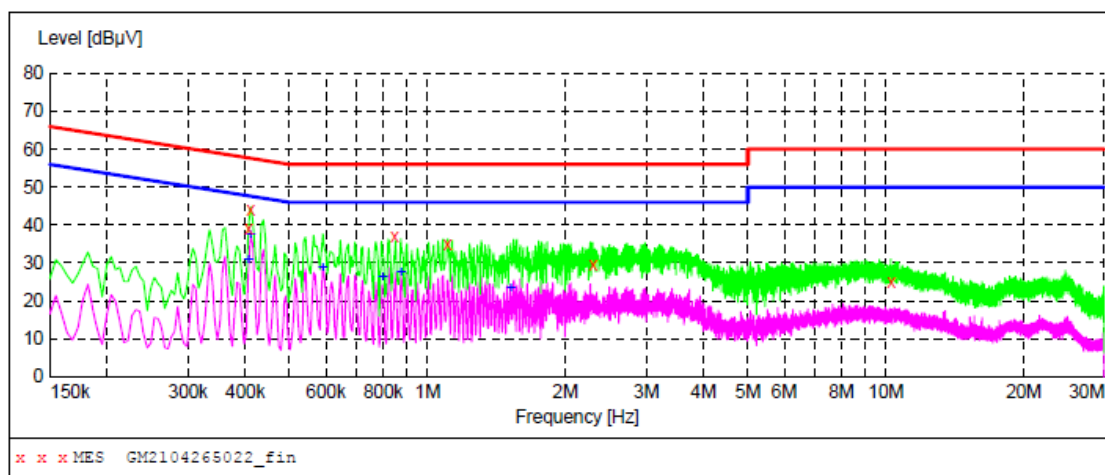**MEASUREMENT RESULT: "GM2104265022\_fin"**

4/26/2021 10:35AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.406500	39.00	10.2	58	18.7	QP	L1	GND
0.411000	43.90	10.2	58	13.7	QP	L1	GND
0.847500	37.00	10.2	56	19.0	QP	L1	GND
1.104000	35.00	10.2	56	21.0	QP	L1	GND
2.292000	29.60	10.2	56	26.4	QP	L1	GND
10.279500	25.10	10.5	60	34.9	QP	L1	GND


**MEASUREMENT RESULT: "GM2104265022\_fin2"**

4/26/2021 10:35AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.406500	30.70	10.2	48	17.0	AV	L1	GND
0.411000	37.40	10.2	48	10.2	AV	L1	GND
0.591000	28.60	10.2	46	17.4	AV	L1	GND
0.798000	26.30	10.2	46	19.7	AV	L1	GND
0.874500	27.40	10.2	46	18.6	AV	L1	GND
1.518000	23.20	10.2	46	22.8	AV	L1	GND

Test Line:

N

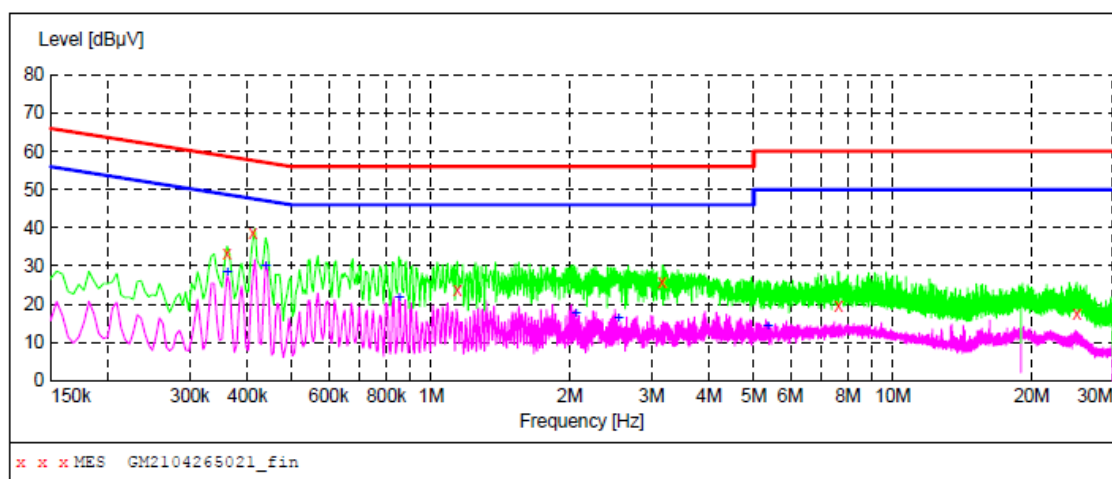**MEASUREMENT RESULT: "GM2104265021\_fin"**

4/26/2021 10:31AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.361500	33.40	10.2	59	25.3	QP	N	GND
0.411000	38.50	10.2	58	19.1	QP	N	GND
1.140000	23.60	10.2	56	32.4	QP	N	GND
3.165000	25.70	10.2	56	30.3	QP	N	GND
7.633500	19.60	10.3	60	40.4	QP	N	GND
25.066500	17.50	10.5	60	42.5	QP	N	GND

**MEASUREMENT RESULT: "GM2104265021\_fin2"**

4/26/2021 10:31AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.361500	28.30	10.2	49	20.4	AV	N	GND
0.438000	30.10	10.2	47	17.0	AV	N	GND
0.852000	21.70	10.2	46	24.3	AV	N	GND
2.058000	17.40	10.2	46	28.6	AV	N	GND
2.548500	16.10	10.2	46	29.9	AV	N	GND
5.356500	14.10	10.2	50	35.9	AV	N	GND

## 5.2. Radiated Emissions


### LIMIT

#### FCC CFR Title 47 Part 15 Subpart B Section 15.109


Frequency	Limit (dBuV/m @3m)	Value
30MHz-88MHz	40.00	Quasi-peak
88MHz-216MHz	43.50	Quasi-peak
216MHz-960MHz	46.00	Quasi-peak
960MHz-1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

### TEST CONFIGURATION

#### ➤ 30MHz ~ 1GHz

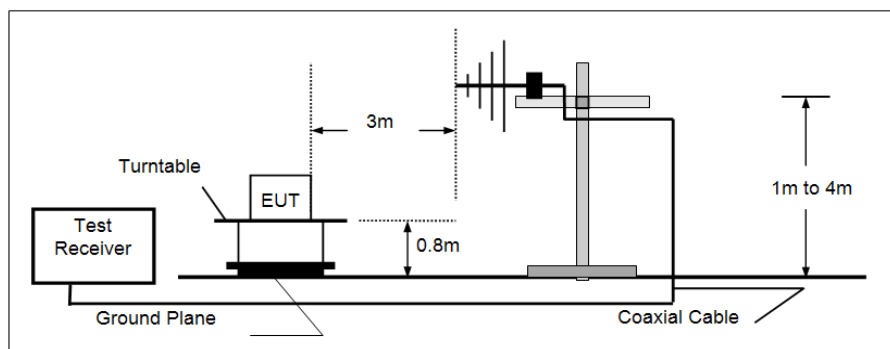

#### ➤ Above 1GHz

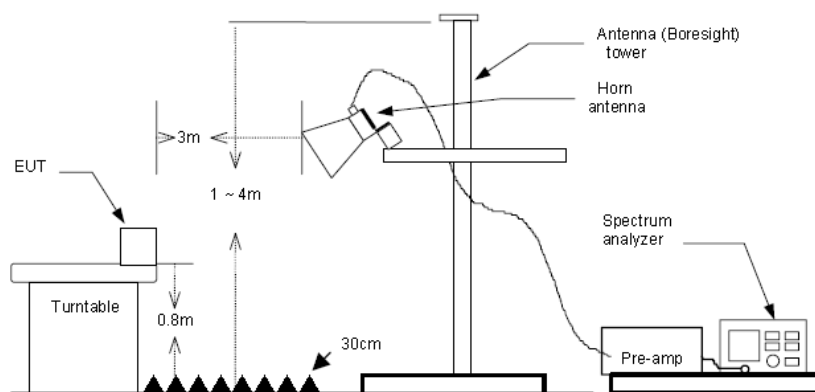

### TEST PROCEDURE

1. The EUT was tested according to ANSI C63.4:2014.
2. The EUT is placed on a turn table which is 0.8 meter above ground.
3. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
4. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
5. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna.
6. Use the following spectrum analyzer settings
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Below 1GHz,  
RBW=120KHz, VBW=300KHz, Sweep=auto, Detector function=peak, Trace=max hold;  
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
  - (3) From 1GHz to 5th harmonic, RBW=1MHz, VBW=3MHz

**TEST MODE:**

Please refer to the clause 4.1

**TEST RESULTS**


☒ **Passed**      ☐ **Not Applicable**

Note: Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor  
The emission levels of frequency above 6GHz are very lower than limit and not show in test report.

## Charging mode


Polarization:

Horizontal

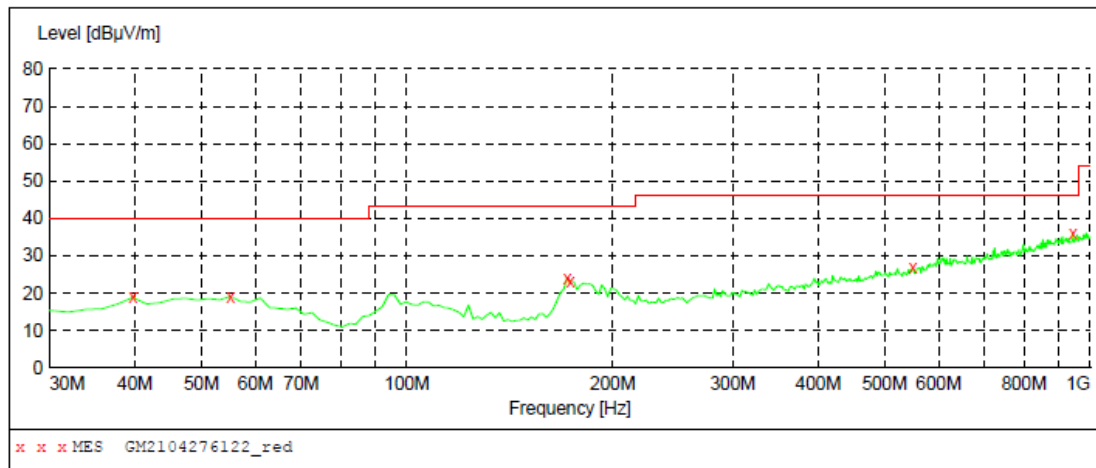**MEASUREMENT RESULT: "GM2104276122\_red"**

4/27/2021 11:59PM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
39.700000	18.90	-10.0	40.0	21.1	QP	300.0	43.00	HORIZONTAL
55.220000	19.20	-9.1	40.0	20.8	QP	100.0	91.00	HORIZONTAL
171.620000	23.80	-12.9	43.5	19.7	QP	100.0	0.00	HORIZONTAL
173.560000	23.30	-12.7	43.5	20.2	QP	100.0	319.00	HORIZONTAL
549.920000	26.70	-0.6	46.0	19.3	QP	300.0	360.00	HORIZONTAL
943.740000	35.90	7.6	46.0	10.1	QP	100.0	181.00	HORIZONTAL

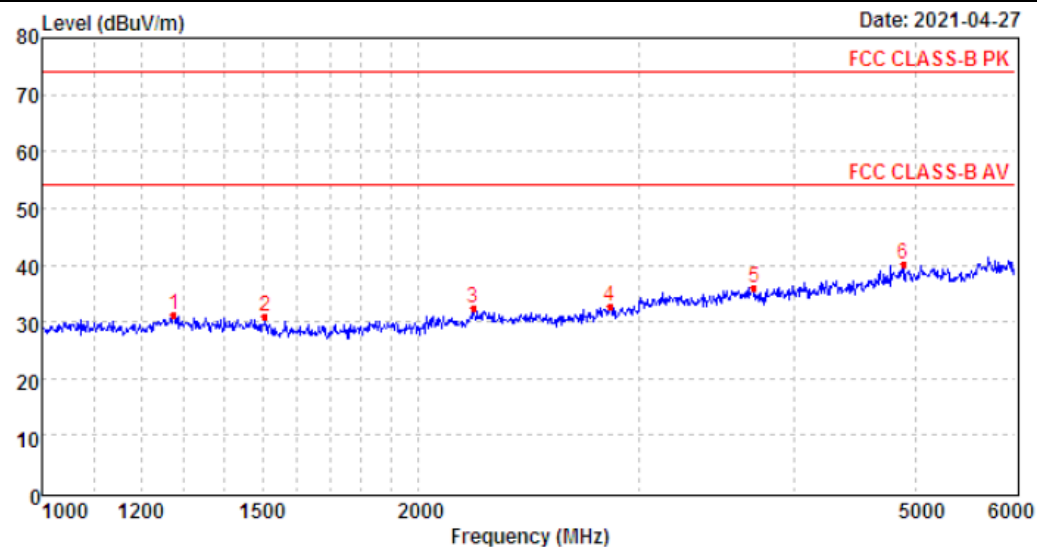


Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1275.94	36.46	25.95	5.34	36.39	31.36	74.00	-42.64	Peak
2	1507.29	36.26	25.84	5.78	36.84	31.04	74.00	-42.96	Peak
3	2211.67	34.30	28.18	7.21	37.41	32.28	74.00	-41.72	Peak
4	2847.35	33.26	28.59	8.25	37.32	32.78	74.00	-41.22	Peak
5	3711.99	33.87	29.42	9.80	37.08	36.01	74.00	-37.99	Peak
6	4882.74	32.33	31.40	11.50	35.18	40.05	74.00	-33.95	Peak

## Charging mode


Polarization:

Vertical

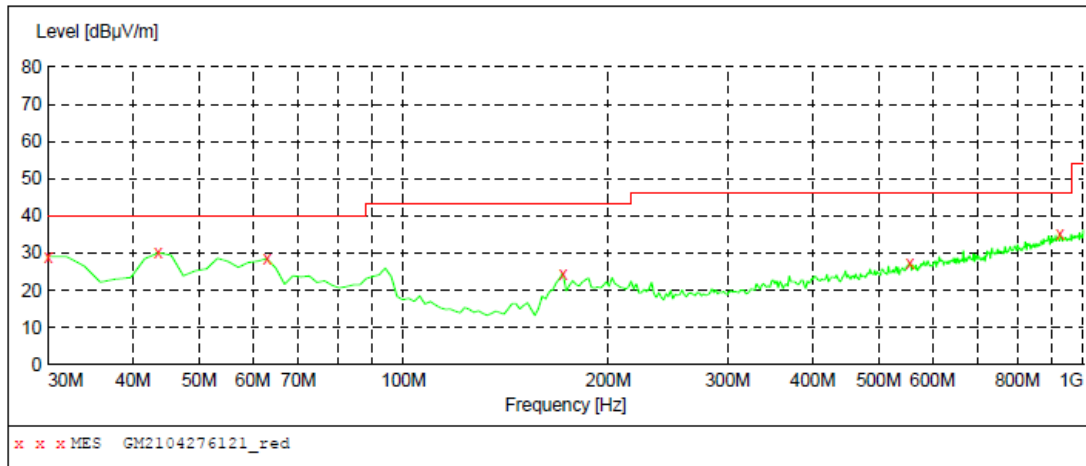**MEASUREMENT RESULT: "GM2104276121\_red"**

4/27/2021 11:55PM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	29.10	-12.4	40.0	10.9	QP	100.0	162.00	VERTICAL
43.580000	30.10	-9.2	40.0	9.9	QP	100.0	114.00	VERTICAL
62.980000	28.60	-10.8	40.0	11.4	QP	100.0	15.00	VERTICAL
171.620000	24.60	-12.9	43.5	18.9	QP	100.0	100.00	VERTICAL
555.740000	27.40	-0.3	46.0	18.6	QP	100.0	125.00	VERTICAL
924.340000	35.20	7.5	46.0	10.8	QP	100.0	222.00	VERTICAL

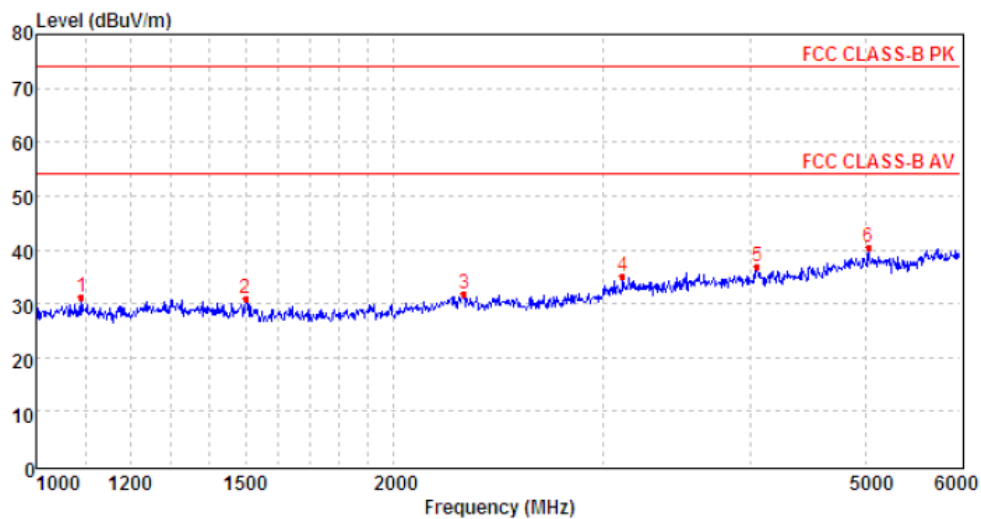

Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1091.77	37.87	25.37	4.96	36.91	31.29	74.00	-42.71	Peak
2	1501.90	36.01	25.88	5.77	36.82	30.84	74.00	-43.16	Peak
3	2292.37	34.10	28.02	7.25	37.54	31.83	74.00	-42.17	Peak
4	3119.80	34.90	29.00	8.64	37.33	35.21	74.00	-38.79	Peak
5	4045.37	33.09	29.99	10.19	36.31	36.96	74.00	-37.04	Peak
6	5024.75	32.15	32.05	11.54	35.30	40.44	74.00	-33.56	Peak


### 5.3. Antenna conducted power for receiver

#### LIMIT

FCC CFR Title 47 Part 15 Subpart B Section 15.111:

Frequency range	Limit
9KHz to 3GHz	2.0 nW (-57dBm)

#### TEST CONFIGURATION

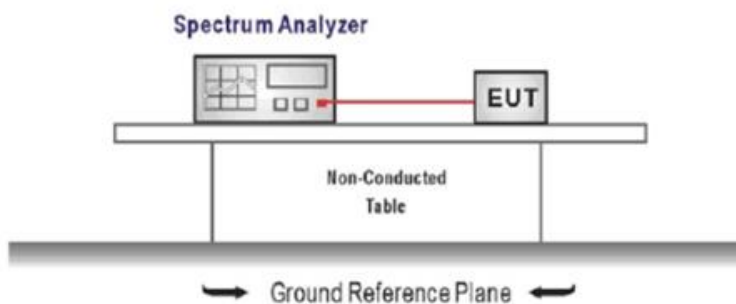

#### TEST PROCEDURE

1. The receiver antenna terminal connected to a spectrum analyzer.
2. Receiver set as follow:

Frequency range	RBW (kHz)	VBW (kHz)
9 kHz ~ 150 kHz	1	3
150 kHz ~ 30 MHz	10	30
30 MHz ~ 1000 MHz	100	300
1000 MHz ~ 3000 MHz	1000	3000


#### TEST MODE:

Please refer to the clause 4.1

#### TEST RESULTS

☒ Passed ☐ Not Applicable



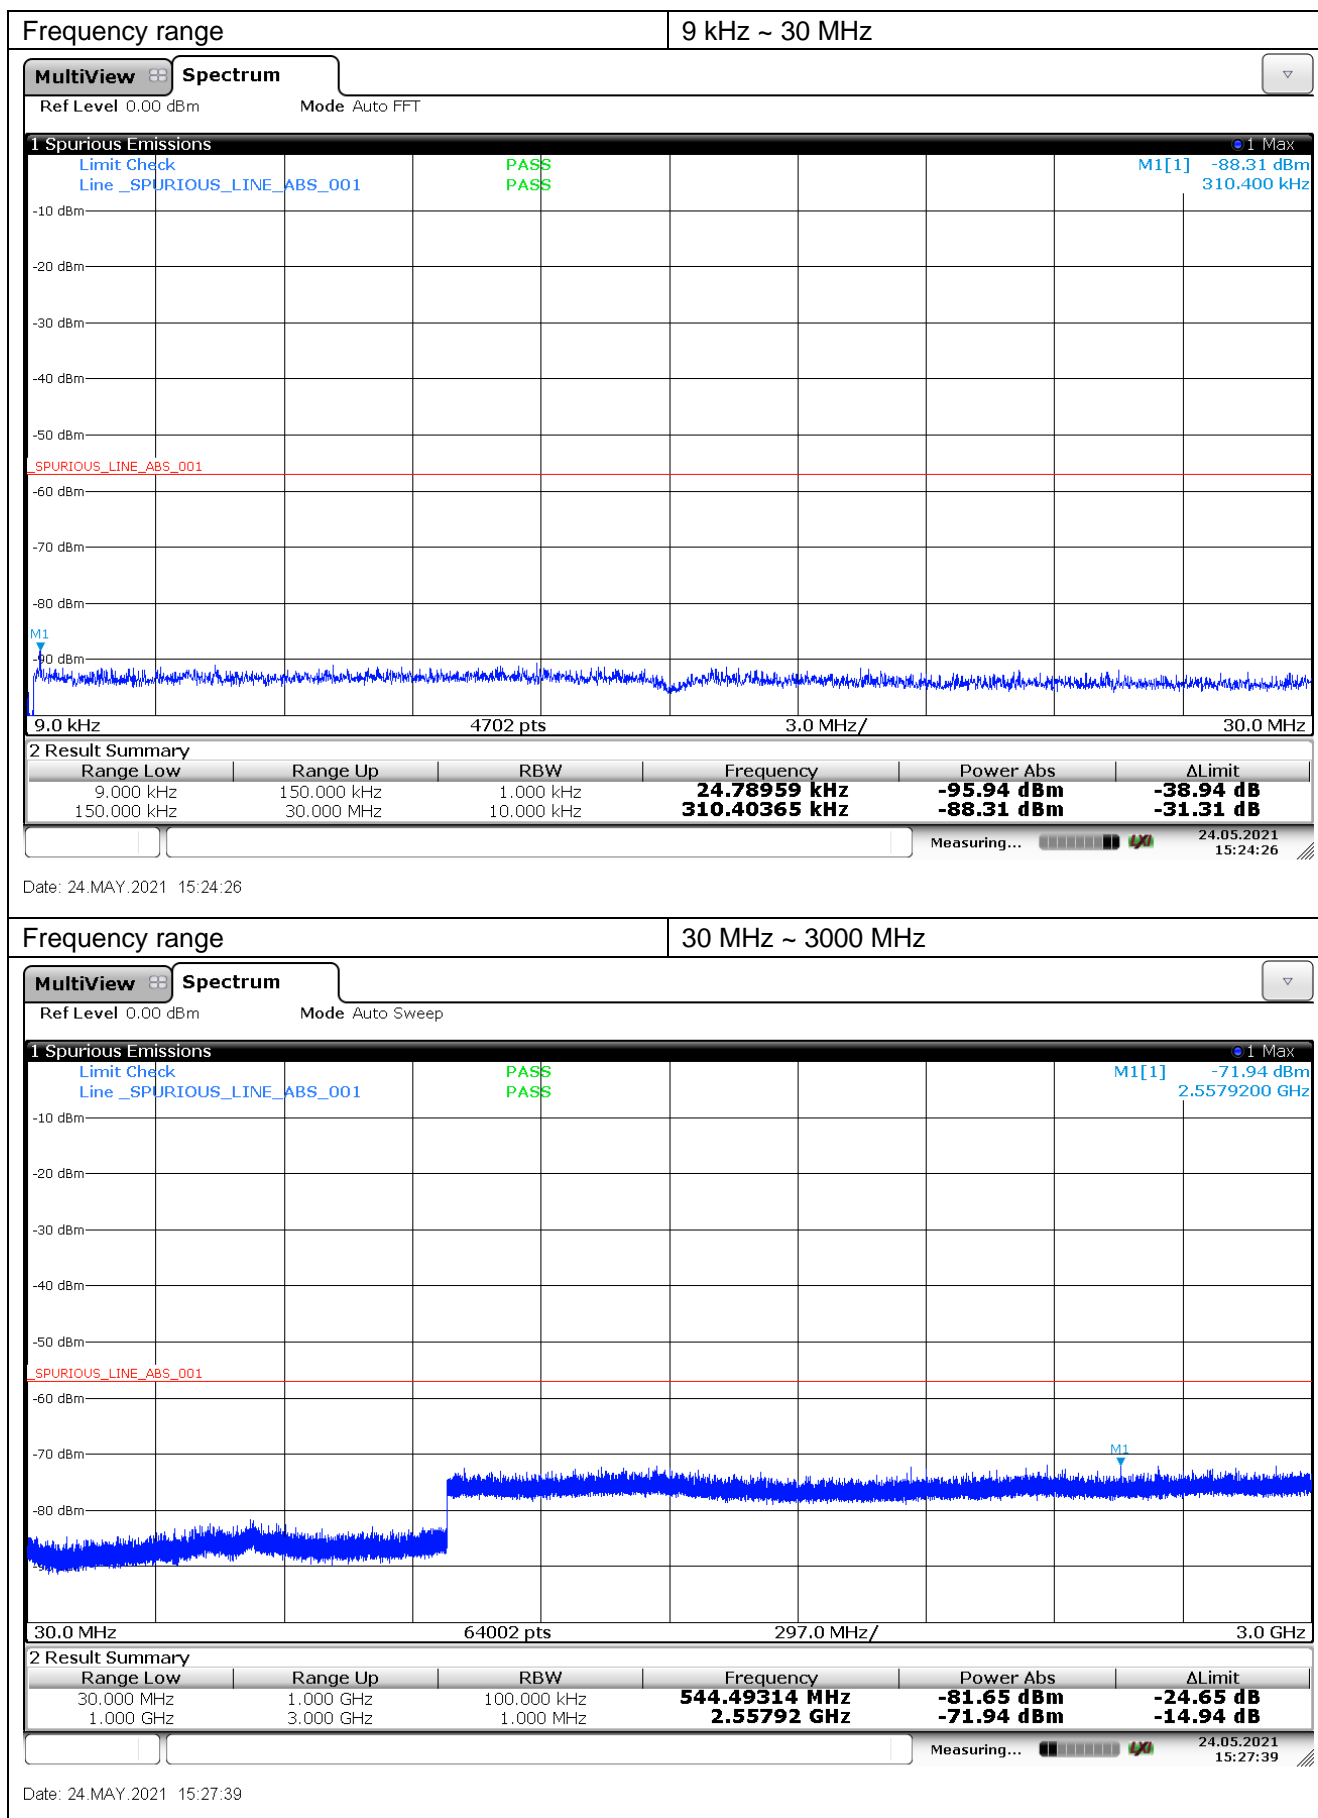


## 5.4. Sanning receivers and frequency converters used with sanning receivers

### LIMIT

scanning receivers shall reject any signals from the Cellular Radiotelephone Service frequency bands that are 38 dB or lower based upon a 12 dB SINAD measurement, which is considered the threshold where a signal can be clearly discerned from any interference that may be present

### TEST CONFIGURATION

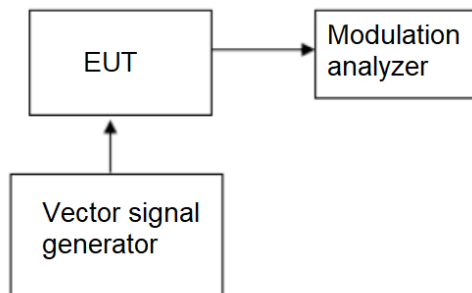

### TEST PROCEDURE

The RF level of vector signal generator will be adjusted to produce GSM signals at the receiver antenna port of the EUT.

### TEST MODE:

Please refer to clause 4.1

### TEST RESULTS

☐ Passed      ☒ Not Applicable


The scanning receive frequency range of this EUT is from 462.5500MHz to 462.7250MHz, not in the cellular radiotelephone service frequency bands, so this item is not applicable.

## 6. TEST SETUP PHOTOS OF THE EUT

### Conducted Emissions (AC Mains)



### Radiated Emissions

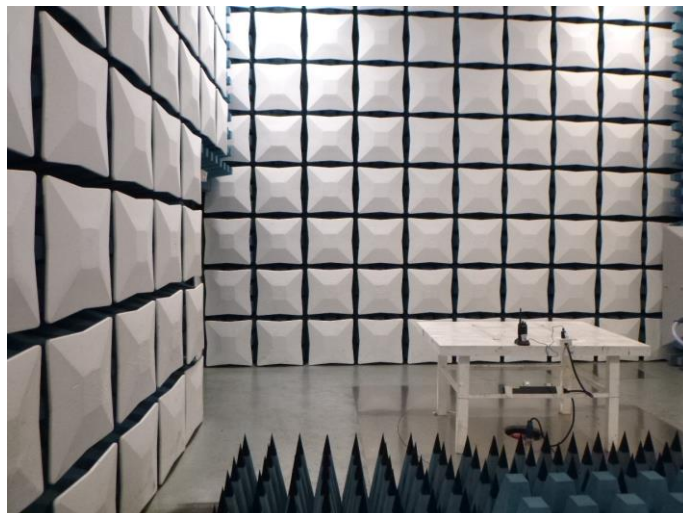

## **7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT**

Reference to the test report No.: CHTEW21050009.

-----End of Report-----