



No.1 is Communication Interface Board, a support board, used as a support board to give serial access to the module and allow the user to exchange RF commands for TX/RX over UART, which connects to the computer via the USB cable.

No. 2 is the test board, with DA14535MOD Module installed on it, which connects to the support board via the JTAG cable.

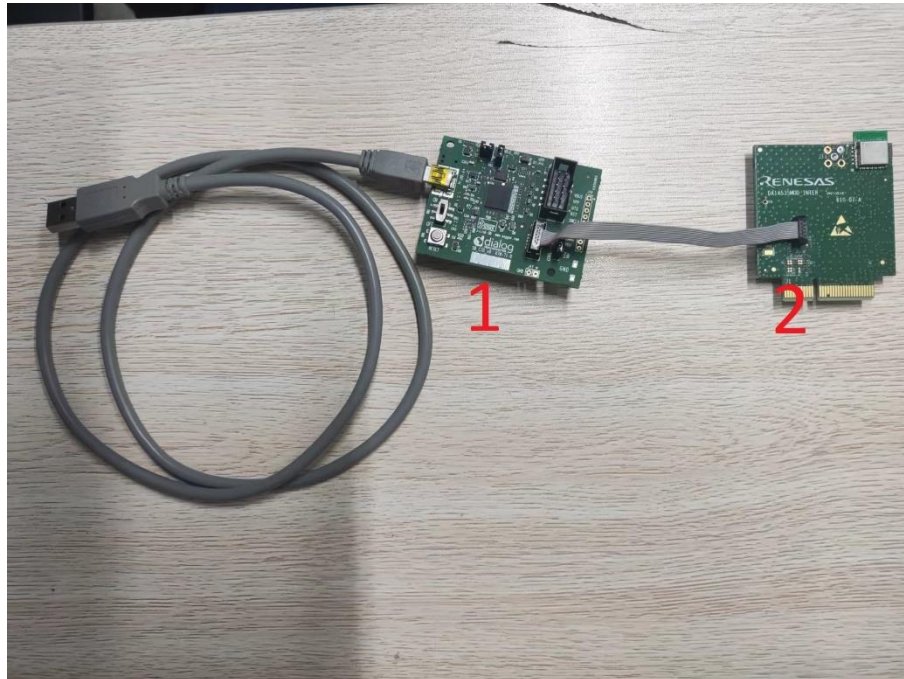


Note: EUT is positioned at the center of the turntable to keep 3m between the measurement antenna and EUT for the radiated emissions measurements

Radiated Emission (Below 1GHz)

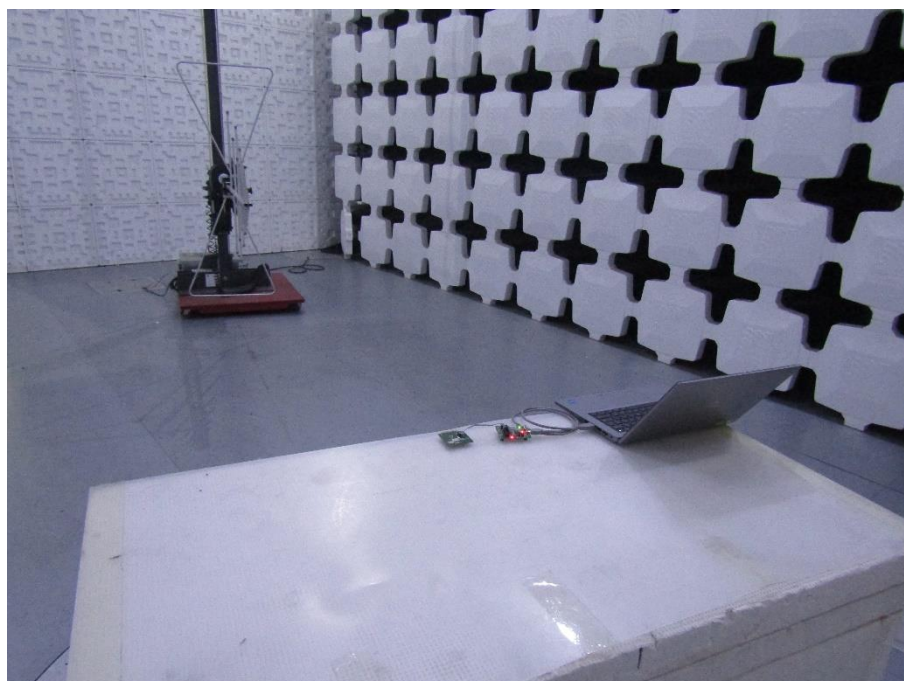

Radiated Emission (Above 1GHz)

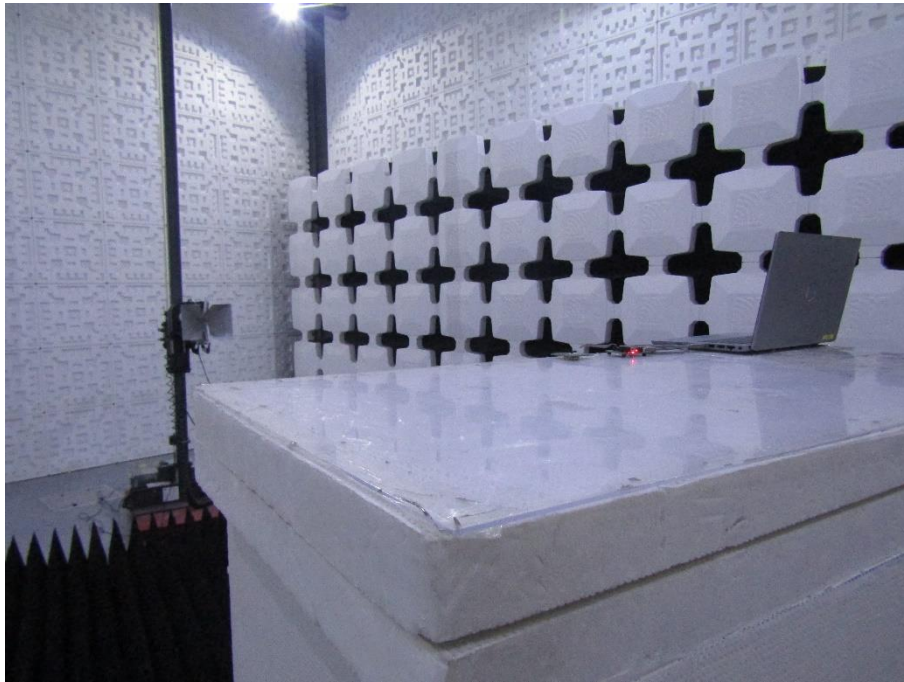

Conducted Emissions

