


Test Mode	Channel	Polarization	Verdict
11ax HE20	5200	Horizontal	PASS

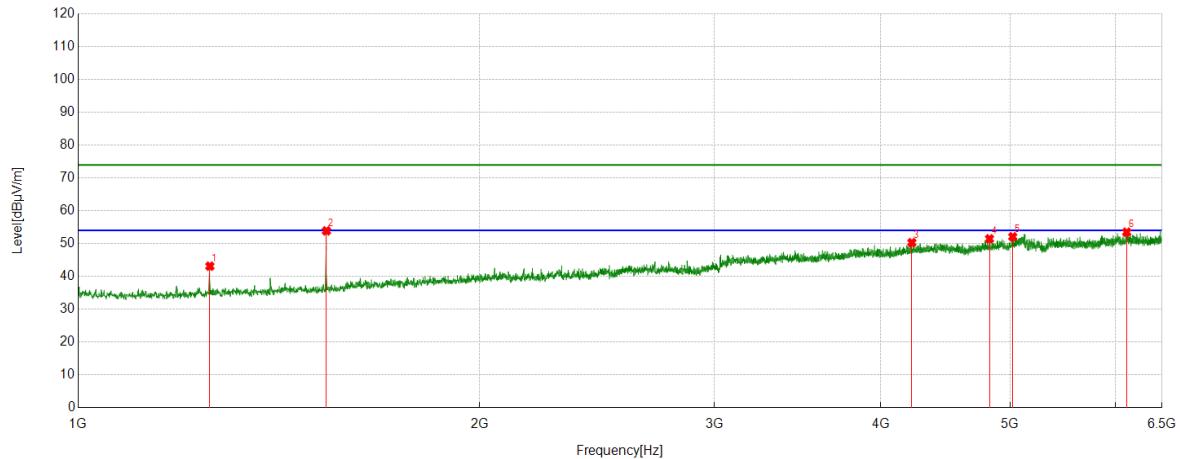


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	44.26	-1.16	43.10	74.00	-30.90	Horizontal
2	1535.3928	54.44	-0.58	53.86	74.00	-20.14	Horizontal
3	4219.6911	36.74	13.54	50.28	74.00	-23.72	Horizontal
4	4825.3695	36.26	15.19	51.45	74.00	-22.55	Horizontal
5	5022.7803	36.67	15.40	52.07	74.00	-21.93	Horizontal
6	6115.5684	35.10	18.39	53.49	74.00	-20.51	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5200	Vertical	PASS

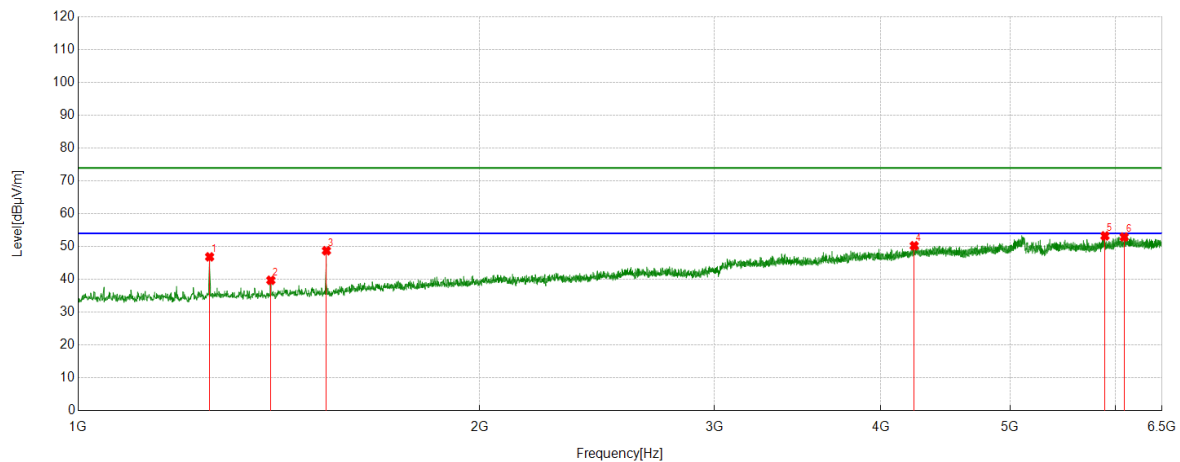


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1254.8617	48.01	-1.15	46.86	74.00	-27.14	Vertical
2	1394.8216	40.70	-0.98	39.72	74.00	-34.28	Vertical
3	1535.3928	49.31	-0.58	48.73	74.00	-25.27	Vertical
4	4236.8041	36.43	13.81	50.24	74.00	-23.76	Vertical
5	5890.0433	35.18	18.07	53.25	74.00	-20.75	Vertical
6	6088.6765	34.65	18.27	52.92	74.00	-21.08	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5240	Horizontal	PASS

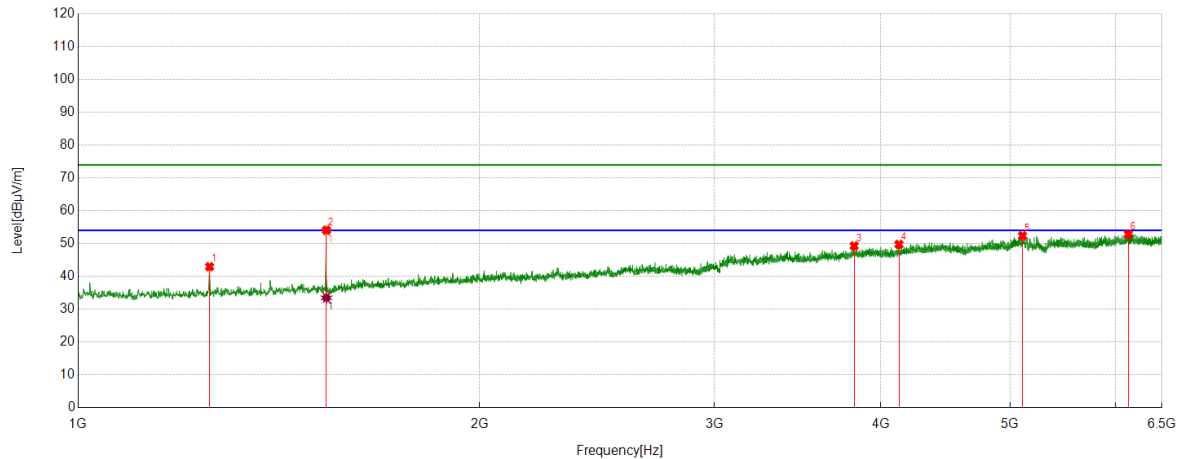

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1254.8617	44.08	-1.15	42.93	74.00	-31.07	Horizontal
2	1535.3928	54.64	-0.58	54.06	74.00	-19.94	Horizontal
3	3819.3688	36.48	12.82	49.30	74.00	-24.70	Horizontal
4	4126.7919	36.63	13.12	49.75	74.00	-24.25	Horizontal
5	5107.7342	35.76	16.60	52.36	74.00	-21.64	Horizontal
6	6132.6814	34.37	18.46	52.83	74.00	-21.17	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1535.3928	34.03	-0.58	33.45	54.00	-20.55	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5240	Vertical	PASS

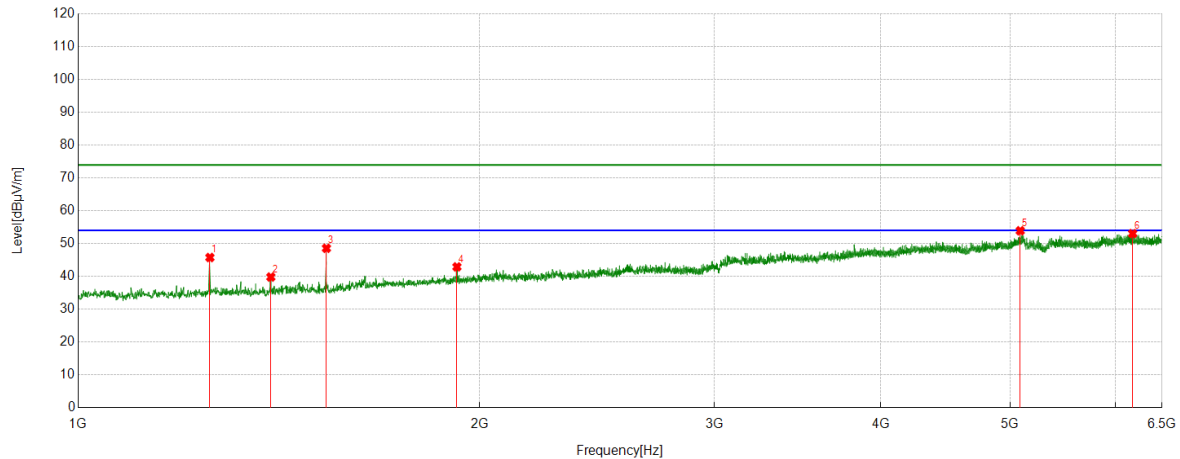


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	46.90	-1.16	45.74	74.00	-28.26	Vertical
2	1394.8216	40.77	-0.98	39.79	74.00	-34.21	Vertical
3	1535.3928	49.14	-0.58	48.56	74.00	-25.44	Vertical
4	1923.4915	40.40	2.49	42.89	74.00	-31.11	Vertical
5	5088.1765	37.31	16.59	53.90	74.00	-20.10	Vertical
6	6178.5198	34.77	18.27	53.04	74.00	-20.96	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5260	Horizontal	PASS

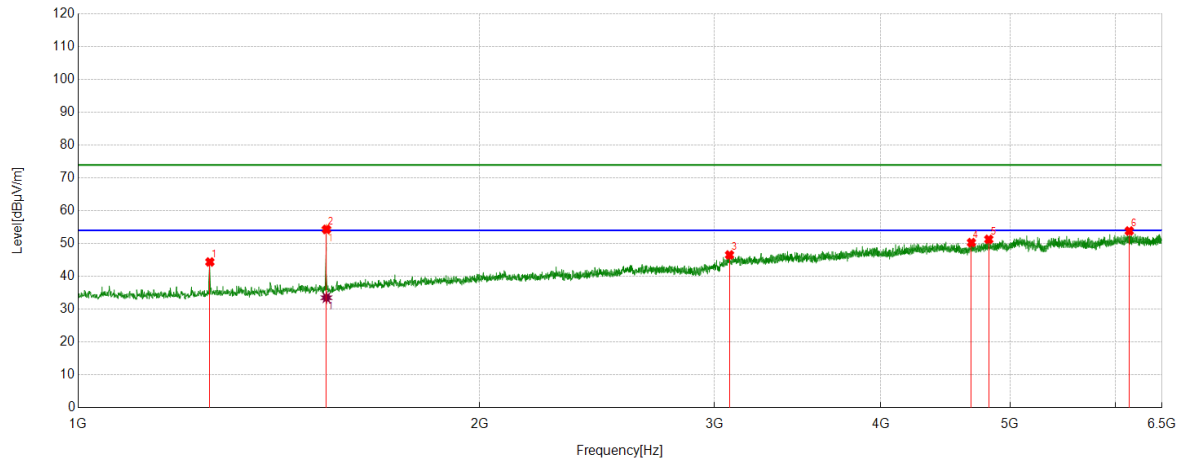

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	45.54	-1.16	44.38	74.00	-29.62	Horizontal
2	1535.3928	54.90	-0.58	54.32	74.00	-19.68	Horizontal
3	3079.8422	36.35	10.18	46.53	74.00	-27.47	Horizontal
4	4676.8530	36.15	14.14	50.29	74.00	-23.71	Horizontal
5	4819.2577	36.12	15.16	51.28	74.00	-22.72	Horizontal
6	6142.4603	35.51	18.32	53.83	74.00	-20.17	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1535.3928	34.06	-0.58	33.48	54.00	-20.52	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5260	Vertical	PASS

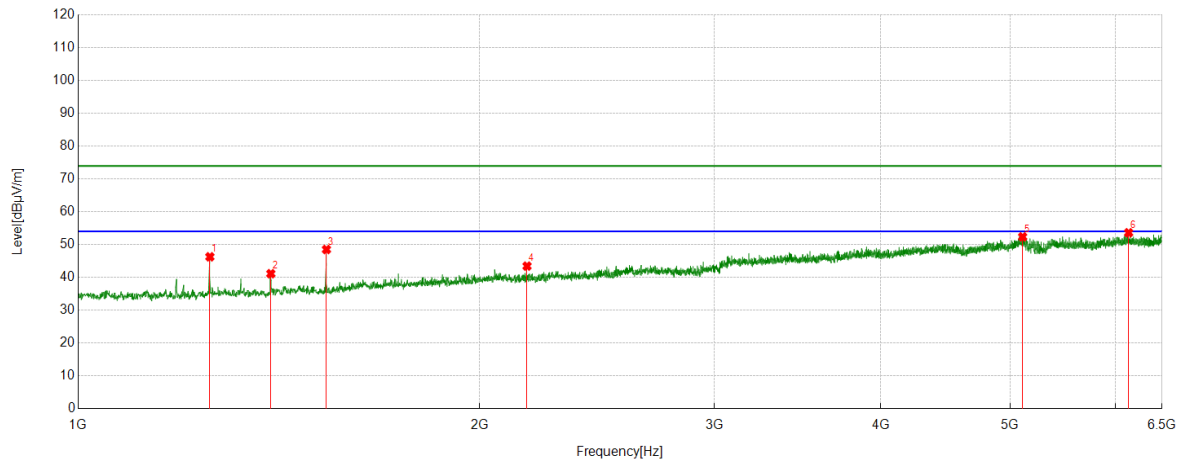


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	47.42	-1.16	46.26	74.00	-27.74	Vertical
2	1394.8216	42.09	-0.98	41.11	74.00	-32.89	Vertical
3	1535.3928	49.08	-0.58	48.50	74.00	-25.50	Vertical
4	2171.0190	39.26	4.16	43.42	74.00	-30.58	Vertical
5	5109.5677	35.76	16.59	52.35	74.00	-21.65	Vertical
6	6135.7373	35.19	18.41	53.60	74.00	-20.40	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5280	Horizontal	PASS

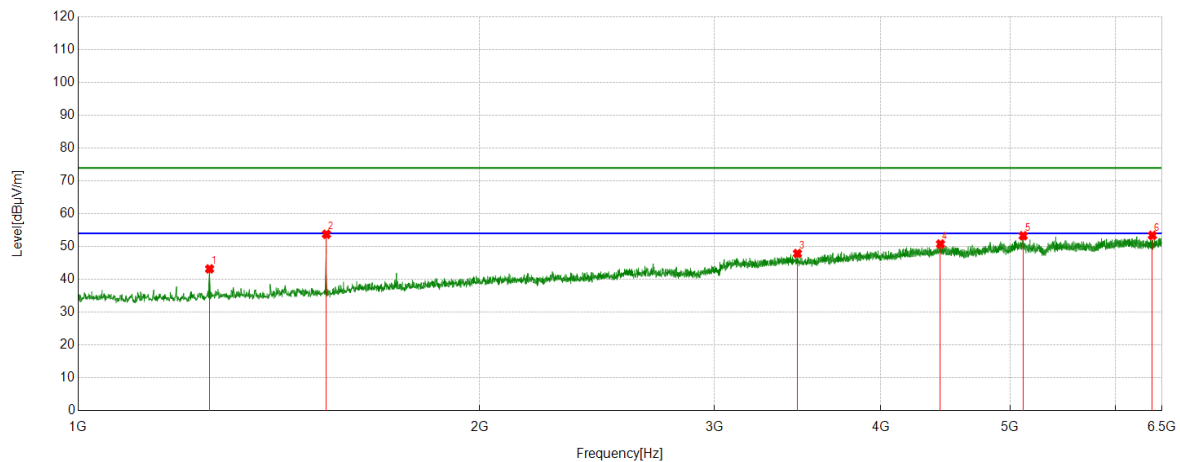


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1254.8617	44.33	-1.15	43.18	74.00	-30.82	Horizontal
2	1535.3928	54.32	-0.58	53.74	74.00	-20.26	Horizontal
3	3463.0514	37.27	10.60	47.87	74.00	-26.13	Horizontal
4	4433.6037	36.56	14.21	50.77	74.00	-23.23	Horizontal
5	5114.4572	36.72	16.56	53.28	74.00	-20.72	Horizontal
6	6392.4325	34.64	18.77	53.41	74.00	-20.59	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5280	Vertical	PASS

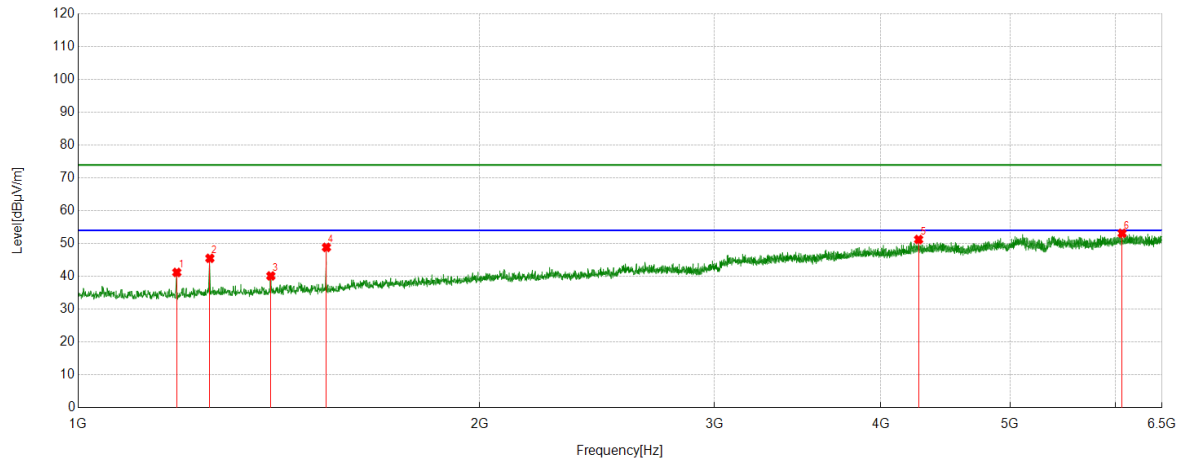


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.7984	43.28	-2.08	41.20	74.00	-32.80	Vertical
2	1255.4728	46.66	-1.16	45.50	74.00	-28.50	Vertical
3	1394.8216	41.10	-0.98	40.12	74.00	-33.88	Vertical
4	1535.3928	49.41	-0.58	48.83	74.00	-25.17	Vertical
5	4269.1966	37.07	14.16	51.23	74.00	-22.77	Vertical
6	6067.2853	35.19	17.94	53.13	74.00	-20.87	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5320	Horizontal	PASS

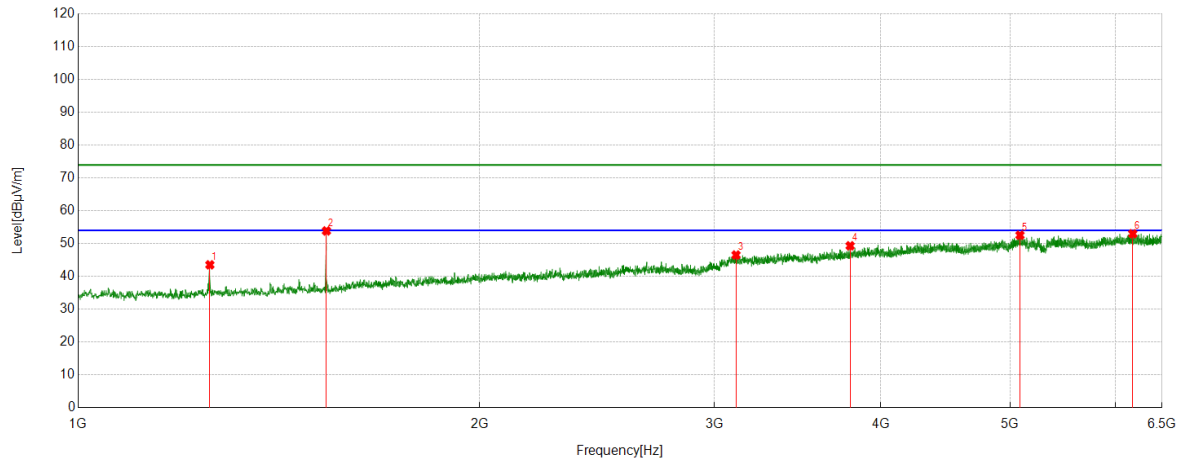


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	44.67	-1.16	43.51	74.00	-30.49	Horizontal
2	1535.3928	54.43	-0.58	53.85	74.00	-20.15	Horizontal
3	3114.6794	36.28	10.23	46.51	74.00	-27.49	Horizontal
4	3793.0881	37.20	12.11	49.31	74.00	-24.69	Horizontal
5	5085.7317	36.03	16.51	52.54	74.00	-21.46	Horizontal
6	6179.7422	34.69	18.29	52.98	74.00	-21.02	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5320	Vertical	PASS

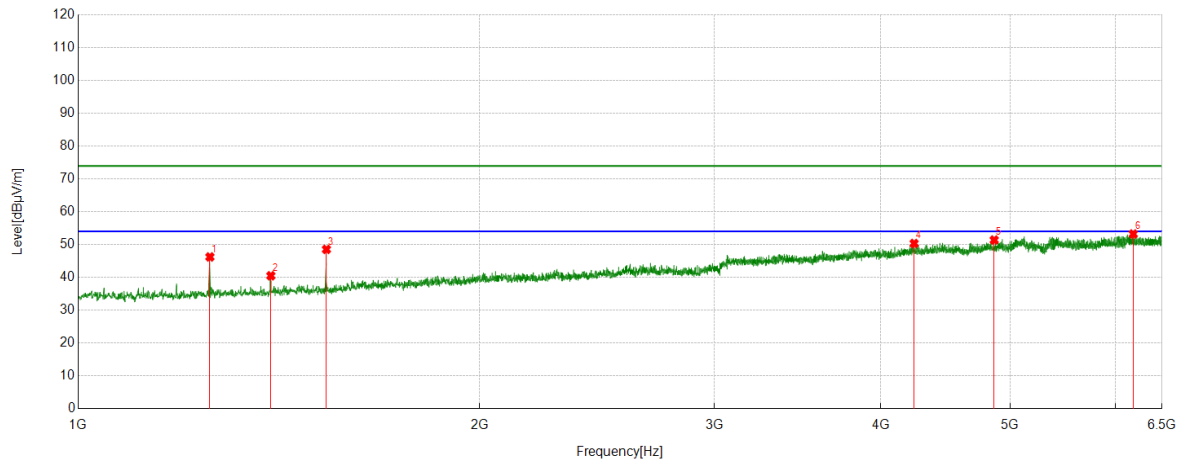


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	47.38	-1.16	46.22	74.00	-27.78	Vertical
2	1394.8216	41.46	-0.98	40.48	74.00	-33.52	Vertical
3	1535.3928	49.11	-0.58	48.53	74.00	-25.47	Vertical
4	4236.1929	36.56	13.78	50.34	74.00	-23.66	Vertical
5	4864.4849	36.40	14.98	51.38	74.00	-22.62	Vertical
6	6184.6316	34.94	18.28	53.22	74.00	-20.78	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5500	Horizontal	PASS

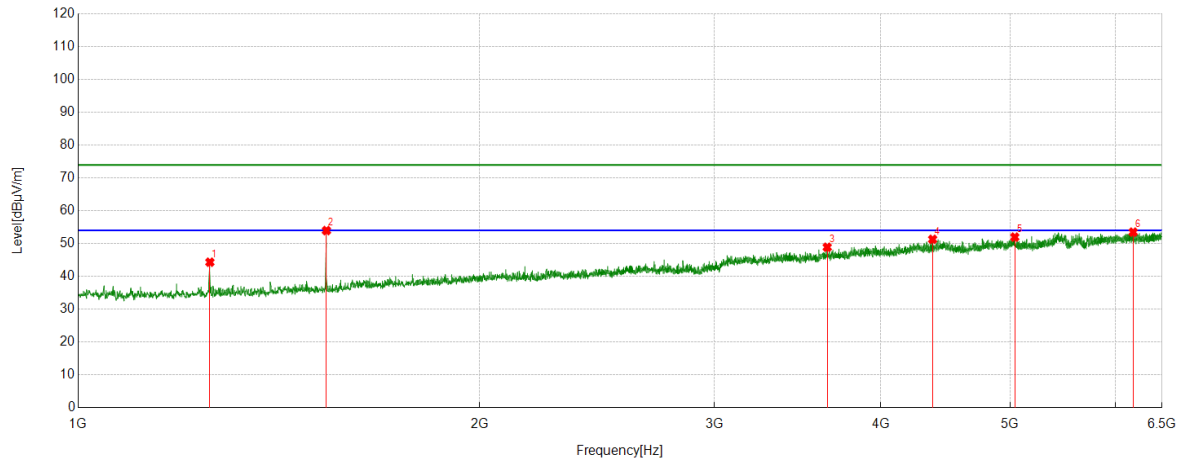


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	45.79	-1.48	44.31	74.00	-29.69	Horizontal
2	1535.3928	54.68	-0.72	53.96	74.00	-20.04	Horizontal
3	3645.7940	37.39	11.49	48.88	74.00	-25.12	Horizontal
4	4373.7082	37.55	13.74	51.29	74.00	-22.71	Horizontal
5	5040.5045	35.81	16.15	51.96	74.00	-22.04	Horizontal
6	6183.4093	34.99	18.50	53.49	74.00	-20.51	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5500	Vertical	PASS

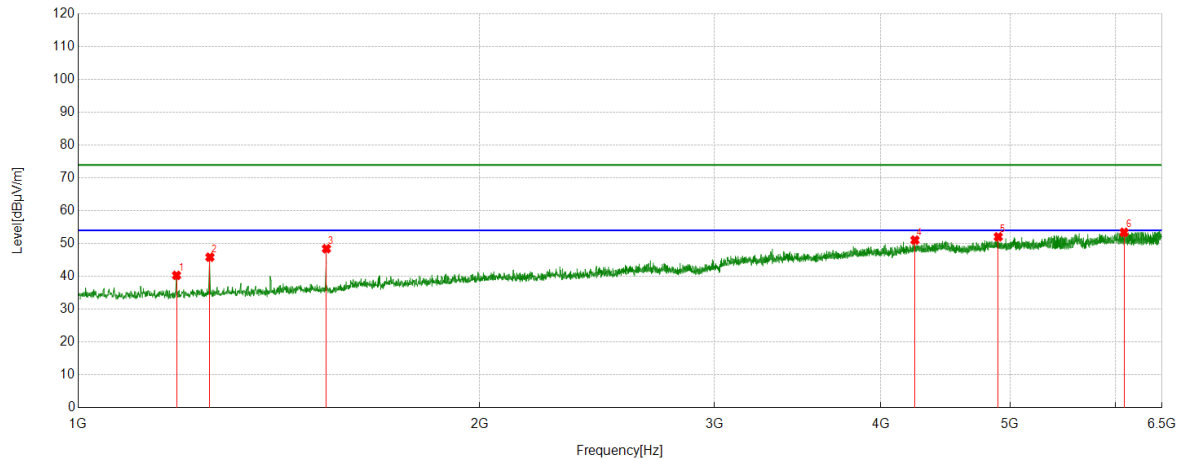


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.1872	42.20	-1.91	40.29	74.00	-33.71	Vertical
2	1255.4728	47.32	-1.48	45.84	74.00	-28.16	Vertical
3	1535.3928	49.15	-0.72	48.43	74.00	-25.57	Vertical
4	4242.3047	36.86	14.19	51.05	74.00	-22.95	Vertical
5	4898.7110	36.70	15.35	52.05	74.00	-21.95	Vertical
6	6087.4542	35.21	18.22	53.43	74.00	-20.57	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5580	Horizontal	PASS

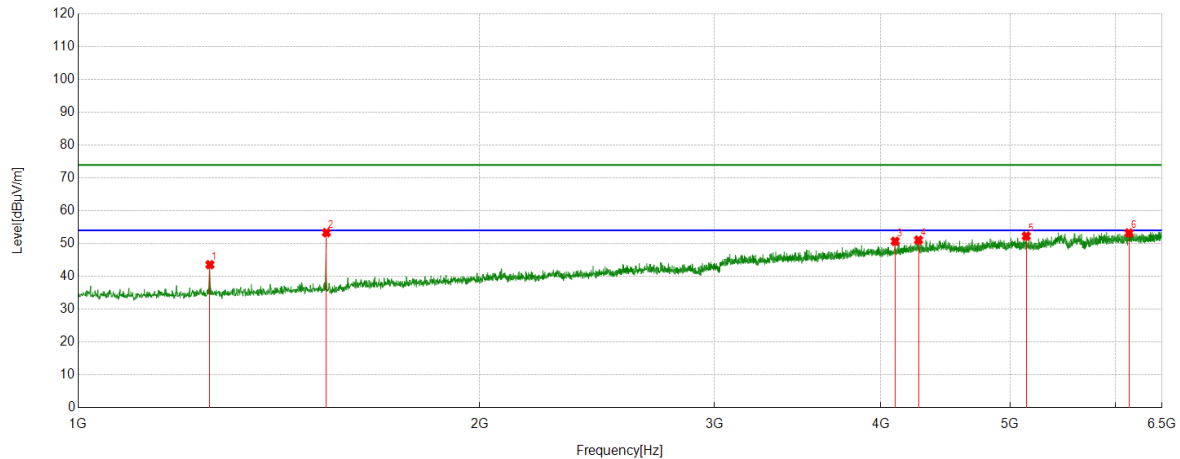


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	45.04	-1.48	43.56	74.00	-30.44	Horizontal
2	1535.3928	54.06	-0.72	53.34	74.00	-20.66	Horizontal
3	4099.9000	37.90	12.80	50.70	74.00	-23.30	Horizontal
4	4268.5854	36.65	14.42	51.07	74.00	-22.93	Horizontal
5	5141.3490	37.07	15.19	52.26	74.00	-21.74	Horizontal
6	6139.4044	35.01	18.21	53.22	74.00	-20.78	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5580	Vertical	PASS

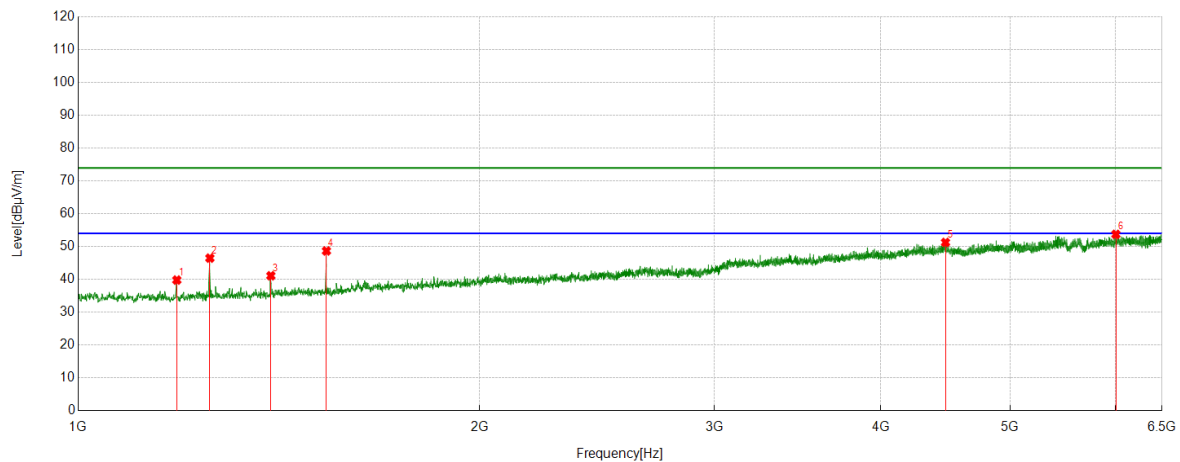


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.7984	41.71	-1.93	39.78	74.00	-34.22	Vertical
2	1255.4728	47.95	-1.48	46.47	74.00	-27.53	Vertical
3	1394.8216	42.23	-1.14	41.09	74.00	-32.91	Vertical
4	1535.3928	49.38	-0.72	48.66	74.00	-25.34	Vertical
5	4472.1080	36.18	15.08	51.26	74.00	-22.74	Vertical
6	6001.8891	35.88	17.84	53.72	74.00	-20.28	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5700	Horizontal	PASS

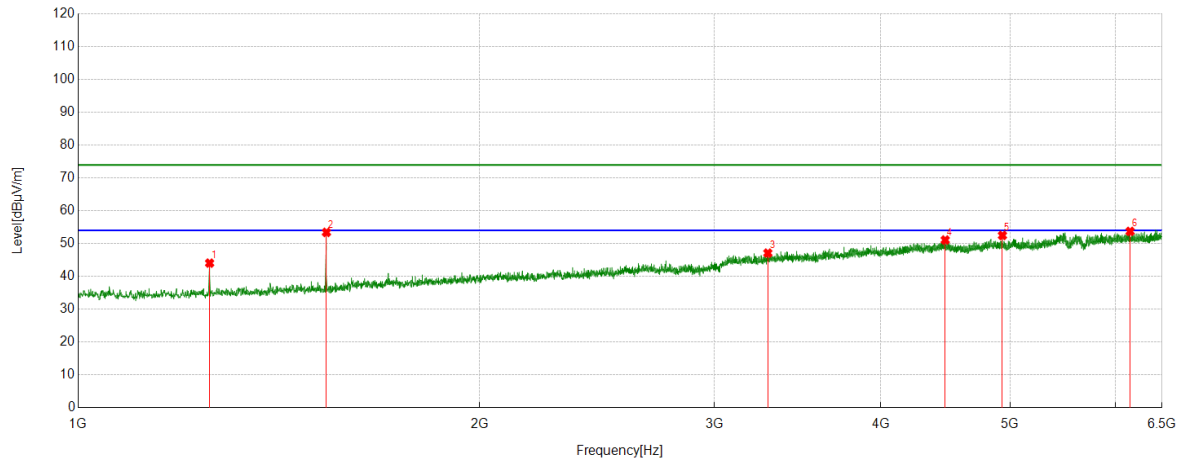


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1254.8617	45.50	-1.47	44.03	74.00	-29.97	Horizontal
2	1535.3928	54.13	-0.72	53.41	74.00	-20.59	Horizontal
3	3290.6990	36.93	10.16	47.09	74.00	-26.91	Horizontal
4	4470.2745	35.87	15.21	51.08	74.00	-22.92	Horizontal
5	4934.1594	37.31	15.16	52.47	74.00	-21.53	Horizontal
6	6151.6280	35.52	18.19	53.71	74.00	-20.29	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5700	Vertical	PASS

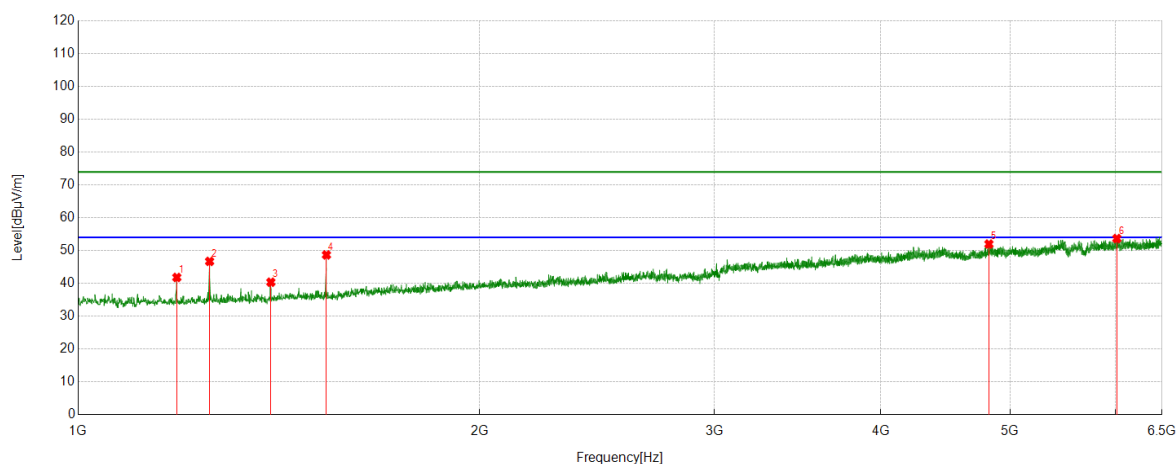


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.7984	43.73	-1.93	41.80	74.00	-32.20	Vertical
2	1254.8617	48.16	-1.47	46.69	74.00	-27.31	Vertical
3	1394.8216	41.49	-1.14	40.35	74.00	-33.65	Vertical
4	1535.3928	49.39	-0.72	48.67	74.00	-25.33	Vertical
5	4820.4801	36.66	15.32	51.98	74.00	-22.02	Vertical
6	6012.2791	35.93	17.73	53.66	74.00	-20.34	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5720	Horizontal	PASS

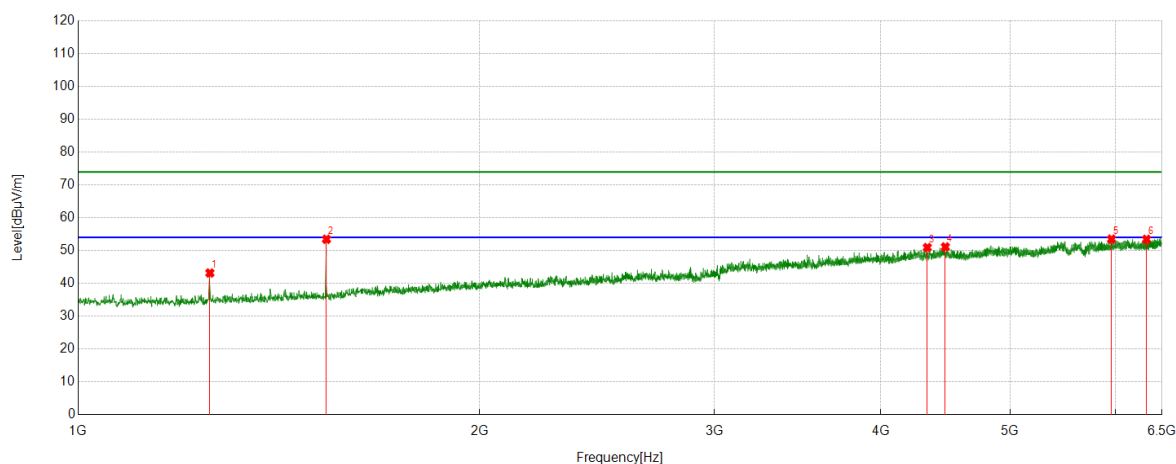


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.4728	44.64	-1.48	43.16	74.00	-30.84	Horizontal
2	1535.3928	54.17	-0.72	53.45	74.00	-20.55	Horizontal
3	4333.9816	37.35	13.57	50.92	74.00	-23.08	Horizontal
4	4470.8857	35.94	15.17	51.11	74.00	-22.89	Horizontal
5	5956.6619	35.89	17.57	53.46	74.00	-20.54	Horizontal
6	6328.2587	34.63	18.79	53.42	74.00	-20.58	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5720	Vertical	PASS

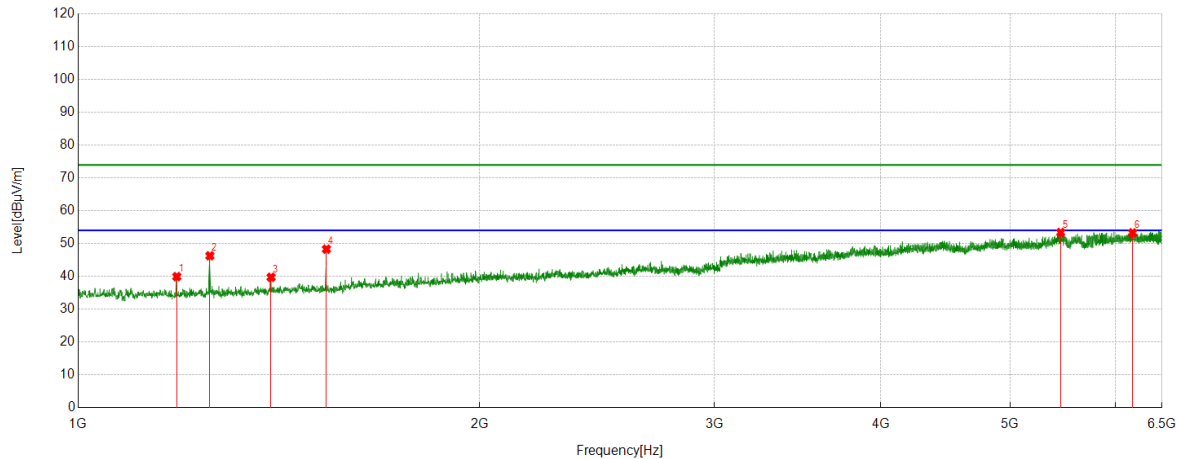


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.7984	41.84	-1.93	39.91	74.00	-34.09	Vertical
2	1255.4728	47.75	-1.48	46.27	74.00	-27.73	Vertical
3	1395.4328	40.87	-1.15	39.72	74.00	-34.28	Vertical
4	1535.3928	49.01	-0.72	48.29	74.00	-25.71	Vertical
5	5456.7174	35.52	17.87	53.39	74.00	-20.61	Vertical
6	6177.2975	34.81	18.46	53.27	74.00	-20.73	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5745	Horizontal	PASS

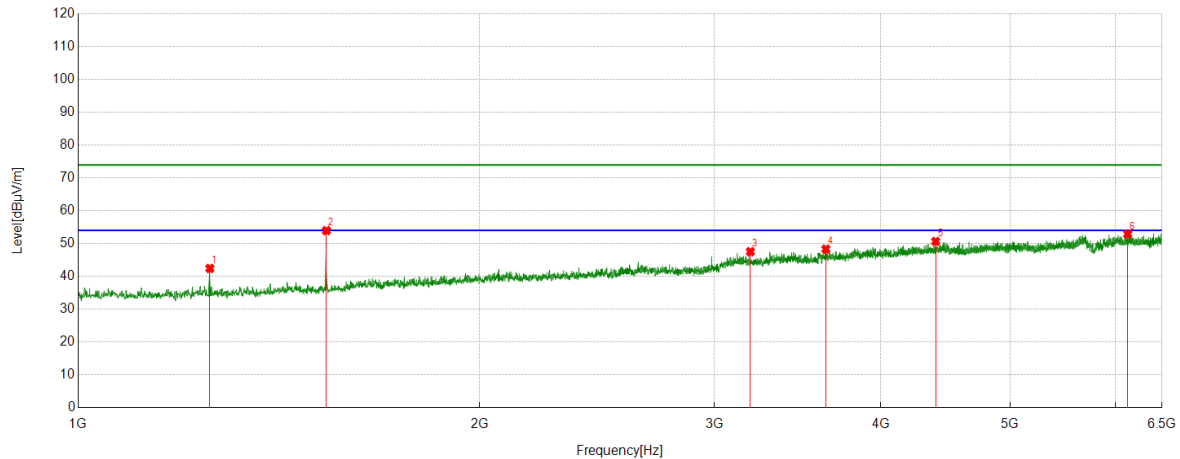


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.4728	44.00	-1.59	42.41	74.00	-31.59	Horizontal
2	1535.3928	54.32	-0.38	53.94	74.00	-20.06	Horizontal
3	3192.9103	38.28	9.25	47.53	74.00	-26.47	Horizontal
4	3637.2375	37.42	10.87	48.29	74.00	-25.71	Horizontal
5	4396.9330	37.12	13.54	50.66	74.00	-23.34	Horizontal
6	6125.9584	35.19	17.70	52.89	74.00	-21.11	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5745	Vertical	PASS

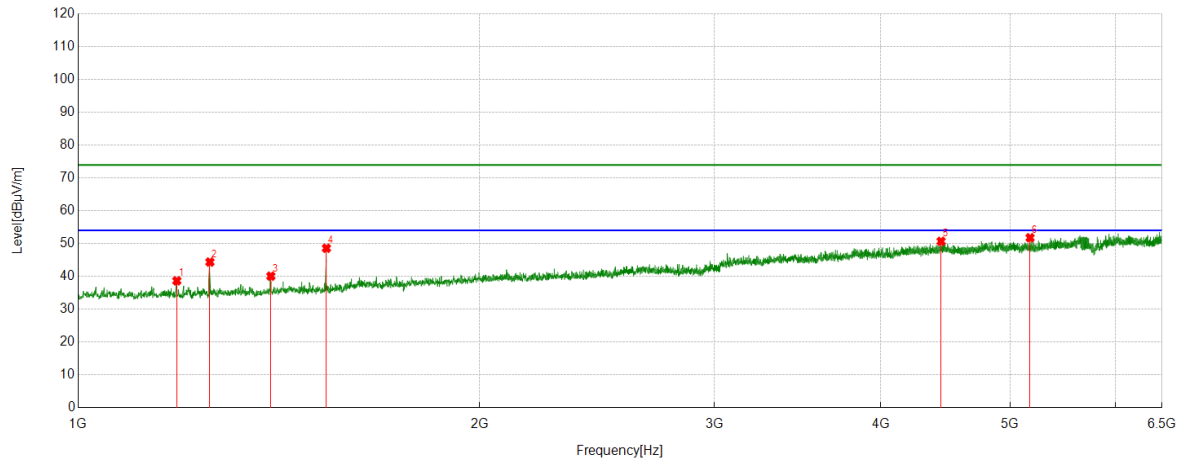


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.7984	40.53	-1.89	38.64	74.00	-35.36	Vertical
2	1255.4728	45.95	-1.59	44.36	74.00	-29.64	Vertical
3	1394.8216	41.21	-1.15	40.06	74.00	-33.94	Vertical
4	1535.3928	48.95	-0.38	48.57	74.00	-25.43	Vertical
5	4437.8820	36.70	13.98	50.68	74.00	-23.32	Vertical
6	5175.5751	36.73	15.04	51.77	74.00	-22.23	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5785	Horizontal	PASS

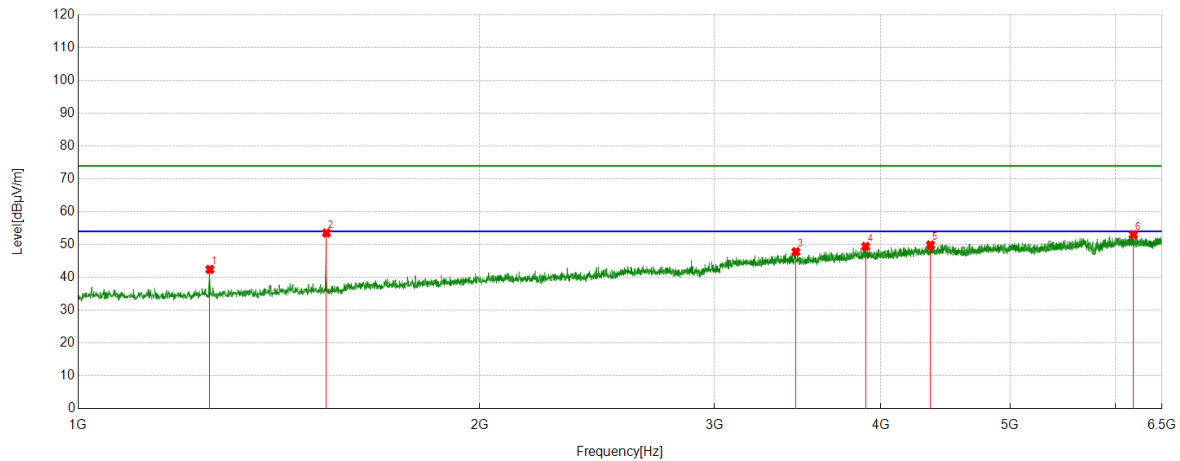


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	44.00	-1.59	42.41	74.00	-31.59	Horizontal
2	1535.3928	53.90	-0.38	53.52	74.00	-20.48	Horizontal
3	3453.8838	36.73	11.07	47.80	74.00	-26.20	Horizontal
4	3895.7662	37.28	12.13	49.41	74.00	-24.59	Horizontal
5	4357.8175	36.43	13.45	49.88	74.00	-24.12	Horizontal
6	6186.4652	34.83	18.20	53.03	74.00	-20.97	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5785	Vertical	PASS

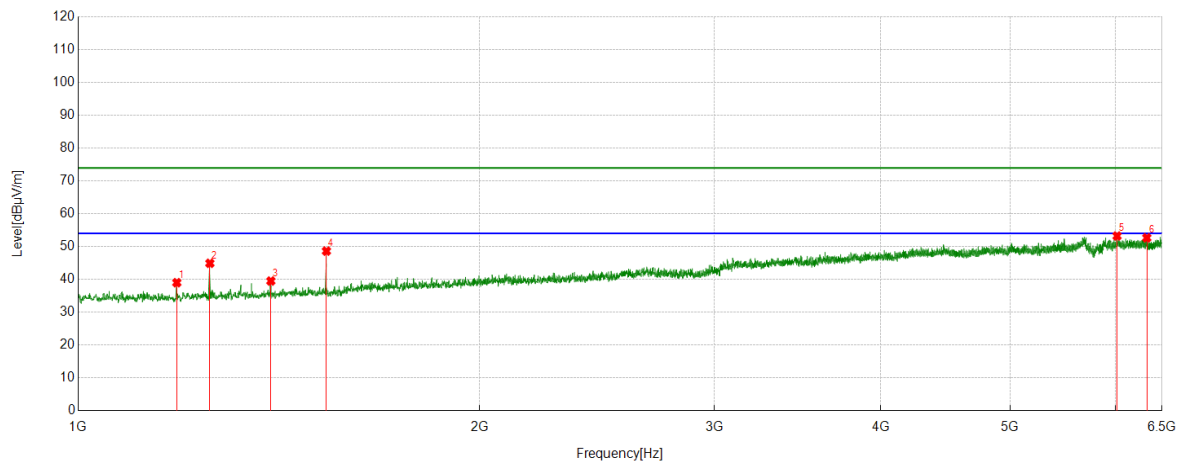


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.7984	40.87	-1.89	38.98	74.00	-35.02	Vertical
2	1255.4728	46.49	-1.59	44.90	74.00	-29.10	Vertical
3	1394.8216	40.64	-1.15	39.49	74.00	-34.51	Vertical
4	1535.3928	49.00	-0.38	48.62	74.00	-25.38	Vertical
5	6014.1127	35.92	17.31	53.23	74.00	-20.77	Vertical
6	6331.3146	34.19	18.47	52.66	74.00	-21.34	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5825	Horizontal	PASS

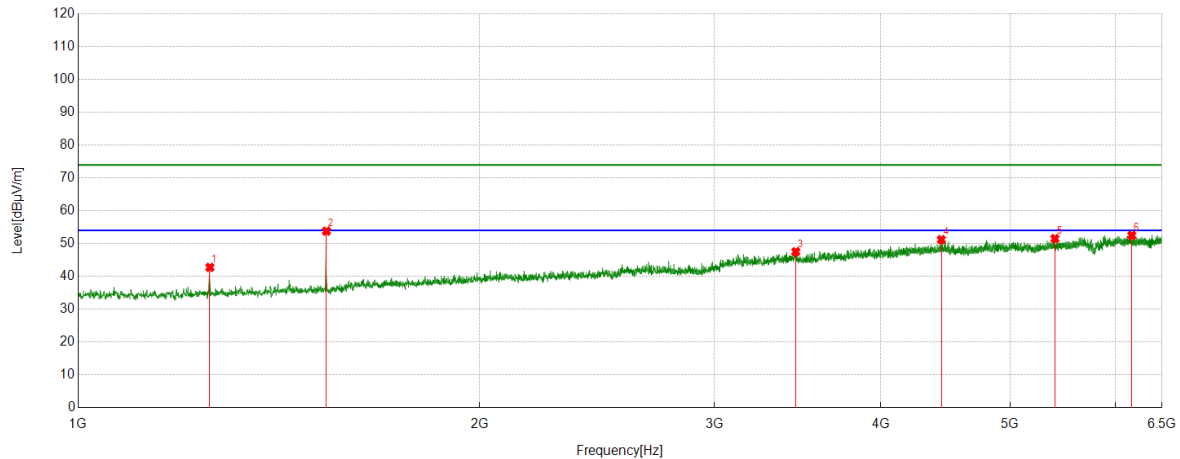


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	44.33	-1.59	42.74	74.00	-31.26	Horizontal
2	1535.3928	54.17	-0.38	53.79	74.00	-20.21	Horizontal
3	3453.2726	36.37	11.13	47.50	74.00	-26.50	Horizontal
4	4440.3267	37.16	14.03	51.19	74.00	-22.81	Horizontal
5	5402.3225	35.42	16.08	51.50	74.00	-22.50	Horizontal
6	6169.3522	34.45	18.03	52.48	74.00	-21.52	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE20	5825	Vertical	PASS

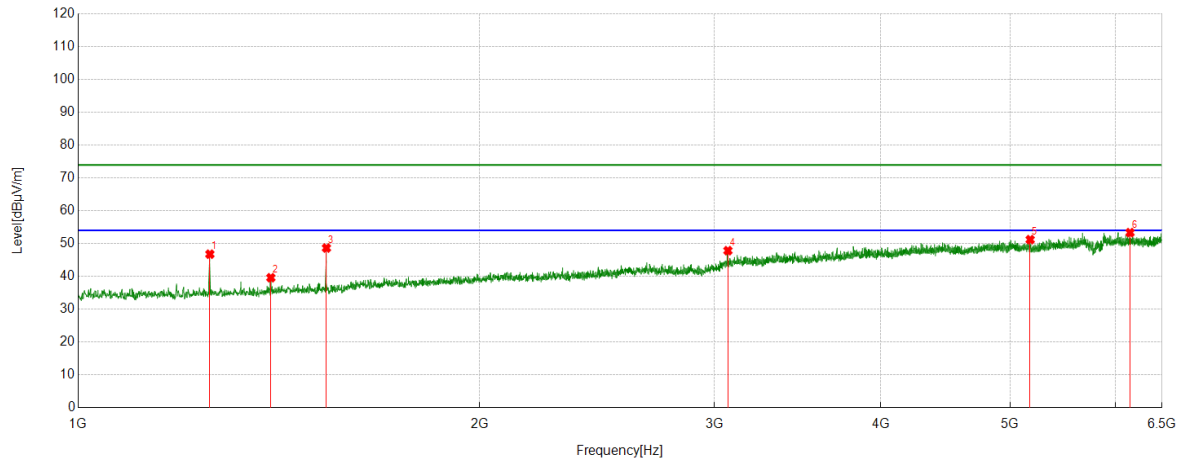


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	48.35	-1.59	46.76	74.00	-27.24	Vertical
2	1394.8216	40.73	-1.15	39.58	74.00	-34.42	Vertical
3	1535.3928	49.02	-0.38	48.64	74.00	-25.36	Vertical
4	3071.2857	39.04	8.80	47.84	74.00	-26.16	Vertical
5	5176.1862	36.14	15.06	51.20	74.00	-22.80	Vertical
6	6150.4056	35.46	17.88	53.34	74.00	-20.66	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5190	Horizontal	PASS

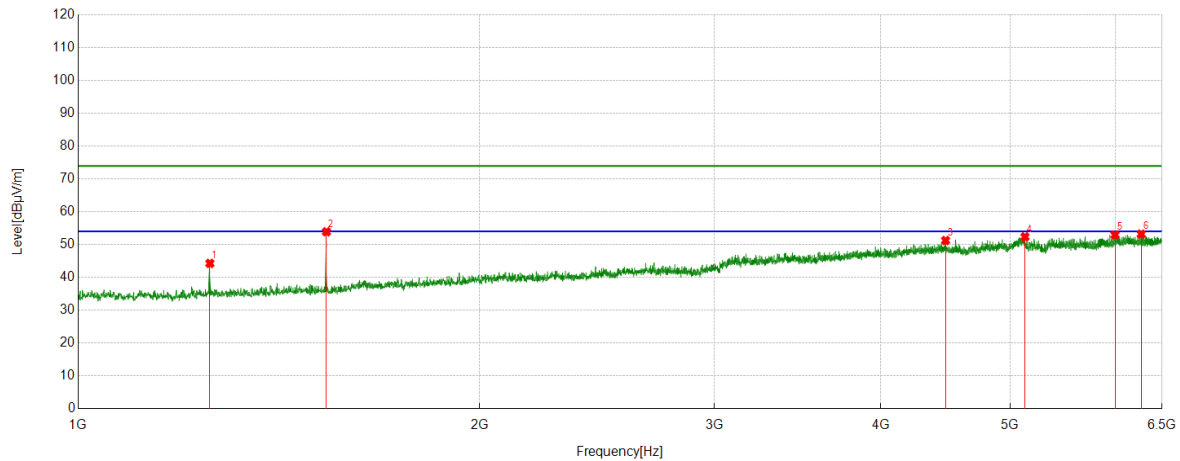


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	45.42	-1.16	44.26	74.00	-29.74	Horizontal
2	1535.3928	54.48	-0.58	53.90	74.00	-20.10	Horizontal
3	4472.7192	36.79	14.45	51.24	74.00	-22.76	Horizontal
4	5130.3478	35.87	16.48	52.35	74.00	-21.65	Horizontal
5	5992.7214	35.17	17.78	52.95	74.00	-21.05	Horizontal
6	6270.1967	34.53	18.66	53.19	74.00	-20.81	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5190	Vertical	PASS

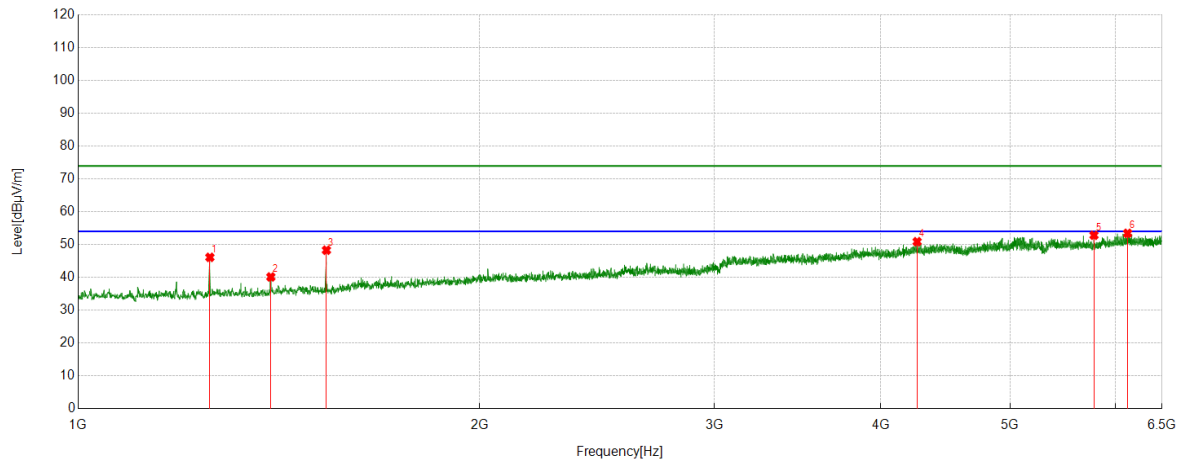


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	47.26	-1.16	46.10	74.00	-27.90	Vertical
2	1394.8216	41.10	-0.98	40.12	74.00	-33.88	Vertical
3	1535.3928	48.86	-0.58	48.28	74.00	-25.72	Vertical
4	4258.1954	37.18	13.70	50.88	74.00	-23.12	Vertical
5	5779.4199	36.32	16.51	52.83	74.00	-21.17	Vertical
6	6124.7361	35.02	18.41	53.43	74.00	-20.57	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5230	Horizontal	PASS

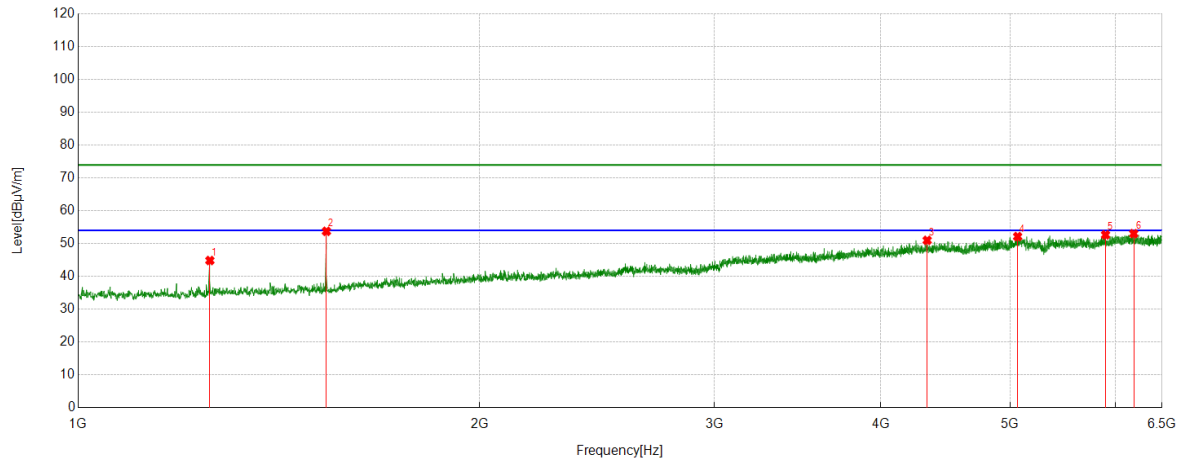


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	45.99	-1.16	44.83	74.00	-29.17	Horizontal
2	1535.3928	54.31	-0.58	53.73	74.00	-20.27	Horizontal
3	4332.7592	37.35	13.63	50.98	74.00	-23.02	Horizontal
4	5065.5628	35.75	16.38	52.13	74.00	-21.87	Horizontal
5	5896.1551	34.94	17.71	52.65	74.00	-21.35	Horizontal
6	6190.1322	34.76	18.27	53.03	74.00	-20.97	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5230	Vertical	PASS

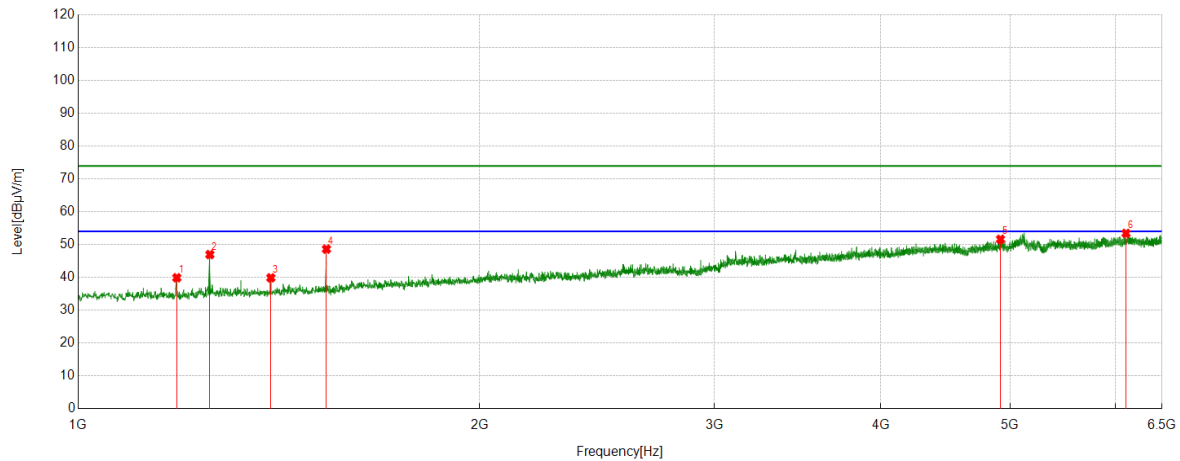


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.7984	41.96	-2.08	39.88	74.00	-34.12	Vertical
2	1255.4728	48.11	-1.16	46.95	74.00	-27.05	Vertical
3	1394.8216	40.84	-0.98	39.86	74.00	-34.14	Vertical
4	1535.3928	49.19	-0.58	48.61	74.00	-25.39	Vertical
5	4917.6575	36.14	15.48	51.62	74.00	-22.38	Vertical
6	6108.2342	35.02	18.40	53.42	74.00	-20.58	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5270	Horizontal	PASS

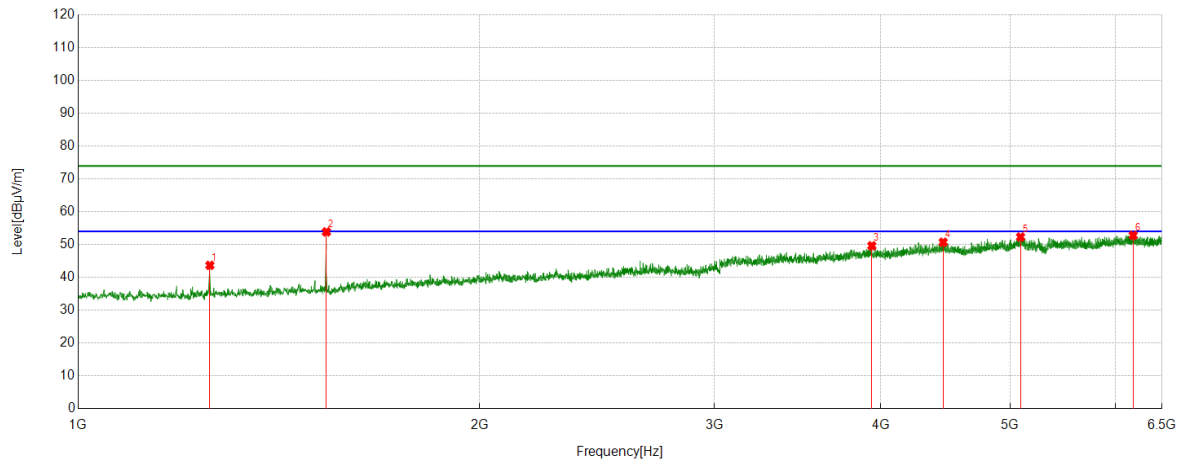


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	44.82	-1.16	43.66	74.00	-30.34	Horizontal
2	1535.3928	54.44	-0.58	53.86	74.00	-20.14	Horizontal
3	3937.9375	37.04	12.57	49.61	74.00	-24.39	Horizontal
4	4454.3838	36.36	14.35	50.71	74.00	-23.29	Horizontal
5	5091.2324	35.64	16.66	52.30	74.00	-21.70	Horizontal
6	6184.0204	34.52	18.28	52.80	74.00	-21.20	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5270	Vertical	PASS

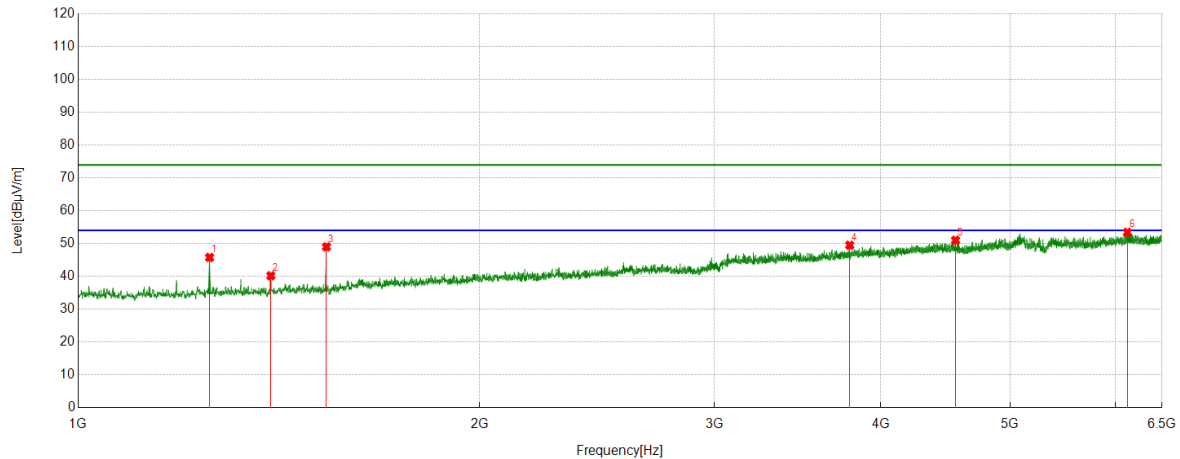


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1254.8617	46.91	-1.15	45.76	74.00	-28.24	Vertical
2	1394.8216	41.16	-0.98	40.18	74.00	-33.82	Vertical
3	1535.3928	49.58	-0.58	49.00	74.00	-25.00	Vertical
4	3790.0322	37.49	12.00	49.49	74.00	-24.51	Vertical
5	4550.3389	36.57	14.42	50.99	74.00	-23.01	Vertical
6	6122.2914	35.05	18.37	53.42	74.00	-20.58	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5310	Horizontal	PASS

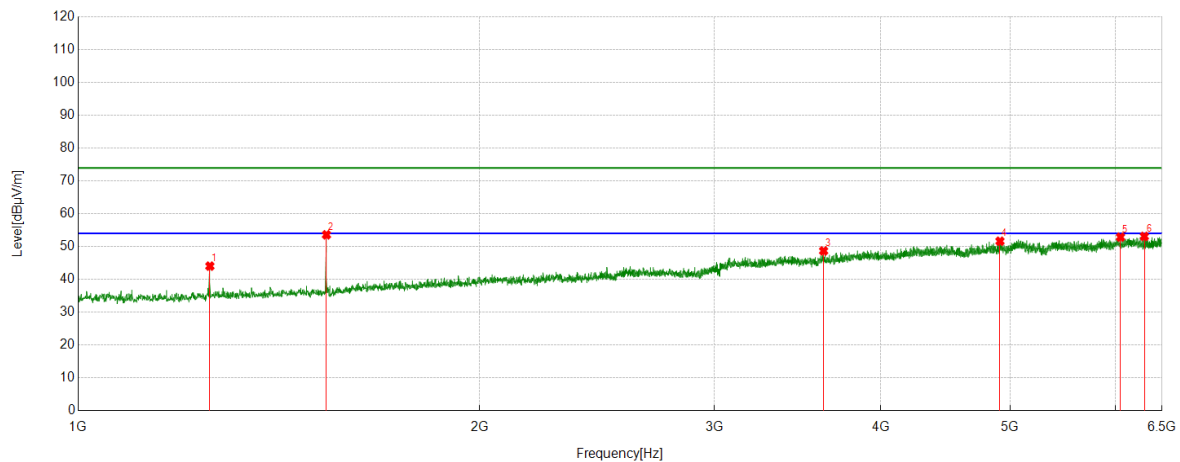


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	45.19	-1.16	44.03	74.00	-29.97	Horizontal
2	1535.3928	54.16	-0.58	53.58	74.00	-20.42	Horizontal
3	3623.1804	37.49	11.18	48.67	74.00	-25.33	Horizontal
4	4913.3793	35.99	15.64	51.63	74.00	-22.37	Horizontal
5	6050.1722	35.09	17.79	52.88	74.00	-21.12	Horizontal
6	6304.4227	34.40	18.70	53.10	74.00	-20.90	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5310	Vertical	PASS

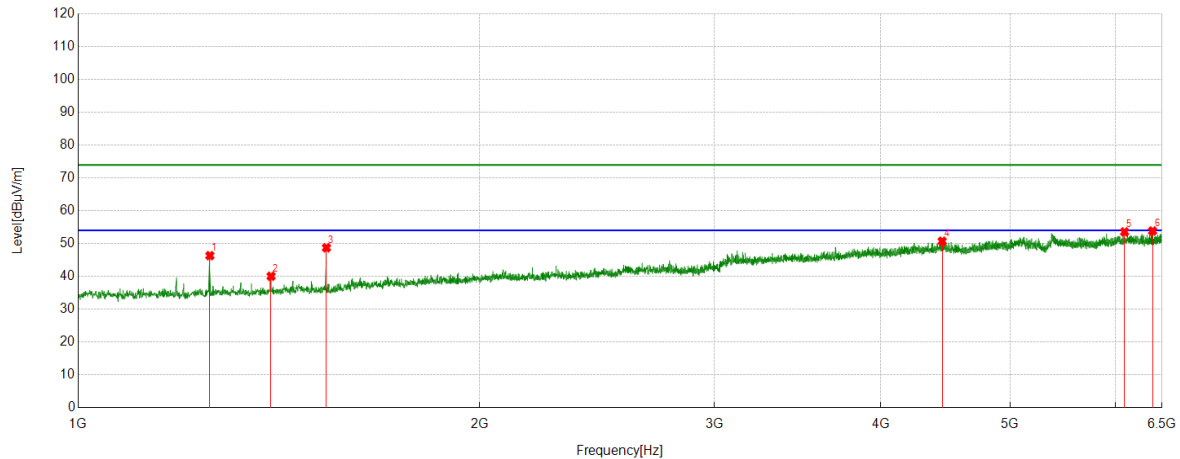


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	47.47	-1.16	46.31	74.00	-27.69	Vertical
2	1395.4328	41.02	-0.99	40.03	74.00	-33.97	Vertical
3	1535.3928	49.29	-0.58	48.71	74.00	-25.29	Vertical
4	4446.4385	36.33	14.38	50.71	74.00	-23.29	Vertical
5	6092.9548	35.27	18.27	53.54	74.00	-20.46	Vertical
6	6394.2660	35.06	18.78	53.84	74.00	-20.16	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5510	Horizontal	PASS

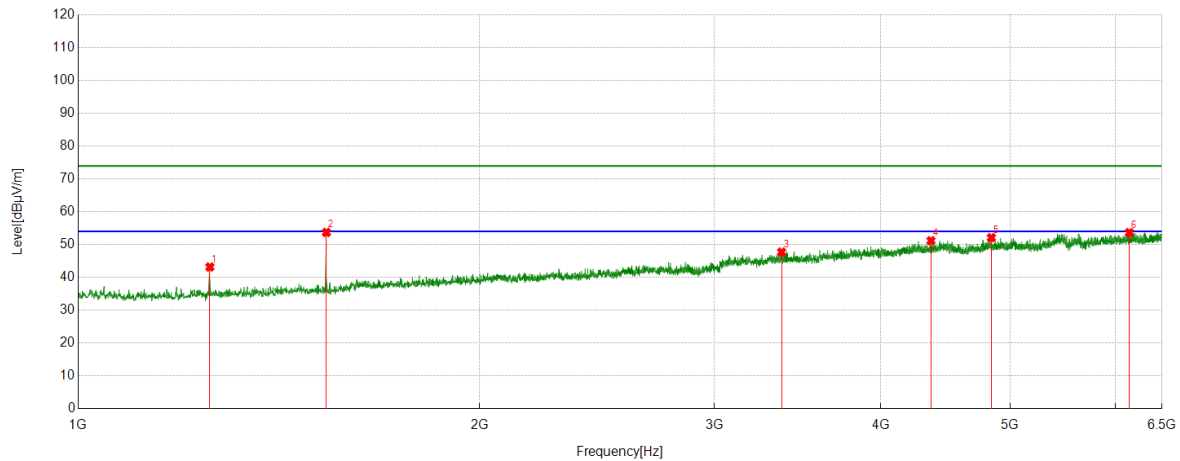


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	44.63	-1.48	43.15	74.00	-30.85	Horizontal
2	1535.3928	54.42	-0.72	53.70	74.00	-20.30	Horizontal
3	3369.5411	37.04	10.66	47.70	74.00	-26.30	Horizontal
4	4361.4846	37.51	13.66	51.17	74.00	-22.83	Horizontal
5	4840.6490	36.55	15.53	52.08	74.00	-21.92	Horizontal
6	6143.6826	35.44	18.20	53.64	74.00	-20.36	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5510	Vertical	PASS

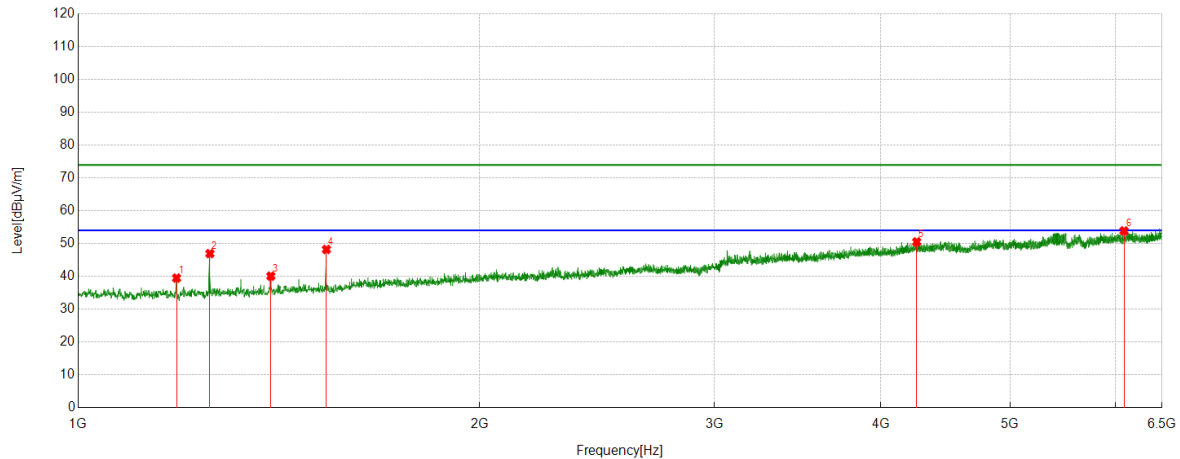


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.1872	41.38	-1.91	39.47	74.00	-34.53	Vertical
2	1255.4728	48.42	-1.48	46.94	74.00	-27.06	Vertical
3	1394.8216	41.20	-1.14	40.06	74.00	-33.94	Vertical
4	1535.3928	48.92	-0.72	48.20	74.00	-25.80	Vertical
5	4255.1395	36.60	13.92	50.52	74.00	-23.48	Vertical
6	6086.8430	35.66	18.20	53.86	74.00	-20.14	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5550	Horizontal	PASS

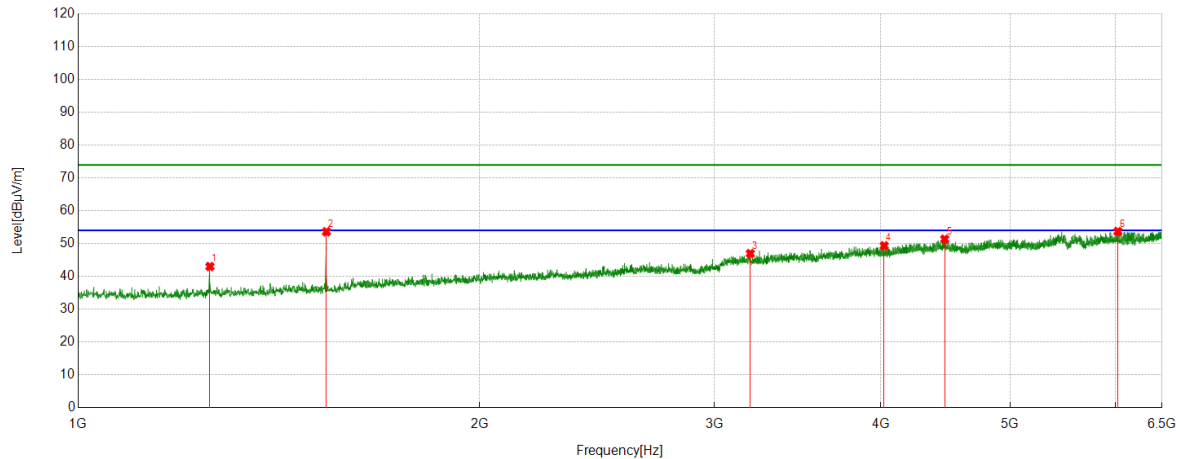


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	44.48	-1.48	43.00	74.00	-31.00	Horizontal
2	1535.3928	54.32	-0.72	53.60	74.00	-20.40	Horizontal
3	3192.2991	36.90	10.05	46.95	74.00	-27.05	Horizontal
4	4022.8914	36.51	12.81	49.32	74.00	-24.68	Horizontal
5	4465.9962	36.39	14.95	51.34	74.00	-22.66	Horizontal
6	6022.6692	35.94	17.73	53.67	74.00	-20.33	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5550	Vertical	PASS

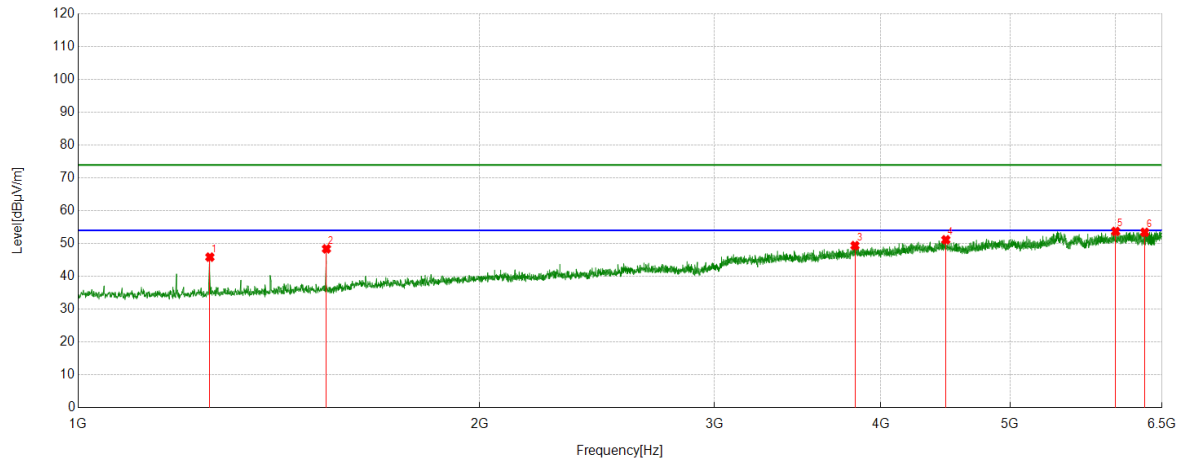


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	47.34	-1.48	45.86	74.00	-28.14	Vertical
2	1535.3928	49.11	-0.72	48.39	74.00	-25.61	Vertical
3	3824.8694	36.61	12.77	49.38	74.00	-24.62	Vertical
4	4474.5527	36.24	14.90	51.14	74.00	-22.86	Vertical
5	5999.4444	35.86	17.85	53.71	74.00	-20.29	Vertical
6	6308.7010	34.57	18.87	53.44	74.00	-20.56	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5670	Horizontal	PASS

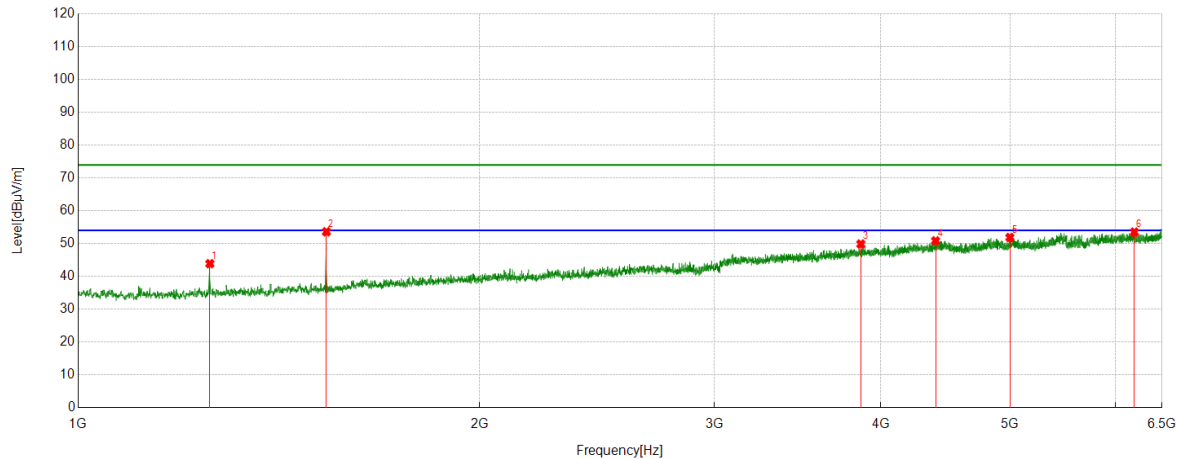


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	45.34	-1.48	43.86	74.00	-30.14	Horizontal
2	1535.3928	54.31	-0.72	53.59	74.00	-20.41	Horizontal
3	3863.9849	37.34	12.52	49.86	74.00	-24.14	Horizontal
4	4396.3218	36.83	13.99	50.82	74.00	-23.18	Horizontal
5	4998.3331	36.52	15.32	51.84	74.00	-22.16	Horizontal
6	6196.8552	34.94	18.56	53.50	74.00	-20.50	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5670	Vertical	PASS

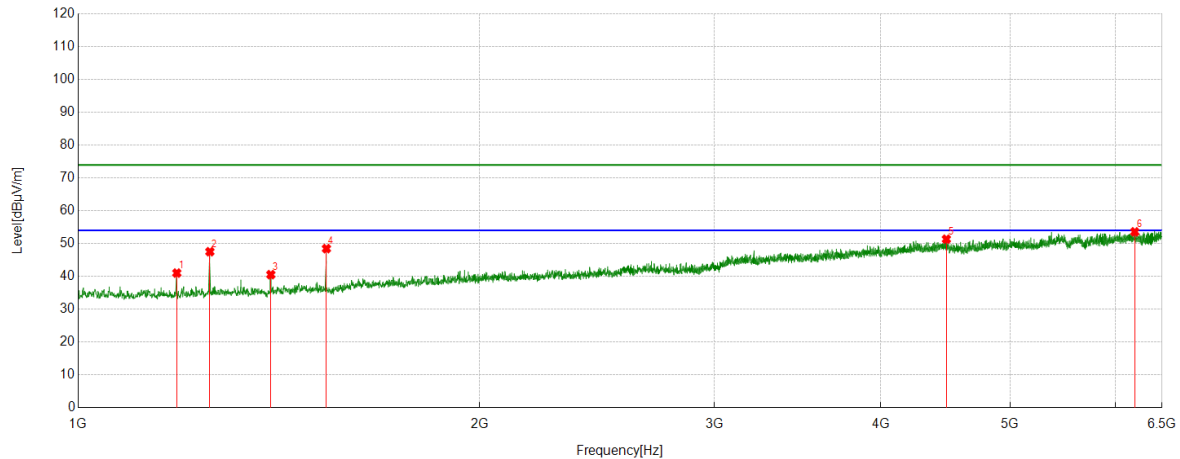


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.7984	42.93	-1.93	41.00	74.00	-33.00	Vertical
2	1255.4728	48.99	-1.48	47.51	74.00	-26.49	Vertical
3	1394.8216	41.66	-1.14	40.52	74.00	-33.48	Vertical
4	1535.3928	49.18	-0.72	48.46	74.00	-25.54	Vertical
5	4478.8310	36.75	14.59	51.34	74.00	-22.66	Vertical
6	6201.1335	34.96	18.61	53.57	74.00	-20.43	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5710	Horizontal	PASS

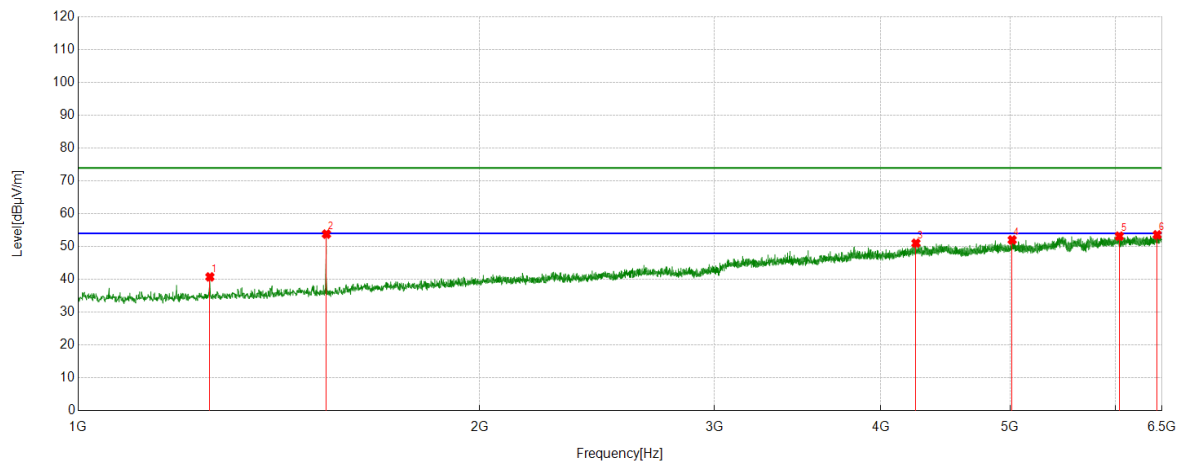


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.4728	42.22	-1.48	40.74	74.00	-33.26	Horizontal
2	1535.3928	54.52	-0.72	53.80	74.00	-20.20	Horizontal
3	4249.6388	37.05	13.98	51.03	74.00	-22.97	Horizontal
4	5017.8909	36.32	15.70	52.02	74.00	-21.98	Horizontal
5	6037.9487	35.49	17.68	53.17	74.00	-20.83	Horizontal
6	6445.6051	34.15	19.42	53.57	74.00	-20.43	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5710	Vertical	PASS

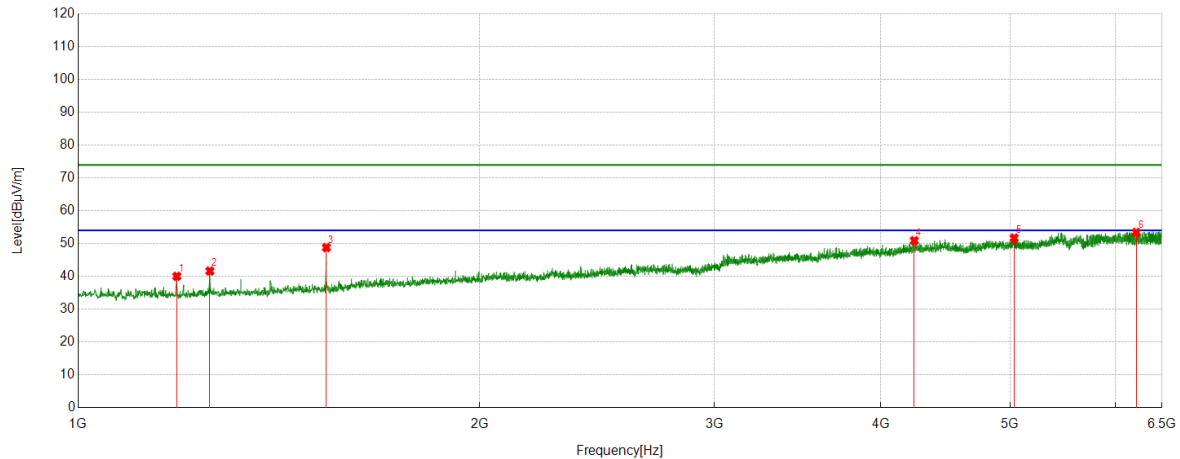

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1185.7984	41.95	-1.93	40.02	74.00	-33.98	Vertical
2	1255.4728	43.10	-1.48	41.62	74.00	-32.38	Vertical
3	1535.3928	49.50	-0.72	48.78	74.00	-25.22	Vertical
4	4238.0264	36.80	14.09	50.89	74.00	-23.11	Vertical
5	5035.0039	35.65	16.05	51.70	74.00	-22.30	Vertical
6	6217.0241	34.85	18.56	53.41	74.00	-20.59	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	6327.0363	25.09	18.83	43.92	54.00	-10.08	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5755	Horizontal	PASS

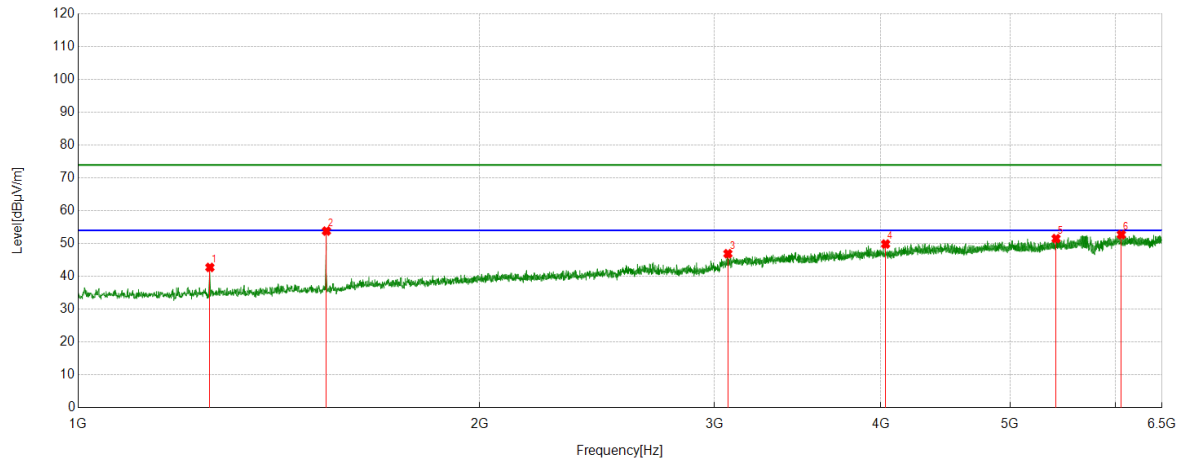


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	44.31	-1.59	42.72	74.00	-31.28	Horizontal
2	1535.3928	54.19	-0.38	53.81	74.00	-20.19	Horizontal
3	3071.2857	38.10	8.80	46.90	74.00	-27.10	Horizontal
4	4032.6703	37.25	12.60	49.85	74.00	-24.15	Horizontal
5	5412.7125	35.46	16.05	51.51	74.00	-22.49	Horizontal
6	6058.7287	35.01	17.71	52.72	74.00	-21.28	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5755	Vertical	PASS

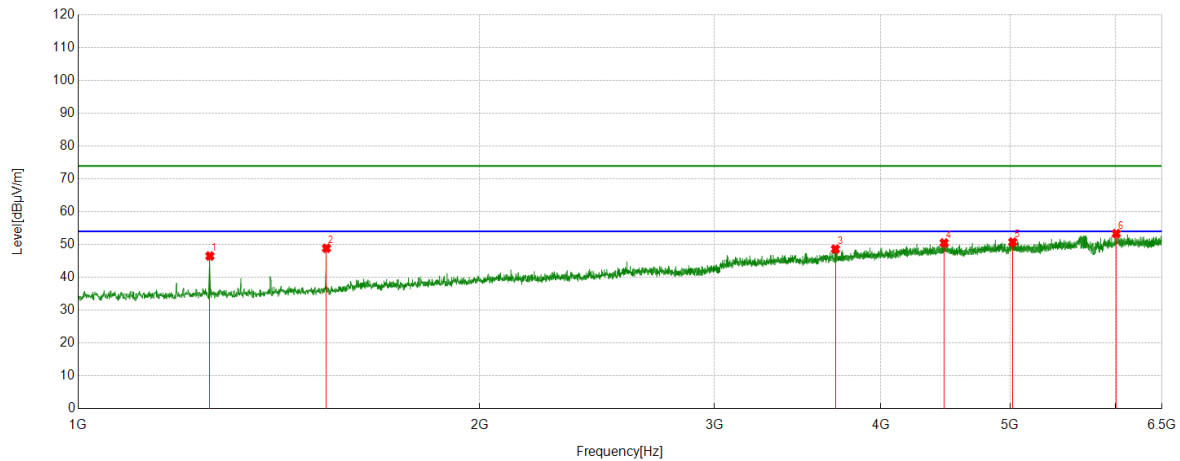


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.4728	48.09	-1.59	46.50	74.00	-27.50	Vertical
2	1535.3928	49.25	-0.38	48.87	74.00	-25.13	Vertical
3	3697.7442	36.58	12.02	48.60	74.00	-25.40	Vertical
4	4461.7180	36.33	14.16	50.49	74.00	-23.51	Vertical
5	5022.7803	35.72	15.04	50.76	74.00	-23.24	Vertical
6	6006.1674	36.01	17.33	53.34	74.00	-20.66	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5795	Horizontal	PASS

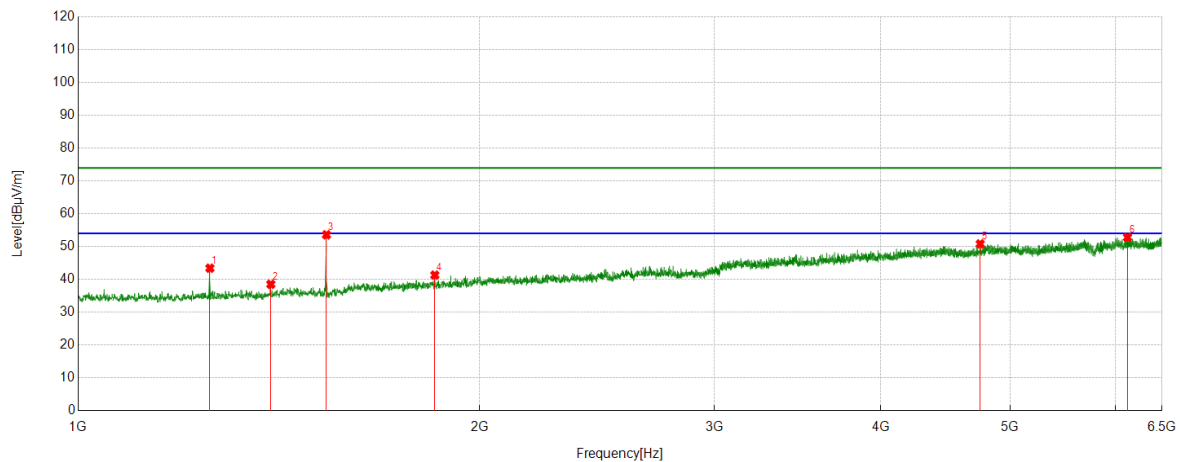


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.4728	44.99	-1.59	43.40	74.00	-30.60	Horizontal
2	1394.8216	39.65	-1.15	38.50	74.00	-35.50	Horizontal
3	1535.3928	53.96	-0.38	53.58	74.00	-20.42	Horizontal
4	1851.3724	39.20	2.10	41.30	74.00	-32.70	Horizontal
5	4748.3609	36.60	14.22	50.82	74.00	-23.18	Horizontal
6	6124.1249	35.12	17.67	52.79	74.00	-21.21	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ax HE40	5795	Vertical	PASS

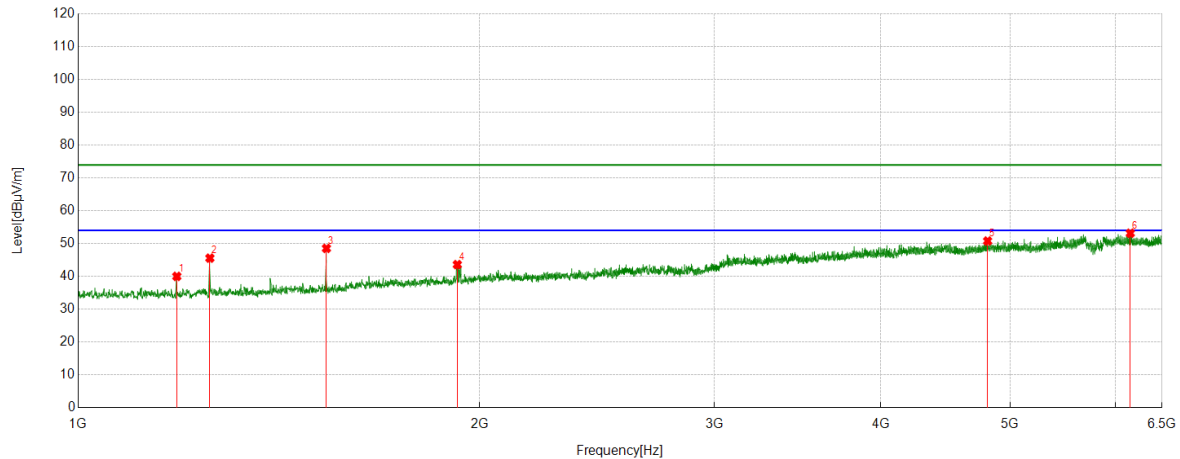


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.7984	41.88	-1.89	39.99	74.00	-34.01	Vertical
2	1255.4728	47.14	-1.59	45.55	74.00	-28.45	Vertical
3	1535.3928	48.91	-0.38	48.53	74.00	-25.47	Vertical
4	1924.7139	41.06	2.52	43.58	74.00	-30.42	Vertical
5	4809.4788	35.76	15.02	50.78	74.00	-23.22	Vertical
6	6153.4615	35.29	17.86	53.15	74.00	-20.85	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for Band Reject Filter losses.
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

PART 2: 6.5GHz~18GHz

Test Mode	Channel	Polarization	Verdict
11a	5180	Horizontal	PASS

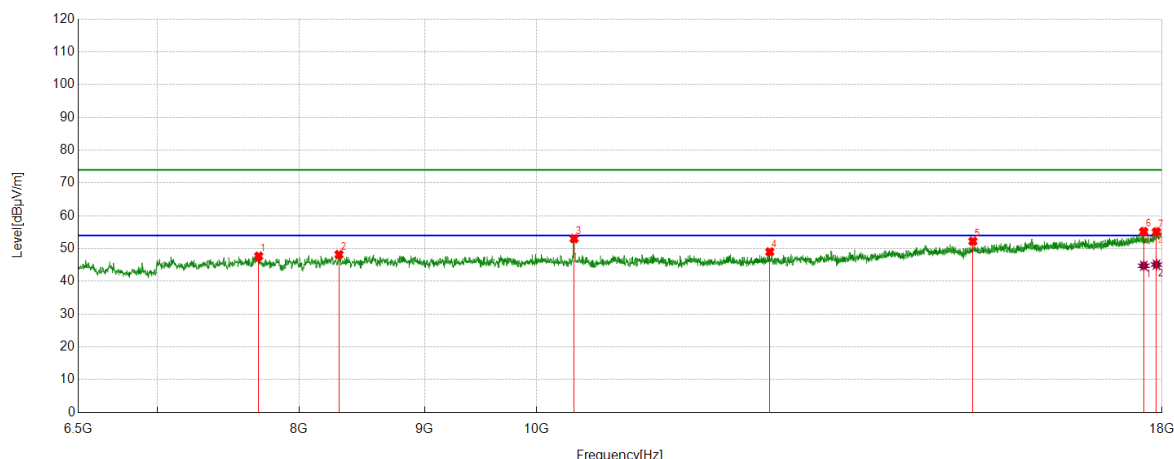

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7701.9503	42.13	5.54	47.67	74.00	-26.33	Horizontal
2	8305.8010	41.85	6.32	48.17	74.00	-25.83	Horizontal
3	10358.8931	46.32	6.70	53.02	74.00	-20.98	Horizontal
4	12450.3251	40.40	8.58	48.98	74.00	-25.02	Horizontal
5	15068.9282	39.11	13.11	52.22	74.00	-21.78	Horizontal
6	17693.2822	36.97	18.21	55.18	74.00	-18.82	Horizontal
7	17906.0677	35.88	19.22	55.10	74.00	-18.90	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17693.2822	26.53	18.21	44.74	54.00	-9.26	Horizontal
2	17906.0677	25.89	19.22	45.11	54.00	-8.89	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5180	Vertical	PASS

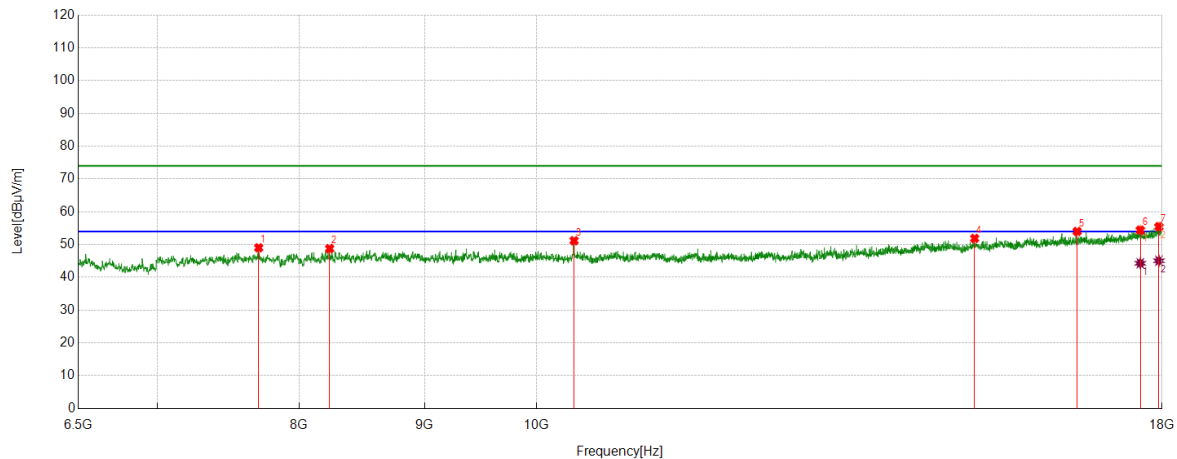

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7701.9503	43.47	5.54	49.01	74.00	-24.99	Vertical
2	8232.9555	42.74	6.02	48.76	74.00	-25.24	Vertical
3	10358.8931	44.48	6.70	51.18	74.00	-22.82	Vertical
4	15093.8490	38.67	13.20	51.87	74.00	-22.13	Vertical
5	16619.7700	38.10	15.90	54.00	74.00	-20.00	Vertical
6	17635.7726	36.38	18.03	54.41	74.00	-19.59	Vertical
7	17948.2414	35.98	19.48	55.46	74.00	-18.54	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17635.7726	26.26	18.03	44.29	54.00	-9.71	Vertical
2	17948.2414	25.57	19.48	45.05	54.00	-8.95	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5200	Horizontal	PASS

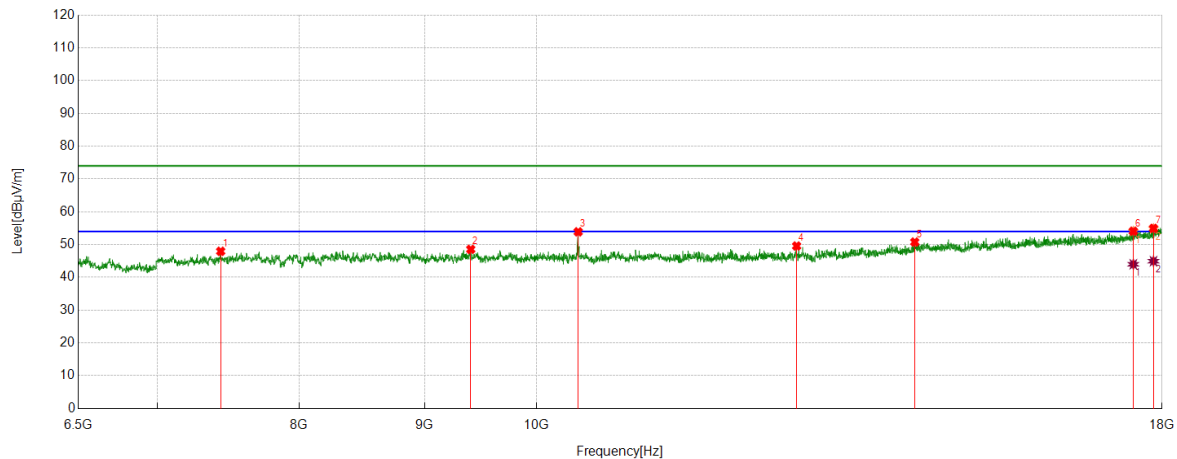

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7431.6553	43.70	4.24	47.94	74.00	-26.06	Horizontal
2	9400.4001	41.93	6.61	48.54	74.00	-25.46	Horizontal
3	10399.1499	47.16	6.72	53.88	74.00	-20.12	Horizontal
4	12768.5448	40.60	8.95	49.55	74.00	-24.45	Horizontal
5	14267.6279	38.68	12.08	50.76	74.00	-23.24	Horizontal
6	17520.7535	36.46	17.61	54.07	74.00	-19.93	Horizontal
7	17856.2260	35.71	19.22	54.93	74.00	-19.07	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17520.7535	26.38	17.61	43.99	54.00	-10.01	Horizontal
2	17856.2260	25.71	19.22	44.93	54.00	-9.07	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5200	Vertical	PASS

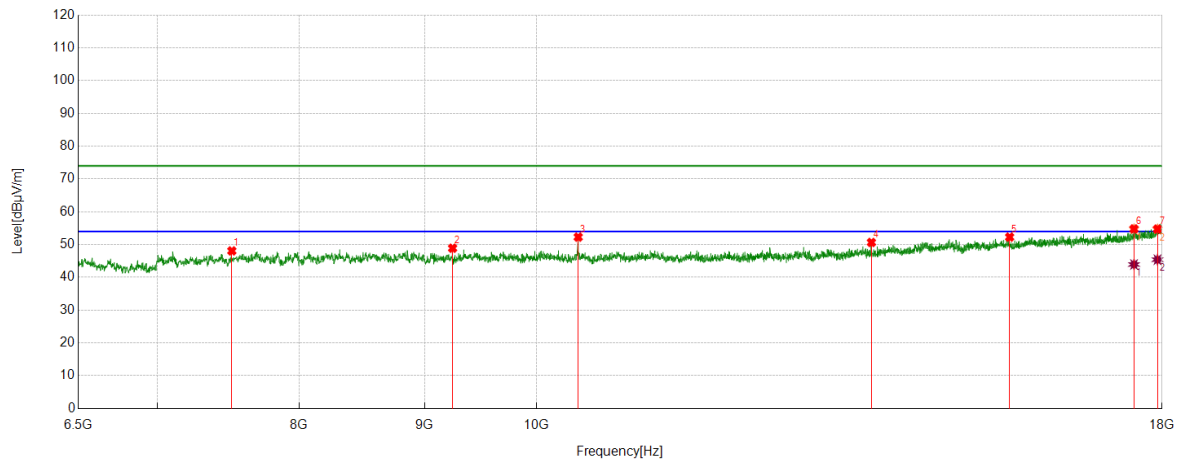

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7510.2517	43.64	4.42	48.06	74.00	-25.94	Vertical
2	9241.2902	42.74	6.14	48.88	74.00	-25.12	Vertical
3	10399.1499	45.56	6.72	52.28	74.00	-21.72	Vertical
4	13698.2830	39.89	10.75	50.64	74.00	-23.36	Vertical
5	15598.0163	38.60	13.67	52.27	74.00	-21.73	Vertical
6	17532.2554	37.16	17.60	54.76	74.00	-19.24	Vertical
7	17923.3206	35.36	19.36	54.72	74.00	-19.28	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17532.2554	26.33	17.60	43.93	54.00	-10.07	Vertical
2	17923.3206	26.03	19.36	45.39	54.00	-8.61	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5240	Horizontal	PASS

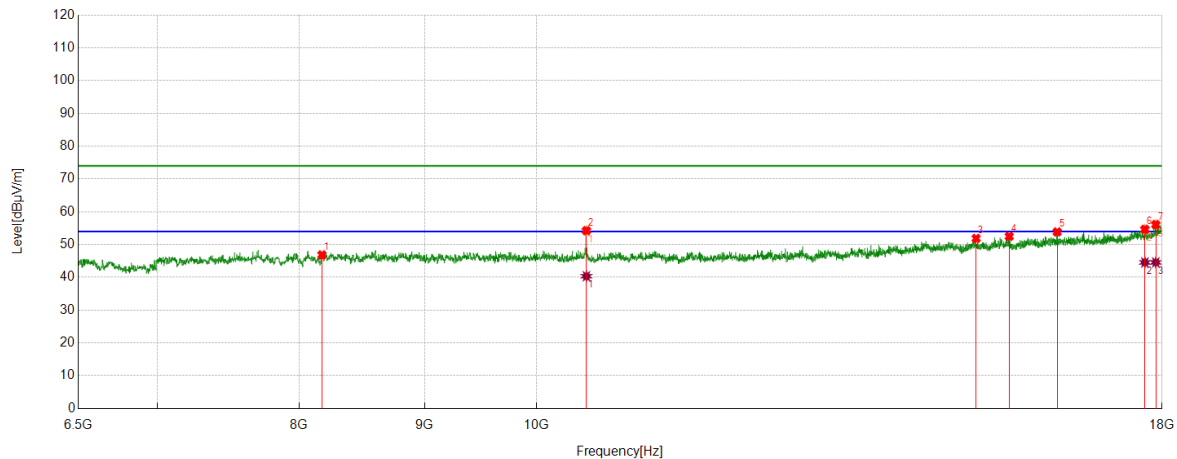

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8173.5289	40.92	5.93	46.85	74.00	-27.15	Horizontal
2	10479.6633	47.46	6.78	54.24	74.00	-19.76	Horizontal
3	15114.9358	38.61	13.25	51.86	74.00	-22.14	Horizontal
4	15592.2654	38.83	13.65	52.48	74.00	-21.52	Horizontal
5	16311.1352	38.76	15.08	53.84	74.00	-20.16	Horizontal
6	17712.4521	36.26	18.38	54.64	74.00	-19.36	Horizontal
7	17894.5658	36.84	19.25	56.09	74.00	-17.91	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10479.6633	33.55	6.78	40.33	54.00	-13.67	Horizontal
2	17712.4521	26.17	18.38	44.55	54.00	-9.45	Horizontal
3	17894.5658	25.31	19.25	44.56	54.00	-9.44	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5240	Vertical	PASS

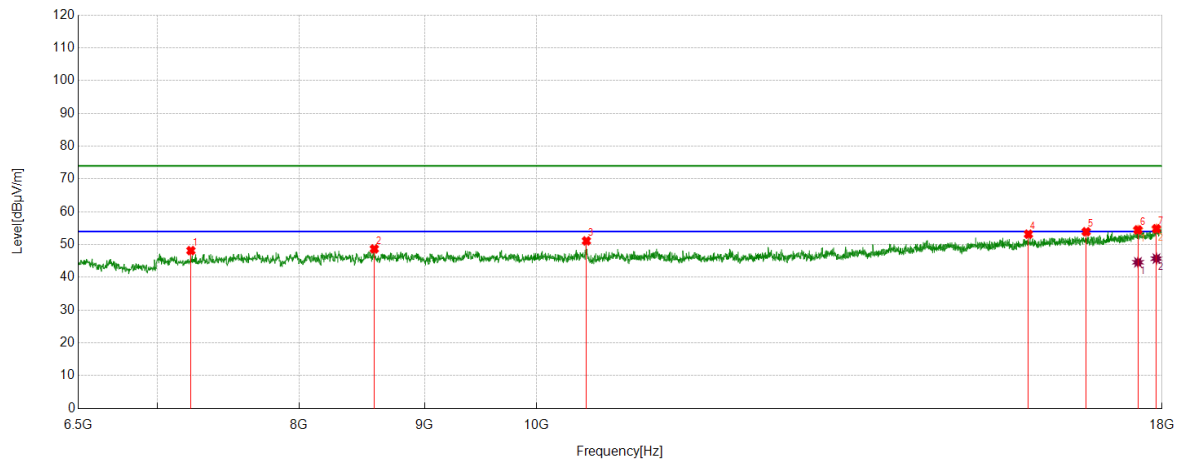

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7226.5378	44.30	3.85	48.15	74.00	-25.85	Vertical
2	8585.6809	42.53	6.14	48.67	74.00	-25.33	Vertical
3	10479.6633	44.33	6.78	51.11	74.00	-22.89	Vertical
4	15875.9793	38.46	14.71	53.17	74.00	-20.83	Vertical
5	16761.6269	37.85	16.06	53.91	74.00	-20.09	Vertical
6	17597.4329	36.44	18.03	54.47	74.00	-19.53	Vertical
7	17906.0677	35.61	19.22	54.83	74.00	-19.17	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17597.4329	26.56	18.03	44.59	54.00	-9.41	Vertical
2	17906.0677	26.49	19.22	45.71	54.00	-8.29	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5260	Horizontal	PASS

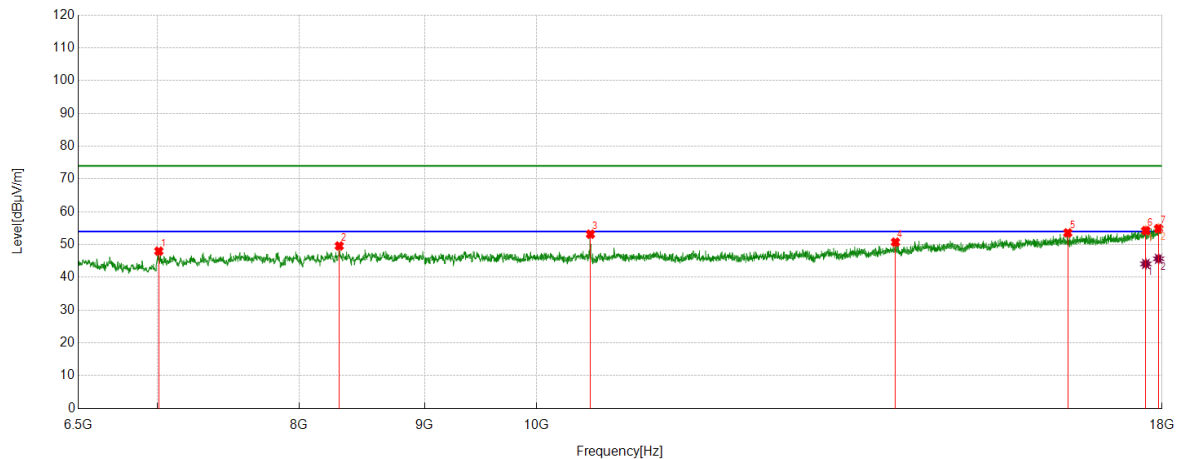

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7011.8353	44.41	3.57	47.98	74.00	-26.02	Horizontal
2	8307.7180	43.24	6.33	49.57	74.00	-24.43	Horizontal
3	10519.9200	46.22	6.94	53.16	74.00	-20.84	Horizontal
4	14010.7518	38.93	11.81	50.74	74.00	-23.26	Horizontal
5	16474.0790	37.80	15.76	53.56	74.00	-20.44	Horizontal
6	17727.7880	35.75	18.52	54.27	74.00	-19.73	Horizontal
7	17942.4904	35.41	19.46	54.87	74.00	-19.13	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17727.7880	25.58	18.52	44.10	54.00	-9.90	Horizontal
2	17942.4904	26.20	19.46	45.66	54.00	-8.34	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5260	Vertical	PASS

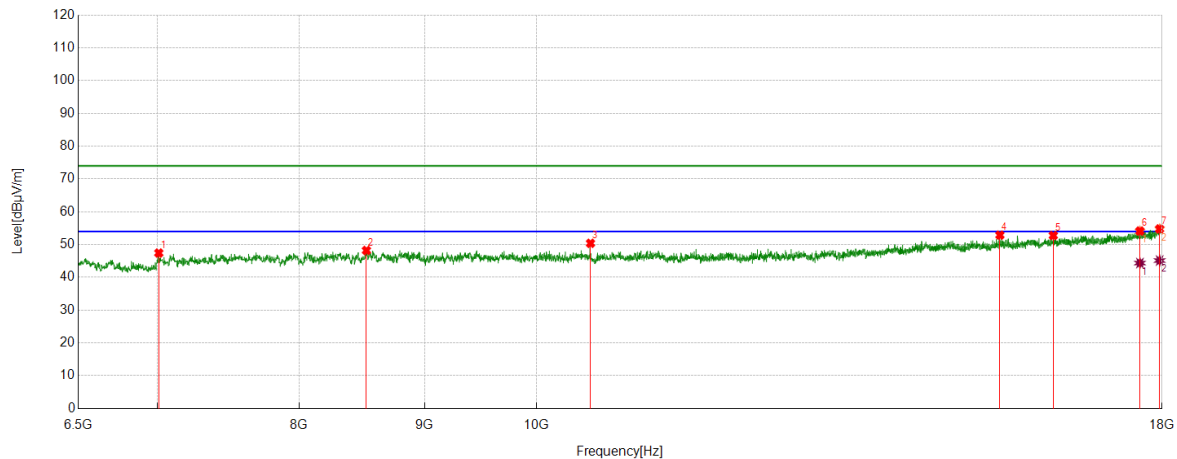

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7011.8353	43.85	3.57	47.42	74.00	-26.58	Vertical
2	8522.4204	41.79	6.41	48.20	74.00	-25.80	Vertical
3	10519.9200	43.44	6.94	50.38	74.00	-23.62	Vertical
4	15456.1594	38.96	13.92	52.88	74.00	-21.12	Vertical
5	16251.7086	37.38	15.38	52.76	74.00	-21.24	Vertical
6	17630.0217	36.07	18.05	54.12	74.00	-19.88	Vertical
7	17959.7433	35.13	19.63	54.76	74.00	-19.24	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17630.0217	26.30	18.05	44.35	54.00	-9.65	Vertical
2	17959.7433	25.49	19.63	45.12	54.00	-8.88	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5280	Horizontal	PASS

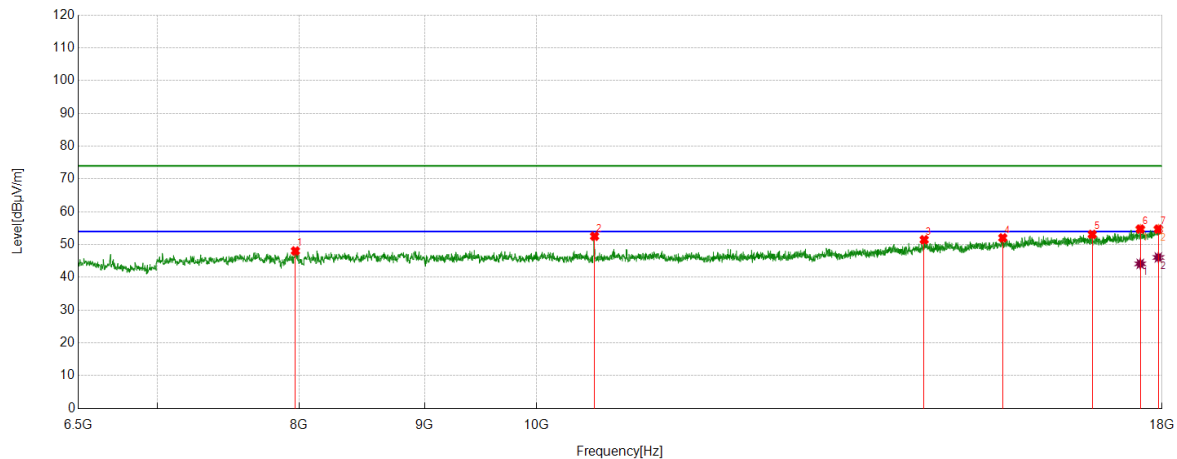

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7972.2454	42.66	5.39	48.05	74.00	-25.95	Horizontal
2	10560.1767	45.73	6.80	52.53	74.00	-21.47	Horizontal
3	14394.1490	38.69	12.77	51.46	74.00	-22.54	Horizontal
4	15498.3331	38.10	13.93	52.03	74.00	-21.97	Horizontal
5	16857.4762	36.79	16.30	53.09	74.00	-20.91	Horizontal
6	17635.7726	36.70	18.03	54.73	74.00	-19.27	Horizontal
7	17938.6564	35.27	19.44	54.71	74.00	-19.29	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17635.7726	26.09	18.03	44.12	54.00	-9.88	Horizontal
2	17938.6564	26.63	19.44	46.07	54.00	-7.93	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5280	Vertical	PASS

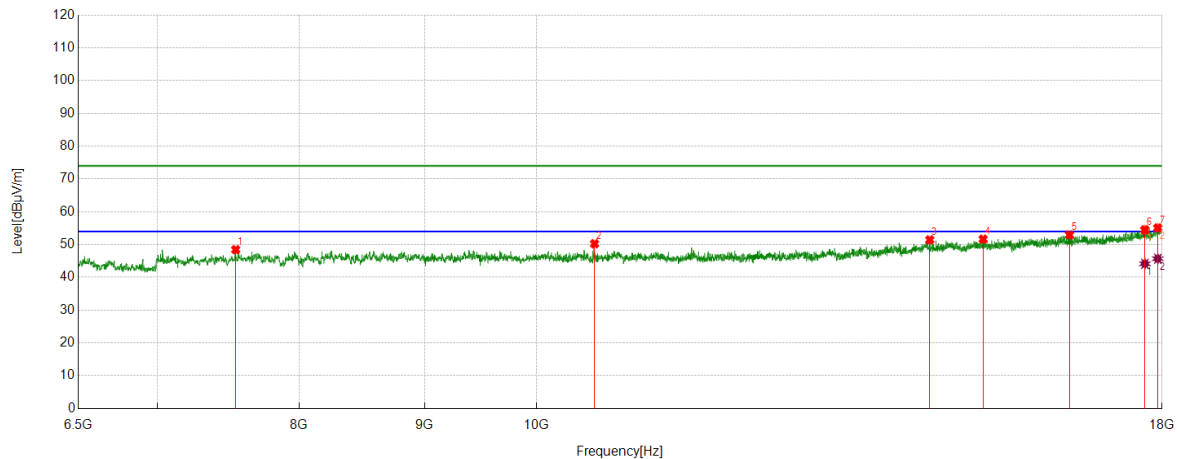

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7537.0895	43.93	4.51	48.44	74.00	-25.56	Vertical
2	10560.1767	43.45	6.80	50.25	74.00	-23.75	Vertical
3	14470.8285	38.58	12.86	51.44	74.00	-22.56	Vertical
4	15214.6191	38.22	13.43	51.65	74.00	-22.35	Vertical
5	16500.9168	37.20	15.73	52.93	74.00	-21.07	Vertical
6	17712.4521	36.13	18.38	54.51	74.00	-19.49	Vertical
7	17929.0715	35.70	19.37	55.07	74.00	-18.93	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17712.4521	25.75	18.38	44.13	54.00	-9.87	Vertical
2	17929.0715	26.32	19.37	45.69	54.00	-8.31	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5320	Horizontal	PASS

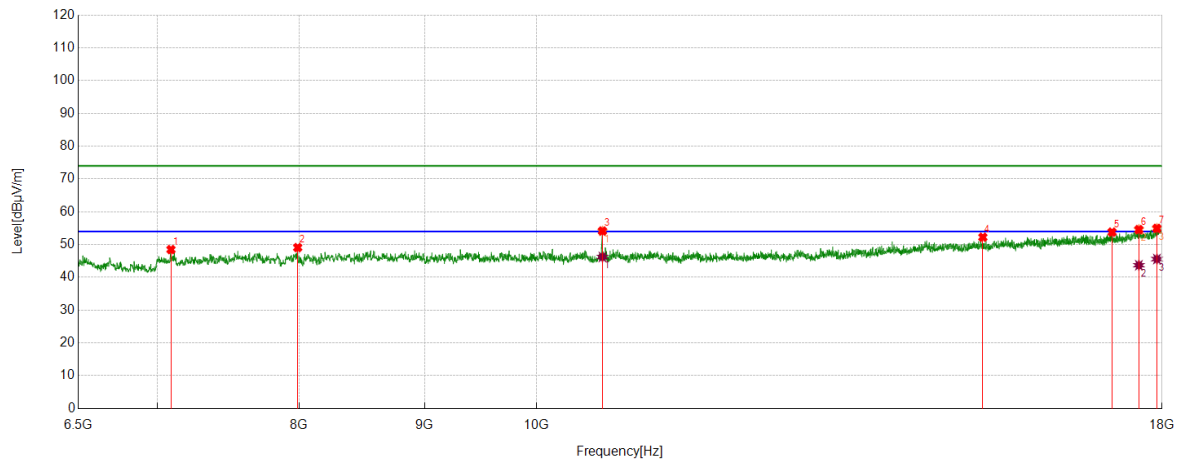

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7092.3487	44.62	3.85	48.47	74.00	-25.53	Horizontal
2	7989.4982	43.48	5.60	49.08	74.00	-24.92	Horizontal
3	10638.7731	47.26	6.87	54.13	74.00	-19.87	Horizontal
4	15210.7851	38.76	13.47	52.23	74.00	-21.77	Horizontal
5	17173.7790	37.28	16.51	53.79	74.00	-20.21	Horizontal
6	17612.7688	36.50	18.06	54.56	74.00	-19.44	Horizontal
7	17913.7356	35.65	19.29	54.94	74.00	-19.06	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	10638.7731	39.34	6.87	46.21	54.00	-7.79	Horizontal
2	17612.7688	25.63	18.06	43.69	54.00	-10.31	Horizontal
3	17913.7356	26.28	19.29	45.57	54.00	-8.43	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5320	Vertical	PASS

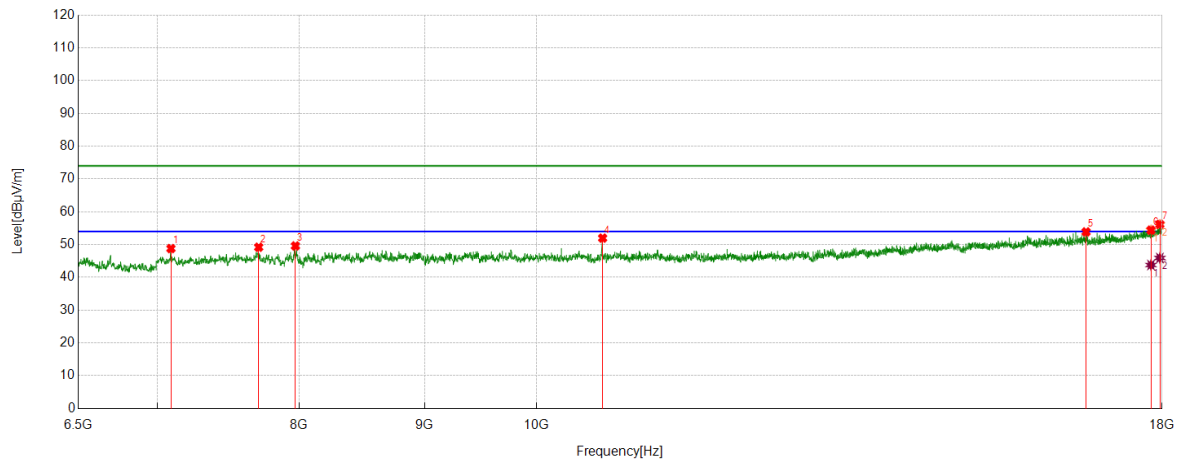

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7092.3487	44.93	3.85	48.78	74.00	-25.22	Vertical
2	7701.9503	43.64	5.54	49.18	74.00	-24.82	Vertical
3	7972.2454	44.19	5.39	49.58	74.00	-24.42	Vertical
4	10640.6901	45.11	6.85	51.96	74.00	-22.04	Vertical
5	16759.7100	37.79	16.08	53.87	74.00	-20.13	Vertical
6	17814.0523	35.48	18.93	54.41	74.00	-19.59	Vertical
7	17963.5773	36.54	19.63	56.17	74.00	-17.83	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17814.0523	24.83	18.93	43.76	54.00	-10.24	Vertical
2	17963.5773	26.27	19.63	45.90	54.00	-8.10	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5500	Horizontal	PASS

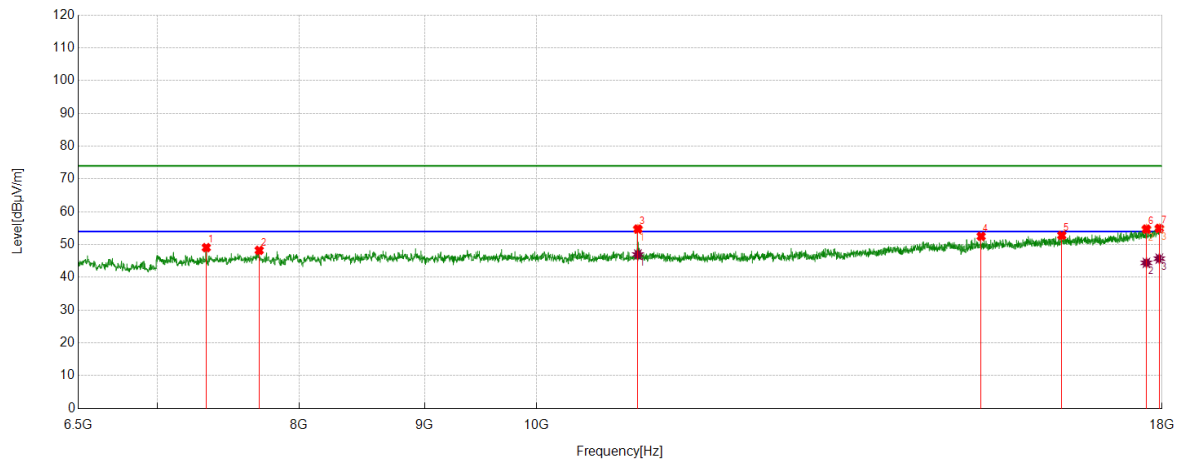

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7331.9720	45.17	3.89	49.06	74.00	-24.94	Horizontal
2	7705.7843	42.87	5.36	48.23	74.00	-25.77	Horizontal
3	10999.1665	47.45	7.28	54.73	74.00	-19.27	Horizontal
4	15185.8643	39.15	13.36	52.51	74.00	-21.49	Horizontal
5	16382.0637	37.72	15.07	52.79	74.00	-21.21	Horizontal
6	17737.3729	36.19	18.53	54.72	74.00	-19.28	Horizontal
7	17953.9923	35.39	19.54	54.93	74.00	-19.07	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	10999.1665	39.67	7.28	46.95	54.00	-7.05	Horizontal
2	17737.3729	25.89	18.53	44.42	54.00	-9.58	Horizontal
3	17953.9923	26.16	19.54	45.70	54.00	-8.30	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5500	Vertical	PASS

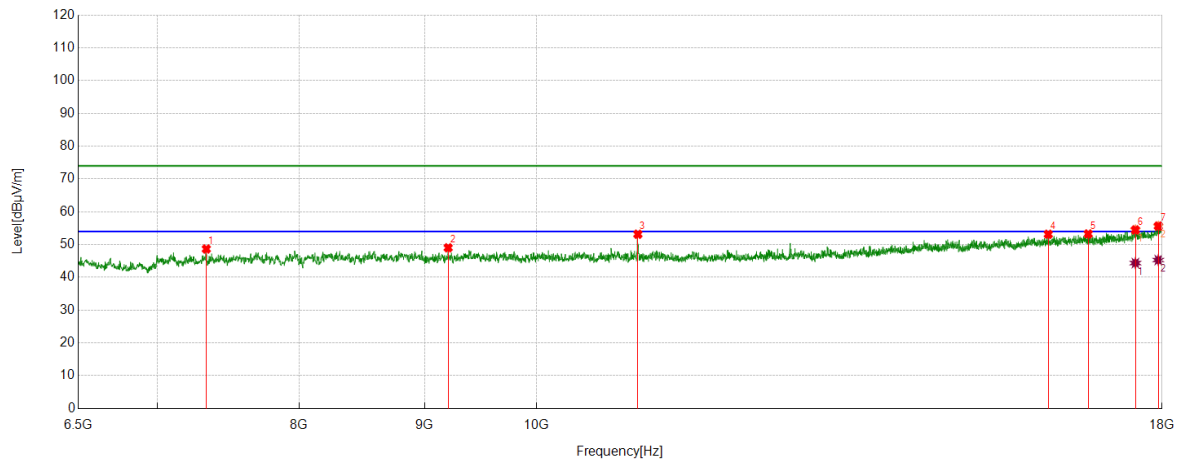

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7331.9720	44.76	3.89	48.65	74.00	-25.35	Vertical
2	9202.9505	42.98	6.03	49.01	74.00	-24.99	Vertical
3	10999.1665	45.87	7.28	53.15	74.00	-20.85	Vertical
4	16175.0292	38.03	15.11	53.14	74.00	-20.86	Vertical
5	16794.2157	37.17	16.06	53.23	74.00	-20.77	Vertical
6	17555.2592	36.70	17.77	54.47	74.00	-19.53	Vertical
7	17936.7395	36.22	19.42	55.64	74.00	-18.36	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17555.2592	26.58	17.77	44.35	54.00	-9.65	Vertical
2	17936.7395	25.86	19.42	45.28	54.00	-8.72	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5580	Horizontal	PASS

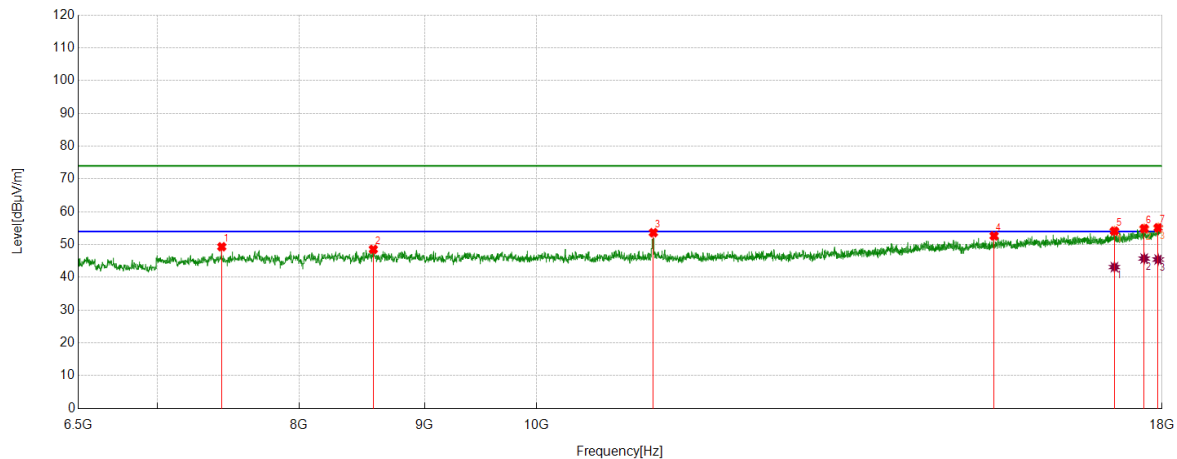

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7439.3232	45.13	4.20	49.33	74.00	-24.67	Horizontal
2	8578.0130	42.14	6.40	48.54	74.00	-25.46	Horizontal
3	11160.1934	46.42	7.21	53.63	74.00	-20.37	Horizontal
4	15371.8120	39.03	13.61	52.64	74.00	-21.36	Horizontal
5	17212.1187	37.34	16.77	54.11	74.00	-19.89	Horizontal
6	17700.9502	36.59	18.28	54.87	74.00	-19.13	Horizontal
7	17934.8225	35.73	19.40	55.13	74.00	-18.87	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17212.1187	26.35	16.77	43.12	54.00	-10.88	Horizontal
2	17700.9502	27.45	18.28	45.73	54.00	-8.27	Horizontal
3	17934.8225	26.03	19.40	45.43	54.00	-8.57	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5580	Vertical	PASS

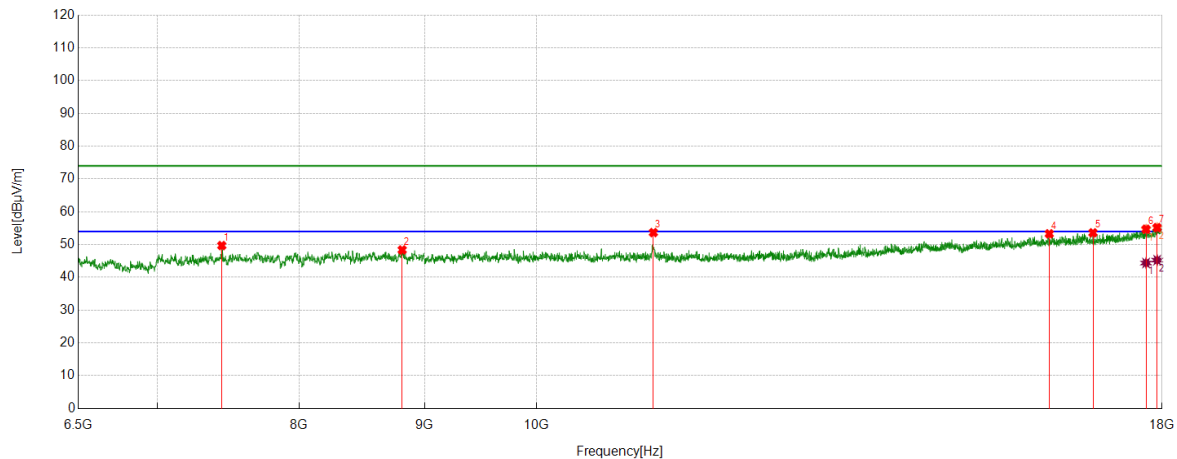

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7439.3232	45.49	4.20	49.69	74.00	-24.31	Vertical
2	8813.8023	42.09	6.28	48.37	74.00	-25.63	Vertical
3	11160.1934	46.44	7.21	53.65	74.00	-20.35	Vertical
4	16190.3651	37.98	15.30	53.28	74.00	-20.72	Vertical
5	16868.9782	37.49	16.10	53.59	74.00	-20.41	Vertical
6	17731.6219	36.15	18.53	54.68	74.00	-19.32	Vertical
7	17917.5696	35.84	19.33	55.17	74.00	-18.83	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17731.6219	25.84	18.53	44.37	54.00	-9.63	Vertical
2	17917.5696	25.91	19.33	45.24	54.00	-8.76	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5700	Horizontal	PASS

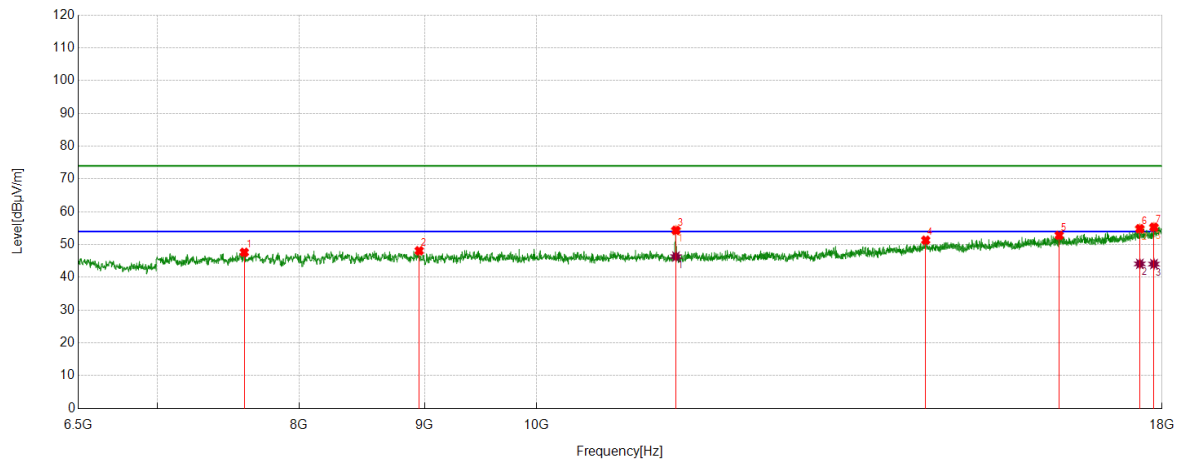

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7598.4331	42.67	4.96	47.63	74.00	-26.37	Horizontal
2	8955.6593	41.90	6.21	48.11	74.00	-25.89	Horizontal
3	11399.8166	46.92	7.41	54.33	74.00	-19.67	Horizontal
4	14415.2359	38.41	12.91	51.32	74.00	-22.68	Horizontal
5	16341.8070	37.78	15.02	52.80	74.00	-21.20	Horizontal
6	17628.1047	36.77	18.06	54.83	74.00	-19.17	Horizontal
7	17863.8940	36.06	19.24	55.30	74.00	-18.70	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	11399.8166	38.93	7.41	46.34	54.00	-7.66	Horizontal
2	17628.1047	26.05	18.06	44.11	54.00	-9.89	Horizontal
3	17863.8940	24.81	19.24	44.05	54.00	-9.95	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5700	Vertical	PASS

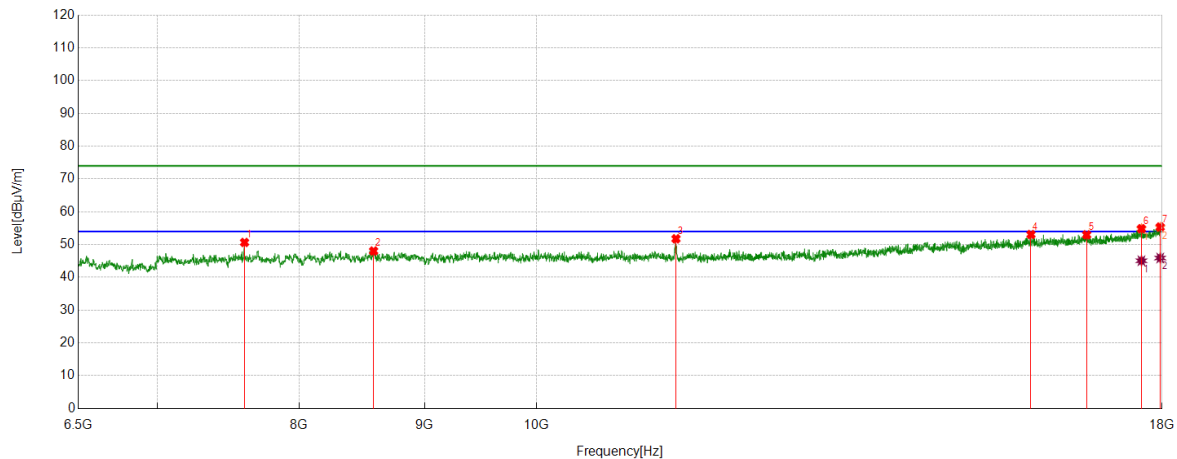

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7600.3501	45.70	4.95	50.65	74.00	-23.35	Vertical
2	8579.9300	41.58	6.45	48.03	74.00	-25.97	Vertical
3	11399.8166	44.34	7.41	51.75	74.00	-22.25	Vertical
4	15914.3191	38.53	14.54	53.07	74.00	-20.93	Vertical
5	16769.2949	36.97	16.00	52.97	74.00	-21.03	Vertical
6	17654.9425	36.78	18.04	54.82	74.00	-19.18	Vertical
7	17969.3282	35.71	19.63	55.34	74.00	-18.66	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17654.9425	27.02	18.04	45.06	54.00	-8.94	Vertical
2	17969.3282	26.27	19.63	45.90	54.00	-8.10	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5720	Horizontal	PASS

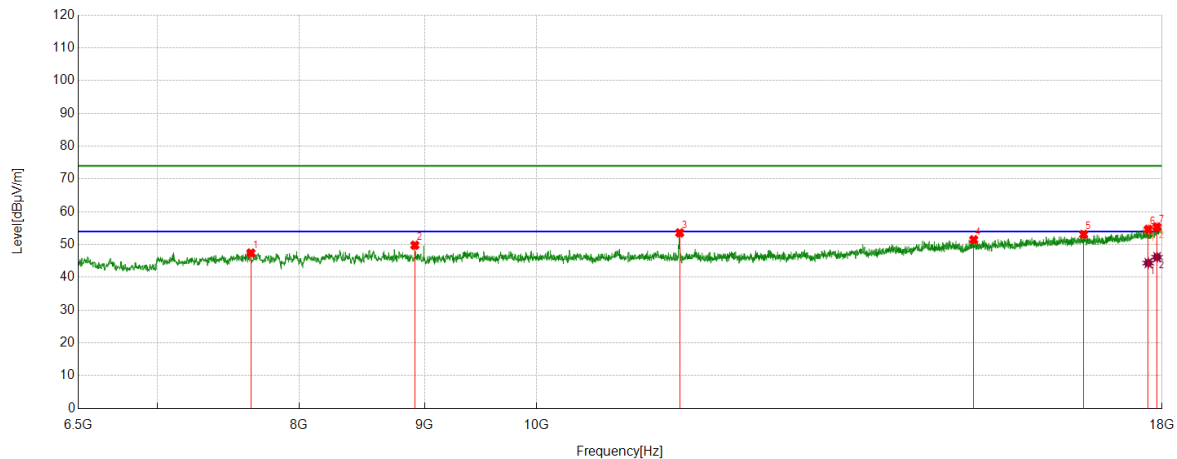

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7646.3577	42.11	5.32	47.43	74.00	-26.57	Horizontal
2	8919.2365	43.56	6.24	49.80	74.00	-24.20	Horizontal
3	11440.0733	46.20	7.37	53.57	74.00	-20.43	Horizontal
4	15080.4301	38.35	13.11	51.46	74.00	-22.54	Horizontal
5	16721.3702	36.79	16.31	53.10	74.00	-20.90	Horizontal
6	17768.0447	36.01	18.62	54.63	74.00	-19.37	Horizontal
7	17915.6526	36.03	19.32	55.35	74.00	-18.65	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17768.0447	25.75	18.62	44.37	54.00	-9.63	Horizontal
2	17915.6526	26.83	19.32	46.15	54.00	-7.85	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5720	Vertical	PASS

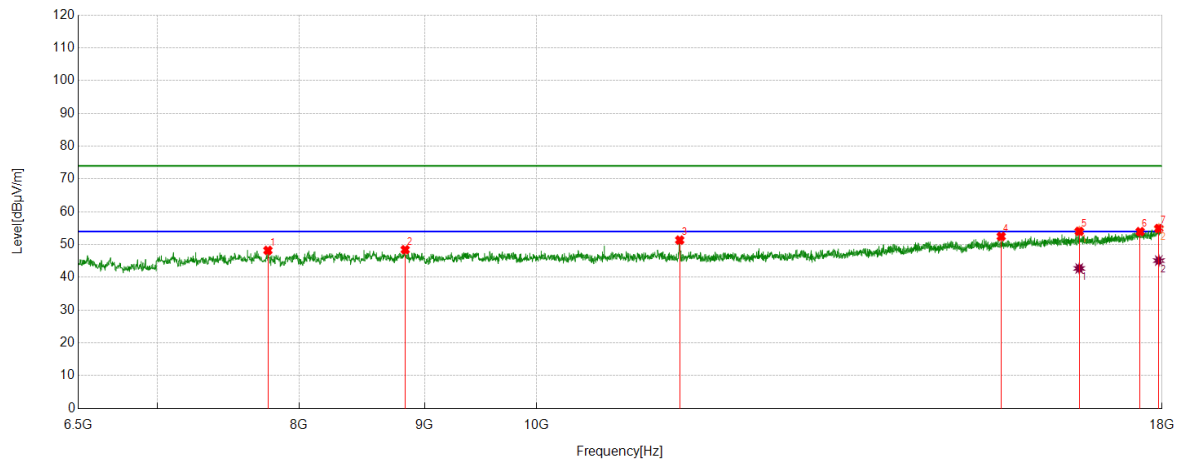

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7769.0448	43.28	4.93	48.21	74.00	-25.79	Vertical
2	8838.7231	42.07	6.36	48.43	74.00	-25.57	Vertical
3	11440.0733	43.99	7.37	51.36	74.00	-22.64	Vertical
4	15475.3292	38.50	13.97	52.47	74.00	-21.53	Vertical
5	16652.3587	38.34	15.68	54.02	74.00	-19.98	Vertical
6	17633.8556	35.91	18.03	53.94	74.00	-20.06	Vertical
7	17946.3244	35.43	19.48	54.91	74.00	-19.09	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16652.3587	27.04	15.68	42.72	54.00	-11.28	Vertical
2	17946.3244	25.63	19.48	45.11	54.00	-8.89	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5745	Horizontal	PASS

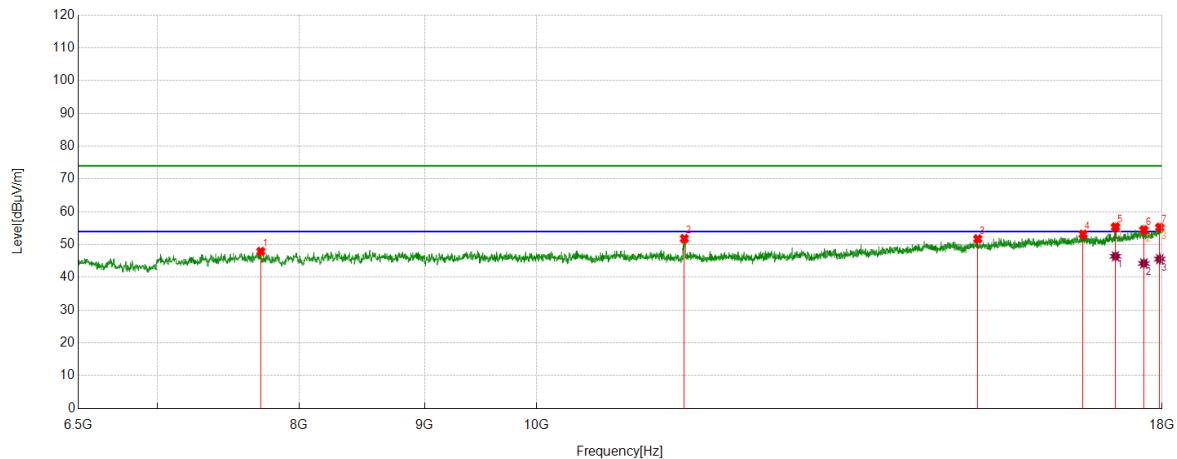

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7717.2862	42.78	5.12	47.90	74.00	-26.10	Horizontal
2	11489.9150	44.28	7.53	51.81	74.00	-22.19	Horizontal
3	15137.9397	38.49	13.24	51.73	74.00	-22.27	Horizontal
4	16713.7023	37.22	15.95	53.17	74.00	-20.83	Horizontal
5	17229.3716	38.64	16.72	55.36	74.00	-18.64	Horizontal
6	17695.1992	36.25	18.23	54.48	74.00	-19.52	Horizontal
7	17961.6603	35.61	19.63	55.24	74.00	-18.76	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17229.3716	29.70	16.72	46.42	54.00	-7.58	Horizontal
2	17695.1992	26.02	18.23	44.25	54.00	-9.75	Horizontal
3	17961.6603	25.94	19.63	45.57	54.00	-8.43	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5745	Vertical	PASS

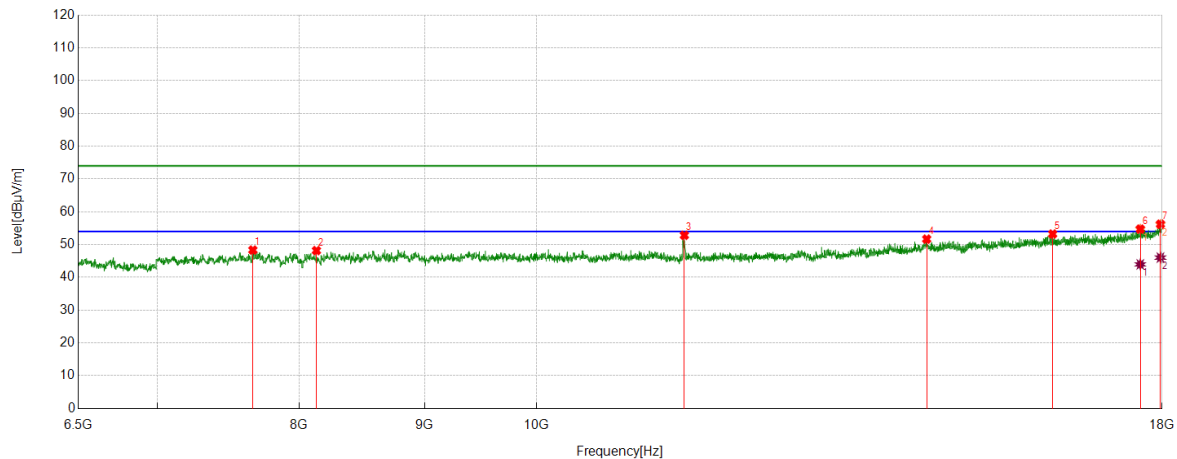

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7659.7766	43.19	5.13	48.32	74.00	-25.68	Vertical
2	8131.3552	42.64	5.52	48.16	74.00	-25.84	Vertical
3	11489.9150	45.30	7.53	52.83	74.00	-21.17	Vertical
4	14428.6548	38.78	12.88	51.66	74.00	-22.34	Vertical
5	16242.1237	37.99	15.23	53.22	74.00	-20.78	Vertical
6	17635.7726	36.68	18.03	54.71	74.00	-19.29	Vertical
7	17973.1622	36.52	19.69	56.21	74.00	-17.79	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17635.7726	25.92	18.03	43.95	54.00	-10.05	Vertical
2	17973.1622	26.33	19.69	46.02	54.00	-7.98	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5785	Horizontal	PASS

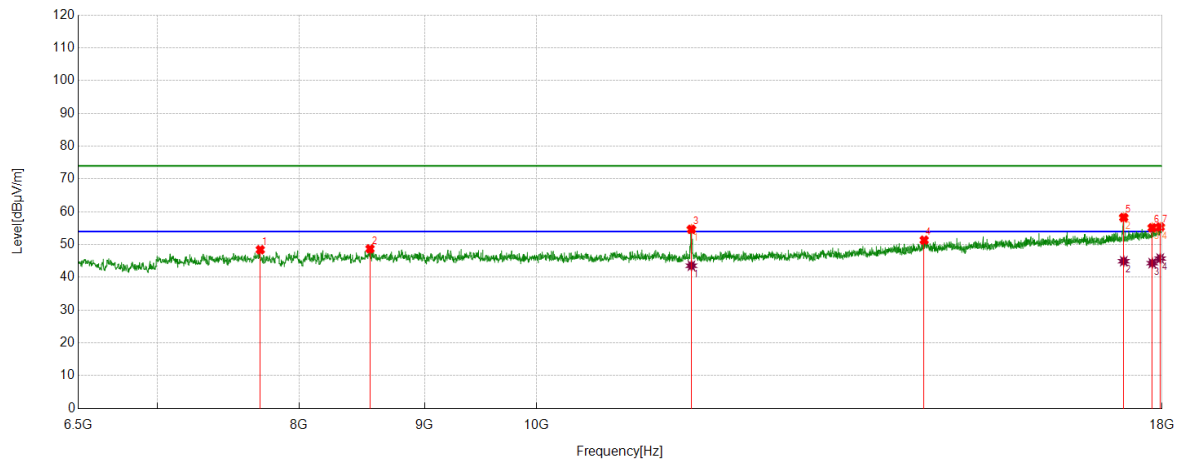

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7713.4522	43.28	5.14	48.42	74.00	-25.58	Horizontal
2	8551.1752	42.25	6.45	48.70	74.00	-25.30	Horizontal
3	11566.5944	46.92	7.72	54.64	74.00	-19.36	Horizontal
4	14394.1490	38.57	12.77	51.34	74.00	-22.66	Horizontal
5	17363.5606	40.95	17.30	58.25	74.00	-15.75	Horizontal
6	17835.1392	36.02	19.10	55.12	74.00	-18.88	Horizontal
7	17969.3282	35.73	19.63	55.36	74.00	-18.64	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	11566.5944	35.82	7.72	43.54	54.00	-10.46	Horizontal
2	17363.5606	27.62	17.30	44.92	54.00	-9.08	Horizontal
3	17835.1392	25.23	19.10	44.33	54.00	-9.67	Horizontal
4	17969.3282	26.10	19.63	45.73	54.00	-8.27	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5785	Vertical	PASS

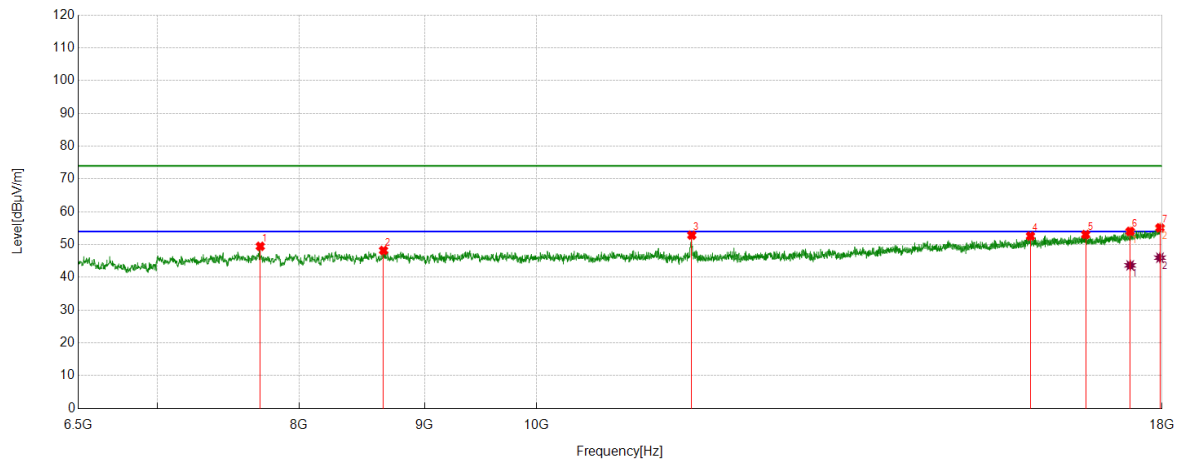

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7713.4522	44.32	5.14	49.46	74.00	-24.54	Vertical
2	8660.4434	41.75	6.45	48.20	74.00	-25.80	Vertical
3	11570.4284	45.13	7.72	52.85	74.00	-21.15	Vertical
4	15906.6511	37.95	14.63	52.58	74.00	-21.42	Vertical
5	16753.9590	36.80	16.26	53.06	74.00	-20.94	Vertical
6	17468.9948	36.38	17.63	54.01	74.00	-19.99	Vertical
7	17965.4942	35.49	19.63	55.12	74.00	-18.88	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17468.9948	26.02	17.63	43.65	54.00	-10.35	Vertical
2	17965.4942	26.36	19.63	45.99	54.00	-8.01	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 6.2.
6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5825	Horizontal	PASS

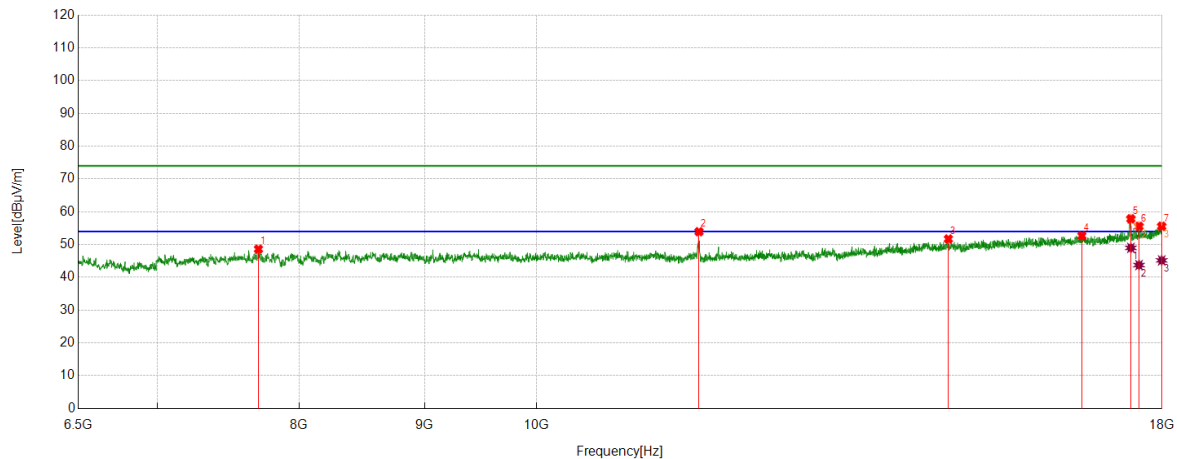

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7700.0333	42.98	5.62	48.60	74.00	-25.40	Horizontal
2	11649.0248	46.18	7.74	53.92	74.00	-20.08	Horizontal
3	14725.7876	38.90	12.80	51.70	74.00	-22.30	Horizontal
4	16694.5324	36.79	15.87	52.66	74.00	-21.34	Horizontal
5	17480.4967	40.19	17.65	57.84	74.00	-16.16	Horizontal
6	17614.6858	37.49	18.06	55.55	74.00	-18.45	Horizontal
7	17994.2490	35.81	19.77	55.58	74.00	-18.42	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17480.4967	31.34	17.65	48.99	54.00	-5.01	Horizontal
2	17614.6858	25.68	18.06	43.74	54.00	-10.26	Horizontal
3	17994.2490	25.39	19.77	45.16	54.00	-8.84	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5825	Vertical	PASS

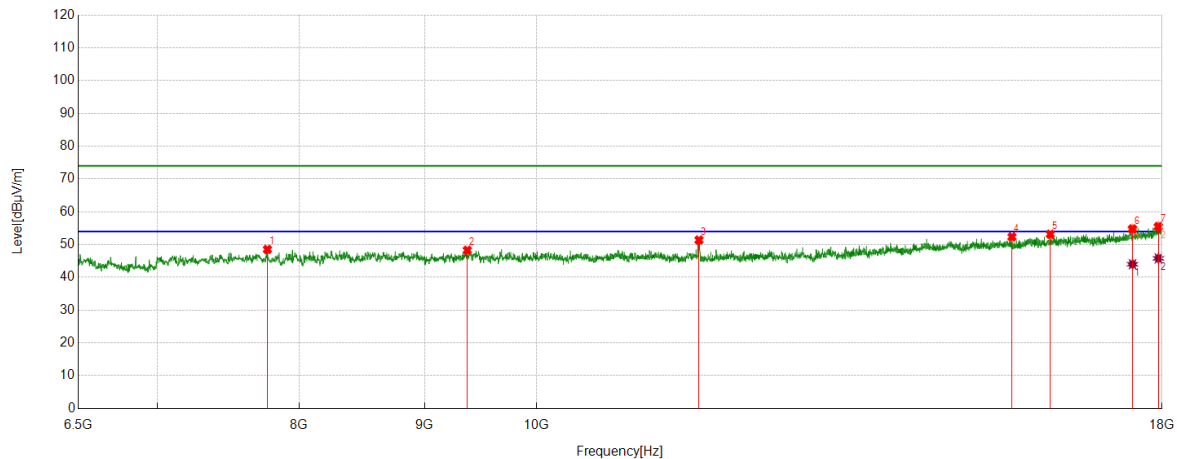

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7765.2109	43.44	5.08	48.52	74.00	-25.48	Vertical
2	9369.7283	41.76	6.50	48.26	74.00	-25.74	Vertical
3	11649.0248	43.64	7.74	51.38	74.00	-22.62	Vertical
4	15632.5221	38.67	13.67	52.34	74.00	-21.66	Vertical
5	16205.7010	38.00	15.16	53.16	74.00	-20.84	Vertical
6	17507.3346	37.14	17.62	54.76	74.00	-19.24	Vertical
7	17938.6564	36.06	19.44	55.50	74.00	-18.50	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17507.3346	26.39	17.62	44.01	54.00	-9.99	Vertical
2	17938.6564	26.35	19.44	45.79	54.00	-8.21	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.