



FCC PART 15.247

TEST REPORT

For

Motic China Group Co.,Ltd

Motic BLDG, TORCH HI-TECH INDUSTRIAL DEV ZONE, XIAMEN FUJIAN, CHINA,
361006

FCC ID: PVEBA210LEDI

Report Type: Original Report	Product Name: Digital Microscope
Report Number:	2407V46941E-RF-01
Report Date:	2024-12-20
Reviewed By:	Ash Lin
Approved By:	Miles Chen
Prepared By:	Bay Area Compliance Laboratories Corp. (Xiamen) Unit 102, No. 902 Meifeng South Road, Binhai West Avenue, Science and Technology Innovation Park, Torch High tech Zone XiaMen Tel: +86-592-3200111 www.baclcorp.com.cn

TABLE OF CONTENTS

REPORT REVISION HISTORY.....	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY.....	6
SYSTEM TEST CONFIGURATION.....	7
TEST MODE AND VOLTAGE.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EQUIPMENT MODIFICATIONS	7
★EUT EXERCISE SOFTWARE	7
DUTY CYCLE	8
SUPPORT EQUIPMENT LIST AND DETAILS	10
EXTERNAL I/O CABLE.....	10
BLOCK DIAGRAM OF TEST SETUP	11
SUMMARY OF TEST RESULTS.....	13
TEST EQUIPMENT LIST	14
FCC §15.203 - ANTENNA REQUIREMENT.....	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE	16
RESULT & MARGIN CALCULATION.....	17
TEST DATA	17
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	20
APPLICABLE STANDARD	20
EUT SETUP	20
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	21
TEST PROCEDURE	22
RESULT & MARGIN CALCULATION.....	23
TEST DATA	24
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	126
APPLICABLE STANDARD	126
EUT SETUP	126
TEST PROCEDURE	126
TEST DATA	127
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	134
APPLICABLE STANDARD	134
EUT SETUP	134
TEST PROCEDURE	134
TEST DATA	135
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	136
APPLICABLE STANDARD	136
EUT SETUP	136

TEST PROCEDURE	136
TEST DATA	136
FCC §15.247(e) - POWER SPECTRAL DENSITY	145
APPLICABLE STANDARD	145
EUT SETUP	145
TEST PROCEDURE	145
TEST DATA	146
EUT PHOTOGRAPHS.....	159
TEST SETUP PHOTOGRAPHS	160

REPORT REVISION HISTORY

Number of Revisions	Report No.	Version	Issue Date	Description
0	2407V46941E-RF-01	R1V1	2024-12-20	Initial Release

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product Name:	Digital Microscope
Tested Model:	BA210LED Digital
Multiple Model(s):	BA210LED i, BA210-i
Power Supply:	AC100-240V
Maximum Conducted Output Power:	16.19dBm
Frequency Range:	2412-2462MHz
Modulation Technique:	802.11b: DSSS-DBPSK, DQPSK, CCK 802.11g/n: OFDM-BPSK, QPSK, 16QAM, 64QAM
Number of TX Chain(s)	2
Number of RX Chain(s)	2
Antenna Type:	FPC
★Maximum Antenna Gain:	3.4dBi
EUT Received Status:	Good
<i>Note:</i> 1. The Maximum Antenna Gain was declared by manufacturer. 2. The model difference: BA210LED I and BA210-I are identity with BA210LED Digital, except for model name. 3. All measurement and test data in this report was gathered from production sample serial number: 2O28-1 (Assigned by the BACL(Xiamen). The EUT supplied by the applicant was received on 2024-07-05)	

Objective

This report is prepared on behalf of *Motic China Group Co.,Ltd* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Xiamen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Xiamen) to collect test data is located on the Unit 102, No. 902 Meifeng South Road, Binhai West Avenue, Science and Technology Innovation Park, Torch High tech Zone XiaMen.

Bay Area Compliance Laboratories Corp. (Xiamen) Lab is accredited to ISO/IEC 17025 by A2LA (Certificate Number: 7134.01) and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No. : CN1384.

Measurement Uncertainty

Item		U_{lab}
Conducted Emission	150kHz-30MHz	2.33 dB
Radiated Emission	9kHz-30MHz	2.59 dB
	30MHz~200MHz	4.38 dB
	200MHz~1GHz	4.50 dB
	1GHz~6GHz	4.58 dB
	6GHz-18GHz	5.43 dB
	18GHz~26.5GHz	5.47 dB
Occupied Channel Bandwidth		0.053kHz
Transmitter Conducted Power(Conducted RF power)		0.624 dB
Power Spectral Density		0.61dB
Duty Cycle		1%
Temperature		1°C
Humidity		5%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

SYSTEM TEST CONFIGURATION

Test Mode and Voltage

The system was configured for testing in a typical mode (as normally used by a typical user).	
Test mode:	Transmitting
Test voltage:	AC 120V/60Hz
Remark:	During all emission tests, the EUT was configured to measure its highest possible emission level and the worst case's test data was presented in this test report.

Description of Test Configuration

For 802.11b, 802.11g, 802.11n-ht20, 802.11n-ht40 mode, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	/	/
6	2437	/	/
7	2442	/	/

For 802.11b, 802.11g, 802.11n-ht20 mode, EUT was tested with Channel 1, 6 and 11.

For 802.11n-ht40 mode, EUT was tested with Channel 3, 6 and 9.

Equipment Modifications

No modification was made to the EUT tested.

★EUT Exercise Software

Wi-Fi test in the engineer mode.

RF Test Tool: REALTEK 11ac 8812AU USB WLAN NIC Massproduction Kit.exe

The device was tested with the worst case was performed as below:

Mode	Data rate	Power level					
		Low channel		Middle channel		High channel	
		Chain 0	Chain 1	Chain 0	Chain 1	Chain 0	Chain 1
802.11b	1 Mbps	35	37	35	36	35	36
802.11g	6 Mbps	45	46	44	46	44	46
802.11n-ht20	MCS0	43	44	42	44	42	44
802.11n-ht40	MCS0	43	44	42	44	42	44


Note:

1. Pre-scan with all the data rates, the above data rate is the worst case for Wi-Fi test.
2. The device supports SISO in all modes, and MIMO 2T2R in 802.11n modes, per pretest. 2T2R mode was the worst mode and reported for 802.11n modes.

Duty cycle


Modes	Ton (ms)	Ton + off (ms)	Duty cycle (%)	1/T (Hz)	Duty Factor (dB)	VBW Setting (kHz)
802.11b	8.439	8.651	97.55	118	0.11	0.20
802.11g	1.407	1.482	94.94	711	0.23	1.00
802.11nHT20	1.303	1.47	88.64	767	0.52	1.00
802.11nHT40	0.649	0.735	88.30	1541	0.54	2.00
Note: Test only performed at Chain 0.						

802.11b Middle Channel

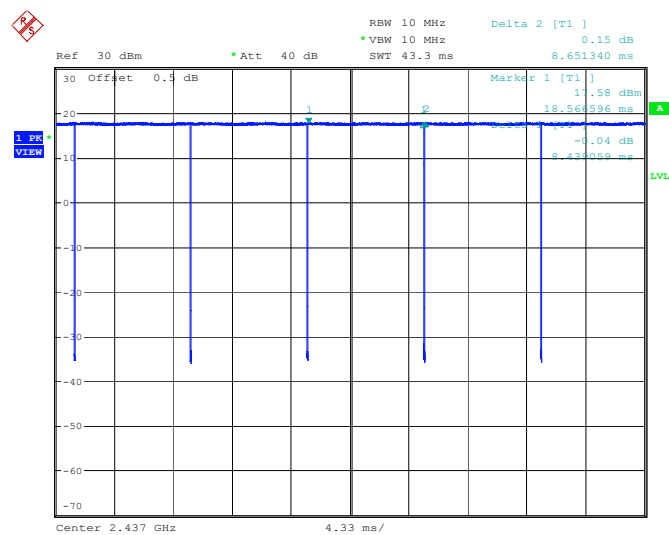


ProjectNo.:2407V46941E-RF Tester:Jason Hu
Date: 17.AUG.2024 09:48:00

802.11g Middle Channel

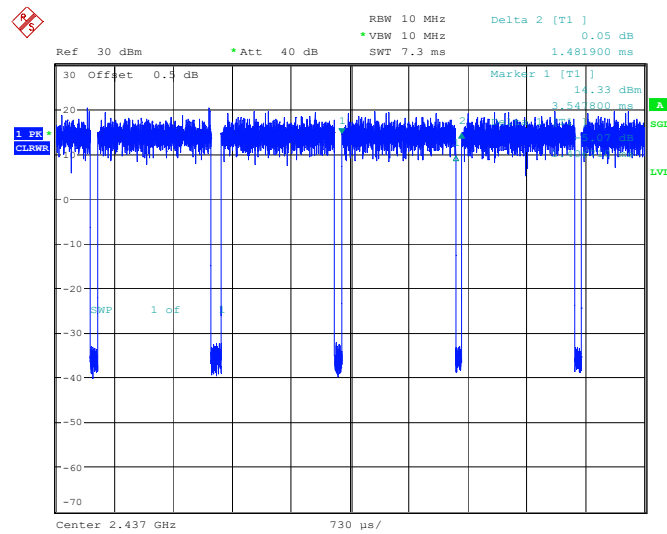


ProjectNo.:2407V46941E-RF Tester:Jason Hu
 Date: 17.AUG.2024 09:48:28

802.11nHT20 Middle Channel

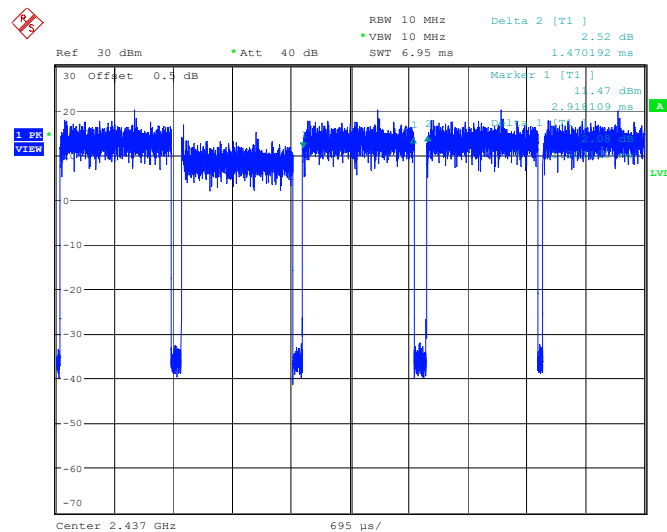

ProjectNo.:2407V46941E-RF Tester:Jason Hu
 Date: 17.AUG.2024 13:13:50

802.11nHT40 Middle Channel

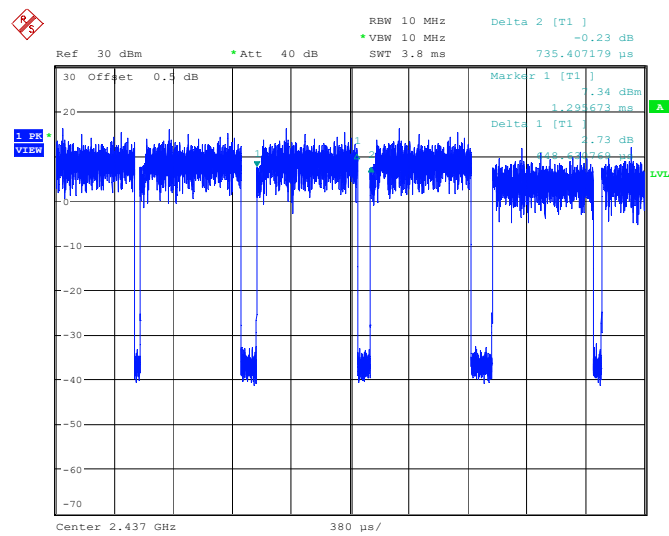

ProjectNo.:2407V46941E-RF Tester:Jason Hu
Date: 17.AUG.2024 13:16:05

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Lenovo	Laptop	T480	PF1P5K4F

External I/O Cable

Cable Description	Length (m)	From Port	To
USB Cable	10	EUT	Laptop
Network cable	10	EUT	Laptop


Block Diagram of Test Setup

Conducted Emission:

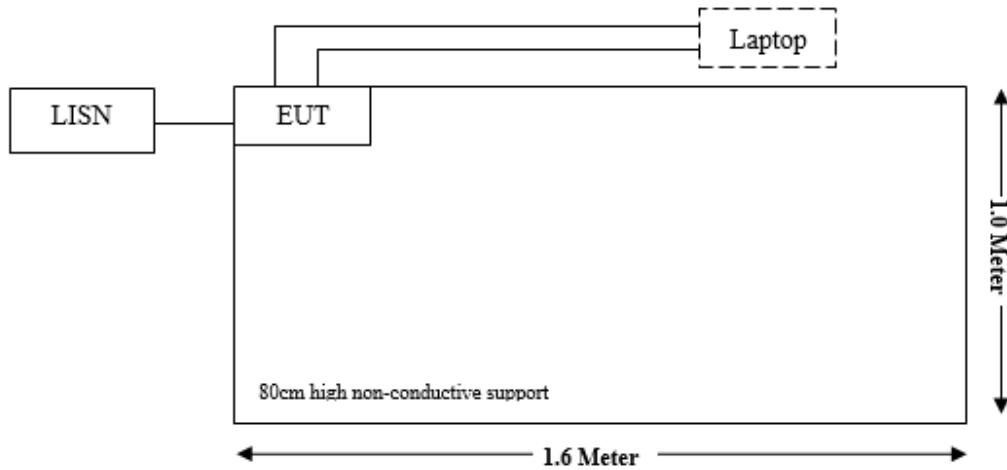


Radiated Emission:


Below 1GHz

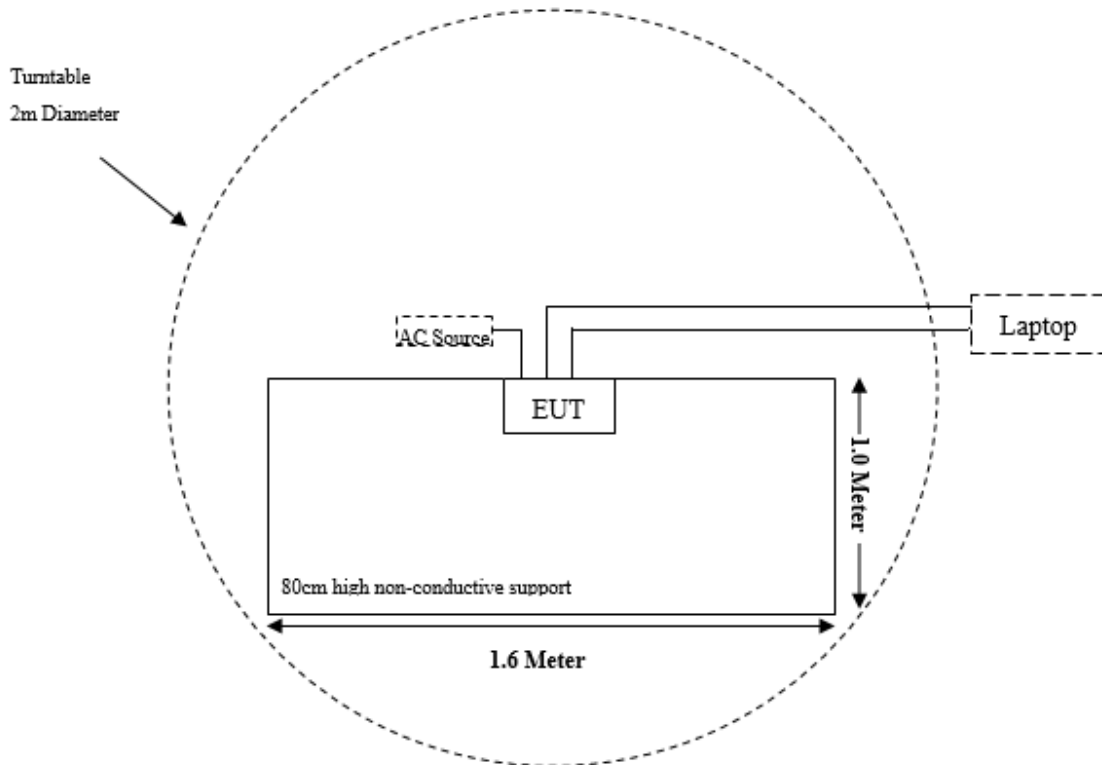

Above 1GHz

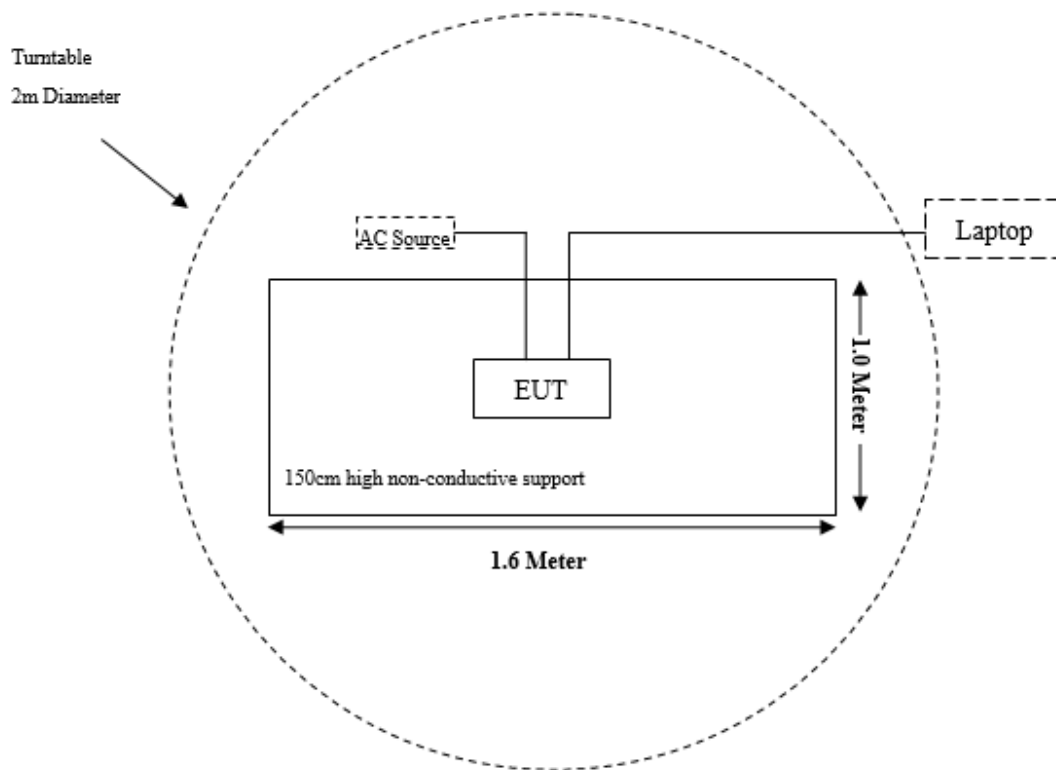

RF:

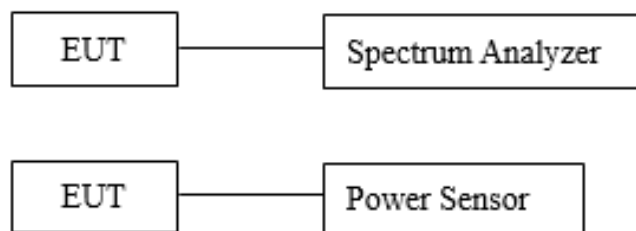

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

TEST EQUIPMENT LIST

Test Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions					
EMI Test Receiver	Rohde & Schwarz	ESR	103105	2024/03/29	2025/03/28
LISN	Rohde & Schwarz	ENV216	100129	2024/03/29	2025/03/28
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	0357.8810.54	2024/03/29	2025/03/28
Coaxial Cable	XINHANGWEIBO	XH400T-N-4M	CC001	2024/03/29	2025/03/28
Test Software	Audix	E3	18621a	N/A	N/A
Radiated Emissions Below 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESR	103103	2024/03/29	2025/03/28
Loop Antenna	Rohde & Schwarz	HFH2-Z2	830749/001	2023/07/27	2026/07/26
Antenna	Sunol Sciences	JB6	A122022-5	2023/07/27	2026/07/26
Amplifier	Sonoma	310B	120903	2024/03/29	2025/03/28
Coaxial Cable	XINHANGWEIBO	XH400T-N-4M	CC002	2024/03/29	2025/03/28
Coaxial Cable	XINHANGWEIBO	XH460B-N-2M	CC006	2024/03/29	2025/03/28
Coaxial Cable	XINHANGWEIBO	XH460B-N-12M	CC007	2024/03/29	2025/03/28
Coaxial Cable	XINHANGWEIBO	HFH2-CC	335.3609	2024/03/29	2025/03/28
Test Software	Audix	E3	18621a	N/A	N/A
Radiated Emissions Above 1 GHz					
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102051	2024/03/29	2025/03/28
Filter Switch Unit	Decentest	DT7220FSU	DS79904	2024/02/23	2025/02/22
Multiplex Switch Test Control Set	Decentest	DT7220SCU	DS79901	2024/02/23	2025/02/22
Double Ridge Guide Horn Antenna	A.H.Systems	SAS-571	1980	2023/07/28	2026/07/27
Preamplifier	A.H.Systems	PAM-0118P	489	2024/03/29	2025/03/28
Coaxial Cable	XINHANGWEIBO	XH800A-N-6M	CC003	2024/03/29	2025/03/28
Coaxial Cable	XINHANGWEIBO	XH800A-N-1M	CC005	2024/03/29	2025/03/28
Horn Antenna	EMCO	3116	9407-2232	2023/07/31	2026/07/30
Horn Antenna	EMCO	3115	9002-3355	2024/11/19	2027/11/18
Preamplifier	A.H.Systems	PAM-1840	200	2024/03/29	2025/03/28
Coaxial Cable	XINHANGWEIBO	XH360A-2.92-3M	CC008	2024/03/29	2025/03/28
Coaxial Cable	XINHANGWEIBO	XH360A-2.92-1M	CC009	2024/03/29	2025/03/28
Test Software	Audix	E3	18621a	N/A	N/A
RF Conducted Test					
Spectrum Analyzer	Rohde & Schwarz	FSU	100405	2024/03/29	2025/03/28
Coaxial Cable	N/A	N/A	N/A	Each time	N/A
Power Sensor	HP	8481A	PS20240325	2024/03/29	2025/03/28

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Xiamen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has two FPC antenna arrangement for WIFI, which was permanently attached and the antenna gain is 3.4 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

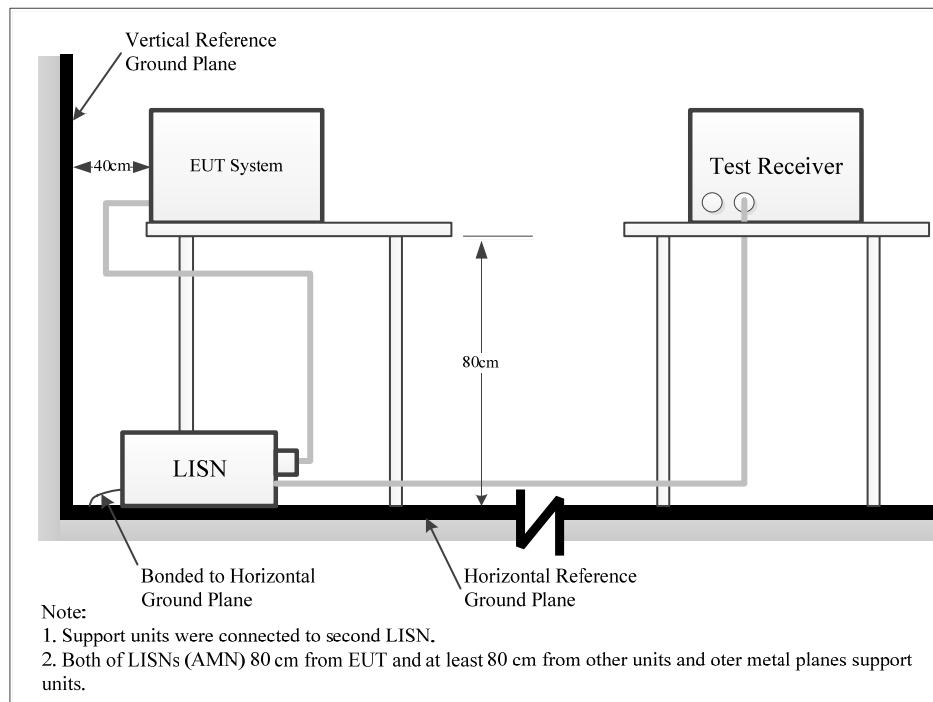

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	VBW	Detector
150 kHz – 30 MHz	9 kHz	30 kHz	QP/AV

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Result & Margin Calculation

The Result is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation from the Meter Reading. The basic equation is as follows:

$$\begin{aligned}\text{Factor (dB)} &= \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)} \\ \text{Result (dB}\mu\text{V)} &= \text{Reading (dB}\mu\text{V)} + \text{Factor (dB)}\end{aligned}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V)} - \text{Result (dB}\mu\text{V)}$$

Test Data

Temperature:	24.8°C
Relative Humidity:	60%
ATM Pressure:	100.1kPa
Test Date:	2024-08-31
Test Engineer:	Spike Gao

EUT operation mode: Transmitting in Wifi 802.11n20 low channel (worst case)

Project No.: 2407V46941E-RF


Test Mode: 11n20 2412

EUT Model: BA210LED Digital

Temp/Humi/ATM: 24.8°C/60%/100.1kPa

Tested by: Spike Gao

Power Source: AC 120V/60Hz

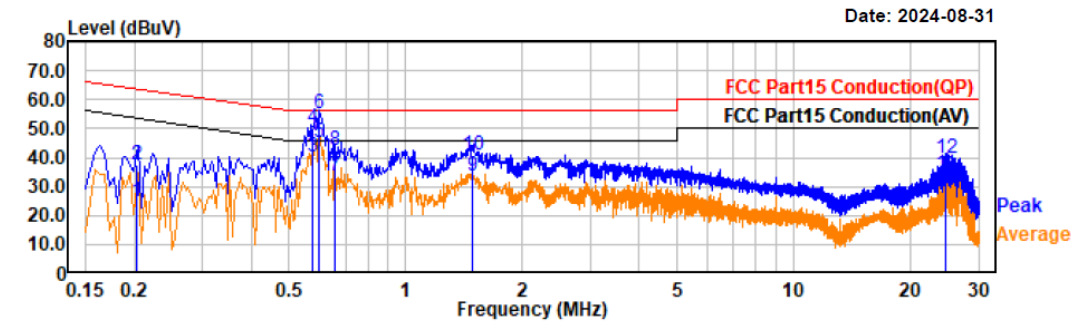


Trace: 1

Freq MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Phase	Remark
0.20	3.78	21.26	25.04	53.53	28.49	Line	Average
0.20	16.07	21.26	37.33	63.53	26.20	Line	QP
0.58	19.60	20.42	40.02	46.00	5.98	Line	Average
0.58	29.91	20.42	50.33	56.00	5.67	Line	QP
0.60	24.97	20.45	45.42	46.00	0.58	Line	Average
0.60	34.65	20.45	55.10	56.00	0.90	Line	QP
0.66	13.23	20.54	33.77	46.00	12.23	Line	Average
0.66	22.10	20.54	42.64	56.00	13.36	Line	QP
1.49	12.65	20.85	33.50	46.00	12.50	Line	Average
1.49	19.98	20.85	40.83	56.00	15.17	Line	QP
24.59	13.12	21.27	34.39	50.00	15.61	Line	Average
24.59	18.22	21.27	39.49	60.00	20.51	Line	QP

Project No.: 2407V46941E-RF
Test Mode: 11n20 2412
EUT Model: BA210LED Digital

Temp/Humi/ATM: 24.8°C/60%/100.1kPa
Tested by: Spike Gao
Power Source: AC 120V/60Hz

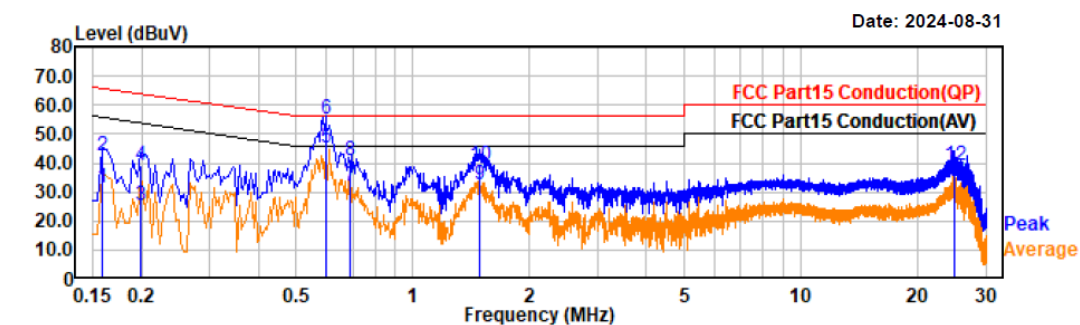

Trace: 1

Freq MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Phase	Remark
0.16	10.78	20.89	31.67	55.57	23.90	Neutral	Average
0.16	21.87	20.89	42.76	65.57	22.81	Neutral	QP
0.20	4.47	21.07	25.54	53.64	28.10	Neutral	Average
0.20	18.21	21.07	39.28	63.64	24.36	Neutral	QP
0.60	25.14	20.34	45.48	46.00	0.52	Neutral	Average
0.60	34.82	20.34	55.16	56.00	0.84	Neutral	QP
0.69	11.63	20.41	32.04	46.00	13.96	Neutral	Average
0.69	20.28	20.41	40.69	56.00	15.31	Neutral	QP
1.49	11.41	20.95	32.36	46.00	13.64	Neutral	Average
1.49	18.13	20.95	39.08	56.00	16.92	Neutral	QP
24.91	12.68	21.20	33.88	50.00	16.12	Neutral	Average
24.91	18.14	21.20	39.34	60.00	20.66	Neutral	QP


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;


EUT Setup

9 kHz-30MHz:

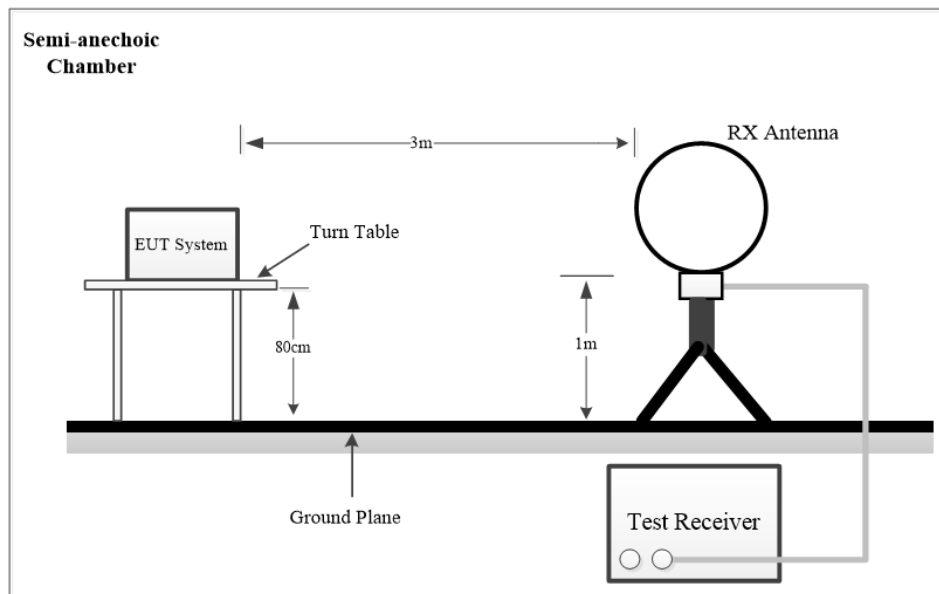

30MHz -1 GHz:

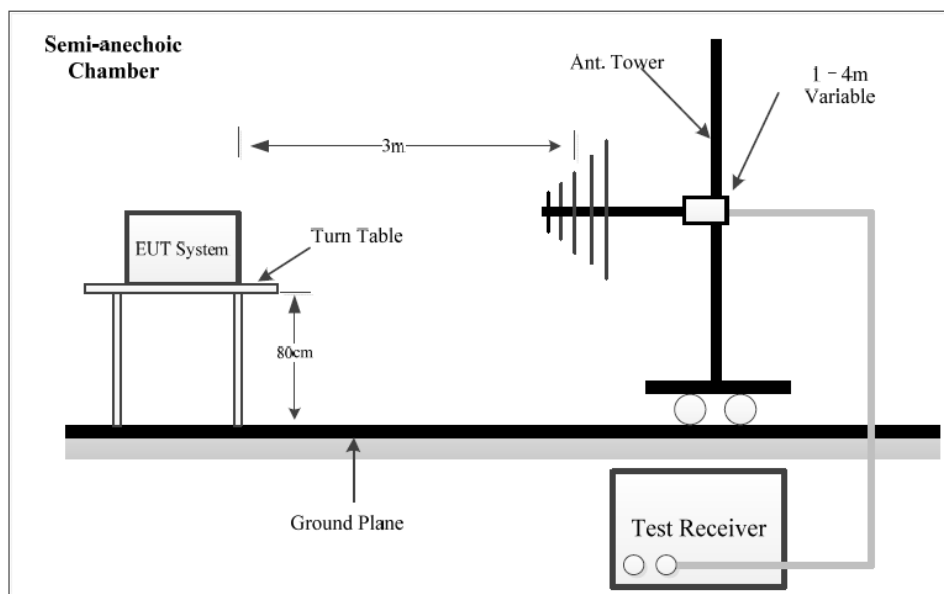

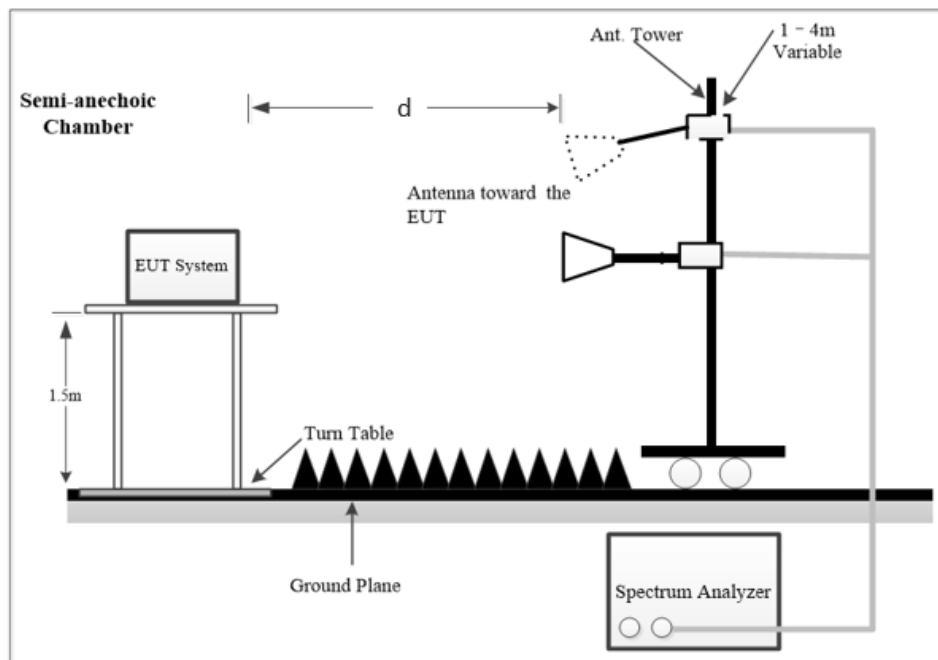Above 1GHz:

The radiated emission test using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

NOTE:

d is testing distance;

For Radiated Emission test (1GHz-18GHz) and Bandedge Emission test, which was performed at 3 m distance.

For Radiated Emission test (18GHz-25GHz), which was performed at 1.0 m distance, according to ANSI C63.10-2013, the test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.0m.

Distance extrapolation Factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1.0m]}) \text{ dB} = 9.54 \text{ dB}$

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Below 1GHz:

Frequency Range	RBW	VBW	IF B/W	Measurement
9 kHz – 150 kHz	200Hz	1 kHz	/	PK
	/	/	200Hz	QP
150 kHz – 30 MHz	10 kHz	30 kHz	/	PK
	/	/	9kHz	QP
30 MHz – 1000 MHz	100 kHz	300 kHz	/	PK
	/	/	120kHz	QP

Above 1GHz:

Pre-scan:

Duty Cycle	RBW	VBW	Measurement
Any	1MHz	3MHz	PK
>98%	1MHz	5kHz	AV
<98%	1MHz	1/T, not less than 5kHz	AV

Final measurement for emission identified during the pre-scan:

Duty Cycle	RBW	VBW	Measurement
Any	1MHz	3MHz	PK
>98%	1MHz	10Hz	AV
<98%	1MHz	1/T	AV

Note: T is minimum transmission duration

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

For each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable. The report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground parallel) unless the margin is greater than 20 dB, then the following statement shall be made: “all emissions were greater than 20 dB below the limit.”

Below 1GHz, if the measured peak level of the emissions that the measuring receiver reading level plus corrected factor is at least 10 dB below the QP emission limit, there's no need to record the measured QP level of the emissions in the report.

Above 1GHz, if the measured peak level of the emissions that the measuring receiver reading level plus corrected factor is at least 6 dB below the AV emission limit, there's no need to record the measured AV level of the emissions in the report.

Result & Margin Calculation

The Result is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

For 9 kHz to 18GHz Radiated emission test

$$\text{Factor (dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

For 18GHz to 25GHz Radiated emission test and Bandedge emissions test

$$\text{Factor (dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)} - \text{Extrapolation factor (dB)}$$

$$\text{Extrapolation factor} = 9.54\text{dB (distance=1m)}$$

$$\text{Result (dB}\mu\text{V/m)} = \text{Reading (dB}\mu\text{V)} + \text{Factor (dB/m)}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Result (dB}\mu\text{V/m)}$$

Test Data

Please refer to the below table and plots.

Frequency Range:	Below 1 GHz	Above 1 GHz
Temperature:	23.5°C	23.2°C~23.5°C
Relative Humidity:	54 %	50%~54%
ATM Pressure:	100.5kPa	100.1kPa
Test Date:	2024-11-12	2024-11-11~2024-12-06
Test Engineer:	Wlif Wu	Wlif Wu


1) 9 kHz~30MHz

Pre-scan in parallel, ground-parallel and perpendicular of orientation of loop antenna, ground-parallel is worst case

EUT operation mode: Transmitting in Wifi 802.11n20 low channel in parallel (Worst case)

Project No.: 2407V46941E-RF
Test Mode: 802.11n20 2412MHz
EUT Model: BA210LED Digital
Test distance: 3m


Temp/Humi/ATM: 23.5°C/54%/100.5kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

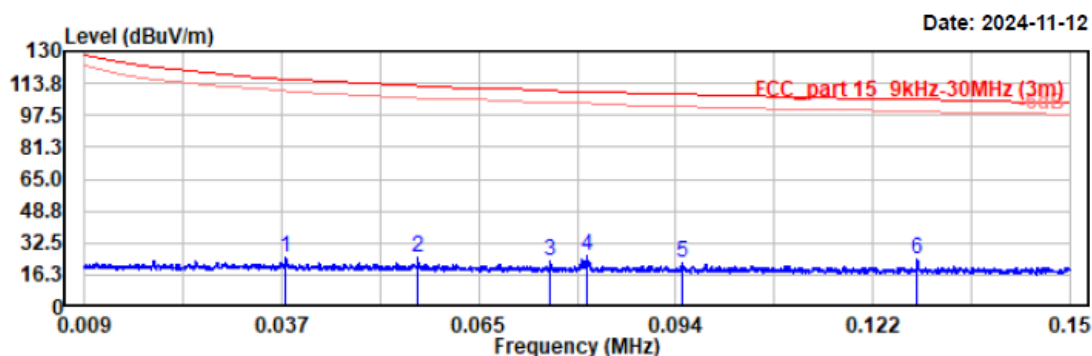

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.038	4.78	19.91	24.69	116.07	91.38	Peak
0.057	4.76	19.91	24.67	112.54	87.87	Peak
0.076	3.18	19.75	22.93	110.04	87.11	Peak
0.081	6.29	19.72	26.01	109.45	83.44	Peak
0.094	2.60	19.78	22.38	108.10	85.72	Peak
0.128	4.06	19.73	23.79	105.45	81.66	Peak

Project No.: 2407V46941E-RF
Test Mode: 802.11n20 2412MHz
EUT Model: BA210LED Digital
Test distance: 3m

Temp/Humi/ATM: 23.5°C/54%/100.5kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

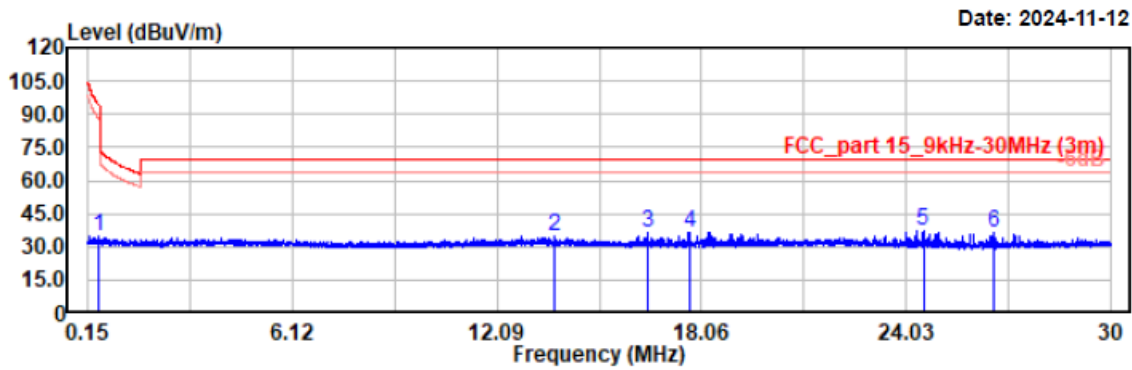


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
0.451	15.26	19.79	35.05	94.51	59.46	Peak
13.771	14.90	19.75	34.65	69.54	34.89	Peak
16.472	16.58	19.86	36.44	69.54	33.10	Peak
17.696	16.86	19.94	36.80	69.54	32.74	Peak
24.534	17.25	20.21	37.46	69.54	32.08	Peak
26.612	15.98	20.14	36.12	69.54	33.42	Peak

2) 30MHz-1GHz

EUT operation mode: Transmitting in Wifi 802.11n20 low channel (worst case)

Project No.: 2407V46941E-RF
Test Mode: 11n20-2412
EUT Model: BA210LED Digital
Test distance: 3m


Temp/Humi/ATM: 23.5°C/54%/100.5kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

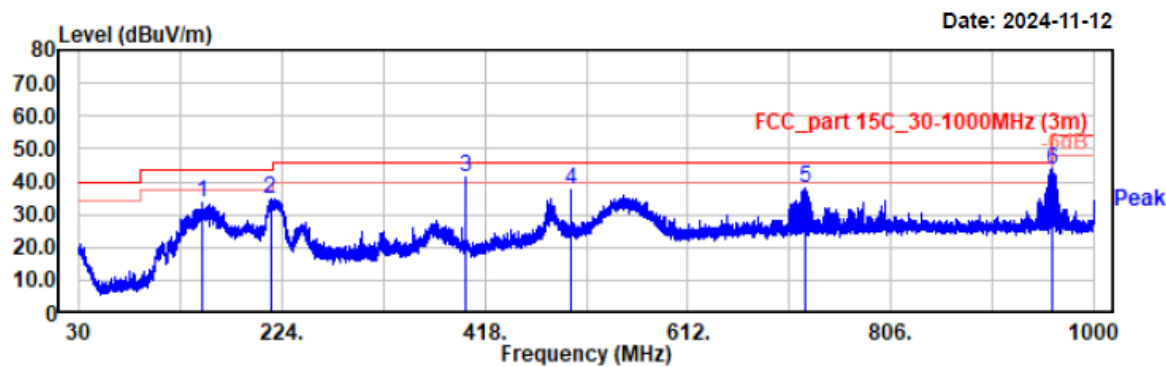

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
147.56	44.51	-11.09	33.42	43.50	10.08	Horizontal	QP
212.94	47.38	-12.67	34.71	43.50	8.79	Horizontal	QP
399.99	47.70	-6.39	41.31	46.00	4.69	Horizontal	QP
499.97	40.78	-3.40	37.38	46.00	8.62	Horizontal	QP
724.62	37.86	0.06	37.92	46.00	8.08	Horizontal	QP
960.00	39.94	3.38	43.32	46.00	2.68	Horizontal	QP

Project No.: 2407V46941E-EM
Test Mode: 11n20-2412
EUT Model: BA210LED Digital
Test distance: 3m

Temp/Humi/ATM: 23.5°C/54%/100.5kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

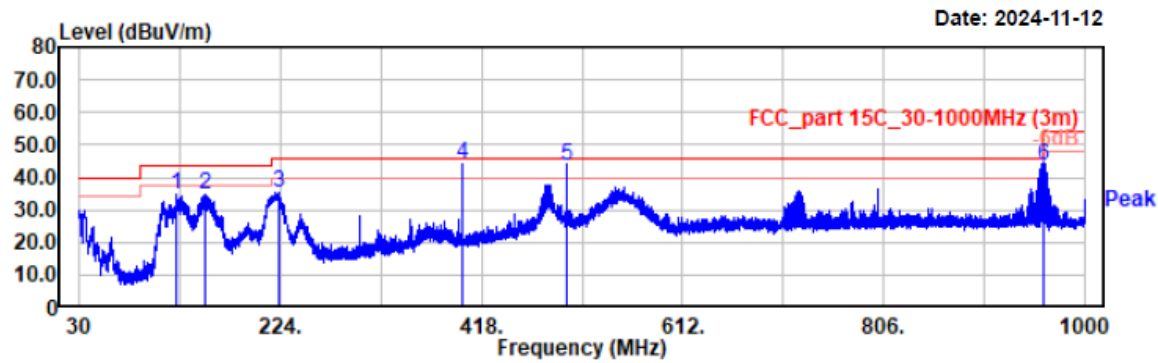


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
124.28	44.45	-9.95	34.50	43.50	9.00	Vertical	QP
151.93	45.93	-11.21	34.72	43.50	8.78	Vertical	QP
221.87	47.89	-12.59	35.30	46.00	10.70	Vertical	QP
399.99	50.66	-6.39	44.27	46.00	1.73	Vertical	QP
500.00	47.02	-3.40	43.62	46.00	2.38	Vertical	QP
960.00	40.45	3.38	43.83	46.00	2.17	Vertical	QP

3) 1GHz~3GHz

EUT operation mode: Transmitting in Wifi 802.11b low channel with Chain 0(Ant 1)

Project No.: 2407V46941E-RF
Test Mode: 11b-2412
EUT Model: BA210LED Digital
Test distance: 3m


Temp/Humi/ATM: 23.5°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

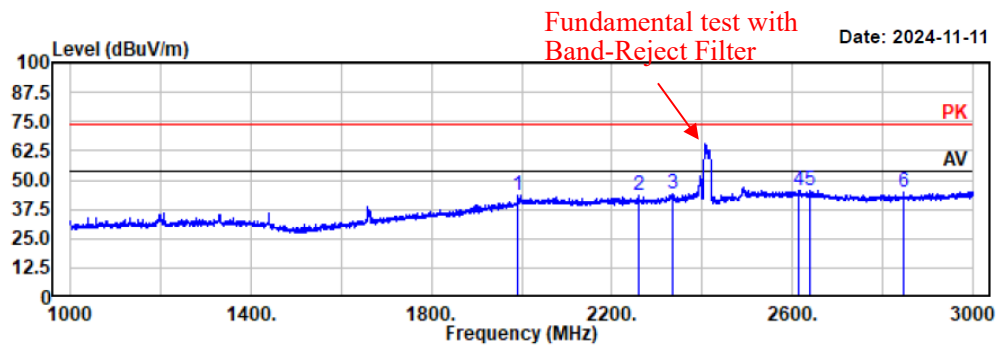

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1991.50	50.60	-7.05	43.55	74.00	30.45	horizontal	Peak
2258.00	49.39	-6.25	43.14	74.00	30.86	horizontal	Peak
2333.50	50.35	-6.02	44.33	74.00	29.67	horizontal	Peak
2613.00	48.89	-3.32	45.57	74.00	28.43	horizontal	Peak
2639.00	48.91	-3.36	45.55	74.00	28.45	horizontal	Peak
2845.50	49.42	-4.56	44.86	74.00	29.14	horizontal	Peak

Project No.: 2407V46941E-RF
Test Mode: 11b-2412
EUT Model: BA210LED Digital
Test distance: 3m

Temp/Humi/ATM: 23.5°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

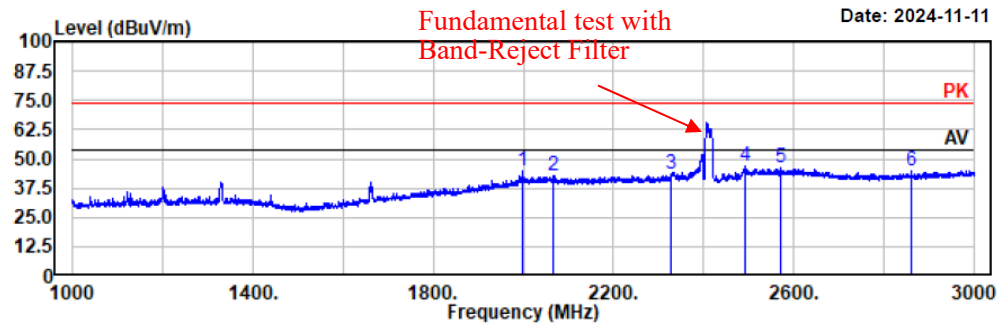


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1999.50	51.63	-6.77	44.86	74.00	29.14	vertical	Peak
2066.00	49.04	-6.23	42.81	74.00	31.19	vertical	Peak
2326.00	49.75	-6.08	43.67	74.00	30.33	vertical	Peak
2492.00	51.48	-4.29	47.19	74.00	26.81	vertical	Peak
2572.00	49.55	-3.39	46.16	74.00	27.84	vertical	Peak
2860.00	49.50	-4.51	44.99	74.00	29.01	vertical	Peak

EUT operation mode: Transmitting in Wifi 802.11b middle channel with Chain 0(Ant 1)

Project No.: 2407V46941E-RF
Test Mode: 11b-2437
EUT Model: BA210LED Digital
Test distance: 3m


Temp/Humi/ATM: 23.5°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

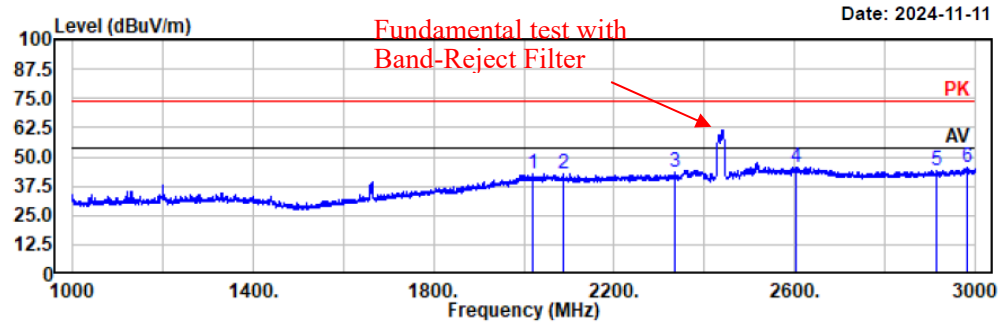

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2020.50	48.98	-6.43	42.55	74.00	31.45	horizontal	Peak
2087.00	48.99	-6.53	42.46	74.00	31.54	horizontal	Peak
2335.50	49.72	-6.00	43.72	74.00	30.28	horizontal	Peak
2604.50	49.11	-3.31	45.80	74.00	28.20	horizontal	Peak
2915.50	48.46	-4.33	44.13	74.00	29.87	horizontal	Peak
2983.50	49.73	-4.09	45.64	74.00	28.36	horizontal	Peak

Project No.: 2407V46941E-RF
Test Mode: 11b-2437
EUT Model: BA210LED Digital
Test distance: 3m

Temp/Humi/ATM: 23.5°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

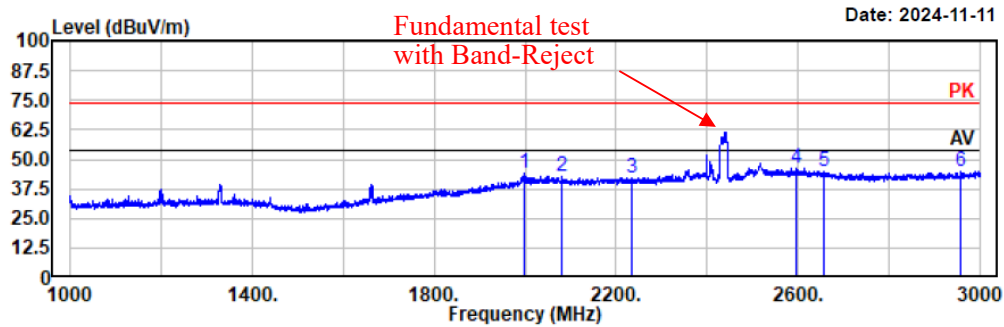


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1997.50	50.79	-6.84	43.95	74.00	30.05	vertical	Peak
2081.50	49.21	-6.44	42.77	74.00	31.23	vertical	Peak
2233.50	48.59	-6.24	42.35	74.00	31.65	vertical	Peak
2597.00	49.53	-3.31	46.22	74.00	27.78	vertical	Peak
2657.00	48.42	-3.55	44.87	74.00	29.13	vertical	Peak
2957.00	49.31	-4.18	45.13	74.00	28.87	vertical	Peak

EUT operation mode: Transmitting in Wifi 802.11b high channel with Chain 0(Ant 1)


Project No.: 2407V46941E-RF
Test Mode: 11b-2462
EUT Model: BA210LED Digital
Test distance: 3m

Temp/Humi/ATM: 23.5°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

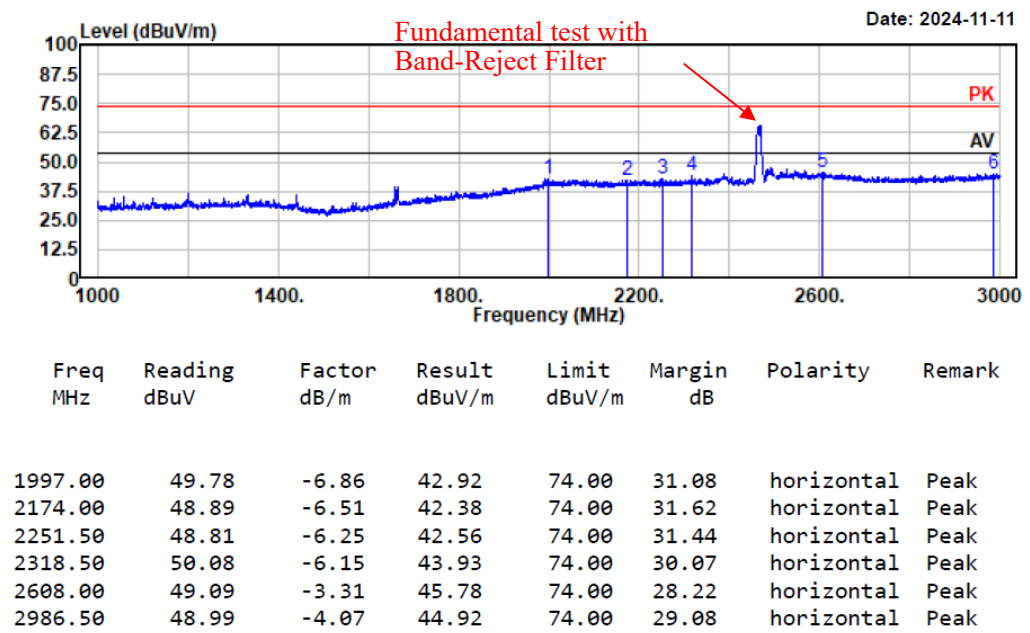

Project No.: 2407V46941E-RF
Test Mode: 11b-2462
EUT Model: BA210LED Digital
Test distance: 3m

Temp/Humi/ATM: 23.5°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

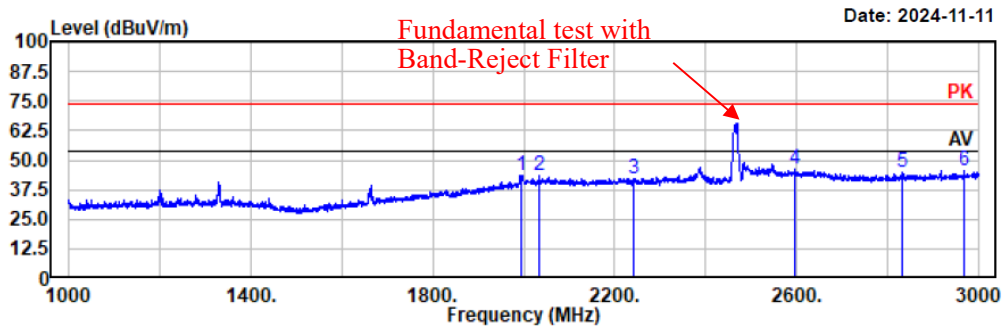


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1995.00	50.36	-6.92	43.44	74.00	30.56	vertical	Peak
2033.50	49.45	-6.23	43.22	74.00	30.78	vertical	Peak
2242.50	48.57	-6.25	42.32	74.00	31.68	vertical	Peak
2596.50	49.85	-3.31	46.54	74.00	27.46	vertical	Peak
2834.00	49.39	-4.59	44.80	74.00	29.20	vertical	Peak
2970.00	49.58	-4.14	45.44	74.00	28.56	vertical	Peak

EUT operation mode: Transmitting in Wifi 802.11g low channel with Chain 0(Ant 1)

Project No.: 2407V46941E-RF
Test Mode: 11g-2412
EUT Model: BA210LED Digital
Test distance: 3m


Temp/Humi/ATM: 23.5°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

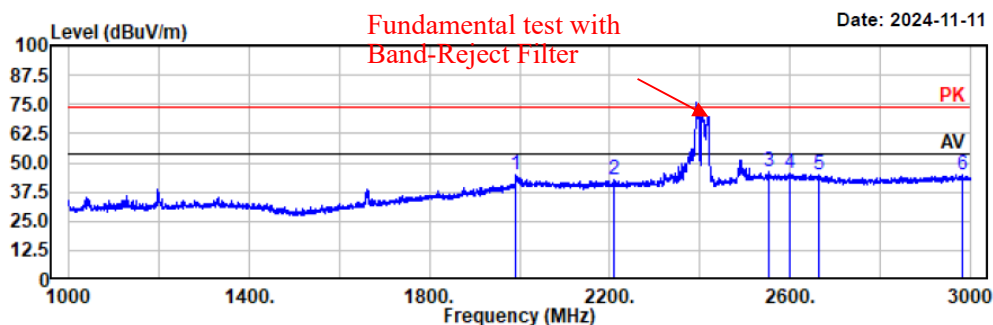

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1992.00	51.69	-7.03	44.66	74.00	29.34	horizontal	Peak
2211.00	48.91	-6.26	42.65	74.00	31.35	horizontal	Peak
2553.00	49.97	-3.46	46.51	74.00	27.49	horizontal	Peak
2601.00	48.89	-3.30	45.59	74.00	28.41	horizontal	Peak
2663.50	48.28	-3.71	44.57	74.00	29.43	horizontal	Peak
2982.00	48.82	-4.09	44.73	74.00	29.27	horizontal	Peak

Project No.: 2407V46941E-RF
Test Mode: 11g-2412
EUT Model: BA210LED Digital
Test distance: 3m

Temp/Humi/ATM: 23.5°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

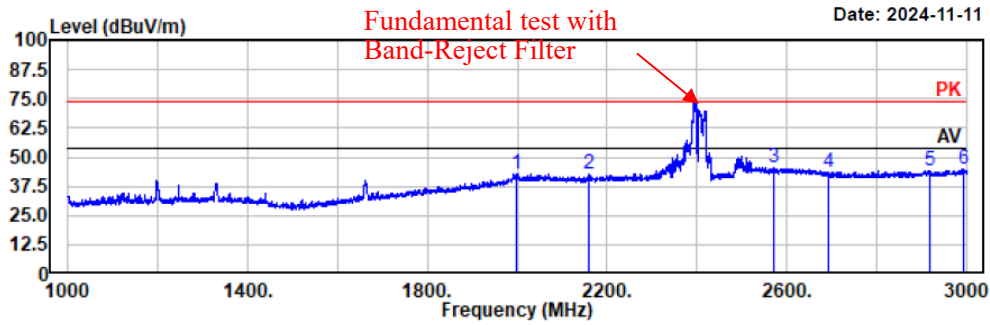


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1997.00	49.79	-6.86	42.93	74.00	31.07	vertical	Peak
2160.00	49.55	-6.64	42.91	74.00	31.09	vertical	Peak
2572.50	49.01	-3.39	45.62	74.00	28.38	vertical	Peak
2692.50	48.04	-4.45	43.59	74.00	30.41	vertical	Peak
2918.50	48.45	-4.32	44.13	74.00	29.87	vertical	Peak
2993.00	49.10	-4.04	45.06	74.00	28.94	vertical	Peak

EUT operation mode: Transmitting in Wifi 802.11g middle channel with Chain 0(Ant 1)

Project No.: 2407V46941E-RF
Test Mode: 11g-2437
EUT Model: BA210LED Digital
Test distance: 3m


Temp/Humi/ATM: 23.5°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

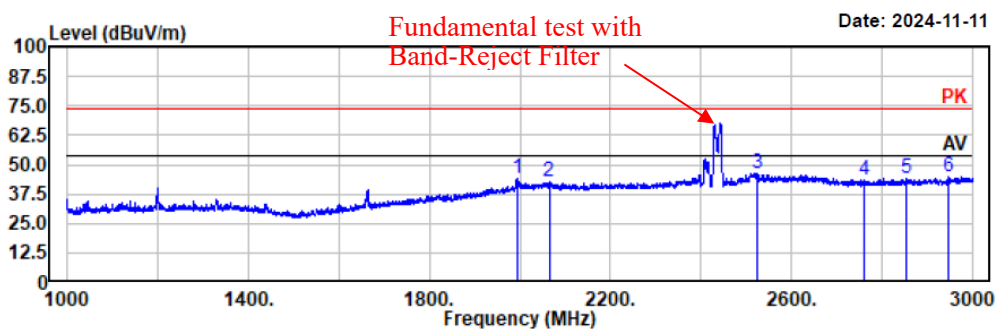

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1995.00	50.99	-6.92	44.07	74.00	29.93	horizontal	Peak
2064.50	49.02	-6.20	42.82	74.00	31.18	horizontal	Peak
2524.00	50.14	-3.82	46.32	74.00	27.68	horizontal	Peak
2760.50	48.45	-4.79	43.66	74.00	30.34	horizontal	Peak
2854.00	48.69	-4.53	44.16	74.00	29.84	horizontal	Peak
2945.50	48.75	-4.23	44.52	74.00	29.48	horizontal	Peak

Project No.: 2407V46941E-RF
Test Mode: 11g-2437
EUT Model: BA210LED Digital
Test distance: 3m

Temp/Humi/ATM: 23.5°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

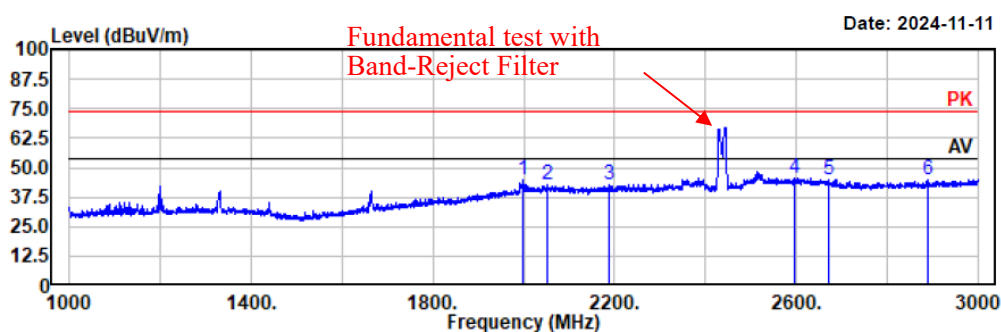


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1998.50	51.76	-6.80	44.96	74.00	29.04	vertical	Peak
2053.00	48.85	-6.03	42.82	74.00	31.18	vertical	Peak
2189.00	49.15	-6.36	42.79	74.00	31.21	vertical	Peak
2596.50	49.06	-3.31	45.75	74.00	28.25	vertical	Peak
2672.50	49.00	-3.94	45.06	74.00	28.94	vertical	Peak
2888.50	49.17	-4.43	44.74	74.00	29.26	vertical	Peak

EUT operation mode: Transmitting in Wifi 802.11g high channel with Chain 0(Ant 1)

Project No.: 2407V46941E-RF
Test Mode: 11g-2462
EUT Model: BA210LED Digital
Test distance: 3m


Temp/Humi/ATM: 23.5°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

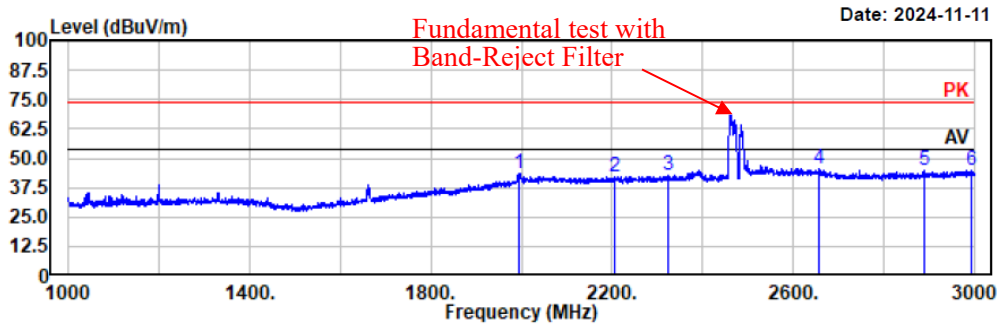

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1995.50	50.31	-6.90	43.41	74.00	30.59	horizontal	Peak
2205.50	48.61	-6.25	42.36	74.00	31.64	horizontal	Peak
2324.00	48.82	-6.10	42.72	74.00	31.28	horizontal	Peak
2658.50	48.90	-3.59	45.31	74.00	28.69	horizontal	Peak
2890.00	49.00	-4.42	44.58	74.00	29.42	horizontal	Peak
2993.00	48.90	-4.04	44.86	74.00	29.14	horizontal	Peak

Project No.: 2407V46941E-RF
Test Mode: 11g-2462
EUT Model: BA210LED Digital
Test distance: 3m

Temp/Humi/ATM: 23.5°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

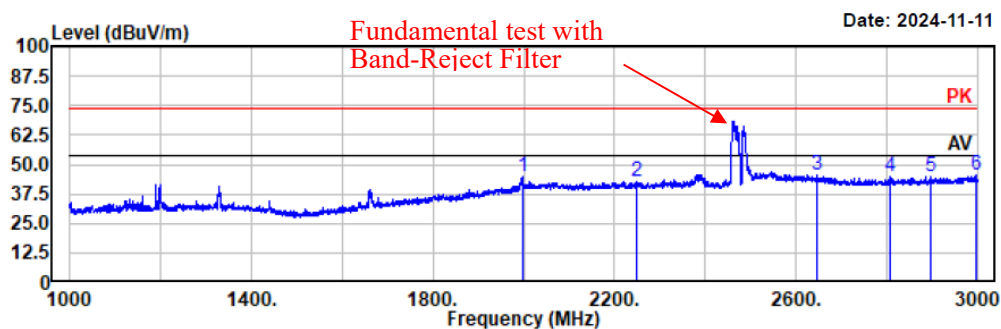


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1998.00	51.43	-6.82	44.61	74.00	29.39	vertical	Peak
2249.50	48.92	-6.23	42.69	74.00	31.31	vertical	Peak
2645.50	48.67	-3.36	45.31	74.00	28.69	vertical	Peak
2806.00	49.33	-4.68	44.65	74.00	29.35	vertical	Peak
2898.50	49.52	-4.39	45.13	74.00	28.87	vertical	Peak
2995.50	49.40	-4.04	45.36	74.00	28.64	vertical	Peak

EUT operation mode: Transmitting in Wifi 802.11b low channel with Chain 1(Ant 2)

Project No.: 2407V46941E-RF
Test Mode: 11b-2412
EUT Model: BA210LED Digital
Test distance: 3m


Temp/Humi/ATM: 23.5°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

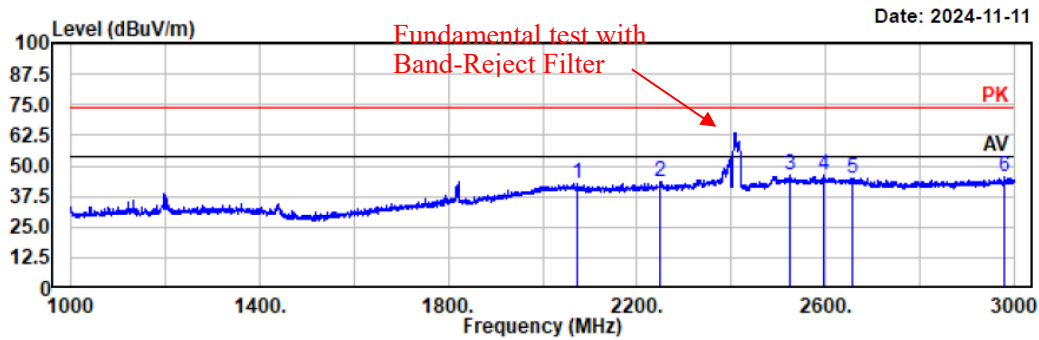

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2074.50	49.35	-6.35	43.00	74.00	31.00	horizontal	Peak
2249.00	49.94	-6.23	43.71	74.00	30.29	horizontal	Peak
2523.00	49.84	-3.84	46.00	74.00	28.00	horizontal	Peak
2595.50	49.35	-3.32	46.03	74.00	27.97	horizontal	Peak
2655.50	48.67	-3.51	45.16	74.00	28.84	horizontal	Peak
2979.50	49.42	-4.09	45.33	74.00	28.67	horizontal	Peak

Project No.: 2407V46941E-RF
Test Mode: 11b-2412
EUT Model: BA210LED Digital
Test distance: 3m

Temp/Humi/ATM: 23.5°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

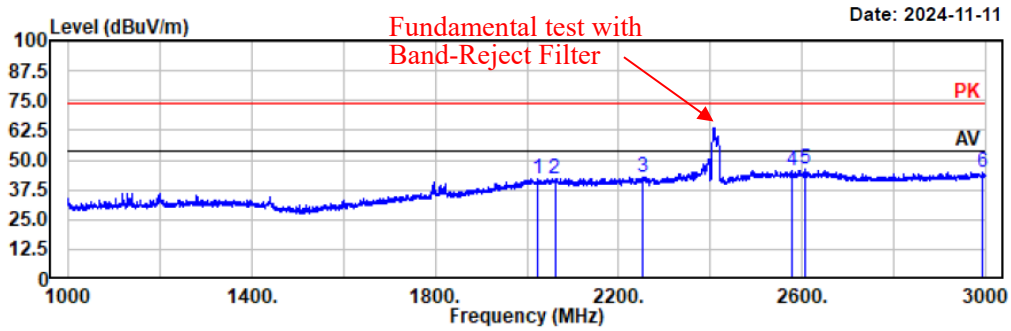


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2022.00	48.76	-6.41	42.35	74.00	31.65	vertical	Peak
2061.00	48.38	-6.15	42.23	74.00	31.77	vertical	Peak
2251.00	48.99	-6.25	42.74	74.00	31.26	vertical	Peak
2577.00	49.09	-3.37	45.72	74.00	28.28	vertical	Peak
2607.00	49.65	-3.30	46.35	74.00	27.65	vertical	Peak
2993.50	49.14	-4.04	45.10	74.00	28.90	vertical	Peak

EUT operation mode: Transmitting in Wifi 802.11b middle channel with Chain 1(Ant 2)

Project No.: 2407V46941E-RF
Test Mode: 11b-2437
EUT Model: BA210LED Digital
Test distance: 3m


Temp/Humi/ATM: 23.5°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

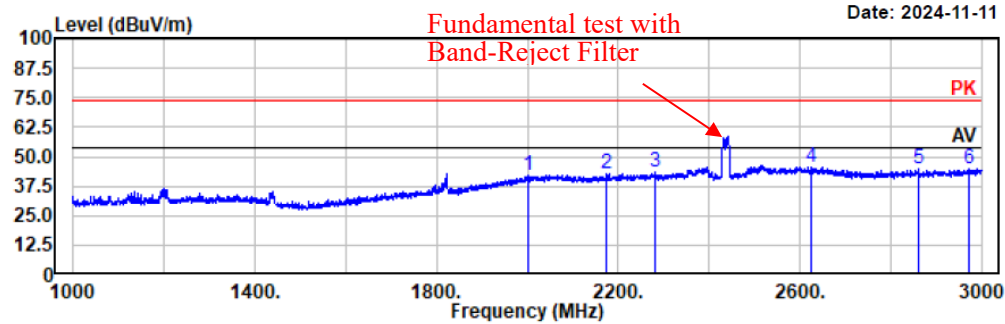

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2003.00	48.75	-6.70	42.05	74.00	31.95	horizontal	Peak
2175.00	49.12	-6.50	42.62	74.00	31.38	horizontal	Peak
2280.50	49.76	-6.30	43.46	74.00	30.54	horizontal	Peak
2625.50	49.11	-3.33	45.78	74.00	28.22	horizontal	Peak
2862.00	49.06	-4.51	44.55	74.00	29.45	horizontal	Peak
2973.00	49.11	-4.12	44.99	74.00	29.01	horizontal	Peak

Project No.: 2407V46941E-RF
Test Mode: 11b-2437
EUT Model: BA210LED Digital
Test distance: 3m

Temp/Humi/ATM: 23.5°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

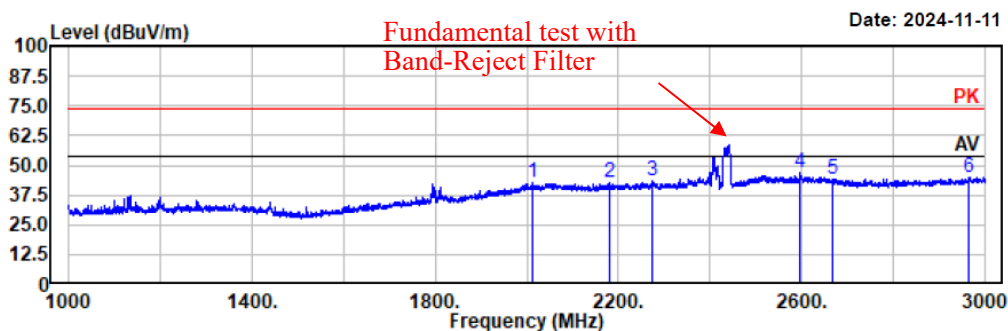


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2011.00	49.16	-6.58	42.58	74.00	31.42	vertical	Peak
2182.50	49.46	-6.42	43.04	74.00	30.96	vertical	Peak
2274.00	49.58	-6.28	43.30	74.00	30.70	vertical	Peak
2597.00	49.87	-3.31	46.56	74.00	27.44	vertical	Peak
2668.00	48.29	-3.83	44.46	74.00	29.54	vertical	Peak
2965.00	48.93	-4.15	44.78	74.00	29.22	vertical	Peak

EUT operation mode: Transmitting in Wifi 802.11b high channel with Chain 1(Ant 2)

Project No.: 2407V46941E-RF
Test Mode: 11b-2462
EUT Model: BA210LED Digital
Test distance: 3m


Temp/Humi/ATM: 23.5°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

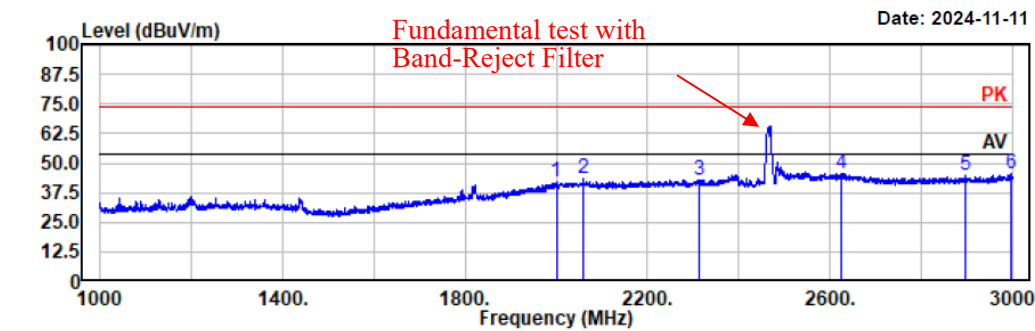

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2000.00	48.70	-6.75	41.95	74.00	32.05	horizontal	Peak
2060.50	49.40	-6.14	43.26	74.00	30.74	horizontal	Peak
2312.00	49.28	-6.22	43.06	74.00	30.94	horizontal	Peak
2625.50	49.15	-3.33	45.82	74.00	28.18	horizontal	Peak
2898.00	48.90	-4.39	44.51	74.00	29.49	horizontal	Peak
2995.50	49.58	-4.04	45.54	74.00	28.46	horizontal	Peak

Project No.: 2407V46941E-RF
Test Mode: 11b-2462
EUT Model: BA210LED Digital
Test distance: 3m

Temp/Humi/ATM: 23.5°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

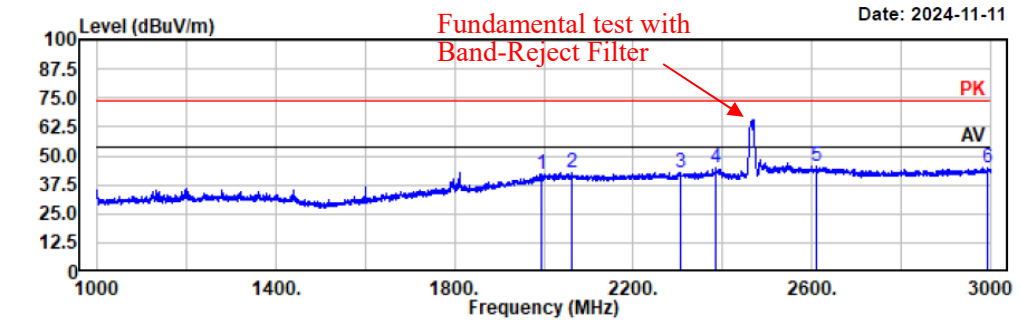


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1995.50	49.12	-6.90	42.22	74.00	31.78	vertical	Peak
2061.50	48.85	-6.15	42.70	74.00	31.30	vertical	Peak
2304.50	49.03	-6.29	42.74	74.00	31.26	vertical	Peak
2385.50	49.94	-5.38	44.56	74.00	29.44	vertical	Peak
2610.00	48.72	-3.31	45.41	74.00	28.59	vertical	Peak
2994.00	48.81	-4.04	44.77	74.00	29.23	vertical	Peak

EUT operation mode: Transmitting in Wifi 802.11g low channel with Chain 1(Ant 2)

Project No.: 2407V46941E-RF
Test Mode: 11g-2412
EUT Model: BA210LED Digital
Test distance: 3m


Temp/Humi/ATM: 23.5℃/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

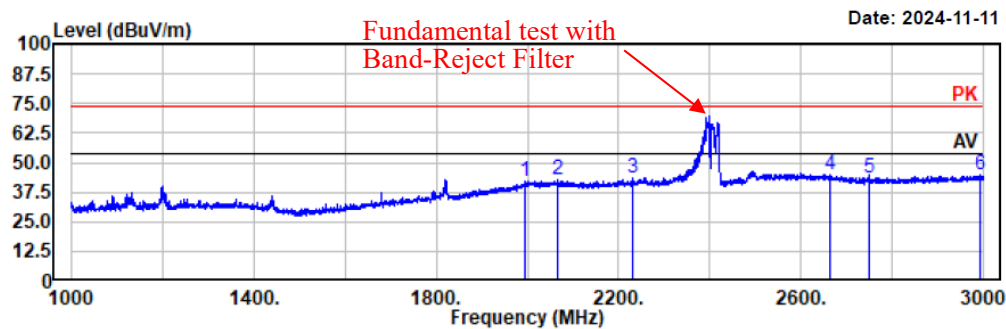

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1995.50	49.02	-6.90	42.12	74.00	31.88	horizontal	Peak
2066.50	48.76	-6.23	42.53	74.00	31.47	horizontal	Peak
2232.50	49.38	-6.25	43.13	74.00	30.87	horizontal	Peak
2665.50	48.36	-3.76	44.60	74.00	29.40	horizontal	Peak
2751.50	48.42	-4.82	43.60	74.00	30.40	horizontal	Peak
2992.50	48.79	-4.04	44.75	74.00	29.25	horizontal	Peak

Project No.: 2407V46941E-RF
Test Mode: 11g-2412
EUT Model: BA210LED Digital
Test distance: 3m

Temp/Humi/ATM: 23.5°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

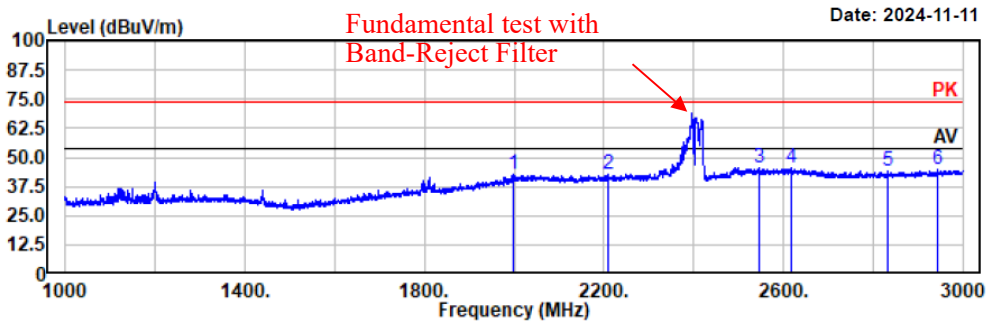

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1998.00	49.32	-6.82	42.50	74.00	31.50	vertical	Peak
2208.00	49.10	-6.25	42.85	74.00	31.15	vertical	Peak
2547.00	48.69	-3.51	45.18	74.00	28.82	vertical	Peak
2617.00	48.50	-3.32	45.18	74.00	28.82	vertical	Peak
2832.50	48.62	-4.59	44.03	74.00	29.97	vertical	Peak
2944.00	48.72	-4.23	44.49	74.00	29.51	vertical	Peak

EUT operation mode: Transmitting in Wifi 802.11g middle channel with Chain 1(Ant 2)

Project No.: 2407V46941E-RF

Test Mode: 11g-2437


EUT Model: BA210LED Digital

Test distance: 3m

Temp/Humi/ATM: 23.5℃/54%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

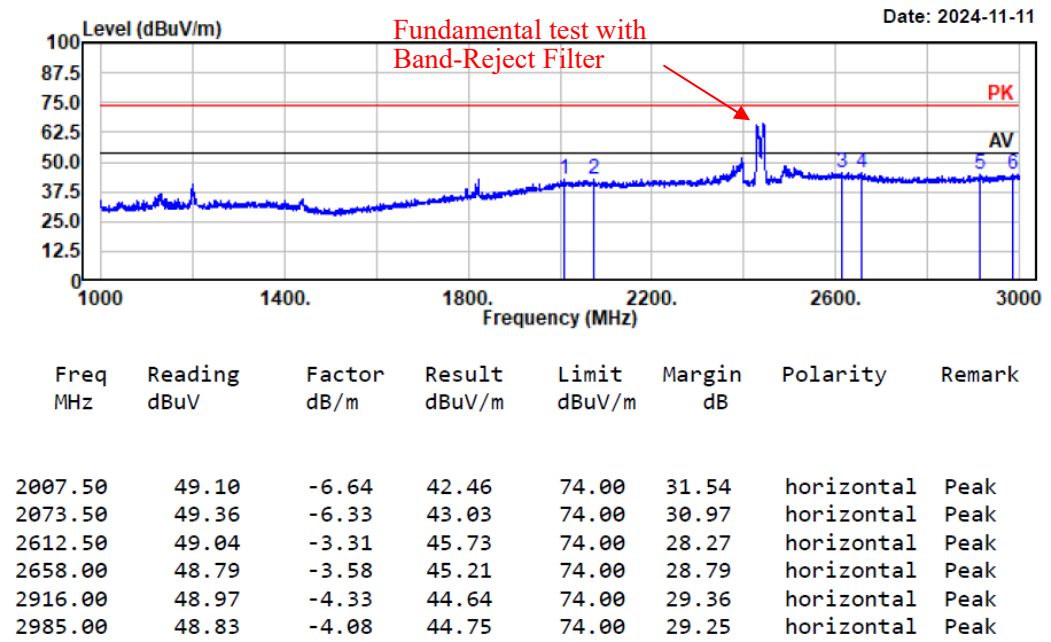

Project No.: 2407V46941E-RF

Test Mode: 11g-2437


EUT Model: BA210LED Digital

Test distance: 3m

Temp/Humi/ATM: 23.5°C/54%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

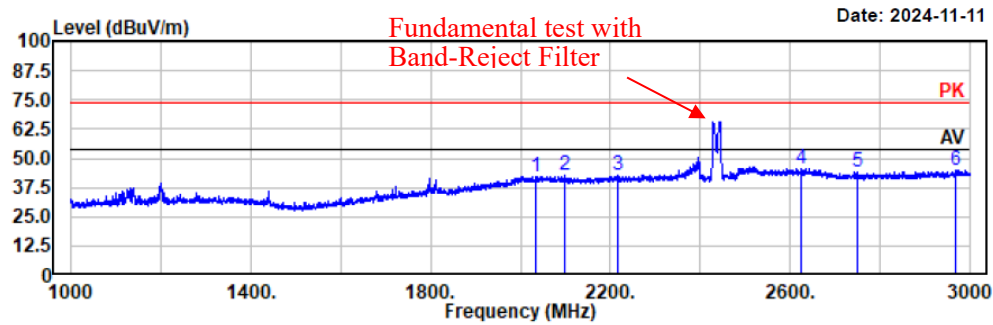

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2033.00	48.56	-6.24	42.32	74.00	31.68	vertical	Peak
2098.50	49.17	-6.70	42.47	74.00	31.53	vertical	Peak
2215.00	49.33	-6.25	43.08	74.00	30.92	vertical	Peak
2624.50	49.09	-3.34	45.75	74.00	28.25	vertical	Peak
2751.50	48.92	-4.82	44.10	74.00	29.90	vertical	Peak
2970.00	48.89	-4.14	44.75	74.00	29.25	vertical	Peak

EUT operation mode: Transmitting in Wifi 802.11g high channel with Chain 1(Ant 2)

Project No.: 2407V46941E-RF

Test Mode: 11g-2462


EUT Model: BA210LED Digital

Test distance: 3m

Temp/Humi/ATM: 23.5°C/54%/100.1kPa

Tested by: Wlif Wu


Power Source: AC120V/60Hz

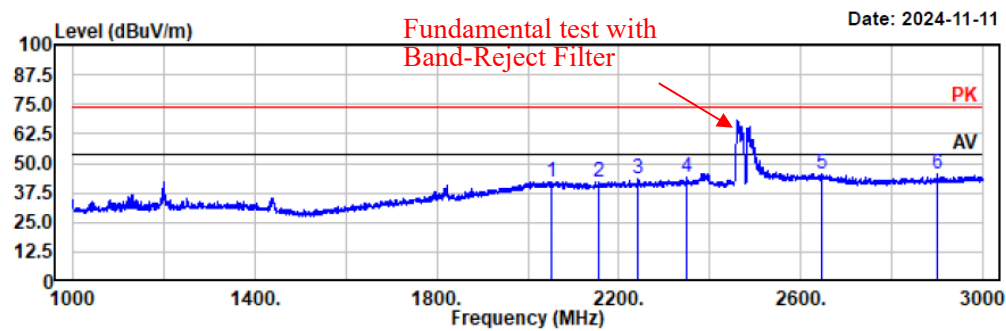

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2051.50	48.14	-6.00	42.14	74.00	31.86	horizontal	Peak
2155.50	49.08	-6.68	42.40	74.00	31.60	horizontal	Peak
2242.00	49.62	-6.25	43.37	74.00	30.63	horizontal	Peak
2348.00	49.72	-5.87	43.85	74.00	30.15	horizontal	Peak
2646.00	48.69	-3.36	45.33	74.00	28.67	horizontal	Peak
2899.50	49.74	-4.39	45.35	74.00	28.65	horizontal	Peak

Project No.: 2407V46941E-RF
Test Mode: 11g-2462
EUT Model: BA210LED Digital
Test distance: 3m

Temp/Humi/ATM: 23.5°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

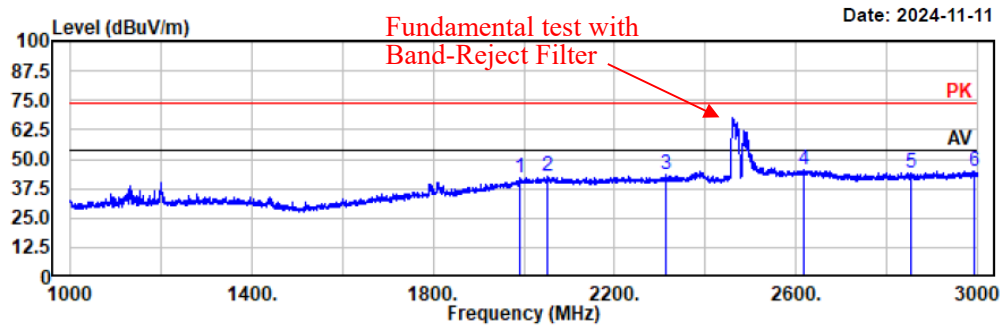


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1991.00	48.94	-7.07	41.87	74.00	32.13	vertical	Peak
2051.50	48.59	-6.00	42.59	74.00	31.41	vertical	Peak
2314.50	49.34	-6.19	43.15	74.00	30.85	vertical	Peak
2616.50	49.08	-3.32	45.76	74.00	28.24	vertical	Peak
2852.50	48.62	-4.53	44.09	74.00	29.91	vertical	Peak
2993.50	49.05	-4.04	45.01	74.00	28.99	vertical	Peak

EUT operation mode: Transmitting in Wifi 802.11n20 low channel with Chain 0(Ant 1) & Chain 1(Ant 2)


Project No.: 2407V46941E-RF
Test Mode: 11n20-2412
EUT Model: BA210LED Digital
Test distance: 3m

Temp/Humi/ATM: 23.5℃/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

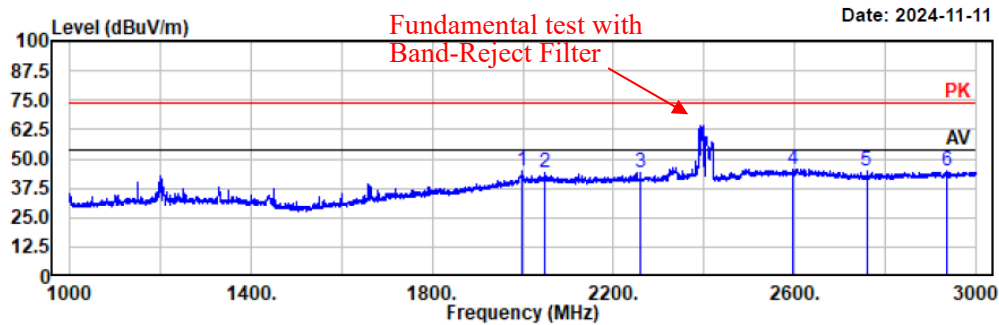

Project No.: 2407V46941E-RF
Test Mode: 11n20-2412
EUT Model: BA210LED Digital
Test distance: 3m

Temp/Humi/ATM: 23.5°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

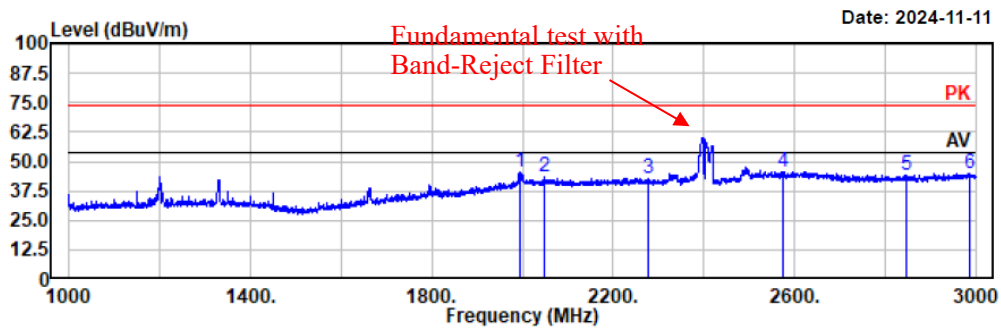

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1995.50	52.16	-6.90	45.26	74.00	28.74	vertical	Peak
2050.00	49.72	-5.98	43.74	74.00	30.26	vertical	Peak
2276.50	49.25	-6.28	42.97	74.00	31.03	vertical	Peak
2576.00	48.98	-3.38	45.60	74.00	28.40	vertical	Peak
2845.50	48.98	-4.56	44.42	74.00	29.58	vertical	Peak
2986.00	49.08	-4.08	45.00	74.00	29.00	vertical	Peak

EUT operation mode: Transmitting in Wifi 802.11n20 middle channel with Chain 0(Ant 1) & Chain 1(Ant 2)

Project No.: 2407V46941E-RF

Test Mode: 11n20-2437


EUT Model: BA210LED Digital

Test distance: 3m

Temp/Humi/ATM: 23.5°C/54%/100.1kPa

Tested by: Wlif Wu


Power Source: AC120V/60Hz

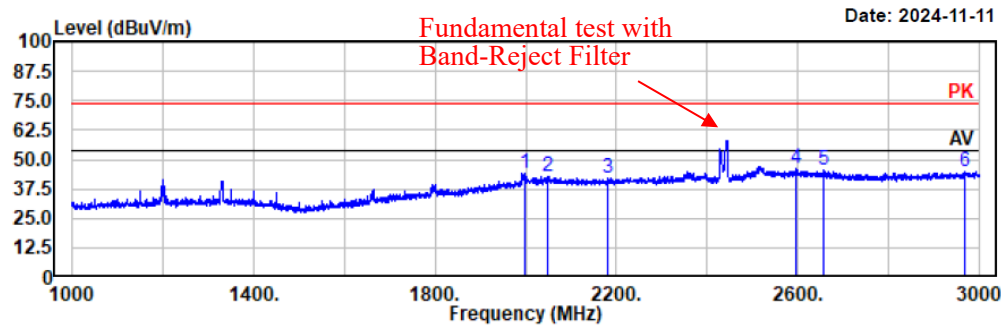

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1999.00	50.77	-6.78	43.99	74.00	30.01	vertical	Peak
2049.50	48.99	-6.00	42.99	74.00	31.01	vertical	Peak
2180.00	48.38	-6.44	41.94	74.00	32.06	vertical	Peak
2596.00	49.39	-3.32	46.07	74.00	27.93	vertical	Peak
2657.50	48.90	-3.56	45.34	74.00	28.66	vertical	Peak
2970.00	49.24	-4.14	45.10	74.00	28.90	vertical	Peak

Project No.: 2407V46941E-RF
Test Mode: 11n20-2437
EUT Model: BA210LED Digital
Test distance: 3m

Temp/Humi/ATM: 23.5°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

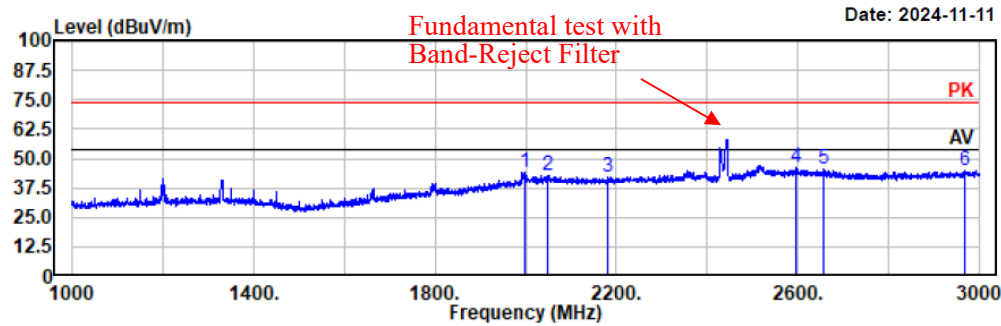

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1999.00	50.77	-6.78	43.99	74.00	30.01	vertical	Peak
2049.50	48.99	-6.00	42.99	74.00	31.01	vertical	Peak
2180.00	48.38	-6.44	41.94	74.00	32.06	vertical	Peak
2596.00	49.39	-3.32	46.07	74.00	27.93	vertical	Peak
2657.50	48.90	-3.56	45.34	74.00	28.66	vertical	Peak
2970.00	49.24	-4.14	45.10	74.00	28.90	vertical	Peak

EUT operation mode: Transmitting in Wifi 802.11n20 high channel with Chain 0(Ant 1) & Chain 1(Ant 2)

Project No.: 2407V46941E-RF

Test Mode: 11n20-2462


EUT Model: BA210LED Digital

Test distance: 3m

Temp/Humi/ATM: 23.5°C/54%/100.1kPa

Tested by: Wlif Wu


Power Source: AC120V/60Hz

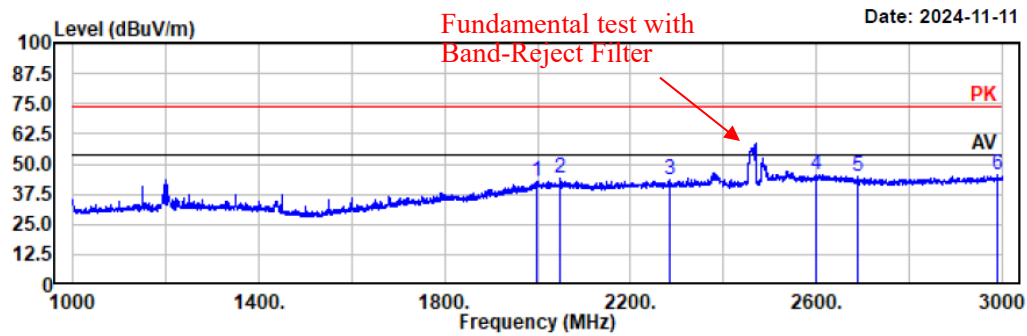

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1999.00	49.68	-6.78	42.90	74.00	31.10	horizontal	Peak
2050.00	49.85	-5.98	43.87	74.00	30.13	horizontal	Peak
2283.50	49.55	-6.30	43.25	74.00	30.75	horizontal	Peak
2600.00	48.89	-3.30	45.59	74.00	28.41	horizontal	Peak
2689.00	49.36	-4.36	45.00	74.00	29.00	horizontal	Peak
2991.00	49.38	-4.05	45.33	74.00	28.67	horizontal	Peak

Project No.: 2407V46941E-RF
Test Mode: 11n20-2462
EUT Model: BA210LED Digital
Test distance: 3m

Temp/Humi/ATM: 23.5°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

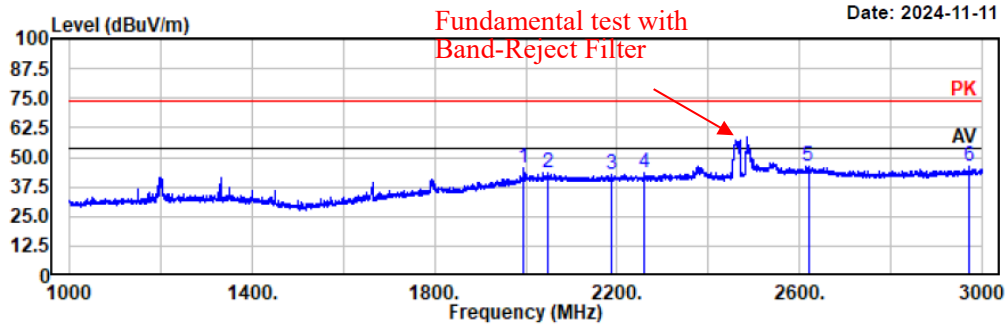

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1995.50	52.19	-6.90	45.29	74.00	28.71	vertical	Peak
2049.50	49.38	-6.00	43.38	74.00	30.62	vertical	Peak
2188.00	49.24	-6.37	42.87	74.00	31.13	vertical	Peak
2261.00	49.84	-6.26	43.58	74.00	30.42	vertical	Peak
2619.50	49.64	-3.33	46.31	74.00	27.69	vertical	Peak
2971.50	50.06	-4.12	45.94	74.00	28.06	vertical	Peak

EUT operation mode: Transmitting in Wifi 802.11n40 low channel with Chain 0(Ant 1) & Chain 1(Ant 2)

Project No.: 2407V46941E-RF

Test Mode: 11n40-2422


EUT Model: BA210LED Digital

Test distance: 3m

Temp/Humi/ATM: 23.5°C/54%/100.1kPa

Tested by: Wlif Wu


Power Source: AC120V/60Hz

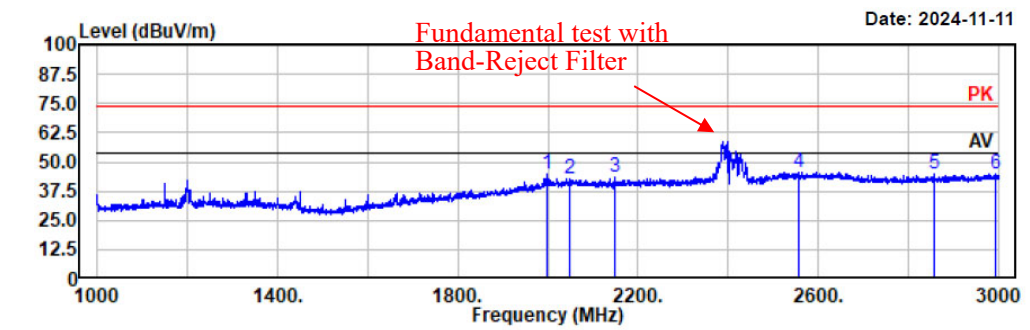

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1998.00	51.60	-6.82	44.78	74.00	29.22	horizontal	Peak
2050.00	48.71	-5.98	42.73	74.00	31.27	horizontal	Peak
2150.00	50.44	-6.74	43.70	74.00	30.30	horizontal	Peak
2556.50	49.06	-3.44	45.62	74.00	28.38	horizontal	Peak
2856.00	49.21	-4.52	44.69	74.00	29.31	horizontal	Peak
2993.50	49.07	-4.04	45.03	74.00	28.97	horizontal	Peak

Project No.: 2407V46941E-RF
Test Mode: 11n40-2422
EUT Model: BA210LED Digital
Test distance: 3m

Temp/Humi/ATM: 23.5°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

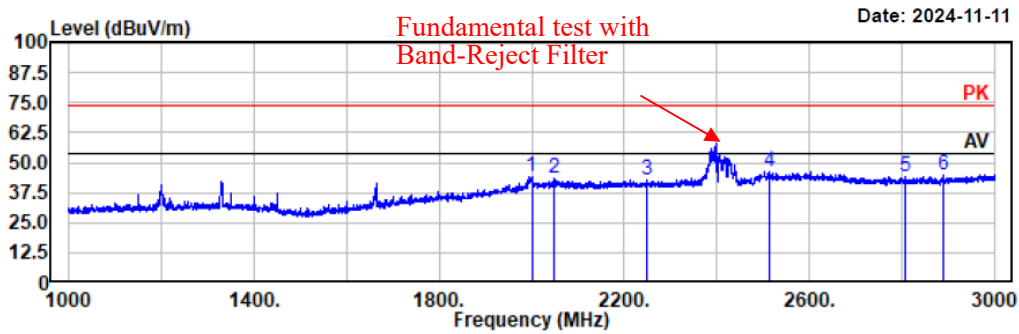

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2000.00	51.20	-6.75	44.45	74.00	29.55	vertical	Peak
2050.00	49.65	-5.98	43.67	74.00	30.33	vertical	Peak
2250.00	48.94	-6.25	42.69	74.00	31.31	vertical	Peak
2515.50	50.31	-3.93	46.38	74.00	27.62	vertical	Peak
2806.00	48.89	-4.68	44.21	74.00	29.79	vertical	Peak
2889.00	49.12	-4.43	44.69	74.00	29.31	vertical	Peak

EUT operation mode: Transmitting in Wifi 802.11n40 middle channel with Chain 0(Ant 1) & Chain 1(Ant 2)

Project No.: 2407V46941E-RF

Test Mode: 11n40-2437


EUT Model: BA210LED Digital

Test distance: 3m

Temp/Humi/ATM: 23.5℃/54%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

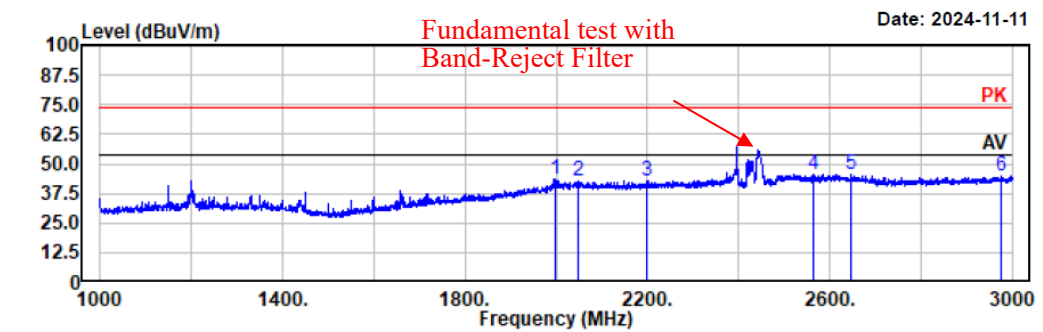

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1998.50	50.52	-6.80	43.72	74.00	30.28	horizontal	Peak
2050.00	48.76	-5.98	42.78	74.00	31.22	horizontal	Peak
2199.50	48.96	-6.26	42.70	74.00	31.30	horizontal	Peak
2564.50	49.04	-3.42	45.62	74.00	28.38	horizontal	Peak
2645.00	48.69	-3.36	45.33	74.00	28.67	horizontal	Peak
2976.00	48.74	-4.11	44.63	74.00	29.37	horizontal	Peak

Project No.: 2407V46941E-RF

Test Mode: 11n40-2437

EUT Model: BA210LED Digital


Test distance: 3m

Temp/Humi/ATM: 23.5°C/54%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

Date: 2024-11-11

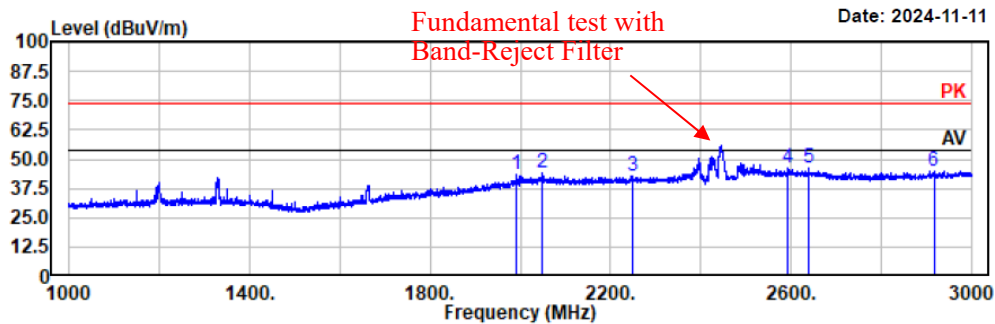

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1992.50	50.46	-7.01	43.45	74.00	30.55	vertical	Peak
2050.00	49.80	-5.98	43.82	74.00	30.18	vertical	Peak
2250.00	48.82	-6.25	42.57	74.00	31.43	vertical	Peak
2593.50	49.34	-3.32	46.02	74.00	27.98	vertical	Peak
2638.50	49.29	-3.36	45.93	74.00	28.07	vertical	Peak
2916.50	49.31	-4.32	44.99	74.00	29.01	vertical	Peak

EUT operation mode: Transmitting in Wifi 802.11n40 high channel with Chain 0(Ant 1) & Chain 1(Ant 2)

Project No.: 2407V46941E-RF

Test Mode: 11n40-2452


EUT Model: BA210LED Digital

Test distance: 3m

Temp/Humi/ATM: 23.5°C/54%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

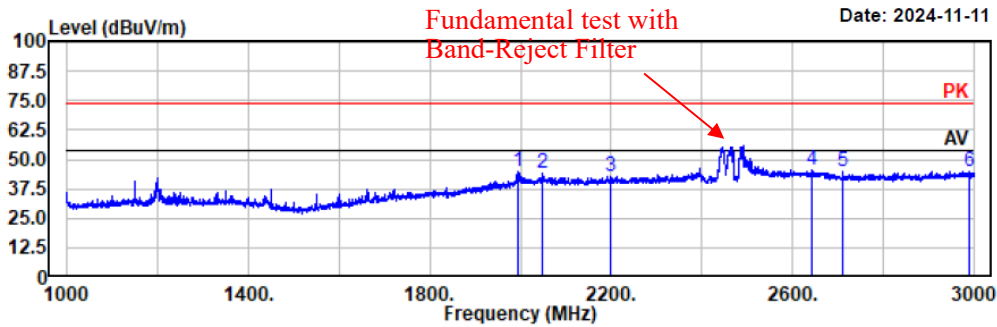

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1995.00	51.50	-6.92	44.58	74.00	29.42	horizontal	Peak
2050.00	50.31	-5.98	44.33	74.00	29.67	horizontal	Peak
2200.00	48.89	-6.25	42.64	74.00	31.36	horizontal	Peak
2643.50	48.85	-3.37	45.48	74.00	28.52	horizontal	Peak
2710.00	49.43	-4.68	44.75	74.00	29.25	horizontal	Peak
2990.50	49.08	-4.05	45.03	74.00	28.97	horizontal	Peak

Project No.: 2407V46941E-RF

Test Mode: 11n40-2452


EUT Model: BA210LED Digital

Test distance: 3m

Temp/Humi/ATM: 23.5°C/54%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

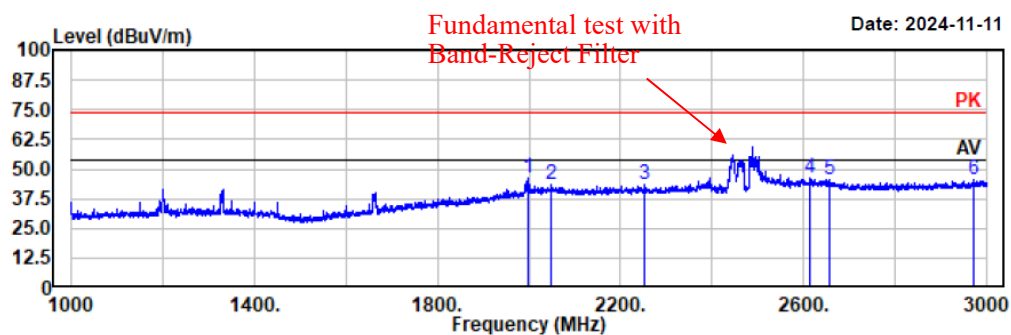

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
1999.50	52.70	-6.77	45.93	74.00	28.07	vertical	Peak
2050.00	49.21	-5.98	43.23	74.00	30.77	vertical	Peak
2251.50	49.45	-6.25	43.20	74.00	30.80	vertical	Peak
2613.00	49.52	-3.32	46.20	74.00	27.80	vertical	Peak
2658.50	49.26	-3.59	45.67	74.00	28.33	vertical	Peak
2973.00	49.37	-4.12	45.25	74.00	28.75	vertical	Peak

4) 3 GHz -18GHz

EUT operation mode: Transmitting in Wifi 802.11b low channel with Chain 0(Ant 1)

Project No.: 2407V46941E-RF

Test Mode: 11b-2412


EUT Model: BA210LED Digital

Test distance:3m

Temp/Humi/ATM: 23.2°C/50%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

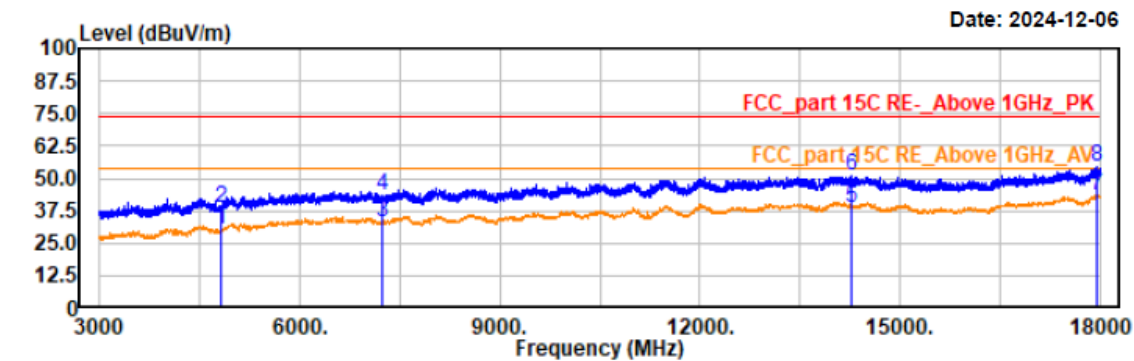


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4824.00	34.48	-4.39	30.09	54.00	23.91	horizontal	Average
4824.00	42.95	-4.39	38.56	74.00	35.44	horizontal	Peak
7236.00	34.90	-1.70	33.20	54.00	20.80	horizontal	Average
7236.00	45.06	-1.70	43.36	74.00	30.64	horizontal	Peak
14265.00	33.74	5.22	38.96	54.00	15.04	horizontal	Average
14265.00	45.79	5.22	51.01	74.00	22.99	horizontal	Peak
17949.00	35.48	7.67	43.15	54.00	10.85	horizontal	Average
17949.00	46.73	7.67	54.40	74.00	19.60	horizontal	Peak

Project No.: 2407V46941E-RF
Test Mode: 11b-2412
EUT Model: BA210LED Digital
Test distance: 3m

Temp/Humi/ATM: 23.2°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

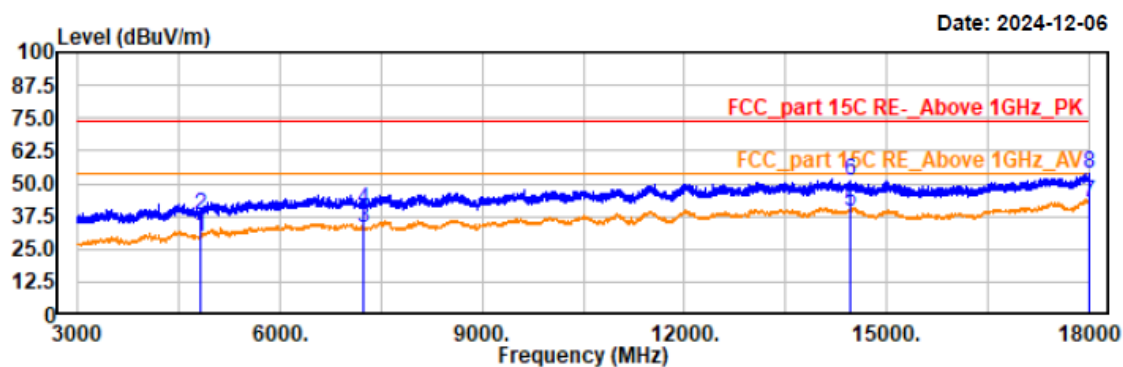

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto


AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4824.00	34.27	-4.39	29.88	54.00	24.12	vertical	Average
4824.00	42.48	-4.39	38.09	74.00	35.91	vertical	Peak
7236.00	34.70	-1.70	33.00	54.00	21.00	vertical	Average
7236.00	42.03	-1.70	40.33	74.00	33.67	vertical	Peak
14466.00	34.47	5.03	39.50	54.00	14.50	vertical	Average
14466.00	46.22	5.03	51.25	74.00	22.75	vertical	Peak
17998.50	34.76	7.74	42.50	54.00	11.50	vertical	Average
17998.50	46.12	7.74	53.86	74.00	20.14	vertical	Peak

EUT operation mode: Transmitting in Wifi 802.11b middle channel with Chain 0(Ant 1)

Project No.: 2407V46941E-RF
Test Mode: 11b-2437
EUT Model: BA210LED Digital
Test distance: 3m

Temp/Humi/ATM: 23.2°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

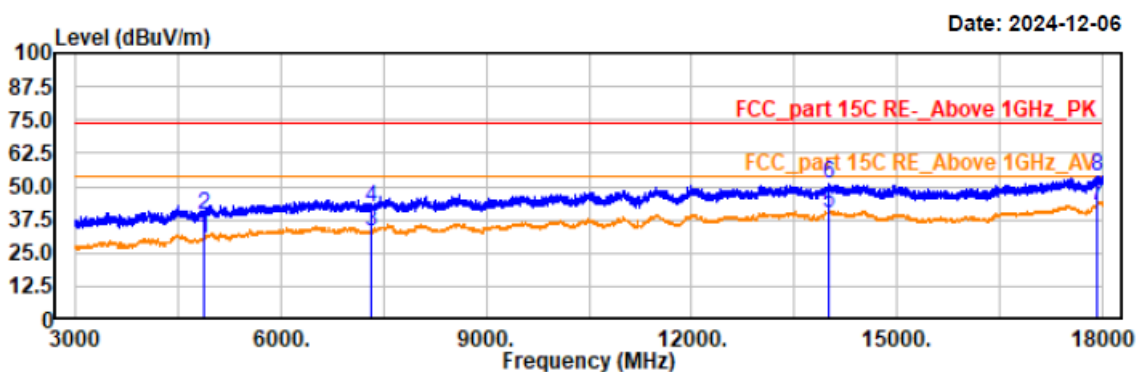

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4873.50	34.74	-4.26	30.48	54.00	23.52	horizontal	Average
4873.50	43.90	-4.26	39.64	74.00	34.36	horizontal	Peak
7311.00	34.70	-1.63	33.07	54.00	20.93	horizontal	Average
7311.00	43.65	-1.63	42.02	74.00	31.98	horizontal	Peak
13993.50	34.60	5.09	39.69	54.00	14.31	horizontal	Average
13993.50	45.99	5.09	51.08	74.00	22.92	horizontal	Peak
17919.00	34.88	7.62	42.50	54.00	11.50	horizontal	Average
17919.00	46.37	7.62	53.99	74.00	20.01	horizontal	Peak

Project No.: 2407V46941E-RF
Test Mode: 11b-2437
EUT Model: BA210LED Digital
Test distance:3m

Temp/Humi/ATM: 23.2°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

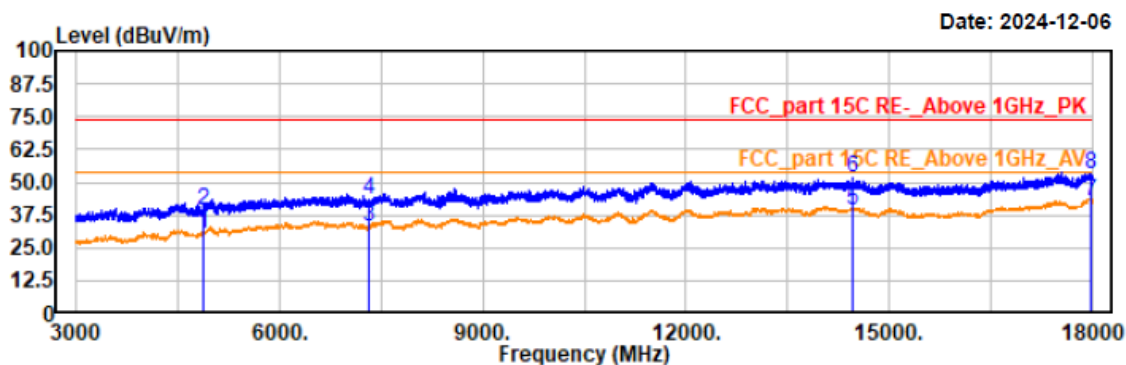

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4873.50	34.70	-4.26	30.44	54.00	23.56	vertical	Average
4873.50	43.28	-4.26	39.02	74.00	34.98	vertical	Peak
7311.00	34.65	-1.63	33.02	54.00	20.98	vertical	Average
7311.00	45.16	-1.63	43.53	74.00	30.47	vertical	Peak
14452.50	34.58	5.06	39.64	54.00	14.36	vertical	Average
14452.50	46.36	5.06	51.42	74.00	22.58	vertical	Peak
17989.50	35.30	7.72	43.02	54.00	10.98	vertical	Average
17989.50	45.60	7.72	53.32	74.00	20.68	vertical	Peak

EUT operation mode: Transmitting in Wifi 802.11b high channel with Chain 0(Ant 1)

Project No.: 2407V46941E-RF

Test Mode: 11b-2462


EUT Model: BA210LED Digital

Test distance:3m

Temp/Humi/ATM: 23.2°C/50%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

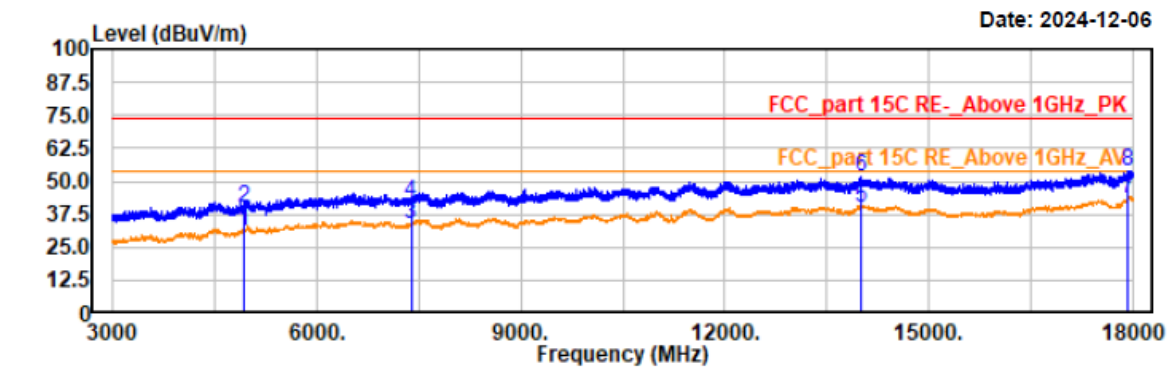

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4924.50	35.07	-4.12	30.95	54.00	23.05	horizontal	Average
4924.50	43.93	-4.12	39.81	74.00	34.19	horizontal	Peak
7386.00	35.44	-1.62	33.82	54.00	20.18	horizontal	Average
7386.00	43.79	-1.62	42.17	74.00	31.83	horizontal	Peak
14004.00	34.58	5.10	39.68	54.00	14.32	horizontal	Average
14004.00	46.54	5.10	51.64	74.00	22.36	horizontal	Peak
17935.50	35.78	7.64	43.42	54.00	10.58	horizontal	Average
17935.50	45.95	7.64	53.59	74.00	20.41	horizontal	Peak

Project No.: 2407V46941E-RF
Test Mode: 11b-2462
EUT Model: BA210LED Digital
Test distance:3m

Temp/Humi/ATM: 23.2°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

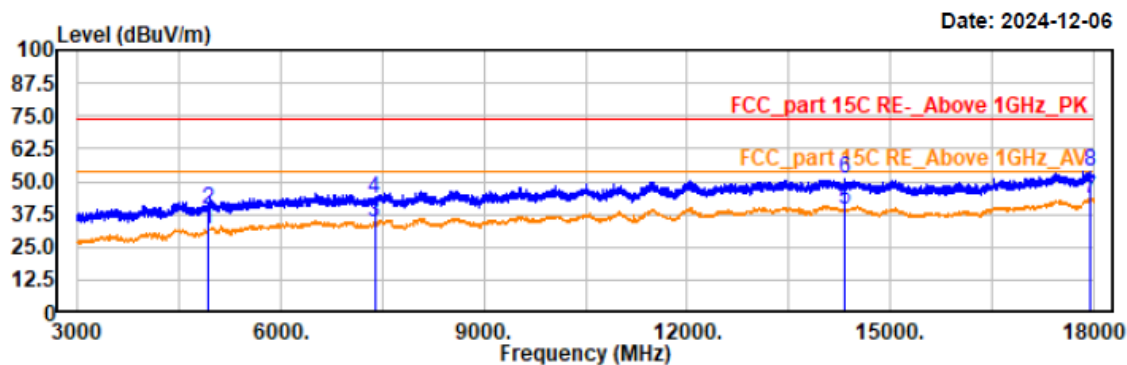

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4924.50	35.61	-4.12	31.49	54.00	22.51	vertical	Average
4924.50	43.66	-4.12	39.54	74.00	34.46	vertical	Peak
7386.00	35.79	-1.62	34.17	54.00	19.83	vertical	Average
7386.00	45.07	-1.62	43.45	74.00	30.55	vertical	Peak
14323.50	33.90	5.19	39.09	54.00	14.91	vertical	Average
14323.50	45.92	5.19	51.11	74.00	22.89	vertical	Peak
17955.00	35.75	7.68	43.43	54.00	10.57	vertical	Average
17955.00	45.80	7.68	53.48	74.00	20.52	vertical	Peak

EUT operation mode: Transmitting in Wifi 802.11g low channel with Chain 0(Ant 1)

Project No.: 2407V46941E-RF

Test Mode: 11g-2412


EUT Model: BA210LED Digital

Test distance:3m

Temp/Humi/ATM: 23.2°C/50%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

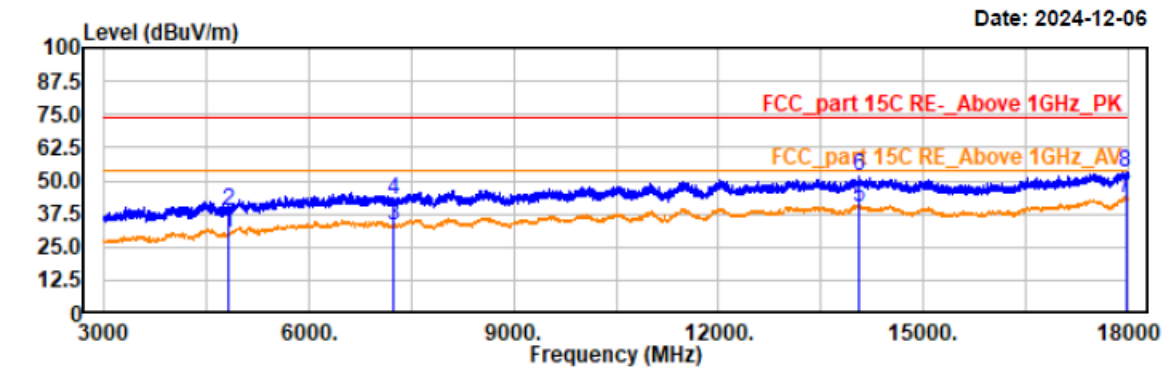

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4824.00	34.50	-4.39	30.11	54.00	23.89	horizontal	Average
4824.00	42.92	-4.39	38.53	74.00	35.47	horizontal	Peak
7236.00	34.72	-1.70	33.02	54.00	20.98	horizontal	Average
7236.00	44.62	-1.70	42.92	74.00	31.08	horizontal	Peak
14053.50	34.49	5.17	39.66	54.00	14.34	horizontal	Average
14053.50	46.23	5.17	51.40	74.00	22.60	horizontal	Peak
17965.50	35.79	7.69	43.48	54.00	10.52	horizontal	Average
17965.50	45.65	7.69	53.34	74.00	20.66	horizontal	Peak

Project No.: 2407V46941E-RF
Test Mode: 11g-2412
EUT Model: BA210LED Digital
Test distance:3m

Temp/Humi/ATM: 23.2°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

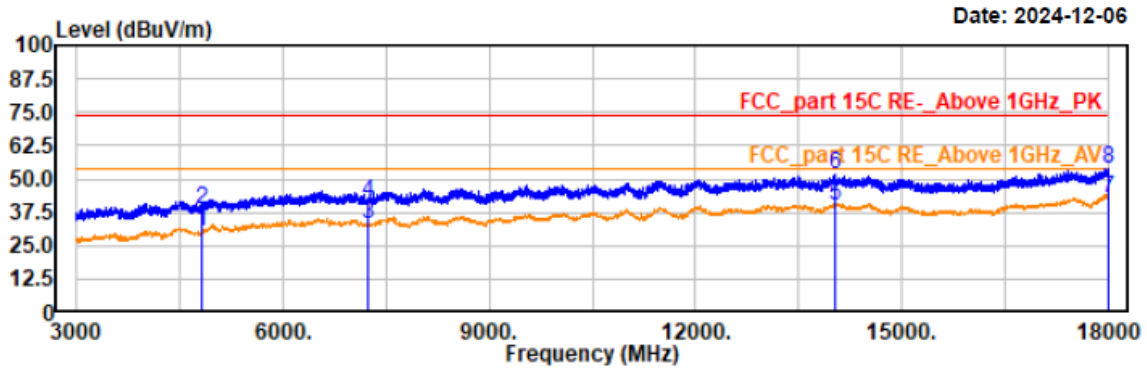

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4824.00	34.47	-4.39	30.08	54.00	23.92	vertical	Average
4824.00	43.09	-4.39	38.70	74.00	35.30	vertical	Peak
7236.00	35.02	-1.70	33.32	54.00	20.68	vertical	Average
7236.00	42.96	-1.70	41.26	74.00	32.74	vertical	Peak
14040.00	34.97	5.15	40.12	54.00	13.88	vertical	Average
14040.00	46.58	5.15	51.73	74.00	22.27	vertical	Peak
17998.50	34.91	7.74	42.65	54.00	11.35	vertical	Average
17998.50	45.87	7.74	53.61	74.00	20.39	vertical	Peak

EUT operation mode: Transmitting in Wifi 802.11g middle channel with Chain 0(Ant 1)

Project No.: 2407V46941E-RF

Test Mode: 11g-2437


EUT Model: BA210LED Digital

Test distance:3m

Temp/Humi/ATM: 23.2°C/50%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

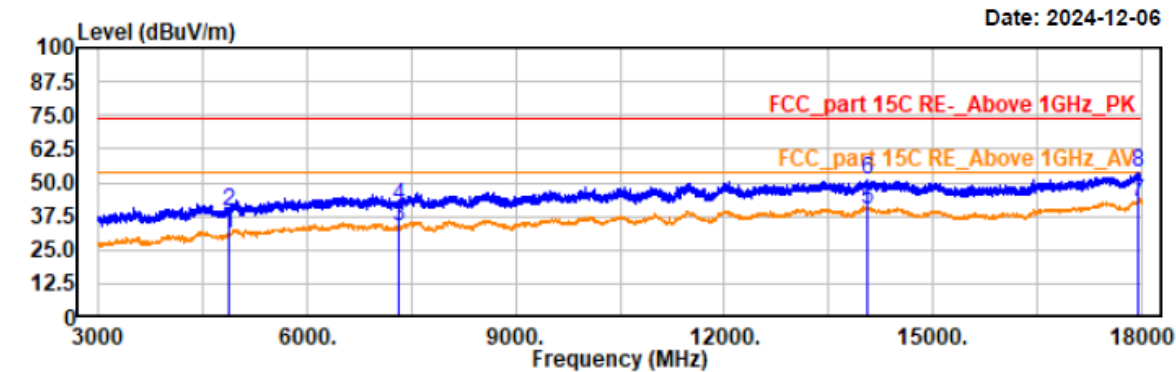


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4873.50	35.39	-4.26	31.13	54.00	22.87	horizontal	Average
4873.50	43.88	-4.26	39.62	74.00	34.38	horizontal	Peak
7311.00	35.25	-1.63	33.62	54.00	20.38	horizontal	Average
7311.00	42.75	-1.63	41.12	74.00	32.88	horizontal	Peak
14059.50	34.86	5.17	40.03	54.00	13.97	horizontal	Average
14059.50	46.03	5.17	51.20	74.00	22.80	horizontal	Peak
17940.00	35.35	7.65	43.00	54.00	11.00	horizontal	Average
17940.00	45.91	7.65	53.56	74.00	20.44	horizontal	Peak

Project No.: 2407V46941E-RF
Test Mode: 11g-2437
EUT Model: BA210LED Digital
Test distance: 3m

Temp/Humi/ATM: 23.2°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

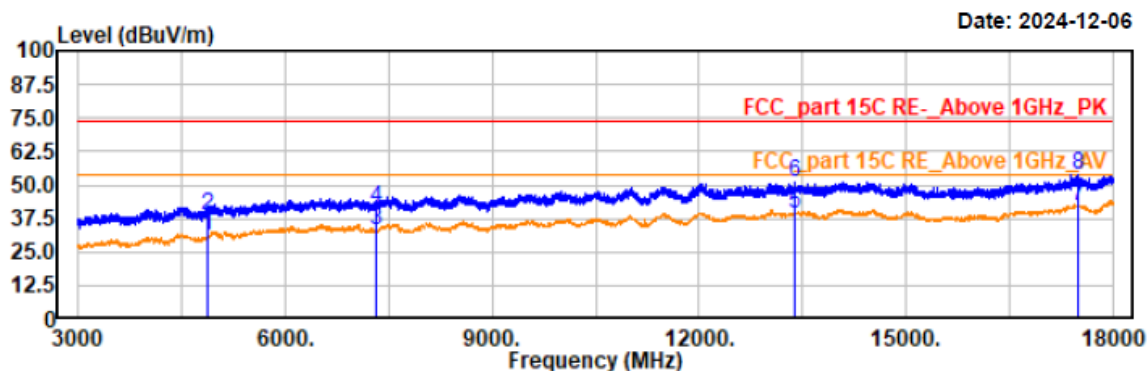

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4873.50	35.04	-4.26	30.78	54.00	23.22	vertical	Average
4873.50	42.68	-4.26	38.42	74.00	35.58	vertical	Peak
7311.00	34.77	-1.63	33.14	54.00	20.86	vertical	Average
7311.00	43.15	-1.63	41.52	74.00	32.48	vertical	Peak
13377.00	34.41	4.88	39.29	54.00	14.71	vertical	Average
13377.00	46.23	4.88	51.11	74.00	22.89	vertical	Peak
17491.50	35.79	6.25	42.04	54.00	11.96	vertical	Average
17491.50	47.74	6.25	53.99	74.00	20.01	vertical	Peak

EUT operation mode: Transmitting in Wifi 802.11g high channel with Chain 0(Ant 1)

Project No.: 2407V46941E-RF

Test Mode: 11g-2462


EUT Model: BA210LED Digital

Test distance:3m

Temp/Humi/ATM: 23.2℃/50%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

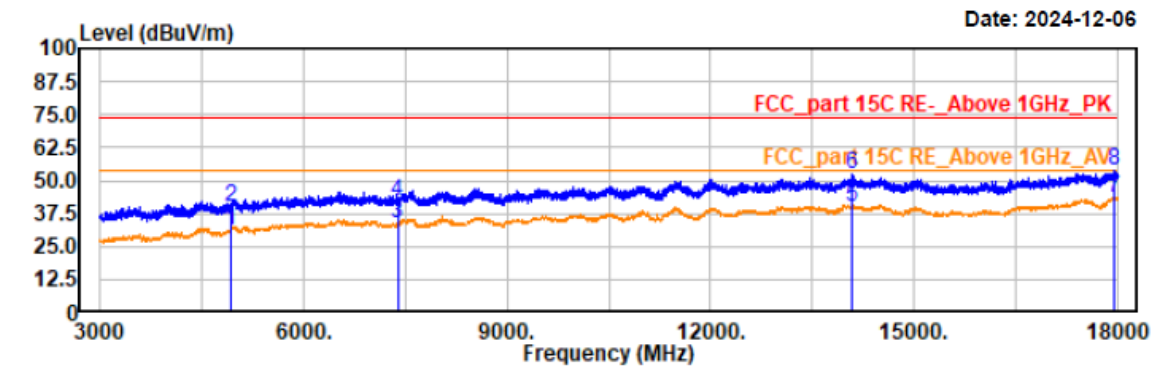


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4924.50	35.40	-4.12	31.28	54.00	22.72	horizontal	Average
4924.50	44.43	-4.12	40.31	74.00	33.69	horizontal	Peak
7386.00	35.51	-1.62	33.89	54.00	20.11	horizontal	Average
7386.00	43.49	-1.62	41.87	74.00	32.13	horizontal	Peak
14094.00	34.74	5.23	39.97	54.00	14.03	horizontal	Average
14094.00	47.37	5.23	52.60	74.00	21.40	horizontal	Peak
17955.00	35.75	7.68	43.43	54.00	10.57	horizontal	Average
17955.00	46.00	7.68	53.68	74.00	20.32	horizontal	Peak

Project No.: 2407V46941E-RF
Test Mode: 11g-2462
EUT Model: BA210LED Digital
Test distance:3m

Temp/Humi/ATM: 23.2°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

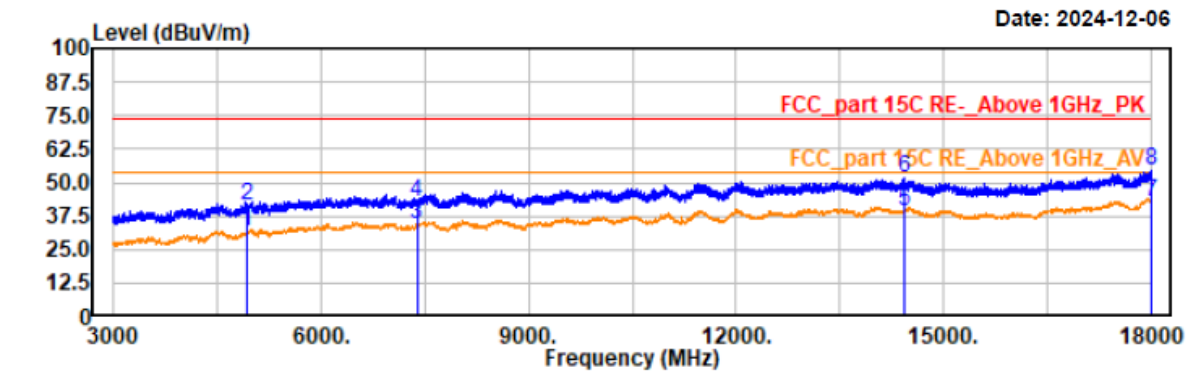

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
 AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4924.50	35.53	-4.12	31.41	54.00	22.59	vertical	Average
4924.50	45.19	-4.12	41.07	74.00	32.93	vertical	Peak
7386.00	35.79	-1.62	34.17	54.00	19.83	vertical	Average
7386.00	44.37	-1.62	42.75	74.00	31.25	vertical	Peak
14433.00	34.53	5.09	39.62	54.00	14.38	vertical	Average
14433.00	46.51	5.09	51.60	74.00	22.40	vertical	Peak
17998.50	35.03	7.74	42.77	54.00	11.23	vertical	Average
17998.50	46.99	7.74	54.73	74.00	19.27	vertical	Peak

EUT operation mode: Transmitting in Wifi 802.11b low channel with Chain 1(Ant 2)

Project No.: 2407V46941E-RF

Temp/Humi/ATM: 23.2°C/50%/100.1kPa


Test Mode: 11b-2412

Tested by: Wlif Wu

EUT Model: BA210LED Digital

Power Source: AC120V/60Hz

Test distance:3m

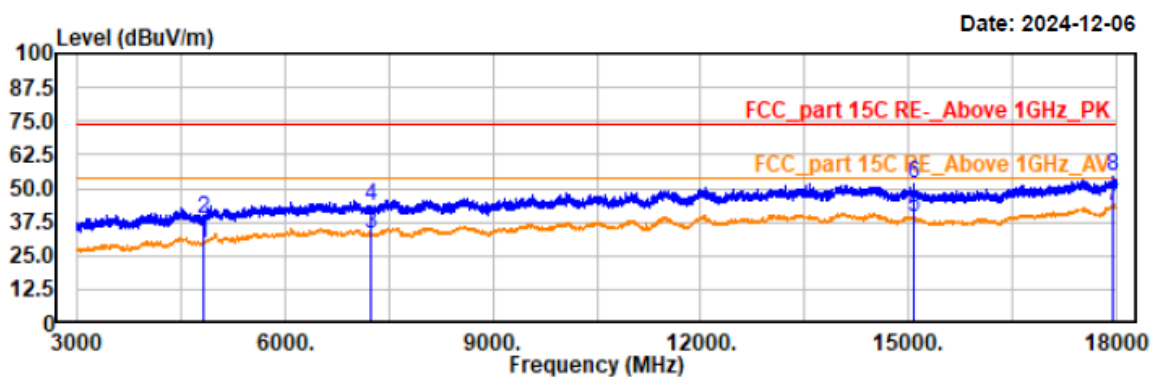

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
4824.00	34.18	-4.39	29.79	54.00	24.21	horizontal	Average
4824.00	42.72	-4.39	38.33	74.00	35.67	horizontal	Peak
7236.00	34.78	-1.70	33.08	54.00	20.92	horizontal	Average
7236.00	44.91	-1.70	43.21	74.00	30.79	horizontal	Peak
15081.00	35.32	3.84	39.16	54.00	14.84	horizontal	Average
15081.00	48.02	3.84	51.86	74.00	22.14	horizontal	Peak
17949.00	35.63	7.67	43.30	54.00	10.70	horizontal	Average
17949.00	46.72	7.67	54.39	74.00	19.61	horizontal	Peak