

FCC Test Report

Report No.: AGC06662230301FR01

FCC ID : 2ANTC-C518

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Wireless IP Camera

BRAND NAME : N/A

C518, C516, C519, C528, C519M, C528M, life-131,

MODEL NAME : ZND5183Y, ZND5185Y, ZND5194Y, ZND5195Y, ZND5196Y,

ZND5284Y, ZND5286Y, ZND5288Y

APPLICANT : Ansjer Electronics Co., Ltd

DATE OF ISSUE : Sep. 05, 2023

STANDARD(S) : FCC Part 15 Subpart C §15.247

REPORT VERSION : V1.1

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 74


REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Sep. 05, 2025	Invalid	Initial Release
V1.1	1 st	Sep. 05, 2023	Valid	 Revise the date of issue of page 1, 2, 5; Revise the date of test of page 5.




TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	7
2.3. IEEE 802.11N MODULATION SCHEME	8
2.5. RELATED SUBMITTAL(S) / GRANT (S)	9
2.6. TEST METHODOLOGY	9
2.7. SPECIAL ACCESSORIES	9
2.8. EQUIPMENT MODIFICATIONS	9
2.9. ANTENNA REQUIREMENT	
2.10. DUTY CYCLE	10
3. MEASUREMENT UNCERTAINTY	12
4. DESCRIPTION OF TEST MODES	13
5. SYSTEM TEST CONFIGURATION	14
5.1. CONFIGURATION OF EUT SYSTEM	14
5.2. EQUIPMENT USED IN EUT SYSTEM	14
5.3. SUMMARY OF TEST RESULTS	14
6. TEST FACILITY	15
7. RF OUTPUT POWER MEASUREMENT	16
7.1 MEASUREMENT LIMITS	16
7.2 MEASUREMENT PROCEDURE	16
7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	16
7.4 MEASUREMENT RESULT	17
8. 6DB BANDWIDTH MEASUREMENT	18
8.1 MEASUREMENT LIMITS	18
8.2 MEASUREMENT PROCEDURE	18
8.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	18
8.4 MEASUREMENT RESULTS	19
9. CONDUCTED SPURIOUS EMISSION	30
9.1 PROVISIONS APPLICABLE	30
9.2 MEASUREMENT PROCEDURE	
9.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
9.4 MEASUREMENT RESULTS	





10. POWER SPECTRAL DENSITY	42
10.1 MEASUREMENT LIMITS	42
10.2 MEASUREMENT PROCEDURE	42
10.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	43
10.4 MEASUREMENT RESULT	43
11. RADIATED EMISSION	49
11.1 MEASUREMENT LIMITS	49
11.2 MEASUREMENT PROCEDURE	49
11.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	52
11.4 MEASUREMENT RESULT	53
12. LINE CONDUCTED EMISSION TEST	70
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	70
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	70
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	71
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	71
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	74
APPENDIX B: PHOTOGRAPHS OF EUT	74





1. VERIFICATION OF CONFORMITY

Applicant	Ansjer Electronics Co., Ltd		
Address	301, 1st Building, No.21 Yongtian Road, Xiangzhou, Zhuhai, Guangdong, China		
manufacturer	Ansjer Electronics Co., Ltd		
Address	No.5 WanLi Road, SanXiang, ZhongShan 528463, Guangdong, China		
Factory	Ansjer Electronics Co., Ltd		
Address	No.5 WanLi Road, SanXiang, ZhongShan 528463, Guangdong, China		
Product Designation	Wireless IP Camera		
Brand Name N/A			
Test Model C518			
Series Model C516, C519, C528, C519M, C528M, life-131, ZND5183Y, ZND5185Y, ZND5194Y, ZND5195Y, ZND5196Y, ZND5284Y, ZND5286Y, ZND5288Y			
Declaration of Difference All the same except the model name			
Date of receipt of test item Jul. 14, 2023			
Date of test Jul. 14, 2023 to Sep. 05, 2023			
Deviation No any deviation from the test method			
Condition of Test Sample Normal			
Test Result Pass			
Report Template AGCRT-US-BGN/RF			
	·		

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Prepared By	Bibo zhang	
	Bibo Zhang (Project Engineer)	Sep. 05, 2023
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Sep. 05, 2023
Approved By	Max Zhang	
	Max Zhang (Authorized Officer)	Sep. 05, 2023



Page 6 of 74

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

Equipment Type	WLAN 2.4G	
Frequency Band	2400MHz ~ 2483.5MHz	
Operation Frequency	uency 2412MHz ~ 2462MHz	
Output Power (Average)	IEEE 802.11b: 16.11dBm; IEEE 802.11g: 15.80dBm;	
Output Fower (Average)	IEEE 802.11n(HT20): 15.66dBm	
Output Power (Peak)	IEEE 802.11b: 18.79dBm; IEEE 802.11g: 22.57dBm;	
Output Fower (Feak)	IEEE 802.11n(HT20): 22.33dBm	
Modulation	802.11b:(DQPSK, DBPSK,CCK)DSSS	
Woddiation	802.11g/n:(64-QAM,16-QAM,QPSK, BPSK)OFDM	
	802.11b:1/2/5.5/11Mbps	
Data Rate	802.11g: 6/9/12/18/24/36/48/54Mbps	
	802.11n: up to 300Mbps	
Number of channels 11		
Hardware Version	rdware Version XS7302+Q03P	
Software Version	V4.1.9.730201350AA	
Antenna Designation Bipolar antenna (Comply with requirements of the FCC		
Antenna Gain	-5.51dBi	
Power Supply	DC 5V by adapter	



Page 7 of 74

2.2. TABLE OF CARRIER FREQUENCYS

For 2412-2462MHz:

11 channels are provided for 802.11b/g/n (HT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz		



Page 8 of 74

2.3. IEEE 802.11N MODULATION SCHEME

MCS	Nss	Modulation	R	R NBPSC	NCBPS	NDBPS	Data rate(Mbps)
Index	1422	Wodulation	K	NDF3C			800nsGI
					20MHz	20MHz	20MHz
0	1	BPSK	1/2	1	52	26	6.5
1	1	QPSK	1/2	2	104	52	13.0
2	1	QPSK	3/4	2	104	78	19.5
3	1	16-QAM	1/2	4	208	104	26.0
4	1	16-QAM	3/4	4	208	156	39.0
5	1	64-QAM	2/3	6	312	208	52.0
6	1	64-QAM	3/4	6	312	234	58.5
7	1	64-QAM	5/6	6	312	260	65.0

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	Guard interval



Page 9 of 74

2.5. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2ANTC-C518** filing to comply with the FCC Part 15 requirements.

2.6. TEST METHODOLOGY

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 662911	KDB 662911 D01 Multiple Transmitter Output v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

2.7. SPECIAL ACCESSORIES

Refer to section 5.2.

2.8. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.9. ANTENNA REQUIREMENT

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. the antenna gain is -5.51dBi.



Page 10 of 74


2.10. Duty cycle

2.4GHz WLAN (DTS) operation is possible in 20MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

, ,					
Operating mode	Data rates (Mbps)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)	Average Factor (dB)
IEEE 802.11b	1	100	-	-	-
IEEE 802.11g	6	80	0.97	0.49	-1.94
IEEE 802.11n-HT20	MCS0	79	1.02	0.53	-2.05


Remark:

1. Duty Cycle factor = 10 * log (1/ Duty cycle) 2. Average factor = 20 log10 Duty Cycle
The duty cycle of each frequency band mode reflects the determination requirements of the middle channel
measurement value





The test plots as follows:

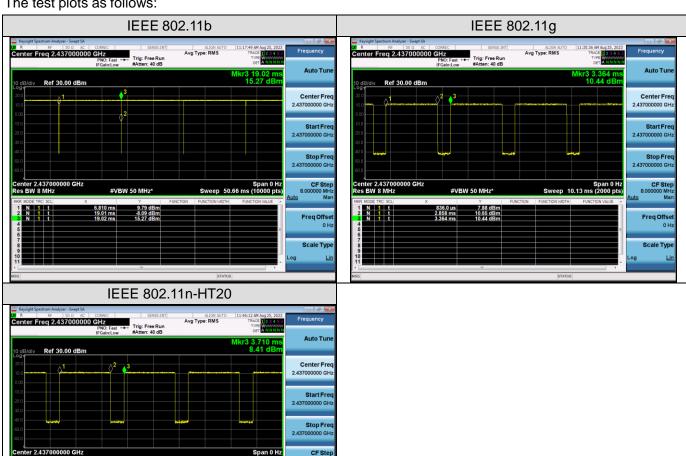



Page 12 of 74

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	U _c = ±2.7 %
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$



4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION		
1	Low channel transmitting (TX)		
2	Middle channel transmitting (TX)		
3	High channel transmitting (TX)		


Note:

- Transmit by 802.11b with Date rate (1/2/5.5/11) 1)
- Transmit by 802.11g with Date rate (6/9/12/18/24/36/48/54) 2)
- Transmit by 802.11n (20MHz) with Date rate (6.5/13/19.5/26/39/52/58.5/65) 3)
- 4) The test channel for 20MHz bandwidth system is channel 1, 6 and 11.

Note:

- 1. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency Individually, and the EUT is operating at its maximum duty cycle>or equal 98%
- 2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.

Software Setting






Page 14 of 74

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

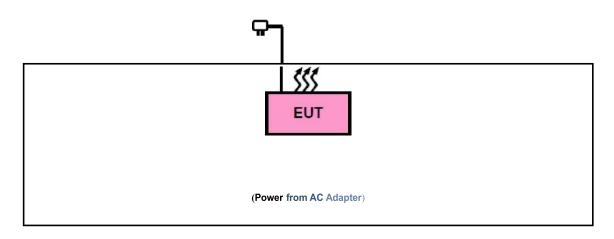


5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Equipment Model No. Identifier		Note
1	Wireless IP Camera	C518	2ANTC-C518	EUT
2	USB Cable	USB Cable N/A N/A		AE

5.3. SUMMARY OF TEST RESULTS

Item	FCC Rules	Result	
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	RF Output Power	Pass
3	§15.247 (a)(1)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
4	§15.247 (d)	Conducted Spurious Emission	Pass
5	§15.209	Radiated Emission& Band Edge	Pass
6	§15.207	AC Power Line Conducted Emission	Pass





6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd		
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China		
Designation Number	CN1259		
FCC Test Firm Registration Number	975832		
A2LA Cert. No.	5054.02		
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA		

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun. 03, 2023	Jun. 02, 2024
LISN	R&S	ESH2-Z5	100086	Jun. 03, 2023	Jun. 02, 2024
Attenuator	Dongfang Xupu	LM-XX-6-5W	N/A	Jun. 09, 2023	Jun. 08, 2024
Test software	R&S	ES-K1 (Ver.V1.71)	N/A	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Feb. 18, 2023	Feb. 17, 2024
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Jun. 01, 2023	May 31, 2024
Power Sensor	Agilent	U2021XA	MY54110007	Mar. 03, 2023	Mar. 02, 2024
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	Jun. 01, 2023	May 31, 2024
Horn antenna	SCHWARZBEC K	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Mar. 23, 2023	Mar. 22, 2024
Broadband Preamplifier	ETS LINDGREN	3117-PA	00246148	Aug. 04, 2022	Aug. 03, 2024
ANTENNA	SCHWARZBEC K	VULB9168	494	Jan. 05, 2023	Jan. 04, 2025
6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	Jun. 09, 2023	Jun. 08, 2024
Test software	FARA	EZ-EMC (Ver.RA-03A)	N/A	N/A	N/A



7. RF OUTPUT POWER MEASUREMENT

7.1 MEASUREMENT LIMITS

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.

7.2 MEASUREMENT PROCEDURE


Method PM is Measurement using an RF Peak power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 11.9.1.3
- 2. The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

☑Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 11.9.2.3
- 2. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
- 3. The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 4. At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 5. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- 6. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 7. Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- 8. Adjust the measurement in dBm by adding [10 log (1 / D)], where D is the duty cycle {e.g., [10 log (1 / 0.25)], if the duty cycle is 25%}.
- 9. Record the test results in the report.

7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

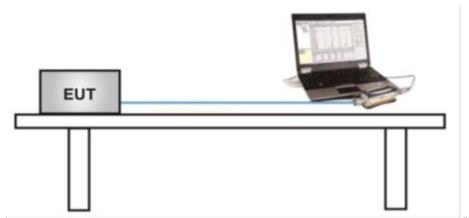




Page 17 of 74

7.4 MEASUREMENT RESULT

Test Data of Conducted Output Power						
Test Mode	Test Channel (MHz)	Average Power (dBm)	Peak Power (dBm)	Limits (dBm)	Pass or Fail	
	2412	16.05	18.71	≤30	Pass	
802.11b	2437	16.11	18.79	≤30	Pass	
	2462	14.36	17.06	≤30	Pass	
	2412	15.80	22.57	≤30	Pass	
802.11g	2437	13.59	21.36	≤30	Pass	
	2462	13.09	20.43	≤30	Pass	
	2412	15.66	22.33	≤30	Pass	
802.11n20	2437	14.23	20.86	≤30	Pass	
	2462	13.19	19.94	≤30	Pass	





8. 6DB BANDWIDTH MEASUREMENT

8.1 MEASUREMENT LIMITS


The minimum 6 dB bandwidth shall be 500 kHz.

8.2 MEASUREMENT PROCEDURE

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).

- The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- 3. For 6dB Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 5. Detector = peak
- 6. Trace mode = max hold.
- 7. Sweep = auto couple.
- 8. Allow the trace to stabilize.
- 9. Measure and record the results in the test report.

8.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

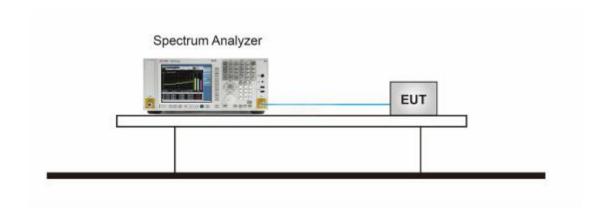




Page 19 of 74


8.4 MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and DTS Bandwidth							
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	DTS Bandwidth (MHz)	DTS Bandwidth	Pass or Fail		
	2412	13.852	9.080	≥0.5	Pass		
802.11b	2437	13.958	9.550	≥0.5	Pass		
	2462	13.878	9.577	≥0.5	Pass		
	2412	16.217	15.065	≥0.5	Pass		
802.11g	2437	16.214	15.020	≥0.5	Pass		
	2462	16.218	15.075	≥0.5	Pass		
	2412	17.348	15.070	≥0.5	Pass		
802.11n20	2437	17.358	15.015	≥0.5	Pass		
	2462	17.352	15.069	≥0.5	Pass		







Test Graphs of Occupied Bandwidth

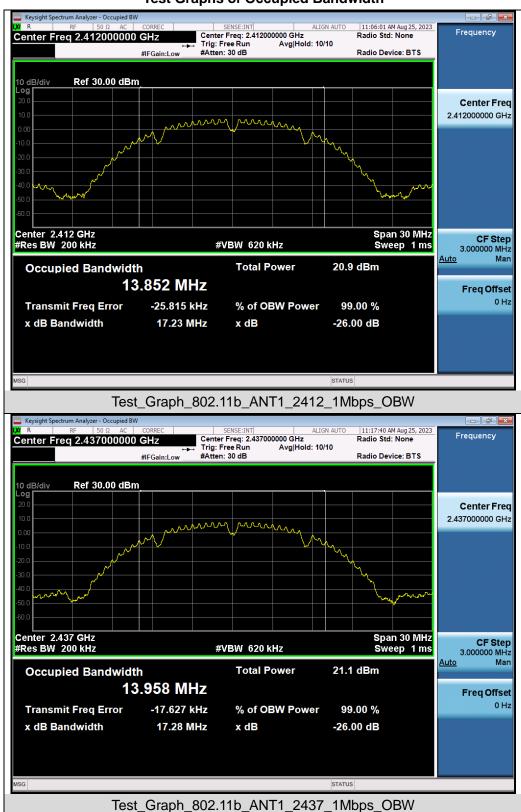


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.







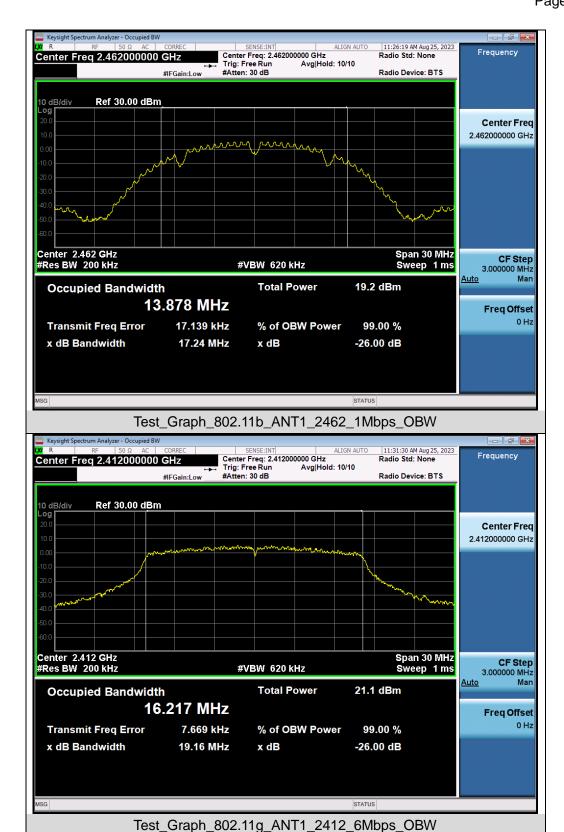







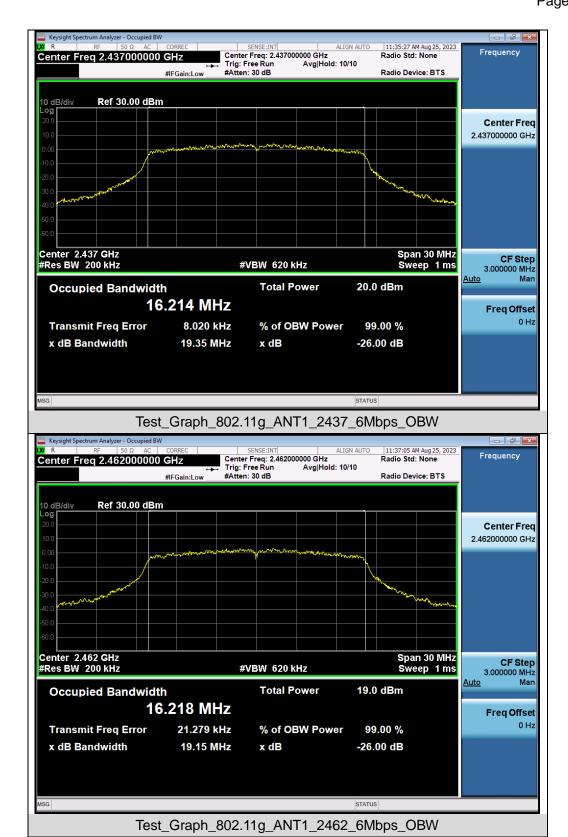







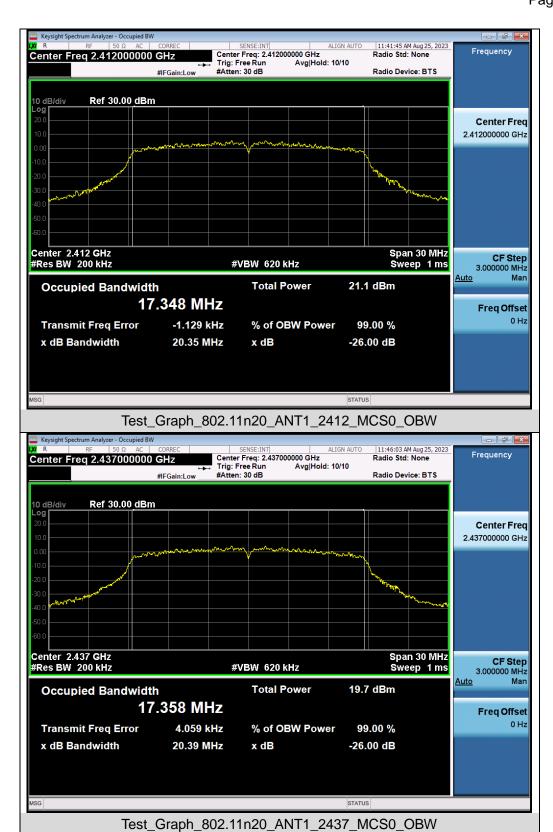






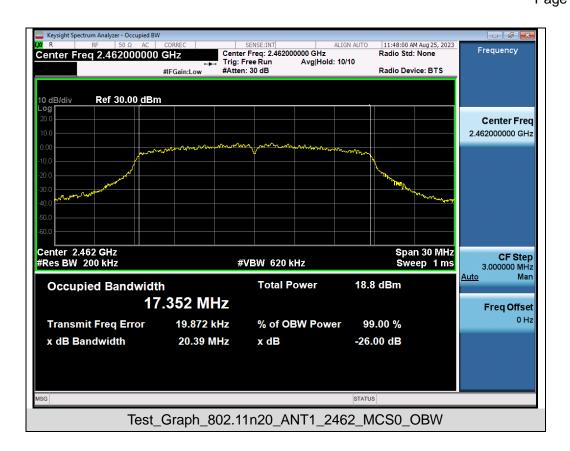







Test Graphs of DTS Bandwidth

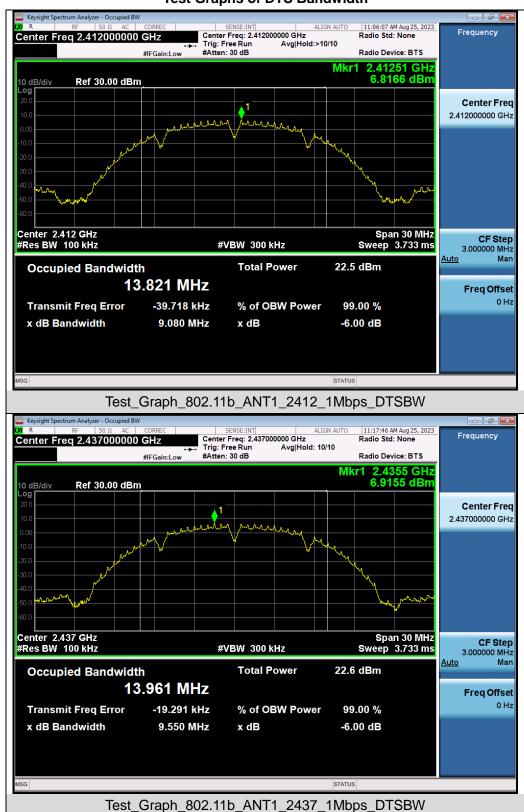


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



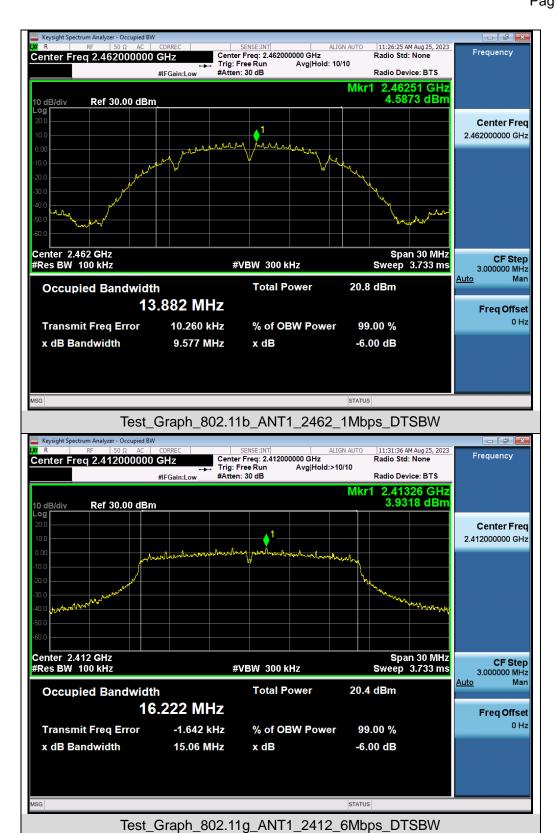







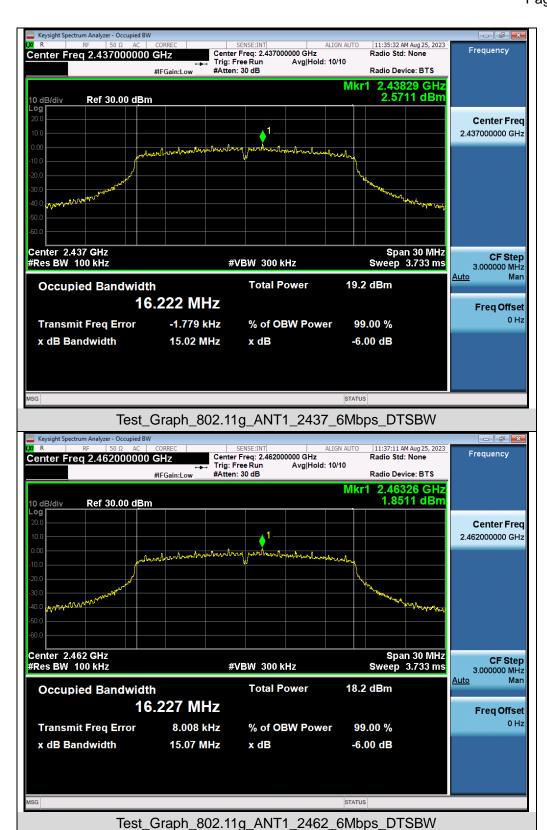




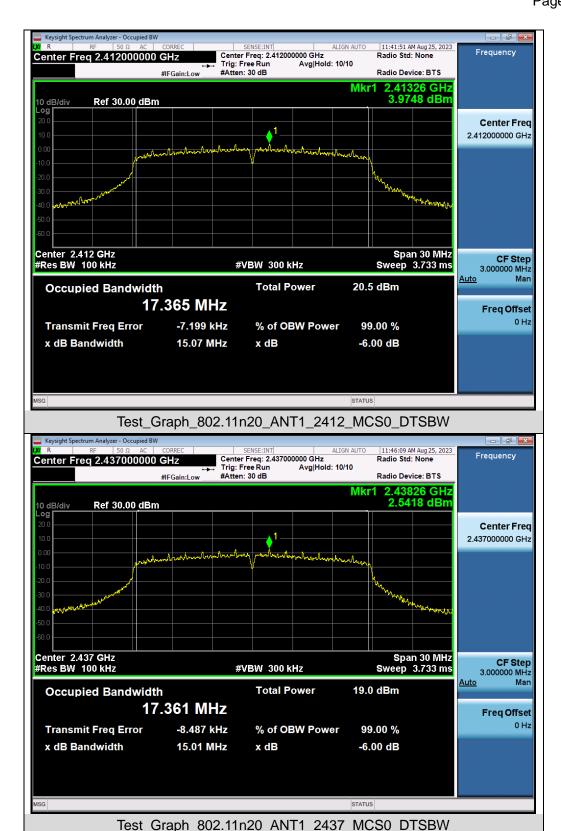





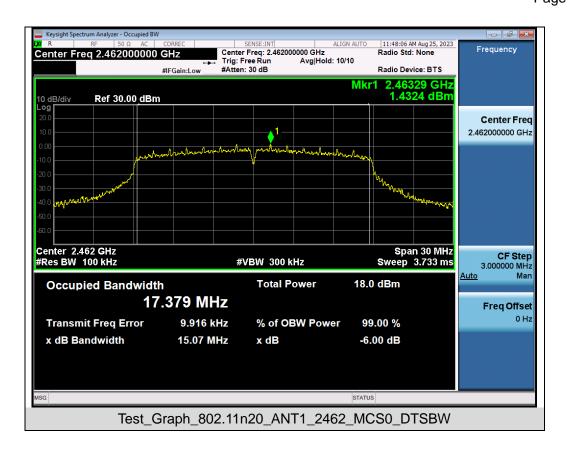



9. CONDUCTED SPURIOUS EMISSION

9.1 PROVISIONS APPLICABLE

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

9.2 MEASUREMENT PROCEDURE


Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.


Use the following spectrum analyzer settings:

- Step 1: Measurement Procedure In-Band Reference Level
 - 1. Set instrument center frequency to DTS channel center frequency.
 - 2. Set the span to ≥ 1.5 times the DTS bandwidth.
 - 3. Set the $\overrightarrow{RBW} = 100 \text{ kHz}$.
 - 4. Set the VBW \geq 3 x RBW.
 - 5. Detector = peak.
 - 6. Sweep time = auto couple.
 - 7. Trace mode = max hold.
 - 8. Allow trace to fully stabilize.
 - 9. Use the peak marker function to determine the maximum PSD level.
 - 10. Note that the channel found to contain the maximum PSD level can be used to establish the reference level.
- Step 2: Measurement Procedure Out of Band Emission
 - 1. Set RBW = 100 kHz.
 - 2. Set VBW ≥ 300 kHz.
 - 3. Detector = peak.
 - 4. Sweep = auto couple.
 - 5. Trace Mode = max hold.
 - 6. Allow trace to fully stabilize.
 - Use the peak marker function to determine the maximum amplitude level.

Note: The cable loss was offset into measure device as an amplitude offset.

9.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

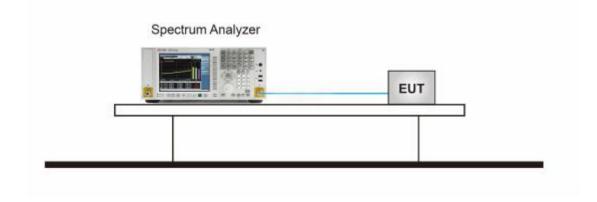







9.4 MEASUREMENT RESULTS

Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands

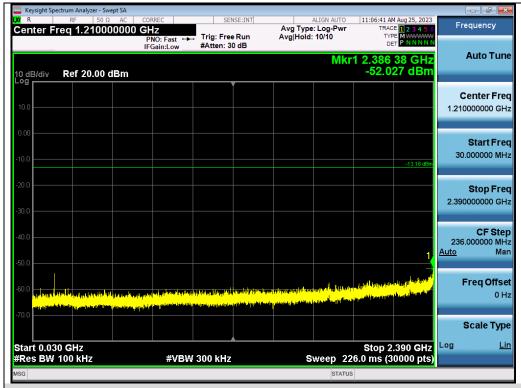

Test_Graph_802.11b_ANT1_2412_1Mbps_Lower Band Emissions


















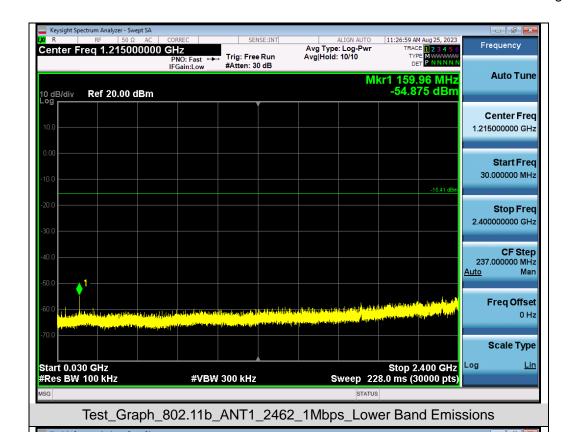





Test_Graph_802.11b_ANT1_2462_1Mbps_Higher Band Emissions





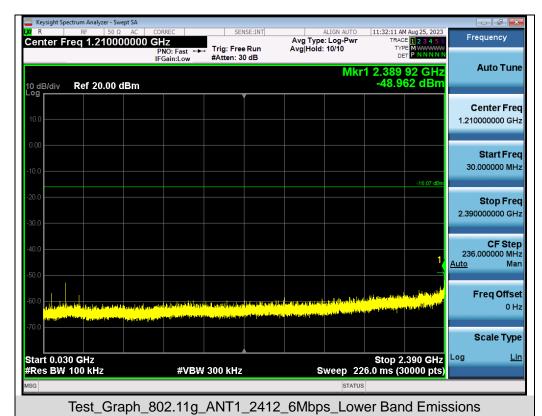












Test_Graph_802.11g_ANT1_2437_6Mbps_Higher Band Emissions


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

























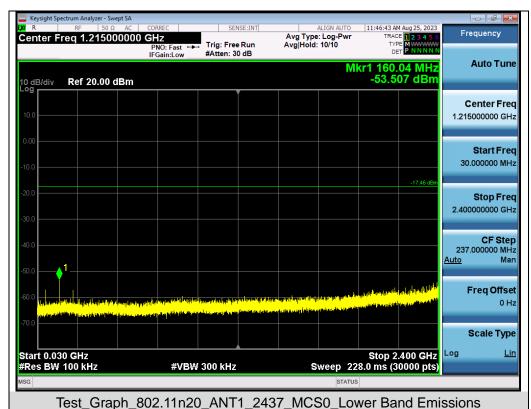

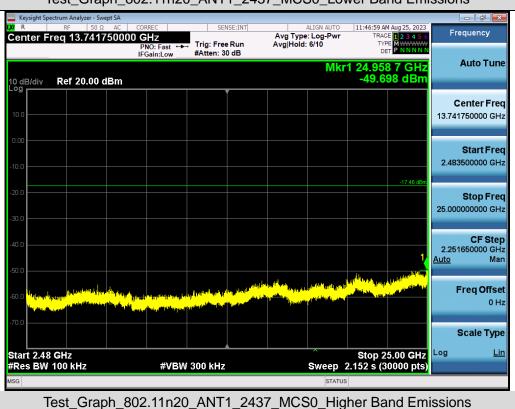








Center Freq 13.750000000 GHz
PN0: Fast
IFGain:Low Avg Type: Log-Pwr Avg|Hold: 6/10 Trig: Free Run #Atten: 30 dB **Auto Tune** Mkr1 24.106 0 GHz -49.653 dBm 10 dB/div Ref 20.00 dBm Center Freq 13.750000000 GHz Start Fred 2.500000000 GHz 25.000000000 GHz **CF Step** 2.250000000 GHz <u>Auto</u> Freq Offset 0 Hz Scale Type Start 2.50 GHz #Res BW 100 kHz Stop 25.00 GHz Sweep 2.152 s (30000 pts) Log #VBW 300 kHz Test_Graph_802.11n20_ANT1_2462_MCS0_Higher Band Emissions






Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11g_ANT1_2412_6Mbps_Lower Band Edge Emissions





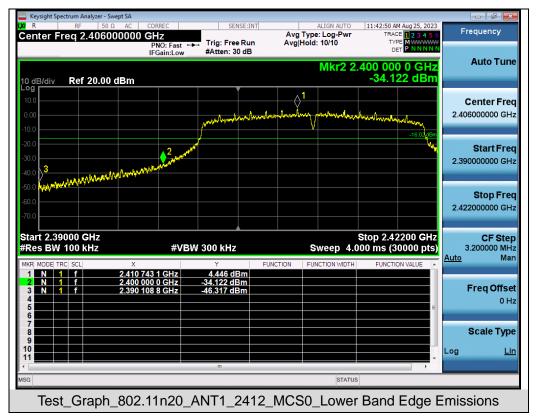

Note: Emissions from 2483.5-2500MHz which fall in the restricted bands had been considered with the radiated emission limits specified.



Page 42 of 74

10. POWER SPECTRAL DENSITY

10.1 MEASUREMENT LIMITS


The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

10.2 MEASUREMENT PROCEDURE

- 1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
- 2. Connect EUT RF output port to the Spectrum Analyzer
- 3. Set the RBW = 20 kHz.
- 4. Set the VBW ≥ [3 × RBW].
- 5. Set the Span ≥ [1.5 × DTS bandwidth].
- 6. Sweep time=Auto couple.
- 7. Detector function=Peak.
- 8. Trace Mode=Max hold.
- 9. When the measurement bandwidth of Maximum PSD is specified in 3 kHz, add a constant factor 10*log(3kHz/20kHz) = -8.23 dB to the measured result.
- 10. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission.
- 11. The indicated level is the peak output power, after any corrections for external cables.


For Average power spectral density test:

- 1. The testing follows the ANSI C63.10 Section 11.10.5 Method AVPSD.
- 2. Connect EUT RF output port to the Spectrum Analyzer.
- 3. Set Span to at least 1.5 times the OBW.
- 4. Set RBW to:3 kHz \leq RBW \leq 100 kHz.
- Set VBW≥[3×RBW].
- 6. Sweep Time=Auto couple.
- 7. Detector function=RMS (i.e., power averaging).
- 8. Trace average at least 100 traces in power averaging (rms) mode.
- When the measurement bandwidth of Maximum PSD is specified in 3 kHz, add a constant factor 10*log(3kHz/20kHz) = -8.23 dB to the measured result.
- 10. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 11. Add [10 log (1 / D)], where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is 25%.
- 12. Record the test results in the report.






10.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

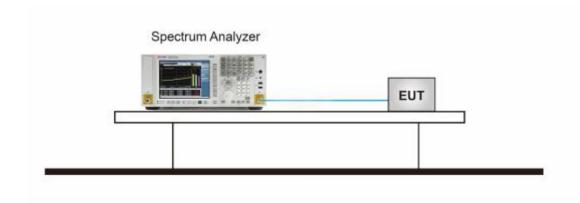

10.4 MEASUREMENT RESULT


	Test Data of Conducted Output Power Spectral Density							
Test Mode	Test Channel (MHz)			Limit (dBm/3kHz)	Pass or Fail			
	2412	1.564	-6.675	≪8	Pass			
802.11b	2437	1.252	-6.987	≪8	Pass			
	2462	-0.266	-8.505	≪8	Pass			
	2412	-1.383	-9.622	≪8	Pass			
802.11g	2437	-2.636	-10.875	≪8	Pass			
	2462	-3.556	-11.795	≪8	Pass			
	2412	-1.920	-10.159	≪8	Pass			
802.11n20	2437	-3.267	-11.506	≪8	Pass			
	2462	-4.228	-12.467	≪8	Pass			

Note: Power density(dBm/3kHz) = Power density(dBm/20kHz) - 10*log(20/3).





Test Graphs of Conducted Output Power Spectral Density

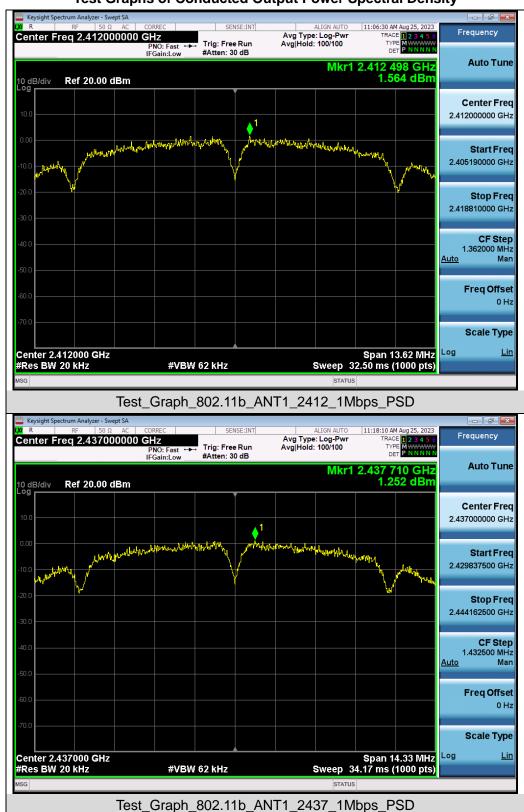


0 Hz

Scale Type

Log

Span 22.60 MHz Sweep 53.88 ms (1000 pts)



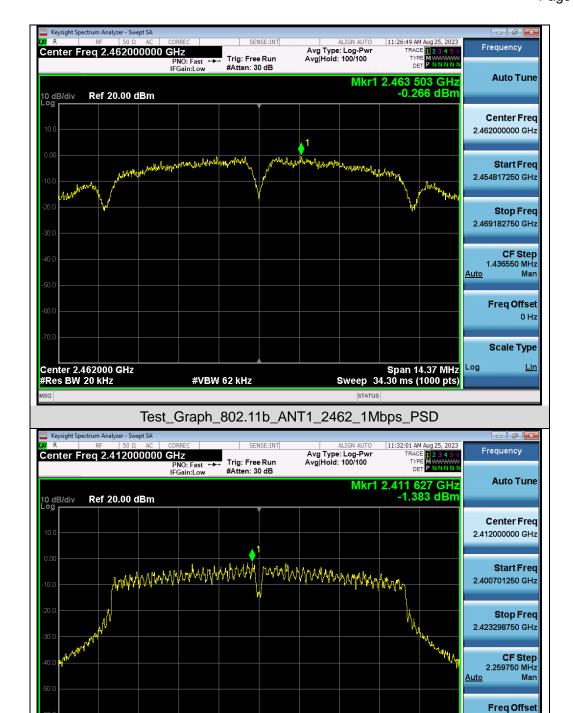

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11g_ANT1_2412_6Mbps_PSD

#VBW 62 kHz

Center 2.41200 GHz #Res BW 20 kHz


Freq Offset 0 Hz

Scale Type

Log

Span 22.61 MHz Sweep 53.95 ms (1000 pts)



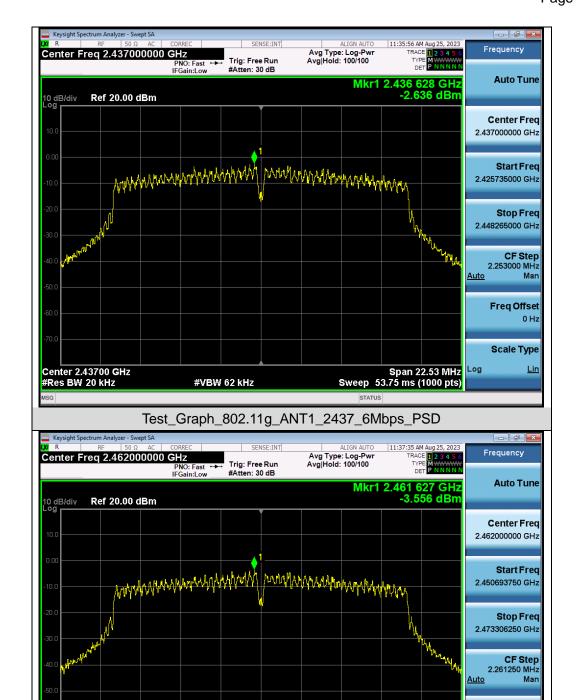


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11g_ANT1_2462_6Mbps_PSD


#VBW 62 kHz


Center 2.46200 GHz #Res BW 20 kHz








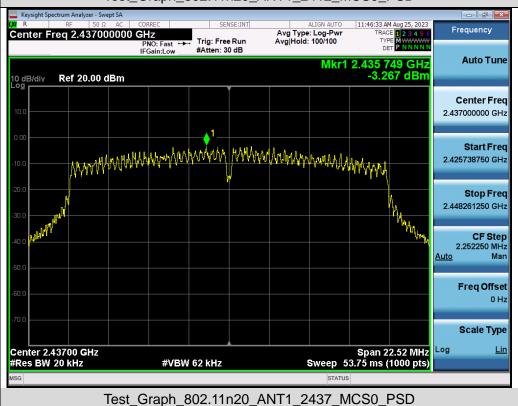





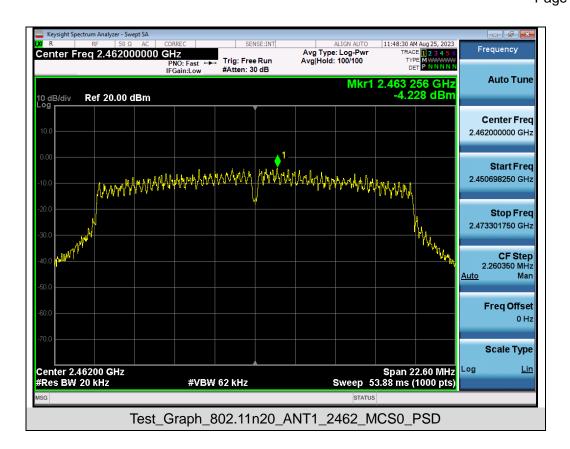



Page 49 of 74

11. RADIATED EMISSION

11.1 MEASUREMENT LIMITS

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.2 MEASUREMENT PROCEDURE

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.



Page 50 of 74

As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting		
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP		
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP		
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP		
Start Stan Fraguency	1GHz~26.5GHz		
Start ~Stop Frequency	1MHz/3MHz for Peak, 1MHz/3MHz for Average		

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP



Page 51 of 74

Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

• Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize


Average Measurements above 1GHz (Method VB)

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW setting requirements are as follows:
- 4. If the EUT is configured to transmit with duty cycle ≥ 98%, set VBW = 10 Hz.
- 5. If the EUT duty cycle is < 98%, set VBW $\ge 1/T$. T is the minimum transmission duration.
- 6. Detector = Peak
- 7. Sweep time = auto
- 8. Trace mode = max hold




11.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)


RADIATED EMISSION TEST SETUP 9KHz-30MHz

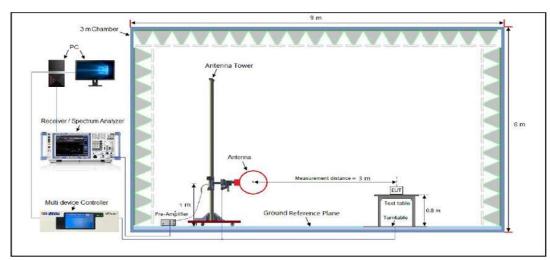

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

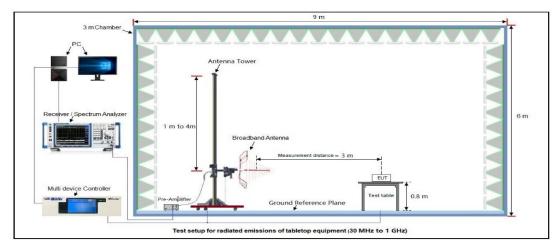

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

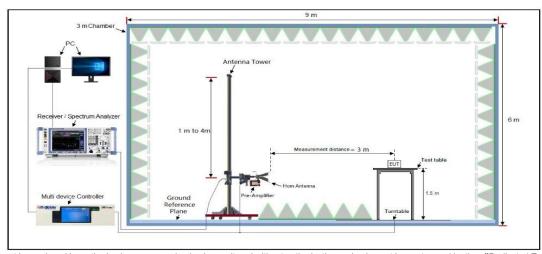




11.4 MEASUREMENT RESULT

Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Radiated emission from 30MHz to 1000MHz

EUT	Wireless IP Camera	Model Name	C518
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with 2412MHz	Antenna	Horizontal

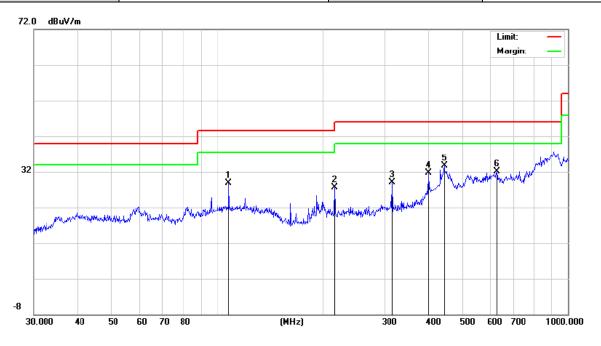

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		107.8877	12.61	16.28	28.89	43.50	-14.61	peak
2		216.0240	13.20	14.42	27.62	46.00	-18.38	peak
3		315.4808	12.53	16.50	29.03	46.00	-16.97	peak
4		400.4319	11.24	20.41	31.65	46.00	-14.35	peak
5	*	443.2943	8.66	24.98	33.64	46.00	-12.36	peak
6		627.2738	7.51	24.51	32.02	46.00	-13.98	peak


RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




EUT	Wireless IP Camera	Model Name	C518
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with 2412MHz	Antenna	Vertical

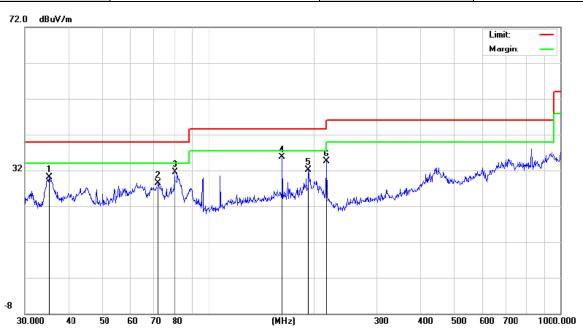

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		35.2511	14.69	15.33	30.02	40.00	-9.98	peak
2		71.8319	11.49	16.98	28.47	40.00	-11.53	peak
3		80.0806	14.60	16.89	31.49	40.00	-8.51	peak
4	*	162.0414	17.50	18.23	35.73	43.50	-7.77	peak
5		191.7450	14.01	18.15	32.16	43.50	-11.34	peak
6		216.0240	17.74	16.70	34.44	46.00	-11.56	peak

Note: 1. Factor=Antenna Factor + Cable loss, Over=Measure-Limit.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. All test modes had been pre-tested. The 802.11b mode of middle channel is the worst case and recorded in the report.





Radiated emission above 1GHz


EUT Wireless IP Camera		Model Name	C518
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1_2412MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4824.000	52.36	0.08	52.44	74.00	-21.56	peak	
4824.000	43.63	0.08	43.71	54.00	-10.29	AVG	
7236.000	50.17	2.21	52.38	74.00	-21.62	peak	
7236.000	41.36	2.21	43.57	54.00	-10.43	AVG	
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

EUT Wireless IP Camera		Model Name	C518
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1_2412MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4824.000	50.36	0.08	50.44	74.00	-23.56	peak	
4824.000	42.72	0.08	42.80	54.00	-11.20	AVG	
7236.000	49.69	2.21	51.90	74.00	-22.10	peak	
7236.000	40.72	2.21	42.93	54.00	-11.07	AVG	
Remark:							
Factor = Anter	Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

RESULT: PASS






EUT	Wireless IP Camera	Model Name	C518
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1_2437MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4874.000	52.87	0.14	53.01	74.00	-20.99	peak
4874.000	37.92	0.14	38.06	54.00	-15.94	AVG
7311.000	51.76	2.36	54.12	74.00	-19.88	peak
7311.000	35.61	2.36	37.97	54.00	-16.03	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT	Wireless IP Camera	Model Name	C518
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1_2437MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4874.000	50.31	0.14	50.45	74.00	-23.55	peak
4874.000	38.27	0.14	38.41	54.00	-15.59	AVG
7311.000	50.92	2.36	53.28	74.00	-20.72	peak
7311.000	36.66	2.36	39.02	54.00	-14.98	AVG
Remark:						
Factor = Anter	Factor = Antenna Factor + Cable Loss – Pre-amplifier.					





EUT	Wireless IP Camera	Model Name	C518
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1_2462MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4924.000	52.63	0.22	52.85	74.00	-21.15	peak
4924.000	43.27	0.22	43.49	54.00	-10.51	AVG
7386.000	48.66	2.64	51.30	74.00	-22.70	peak
7386.000	39.41	2.64	42.05	54.00	-11.95	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT	Wireless IP Camera	Model Name	C518
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1_2462MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4924.000	49.82	0.22	50.04	74.00	-23.96	peak
4924.000	41.27	0.22	41.49	54.00	-12.51	AVG
7386.000	47.37	2.64	50.01	74.00	-23.99	peak
7386.000	38.39	2.64	41.03	54.00	-12.97	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Emission Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been pre-tested. The 802.11b mode is the worst case and recorded in the report.




Test result for band edge emission at restricted bands

EUT	Wireless IP Camera	Model Name	C518
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1_2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement




Test Graph for Average Measurement

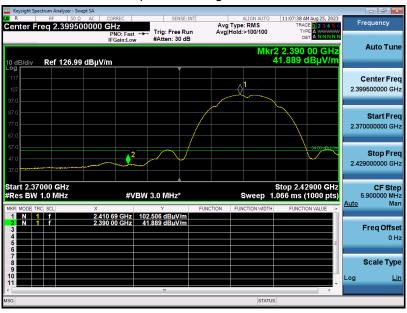

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






EUT	Wireless IP Camera	Model Name	C518
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1_2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement









EUT	Wireless IP Camera	Model Name	C518
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1_2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

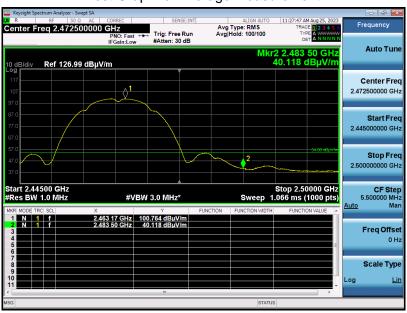







EUT	Wireless IP Camera	Model Name	C518
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1_2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

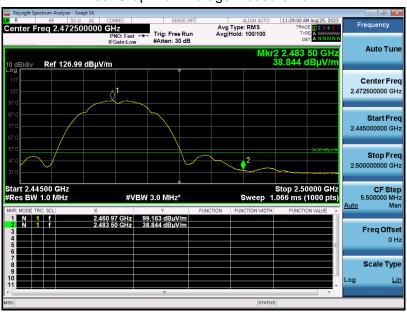







EUT	Wireless IP Camera	Model Name	C518
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6_2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

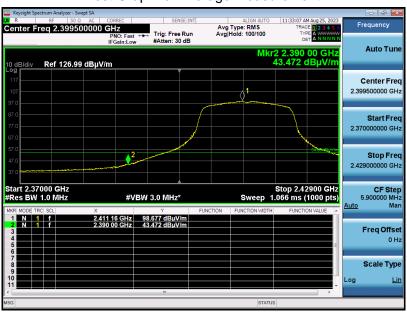







EUT	Wireless IP Camera	Model Name	C518
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6_2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

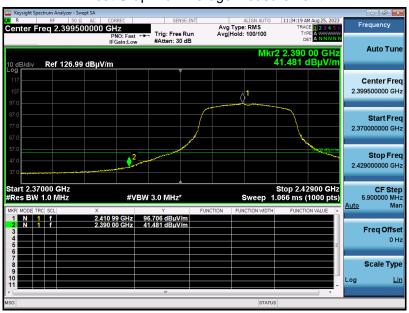






EUT	Wireless IP Camera	Model Name	C518
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6_2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement









EUT	Wireless IP Camera	Model Name	C518
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

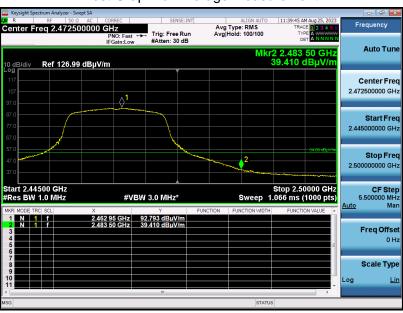







EUT	Wireless IP Camera	Model Name	C518
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

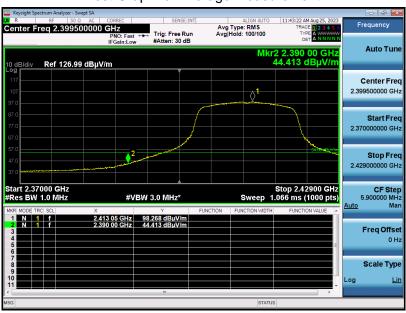





EUT	Wireless IP Camera	Model Name	C518
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

