

规格书

Specification

客户名称:

CUSTOMER:

客户料号:

CUSTOMER P/N:

客户品名:

DESCRIPTION:

捷雷料号:

JL P/N:

捷雷品名:

PART NO:

版 本:

Revision:

C168-JL-7038

NDM-WIFI 2.4G EST 天线

V1.0

核准	审核	编制
Frank	Eason	张仙
2021. 09. 10	2021. 09. 10	2021. 09. 10

© 2021-2030 Fu Zhou Jie Lei Corporation. All rights reserved.

All content, materials, and programs in this document, including all code, text, graphics, and logos, unless otherwise noted, are the property of Jie Lei Corporation and cannot be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the express written permission of Jie Lei Corporation.

Jie Lei Corporation may have patents or pending patent applications, trademarks, copyrights, or other intellectual property rights covering subject matter in this document. The furnishing of this document does not give you any license to these patents, trademarks, copyrights, or other intellectual property rights except expressly provided in any written license agreement from Jie Lei.

目录

1. Product Performance.....	2
2. Environmental Performance Test.....	3
3. Mechanical Dimension Drawing.....	4

版本描述

日期	批准	版本	描述
2021-09-10		V1.0	初版


1. Product Performance



电性能指标/Electrical specifications		
天线编号（见图纸）	2.4G1	2.4G2
频率范围(MHz)/Frequency range(MHz)	2400~2500	
电压驻波比/VSWR	≤2	
输入阻抗(Ohm)/Impedance(Ohm)	50	
增益(dBi)/Peak Gain(dBi)	6.90	6.24
极化形式/Polarization Type	Horiznotal	Vertical
水平面波瓣宽度/Horizontal Beamwidth(°)	70	
垂直面波瓣宽度/Vertical Beamwidth(°)	70	
隔离度/Isolation(dB)	≥20	
机械指标/Mechanical specifications		
天线尺寸（mm）/Dimensions(mm)	52.5*52.5*7	
工作温度(℃)/Operation Temperature(℃)	-40~70	
存储温度（℃）/Storage Temperature（℃）	-40~70	

2. Environmental Performance Test


NO	项目 Item	测试条件 Test Condition	规格要求 Requirement	结论
1	高温测试 /High temperatur e test	参考 GB-T2423.2 规范，温度 70℃，测试时间 24 小时。 Refer to GB-T2423.2, the temperature is 70 °C and the time is 24 hours.	静置常温干燥后，检查外观，样品无变形、剥离、裂纹、皱纹异色、鱼鳞纹。 After drying at room temperature, check appearance, samples without deformation, stripping, cracks, wrinkles, different color, fish scale lines.	☒ 合格/Pass ☐ 不合格/Fail ☐ 不适用/NA
2	低温测试 /Low temperatur e test	参考 GB-T2423.2 规范，温度 -40℃，测试时间 24 小时。 Refer to GB-T2423.2, the temperature is -40 °C and the time is 24 hours.	静置常温干燥后，检查外观，样品无变形、剥离、裂纹、皱纹异色、鱼鳞纹。 After drying at room temperature, check appearance, samples without deformation, stripping, cracks, wrinkles, different color, fish scale lines.	☒ 合格/Pass ☐ 不合格/Fail ☐ 不适用/NA

3. Mechanical Dimension Drawing

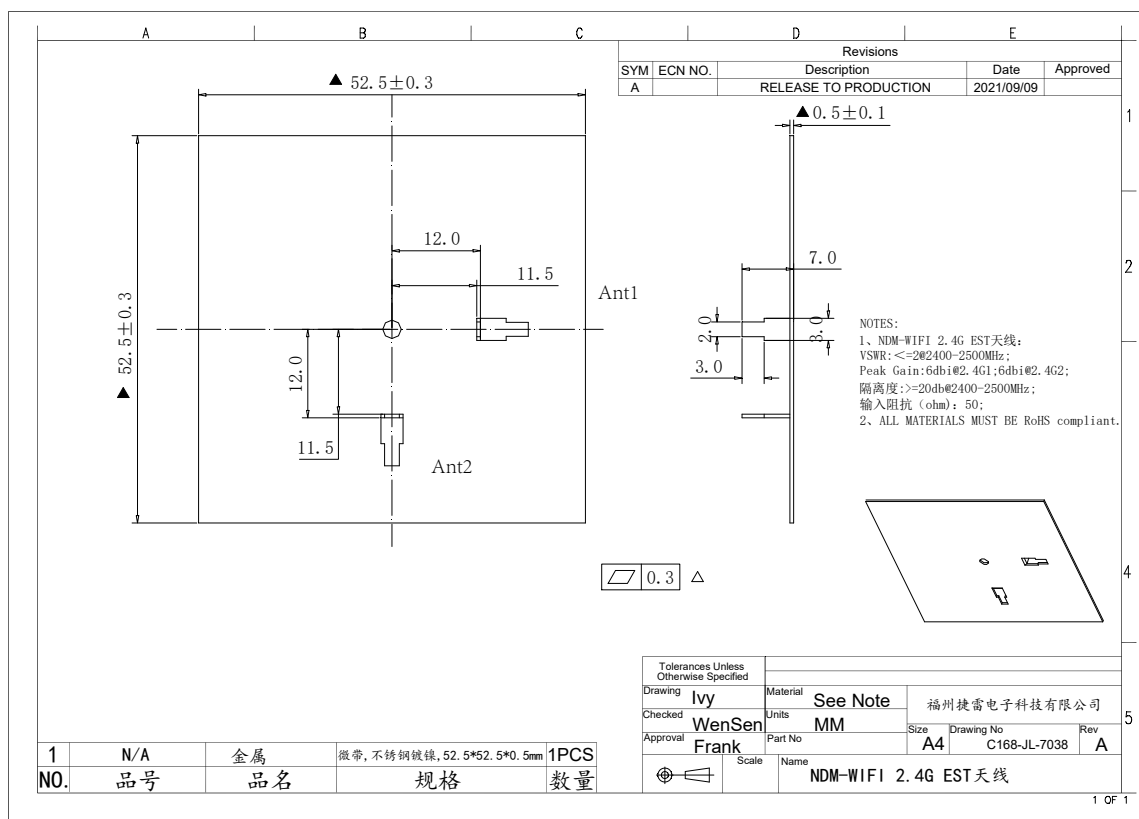


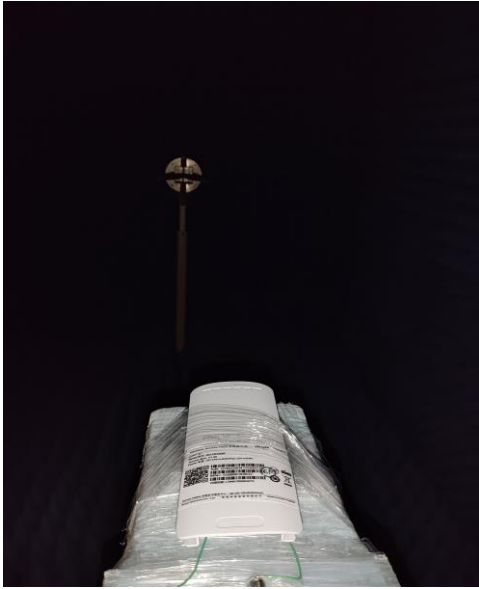 捷雷科技 OTA 实验室测试报告 Fuzhou Jielei Electronic Technology CO.,LTD																																																																							
TEST Result																																																																							
检测结果记录																																																																							
样机信息 (含S/N号)	  H: xoy E1: xoz E2: zoy																																																																						
	备注说明																																																																						
<table><tr><th>Freq (MHz)</th><th>Effi (%)</th><th>Gain (dB)</th><th>Freq (MHz)</th><th>Effi (%)</th><th>Gain (dB)</th><th>Freq (MHz)</th><th>Effi (%)</th><th>Gain (dB)</th></tr><tr><td>2400</td><td>70.96</td><td>6.9</td><td>2440</td><td>68.01</td><td>6.7</td><td>2480</td><td>63.68</td><td>6.52</td></tr><tr><td>2410</td><td>70.46</td><td>6.89</td><td>2450</td><td>68.8</td><td>6.76</td><td>2490</td><td>61.54</td><td>6.37</td></tr><tr><td>2420</td><td>70.15</td><td>6.85</td><td>2460</td><td>66.72</td><td>6.66</td><td>2500</td><td>58.79</td><td>6.15</td></tr><tr><td>2430</td><td>69.41</td><td>6.8</td><td>2470</td><td>64.36</td><td>6.54</td><td></td><td></td><td></td></tr><tr><td colspan="9">2.4G antennal</td></tr><tr><td colspan="3">检测人员/日期</td><td colspan="3">/20230504</td><td></td><td></td><td></td></tr></table>									Freq (MHz)	Effi (%)	Gain (dB)	Freq (MHz)	Effi (%)	Gain (dB)	Freq (MHz)	Effi (%)	Gain (dB)	2400	70.96	6.9	2440	68.01	6.7	2480	63.68	6.52	2410	70.46	6.89	2450	68.8	6.76	2490	61.54	6.37	2420	70.15	6.85	2460	66.72	6.66	2500	58.79	6.15	2430	69.41	6.8	2470	64.36	6.54				2.4G antennal									检测人员/日期			/20230504					
Freq (MHz)	Effi (%)	Gain (dB)	Freq (MHz)	Effi (%)	Gain (dB)	Freq (MHz)	Effi (%)	Gain (dB)																																																															
2400	70.96	6.9	2440	68.01	6.7	2480	63.68	6.52																																																															
2410	70.46	6.89	2450	68.8	6.76	2490	61.54	6.37																																																															
2420	70.15	6.85	2460	66.72	6.66	2500	58.79	6.15																																																															
2430	69.41	6.8	2470	64.36	6.54																																																																		
2.4G antennal																																																																							
检测人员/日期			/20230504																																																																				


2400.000MHz

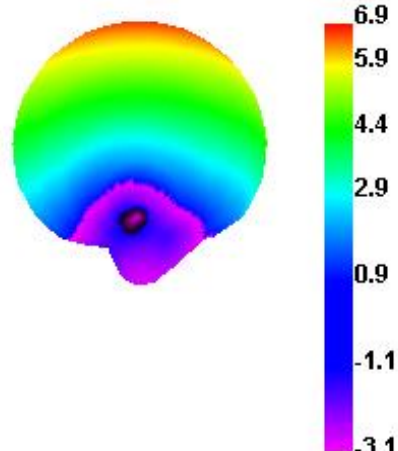


2400.000MHz H

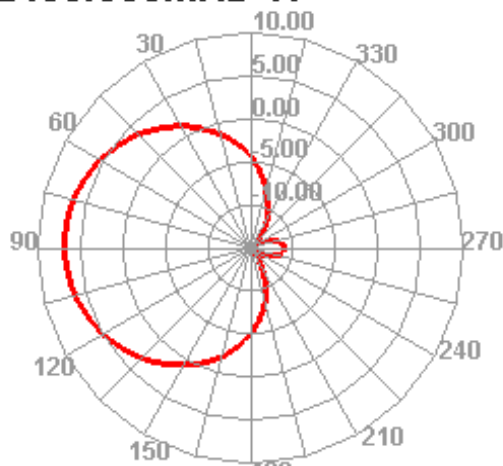


2400.000MHz E1

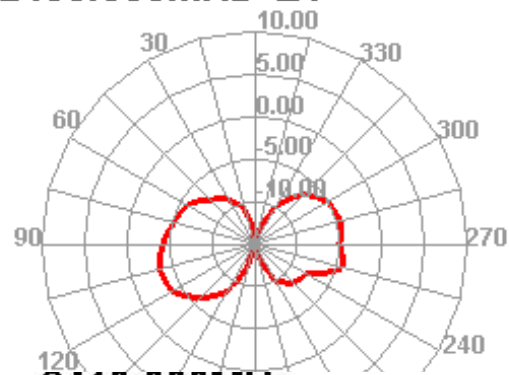


2400.000MHz E2

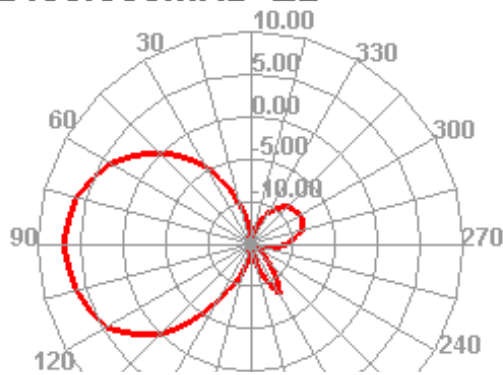


2410.000MHz

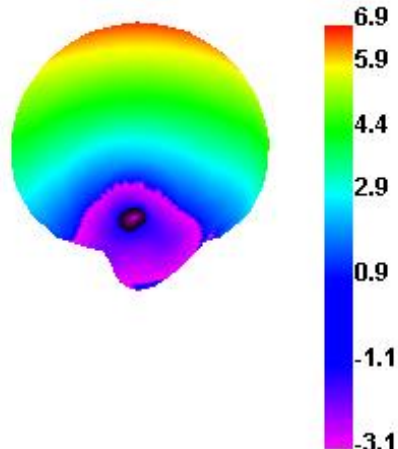


2410.000MHz H

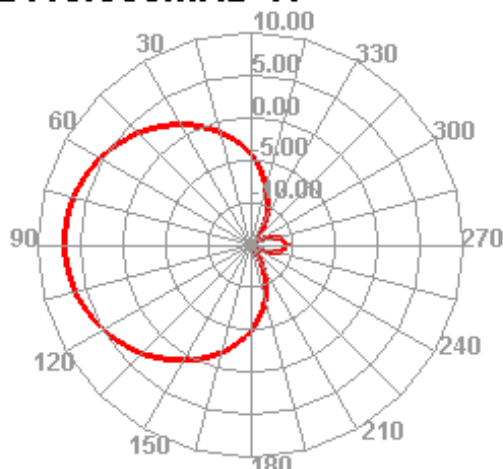


2410.000MHz E1

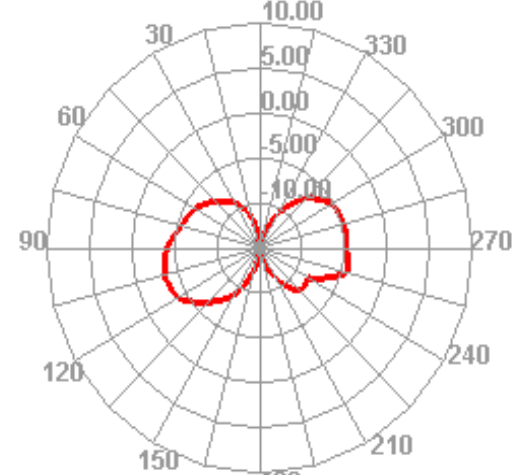


2410.000MHz E2

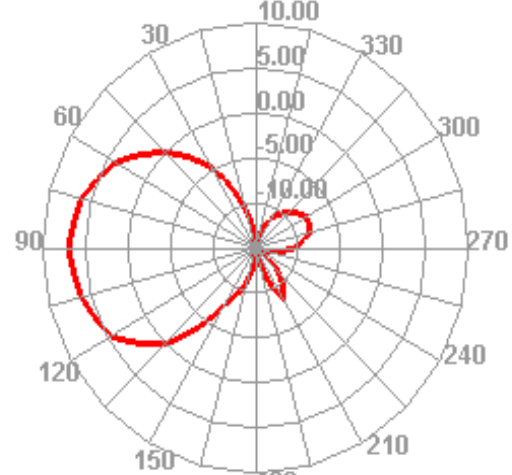


2420.000MHz

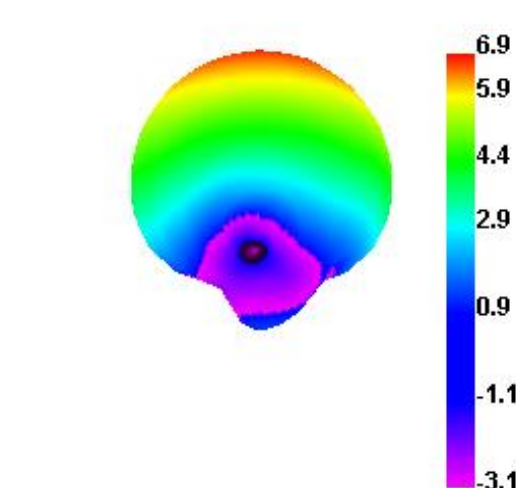


2420.000MHz H

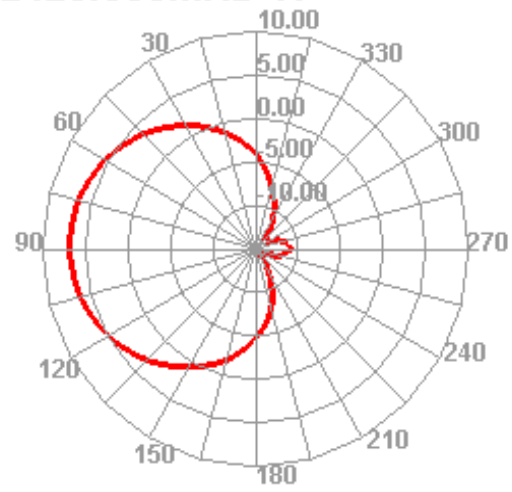


2420.000MHz E1

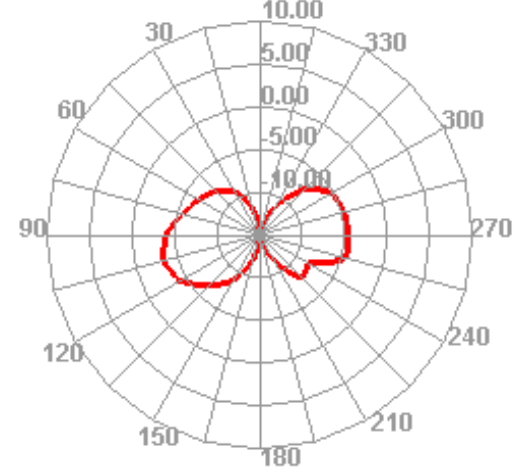


2420.000MHz E2

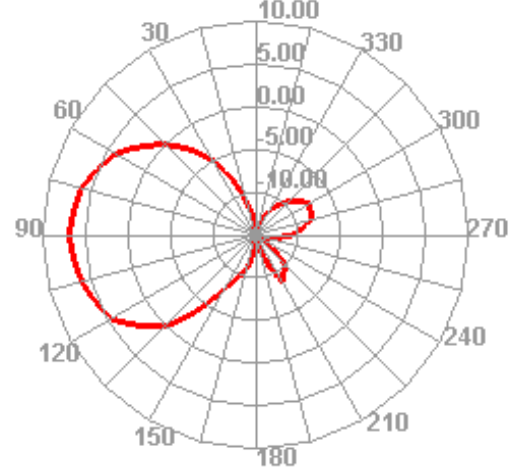


2430.000MHz

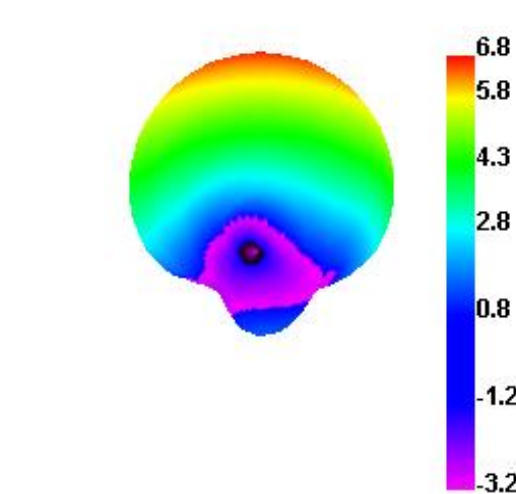


2430.000MHz H

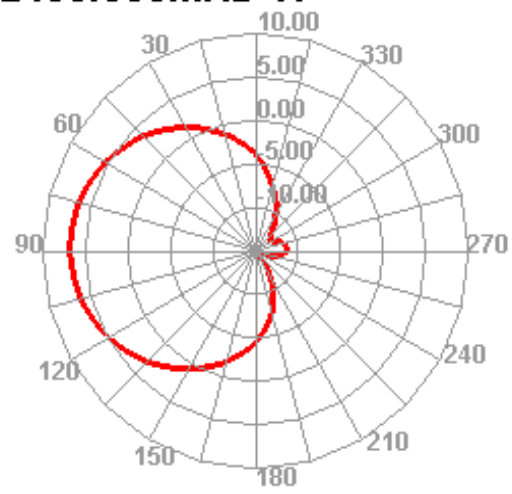


2430.000MHz E1

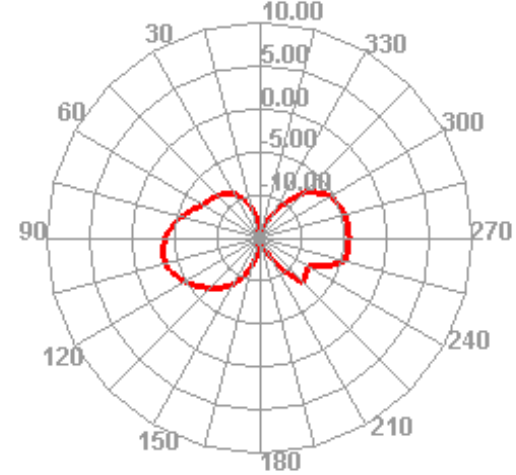


2430.000MHz E2

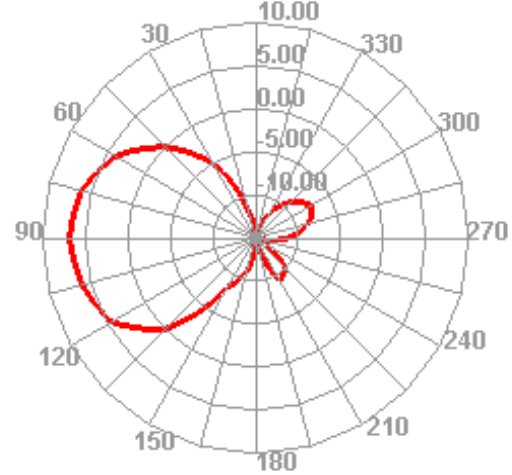


2440.000MHz

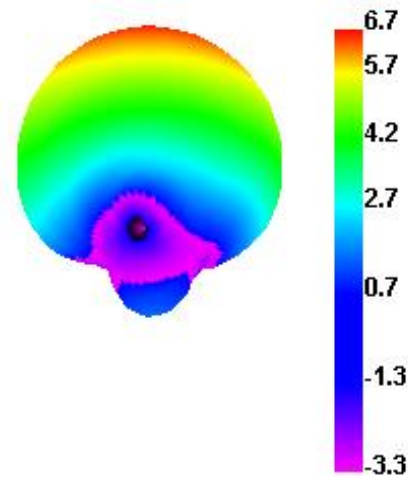


2440.000MHz H

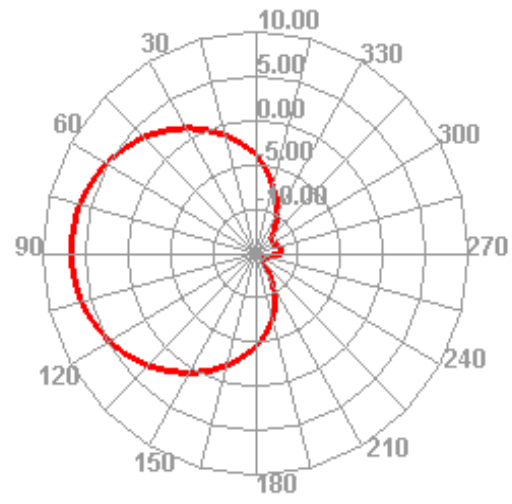


2440.000MHz E1

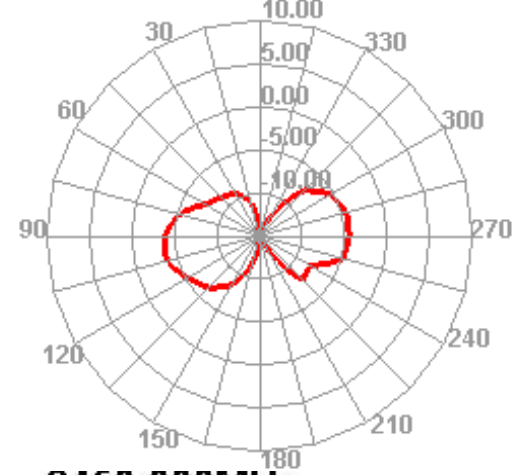


2440.000MHz E2

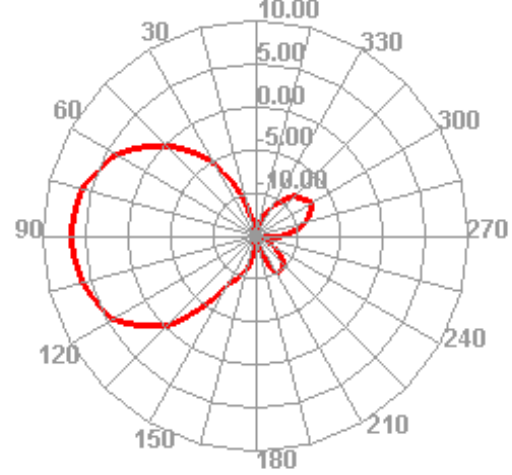


2450.000MHz

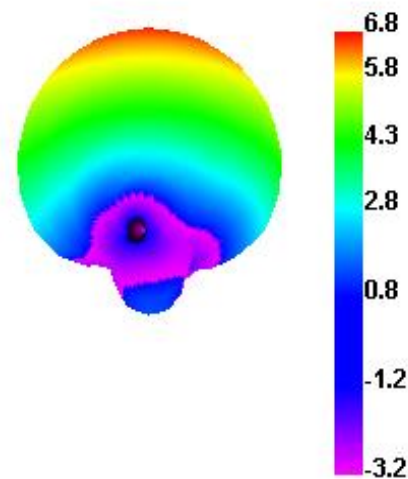


2450.000MHz H

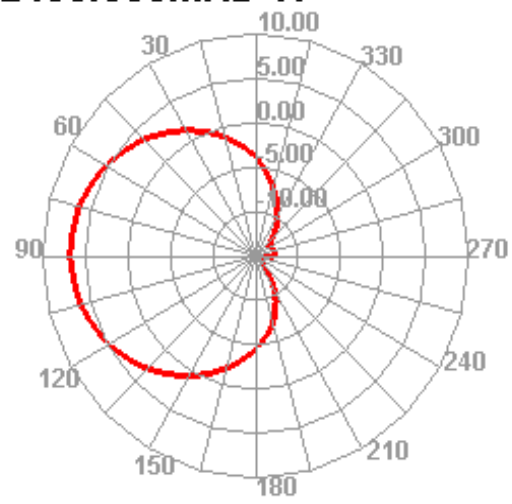


2450.000MHz E1

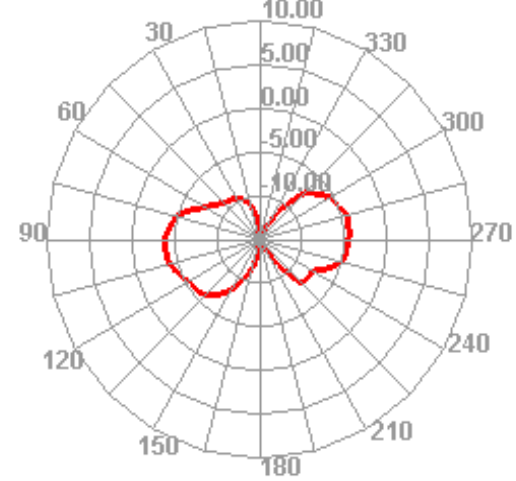


2450.000MHz E2

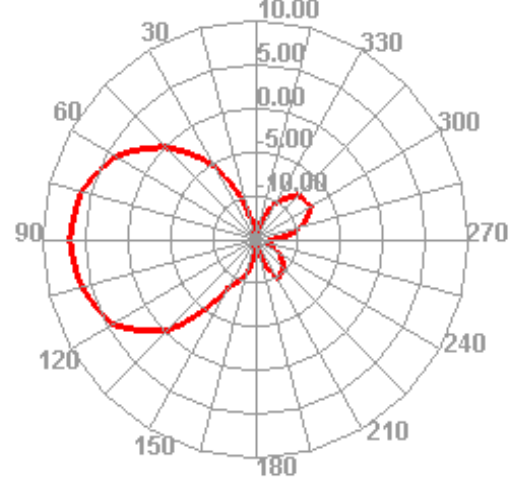


2460.000MHz

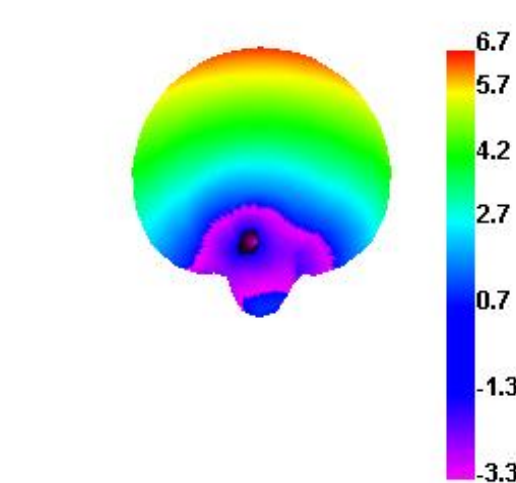


2460.000MHz H

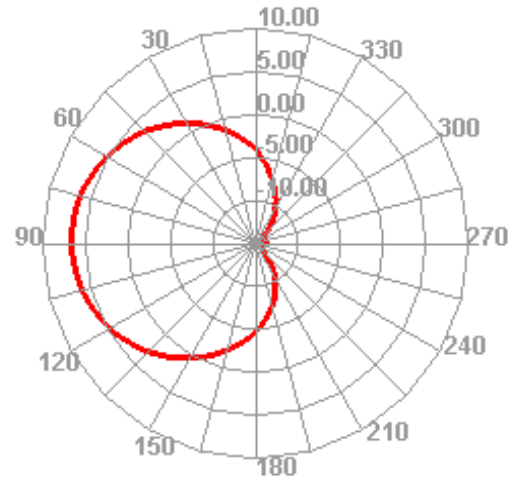


2460.000MHz E1

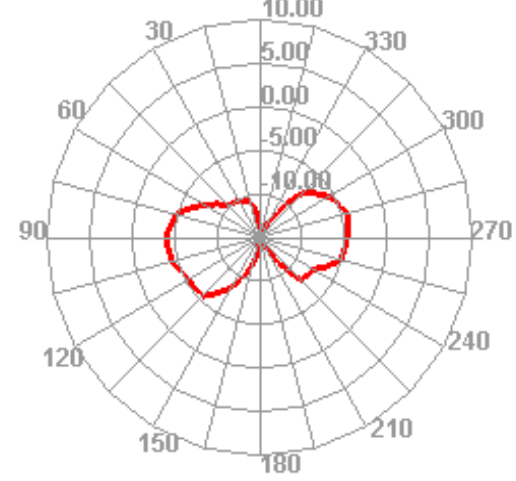


2460.000MHz E2

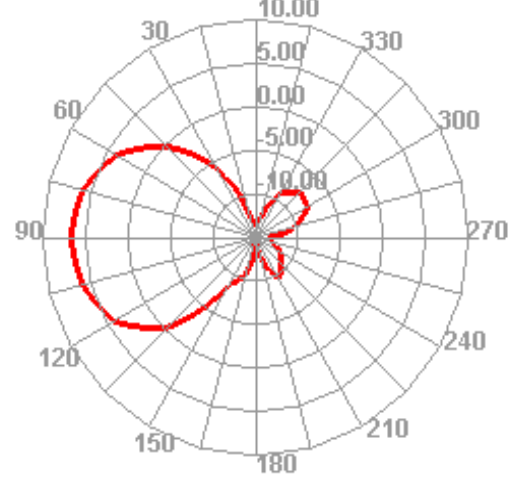


2470.000MHz

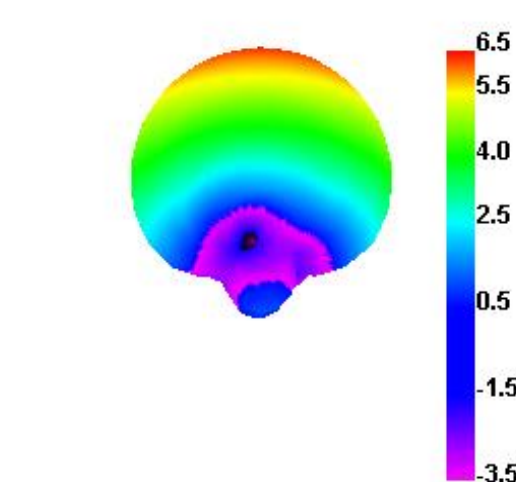


2470.000MHz H

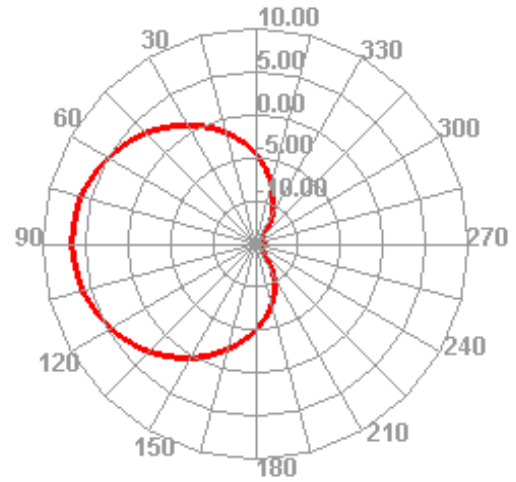


2470.000MHz E1

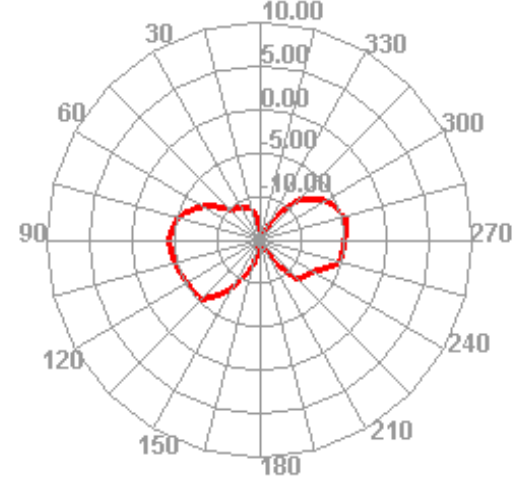


2470.000MHz E2


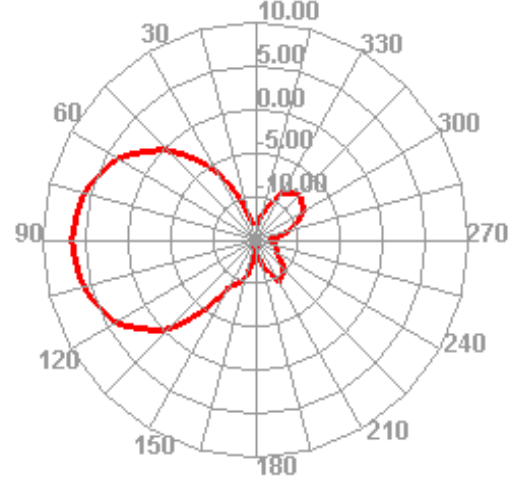


2480.000MHz

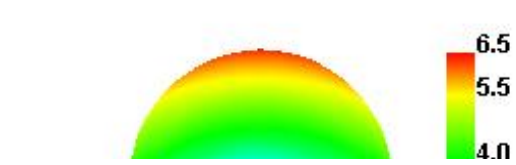



2480.000MHz H

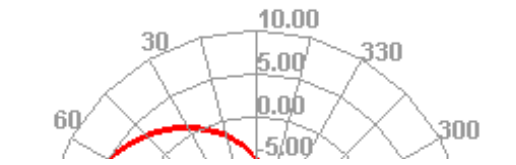

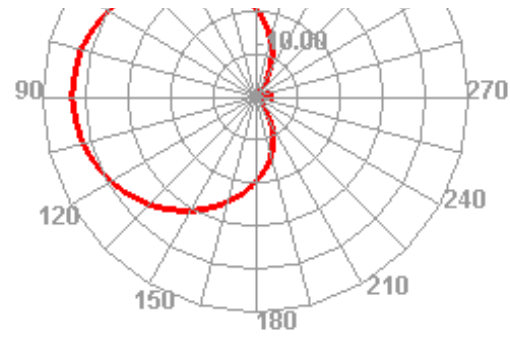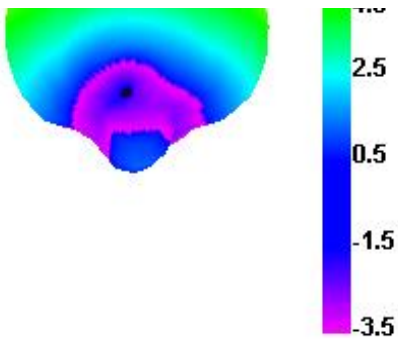



2480.000MHz E1

2480.000MHz E2

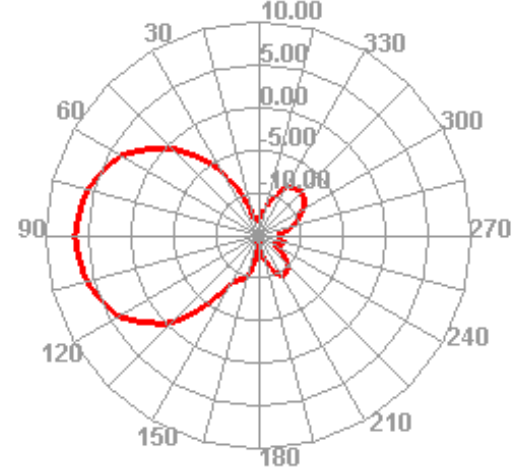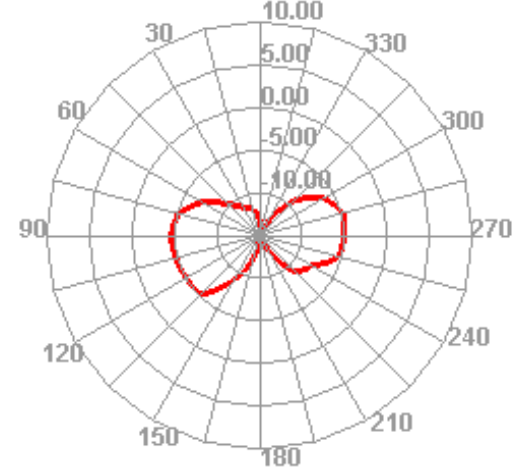


2490.000MHz


2490.000MHz H

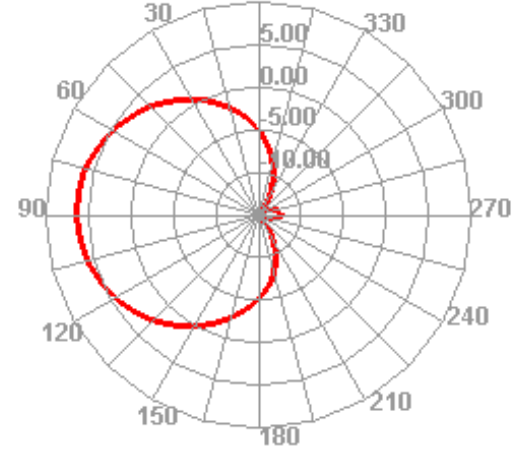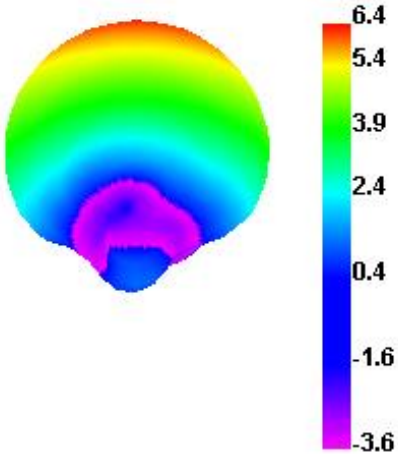


2490.000MHz E1

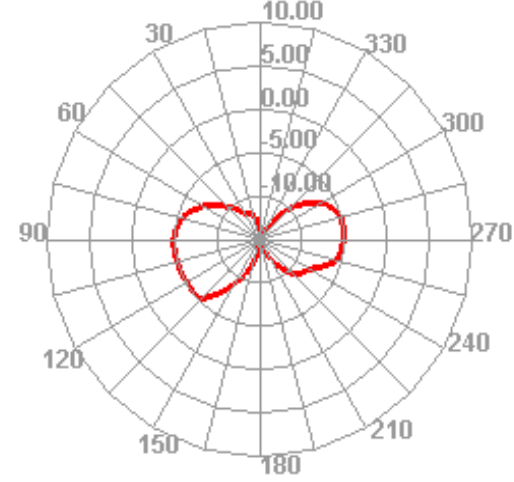


2490.000MHz E2

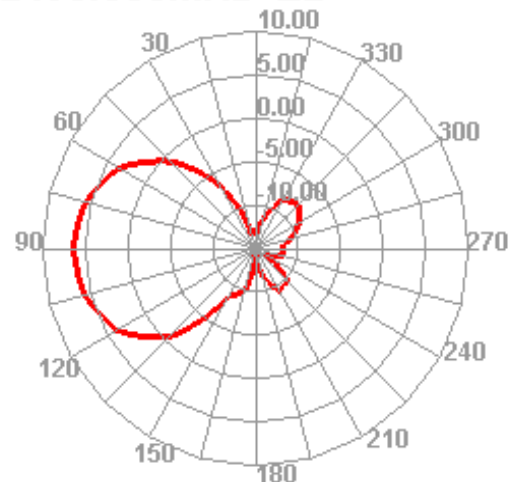


2500.000MHz

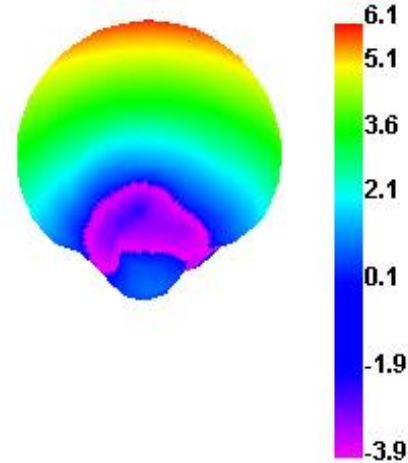



2500.000MHz H

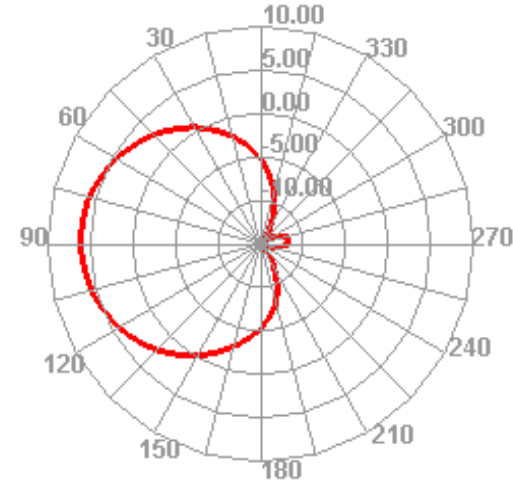

2500.000MHz E1

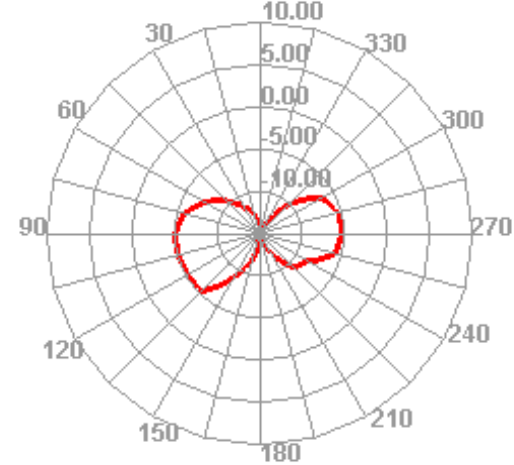

2500.000MHz E2

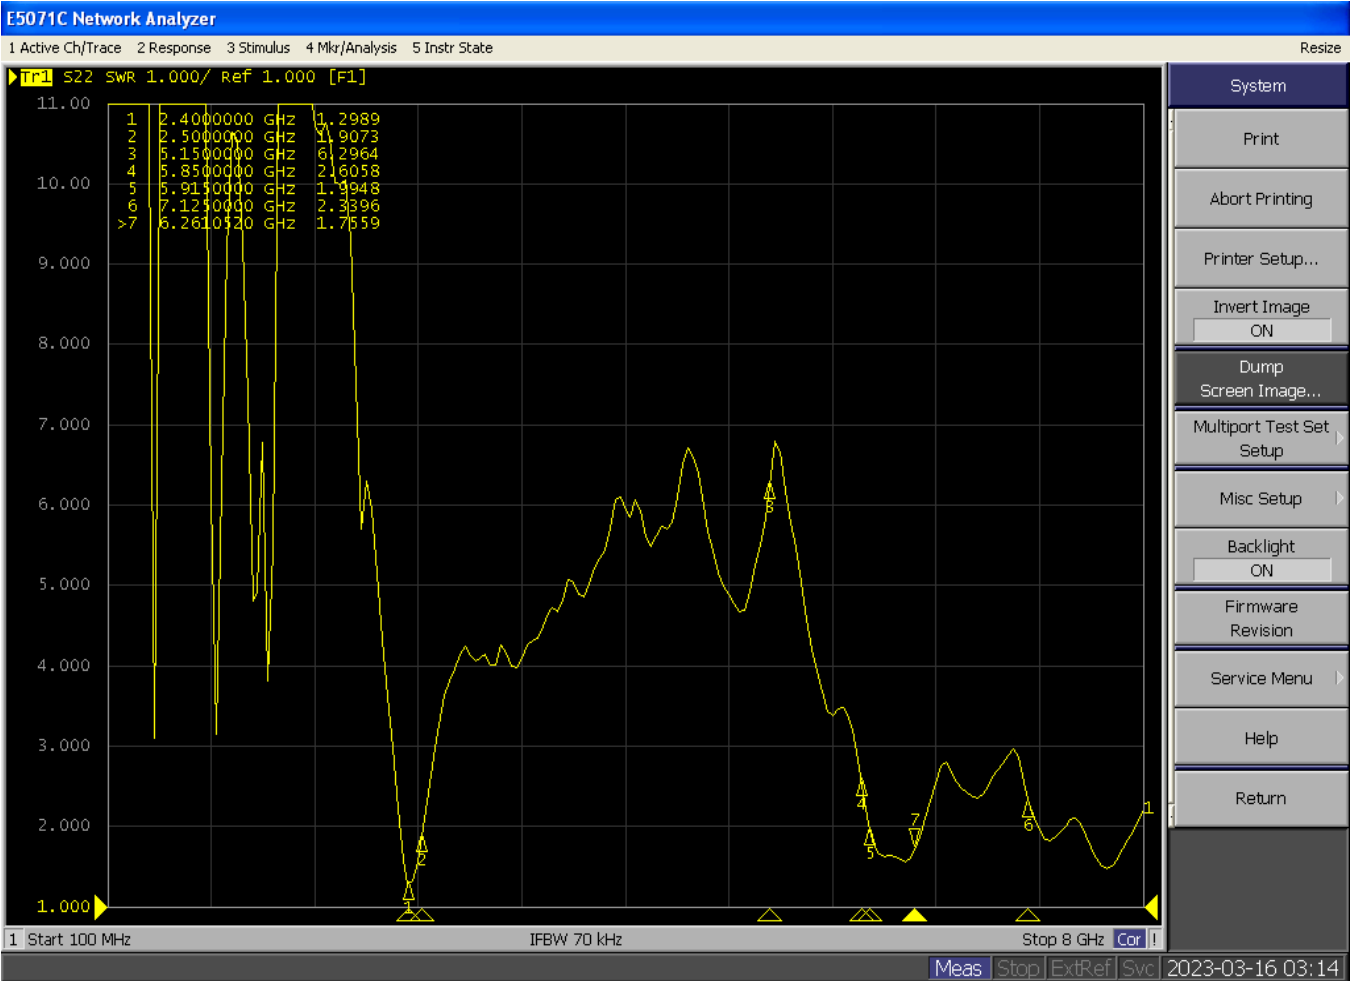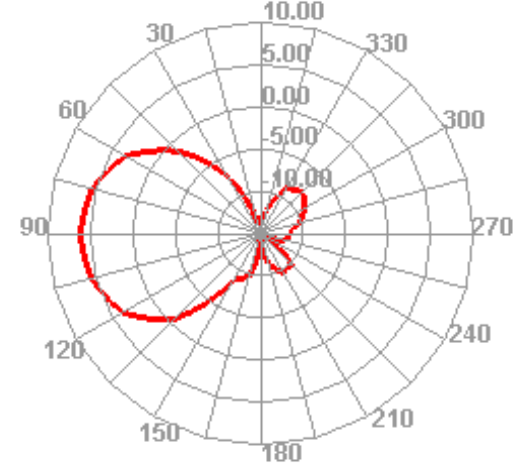





检测结果记录表

申请人/送样人	\	软件版本		硬件版本	—			
样机信息 (含S/N号)	H: xoy E1: xoz E2: zoy							
	备注说明							
Freq (MHz)	Effi (%)	Gain (dB)	Freq (MHz)	Effi (%)	Gain (dB)	Freq (MHz)	Effi (%)	Gain (dB)
2400	64.12	6.24	2440	61.5	5.92	2480	57.97	5.59
2410	63.52	6.2	2450	62.26	5.94	2490	56.22	5.49
2420	62.8	6.12	2460	60.62	5.78	2500	53.82	5.35
2430	62.52	6.05	2470	58.68	5.63			
2.4G antenna 2								
检测人员/日期		/20230504						


2400.000MHz

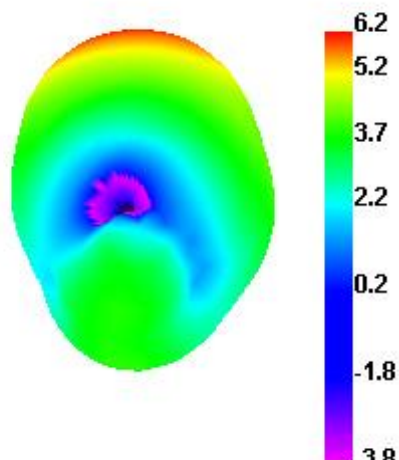


2400.000MHz H

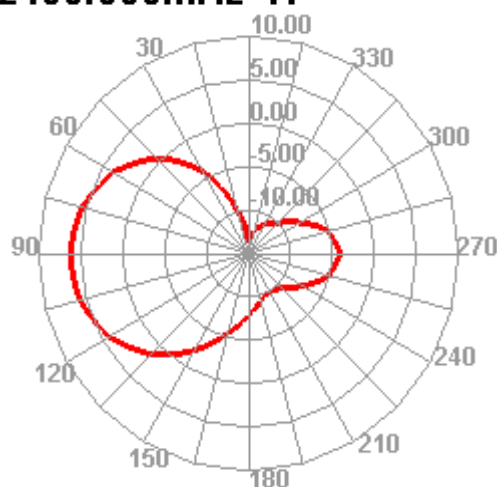


2400.000MHz E1

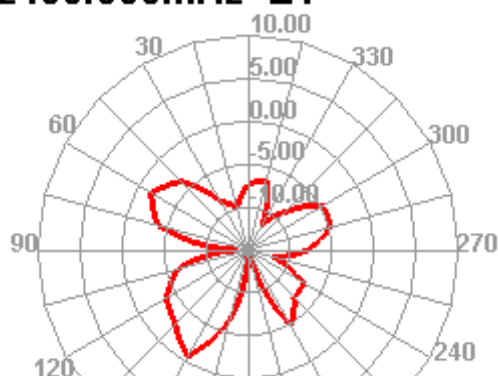


2400.000MHz E2

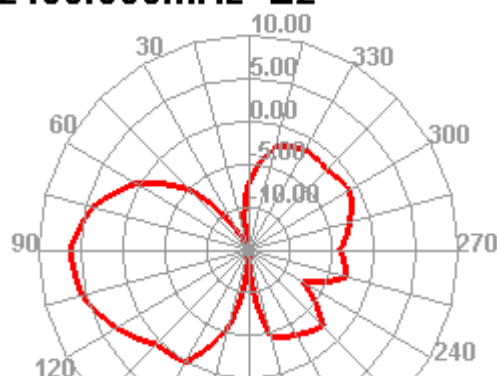


2410.000MHz

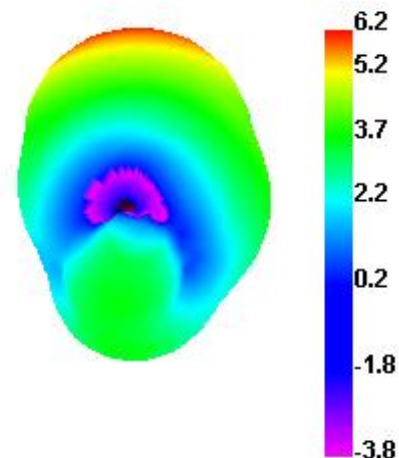


2410.000MHz H

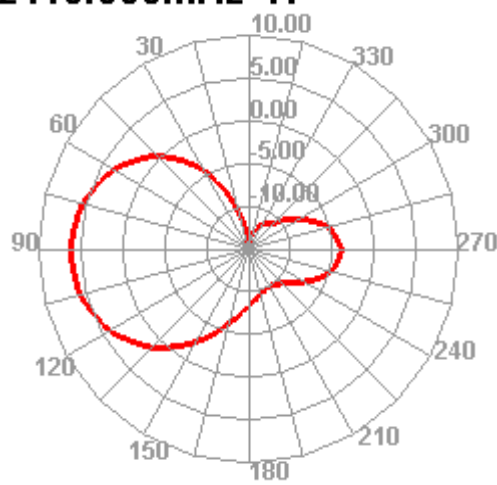


2410.000MHz E1

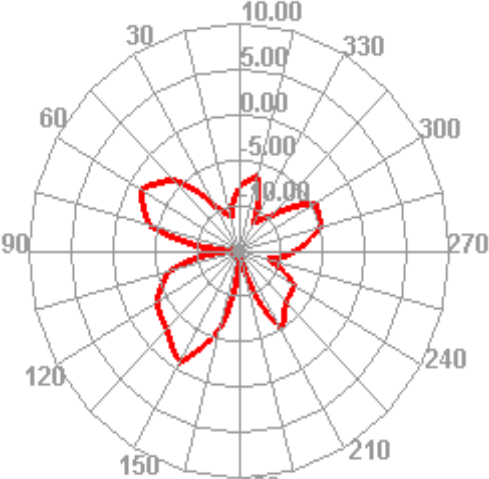


2410.000MHz E2

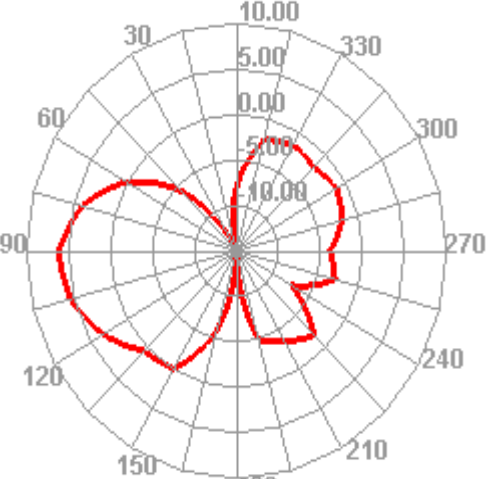


2420.000MHz

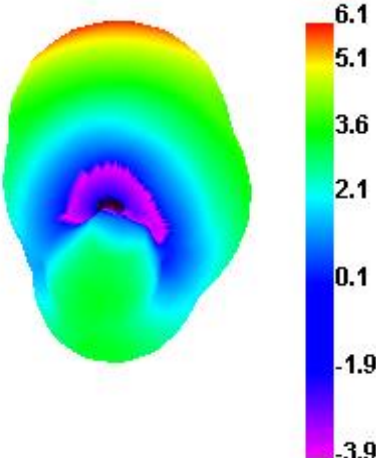


2420.000MHz H

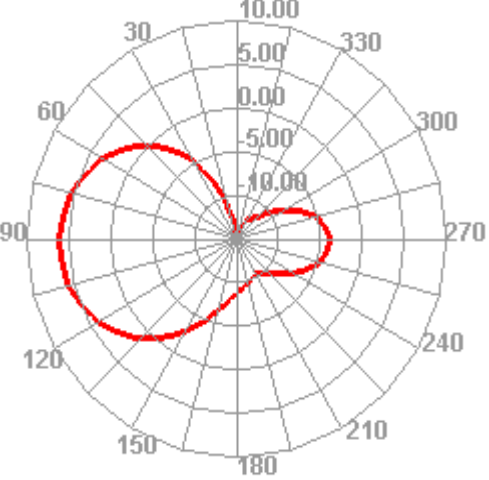


2420.000MHz E1

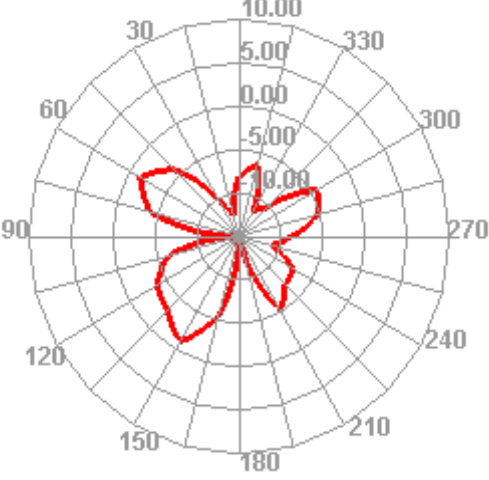


2420.000MHz E2

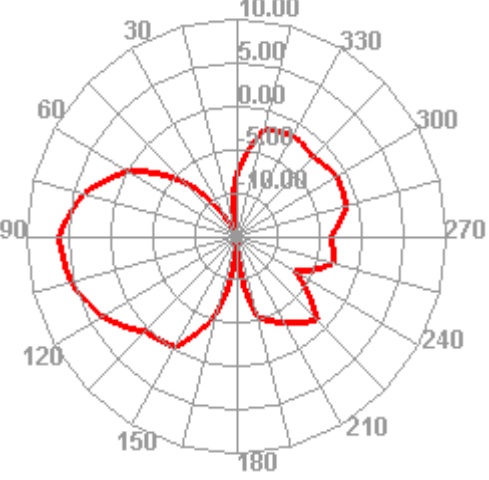


2430.000MHz

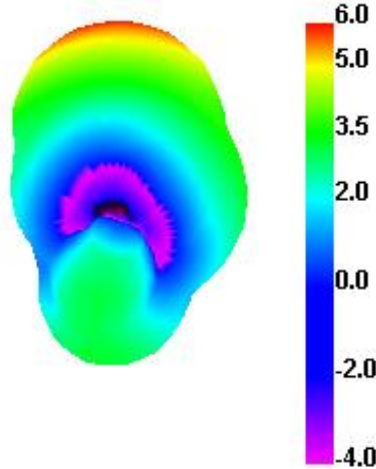


2430.000MHz H

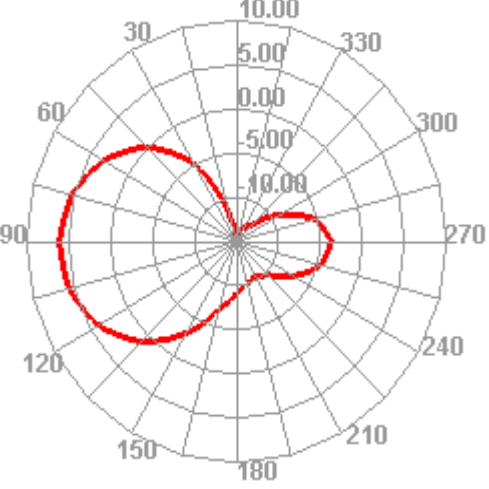


2430.000MHz E1

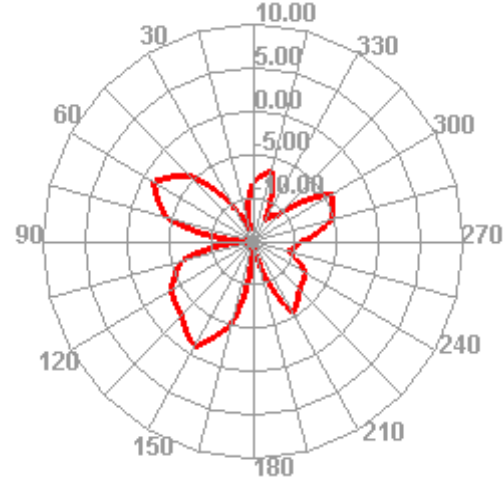


2430.000MHz E2

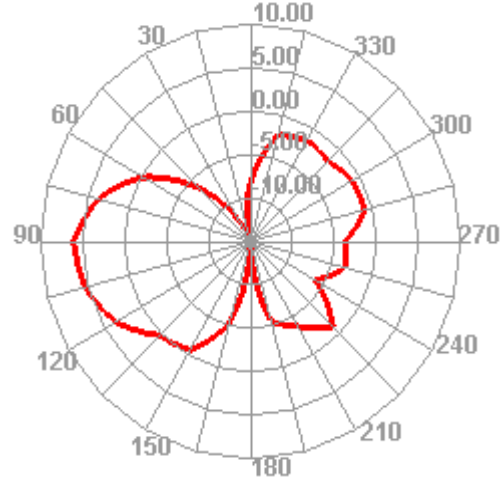


2440.000MHz

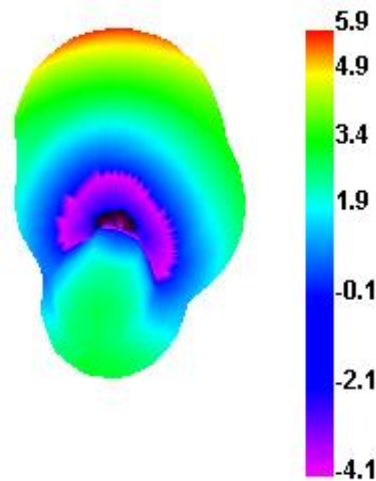


2440.000MHz H

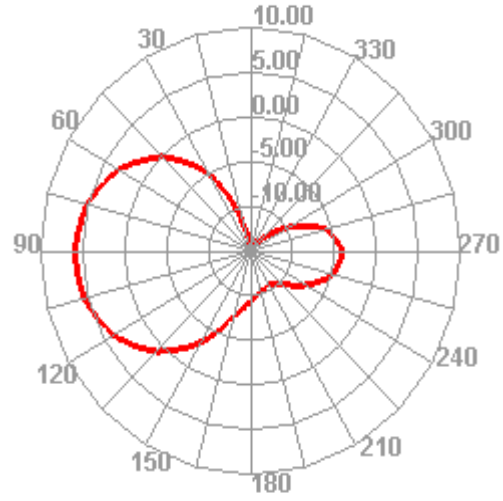


2440.000MHz E1

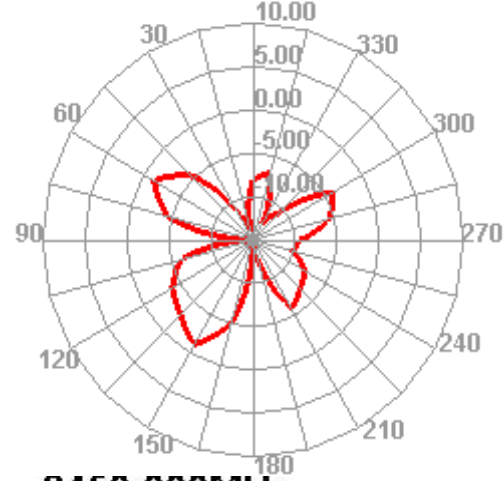


2440.000MHz E2

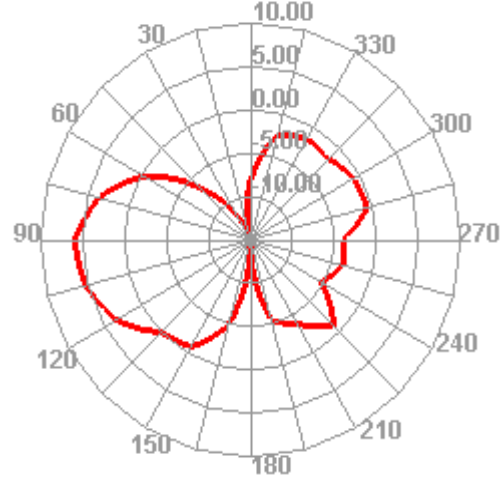

2450.000MHz

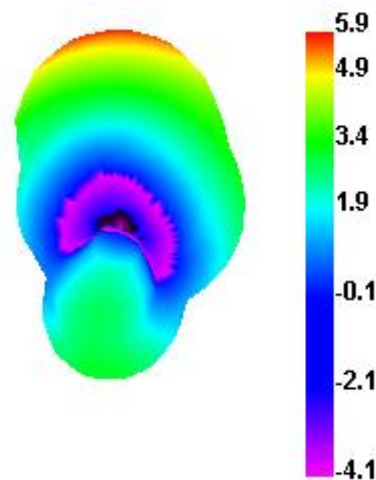


2450.000MHz H

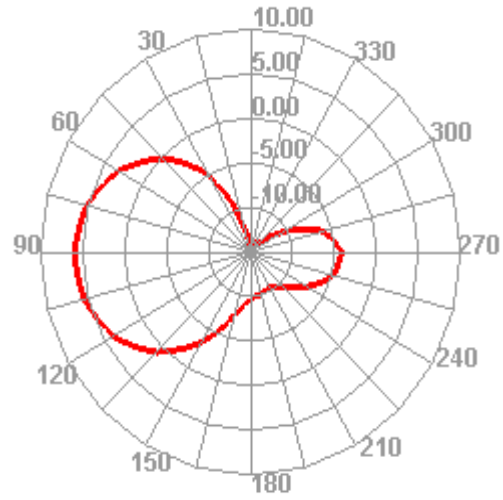


2450.000MHz E1

2450.000MHz E2


2450.000MHz E1

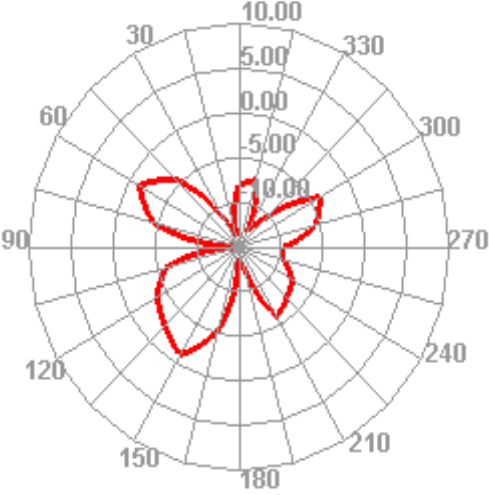


2450.000MHz E2

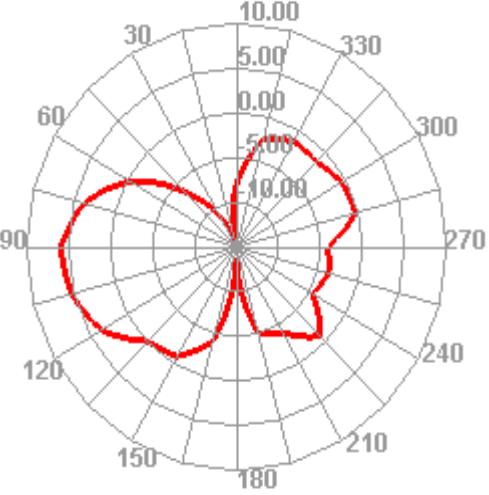


2460.000MHz

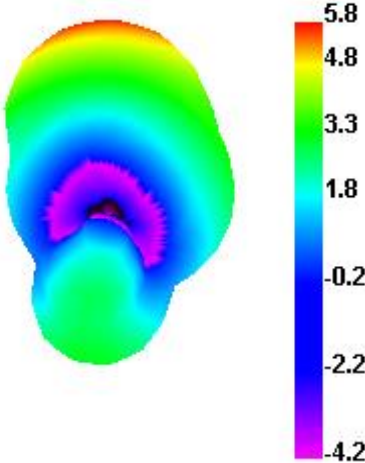


2460.000MHz H

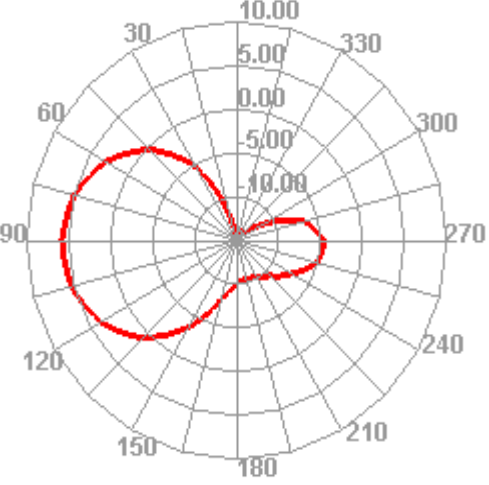


2460.000MHz E1

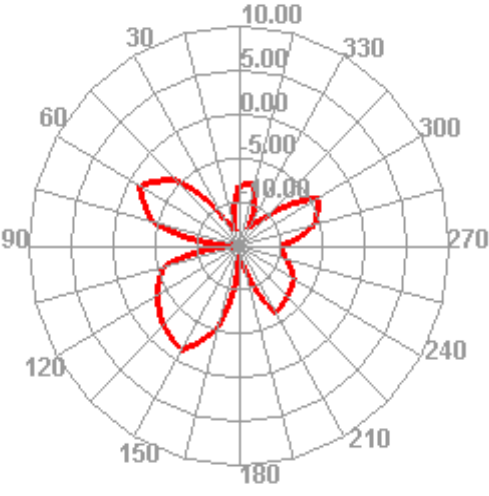


2460.000MHz E2

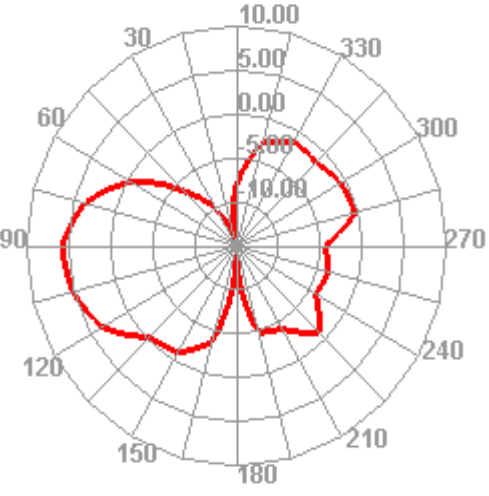


2470.000MHz

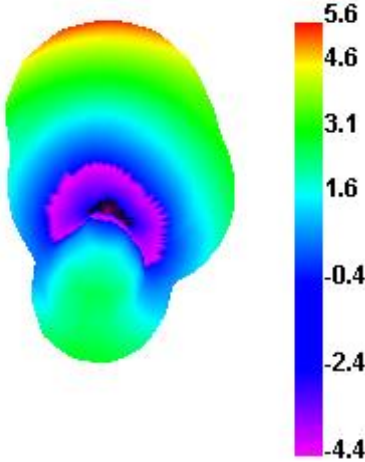


2470.000MHz H

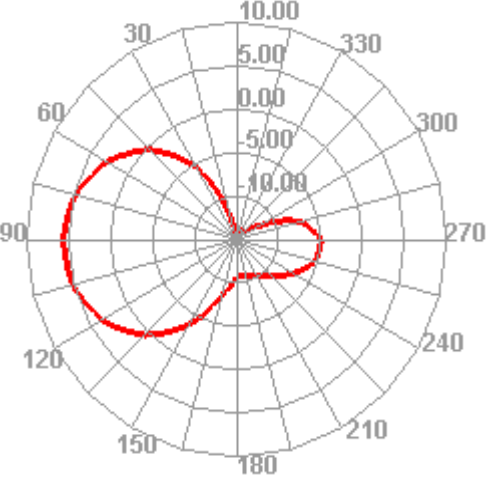


2470.000MHz E1

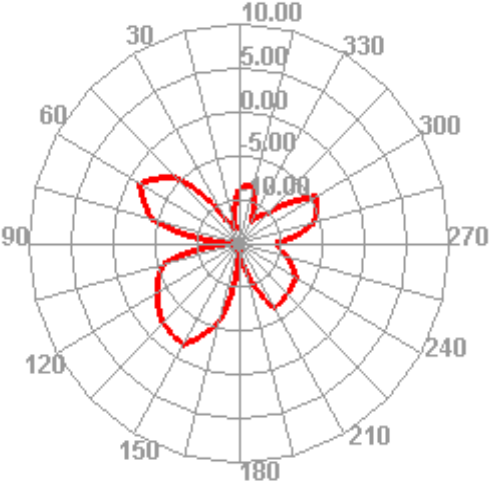


2470.000MHz E2

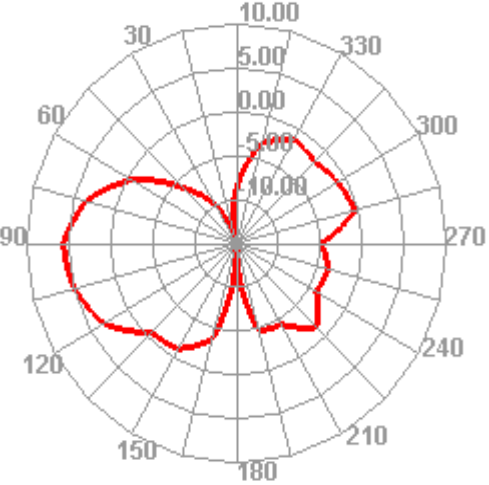


2480.000MHz

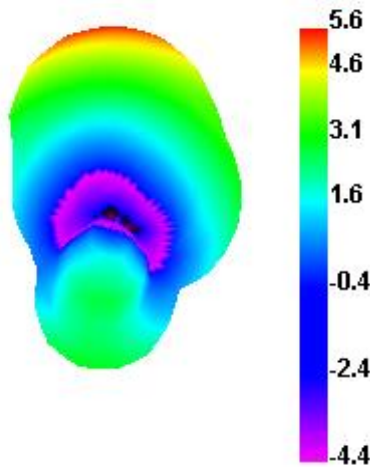


2480.000MHz H

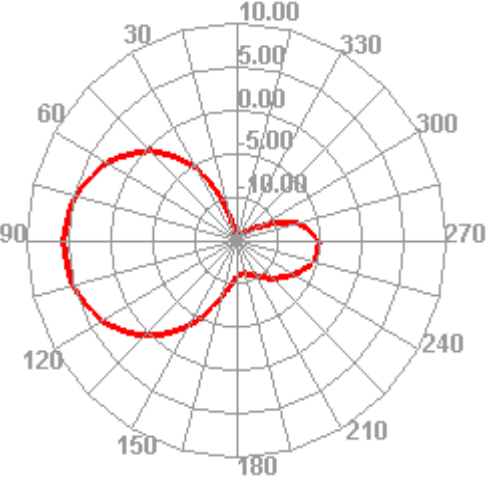


2480.000MHz E1

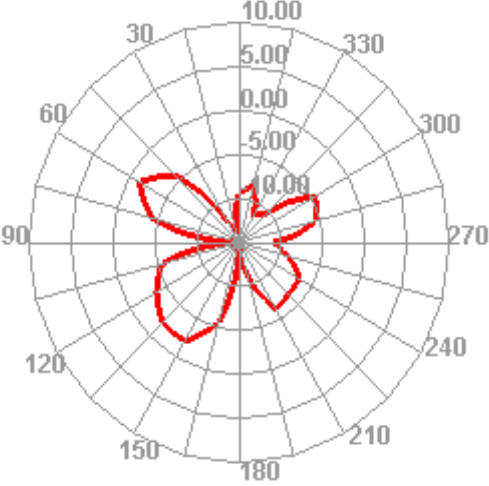


2480.000MHz E2

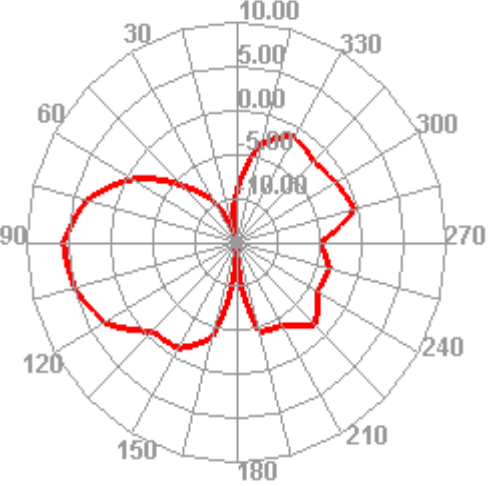


2490.000MHz

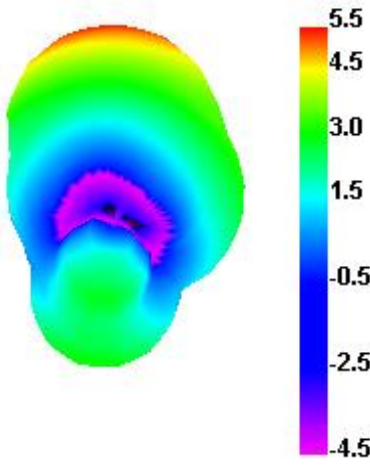


2490.000MHz H

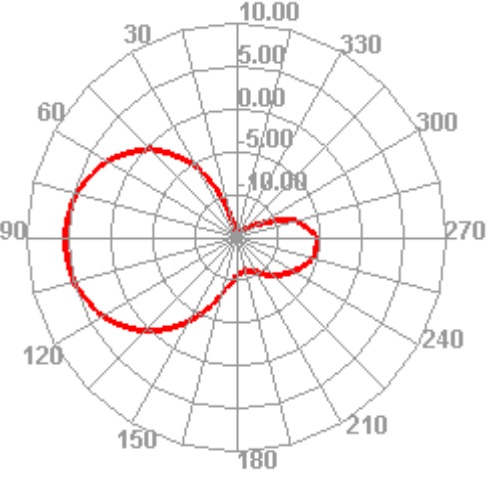


2490.000MHz E1

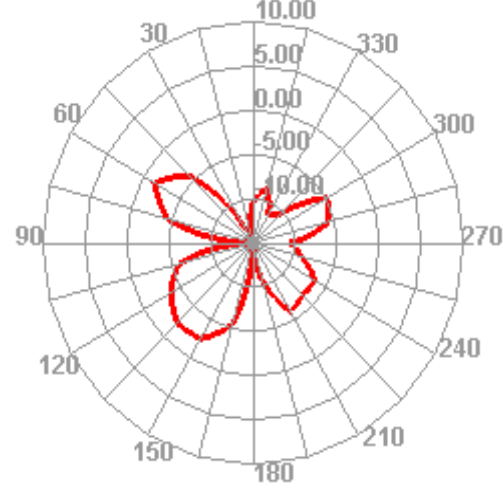


2490.000MHz E2

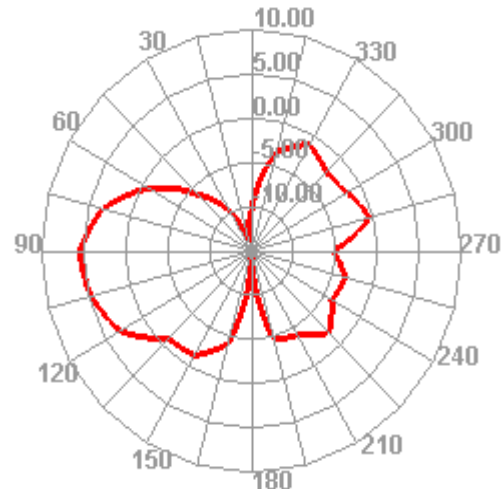


2500.000MHz

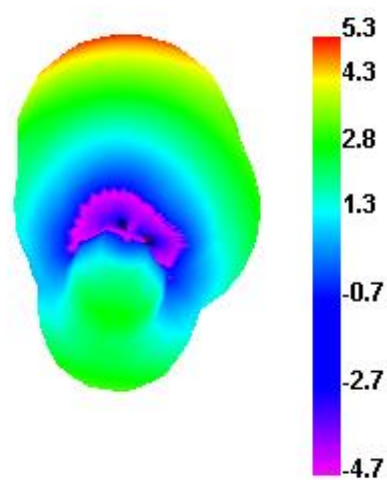


2500.000MHz H

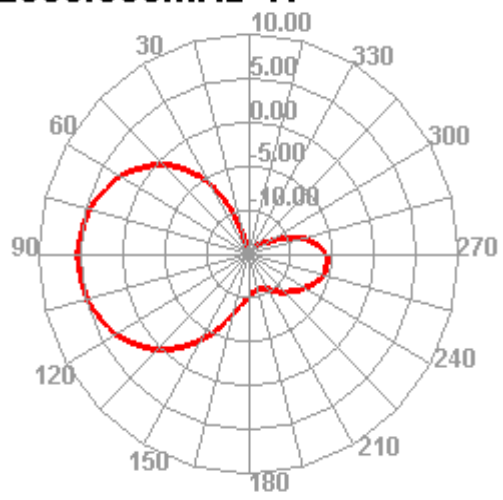

2500.000MHz E1

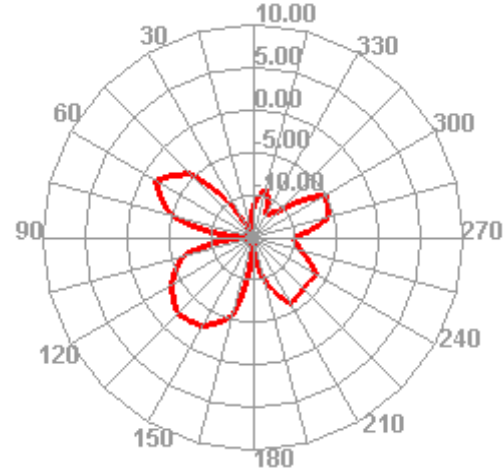

2500.000MHz E2

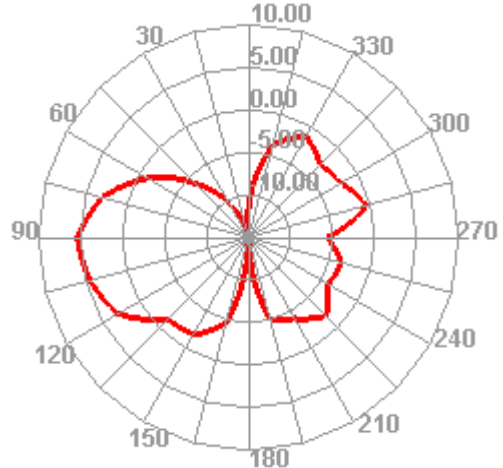


E5071C Network Analyzer

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Resize

► Tr1 S22 SWR 1.000/ Ref 1.000 [F1]

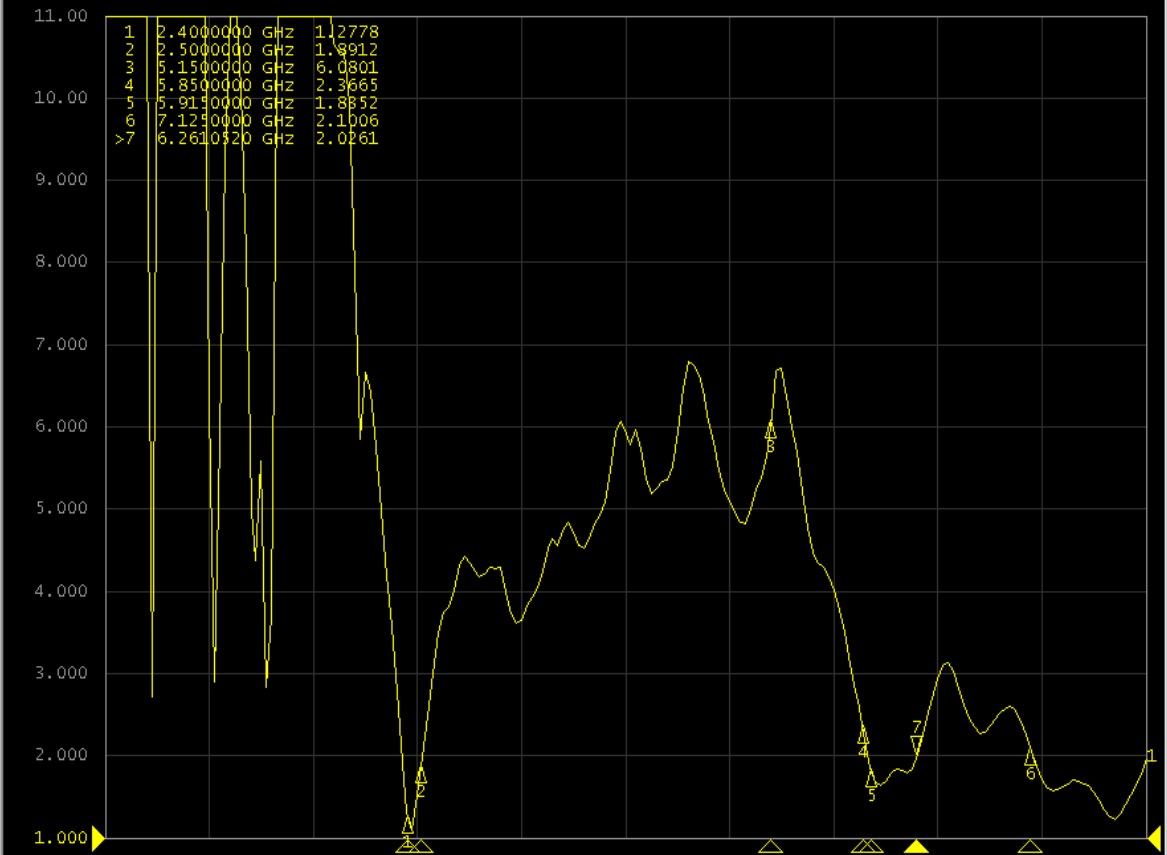

1 Start 100 MHz IFBW 70 kHz Stop 8 GHz Cor I

Meas Stop ExtRef Svc 2023-03-16 03:12

System

Print

Abort Printing

Printer Setup...

Invert Image

ON

Dump

Screen Image...

Multiport Test Set

Setup

Misc Setup

Backlight

ON

Firmware

Revision

Service Menu

Help

Return