



FCC RADIO TEST REPORT

FCC ID : Z8H89FT0051

Equipment : cnPilot e510 Outdoor, cnVision Hub 360r integrated 8dBi omni, ePMP 5 GHz MP 3000 MicroPOP Radio

Brand Name : Cambium Networks

Model Name : REG-PL-E510, cnVision Hub 360r integrated 8dBi omni, ePMP 5 GHz MP 3000 MicroPOP Radio

Applicant : Cambium Networks Inc.
3800 Golf Road, Suite 360 Rolling Meadows, IL 60008, USA

Manufacturer : Cambium Networks, Ltd.
Ashburton, TQ13 7UP, UK

Standard : 47 CFR FCC Part 15.407

The product was received on Nov. 01, 2018, and testing was started from Nov. 02, 2018 and completed on Nov. 12, 2018. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.


Approved by: Cliff Chang

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Testing Applied Standards	10
1.3 Testing Location Information	10
1.4 Measurement Uncertainty	10
2 Test Configuration of EUT.....	11
2.1 Test Channel Mode	11
2.2 The Worst Case Measurement Configuration.....	12
2.3 EUT Operation during Test	12
2.4 Accessories	12
2.5 Support Equipment.....	12
2.6 Test Setup Diagram	13
3 Transmitter Test Result	14
3.1 Emission Bandwidth	14
3.2 Maximum Conducted Output Power	16
3.3 Peak Power Spectral Density.....	18
3.4 Unwanted Emissions.....	21
4 Test Equipment and Calibration Data	25
Appendix A. Test Results of Emission Bandwidth	
Appendix B. Test Results of Maximum Conducted Output Power	
Appendix C. Test Results of Peak Power Spectral Density	
Appendix D. Test Results of Unwanted Emissions	
Appendix E. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A12_1 Ver1.0



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.407(a)	Emission Bandwidth	PASS	-
3.2	15.407(a)	Maximum Conducted Output Power	PASS	-
3.3	15.407(a)	Peak Power Spectral Density	PASS	-
3.4	15.407(b)	Unwanted Emissions	PASS	-
Note: Reference to Sporton Project No.: 870416-04.				

Declaration of Conformity:

The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.

Comments and Explanations:

1. The test configuration, test mode and test software were written in this test report are declared by the manufacturer.
2. The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen

Report Producer: Sandy Chuang



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)
5250-5350	a, n (HT20), ac (VHT20)	5260-5320
5470-5725		5500-5700
5250-5350	n (HT40), ac (VHT40)	5270-5310
5470-5725		5510-5670
5250-5350	ac (VHT80)	5290
5470-5725		5530-5610

Band	Mode	BWch (MHz)	Nant
5.25-5.35GHz	802.11a	20	2TX
5.25-5.35GHz	802.11n HT20	20	2TX
5.25-5.35GHz	802.11ac VHT20	20	2TX
5.25-5.35GHz	802.11n HT40	40	2TX
5.25-5.35GHz	802.11ac VHT40	40	2TX
5.25-5.35GHz	802.11ac VHT80	80	2TX
5.47-5.725GHz	802.11a	20	2TX
5.47-5.725GHz	802.11n HT20	20	2TX
5.47-5.725GHz	802.11ac VHT20	20	2TX
5.47-5.725GHz	802.11n HT40	40	2TX
5.47-5.725GHz	802.11ac VHT40	40	2TX
5.47-5.725GHz	802.11ac VHT80	80	2TX

Note:

- ♦ 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40 and VHT80 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
- ♦ BWch is the nominal channel bandwidth.
- ♦ Nss-Min is the minimum number of spatial streams.
- ♦ Nant is the number of outputs. e.g., 2(2,3) means have 2 outputs for port 2 and port 3. 2 means have 2 outputs for port 1 and port 2.

**1.1.2 Antenna Information**

Ant.	Port	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
1	1	Cambium	120G00000194A	PCB Antenna	I-PEX	8.4	2.4GHz
2	2	Cambium	120G00000195A	PCB Antenna	I-PEX	8.4	
3	3	Cambium	120G00000196A	PCB Antenna	I-PEX	8.9	5GHz
4	4	Cambium	120G00000197A	PCB Antenna	I-PEX	8.9	

Note1: The above information was declared by manufacturer.

Note2: The EUT has four antennas.

For 2.4GHz function:

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For 5GHz function:

Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 3 and Port 4 could transmit/receive simultaneously.

1.1.3 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
802.11a	0.963	0.164	2.066m	1k
802.11ac VHT20	0.983	0.074	n/a (DC \geq 0.98)	n/a (DC \geq 0.98)
802.11ac VHT40	0.96	0.177	2.43m	1k
802.11ac VHT80	0.916	0.381	1.142m	1k

1.1.4 EUT Operational Condition

EUT Power Type	From PoE			
Beamforming Function	<input type="checkbox"/>	With beamforming	<input checked="" type="checkbox"/>	Without beamforming
Weather Band	<input checked="" type="checkbox"/>	With 5600~5650MHz	<input type="checkbox"/>	Without 5600~5650MHz
Function	<input checked="" type="checkbox"/>	Outdoor P2M	<input type="checkbox"/>	Indoor P2M
	<input type="checkbox"/>	Fixed P2P	<input type="checkbox"/>	Client
TPC Function	<input checked="" type="checkbox"/>	With TPC	<input type="checkbox"/>	Without TPC
Communication Mode	<input type="checkbox"/>	IP Based (Load Based)	<input checked="" type="checkbox"/>	Frame Based
Test Software Version	QRCT V3.0.187.0			

Note1: The above information was declared by manufacturer.

Note2: While frame-based mechanism is implemented, the test procedure is the same with regular IEEE 802.11a/n/ac devices.



1.1.5 Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems:

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5250~5350 MHz Band 2	1	5260 MHz	8	5295 MHz
	2	5265 MHz	9	5300 MHz
	3	5270 MHz	10	5305 MHz
	4	5275 MHz	11	5310 MHz
	5	5280 MHz	12	5315 MHz
	6	5285 MHz	13	5320 MHz
	7	5290 MHz	-	-
5470~5725 MHz Band 3	1	5500 MHz	22	5605 MHz
	2	5505 MHz	23	5610 MHz
	3	5510 MHz	24	5615 MHz
	4	5515 MHz	25	5620 MHz
	5	5520 MHz	26	5625 MHz
	6	5525 MHz	27	5630 MHz
	7	5530 MHz	28	5635 MHz
	8	5535 MHz	29	5640 MHz
	9	5540 MHz	30	5645 MHz
	10	5545 MHz	31	5650 MHz
	11	5550 MHz	32	5655 MHz
	12	5555 MHz	33	5660 MHz
	13	5560 MHz	34	5665 MHz
	14	5565 MHz	35	5670 MHz
	15	5570 MHz	36	5675 MHz
	16	5575 MHz	37	5680 MHz
	17	5580 MHz	38	5685 MHz
	18	5585 MHz	39	5690 MHz
	19	5590 MHz	40	5695 MHz
	20	5595 MHz	41	5700 MHz
	21	5600 MHz	-	-



For 40MHz bandwidth systems:

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5250~5350 MHz Band 2	1	5270 MHz	6	5295 MHz
	2	5275 MHz	7	5300 MHz
	3	5280 MHz	8	5305 MHz
	4	5285 MHz	9	5310 MHz
	5	5290 MHz	-	-
5470~5725 MHz Band 3	1	5510 MHz	18	5595 MHz
	2	5515 MHz	19	5600 MHz
	3	5520 MHz	20	5605 MHz
	4	5525 MHz	21	5610 MHz
	5	5530 MHz	22	5615 MHz
	6	5535 MHz	23	5620 MHz
	7	5540 MHz	24	5625 MHz
	8	5545 MHz	25	5630 MHz
	9	5550 MHz	26	5635 MHz
	10	5555 MHz	27	5640 MHz
	11	5560 MHz	28	5645 MHz
	12	5565 MHz	29	5650 MHz
	13	5570 MHz	30	5655 MHz
	14	5575 MHz	31	5660 MHz
	15	5580 MHz	32	5665 MHz
	16	5585 MHz	33	5670 MHz
	17	5590 MHz	-	-

For 80MHz bandwidth systems:

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5250~5350 MHz Band 2	1	5290 MHz	-	-
5470~5725 MHz Band 3	1	5530 MHz	10	5575 MHz
	2	5535 MHz	11	5580 MHz
	3	5540 MHz	12	5585 MHz
	4	5545 MHz	13	5590 MHz
	5	5550 MHz	14	5595 MHz
	6	5555 MHz	15	5600 MHz
	7	5560 MHz	16	5605 MHz
	8	5565 MHz	17	5610 MHz
	9	5570 MHz	-	-



1.1.6 Table for Multiple Listing

The EUT has three equipment names/model names which are identical to each other in all aspects except for the following table:

Equipment Name	Model No.	Description
cnPilot e510 Outdoor	REG-PL-E510	All the equipment names/model names are identical, the difference equipment names/model names served as marketing strategy.
cnVision Hub 360r integrated 8dBi omni	cnVision Hub 360r integrated 8dBi omni	
ePMP 5 GHz MP 3000 MicroPOP Radio	ePMP 5 GHz MP 3000 MicroPOP Radio	

Note: Model Name REG-PL-E510 was selected as representative model for the test and its data was recorded in this report.

1.1.7 Table for Class III Change

This product is an extension of original one reported under Sporton project number: FR870416-03AB.

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Adding U-NII-2A and U-NII-2C bands (5250~5350 MHz, 5470~5725 MHz) for this device.	1. Emission Bandwidth 2. Maximum Conducted Output Power 3. Peak Power Spectral Density 4. Unwanted Emissions <Above 1GHz>
2. Adding the equipment name: cnVision Hub 360r integrated 8dBi omni, ePMP 5 GHz MP 3000 MicroPOP Radio	Do not affect the test result.
3. Adding the model name: cnVision Hub 360r integrated 8dBi omni, ePMP 5 GHz MP 3000 MicroPOP Radio	
4. Update to frame based from Load Based.	
5. Changing the brand name of Antenna to Cambium from Accton.	



1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 789033 D02 v02r01
- ♦ FCC KDB 662911 D01 v02r01
- ♦ FCC KDB 412172 D01 v01r01

1.3 Testing Location Information

Testing Location				
<input type="checkbox"/>	HWA YA	ADD	: No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)	
		TEL	: 886-3-327-3456	FAX : 886-3-327-0973
<input checked="" type="checkbox"/>	JHUBEI	ADD	: No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.	
		TEL	: 886-3-656-9065	FAX : 886-3-656-9085

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-CB	Serway Li	25°C / 60%	Nov. 02, 2018 ~ Nov. 09, 2018
Radiated	03CH01-CB	Eason Chen	25°C / 60%	Nov. 12, 2018

Test site Designation No. TW0006 with FCC

Test site registered number IC 4086D with Industry Canada.

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%
Output Power Measurement	1.33 dB	Confidence levels of 95%
Power Density Measurement	1.27 dB	Confidence levels of 95%
Bandwidth Measurement	9.74×10^{-8}	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode	PowerSetting
802.11a_Nss1,(6Mbps)_2TX	-
5260MHz	16
5300MHz	16
5320MHz	15.5
5500MHz	15
5580MHz	15
5700MHz	15.5
802.11ac VHT20_Nss1,(MCS0)_2TX	-
5260MHz	16
5300MHz	16
5320MHz	15.5
5500MHz	15.5
5580MHz	15.5
5700MHz	16
802.11ac VHT40_Nss1,(MCS0)_2TX	-
5270MHz	15
5310MHz	14.5
5510MHz	14.5
5550MHz	14.5
5670MHz	18
802.11ac VHT80_Nss1,(MCS0)_2TX	-
5290MHz	14
5530MHz	13.5
5610MHz	17.5

Note: VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.



2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Conducted Output Power Peak Power Spectral Density Unwanted Emissions (Above 1GHz)
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode > 1GHz	CTX

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	WLAN 2.4GHz + WLAN 5GHz
Refer to Sporton Test Report No.: FA870416-07 for Co-location RF Exposure Evaluation.	

Note 1: The EUT can only be used in Y axis positon.

Note 2: PoE information as below:

The EUT was powered by PoE, and the PoE was for measurement only, would not be marked.

Support Unit	Brand Name	Model Name
PoE	Cambium Networks	NET-P15-56IN

2.3 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


2.4 Accessories

N/A

2.5 Support Equipment

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
B	PoE	Cambium Networks	NET-P15-56IN	N/A

2.6 Test Setup Diagram

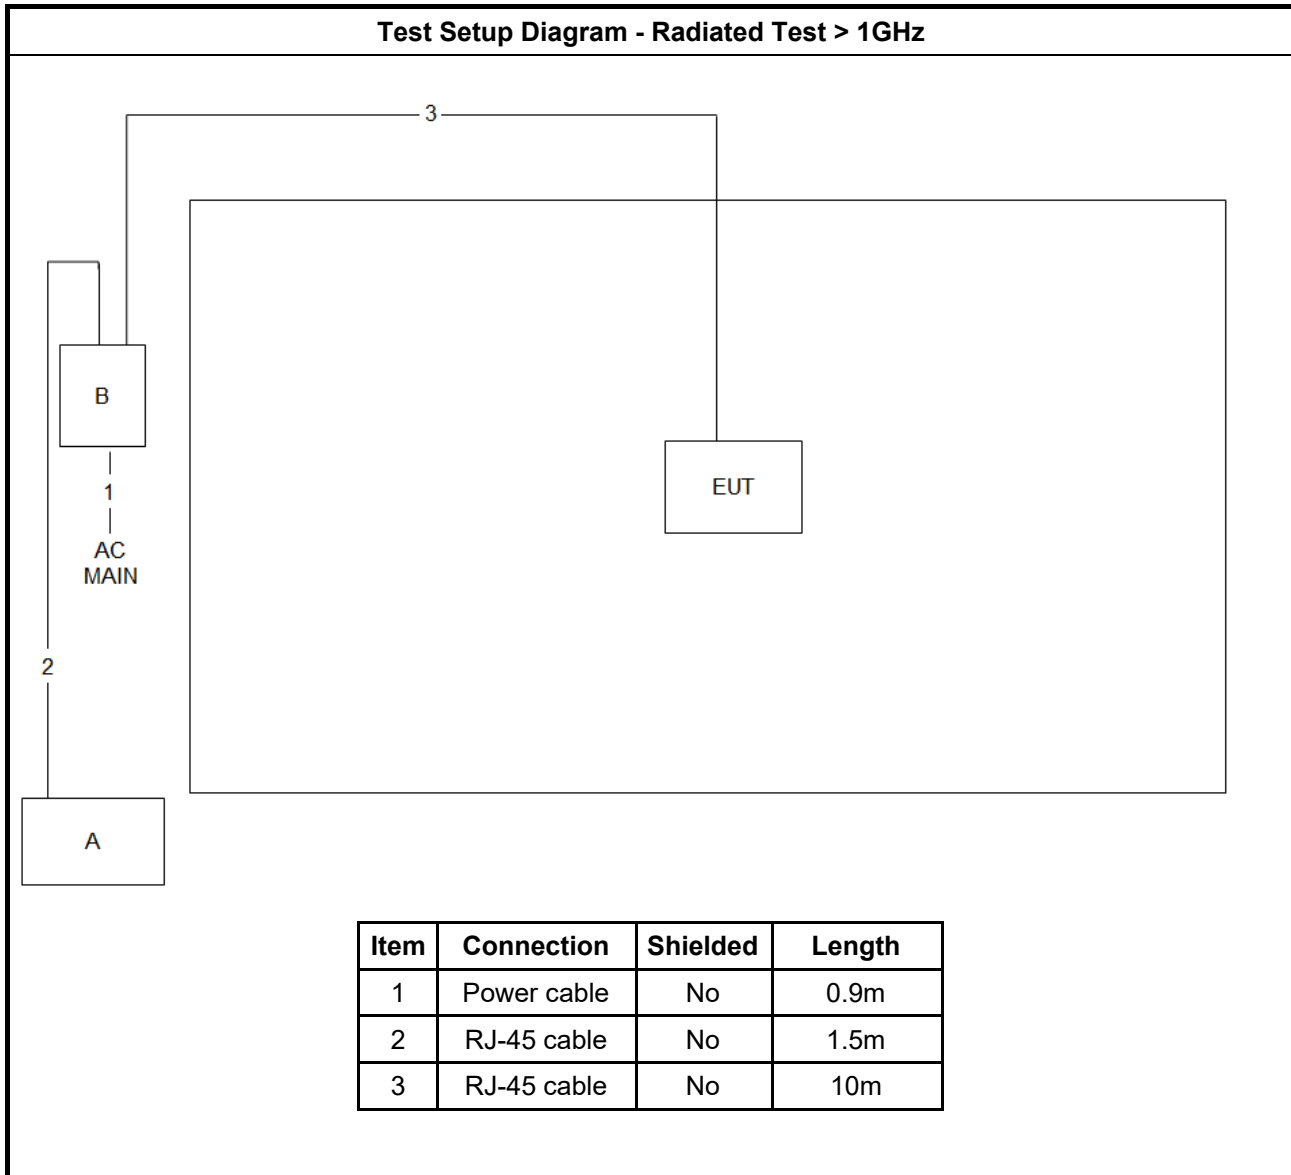

3 Transmitter Test Result

3.1 Emission Bandwidth

3.1.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
<input type="checkbox"/>	For the 5.15-5.25 GHz band, N/A
<input checked="" type="checkbox"/>	For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
<input checked="" type="checkbox"/>	For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
<input type="checkbox"/>	For the 5.725-5.85 GHz band, 6 dB emission bandwidth \geq 500kHz.
LE-LAN Devices	
<input type="checkbox"/>	For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
<input type="checkbox"/>	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
<input type="checkbox"/>	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
<input type="checkbox"/>	For the 5.725-5.85 GHz band, 6 dB emission bandwidth \geq 500kHz.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> For the emission bandwidth shall be measured using one of the options below: 	
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause C for EBW and clause D for OBW measurement.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input type="checkbox"/>	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.1.4 Test Setup

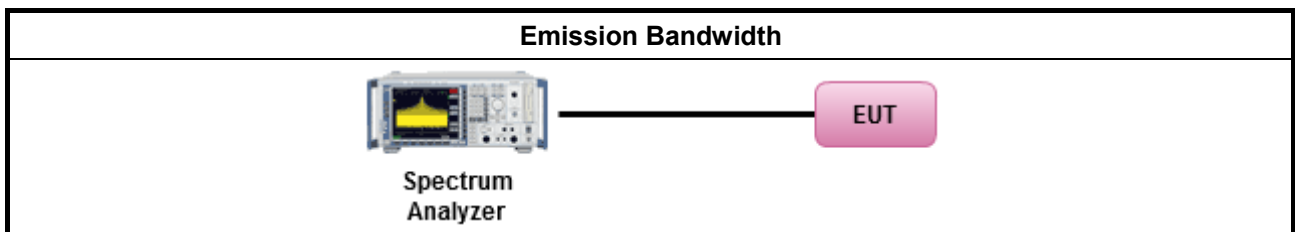



3.1.5 Test Result of Emission Bandwidth

Refer as Appendix A

3.2 Maximum Conducted Output Power

3.2.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
UNII Devices	
<input type="checkbox"/> For the 5.15-5.25 GHz band:	
<input type="checkbox"/>	<ul style="list-style-type: none"> Outdoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. e.i.r.p. at any elevation angle above 30 degrees ≤ 125mW [21dBm] Indoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ Point-to-point AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$. Mobile or Portable Client: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
<input checked="" type="checkbox"/>	For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
<input checked="" type="checkbox"/>	For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
<input type="checkbox"/> For the 5.725-5.85 GHz band:	
<input type="checkbox"/>	<ul style="list-style-type: none"> Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
LE-LAN Devices	
<input type="checkbox"/>	For the 5.15-5.25 GHz band, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
<input type="checkbox"/>	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
<input type="checkbox"/>	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
<input type="checkbox"/> For the 5.725-5.85 GHz band:	
<input type="checkbox"/>	<ul style="list-style-type: none"> Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> Maximum Conducted Output Power 	
	Average over on/off periods with duty factor
<input type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause E Method PM-G (using an RF average power meter).
<ul style="list-style-type: none"> For conducted measurement. 	
<ul style="list-style-type: none"> If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. 	
<ul style="list-style-type: none"> If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$ 	

3.2.4 Test Setup

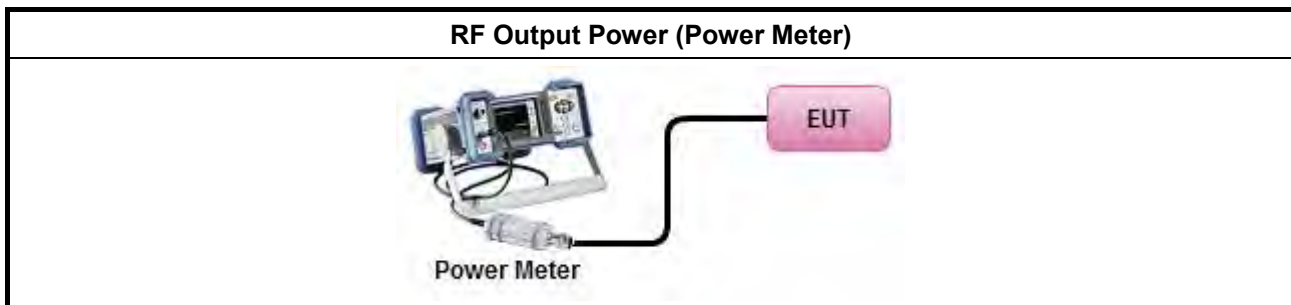

3.2.5 Test Result of Maximum Conducted Output Power

Refer as Appendix B



3.3 Peak Power Spectral Density

3.3.1 Peak Power Spectral Density Limit

Peak Power Spectral Density Limit	
UNII Devices	
<input type="checkbox"/> For the 5.15-5.25 GHz band:	
<input type="checkbox"/>	<ul style="list-style-type: none">Outdoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$.Indoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$.Point-to-point AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 23$ dBi, then $P_{Out} = 17 - (G_{TX} - 23)$.Mobile or Portable Client: the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
<input checked="" type="checkbox"/>	For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
<input checked="" type="checkbox"/>	For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
<input type="checkbox"/> For the 5.725-5.85 GHz band:	
<input type="checkbox"/>	<ul style="list-style-type: none">Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$.Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
LE-LAN Devices	
<input type="checkbox"/> For the 5.15-5.25 GHz band, the e.i.r.p. peak power spectral density (PPSD) ≤ 10 dBm/MHz.	
<input type="checkbox"/> For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz.	
<input type="checkbox"/>	<ul style="list-style-type: none">e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. at different elevations, where θ is the angle above the local horizontal plane (of the Earth) as shown below: -13 dBW/MHz for $0^\circ \leq \theta < 8^\circ$; -13 - 0.716 (θ-8) dBW/MHz for $8^\circ \leq \theta < 40^\circ$ -35.9 - 1.22 (θ-40) dBW/MHz for $40^\circ \leq \theta \leq 45^\circ$; -42 dBW/MHz for $\theta > 45^\circ$
<input type="checkbox"/> For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz.	
<input type="checkbox"/> For the 5.725-5.85 GHz band:	
<input type="checkbox"/>	<ul style="list-style-type: none">Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$.Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
PPSD = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

**3.3.3 Test Procedures**

Test Method	
<ul style="list-style-type: none">Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
<input type="checkbox"/>	Refer as FCC KDB 789033, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
[duty cycle ≥ 98% or external video / power trigger]	
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
<ul style="list-style-type: none">For conducted measurement.	
<ul style="list-style-type: none">If the EUT supports multiple transmit chains using options given below:	
<input checked="" type="checkbox"/>	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
<input type="checkbox"/>	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
<input type="checkbox"/>	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
<ul style="list-style-type: none">If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	

3.3.4 Test Setup

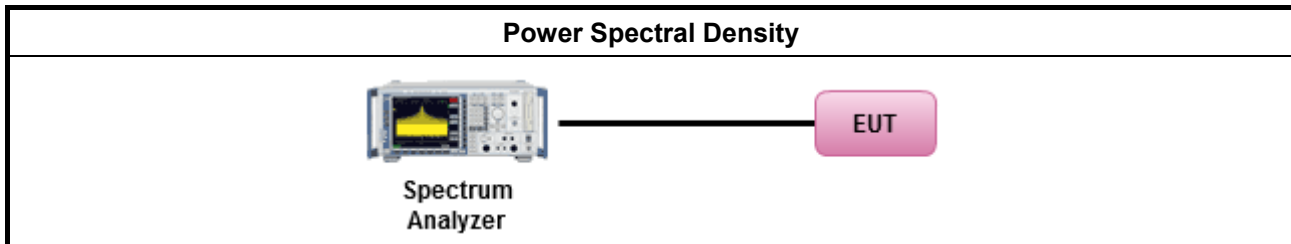

3.3.5 Test Result of Peak Power Spectral Density

Refer as Appendix C



3.4 Unwanted Emissions

3.4.1 Transmitter Radiated Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.



Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
<input type="checkbox"/> 5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
<input checked="" type="checkbox"/> 5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
<input checked="" type="checkbox"/> 5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
<input type="checkbox"/> 5.725 - 5.85 GHz	all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	

3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures



Test Method	
<ul style="list-style-type: none">Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
<ul style="list-style-type: none">The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].	
<ul style="list-style-type: none">For the transmitter unwanted emissions shall be measured using following options below:	
<ul style="list-style-type: none">	<ul style="list-style-type: none">Refer as FCC KDB 789033, clause H)2) for unwanted emissions into non-restricted bands.
	<ul style="list-style-type: none">Refer as FCC KDB 789033, clause H)1) for unwanted emissions into restricted bands.
	<input type="checkbox"/> Refer as FCC KDB 789033, H)6) Method AD (Trace Averaging).
	<input checked="" type="checkbox"/> Refer as FCC KDB 789033, H)6) Method VB (Reduced VBW).
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW \geq 1/T, where T is pulse time.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
	<input checked="" type="checkbox"/> Refer as FCC KDB 789033, clause H)5) measurement procedure peak limit.
<ul style="list-style-type: none">	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
	<ul style="list-style-type: none">For radiated measurement.



Test Method	
	<ul style="list-style-type: none">Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
	<ul style="list-style-type: none">The any unwanted emissions level shall not exceed the fundamental emission level.
	<ul style="list-style-type: none">All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Test Method	
	<ul style="list-style-type: none">For conducted and cabinet radiation measurement, refer as FCC KDB 789033, clause H)3).
	<ul style="list-style-type: none">For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dBFor FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.4.4 Test Setup

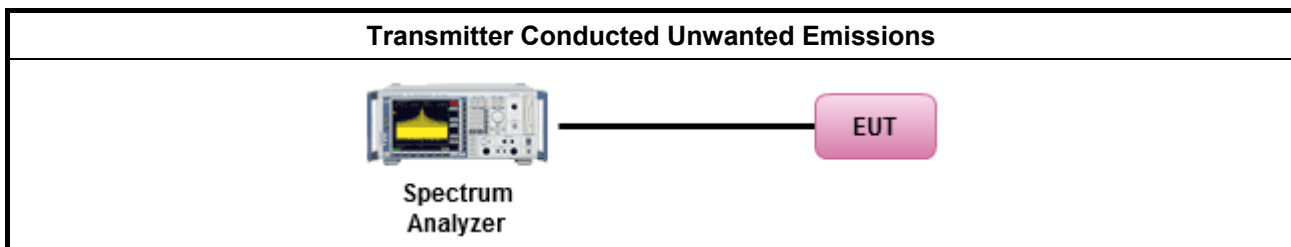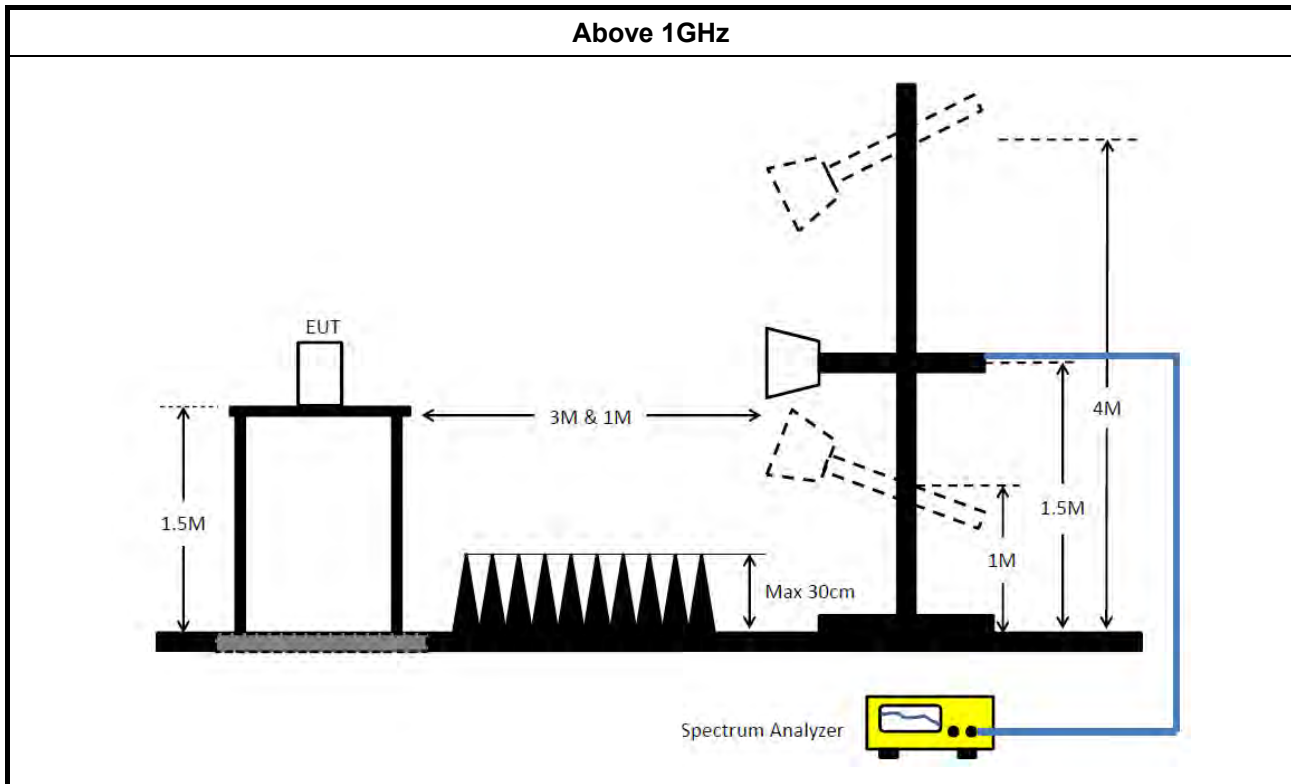

3.4.5 Test Result of Transmitter Unwanted Emissions

Refer as Appendix D



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Nov. 20, 2017	Nov. 19, 2018	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jun. 28, 2018	Jun. 27, 2019	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 09, 2018	Jan. 08, 2019	Radiation (03CH01-CB)
Pre-Amplifier	MITEQ	TTA1840-35-HG	1864479	18GHz ~ 40GHz	Jul. 04, 2018	Jul. 03, 2019	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 23, 2017	Nov. 22, 2018	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16+17	N/A	1 GHz ~ 18 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#1	N/A	18GHz ~ 40 GHz	Jul. 27, 2018	Jul. 26, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#2	N/A	18GHz ~ 40 GHz	Jul. 27, 2018	Jul. 26, 2019	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 21, 2017	Dec. 20, 2018	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz –26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz –26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz –26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz –26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY54320014	50MHz~18GHz	Apr. 17, 2018	Apr. 16, 2019	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.25-5.35GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	19.075M	16.392M	16M4D1D	18.8M	16.367M
802.11ac VHT20_Nss1,(MCS0)_2TX	20.225M	17.616M	17M6D1D	19.85M	17.566M
802.11ac VHT40_Nss1,(MCS0)_2TX	39.65M	36.032M	36M0D1D	39.5M	35.882M
802.11ac VHT80_Nss1,(MCS0)_2TX	83.7M	75.862M	75M9D1D	83.3M	75.862M
5.47-5.725GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	19.15M	16.442M	16M4D1D	18.8M	16.392M
802.11ac VHT20_Nss1,(MCS0)_2TX	20.35M	17.641M	17M6D1D	19.95M	17.591M
802.11ac VHT40_Nss1,(MCS0)_2TX	39.8M	36.032M	36M0D1D	39.35M	35.882M
802.11ac VHT80_Nss1,(MCS0)_2TX	83.5M	75.862M	75M9D1D	82.9M	75.762M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth;

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5260MHz	Pass	Inf	19.075M	16.392M	18.9M	16.367M
5300MHz	Pass	Inf	18.975M	16.392M	18.95M	16.392M
5320MHz	Pass	Inf	18.975M	16.392M	18.8M	16.392M
5500MHz	Pass	Inf	19.1M	16.417M	19M	16.392M
5580MHz	Pass	Inf	19.05M	16.442M	18.875M	16.392M
5700MHz	Pass	Inf	19.15M	16.417M	18.8M	16.392M
802.11ac_VHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5260MHz	Pass	Inf	19.975M	17.591M	20.225M	17.616M
5300MHz	Pass	Inf	20.15M	17.591M	19.875M	17.591M
5320MHz	Pass	Inf	19.95M	17.616M	19.85M	17.566M
5500MHz	Pass	Inf	20M	17.616M	19.95M	17.616M
5580MHz	Pass	Inf	20.3M	17.641M	20.2M	17.591M
5700MHz	Pass	Inf	20.35M	17.641M	19.95M	17.591M
802.11ac_VHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5270MHz	Pass	Inf	39.5M	35.982M	39.65M	35.882M
5310MHz	Pass	Inf	39.55M	35.932M	39.65M	36.032M
5510MHz	Pass	Inf	39.5M	35.982M	39.65M	35.932M
5550MHz	Pass	Inf	39.35M	35.882M	39.5M	35.982M
5670MHz	Pass	Inf	39.35M	35.882M	39.8M	36.032M
802.11ac_VHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5290MHz	Pass	Inf	83.7M	75.862M	83.3M	75.862M
5530MHz	Pass	Inf	82.9M	75.762M	83.2M	75.762M
5610MHz	Pass	Inf	83.5M	75.862M	83.4M	75.762M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band


Port X-OBW = Port X 99% occupied bandwidth;

802.11a_Nss1,(6Mbps)_2TX
EBW
5260MHz


08/11/2018

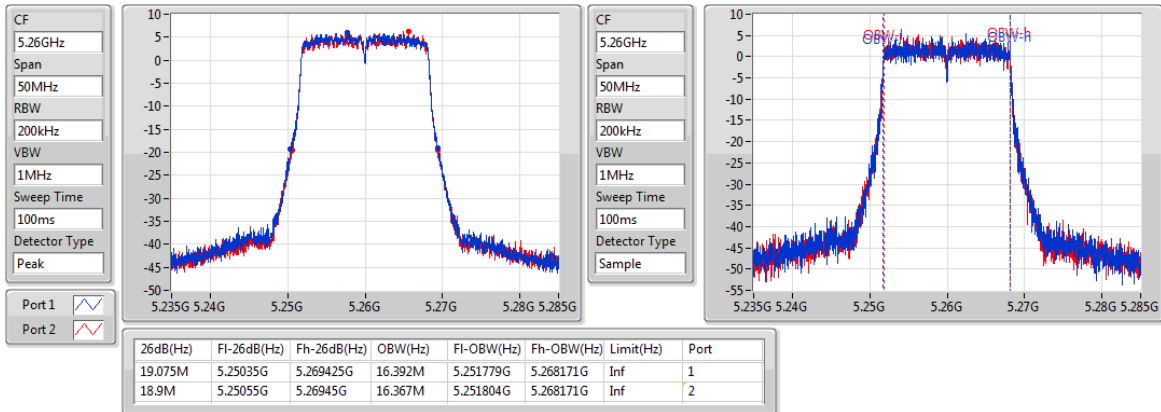
802.11a_Nss1,(6Mbps)_2TX
EBW
5300MHz

08/11/2018

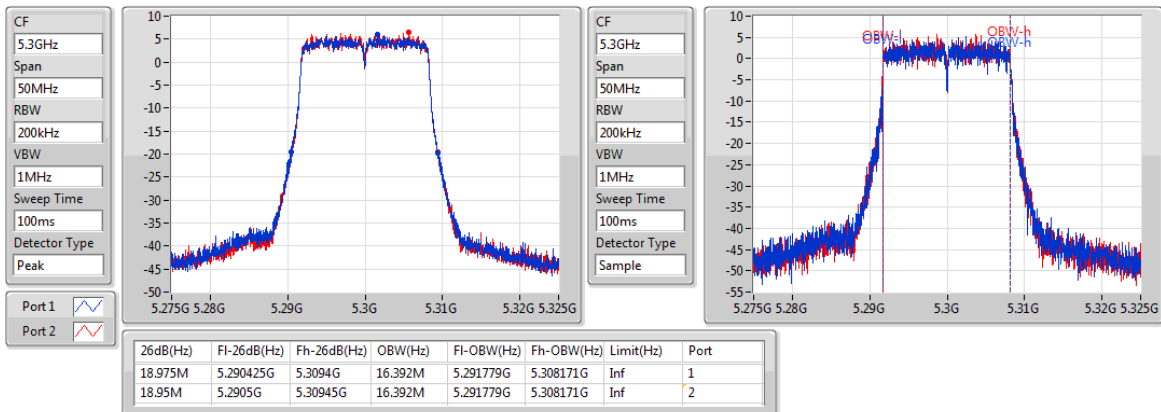

802.11a_Nss1,(6Mbps)_2TX
EBW
5320MHz

08/11/2018

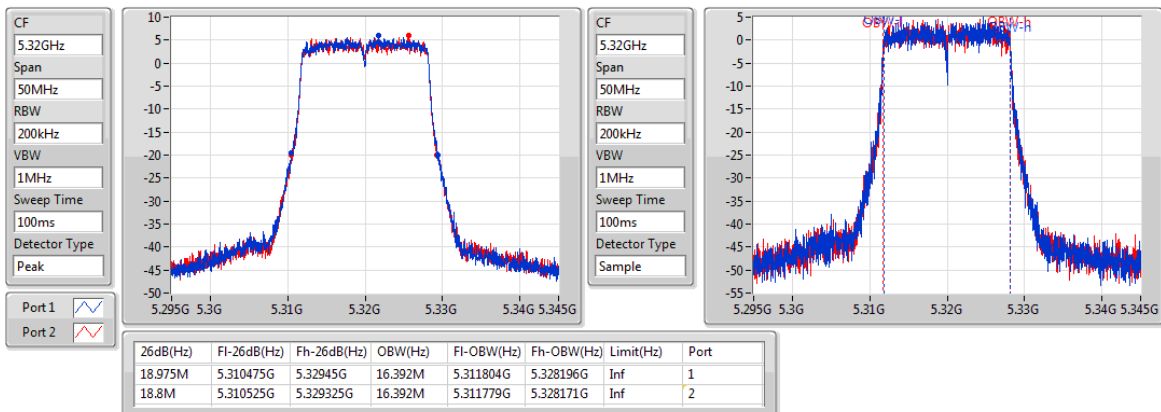


802.11a_Nss1,(6Mbps)_2TX
EBW
5500MHz


08/11/2018

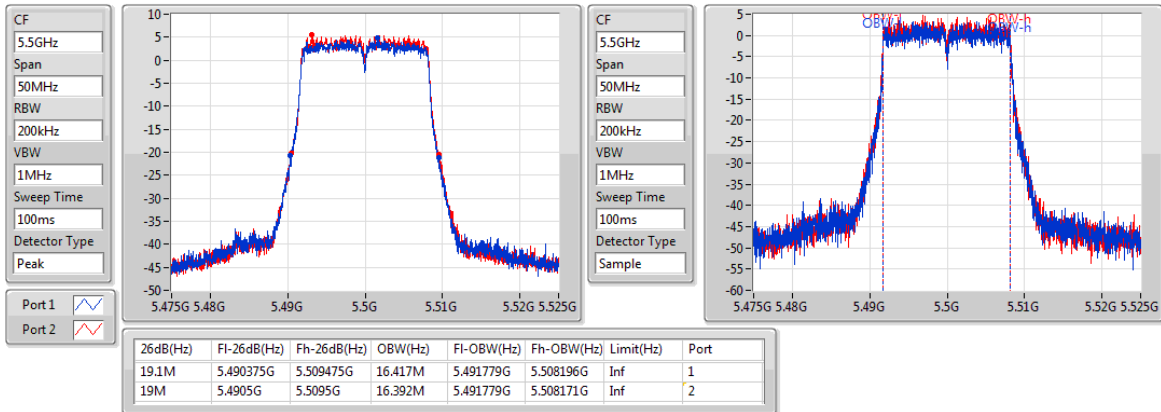
802.11a_Nss1,(6Mbps)_2TX
EBW
5580MHz

08/11/2018

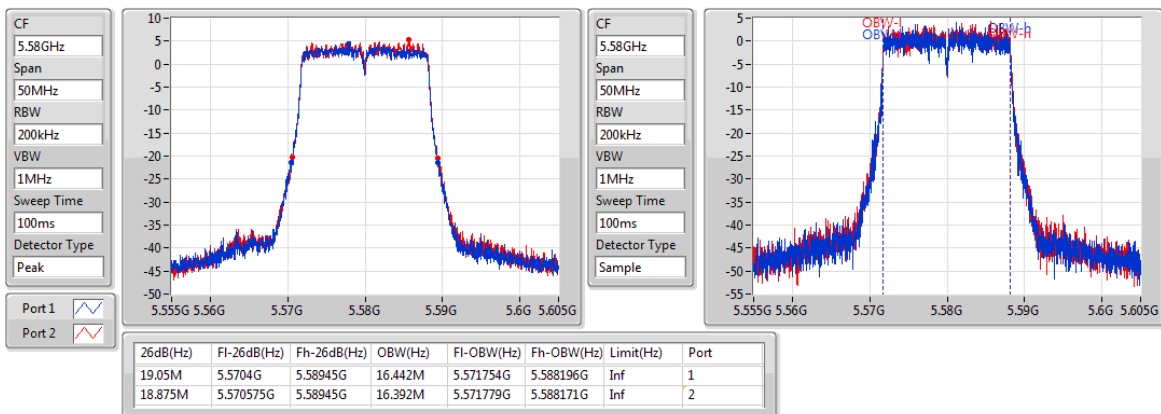

802.11a_Nss1,(6Mbps)_2TX
EBW
5700MHz

08/11/2018

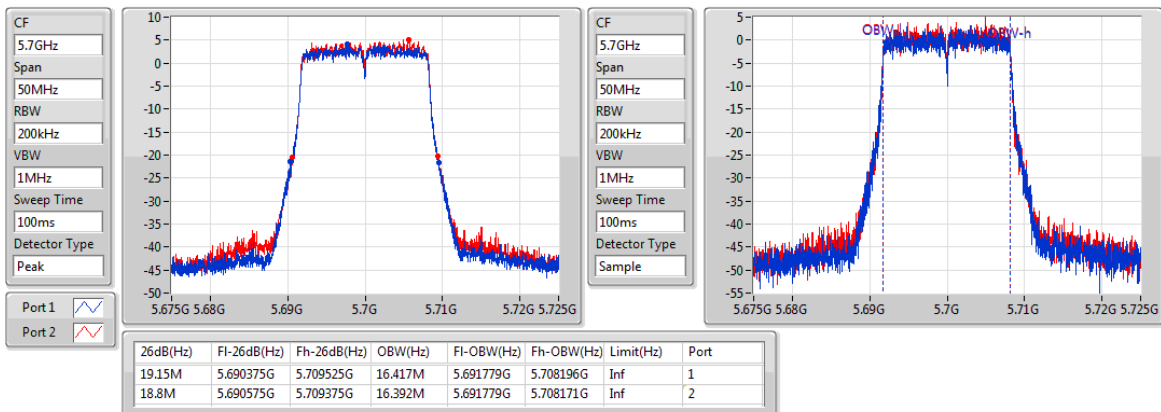


802.11ac VHT20_Nss1,(MCS0)_2TX
EBW
5260MHz


08/11/2018

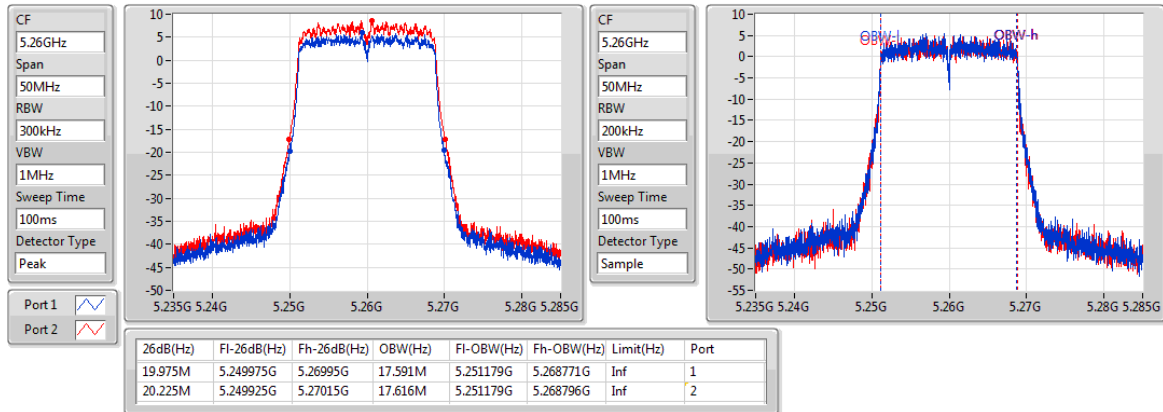
802.11ac VHT20_Nss1,(MCS0)_2TX
EBW
5300MHz

08/11/2018

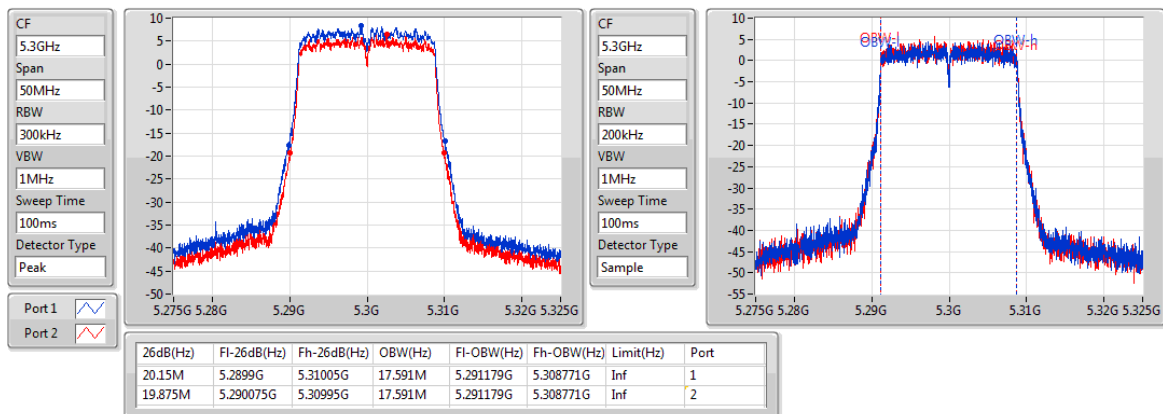

802.11ac VHT20_Nss1,(MCS0)_2TX
EBW
5320MHz

08/11/2018

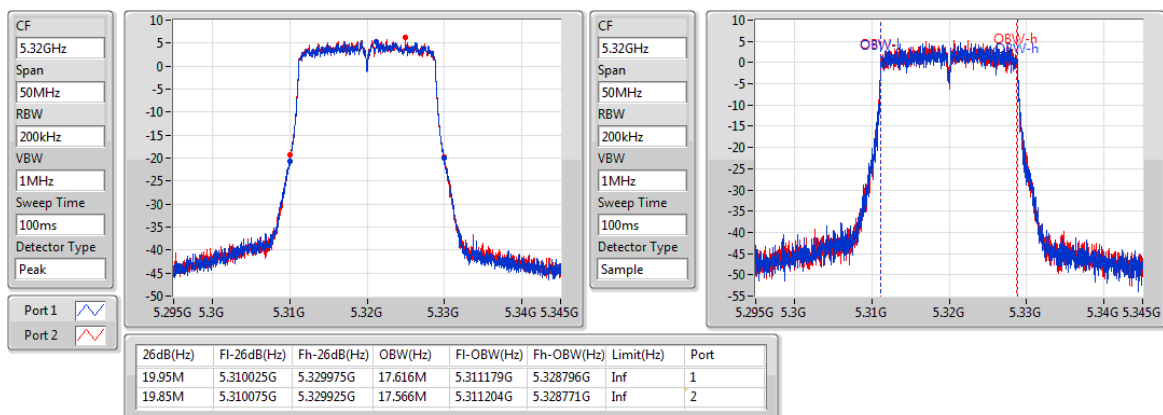


802.11ac VHT20_Nss1,(MCS0)_2TX
EBW
5500MHz


08/11/2018

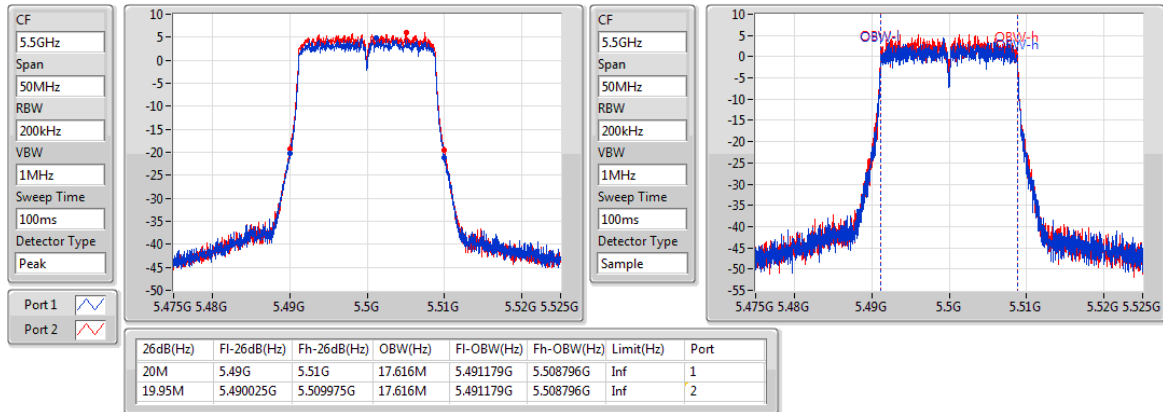
802.11ac VHT20_Nss1,(MCS0)_2TX
EBW
5580MHz

08/11/2018

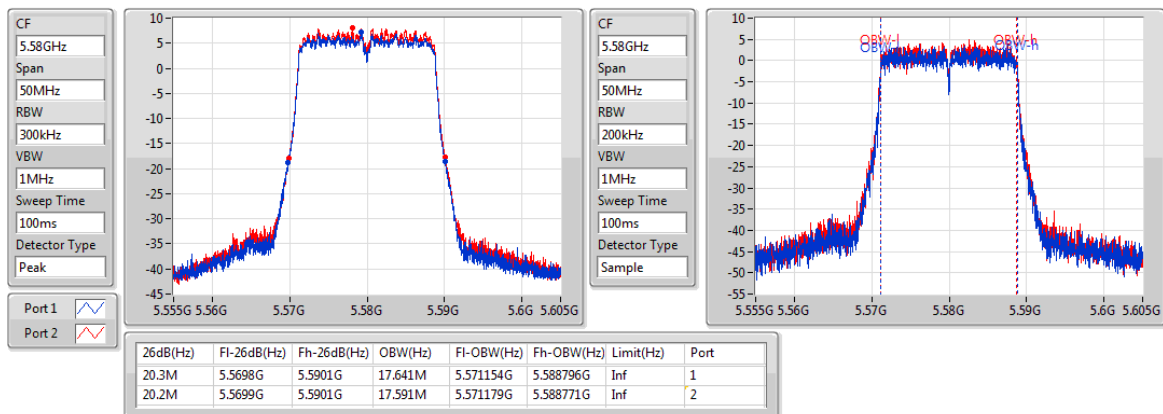

802.11ac VHT20_Nss1,(MCS0)_2TX
EBW
5700MHz

08/11/2018

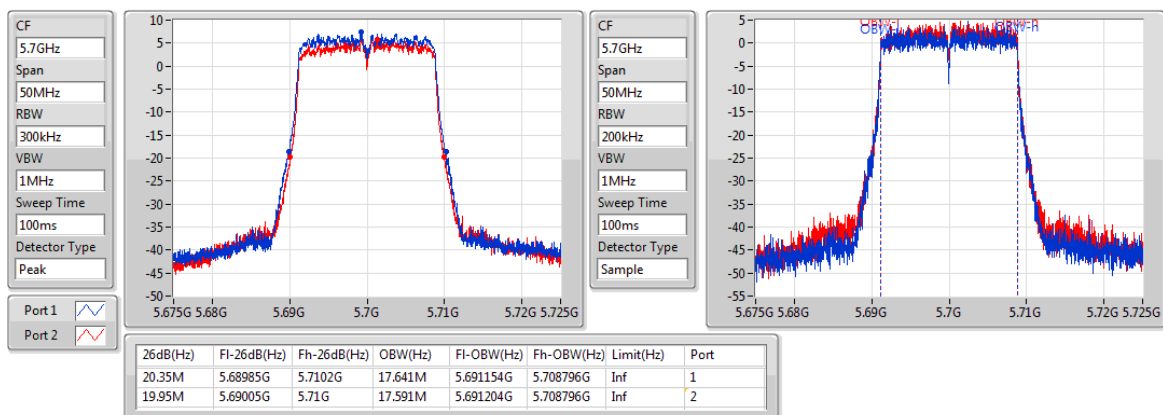


802.11ac VHT40_Nss1,(MCS0)_2TX
EBW
5270MHz


08/11/2018

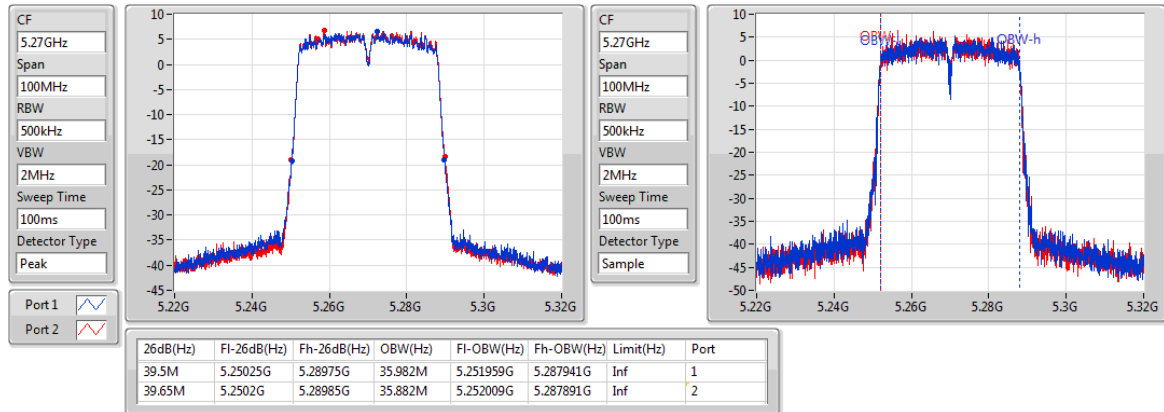
802.11ac VHT40_Nss1,(MCS0)_2TX
EBW
5310MHz

08/11/2018

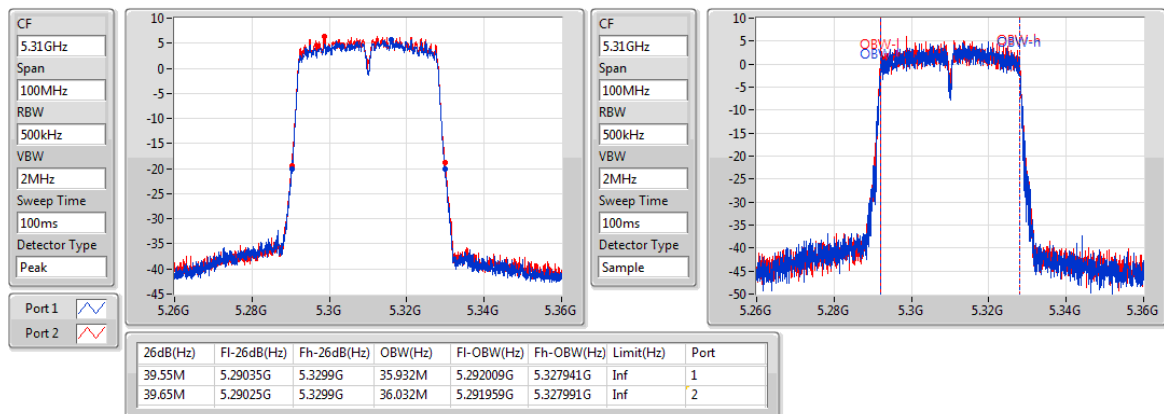

802.11ac VHT40_Nss1,(MCS0)_2TX
EBW
5510MHz

08/11/2018

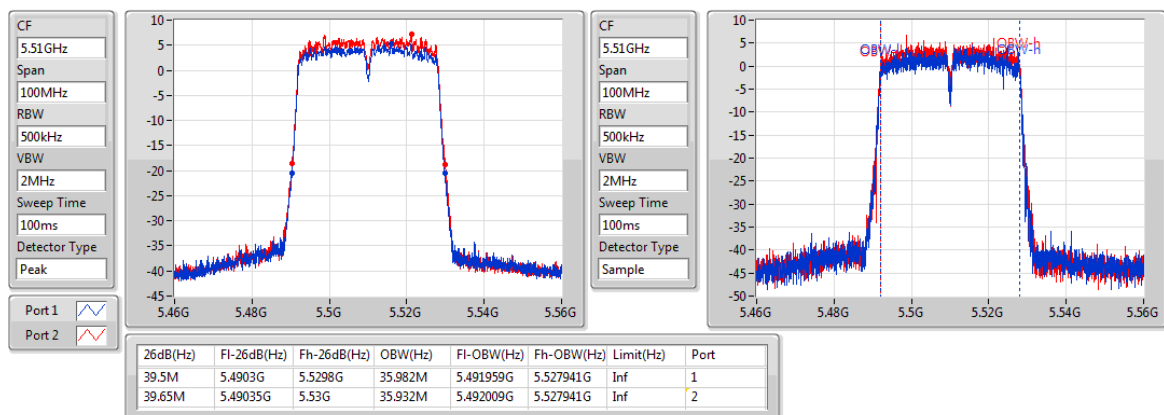


802.11ac VHT40_Nss1,(MCS0)_2TX
EBW
5550MHz


08/11/2018

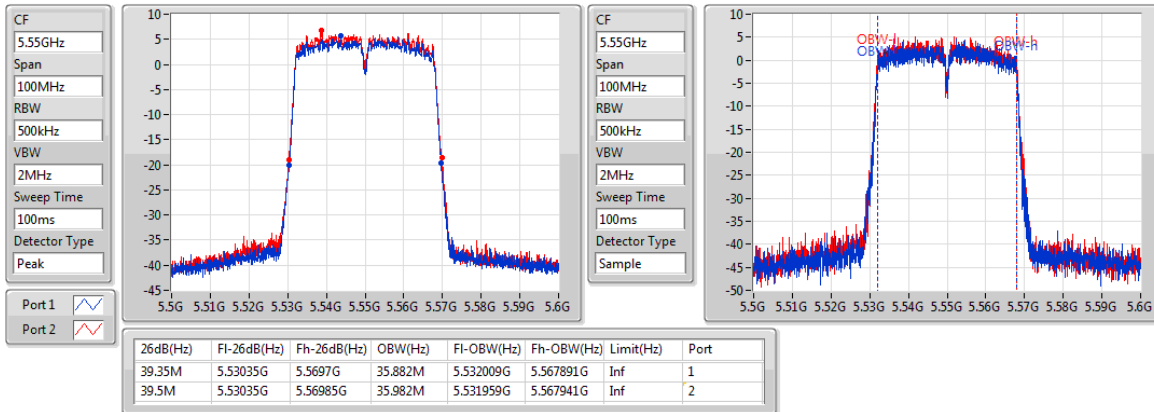
802.11ac VHT40_Nss1,(MCS0)_2TX
EBW
5670MHz

08/11/2018

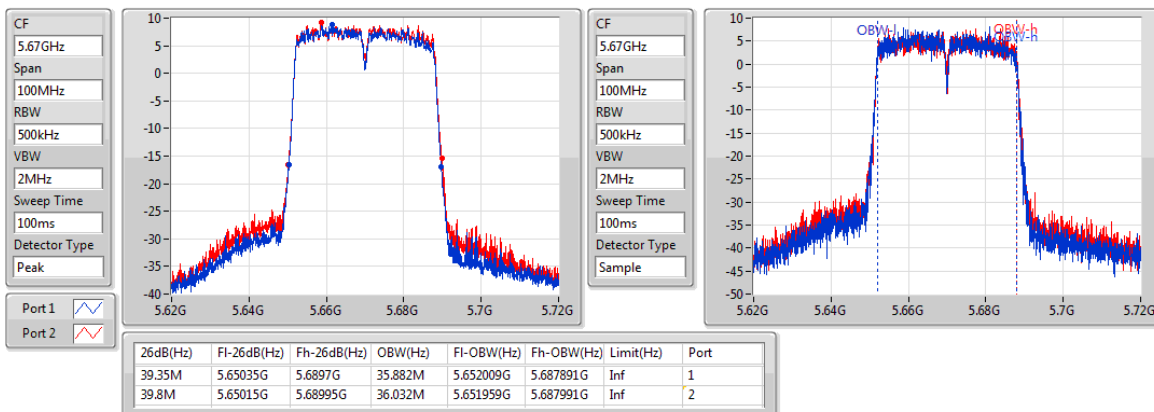

802.11ac VHT80_Nss1,(MCS0)_2TX
EBW
5290MHz

08/11/2018

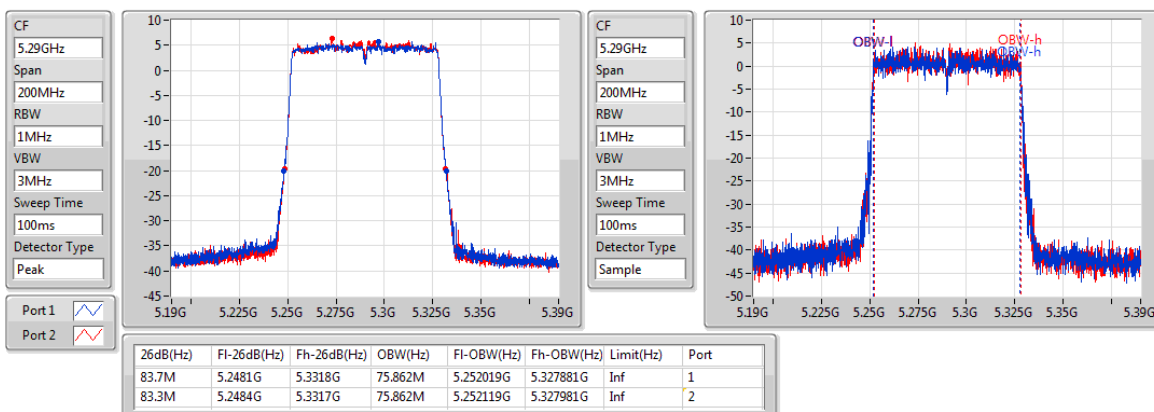


802.11ac VHT80_Nss1,(MCS0)_2TX
EBW
5530MHz

08/11/2018

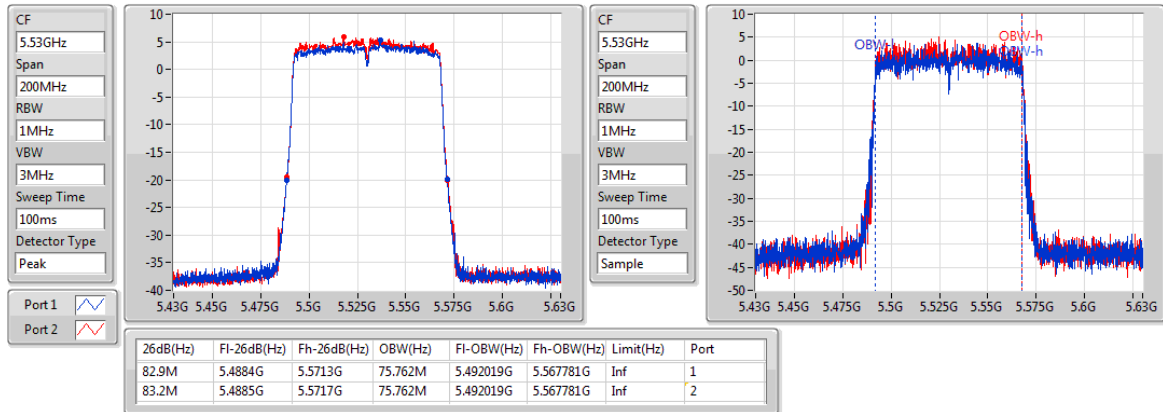
802.11ac VHT80_Nss1,(MCS0)_2TX
EBW
5610MHz

08/11/2018

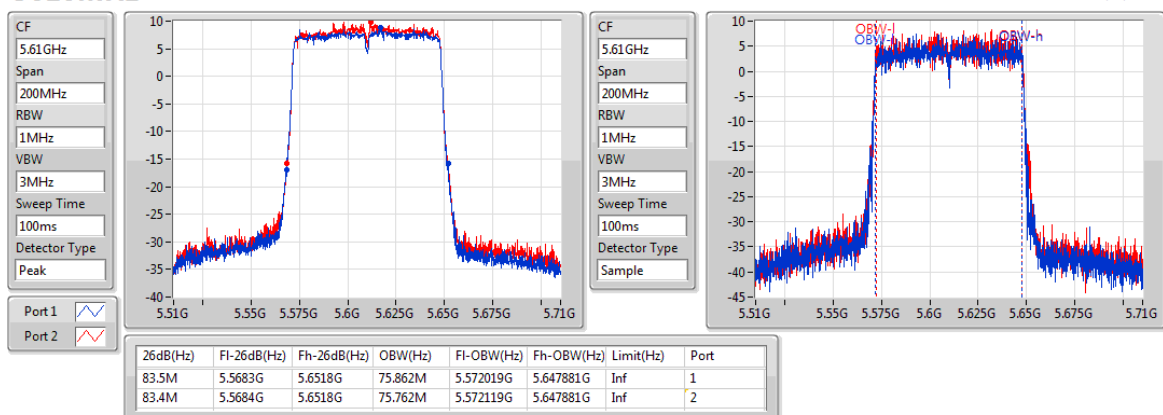

Summary

Mode	Total Power (dBm)	Total Power (W)
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	19.92	0.09817
802.11ac VHT20_Nss1,(MCS0)_2TX	19.96	0.09908
802.11ac VHT40_Nss1,(MCS0)_2TX	19.01	0.07962
802.11ac VHT80_Nss1,(MCS0)_2TX	17.82	0.06053
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	18.76	0.07516
802.11ac VHT20_Nss1,(MCS0)_2TX	19.28	0.08472
802.11ac VHT40_Nss1,(MCS0)_2TX	20.95	0.12445
802.11ac VHT80_Nss1,(MCS0)_2TX	20.89	0.12274

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5260MHz	Pass	8.90	16.79	16.83	19.82	20.86
5300MHz	Pass	8.90	16.75	17.07	19.92	20.88
5320MHz	Pass	8.90	16.37	16.42	19.41	20.84
5500MHz	Pass	8.90	15.51	15.97	18.76	20.89
5580MHz	Pass	8.90	15.22	15.65	18.45	20.86
5700MHz	Pass	8.90	15.19	15.53	18.37	20.84
802.11ac VHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5260MHz	Pass	8.90	16.86	16.98	19.93	21.08
5300MHz	Pass	8.90	16.78	17.12	19.96	21.08
5320MHz	Pass	8.90	16.51	16.58	19.56	21.08
5500MHz	Pass	8.90	15.94	16.41	19.19	21.08
5580MHz	Pass	8.90	15.75	16.29	19.04	21.08
5700MHz	Pass	8.90	15.84	16.66	19.28	21.08
802.11ac VHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5270MHz	Pass	8.90	15.97	16.02	19.01	21.08
5310MHz	Pass	8.90	15.28	15.66	18.48	21.08
5510MHz	Pass	8.90	15.44	16.15	18.82	21.08
5550MHz	Pass	8.90	15.14	15.78	18.48	21.08
5670MHz	Pass	8.90	17.61	18.24	20.95	21.08
802.11ac VHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5290MHz	Pass	8.90	14.81	14.80	17.82	21.08
5530MHz	Pass	8.90	13.58	14.27	16.95	21.08
5610MHz	Pass	8.90	17.62	18.13	20.89	21.08

DG = Directional Gain; **Port X** = Port X output power

Summary

Mode	PD (dBm/RBW)
5.25-5.35GHz	-
802.11a_Nss1,(6Mbps)_2TX	7.01
802.11ac VHT20_Nss1,(MCS0)_2TX	6.99
802.11ac VHT40_Nss1,(MCS0)_2TX	3.34
802.11ac VHT80_Nss1,(MCS0)_2TX	-1.53
5.47-5.725GHz	-
802.11a_Nss1,(6Mbps)_2TX	6.09
802.11ac VHT20_Nss1,(MCS0)_2TX	6.45
802.11ac VHT40_Nss1,(MCS0)_2TX	5.43
802.11ac VHT80_Nss1,(MCS0)_2TX	1.92

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5260MHz	Pass	8.90	4.00	4.11	7.01	8.10
5300MHz	Pass	8.90	3.81	4.22	6.98	8.10
5320MHz	Pass	8.90	3.70	3.81	6.64	8.10
5500MHz	Pass	8.90	2.67	3.62	6.09	8.10
5580MHz	Pass	8.90	2.52	3.18	5.74	8.10
5700MHz	Pass	8.90	2.19	3.16	5.59	8.10
802.11ac VHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5260MHz	Pass	8.90	4.01	4.05	6.99	8.10
5300MHz	Pass	8.90	3.71	4.24	6.92	8.10
5320MHz	Pass	8.90	3.56	3.83	6.63	8.10
5500MHz	Pass	8.90	2.86	3.98	6.39	8.10
5580MHz	Pass	8.90	2.48	3.53	6.04	8.10
5700MHz	Pass	8.90	2.86	4.06	6.45	8.10
802.11ac VHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5270MHz	Pass	8.90	0.38	0.40	3.34	8.10
5310MHz	Pass	8.90	-0.26	-0.03	2.87	8.10
5510MHz	Pass	8.90	-0.87	0.42	2.77	8.10
5550MHz	Pass	8.90	-1.00	-0.23	2.29	8.10
5670MHz	Pass	8.90	2.61	2.43	5.43	8.10
802.11ac VHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5290MHz	Pass	8.90	-4.52	-4.25	-1.53	8.10
5530MHz	Pass	8.90	-4.86	-4.49	-1.77	8.10
5610MHz	Pass	8.90	-1.27	-0.72	1.92	8.10

DG = Directional Gain; **RBW** = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port Xpower density;


802.11a_Nss1,(6Mbps)_2TX

PSD

5260MHz

08/11/2018

CF
5.26GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS

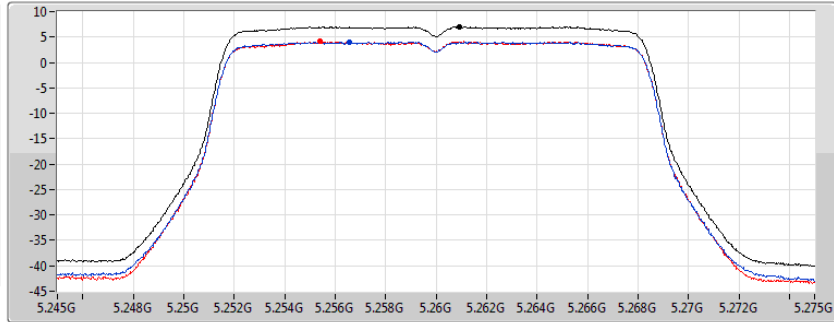

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.01	7.01	4.00	4.11


802.11a_Nss1,(6Mbps)_2TX

PSD

5300MHz

08/11/2018

CF
5.3GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS

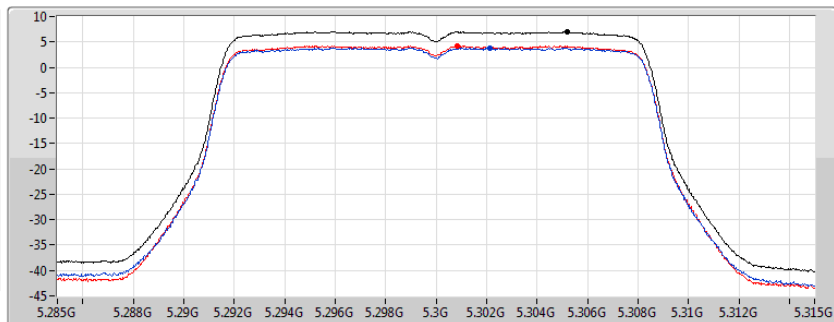

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.98	6.98	3.81	4.22


802.11a_Nss1,(6Mbps)_2TX

PSD

5320MHz

08/11/2018

CF
5.32GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS

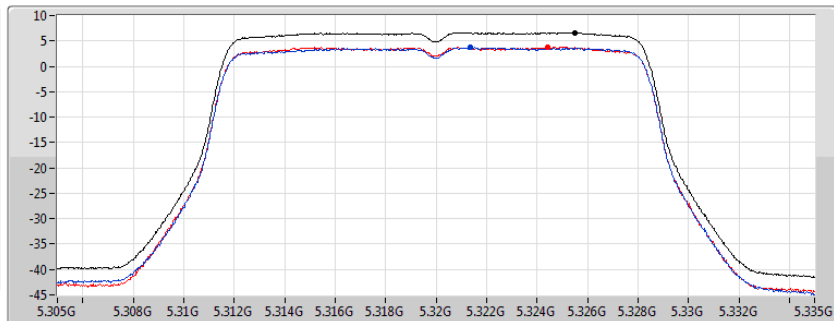

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.64	6.64	3.70	3.81

802.11a_Nss1,(6Mbps)_2TX

PSD

5500MHz

08/11/2018

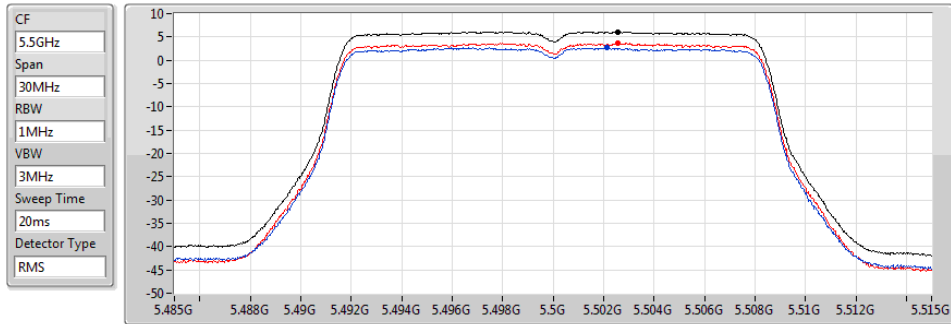


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.09	6.09	2.67	3.62

802.11a_Nss1,(6Mbps)_2TX

PSD

5580MHz

08/11/2018

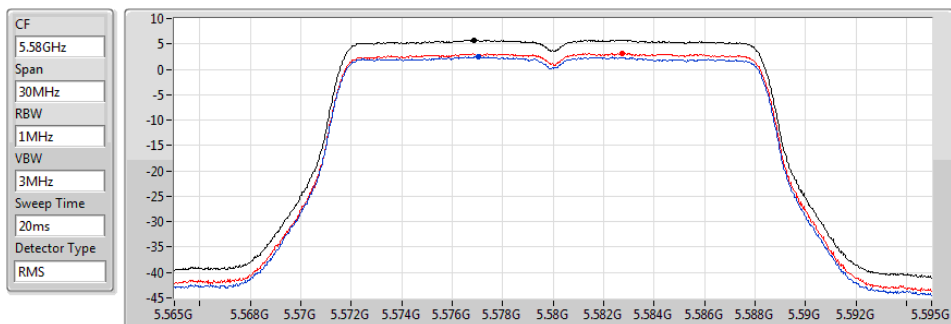


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.74	5.74	2.52	3.18

802.11a_Nss1,(6Mbps)_2TX

PSD

5700MHz

08/11/2018

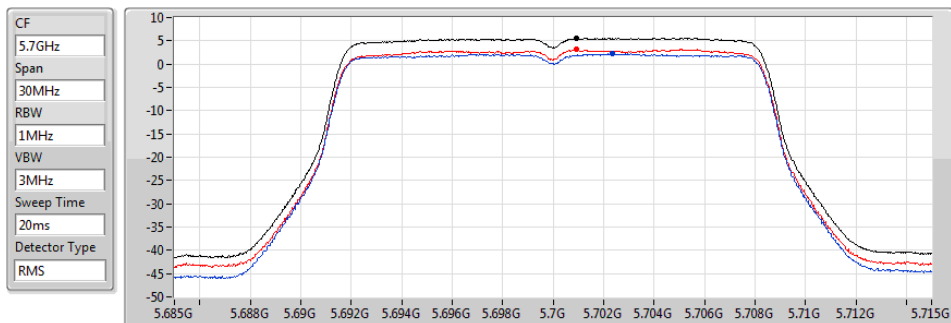


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.59	5.59	2.19	3.16

802.11ac VHT20_Nss1,(MCS0)_2TX

PSD

5260MHz

08/11/2018

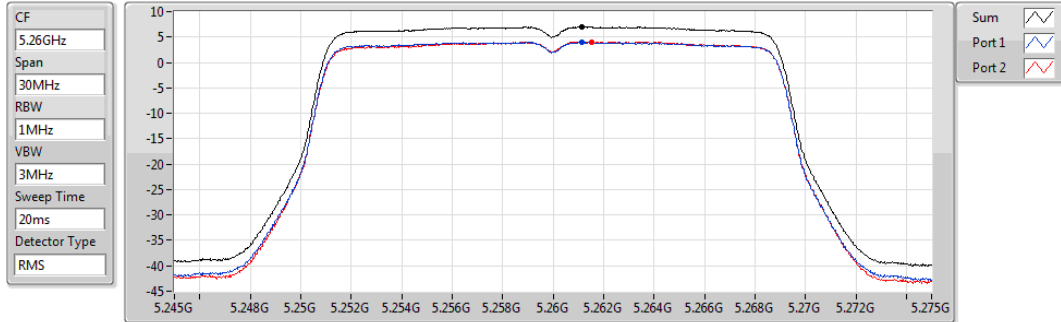


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.99	6.99	4.01	4.05

802.11ac VHT20_Nss1,(MCS0)_2TX

PSD

5300MHz

08/11/2018

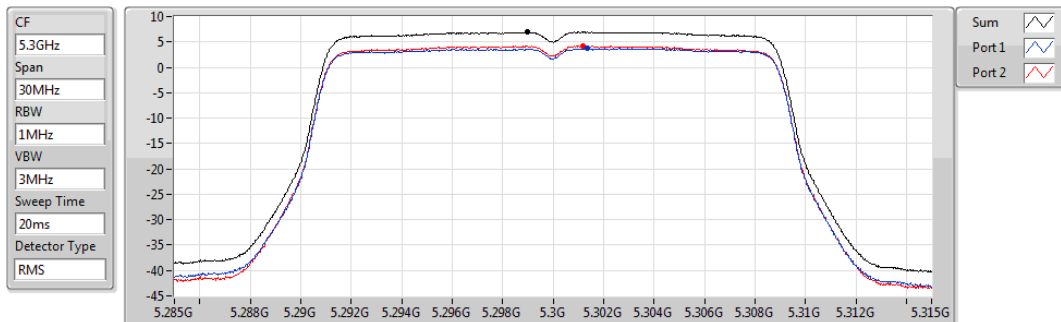


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.92	6.92	3.71	4.24

802.11ac VHT20_Nss1,(MCS0)_2TX

PSD

5320MHz

08/11/2018

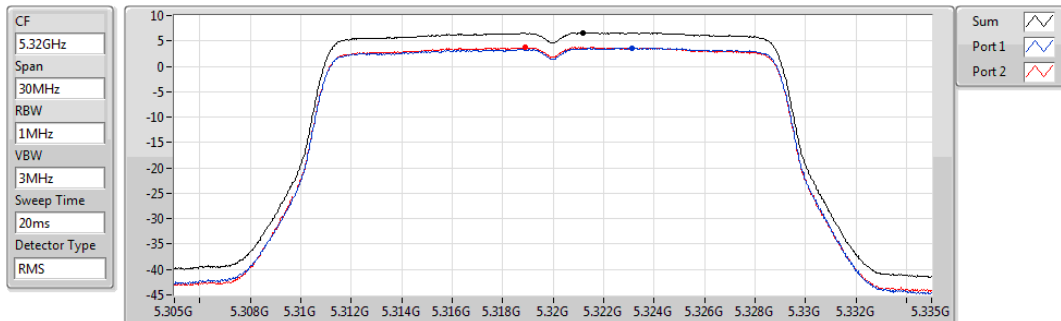


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.63	6.63	3.56	3.83

802.11ac VHT20_Nss1,(MCS0)_2TX

PSD

5500MHz

08/11/2018

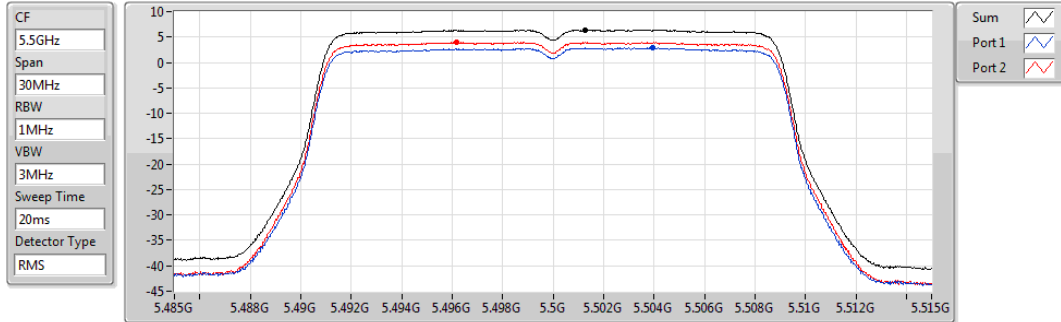


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.39	6.39	2.86	3.98

802.11ac VHT20_Nss1,(MCS0)_2TX

PSD

5580MHz

08/11/2018

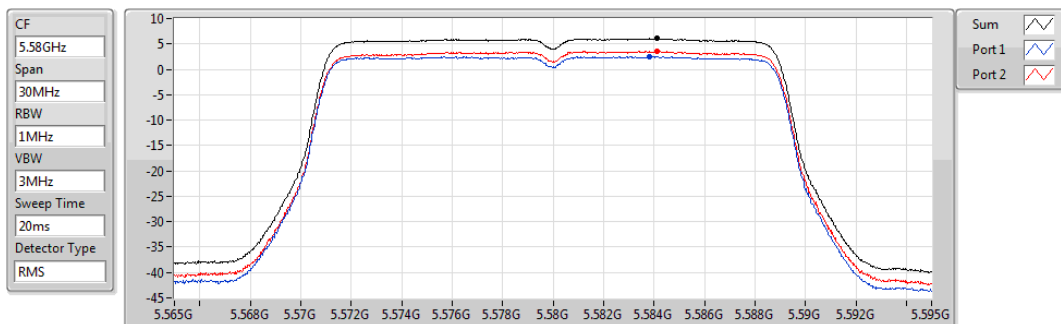


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.04	6.04	2.48	3.53

802.11ac VHT20_Nss1,(MCS0)_2TX

PSD

5700MHz

08/11/2018

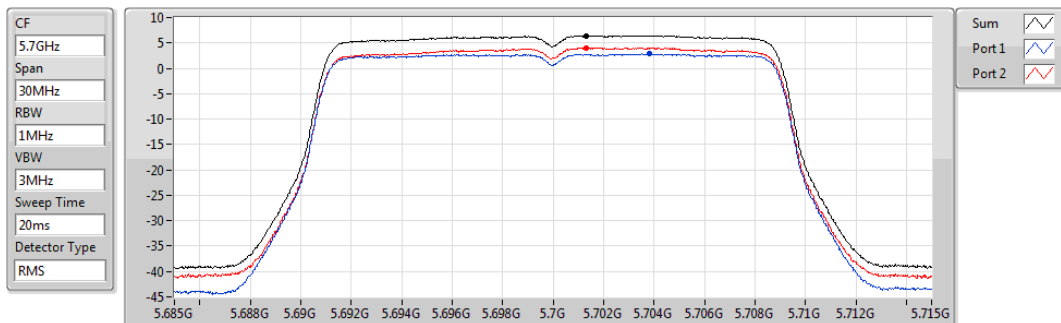


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.45	6.45	2.86	4.06

802.11ac VHT40_Nss1,(MCS0)_2TX

PSD

5270MHz

08/11/2018

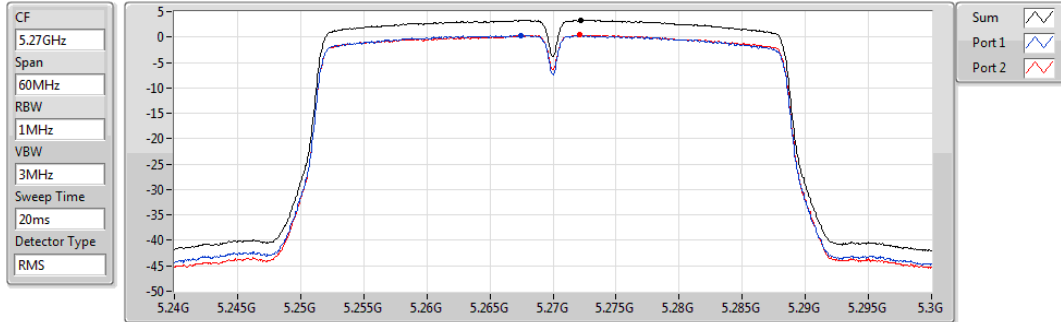


802.11ac VHT40_Nss1,(MCS0)_2TX

PSD

5310MHz

08/11/2018

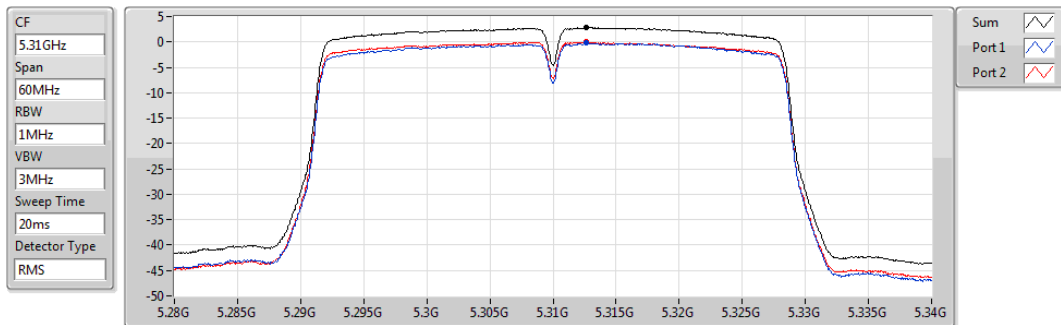


802.11ac VHT40_Nss1,(MCS0)_2TX

PSD

5510MHz

08/11/2018

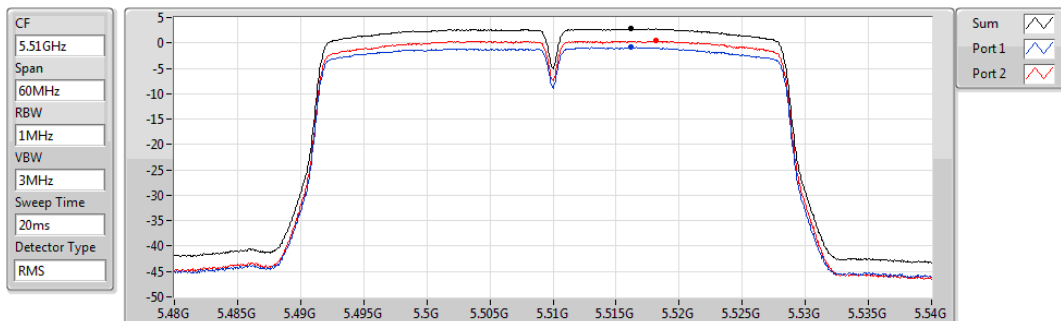


802.11ac VHT40_Nss1,(MCS0)_2TX

PSD

5550MHz

08/11/2018

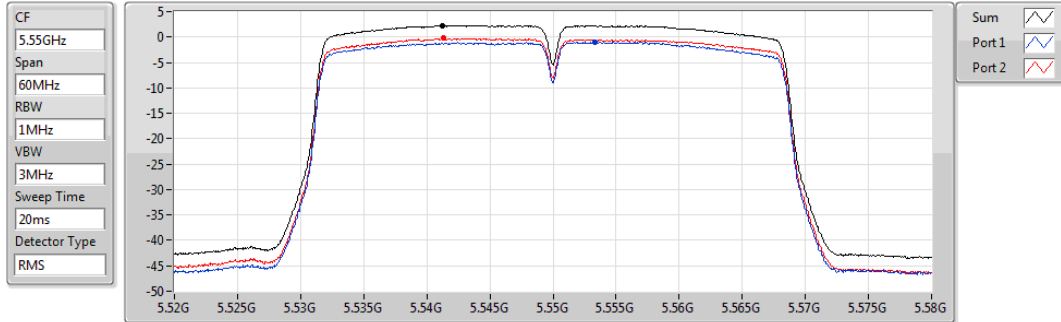


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.29	2.29	-1.00	-0.23

802.11ac VHT40_Nss1,(MCS0)_2TX

PSD

5670MHz

08/11/2018

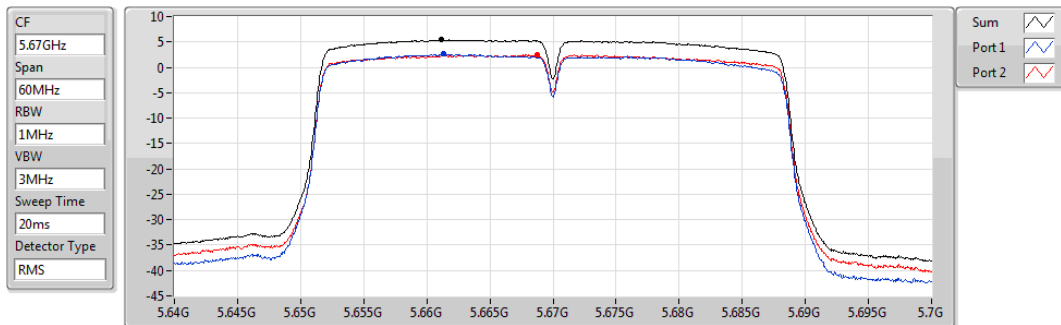


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.43	5.43	2.61	2.43

802.11ac VHT80_Nss1,(MCS0)_2TX

PSD

5290MHz

08/11/2018

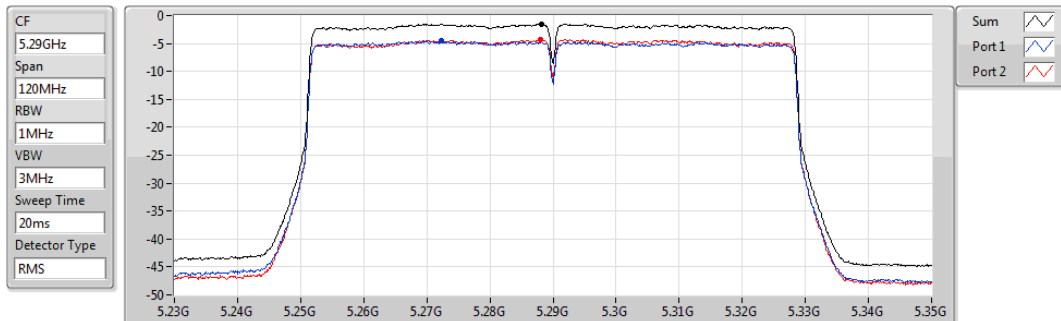


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.53	-1.53	-4.52	-4.25

802.11ac VHT80_Nss1,(MCS0)_2TX

PSD

5530MHz

08/11/2018

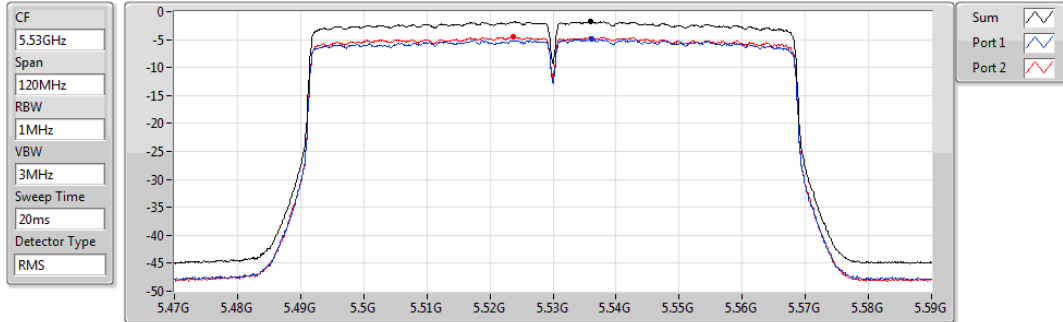


Sum	PD	Port 1	Port 2
(dBm/100Hz)	(dBm/100Hz)	(dBm/100Hz)	(dBm/100Hz)
-1.77	-1.77	-4.86	-4.49

802.11ac VHT80_Nss1,(MCS0)_2TX

PSD

5610MHz

08/11/2018

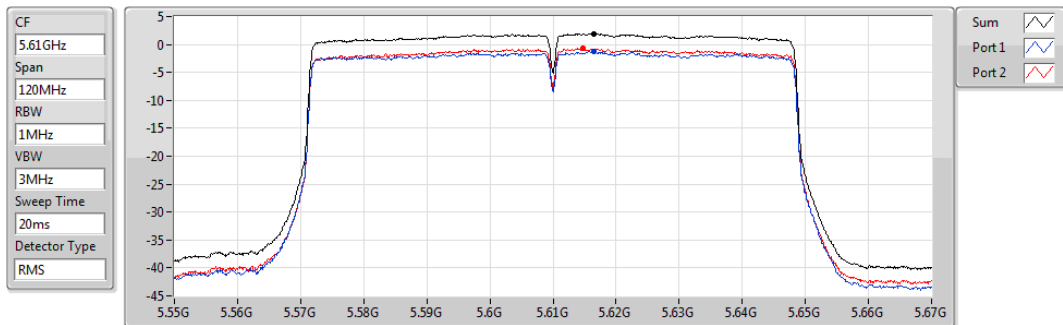

Sum	PD	Port 1	Port 2
(dBm/100Hz)	(dBm/100Hz)	(dBm/100Hz)	(dBm/100Hz)
1.92	1.92	-1.27	-0.72

**Summary**


Mode	Result	F-Start (Hz)	F-Stop (Hz)	RBW (Hz)	Type	Freq (Hz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	DG (dBi)	Refl (dB)	Psum (dBm)	P1 (dBm)	P2 (dBm)
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11ac VHT80_Nss1,(MCS0)_2TX	Pass	1G	8G	1M	PK	5.73025G	-27.07	-27.00	-0.07	8.90	0.00	-35.97	-40.19	-38.04

DG = Directional Gain;
PX=Port X; Psum=P1+.P2+..PX

802.11a_Nss1,(6Mbps)_2TX

5260MHz


CSE-PK

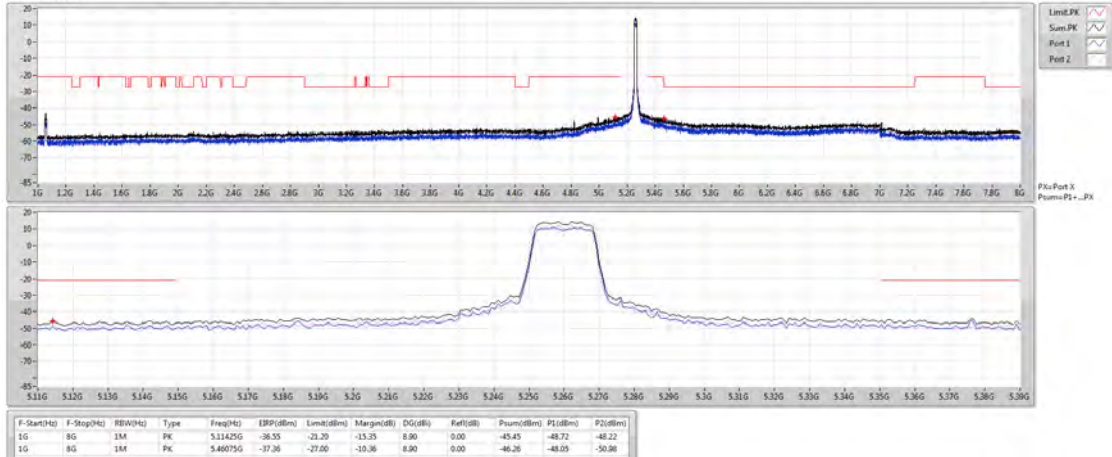

802.11a_Nss1,(6Mbps)_2TX

5260MHz


CSE-AV

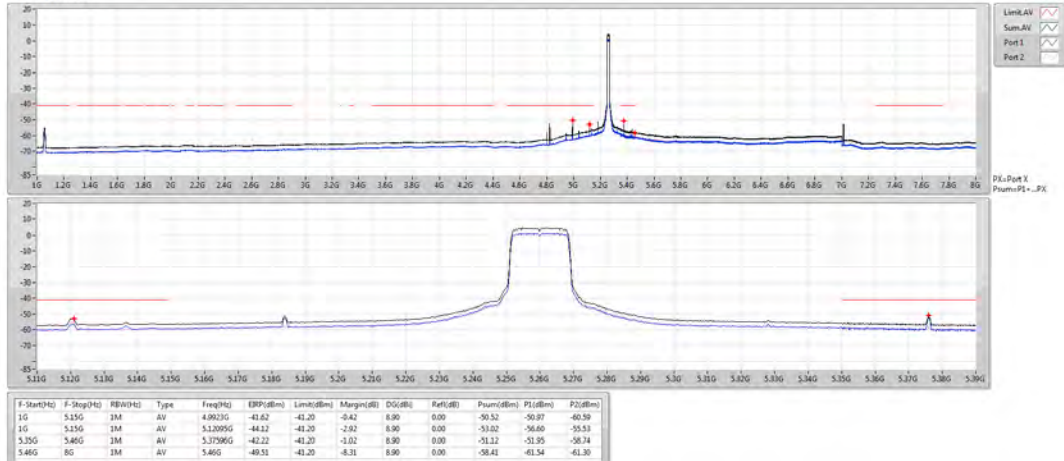

802.11a_Nss1,(6Mbps)_2TX

5300MHz

CSE-PK

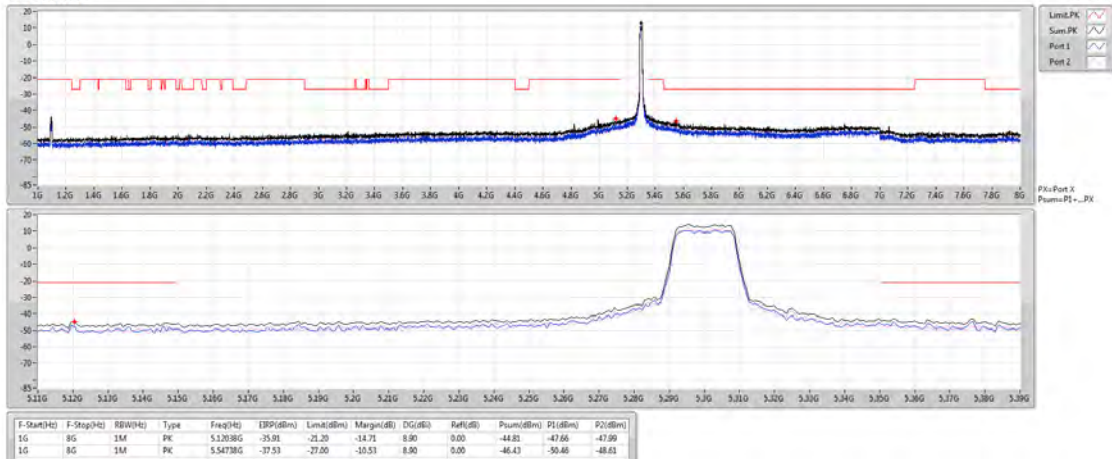


802.11a_Nss1,(6Mbps)_2TX

5300MHz

CSE-AV

01/11/2018

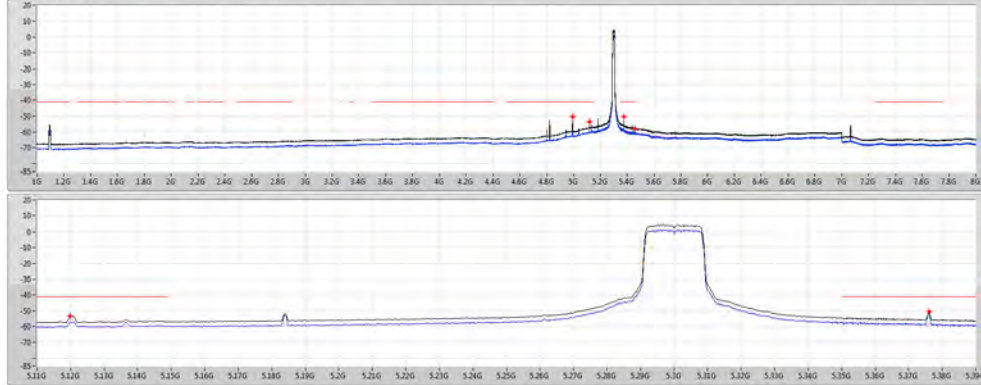


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	ERP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	5.15G	1M	AV	4.9923G	-41.46	-41.20	-0.26	8.90	0.00	-50.36	-50.93	-50.48
1G	5.15G	1M	AV	5.1198G	-44.68	-41.20	-3.48	8.90	0.00	-51.59	-57.49	-55.87
5.15G	5.40G	1M	AV	5.37607G	-41.84	-41.20	-0.64	8.90	0.00	-50.74	-51.67	-57.91
5.40G	8G	1M	AV	5.46G	-48.92	-41.20	-7.72	8.90	0.00	-57.82	-60.56	-61.11

802.11a_Nss1,(6Mbps)_2TX

5320MHz

CSE-PK

01/11/2018

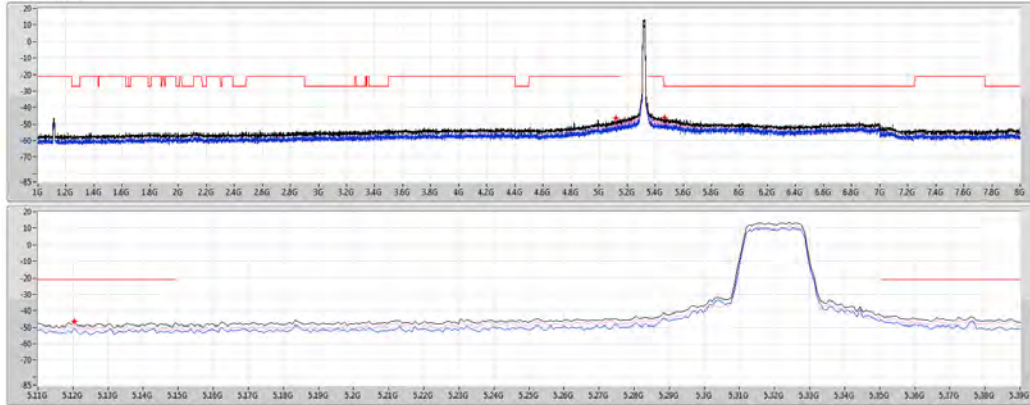


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	ERP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.12038G	-37.56	-21.20	-16.36	8.90	0.00	-46.46	-50.63	-48.56
1G	8G	1M	PK	5.46688G	-37.15	-27.00	-10.15	8.90	0.00	-46.05	-50.01	-48.38

802.11a_Nss1,(6Mbps)_2TX

5320MHz

CSE-AV

01/11/2018

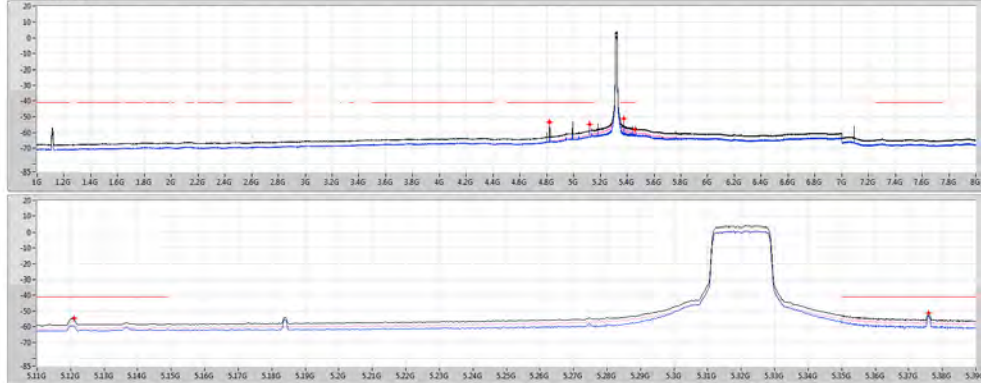


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	ERP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	5.15G	1M	AV	4.9235G	-44.38	-41.20	-3.18	8.90	0.00	-51.28	-61.24	-54.04
1G	5.15G	1M	AV	5.12095G	-45.88	-41.20	-4.68	8.90	0.00	-54.78	-59.54	-56.54
5.15G	5.40G	1M	AV	5.37985G	-42.36	-41.20	-1.16	8.90	0.00	-51.26	-52.79	-56.55
5.40G	8G	1M	AV	5.46G	-49.12	-41.20	-7.92	8.90	0.00	-58.02	-61.63	-60.50

802.11a_Nss1,(6Mbps)_2TX

5500MHz


CSE-PK

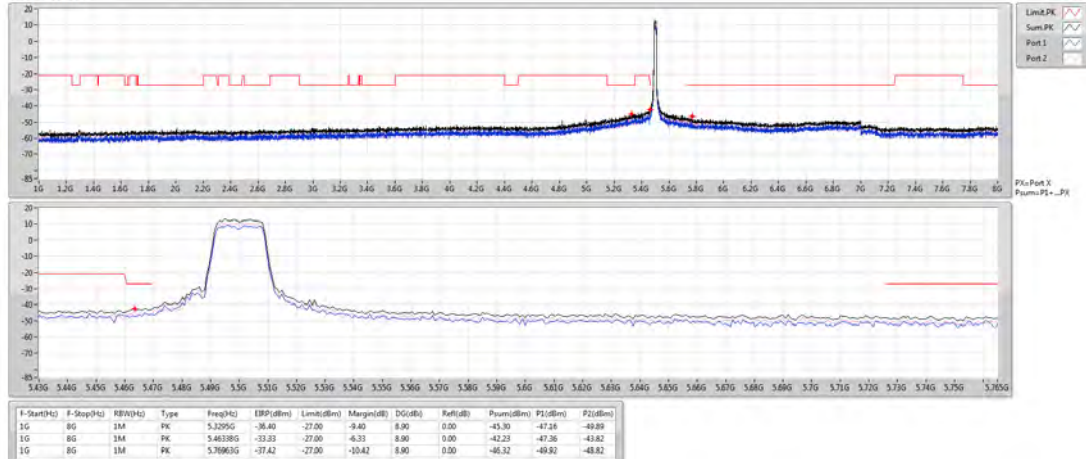

802.11a_Nss1,(6Mbps)_2TX

5500MHz


CSE-AV

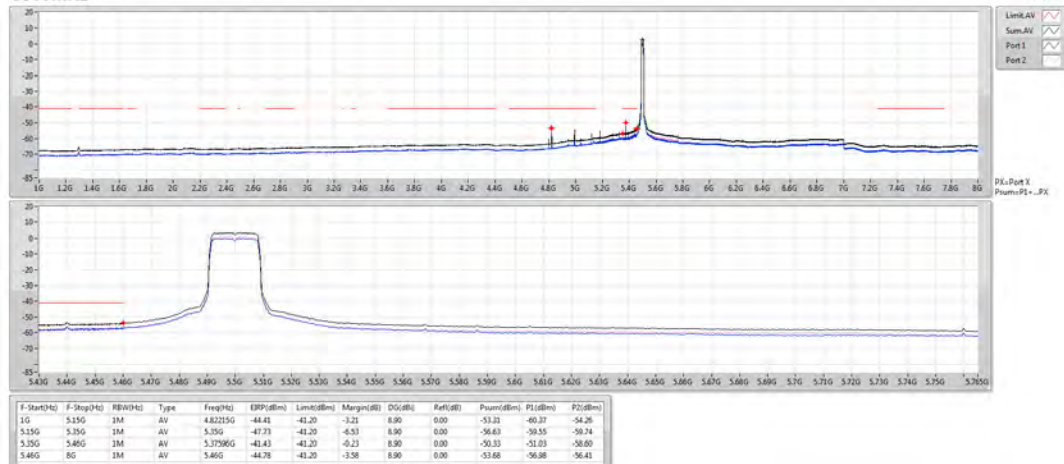

802.11a_Nss1,(6Mbps)_2TX


5580MHz

CSE-PK

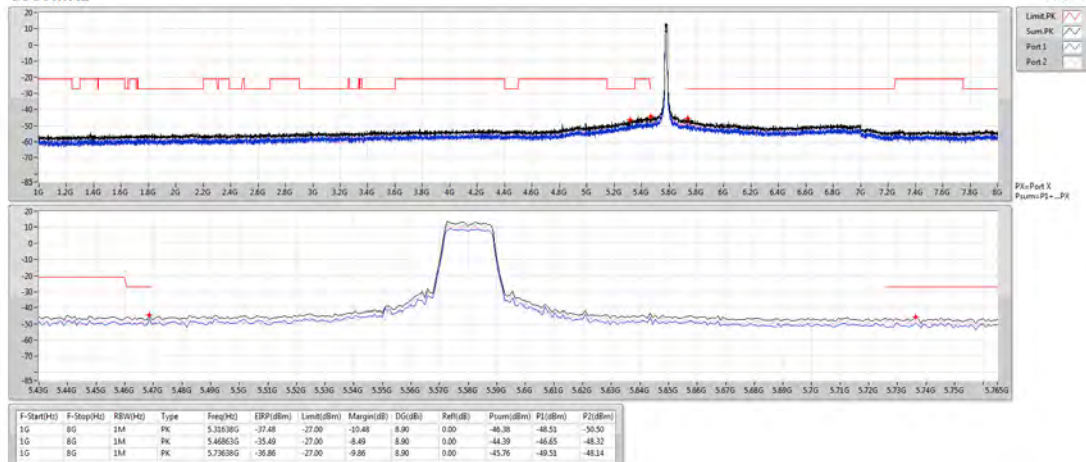


802.11a_Nss1,(6Mbps)_2TX 5580MHz

CSE-AV

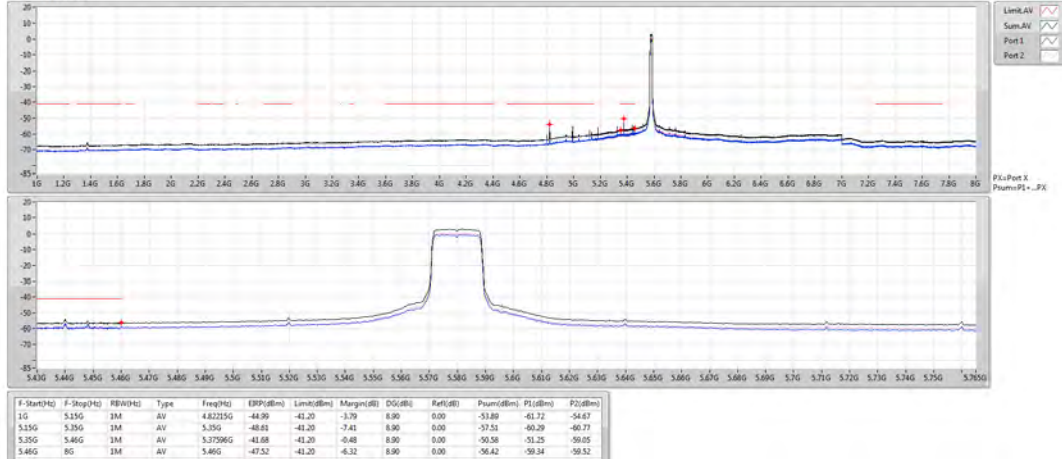


802.11a_Nss1,(6Mbps)_2TX 5700MHz

CSE-PK

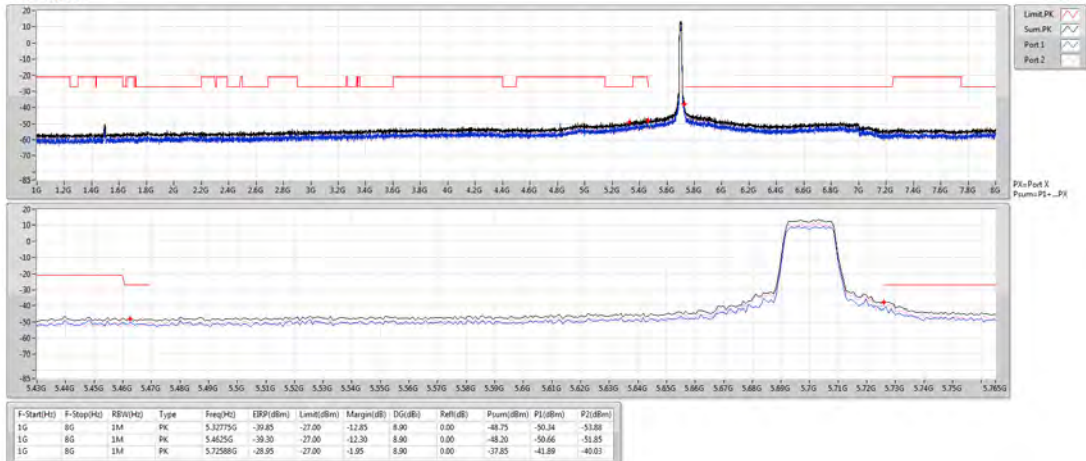


802.11a_Nss1,(6Mbps)_2TX 5700MHz

CSE-AV

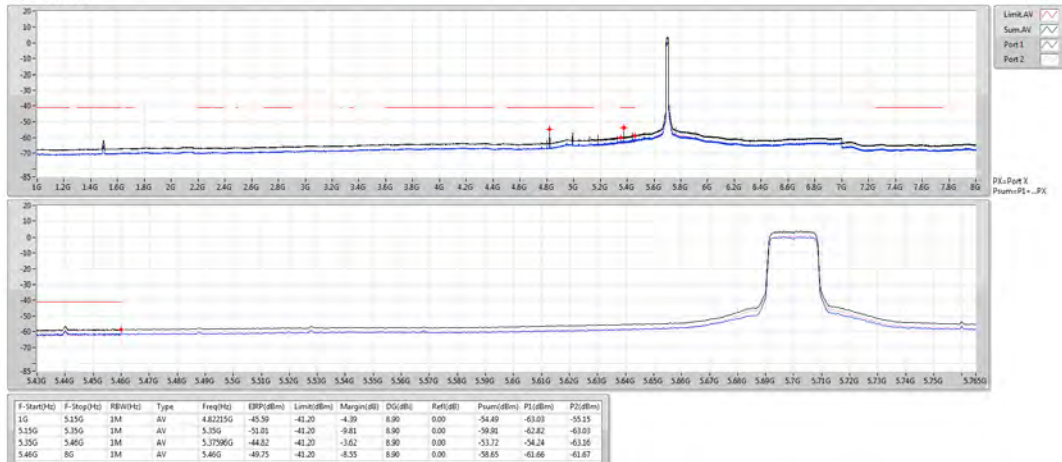


802.11ac VHT20_Nss1,(MCS0)_2TX 5260MHz

CSE-PK

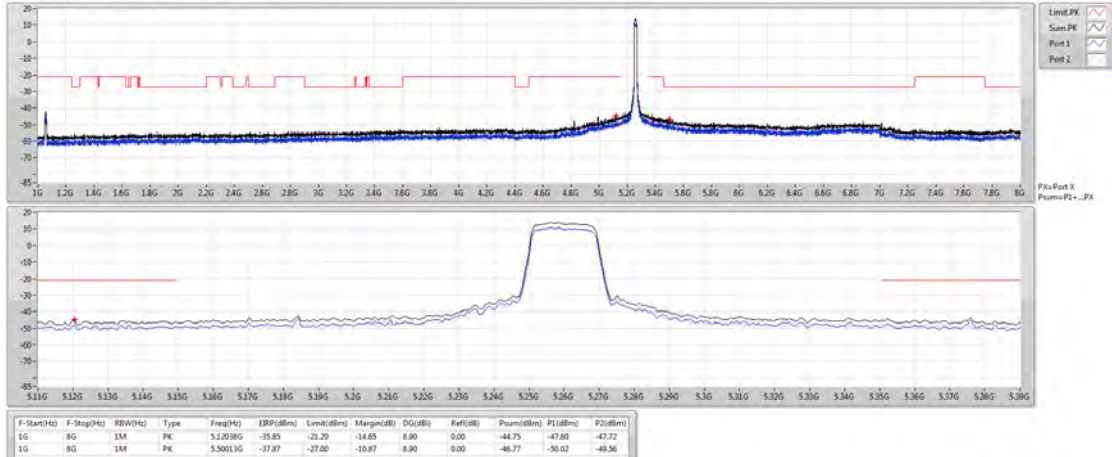


802.11ac VHT20_Nss1,(MCS0)_2TX 5260MHz

CSE-AV

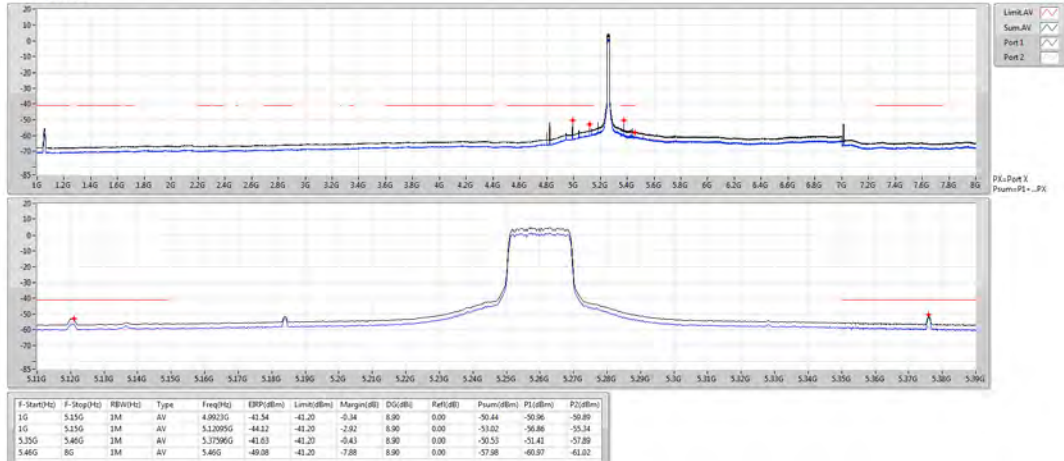


802.11ac VHT20_Nss1,(MCS0)_2TX 5300MHz

CSE-PK

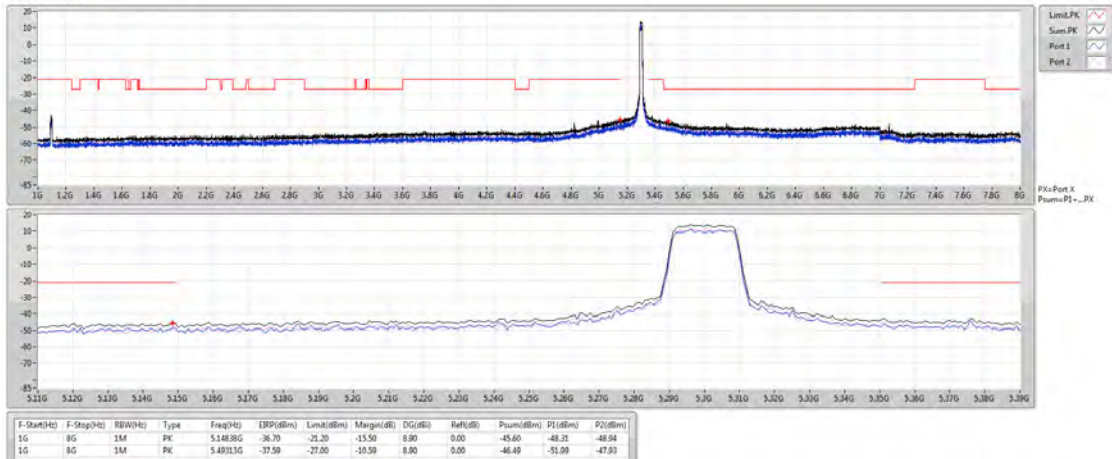


802.11ac VHT20_Nss1,(MCS0)_2TX
5300MHz

CSE-AV

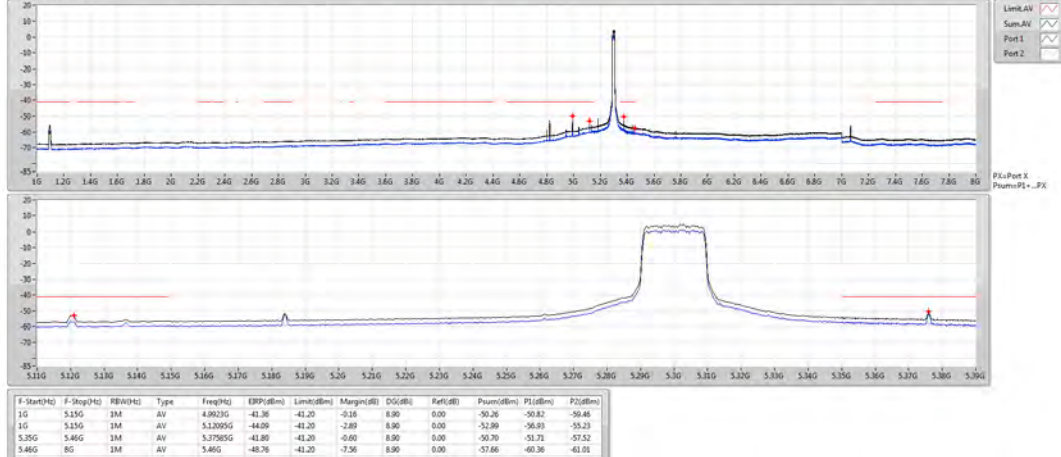


802.11ac VHT20_Nss1,(MCS0)_2TX
5320MHz

CSE-PK

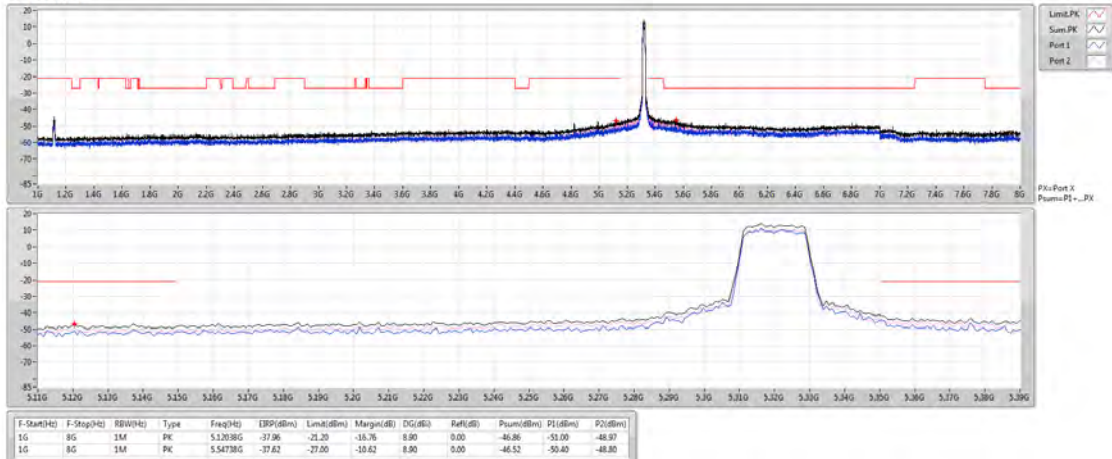


802.11ac VHT20_Nss1,(MCS0)_2TX
5320MHz

CSE-AV

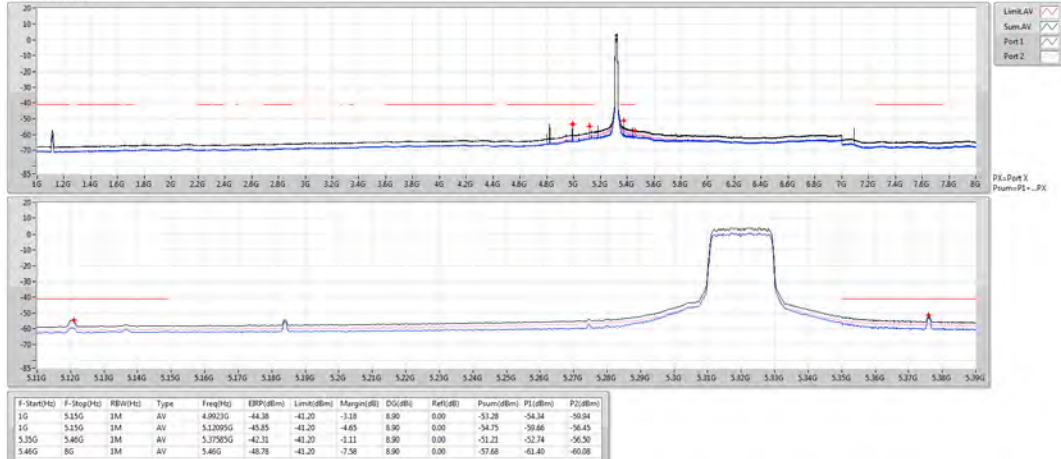


802.11ac VHT20_Nss1,(MCS0)_2TX
5500MHz

CSE-PK

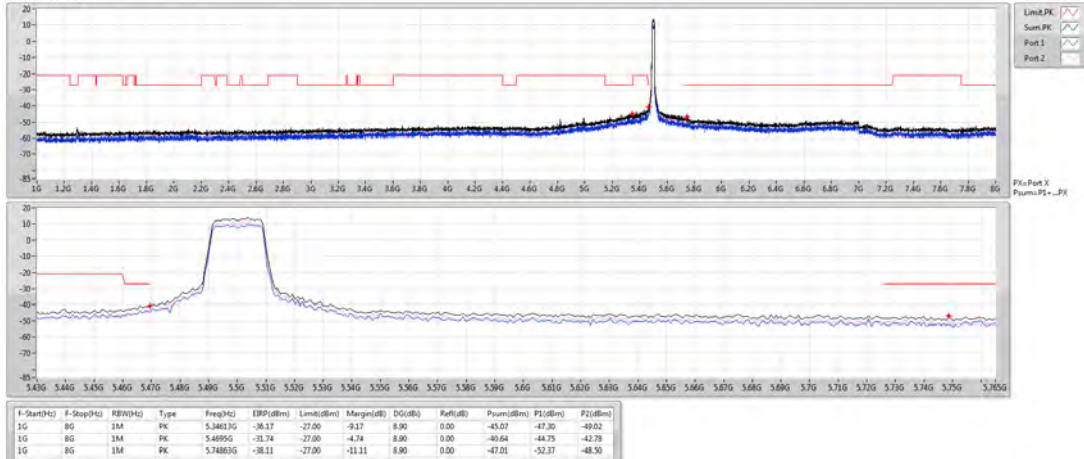


802.11ac VHT20_Nss1,(MCS0)_2TX
5500MHz

CSE-AV

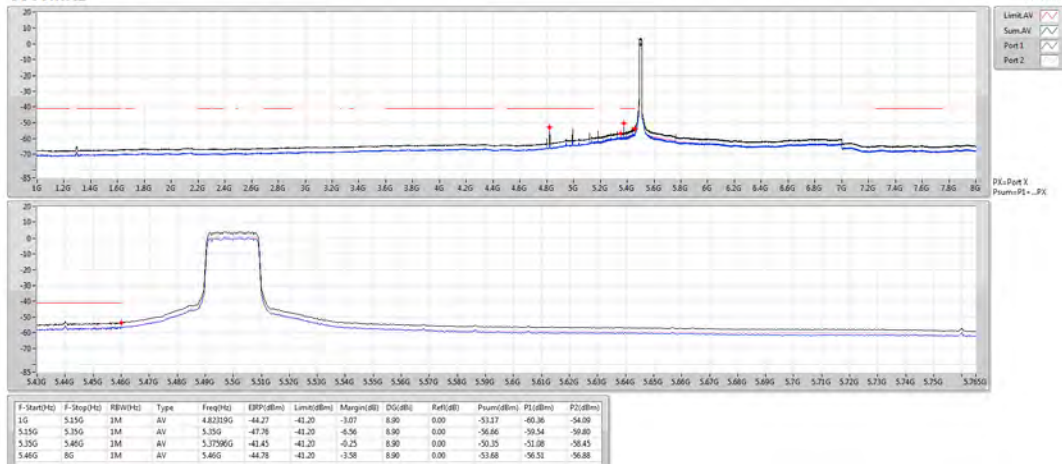


802.11ac VHT20_Nss1,(MCS0)_2TX
5580MHz

CSE-PK

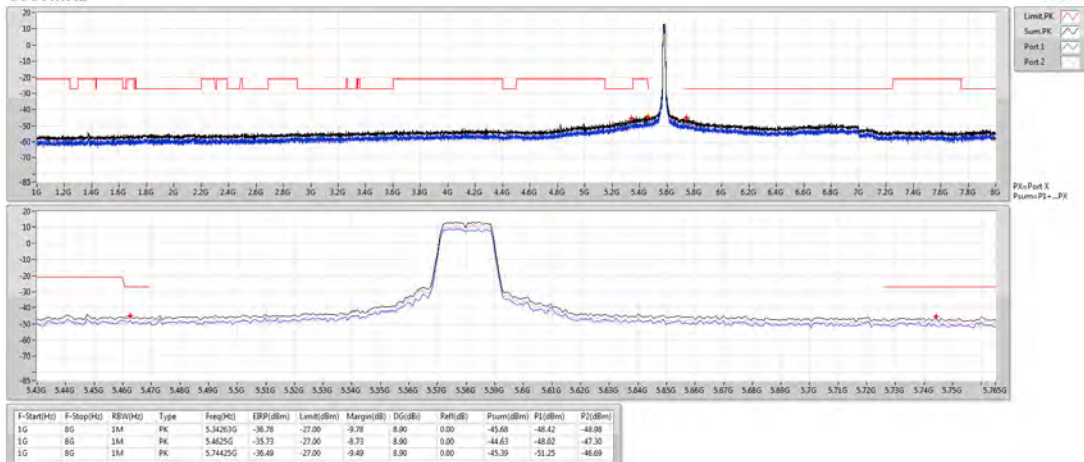


802.11ac VHT20_Nss1,(MCS0)_2TX 5580MHz

CSE-AV

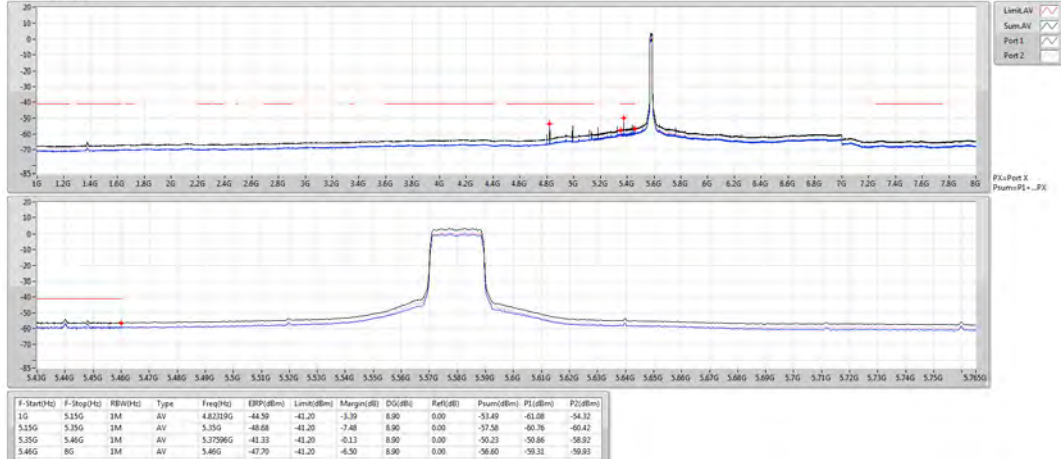


802.11ac VHT20_Nss1,(MCS0)_2TX 5700MHz

CSE-PK

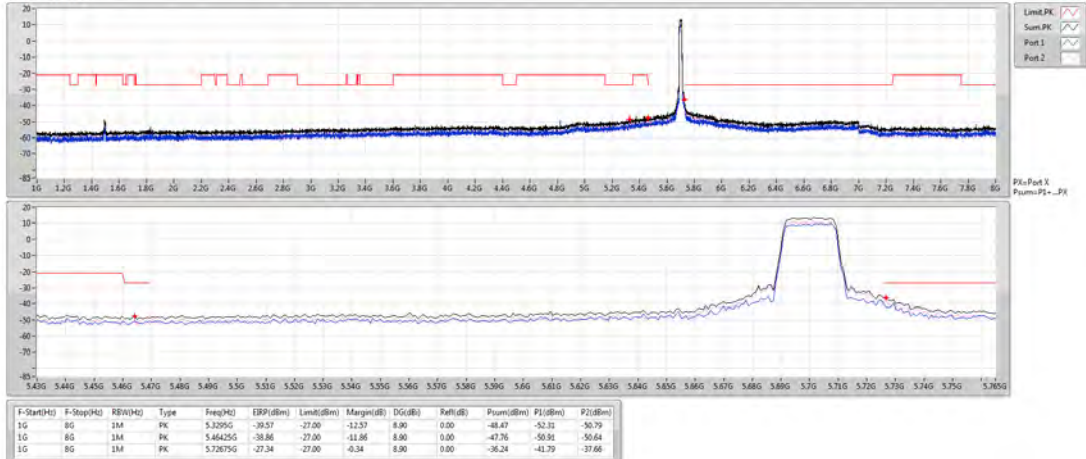


802.11ac VHT20_Nss1,(MCS0)_2TX 5700MHz

CSE-AV

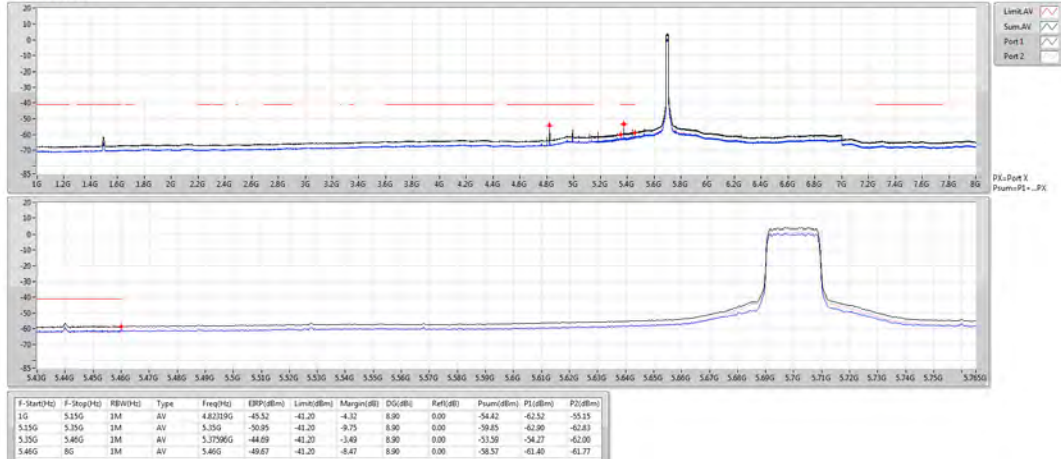


802.11ac VHT40_Nss1,(MCS0)_2TX
5270MHz

CSE-PK

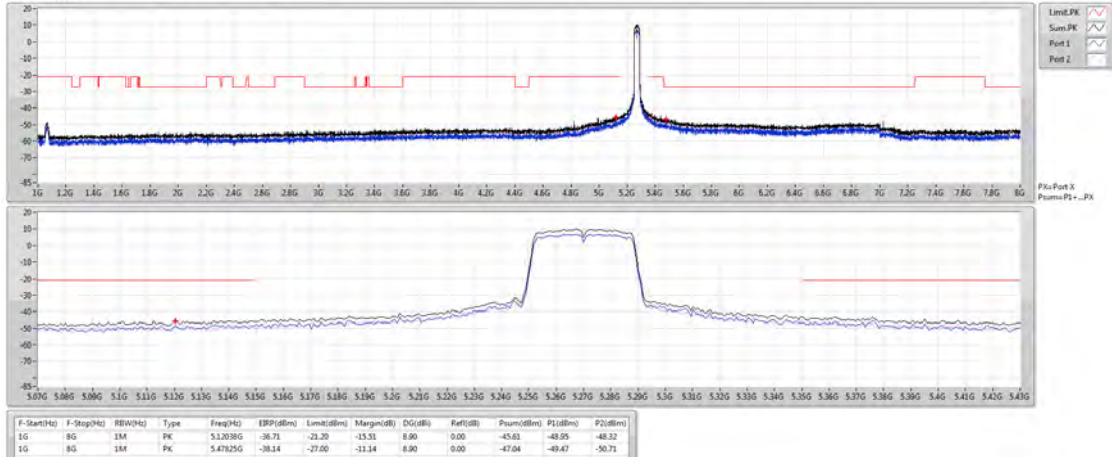


802.11ac VHT40_Nss1,(MCS0)_2TX
5270MHz

CSE-AV

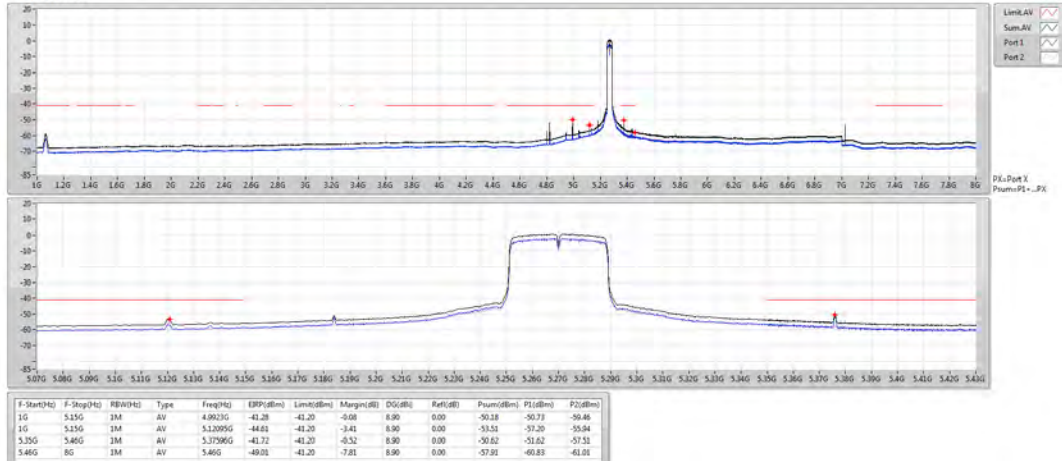


802.11ac VHT40_Nss1,(MCS0)_2TX
5310MHz

CSE-PK

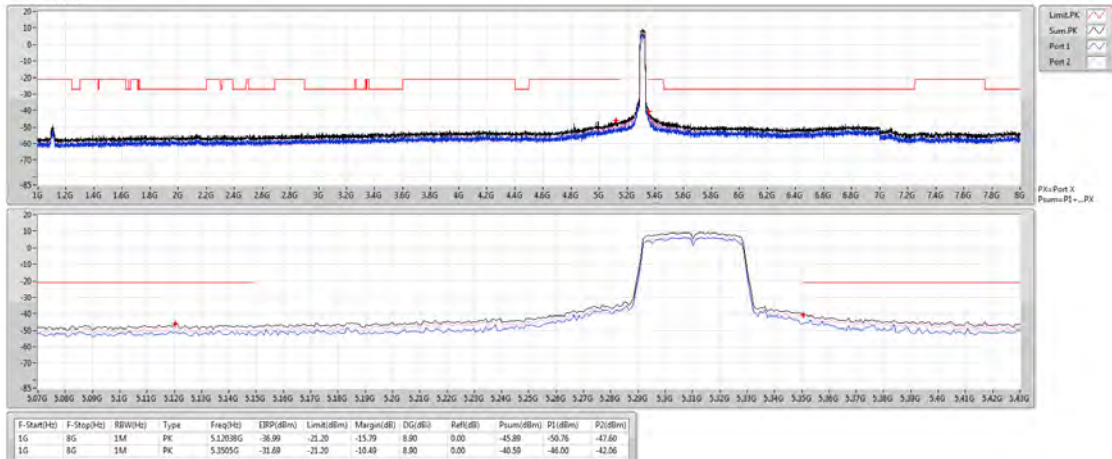


802.11ac VHT40_Nss1,(MCS0)_2TX 5310MHz

CSE-AV

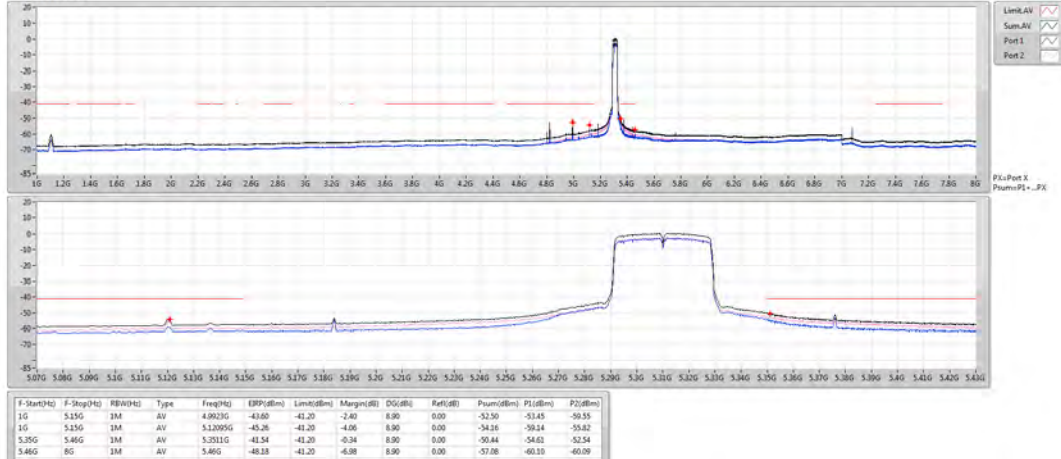


802.11ac VHT40_Nss1,(MCS0)_2TX 5510MHz

CSE-PK

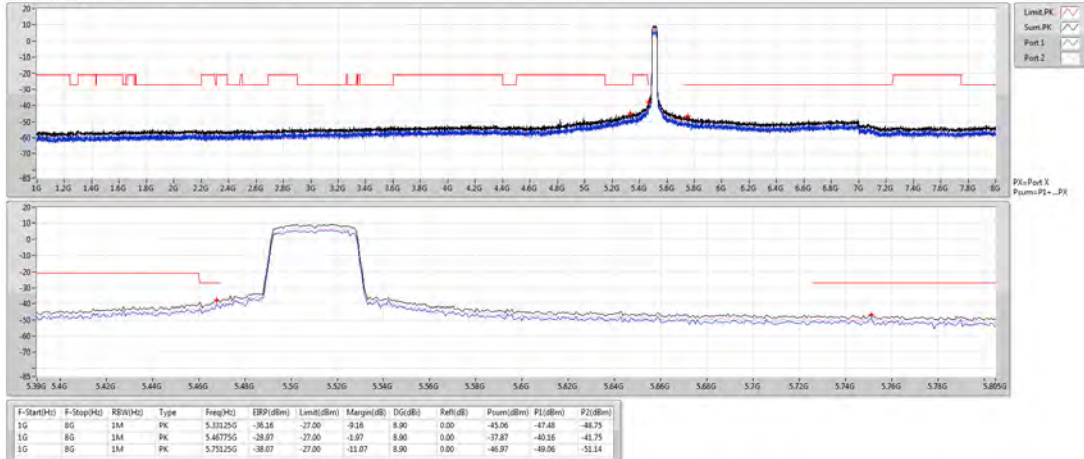


802.11ac VHT40_Nss1,(MCS0)_2TX 5510MHz

CSE-AV

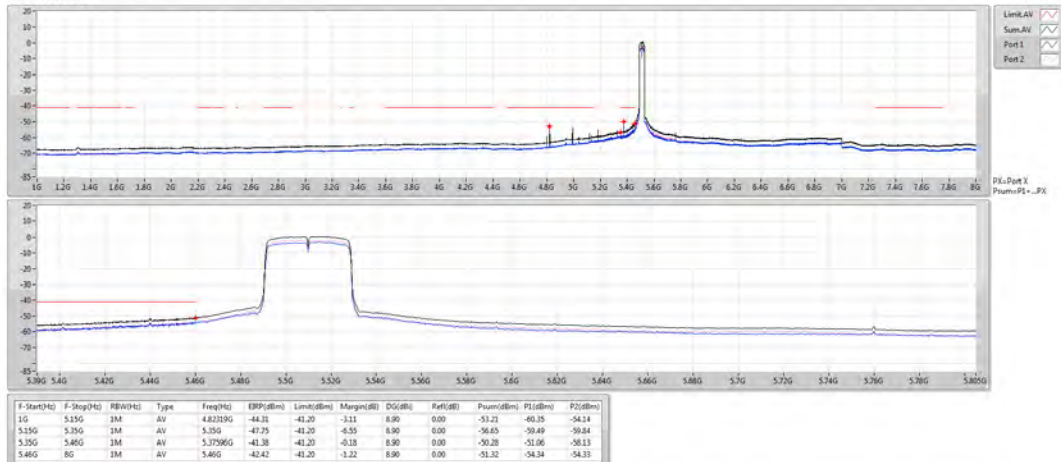


802.11ac VHT40_Nss1,(MCS0)_2TX 5550MHz

CSE-PK

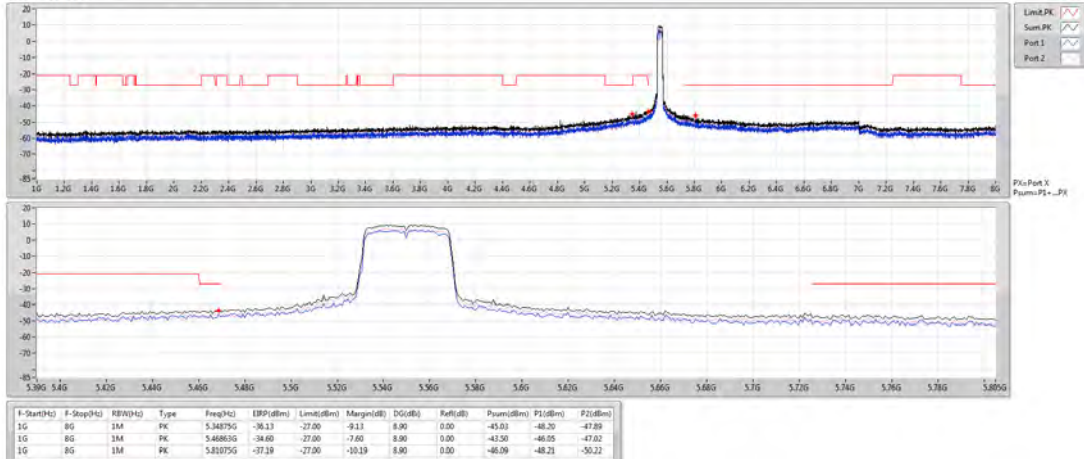


802.11ac VHT40_Nss1,(MCS0)_2TX 5550MHz

CSE-AV

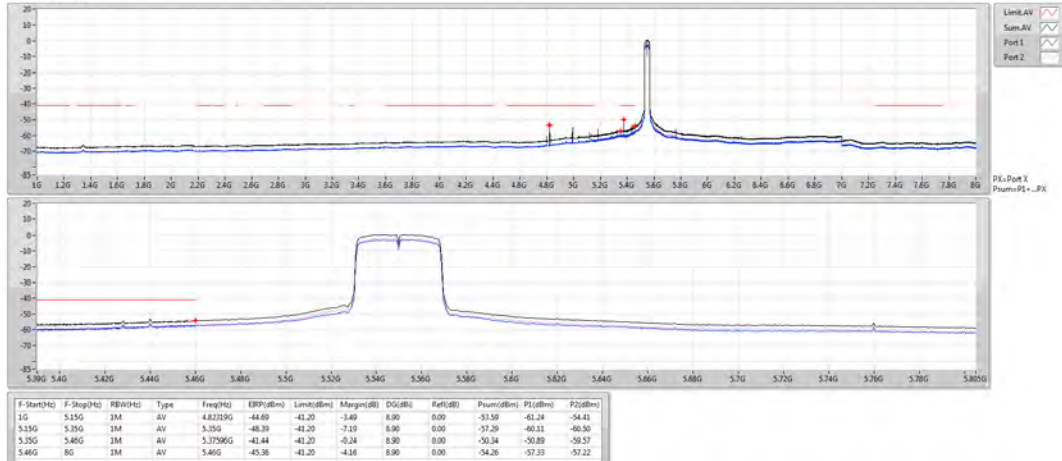


802.11ac VHT40_Nss1,(MCS0)_2TX 5670MHz

CSE-PK

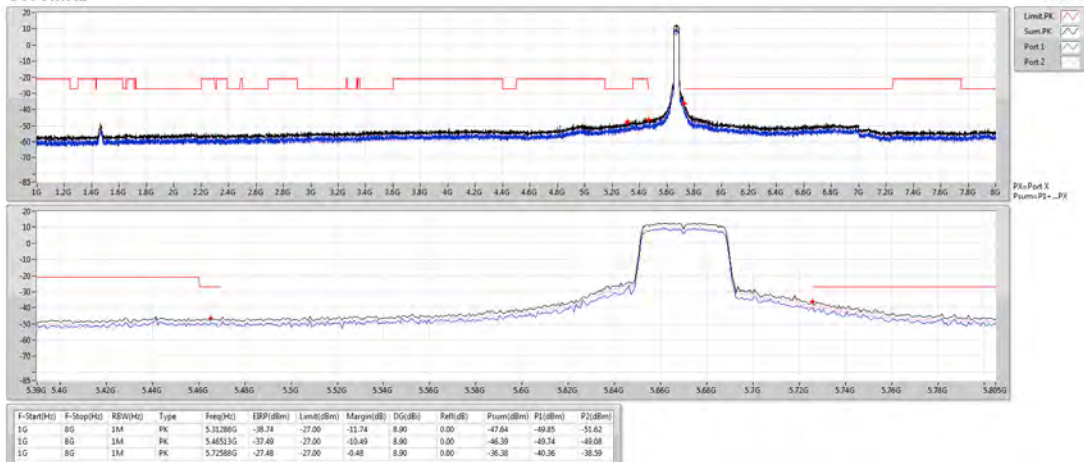


802.11ac VHT40_Nss1,(MCS0)_2TX
5670MHz

CSE-AV

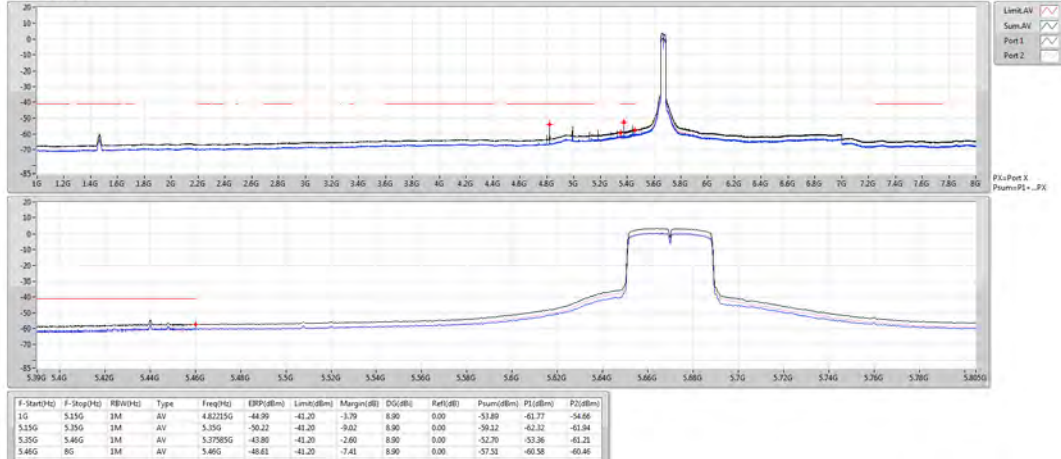


802.11ac VHT80_Nss1,(MCS0)_2TX
5290MHz

CSE-PK

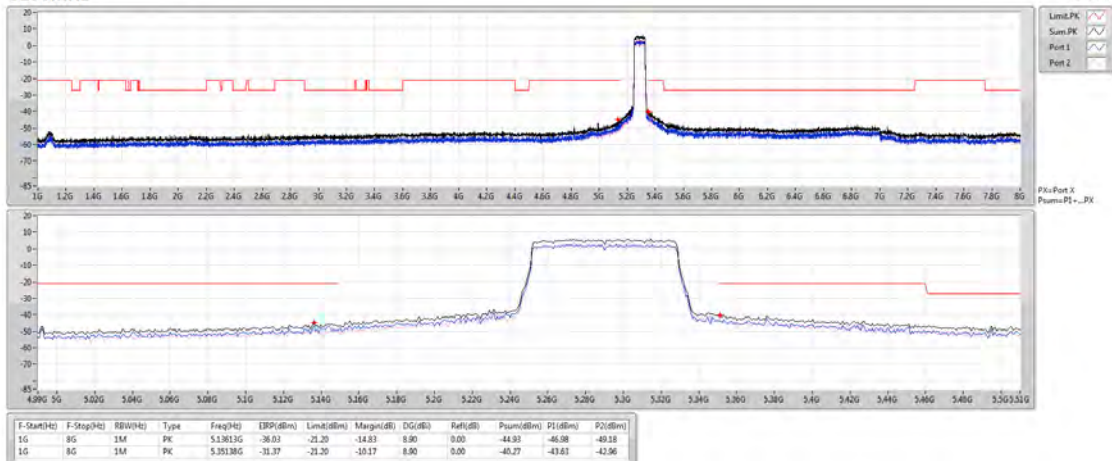


802.11ac VHT80_Nss1,(MCS0)_2TX
5290MHz

CSE-AV

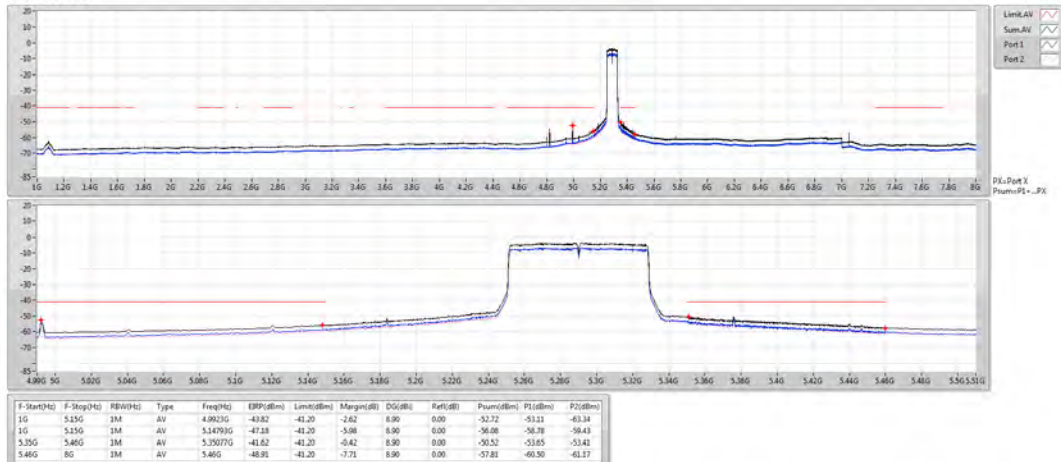


802.11ac VHT80_Nss1,(MCS0)_2TX 5530MHz

CSE-PK

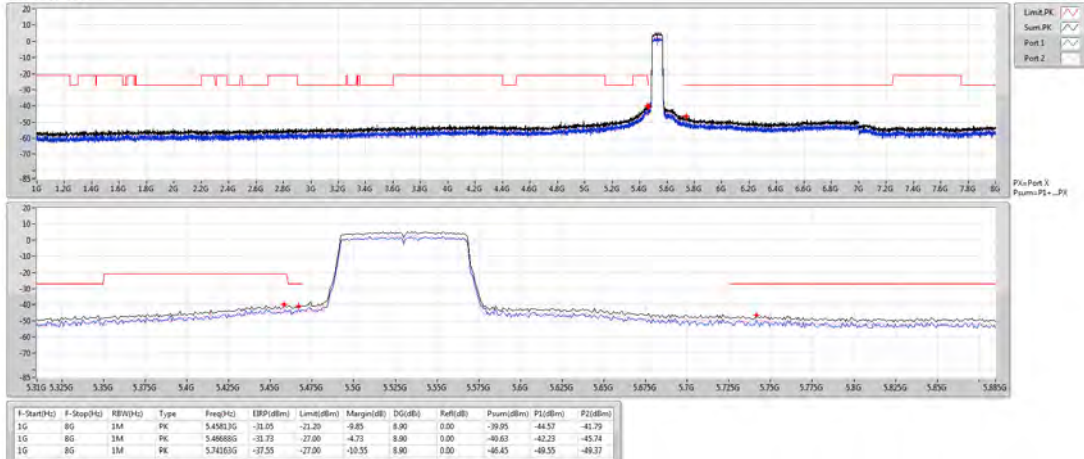


802.11ac VHT80_Nss1,(MCS0)_2TX 5530MHz


CSE-AV

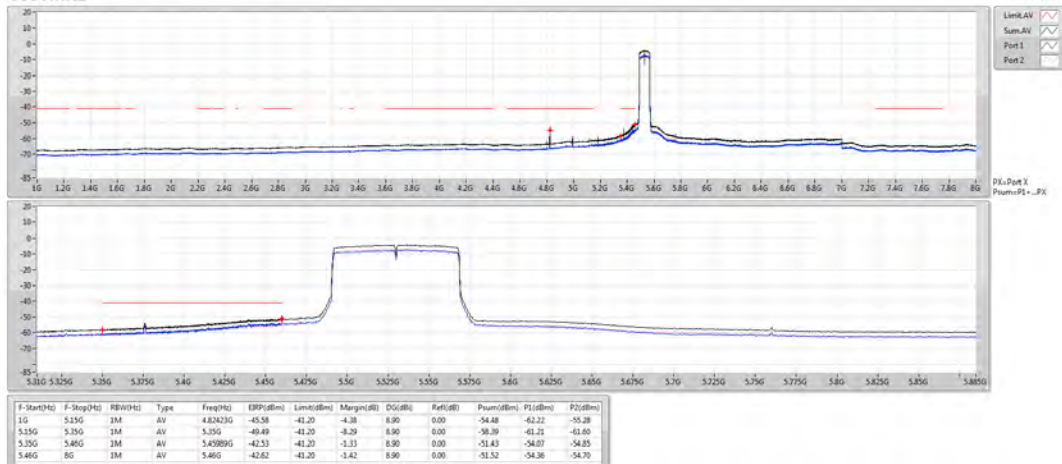

802.11ac VHT80_Nss1,(MCS0)_2TX 5610MHz

CSE-PK

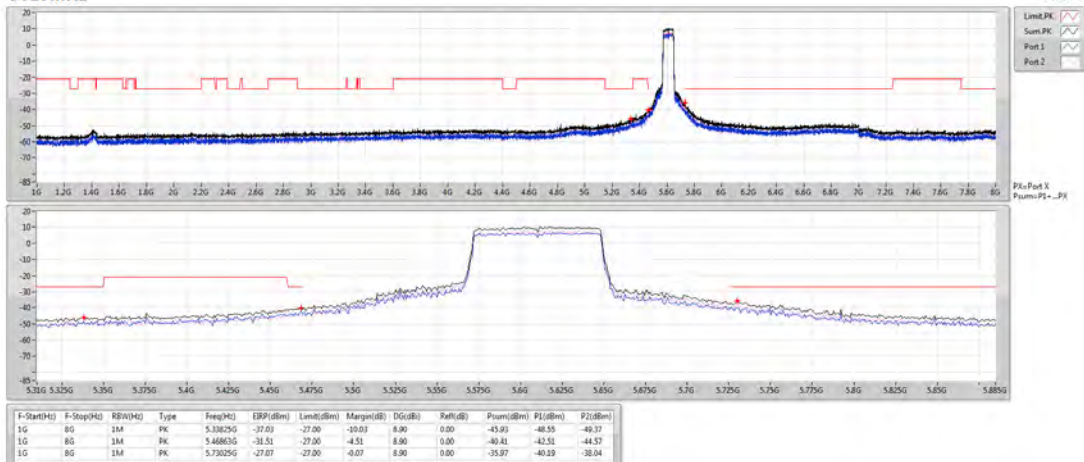

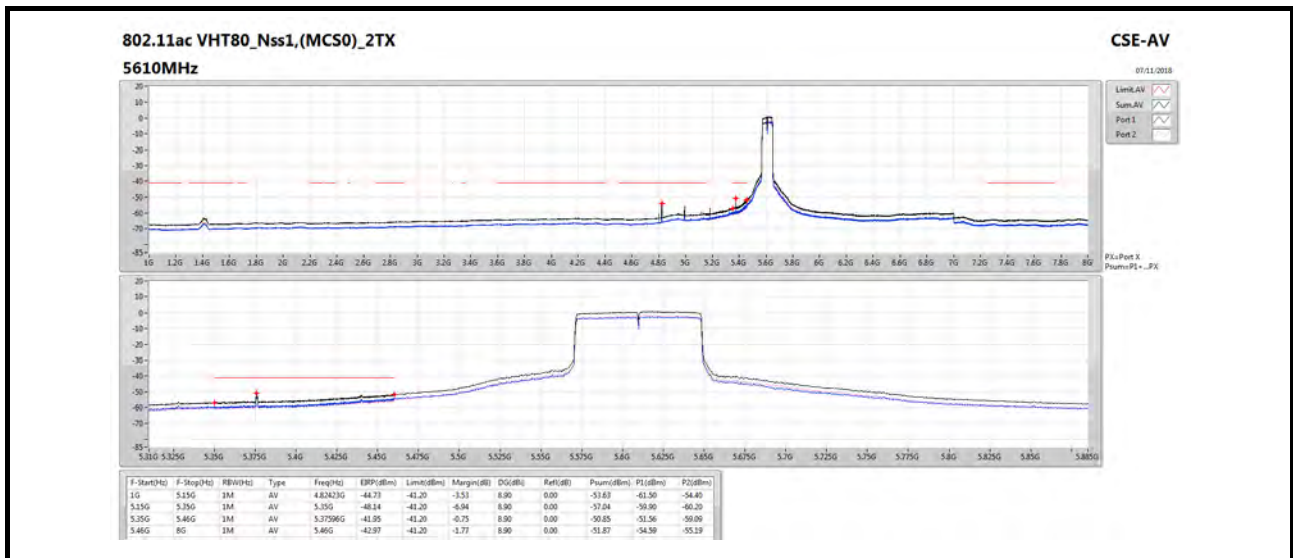



CSE above 1GHz (8GHz ~ 40GHz) Result

Appendix D.2

Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	RBW (Hz)	Type	Freq (Hz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	DG (dBi)	Refl (dB)	Psum (dBm)	P1 (dBm)	P2 (dBm)
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11ac VHT80_Nss1,(MCS0)_2TX	Pass	8G	40G	1M	AV	39.999G	-54.45	-41.20	-13.25	8.90	0.00	-63.35	-66.31	-66.42

DG = Directional Gain;
PX=Port X; Psum=P1+.P2+..PX




802.11a_Nss1,(6Mbps)_2TX

5260MHz

CSE-PK

08/11/2018

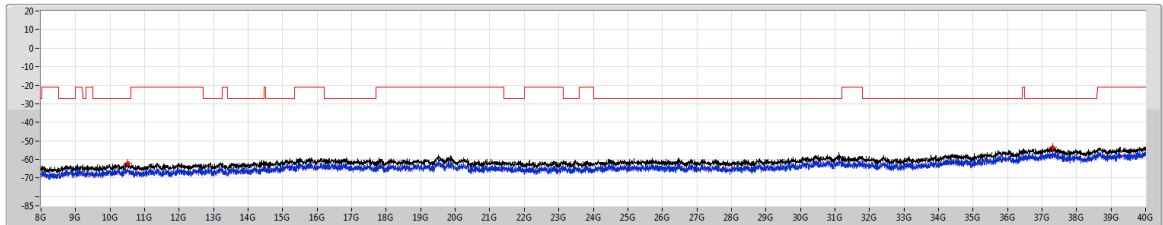

Limit.PK
Sum.PK
Port 1
Port 2

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	PK	10.52G	-53.01	-27.00	-26.01	8.90	0.00	-61.91	-64.63	-65.23
8G	40G	1M	PK	37.304G	-44.55	-27.00	-17.55	8.90	0.00	-53.45	-56.33	-56.59

802.11a_Nss1,(6Mbps)_2TX

5260MHz

CSE-AV

08/11/2018

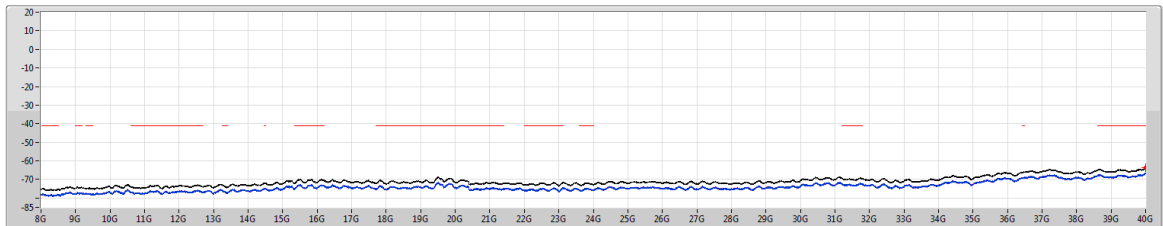

Limit.AV
Sum.AV
Port 1
Port 2

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	AV	39.999G	-54.65	-41.20	-13.45	8.90	0.00	-63.55	-66.54	-66.59

802.11a_Nss1,(6Mbps)_2TX

5300MHz

CSE-PK

08/11/2018

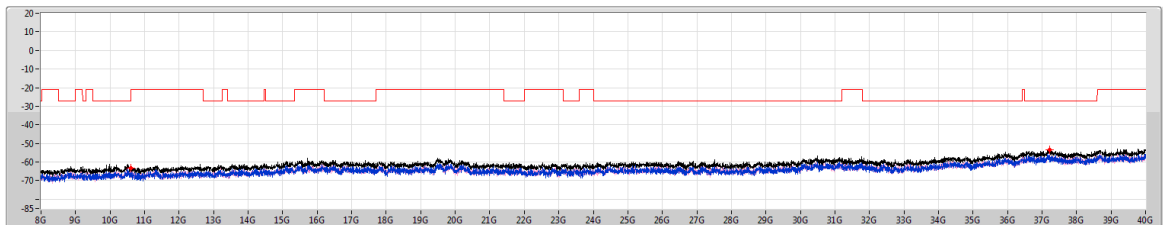

Limit.PK
Sum.PK
Port 1
Port 2

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	PK	10.596G	-54.41	-27.00	-27.41	8.90	0.00	-63.31	-67.00	-65.74
8G	40G	1M	PK	37.22G	-44.37	-27.00	-17.37	8.90	0.00	-53.27	-57.57	-55.28

802.11a_Nss1,(6Mbps)_2TX

5300MHz

CSE-AV

08/11/2018

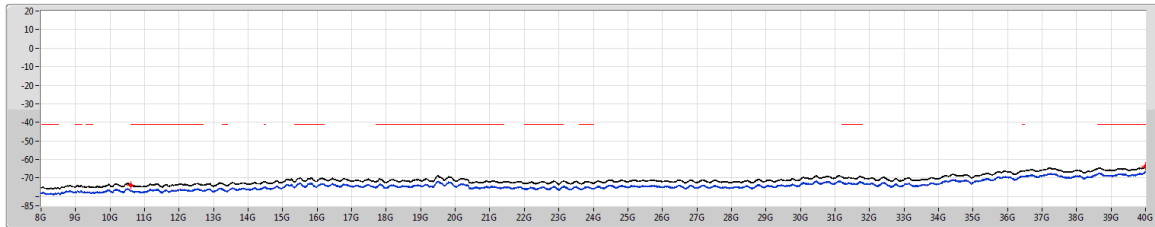

Limit:AV
Sum:AV
Port:1
Port:2

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	AV	10.606G	-65.00	-41.20	-23.80	8.90	0.00	-73.90	-76.94	-76.88
8G	40G	1M	AV	39.996G	-54.65	-41.20	-13.45	8.90	0.00	-63.55	-66.48	-66.65

802.11a_Nss1,(6Mbps)_2TX

5320MHz

CSE-PK

08/11/2018

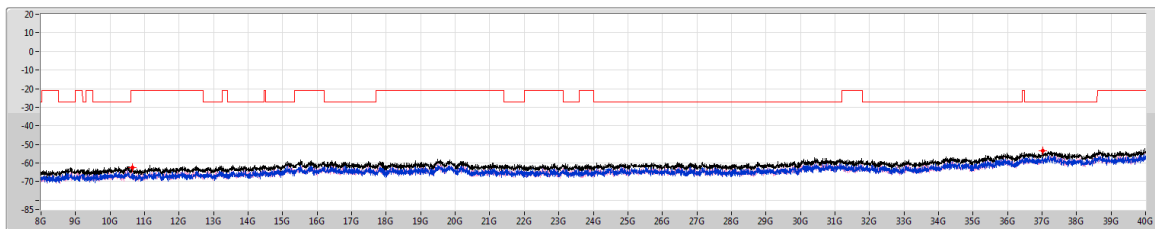

Limit:PK
Sum:PK
Port:1
Port:2

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	PK	10.64G	-53.43	-21.20	-32.23	8.90	0.00	-62.33	-66.31	-64.55
8G	40G	1M	PK	37.012G	-44.49	-27.00	-17.49	8.90	0.00	-53.39	-58.26	-55.10

802.11a_Nss1,(6Mbps)_2TX

5320MHz

CSE-AV

08/11/2018

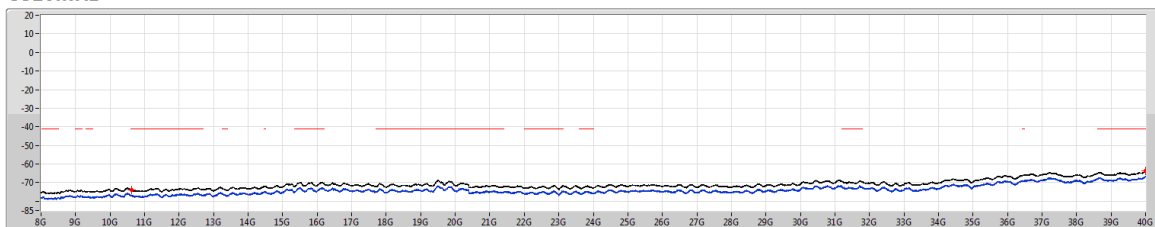

Limit:AV
Sum:AV
Port:1
Port:2

PX=Port X
Psum=P1+...PX

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	AV	10.632G	-64.94	-41.20	-23.74	8.90	0.00	-73.84	-77.14	-76.57
8G	40G	1M	AV	39.999G	-54.64	-41.20	-13.44	8.90	0.00	-63.54	-66.58	-66.52




802.11a_Nss1,(6Mbps)_2TX

5500MHz

CSE-PK

08/11/2018

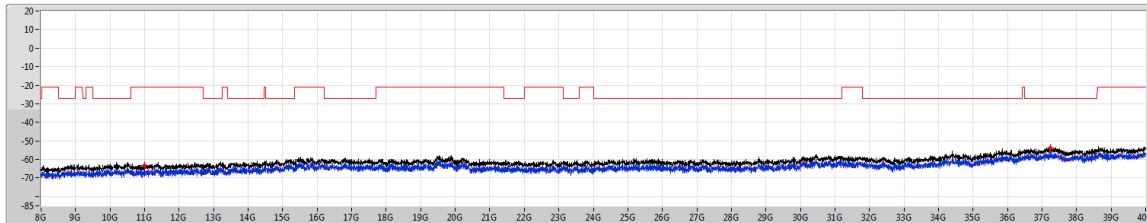

Limit.PK
Sum.PK
Port 1
Port 2

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	PK	11.004G	-54.33	-21.20	-33.13	8.90	0.00	-63.23	-66.72	-65.80
8G	40G	1M	PK	37.248G	-44.80	-27.00	-17.80	8.90	0.00	-53.70	-56.34	-57.12

802.11a_Nss1,(6Mbps)_2TX

5500MHz

CSE-AV

08/11/2018

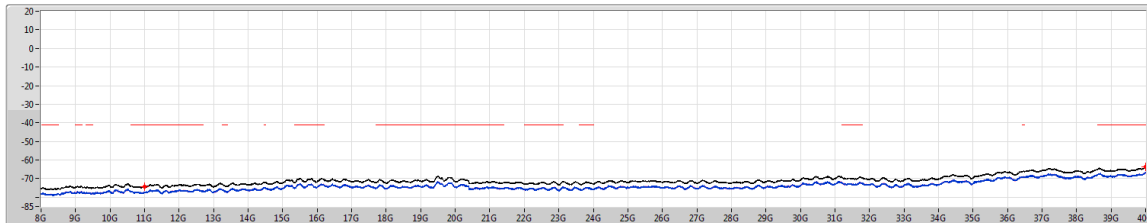

Limit.AV
Sum.AV
Port 1
Port 2

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	AV	11.004G	-63.36	-41.20	-24.16	8.90	0.00	-74.26	-77.42	-77.13
8G	40G	1M	AV	39.995G	-54.61	-41.20	-13.41	8.90	0.00	-63.51	-66.52	-66.52

802.11a_Nss1,(6Mbps)_2TX

5580MHz

CSE-PK

08/11/2018

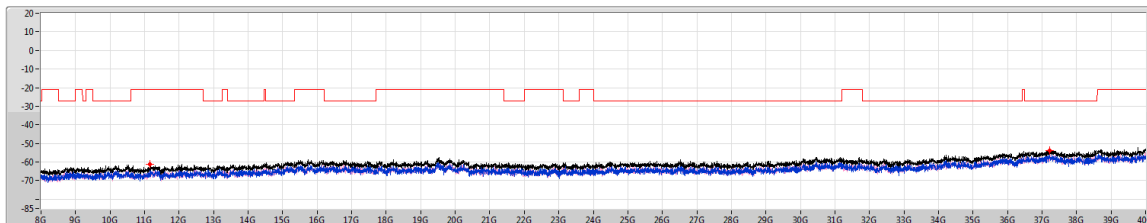

Limit.PK
Sum.PK
Port 1
Port 2

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	PK	11.152G	-52.30	-21.20	-31.10	8.90	0.00	-61.20	-64.31	-64.11
8G	40G	1M	PK	37.22G	-44.79	-27.00	-17.79	8.90	0.00	-53.69	-56.26	-57.19

802.11a_Nss1,(6Mbps)_2TX

5580MHz

CSE-AV

08/11/2018

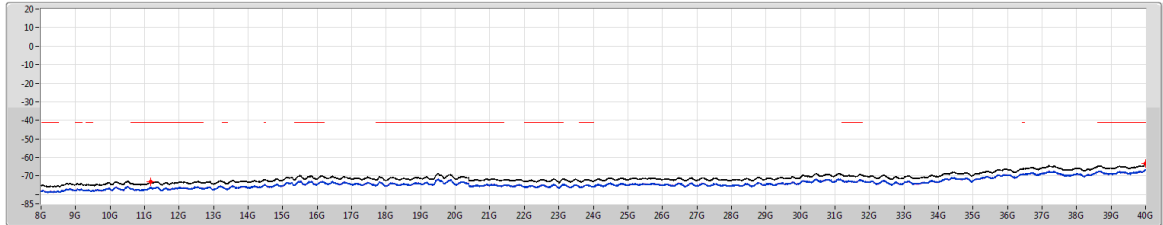

Limit:AV
Sum:AV
Port 1
Port 2

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	AV	11.168G	-64.28	-41.20	-23.08	8.90	0.00	-73.18	-75.91	-76.50
8G	40G	1M	AV	39.998G	-54.55	-41.20	-13.35	8.90	0.00	-63.45	-66.49	-66.44

802.11a_Nss1,(6Mbps)_2TX

5700MHz

CSE-PK

08/11/2018

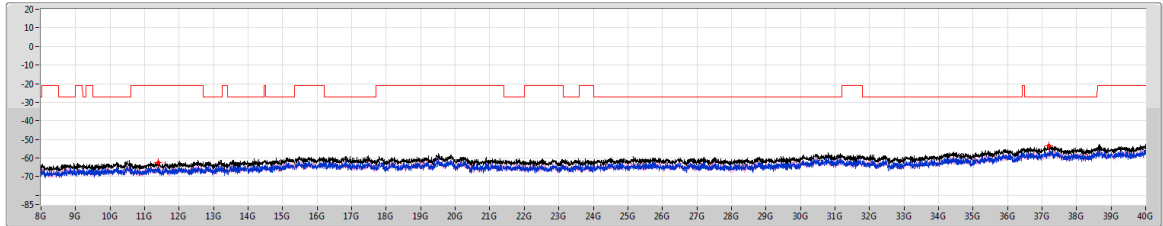

Limit:PK
Sum:PK
Port 1
Port 2

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	PK	11.396G	-53.61	-21.20	-32.41	8.90	0.00	-62.51	-64.84	-66.33
8G	40G	1M	PK	37.2G	-44.33	-27.00	-17.33	8.90	0.00	-53.23	-56.89	-55.68

802.11a_Nss1,(6Mbps)_2TX

5700MHz

CSE-AV

08/11/2018

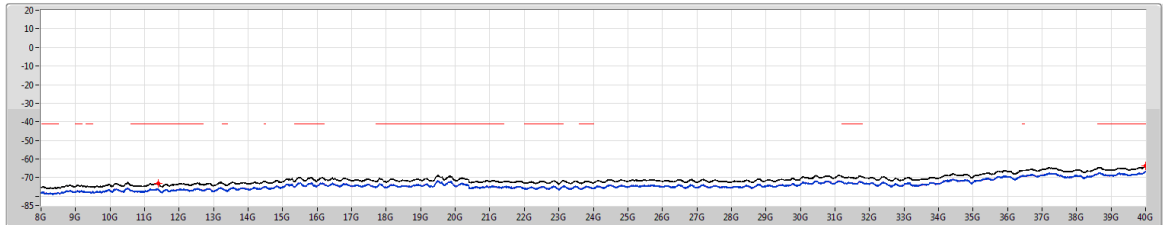

Limit:AV
Sum:AV
Port 1
Port 2

PX=Port X
Psum=P1+...PX

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	AV	11.398G	-64.20	-41.20	-23.00	8.90	0.00	-73.10	-76.02	-76.20
8G	40G	1M	AV	39.999G	-54.68	-41.20	-13.48	8.90	0.00	-63.58	-66.44	-66.74




802.11ac VHT20_Nss1,(MCS0)_2TX

5260MHz

CSE-PK

08/11/2018

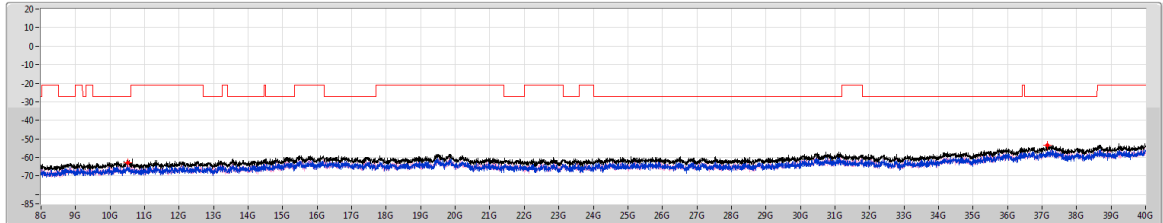

Limit.PK
Sum.PK
Port 1
Port 2

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	PK	10.512G	-53.81	-27.00	-26.81	8.90	0.00	-62.71	-65.03	-66.53
8G	40G	1M	PK	37.148G	-44.46	-27.00	-17.46	8.90	0.00	-53.36	-56.13	-56.62

802.11ac VHT20_Nss1,(MCS0)_2TX

5260MHz

CSE-AV

08/11/2018

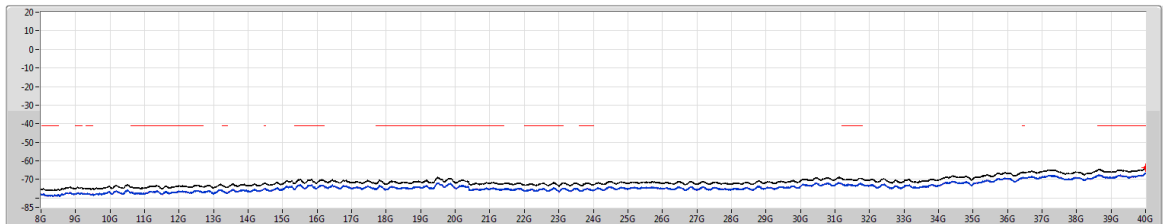

Limit.AV
Sum.AV
Port 1
Port 2

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	AV	39.996G	-54.81	-41.20	-13.61	8.90	0.00	-63.71	-66.68	-66.76

802.11ac VHT20_Nss1,(MCS0)_2TX

5300MHz

CSE-PK

08/11/2018

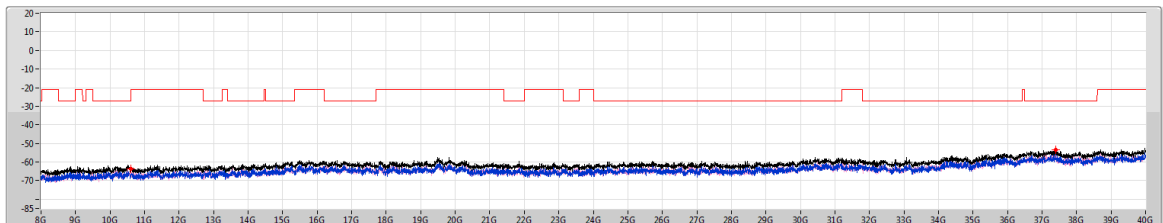

Limit.PK
Sum.PK
Port 1
Port 2

PX=Port X
Psum=P1+...PX

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	PK	10.596G	-54.77	-27.00	-27.77	8.90	0.00	-63.67	-67.09	-66.31
8G	40G	1M	PK	37.396G	-44.63	-27.00	-17.63	8.90	0.00	-53.53	-56.00	-57.15




802.11ac VHT20_Nss1,(MCS0)_2TX

5300MHz

CSE-AV

08/11/2018

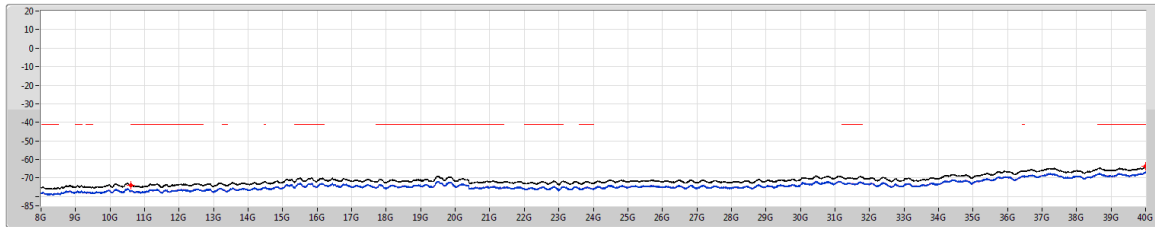

Limit:AV
Sum:AV
Port 1
Port 2

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	AV	10.602G	-65.05	-41.20	-23.85	8.90	0.00	-73.95	-76.90	-77.03
8G	40G	1M	AV	39.998G	-54.75	-41.20	-13.55	8.90	0.00	-63.65	-66.50	-66.82

802.11ac VHT20_Nss1,(MCS0)_2TX

5320MHz

CSE-PK

08/11/2018

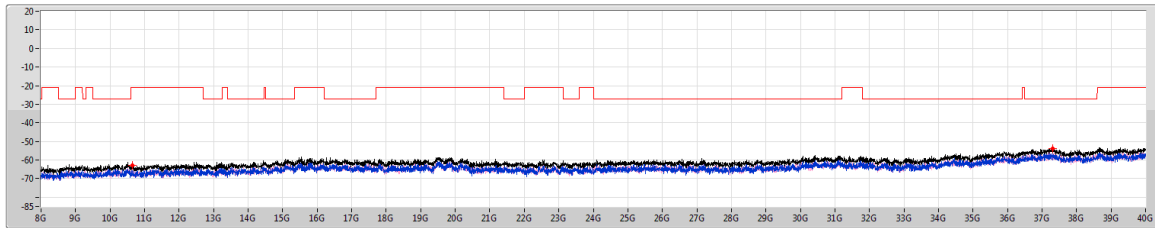

Limit:PK
Sum:PK
Port 1
Port 2

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	PK	10.648G	-54.12	-21.20	-32.92	8.90	0.00	-63.02	-65.62	-66.48
8G	40G	1M	PK	37.308G	-44.99	-27.00	-17.99	8.90	0.00	-53.89	-58.42	-55.78

802.11ac VHT20_Nss1,(MCS0)_2TX

5320MHz

CSE-AV

08/11/2018

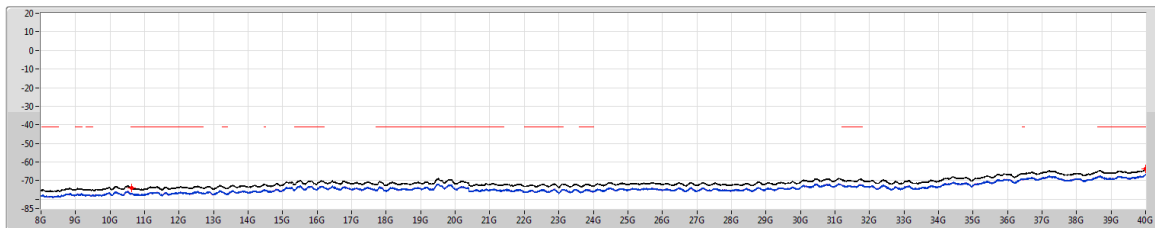

Limit:AV
Sum:AV
Port 1
Port 2

PX=Port X
Psum=P1+...PX

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	AV	10.633G	-65.14	-41.20	-23.94	8.90	0.00	-74.04	-77.06	-77.04
8G	40G	1M	AV	40G	-54.73	-41.20	-13.53	8.90	0.00	-63.63	-66.43	-66.86




802.11ac VHT20_Nss1,(MCS0)_2TX

5500MHz

CSE-PK

08/11/2018

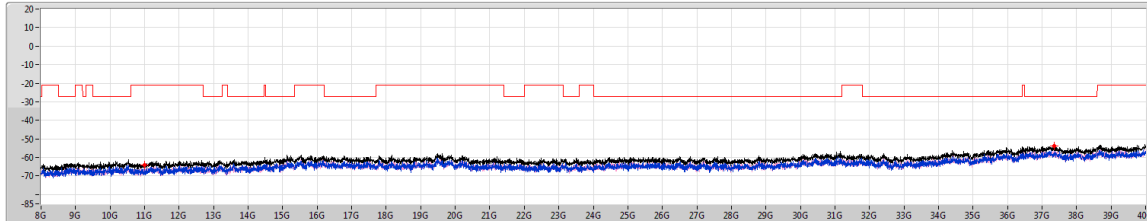

Limit.PK
Sum.PK
Port 1
Port 2

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	PK	10.992G	-55.29	-21.20	-34.09	8.90	0.00	-64.19	-66.59	-67.92
8G	40G	1M	PK	37.36G	-44.73	-27.00	-17.73	8.90	0.00	-53.63	-57.50	-55.92

802.11ac VHT20_Nss1,(MCS0)_2TX

5500MHz

CSE-AV

08/11/2018

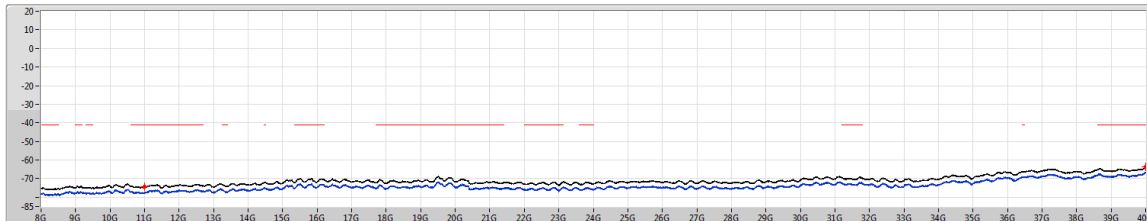

Limit.AV
Sum.AV
Port 1
Port 2

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	AV	10.999G	-65.50	-41.20	-24.30	8.90	0.00	-74.40	-77.39	-77.44
8G	40G	1M	AV	39.996G	-54.73	-41.20	-13.53	8.90	0.00	-63.63	-66.64	-66.65

802.11ac VHT20_Nss1,(MCS0)_2TX

5580MHz

CSE-PK

08/11/2018

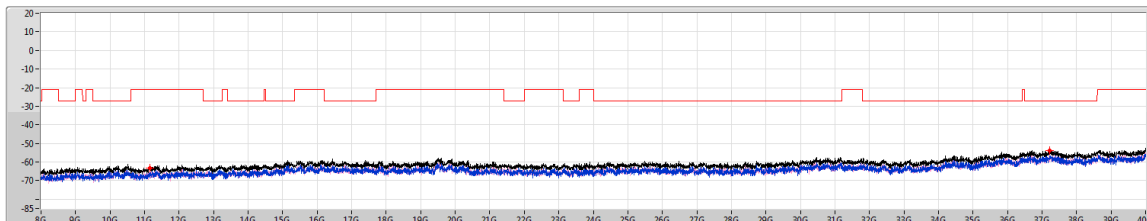

Limit.PK
Sum.PK
Port 1
Port 2

PX=Port X
Psum=P1+...PX

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	PK	11.156G	-54.19	-21.20	-32.99	8.90	0.00	-63.09	-65.54	-66.75
8G	40G	1M	PK	37.228G	-44.85	-27.00	-17.85	8.90	0.00	-53.75	-57.66	-56.01




802.11ac VHT20_Nss1,(MCS0)_2TX

5580MHz

CSE-AV

08/11/2018

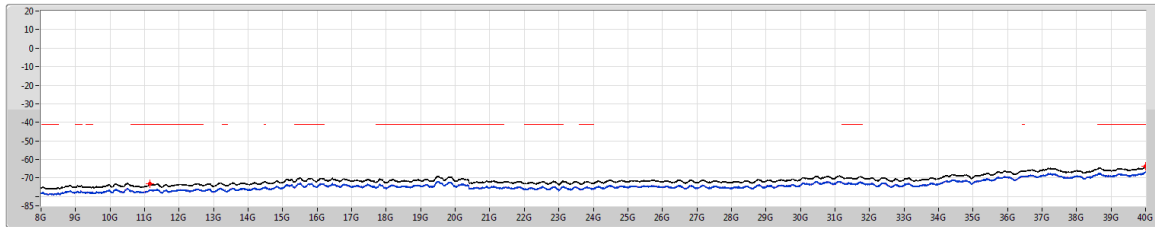

Limit:AV
Sum:AV
Port 1
Port 2

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	AV	11.156G	-64.30	-41.20	-23.10	8.90	0.00	-73.20	-76.19	-76.23
8G	40G	1M	AV	39.998G	-54.74	-41.20	-13.54	8.90	0.00	-63.64	-66.58	-66.73

802.11ac VHT20_Nss1,(MCS0)_2TX

5700MHz

CSE-PK

08/11/2018

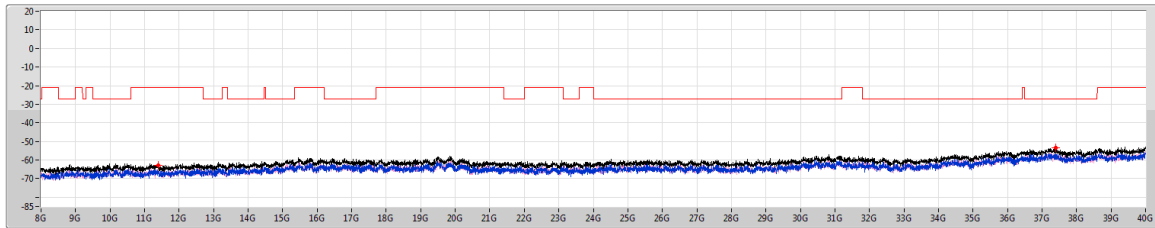

Limit:PK
Sum:PK
Port 1
Port 2

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	PK	11.14G	-54.03	-21.20	-32.83	8.90	0.00	-62.93	-66.00	-65.88
8G	40G	1M	PK	37.396G	-44.63	-27.00	-17.63	8.90	0.00	-53.53	-55.71	-57.57

802.11ac VHT20_Nss1,(MCS0)_2TX

5700MHz

CSE-AV

08/11/2018

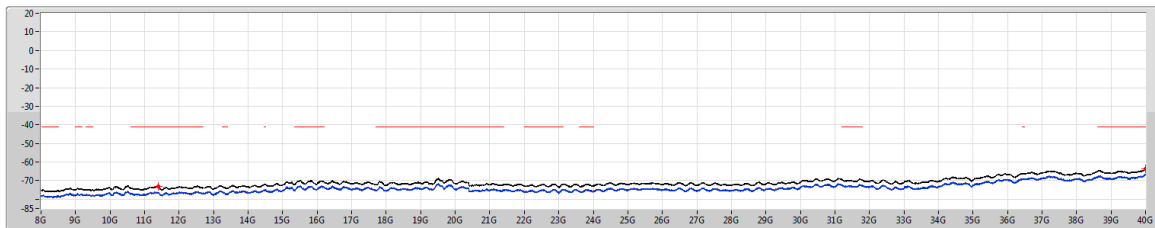

Limit:AV
Sum:AV
Port 1
Port 2

PX=Port X
Psum=P1+...PX

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	AV	11.398G	-64.41	-41.20	-23.21	8.90	0.00	-73.31	-76.41	-76.24
8G	40G	1M	AV	39.994G	-54.81	-41.20	-13.61	8.90	0.00	-63.71	-66.75	-66.70




802.11ac VHT40_Nss1,(MCS0)_2TX

5270MHz

CSE-PK

08/11/2018

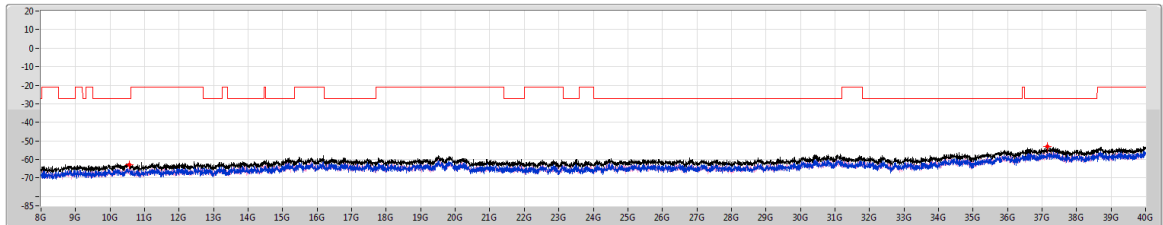

Limit.PK
Sum.PK
Port 1
Port 2

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	PK	10.552G	-53.99	-27.00	-26.99	8.90	0.00	-62.89	-65.51	-66.32
8G	40G	1M	PK	37.16G	-44.22	-27.00	-17.22	8.90	0.00	-53.12	-56.14	-56.12

802.11ac VHT40_Nss1,(MCS0)_2TX

5270MHz

CSE-AV

08/11/2018

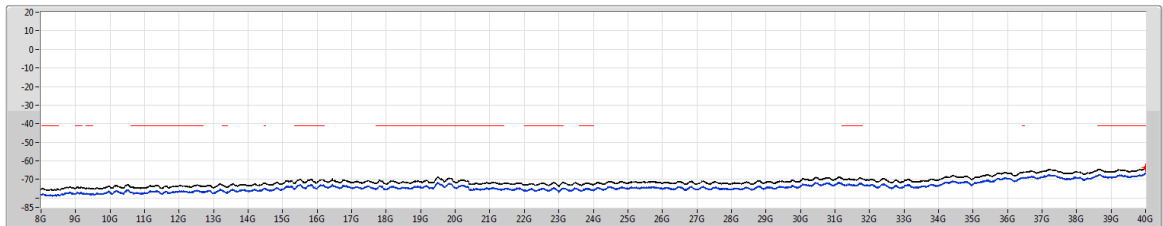

Limit.AV
Sum.AV
Port 1
Port 2

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	AV	39.991G	-54.64	-41.20	-13.44	8.90	0.00	-63.54	-66.45	-66.66

802.11ac VHT40_Nss1,(MCS0)_2TX

5310MHz

CSE-PK

08/11/2018

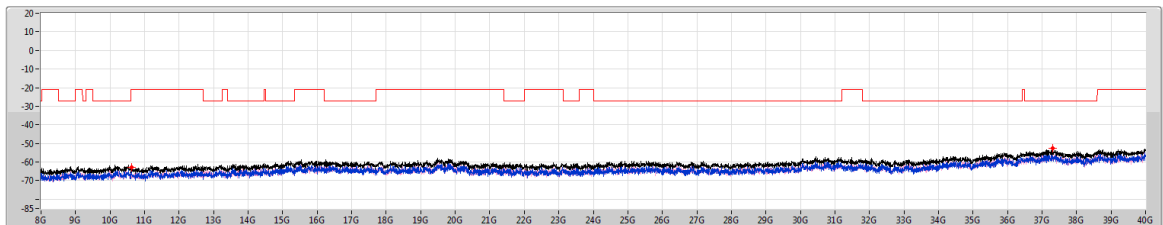

Limit.PK
Sum.PK
Port 1
Port 2

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	PK	10.628G	-53.79	-21.20	-32.59	8.90	0.00	-62.69	-65.80	-65.61
8G	40G	1M	PK	37.3G	-43.73	-27.00	-16.73	8.90	0.00	-52.63	-56.55	-54.89

802.11ac VHT40_Nss1,(MCS0)_2TX

5310MHz

CSE-AV

08/11/2018

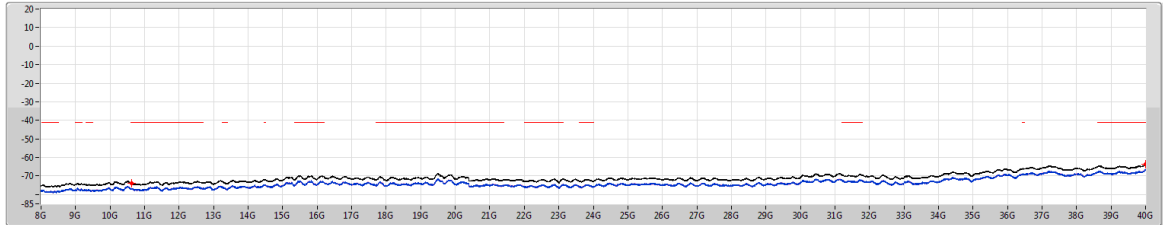

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	AV	10.629G	-64.89	-41.20	-23.69	8.90	0.00	-73.79	-76.75	-76.86
8G	40G	1M	AV	39.993G	-54.68	-41.20	-13.48	8.90	0.00	-63.58	-66.44	-66.74


PX=Port X
Psum=P1+...PX

802.11ac VHT40_Nss1,(MCS0)_2TX

5510MHz

CSE-PK

08/11/2018

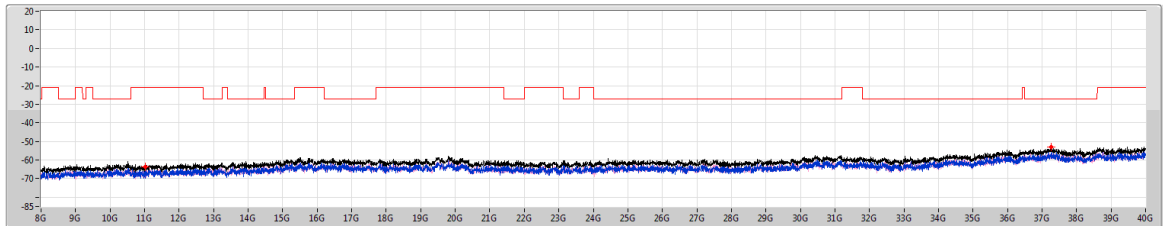

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	PK	11.012G	-54.69	-21.20	-33.49	8.90	0.00	-63.59	-65.80	-67.57
8G	40G	1M	PK	37.26G	-44.08	-27.00	-17.08	8.90	0.00	-52.98	-55.89	-56.09


PX=Port X
Psum=P1+...PX

802.11ac VHT40_Nss1,(MCS0)_2TX

5510MHz

CSE-AV

08/11/2018

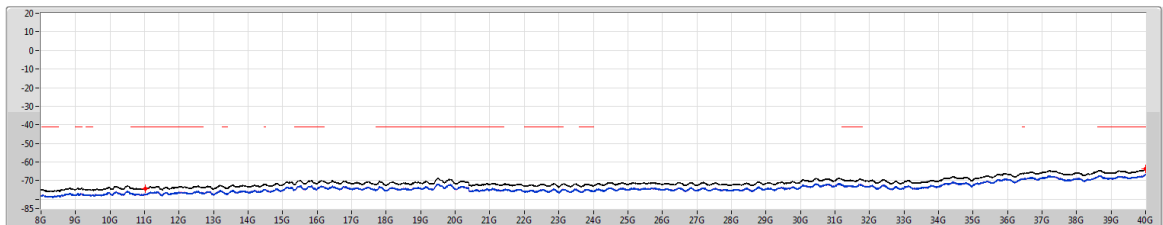

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	AV	11.025G	-65.35	-41.20	-24.15	8.90	0.00	-74.25	-77.33	-77.19
8G	40G	1M	AV	39.994G	-54.63	-41.20	-13.43	8.90	0.00	-63.53	-66.47	-66.62

PX=Port X
Psum=P1+...PX




802.11ac VHT40_Nss1,(MCS0)_2TX

5550MHz

CSE-PK

08/11/2018

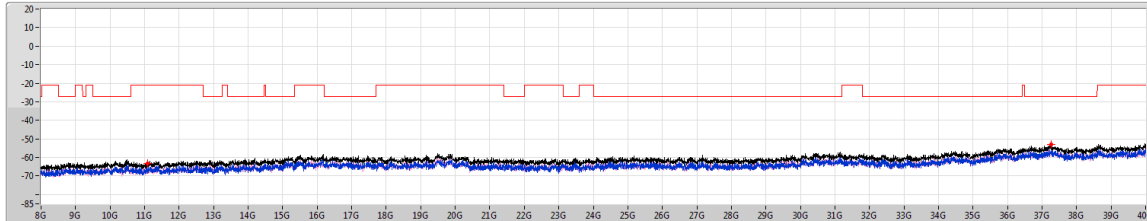

Limit.PK
Sum.PK
Port 1
Port 2

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	PK	11.096G	-54.45	-21.20	-33.25	8.90	0.00	-63.35	-66.18	-66.54
8G	40G	1M	PK	37.276G	-44.31	-27.00	-17.31	8.90	0.00	-53.21	-55.52	-57.05

802.11ac VHT40_Nss1,(MCS0)_2TX

5550MHz

CSE-AV

08/11/2018

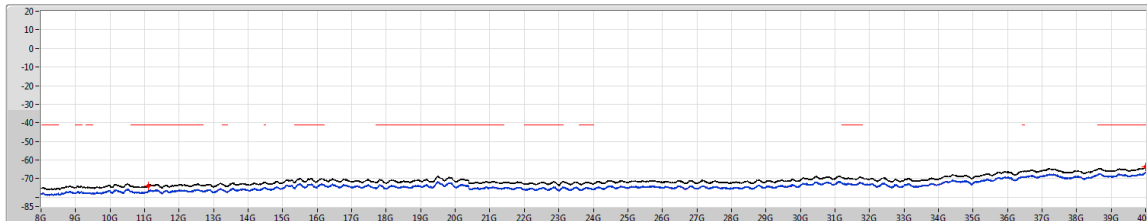

Limit.AV
Sum.AV
Port 1
Port 2

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	AV	11.111G	-64.89	-41.20	-23.69	8.90	0.00	-73.79	-76.90	-76.70
8G	40G	1M	AV	40G	-54.61	-41.20	-13.41	8.90	0.00	-63.51	-66.51	-66.54

802.11ac VHT40_Nss1,(MCS0)_2TX

5670MHz

CSE-PK

08/11/2018

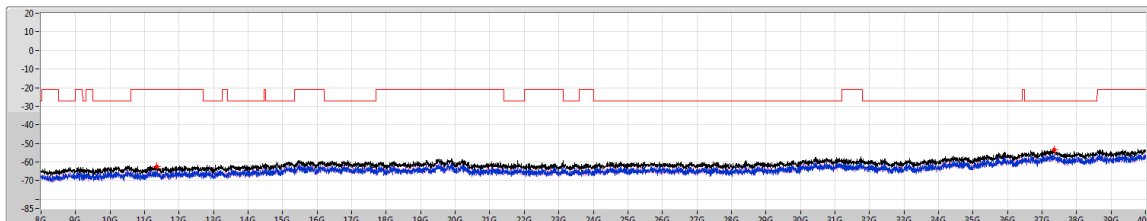

Limit.PK
Sum.PK
Port 1
Port 2

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	PK	11.356G	-53.51	-21.20	-32.31	8.90	0.00	-62.41	-65.39	-65.46
8G	40G	1M	PK	37.352G	-44.60	-27.00	-17.60	8.90	0.00	-53.50	-55.05	-58.74

802.11ac VHT40_Nss1,(MCS0)_2TX

5670MHz

CSE-AV

08/11/2018

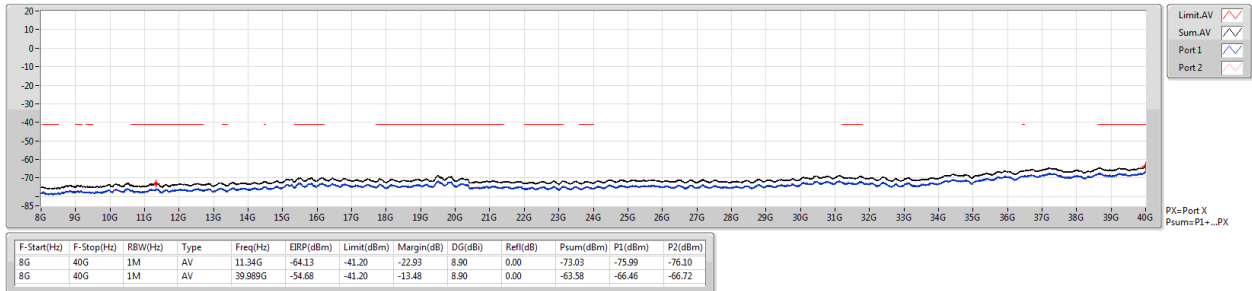


802.11ac VHT80_Nss1,(MCS0)_2TX

5290MHz

CSE-PK

08/11/2018

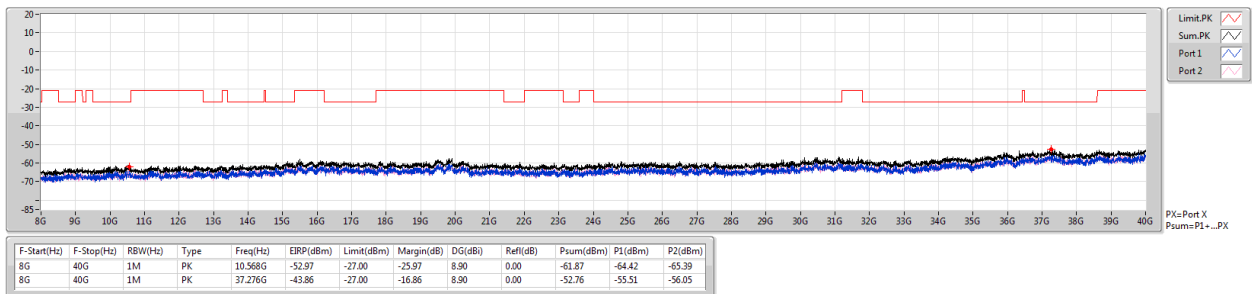


802.11ac VHT80_Nss1,(MCS0)_2TX

5290MHz

CSE-AV

08/11/2018

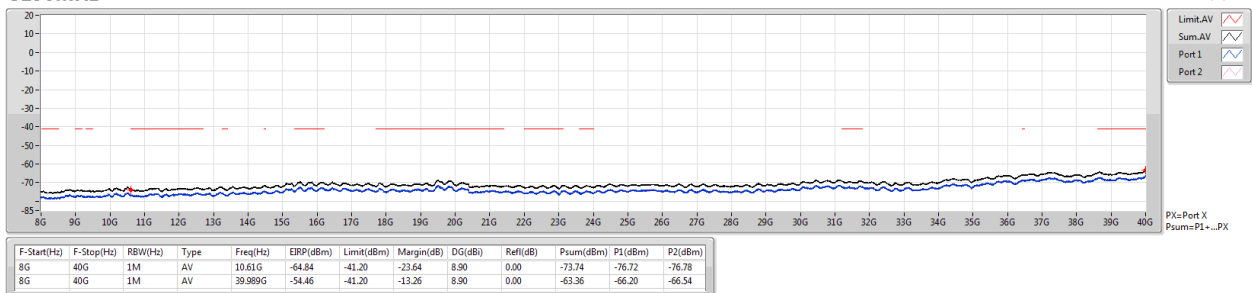


802.11ac VHT80_Nss1,(MCS0)_2TX

5530MHz

CSE-PK

08/11/2018

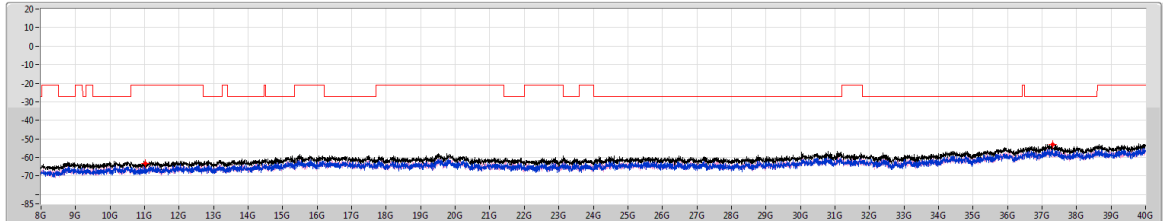

Limit.PK
Sum.PK
Port 1
Port 2

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	PK	11.028G	-54.34	-21.20	-33.14	8.90	0.00	-63.24	-65.40	-67.31
8G	40G	1M	PK	37.316G	-43.98	-27.00	-16.98	8.90	0.00	-52.88	-55.31	-56.57

802.11ac VHT80_Nss1,(MCS0)_2TX

5530MHz

CSE-AV

08/11/2018

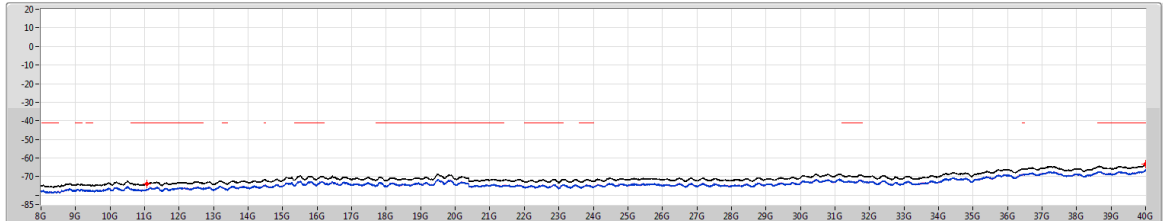

Limit.AV
Sum.AV
Port 1
Port 2

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	AV	11.075G	-64.98	-41.20	-23.78	8.90	0.00	-73.88	-76.81	-76.97
8G	40G	1M	AV	39.999G	-54.45	-41.20	-13.25	8.90	0.00	-63.35	-66.31	-66.42

802.11ac VHT80_Nss1,(MCS0)_2TX

5610MHz

CSE-PK

08/11/2018

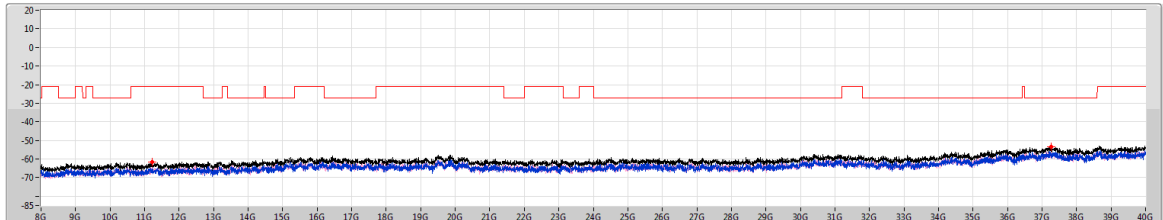

Limit.PK
Sum.PK
Port 1
Port 2

PX=Port X
Psum=P1+...PX


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
8G	40G	1M	PK	11.224G	-52.72	-21.20	-31.52	8.90	0.00	-61.62	-66.25	-63.46
8G	40G	1M	PK	37.26G	-44.59	-27.00	-17.59	8.90	0.00	-53.49	-57.90	-55.44

802.11ac VHT80_Nss1,(MCS0)_2TX

5610MHz

CSE-AV

08/11/2018

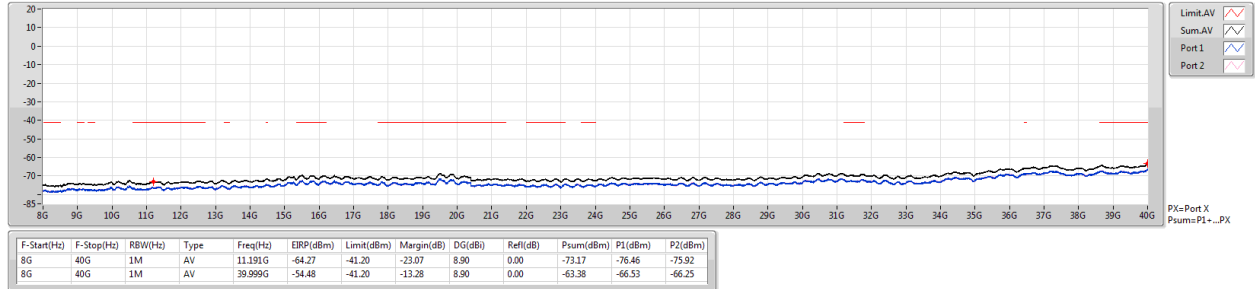


**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Pol. (H/V)	Azimuth (°)	Height (m)	Comments
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11ac VHT40_Nss1,(MCS0)_2TX	Pass	AV	12.49996G	52.26	54.00	-1.74	15.57	3	Horizontal	83	1.20	-

802.11ac VHT40_Nss1,(MCS0)_2TX

12/11/2018

5795MHz_TX

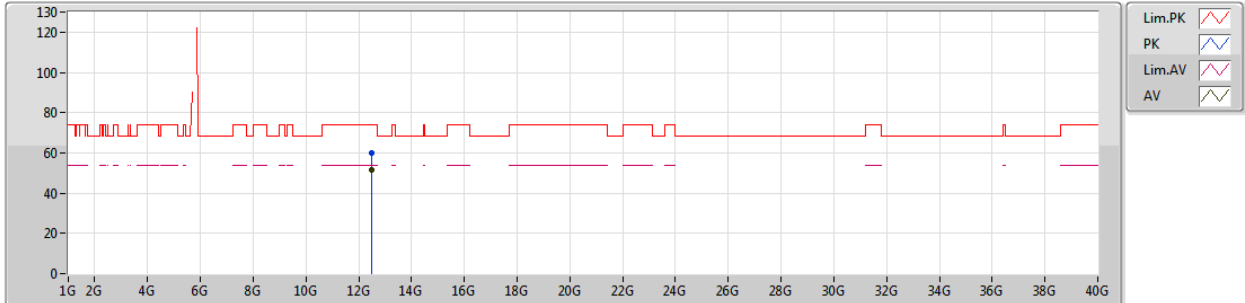


EUT Y_2TX
Setting 23.5
04-E-2
FSP(100142)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Pol. (H/V)	Azimuth (°)	Height (m)	Comments						
PK	12.50019G	60.16	74.00	-13.84	15.58	3	Vertical	185	1.63	-						
AV	12.49994G	51.58	54.00	-2.42	15.57	3	Vertical	185	1.63	-						

802.11ac VHT40_Nss1,(MCS0)_2TX

12/11/2018

5795MHz_TX

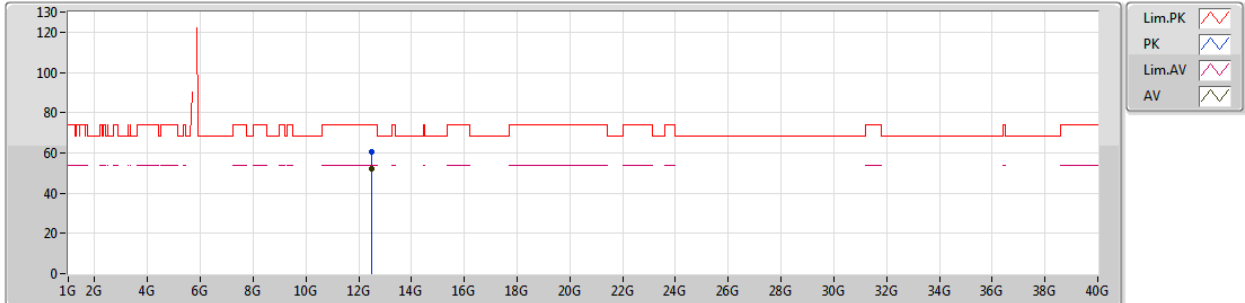

EUT Y_2TX
Setting 23.5
04-E-2
FSP(100142)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Pol. (H/V)	Azimuth (°)	Height (m)	Comments						
PK	12.49992G	60.30	74.00	-13.70	15.57	3	Horizontal	83	1.20	-						
AV	12.49996G	52.26	54.00	-1.74	15.57	3	Horizontal	83	1.20	-						