


Operating instruction for the CS 434

The E-Stop

1. Insert battery in to the E-Stop Module
2. Push the start button to allow the operator of the equipment to operate.
3. If there is an emergency push the red button and the RF Module will send a stop signal. The equipment will be disabled
4. To restart operations push the start button to allow the equipment to continue.
5. Best operated by a Forman or a safety officer.

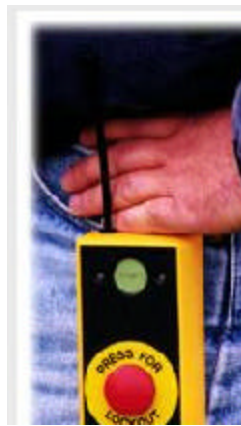

The module is inside of a sealed system. It takes no external or internal maintenance.

FCC ID: LW9-CS434-TX

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

[illegible]