

**SUMMARY OF TEST RESULTS  
IN ACCORD WITH FCC RULES PART 15 AND C63.4-1992**


Equipment Model:	ACP00870
Transmitter Tested to C63.4-1992 Section:	FCC Rules 15.231
Field Strength at a distance of 3 meters:	8900 uV/Mtr (- 0.5 dB below limit) @ 390 MHz
Peak to Average Ratio:	11 dB - Worst Case Duty Cycle
Test Conditions:	Radiated (Sections 11 & 13)
Transmitter:	
Transmitter Frequency:	390 MHz Nominal (Factory Tuned Only)
Bandwidth (20 dB down)	< 0.010% of Center Freq.
Frequency Tolerance:	N/A (Nominal +/- 0.125 MHz)
Frequency Stability:	N/A (Nominal +/- 0.125 MHz)
Transmitter Spurious at 3 meters: (Worst Harmonic)	841 uV/Mtr (- 0.75 dB below limit)
Frequency:	1170 MHz
Momentary Operation (Yes/No)	Yes
Holdover time after manual release:	0 seconds
Duration of transmission after activation:	45 seconds on any single manual activation

**Attestation:**

The radio apparatus identified in the application has been subject to all the applicable test conditions specified in FCC Rules Part 15 and all of the requirements of the Standard have been met.

Regulatory Compliance Engineer

John W. Kuivinen, P.E.

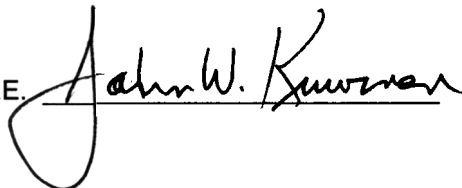

Date:

Jan. 31, 2000

LINEAR CORPORATION  
FCC ID: EF4 ACP00870