

FCC Test Report

Report No.: AGC16084231002FR01

FCC ID	:	2A5JU-BD10500
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Pipedream oval remote for body dock
BRAND NAME	:	Pipedream
MODEL NAME	:	BD10500
APPLICANT	:	Pipedream Products
DATE OF ISSUE	:	Nov. 03, 2023
STANDARD(S)	:	FCC Part 15 Subpart C §15.231
REPORT VERSION	:	V 1.0 Volucitaria Compliance Shenzhen) Co.
<u>Attestation of</u>	<u>Glo</u>	bal Compliance (Shenzhen) Co., Ltd





REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes	
V1.0	/	Nov. 03, 2023	Valid	Initial Release	



TABLE OF CONTENTS

1. GENERAL INFORMATION	5
2. PRODUCT INFORMATION	6
2.1 PRODUCT TECHNICAL DESCRIPTION	6
2.2 TEST FREQUENCY LIST	6
2.3 RELATED SUBMITTAL(S) / GRANT (S)	7
2.4 TEST METHODOLOGY	7
2.5 SPECIAL ACCESSORIES	7
2.6 EQUIPMENT MODIFICATIONS	7
2.7 ANTENNA REQUIREMENT	7
3. TEST ENVIRONMENT	8
3.1 ADDRESS OF THE TEST LABORATORY	8
3.2 TEST FACILITY	8
3.3 ENVIRONMENTAL CONDITIONS	9
3.4 MEASUREMENT UNCERTAINTY	9
3.5 LIST OF EQUIPMENTS USED	
4.SYSTEM TEST CONFIGURATION	
4.1 EUT CONFIGURATION	
4.2 EUT EXERCISE	
4.3 CONFIGURATION OF TESTED SYSTEM	
4.4 EQUIPMENT USED IN TESTED SYSTEM	
4.5 SUMMARY OF TEST RESULTS	
5. DESCRIPTION OF TEST MODES	
6. PROVISION FOR MOMENTARY OPERATION	
6.1 PROVISIONS APPLICABLE	
6.2 MEASUREMENT PROCEDURE	
6.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION).	
6.4 MEASUREMENT RESULTS	
7. DUTY CYCLE CORRECTION FACTOR	
7.1 PROVISIONS APPLICABLE	
7.2 MEASUREMENT PROCEDURE	
7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION).	
7.4 MEASUREMENT RESULTS	
8. 20 DB BANDWIDTH	
8.1 PROVISIONS APPLICABLE	



8.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	20
7.4 MEASUREMENT RESULTS	21
7. RADIATED EMISSION	22
7.1 LIMITS OF RADIATED EMISSION TEST	22
7.2 MEASUREMENT PROCEDURE	23
7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	25
7.4 MEASUREMENT RESULT	
8. AC LINE CONDUCTED EMISSION TEST	30
8.1 LIMITS OF LINE CONDUCTED EMISSION TEST	
8.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
8.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	31
8.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	31
8.5 MEASUREMENT RESULTS	31
APPENDIX I: PHOTOGRAPHS OF TEST SETUP	32
APPENDIX II: PHOTOGRAPHS OF TEST EUT	32



1. GENERAL INFORMATION

Pipedream Products
•
8501 Fallbrook Ave 370 West Hill, CA 91304, NY 11200, United States
Pipedream Products
8501 Fallbrook Ave 370 West Hill, CA 91304, NY 11200, United States
Pipedream Products
8501 Fallbrook Ave 370 West Hill, CA 91304, NY 11200, United States
Pipedream oval remote for body dock
Pipedream
BD10500
N/A
N/A
No any deviation from the test method
Oct. 24, 2023
Oct. 24, 2023 – Nov. 03, 2023
Pass
AGCTR-ER-FCC-SRDV1.0

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By

AS-li

Cici Li (Project Engineer)

Nov. 03, 2023

Reviewed By

in Lin

Calvin Liu (Reviewer)

Nov. 03, 2023

Approved By

Max Zhang

Max Zhang Authorized Officer

Nov. 03, 2023



2. PRODUCT INFORMATION

2.1 PRODUCT TECHNICAL DESCRIPTION

Hardware Version	V1.0
Software Version	V1.0
Operation Frequency	433.92MHz
Modulation Type	ASK
Number of channels	1
Field Strength of Fundamental	67.37dBμV/m(Peak)@3m 59.33dBμV/m(Average)@3m
Antenna Designation	Monopole Antenna
Antenna Gain	0dBi
Power Supply	DC 3.7V by battery

2.2 TEST FREQUENCY LIST

Frequency Band	Channel Number	Frequency
	01	433.92 MHz

Note: According to manufacturer's requirements, periodic operation in the band 40.66-40.70 MHz and above 70 MHz.



2.3 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: 2A5JU-BD10500, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 TEST METHODOLOGY

The tests were performed according to following standards:

No.	Identity	Document Title		
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations		
2	FCC 47 CFR Part 15	Radio Frequency Devices		
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices		

2.5 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

2.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7 ANTENNA REQUIREMENT

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antennathat uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a brokenantenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 0dBi.



3. TEST ENVIRONMENT

3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 ENVIRONMENTAL CONDITIONS

	NORMAL CONDITIONS	EXTREME CONDITIONS			
Temperature range (°C)	15 - 35	-20 - 50			
Relative humidty range	20 % - 75 %	20 % - 75 %			
Pressure range (kPa)	86 - 106	86 - 106			
Power supply	3.7V	3.33V - 4.07V			
Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.					

3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	U _c = ±2 %
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$



3.5 LIST OF EQUIPMENTS USED

• R	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\square	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-06-01	2024-05-31	
	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2023-03-03	2024-03-02	
	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2023-03-03	2024-03-02	
\boxtimes	AGC-EM-A152	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2023-06-01	2024-05-31	
\boxtimes	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A	
	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• R	Radiated Spurious Emission						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2023-02-18	2024-02-17
\boxtimes	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2023-06-03	2024-06-02
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2022-03-12	2024-03-11
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10
\square	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2024-03-22
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2021-10-31	2023-10-30
\square	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2023-06-01	2024-05-31
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08

AC Power Line Conducted Emission								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2023-06-03	2024-06-02	
	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2024-06-08	
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2023-06-03	2024/06/02	



Test Software							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information		
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71		
\boxtimes	AGC-EM-S004	RE Test System	FARA	EZ-EMC	Ver.RA-03A		
	AGC-ER-S012	BT/WIFI-Test System	Tonscend	JS1120-2	2.6		
\boxtimes	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0		



4.SYSTEM TEST CONFIGURATION

4.1 EUT CONFIGURATION


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT EXERCISE

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 CONFIGURATION OF TESTED SYSTEM

Radiated Emission Configure:



4.4 EQUIPMENT USED IN TESTED SYSTEM

The Following Peripheral Devices And Interface Cables Were Connected During The Measurement: Test Accessories Come From The Laboratory

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable			
1	-	-	-	-	-			
	Test Accessories Come From The Manufacturer							

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	-	-	-	-	-



4.5 SUMMARY OF TEST RESULTS

ltem	FCC Rules	Description Of Test	Result
1	§15.203	Antenna Equipment	Pass
2	§15.231(a)	Transmission Time (Activated automatically)	Pass
3	§15.231	Field Strength of Fundamental	Pass
4	§15.209	Radiated Emission	Pass
5	§15.205(a)	Restricted Bands of Operation	Pass
6	§15.231(c)	20dB Bandwidth	Pass
7	§15.207	AC Power Line Conducted Emission	N/A

Note: 1.N/A means not applicable

Note: 2.The SRD function cannot transmit when charging and does not require evaluation of AC Power Line Conducted Emission.



5. DESCRIPTION OF TEST MODES

Summary table of Test Cases					
	Data Rate / Modulation				
Test Item	Short-range equipment / ASK				
Radiated&Conducted Test Cases	Mode 1: Tx _433.92 MHz				
AC Conducted Emission N/A					
Note:					

Only the result of the worst case was recorded in the report, if no other cases. 1.

2. 3. The battery is full-charged during the test.

For Radiated Emission, 3axis were chosen for testing for each applicable mode.

4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.



6. PROVISION FOR MOMENTARY OPERATION

6.1 PROVISIONS APPLICABLE

- (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.
- (3) Periodic transmissions at regular predetermined intervals are not permitted.
 - However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.
- (4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.
- (5) Transmission of set-up information for security systems may exceed the transmission duration limits in (1) and (2) above, provided such transmission are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

6.2 MEASUREMENT PROCEDURE

- 1. Set the parameters of SPA as below:
- 2. Centre frequency = Operation Frequency
- 3. RBW=1MHz, VBW=3MHz Span: 0Hz Sweep time: 10S
- 4. Set the EUT to transmit by manually operated. Use the "View" function of SPA to find the transmission time of being released.
- 5. Record the data and Reported.

6.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)



Spectrum Analyzer



6.4 MEASUREMENT RESULTS

Test Mode	Test Channel (MHz)	The time of stopping transmission after automatically activation by alarm sensor (s)	Limits	Pass or Fail
ASK	433.92	0.18	5s	Pass

Test Graphs Of Launch Operation Time

	ectrum Analyzer - Swept SA							
	RF 50 Ω AC	CORREC	SENSE:INT		ALIGN AUTO	05:04:14 PM Nov 01 TRACE 12		Frequency
Center Fr	req 433.920000 N	PNO: Fast IFGain:Low	Trig: Free Run Atten: 30 dB	Avg Hol	d: 6/100			Auto Tune
10 dB/div Log √	Ref 20.00 dBm				Δ	Mkr1 180.0 -2.169	ms dB	Auto Tune
10.0 0.00	<u>1∆2</u>							Center Freq 433.920000 MHz
-20.0 -30.0								Start Freq 433.920000 MHz
-50.0 -60.0 -70.0		1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 -	los A con a canna non activ		สม _ี สุราชาวิทยาส์ 	A		Stop Freq 433.920000 MHz
Center 43 Res BW 1		VBW 3	3.0 MHz	FUNCTION FI	Sweep	Span 10.00 s (1001 FUNCTION VALU	pts)	CF Step 1.000000 MHz <u>Auto</u> Man
1 Δ2 1 2 F 1 3 4		180.0 ms (Δ) 1.871 s	-2.169 dB 7.407 dBm					Freq Offset 0 Hz
6 7 8 9 10 11								Scale Type Log <u>Lin</u>
•			III				۰.	
MSG					STATUS	3		



7. DUTY CYCLE CORRECTION FACTOR

7.1 PROVISIONS APPLICABLE

According to FCC Part 15.231 (b)(2) and 15.35 (c), For pulse operation transmitter, the averaging pulsed emissions are calculated by peak value of measured emission plus duty cycle factor.

7.2 MEASUREMENT PROCEDURE

After the antenna of the EUT is connected, the output signal of the EUT is received by the connected test antenna

To the spectrum analyzer. Set the center frequency to the actual working frequency of the EUT, and then set the spectrum analyzer to Zero Span for

Release time reading. During the test, the switch is released and the EUT is automatically closed

1. Set the parameters of SPA as below:

Centre frequency = Operation Frequency RBW=1MHz, VBW=3MHz Span: 0Hz

Sweep time: more than two pulse trains or more than each type of pulse occupancy time

- 2. Set the EUT to transmit by manually operated. Use the "Delta mark" function of SPA to find the period time between two pulse trains and each type of pulse occupancy time.
- 3. Record the plots and Reported.

7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)



Spectrum Analyzer

7.4 MEASUREMENT RESULTS

Type of Pules	Width of Pules (ms)	Quantity of Pules (pcs)	Transmission Time (ms)	Total Time (Ton) (ms)
Pules 1	0.97	10	9.7	14.5
Pules 2	0.32	15	4.8	14.5

Test Period (Tp)	Total Time (Ton)	Duty Cycle	Duty Cycle Correction Factor
(ms)	(ms)	(%)	(dB)
36.6	14.5	39.62	-8.04


NOTE 1: Duty Cycle Factor=20 log (Duty Cycle) =-8.04

NOTE 2: The maximum reference value of the test cycle is 100ms.


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




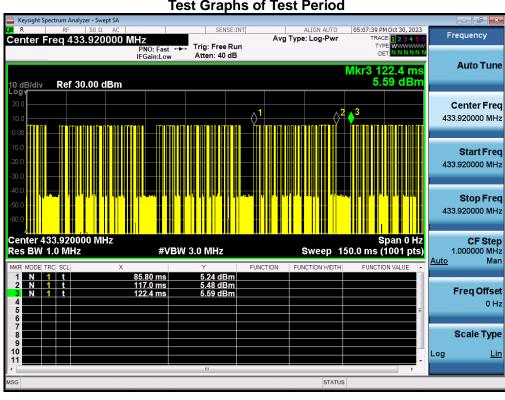


Test Graphs of Test Period

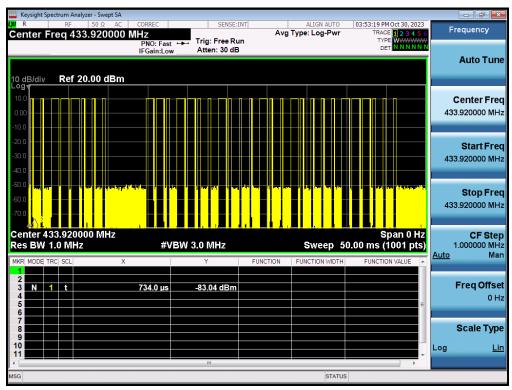



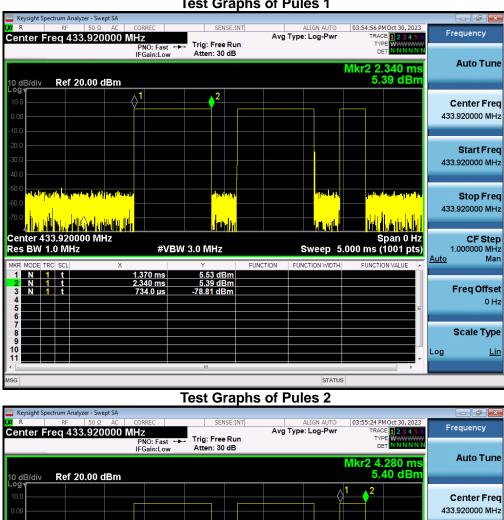

Test Graphs of Pules 1

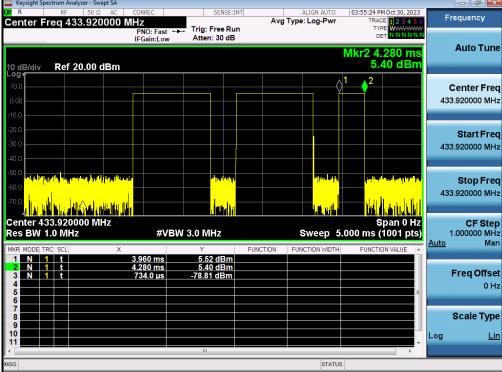



8. 20 dB BANDWIDTH

8.1 PROVISIONS APPLICABLE

According to FCC Part 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier

8.2 MEASUREMENT PROCEDURE

- 1. Set the parameters of SPA as below: Centre frequency = Operation Frequency RBW=0.3kHz VBW=1.0kHz Span: 100kHz Sweep time: Auto
- 2. Set the EUT to continue transmitting mode. Allow the trace to stabilize. Use the "N dB down" function of SPA to define the bandwidth.
- 3. Record the plots and Reported.

8.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)




Spectrum Analyzer



7.4 MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and -20dB Bandwidth							
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (kHz)	-20dB Bandwidth (kHz)	Limits (MHz)	Pass or Fail		
ASK	433.92	27.509	13.53	1.0848	Pass		

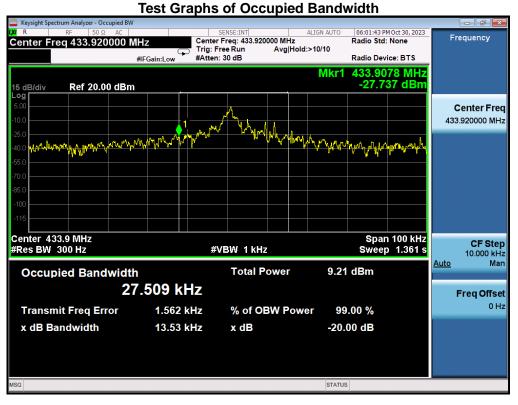



7. RADIATED EMISSION

7.1 LIMITS OF RADIATED EMISSION TEST

15.209 Limit in the below table has to be followed:

Frequency	Distance	Field Streng	gths Limit		
(MHz)	Meters	μ V/m	dB(µV)/m		
0.009 ~ 0.490	300	2400/F(kHz)			
0.490 ~ 1.705	30	24000/F(kHz)			
1.705 ~ 30	30	30			
30 ~ 88	3	100	40.0		
88 ~ 216	3	150	43.5		
216 ~ 960	3	200	46.0		
960 ~ 1000	3	500	54.0		
44 4000		74.0 dB(μV)/m (Peak)			
Above 1000	3	54.0 dB(µV)/m (Average)			
Remark: (1) Emission level dB μ V = 20 log Emission level μ V/m					
(2) The smaller limit shall apply at the cross point between two frequency bands.					
(3) Distance is the distance in meters between the measuring instrument, antenna and the					

(3) Distance is the distance in meters between the measuring instrument, antenna and the

closest point of any part of the device or system.

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

15 001/h	limitin	the helew	table has	to ho	followed
15.231(0)) ∟!!!!!! !!!	the below	lable has	lo be	ionowea.

Fundamental Frequency	Field Strength of Fundamental (microvolts/meter)	Field Strength of Harmonics (microvolts/meter)
40.66-40.70MHz	2250	225
70-130MHz	1250	125
130-174MHz	1250 to 3750	125 to 375
174-260MHz	3750	375
260-470MHz	3750 to 12500	375 to 1250
Above 470MHz	12500	1250



Fundamental Frequency	Field Strength of Fundamental (microvolts/meter)	Field Strength of Harmonics (microvolts/meter)
40.66-40.70MHz	1000	225
70-130MHz	1250	125
130-174MHz	1250 to 3750	125 to 375
174-260MHz	3750	375
260-470MHz	3750 to 12500	375 to 1250
Above 470MHz	12500	1250

15.231(e) Limit in the below table has to be followed:

7.2 MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not

Any reparters and any reparters and any reparter of the second by none using the guas break method for below below by any reparter of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting			
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP			
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP			
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP			
Start ~Stop Frequency	1GHz~26.5GHz			
	1MHz/3MHz for Peak, 1MHz/3MHz for Average			

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP




7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)


RADIATED EMISSION TEST SETUP 9KHz-30MHz

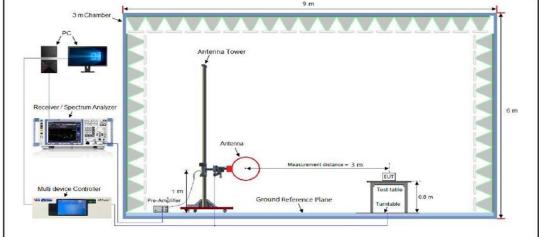

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

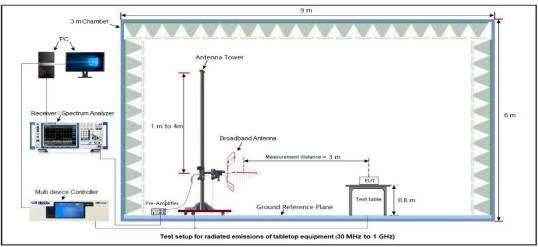

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

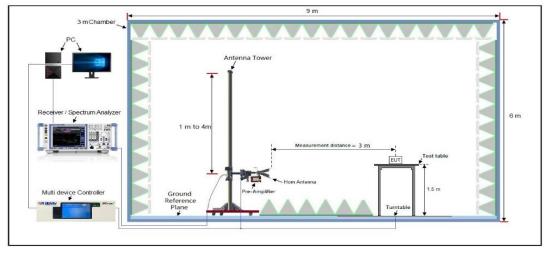

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



7.4 MEASUREMENT RESULT

RADIATED EMISSION BELOW 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

	RADIATED EMISSION FROM 30MHz ~1000MHz									
EUT			Pipedream oval remote for boo dock			body	Mode	l Name	BD1050	0
Temp	perature		22.9° CRelative Humidity59.2%							
Pres	sure		960	hPa			Test V	/oltage	Normal	Voltage
Test	Mode		Мос	de 1			Anten	na	Horizon	tal
	72.0 dB	uV/m								
								3X	Limit: Margin:	×
										7
										X
	32	1 โหนะสารระการับสไปสามาร	A-Iwayo	esterner grant of water water	www.how.man.wesh.wesh.wesh.wesh.wesh.wesh.wesh.wesh	and the second	parentariter	within the other within the other	-real alor-ryletion	
	-8									
Suer	30.000 Dected Data			0 70 80	(MH	z)		300 400 500	600 700	1000.000
ousp				Detection						
NO.	Freq. [MHz]	Leve [dBµV/		Factor [dB]	Limit [dBµV/m]		rgin B]	Height [cm]	Angle [°]	Polarity
1	43.2017	20.10)	13.68	40.00	-19	.90	150	359	Horizontal
2	120.6991	22.02	2	16.36	43.50	-21	.48	150	38	Horizontal
3	433.9200	67.37	7	23.82	46.00	21	.37	150	42	Horizontal
4	530.1014	30.65	5	24.54	46.00	-15	.35	150	42	Horizontal
5	612.0642	30.80)	25.16	46.00	-15	.20	150	48	Horizontal
6	869.1301	62.69)	29.19	46.00	16	.69	150	114	Horizontal
7	900.1473	37.69)	31.78	46.00	-8.	31	150	293	Horizontal
Final	data result	_ Avera	ge D	Detection						
NO.	Freq. [MHz]	PK Lev [dBµV/		Duty cycle	factor(dB)		.evel V/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	433.9200	67.37	7	-8.	04	59	.33	80.82	21.49	Horizontal
2	869.1301	62.69)	-8.	04	54	.65	60.82	6.17	Horizontal

----.



EUT	JT Pipedream oval remote for body dock			Mode	Model Name		BD10500		
Tem	perature	22	22.9° CRelative Humidity59.2%						
Pres	sure	96	960hPa			/oltage	Normal Voltage		
Test	Mode	Mo	ode 1		Anten	ina	Vertical		
	72.0 dBuV	//m							
						\$	Limit: Margin:		
	-8 30.000			Janto de ^{la ganda d} a de la d	en and a strath and the strath and t				
				נחווצ) :	300 400 500	600 700	1000.000	
Susp	pected Data	List_ Peak		[miiz) :	300 400 500	600 700	1000.000	
Susp NO.	Freq. [MHz]	List_ Peak Level [dBµV/m]		Limit [dBµV/m]) Margin [dB]	300 400 500 Height [cm]	600 700 Angle [°]	Polarity	
	Freq.	Level	Detection Factor	Limit	Margin	Height	Angle		
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°] 359 38	Polarity	
NO.	Freq. [MHz] 48.1626	Level [dBµV/m] 23.95	A DetectionFactor [dB]16.98	Limit [dBµV/m] 40.00	Margin [dB] -16.05	Height [cm] 150	Angle [°] 359	Polarity Vertical	
NO.	Freq. [MHz] 48.1626 433.9200 460.7271 714.1734	Level [dBµV/m] 23.95 66.66 33.03 35.05	Factor [dB] 16.98 25.15 28.60	Limit [dBµV/m] 40.00 46.00 46.00 46.00	Margin [dB] -16.05 20.66 -12.97 -10.95	Height [cm] 150 150 150 150	Angle [°] 359 38 42 42	Polarity Vertical Vertical Vertical Vertical	
NO. 1 2 3 4 5	Freq. [MHz] 48.1626 433.9200 460.7271 714.1734 760.7036	Level [dBµV/m] 23.95 66.66 33.03 35.05 37.35	Factor [dB] 16.98 25.15 25.15 28.60 28.17	Limit [dBµV/m] 40.00 46.00 46.00 46.00 46.00	Margin [dB] -16.05 20.66 -12.97 -10.95 -8.65	Height [cm] 150 150 150 150 150 150	Angle [°] 359 38 42 42 42 48	Polarity Vertical Vertical Vertical Vertical Vertical	
NO. 1 2 3 4 5 6	Freq. [MHz] 48.1626 433.9200 460.7271 714.1734 760.7036 869.1302	Level [dBµV/m] 23.95 66.66 33.03 35.05 37.35 55.20	Factor [dB] 16.98 25.15 25.15 28.60 28.17 27.73	Limit [dBµV/m] 40.00 46.00 46.00 46.00 46.00 46.00	Margin [dB] -16.05 20.66 -12.97 -10.95 -8.65 9.20	Height [cm] 150 150 150 150 150 150	Angle [°] 359 38 42 42 42 48 114	Polarity Vertical Vertical Vertical Vertical Vertical Vertical	
NO. 1 2 3 4 5 6 7	Freq. [MHz] 48.1626 433.9200 460.7271 714.1734 760.7036 869.1302 935.5463	Level [dBµV/m] 23.95 66.66 33.03 35.05 37.35 55.20 36.81	Factor [dB] 16.98 25.15 25.15 28.60 28.17 27.73 30.40 30.40	Limit [dBµV/m] 40.00 46.00 46.00 46.00 46.00	Margin [dB] -16.05 20.66 -12.97 -10.95 -8.65	Height [cm] 150 150 150 150 150 150	Angle [°] 359 38 42 42 42 48	Polarity Vertical Vertical Vertical Vertical Vertical	
NO. 1 2 3 4 5 6 7	Freq. [MHz] 48.1626 433.9200 460.7271 714.1734 760.7036 869.1302	Level [dBµV/m] 23.95 66.66 33.03 35.05 37.35 55.20 36.81	Factor [dB] 16.98 25.15 25.15 28.60 28.17 27.73 30.40 30.40	Limit [dBµV/m] 40.00 46.00 46.00 46.00 46.00 46.00	Margin [dB] -16.05 20.66 -12.97 -10.95 -8.65 9.20	Height [cm] 150 150 150 150 150 150	Angle [°] 359 38 42 42 42 48 114	Polarity Vertical Vertical Vertical Vertical Vertical Vertical	
NO. 1 2 3 4 5 6 7	Freq. [MHz] 48.1626 433.9200 460.7271 714.1734 760.7036 869.1302 935.5463	Level [dBµV/m] 23.95 66.66 33.03 35.05 37.35 55.20 36.81	Factor [dB] 16.98 25.15 25.15 28.60 28.17 27.73 30.40 Detection	Limit [dBµV/m] 40.00 46.00 46.00 46.00 46.00 46.00	Margin [dB] -16.05 20.66 -12.97 -10.95 -8.65 9.20	Height [cm] 150 150 150 150 150 150	Angle [°] 359 38 42 42 42 48 114	Polarity Vertical Vertical Vertical Vertical Vertical Vertical	
NO. 1 2 3 4 5 6 7 Fina	Freq. [MHz] 48.1626 433.9200 460.7271 714.1734 760.7036 869.1302 935.5463 data result Freq.	Level [dBµV/m] 23.95 66.66 33.03 35.05 37.35 55.20 36.81 t_ Average	Pactor Factor [dB] 16.98 25.15 25.15 28.60 28.17 27.73 30.40 Detection Duty cycle	Limit [dBµV/m] 40.00 46.00 46.00 46.00 46.00 46.00 46.00	Margin [dB] -16.05 20.66 -12.97 -10.95 -8.65 9.20 -9.19 AV Level	Height [cm] 150 150 150 150 150 150 150 150	Angle [°] 359 38 42 42 42 48 114 293 Margin	Polarity Vertical Vertical Vertical Vertical Vertical Vertical Vertical	

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Limit-Level.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



RADIATED EMISSION FROM ABOVE 1GHZ

EUT			Pipedream oval remote for body dock			Name	BD10500)	
Temp	erature 2		24.3° C			ve Humidity	58.6%		
Press	sure	96	960hPa T			/oltage	Normal Voltage		
Test I	Vode	Mc	de 1		Anten	na	Horizontal		
	130 120 110 90 80 70 70 70 70 70 80 80 80 80 80 80 80 80 80 80 80 80 80	PK Limit — AV AV Detector		2G Fre	C Part 15C	46	56	63	
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	
1	1217.0434	32.90	-17.99	74.00	41.10	100	150	Horizontal	
2	1795.159	35.26	-15.10	74.00	38.74	100	240	Horizontal	
3	2996.3993	36.44	-11.97	74.00	37.56	100	140	Horizontal	
4	4209.6419	37.43	-9.09	74.00	36.57	100	50	Horizontal	
5	5331.8664	36.10	-7.18	74.00	37.90	100	140	Horizontal	
6	5975.9952	38.60	-5.47	74.00	35.40	100	40	Horizontal	

RESULT: PASS



EUT			Pipedream oval remote for body dock			Name	BD1050	00					
Temp	emperature24.3° CRelative Humidity				58.6%	58.6%							
Pres	sure	960	960hPa Test Voltage					60hPa Test Voltage Normal Voltage			Test Voltage Normal Voltage		
Test	Mode	Мо	de 1		Anten	na	Vertical						
	120 110 100 90 80 100 90 80 100 90 80 100 90 80 100 90 80 100 90 80 100 90 80 100 90 80 100 90 80 100 100 90 80 100 100 90 80 100 100 100 100 100 100 100	yeen 1 , magaala ja aa dagaala d	energy for the staff of the sta		u <mark>n 3</mark> au tau an	مىرىر بىلام كەركى مەركى مە مەركى مەركى مەر							
	20 10 0 10 1G	(Limit — AV Lim V Detector	it — Vertical PK	2G Free	3G quency[Hz]	4G	56	6G					
NO.	20 10 0 10 1G		it — Vertical PK Factor [dB]										
NO. 1	20 10 0 10 16 PP * A	V Detector	Factor	Free	uuency[Hz] Margin	4G Height	5G Angle	6G					
	20 10 0 10 16 Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	^{quency[Hz]} Margin [dB]	4G Height [cm]	5G	eg					
1	20 10 0 10 16 Freq. [MHz] 1162.0324	Level [dBµV/m] 32.65	Factor [dB] -18.08	Limit [dBµV/m] 74.00	Margin [dB] 41.35	4G Height [cm] 100	5G Angle [°] 150	Polarity Vertical					
1 2	Freq. [MHz] 1162.0324 1710.142	Level [dBµV/m] 32.65 35.78	Factor [dB] -18.08 -15.80	Free Limit [dBµV/m] 74.00 74.00	Margin [dB] 41.35 38.22	46 Height [cm] 100 100	5G Angle [°] 150 60	Polarity Vertical Vertical					
1 2 3	Freq. [MHz] 1162.0324 1710.142 2404.2809	Level [dBµV/m] 32.65 35.78 34.59	Factor [dB] -18.08 -15.80 -12.43	Free Limit [dBµV/m] 74.00 74.00 74.00	Margin [dB] 41.35 38.22 39.41	4G Height [cm] 100 100 100	5G Angle [°] 150 60 90	Polarity Vertical Vertical Vertical					

RADIATED EMISSION FROM ABOVE 1GHZ

RESULT: PASS

Note:

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin=Limit-Level.

The "Factor" value can be calculated automatically by software of measurement system.



8. AC LINE CONDUCTED EMISSION TEST

8.1 LIMITS OF LINE CONDUCTED EMISSION TEST


F rancisco au	Maximum RF Line Voltage				
Frequency	Q.P. (dBµV)	Average (dBµV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

8.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

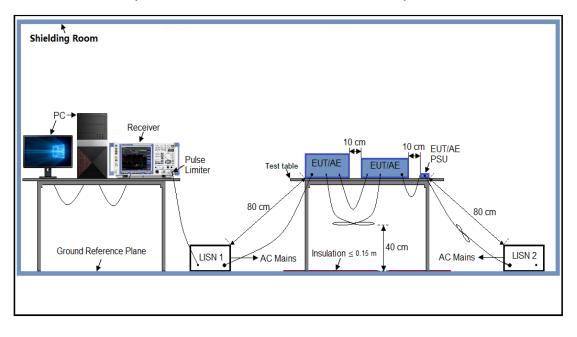



8.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 3.7V power from battery.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

8.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

8.5 MEASUREMENT RESULTS

Not Applicable Note: The SRD function cannot transmit when charging.



APPENDIX I: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC16084231002AP01

APPENDIX II: PHOTOGRAPHS OF TEST EUT

Refer to the Report No.: AGC16084231002AP02

-----END OF REPORT-----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.