

# 47 CFR Part 15 Subpart C

## Section 15.249

### Test Report

Product : Transceiver

Trade Name : N/A

Model Number : CAIVU-FM2; SLIVU-FM2

FCC ID : ELVMTRUE

Prepared for

#### **Nutek Corporation**

No.167, Lane 235, Bauchiau Rd., Xindian District,  
New Taipei City 23145, Taiwan

TEL. : +886 2 2918 9478

FAX. : +886 2 2917 9069

Prepared by

#### **Interocean EMC Technology Corp.**

#### **Interocean EMC Technology Tin-Fu Laboratory**

No. 5-2, Lin 1, Tin-Fu, Lin-Kou Dist., New Taipei City,  
Taiwan 244, R.O.C.

TEL.: +886 2 2600 6861

FAX.: +886 2 2600 6859



#### **Remark:**

The test report consists of **36** pages in total. It shall not be reproduced except in full, without the written approval of IETC. This document may be altered or revised by IETC only, and shall be noted in the revision section of the document.  
The test result in this report is only subjected to the test sample.

# Table of Contents

<b>1</b>	<b>General Information</b>	<b>4</b>
1.1	Description of Equipment Under Test	4
1.2	Table for Channel Frequencies	5
1.3	Test Facility	6
1.4	Test Equipment	7
1.5	Measurement Uncertainty	7
1.6	Summary of Measurement	8
<b>2</b>	<b>Test Specifications</b>	<b>9</b>
2.1	Test Standard	9
2.2	Operation Mode	9
2.3	Test Step of EUT	9
<b>3</b>	<b>20dB Bandwidth test</b>	<b>10</b>
3.1	Limit	10
3.2	Test Procedure	10
3.3	Test Result	10
<b>4</b>	<b>RF Radiated spurious emission test</b>	<b>12</b>
4.1	Limit	12
4.2	Configuration of Measurement	12
4.3	Test Procedure	13
4.4	The description of operation mode	13
4.5	Test Result	13
<b>5</b>	<b>Emission on the Band Edge test</b>	<b>26</b>
5.1	Limit	26
5.2	Configuration of Measurement	26
5.3	Test Procedure	26
5.4	Test Result	26
<b>6</b>	<b>Photographs of Test</b>	<b>31</b>
6.1	Radiated Emission Measurement (Below 1 GHz)	31
6.2	Radiated Emission Measurement (Above 1 GHz)	31
<b>7</b>	<b>Photographs of EUT</b>	<b>32</b>
7.1	Model No.: CAIVU-FM2	32

# Statement of Compliance

**Applicant:** Nutek Corporation  
**Manufacturer:** Nutek Corporation  
**Product:** Transceiver  
**Model No.:** CAIVU-FM2; SLIVU-FM2  
**Tested Power Voltage:** DC 5V  
**Date of Final Test:** May 14, 2021  
**Revision of Report:** Rev. 02

**Configuration of Measurements and Standards Used :**

FCC Rules and Regulations Part 15 Subpart C

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.10, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

- Note:**
1. The result of the testing report relate only to the item tested.
  2. This report shall not be partial reproduced without written approval by Interocean EMC Technology Corporation.
  3. Judgment of conformity is based on test result, regardless of measurement uncertainty.

Report Issued: 2021/05/27

Prepared by: Ivan Wang Approved: Jerry Chang  
Ivan Wang Jerry Chang

# 1 General Information

## 1.1 Description of Equipment Under Test

<b>Product</b>	: Transceiver
<b>Model Number</b>	: CAIVU-FM2; SLIVU-FM2
<b>Applicant</b>	: <b>Nutek Corporation</b> No.167, Lane 235, Bauchiau Rd., Xindian District, New Taipei City 23145, Taiwan
<b>Manufacturer</b>	: <b>Nutek Corporation</b> No.167, Lane 235, Bauchiau Rd., Xindian District, New Taipei City 23145, Taiwan
<b>Power Supply</b>	: DC 5V
<b>Operating Frequency</b>	: 903.966 MHz - 917.196 MHz
<b>Output Power</b>	: 94.06 dBμV/m
<b>Channel Number</b>	: 50 channels
<b>Type of Modulation</b>	: GFSK
<b>Antenna Description</b>	: Helix Antenna. maximum Peak gain: 0dBi.
<b>Measurement Software</b>	: e3; Ver: 8.120803a7-2
<b>Receipt Date of EUT</b>	: Apr. 13, 2021
<b>Date of Test</b>	: Apr. 19 ~ May 14, 2021
<b>Additional Description</b>	: 1) The test model is “ <b>CAIVU-FM2</b> ”, designated by the applicant and included in this report. 2) The differences of all models included in this report are provided by the applicant, and the lab disclaims any liability related to reporting, if incorrect, from such provision. The difference of all models is only for different market. 3) For more detailed specification about EUT, please refer to the user's manual.

## 1.2 Table for Channel Frequencies

	FC (MHz)		FC (MHz)		FC (MHz)		FC (MHz)
<b>CH0</b>	903.966	<b>CH13</b>	907.476	<b>CH26</b>	910.986	<b>CH39</b>	914.496
<b>CH1</b>	904.236	<b>CH14</b>	907.746	<b>CH27</b>	911.256	<b>CH40</b>	914.766
<b>CH2</b>	904.506	<b>CH15</b>	908.016	<b>CH28</b>	911.526	<b>CH41</b>	915.036
<b>CH3</b>	904.776	<b>CH16</b>	908.286	<b>CH29</b>	911.796	<b>CH42</b>	915.306
<b>CH4</b>	905.046	<b>CH17</b>	908.556	<b>CH30</b>	912.066	<b>CH43</b>	915.576
<b>CH5</b>	905.316	<b>CH18</b>	908.826	<b>CH31</b>	912.336	<b>CH44</b>	915.846
<b>CH6</b>	905.586	<b>CH19</b>	909.096	<b>CH32</b>	912.606	<b>CH45</b>	916.116
<b>CH7</b>	905.856	<b>CH20</b>	909.366	<b>CH33</b>	912.876	<b>CH46</b>	916.386
<b>CH8</b>	906.126	<b>CH21</b>	909.636	<b>CH34</b>	913.146	<b>CH47</b>	916.656
<b>CH9</b>	906.396	<b>CH22</b>	909.906	<b>CH35</b>	913.416	<b>CH48</b>	916.926
<b>CH10</b>	906.666	<b>CH23</b>	910.176	<b>CH36</b>	913.686	<b>CH49</b>	917.196
<b>CH11</b>	906.936	<b>CH24</b>	910.446	<b>CH37</b>	913.956		
<b>CH12</b>	907.206	<b>CH25</b>	910.716	<b>CH38</b>	914.226		

### 1.3 Test Facility

- Site Description** : ☒Chamber 3
- Name of Firm** : Interocean EMC Technology Corp.
- Company web** : <http://www.ietc.com.tw>
- Location** : No. 5-2, Lin 1, Tin-Fu, Lin-Kou Dist., New Taipei City, Taiwan 244, R.O.C.
- Site Filing** : ● Federal Communication Commissions – USA  
Designation No.: TW1020 (Test Firm Registration #: 651092)  
Designation No.: TW1113 (Test Firm Registration #: 959554)  
● Innovation, Science and Economic Development Canada (ISED)  
CAB identifier: TW1113 (Ref. No 14962756)  
● Voluntary Control Council for Interference by Information Technology Equipment (VCCI) – Japan  
Member No.: 1349  
Registration No. (Conducted Room): C-11094  
Registration No. (Conducted Room): T-11562  
Registration No. (OATS 1): R-11040  
Registration No. (Chamber 3): G-20080
- Site Accreditation** : ● Bureau of Standards and Metrology and Inspection (BSMI) – Taiwan, R.O.C.  
Accreditation No.:  
SL2-IN-E-0026 for CNS 13438 / CISPR 22  
SL2-R1-E-0026 for CNS 13439 / CISPR 13  
SL2-R2-E-0026 for CNS 13439 / CISPR 13  
SL2-L1-E-0026 for CNS 14115 / CISPR 15  
● Taiwan Accreditation Foundation (TAF)  
Accreditation No.: 1113  
● American Association for Laboratory Accreditation (A2LA)  
Certificate Number: 4891.01  
● Vehicle Safety Certification Center (VSCC)  
Approval No.: TW16-11

## 1.4 Test Equipment

Instrument	Manufacturer	Model	Serial No.	Next Cal. Date
Spectrum Analyzer	R&S	FSP40	100478	2021/07/28
Loop Antenna	Electro-Metrics	EM-6879	261	2021/09/16
Bilog Antenna	ETC	MCTD 2786B	BLB17S04020	2021/05/04
Horn Antenna	Schwarzbeck	BBHA9120	9120D-1051	2021/08/03
Pre-Amplifier	EMCI	EMC001150	980130	2021/08/02
Pre-Amplifier	EMCI	EMC051845	980110	2021/07/02
RF Cable	HARBOUR	27478LL142	CBL65	2021/07/28
RF Cable	Marvelous Microwave	MCBL-LL266.50	CBL70	2021/07/28
Measurement Software	AUDIX-e3			

Note: The above equipments are within the valid calibration period.

## 1.5 Measurement Uncertainty

Item	Value
Chamber 3:	
Radiated Emission Test (9 kHz to 30 MHz)	3.2 dB
Radiated Emission Test (30 MHz to 200 MHz)	4.6 dB
Radiated Emission Test (200 MHz to 1 GHz) (Antenna: without tilting)	5.9 dB
Radiated Emission Test (1 GHz to 18 GHz)	5.0 dB
Radiated Emission Test (18 GHz to 40 GHz)	5.4 dB
The reported expanded uncertainty is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%	

## 1.6 Summary of Measurement

Test Parameter	Reference Document CFR47 Part15	Results
RF Radiated spurious emission test	§15.205, §15.209 §15.249	Pass
Emission on the Band Edge	§15.249(d)	Pass
AC Power Line Conducted Emission test	§15.207(a)	N/A
20 dB Bandwidth	§15.215(c)	Pass
Note: N/A is an abbreviation for Not Applicable.		



## **2 Test Specifications**

### **2.1 Test Standard**

The EUT was performed according to FCC Part 15 Subpart C Section 15.249 procedure and setup followed by ANSI C63.10-2013 requirements.

### **2.2 Operation Mode**

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that “Y axis” position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

### **2.3 Test Step of EUT**

- 2.3.1 Set the fixture to EUT for power supplying.
- 2.3.2 Turn on the power of all equipments.
- 2.3.3 Let the EUT continuous transmission.
- 2.3.4 Execute the test.

### 3 20dB Bandwidth test

#### 3.1 Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

#### 3.2 Test Procedure

The 20dB bandwidth per FCC §15.215 was measured using spectrum analyzer with the resolutions bandwidth set at 100 kHz, the video bandwidth  $\geq$  RBW, and the SPAN may equal to approximately 2 to 3 time the 20 dB bandwidth.

#### 3.3 Test Result


**PASS.**

The final test data is shown as following pages.

Test CH	Modulation	Frq. (MHz)	20dB Bandwidth (MHz)
Low	GFSK	903.966	0.312
MID	GFSK	910.446	0.312
HIGH	GFSK	917.196	0.308


**Plot:**

**Low Channel:**

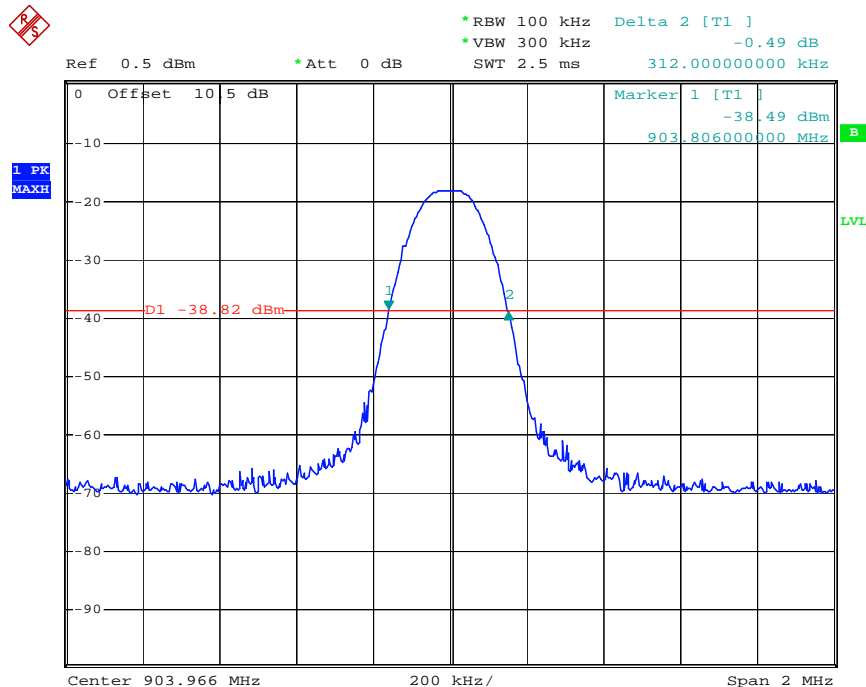


Date: 14.MAY.2021 11:24:29

**Mid Channel:**

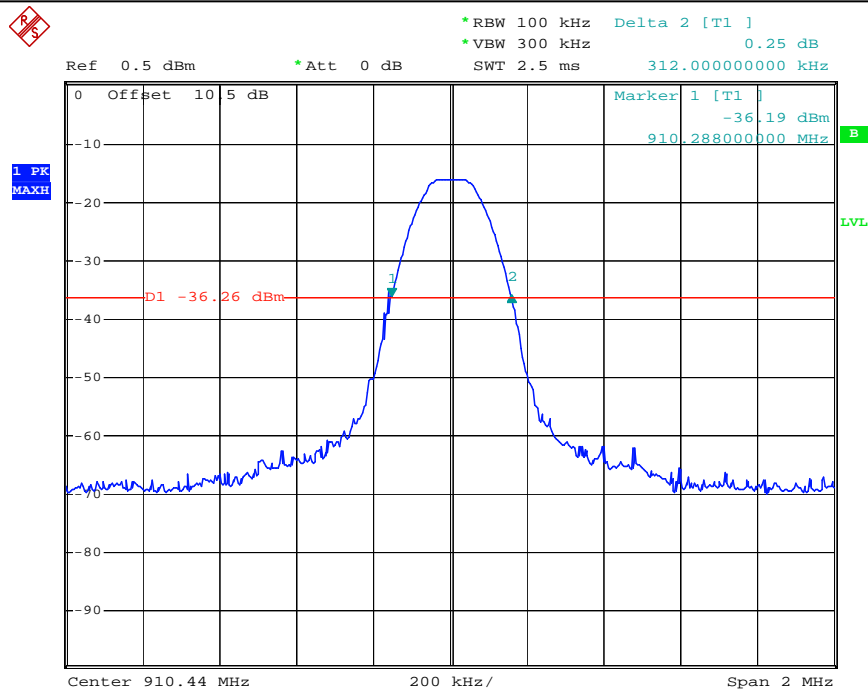

Date: 14.MAY.2021 11:26:59

### High Channel:

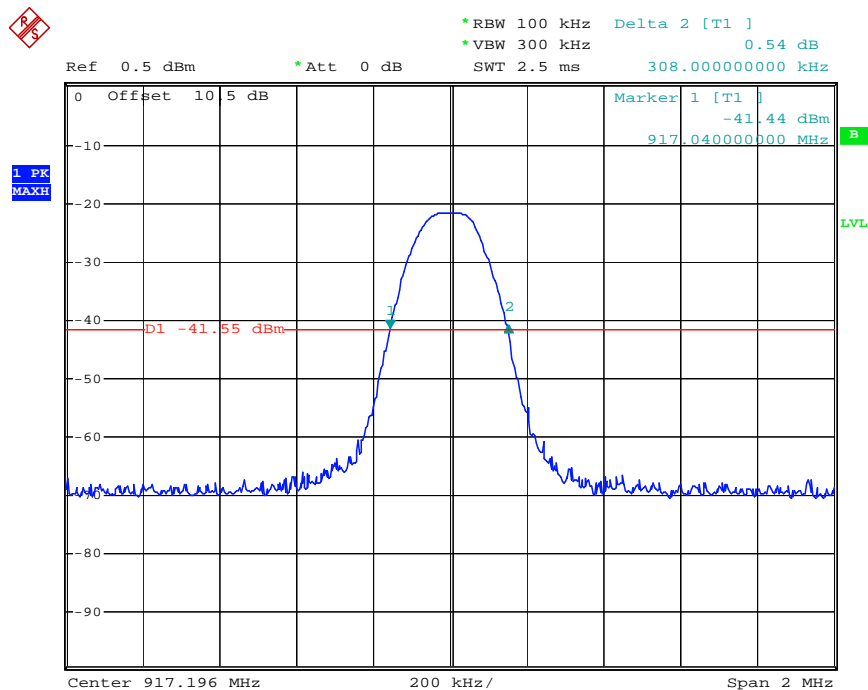

Date: 14.MAY.2021 11:30:35

## 4 RF Radiated spurious emission test

### 4.1 Limit

According to §15.249 (a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:


Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902 - 928 MHz	50	500
2400 - 2483.5 MHz	50	500
5725 - 5875 MHz	50	500
24.0 - 24.25 GHz	250	2500

For intentional radiator, the radiated emission shall comply with §15.209(a).


Frequency (MHz)	Field strength dB( $\mu$ V/m)	Measurement distance (meters)
1.705 - 30.0	29.5	30
30 - 88	40	3
88 - 216	43.5	3
216 - 960	46	3
Above 960	54	3

### 4.2 Configuration of Measurement

Measurement Frequency under 1 GHz

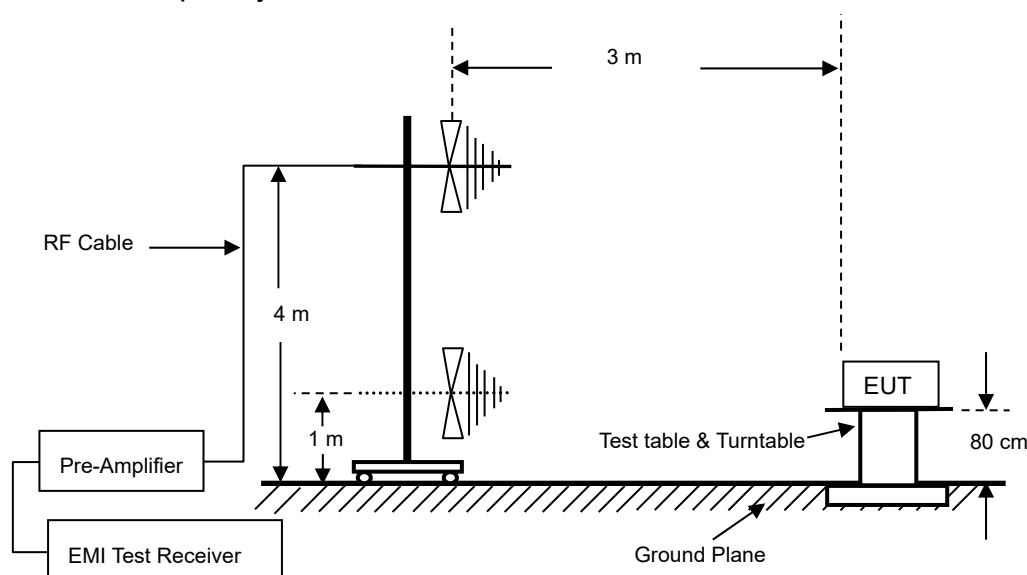

### Measurement Frequency above 1 GHz

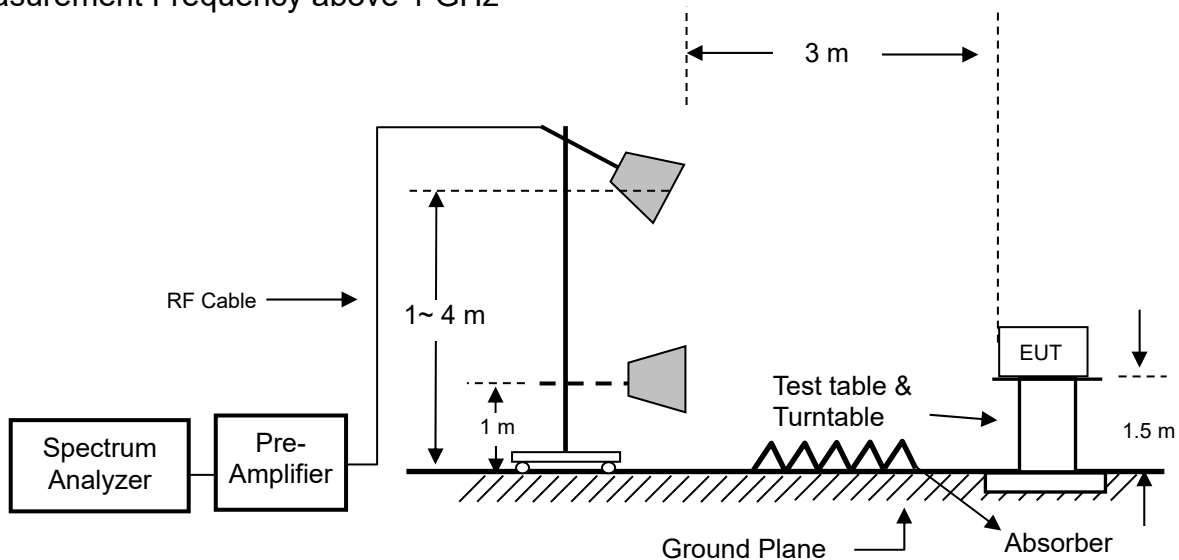

### 4.3 Test Procedure

The EUT was setup to ANSI C63.10-2013.

Radiated emission measurements were performed from 30 MHz to 25 GHz. Spectrum Analyzer set as below: For frequency range from 30 MHz to 1 GHz: RBW=100 kHz or greater. For frequencies above 1 GHz: set RBW=VBW=1 MHz for peak detector and RBW=1 MHz, VBW=10 Hz for average detector.

The EUT for testing is arranged on a wooden turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meter and down to 1 meter.

### 4.4 The description of operation mode

Setup EUT to continuously transmit signal with 100% duty cycle during the test period.

### 4.5 Test Result

#### **PASS.**

The frequency range from 9 kHz to 30 MHz was pre-scanned and the results were 20 dB lower than the limit line which according to FCC 15.31(o) needs not be recorded.

The final test emission data is shown as following tables.

## Radiated Emission Below 1 GHz

CLIENT: Nutek Corporation

EUT: Transceiver

MODEL: CAIVU-FM2

RATING: DC 5V

COMMENT: Low Channel

Data:211

OPERATOR : Scott


TEST SITE : Chamber 3

TEST DISTANCE : 3 m

POLARIZATION : HORIZONTAL

TEMP/HUM : 25.2°C/42%

2021-04-19

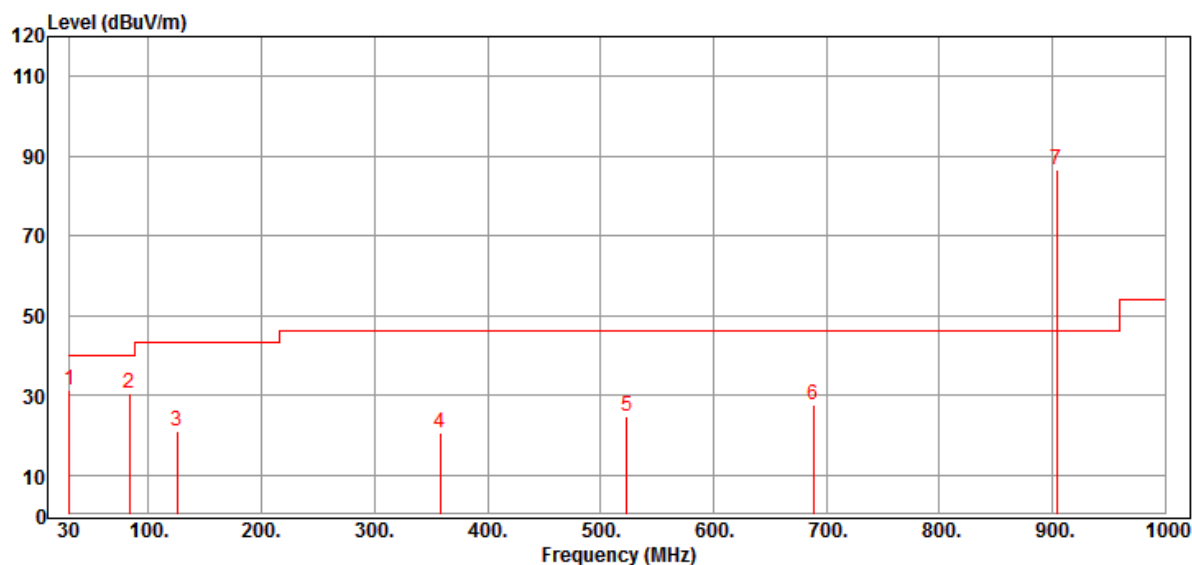

Item	Freq.	Reading	Factor	Level	Limit	Margin	Remark
Mark	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	30.000	62.12	-30.97	31.15	40.00	-8.85	Peak
2	83.320	68.34	-37.77	30.57	40.00	-9.43	Peak
3	125.360	50.34	-29.47	20.87	43.50	-22.63	Peak
4	358.230	49.34	-28.76	20.58	46.00	-25.42	Peak
5	523.320	50.84	-26.20	24.64	46.00	-21.36	Peak
*	688.350	52.11	-24.34	27.77	46.00	-18.23	Peak
7	903.930	107.24	-20.69	86.55	94.00	-7.45	Peak

Remark : Corrected Level = Reading + Correction Factor – Preamp


Correction Factor = Antenna Factor + Cable Loss

Margin = Corrected Level – Limits

“ \* ” Mark indicated Background Noise Level

CLIENT: Nutek Corporation  
EUT: Transceiver  
MODEL: CAIVU-FM2  
RATING: DC 5V  
COMMENT: Low Channel  
Data:212

OPERATOR : Scott  
TEST SITE : Chamber 3  
TEST DISTANCE : 3 m  
POLARIZATION : VERTICAL  
TEMP/HUM : 25.2°C/42%  
2021-04-19

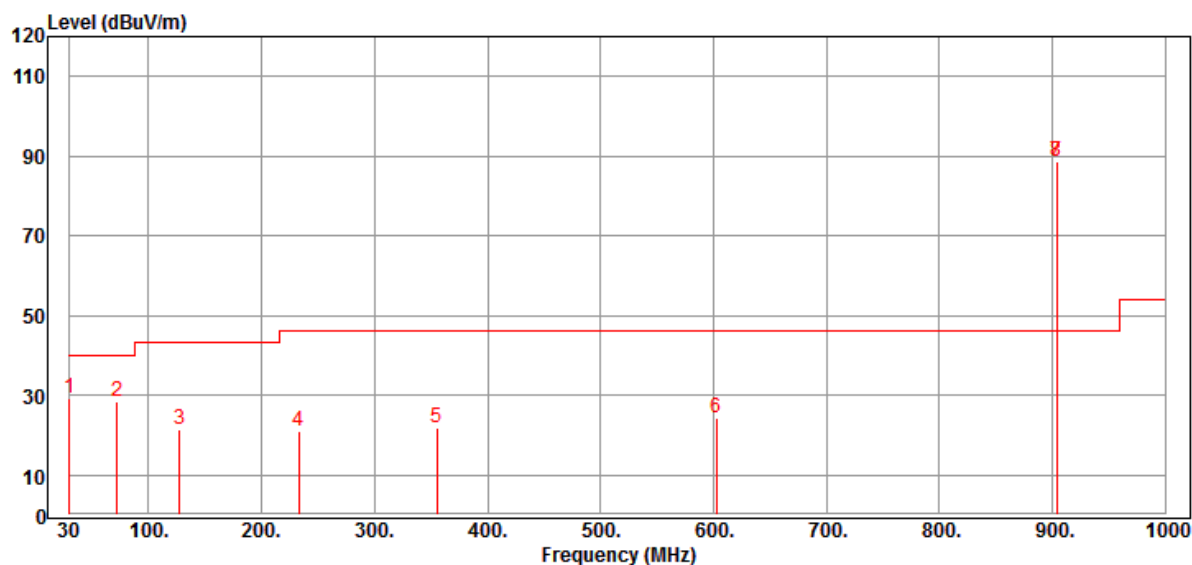


Item Mark	Freq. MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark
1	30.010	60.23	-30.97	29.26	40.00	-10.74	Peak
2	72.350	67.22	-38.83	28.39	40.00	-11.61	Peak
3	127.220	50.84	-29.53	21.31	43.50	-22.19	Peak
4	232.650	53.57	-32.72	20.85	46.00	-25.15	Peak
5	355.260	50.77	-28.81	21.96	46.00	-24.04	Peak
6	602.580	49.68	-25.40	24.28	46.00	-21.72	Peak
* 7	903.984	109.32	-20.69	88.63	94.00	-5.37	Peak

Remark : Corrected Level = Reading + Correction Factor – Preamp  
Correction Factor = Antenna Factor + Cable Loss  
Margin = Corrected Level – Limits  
“ \* ” Mark indicated Background Noise Level

CLIENT: Nutek Corporation  
EUT: Transceiver  
MODEL: CAIVU-FM2  
RATING: DC 5V  
COMMENT: Mid Channel  
Data:213

OPERATOR : Scott  
TEST SITE : Chamber 3  
TEST DISTANCE : 3 m  
POLARIZATION : HORIZONTAL  
TEMP/HUM : 25.2°C/42%  
2021-04-19

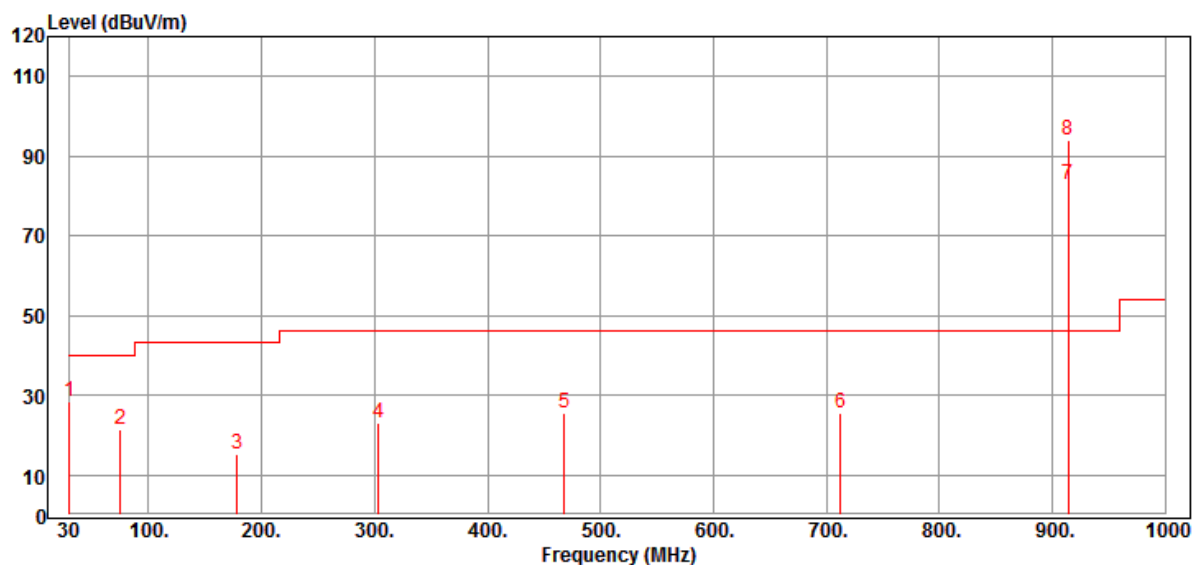


Item	Freq.	Reading	Factor	Level	Limit	Margin	Remark
Mark	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	30.000	59.36	-30.97	28.39	40.00	-11.61	Peak
2	75.360	60.22	-38.88	21.34	40.00	-18.66	Peak
3	178.330	50.36	-35.22	15.14	43.50	-28.36	Peak
4	303.250	52.87	-29.93	22.94	46.00	-23.06	Peak
5	468.350	52.27	-26.82	25.45	46.00	-20.55	Peak
* 6	712.360	49.68	-24.14	25.54	46.00	-20.46	Peak
7	914.461	103.18	-20.32	82.86	94.00	-11.14	QP
8	914.461	114.38	-20.32	94.06	114.00	-19.94	Peak

Remark : Corrected Level = Reading + Correction Factor – Preamp  
Correction Factor = Antenna Factor + Cable Loss  
Margin = Corrected Level – Limits  
“ \* ” Mark indicated Background Noise Level



CLIENT: Nutek Corporation  
EUT: Transceiver  
MODEL: CAIVU-FM2  
RATING: DC 5V  
COMMENT: Mid Channel  
Data:214

OPERATOR : Scott  
TEST SITE : Chamber 3  
TEST DISTANCE : 3 m  
POLARIZATION : VERTICAL  
TEMP/HUM : 25.2°C/42%  
2021-04-19

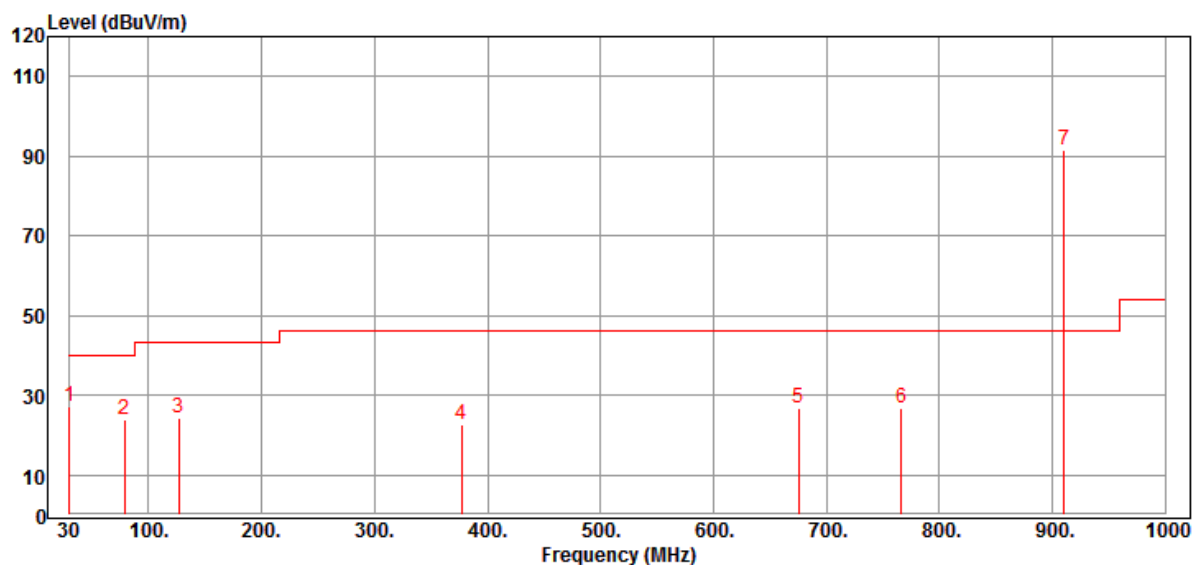


Item Mark	Freq. MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark
1	30.010	58.22	-30.97	27.25	40.00	-12.75	Peak
2	78.650	62.33	-38.49	23.84	40.00	-16.16	Peak
3	126.330	53.68	-29.51	24.17	43.50	-19.33	Peak
4	377.110	50.98	-28.13	22.85	46.00	-23.15	Peak
5	675.210	51.29	-24.61	26.68	46.00	-19.32	Peak
6	766.350	49.88	-23.14	26.74	46.00	-19.26	Peak
* 7	910.430	111.79	-20.42	91.37	94.00	-2.63	Peak

Remark : Corrected Level = Reading + Correction Factor – Preamp  
Correction Factor = Antenna Factor + Cable Loss  
Margin = Corrected Level – Limits  
“ \* ” Mark indicated Background Noise Level

CLIENT: Nutek Corporation  
EUT: Transceiver  
MODEL: CAIVU-FM2  
RATING: DC 5V  
COMMENT: High Channel  
Data:216

OPERATOR : Scott  
TEST SITE : Chamber 3  
TEST DISTANCE : 3 m  
POLARIZATION : HORIZONTAL  
TEMP/HUM : 25.2°C/42%  
2021-04-19

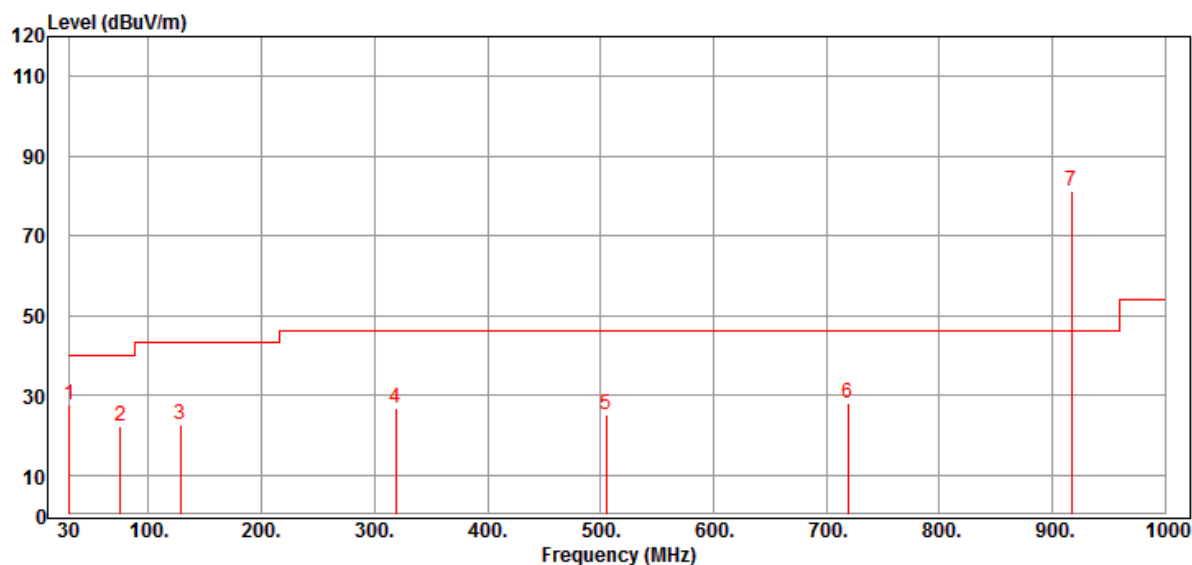


Item Mark	Freq. MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark
1	30.010	58.66	-30.97	27.69	40.00	-12.31	Peak
2	75.360	61.22	-38.88	22.34	40.00	-17.66	Peak
3	128.360	52.36	-29.59	22.77	43.50	-20.73	Peak
4	318.560	56.33	-29.43	26.90	46.00	-19.10	Peak
5	505.220	51.36	-26.31	25.05	46.00	-20.95	Peak
* 6	718.990	52.18	-24.12	28.06	46.00	-17.94	Peak
7	917.214	101.56	-20.20	81.36	94.00	-12.64	Peak

Remark : Corrected Level = Reading + Correction Factor – Preamp  
Correction Factor = Antenna Factor + Cable Loss  
Margin = Corrected Level – Limits  
“ \* ” Mark indicated Background Noise Level

CLIENT: Nutek Corporation  
EUT: Transceiver  
MODEL: CAIVU-FM2  
RATING: DC 5V  
COMMENT: High Channel  
Data:215

OPERATOR : Scott  
TEST SITE : Chamber 3  
TEST DISTANCE : 3 m  
POLARIZATION : VERTICAL  
TEMP/HUM : 25.2°C/42%  
2021-04-19

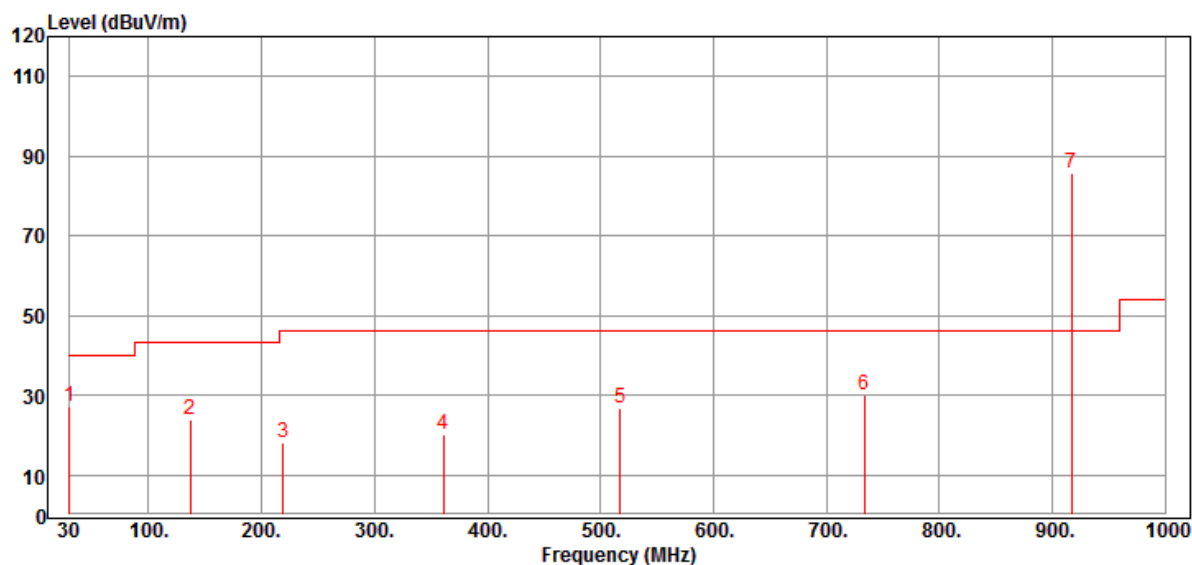

Item	Freq.	Reading	Factor	Level	Limit	Margin	Remark
Mark	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	30.020	58.34	-30.98	27.36	40.00	-12.64	Peak
2	136.570	53.68	-29.77	23.91	43.50	-19.59	Peak
3	218.990	51.86	-33.79	18.07	46.00	-27.93	Peak
4	361.250	48.96	-28.67	20.29	46.00	-25.71	Peak
5	517.830	52.88	-26.28	26.60	46.00	-19.40	Peak
6	733.650	53.47	-23.54	29.93	46.00	-16.07	Peak
* 7	917.000	105.87	-20.22	85.65	94.00	-8.35	Peak

Remark : Corrected Level = Reading + Correction Factor – Preamp  
Correction Factor = Antenna Factor + Cable Loss  
Margin = Corrected Level – Limits  
“ \* ” Mark indicated Background Noise Level

## Radiated Emission Above 1 GHz

CLIENT: Nutek Corporation

EUT: Transceiver

MODEL: CAIVU-FM2

RATING: DC 5V

COMMENT: Low Channel

Data:198

OPERATOR : Scott


TEST SITE : Chamber 3

TEST DISTANCE : 3 m

POLARIZATION : HORIZONTAL

TEMP/HUM : 25.1°C/43%

2021-05-13

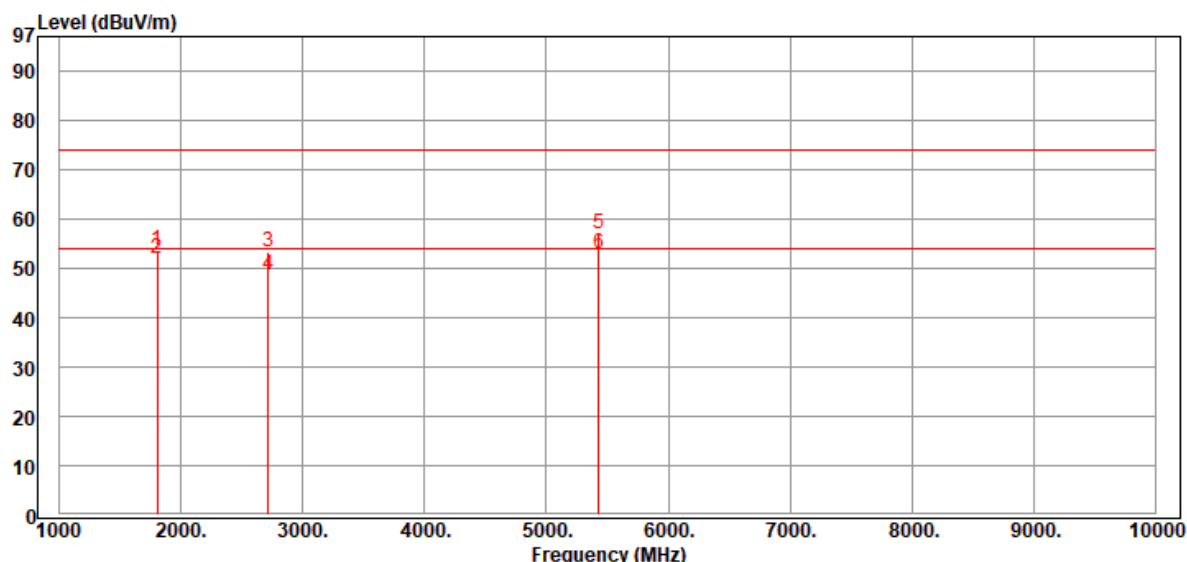

Item	Freq.	Reading	Factor	Level	Limit	Margin	Remark
Mark	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	1800.000	73.13	-19.56	53.57	74.00	-20.43	Peak
2	1800.000	71.52	-19.56	51.96	54.00	-2.04	Average
3	2715.000	68.45	-15.10	53.35	74.00	-20.65	Peak
4	2715.000	63.72	-15.10	48.62	54.00	-5.38	Average
5	5430.000	65.06	-8.15	56.91	74.00	-17.09	Peak
6	5430.000	61.13	-8.15	52.98	54.00	-1.02	Average

Remark: Corrected Level = Reading + Correction Factor - Preamp

Correction Factor = Antenna Factor + Cable Loss


Margin = Corrected Level – Limits

“ \* ” Mark indicated Background Noise Level

Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.

CLIENT: Nutek Corporation  
EUT: Transceiver  
MODEL: CAIVU-FM2  
RATING: DC 5V  
COMMENT: Low Channel  
Data:197

OPERATOR : Scott  
TEST SITE : Chamber 3  
TEST DISTANCE : 3 m  
POLARIZATION : VERTICAL  
TEMP/HUM : 25.1°C/43%  
2021-05-13

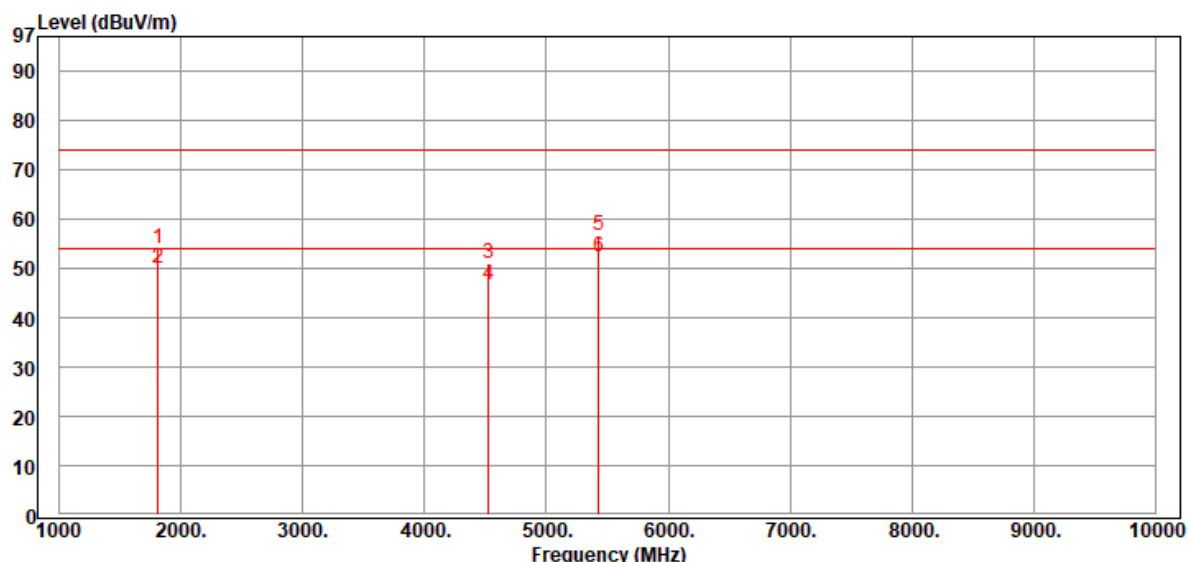

Item	Freq.	Reading	Factor	Level	Limit	Margin	Remark
Mark	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	1810.000	73.59	-19.52	54.07	74.00	-19.93	Peak
2	1810.000	69.48	-19.52	49.96	54.00	-4.04	Average
3	4525.000	60.54	-9.64	50.90	74.00	-23.10	Peak
4	4525.000	56.20	-9.64	46.56	54.00	-7.44	Average
5	5430.000	64.91	-8.15	56.76	74.00	-17.24	Peak
6	5430.000	60.41	-8.15	52.26	54.00	-1.74	Average

Remark: Corrected Level = Reading + Correction Factor - Preamp

Correction Factor = Antenna Factor + Cable Loss


Margin = Corrected Level – Limits

“ \* ” Mark indicated Background Noise Level

Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.  
Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.

CLIENT: Nutek Corporation  
EUT: Transceiver  
MODEL: CAIVU-FM2  
RATING: DC 5V  
COMMENT: Mid Channel  
Data:199

OPERATOR : Scott  
TEST SITE : Chamber 3  
TEST DISTANCE : 3 m  
POLARIZATION : HORIZONTAL  
TEMP/HUM : 25.1°C/43%  
2021-05-13

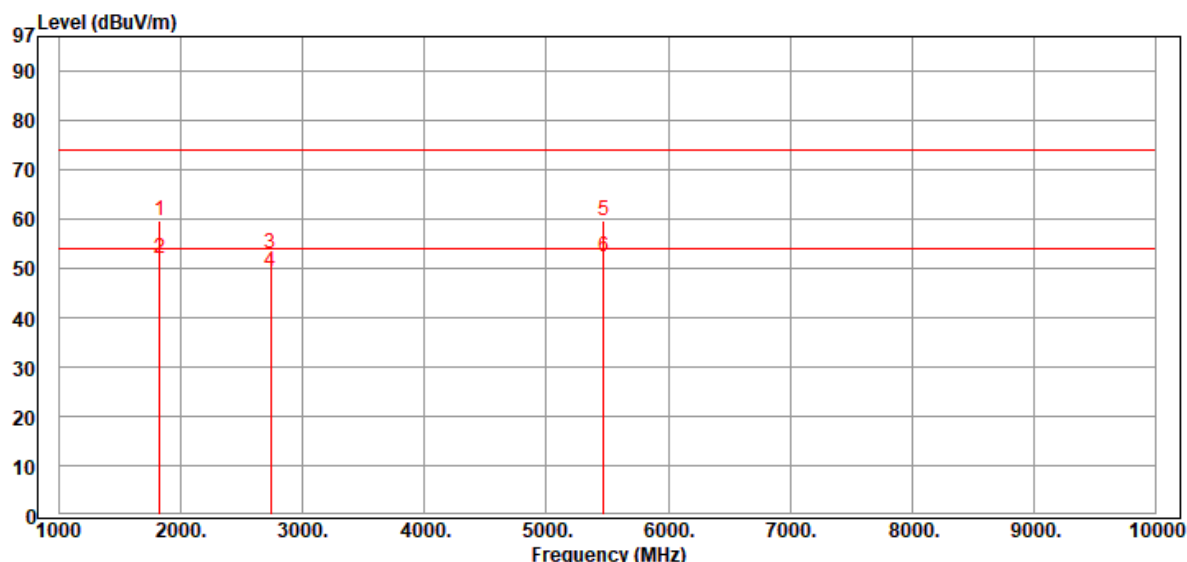

Item	Freq.	Reading	Factor	Level	Limit	Margin	Remark
Mark	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	1820.000	79.20	-19.48	59.72	74.00	-14.28	Peak
2	1820.000	71.59	-19.48	52.11	54.00	-1.89	Average
3	2735.000	68.11	-15.07	53.04	74.00	-20.96	Peak
4	2735.000	64.43	-15.07	49.36	54.00	-4.64	Average
5	5470.000	67.63	-8.04	59.59	74.00	-14.41	Peak
6	5470.000	60.25	-8.04	52.21	54.00	-1.79	Average

Remark: Corrected Level = Reading + Correction Factor - Preamp

Correction Factor = Antenna Factor + Cable Loss


Margin = Corrected Level – Limits

“ \* ” Mark indicated Background Noise Level

Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.  
Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.

CLIENT: Nutek Corporation  
EUT: Transceiver  
MODEL: CAIVU-FM2  
RATING: DC 5V  
COMMENT: Mid Channel  
Data:200

OPERATOR : Scott  
TEST SITE : Chamber 3  
TEST DISTANCE : 3 m  
POLARIZATION : VERTICAL  
TEMP/HUM : 25.1°C/43%  
2021-05-13

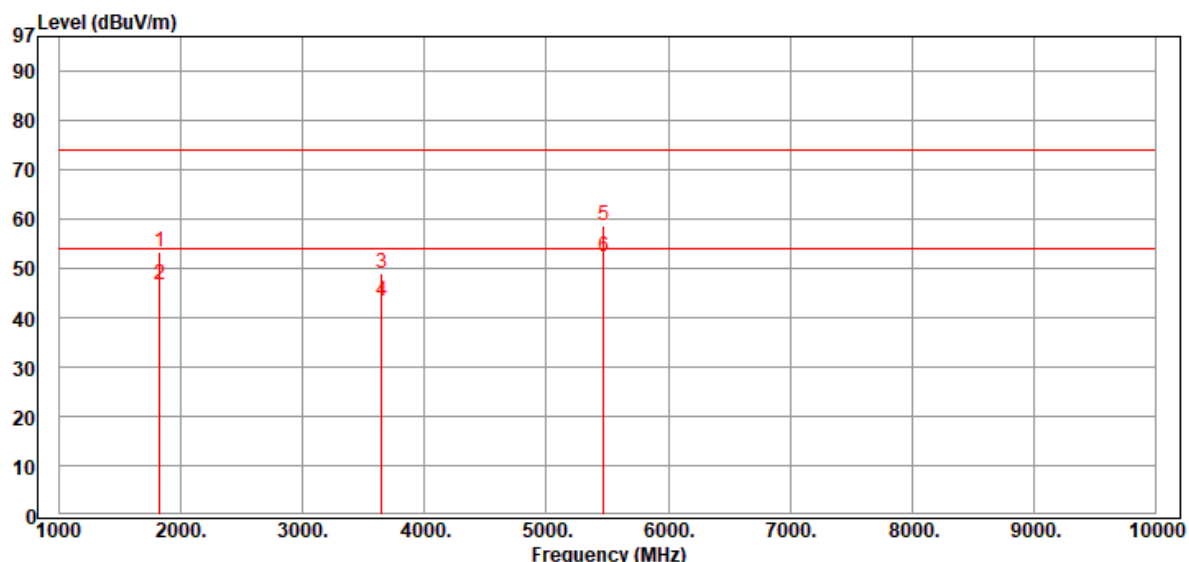

Item	Freq.	Reading	Factor	Level	Limit	Margin	Remark
Mark	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	1820.000	72.90	-19.48	53.42	74.00	-20.58	Peak
2	1820.000	66.19	-19.48	46.71	54.00	-7.29	Average
3	3645.000	61.70	-12.85	48.85	74.00	-25.15	Peak
4	3645.000	56.20	-12.85	43.35	54.00	-10.65	Average
5	5470.000	66.75	-8.04	58.71	74.00	-15.29	Peak
6	5470.000	60.26	-8.04	52.22	54.00	-1.78	Average

Remark: Corrected Level = Reading + Correction Factor - Preamp

Correction Factor = Antenna Factor + Cable Loss


Margin = Corrected Level – Limits

“ \* ” Mark indicated Background Noise Level

Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.  
Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.

CLIENT: Nutek Corporation  
EUT: Transceiver  
MODEL: CAIVU-FM2  
RATING: DC 5V  
COMMENT: High Channel  
Data:201

OPERATOR : Scott  
TEST SITE : Chamber 3  
TEST DISTANCE : 3 m  
POLARIZATION : HORIZONTAL  
TEMP/HUM : 25.1°C/43%  
2021-05-13

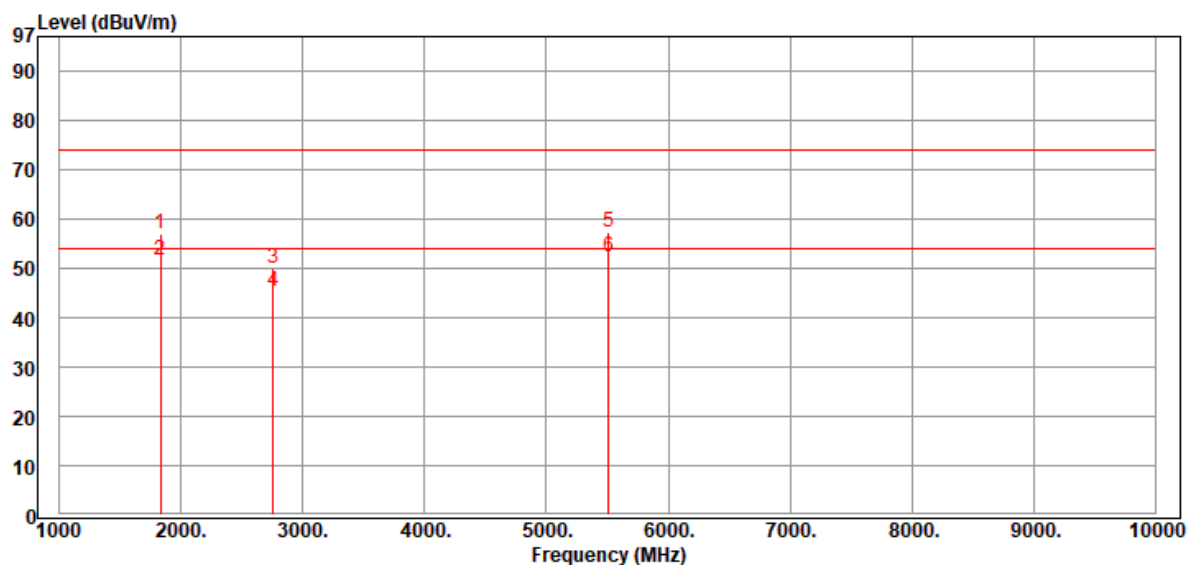

Item	Freq.	Reading	Factor	Level	Limit	Margin	Remark
Mark	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	1830.000	76.37	-19.45	56.92	74.00	-17.08	Peak
2	1830.000	71.20	-19.45	51.75	54.00	-2.25	Average
3	2755.000	65.18	-15.03	50.15	74.00	-23.85	Peak
4	2755.000	60.30	-15.03	45.27	54.00	-8.73	Average
5	5510.000	65.21	-7.99	57.22	74.00	-16.78	Peak
6	5510.000	60.20	-7.99	52.21	54.00	-1.79	Average

Remark: Corrected Level = Reading + Correction Factor - Preamp

Correction Factor = Antenna Factor + Cable Loss

Margin = Corrected Level – Limits


“ \* ” Mark indicated Background Noise Level

Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.  
Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.



CLIENT: Nutek Corporation  
EUT: Transceiver  
MODEL: CAIVU-FM2  
RATING: DC 5V  
COMMENT: High Channel  
Data:202

OPERATOR : Scott  
TEST SITE : Chamber 3  
TEST DISTANCE : 3 m  
POLARIZATION : VERTICAL  
TEMP/HUM : 25.1°C/43%  
2021-05-13

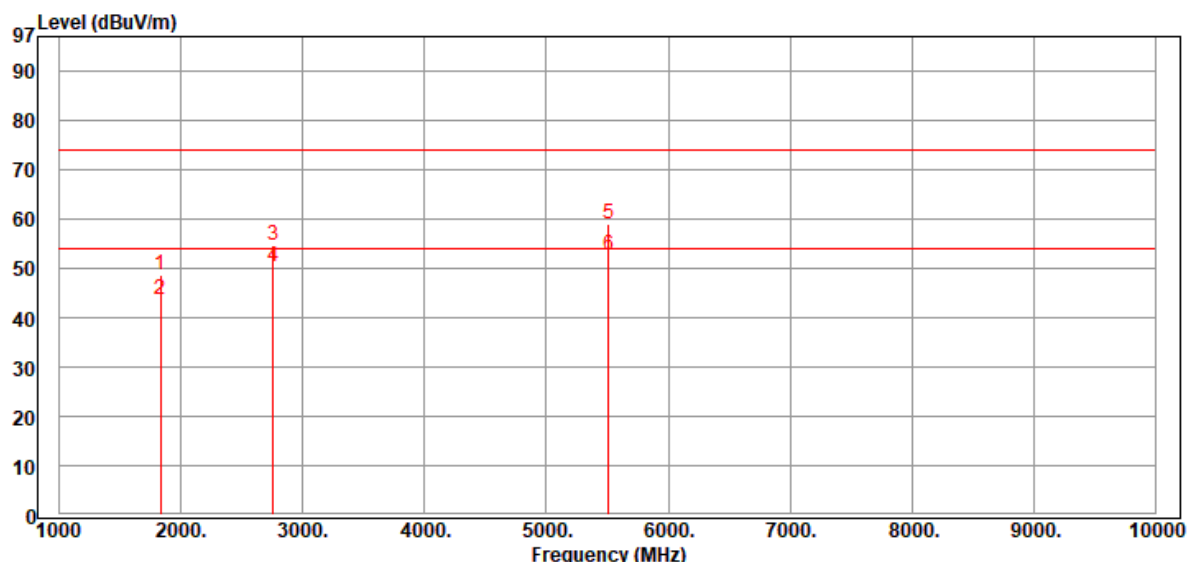

Item	Freq.	Reading	Factor	Level	Limit	Margin	Remark
Mark	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	1830.000	68.15	-19.45	48.70	74.00	-25.30	Peak
2	1830.000	63.20	-19.45	43.75	54.00	-10.25	Average
3	2755.000	69.64	-15.03	54.61	74.00	-19.39	Peak
4	2755.000	65.20	-15.03	50.17	54.00	-3.83	Average
5	5510.000	67.09	-7.99	59.10	74.00	-14.90	Peak
6	5510.000	60.57	-7.99	52.58	54.00	-1.42	Average

Remark: Corrected Level = Reading + Correction Factor - Preamp

Correction Factor = Antenna Factor + Cable Loss

Margin = Corrected Level – Limits

“ \* ” Mark indicated Background Noise Level

Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.  
Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.


## 5 Emission on the Band Edge test

### 5.1 Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

### 5.2 Configuration of Measurement

Measurement Frequency under 1 GHz

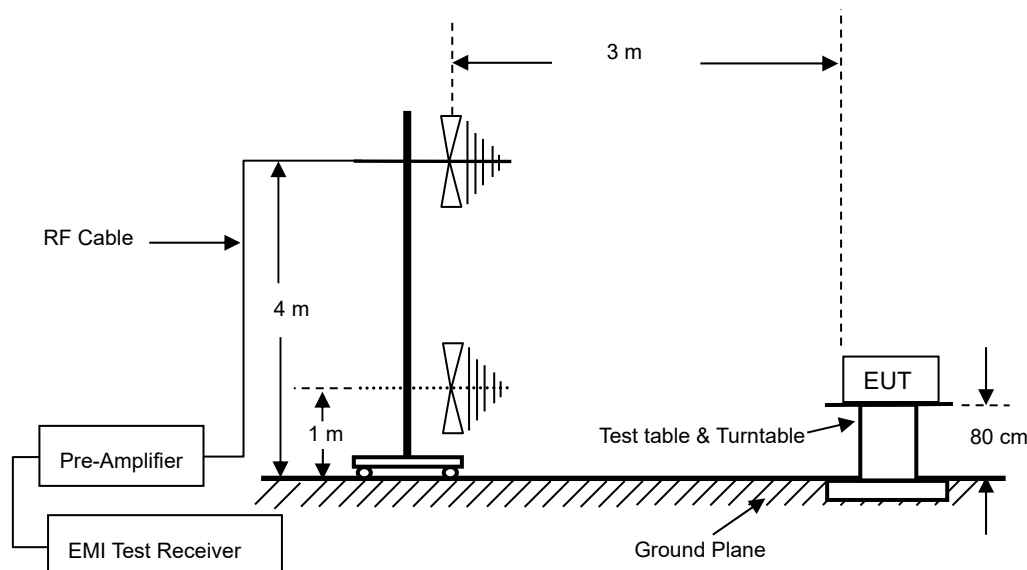

### 5.3 Test Procedure

The EUT was setup to ANSI C63.10-2013.

The EUT for testing is arranged on a wooden turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meter and down to 1 meter.

### 5.4 Test Result

**PASS.**

The final test data is shown on as following pages.


## Band edge

CLIENT: Nutek Corporation  
EUT: Transceiver  
MODEL: CAIVU-FM2  
RATING: DC 5V  
COMMENT: Low Channel

OPERATOR : Scott  
TEST SITE : Chamber 3  
TEST DISTANCE : 3 m  
POLARIZATION : HORIZONTAL  
TEMP/HUM : 25.2°C/42%

Data:255

2021-04-19

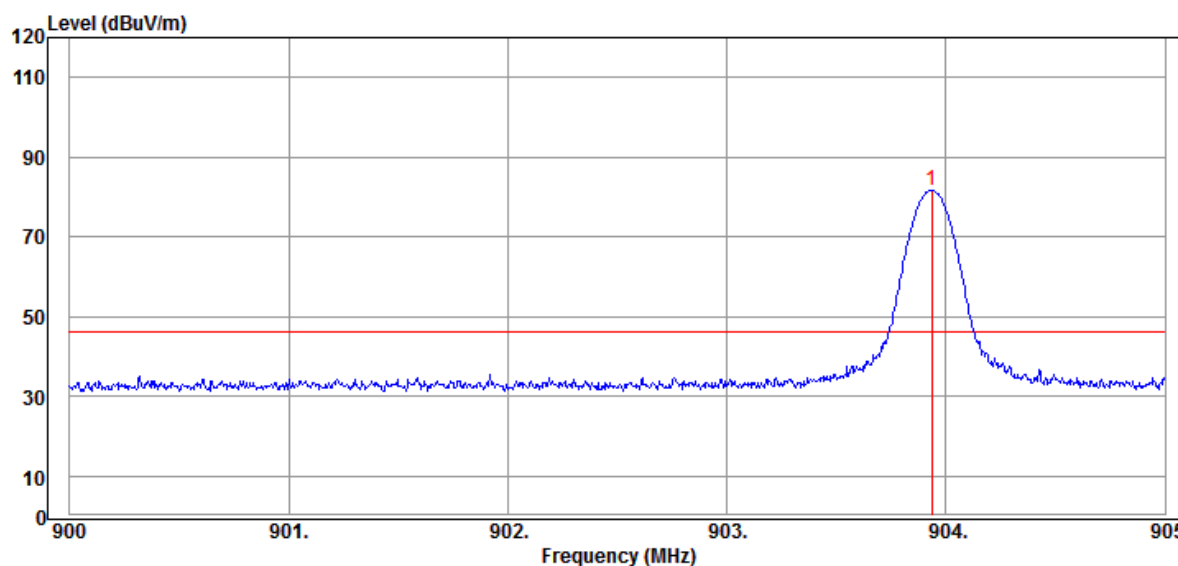


Item	Freq.	Reading	Factor	Level	Limit	Margin	Remark
Mark	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	903.935	102.31	-20.69	81.62	94.00	-12.38	Peak

CLIENT: Nutek Corporation  
EUT: Transceiver  
MODEL: CAIVU-FM2  
RATING: DC 5V  
COMMENT: Low Channel

OPERATOR : Scott  
TEST SITE : Chamber 3  
TEST DISTANCE : 3 m  
POLARIZATION : VERTICAL  
TEMP/HUM : 25.2°C/42%

Data:226

2021-04-19

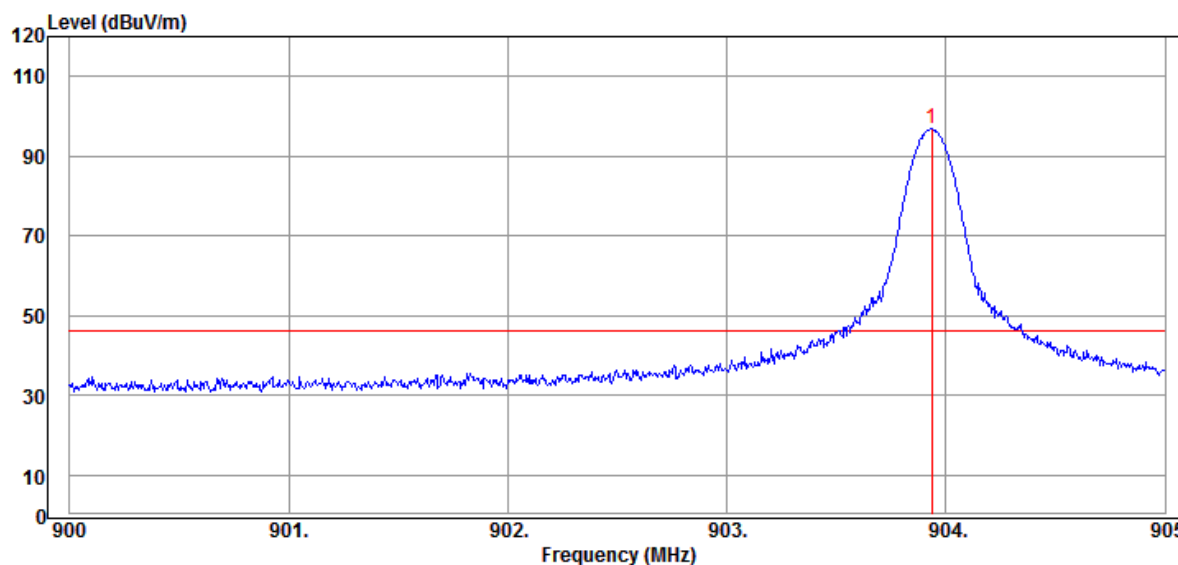


Item	Freq.	Reading	Factor	Level	Limit	Margin	Remark
Mark	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	903.935	117.40	-20.69	96.71	114.00	-17.29	Peak

CLIENT: Nutek Corporation  
EUT: Transceiver  
MODEL: CAIVU-FM2  
RATING: DC 5V  
COMMENT: High Channel

OPERATOR : Scott  
TEST SITE : Chamber 3  
TEST DISTANCE : 3 m  
POLARIZATION : HORIZONTAL  
TEMP/HUM : 25.2°C/42%

Data:227

2021-04-19

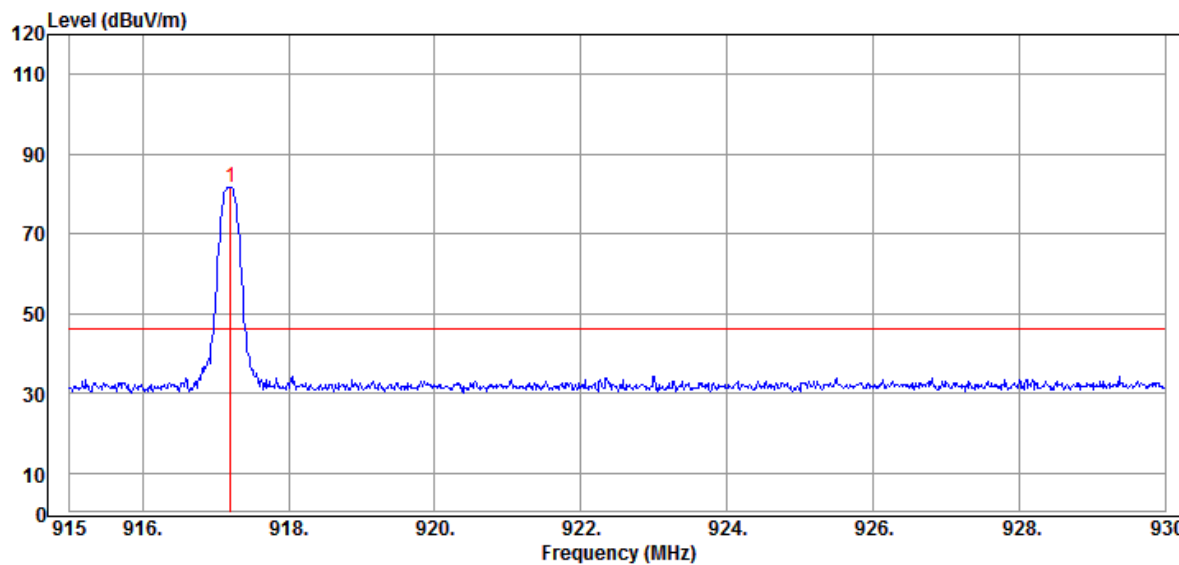


Item	Freq.	Reading	Factor	Level	Limit	Margin	Remark
Mark	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	917.205	101.72	-20.20	81.52	94.00	-12.48	Peak

CLIENT: Nutek Corporation  
EUT: Transceiver  
MODEL: CAIVU-FM2  
RATING: DC 5V  
COMMENT: High Channel

OPERATOR : Scott  
TEST SITE : Chamber 3  
TEST DISTANCE : 3 m  
POLARIZATION : VERTICAL  
TEMP/HUM : 25.2°C/42%

Data:228

2021-04-19

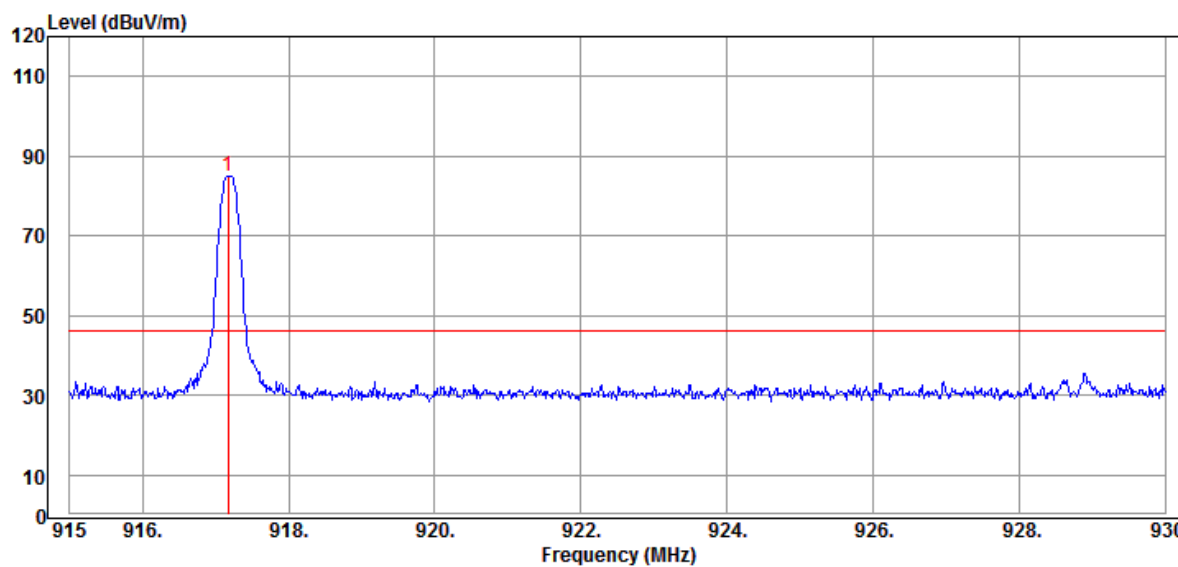

Item	Freq.	Reading	Factor	Level	Limit	Margin	Remark
Mark	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	917.175	105.28	-20.20	85.08	94.00	-8.92	Peak