

产品规格承认书

Product specifications
acknowledgment

承认厂商：_____
(Recognized manufacturers)

制造厂商： 深圳市欧德声科技有限公司
(Manufacturer) ODSOUNDS Technology (Shenzhen) Co., Ltd

公司地址： 深圳市龙华街道富康社区东环二路65号中佳创意园C2栋3层
(Company address) Floor 3, Building C2, Zhongjian Creative Park, No.65, Donghuan Second Road, Fukang Community, Longhua Street, Shenzhen City

生产地址： 广东省东莞市长安镇新安格田一街7号
(Production address) No. 7 Xin'angetian First Street, Chang'an Town, Dongguan City, Guangdong Province

产品名称： 2.4G Flexible plate antenna
(Description)

产品选型表：

(Product Type)		
型号	说明	备注
BW2.4FNX42-12B1L120	IPEX1 接口线长 120mm	参数均可订制

供应商承认签栏		
制表者	审核者	核准者

客户承认栏	
审核者	核准者

1.1 Specifications

天线型号 Antennas Type	BW2.4FNX42-12B1L120
频率范围 Frequenc Range (MHz)	2400-2500
输入阻抗 Input Impendence (Ω)	50 Ω
电压驻波比 V. S. W. R	<2
增益 Gain (dBi)	2-3dBi
极化形式 Polarization Type	垂直 Vertical
功率容量 Power Capacity (w)	50
雷电保护 Lingtning Protection	None
工作电压 DC Voltage (V)	None
天线尺寸 Dimension (mm)	42x12
接口形式/Connector Type :	IPEX-1
电缆型号 Cable type (mm)	ϕ 1.13
电缆长度 Cable length(mm)	120
辐射体 Radiator	None
天线颜色 Color	黑色 Black
重量 Weight(g)	None
工作温度 Operating Temperature ($^{\circ}\text{C}$)	-40~80
储藏温度 Storage Temperature ($^{\circ}\text{C}$)	-20~85

*注： 以上数据仅供参考；因天线功能较为敏感，主体周边机构有变更请通知我们评估。

1.2 Antenna Picture



上图型号: BW2.4FNX42-12B1 图片仅供参考

(定制客户中间连接线长度定制, 天线形状定制)

*注: 因天线功能较为敏感, 主体周边机构有变更请通知我们评估。

2. Electrical Specification

2.1 Test Equipment

- A. VSWR and input impedance: Agilent 8753/E5071 Network Analyzer
- B. Antenna gain and efficiency: ETS three-dimensional anechoic chamber

2.2 Test Setup

2.2.1 Frequency Range

2.2.2 VSWR

Step 1: The antenna is arranged on the customer provided test fixture.

Step 2: The VSWR of the antenna is measured via Agilent 8720/8753 Network Analyzer (see figure. 1).



Figure.1

2.2.3 Radiation pattern and Gain

- A. The 3D chamber provides less than -40dB reflectivity from 800MHz to 6GHz and a 40cm diameter spherical quiet zone. The measurement results are calibrated using both dipoles and standard gain horns (see figure. 2).
- B. The antenna under tested is arranged in the turned table and a decoupling sleeve is used to reduce feed line radiation (see figure. 3).
- C. The measured results of the radiation patterns and antenna gain are obtained from the control system and showed on the monitor (see figure. 4 and 5).

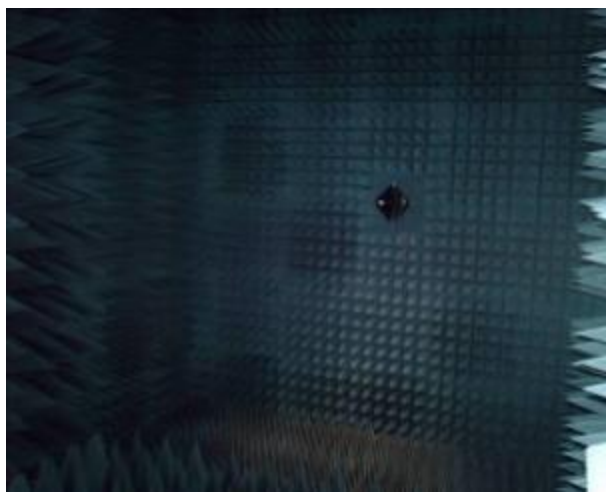


Figure.2

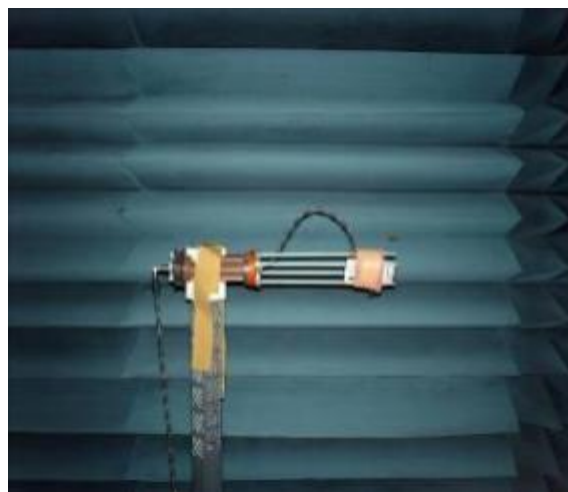


Figure.3



Figure.4

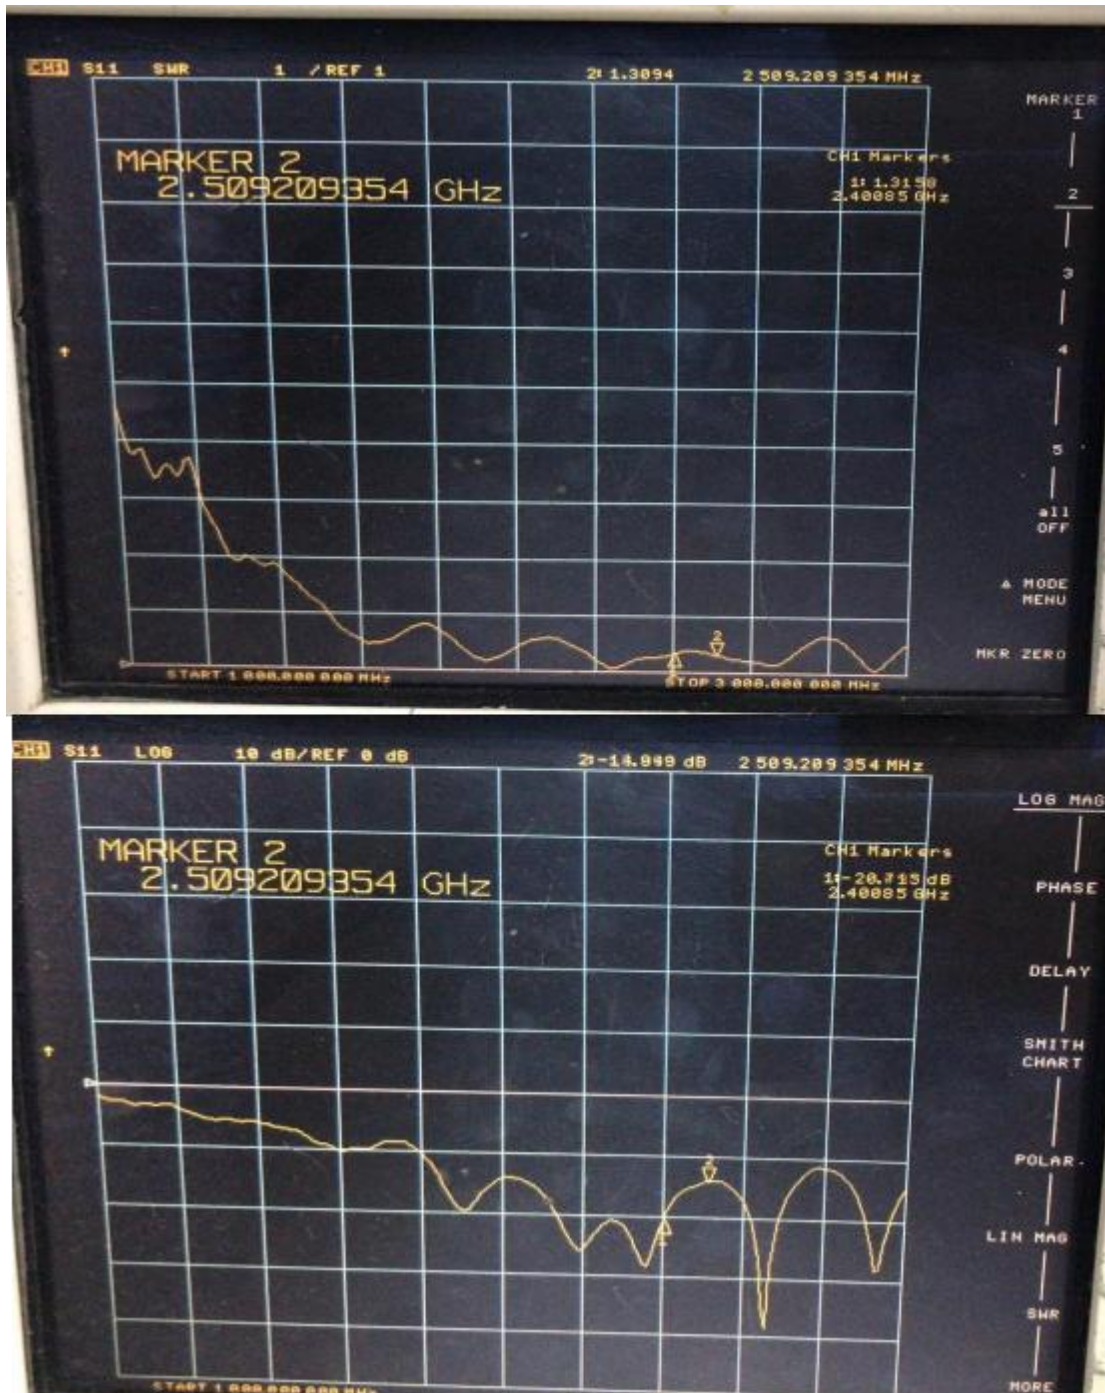


Figure.5

3. Performance Data

3.1 Passive data

VSWR (电压驻波比) /Return Loss (回波损耗) /Smith Chart (史密斯圆图)






六注： 以上为实测数据，仅供参考；因天线功能较为敏感，主体周边机构有变更请通知我们评估。

增益：


Passive Test For WIFI										
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)	Attenut Hor	Attenut Ver
2400	65.99	-1.8	2.99	0.84	35.629	30.365	2.99	-8.28	48.09	47.94
2410	61.32	-2.12	2.62	0.47	32.762	28.557	2.62	-8.32	48.07	47.87
2420	60.58	-2.18	2.52	0.37	32.121	28.457	2.52	-8.49	48.18	48
2430	61.75	-2.09	2.58	0.43	32.561	29.188	2.58	-9.08	48.17	47.99
2440	64.63	-1.9	2.73	0.58	34.122	30.503	2.73	-9.66	48.33	48.11
2450	66.86	-1.75	2.86	0.71	35.326	31.534	2.86	-9.93	48.44	48.14
2460	67.45	-1.71	2.92	0.77	35.514	31.938	2.92	-9.82	48.41	48.06
2470	68.53	-1.64	3.02	0.87	35.718	32.817	3.02	-9.44	48.49	48.11
2480	67.12	-1.73	2.94	0.79	34.493	32.624	2.94	-11.1	48.63	48.18
2490	64.57	-1.9	2.74	0.59	32.811	31.763	2.74	-12.94	48.76	48.29
2500	63.95	-1.94	2.7	0.55	32.027	31.926	2.7	-14.21	48.69	48.16

辐射图

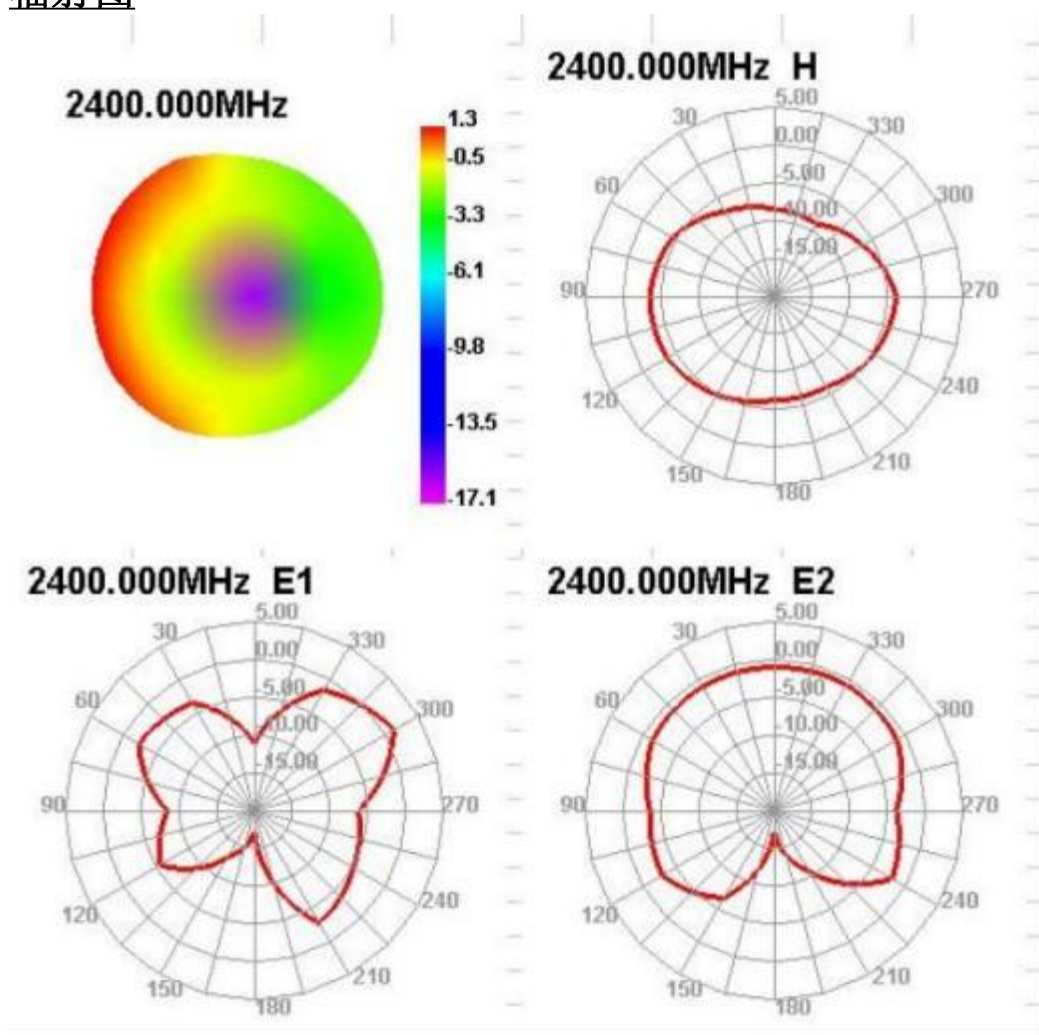

4.Mechanical Specification

4.1 Assembly Drawing

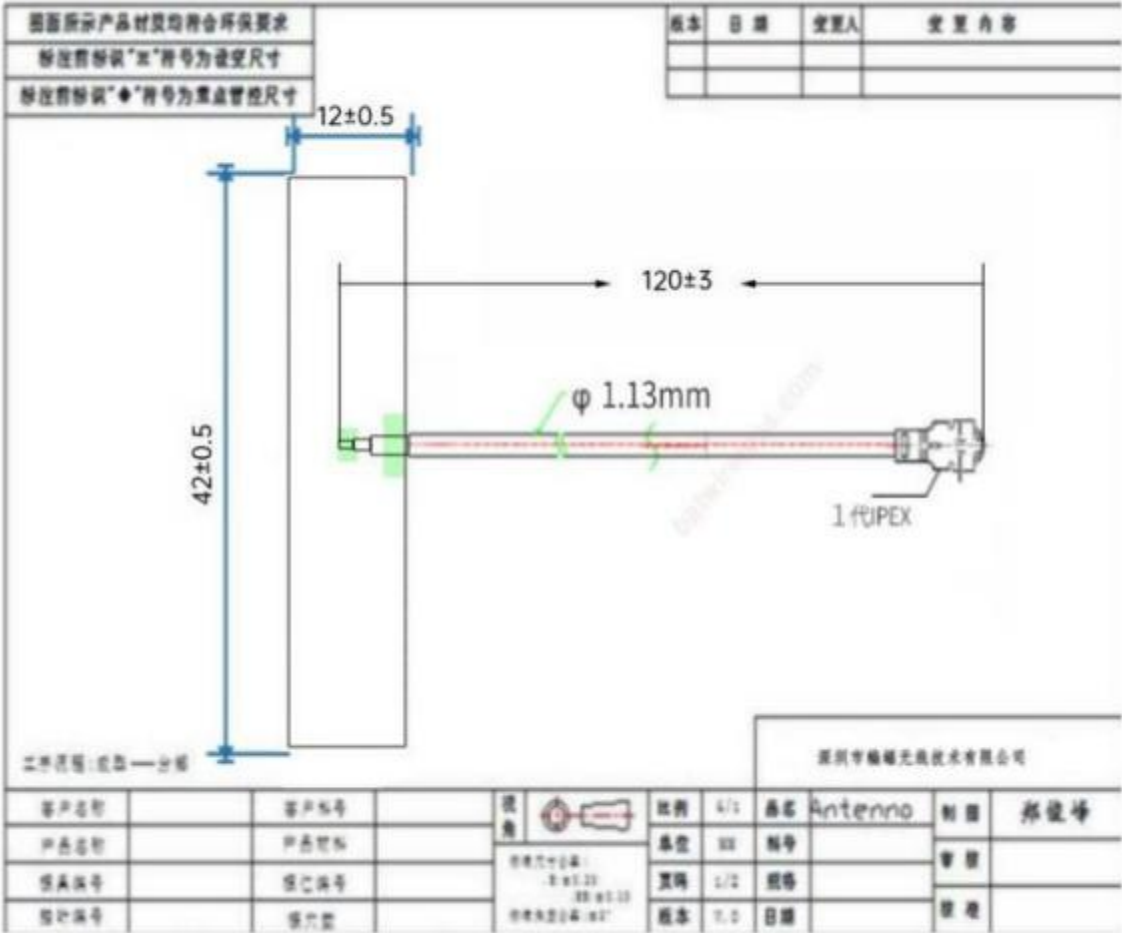

5. RF113

1. 适用范围

本规格书制定了电线的结构和电气特性

同轴线
AWG 32

1. Scope

This specification covers the construction and the electrical properties of wire.

Coaxial Wire
AWG 32

2. 结构/Construction


单位/Unit: mm

项目/Item		单位/Unit	详细资料/Details
Conductor 导体	材料/Material	-	绞合镀银铜丝 Silver-coated copper wire
	构成/Composition	(No./mm)	7/0.08
	外径/OD.	mm	0.24
	绞向/Orientation	-	S
Insulation 绝缘层	材料/Material	-	FEP(进口料)
	绝缘颜色/Insulation color	-	本色/Natural
	标称绝缘厚度/ Nom. Thickness	mm	0.22
	绝缘线径/OD.	mm	0.69
Braid Shield 编织	材料/Material	-	镀锡铜丝 Tinned copper wire
	构成/Composition	(No./mm)	16/4/0.05
	编织密度/Coverage	(%)	>=90
Jacket 外被	材料/Material	-	FEP
	标称绝缘厚度/ Nom. Thickness	mm	0.12
	外径/OD.	mm	1.13±0.10

3. Electrical Properties (at 20℃) /电气特性(20℃时)

项目/Item	单位/Unit	详细资料/Details
导体电阻/Conductor Resistance	Ω/km	571 (Max.)
绝缘电阻/Insulation Resistance	MΩ • km	100 (Min.)
耐压强度(AC)/Dielectric Strength(AC)	V/ 1 Min	500
特性阻抗/Impedance	Ω	50±3
耐温等级/ Temperature	℃	200
额定电压/rated voltage	V	30

4. 电线截面图示如下:



6.免责声明:

本着为用户提供更好服务的原则, 深圳市欧德声科技有限公司(下称“ODS”)在本手册中将尽可能地为 用户呈现详实、准确的产品信息。但鉴于本手册的内容具有一定的时效性, ODS不能完全保证该文档在任 何时段的时效性 与适用性。ODS有权在没有通知的情况下对本手册上的内容进行更新, 恕不另行 通知。为了得到最新版本的信息, 请尊敬的用户定时访问ODS官方网站或者与ODS工作人员联系。感谢您的包容与支持!