

# TEST REPORT

FCC Test for eROU\_17192325L1\_X  
Certification

**APPLICANT**  
SOLiD, Inc.

**REPORT NO.**  
HCT-RF-2102-FC033-R2

**DATE OF ISSUE**  
February 26, 2021

**Tested by**  
Kyung Soo Kang



**Technical Manager**  
Jong Seok Lee



**HCT CO., LTD.**

*Soo Chan Lee*  
SooChan Lee / CEO

**HCT CO., LTD.**

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 634 6300 F ax. +82 31 645 6401



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 634 6300 Fax. +82 31 645 6401

# TEST REPORT

FCC Test for  
eROU\_17192325L1\_X

## REPORT NO.

HCT-RF-2102-FC033-R2

## DATE OF ISSUE

February 26, 2021

## Additional Model

-

### Applicant

#### SOLiD, Inc.

10, 9th Floor, SOLiD Space, Pangyoyeok-ro 220, Bundang-gu, Seongnam-si,  
Gyeonggi-do, 463-400, South Korea

### Eut Type Model Name

DAS System  
eROU\_17192325L1\_X

### FCC ID

W6UER17192325

### Output Power

21 dBm

### Date of Test

January 19, 2021~ February 23, 2021

### FCC Rule Parts:

CFR 47 Part 2, Part 24, Part 27

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard.

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	February 23, 2021	Initial Release
1	February 25, 2021	- Added simultaneous test results of out-of-band/out-of-block emissions on section 5.5. - Revised the OOB plot of AWS band.
2	February 26, 2021	Revised the wrong out-of band (two adjacent test signals) plot name of the BRS band. (114p~123p)

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

\* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

## CONTENTS

1. GENERAL INFORMATION	5
1.1. APPLICANT INFORMATION	5
1.2. PRODUCT INFORMATION	5
1.3. TEST INFORMATION	5
2. FACILITIES AND ACCREDITATIONS	6
2.1. FACILITIES	6
2.2. EQUIPMENT	6
3. TEST SPECIFICATIONS	7
3.1. STANDARDS	7
3.2. ADDITIONAL DESCRIPTIONS ABOUT TEST	8
3.3. MEASUREMENT UNCERTAINTY	11
3.4. STANDARDS ENVIRONMENTAL TEST CONDITIONS	11
3.5. TEST DIAGRAMS	12
4. TEST EQUIPMENTS	13
5. TEST RESULT	14
5.1. AGC THRESHOLD	14
5.2. OUT-OF-BAND REJECTION	16
5.3. INPUT-VERSUS-OUTPUT SIGNAL COMPARISON	19
5.4. INPUT/OUTPUT POWER AND AMPLIFIER/BOOSTER GAIN	64
5.5. OUT-OF-BAND/OUT-OF-BLOCK EMISSIONS AND SPURIOUS EMISSIONS	84
5.6. RADIATED SPURIOUS EMISSIONS	195
6. Annex A_EUT AND TEST SETUP PHOTO	200

## 1. GENERAL INFORMATION

### 1.1. APPLICANT INFORMATION

Company Name	SOLiD, Inc.
Company Address	10, 9th Floor, SOLiD Space, Pangyoyeok-ro 220, Bundang-gu, Seongnam-si, Gyeonggi-do, 463-400, South Korea

### 1.2. PRODUCT INFORMATION

EUT Type	DAS System	
EUT Serial Number	EX21010001	
Power Supply	DC 39~57 Vdc	
Frequency Range	Band Name	Downlink (MHz)
	Broadband PCS	1 930 ~ 1 995
	AWS13	2 110 ~ 2 180
	WCS	2 350 ~ 2 360
	BRS/EBS	2 496 ~ 2 690
Tx Output Power	21 dBm	
Antenna Peak Gain	17 dBi	

### 1.3. TEST INFORMATION

FCC Rule Parts	CFR 47 Part 2, Part 24, Part 27
Measurement Standards	KDB 935210 D05 v01r04, KDB 971168 D01 v03r01, ANSI C63.26-2015
Test Location	HCT CO., LTD. 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

## 2. FACILITIES AND ACCREDITATIONS

### 2.1. FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4 (Version: 2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

### 2.2. EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 3. TEST SPECIFICATIONS

#### 3.1. STANDARDS

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 2, Part 24, Part 27.

Description	Reference	Results
AGC threshold	KDB 935210 D05 v01r04 3.2	Compliant
Out-of-band rejection	KDB 935210 D05 v01r04 3.3	Compliant
Input-versus-output signal comparison	§ 2.1049	Compliant
Input/output power and amplifier/booster gain	§ 2.1046, § 24.232, § 27.50(a), § 27.50(d), § 27.50(h)	Compliant
Out-of-band/out-of-block emissions and spurious emissions	§ 2.1051, § 24.238, § 27.53(a), § 27.53(h), § 27.53(m)	Compliant
Spurious emissions radiated	§ 2.1053	Compliant

### 3.2. ADDITIONAL DESCRIPTIONS ABOUT TEST

Except for the following cases, EUT was tested under normal operating conditions.

: Out-of-band rejection test requires maximum gain condition without AGC.

The test was generally based on the method of KDB 935210 D05 v01r04 and only followed ANSI C63.26-2015 if there was no test method in KDB standard.

EUT was tested with following modulated signals provide by applicant.

Band Name	Tested signals
Broadband PCS	GSM
	CDMA
	WCDMA
	LTE 5 MHz
	LTE 10 MHz
	LTE 20 MHz
AWS13	CDMA
	WCDMA
	LTE 5 MHz
	LTE 10 MHz
	LTE 20 MHz
WCS	LTE 5 MHz
	LTE 10 MHz
	LTE 20 MHz
BRS/EBS	5G NR 20 MHz
	5G NR 40 MHz
	5G NR 60 MHz
	5G NR 80 MHz
	5G NR 100 MHz

\*Note: We have done GSM and EDGE / CDMA and 1xEVDO modulation test in technology. Test results are only attached worst cases.

The frequency stability measurement has been omitted in accordance with section 3.7 of KDB 935210 D05 v01r04.

: It can be confirmed through input-versus-output signal comparison test that EUT does not alter the input signal.



The tests results included actual loss value for attenuator and cable combination as shown in the table below.

: Input Path

Correction factor table			
Frequency (MHz)	Factor (dB)	Frequency (MHz)	Factor (dB)
1 900	0.877	2 350	1.683
1 950	1.586	2 400	1.595
2 000	1.291	2 450	1.402
2 050	0.947	2 500	1.327
2 100	1.248	2 550	1.535
2 150	1.264	2 600	1.510
2 200	1.139	2 650	1.489
2 250	1.512	2 700	1.384
2 300	1.220		

: Output Path

Correction factor table

Frequency (MHz)	Factor (dB)	Frequency (MHz)	Factor (dB)
2	30.757	3 000	32.302
10	29.999	4 000	32.747
30	29.628	5 000	32.991
50	29.672	6 000	33.919
100	29.727	7 000	33.994
200	29.938	8 000	34.505
300	30.334	9 000	35.234
400	30.467	10 000	37.240
500	30.571	11 000	36.145
600	30.674	12 000	36.526
700	30.772	13 000	36.010
800	30.805	14 000	37.449
900	30.784	15 000	37.712
1 000	30.784	16 000	38.206
1 100	30.889	17 000	37.218
1 200	31.096	18 000	37.602
1 300	31.138	19 000	38.374
1 400	31.202	20 000	39.026
1 500	31.305	21 000	41.370
1 600	31.411	22 000	40.625
1 700	31.286	23 000	41.689
1 800	31.239	24 000	41.187
1 900	31.309	25 000	42.912
2 000	31.403	26 000	43.843
2 100	31.515	26 500	39.878
2 200	31.592		
2 300	31.635		
2 400	31.805		
2 500	31.857		
2 600	32.022		
2 700	31.748		

### 3.3. MEASUREMENT UNCERTAINTY

Description	Reference	Results
AGC threshold	-	$\pm 0.87$ dB
Out-of-band rejection	-	$\pm 0.58$ MHz
Input-versus-output signal comparison	OBW > 5 MHz	$\pm 0.58$ MHz
Input/output power and amplifier/booster gain	-	$\pm 0.87$ dB
Out-of-band/out-of-block emissions and spurious emissions	-	$\pm 1.08$ dB
Spurious emissions radiated	$f \leq 1$ GHz	$\pm 4.80$ dB
	$f > 1$ GHz	$\pm 6.07$ dB


\* Coverage factor  $k = 2$ , Confidence levels of 95 %

### 3.4. STANDARDS ENVIRONMENTAL TEST CONDITIONS

Temperature	+15 °C to +35 °C
Relative humidity	30 % to 60 %
Air pressure	860 mbar to 1 060 mbar


### 3.5. TEST DIAGRAMS

#### Conducted Test

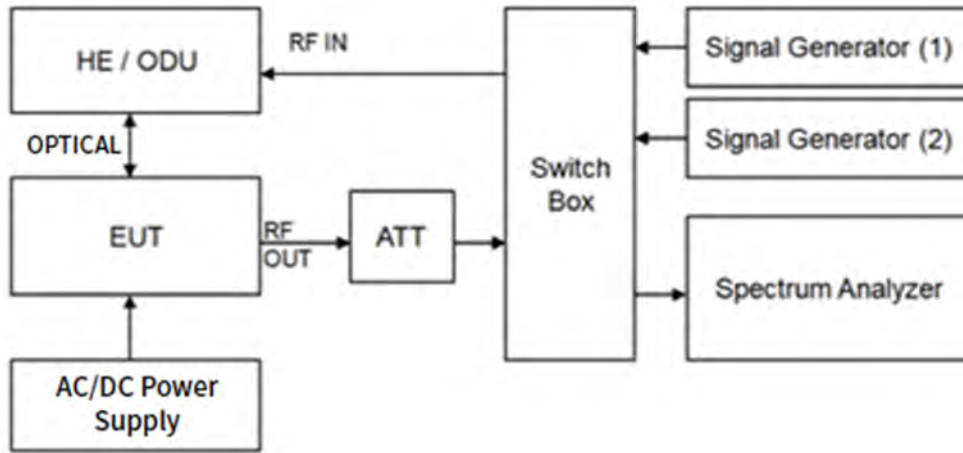


#### Radiated Test

30 MHz ~ 1 GHz

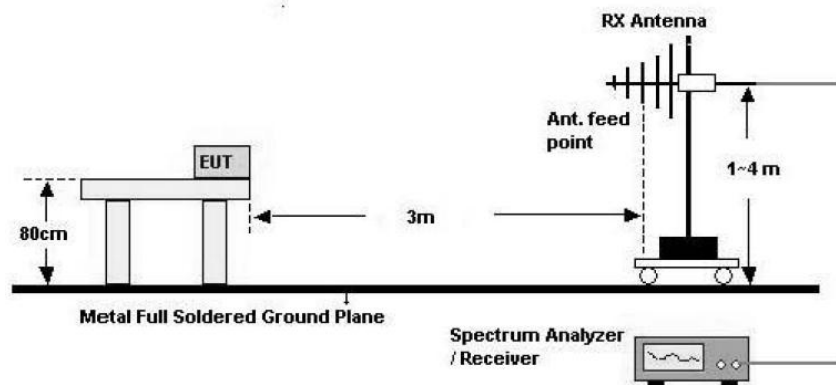

Above 1 GHz

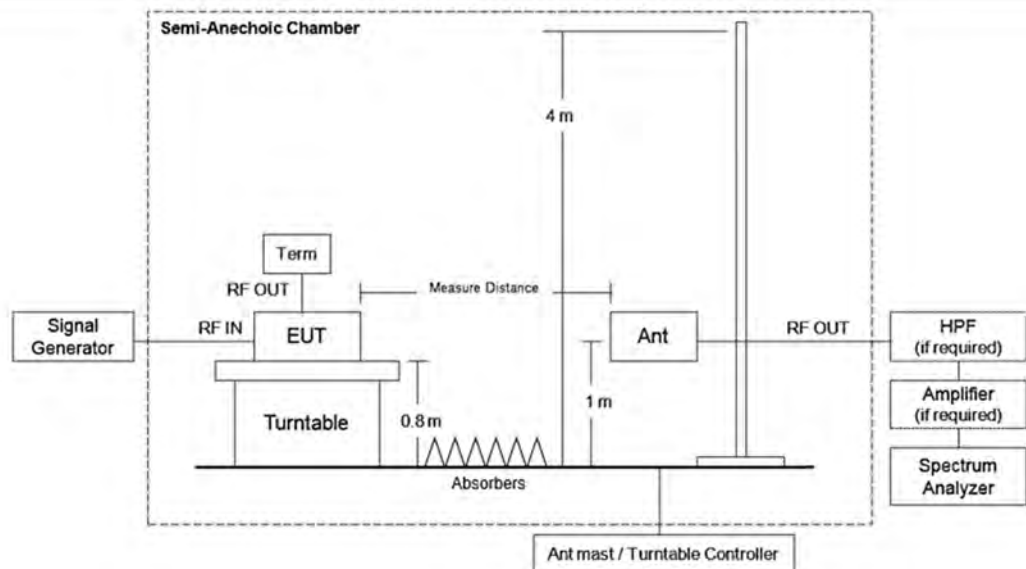

#### 4. TEST EQUIPMENTS

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Agilent	N9020A / MXA Signal Analyzer	08/06/2020	Annual	MY52440870
Keysight	N9030A / PXA Signal Analyzer	04/09/2020	Annual	US51350313
Agilent	N5182A / MXG Vector Signal Generator	08/26/2020	Annual	MY50140312
Agilent	N5182A / MXG Vector Signal Generator	12/02/2020	Annual	MY46240807
Weinschel Associates	WA93-30-33 / 30 dB Attenuator	04/09/2020	Annual	0202
KEITHLEY	S46 / Switch	N/A	N/A	1088024
KIKUSUI	PCR4000M / AC, DC Power Supply	10/14/2020	Annual	VM002269
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
TNM system	FBSM-01B / Amp & Filter Bank Switch Controller	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	05/18/2020	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	08/02/2020	Biennial	01039
Schwarzbeck	BBHA 9120D / Horn Antenna	06/28/2020	Biennial	1300
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	10/13/2020	Biennial	BBHA9170342
Rohde & Schwarz	FSV / Spectrum Analyzer	05/13/2020	Annual	101055
CERNEX	CBL18265035 / Power Amplifier	12/04/2020	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	03/23/2020	Annual	25956
TNM system	FBSM-05B / HPF(3~18GHz) + LNA1(1~18GHz)	01/20/2020	Annual	F6

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

## 5. TEST RESULT

### 5.1. AGC THRESHOLD

#### Test Requirement:

##### KDB 935210 D05 v01r04

Testing at and above the AGC threshold is required.

#### Test Procedures:

Measurements were in accordance with the test methods section 3.2 of KDB 935210 D05 v01r04.

In the case of fiber-optic distribution systems, the RF input port of the equipment under test (EUT) refers to the RF input of the supporting equipment RF to optical convertor; see also descriptions and diagrams for typical DAS booster systems in KDB Publication 935210 D02

Devices intended to be directly connected to an RF source (donor port) only need to be evaluated for any over-the-air transmit paths.

- a) Connect a signal generator to the input of the EUT.
- b) Connect a spectrum analyzer or power meter to the output of the EUT using appropriate attenuation as necessary.
- c) The signal generator should initially be configured to produce either of the required test signals.
- d) Set the signal generator frequency to the center frequency of the EUT operating band.
- e) While monitoring the output power of the EUT, measured using the methods of ANSI C63.26-2015 subclause 5.2.4.4.1, increase the input level until a 1 dB increase in the input signal power no longer causes a 1 dB increase in the output signal power.
- f) Record this level as the AGC threshold level.
- g) Repeat the procedure with the remaining test signal.

Output power measurement in subclause 5.2.4.4.1 of ANSI C63.26

- a) Set span to  $2 \times$  to  $3 \times$  the OBW.
- b) Set RBW = 1% to 5% of the OBW.
- c) Set VBW  $\geq 3 \times$  RBW.
- d) Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.
- e) Sweep time: auto-couple
- f) Detector = power averaging (rms).
- g) If the EUT can be configured to transmit continuously, then set the trigger to free run.
- h) Omit
- i) Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over multiple symbols, it can be necessary to increase the number of traces to be

averaged above 100 or, if using a manually configured sweep time, increase the sweep time.

- j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function, with the band/channel limits set equal to the OBW band edges. If the instrument does not have a band or channel power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

**Test Results:**

Test Band	Link	Signal	Center Frequency (MHz)	AGC Threshold Level (dBm)	Output Level (dBm)
Broadband PCS	Downlink	GSM	1962.50	-20	20.98
		CDMA	1962.50	-20	20.77
		WCDMA	1962.50	-20	21.18
		LTE 5 MHz	1962.50	-20	20.85
		LTE 10 MHz	1962.50	-20	20.82
		LTE 20 MHz	1962.50	-20	21.07
AWS13		CDMA	2145.00	-20	21.00
		WCDMA	2145.00	-20	20.85
		LTE 5 MHz	2145.00	-20	20.77
		LTE 10 MHz	2145.00	-20	20.81
		LTE 20 MHz	2145.00	-20	20.70
WCS		LTE 5 MHz	2355.00	-20	20.94
	LTE 10 MHz	2355.00	-20	21.00	
BRS/EBS	LTE 20MHz	2593.00	-20	20.79	
	5G NR 20 MHz	2593.00	-20	20.94	
	5G NR 40 MHz	2593.00	-20	21.16	
	5G NR 60 MHz	2593.00	-20	20.69	
	5G NR 80 MHz	2593.00	-20	20.65	
	5G NR 100 MHz	2593.00	-20	20.60	

## 5.2. OUT-OF-BAND REJECTION

### Test Requirement:

**KDB 935210 D05 v01r04**

Out-of-band rejection required.

### Test Procedures:

Measurements were in accordance with the test methods section 3.3 of KDB 935210 D05 v01r04.


A signal booster shall reject amplification of other signals outside of its passband. Adjust the internal gain control of the EUT (if so equipped) to the maximum gain for which equipment certification is sought.

- a) Connect a signal generator to the input of the EUT.
- b) Configure a swept CW signal with the following parameters:
  - 1) Frequency range =  $\pm 250\%$  of the passband, for each applicable CMRS band.
  - 2) Level = a sufficient level to affirm that the out-of-band rejection is  $> 20$  dB above the noise floor and will not engage the AGC during the entire sweep.
  - 3) Dwell time = approximately 10 ms.
  - 4) Number of points =  $\text{SPAN}/(\text{RBW}/2)$ .
- c) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation.
- d) Set the span of the spectrum analyzer to the same as the frequency range of the signal generator.
- e) Set the resolution bandwidth (RBW) of the spectrum analyzer to be 1 % to 5 % of the EUT passband, and the video bandwidth (VBW) shall be set to  $\geq 3 \times \text{RBW}$ .
- f) Set the detector to Peak Max-Hold and wait for the spectrum analyzer's spectral display to fill.
- g) Place a marker to the peak of the frequency response and record this frequency as  $f_0$ .
- h) Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the  $-20$  dB down amplitude, to determine the 20 dB bandwidth.
- i) Capture the frequency response of the EUT.
- j) Repeat for all frequency bands applicable for use by the EUT.




## Test Results:

### Broadband PCS (1 930 MHz ~ 1 995 MHz) / Downlink

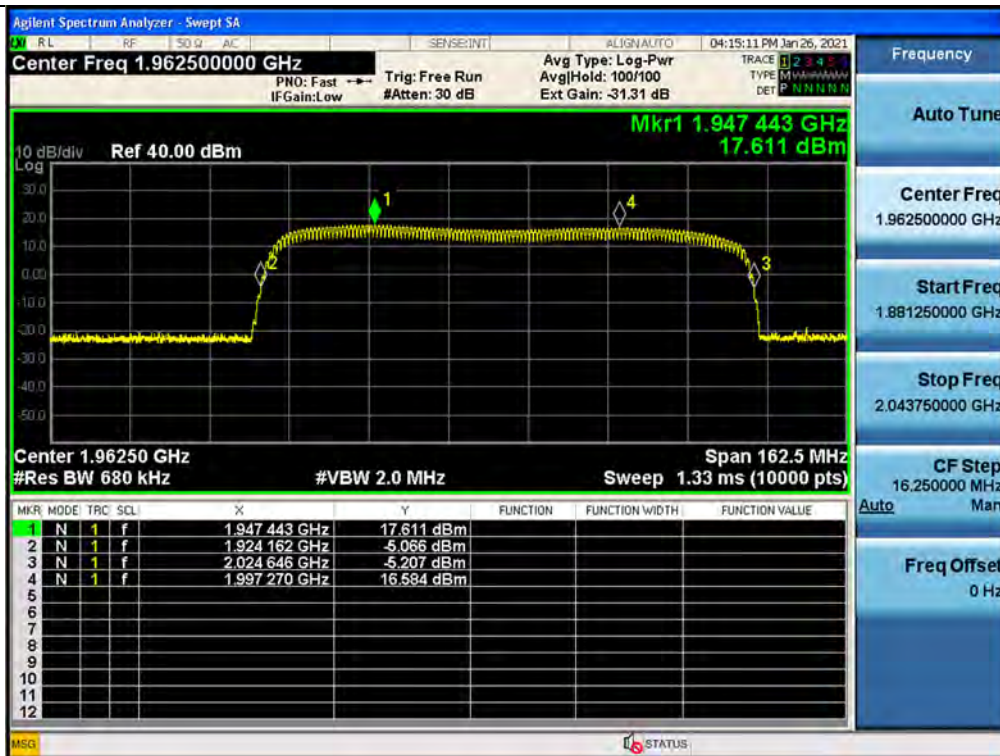


### AWS13 (2 110 MHz ~ 2 180 MHz) / Downlink

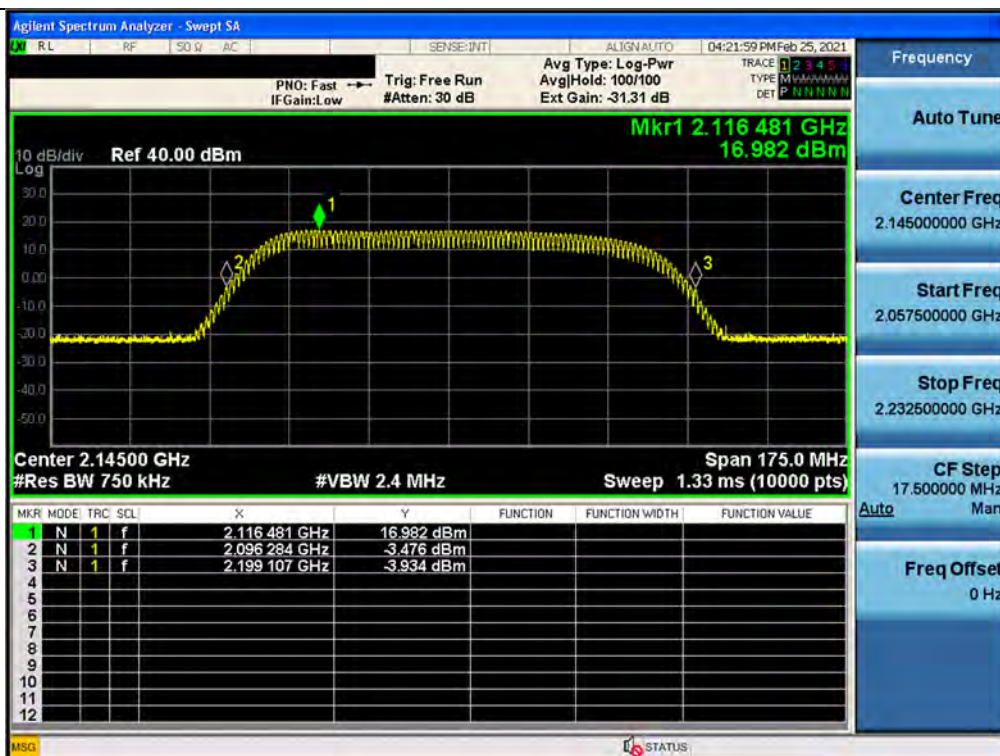

WCS (2 350 MHz ~ 2 360 MHz) / Downlink



BRS/EBS (2 496 MHz ~ 2 690 MHz) / Downlink

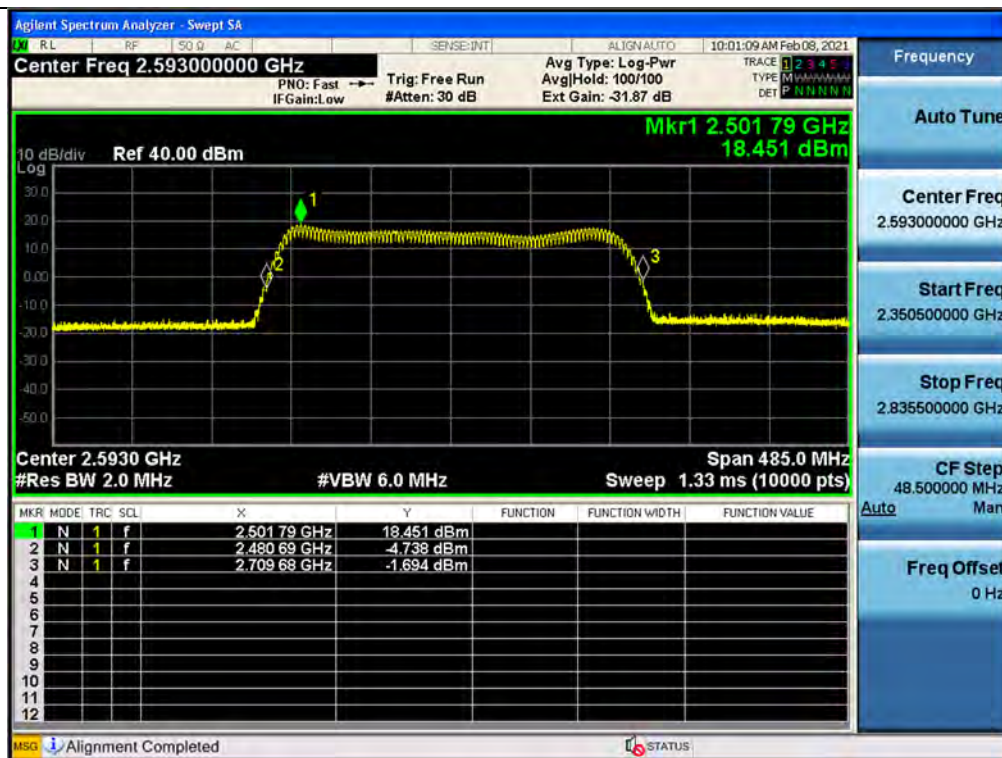

### 5.3. INPUT-VERSUS-OUTPUT SIGNAL COMPARISON

#### Test Requirement:

##### § 2.1049 Measurements required: Occupied bandwidth.

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the specified conditions of § 2.1049 (a) through (i) as applicable.

#### Test Procedures:

Measurements were in accordance with the test methods section 3.4 of KDB 935210 D05 v01r04.

A 26 dB bandwidth measurement shall be performed on the input signal and the output signal; alternatively, the 99% OBW can be measured and used. See KDB Publication 971168 [R8] for more information on measuring OBW.

- a) Connect a signal generator to the input of the EUT.
- b) Configure the signal generator to transmit the AWGN signal.
- c) Configure the signal amplitude to be just below the AGC threshold level (see 3.2), but not more than 0.5 dB below.
- d) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation.
- e) Set the spectrum analyzer center frequency to the center frequency of the operational band under test. The span range of the spectrum analyzer shall be between 2 times to 5 times the emission bandwidth (EBW) or alternatively, the OBW.
- f) The nominal RBW shall be in the range of 1 % to 5 % of the anticipated OBW, and the VBW shall be  $\geq 3 \times \text{RBW}$ .
- g) Set the reference level of the instrument as required to preclude the signal from exceeding the maximum spectrum analyzer input mixer level for linear operation. In general, the peak of the spectral envelope must be more than  $[10 \log (\text{OBW} / \text{RBW})]$  below the reference level. Steps f) and g) may require iteration to enable adjustments within the specified tolerances.
- h) The noise floor of the spectrum analyzer at the selected RBW shall be at least 36 dB below the reference level.
- i) Set spectrum analyzer detection function to positive peak.
- j) Set the trace mode to max hold.
- k) Determine the reference value: Allow the trace to stabilize. Set the spectrum analyzer marker to the highest amplitude level of the displayed trace (this is the reference value) and record the associated frequency.
- l) Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the  $-26$  dB down amplitude. The 26 dB EBW (alternatively OBW) is the positive frequency difference between the two markers. If the spectral envelope crosses the  $-26$  dB down amplitude at multiple points, the lowest or highest frequency shall be selected as the frequencies that are the furthest removed from the center frequency at which the spectral envelope crosses the  $-26$  dB down amplitude point.
- m) Repeat steps e) to l) with the input signal connected directly to the spectrum analyzer (i.e., input signal

measurement).

- n) Compare the spectral plot of the input signal (determined from step m) to the output signal (determined from step l) to affirm that they are similar (in passband and rolloff characteristic features and relative spectral locations), and include plot(s) and descriptions in test report.
- o) Repeat the procedure [steps e) to n)] with the input signal amplitude set to 3 dB above the AGC threshold.
- p) Repeat steps e) to o) with the signal generator set to the narrowband signal.
- q) Repeat steps e) to p) for all frequency bands authorized for use by the EUT.

**Test Results:**

Tabular data of Output Occupied Bandwidth

Test Band	Link	Signal	Center Frequency (MHz)	99 % OBW (kHz)	26 dB OBW (kHz)
Broadband PCS	Downlink	GSM	1962.50	244.07	314.40
Test Band	Link	Signal	Center Frequency (MHz)	99 % OBW (MHz)	26 dB OBW (MHz)
Broadband PCS	Downlink	CDMA	1962.50	1.2588	1.401
		WCDMA	1962.50	4.1962	4.726
		LTE 5 MHz	1962.50	4.5103	4.991
		LTE 10 MHz	1962.50	8.9762	9.983
		LTE 20 MHz	1962.50	17.9840	19.796
AWS13		CDMA	2145.00	1.2680	1.393
		WCDMA	2145.00	4.1733	4.718
		LTE 5 MHz	2145.00	4.5141	4.983
		LTE 10 MHz	2145.00	9.0250	9.886
		LTE 20 MHz	2145.00	17.9857	19.780
WCS		LTE 5 MHz	2355.00	4.5235	4.983
		LTE 10 MHz	2355.00	9.0400	9.828
BRS/EBS		LTE 20MHz	2593.00	17.9473	19.770
		5G NR 20 MHz	2593.00	18.2480	19.494
		5G NR 40 MHz	2593.00	38.0766	39.964
		5G NR 60 MHz	2593.00	58.1727	60.946
		5G NR 80 MHz	2593.00	77.8416	81.573
		5G NR 100 MHz	2593.00	97.4114	102.660



Tabular data of Input Occupied Bandwidth

Test Band	Link	Signal	Center Frequency (MHz)	99 % OBW (kHz)	26 dB OBW (kHz)
Broadband PCS	Downlink	GSM	1962.50	245.70	310.98
Test Band	Link	Signal	Center Frequency (MHz)	99 % OBW (MHz)	26 dB OBW (MHz)
Broadband PCS	Downlink	CDMA	1962.50	1.2594	1.398
		WCDMA	1962.50	4.1802	4.704
		LTE 5 MHz	1962.50	4.5045	4.972
		LTE 10 MHz	1962.50	9.0138	9.934
		LTE 20 MHz	1962.50	17.9319	19.766
AWS13		CDMA	2145.00	1.2615	1.406
		WCDMA	2145.00	4.1852	4.718
		LTE 5 MHz	2145.00	4.5213	4.998
		LTE 10 MHz	2145.00	9.0123	9.982
		LTE 20 MHz	2145.00	17.9595	19.783
WCS		LTE 5 MHz	2355.00	4.5136	4.978
		LTE 10 MHz	2355.00	9.0054	9.977
BRS/EBS		LTE 20MHz	2593.00	17.9454	19.843
		5G NR 20 MHz	2593.00	18.2687	19.417
		5G NR 40 MHz	2593.00	37.9306	39.953
		5G NR 60 MHz	2593.00	57.9067	60.889
		5G NR 80 MHz	2593.00	77.5526	81.581
		5G NR 100 MHz	2593.00	97.2035	102.360

Tabular data of 3 dB above the AGC threshold Output Occupied Bandwidth

Test Band	Link	Signal	Center Frequency (MHz)	99 % OBW (kHz)	26 dB OBW (kHz)
Broadband PCS	Downlink	GSM	1962.50	242.53	303.28
Test Band	Link	Signal	Center Frequency (MHz)	99 % OBW (MHz)	26 dB OBW (MHz)
Broadband PCS	Downlink	CDMA	1962.50	1.2626	1.391
		WCDMA	1962.50	4.1586	4.694
		LTE 5 MHz	1962.50	4.5200	4.956
		LTE 10 MHz	1962.50	8.9867	9.958
		LTE 20 MHz	1962.50	17.9549	19.791
AWS13		CDMA	2145.00	1.2608	1.392
		WCDMA	2145.00	4.1951	4.721
		LTE 5 MHz	2145.00	4.5070	5.002
		LTE 10 MHz	2145.00	9.0042	9.912
		LTE 20 MHz	2145.00	18.0038	19.652
WCS		LTE 5 MHz	2355.00	4.5278	5.010
		LTE 10 MHz	2355.00	9.0295	10.044
BRS/EBS		LTE 20MHz	2593.00	18.0038	19.516
		5G NR 20 MHz	2593.00	18.2686	19.426
		5G NR 40 MHz	2593.00	38.0504	40.060
		5G NR 60 MHz	2593.00	58.1346	60.936
		5G NR 80 MHz	2593.00	77.7936	81.683
		5G NR 100 MHz	2593.00	97.2820	102.634

Tabular data of 3 dB above the AGC threshold Input Occupied Bandwidth

Test Band	Link	Signal	Center Frequency (MHz)	99 % OBW (kHz)	26 dB OBW (kHz)
Broadband PCS	Downlink	GSM	1962.50	246.43	319.43
Test Band	Link	Signal	Center Frequency (MHz)	99 % OBW (MHz)	26 dB OBW (MHz)
Broadband PCS	Downlink	CDMA	1962.50	1.2624	1.391
		WCDMA	1962.50	4.1923	4.701
		LTE 5 MHz	1962.50	4.5202	4.977
		LTE 10 MHz	1962.50	9.0289	9.853
		LTE 20 MHz	1962.50	18.0308	19.559
AWS13		CDMA	2145.00	1.2684	1.394
		WCDMA	2145.00	4.1720	4.700
		LTE 5 MHz	2145.00	4.5165	5.036
		LTE 10 MHz	2145.00	9.0141	9.961
		LTE 20 MHz	2145.00	18.0097	19.581
WCS		LTE 5 MHz	2355.00	4.5242	5.027
		LTE 10 MHz	2355.00	9.0095	9.901
BRS/EBS		LTE 20MHz	2593.00	17.9351	19.827
		5G NR 20 MHz	2593.00	18.2771	19.367
		5G NR 40 MHz	2593.00	37.9707	39.922
		5G NR 60 MHz	2593.00	57.9480	60.928
		5G NR 80 MHz	2593.00	77.5032	81.442
		5G NR 100 MHz	2593.00	97.2994	102.520



## Measured Occupied Bandwidth Comparison

Test Band	Link	Signal	Variant of Input and output Occupied Bandwidth (%)	Variant of Input and 3 dB above the AGC threshold output Occupied Bandwidth (%)
Broadband PCS	Downlink	GSM	-0.665	-1.583
		CDMA	0.000	0.079
		WCDMA	0.383	-0.787
		LTE 5 MHz	0.111	0.000
		LTE 10 MHz	-0.422	-0.465
		LTE 20 MHz	0.290	-0.421
AWS13		CDMA	0.555	-0.552
		WCDMA	-0.287	0.551
		LTE 5 MHz	-0.155	-0.221
		LTE 10 MHz	0.144	-0.111
		LTE 20 MHz	0.150	-0.033
WCS		LTE 5 MHz	0.222	0.088
		LTE 10 MHz	0.389	0.222
BRS/EBS		LTE 20MHz	0.011	0.385
		5G NR 20 MHz	-0.115	-0.044
		5G NR 40 MHz	0.385	0.208
		5G NR 60 MHz	0.459	0.323
		5G NR 80 MHz	0.373	0.375
		5G NR 100 MHz	0.214	-0.017

\* Change in input-output OBW is less than  $\pm 5\%$ .

## Plot data of Occupied Bandwidth

Output / Broadband PCS / Downlink / GSM



Input / Broadband PCS / Downlink / GSM




3 dB above the AGC threshold output / Broadband PCS / Downlink / GSM




3 dB above the AGC threshold Input / Broadband PCS / Downlink / GSM



## Output / Broadband PCS / Downlink / CDMA

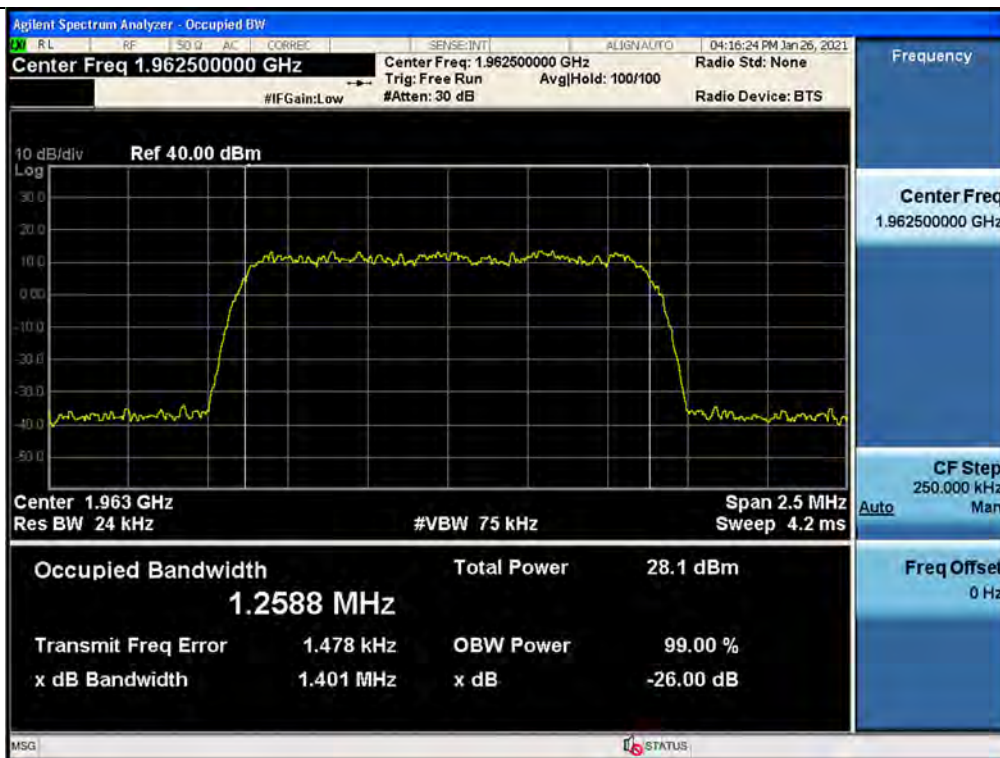


## Input / Broadband PCS / Downlink / CDMA

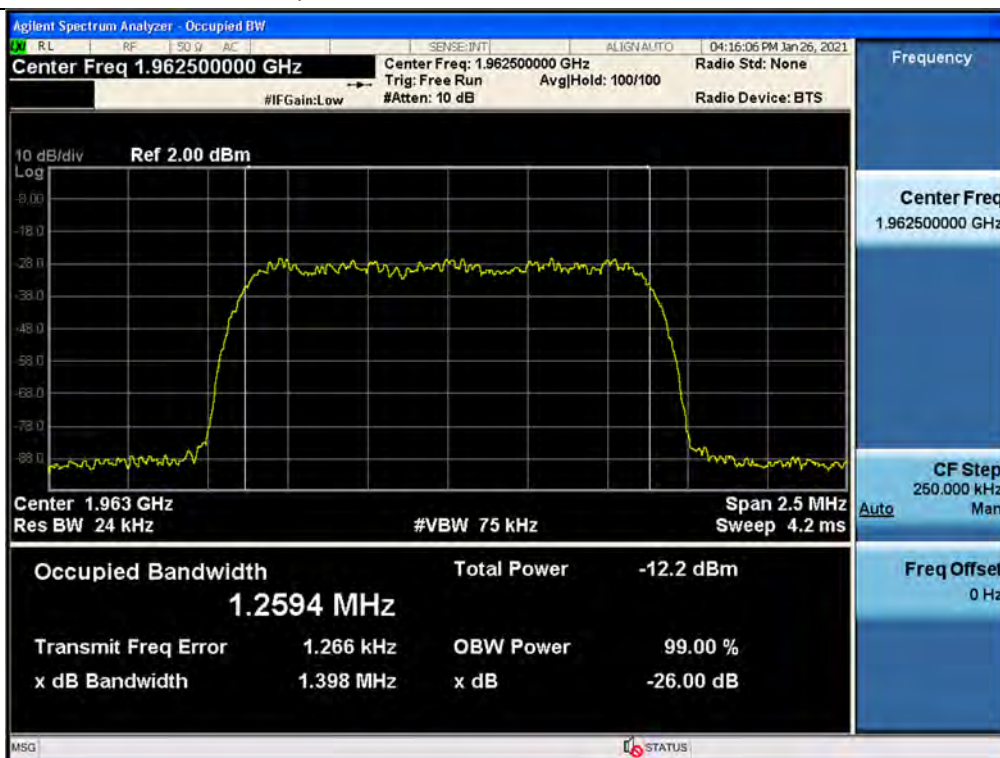





3 dB above the AGC threshold output / Broadband PCS / Downlink / CDMA

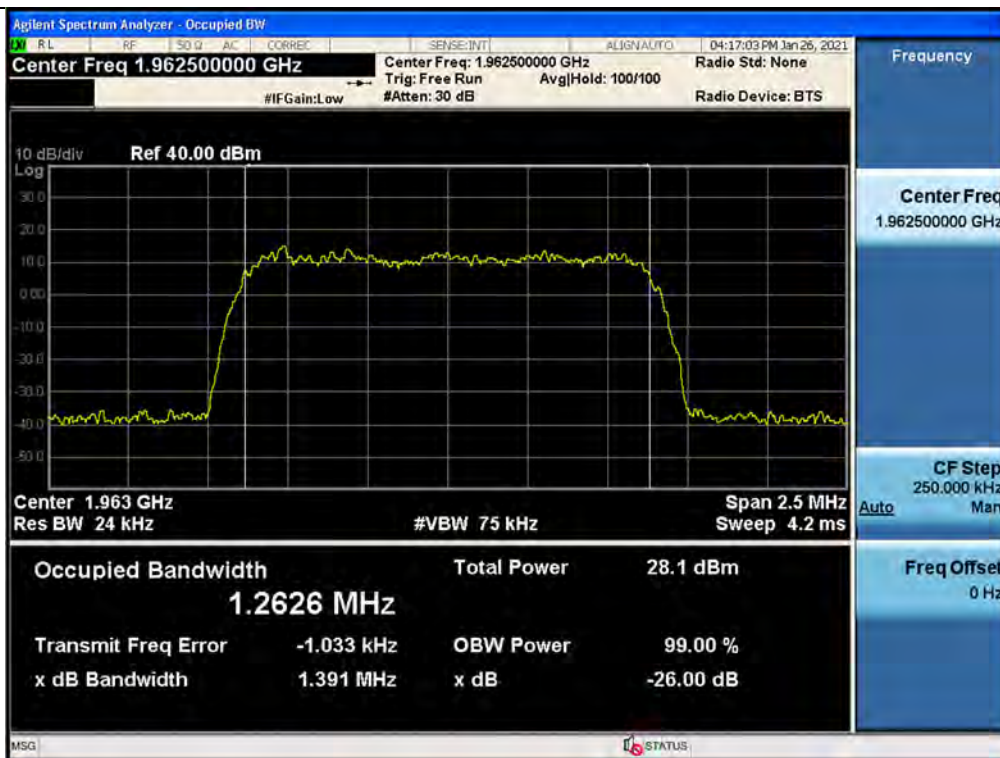


3 dB above the AGC threshold Input / Broadband PCS / Downlink / CDMA

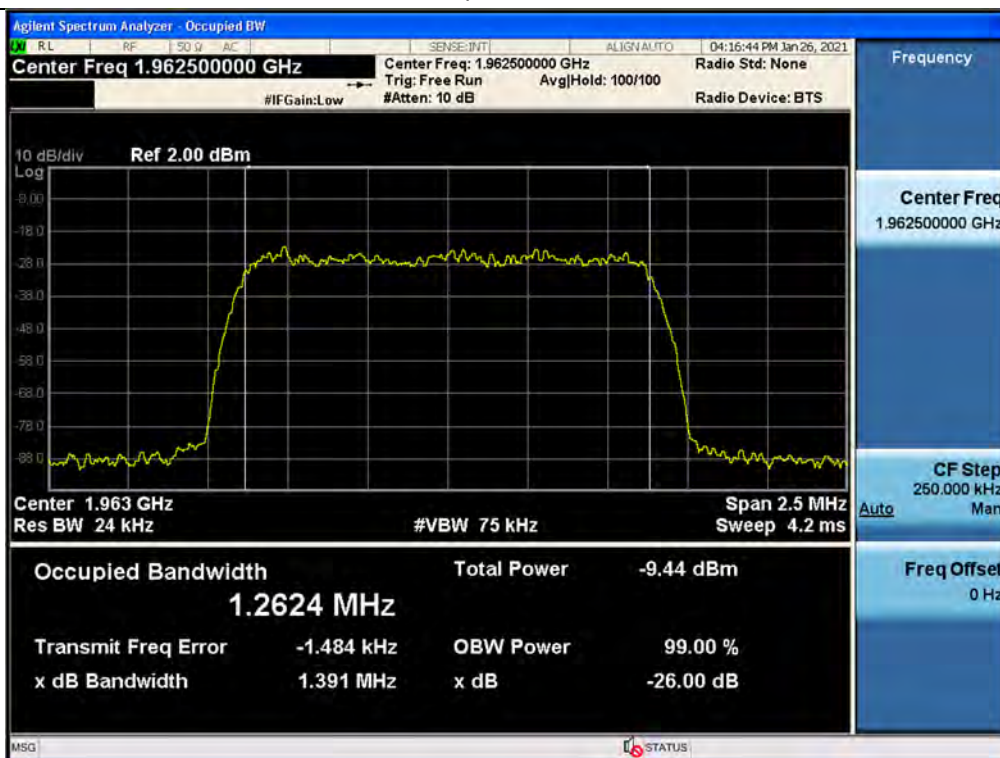


## Output / Broadband PCS / Downlink / WCDMA

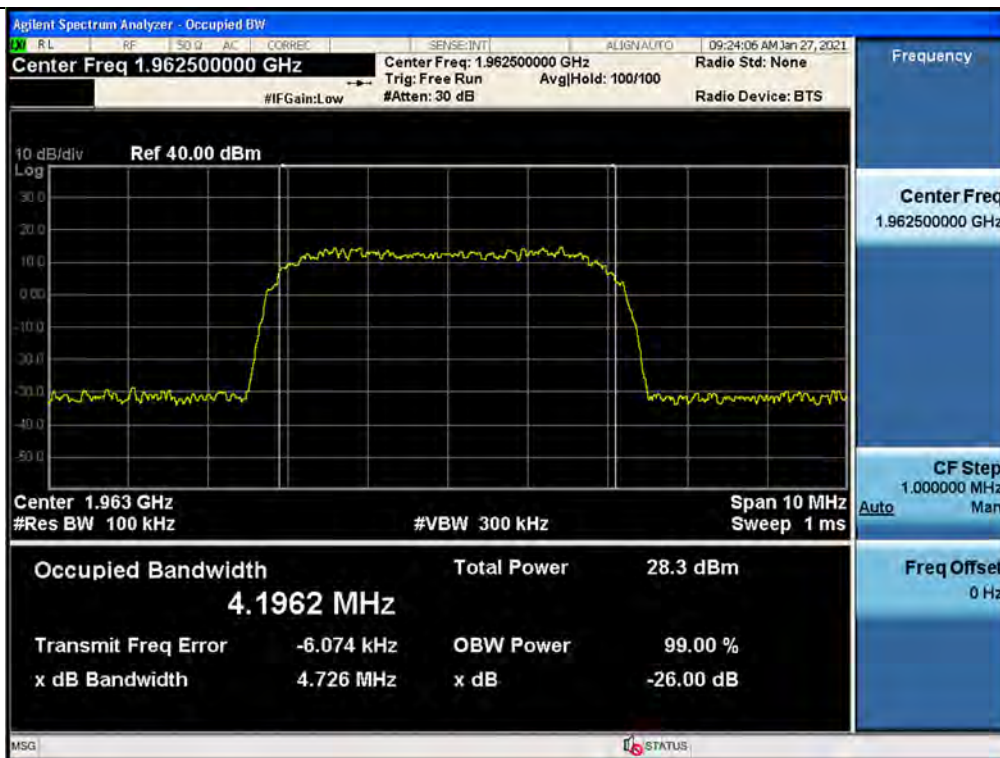


## Input / Broadband PCS / Downlink / WCDMA

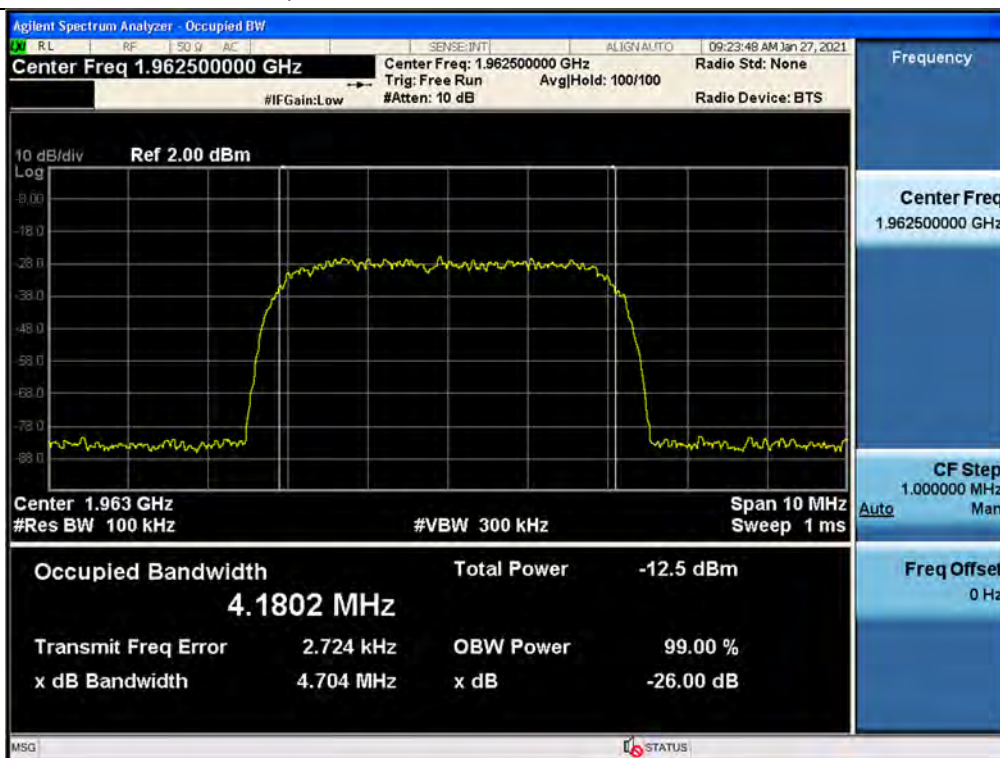

3 dB above the AGC threshold output / Broadband PCS / Downlink / WCDMA

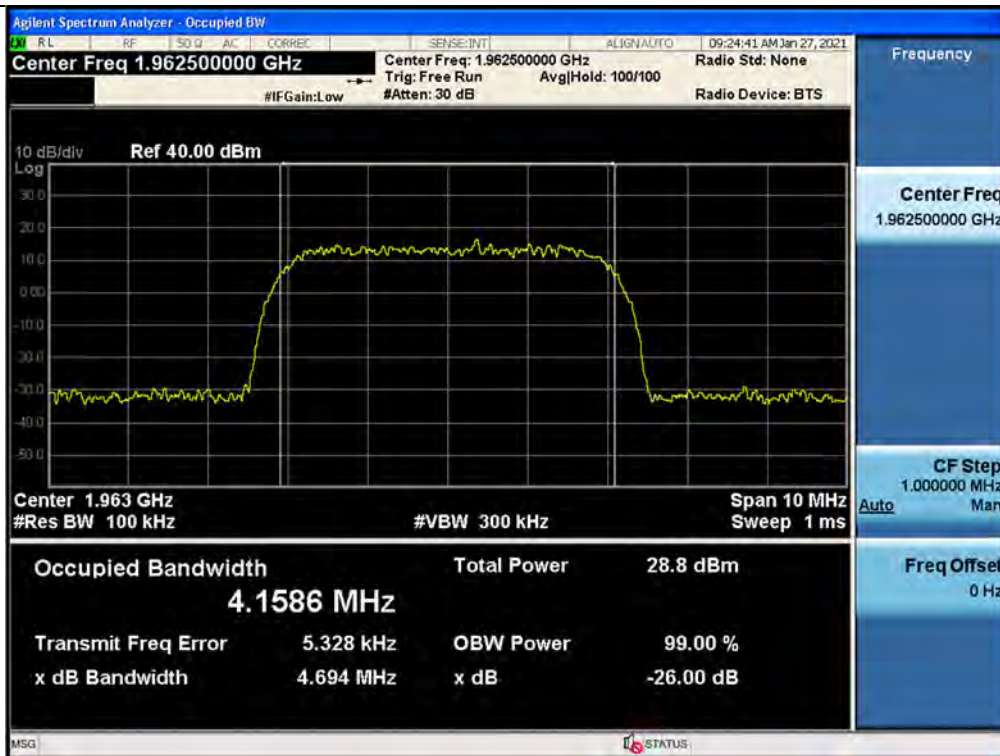


3 dB above the AGC threshold Input / Broadband PCS / Downlink / WCDMA

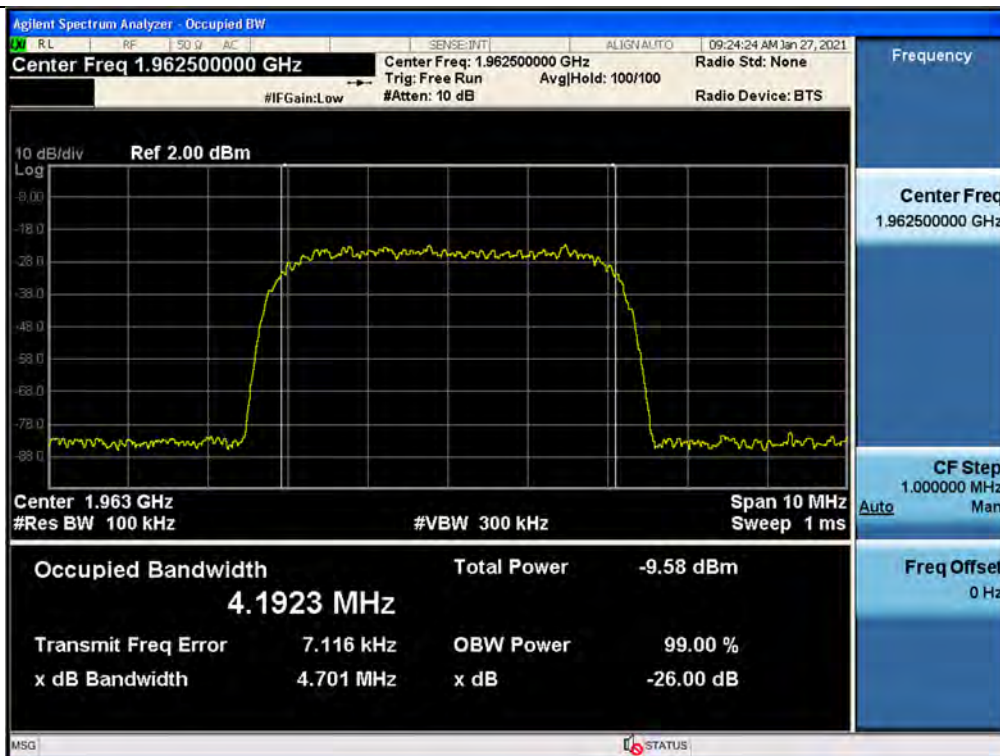




Output / Broadband PCS / Downlink / LTE 5 MHz

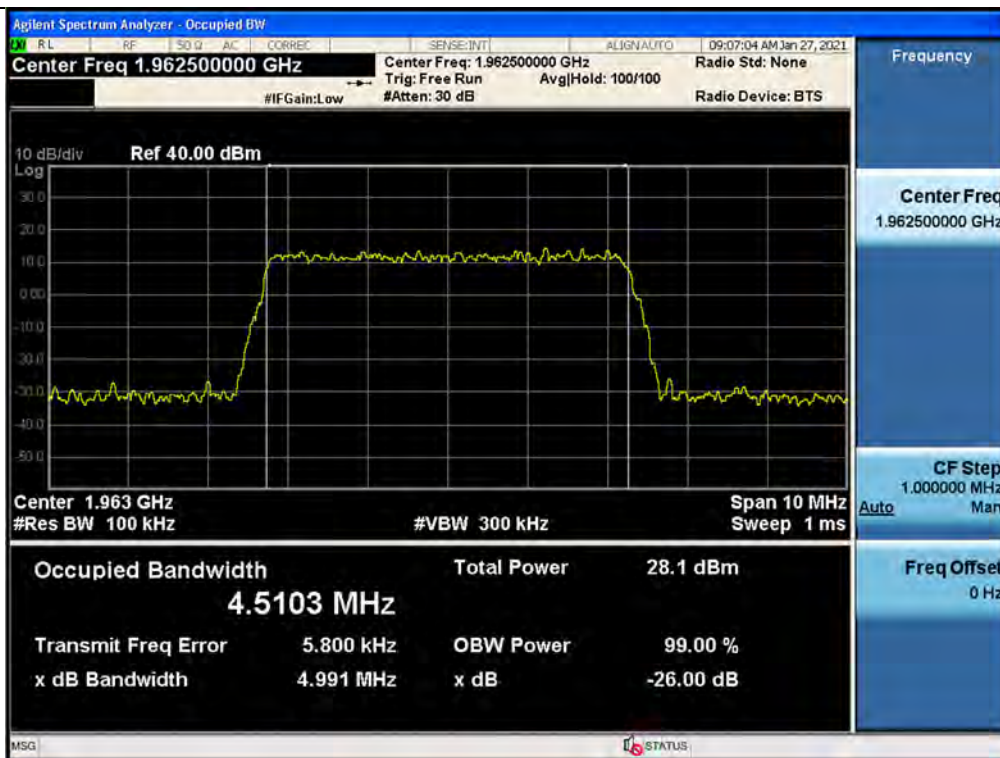


Input / Broadband PCS / Downlink / LTE 5 MHz

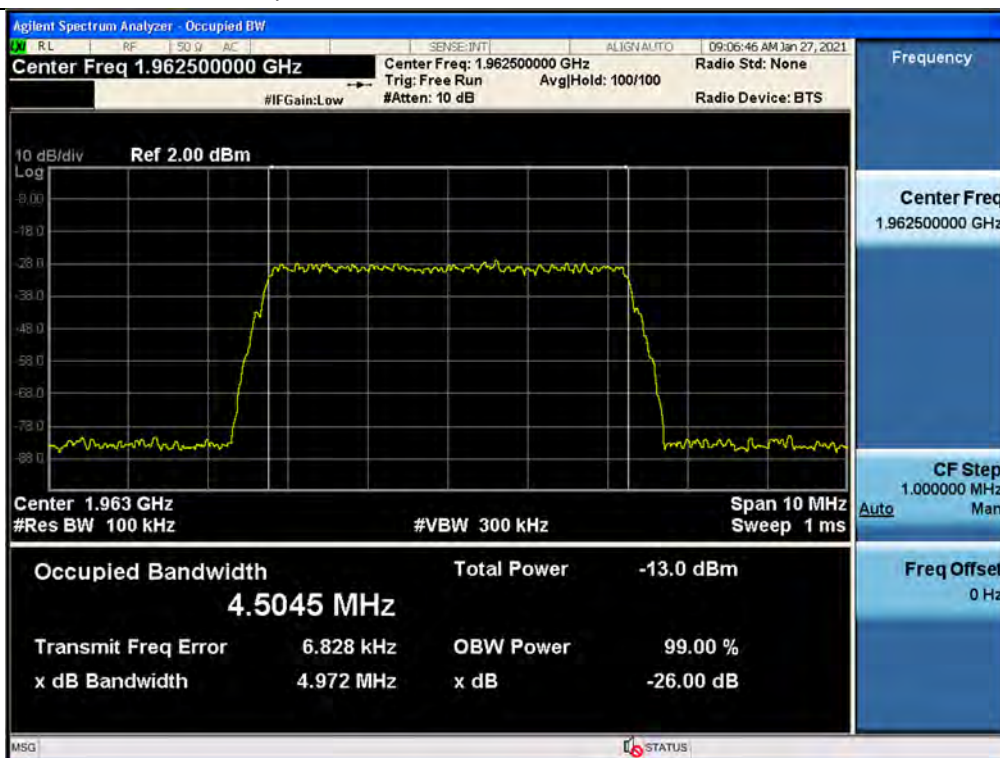





3 dB above the AGC threshold output / Broadband PCS / Downlink / LTE 5 MHz

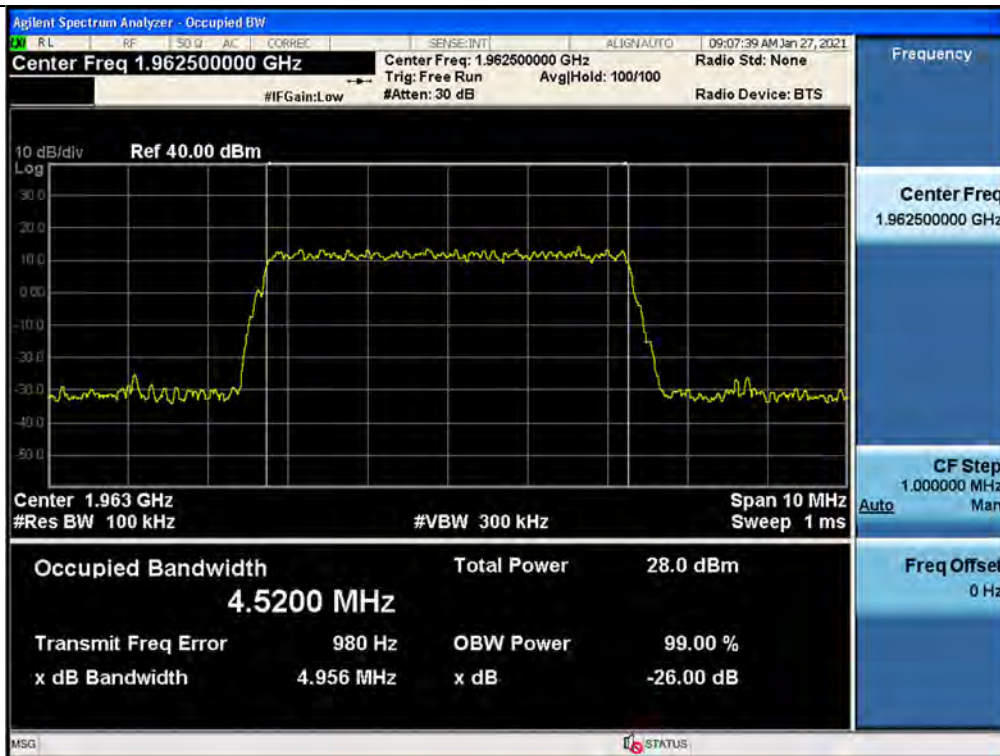


3 dB above the AGC threshold Input / Broadband PCS / Downlink / LTE 5 MHz

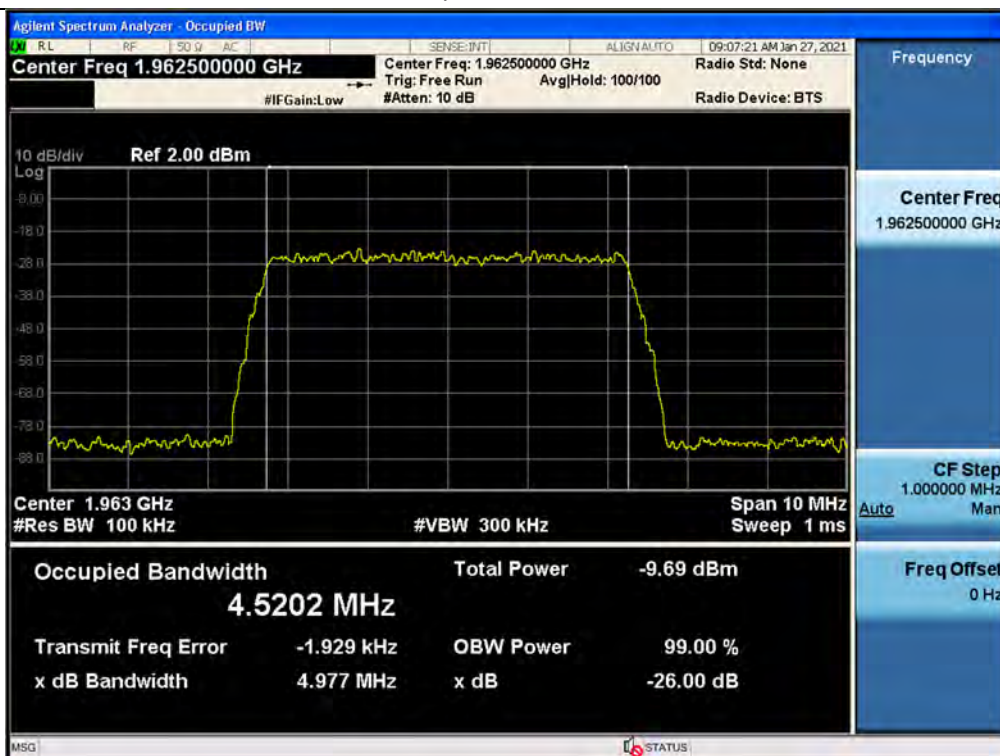


## Output / Broadband PCS / Downlink / LTE 10 MHz

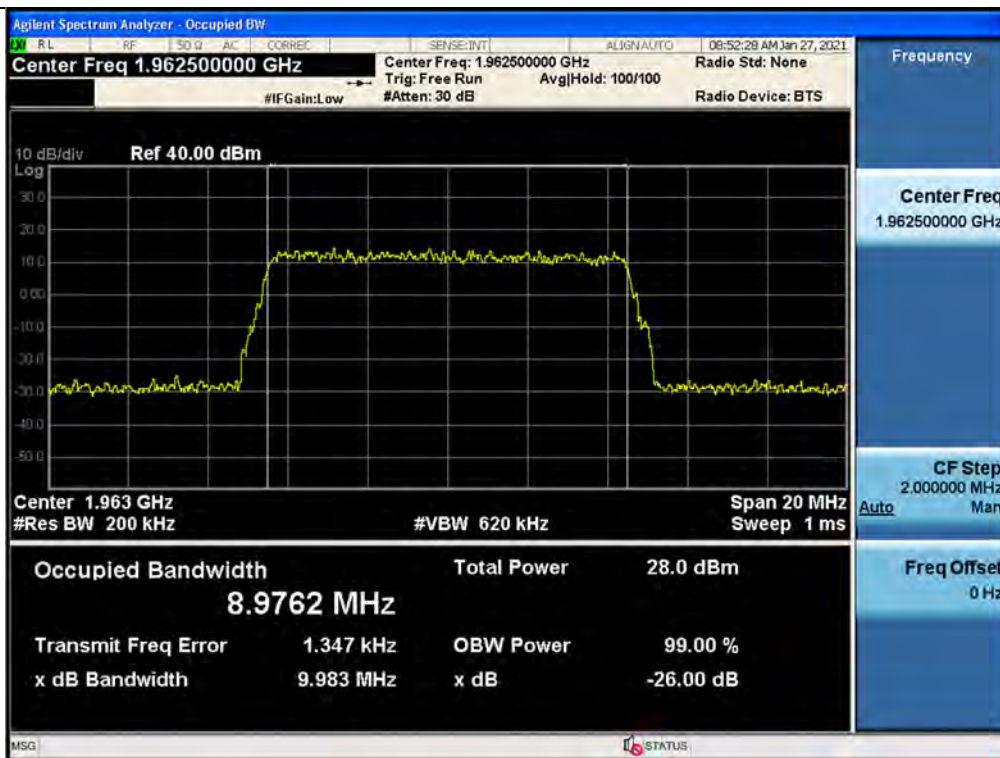


## Input / Broadband PCS / Downlink / LTE 10 MHz

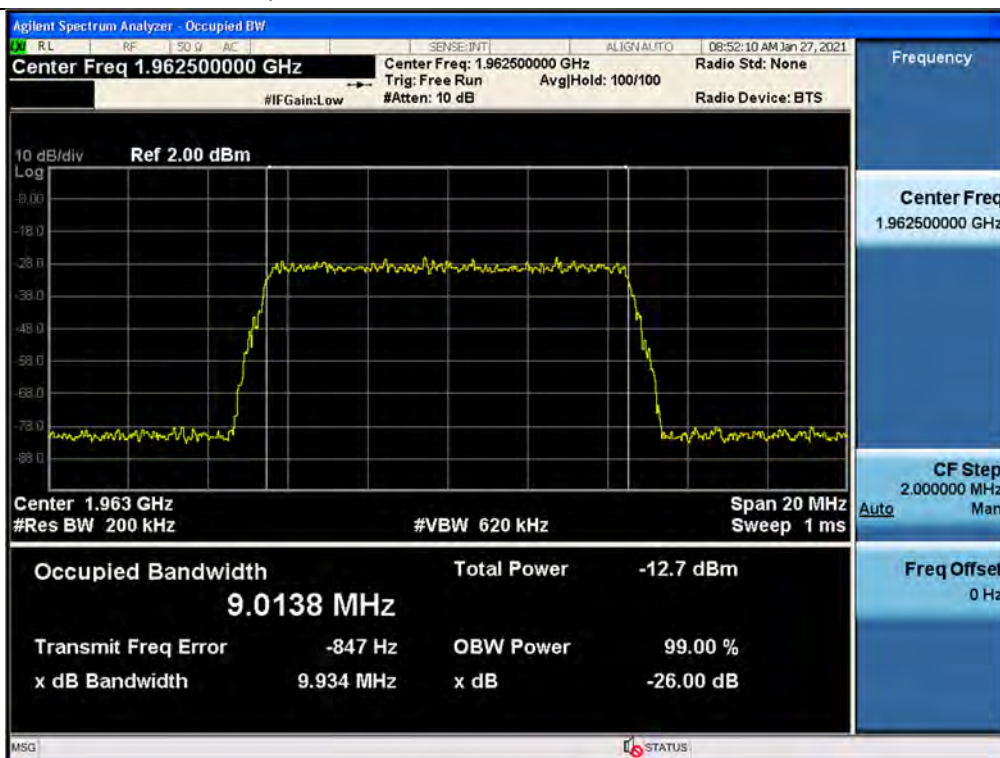

3 dB above the AGC threshold output / Broadband PCS / Downlink / LTE 10 MHz

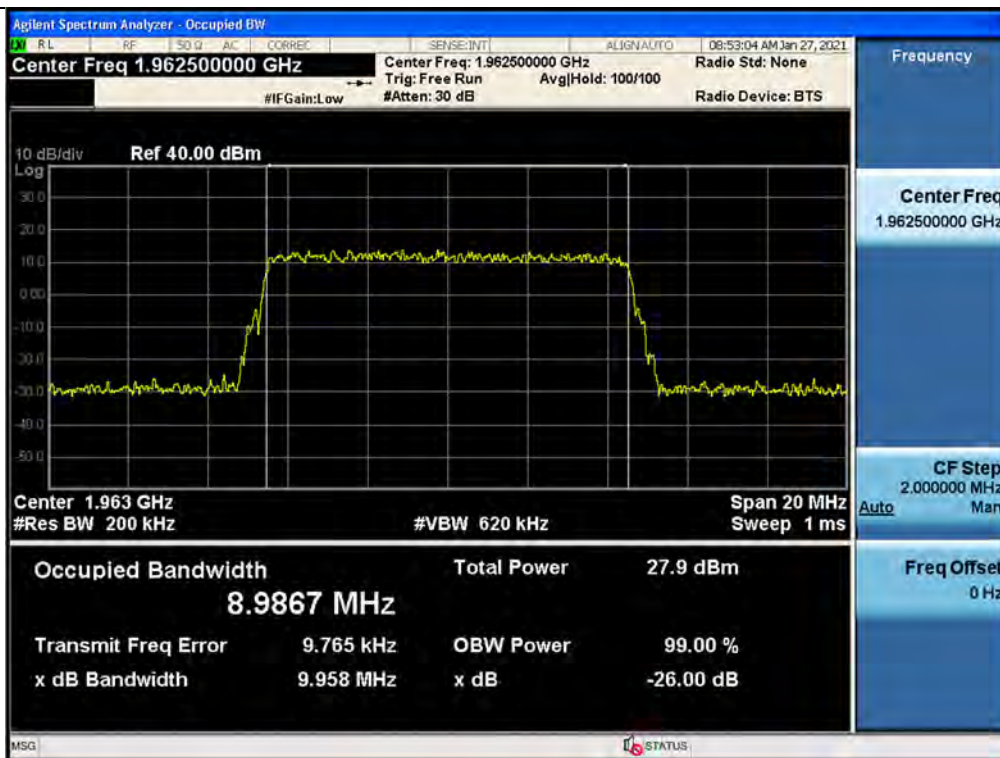


3 dB above the AGC threshold Input / Broadband PCS / Downlink / LTE 10 MHz

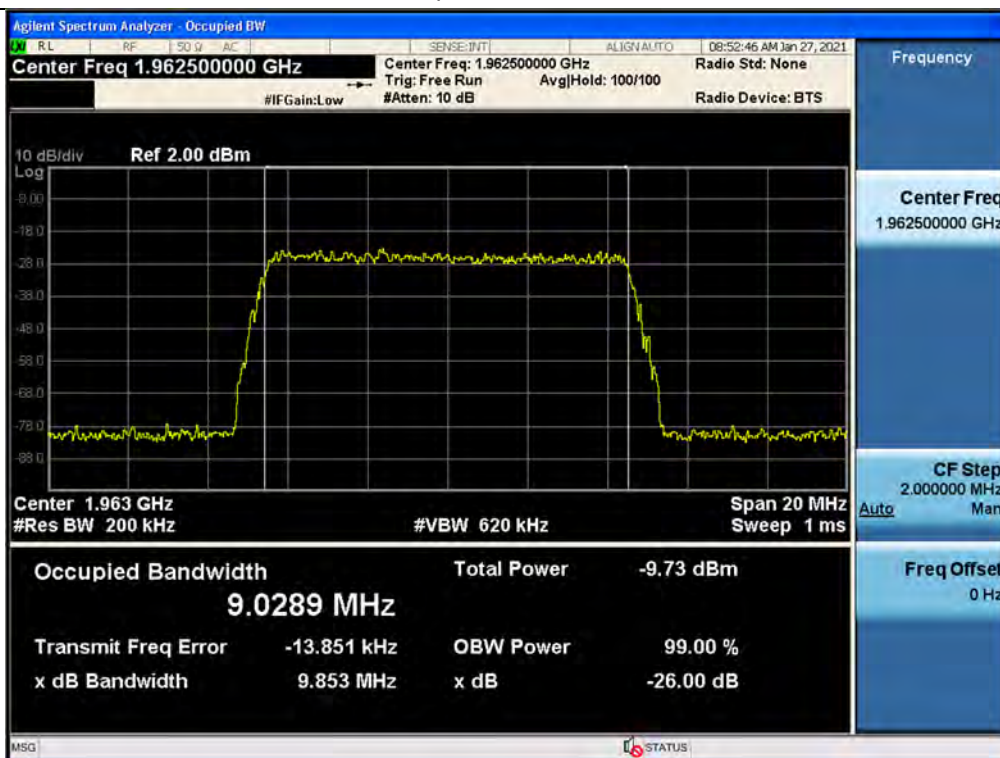





## Output / Broadband PCS / Downlink / LTE 20 MHz

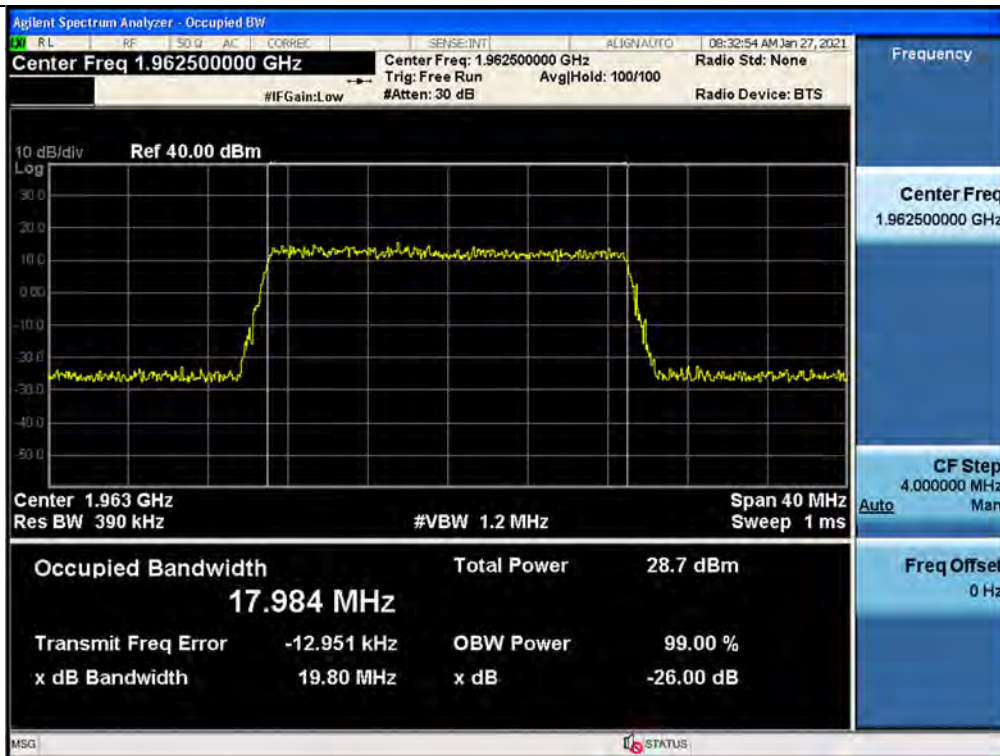


## Input / Broadband PCS / Downlink / LTE 20 MHz

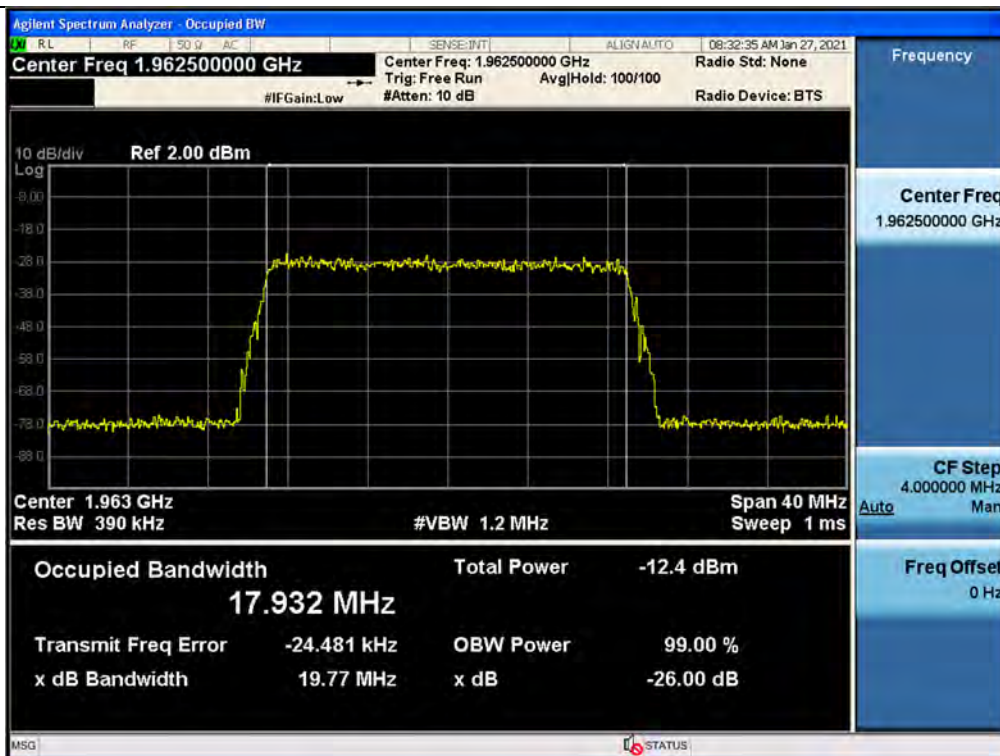


3 dB above the AGC threshold output / Broadband PCS / Downlink / LTE 20 MHz

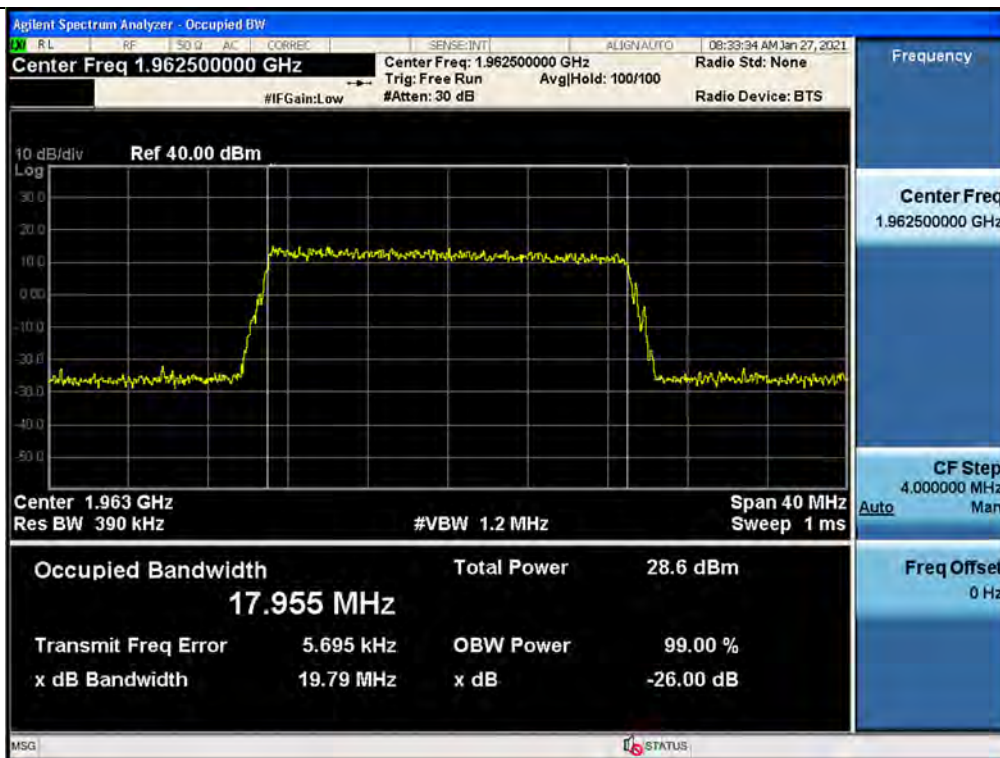


3 dB above the AGC threshold Input / Broadband PCS / Downlink / LTE 20 MHz

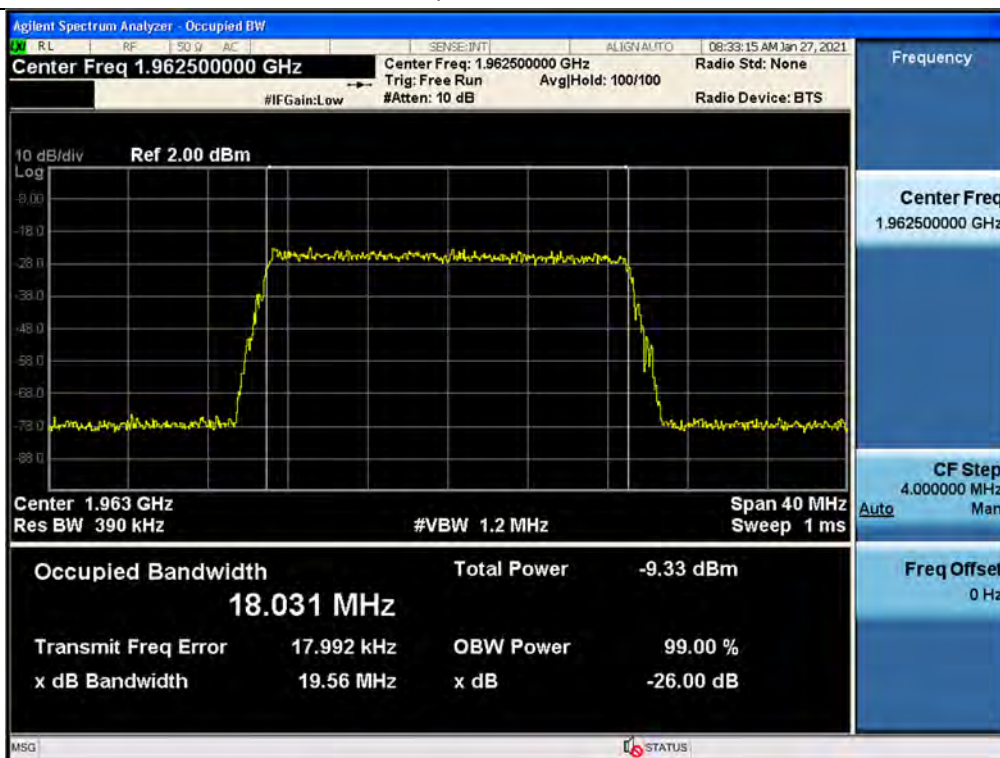

## Output / AWS13 / Downlink / CDMA

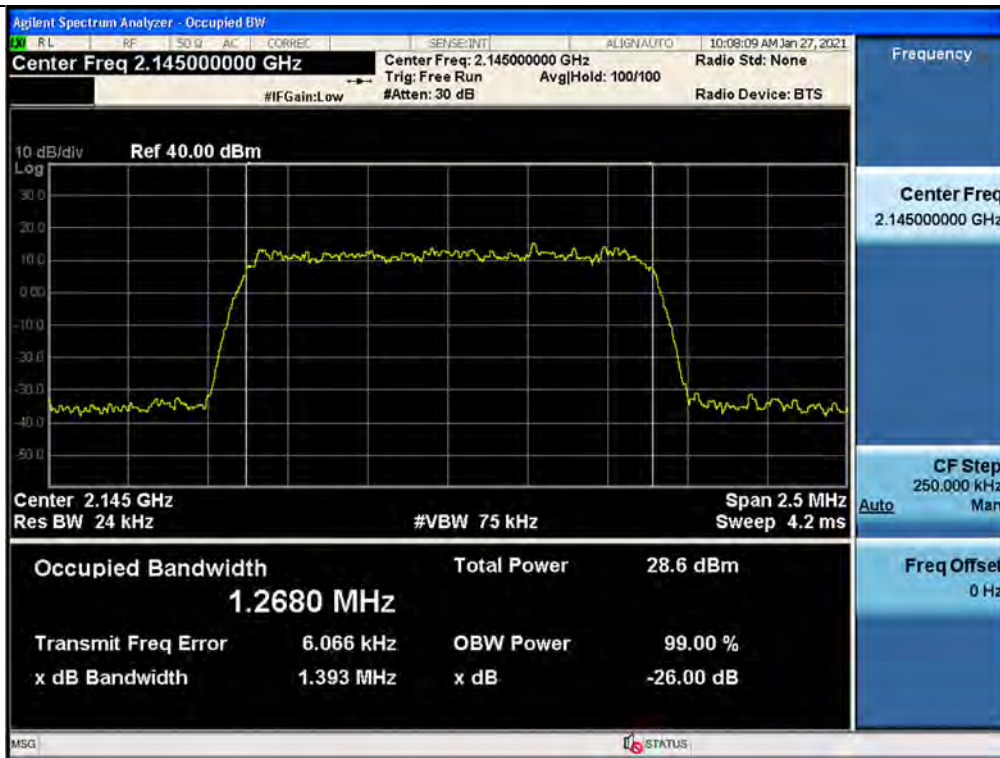


## Input / AWS13 / Downlink / CDMA

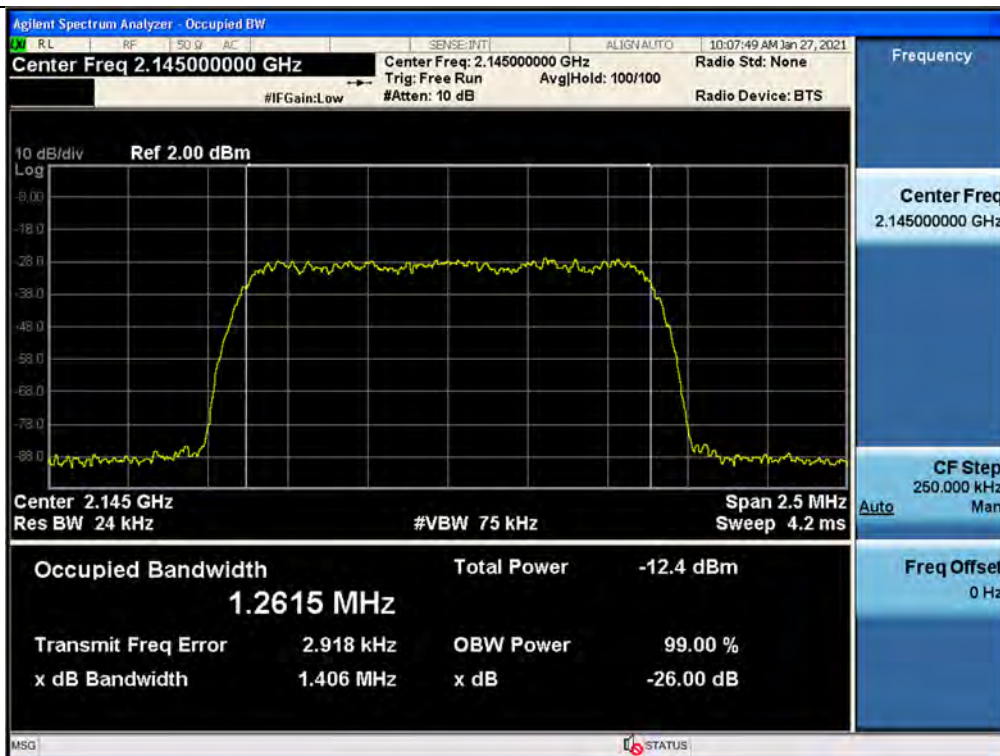





3 dB above the AGC threshold output / AWS13 / Downlink / CDMA

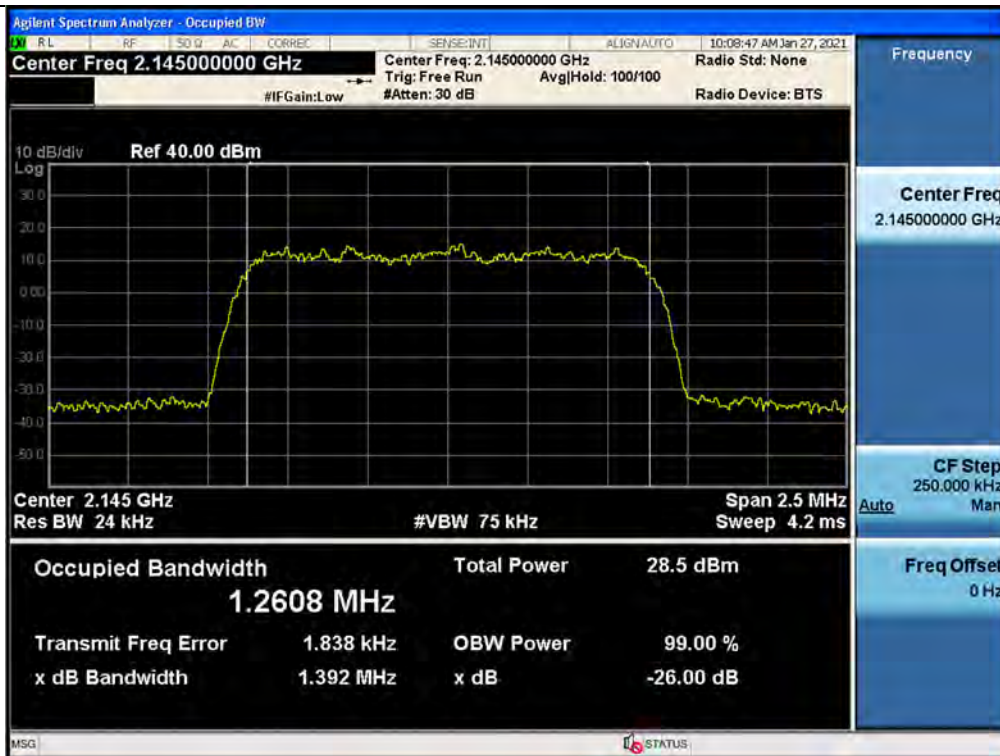


3 dB above the AGC threshold Input / AWS13 / Downlink / CDMA

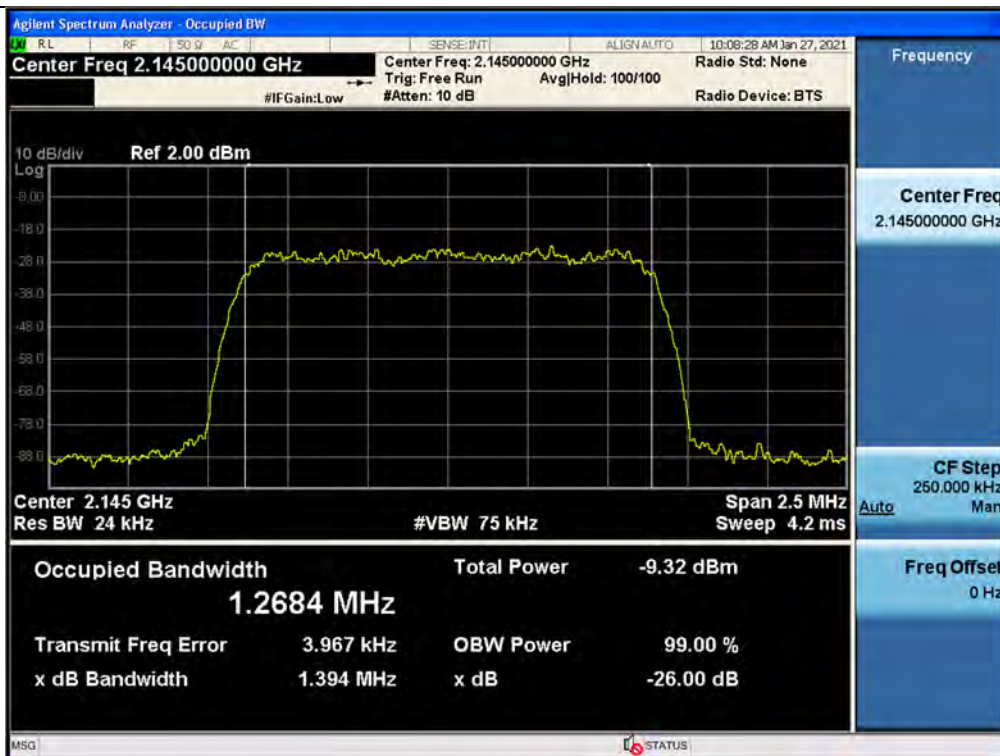

## Output / AWS13 / Downlink / WCDMA

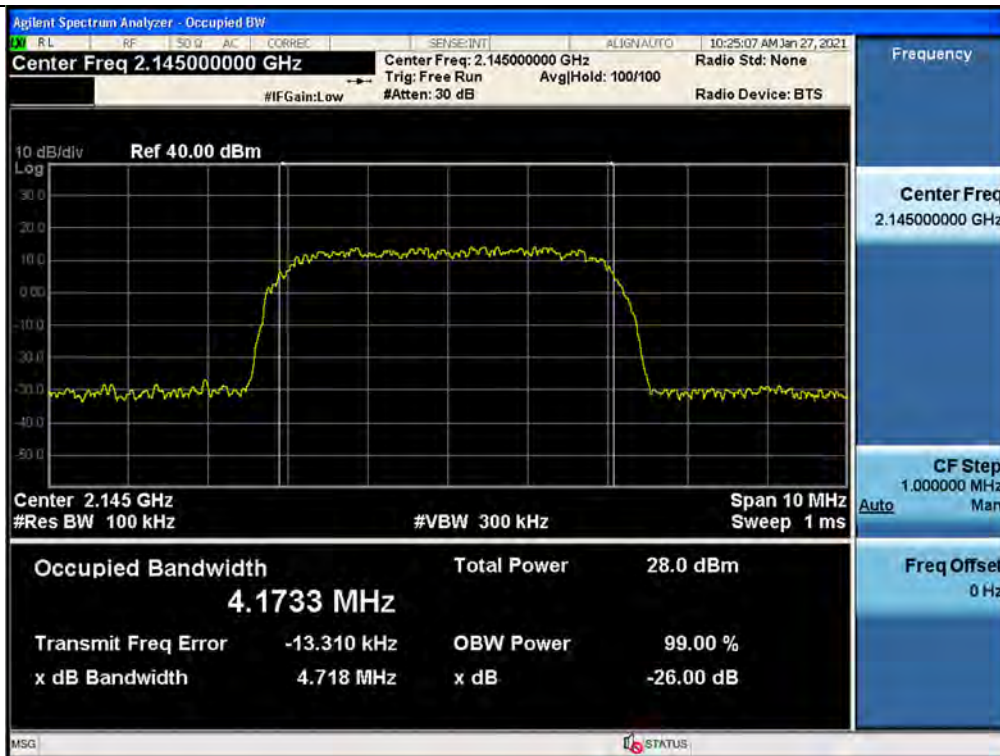


## Input / AWS13 / Downlink / WCDMA

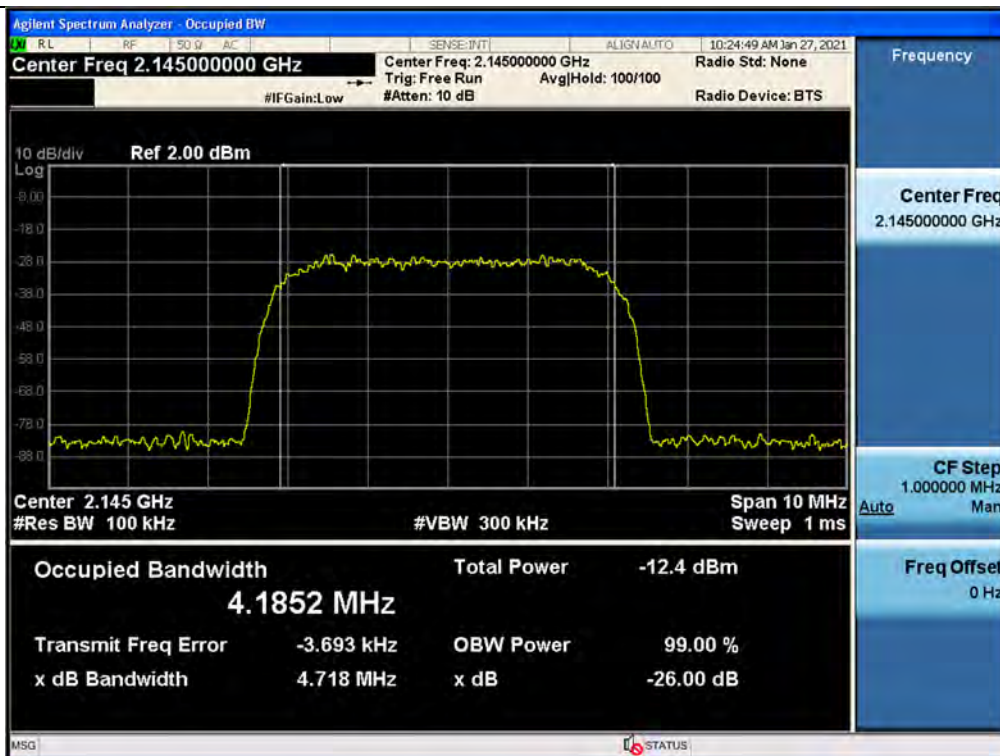





3 dB above the AGC threshold output / AWS13 / Downlink / WCDMA

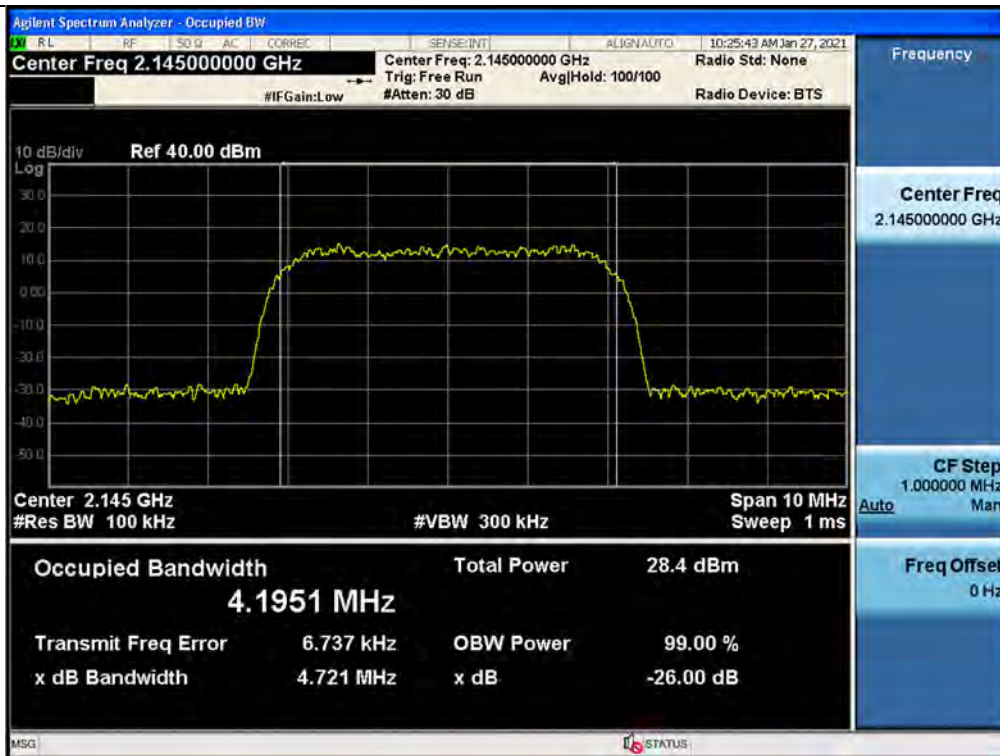


3 dB above the AGC threshold Input / AWS13 / Downlink / WCDMA

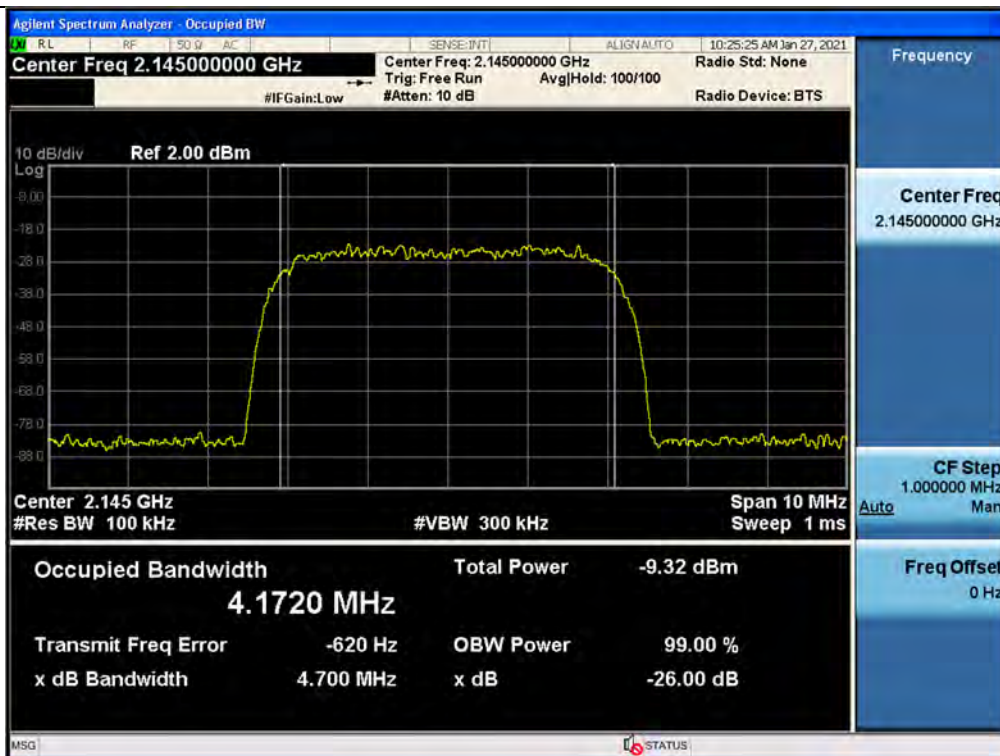


## Output / AWS13 / Downlink / LTE 5 MHz

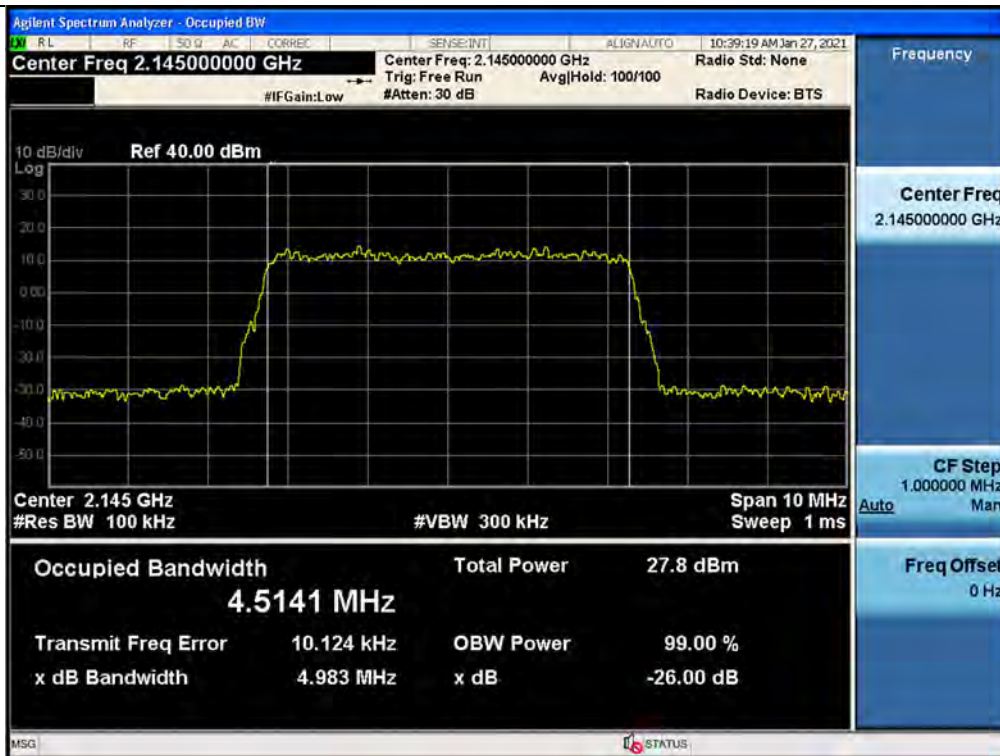


## Input / AWS13 / Downlink / LTE 5 MHz

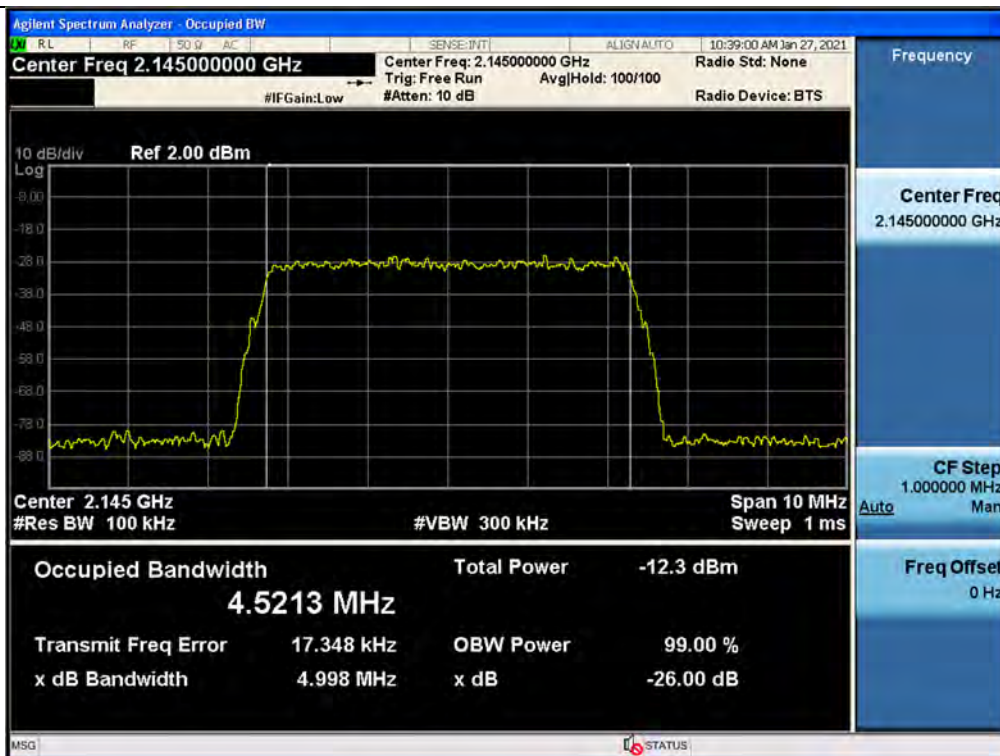

3 dB above the AGC threshold output / AWS13 / Downlink / LTE 5 MHz

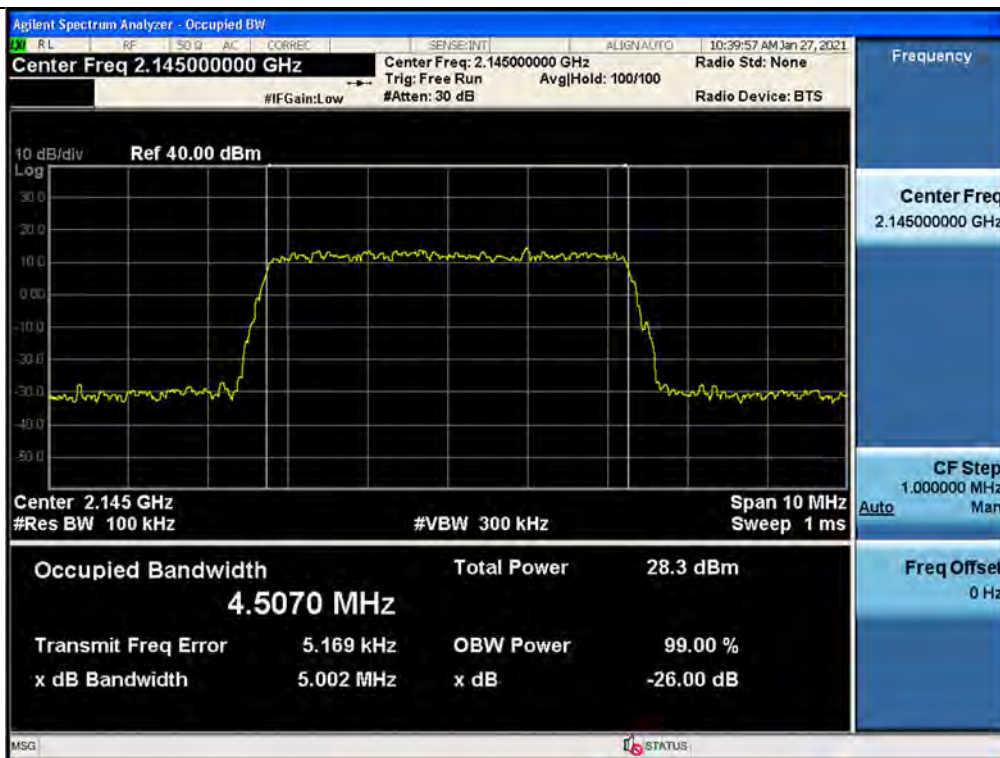


3 dB above the AGC threshold Input / AWS13 / Downlink / LTE 5 MHz

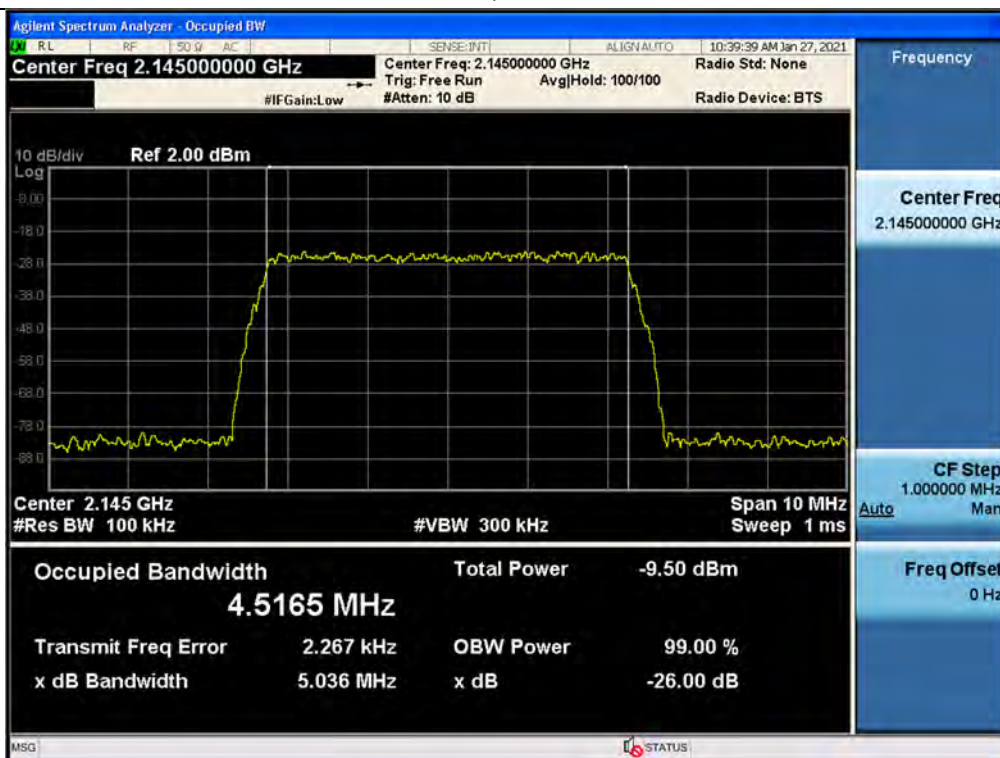





## Output / AWS13 / Downlink / LTE 10 MHz

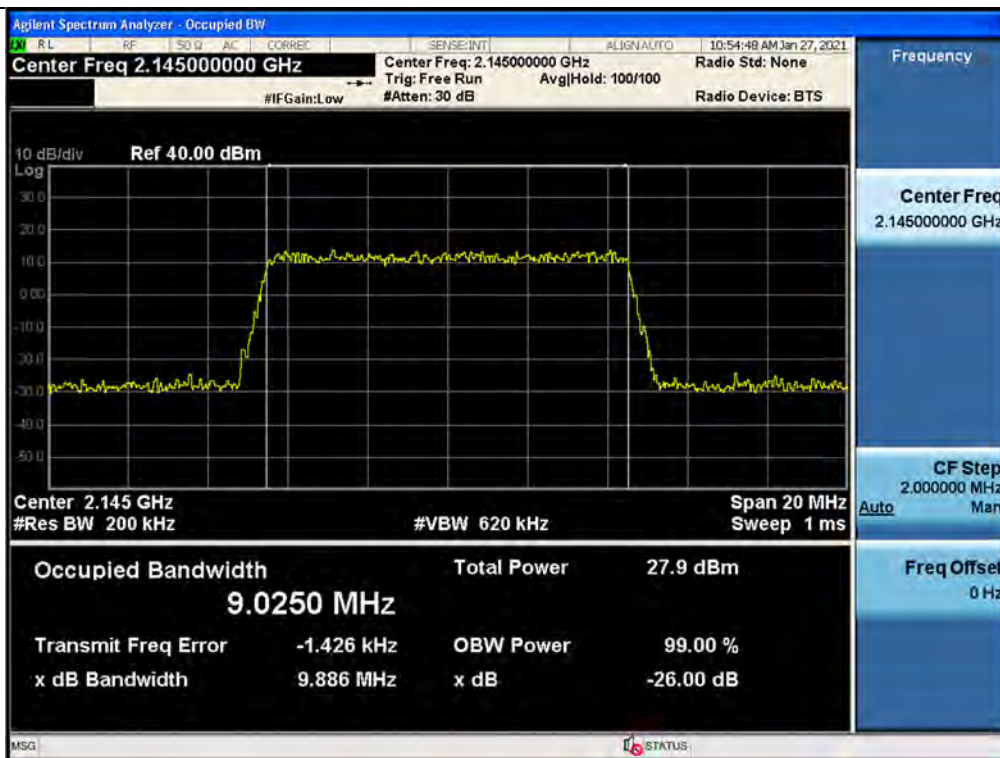


## Input / AWS13 / Downlink / LTE 10 MHz

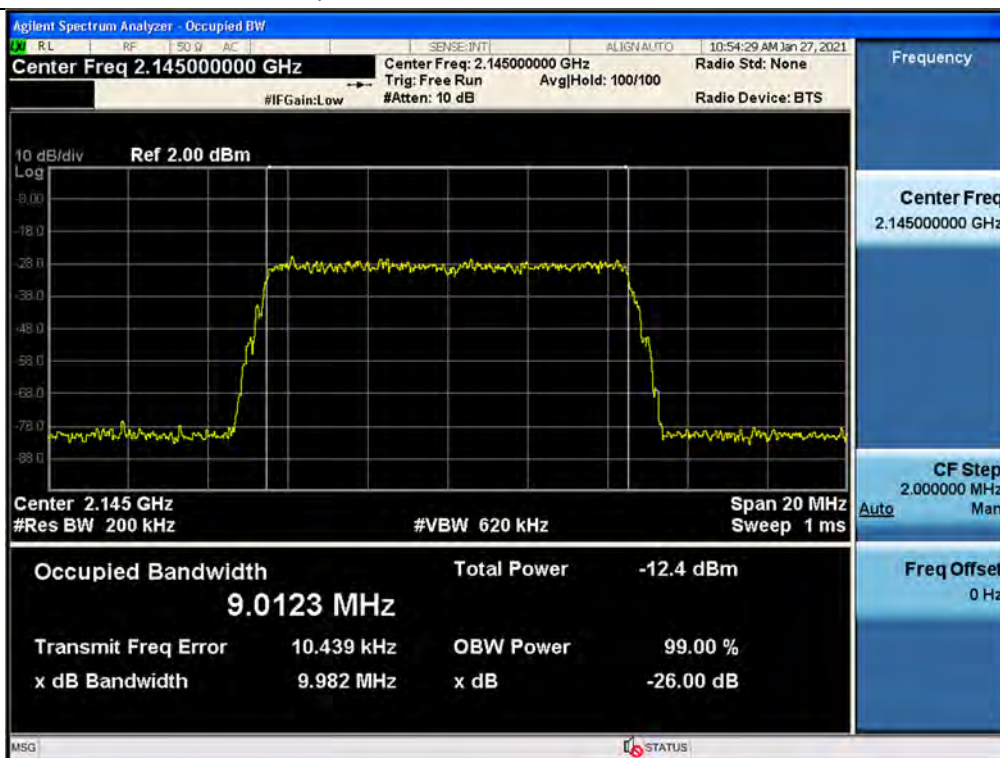


## 3 dB above the AGC threshold output / AWS13 / Downlink / LTE 10 MHz

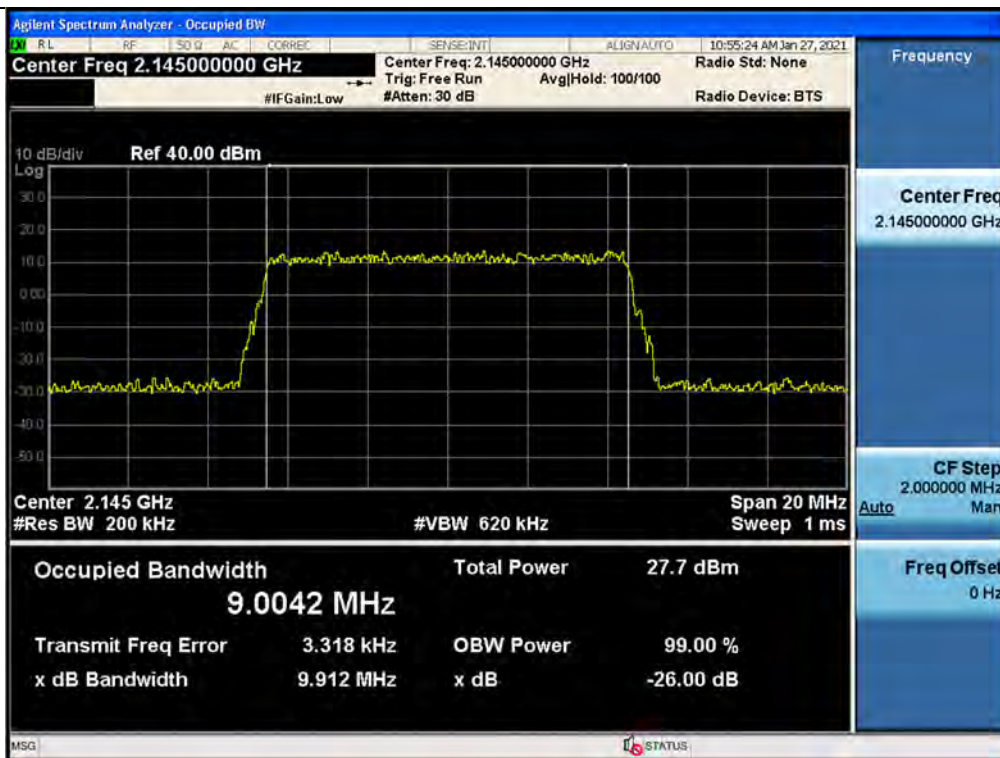


## 3 dB above the AGC threshold Input / AWS13 / Downlink / LTE 10 MHz

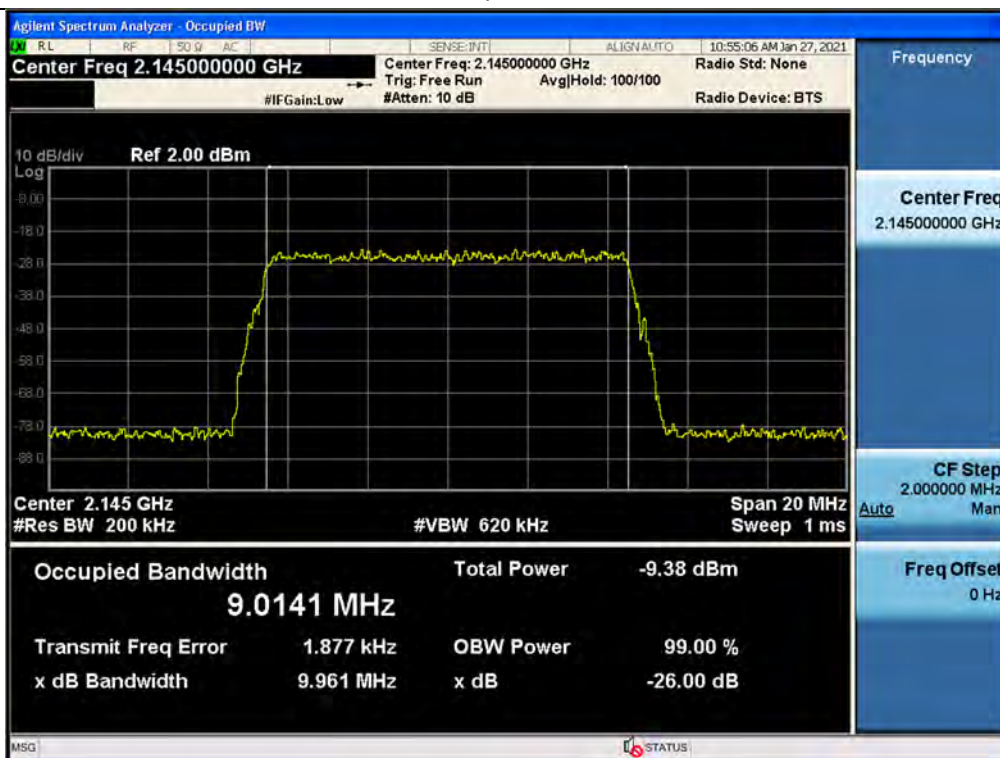

## Output / AWS13 / Downlink / LTE 20 MHz

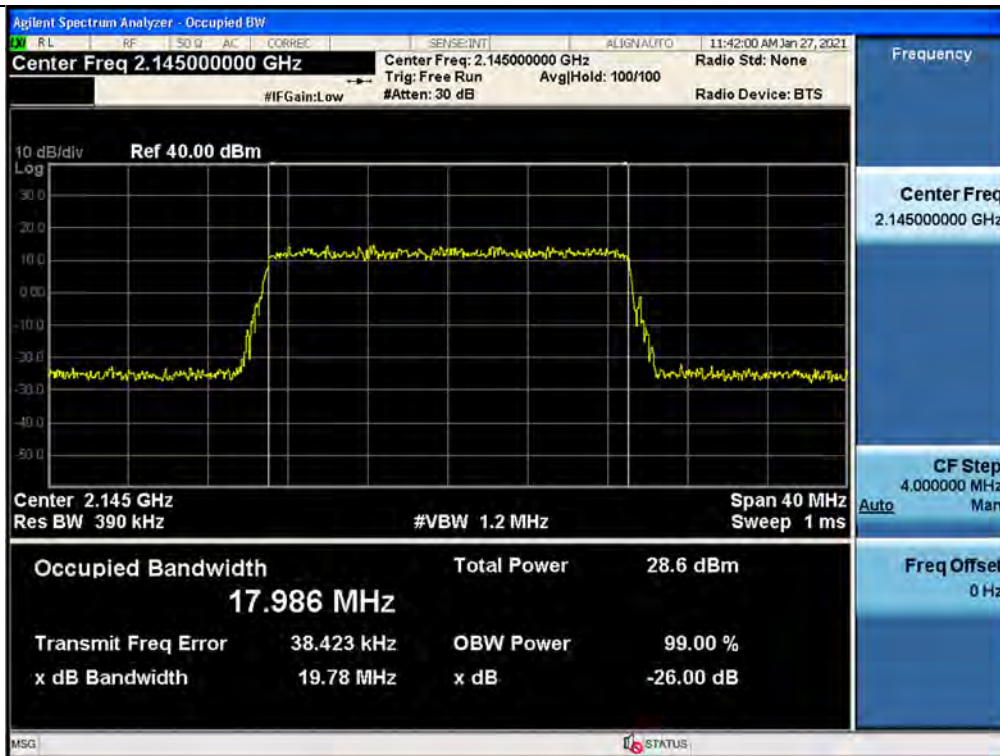


## Input / AWS13 / Downlink / LTE 20 MHz

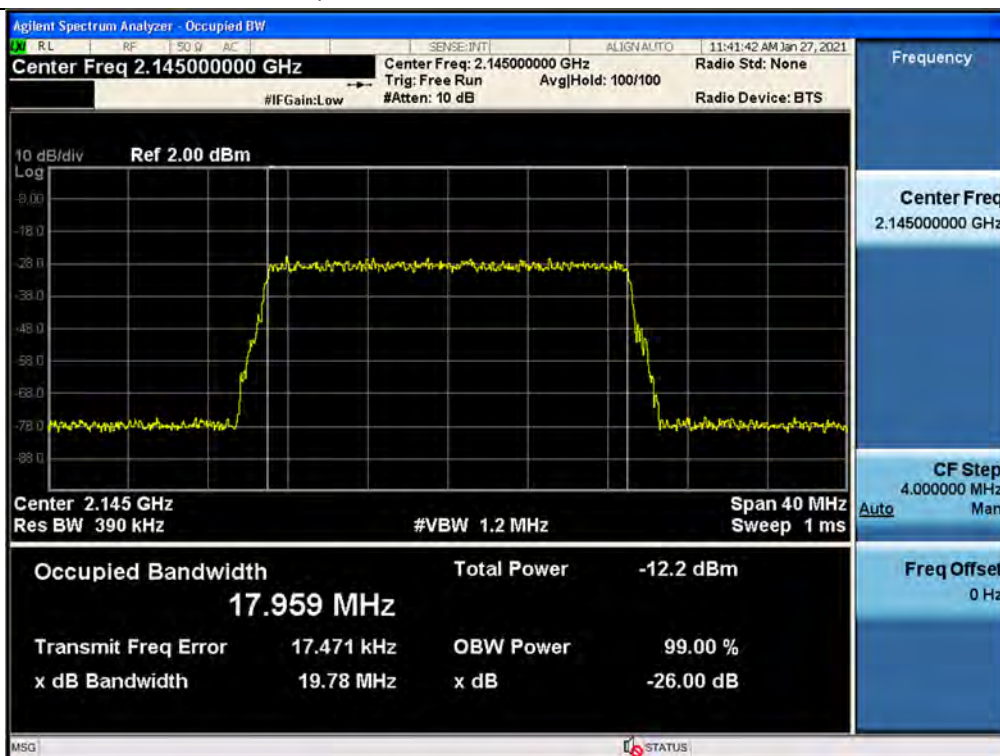





3 dB above the AGC threshold output / AWS13 / Downlink / LTE 20 MHz

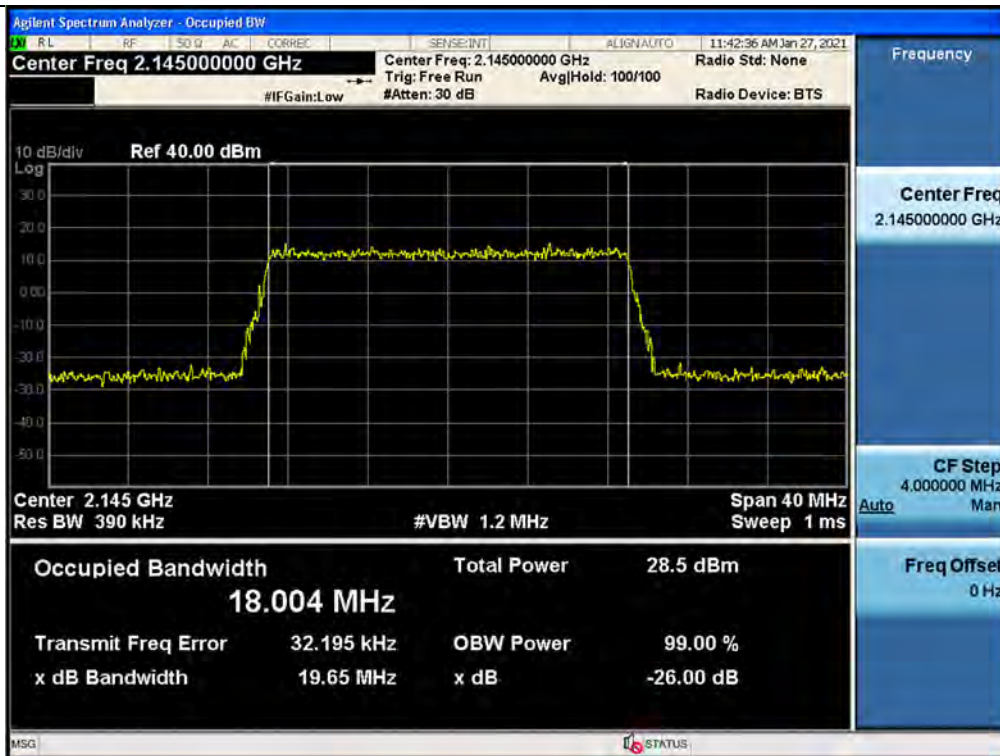


3 dB above the AGC threshold Input / AWS13 / Downlink / LTE 20 MHz

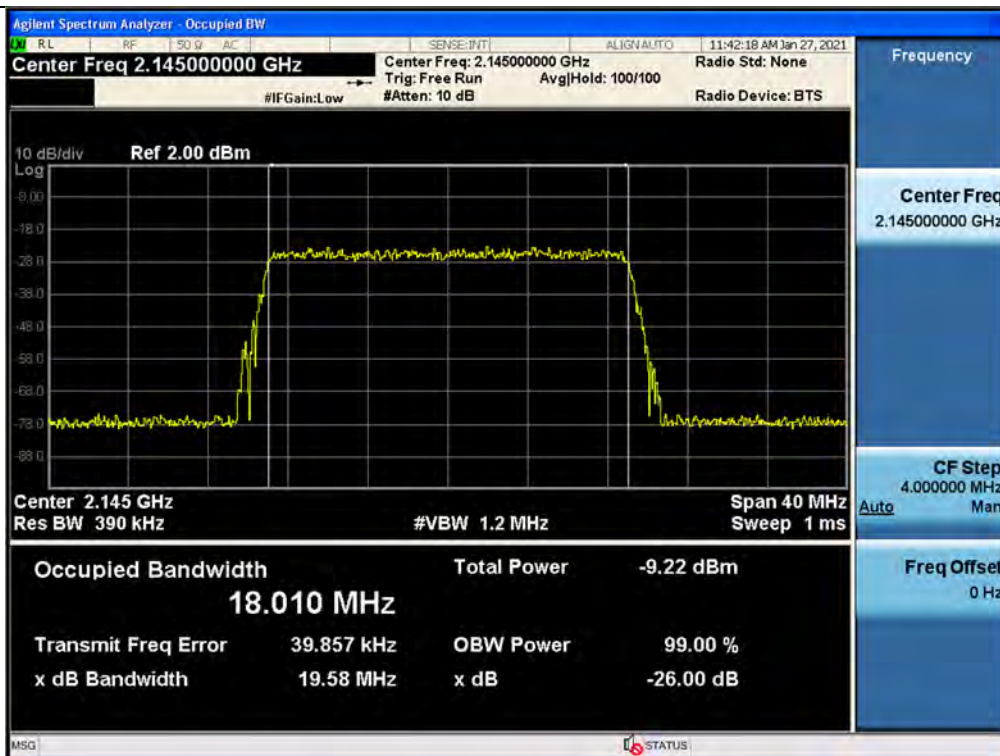

## Output / WCS / Downlink / LTE 5 MHz

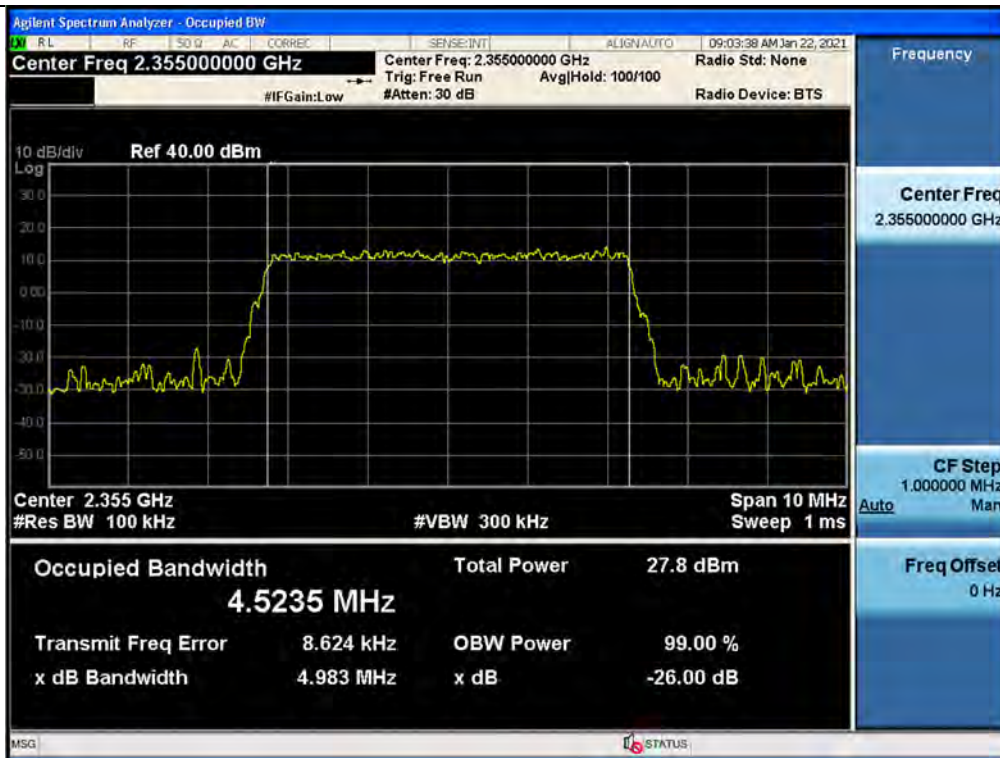


## Input / WCS / Downlink / LTE 5 MHz

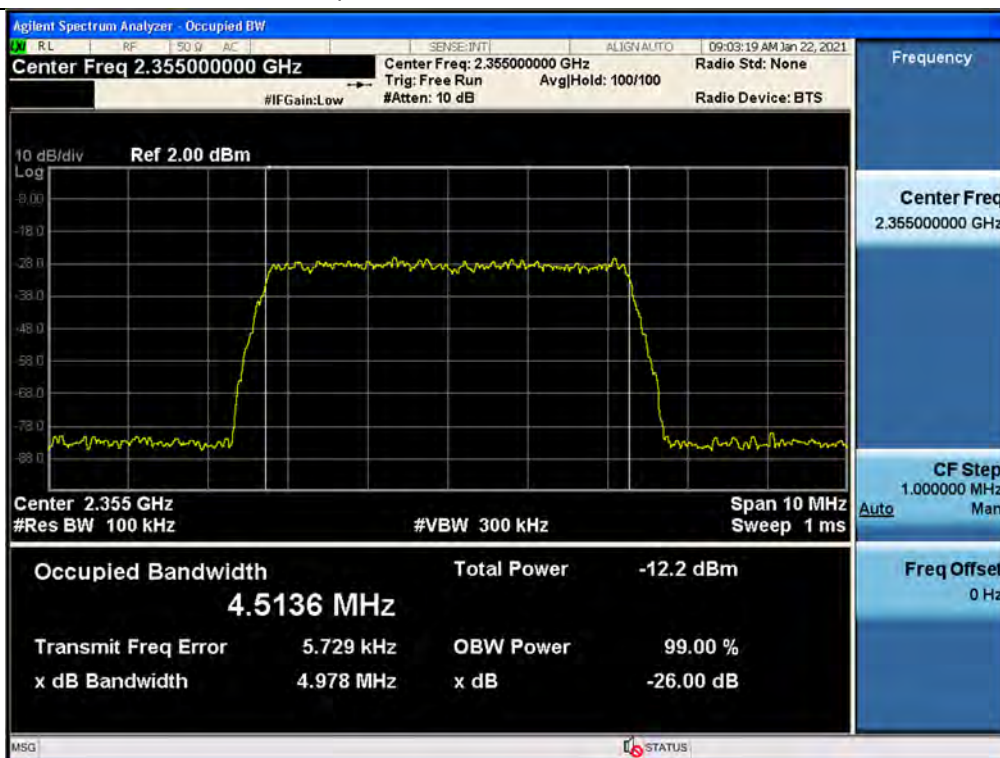





## 3 dB above the AGC threshold output / WCS / Downlink / LTE 5 MHz

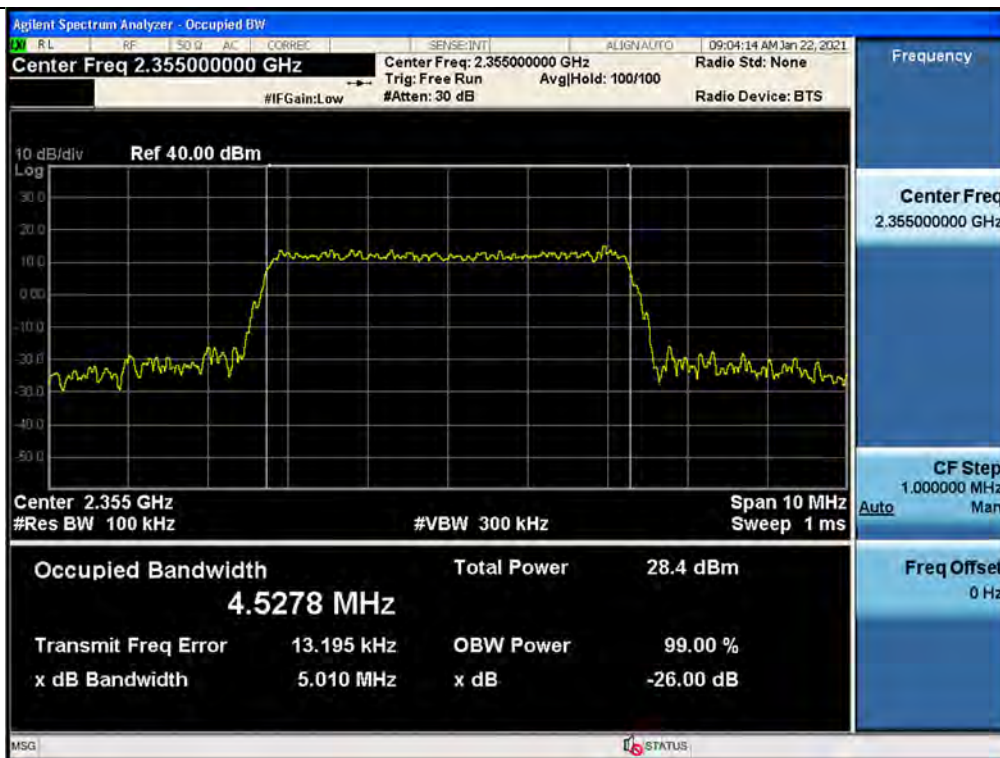


## 3 dB above the AGC threshold Input / WCS / Downlink / LTE 5 MHz

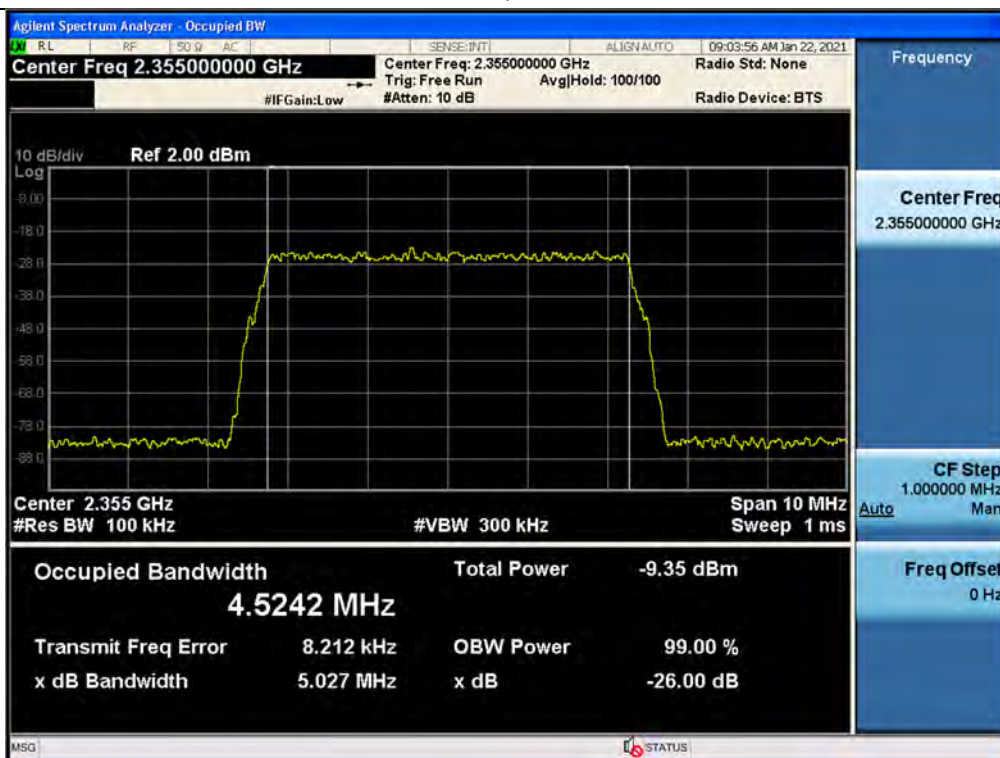


## Output / WCS / Downlink / LTE 10 MHz

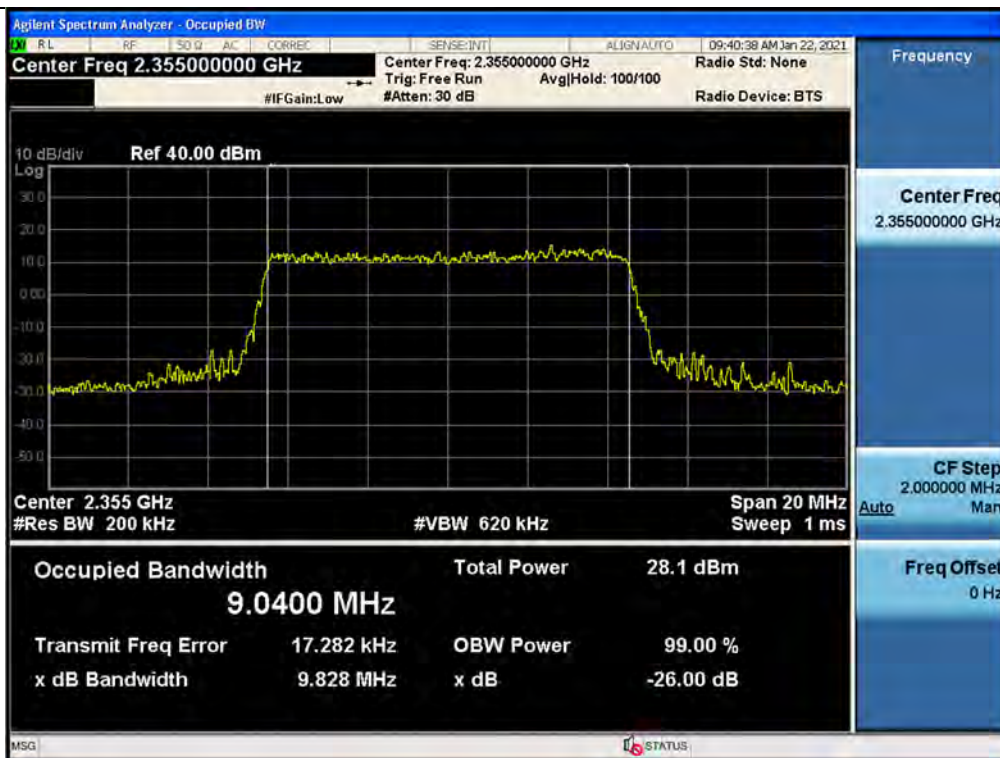

## Input / WCS / Downlink / LTE 10 MHz

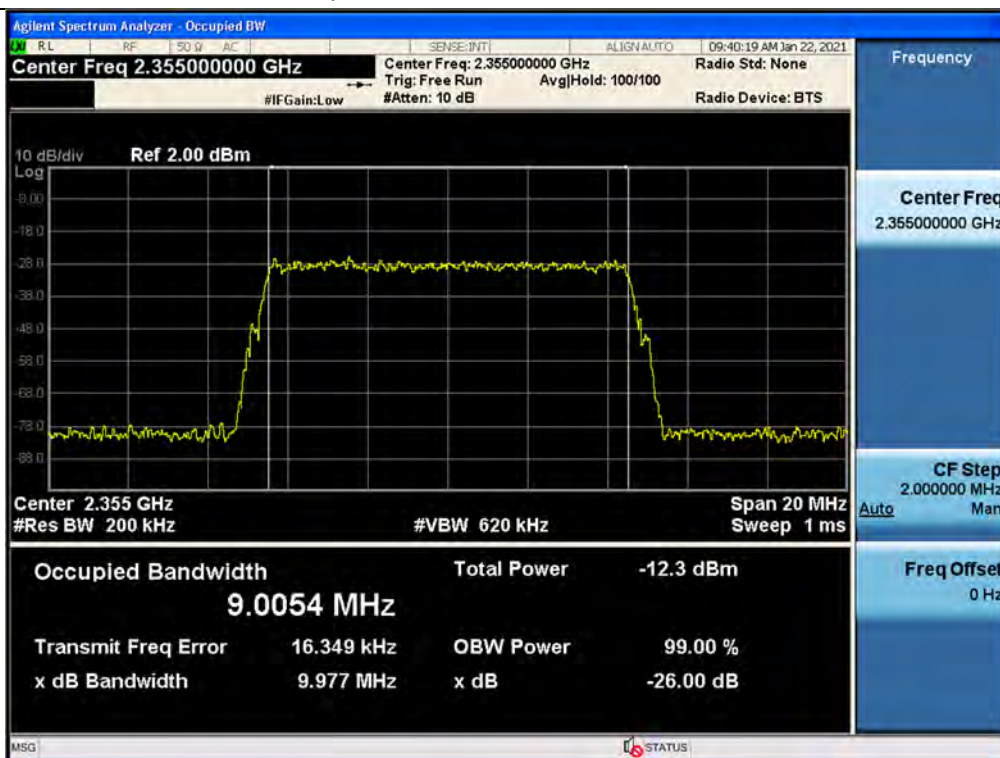

3 dB above the AGC threshold output / WCS / Downlink / LTE 10 MHz

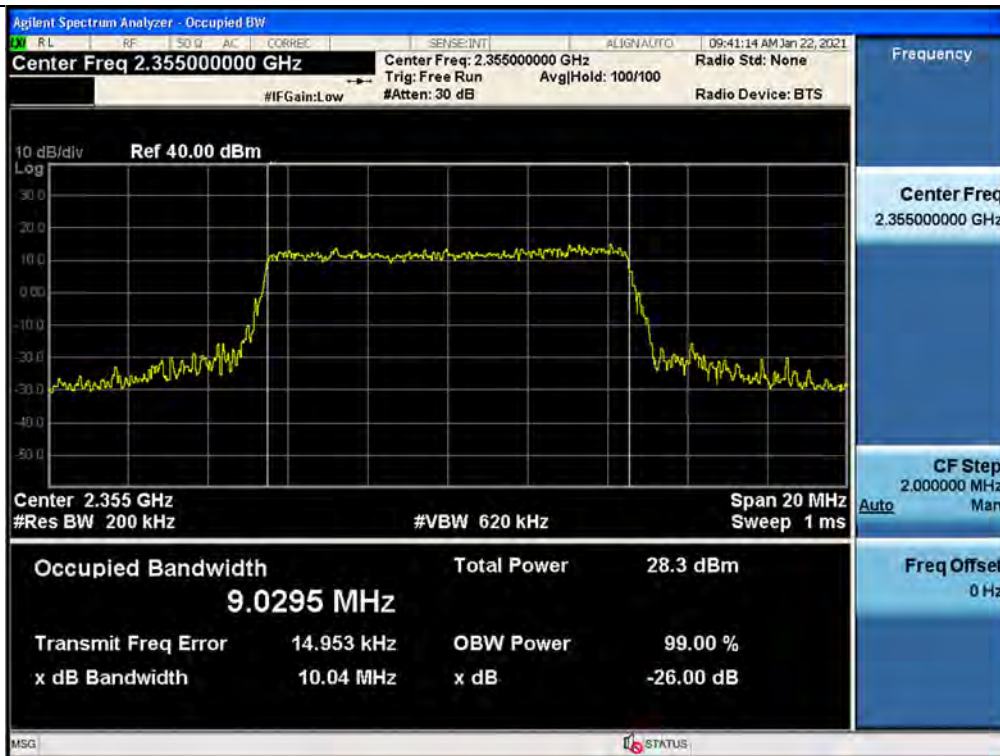


3 dB above the AGC threshold Input / WCS / Downlink / LTE 10 MHz







## Output / BRS/EBS / Downlink / LTE 20MHz

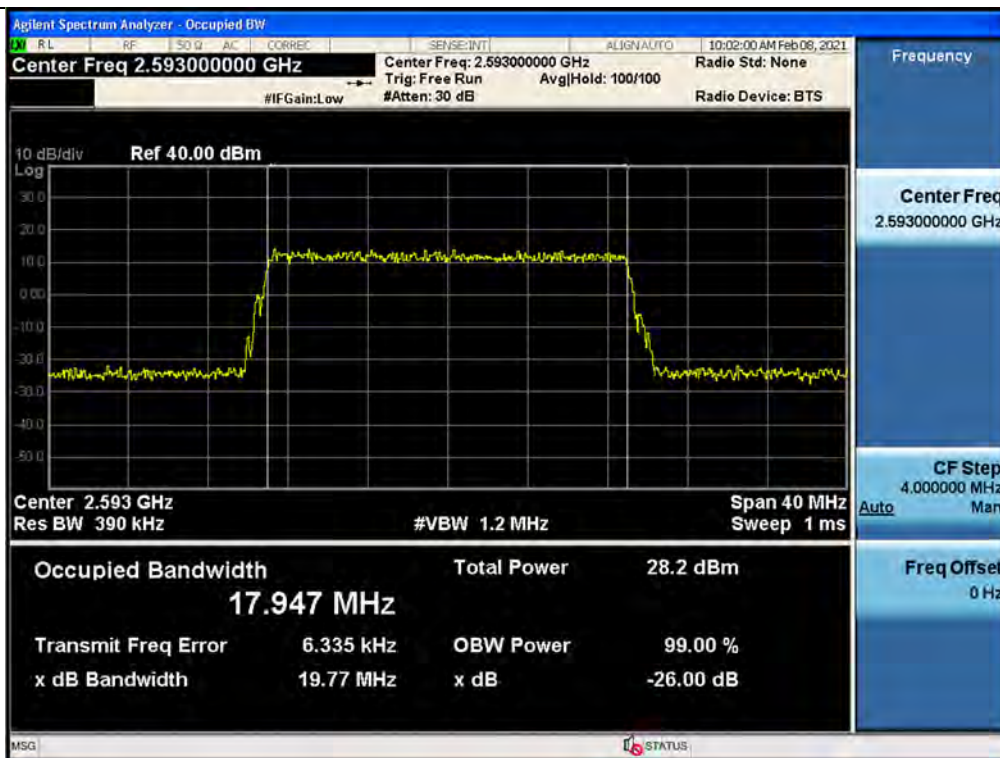


## Input / BRS/EBS / Downlink / LTE 20 MHz

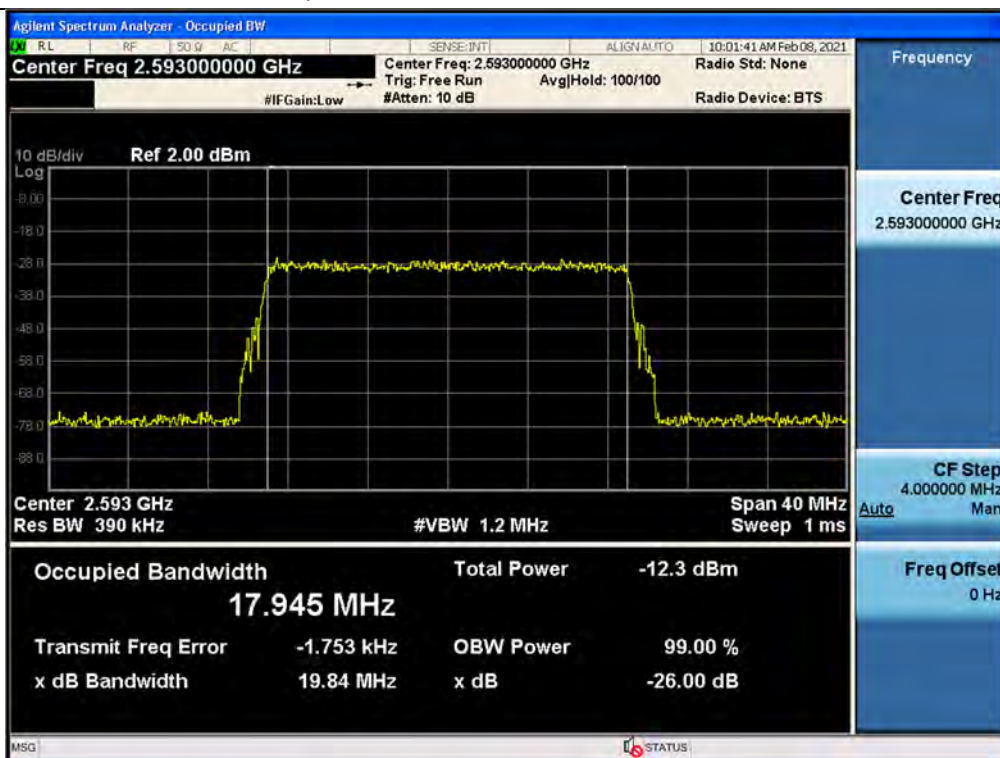


3 dB above the AGC threshold output / BRS/EBS / Downlink / LTE 20 MHz

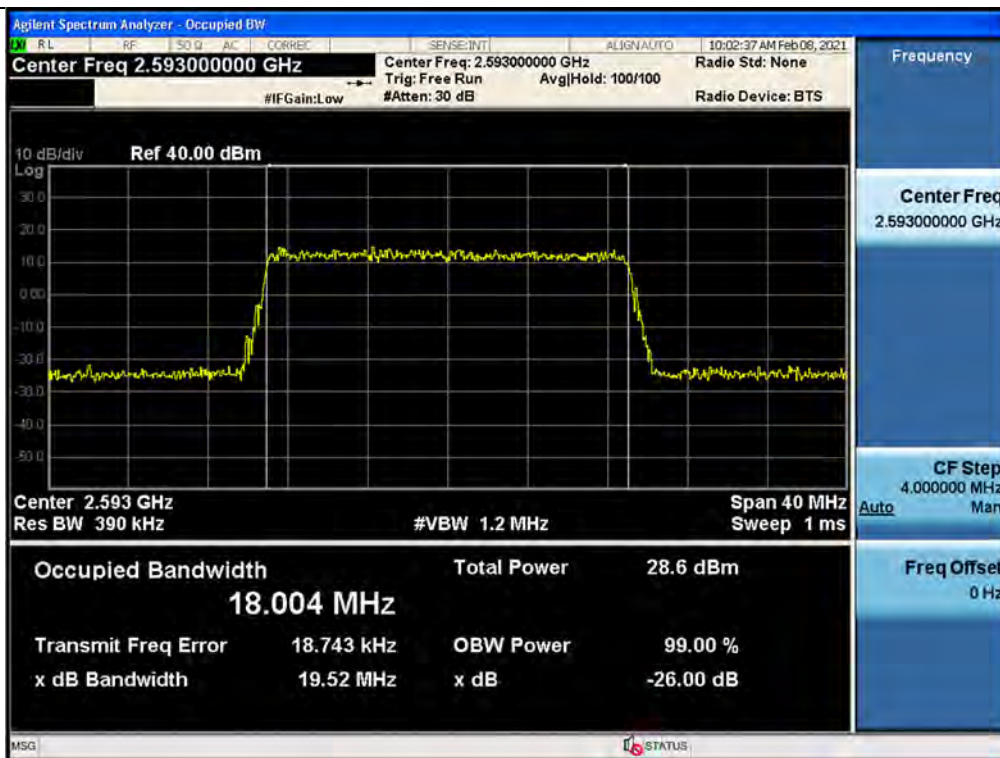


3 dB above the AGC threshold Input / BRS/EBS / Downlink / LTE 20 MHz

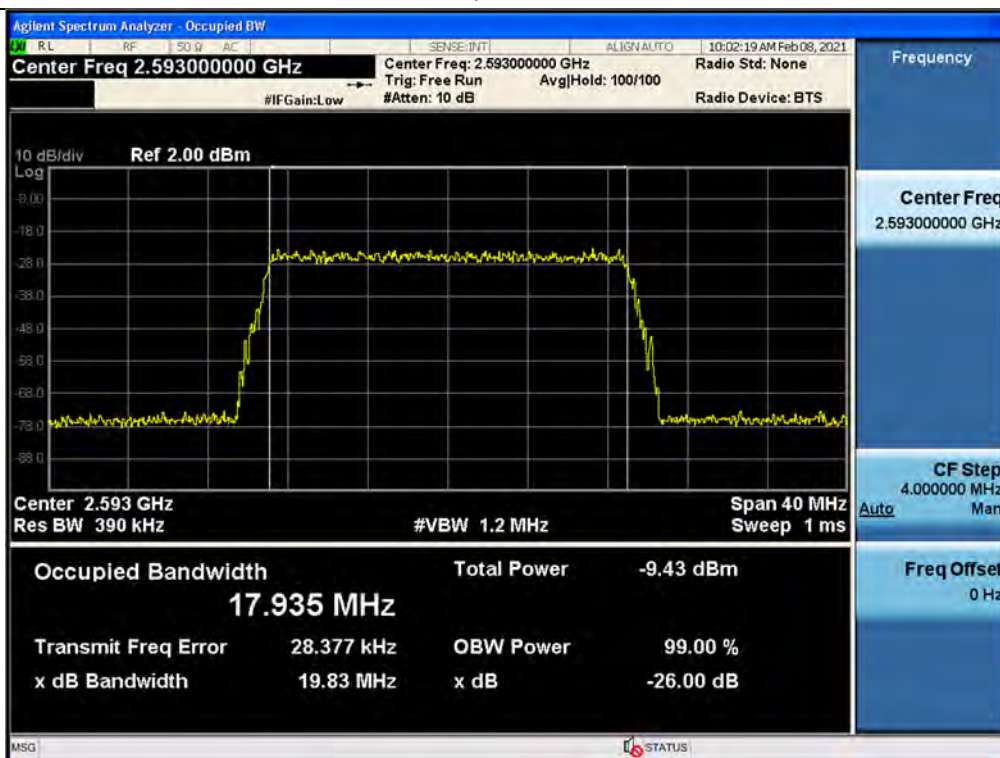

## Output / BRS/EBS / Downlink / 5G NR 20 MHz

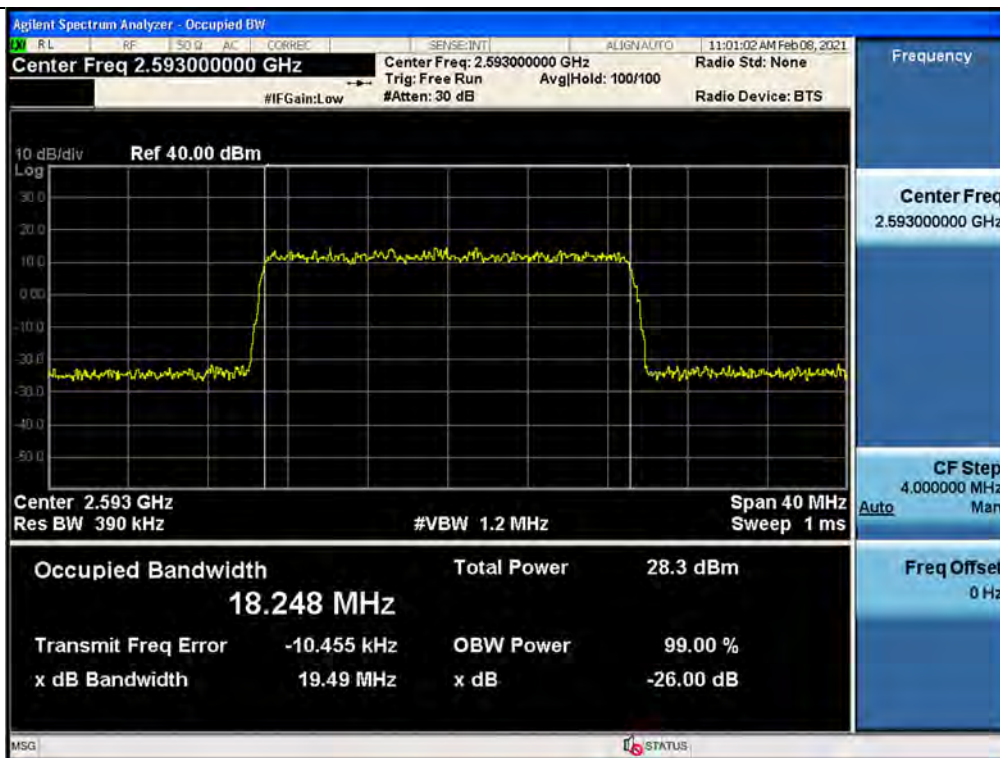


## Input / BRS/EBS / Downlink / 5G NR 20 MHz

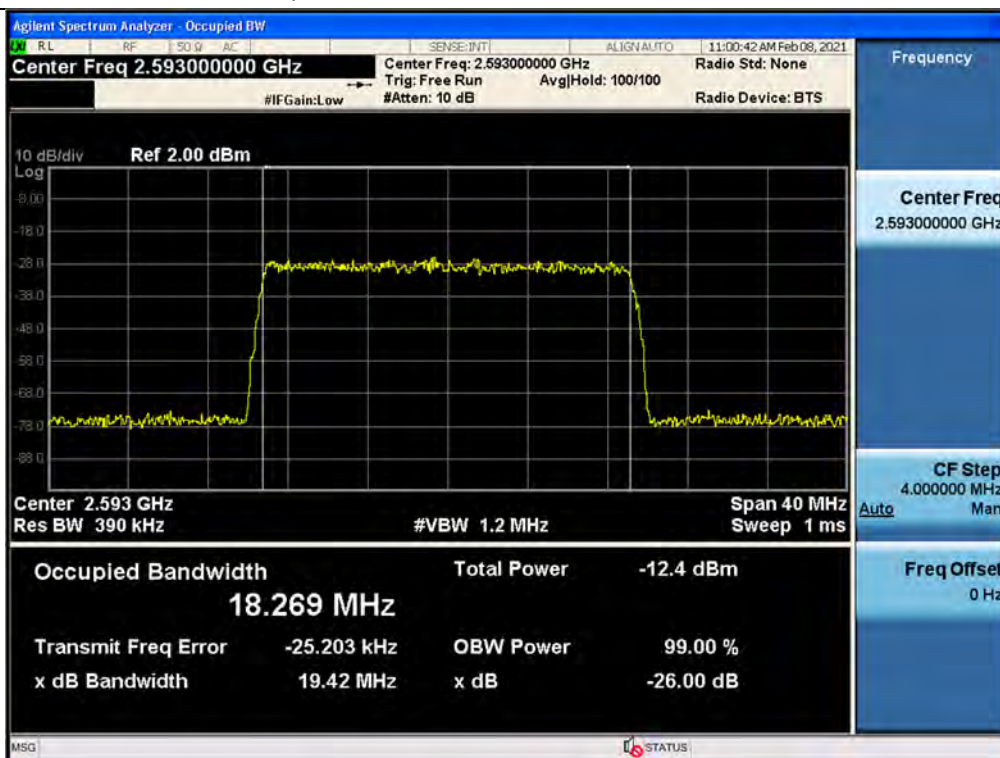




3 dB above the AGC threshold output / BRS/EBS / Downlink / 5G NR 20 MHz

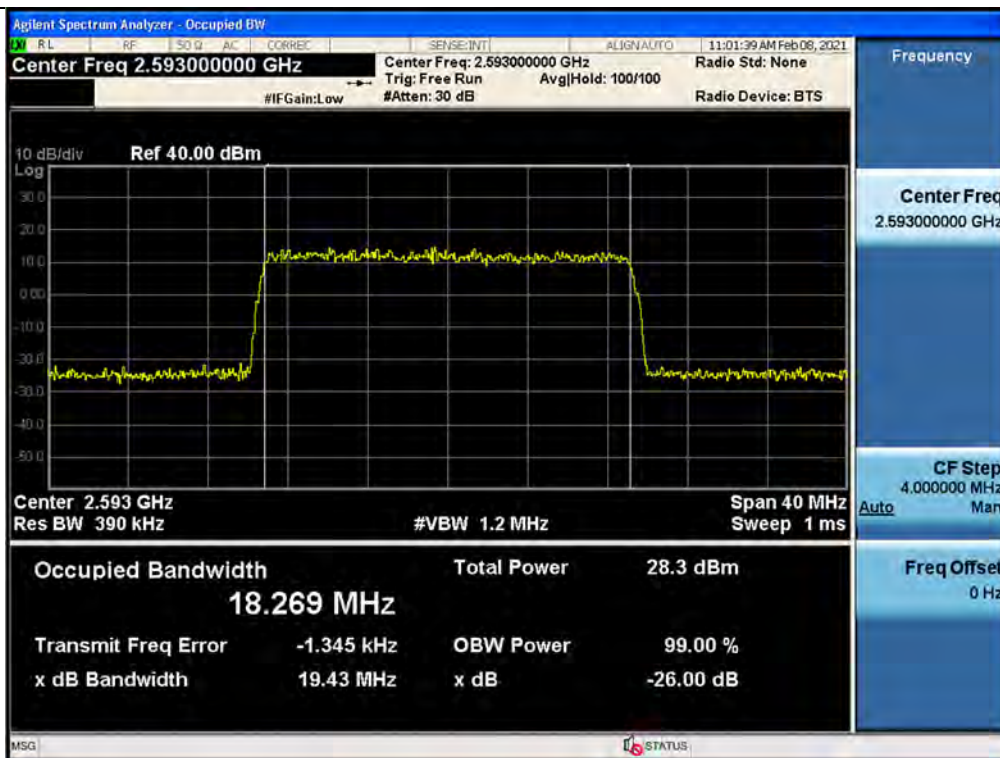


3 dB above the AGC threshold Input / BRS/EBS / Downlink / 5G NR 20 MHz

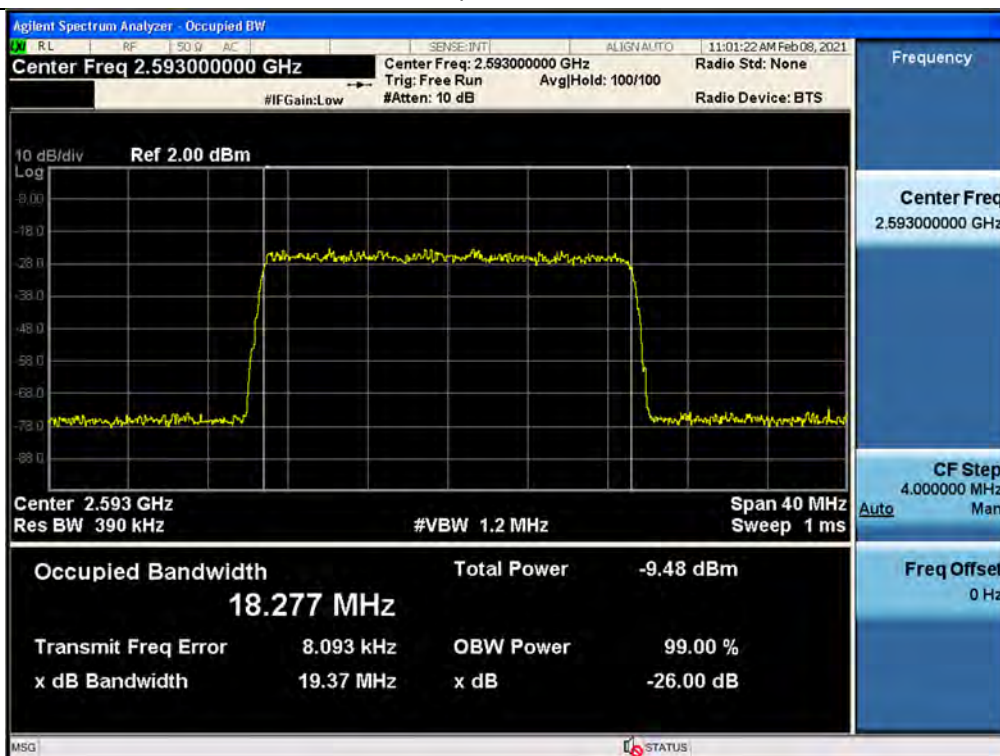





## Output / BRS/EBS / Downlink / 5G NR 40 MHz

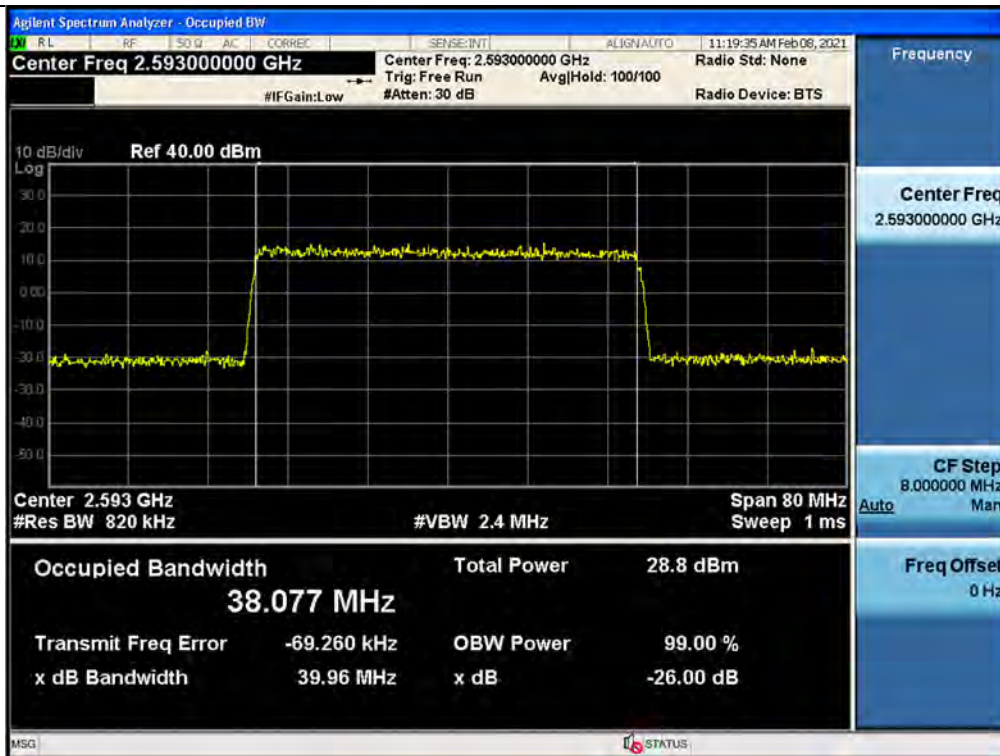


## Input / BRS/EBS / Downlink / 5G NR 40 MHz

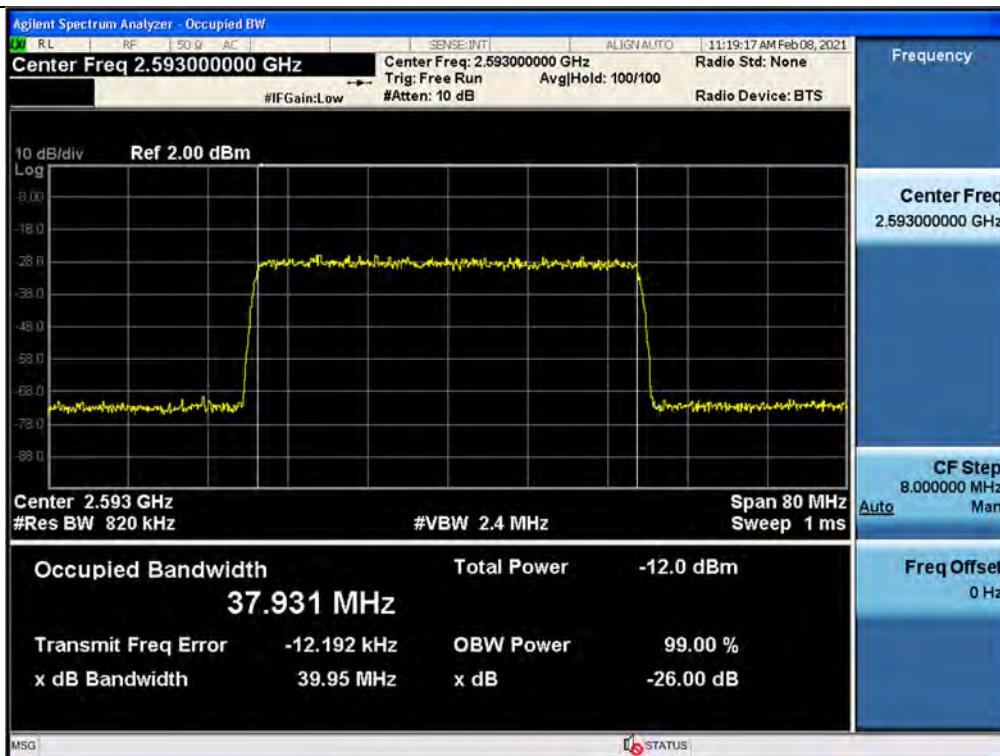


3 dB above the AGC threshold output / BRS/EBS / Downlink / 5G NR 40 MHz

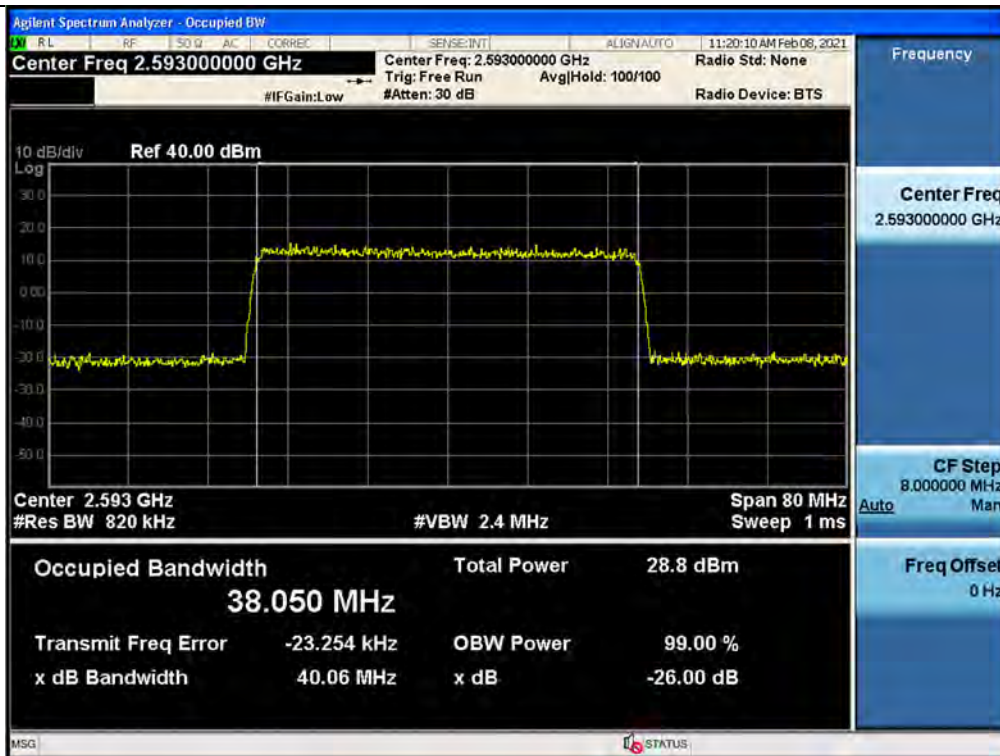


3 dB above the AGC threshold Input / BRS/EBS / Downlink / 5G NR 40 MHz

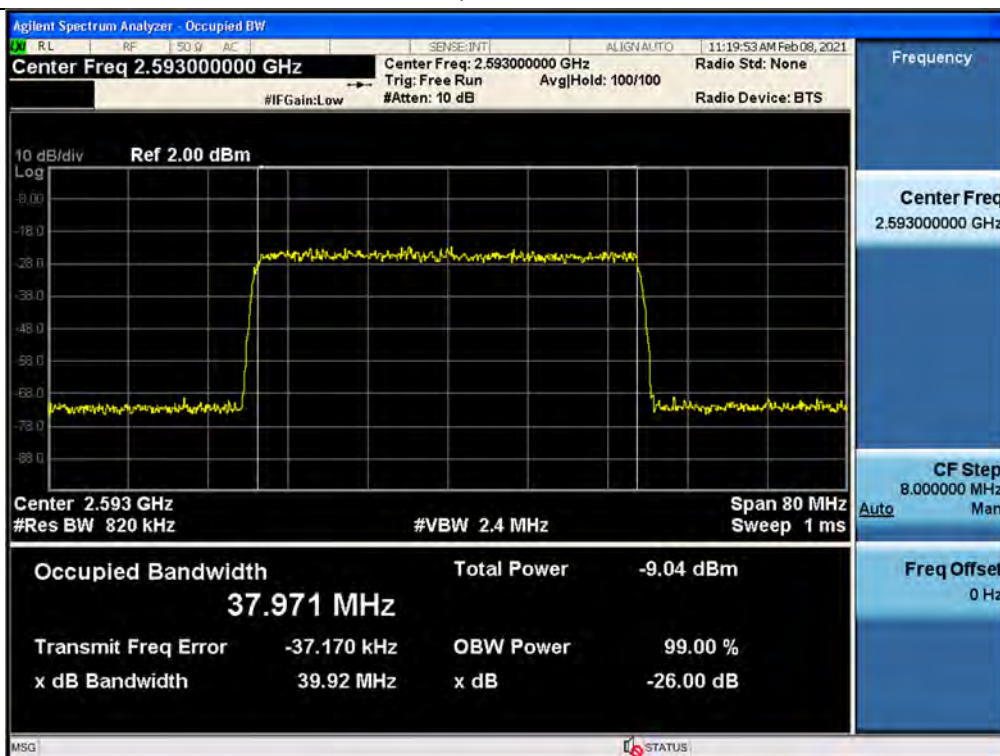

## Output / BRS/EBS / Downlink / 5G NR 60 MHz

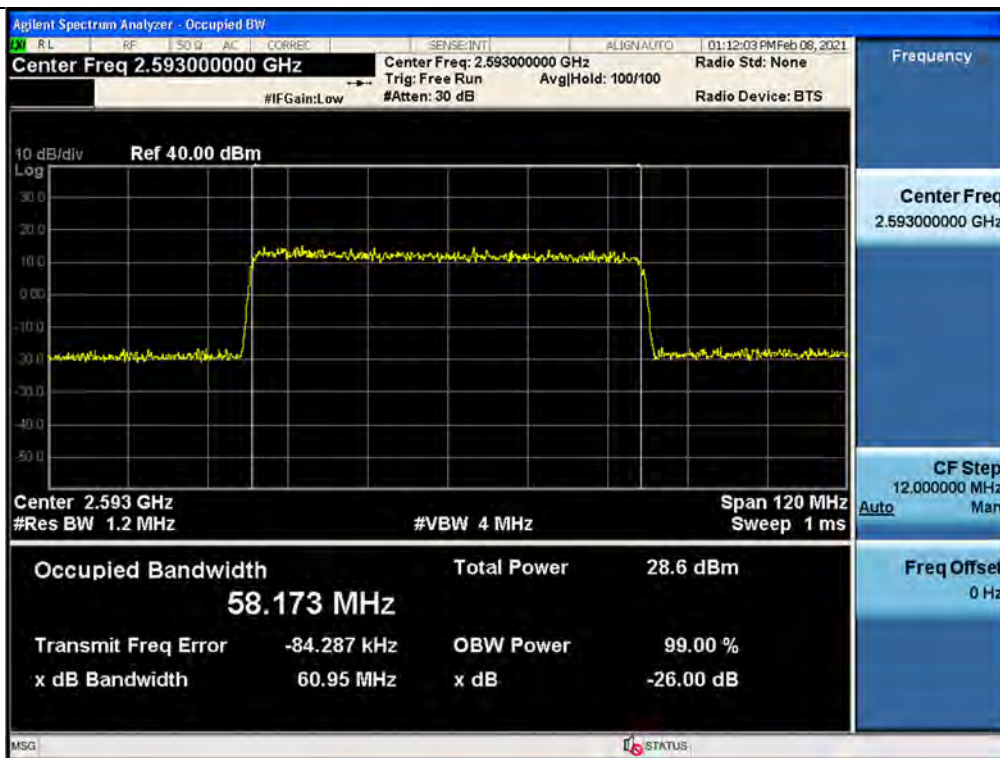


## Input / BRS/EBS / Downlink / 5G NR 60 MHz

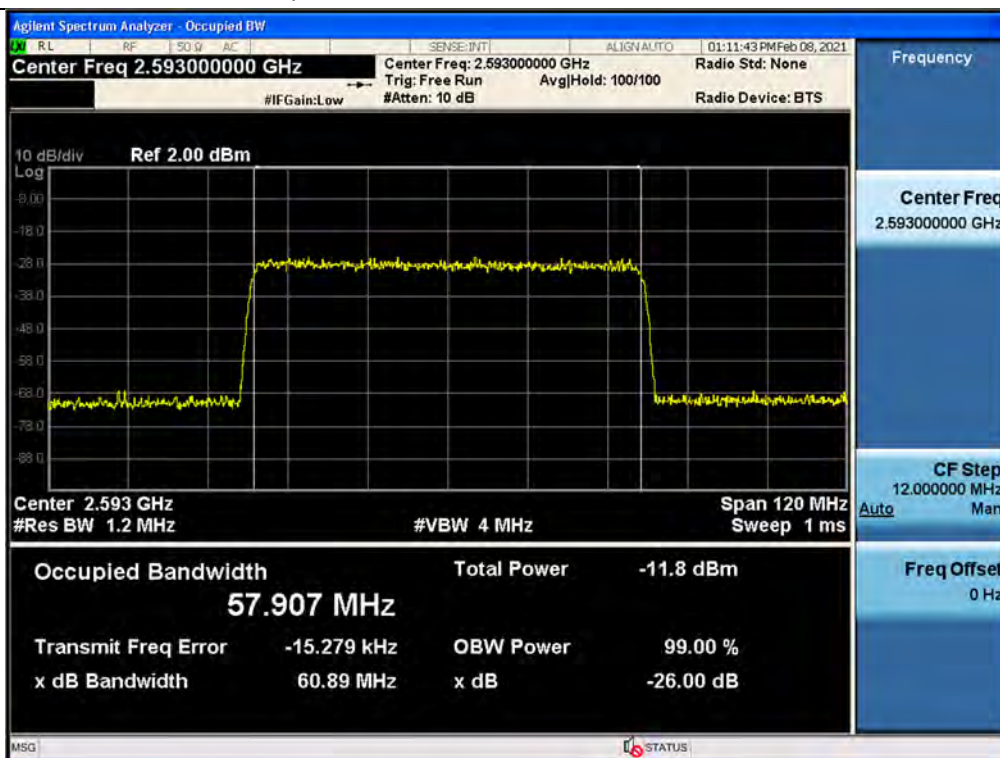




3 dB above the AGC threshold output / BRS/EBS / Downlink / 5G NR 60 MHz

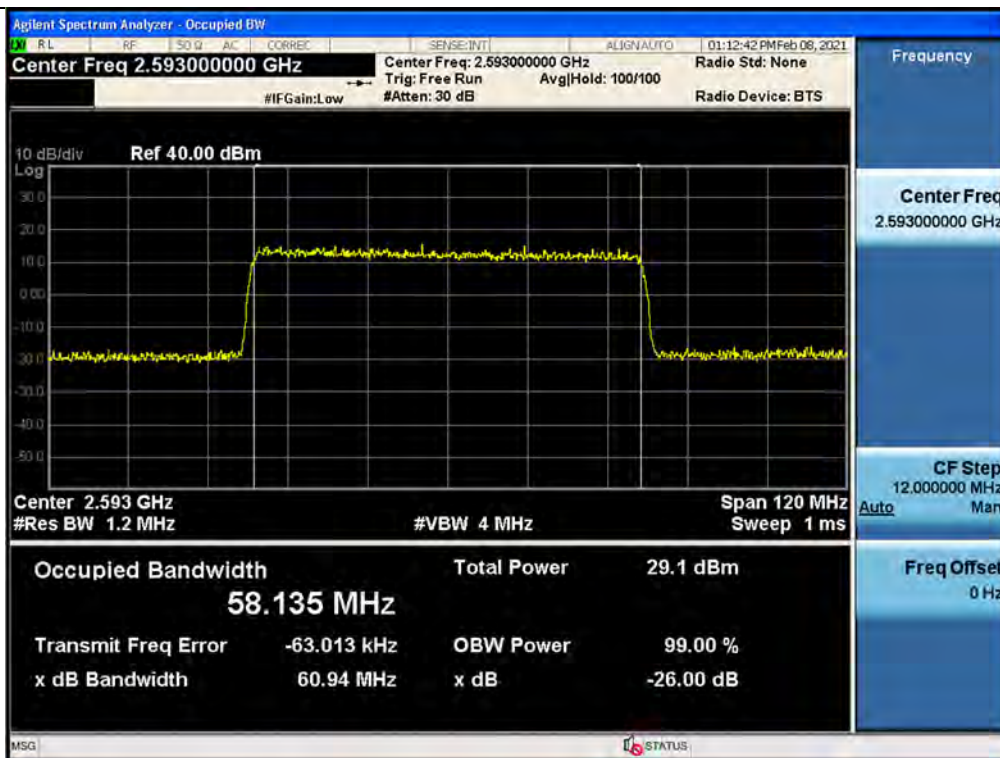


3 dB above the AGC threshold Input / BRS/EBS / Downlink / 5G NR 60 MHz

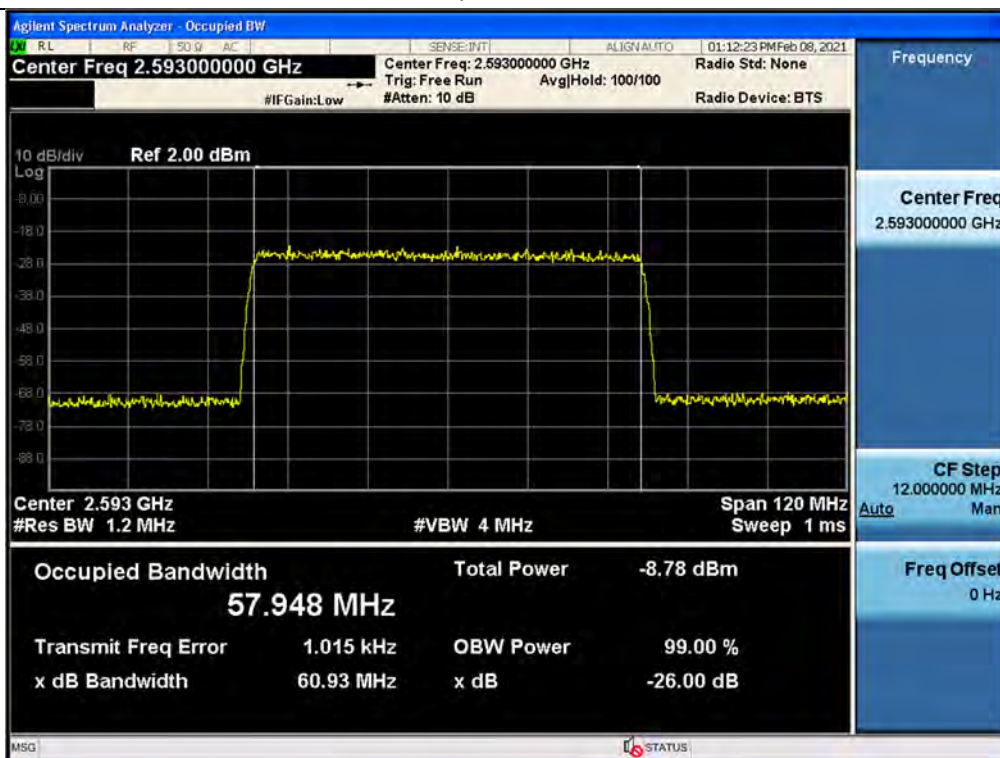

Output / BRS/EBS / Downlink / 5G NR 80 MHz




Input / BRS/EBS / Downlink / 5G NR 80 MHz

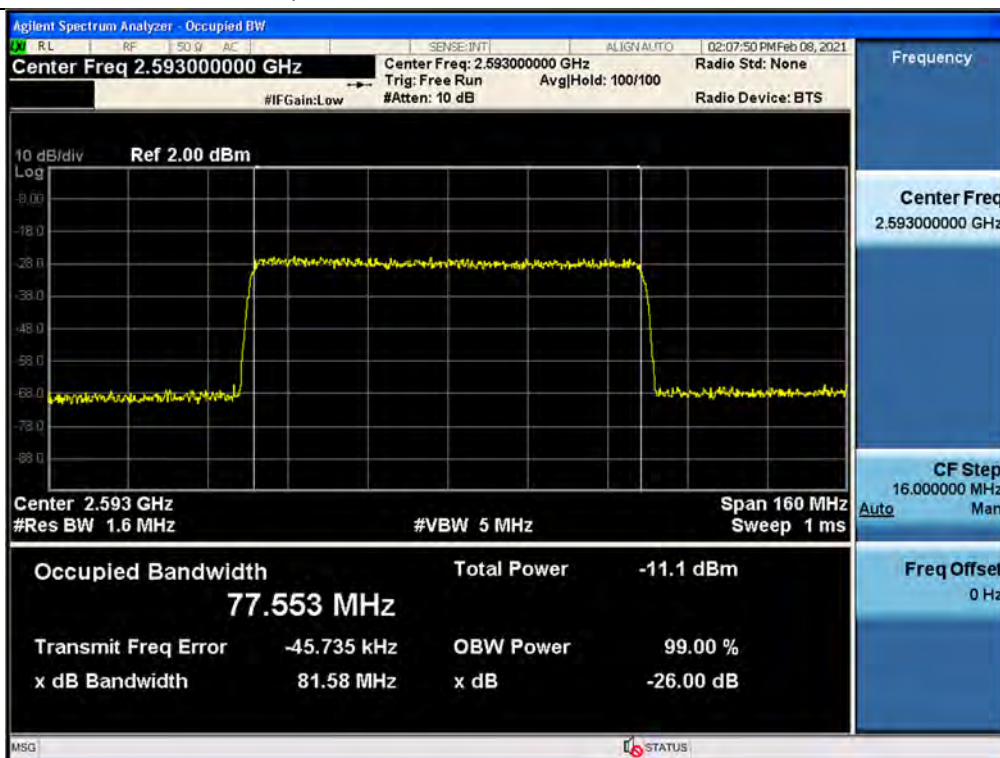





3 dB above the AGC threshold output / BRS/EBS / Downlink / 5G NR 80 MHz

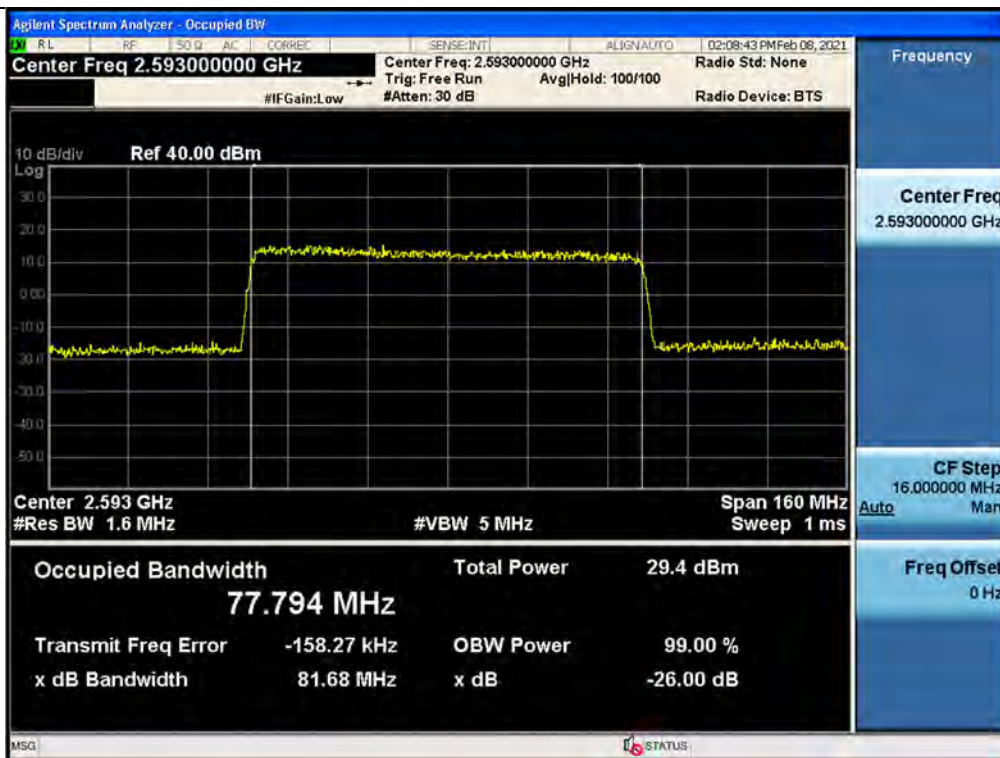


3 dB above the AGC threshold Input / BRS/EBS / Downlink / 5G NR 80 MHz

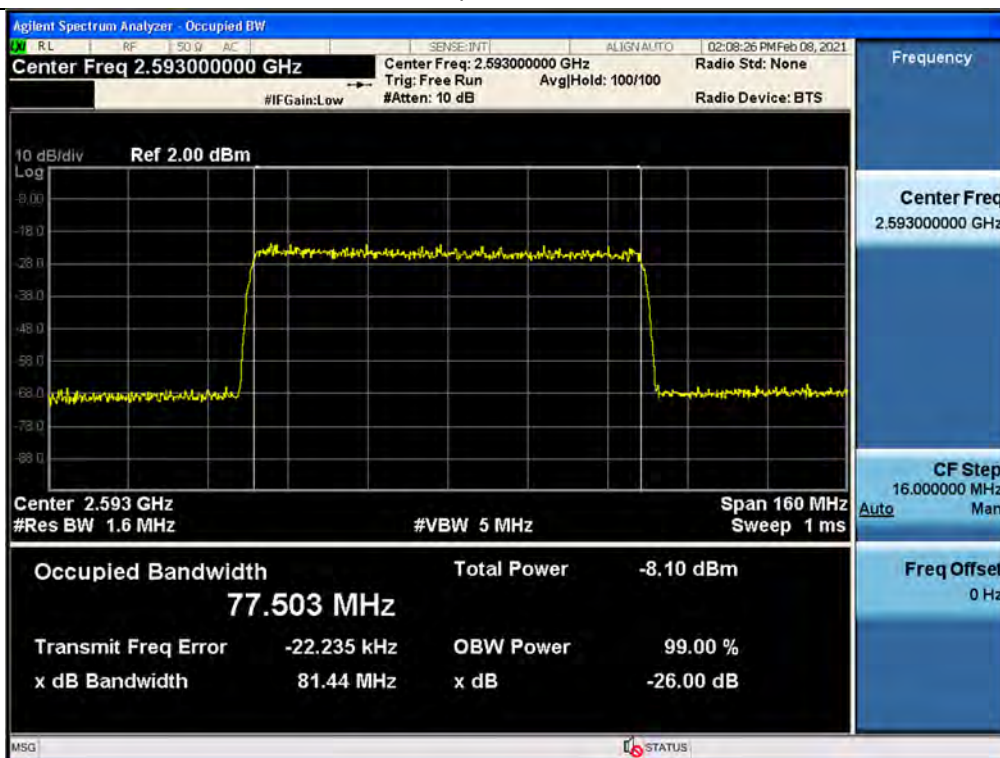


## Output / BRS/EBS / Downlink / 5G NR 100 MHz

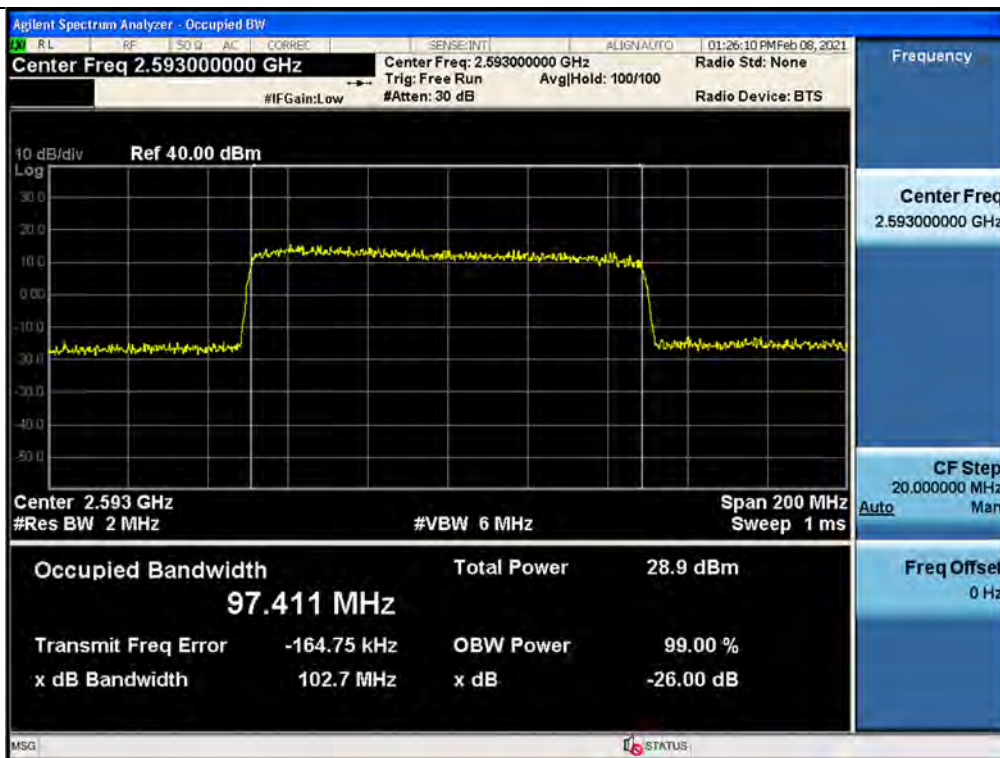


## Input / BRS/EBS / Downlink / 5G NR 100 MHz

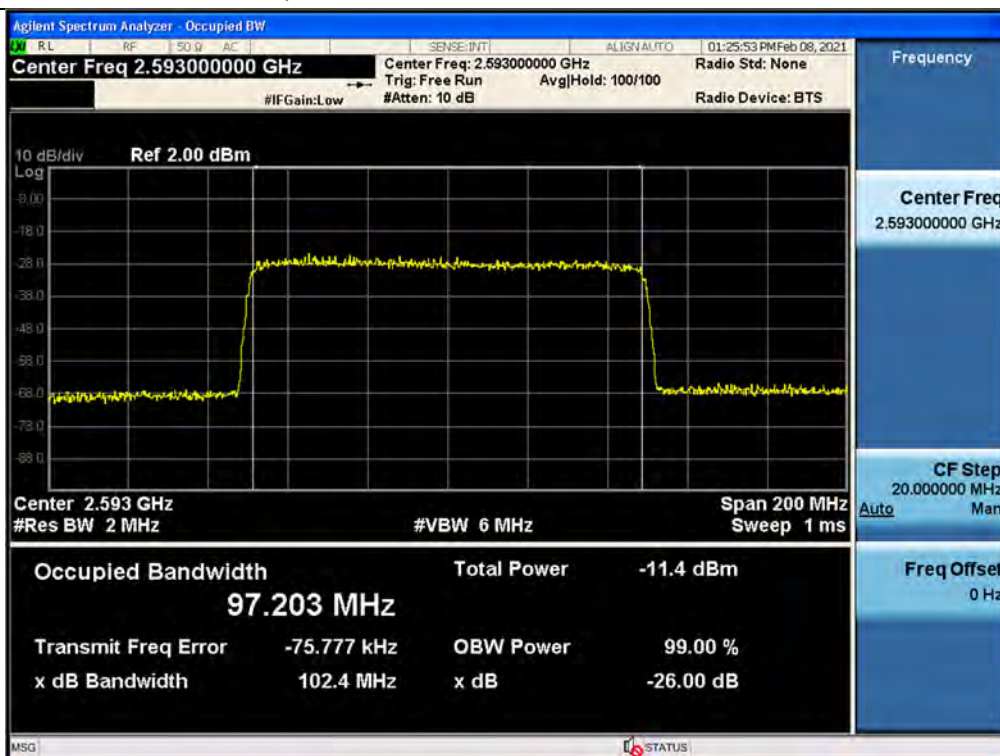

3 dB above the AGC threshold output / BRS/EBS / Downlink / 5G NR 100 MHz

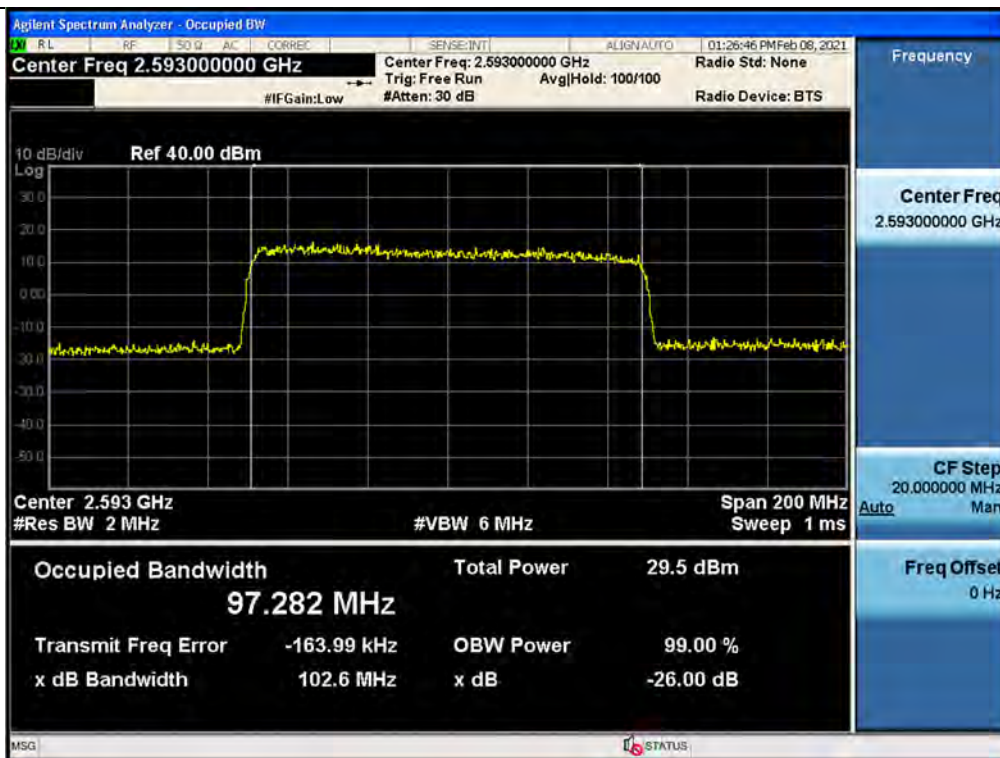

3 dB above the AGC threshold Input / BRS/EBS / Downlink / 5G NR 100 MHz

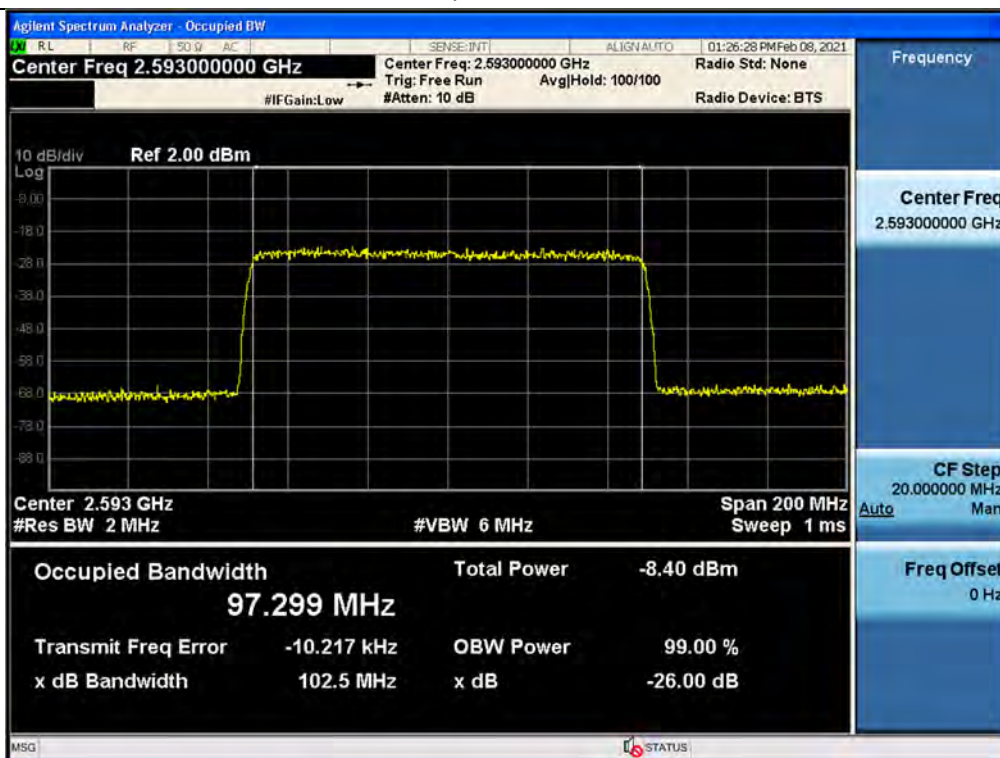



#### 5.4. INPUT/OUTPUT POWER AND AMPLIFIER/BOOSTER GAIN

##### Test Requirement:

##### § 2.1046 Measurements required: RF power output.

- (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.
- (b) For single sideband, independent sideband, and single channel, controlled carrier radiotelephone transmitters the procedure specified in paragraph (a) of this section shall be employed and, in addition, the transmitter shall be modulated during the test as specified and applicable in § 2.1046 (b) (1-5). In all tests, the input level of the modulating signal shall be such as to develop rated peak envelope power or carrier power, as appropriate, for the transmitter.
- (c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations.

##### § 24.232 Power and antenna height limits.

- (a) (1) Base stations with an emission bandwidth of 1 MHz or less are limited to 1640 watts equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT, except as described in paragraph (b) below.
- (2) Base stations with an emission bandwidth greater than 1 MHz are limited to 1640 watts/MHz equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT, except as described in paragraph (b) below.
- (3) Base station antenna heights may exceed 300 meters HAAT with a corresponding reduction in power; see Tables 1 and 2 of this section.
- (4) The service area boundary limit and microwave protection criteria specified in §§ 24.236 and 24.237 apply.

Table 1—Reduced Power for Base Station Antenna Heights Over 300 Meters, With Emission Bandwidth of 1 MHz or Less

HAAT in meters	Maximum EIRP watts
≤300	1640
≤500	1070
≤1000	490
≤1500	270
≤2000	160

Table 2—Reduced Power for Base Station Antenna Heights Over 300 Meters, With Emission Bandwidth Greater Than 1 MHz

HAAT in meters	Maximum EIRP watts/MHz
≤300	1640
≤500	1070
≤1000	490
≤1500	270
≤2000	160

- (b) (1) Base stations that are located in counties with population densities of 100 persons or fewer per square mile, based upon the most recently available population statistics from the Bureau of the Census, with an emission bandwidth of 1 MHz or less are limited to 3280 watts equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT.
- (2) Base stations that are located in counties with population densities of 100 persons or fewer per square mile, based upon the most recently available population statistics from the Bureau of the Census, with an emission bandwidth greater than 1 MHz are limited to 3280 watts/MHz equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT.
- (3) Base station antenna heights may exceed 300 meters HAAT with a corresponding reduction in power; see Tables 3 and 4 of this section.
- (4) The service area boundary limit and microwave protection criteria specified in § 24.236 and 24.237 apply.
- (5) Operation under this paragraph (b) at power limits greater than permitted under paragraph (a) of this section must be coordinated in advance with all broadband PCS licensees authorized to operate on adjacent frequency blocks within 120 kilometers (75 miles) of the base station and is limited to base stations located more than 120 kilometers (75 miles) from the Canadian border and more than 75 kilometers (45 miles) from the Mexican border.

Table 3—Reduced Power for Base Station Antenna Heights Over 300 Meters, With Emission Bandwidth of 1 MHz or Less

HAAT in meters	Maximum EIRP watts
≤300	3280
≤500	2140
≤1000	980
≤1500	540
≤2000	320



Table 4—Reduced Power for Base Station Antenna Heights Over 300 Meters, With Emission Bandwidth Greater Than 1 MHz

HAAT in meters	Maximum EIRP watts/MHz
≤300	3280
≤500	2140
≤1000	980
≤1500	540
≤2000	320

- (c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.
- (d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.
- (e) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

### § 27.50 Power limits and duty cycle.

- (a) The following power limits and related requirements apply to stations transmitting in the 2305-2320 MHz band or the 2345-2360 MHz band.
  - (1) *Base and fixed stations.*
    - (i) For base and fixed stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band:
      - (A) The average equivalent isotropically radiated power (EIRP) must not exceed 2,000 watts within any 5 megahertz of authorized bandwidth and must not exceed 400 watts within any 1 megahertz of authorized bandwidth.
      - (B) The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.
    - (ii) For base and fixed stations transmitting in the 2315-2320 MHz band or the 2345-2350 MHz band, the peak EIRP must not exceed 2,000 watts.
  - (2) *Fixed customer premises equipment stations.* For fixed customer premises equipment (CPE) stations transmitting in the 2305-2320 MHz band or in the 2345-2360 MHz band, the peak EIRP must not exceed 20

watts within any 5 megahertz of authorized bandwidth. Fixed CPE stations transmitting in the 2305-2320 MHz band or in the 2345-2360 MHz band must employ automatic transmit power control when operating so the stations operate with the minimum power necessary for successful communications. The use of outdoor antennas for CPE stations or outdoor CPE station installations operating with 2 watts per 5 megahertz or less average EIRP using the stepped emissions mask prescribed in § 27.53(a)(3) is prohibited except if professionally installed in locations removed by 20 meters from roadways or in locations where it can be shown that the ground power level of  $-44$  dBm in the A or B blocks or  $-55$  dBm in the C or D blocks will not be exceeded at the nearest road location. The use of outdoor antennas for fixed CPE stations operating with 2 watts per 5 megahertz or less average EIRP and the emissions mask prescribed in § 27.53(a)(1)(i) through (iii) is permitted in all locations. For fixed WCS CPE using TDD technology, the duty cycle must not exceed 38 percent;

(3) *Mobile and portable stations.*

- (i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.
- (ii) Mobile and portable stations are not permitted to transmit in the 2315-2320 MHz and 2345-2350 MHz bands.
- (iii) *Automatic transmit power control.* Mobile and portable stations transmitting in the 2305-2315 MHz band or in the 2350-2360 MHz band must employ automatic transmit power control when operating so the stations operate with the minimum power necessary for successful communications.
- (iv) *Prohibition on external vehicle-mounted antennas.* The use of external vehicle-mounted antennas for mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band is prohibited.

(d) The following power and antenna height requirements apply to stations transmitting in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz and 2180-2200 MHz bands:

- (1) The power of each fixed or base station transmitting in the 1995-2000 MHz, 2110-2155 MHz, 2155-2180 MHz or 2180-2200 MHz band and located in any county with population density of 100 or fewer persons per square mile, based upon the most recently available population statistics from the Bureau of the Census, is limited to:
  - (i) An equivalent isotropically radiated power (EIRP) of 3280 watts when transmitting with an emission bandwidth of 1 MHz or less;
  - (ii) An EIRP of 3280 watts/MHz when transmitting with an emission bandwidth greater than 1 MHz.

- (2) The power of each fixed or base station transmitting in the 1995-2000 MHz, the 2110-2155 MHz 2155-2180 MHz band, or 2180-2200 MHz band and situated in any geographic location other than that described in paragraph (d)(1) of this section is limited to:
  - (i) An equivalent isotropically radiated power (EIRP) of 1640 watts when transmitting with an emission bandwidth of 1 MHz or less;
  - (ii) An EIRP of 1640 watts/MHz when transmitting with an emission bandwidth greater than 1 MHz.
- (3) A licensee operating a base or fixed station in the 2110-2155 MHz band utilizing a power greater than 1640 watts EIRP and greater than 1640 watts/MHz EIRP must coordinate such operations in advance with all Government and non-Government satellite entities in the 2025-2110 MHz band. A licensee operating a base or fixed station in the 2110-2180 MHz band utilizing power greater than 1640 watts EIRP and greater than 1640 watts/MHz EIRP must be coordinated in advance with the following licensees authorized to operate within 120 kilometers (75 miles) of the base or fixed station operating in this band: All Broadband Radio Service (BRS) licensees authorized under this part in the 2155-2160 MHz band and all advanced wireless services (AWS) licensees authorized to operate on adjacent frequency blocks in the 2110-2180 MHz band.
- (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.
- (5) Equipment employed must be authorized in accordance with the provisions of § 24.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (d)(6) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.
- (6) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.
- (7) Fixed, mobile, and portable (hand-held) stations operating in the 2000-2020 MHz band are limited to 2 watts EIRP, except that the total power of any portion of an emission that falls within the 2000-2005 MHz band may not exceed 5 milliwatts. A licensee of AWS-4 authority may enter into private operator-to-operator agreements with all 1995-2000 MHz licensees to operate in 2000-2005 MHz at power levels above 5 milliwatts EIRP; except the total power of the AWS-4 mobile emissions may not exceed 2 watts EIRP.
- (8) A licensee operating a base or fixed station in the 2180-2200 MHz band utilizing a power greater than 1640 watts EIRP and greater than 1640 watts/MHz EIRP must be coordinated in advance with all AWS licensees authorized to operate on adjacent frequency blocks in the 2180-2200 MHz band.
- (9) Fixed, mobile and portable (hand-held) stations operating in the 1915-1920 MHz band are limited to 300 milliwatts EIRP.
- (10) A licensee operating a base or fixed station in the 1995-2000 MHz band utilizing a power greater than 1640 watts EIRP and greater than 1640 watts/MHz EIRP must be coordinated in advance with all PCS G Block

licensees authorized to operate on adjacent frequency blocks in the 1990-1995 MHz band within 120 kilometers of the base or fixed station operating in this band.

(h) The following power limits shall apply in the BRS and EBS:

(1) Main, booster and base stations.

- (i) The maximum EIRP of a main, booster or base station shall not exceed  $33 \text{ dBW} + 10\log(X/Y) \text{ dBW}$ , where X is the actual channel width in MHz and Y is either 6 MHz if prior to transition or the station is in the MBS following transition or 5.5 MHz if the station is in the LBS and UBS following transition, except as provided in paragraph (h)(1)(ii) of this section.
- (ii) If a main or booster station sectorizes or otherwise uses one or more transmitting antennas with a non-omnidirectional horizontal plane radiation pattern, the maximum EIRP in dBW in a given direction shall be determined by the following formula:  $\text{EIRP} = 33 \text{ dBW} + 10 \log(X/Y) \text{ dBW} + 10 \log(360/\text{beamwidth}) \text{ dBW}$ , where X is the actual channel width in MHz, Y is either (i) 6 MHz if prior to transition or the station is in the MBS following transition or (ii) 5.5 MHz if the station is in the LBS and UBS following transition, and beamwidth is the total horizontal plane beamwidth of the individual transmitting antenna for the station or any sector measured at the half-power points.

#### Test Procedures:

Measurements were in accordance with the test methods section 3.5 of KDB 935210 D05 v01r04.

Adjust the internal gain control of the EUT to the maximum gain for which the equipment certification is being sought. Any EUT attenuation settings shall be set to their minimum value.

Input power levels (uplink and downlink) should be set to maximum input ratings while confirming that the device is not capable of operating in saturation (non-linear mode) at the rated input levels, including during the performance of the input/output power measurements.

#### 3.5.2 Measuring the EUT mean input and output power

- a) Connect a signal generator to the input of the EUT.
- b) Configure to generate the test signal.
- c) The frequency of the signal generator shall be set to the frequency  $f_0$  as determined from out-of-band rejection test.
- d) Connect a spectrum analyzer or power meter to the output of the EUT using appropriate attenuation as necessary.
- e) Set the signal generator output power to a level that produces an EUT output level that is just below the AGC threshold, but not more than 0.5 dB below.
- f) Measure and record the output power of the EUT; use ANSI C63.26-2015 subclause 5.2.4.4.1, for power measurement.
- g) Remove the EUT from the measurement setup. Using the same signal generator settings, repeat the power measurement at the signal generator port, which was used as the input signal to the EUT, and record as the input power. EUT gain may be calculated as described in 3.5.5.



- h) Repeat steps f) and g) with input signal amplitude set to 3 dB above the AGC threshold level.
- i) Repeat steps e) to h) with the narrowband test signal.
- j) Repeat steps e) to i) for all frequency bands authorized for use by the EUT.

#### 3.5.5 Calculating amplifier, repeater, or industrial booster gain

After the input and output power levels have been measured as described in the preceding subclauses, the gain of the EUT can be determined from:

$$\text{Gain (dB)} = \text{output power (dBm)} - \text{input power (dBm)}.$$

Report the gain for each authorized operating frequency band, and each test signal stimulus.

Note. If  $f_0$  that determined from out-of-band test is smaller or greater than difference of test signal's center frequency and operation band block, test is performed at the lowest or the highest frequency that test signals can be passed.

## Test Results:

Tabular data of Input / Output Power and Gain

Test Band	Signal	f <sub>0</sub> Frequency	Input Power	Output Power	Gain	E.I.R.P		
		(MHz)	(dBm)		(dB)	(dBm)	(W/MHz)	(W)
Broadband PCS	GSM	1947.44	-20.18	21.20	41.38	38.20	33.03	6.61
	CDMA	1947.44	-20.13	21.00	41.13	38.00	5.05	6.31
	WCDMA	1947.44	-20.07	21.20	41.27	38.20	1.32	6.61
	LTE 5 MHz	1947.44	-20.06	20.93	40.99	37.93	1.24	6.21
	LTE 10 MHz	1947.44	-20.02	20.90	40.92	37.90	0.62	6.17
	LTE 20 MHz	1947.44	-19.96	21.14	41.10	38.14	0.33	6.52
AWS13	CDMA	2116.48	-19.84	21.09	40.93	38.09	5.15	6.44
	WCDMA	2116.48	-19.72	20.95	40.67	37.95	1.25	6.24
	LTE 5 MHz	2116.48	-19.83	20.96	40.79	37.96	1.25	6.25
	LTE 10 MHz	2116.48	-19.67	21.09	40.76	38.09	0.64	6.44
	LTE 20 MHz	2120.00	-19.78	20.77	40.55	37.77	0.30	5.98
WCS	LTE 5 MHz	2357.50	-19.67	21.00	40.67	38.00	1.26	6.31
	LTE 10 MHz	2355.00	-19.57	21.15	40.72	38.15	0.65	6.53
BRS/EBS	LTE 20 MHz	2506.00	-20.20	21.11	41.31	38.11	6.47	0.32
	5G NR 20 MHz	2506.00	-20.18	21.20	41.38	38.20	6.61	0.33
	5G NR 40 MHz	2516.00	-20.31	21.29	41.60	38.29	6.75	0.17
	5G NR 60 MHz	2526.00	-20.08	20.79	40.87	37.79	6.01	0.10
	5G NR 80 MHz	2536.00	-19.66	20.75	40.41	37.75	5.96	0.07
	5G NR 100 MHz	2546.00	-19.99	20.94	40.93	37.94	6.23	0.06

Tabular data of Input / 3 dB above AGC threshold Output Power and Gain

Test Band	Signal	f <sub>0</sub> Frequency	Input Power	Output Power	Gain	E.I.R.P		
		(MHz)	(dBm)		(dB)	(dBm)	(W/MHz)	(W)
Broadband PCS	GSM	1947.44	-17.01	20.91	37.92	37.91	30.90	6.18
	CDMA	1947.44	-16.93	20.86	37.79	37.86	4.89	6.11
	WCDMA	1947.44	-16.84	21.00	37.84	38.00	1.26	6.31
	LTE 5 MHz	1947.44	-16.79	20.78	37.57	37.78	1.20	6.00
	LTE 10 MHz	1947.44	-16.73	20.75	37.48	37.75	0.60	5.96
	LTE 20 MHz	1947.44	-16.80	21.04	37.84	38.04	0.32	6.37
AWS13	CDMA	2116.48	-16.84	20.95	37.79	37.95	4.99	6.24
	WCDMA	2116.48	-16.92	20.90	37.82	37.90	1.23	6.17
	LTE 5 MHz	2116.48	-16.68	20.84	37.52	37.84	1.22	6.08
	LTE 10 MHz	2116.48	-16.65	21.03	37.68	38.03	0.64	6.35
	LTE 20 MHz	2120.00	-16.77	20.62	37.39	37.62	0.29	5.78
WCS	LTE 5 MHz	2357.50	-16.63	20.76	37.39	37.76	1.19	5.97
	LTE 10 MHz	2355.00	-16.51	21.02	37.53	38.02	0.63	6.34
BRS/EBS	LTE 20 MHz	2506.00	-17.13	21.16	38.29	38.16	0.33	6.55
	5G NR 20 MHz	2506.00	-17.18	21.21	38.39	38.21	0.33	6.62
	5G NR 40 MHz	2516.00	-17.27	21.29	38.56	38.29	0.17	6.75
	5G NR 60 MHz	2526.00	-17.07	20.84	37.91	37.84	0.10	6.08
	5G NR 80 MHz	2536.00	-16.64	20.67	37.31	37.67	0.07	5.85
	5G NR 100 MHz	2546.00	-17.01	20.97	37.98	37.97	0.06	6.27


Tabular data of PAPR

Test Band	Link	Signal	f <sub>0</sub> Frequency (MHz)	0.1 % PAPR (dB)
Broadband PCS	Downlink	GSM	1947.44	1.04
		CDMA	1947.44	7.74
		WCDMA	1947.44	4.48
		LTE 5 MHz	1947.44	8.30
		LTE 10 MHz	1947.44	8.34
		LTE 20 MHz	1947.44	8.40
AWS13		CDMA	2116.48	7.75
		WCDMA	2116.48	4.43
		LTE 5 MHz	2116.48	8.38
		LTE 10 MHz	2116.48	8.38
		LTE 20 MHz	2120.00	8.53
WCS		LTE 5 MHz	2357.50	8.14
		LTE 10 MHz	2355.00	7.85
BRS/EBS		LTE 20MHz	2506.00	8.64
		5G NR 20 MHz	2506.00	8.76
		5G NR 40 MHz	2516.00	8.55
		5G NR 60 MHz	2526.00	8.55
		5G NR 80 MHz	2536.00	8.51
		5G NR 100 MHz	2546.00	8.53




## Plot data of PAPR

### PAPR / Broadband PCS / Downlink / GSM

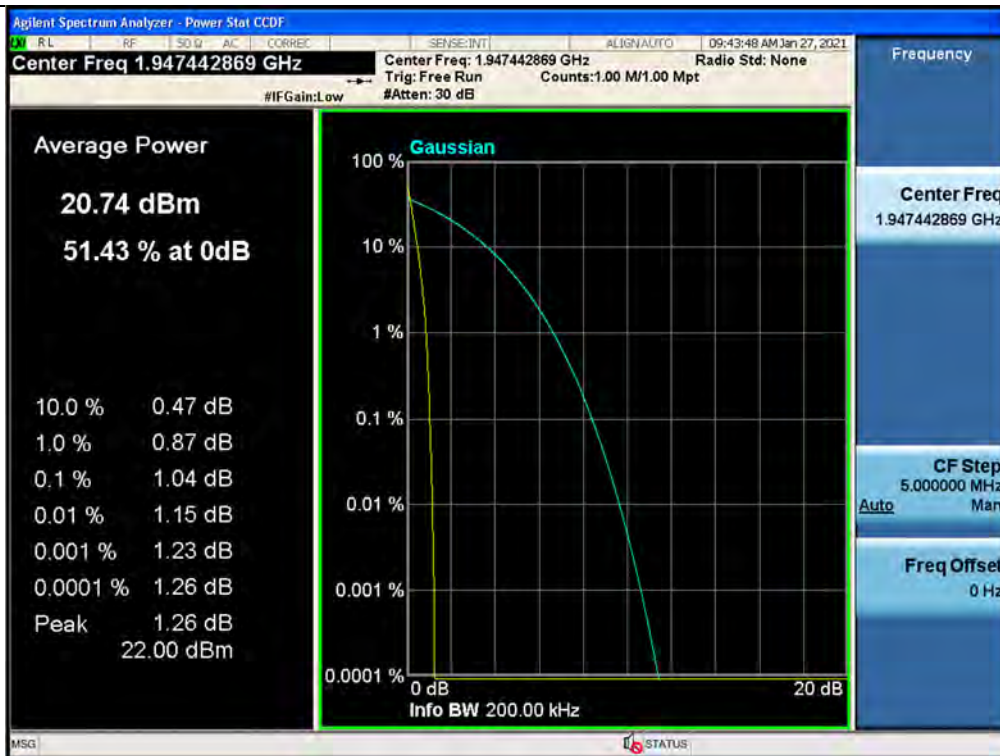


### PAPR / Broadband PCS / Downlink / CDMA

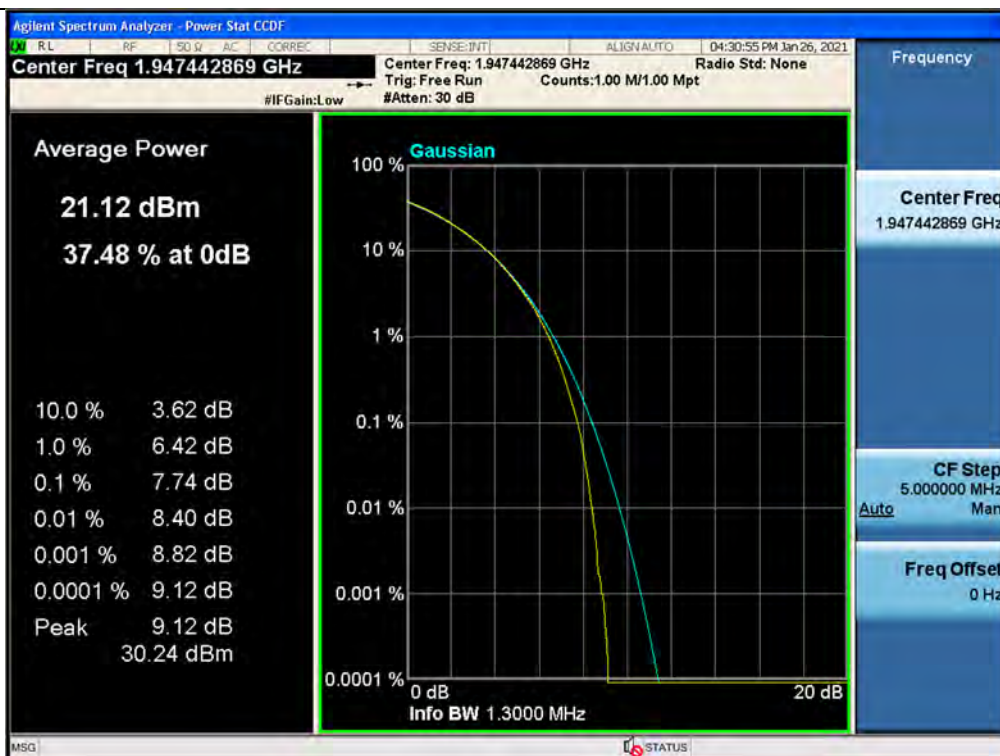

PAPR / Broadband PCS / Downlink / WCDMA



PAPR / Broadband PCS / Downlink / LTE 5 MHz

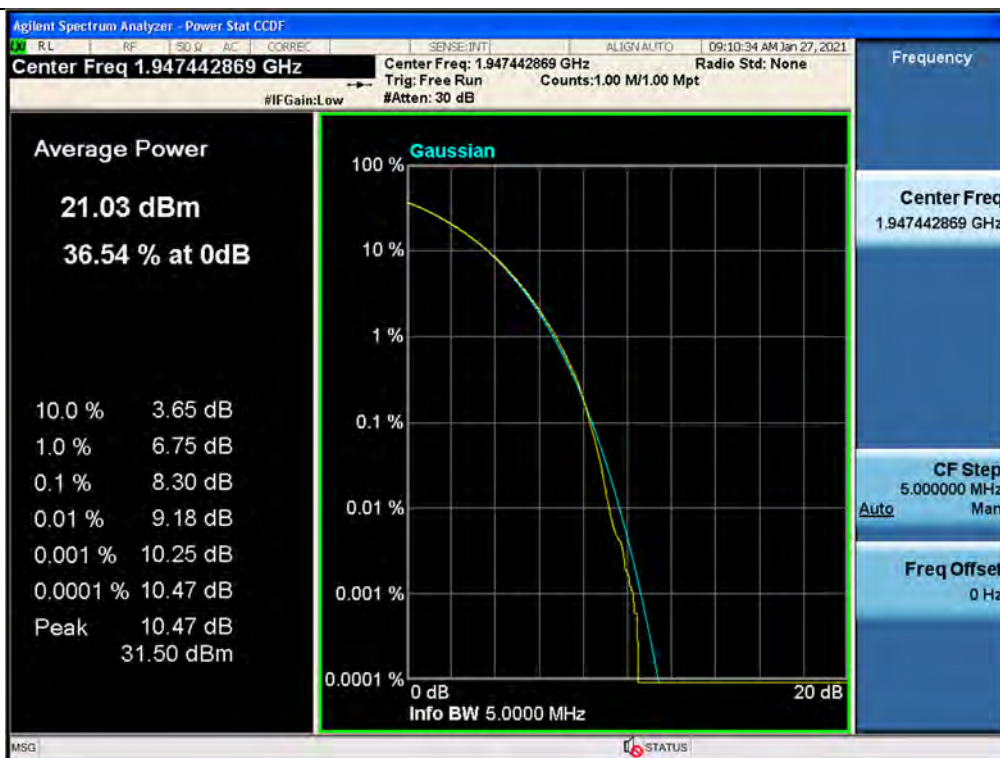

PAPR / Broadband PCS / Downlink / LTE 10 MHz



PAPR / Broadband PCS / Downlink / LTE 20 MHz






PAPR / AWS13 / Downlink / CDMA



PAPR / AWS13 / Downlink / WCDMA

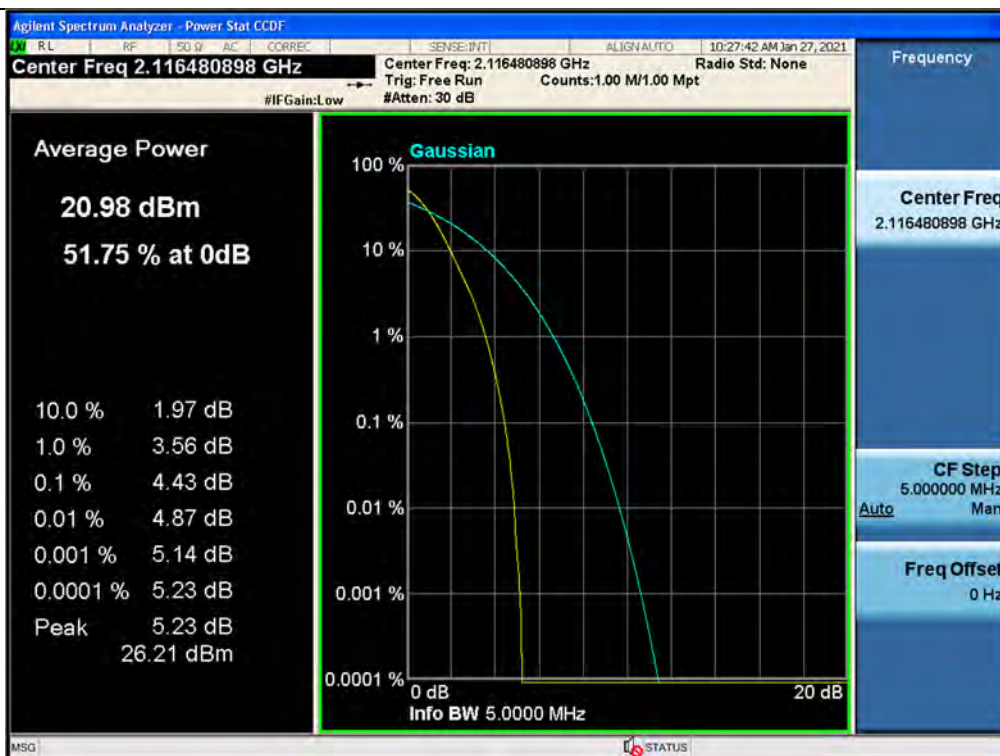





PAPR / AWS13 / Downlink / LTE 5 MHz



PAPR / AWS13 / Downlink / LTE 10 MHz

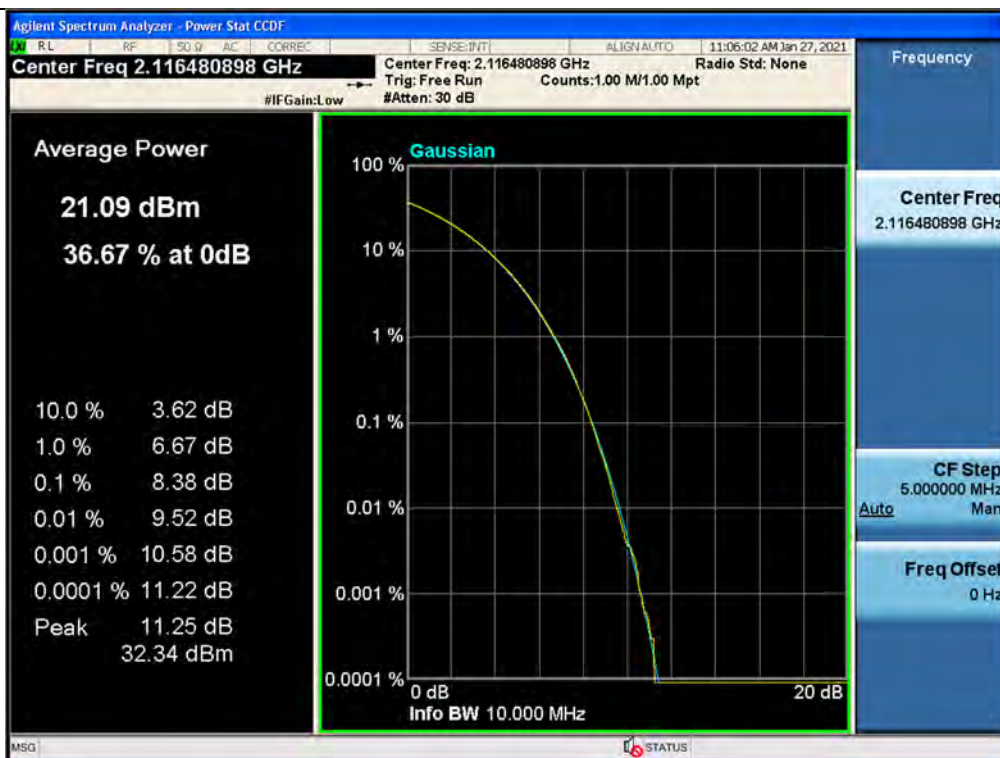

PAPR / AWS13 / Downlink / LTE 20 MHz

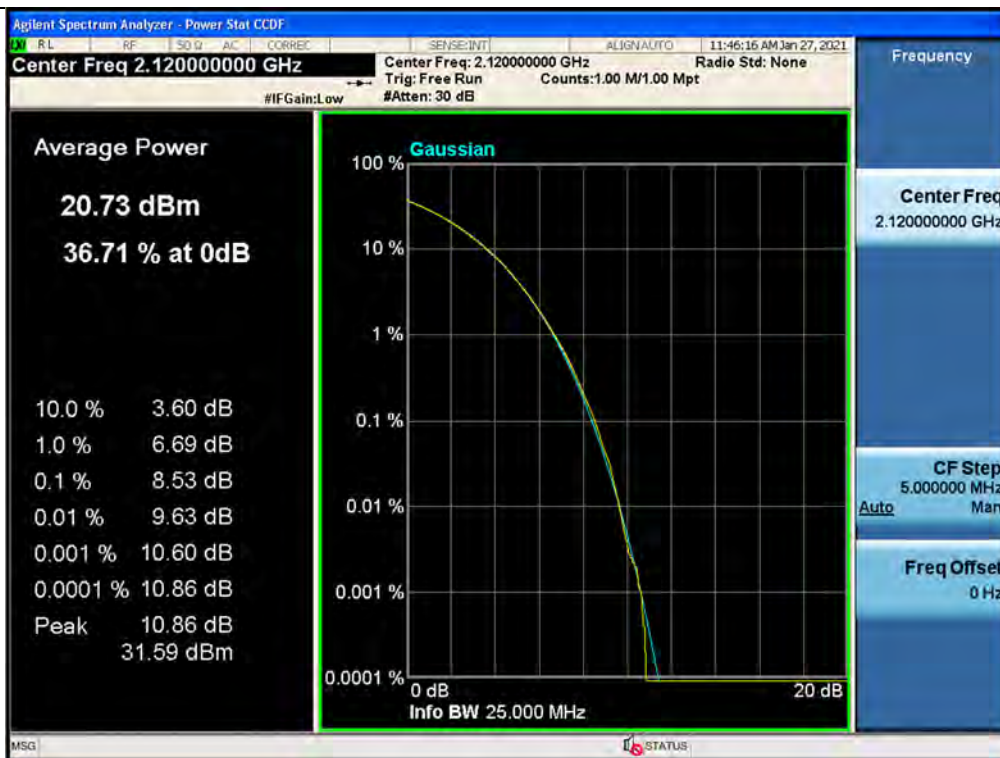

PAPR / WCS / Downlink / LTE 5 MHz



PAPR / WCS / Downlink / LTE 10 MHz



PAPR / BRS/EBS / Downlink / LTE 20 MHz






PAPR / BRS/EBS / Downlink / 5G NR 20 MHz




PAPR / BRS/EBS / Downlink / 5G NR 40 MHz

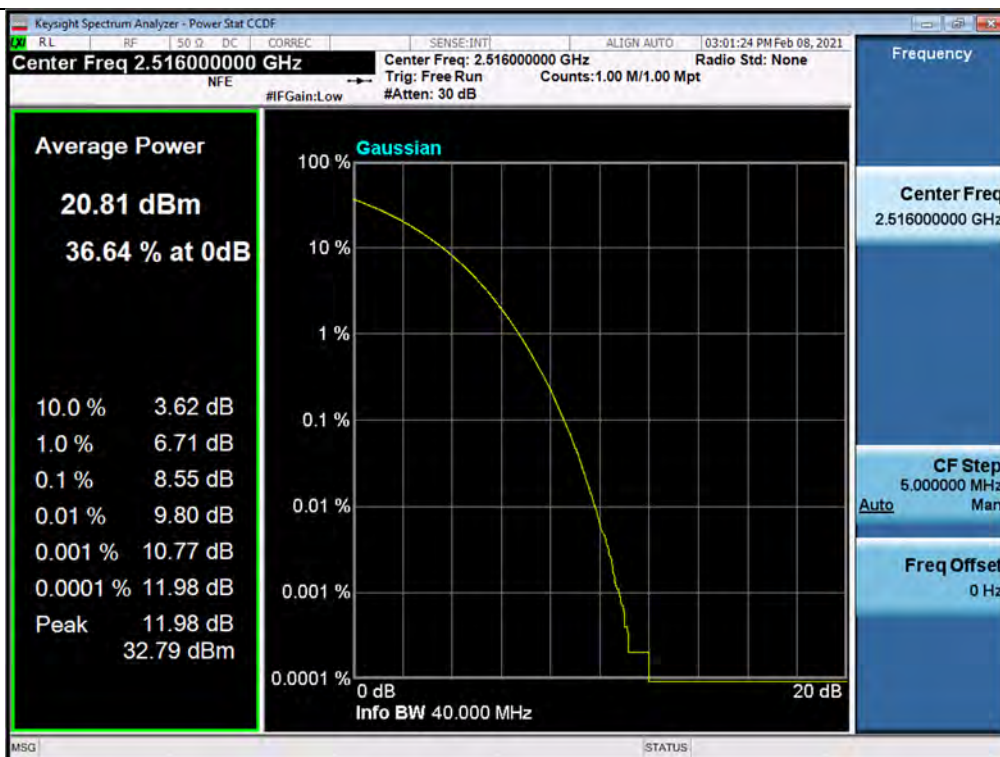





PAPR / BRS/EBS / Downlink / 5G NR 60 MHz

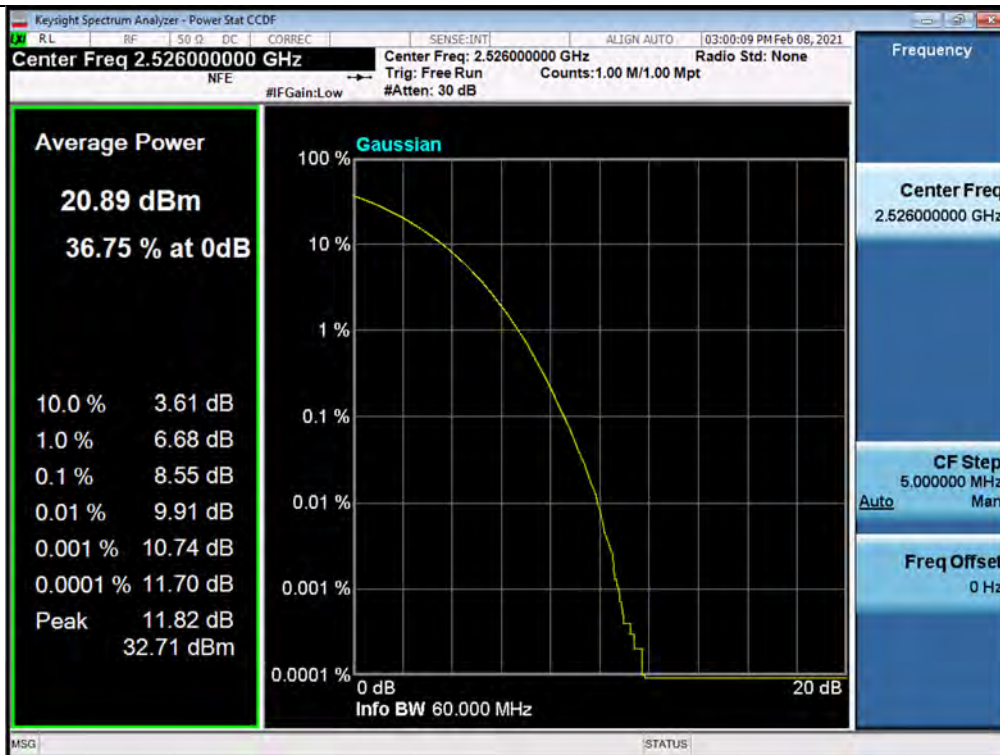

PAPR / BRS/EBS / Downlink / 5G NR 80 MHz

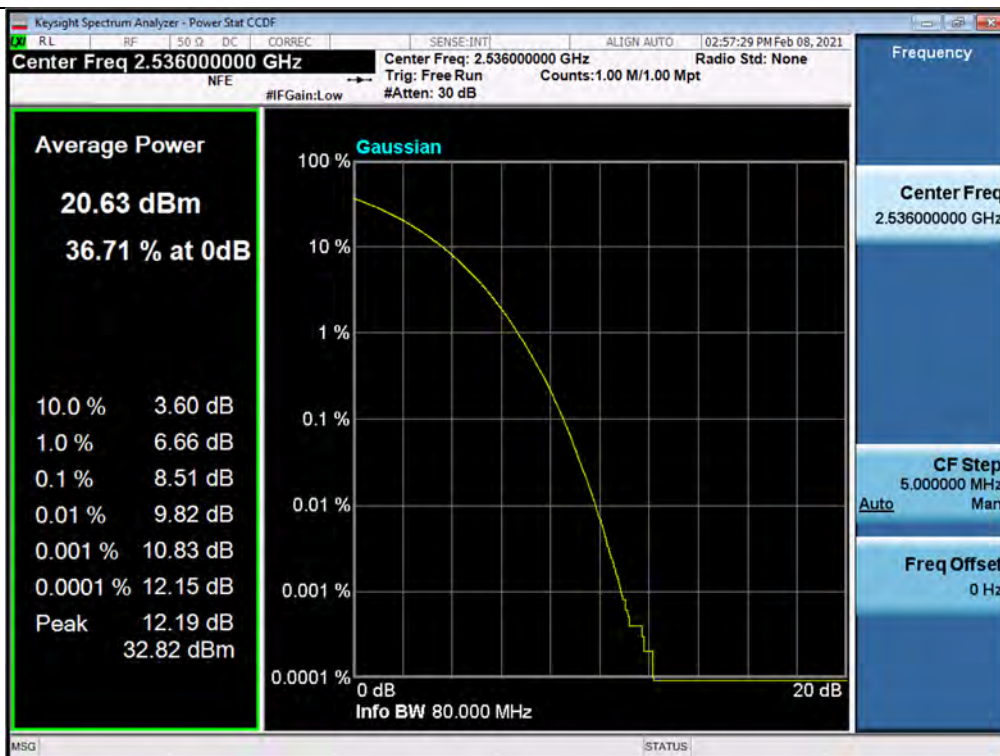

## PAPR / BRS/EBS / Downlink / 5G NR 100 MHz

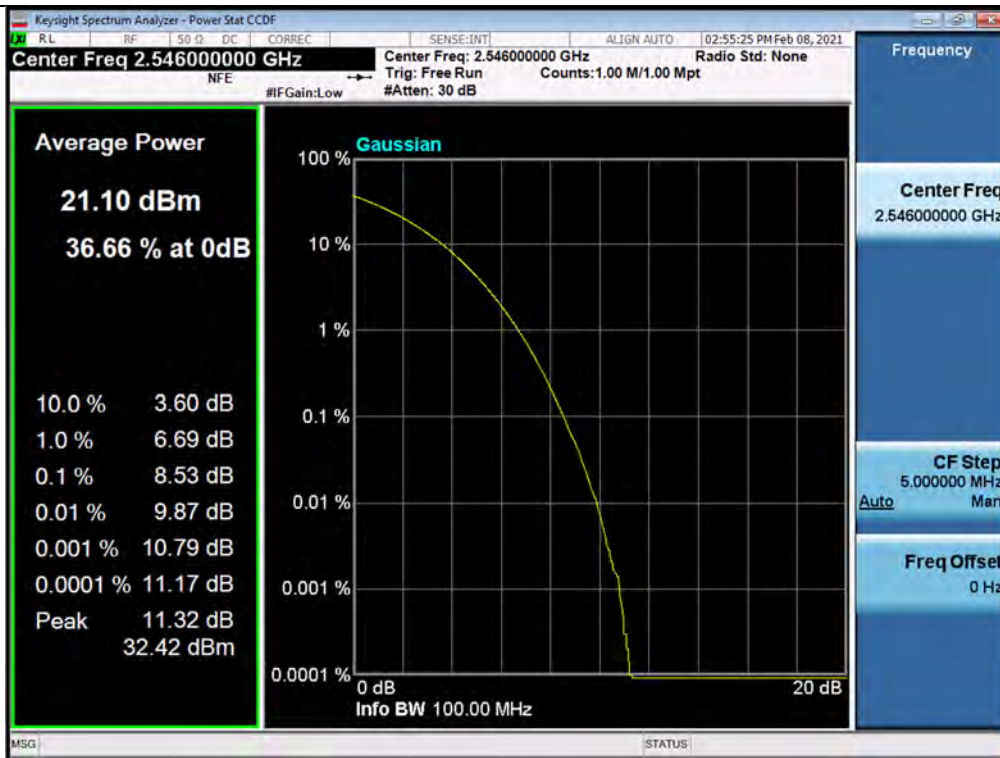

## 5.5. OUT-OF-BAND/OUT-OF-BLOCK EMISSIONS AND SPURIOUS EMISSIONS

### Test Requirements:

#### § 2.1051 Measurements required: Spurious emissions at antenna terminals:

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

#### § 24.238 Emission limitations for Broadband PCS equipment.

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

- (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.
- (b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- (c) Alternative out of band emission limit. Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.
- (d) Interference caused by out of band emissions. If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

#### § 27.53 Emission limits.

- (a) For operations in the 2305-2320 MHz band and the 2345-2360 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power P (with averaging performed only during periods of transmission) within the licensed band(s) of operation, in watts, by the following amounts:
  - (1) For base and fixed stations' operations in the 2305-2320 MHz band and the 2345-2360 MHz band:
    - (i) By a factor of not less than  $43 + 10 \log(P)$  dB on all frequencies between 2305 and 2320 MHz and on all

frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, and not less than  $75 + 10 \log (P)$  dB on all frequencies between 2320 and 2345 MHz;

- (ii) By a factor of not less than  $43 + 10 \log (P)$  dB on all frequencies between 2300 and 2305 MHz,  $70 + 10 \log (P)$  dB on all frequencies between 2287.5 and 2300 MHz,  $72 + 10 \log (P)$  dB on all frequencies between 2285 and 2287.5 MHz, and  $75 + 10 \log (P)$  dB below 2285 MHz;
  - (iii) By a factor of not less than  $43 + 10 \log (P)$  dB on all frequencies between 2360 and 2362.5 MHz,  $55 + 10 \log (P)$  dB on all frequencies between 2362.5 and 2365 MHz,  $70 + 10 \log (P)$  dB on all frequencies between 2365 and 2367.5 MHz,  $72 + 10 \log (P)$  dB on all frequencies between 2367.5 and 2370 MHz, and  $75 + 10 \log (P)$  dB above 2370 MHz.
- (5) *Measurement procedure.* Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the channel blocks at 2305, 2310, 2315, 2320, 2345, 2350, 2355, and 2360 MHz, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 1 MHz). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(h) AWS emission limits

- (1) *General protection levels.* Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10} (P)$  dB.
- (2) *Additional protection levels.* Notwithstanding the foregoing paragraph (h)(1) of this section:
  - (i) Operations in the 2180-2200 MHz band are subject to the out-of-band emission requirements set forth in § 27.1134 for the protection of federal government operations operating in the 2200-2290 MHz band.
  - (ii) For operations in the 2000-2020 MHz band, the power of any emissions below 2000 MHz shall be attenuated below the transmitter power (P) in watts by at least  $70 + 10 \log_{10}(P)$  dB.
  - (iii) For operations in the 1915-1920 MHz band, the power of any emission between 1930-1995 MHz shall be attenuated below the transmitter power (P) in watts by at least  $70 + 10 \log_{10}(P)$  dB.
  - (iv) For operations in the 1995-2000 MHz band, the power of any emission between 2005-2020 MHz shall be attenuated below the transmitter power (P) in watts by at least  $70 + 10 \log_{10}(P)$  dB.
- (3) *Measurement procedure.*
  - (i) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.



- (ii) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (iii) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.
- (4) *Private agreements.*
  - (i) For AWS operations in the 2000-2020 MHz and 2180-2200 MHz bands, to the extent a licensee establishes unified operations across the AWS blocks, that licensee may choose not to observe the emission limit specified in paragraph (h)(1), above, strictly between its adjacent block licenses in a geographic area, so long as it complies with other Commission rules and is not adversely affecting the operations of other parties by virtue of exceeding the emission limit.
  - (ii) For AWS operations in the 2000-2020 MHz band, a licensee may enter into private agreements with all licensees operating between 1995 and 2000 MHz to allow the  $70 + 10 \log_{10}(P)$  dB limit to be exceeded within the 1995-2000 MHz band.
  - (iii) An AWS licensee who is a party to a private agreement described in this section (4) must maintain a copy of the agreement in its station files and disclose it, upon request, to prospective AWS assignees, transferees, or spectrum lessees and to the Commission.
- (m) For BRS and EBS stations, the power of any emissions outside the licensee's frequency bands of operation shall be attenuated below the transmitter power (P) measured in watts in accordance with the standards below. If a licensee has multiple contiguous channels, out-of-band emissions shall be measured from the upper and lower edges of the contiguous channels.
- (2) For digital base stations, the attenuation shall be not less than  $43 + 10 \log (P)$  dB, unless a documented interference complaint is received from an adjacent channel licensee with an overlapping Geographic Service Area. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS No. 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. Provided that a documented interference complaint cannot be mutually resolved between the parties prior to the applicable deadline, then the following additional attenuation requirements shall apply:
  - (i) If a pre-existing base station suffers harmful interference from emissions caused by a new or modified base station located 1.5 km or more away, within 24 hours of the receipt of a documented interference complaint the licensee of the new or modified base station must attenuate its emissions by at least  $67 + 10 \log (P)$  dB measured at 3 megahertz, above or below, from the channel edge of its frequency block and shall immediately notify the complaining licensee upon implementation of the additional attenuation. No later than 60 days after the implementation of such additional attenuation, the licensee of the complaining base station must attenuate its base station emissions by at least  $67 + 10 \log (P)$  dB measured at 3 megahertz, above or below, from the channel edge of its frequency block of the new or modified base station.
  - (ii) If a pre-existing base station suffers harmful interference from emissions caused by a new or modified base station located less than 1.5 km away, within 24 hours of receipt of a documented interference complaint the licensee of the new or modified base station must attenuate its emissions by at least  $67 + 10 \log (P) - 20 \log (D\text{km}/1.5)$  dB measured at 3 megahertz, above or below, from the channel edge of

its frequency block of the complaining licensee, or if both base stations are co-located, limit its undesired signal level at the pre-existing base station receiver(s) to no more than  $-107$  dBm measured in a 5.5 megahertz bandwidth and shall immediately notify the complaining licensee upon such reduction in the undesired signal level. No later than 60 days after such reduction in the undesired signal level, the complaining licensee must attenuate its base station emissions by at least  $67 + 10 \log (P)$  dB measured at 3 megahertz, above or below, from the channel edge of its frequency block of the new or modified base station.

- (iii) If a new or modified base station suffers harmful interference from emissions caused by a pre-existing base station located 1.5 km or more away, within 60 days of receipt of a documented interference complaint the licensee of each base station must attenuate its base station emissions by at least  $67 + 10 \log (P)$  dB measured at 3 megahertz, above or below, from the channel edge of its frequency block of the other licensee.
  - (iv) If a new or modified base station suffers harmful interference from emissions caused by a pre-existing base station located less than 1.5 km away, within 60 days of receipt of a documented interference complaint: (a) The licensee of the new or modified base station must attenuate its OOB by at least  $67 + 10 \log (P) - 20 \log (D\text{km}/1.5)$  measured 3 megahertz above or below, from the channel edge of its frequency block of the other licensee, or if the base stations are co-located, limit its undesired signal level at the other base station receiver(s) to no more than  $-107$  dBm measured in a 5.5-megahertz bandwidth; and (b) the licensee causing the interference must attenuate its emissions by at least  $67 + 10 \log (P)$  dB measured at 3 megahertz, above or below, from the channel edge of its frequency block of the new or modified base station.
  - (v) For all fixed digital user stations, the attenuation factor shall be not less than  $43 + 10 \log (P)$  dB at the channel edge.
- (6) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed; for mobile digital stations, in the 1 megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed, except when the 1 megahertz band is 2495-2496 MHz, in which case a resolution bandwidth of at least one percent may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 megahertz or 1 percent of emission bandwidth, as specified; or 1 megahertz or 2 percent for mobile digital stations, except in the band 2495-2496 MHz). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. With respect to television operations, measurements must be made of the separate visual and aural operating powers at sufficiently frequent intervals to ensure compliance with the rules.

**Test Procedures:**

Measurements were in accordance with the test methods section 3.6 of KDB 935210 D05 v01r04.

Spurious emissions shall be measured using a single test signal sequentially tuned to the low, middle, and high channels or frequencies within each authorized frequency band of operation.

Out-of-band/out-of-block emissions (including intermodulation products) shall be measured under each of the following two stimulus conditions:

- a) two adjacent test signals sequentially tuned to the lower and upper frequency band/block edges;
- b) a single test signal, sequentially tuned to the lowest and highest frequencies or channels within the frequency band/block under examination.

NOTE—Single-channel boosters that cannot accommodate two simultaneous signals within the passband may be excluded from the test stipulated in step a).

**3.6.2 Out-of-band/out-of-block emissions conducted measurements**

- a) Connect a signal generator to the input of the EUT.  
If the signal generator is not capable of generating two modulated carriers simultaneously, then two discrete signal generators can be connected with an appropriate combining network to support this two-signal test.
- b) Set the signal generator to produce two AWGN signals as previously described.
- c) Set the center frequencies such that the AWGN signals occupy adjacent channels, as defined by industry standards such as 3GPP or 3GPP2, at the upper edge of the frequency band or block under test.
- d) Set the composite power levels such that the input signal is just below the AGC threshold, but not more than 0.5 dB below. The composite power can be measured using the procedures provided in KDB Publication 971168, but it will be necessary to expand the power integration bandwidth so as to include both of the transmit channels.
- e) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation as necessary.
- f) Set the RBW = reference bandwidth in the applicable rule section for the supported frequency band.
- g) Set the VBW =  $3 \times \text{RBW}$ .
- h) Set the detector to power averaging (rms) detector.
- i) Set the Sweep time = auto-couple.
- j) Set the spectrum analyzer start frequency to the upper block edge frequency, and the stop frequency to the upper block edge frequency plus 300 kHz or 3 MHz, for frequencies below and above 1 GHz, respectively.
- k) Trace average at least 100 traces in power averaging (rms) mode.
- l) Use the marker function to find the maximum power level.
- m) Capture the spectrum analyzer trace of the power level for inclusion in the test report.
- n) Repeat steps k) to m) with the composite input power level set to 3 dB above the AGC threshold.
- o) Reset the frequencies of the input signals to the lower edge of the frequency block or band under test.
- p) Reset the spectrum analyzer start frequency to the lower block edge frequency minus 300 kHz or 3 MHz, for frequencies below and above 1 GHz, respectively, and the stop frequency to the lower band or block edge frequency.
- q) Repeat steps k) to n).
- r) Repeat steps a) to q) with the signal generator configured for a single test signal tuned as close as possible to

the block edges.

- s) Repeat steps a) to r) with the narrowband test signal.
- t) Repeat steps a) to s) for all authorized frequency bands or blocks used by the EUT.

### 3.6.3 Spurious emissions conducted measurements

- a) Connect a signal generator to the input of the EUT.
- b) Set the signal generator to produce the broadband test signal as previously described.
- c) Set the center frequency of the test signal to the lowest available channel within the frequency band or block.
- d) Set the EUT input power to a level that is just below the AGC threshold, but not more than 0.5 dB below.
- e) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation as necessary.
- f) Set the RBW = reference bandwidth in the applicable rule section for the supported frequency band of operation.
- g) Set the VBW  $\geq 3 \times$  RBW.
- h) Set the Sweep time = auto-couple.
- i) Set the spectrum analyzer start frequency to the lowest RF signal generated in the equipment, without going below 9 kHz, and the stop frequency to the lower band/block edge frequency minus 1 MHz.  
The number of measurement points in each sweep must be  $\geq (2 \times \text{span}/\text{RBW})$ , which may require that the measurement range defined by the start and stop frequencies be subdivided, depending on the available number of measurement points provided by the spectrum analyzer.
- j) Select the power averaging (rms) detector function.
- k) Trace average at least 10 traces in power averaging (rms) mode.
- l) Use the peak marker function to identify the highest amplitude level over each measured frequency range. Record the frequency and amplitude and capture a plot for inclusion in the test report.
- m) Reset the spectrum analyzer start frequency to the upper band/block edge frequency plus 1 MHz, and the spectrum analyzer stop frequency to 10 times the highest frequency of the fundamental emission. The number of measurement points in each sweep must be  $\geq (2 \times \text{span}/\text{RBW})$ , which may require that the measurement range defined by the start and stop frequencies be subdivided, depending on the available number of measurement points provided by the spectrum analyzer.
- n) Trace average at least 10 traces in power averaging (rms) mode.
- o) Use the peak marker function to identify the highest amplitude level over each of the measured frequency ranges. Record the frequency and amplitude and capture a plot for inclusion in the test report; also provide tabular data, if required.
- p) Repeat steps i) to o) with the input test signals firstly tuned to a middle band/block frequency/channel, and then tuned to a high band/block frequency/channel.
- q) Repeat steps b) to p) with the narrowband test signal.
- r) Repeat steps b) to q) for all authorized frequency bands/blocks used by the EUT.

**Note:** In 9 kHz-150 kHz and 150 kHz-30 MHz bands, RBW was reduced to 0.1 % and 1 % of the reference bandwidth for measuring unwanted emission level (typically, 1 MHz if the authorized frequency band is above 1 GHz) and power was integrated. (1% = +30 dB, 10% = +20 dB )



**Test Results: Plot data of Out-of-band/out-of-block emissions**


Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / GSM / Lower



Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / GSM / Upper




+3 dB above Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / GSM / Lower

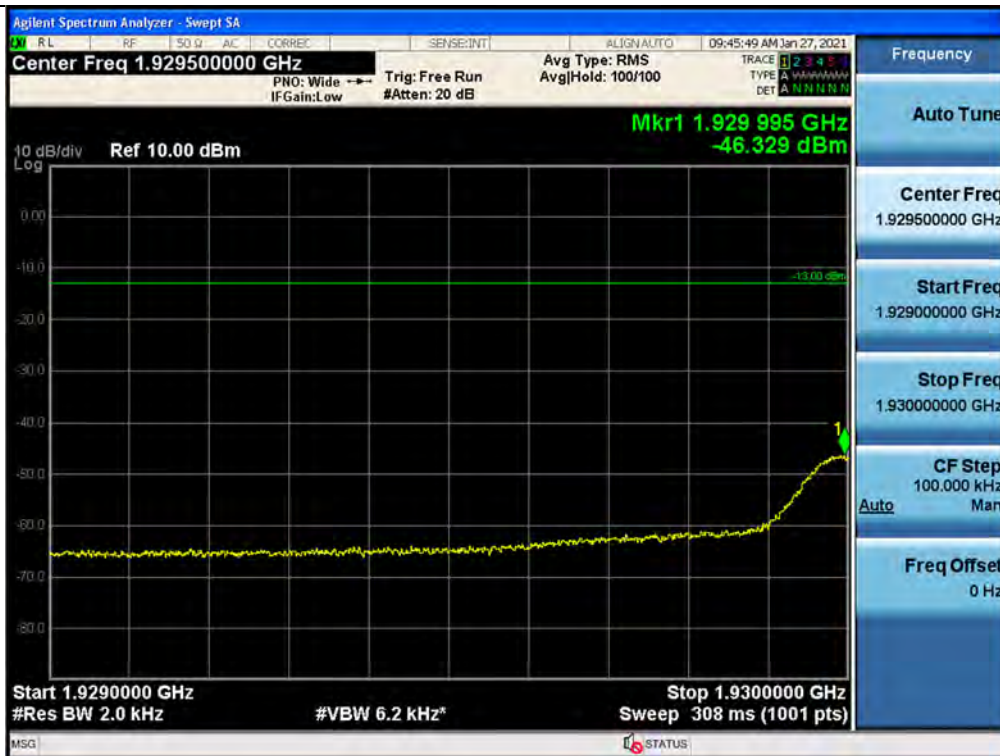


+3 dB above Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / GSM / Upper



Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / CDMA / Lower

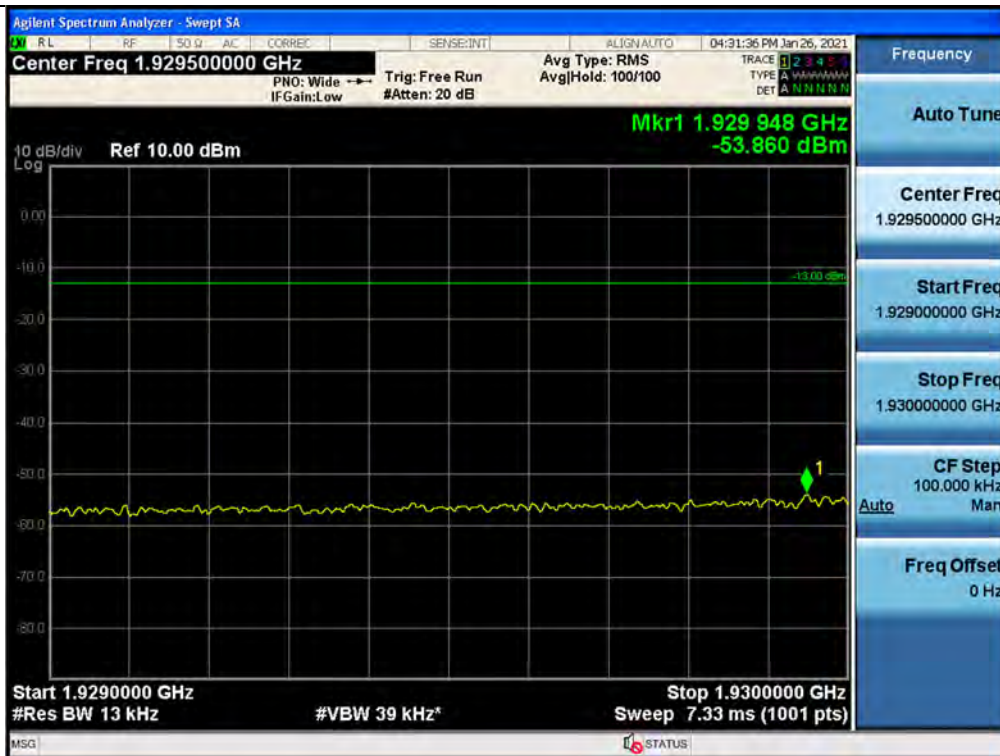


Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / CDMA / Upper

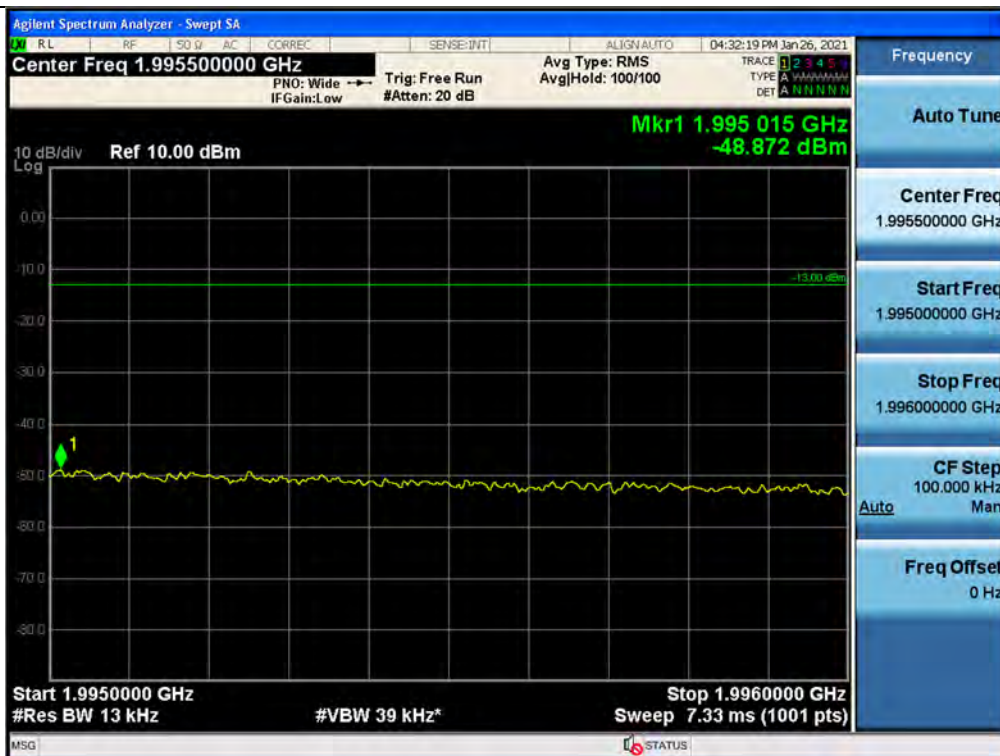




+3 dB above Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / CDMA / Lower

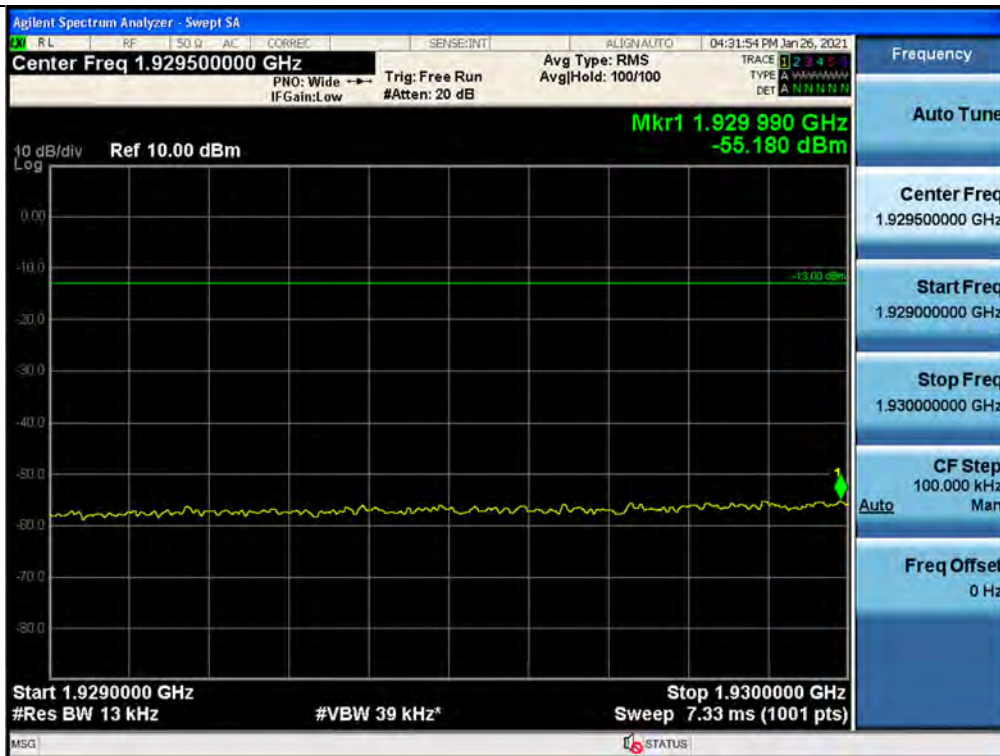


+3 dB above Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / CDMA / Upper

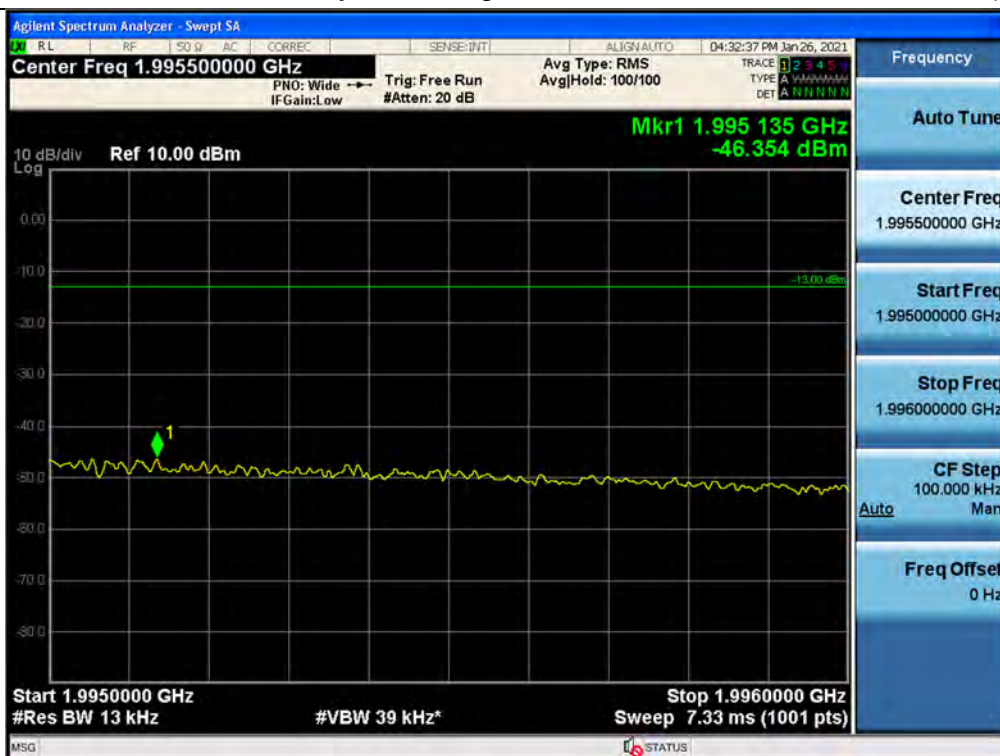





Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / WCDMA / Lower

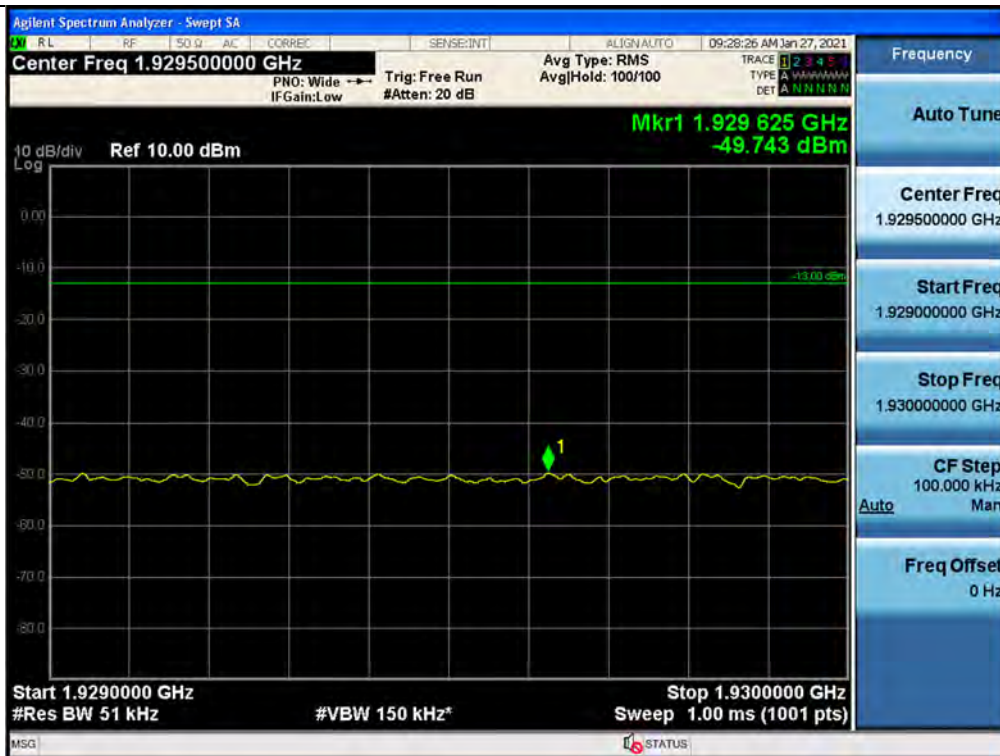


Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / WCDMA / Upper

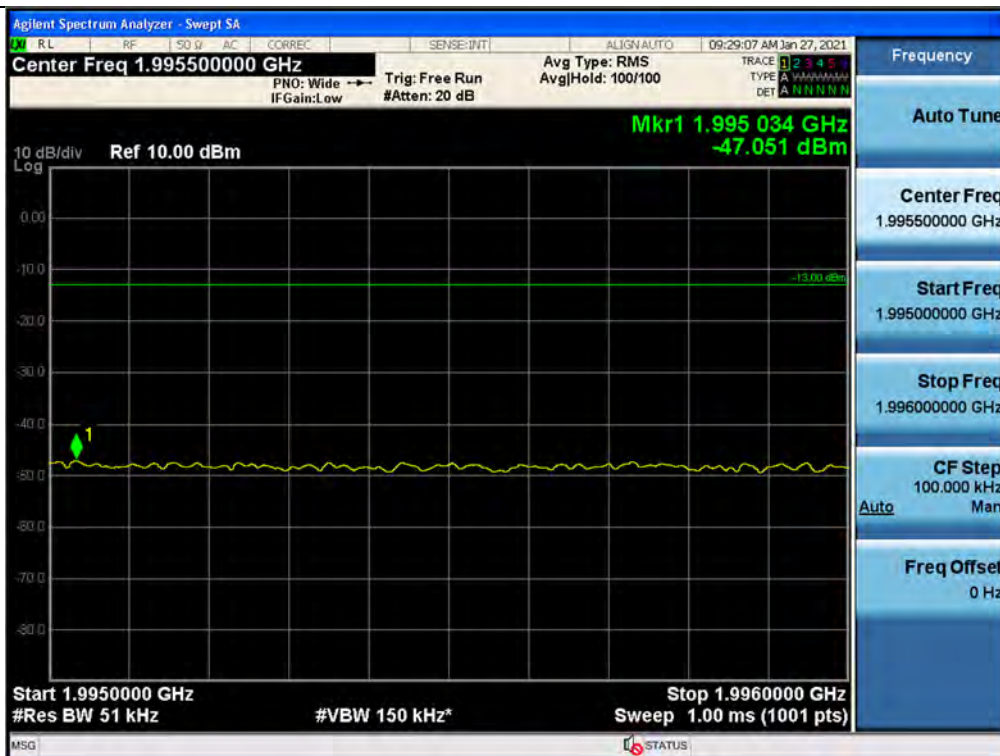


+3 dB above Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / WCDMA / Lower

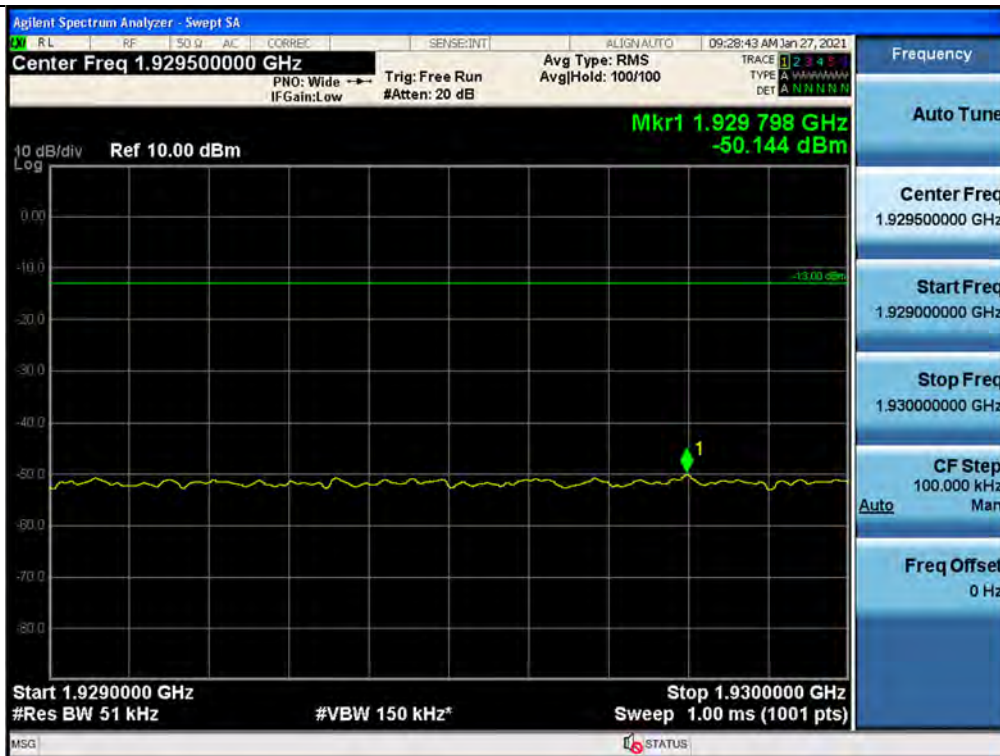


+3 dB above Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / WCDMA / Upper

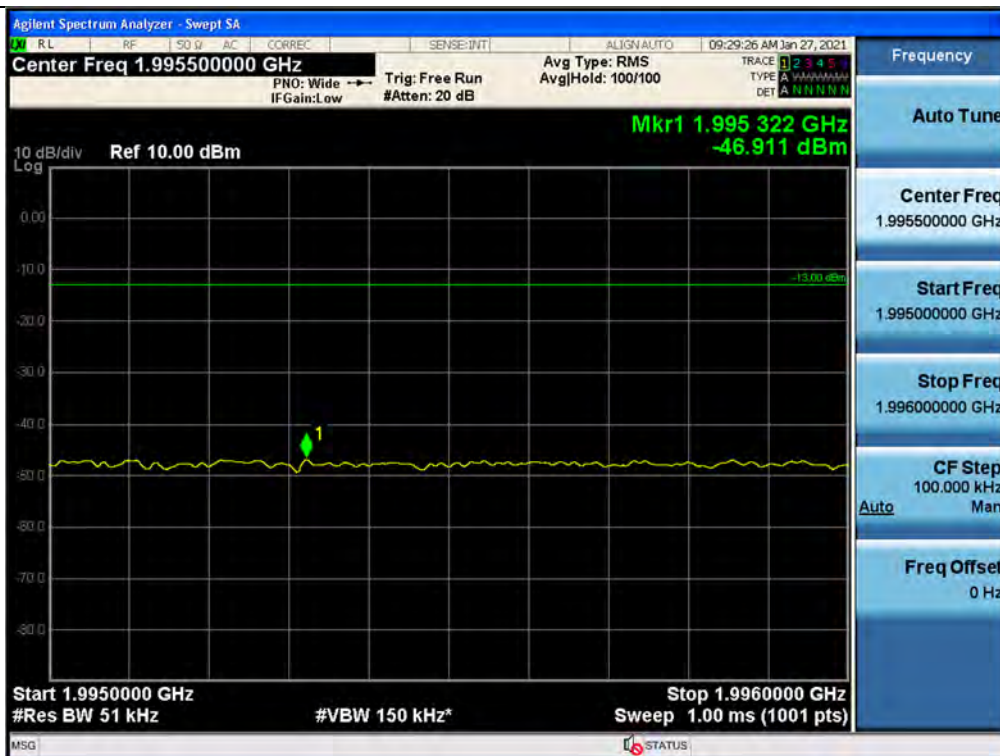

Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / LTE 5 MHz / Lower

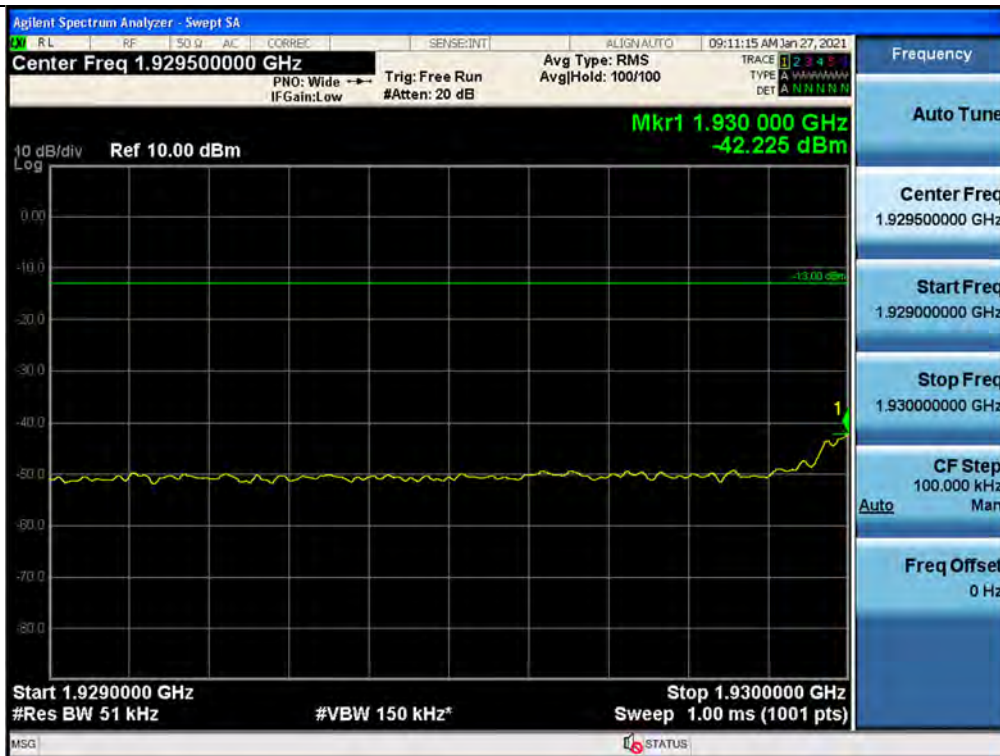


Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / LTE 5 MHz / Upper

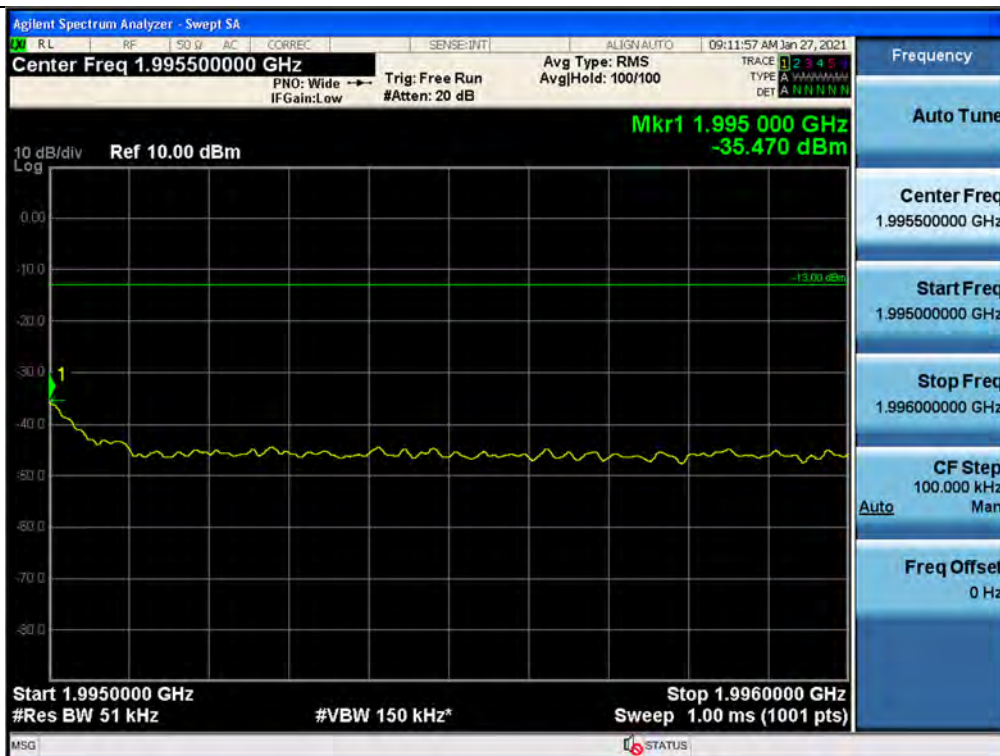




+3 dB above Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / LTE 5 MHz / Lower

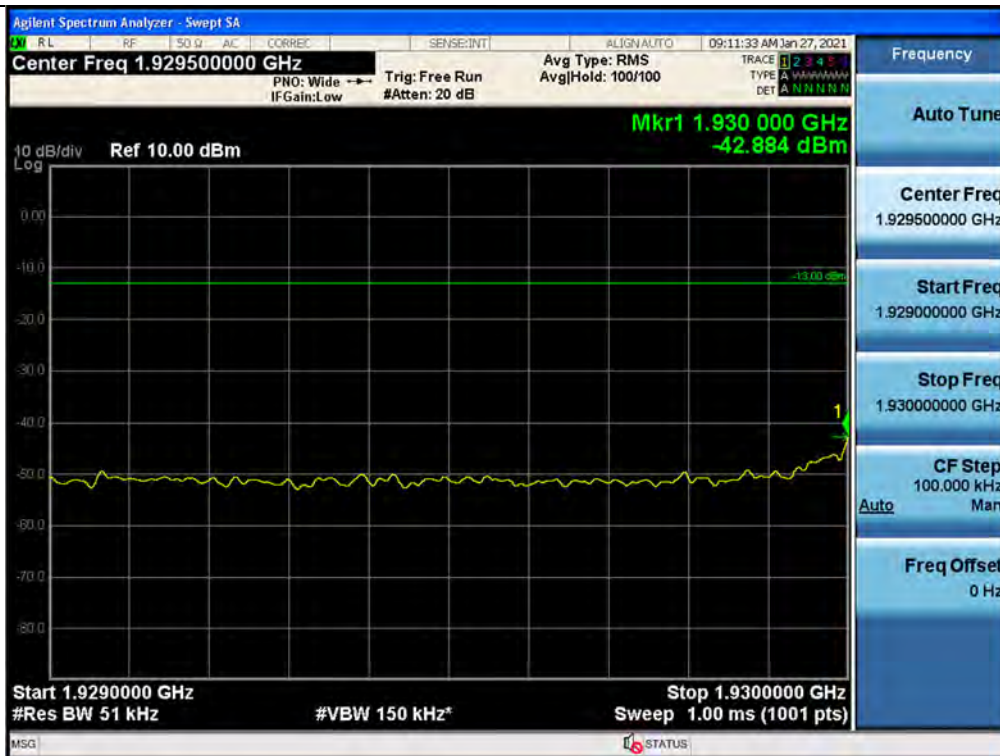


+3 dB above Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / LTE 5 MHz / Upper

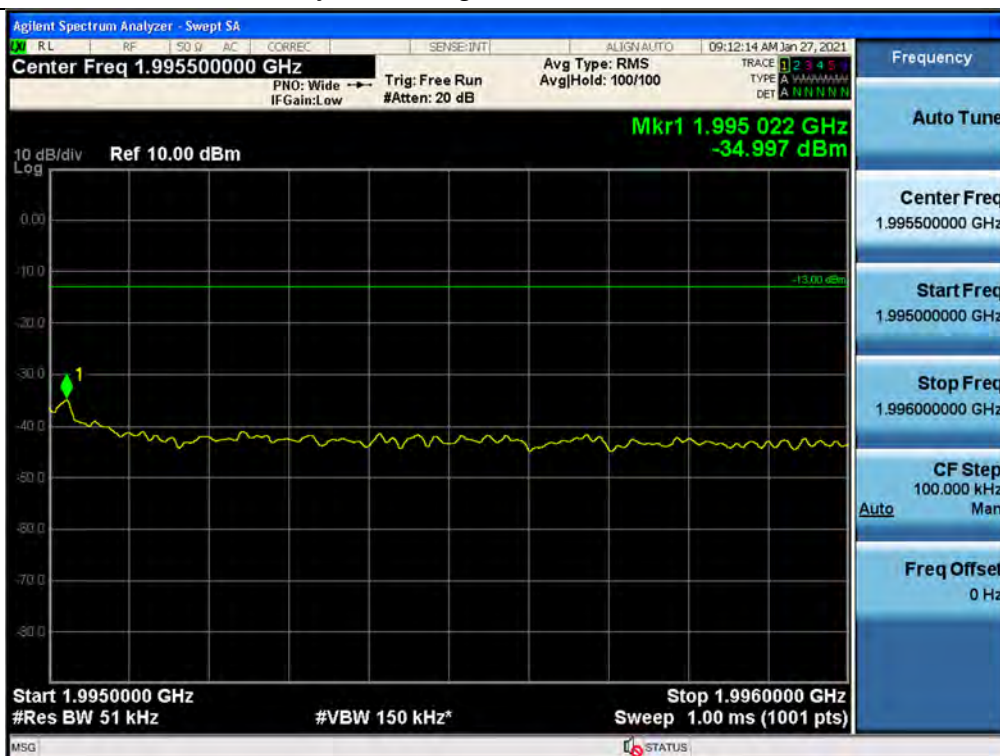





Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / LTE 10 MHz / Lower

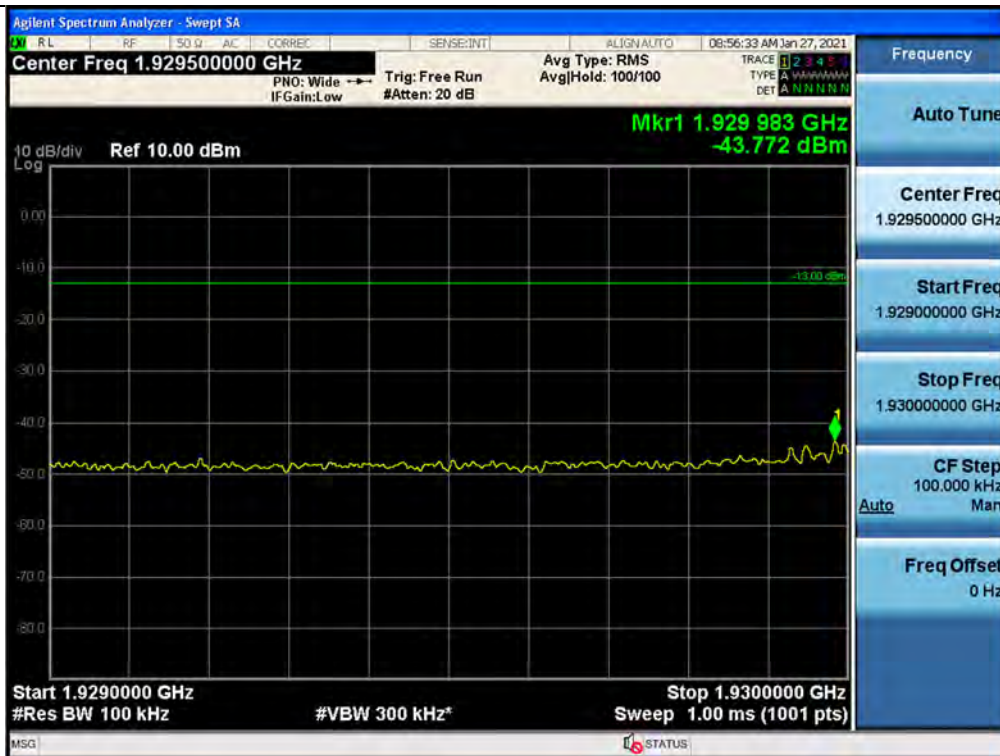


Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / LTE 10 MHz / Upper

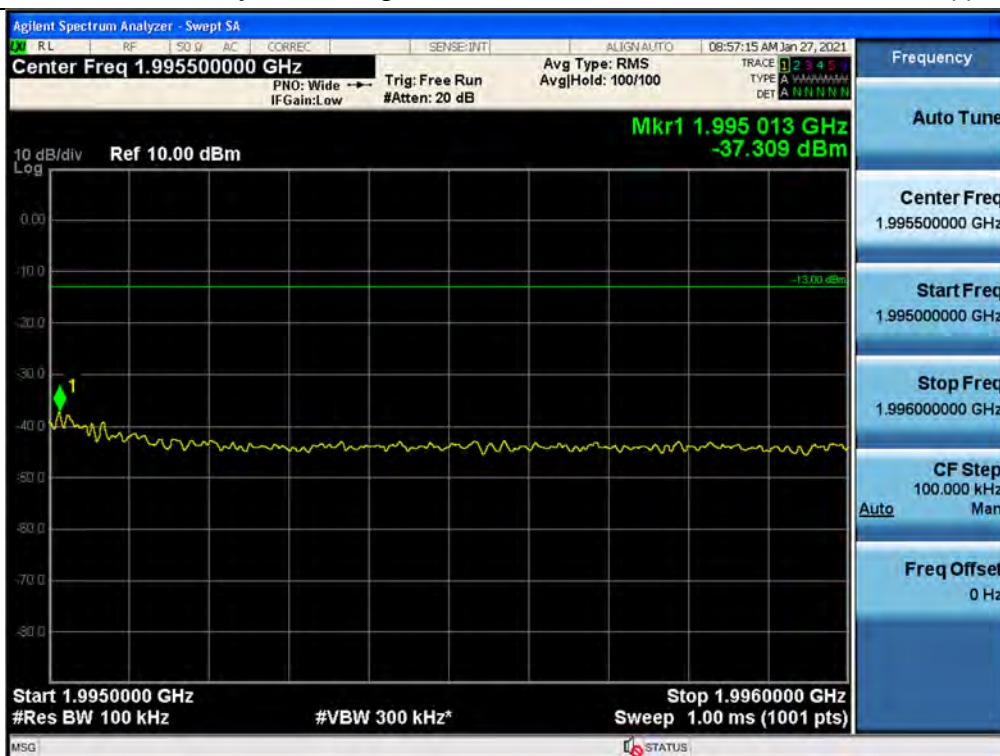


+3 dB above Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / LTE 10 MHz / Lower

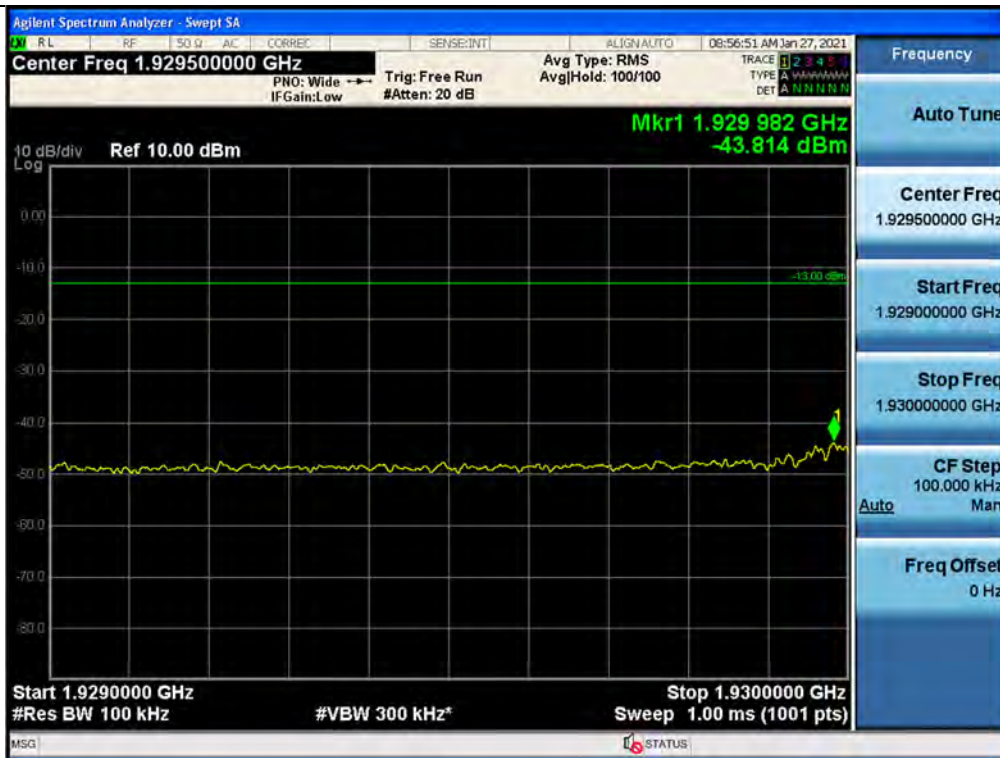


+3 dB above Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / LTE 10 MHz / Upper

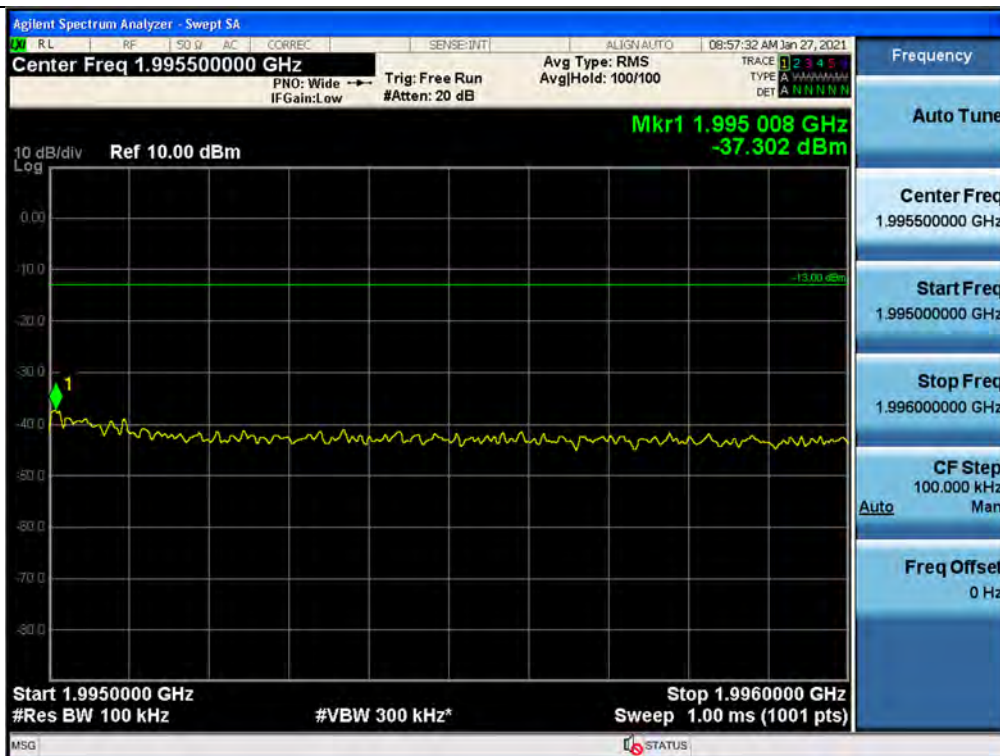

Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / LTE 20 MHz / Lower

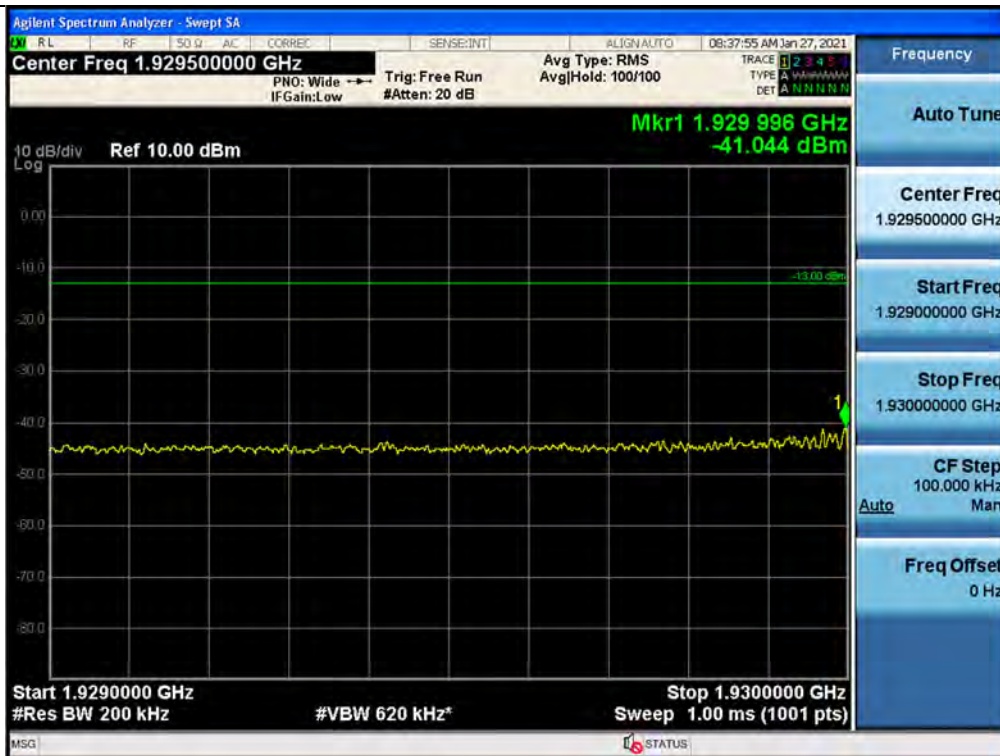


Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / LTE 20 MHz / Upper

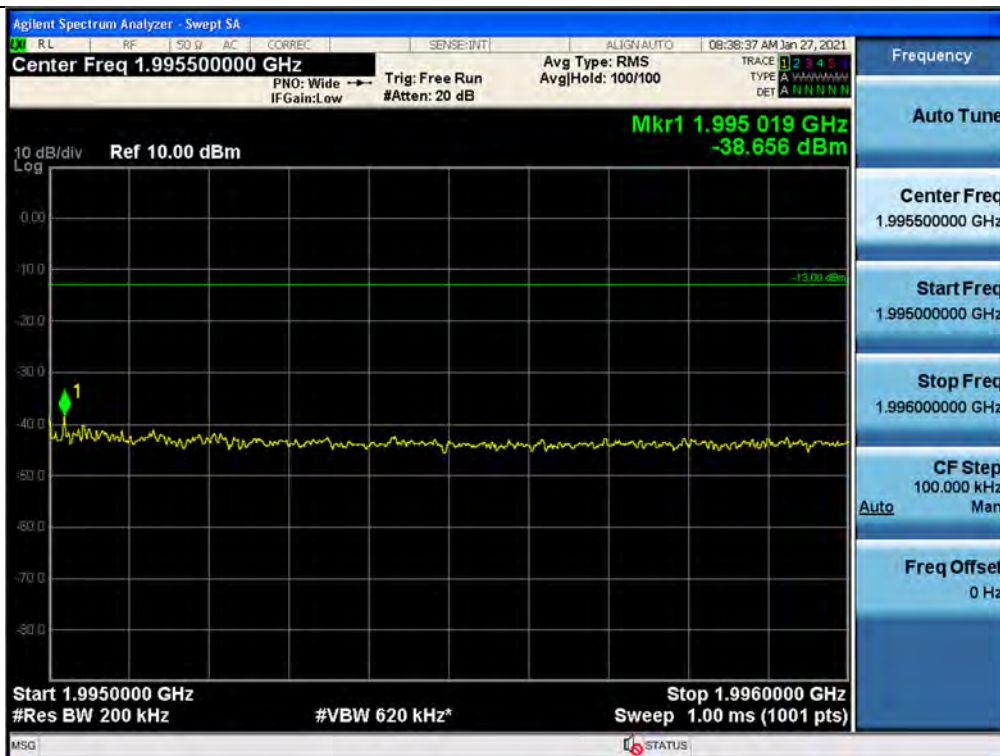




+3 dB above Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / LTE 20 MHz / Lower

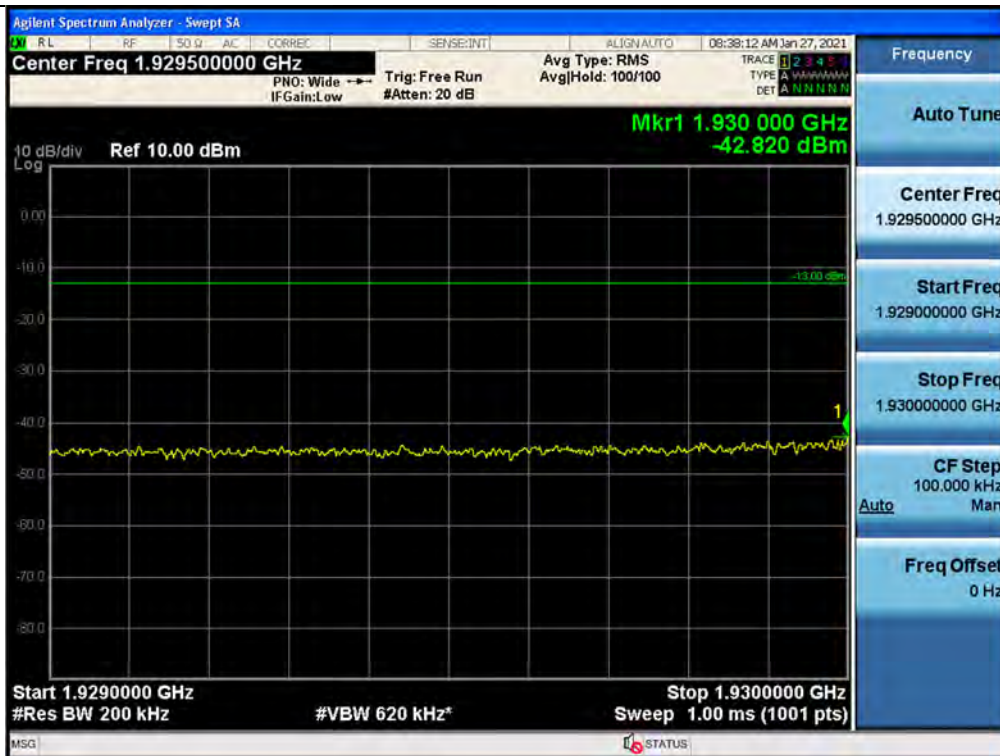


+3 dB above Out-of-band (two adjacent test signals) / Broadband PCS / Downlink / LTE 20 MHz / Upper

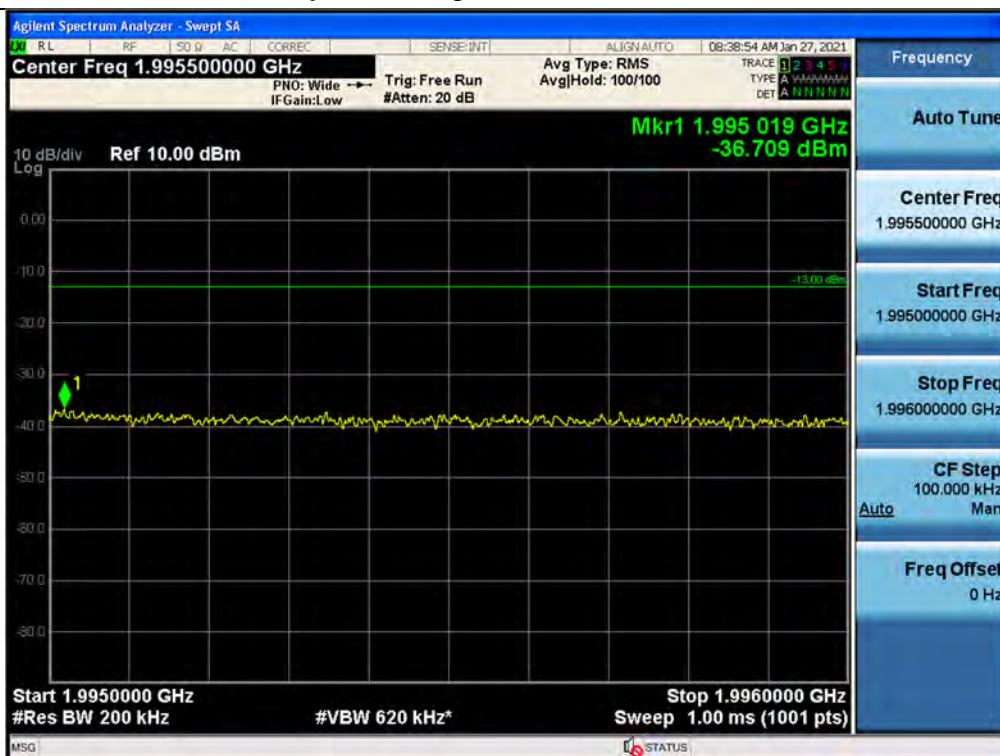





Out-of-band (two adjacent test signals) / AWS13 / Downlink / CDMA / Lower

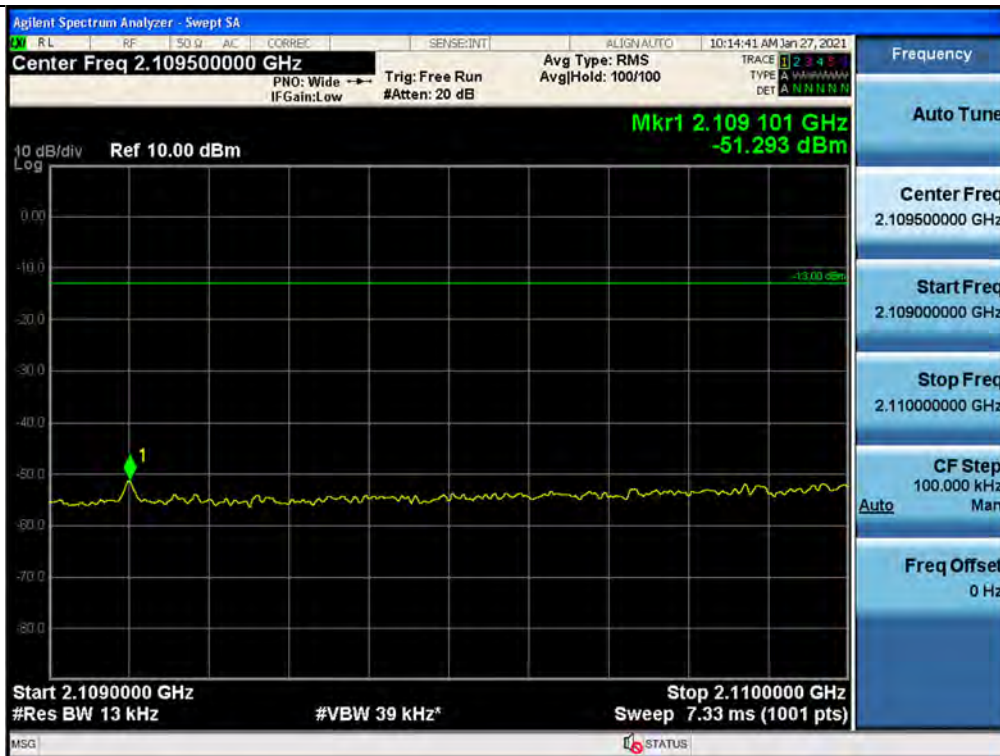


Out-of-band (two adjacent test signals) / AWS13 / Downlink / CDMA / Upper

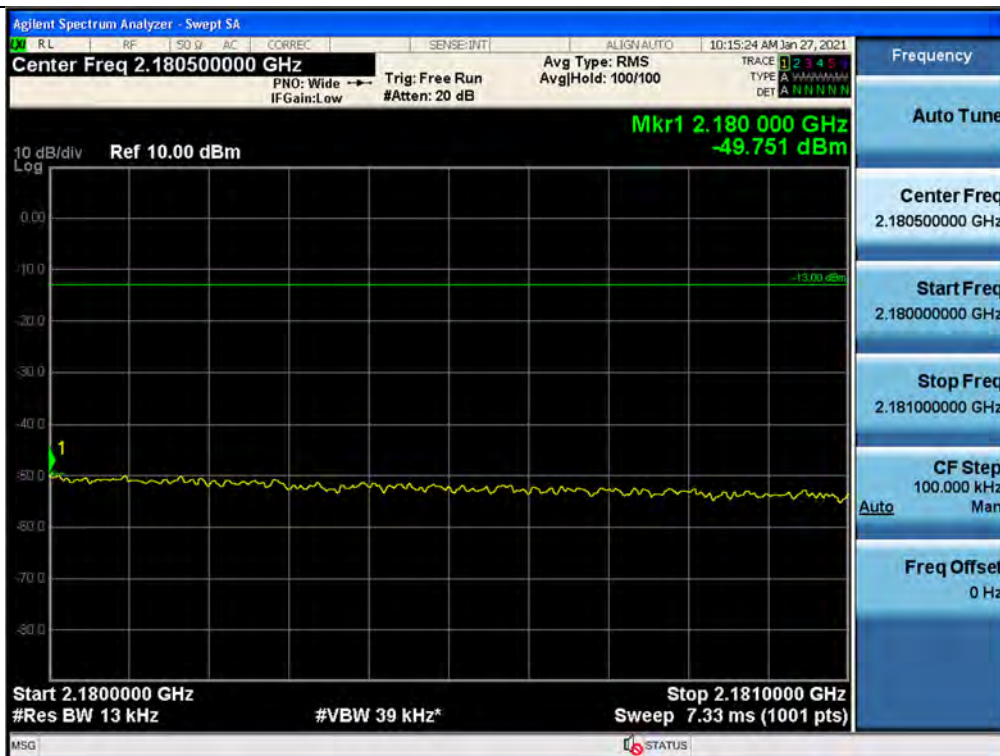


+3 dB above Out-of-band (two adjacent test signals) / AWS13 / Downlink / CDMA / Lower

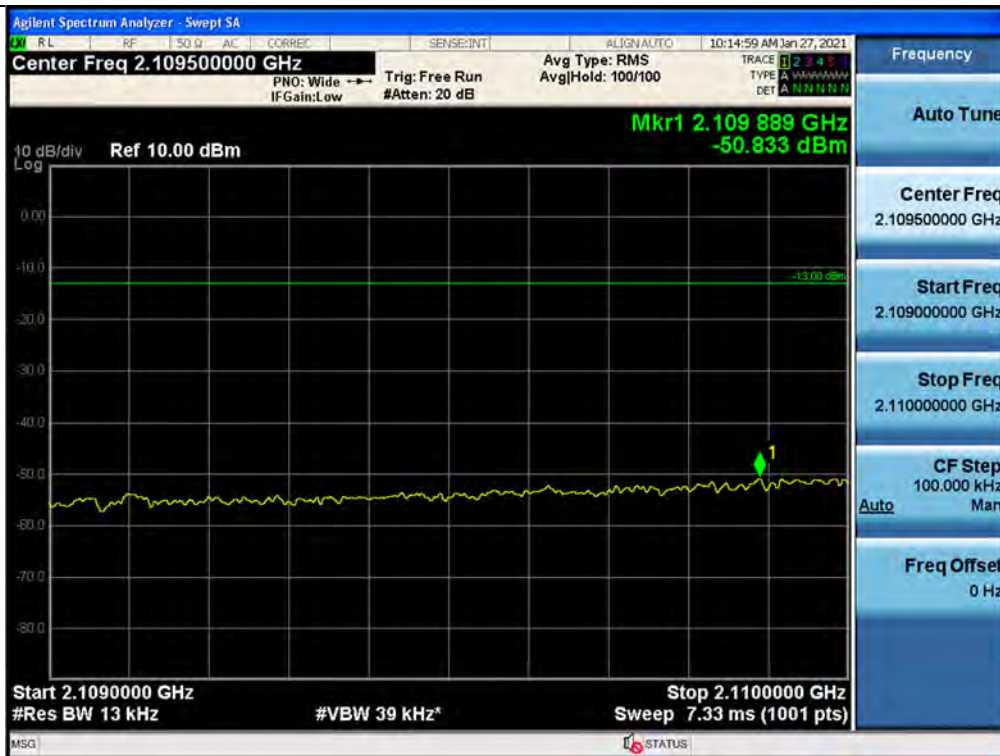


+3 dB above Out-of-band (two adjacent test signals) / AWS13 / Downlink / CDMA / Upper

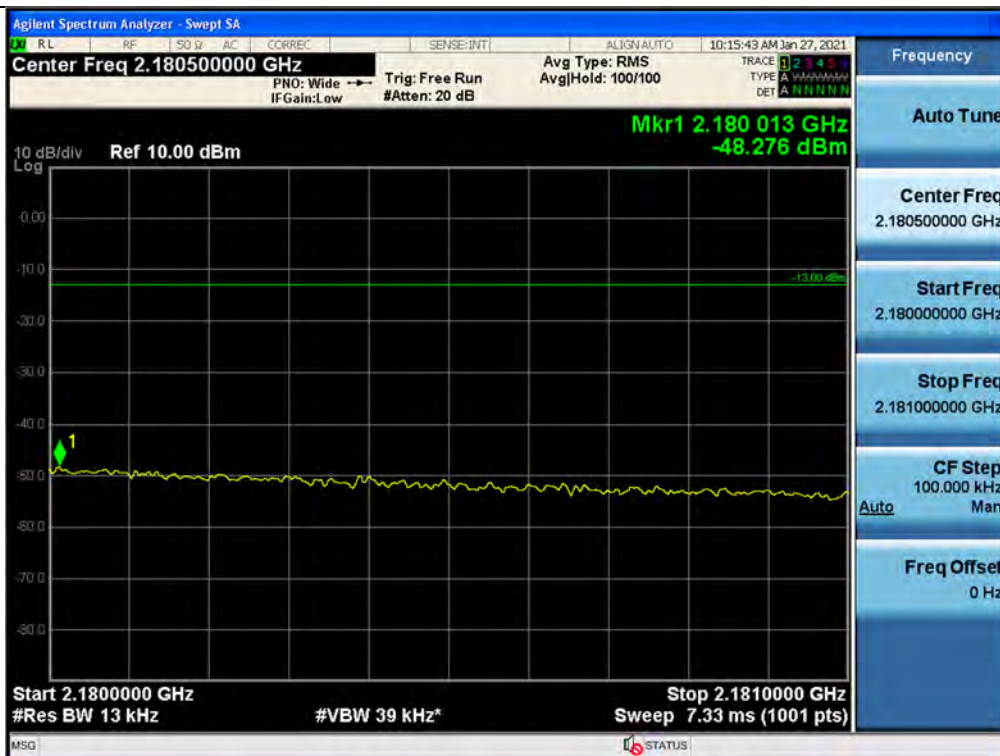

Out-of-band (two adjacent test signals) / AWS13 / Downlink / WCDMA / Lower

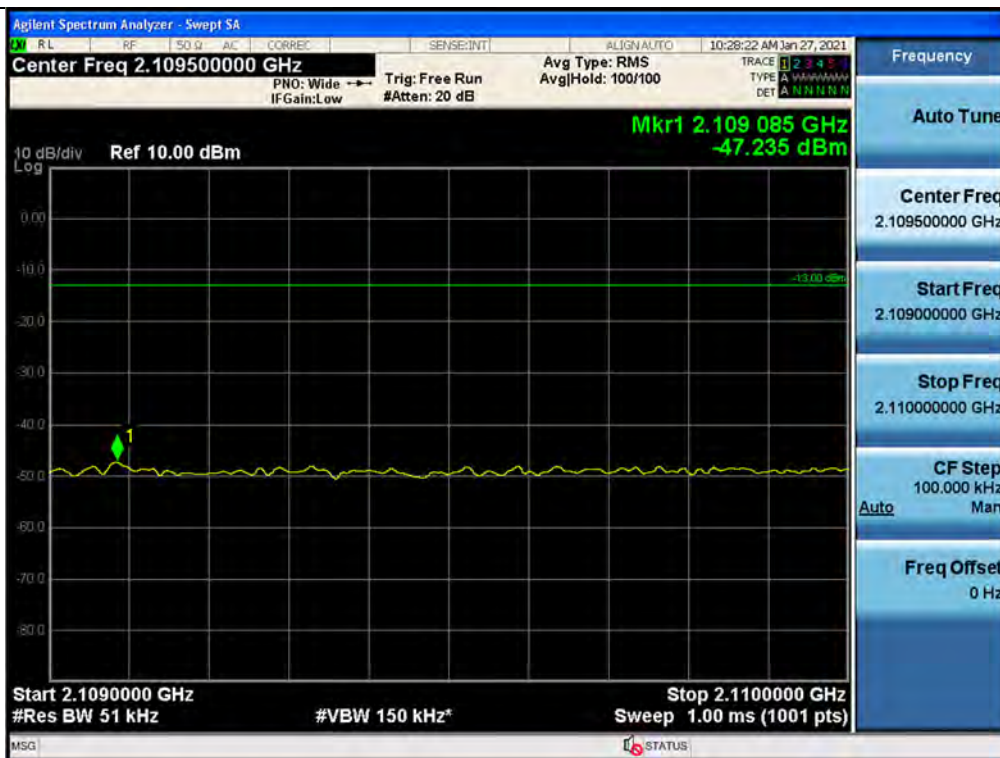


Out-of-band (two adjacent test signals) / AWS13 / Downlink / WCDMA / Upper

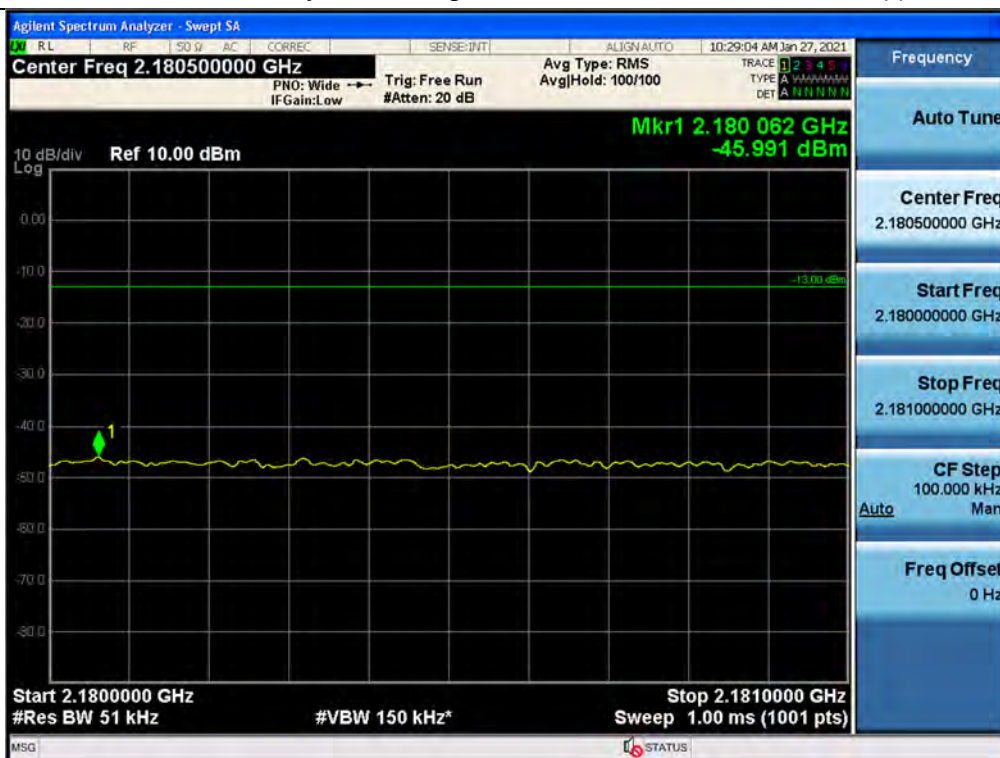




+3 dB above Out-of-band (two adjacent test signals) / AWS13 / Downlink / WCDMA / Lower

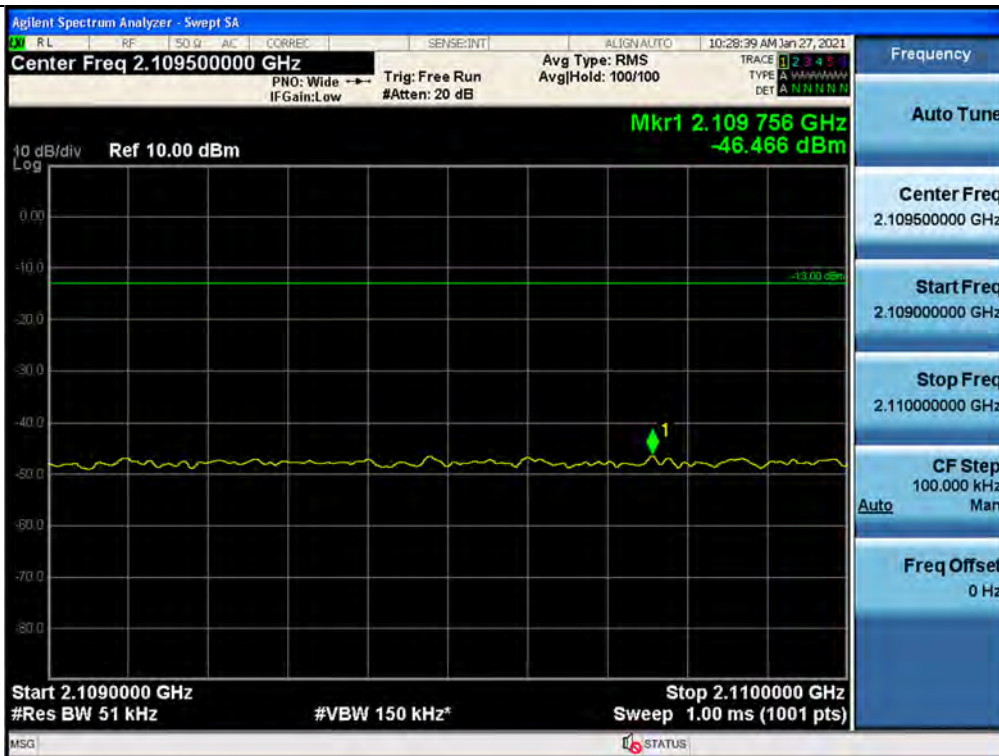


+3 dB above Out-of-band (two adjacent test signals) / AWS13 / Downlink / WCDMA / Upper

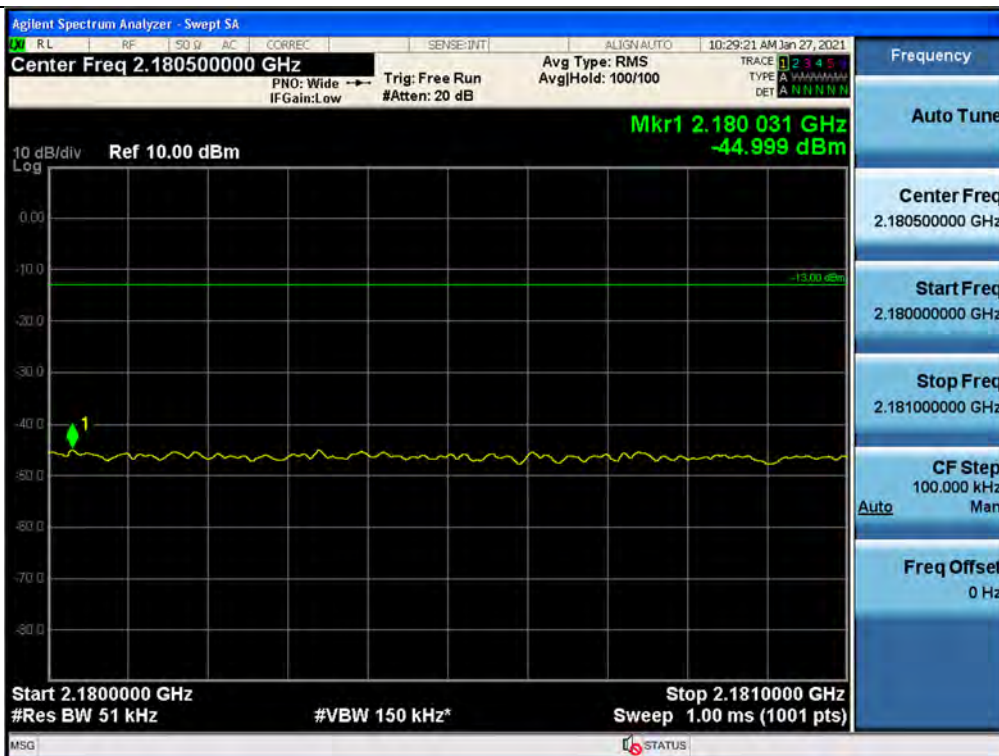




Out-of-band (two adjacent test signals) / AWS13 / Downlink / LTE 5 MHz / Lower

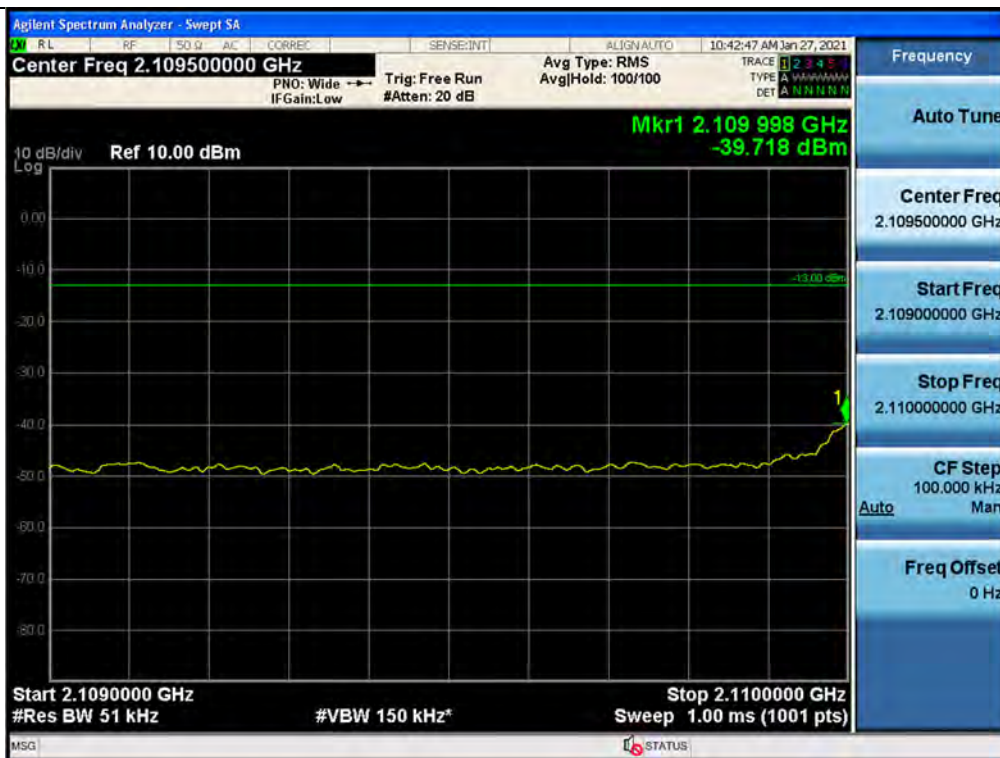


Out-of-band (two adjacent test signals) / AWS13 / Downlink / LTE 5 MHz / Upper




+3 dB above Out-of-band (two adjacent test signals) / AWS13 / Downlink / LTE 5 MHz / Lower

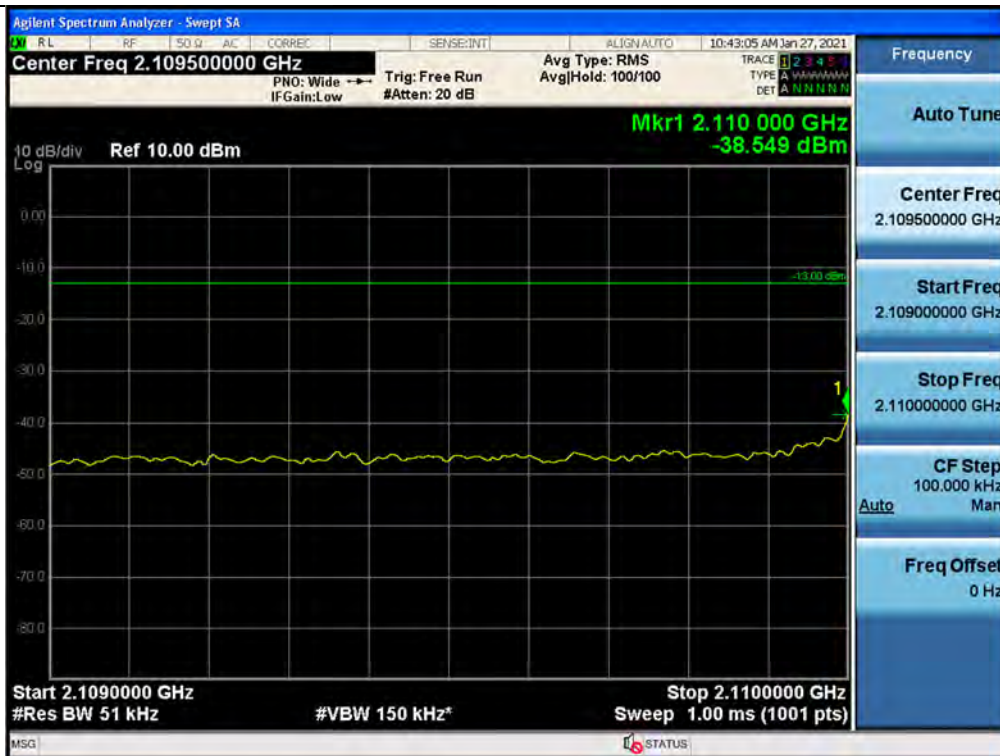


+3 dB above Out-of-band (two adjacent test signals) / AWS13 / Downlink / LTE 5 MHz / Upper

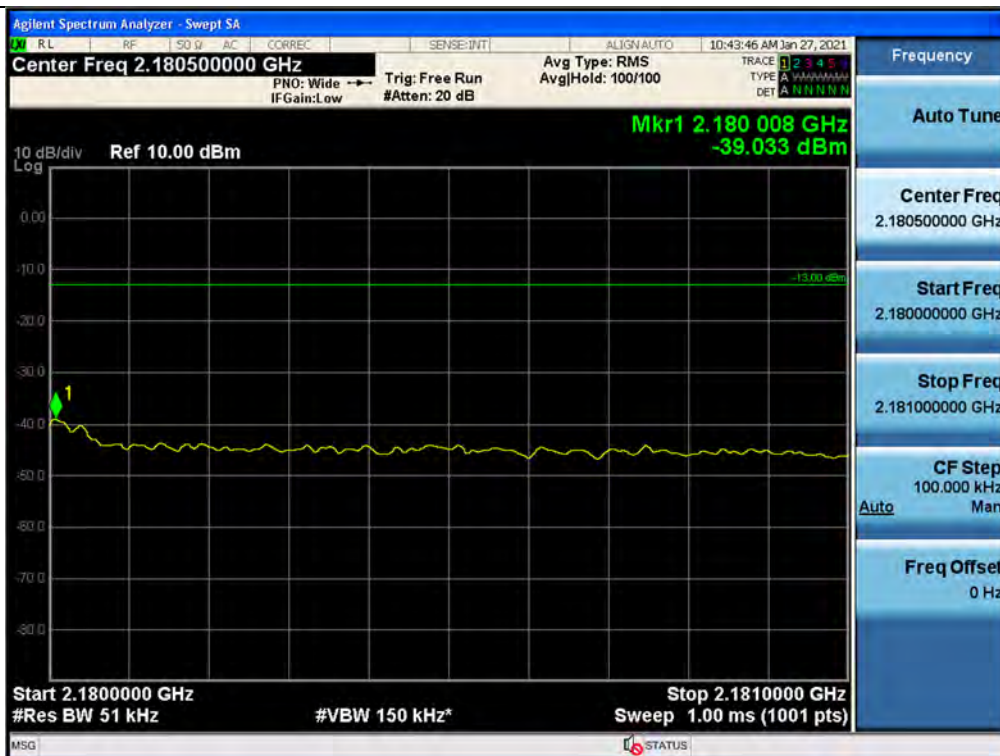

## Out-of-band (two adjacent test signals) / AWS13 / Downlink / LTE 10 MHz / Lower

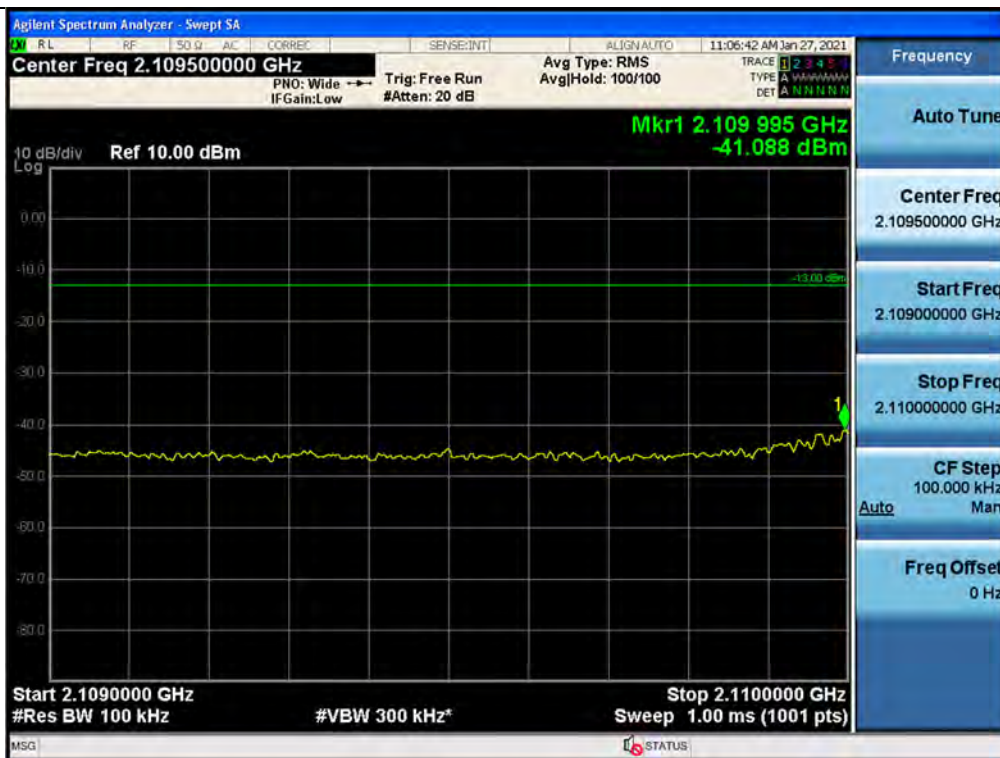


## Out-of-band (two adjacent test signals) / AWS13 / Downlink / LTE 10 MHz / Upper

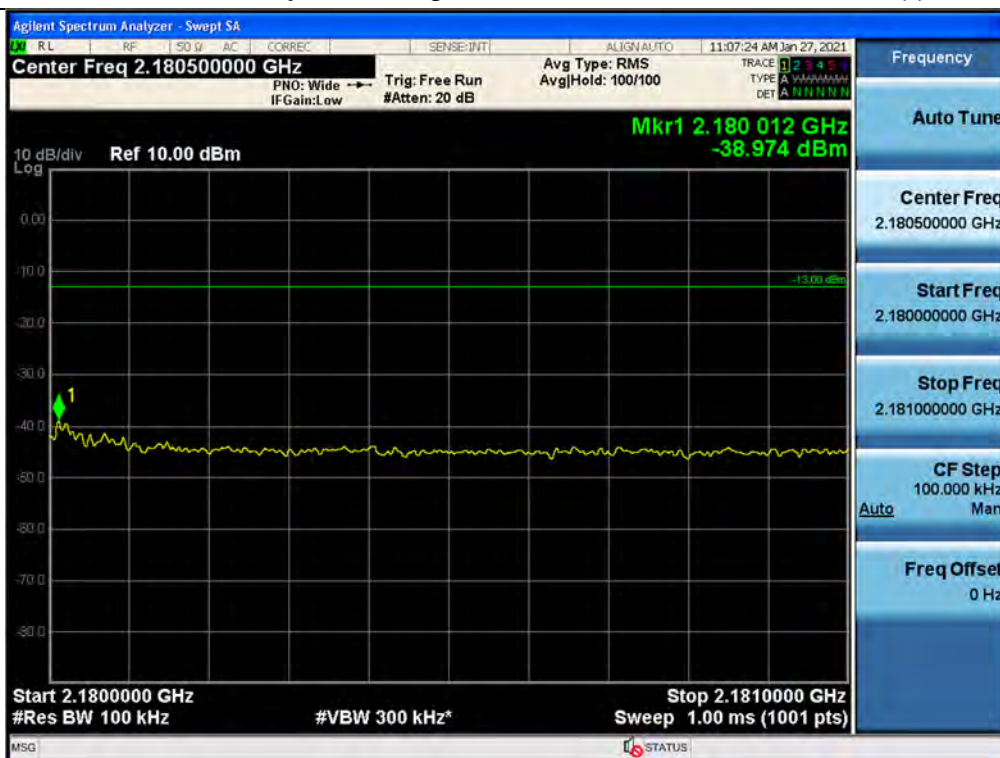




+3 dB above Out-of-band (two adjacent test signals) / AWS13 / Downlink / LTE 10 MHz / Lower

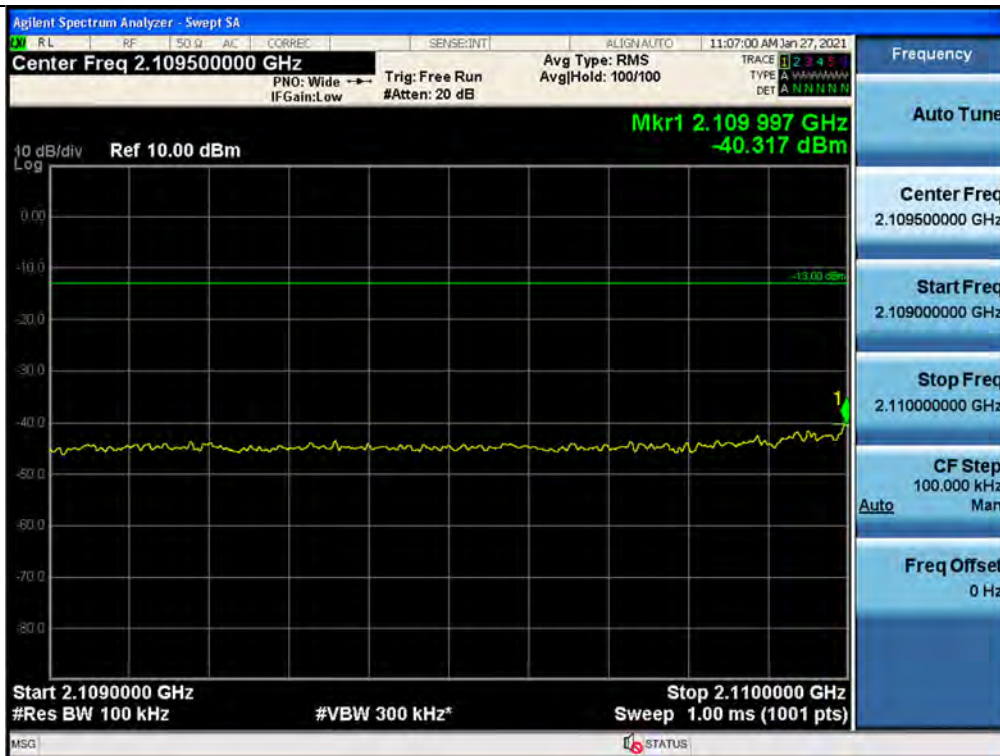


+3 dB above Out-of-band (two adjacent test signals) / AWS13 / Downlink / LTE 10 MHz / Upper

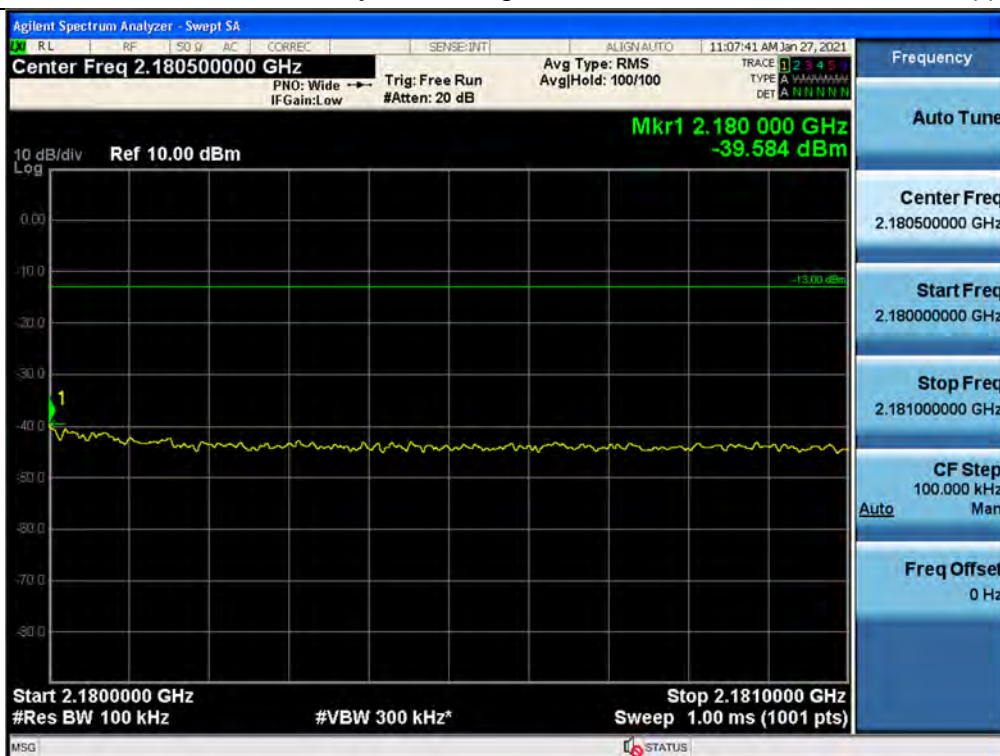



## Out-of-band (two adjacent test signals) / AWS13 / Downlink / LTE 20 MHz / Lower

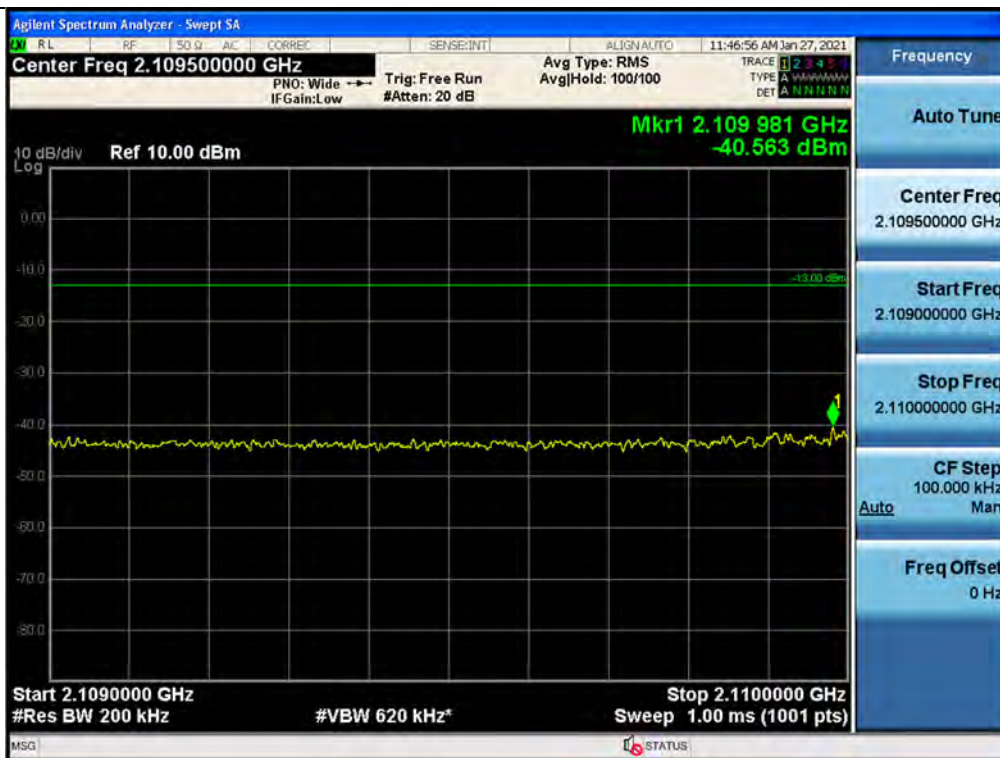

## Out-of-band (two adjacent test signals) / AWS13 / Downlink / LTE 20 MHz / Upper

