



FCC PART 15.407 TEST REPORT

For

Thundercomm Technology Co., Ltd

4F, Taixiang Building, 1A Longxiang Rd Haidian Dist, Beijing, China, 100191

FCC ID: 2AOHHTURBOXSOMD820

Report Type: Original Report	Product Type: Thundersoft TurboX-D820-SoM
Report Number: RSZ180710003-00D	
Report Date: 2018-08-22	
Rocky Kang	
Reviewed By: RF Engineer	<i>Rocky Kang</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP* or any agency of the Federal Government. * This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk

“*”

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	7
EQUIPMENT MODIFICATIONS	11
SUPPORT EQUIPMENT LIST AND DETAILS	11
EXTERNAL I/O CABLE.....	11
BLOCK DIAGRAM OF TEST SETUP	12
SUMMARY OF TEST RESULTS.....	13
TEST EQUIPMENT LIST	14
§1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	16
APPLICABLE STANDARD	16
RESULT	16
FCC §15.203 – ANTENNA REQUIREMENT	17
APPLICABLE STANDARD	17
ANTENNA CONNECTOR CONSTRUCTION	17
FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS	18
APPLICABLE STANDARD	18
EUT SETUP.....	18
EMI TEST RECEIVER SETUP.....	18
TEST PROCEDURE	18
TEST RESULTS SUMMARY	19
TEST DATA	19
§15.205 & §15.209 & §15.407(B) (1), (4), (6), (7) – UNDESIRABLE EMISSION	22
APPLICABLE STANDARD	22
EUT SETUP.....	22
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	23
TEST PROCEDURE	23
CORRECTED AMPLITUDE & MARGIN CALCULATION	24
TEST RESULTS SUMMARY	24
TEST DATA	24
§15.407(B) (1), (4) –OUT OF BAND EMISSION	42
APPLICABLE STANDARD	42
TEST PROCEDURE	42
TEST DATA	42
FCC §15.407(a) (1) – 26 dB & 6dB EMISSION BANDWIDTH.....	67
APPLICABLE STANDARD	67

TEST PROCEDURE	67
TEST DATA	67
FCC §15.407(a) (1) (3) – CONDUCTED TRANSMITTER OUTPUT POWER	128
APPLICABLE STANDARD	128
TEST PROCEDURE	128
TEST DATA	129
FCC §15.407(a) (1) (3) - POWER SPECTRAL DENSITY	132
APPLICABLE STANDARD	132
TEST PROCEDURE	132
TEST DATA	133

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Thundercomm Technology Co., Ltd*'s product, model number: *TurboX-D820* (FCC ID: 2AOHHTURBOXSOMD820) or the "EUT" in this report was an *Thundersoft TurboX-D820-SoM*, which was measured approximately: 5.0 cm (L) * 3.6 cm (W) * 0.4 cm (H), rated with input voltage: DC 4.0V.

Notes: This series products model: TurboX and TurboX-D820 are electrically identical; the differences between them are the model number. Model TurboX-D820 was selected for fully testing, the detailed information can be referred to the declaration which was stated and guaranteed by the applicant.

**All measurement and test data in this report was gathered from production sample serial number: 180710003 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2018-07-10.*

Objective

This type approval report is prepared on behalf of *Thundercomm Technology Co., Ltd* in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS&DSS submissions with FCC ID: 2AOHHTURBOXSOMD820.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		uncertainty
Occupied Channel Bandwidth		±5%
RF Output Power with Power meter		±0.5dB
RF conducted test with spectrum		±1.5dB
AC Power Lines Conducted Emissions		±1.95dB
Emissions, Radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		-30~60 °C
Humidity		±6%
Supply voltages		±0.4%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.

The device support 802.11a/n20/n40/ac20/ac40/ac80 modes.

For 5150-5250MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For 5725-5850MHz Band, 8 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785
151	5755	159	5795
153	5765	161	5805
155	5775	165	5825

The EUT 802.11a mode only support SISO mode,the others mode can support SISO and MIMO mode, pre-scan the output power of both modes, the result of both modes was almost identical, so the MIMO mode was chosen for testing.


EUT Exercise Software

“QRCT” software was used. Test frequencies and power level were configured as below:

U-NII	Mode	Channel Number	Frequency (MHz)	Rate (Mbps)	Power Level
5150 – 5250MHz	802.11 a	CH36	5180	6	12
		CH40	5200	6	12
		CH48	5240	6	12
	802.11 n20	CH36	5180	MCS0	12
		CH40	5200	MCS0	12
		CH48	5240	MCS0	12
	802.11 n40	CH38	5190	MCS0	11
		CH46	5230	MCS0	11
	802.11 ac20	CH36	5180	MCS0	12
		CH40	5200	MCS0	12
		CH48	5240	MCS0	12
	802.11 ac40	CH38	5190	MCS0	11
		CH46	5230	MCS0	11
	802.11 ac80	CH42	5210	MCS0	11
5725 – 5850MHz	802.11 a	CH149	5745	6	12
		CH157	5785	6	12
		CH165	5825	6	12
	802.11 n20	CH149	5745	MCS0	12
		CH157	5785	MCS0	12
		CH165	5825	MCS0	12
	802.11 n40	CH151	5755	MCS0	11
		CH159	5795	MCS0	11
	802.11 ac20	CH149	5745	MCS0	12
		CH157	5785	MCS0	12
		CH165	5825	MCS0	12
	802.11 ac40	CH151	5755	MCS0	11
		CH159	5795	MCS0	11
	802.11 ac80	CH155	5775	MCS0	11


Duty cycle
5150-5250 MHz

802.11a mode

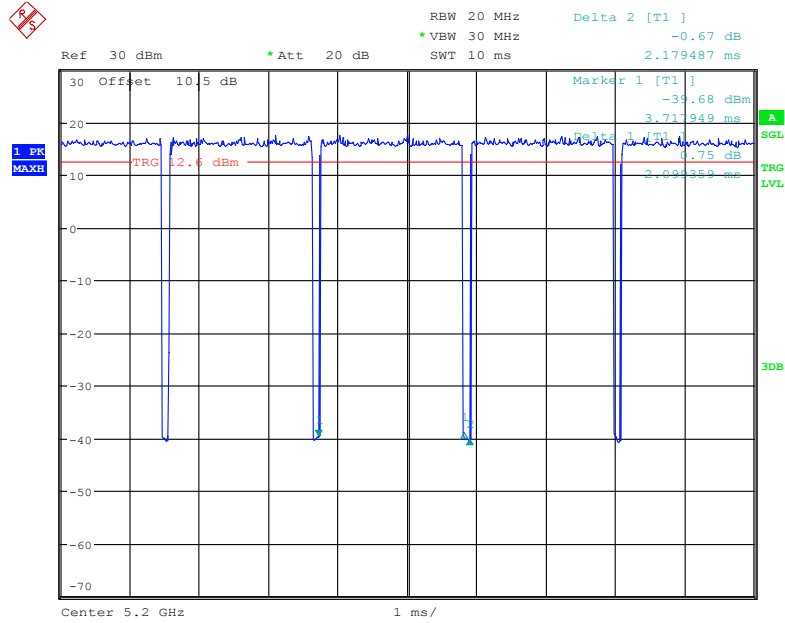


Date: 14.AUG.2018 21:36:35

802.11n20 mode

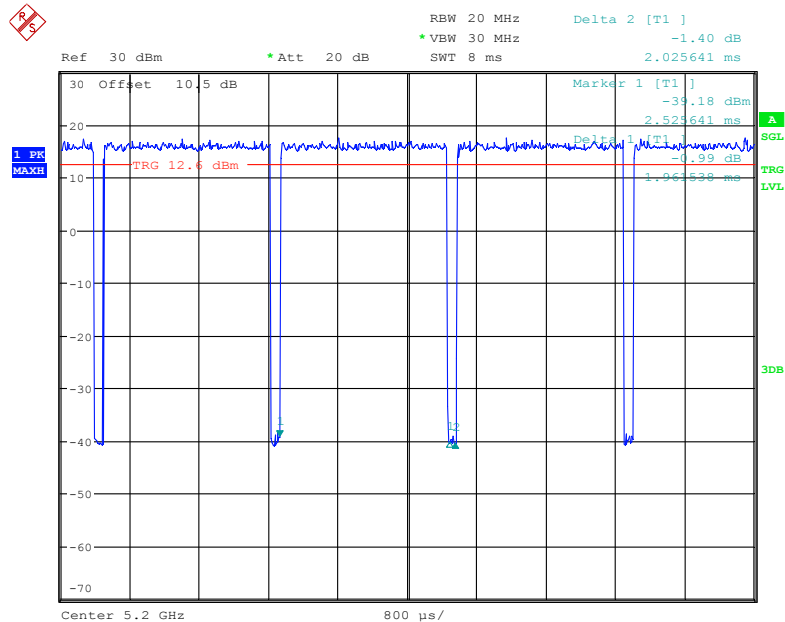


Date: 14.AUG.2018 21:42:03

802.11n40 Mode

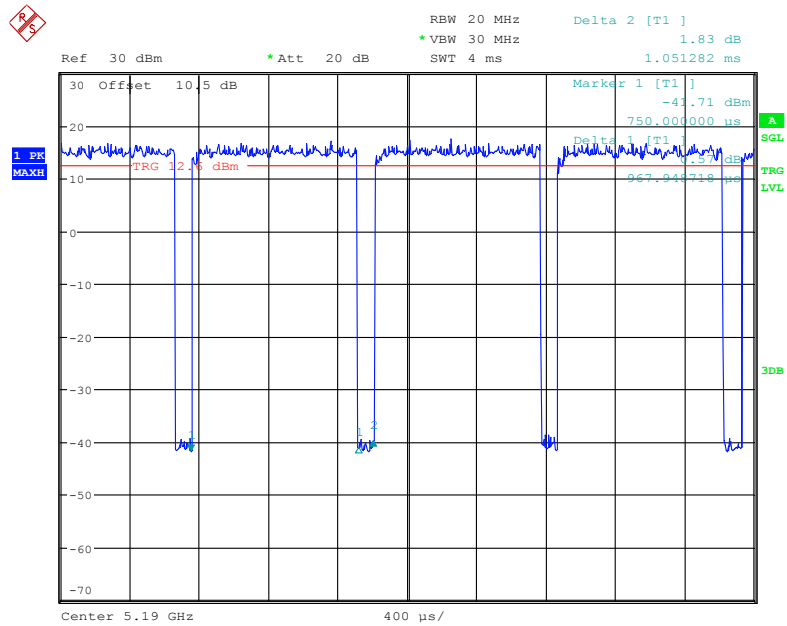


Date: 14.AUG.2018 21:44:09

802.11ac20 Mode

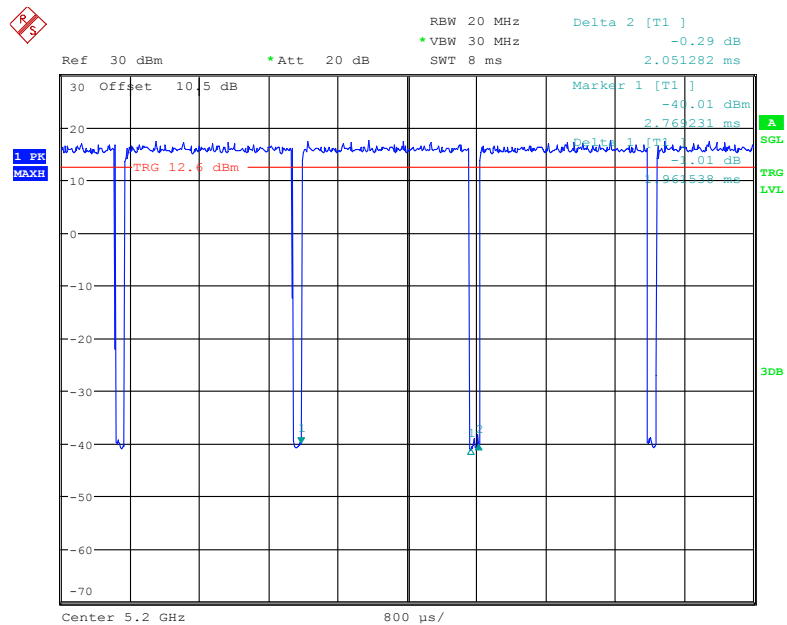


Date: 14.AUG.2018 21:43:00

802.11ac40 Mode

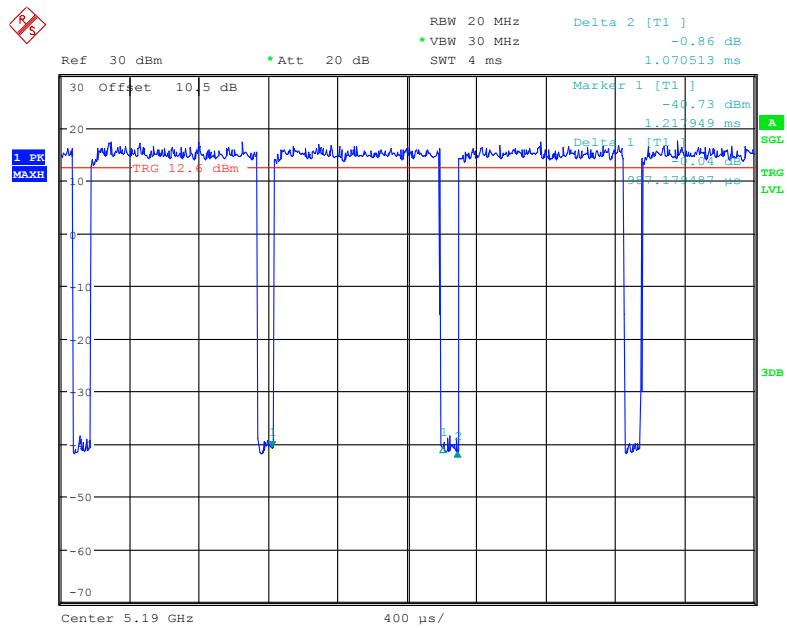

Date: 14.AUG.2018 21:44:58

802.11ac80 Mode

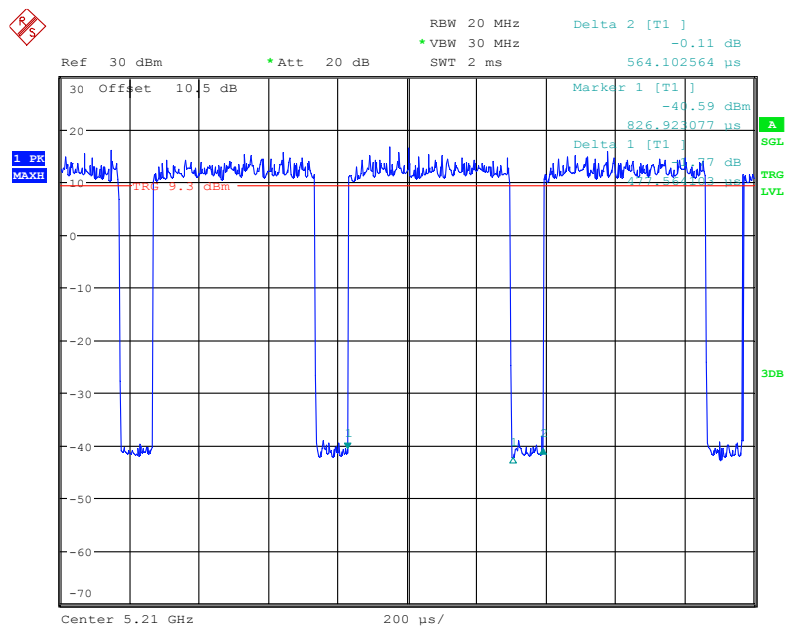

Date: 14.AUG.2018 21:46:07

Band	Duty Cycle (%)	T(ms)	1/T(kHz)	VBW Setting	Dutycycle factor
802.11a	96.32	2.099	0.476	1kHz	0.16
802.11n20	95.62	1.962	0.510	1kHz	0.14
802.11n40	96.84	0.968	1.033	3kHz	0.36
802.11ac20	92.07	1.962	0.510	1kHz	0.19
802.11ac40	92.22	0.987	1.013	3kHz	0.35
802.11ac80	84.66	0.478	2.092	3kHz	0.72

Note: The dutycycle of band 5725-5850MHz is same to band 5150-5250MHz.

Duty cycle factor = $10\log(1/\text{duty cycle})$

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Thundersoft	Testing Jig	N/A	N/A
STH	Adapter	P24120200	N/A
BULL	Socket	GN-415K	5503290068073
Compaq	Laptop	CQ45	CND9524JMW
N/A	Antenna 0	N/A	N/A
N/A	Antenna 1	N/A	N/A

External I/O Cable

Cable Description	Length (m)	From/Port	To
Unshielded un-detachable AC cable	1.2	Socket	mains
Unshielded un-detachable DC cable	1.4	Adapter	Testing Jig
Unshielded un-detachable DC cable	1.4	Testing Jig	Laptop

Block Diagram of Test Setup

For Conducted Emission:

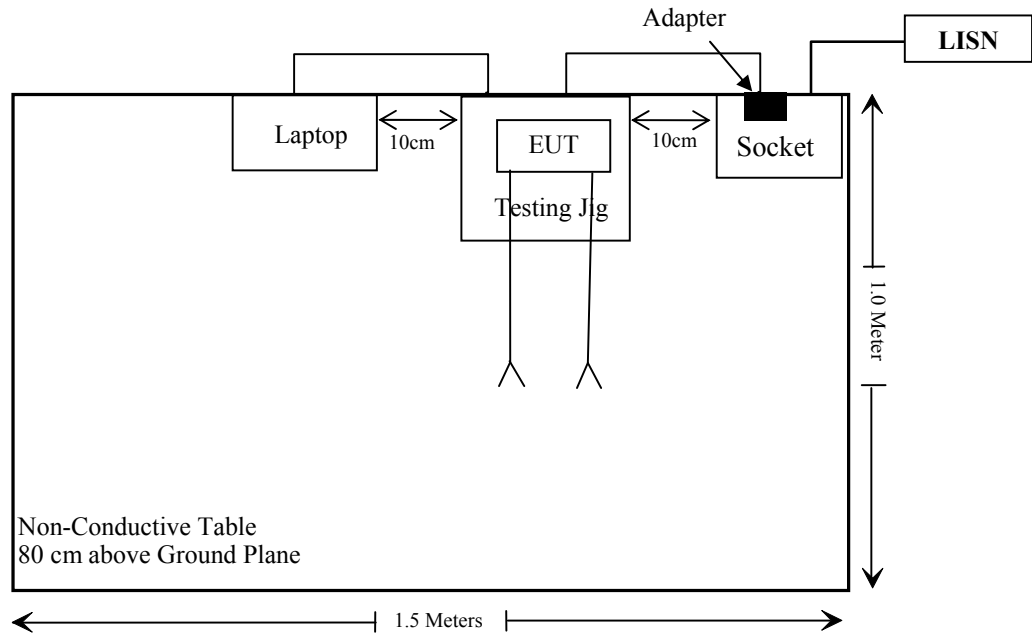

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 (b) (1) & §2.1091	Maximum Permissible exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.407(b)(6)& §15.207(a)	Conducted Emissions	Compliance
§15.205& §15.209 &§15.407(b) (1), (4),(7)	Undesirable Emission& Restricted Bands	Compliance
§15.407(b) (1),(4)	Out Of Band Emission	Compliance
§15.407(a) (1), (5),(e)	26 dB Emission Bandwidth & 6dB Bandwidth	Compliance
§15.407(a)(1),(3)	Conducted Transmitter Output Power	Compliance
§15.407 (a)(1),(3)	Power Spectral Density	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conducted test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2018-07-11	2019-07-11
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2017-12-21	2018-12-21
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2018-05-21	2018-11-19
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
N/A	Conducted Emission Cable	N/A	UF A210B-1-0720-504504	2018-05-12	2018-11-12
Radiated Emission Test					
A.H.System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Rohde & Schwarz	Signal Analyzer	FSEM	845987/005	2018-06-23	2019-06-23
Agilent	Spectrum Analyzer	8564E	3943A01781	2018-01-04	2019-01-04
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017-12-22	2020-12-21
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2018-05-21	2019-05-21
HP	Amplifier	HP8447E	1937A01046	2018-05-21	2018-11-19
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2018-01-11	2019-01-11
UTiFLEX MICRO-C0AX	RF Cable	UFA147A-2362-100100	MFR64639 231029-003	2018-04-01	2018-10-01
Ducommun technologies	RF Cable	104PEA	218124002	2018-05-21	2018-11-19
Ducommun technologies	RF Cable	RG-214	1	2018-05-21	2018-11-19
Ducommun technologies	RF Cable	RG-214	2	2018-05-22	2018-11-22
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2017-12-06	2020-12-05
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-04	2017-12-06	2020-12-05
Ducommun Technologies	Pre-amplifier	ALN-22093530-01	991373-01	2018-08-03	2019-08-03

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSU26	200120	2017-12-24	2018-12-24
Agilent	USB Wideband Power Meter	U2021XA	MY54250003	2018-03-21	2019-03-21
Ducommun technologies	RF Cable	RG-214	3	Each Time	
WEINSCHTEL	3dB Attenuator	N/A	N/A	Each Time	

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

§1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)**Applicable Standard**

According to subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Result**Calculated Formulary:**

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm²)	MPE Limit (mW/cm²)
	(dBi)	(numeric)	(dBm)	(mW)			
5150-5250	5	3.16	13.5	22.39	20	0.014	1.0
5725-5850	5	3.16	13.5	22.39	20	0.014	1.0

Simultaneous transmitting consideration: (referring to the DSS report, the highest MPE for Bluetooth is 0.007mW/cm²)

The ratio=MPE/limit_{DSS}+MPE/limit_{NII}=0.007+0.014=0.021 < 1.0, simultaneous exposure is not required.

Note:

- 1) The conducted power is the tune-up power of the Max Conducted Output Power.
- 2) 2.4GHz and 5GHz WiFi can't transmit simultaneously for this device.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons, and the max available antenna gain is 5dBi.

Result: Compliance

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407 (a), if the transmitting antennas of directional gain greater than 6dBi are used, the transmit power and power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has two PCB antennas arrangement, which were connected to board with an unique connector and the antenna gain is 5 dBi, one for Bluetooth and wifi(antenna 0), the other for wifi only(antenna 1), fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207, §15.407(b) (6)

EUT Setup

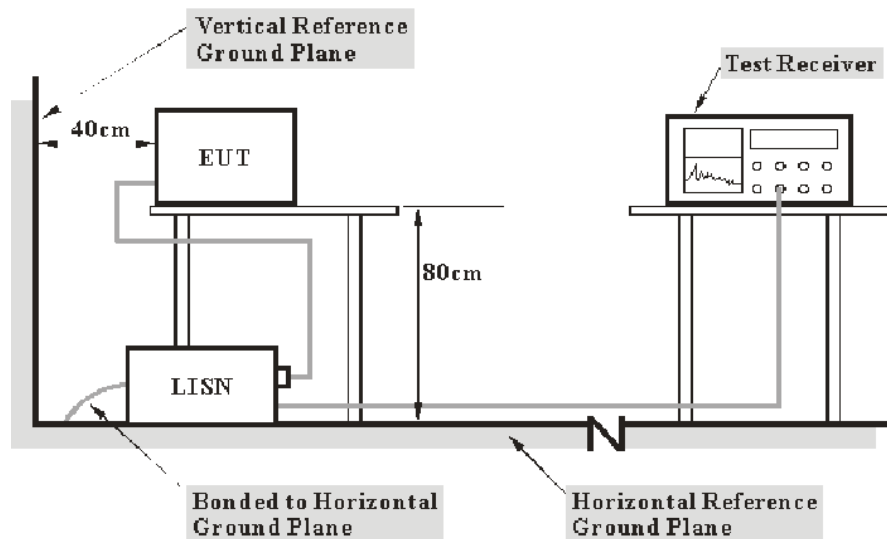

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BACL, $U_{(L_m)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.


Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Tracy Hu on 2018-08-15.

EUT operation mode: Transmitting (worst case is 802.11a mode 5180 MHz)

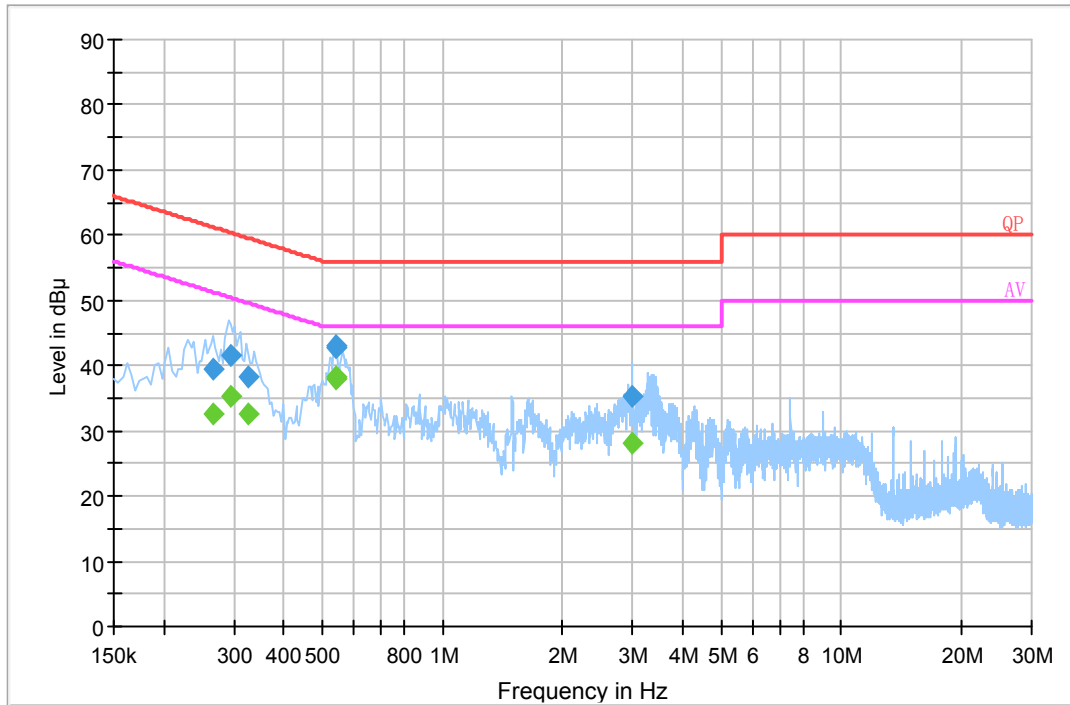AC 120V/60 Hz, Line:

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.265500	39.5	19.8	61.3	21.8	QP
0.294500	41.6	19.8	60.4	18.8	QP
0.325170	38.3	19.8	59.6	21.3	QP
0.537930	42.8	19.7	56.0	13.2	QP
0.537990	42.9	19.7	56.0	13.1	QP
2.985150	35.4	19.9	56.0	20.6	QP
0.265500	32.5	19.8	51.3	18.8	Ave.
0.294500	35.2	19.8	50.4	15.2	Ave.
0.325170	32.7	19.8	49.6	16.9	Ave.
0.537930	38.3	19.7	46.0	7.7	Ave.
0.537990	38.0	19.7	46.0	8.0	Ave.
2.985150	28.0	19.9	46.0	18.0	Ave.

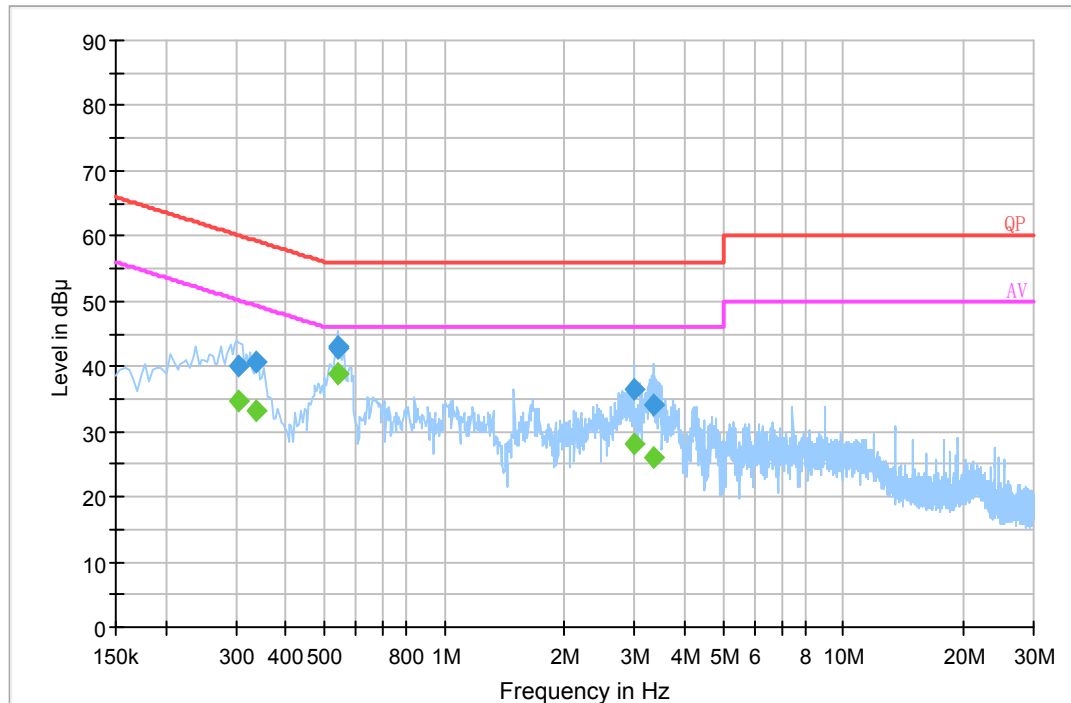AC120V, 60 Hz, Neutral:

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.305470	40.1	19.8	60.1	20.0	QP
0.336870	40.6	19.7	59.3	18.7	QP
0.537930	42.8	19.8	56.0	13.2	QP
0.537990	43.0	19.8	56.0	13.0	QP
2.989150	36.4	19.9	56.0	19.6	QP
3.327690	34.2	19.9	56.0	21.8	QP
0.305470	34.8	19.8	50.1	15.3	Ave.
0.336870	33.1	19.7	49.3	16.2	Ave.
0.537930	38.9	19.8	46.0	7.1	Ave.
0.537990	38.9	19.8	46.0	7.1	Ave.
2.989150	28.1	19.9	46.0	17.9	Ave.
3.327690	26.2	19.9	46.0	19.8	Ave.

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

§15.205 & §15.209 & §15.407(B) (1), (4), (6), (7) – UNDESIRABLE EMISSION**Applicable Standard**

FCC §15.407 (b) (1), (4), (6), (7); §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.


(4) For transmitters operating in the 5.725-5.85 GHz band:


(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

EUT Setup

Below 1 GHz:

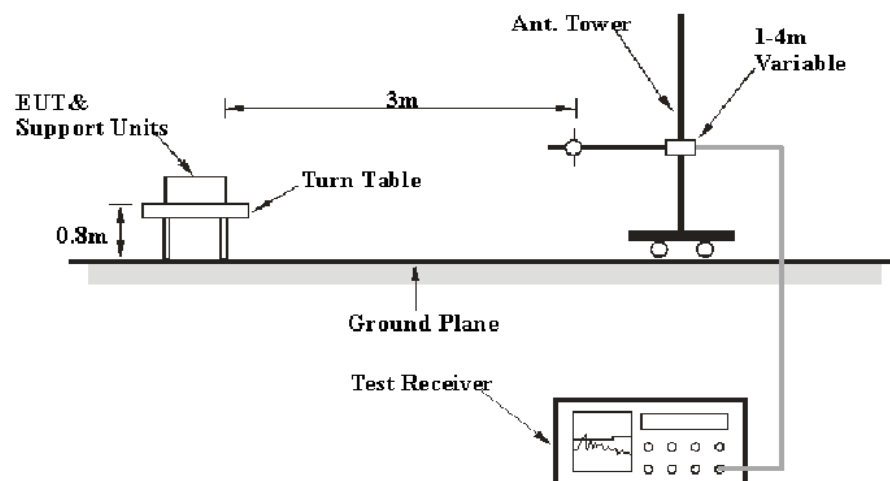

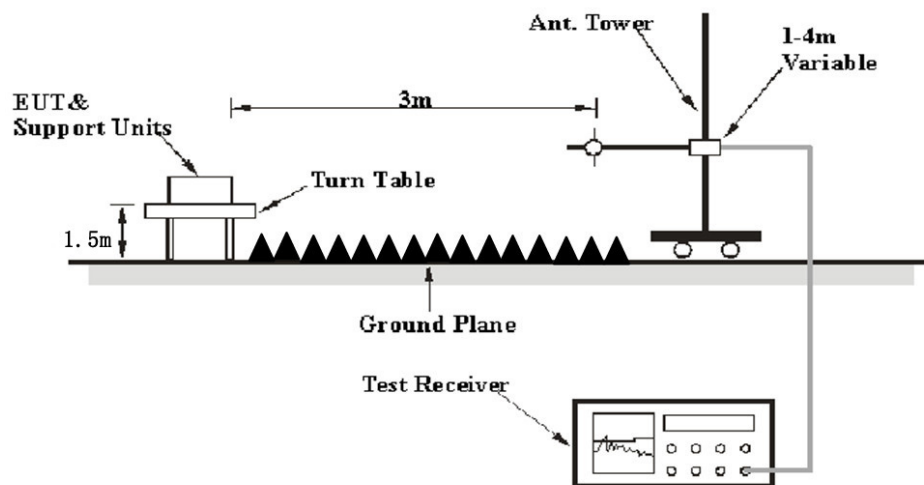Above 1 GHz:

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure**Radiated Spurious Emission**

During the radiated emission test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all the installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Tracy Hu on 2018-08-22.

EUT operation mode: Transmitting

Note: For wifi 802.11a mode, the worst case is antenna 1, for others mode, the two antennas transmitting simultaneously.

30 MHz – 1 GHz: (worst case is 802.11a mode 5180 MHz)

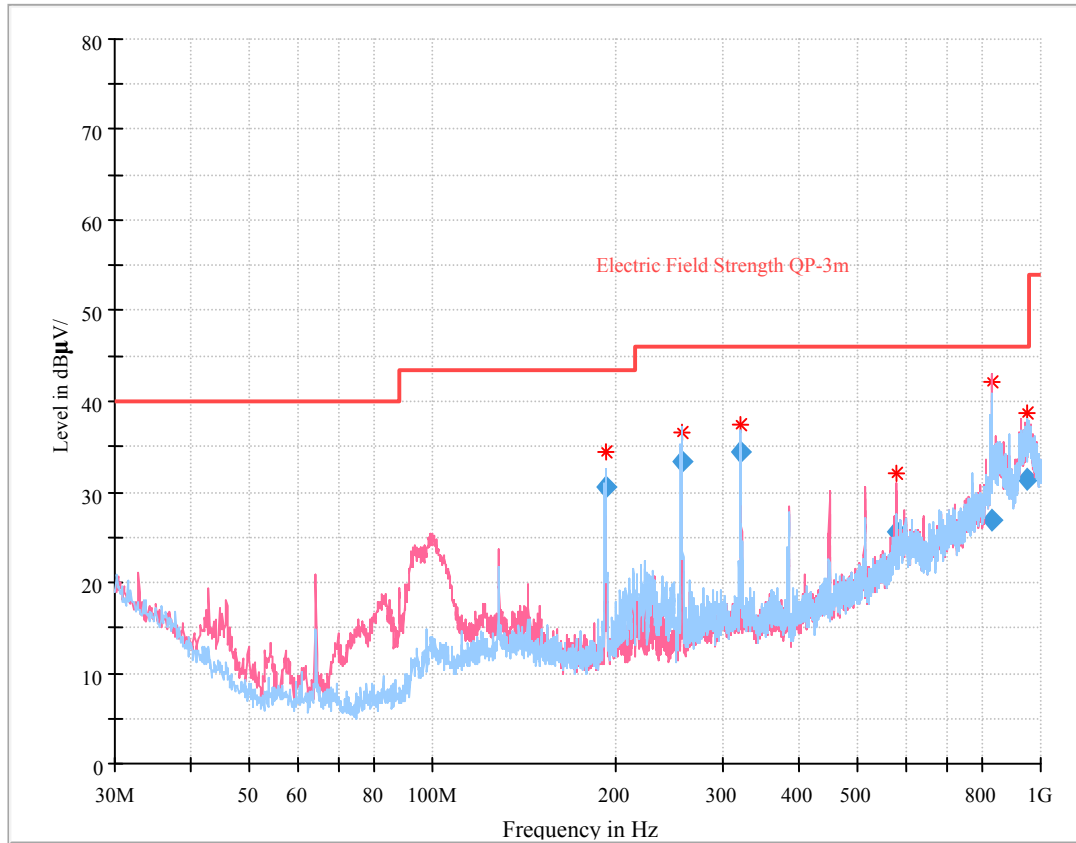

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
192.743625	30.45	182.0	H	350.0	-14.8	43.50	13.05
256.361375	33.30	124.0	H	307.0	-13.7	46.00	12.70
320.554000	34.36	113.0	H	333.0	-10.7	46.00	11.64
578.022000	25.57	100.0	V	195.0	-3.3	46.00	20.43
829.278375	26.84	191.0	V	146.0	4.8	46.00	19.16
952.794250	31.34	223.0	H	233.0	9.7	46.00	14.66

30 MHz ~ 40 GHz:**5150-5250 MHz:**

Frequency (MHz)	Receiver		Turntable	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	PK/QP/Ave.	Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11a									
5180 MHz									
5180.00	65.53	PK	359	2.0	H	41.80	107.33	/	/
5180.00	50.17	Ave.	359	2.0	H	41.80	91.97	/	/
5180.00	62.35	PK	157	2.3	V	41.80	104.15	/	/
5180.00	48.33	Ave.	157	2.3	V	41.80	90.13	/	/
5149.00	53.24	PK	293	1.4	H	6.90	60.14	74.00	13.86
5149.00	39.07	Ave.	293	1.4	H	6.90	45.97	54.00	8.03
5356.00	52.79	PK	36	1.2	H	6.93	59.72	74.00	14.28
5356.00	38.89	Ave.	36	1.2	H	6.93	45.82	54.00	8.18
10360.00	39.54	PK	243	1.6	H	15.66	55.20	74.00	18.80
10360.00	24.25	Ave.	243	1.6	H	15.66	39.91	54.00	14.09
5200 MHz									
5200.00	65.85	PK	129	2.0	H	41.80	107.65	/	/
5200.00	52.74	Ave.	129	2.0	H	41.80	94.54	/	/
5200.00	61.74	PK	93	1.0	V	41.80	103.54	/	/
5200.00	48.85	Ave.	93	1.0	V	41.80	90.65	/	/
10400.00	38.76	PK	345	1.7	H	16.70	55.46	74.00	18.54
10400.00	23.89	Ave.	345	1.7	H	16.70	40.59	54.00	13.41
5240 MHz									
5240.00	65.31	PK	12	2.5	H	41.80	107.11	/	/
5240.00	51.96	Ave.	12	2.5	H	41.80	93.76	/	/
5240.00	61.70	PK	56	2.5	V	41.80	103.50	/	/
5240.00	48.62	Ave.	56	2.5	V	41.80	90.42	/	/
5149.00	53.64	PK	149	1.9	H	6.90	60.54	74.00	13.46
5149.00	39.16	Ave.	149	1.9	H	6.90	46.06	54.00	7.94
5351.00	53.66	PK	255	2.3	H	6.93	60.59	74.00	13.41
5351.00	38.98	Ave.	255	2.3	H	6.93	45.91	54.00	8.09
10480.00	38.73	PK	230	2.4	H	16.56	55.29	74.00	18.71
10480.00	23.97	Ave.	230	2.4	H	16.56	40.53	54.00	13.47

Frequency (MHz)	Receiver		Turntable	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	PK/QP/Ave.	Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11n20									
5180 MHz									
5180.00	64.56	PK	151	1.1	H	41.80	106.36	/	/
5180.00	51.92	Ave.	151	1.1	H	41.80	93.72	/	/
5180.00	61.39	PK	226	2.2	V	41.80	103.19	/	/
5180.00	47.99	Ave.	226	2.2	V	41.80	89.79	/	/
5150.00	54.13	PK	252	1.4	H	6.60	60.73	74.00	13.27
5150.00	39.29	Ave.	252	1.4	H	6.60	45.89	54.00	8.11
5351.00	53.31	PK	228	1.7	H	6.93	60.24	74.00	13.76
5351.00	39.02	Ave.	228	1.7	H	6.93	45.95	54.00	8.05
10360.00	37.98	PK	254	1.1	H	15.66	53.64	74.00	20.36
10360.00	23.45	Ave.	254	1.1	H	15.66	39.11	54.00	14.89
5200 MHz									
5200.00	64.66	PK	128	1.9	H	41.80	106.46	/	/
5200.00	52.05	Ave.	128	1.9	H	41.80	93.85	/	/
5200.00	61.79	PK	234	1.3	V	41.80	103.59	/	/
5200.00	49.04	Ave.	234	1.3	V	41.80	90.84	/	/
10400.00	38.15	PK	68	2.2	H	15.66	53.81	74.00	20.19
10400.00	24.07	Ave.	68	2.2	H	15.66	39.73	54.00	14.27
5240 MHz									
5240.00	65.07	PK	166	2.1	H	41.80	106.87	/	/
5240.00	52.29	Ave.	166	2.1	H	41.80	94.09	/	/
5240.00	62.34	PK	307	2.1	V	41.80	104.14	/	/
5240.00	49.47	Ave.	307	2.1	V	41.80	91.27	/	/
5150.00	53.54	PK	73	1.5	H	6.60	60.14	74.00	13.86
5150.00	39.34	Ave.	73	1.5	H	6.60	45.94	54.00	8.06
5351.00	53.35	PK	69	1.9	H	6.93	60.28	74.00	13.72
5351.00	39.10	Ave.	69	1.9	H	6.93	46.03	54.00	7.97
10480.00	38.24	PK	324	1.4	H	16.56	54.80	74.00	19.20
10480.00	24.11	Ave.	324	1.4	H	16.56	40.67	54.00	13.33

Frequency (MHz)	Receiver		Turntable	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	PK/QP/Ave.	Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11n40									
5190 MHz									
5190.00	61.10	PK	257	1.1	H	41.80	102.90	/	/
5190.00	50.64	Ave.	257	1.1	H	41.80	92.44	/	/
5190.00	58.04	PK	271	1.6	V	41.80	99.84	/	/
5190.00	47.74	Ave.	271	1.6	V	41.80	89.54	/	/
5150.00	53.59	PK	113	1.0	H	6.60	60.19	74.00	13.81
5150.00	39.75	Ave.	113	1.0	H	6.60	46.35	54.00	7.65
5350.00	53.15	PK	97	2.3	H	6.93	60.08	74.00	13.92
5350.00	38.86	Ave.	97	2.3	H	6.93	45.79	54.00	8.21
10380.00	38.57	PK	320	1.6	H	15.66	54.23	74.00	19.77
10380.00	23.46	Ave.	320	1.6	H	15.66	39.12	54.00	14.88
5230 MHz									
5230.00	62.03	PK	359	2.4	H	41.80	103.83	/	/
5230.00	51.37	Ave.	359	2.4	H	41.80	93.17	/	/
5230.00	58.75	PK	135	1.5	V	41.80	100.55	/	/
5230.00	48.04	Ave.	135	1.5	V	41.80	89.84	/	/
5146.00	53.29	PK	326	1.1	H	6.90	60.19	74.00	13.81
5146.00	38.89	Ave.	326	1.1	H	6.90	45.79	54.00	8.21
5350.00	53.36	PK	247	1.3	H	6.93	60.29	74.00	13.71
5350.00	39.00	Ave.	247	1.3	H	6.93	45.93	54.00	8.07
10460.00	39.87	PK	250	1.2	H	16.56	56.43	74.00	17.57
10460.00	24.19	Ave.	250	1.2	H	16.56	40.75	54.00	13.25

Frequency (MHz)	Receiver		Turntable	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	PK/QP/Ave.	Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11ac20									
5180 MHz									
5180.00	64.51	PK	197	1.1	H	41.80	106.31	/	/
5180.00	53.25	Ave.	197	1.1	H	41.80	95.05	/	/
5180.00	61.70	PK	256	2.0	V	41.80	103.50	/	/
5180.00	49.67	Ave.	256	2.0	V	41.80	91.47	/	/
5150.00	54.12	PK	141	1.9	H	6.60	60.72	74.00	13.28
5150.00	39.30	Ave.	141	1.9	H	6.60	45.90	54.00	8.10
5350.00	53.25	PK	239	2.4	H	6.93	60.18	74.00	13.82
5350.00	38.92	Ave.	239	2.4	H	6.93	45.85	54.00	8.15
10360.00	38.76	PK	53	2.0	H	15.66	54.42	74.00	19.58
10360.00	24.35	Ave.	53	2.0	H	15.66	40.01	54.00	13.99
5200 MHz									
5200.00	64.75	PK	291	2.1	H	41.80	106.55	/	/
5200.00	52.89	Ave.	291	2.1	H	41.80	94.69	/	/
5200.00	61.88	PK	50	2.1	V	41.80	103.68	/	/
5200.00	49.74	Ave.	50	2.1	V	41.80	91.54	/	/
10400.00	39.08	PK	341	1.5	H	15.66	54.74	74.00	19.26
10400.00	24.37	Ave.	341	1.5	H	15.66	40.03	54.00	13.97
5240 MHz									
5240.00	64.59	PK	75	1.3	H	41.80	106.39	/	/
5240.00	52.39	Ave.	75	1.3	H	41.80	94.19	/	/
5240.00	62.00	PK	270	1.6	V	41.80	103.80	/	/
5240.00	49.62	Ave.	270	1.6	V	41.80	91.42	/	/
5150.00	53.56	PK	242	2.4	H	6.60	60.16	74.00	13.84
5150.00	39.25	Ave.	242	2.4	H	6.60	45.85	54.00	8.15
5391.00	53.26	PK	161	1.9	H	6.93	60.19	74.00	13.81
5391.00	39.02	Ave.	161	1.9	H	6.93	45.95	54.00	8.05
10480.00	39.55	PK	252	2.0	H	16.56	56.11	74.00	17.89
10480.00	24.38	Ave.	252	2.0	H	16.56	40.94	54.00	13.06

Frequency (MHz)	Receiver		Turntable	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	PK/QP/Ave.	Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11ac40									
5190 MHz									
5190.00	61.39	PK	25	2.0	H	41.80	103.19	/	/
5190.00	50.14	Ave.	25	2.0	H	41.80	91.94	/	/
5190.00	57.70	PK	25	1.9	V	41.80	99.50	/	/
5190.00	46.99	Ave.	25	1.9	V	41.80	88.79	/	/
5149.00	60.03	PK	235	1.5	H	6.90	66.93	74.00	7.07
5149.00	39.36	Ave.	235	1.5	H	6.90	46.26	54.00	7.74
5391.00	53.86	PK	201	1.3	H	6.93	60.79	74.00	13.21
5391.00	39.11	Ave.	201	1.3	H	6.93	46.04	54.00	7.96
10380.00	39.61	PK	133	1.2	H	15.66	55.27	74.00	18.73
10380.00	24.58	Ave.	133	1.2	H	15.66	40.24	54.00	13.76
5230 MHz									
5230.00	62.21	PK	7	1.9	H	41.80	104.01	/	/
5230.00	50.45	Ave.	7	1.9	H	41.80	92.25	/	/
5230.00	58.75	PK	181	2.3	V	41.80	100.55	/	/
5230.00	47.61	Ave.	181	2.3	V	41.80	89.41	/	/
5149.00	53.55	PK	152	2.2	H	6.90	60.45	74.00	13.55
5149.00	39.02	Ave.	152	2.2	H	6.90	45.92	54.00	8.08
5399.00	54.03	PK	51	2.4	H	6.93	60.96	74.00	13.04
5399.00	39.20	Ave.	51	2.4	H	6.93	46.13	54.00	7.87
10460.00	39.58	PK	79	1.5	H	16.56	56.14	74.00	17.86
10460.00	24.71	Ave.	79	1.5	H	16.56	41.27	54.00	12.73
802.11ac80									
5210 MHz									
5210.00	58.71	PK	252	1.8	H	41.80	100.51	/	/
5210.00	48.90	Ave.	252	1.8	H	41.80	90.70	/	/
5210.00	55.74	PK	103	2.0	V	41.80	97.54	/	/
5210.00	45.52	Ave.	103	2.0	V	41.80	87.32	/	/
5150.00	54.66	PK	325	1.5	H	6.60	61.26	74.00	12.74
5150.00	40.02	Ave.	325	1.5	H	6.60	46.62	54.00	7.38
5350.00	54.29	PK	12	2.0	H	6.93	61.22	74.00	12.78
5350.00	39.53	Ave.	12	2.0	H	6.93	46.46	54.00	7.54
10420.00	39.27	PK	198	1.4	H	15.66	54.93	74.00	19.07
10420.00	24.62	Ave.	198	1.4	H	15.66	40.28	54.00	13.72

Note: For the band edge of 5150-5250MHz band testing, the amplifier had been use.

5725-5850 MHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
802.11a									
5745 MHz									
5745.00	65.53	PK	210	1.5	H	42.15	107.68	/	/
5745.00	52.17	Ave.	210	1.5	H	42.15	94.32	/	/
5745.00	62.35	PK	336	1.4	V	42.15	104.50	/	/
5745.00	49.33	Ave.	336	1.4	V	42.15	91.48	/	/
5725.00	28.96	PK	25	1.7	H	42.15	71.11	122.2	51.09
5720.00	28.67	PK	25	1.7	H	42.15	70.82	110.8	39.98
5700.00	27.54	PK	322	2.3	H	42.15	69.69	105.2	35.51
11490.00	39.09	PK	271	1.8	H	18.92	58.01	74	15.99
11490.00	24.17	Ave.	271	1.8	H	18.92	43.09	54	10.91
5785 MHz									
5785.00	65.01	PK	350	1.3	H	42.08	107.09	/	/
5785.00	52.87	Ave.	350	1.3	H	42.08	94.95	/	/
5785.00	59.37	PK	89	1.4	V	42.08	101.45	/	/
5785.00	46.54	Ave.	89	1.4	V	42.08	88.62	/	/
11570.00	38.22	PK	75	2.2	H	18.04	56.26	74	17.74
11570.00	24.06	Ave.	75	2.2	H	18.04	42.10	54	11.90
5825 MHz									
5825.00	66.24	PK	160	2.2	H	42.08	108.32	/	/
5825.00	55.02	Ave.	160	2.2	H	42.08	97.10	/	/
5825.00	63.85	PK	253	2.0	V	42.08	105.93	/	/
5825.00	52.47	Ave.	253	2.0	V	42.08	94.55	/	/
5850.00	28.97	PK	301	1.4	H	42.55	71.52	122.2	50.68
5855.00	28.45	PK	301	1.4	H	42.55	71.00	110.8	39.80
5875.00	27.95	PK	237	2.1	H	42.55	70.50	105.2	34.70
11650.00	38.33	PK	242	2.4	H	19.17	57.50	74	16.50
11650.00	24.18	Ave.	242	2.4	H	19.17	43.35	54	10.65

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
802.11n20									
5745 MHz									
5745.00	67.02	PK	73	1.0	H	42.15	109.17	/	/
5745.00	56.18	Ave.	73	1.0	H	42.15	98.33	/	/
5745.00	64.32	PK	186	2.2	V	42.15	106.47	/	/
5745.00	53.24	Ave.	186	2.2	V	42.15	95.39	/	/
5725.00	28.79	PK	238	2.2	H	42.15	70.94	122.2	51.26
5720.00	28.26	PK	238	2.2	H	42.15	70.41	110.8	40.39
5700.00	28.05	PK	269	2.2	H	42.15	70.20	105.2	35.00
11490.00	38.50	PK	249	2.1	H	18.92	57.42	74	16.58
11490.00	23.95	Ave.	249	2.1	H	18.92	42.87	54	11.13
5785 MHz									
5785.00	66.74	PK	71	1.9	H	42.08	108.82	/	/
5785.00	55.65	Ave.	71	1.9	H	42.08	97.73	/	/
5785.00	64.32	PK	228	2.0	V	42.08	106.40	/	/
5785.00	53.24	Ave.	228	2.0	V	42.08	95.32	/	/
11570.00	38.76	PK	96	2.3	H	19.17	57.93	74	16.07
11570.00	23.89	Ave.	96	2.3	H	19.17	43.06	54	10.94
5825 MHz									
5825.00	66.08	PK	239	2.3	H	42.08	108.16	/	/
5825.00	55.11	Ave.	239	2.3	H	42.08	97.19	/	/
5825.00	64.20	PK	190	2.0	V	42.08	106.28	/	/
5825.00	53.19	Ave.	190	2.0	V	42.08	95.27	/	/
5850.00	28.87	PK	330	2.2	H	42.55	71.42	122.2	50.96
5855.00	28.46	PK	330	2.2	H	42.55	71.01	110.8	39.79
5875.00	28.19	PK	234	1.8	H	42.55	70.74	105.2	34.46
11650.00	38.91	PK	46	1.7	H	19.17	58.08	74	15.92
11650.00	24.16	Ave.	46	1.7	H	19.17	43.33	54	10.67

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBµV/m)	FCC Part 15.407/205/209	
	Reading (dBµV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
802.11n40									
5755 MHz									
5755.00	64.75	PK	88	2.1	H	56.29	121.04	/	/
5755.00	53.62	Ave.	88	2.1	H	56.29	109.91	/	/
5755.00	62.24	PK	27	1.5	V	56.29	118.53	/	/
5755.00	51.04	Ave.	27	1.5	V	56.29	107.33	/	/
5721.00	28.89	PK	98	1.3	H	42.15	71.04	122.2	51.16
5720.00	28.57	PK	98	1.3	H	42.15	70.72	110.8	40.08
5700.00	28.41	PK	140	2.1	H	42.15	70.56	105.2	34.64
11510.00	38.48	PK	210	2.5	H	18.92	57.40	74	16.60
11510.00	24.05	Ave.	210	2.5	H	18.92	42.97	54	11.03
5795 MHz									
5795.00	64.08	PK	129	1.0	H	42.08	106.16	/	/
5795.00	52.91	Ave.	129	1.0	H	42.08	94.99	/	/
5795.00	62.14	PK	294	1.0	V	42.08	104.22	/	/
5795.00	51.07	Ave.	294	1.0	V	42.08	93.15	/	/
5850.00	29.60	PK	10	2.3	H	42.55	72.15	122.2	50.05
5855.00	28.46	PK	296	1.9	H	42.55	71.01	110.8	39.79
5875.00	28.51	PK	116	1.6	H	42.55	71.06	105.2	34.14
11590.00	38.70	PK	293	1.4	H	19.17	57.87	74	16.13
11590.00	24.13	Ave.	293	1.4	H	19.17	43.30	54	10.70

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
802.11ac20									
5745 MHz									
5745.00	65.85	PK	18	1.9	H	42.15	108.00	/	/
5745.00	55.05	Ave.	18	1.9	H	42.15	97.20	/	/
5745.00	63.19	PK	296	2.2	V	42.15	105.34	/	/
5745.00	51.97	Ave.	296	2.2	V	42.15	94.12	/	/
5725.00	28.74	PK	79	1.9	H	42.15	70.89	122.2	51.31
5720.00	28.46	PK	79	1.9	H	42.15	70.61	110.8	40.19
5700.00	28.50	PK	310	1.2	H	42.15	70.65	105.2	34.55
11490.00	38.86	PK	147	2.4	H	18.92	57.78	74	16.22
11490.00	24.25	Ave.	147	2.4	H	18.92	43.17	54	10.83
5785 MHz									
5785.00	65.91	PK	123	1.8	H	42.08	107.99	/	/
5785.00	55.42	Ave.	123	1.8	H	42.08	97.50	/	/
5785.00	63.24	PK	128	2.5	V	42.08	105.32	/	/
5785.00	51.74	Ave.	128	2.5	V	42.08	93.82	/	/
11570.00	38.49	PK	94	1.7	H	19.17	57.66	74	16.34
11570.00	23.55	Ave.	94	1.7	H	19.17	42.72	54	11.28
5825 MHz									
5825.00	66.14	PK	146	1.3	H	42.08	108.22	/	/
5825.00	55.60	Ave.	146	1.3	H	42.08	97.68	/	/
5825.00	63.82	PK	279	2.0	V	42.08	105.90	/	/
5825.00	52.30	Ave.	279	2.0	V	42.08	94.38	/	/
5850.00	28.40	PK	162	2.5	H	42.55	70.95	122.2	51.25
5855.00	28.53	PK	162	2.5	H	42.55	71.08	110.8	39.72
5875.00	28.26	PK	200	1.6	H	42.55	70.81	105.2	34.39
11650.00	38.70	PK	270	1.2	H	19.17	57.87	74	16.13
11650.00	24.31	Ave.	270	1.2	H	19.17	43.48	54	10.52

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
802.11ac40									
5755 MHz									
5755.00	62.96	PK	191	1.4	H	42.08	105.04	/	/
5755.00	52.24	Ave.	191	1.4	H	42.08	94.32	/	/
5755.00	61.05	PK	105	1.7	V	42.08	103.13	/	/
5755.00	50.87	Ave.	105	1.7	V	42.08	92.95	/	/
5725.00	28.66	PK	25	1.9	H	42.15	70.81	122.2	51.39
5720.00	28.54	PK	25	1.9	H	42.15	70.69	110.8	40.11
5700.00	28.39	PK	143	1.9	H	42.15	70.54	105.2	34.66
11510.00	38.89	PK	33	1.4	H	18.92	57.81	74	16.19
11510.00	24.12	Ave.	33	1.4	H	18.92	43.04	54	10.96
5795 MHz									
5795.00	63.21	PK	198	2.4	H	42.08	105.29	/	/
5795.00	52.67	Ave.	198	2.4	H	42.08	94.75	/	/
5795.00	61.39	PK	45	2.1	V	42.08	103.47	/	/
5795.00	50.81	Ave.	45	2.1	V	42.08	92.89	/	/
5850.00	28.74	PK	306	1.4	H	42.55	71.29	122.2	50.91
5855.00	28.55	PK	306	1.4	H	42.55	71.10	110.8	39.70
5875.00	28.46	PK	306	1.6	H	42.55	71.01	105.2	34.19
11590.00	39.85	PK	331	2.0	H	19.17	59.02	74	14.98
11590.00	24.30	Ave.	331	2.0	H	19.17	43.47	54	10.53

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
802.11ac80									
5775 MHz									
5775.00	61.20	PK	98	1.5	H	42.08	103.28	/	/
5775.00	51.05	Ave.	98	1.5	H	42.08	93.13	/	/
5775.00	57.91	PK	155	2.3	V	42.08	99.99	/	/
5775.00	47.26	Ave.	155	2.3	V	42.08	89.34	/	/
5850.00	28.19	PK	128	1.8	H	42.55	70.74	122.2	51.46
5855.00	28.32	PK	128	1.8	H	42.55	70.87	110.8	39.93
5875.00	28.16	PK	81	1.1	H	42.55	70.71	105.2	34.49
5725.00	28.46	PK	268	2.2	H	42.15	70.61	122.2	51.59
5720.00	28.39	PK	268	2.2	H	42.15	70.54	110.8	40.26
5700.00	28.51	PK	248	1.7	H	42.15	70.66	105.2	34.54
11550.00	38.94	PK	97	1.9	H	19.17	58.11	74	15.89
11550.00	24.39	Ave.	97	1.9	H	19.17	43.56	54	10.44

Note:

Corrected Amplitude = Corrected Factor + Reading



Corrected Factor=Antenna factor (RX) + Cable Loss – Amplifier Factor

Margin = Limit- Corr. Amplitude



All other spurious emissions are 20 dB below the limit or are on the system noise floor level.

Peak



Pre-scan with 802.11a 5745MHz
Horizontal

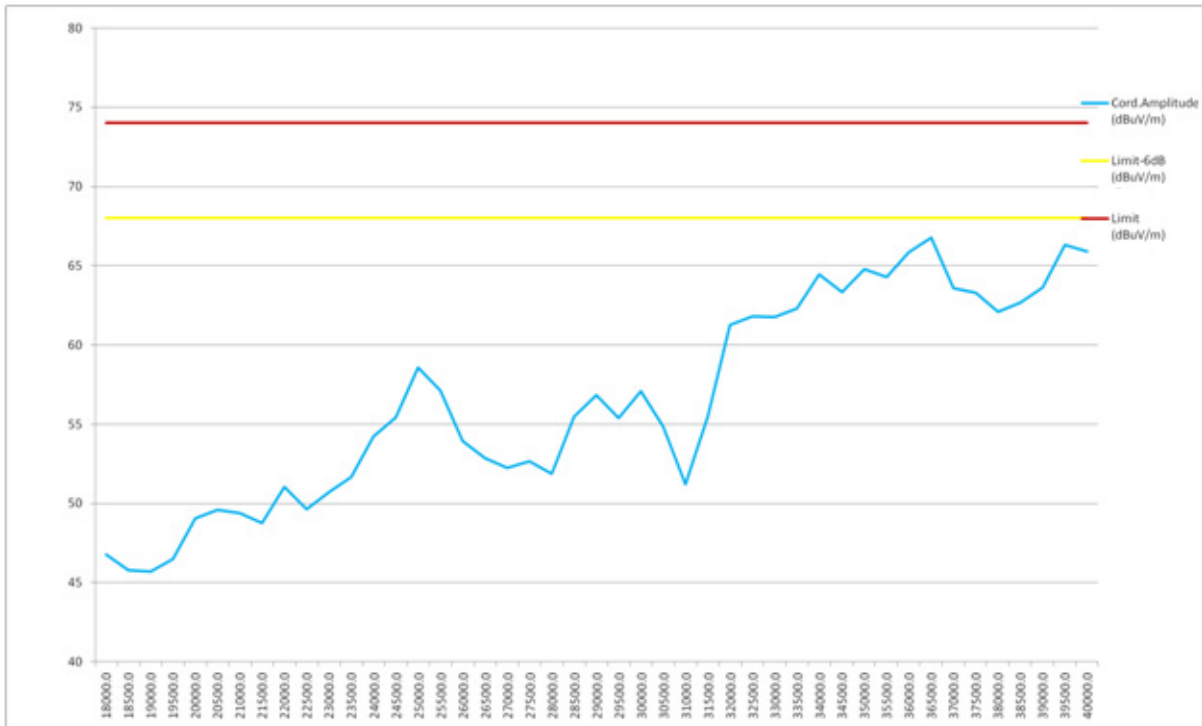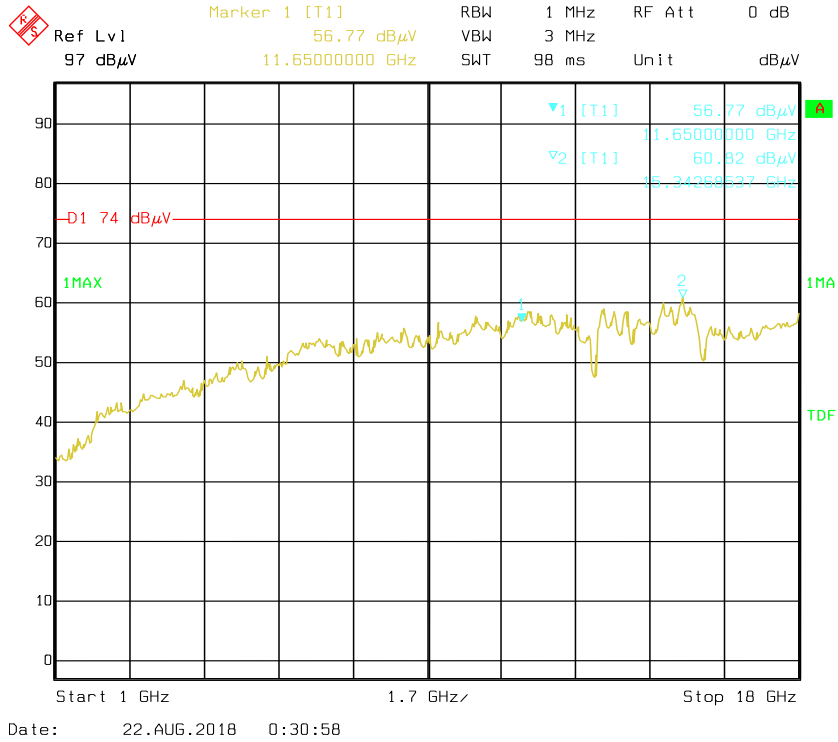


Vertical

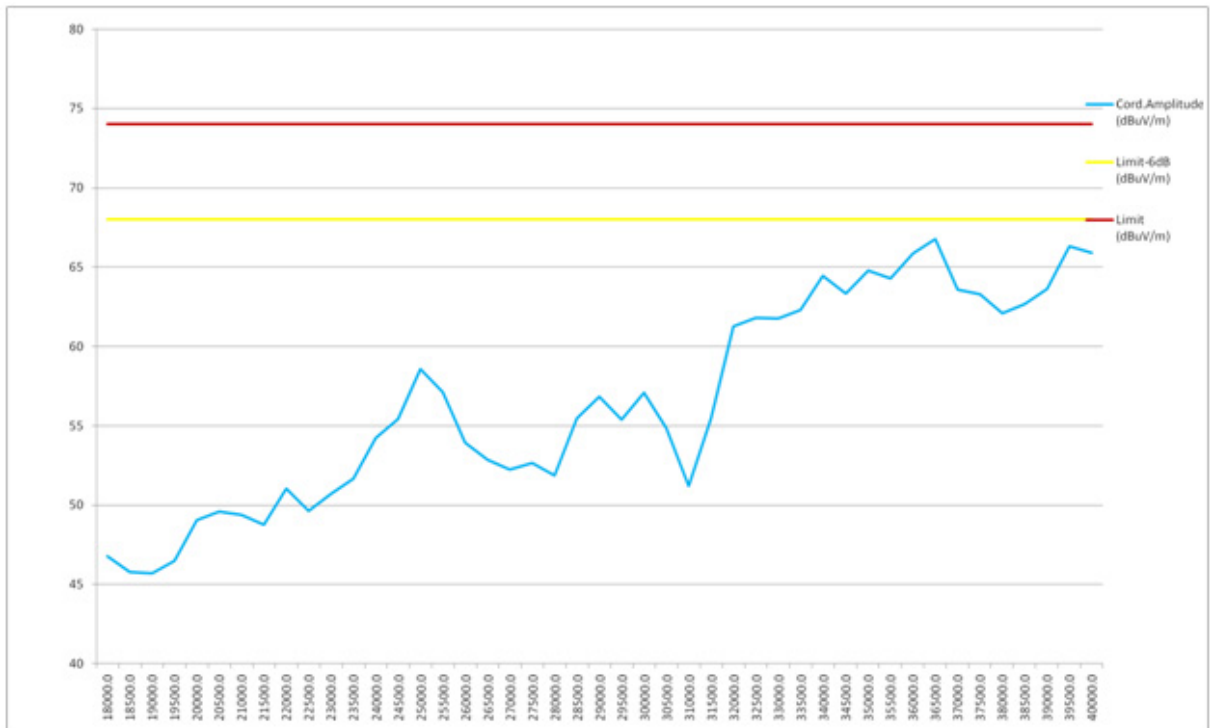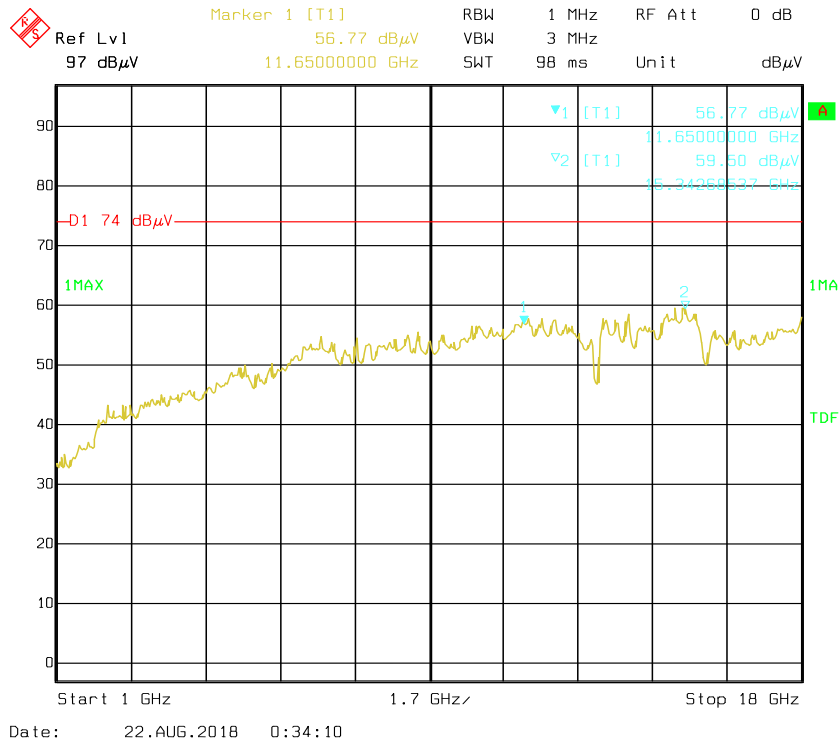




Average Horizontal

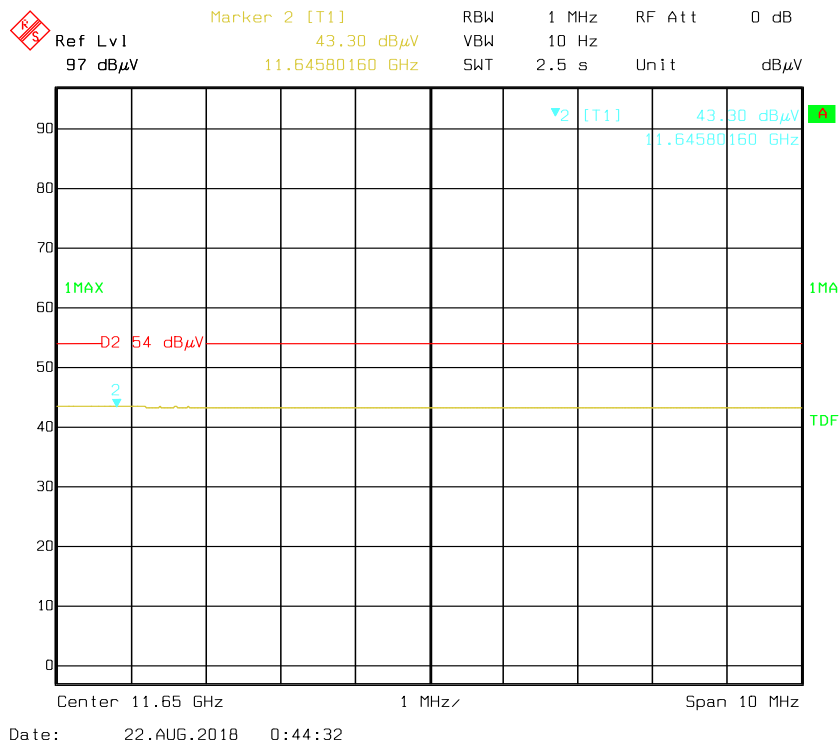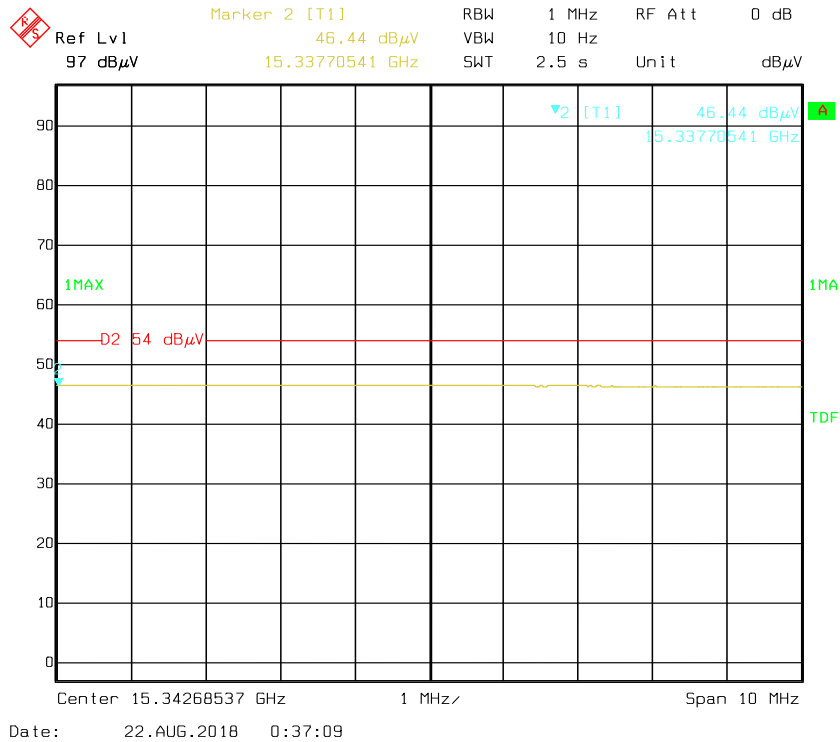

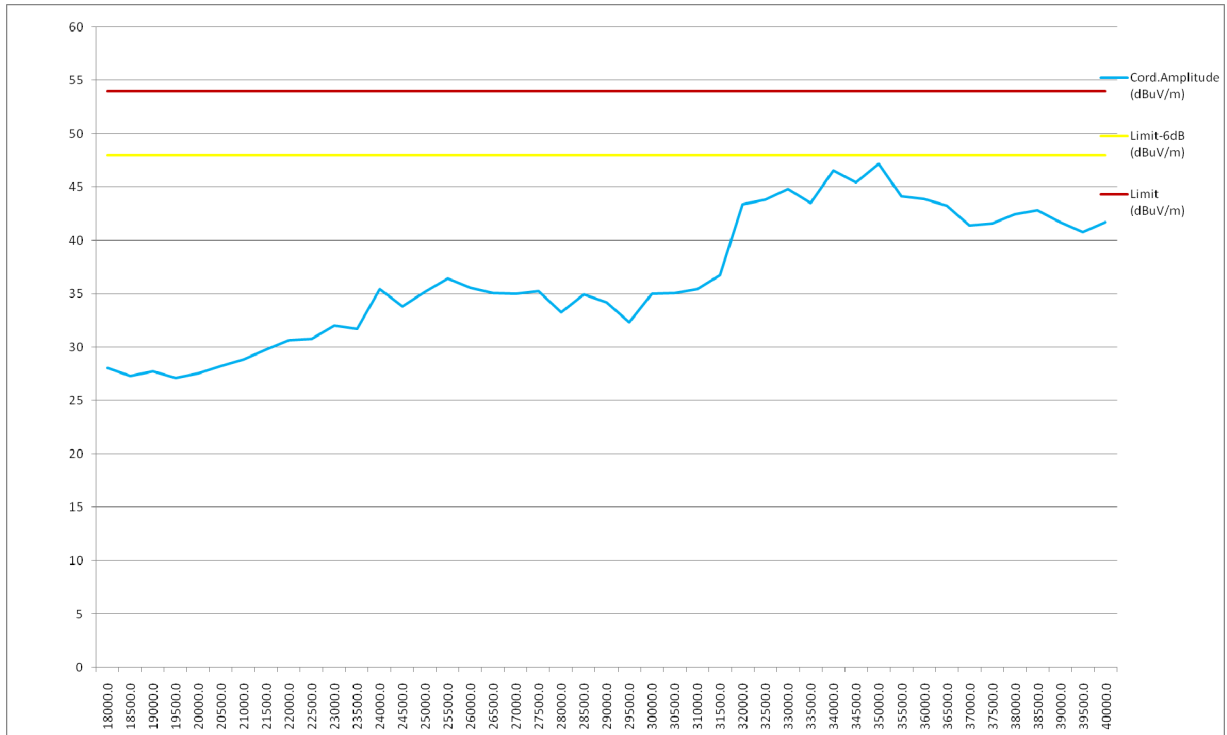

Vertical

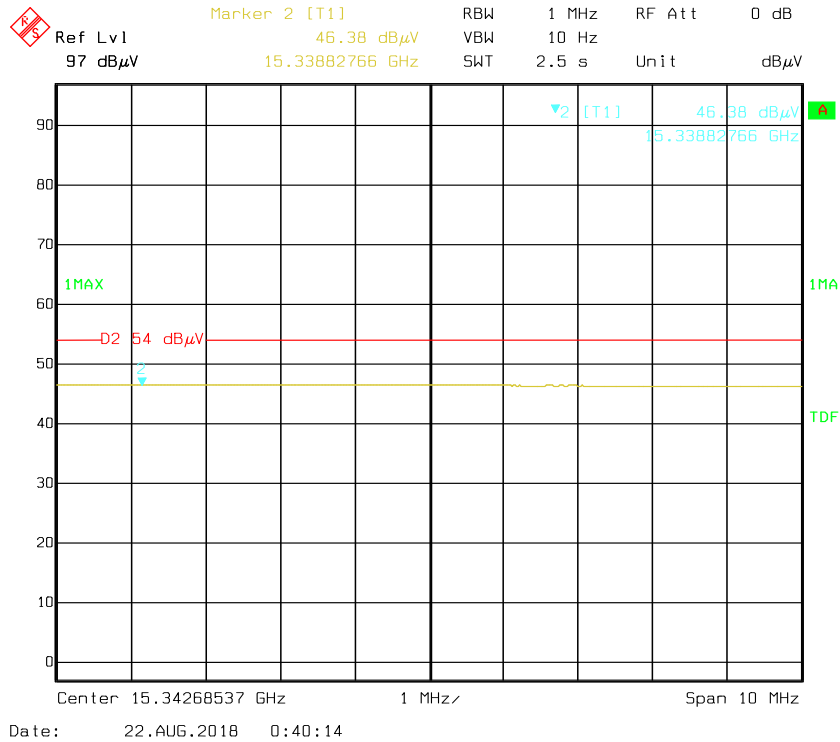

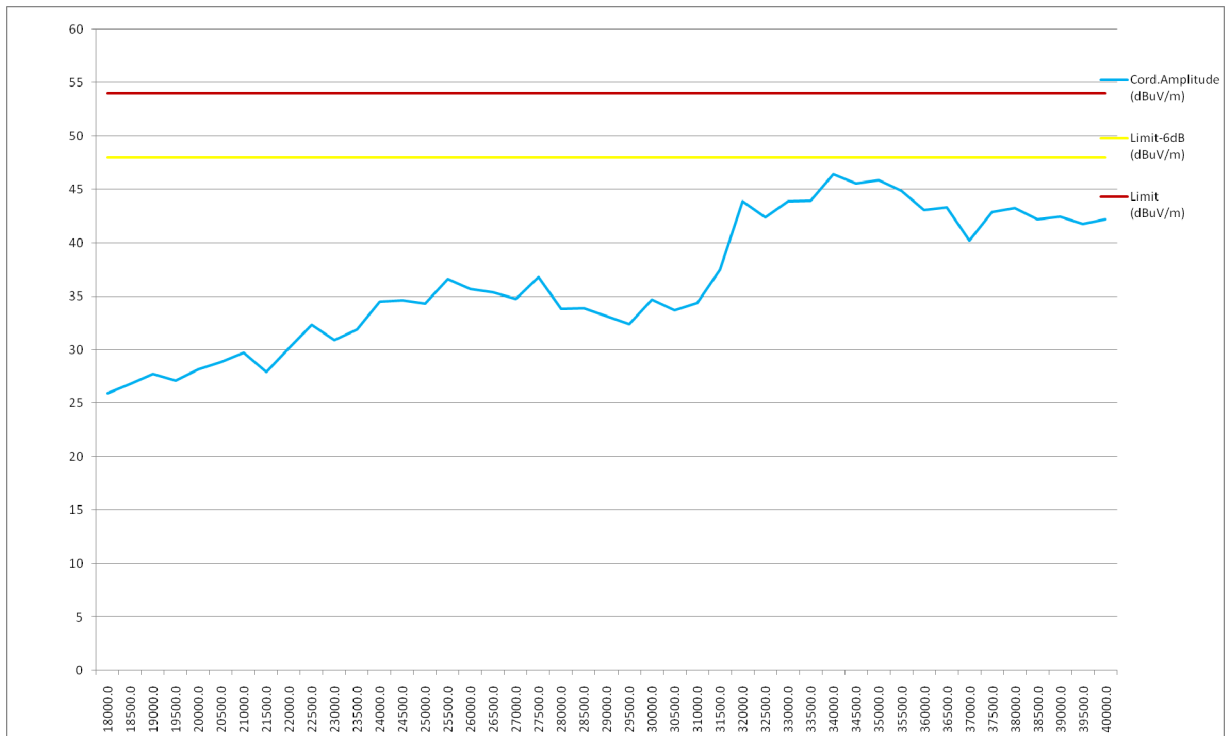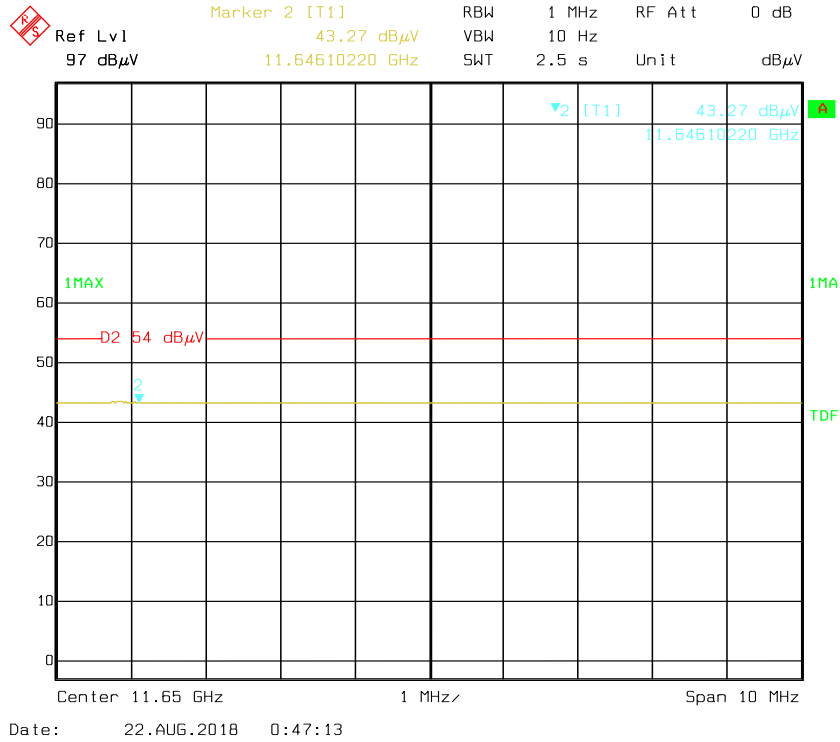

§15.407(B) (1), (4) –OUT OF BAND EMISSION

Applicable Standard


FCC §15.407 (b) (1), (4);

For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27dBm/MHz.

For transmitters operating in the 5.725–5.825 GHz band: All emissions shall be limited to a level of –27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The Resolution bandwidth is set to 1MHz, The Video bandwidth is set to ≥ 1 MHz, report the peak value out of the operating band.
3. Repeat above procedures until all frequencies measured were complete.
4. when necessary, provided the measured energy is integrated to show the total power over 1 MHz.



Test Data

Environmental Conditions

Temperature:	23~25 °C
Relative Humidity:	53~56 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Tracy Hu on 2018-08-09 to 2018-08-14.


EUT operation mode: Transmitting

Note: The testing results were all below the limit 3dB, so consider the two antennas transmitting simultaneously, the result should be ok.

Antenna 0:


5150 – 5250 MHz:

802.11a mode, Band Edge, Left Side

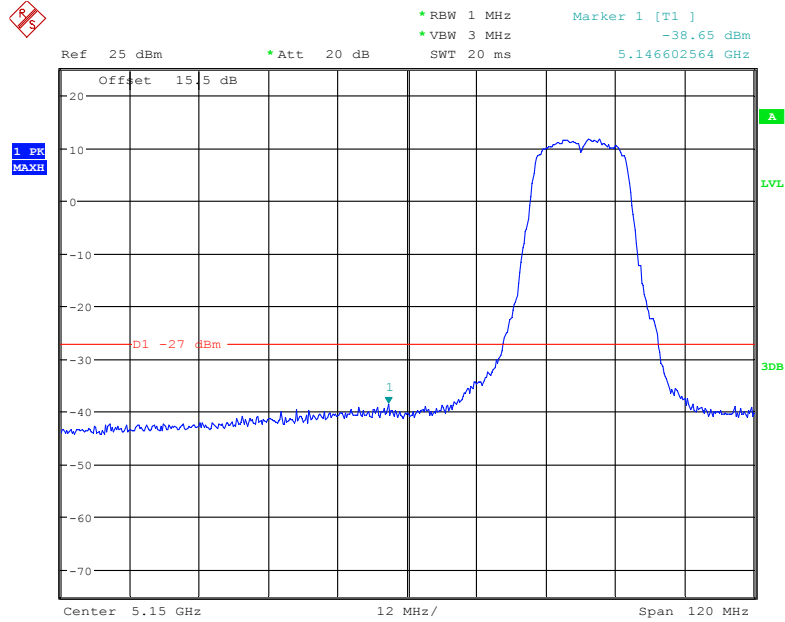


Date: 9.AUG.2018 21:22:41

802.11a mode, Band Edge, Right Side

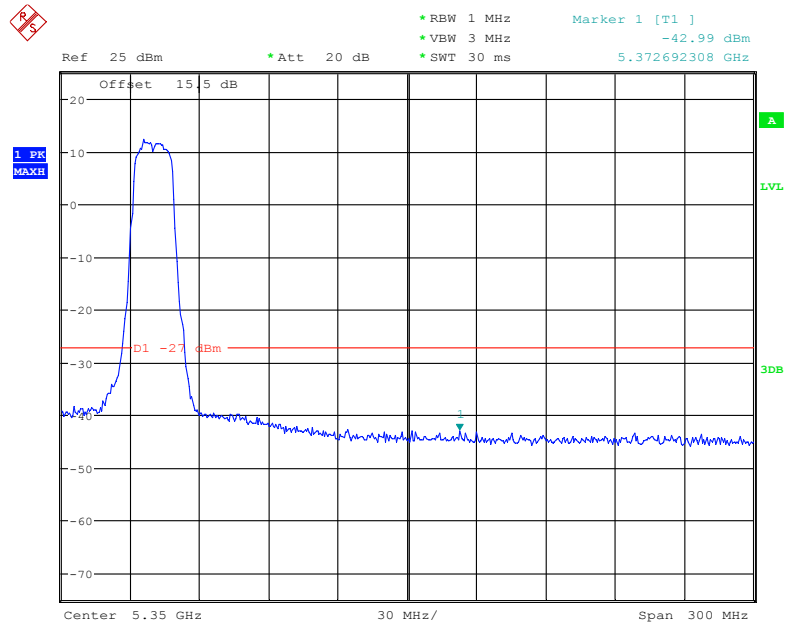


Date: 9.AUG.2018 21:32:16

802.11n20 mode, Band Edge, Left Side

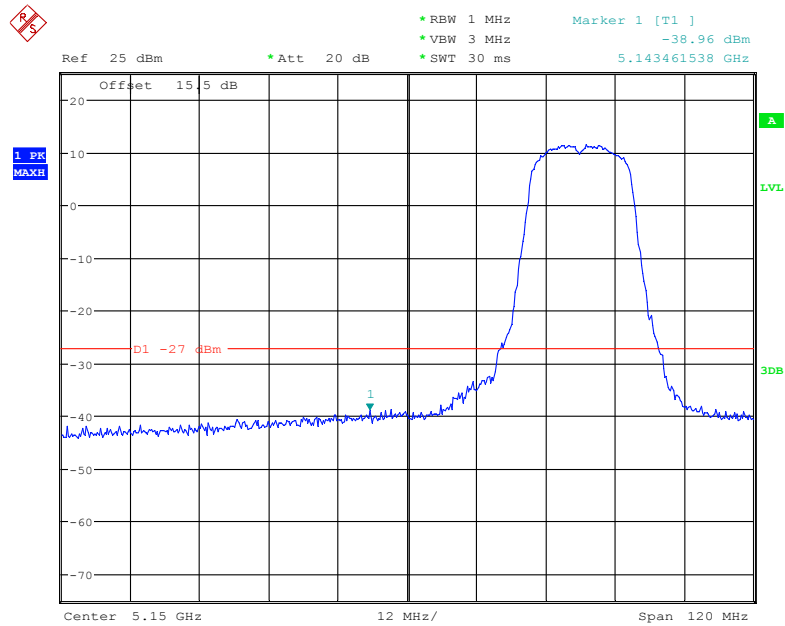


Date: 9.AUG.2018 21:34:36

802.11n20 mode, Band Edge, Right Side

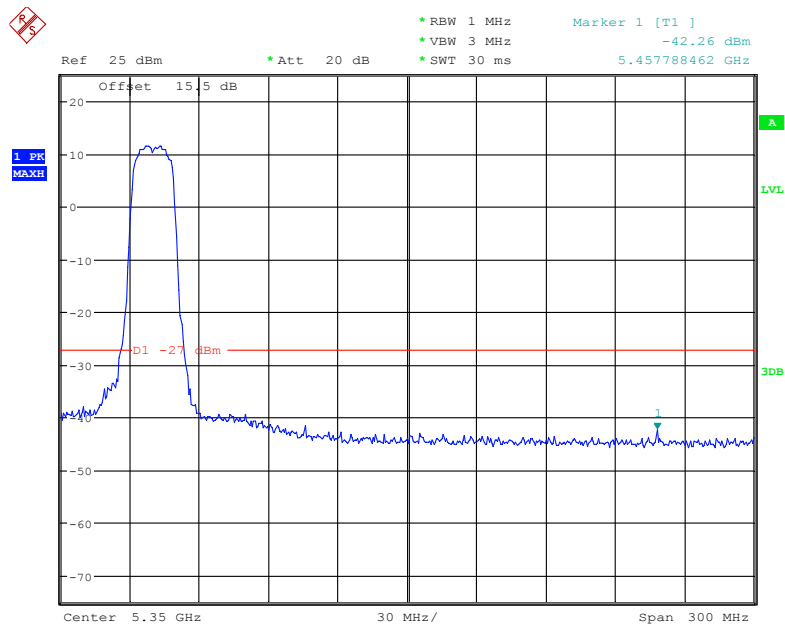


Date: 9.AUG.2018 21:33:37

802.11n40 mode, Band Edge, Left Side

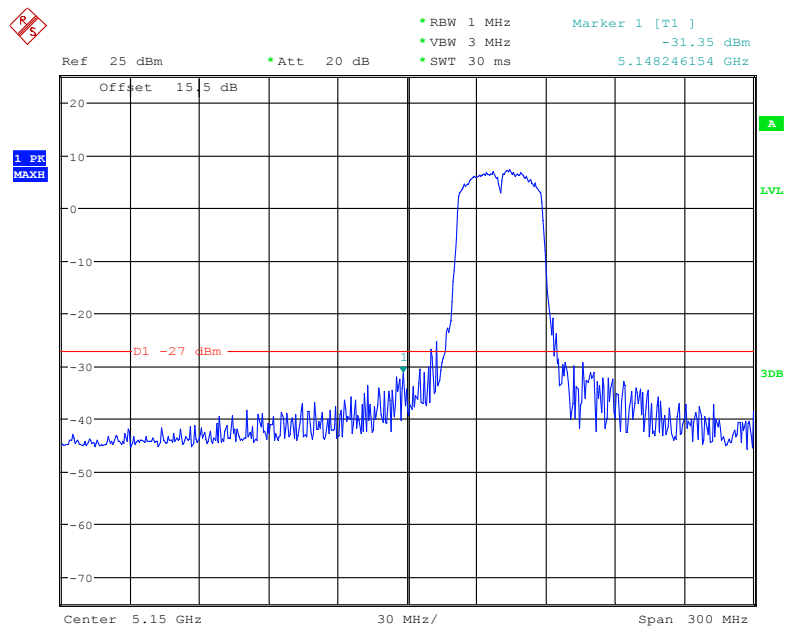


Date: 9.AUG.2018 21:27:16

802.11n40 mode, Band Edge, Right Side

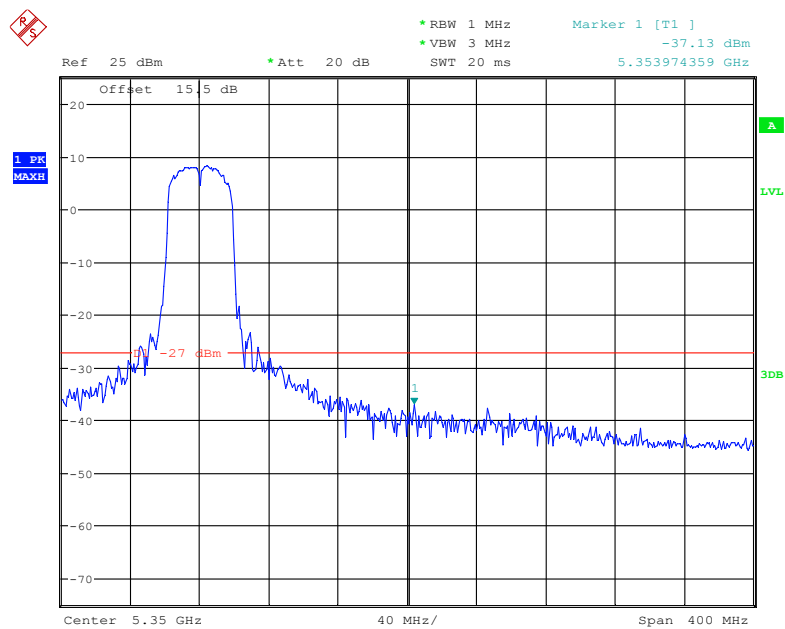


Date: 9.AUG.2018 21:20:11

802.11ac20 mode, Band Edge, Left Side

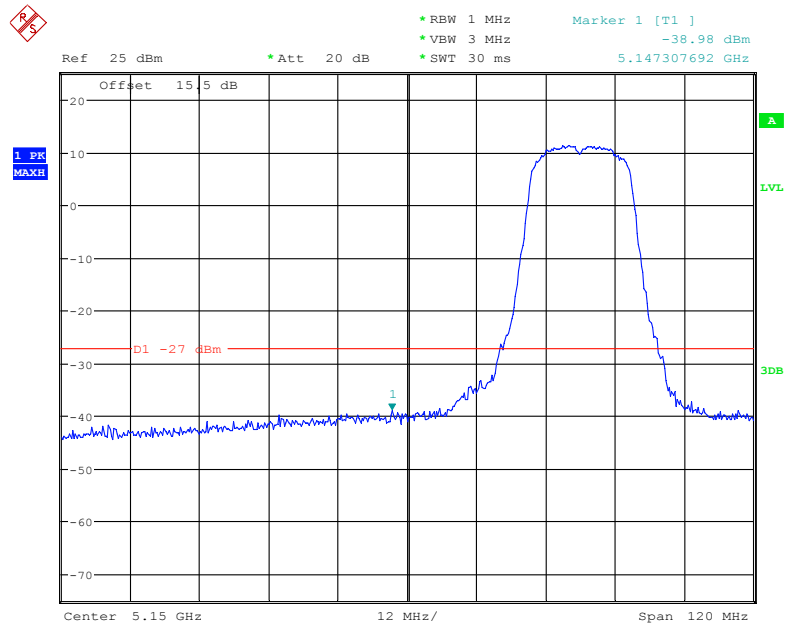


Date: 9.AUG.2018 21:35:28

802.11ac20 mode, Band Edge, Right Side

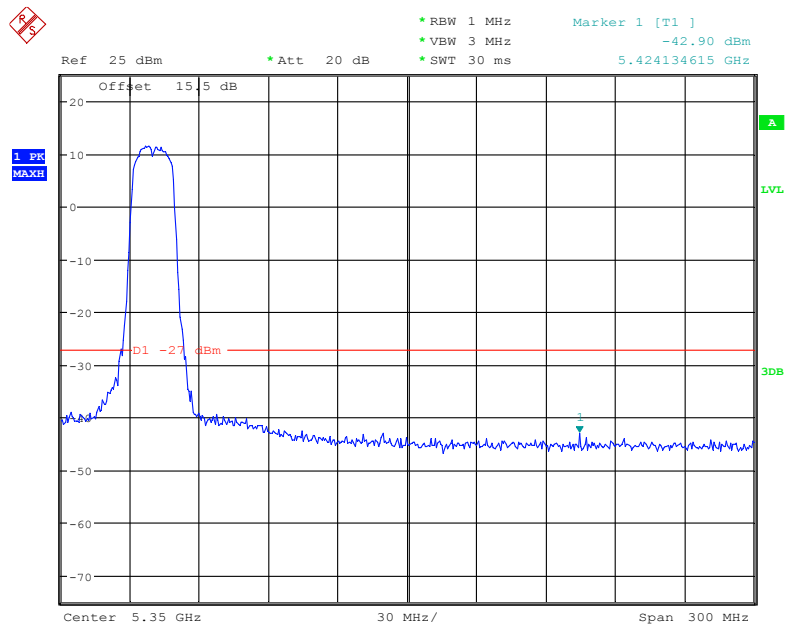


Date: 9.AUG.2018 21:36:02

802.11ac40 mode, Band Edge, Left Side

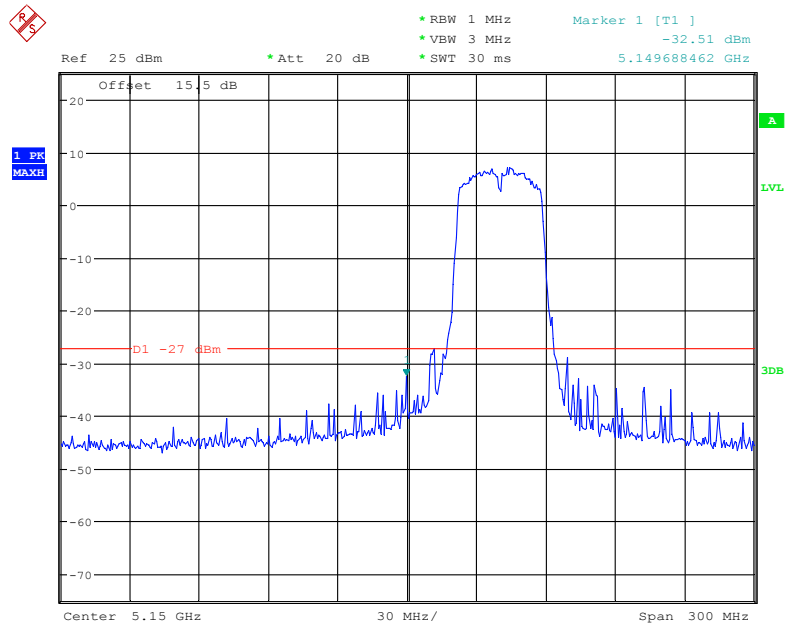


Date: 9.AUG.2018 21:28:59

802.11ac40 mode, Band Edge, Right Side

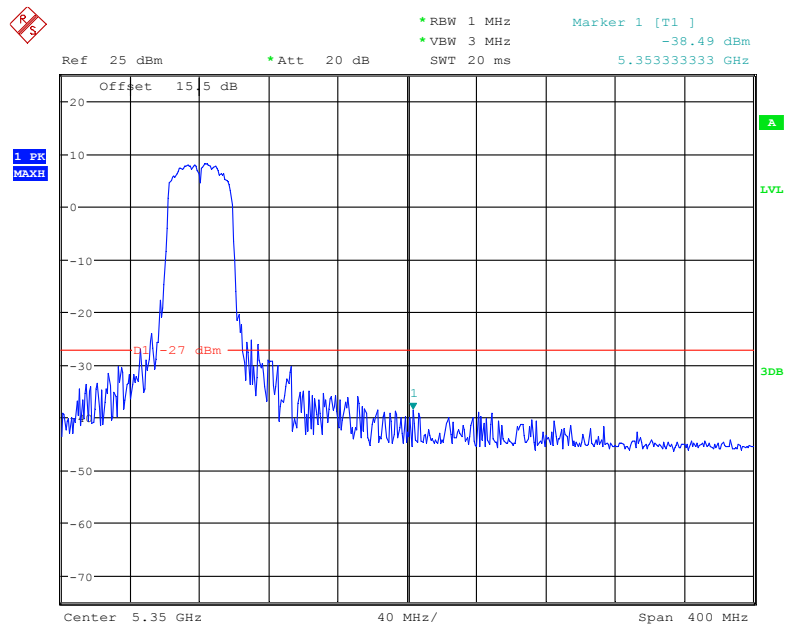


Date: 9.AUG.2018 21:17:58

802.11ac80 mode, Band Edge, Left Side

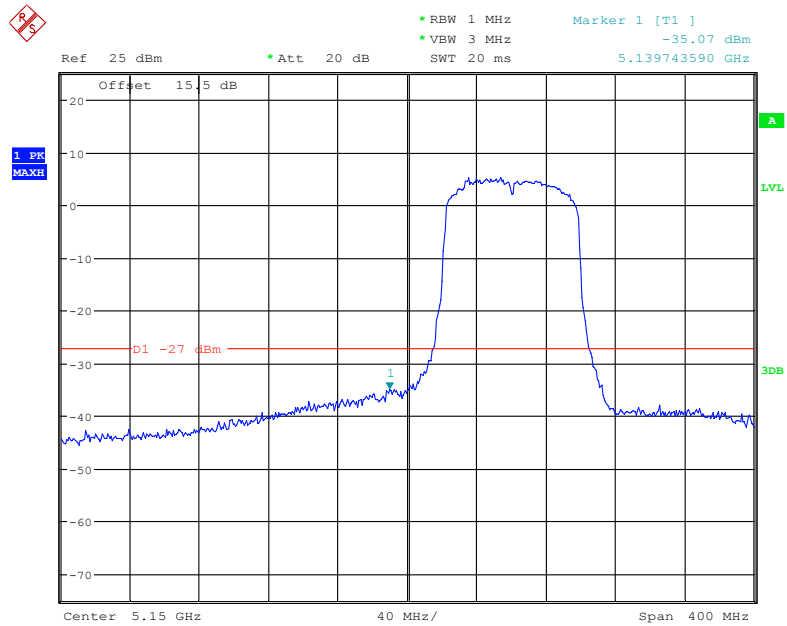

Date: 9.AUG.2018 21:14:52


802.11ac80 mode, Band Edge, Right Side

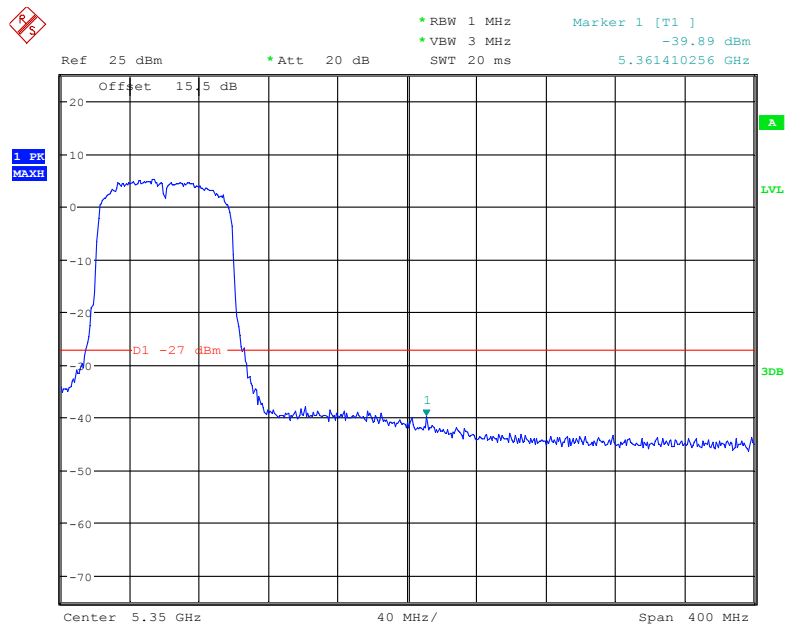

Date: 9.AUG.2018 21:14:12


5725 – 5850 MHz:

802.11a mode, Band Edge, Left Side

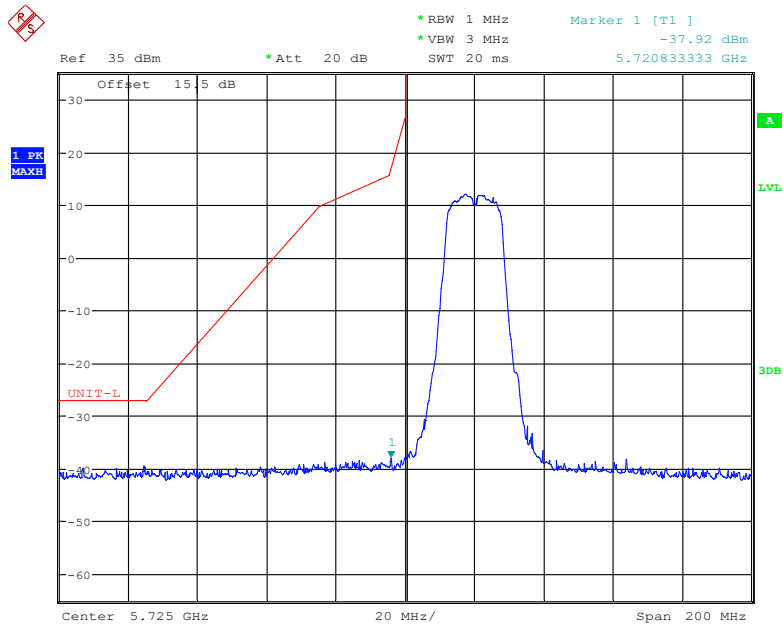


Date: 14.AUG.2018 23:08:01

802.11a mode, Band Edge, Right Side

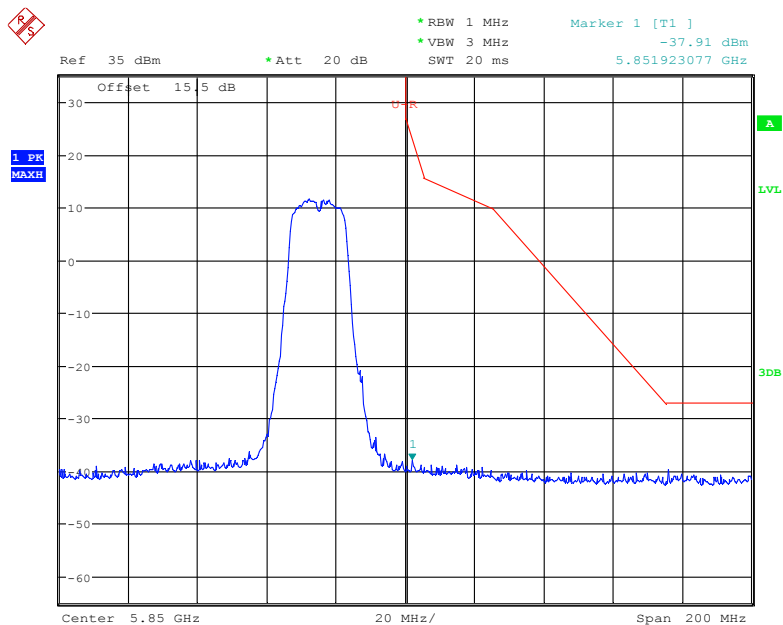


Date: 14.AUG.2018 23:07:16

802.11n20 mode, Band Edge, Left Side

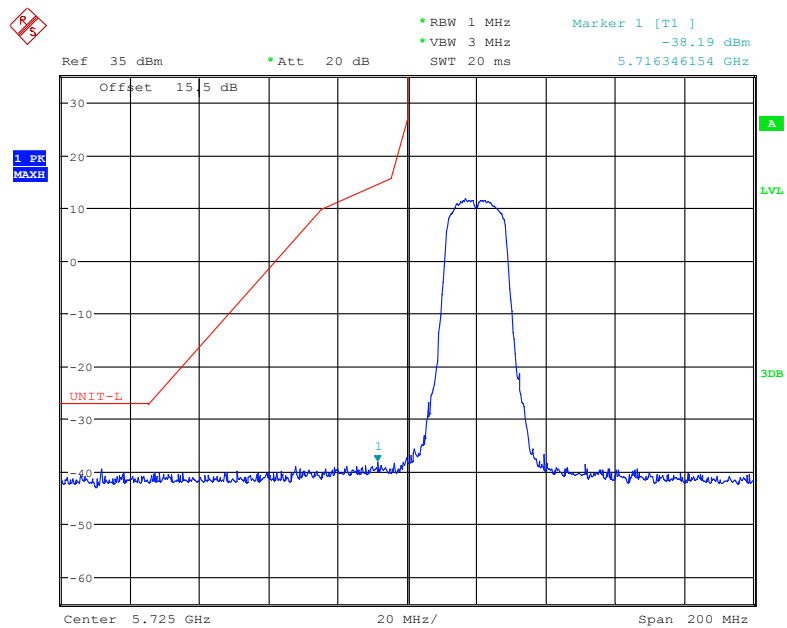


Date: 14.AUG.2018 23:05:47

802.11n20 mode, Band Edge, Right Side

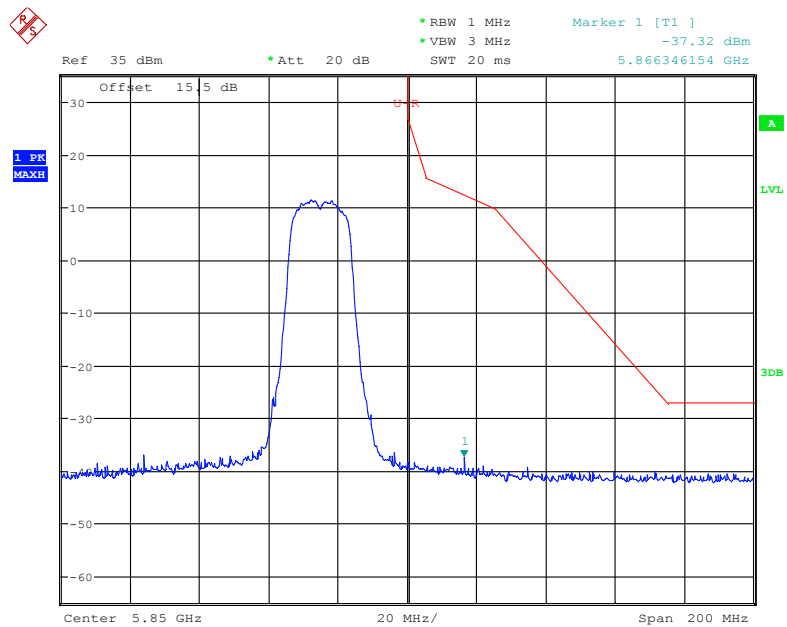


Date: 14.AUG.2018 23:06:45

802.11n40 mode, Band Edge, Left Side

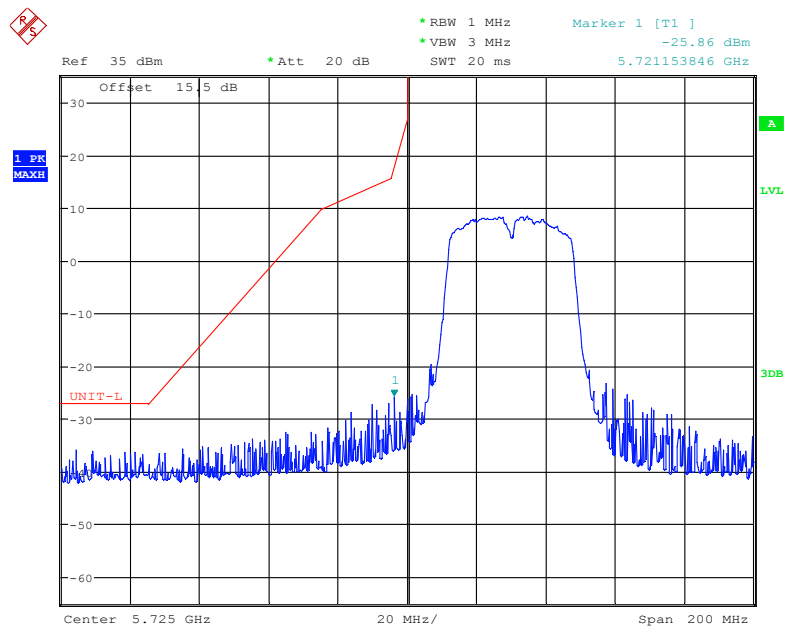


Date: 14.AUG.2018 23:08:51

802.11n40 mode, Band Edge, Right Side

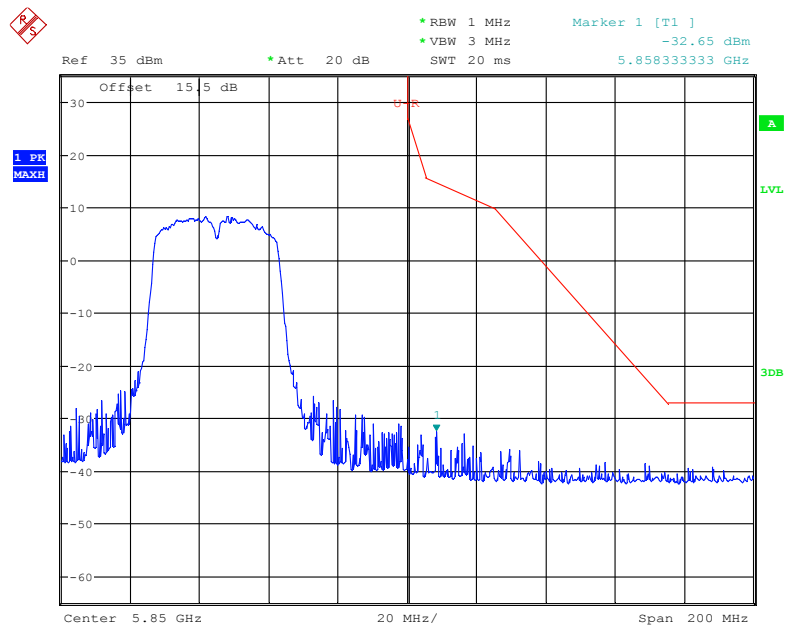


Date: 14.AUG.2018 23:09:26

802.11ac20 mode, Band Edge, Left Side

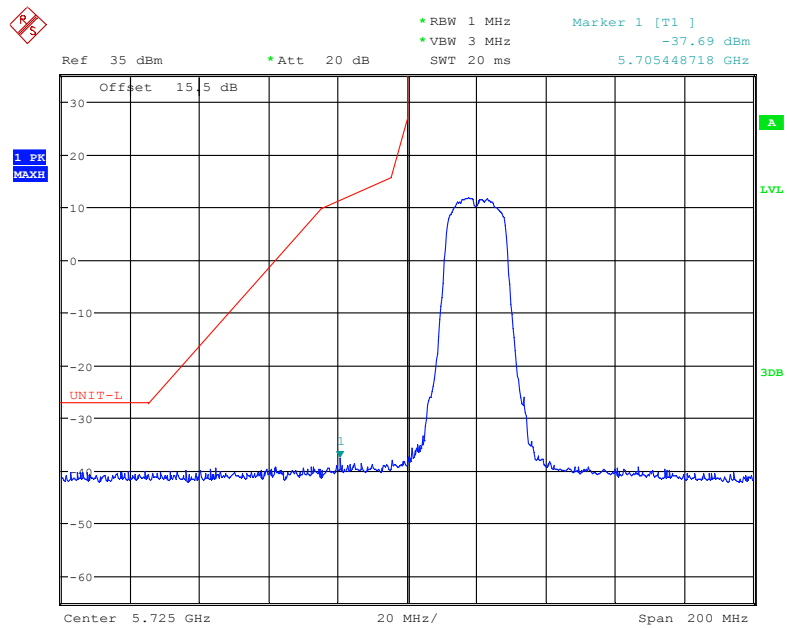


Date: 14.AUG.2018 23:05:10

802.11ac20 mode, Band Edge, Right Side

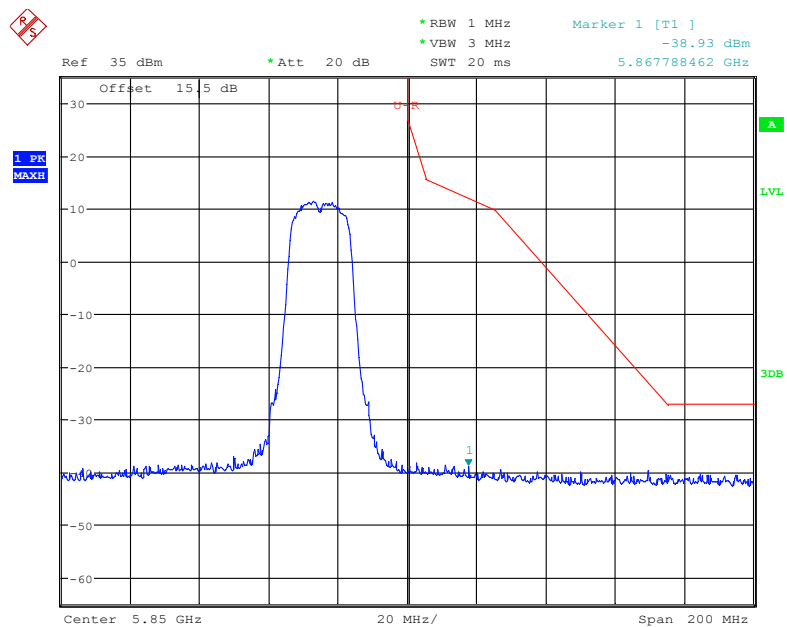


Date: 14.AUG.2018 23:04:26

802.11ac40 mode, Band Edge, Left Side

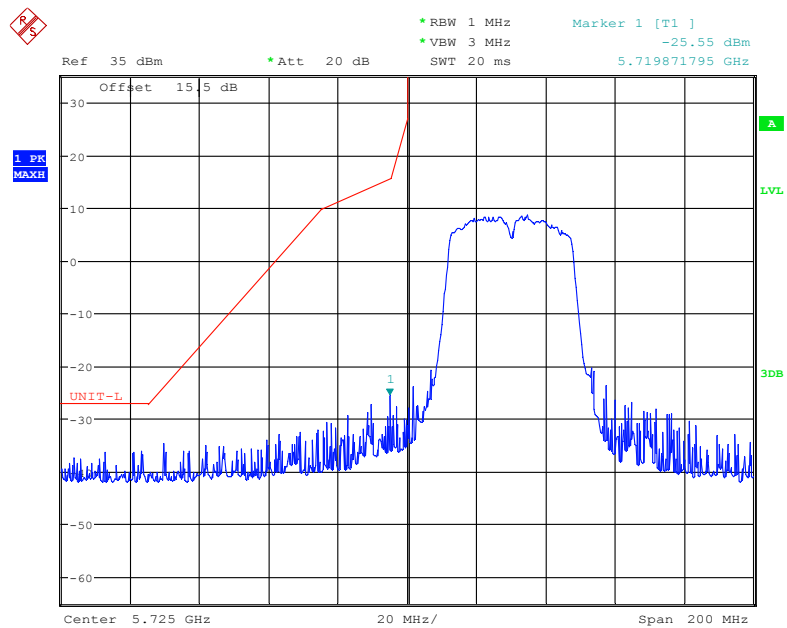


Date: 14.AUG.2018 23:10:50

802.11ac40 mode, Band Edge, Right Side

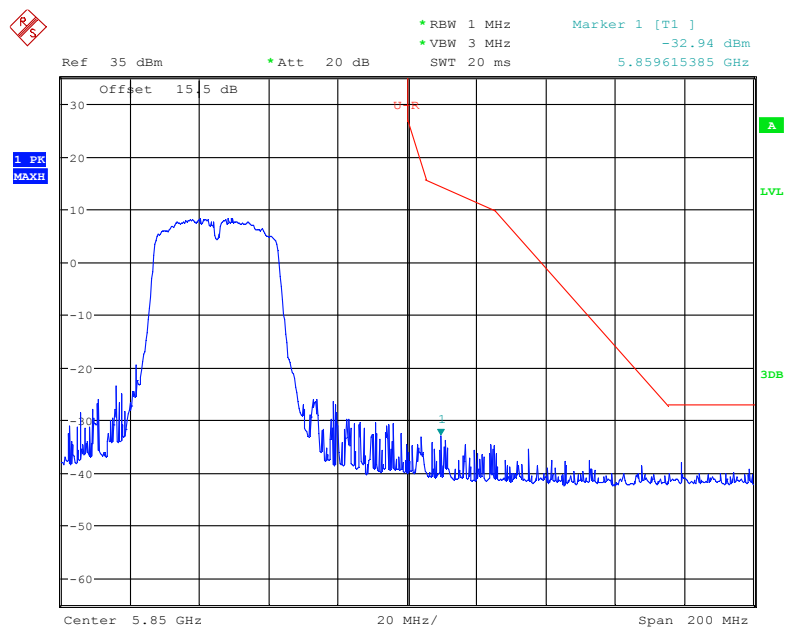


Date: 14.AUG.2018 23:10:12

802.11ac80 mode, Band Edge, Left Side

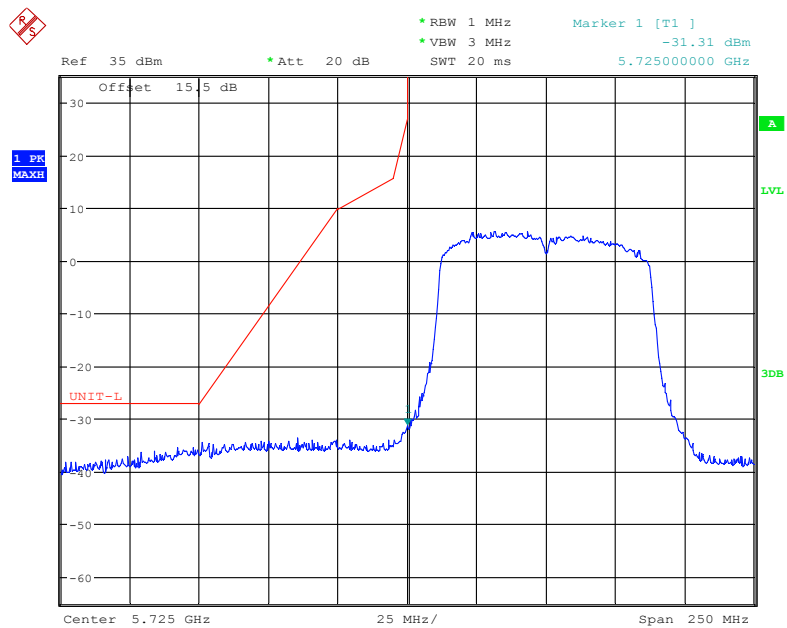

Date: 14.AUG.2018 23:11:23

802.11ac80 mode, Band Edge, Right Side

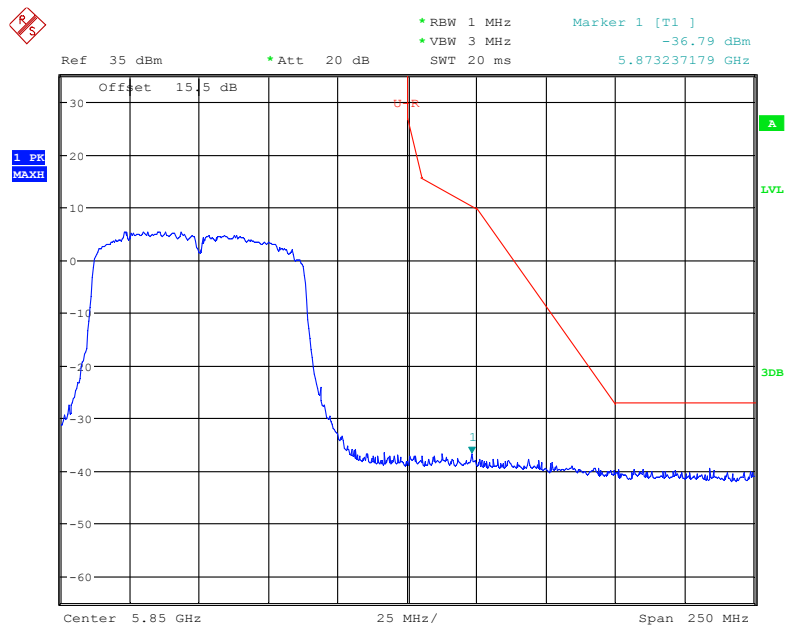


Date: 14.AUG.2018 23:12:01

Antenna 1:


5150 – 5250 MHz:

802.11a mode, Band Edge, Left Side

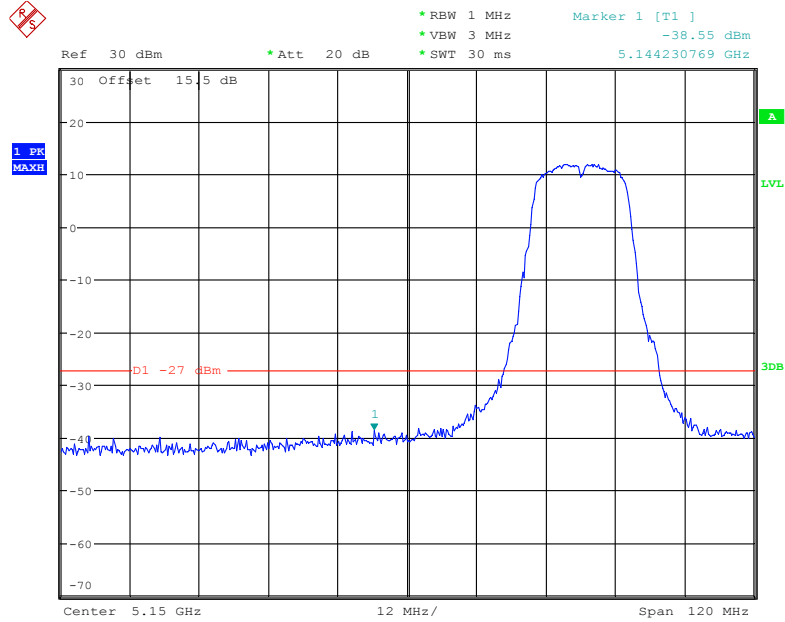


Date: 9.AUG.2018 23:23:09

802.11a mode, Band Edge, Right Side

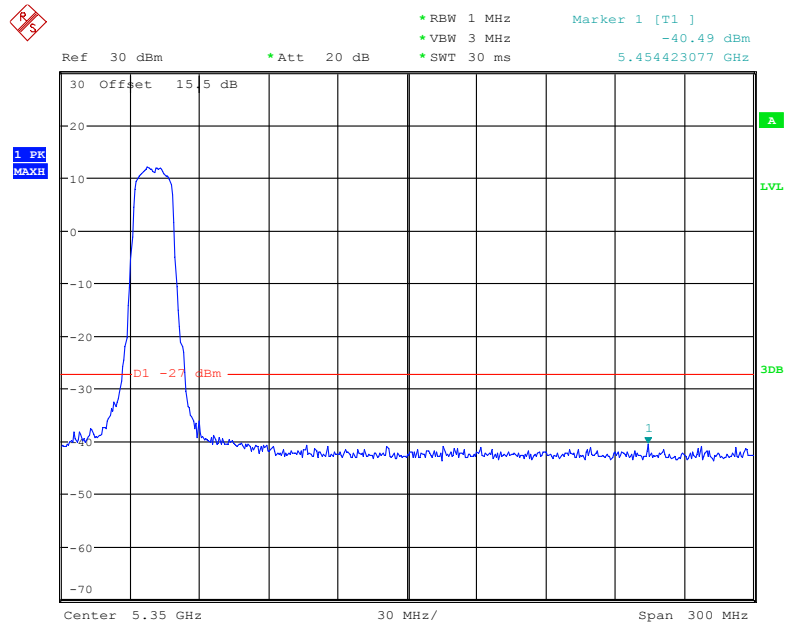


Date: 9.AUG.2018 23:23:48

802.11n20 mode, Band Edge, Left Side

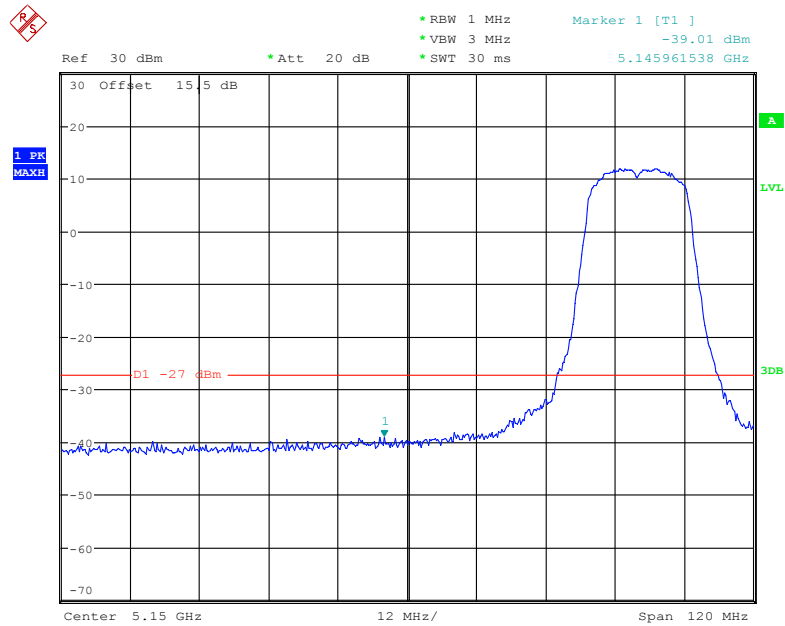


Date: 9.AUG.2018 23:25:22

802.11n20 mode, Band Edge, Right Side

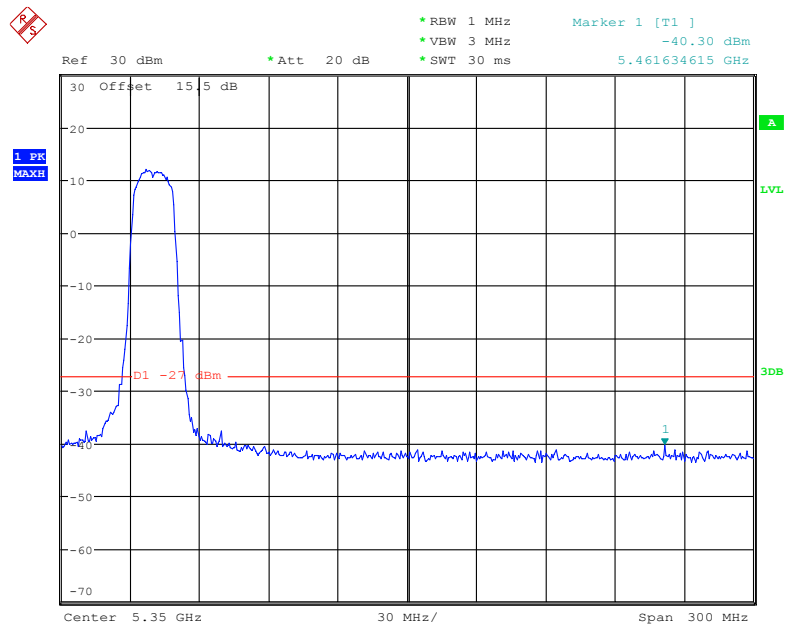


Date: 9.AUG.2018 23:25:58

802.11n40 mode, Band Edge, Left Side

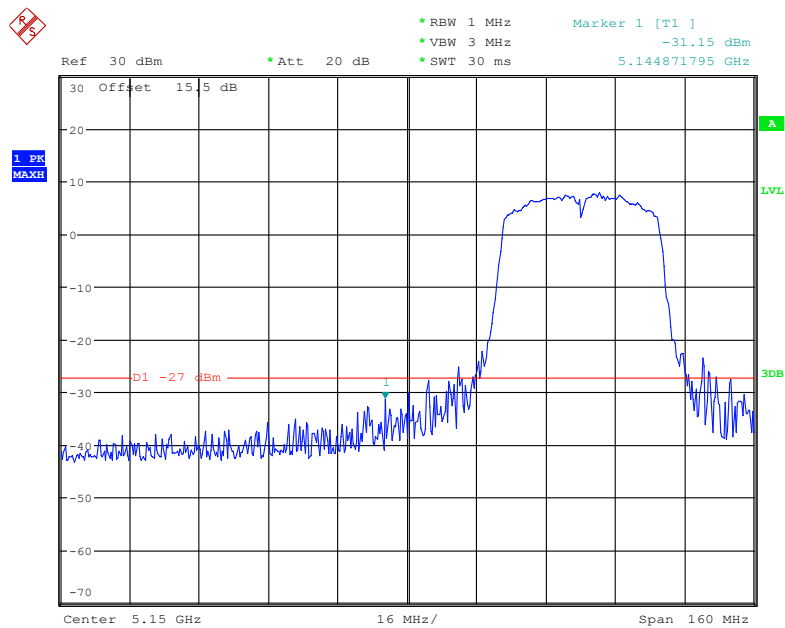


Date: 9.AUG.2018 23:15:55

802.11n40 mode, Band Edge, Right Side

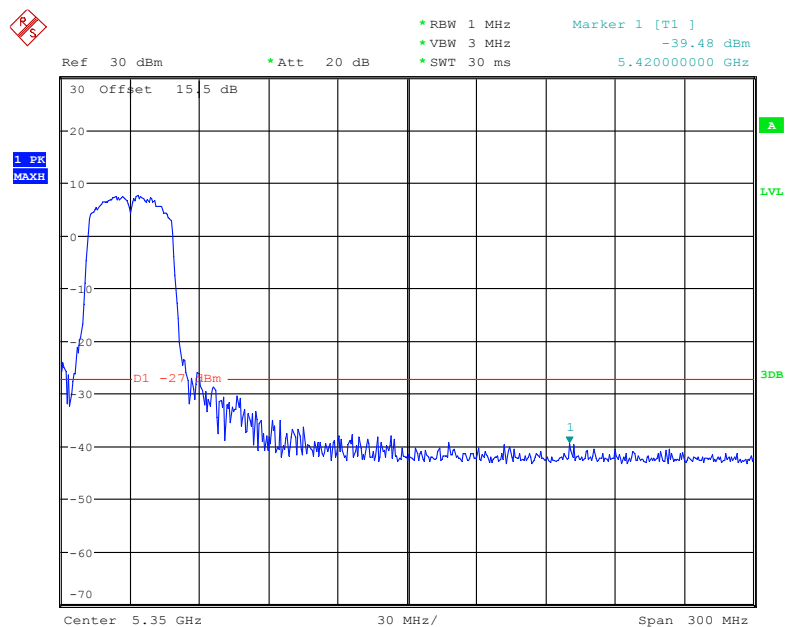


Date: 9.AUG.2018 23:17:06

802.11ac20 mode, Band Edge, Left Side

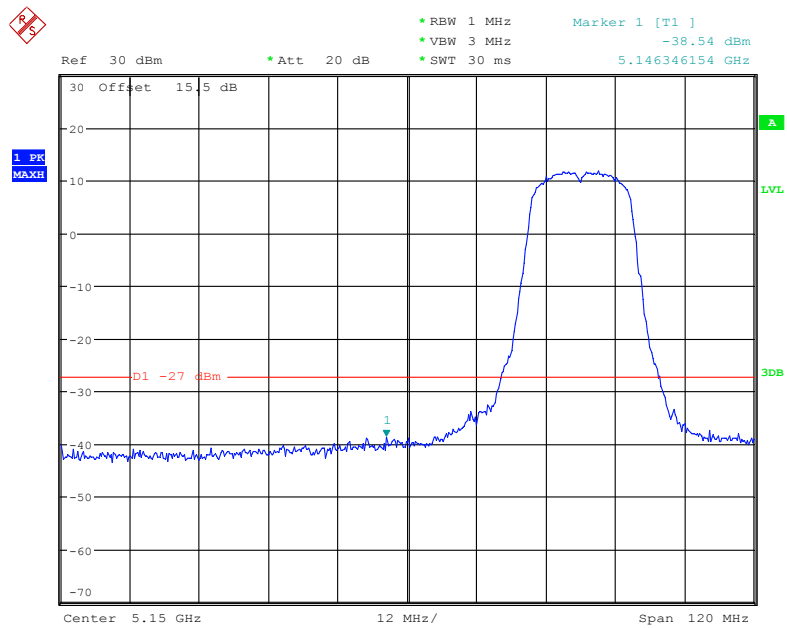


Date: 9.AUG.2018 23:27:10

802.11ac20 mode, Band Edge, Right Side

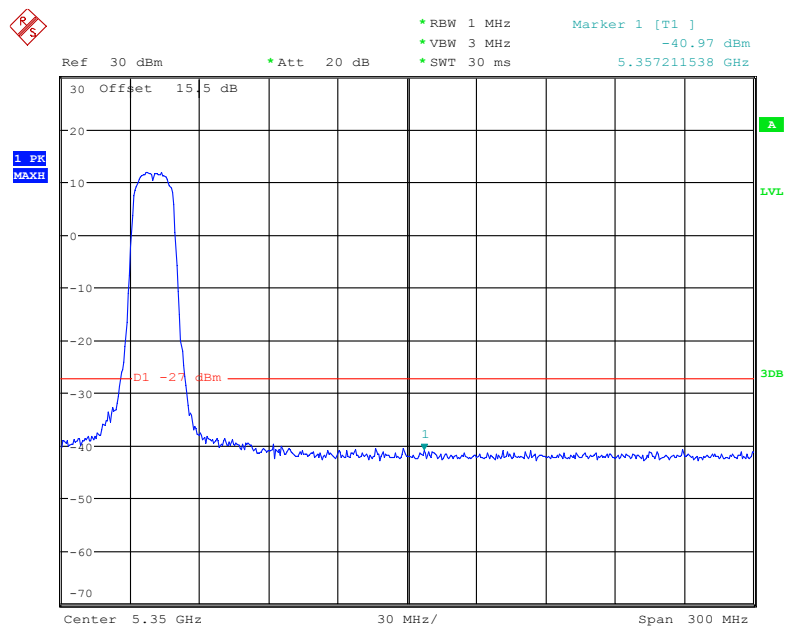


Date: 9.AUG.2018 23:29:33

802.11ac40 mode, Band Edge, Left Side

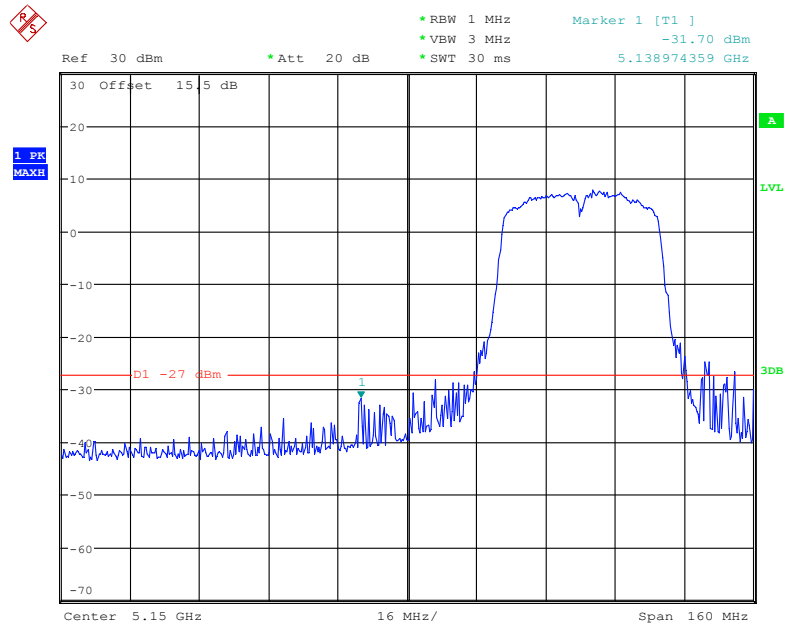


Date: 9.AUG.2018 23:20:31

802.11ac40 mode, Band Edge, Right Side

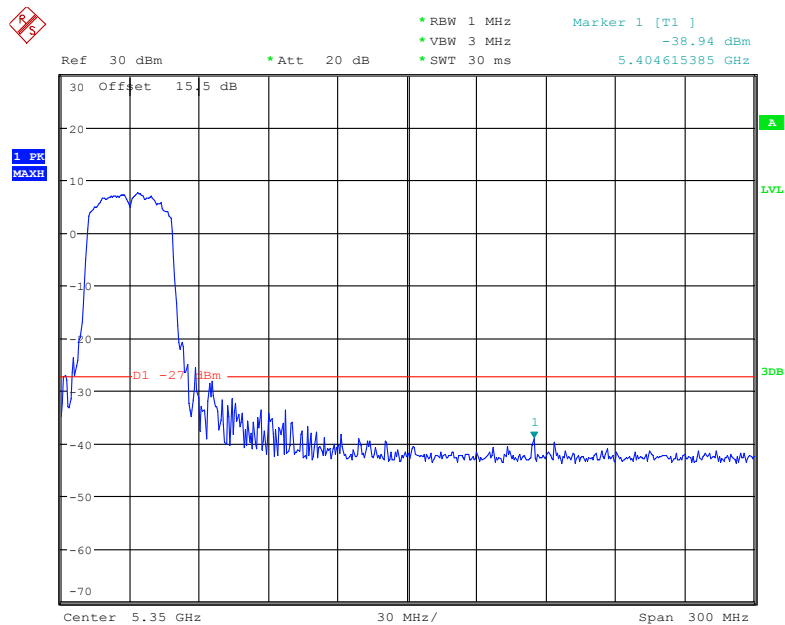


Date: 9.AUG.2018 23:21:29

802.11ac80 mode, Band Edge, Left Side

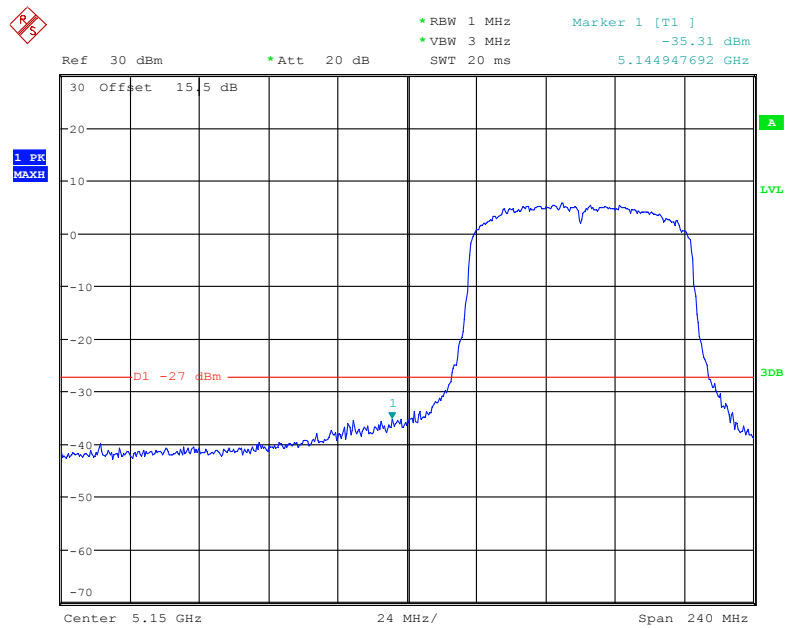

Date: 9.AUG.2018 23:10:41


802.11ac80 mode, Band Edge, Right Side

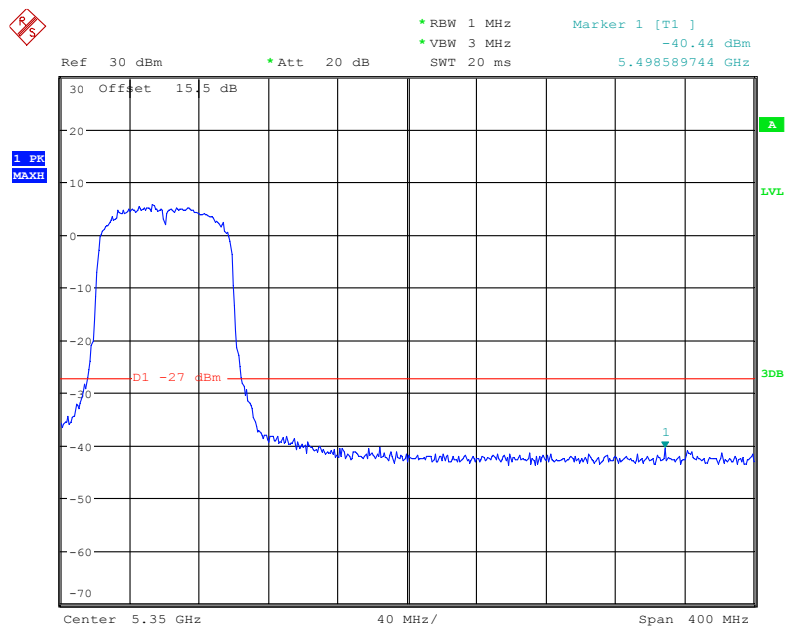

Date: 9.AUG.2018 23:11:21


5725 – 5850 MHz:

802.11a mode, Band Edge, Left Side

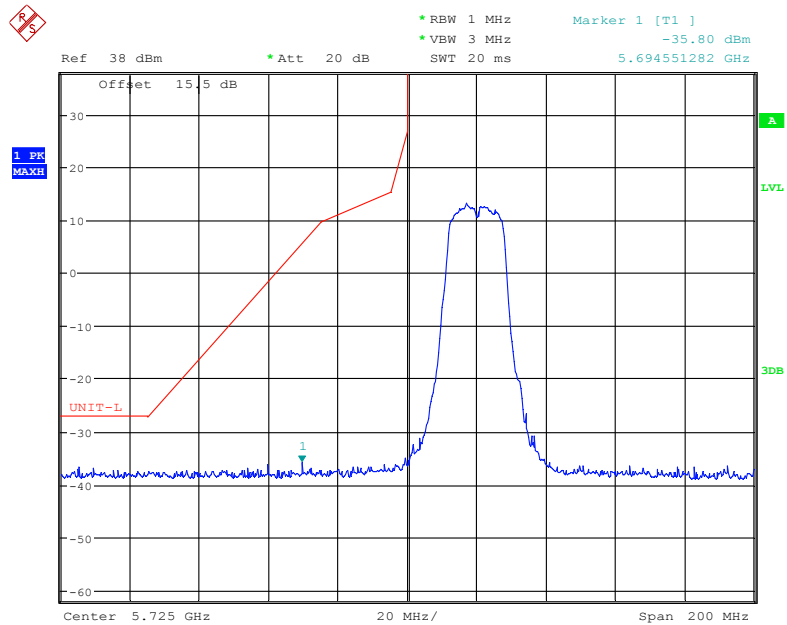


Date: 14.AUG.2018 20:47:19

802.11a mode, Band Edge, Right Side

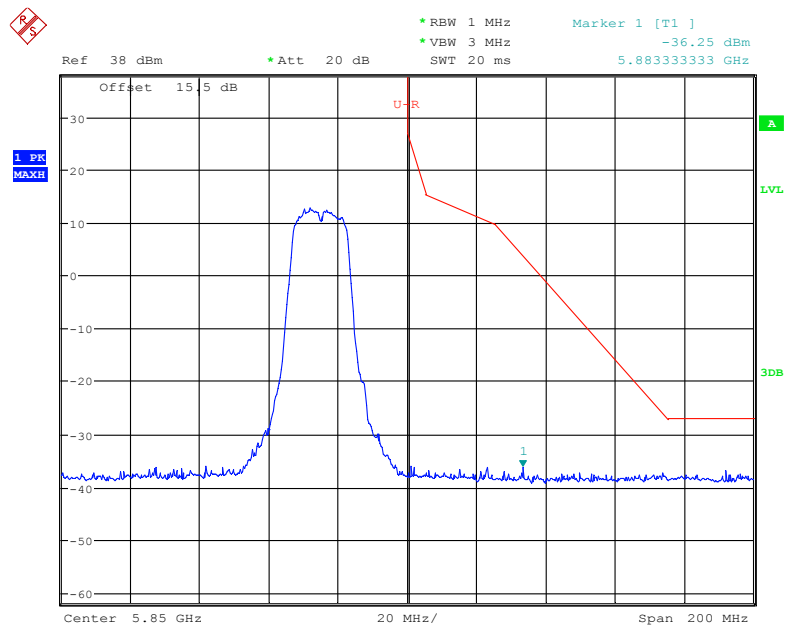


Date: 14.AUG.2018 20:49:21

802.11n20 mode, Band Edge, Left Side

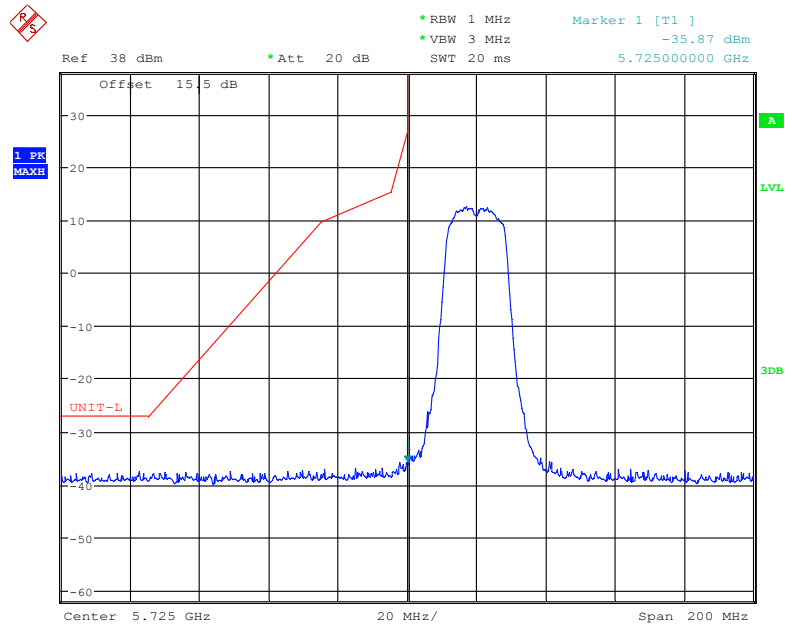


Date: 14.AUG.2018 20:51:01

802.11n20 mode, Band Edge, Right Side

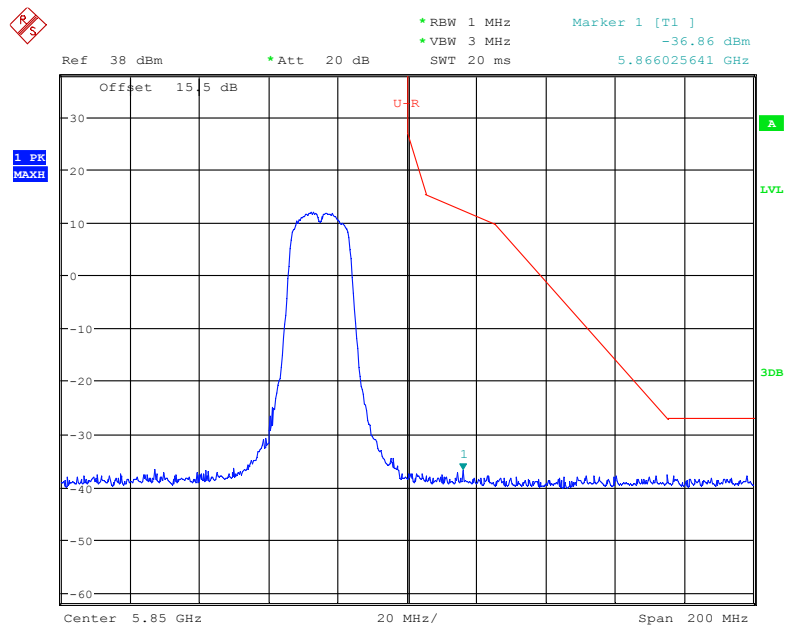


Date: 14.AUG.2018 20:50:19

802.11n40 mode, Band Edge, Left Side

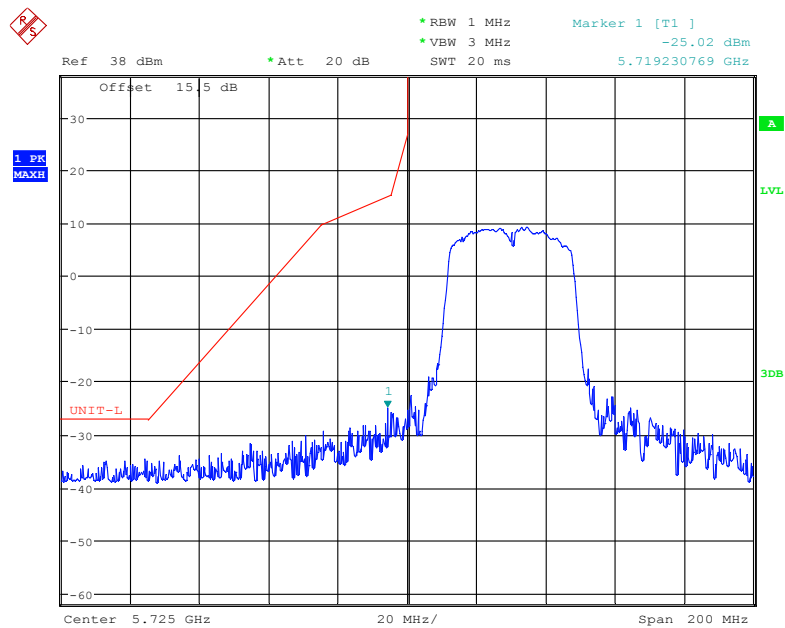


Date: 14.AUG.2018 20:54:54

802.11n40 mode, Band Edge, Right Side

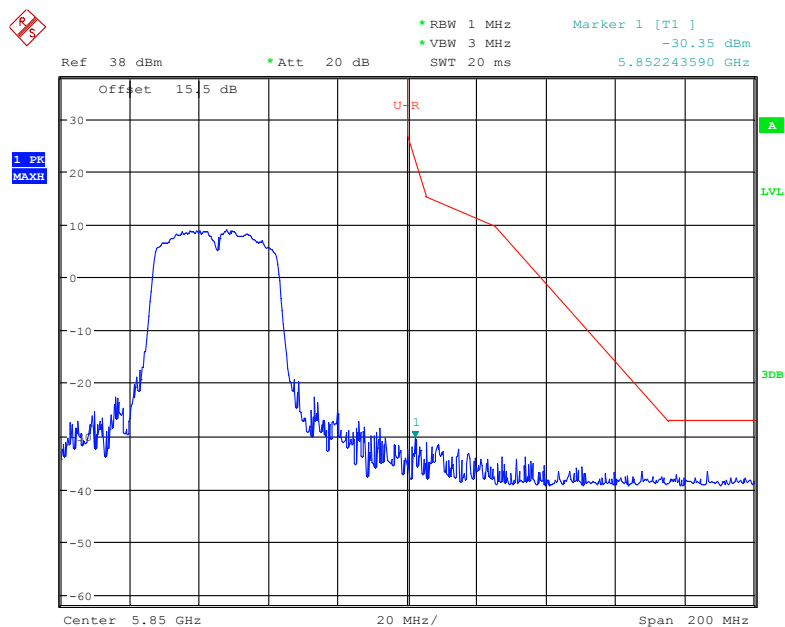


Date: 14.AUG.2018 20:56:13

802.11ac20 mode, Band Edge, Left Side

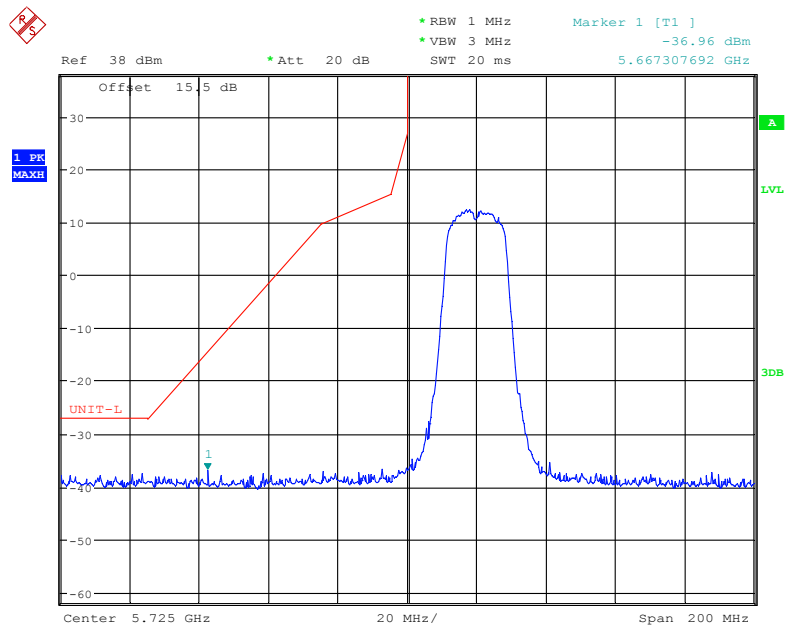


Date: 14.AUG.2018 20:51:33

802.11ac20 mode, Band Edge, Right Side

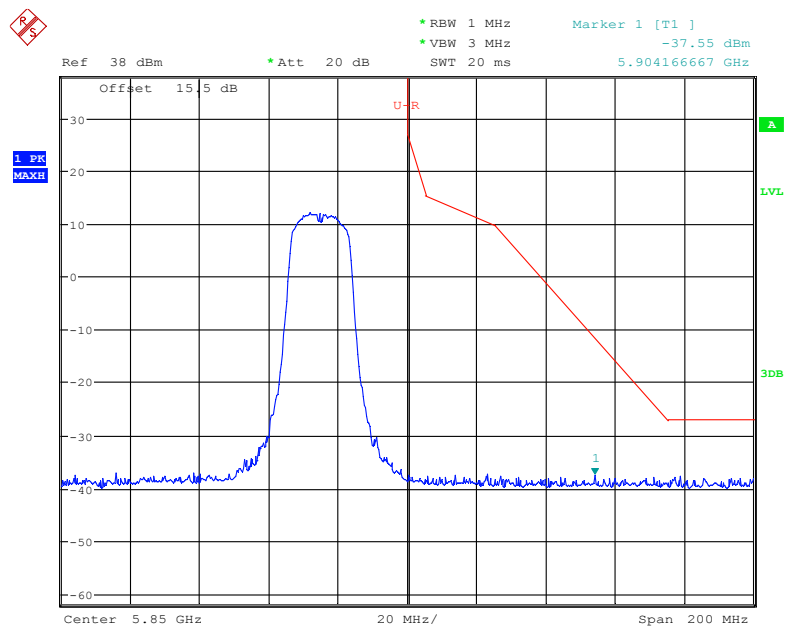


Date: 14.AUG.2018 20:52:13

802.11ac40 mode, Band Edge, Left Side

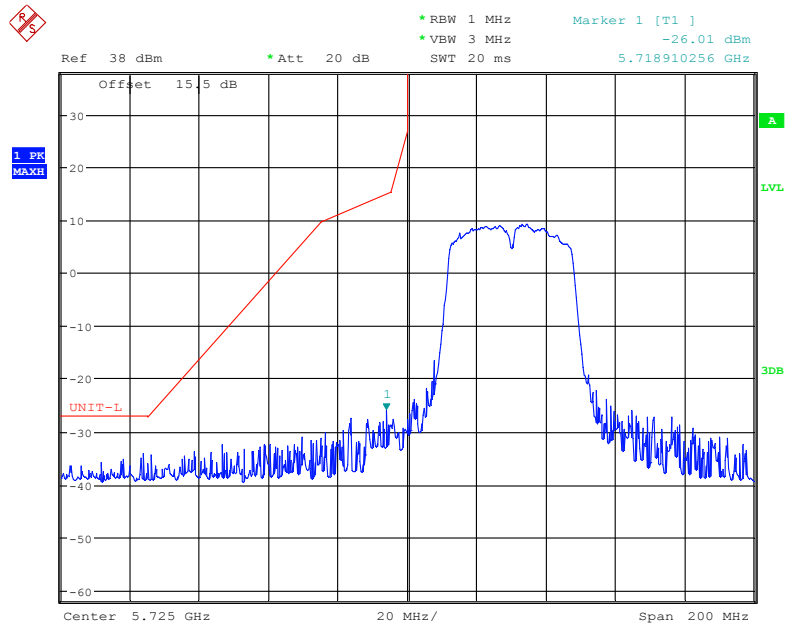


Date: 14.AUG.2018 20:57:14

802.11ac40 mode, Band Edge, Right Side

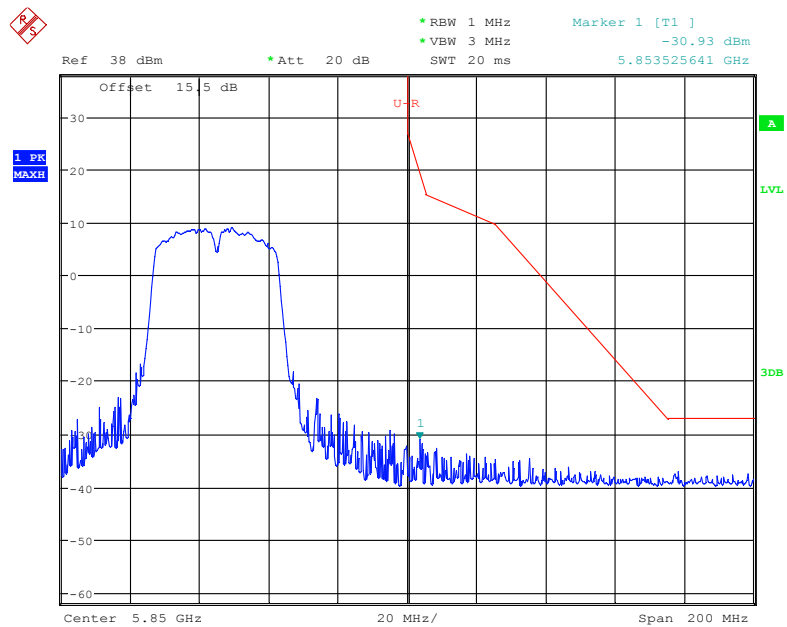


Date: 14.AUG.2018 20:58:11

802.11ac80 mode, Band Edge, Left Side

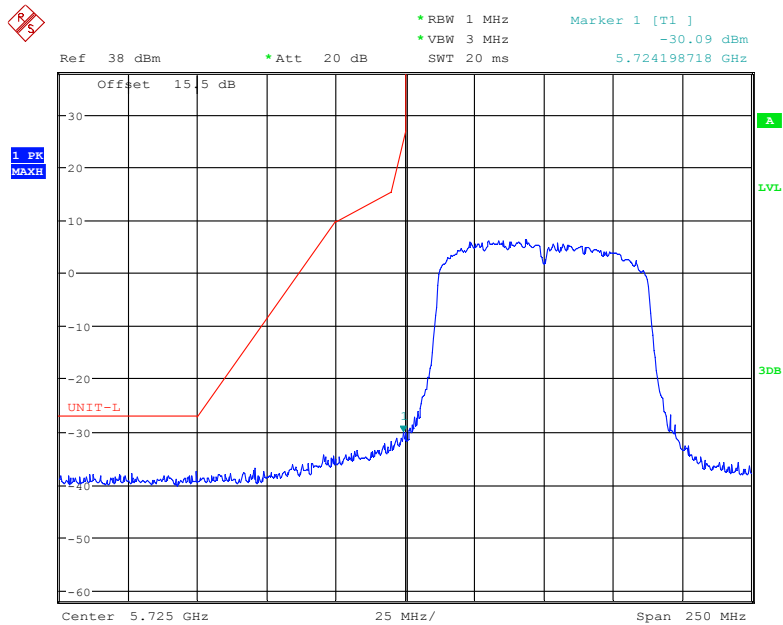

Date: 14.AUG.2018 20:59:56

802.11ac80 mode, Band Edge, Right Side

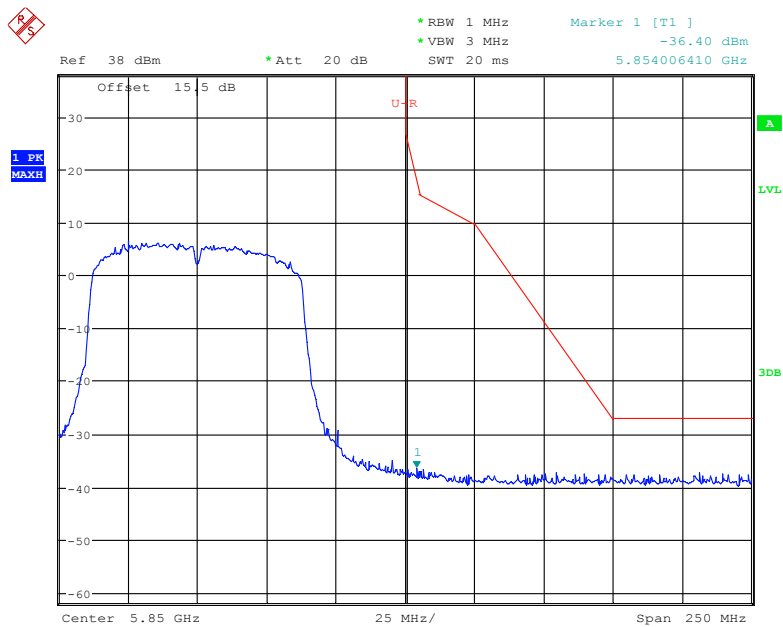

Date: 14.AUG.2018 20:59:26

FCC §15.407(a) (1) – 26 dB & 6dB EMISSION BANDWIDTH**Applicable Standard**

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.


Test Procedure**1. Emission Bandwidth (EBW)**

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**Test Data****Environmental Conditions**

Temperature:	26°C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Tracy Hu on 2018-08-09 and 2018-08-14.

EUT operation mode: Transmitting


Test Result: Pass; please refer to the following tables and plots.

Antenna 0:

5150 MHz - 5250 MHz:


Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)	Remark
802.11a			No transmitted signal in the 99% bandwidth extends into the U-NII-2A band
5180	19.295	16.410	
5200	19.231	16.346	
5240	19.359	16.346	
802.11n20			
5180	20.769	17.436	
5200	20.577	17.436	
5240	20.513	17.436	
802.11n40			
5190	41.154	36.026	
5230	41.154	36.026	
802.11ac20			
5180	20.385	17.436	
5200	20.641	17.436	
5240	20.385	17.436	
802.11ac40			
5190	41.026	35.897	
5230	41.026	35.897	
802.11ac80			
5210	83.846	75.128	

802.11a mode, 26 dB Emissions, 5180 MHz

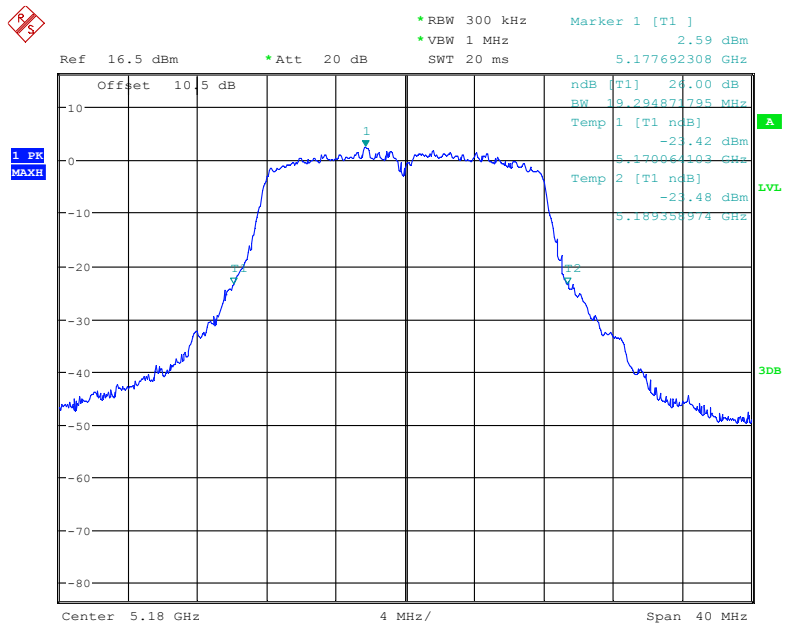


Date: 14.AUG.2018 19:03:00

802.11a mode, 26 dB Emissions, 5200 MHz

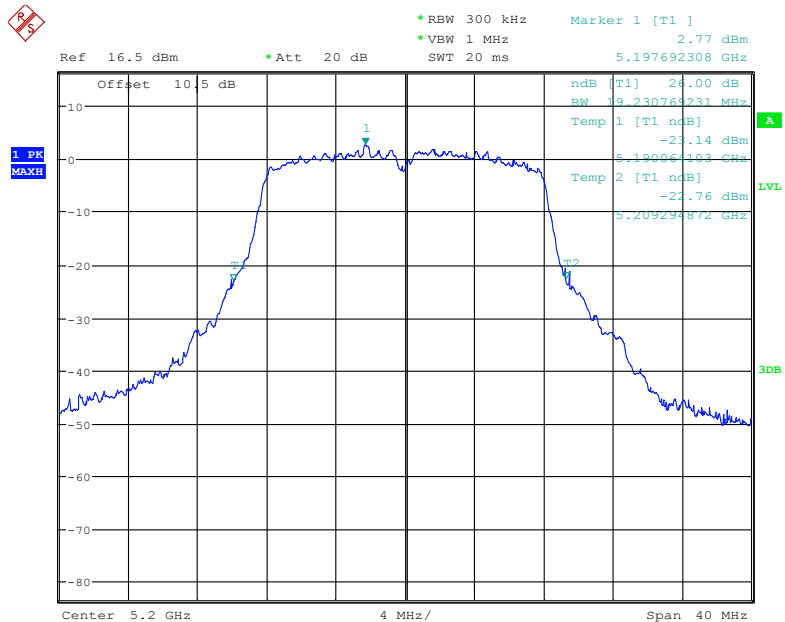


Date: 14.AUG.2018 18:59:02

802.11a mode, 26 dB Emissions, 5240 MHz

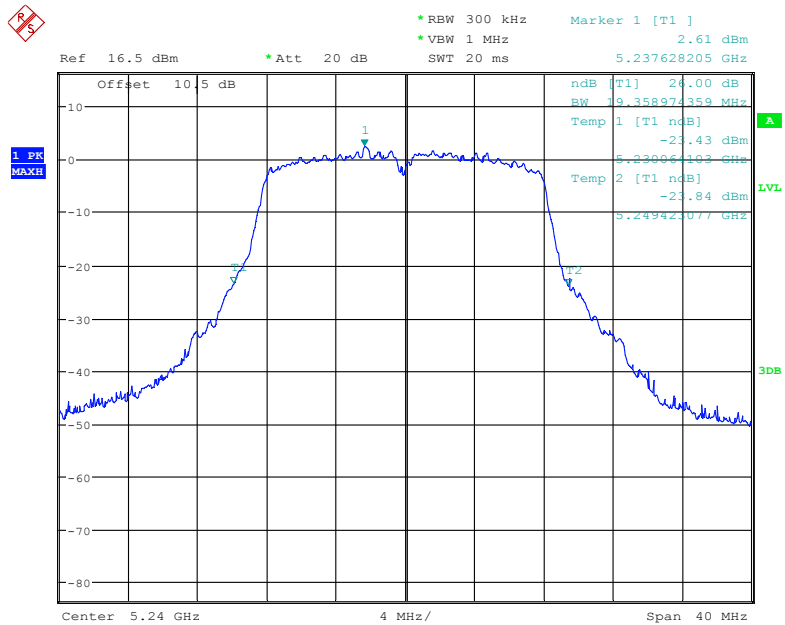


Date: 14.AUG.2018 19:01:59

802.11n20 mode, 26 dB Emissions, 5180 MHz

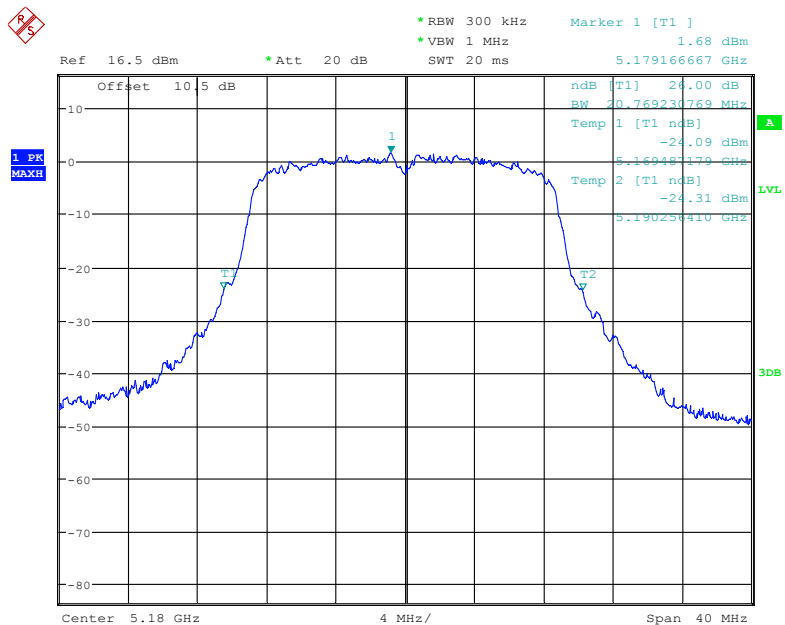


Date: 14.AUG.2018 19:04:43

802.11n20 mode, 26 dB Emissions, 5200 MHz

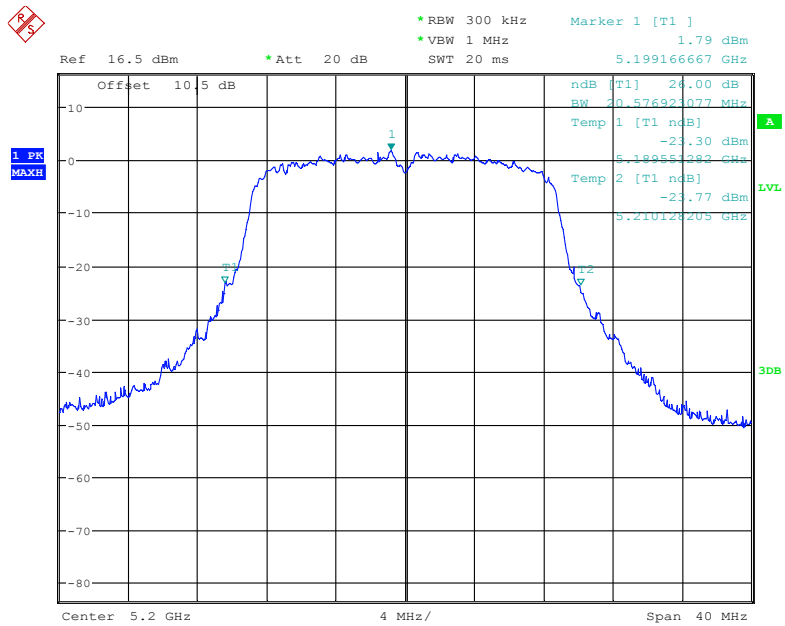


Date: 14.AUG.2018 19:05:32

802.11n20 mode, 26 dB Emissions, 5240 MHz

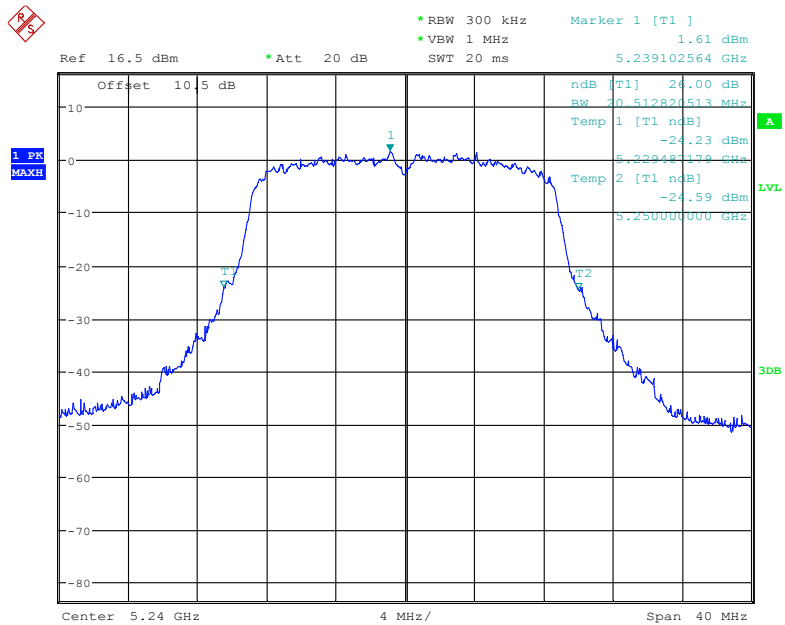


Date: 14.AUG.2018 19:06:20

802.11n40 mode, 26 dB Emissions, 5190 MHz

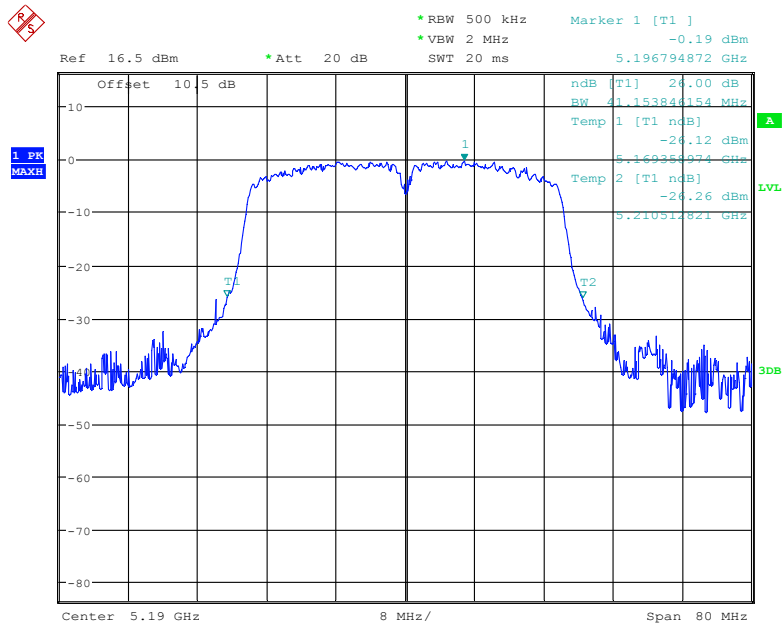


Date: 14.AUG.2018 19:09:26

802.11n40 mode, 26 dB Emissions, 5230 MHz

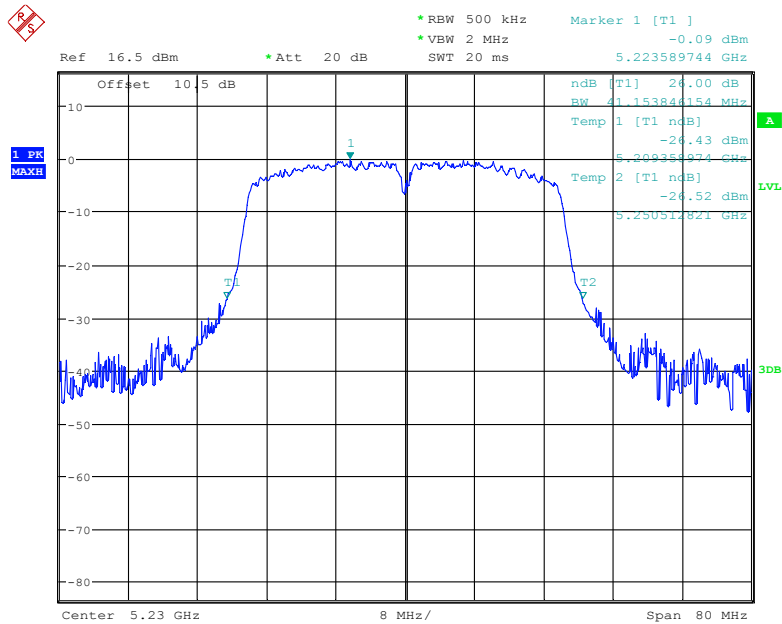


Date: 14.AUG.2018 19:10:44

802.11ac20 mode, 26 dB Emissions, 5180 MHz

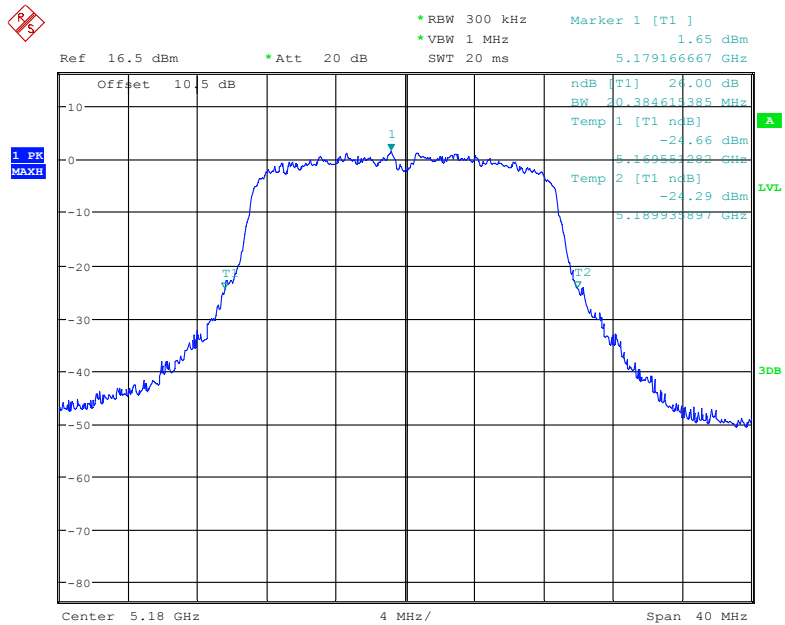


Date: 14.AUG.2018 19:07:01

802.11ac20 mode, 26 dB Emissions, 5200 MHz

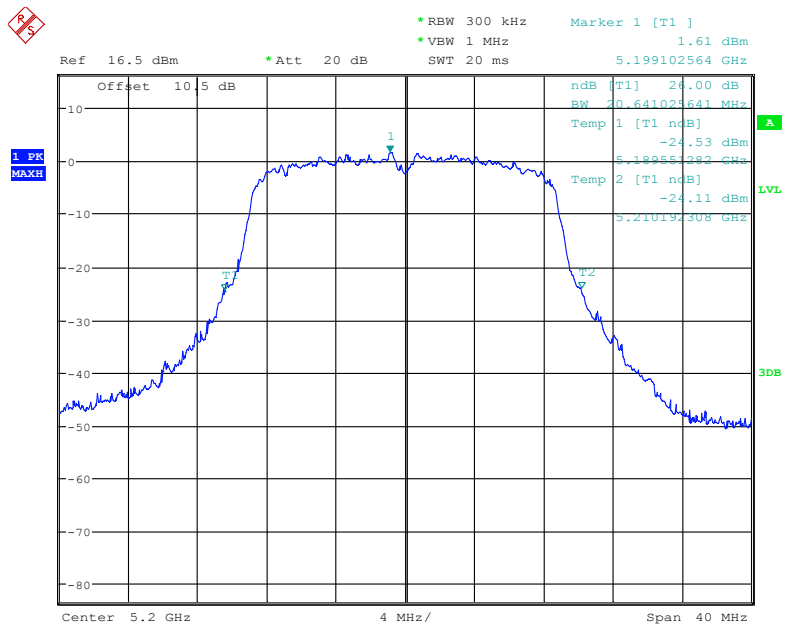


Date: 14.AUG.2018 19:07:40

802.11ac20 mode, 26 dB Emissions, 5240 MHz

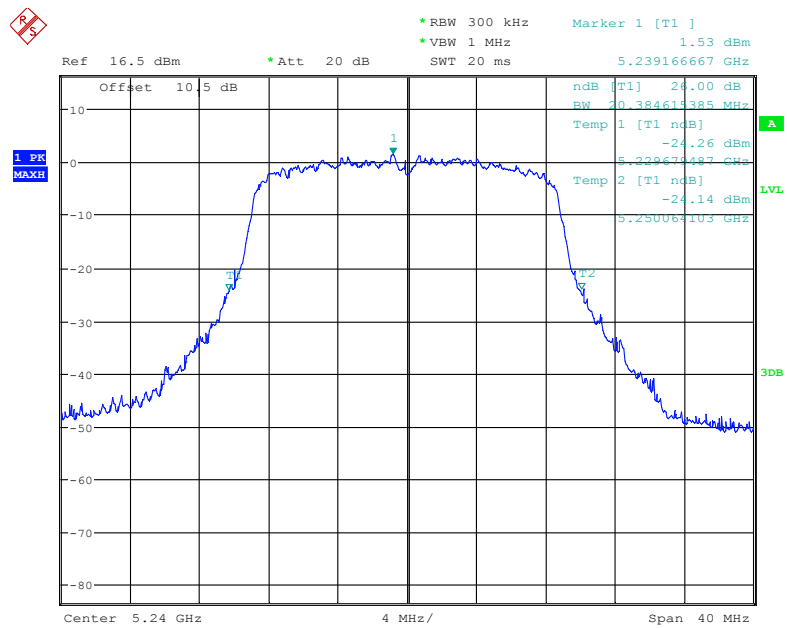

Date: 14.AUG.2018 19:08:05

802.11ac40 mode, 26 dB Emissions, 5190 MHz

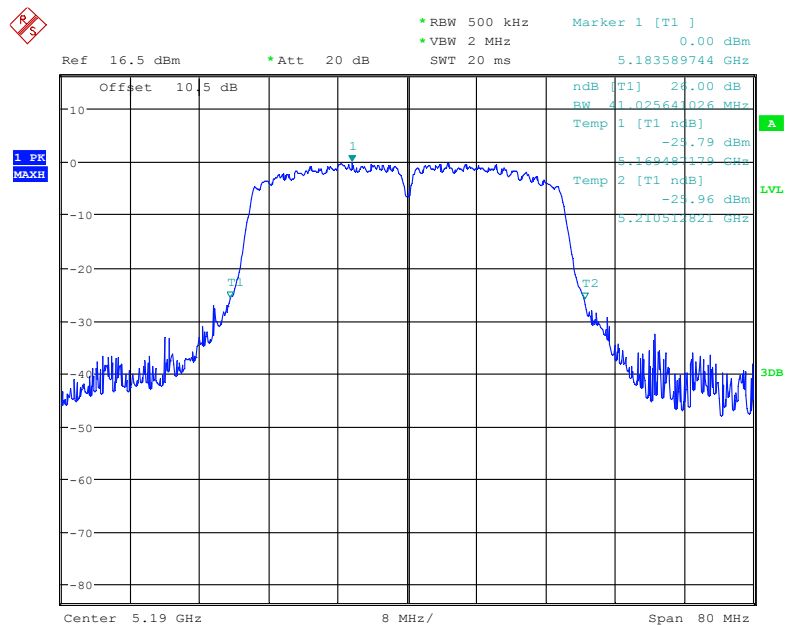

Date: 14.AUG.2018 19:11:40

Ref 16.5 dBm * Att 20 dB

* RBW 500 kHz * VBW 2 MHz * SWT 20 ms

Marker 1 [T1] -0.27 dBm 5.240128205 GHz

Offset 10.5 dB

1 PK MAXH

ndB [T1] 24.00 dB
BW 41.025641026 MHz
Temp 1 [T1 ndB] -24.33 dBm
5.200358974 GHz
Temp 2 [T1 ndB] -24.76 dBm
5.250386615 GHz

Center 5.23 GHz 8 MHz/ Span 80 MHz

Date: 14.AUG.2018 19:12:23

Ref 16.5 dBm *Att 20 dB

*RBW 1 MHz *VBW 3 MHz SWT 20 ms

Marker 1 [T1] 0.35 dBm 5.203333333 GHz

Offset 10.5 dB

1 PK MAXH

1

T1

T2


ndB [T1] 24.00 dB
BW 53.846153846 MHz
Temp 1 [T1 ndB] -29.45 dBm
5.167944718 GHz
Temp 2 [T1 ndB] -29.96 dBm
5.251794872 GHz

3DB

Center 5.21 GHz 16 MHz/ Span 160 MHz


Date: 14.AUG.2018 19:13:39

802.11a mode, 99% Occupied Bandwidth, 5180 MHz

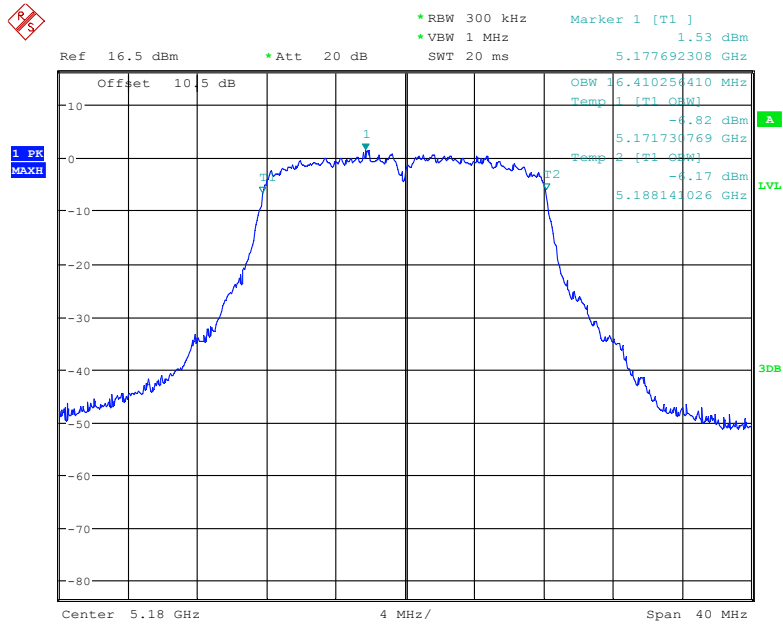


Date: 14.AUG.2018 19:19:35

802.11a mode, 99% Occupied Bandwidth, 5200 MHz

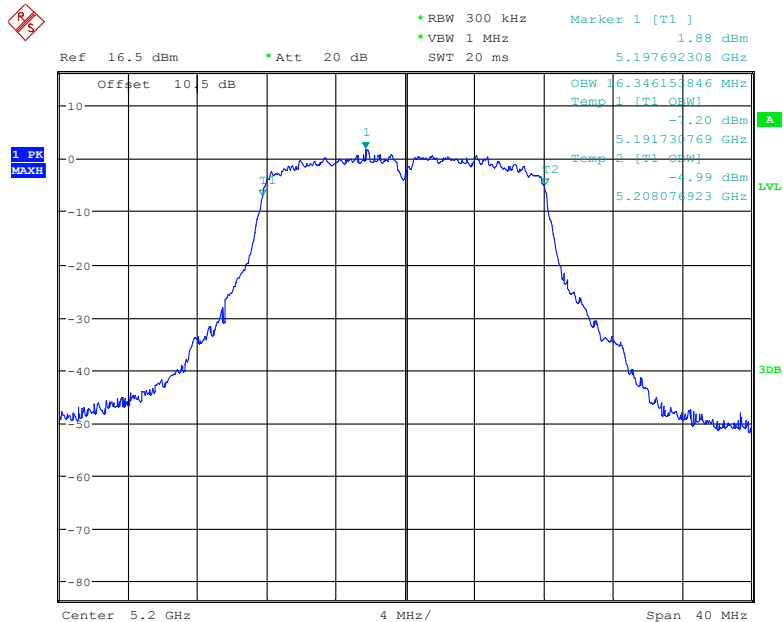


Date: 14.AUG.2018 19:20:06

802.11a mode, 99% Occupied Bandwidth, 5240 MHz

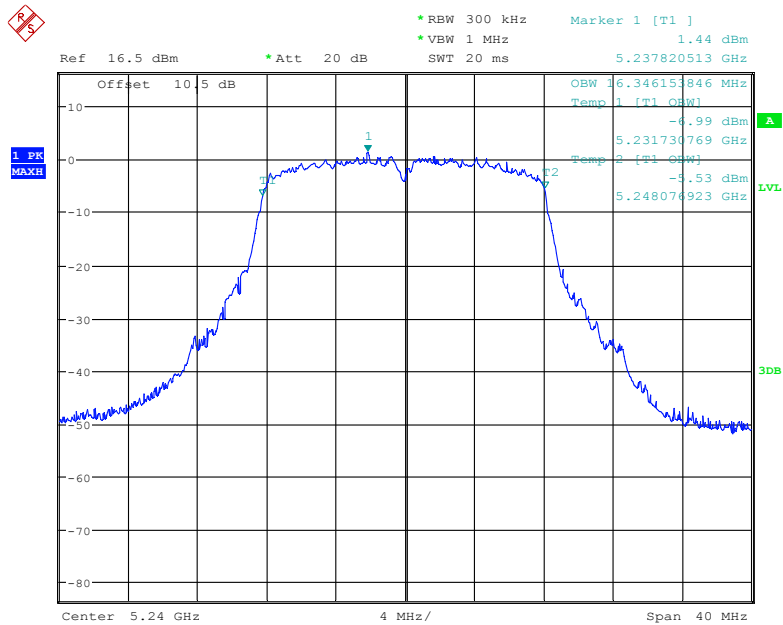


Date: 14.AUG.2018 19:20:29

802.11n20 mode, 99% Occupied Bandwidth, 5180 MHz

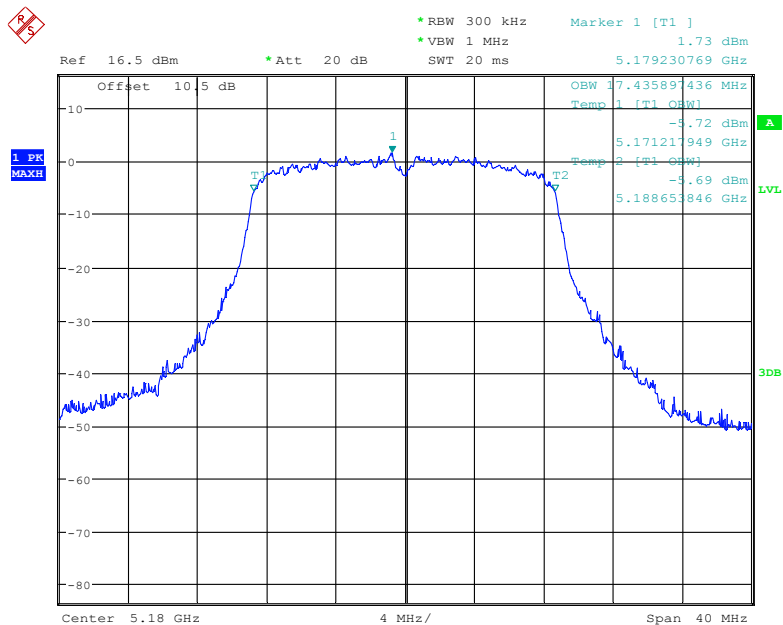


Date: 14.AUG.2018 19:21:17

802.11n20 mode, 99% Occupied Bandwidth, 5200 MHz

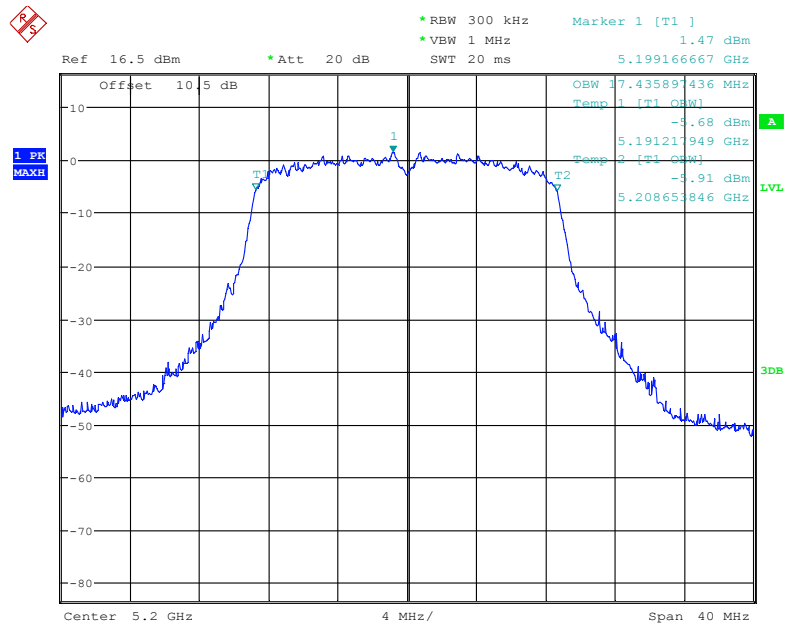


Date: 14.AUG.2018 19:21:54

802.11n20 mode, 99% Occupied Bandwidth, 5240 MHz

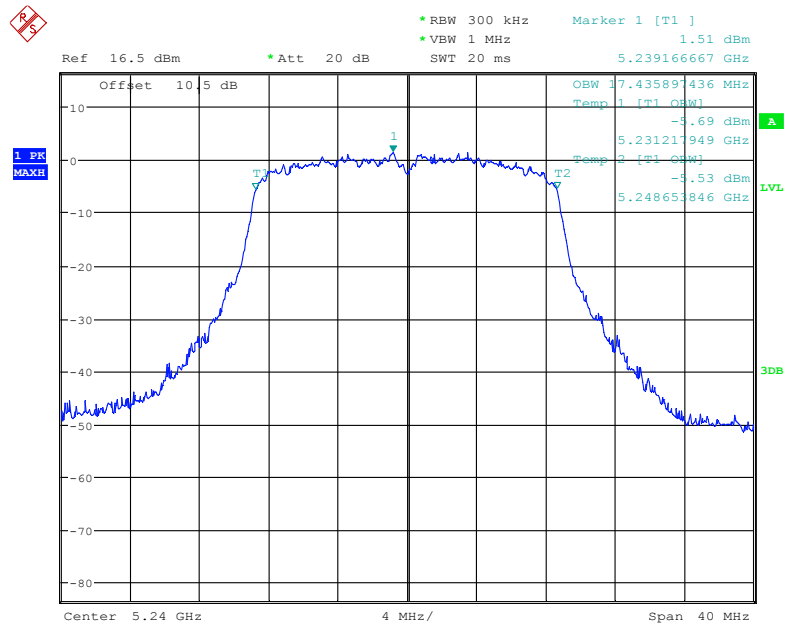


Date: 14.AUG.2018 19:22:18

802.11n40 mode, 99% Occupied Bandwidth, 5190 MHz

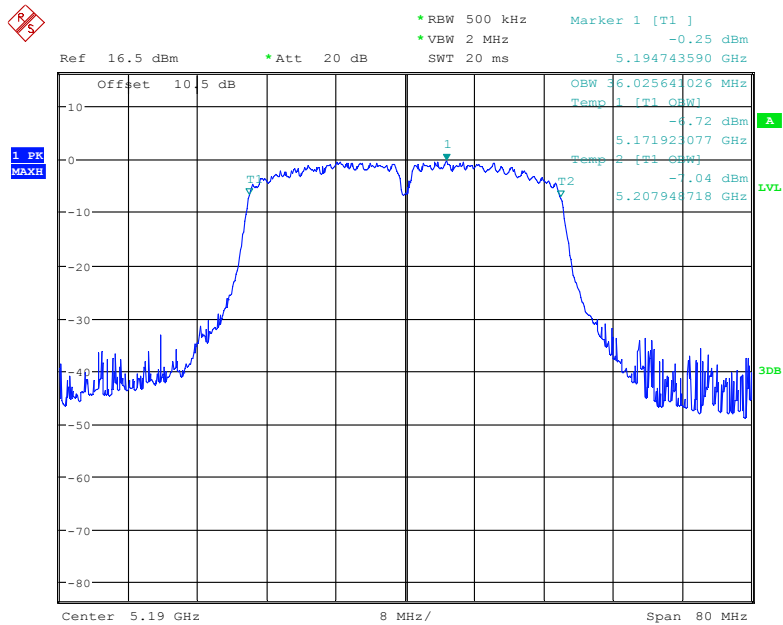


Date: 14.AUG.2018 19:16:30

802.11n40 mode, 99% Occupied Bandwidth, 5230 MHz

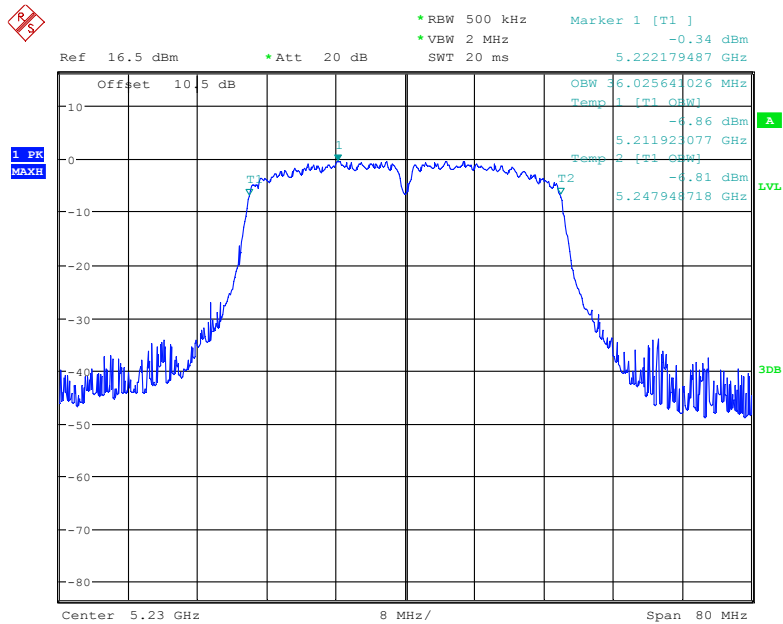


Date: 14.AUG.2018 19:17:19

802.11ac20 mode, 99% Occupied Bandwidth, 5180 MHz

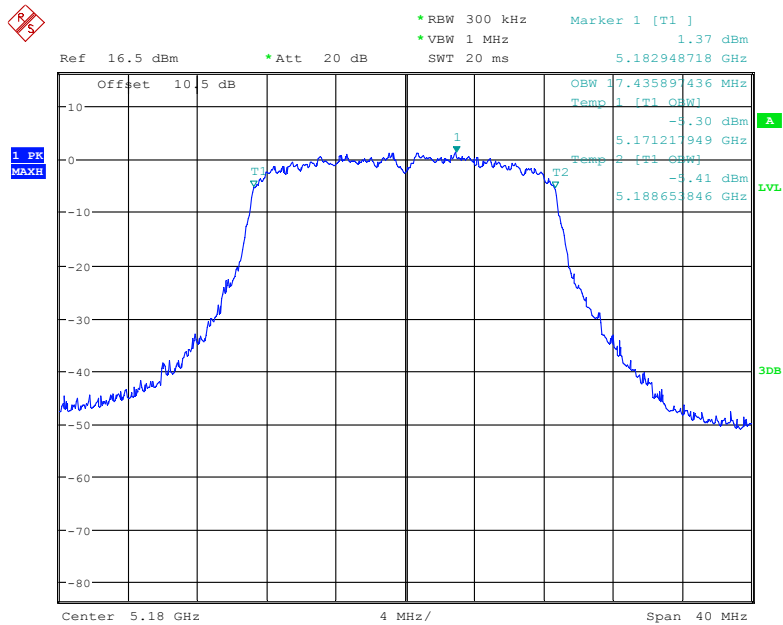


Date: 14.AUG.2018 19:22:44

802.11ac20 mode, 99% Occupied Bandwidth, 5200 MHz

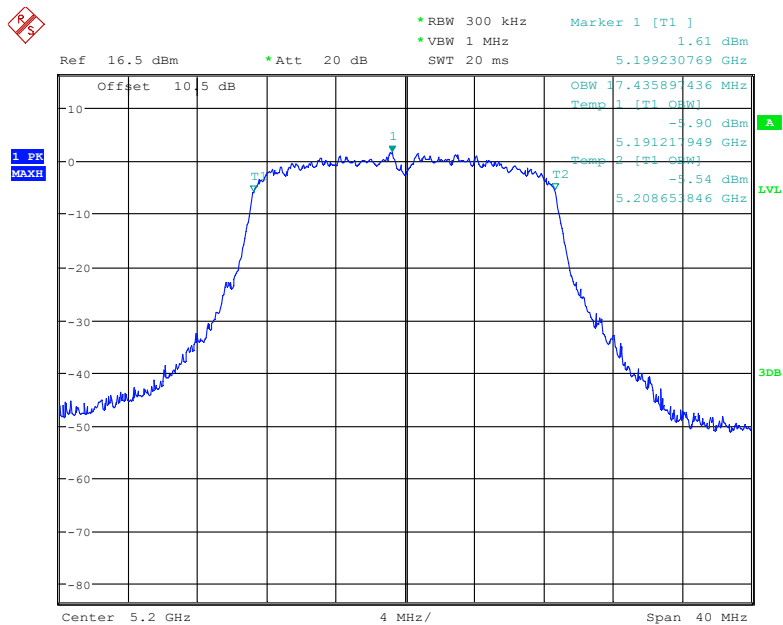


Date: 14.AUG.2018 19:23:20

802.11ac20 mode, 99% Occupied Bandwidth, 5240 MHz

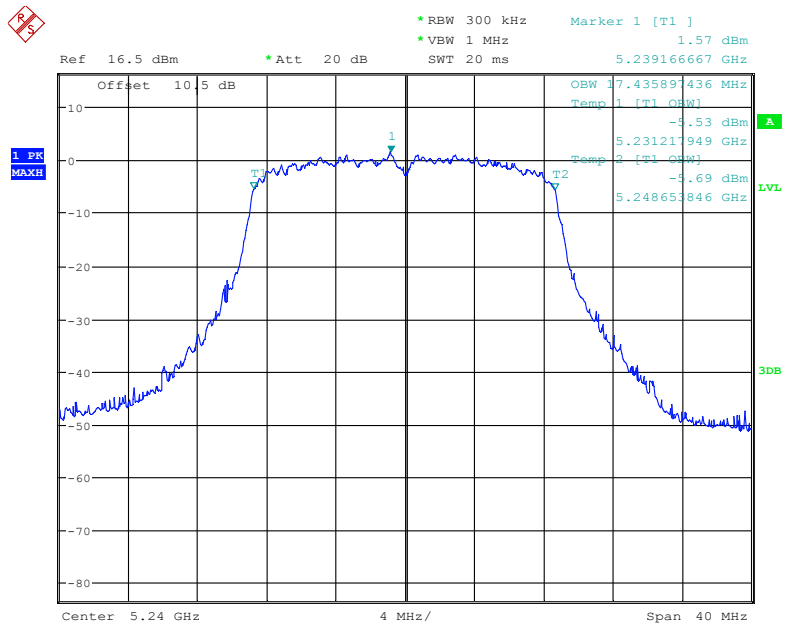


Date: 14.AUG.2018 19:23:47

802.11ac40 mode, 99% Occupied Bandwidth, 5190 MHz

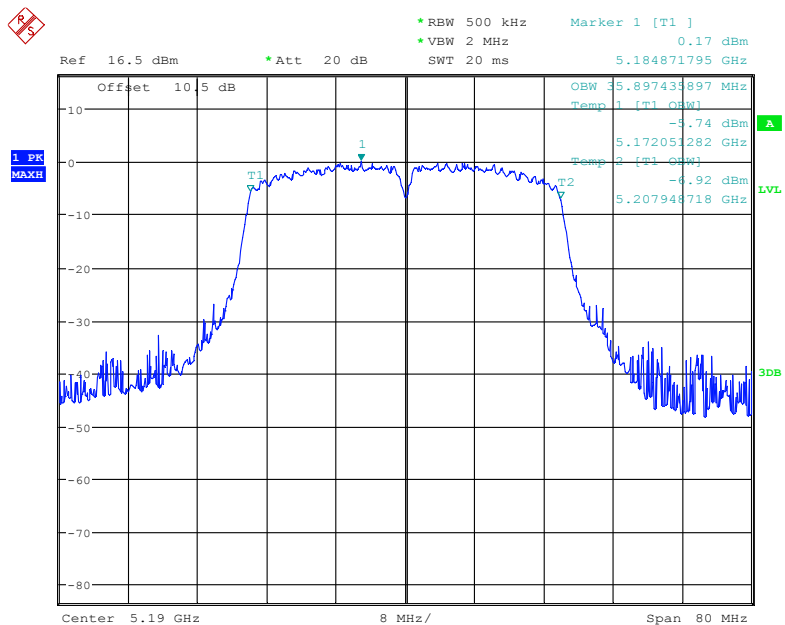


Date: 14.AUG.2018 19:17:51

802.11ac40 mode, 99% Occupied Bandwidth, 5230 MHz

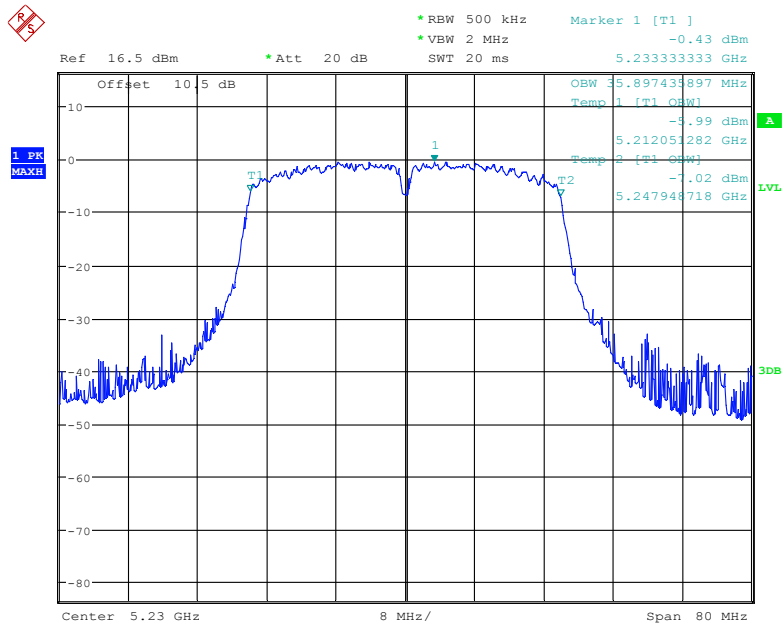

Date: 14.AUG.2018 19:18:24

802.11ac80 mode, 99% Occupied Bandwidth, 5210 MHz

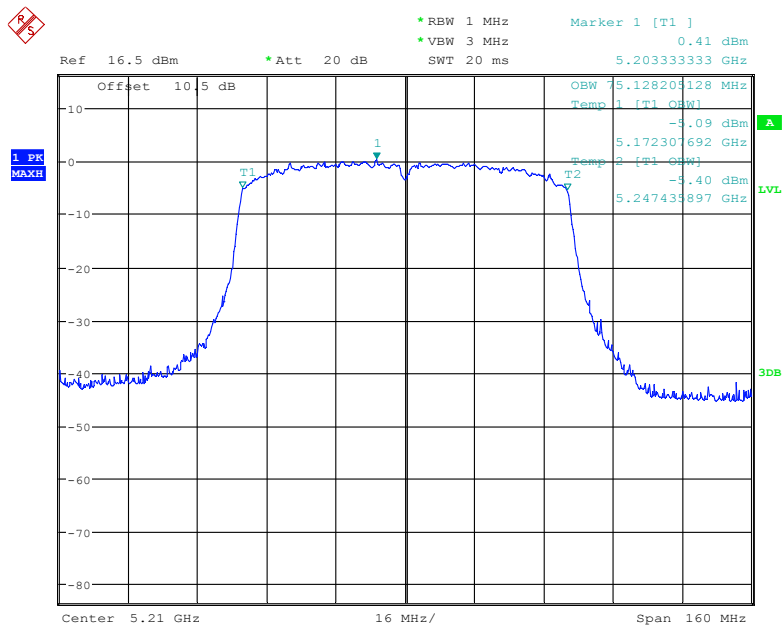


Date: 14.AUG.2018 19:15:44

Antenna 0:

5725 MHz – 5850 MHz:


Frequency (MHz)	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)	Remark
802.11a				No transmitted signal in the 99% bandwidth extends into the U-NII-2C band
5745	15.385	16.346	0.5	
5785	15.513	16.346	0.5	
5825	15.385	16.346	0.5	
802.11n20				
5745	15.513	17.436	0.5	
5785	15.513	17.500	0.5	
5825	15.577	17.500	0.5	
802.11n40				
5755	35.000	35.897	0.5	
5795	35.128	35.897	0.5	
802.11ac20				
5745	15.513	17.436	0.5	
5785	15.577	17.436	0.5	
5825	15.513	17.436	0.5	
802.11ac40				
5755	35.128	35.897	0.5	
5795	35.128	35.897	0.5	
802.11ac80				
5775	75.128	75.128	0.5	

802.11a mode, 6dB Emission Bandwidth, 5745 MHz

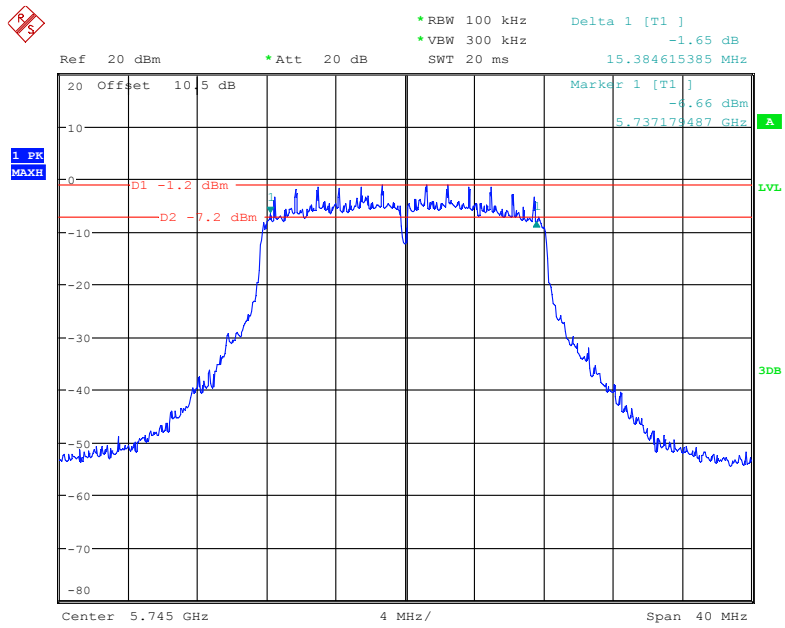


Date: 14.AUG.2018 22:31:25

802.11a mode, 6dB Emission Bandwidth, 5785 MHz

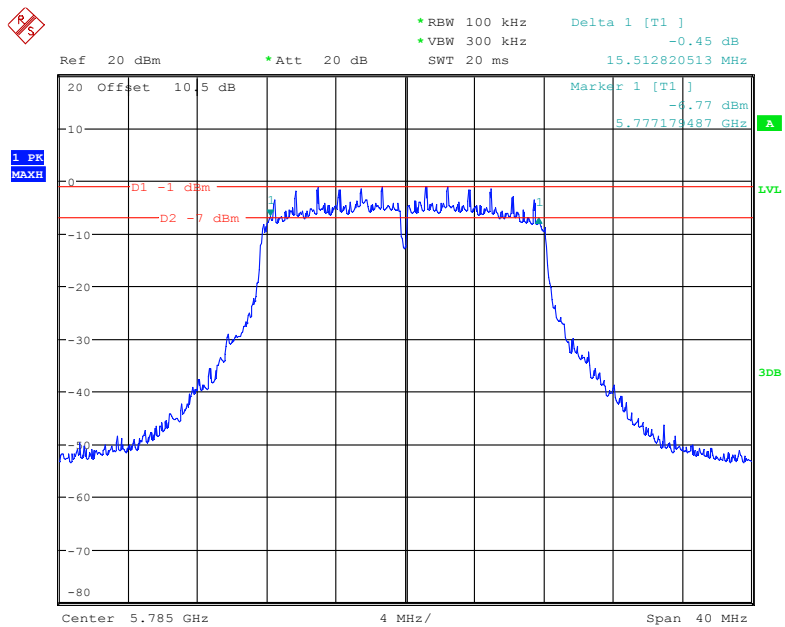


Date: 14.AUG.2018 22:36:44

802.11a mode, 6dB Emission Bandwidth, 5825 MHz

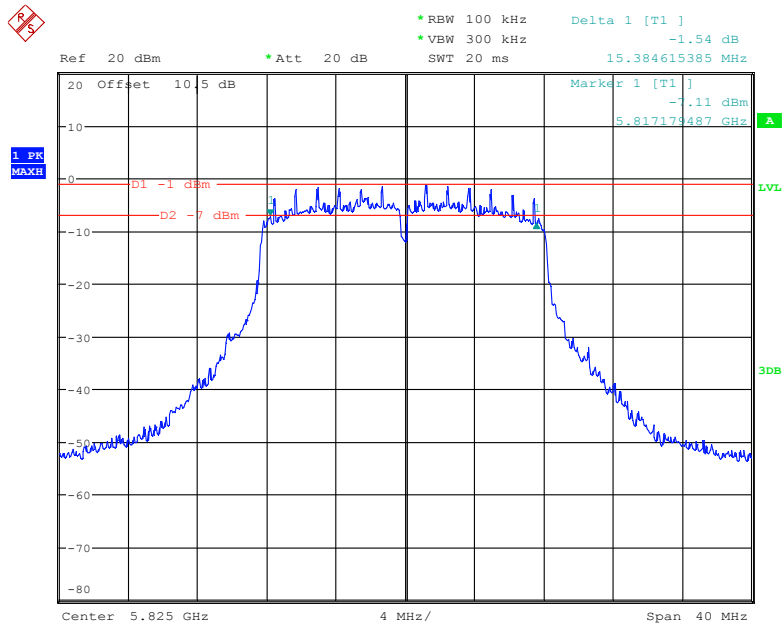


Date: 14.AUG.2018 22:35:39

802.11n20 mode, 6dB Emission Bandwidth, 5745 MHz

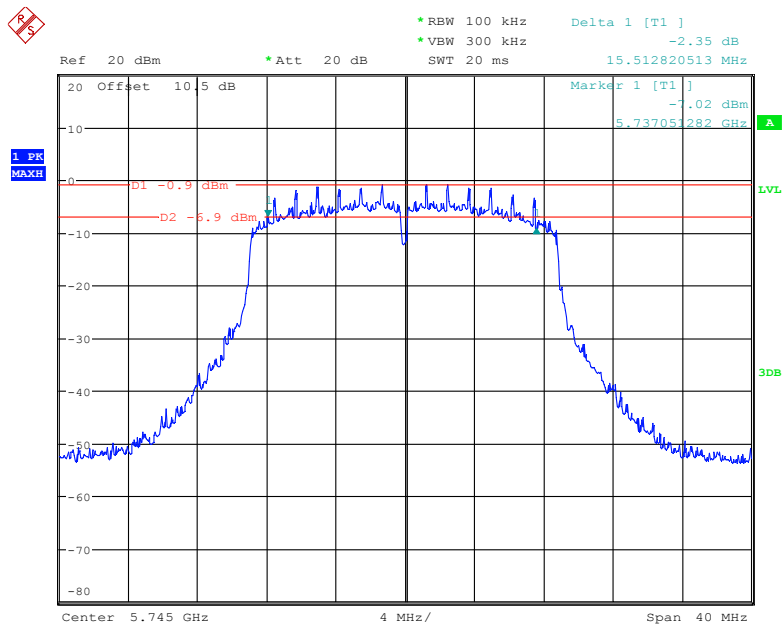


Date: 14.AUG.2018 22:39:46

802.11n20 mode, 6dB Emission Bandwidth, 5785 MHz

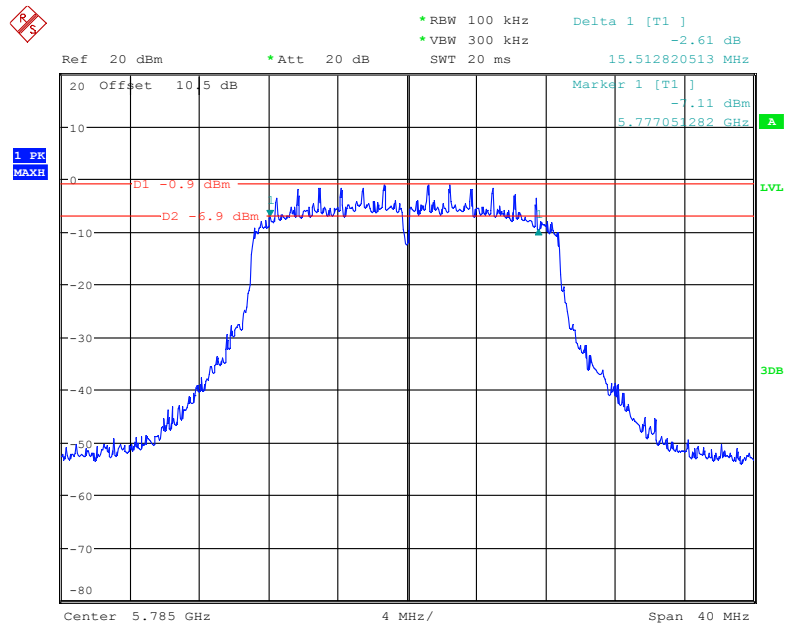


Date: 14.AUG.2018 22:40:33

802.11n20 mode, 6dB Emission Bandwidth, 5825 MHz

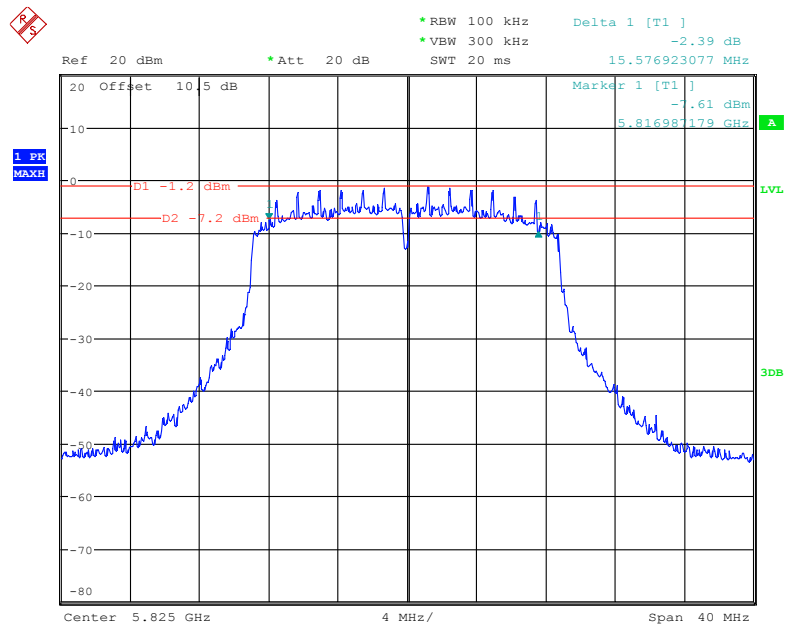


Date: 14.AUG.2018 22:41:55

802.11n40 mode, 6dB Emission Bandwidth, 5755 MHz

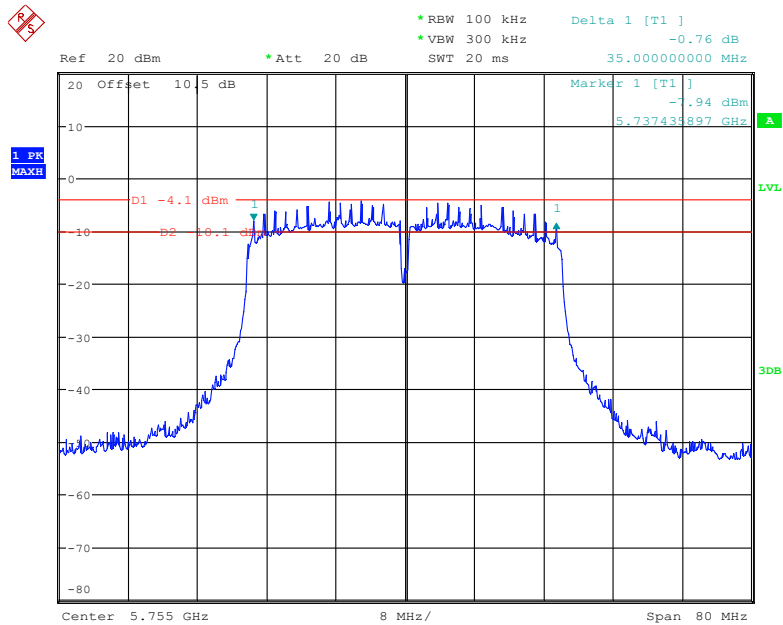


Date: 14.AUG.2018 22:43:31

802.11n40 mode, 6dB Emission Bandwidth, 5795 MHz

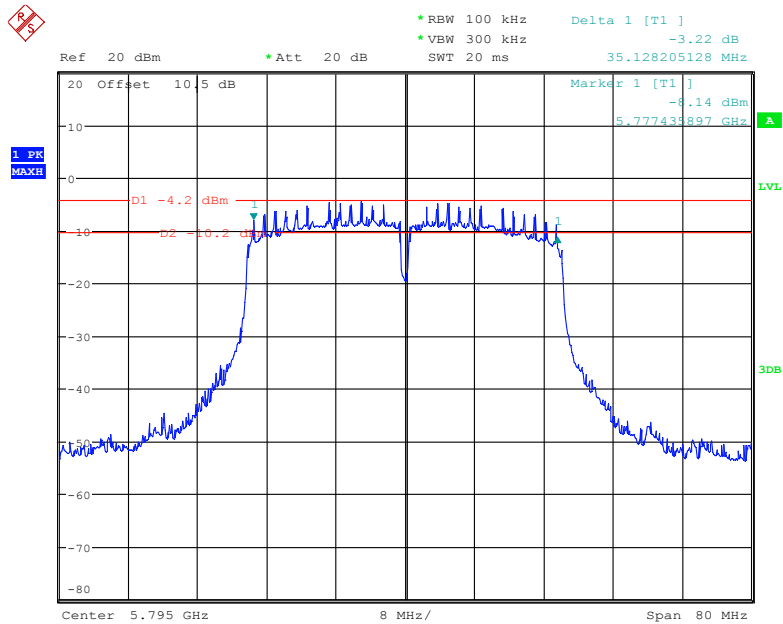


Date: 14.AUG.2018 22:44:54

802.11ac20 mode, 6dB Emission Bandwidth, 5745 MHz

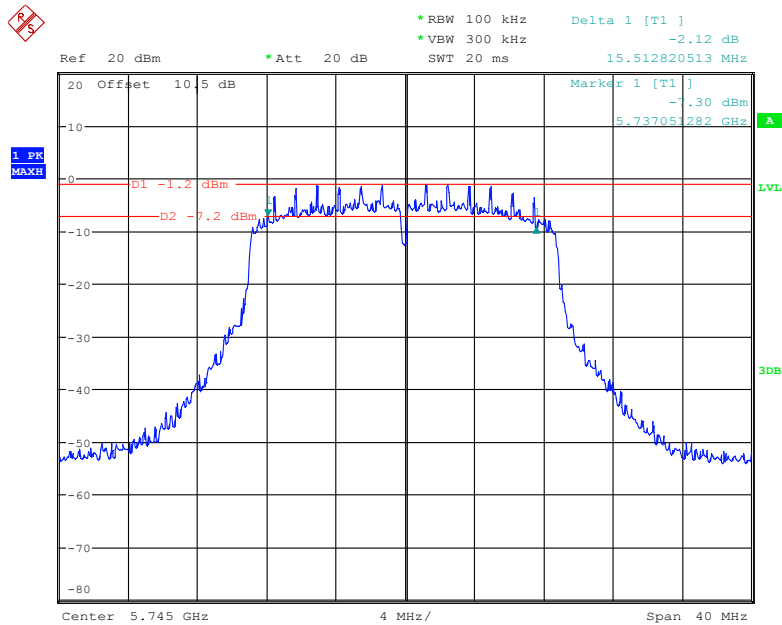


Date: 14.AUG.2018 22:30:13

802.11ac20 mode, 6dB Emission Bandwidth, 5785 MHz

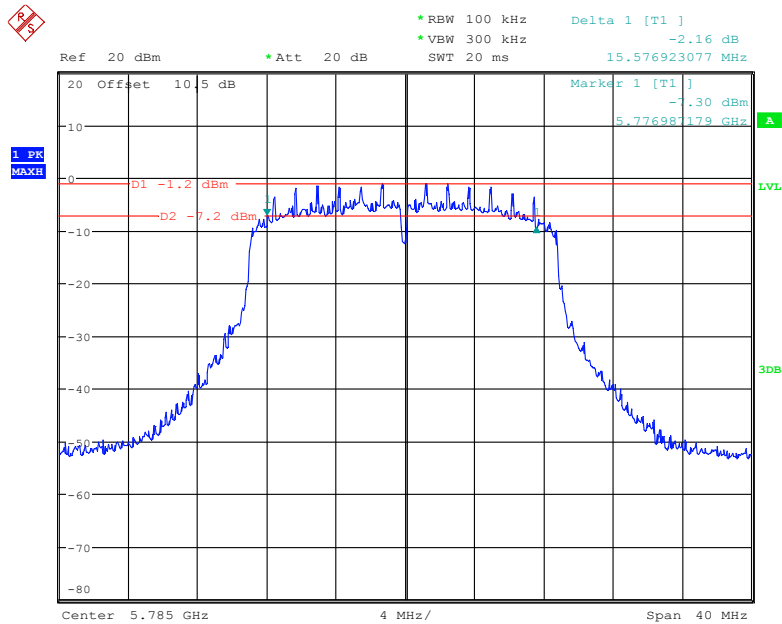


Date: 14.AUG.2018 22:29:13

802.11ac20 mode, 6dB Emission Bandwidth, 5825 MHz

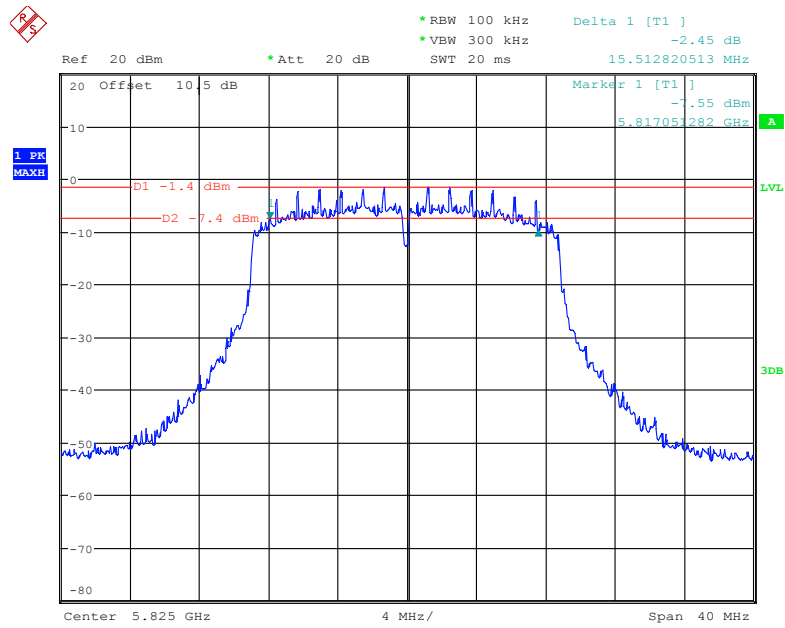


Date: 14.AUG.2018 22:27:29

802.11ac40 mode, 6dB Emission Bandwidth, 5755 MHz

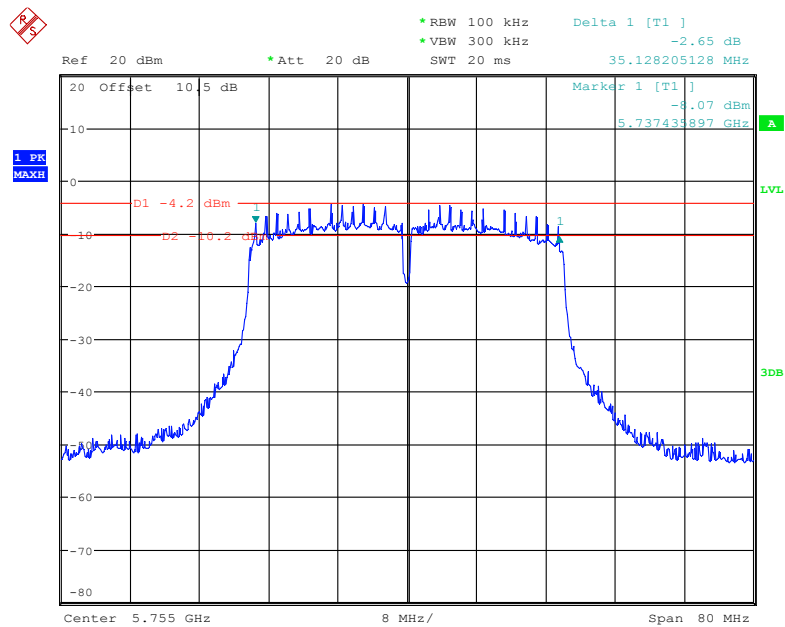


Date: 14.AUG.2018 22:46:26

802.11ac40 mode, 6dB Emission Bandwidth, 5795 MHz

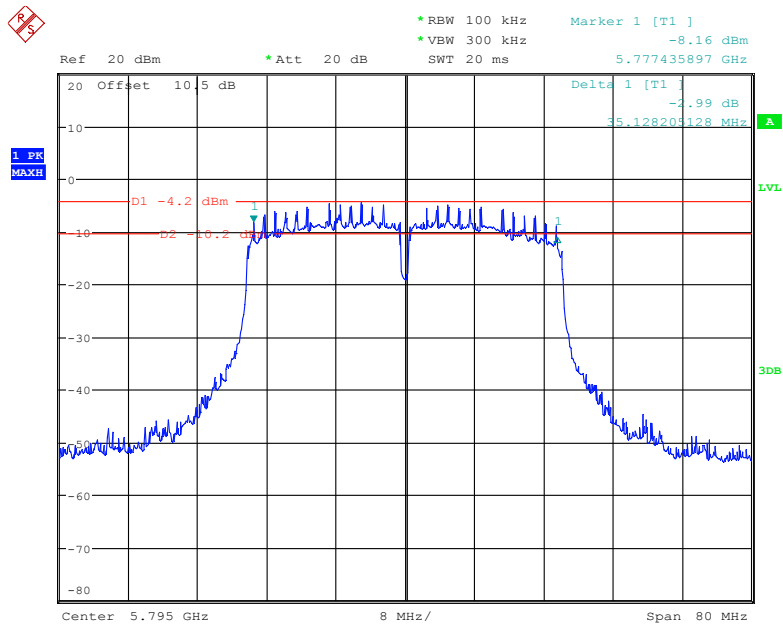


Date: 14.AUG.2018 22:47:46

802.11ac80 mode, 6dB Emission Bandwidth, 5775 MHz

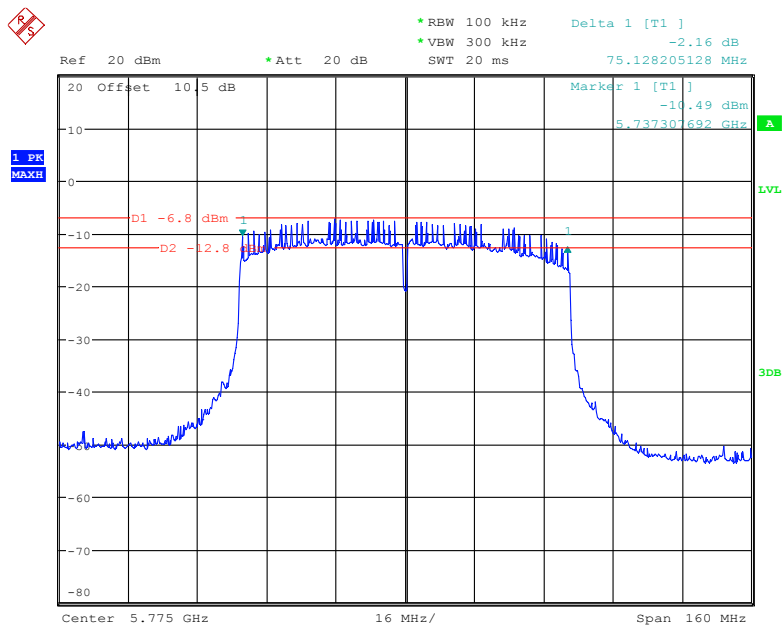


Date: 14.AUG.2018 22:51:20

802.11a mode, 99% Occupied Bandwidth, 5745 MHz

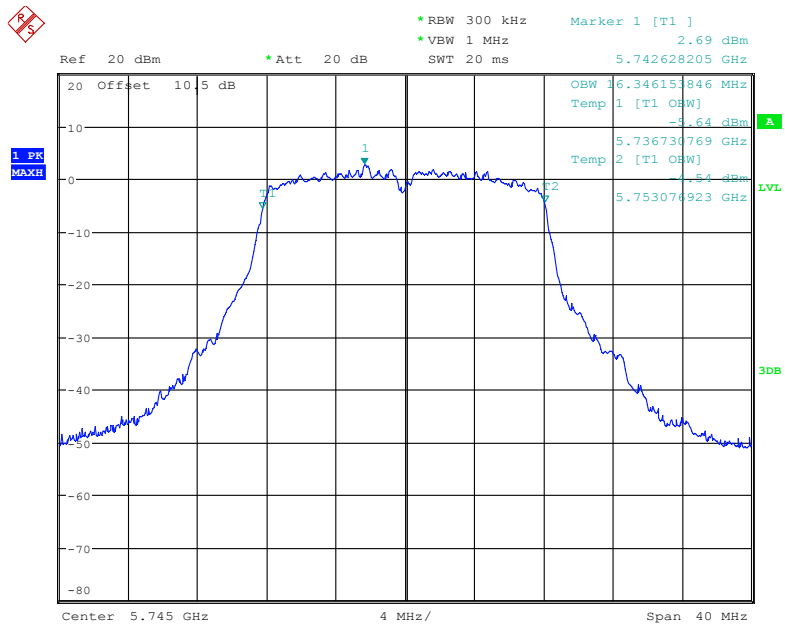


Date: 14.AUG.2018 22:18:32

802.11a mode, 99% Occupied Bandwidth, 5785 MHz

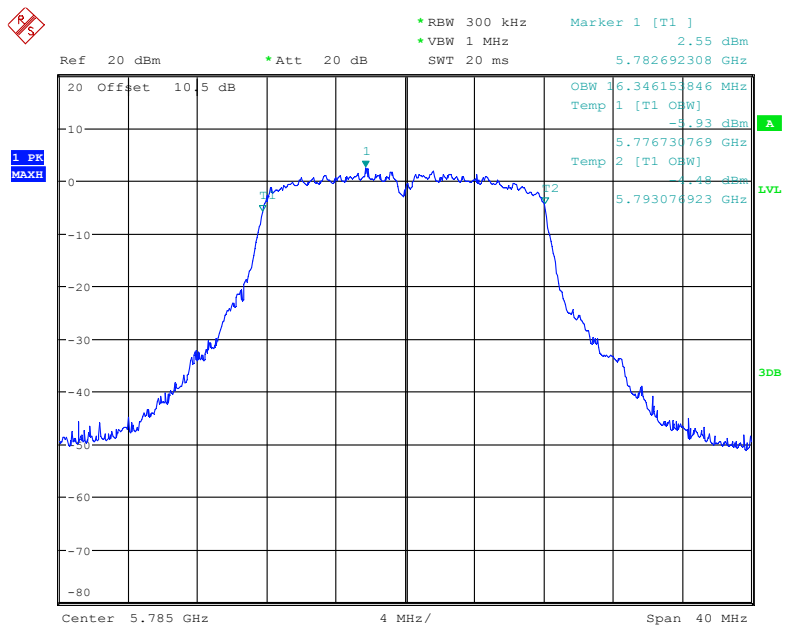


Date: 14.AUG.2018 22:19:07

802.11a mode, 99% Occupied Bandwidth, 5825 MHz

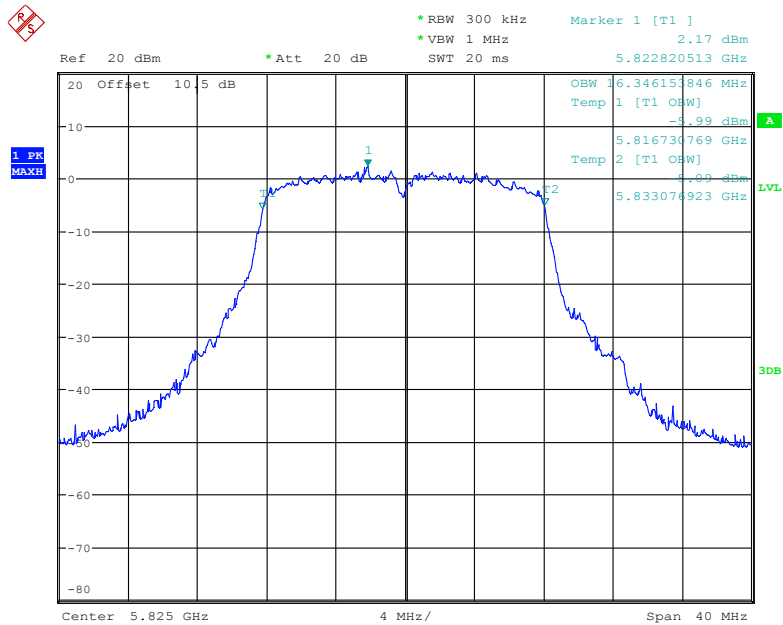


Date: 14.AUG.2018 22:19:29

802.11n20 mode, 99% Occupied Bandwidth, 5745 MHz

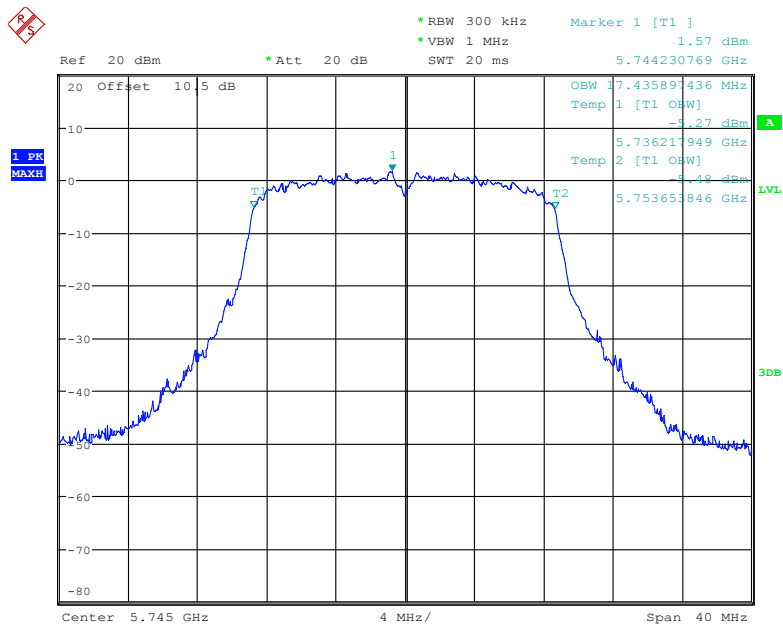


Date: 14.AUG.2018 22:21:38

802.11n20 mode, 99% Occupied Bandwidth, 5785 MHz

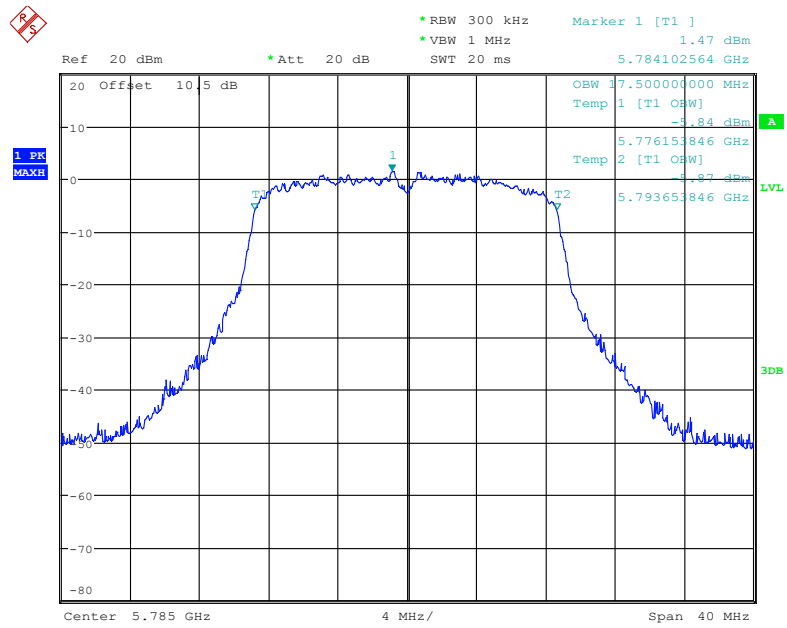


Date: 14.AUG.2018 22:22:04

802.11n20 mode, 99% Occupied Bandwidth, 5825 MHz

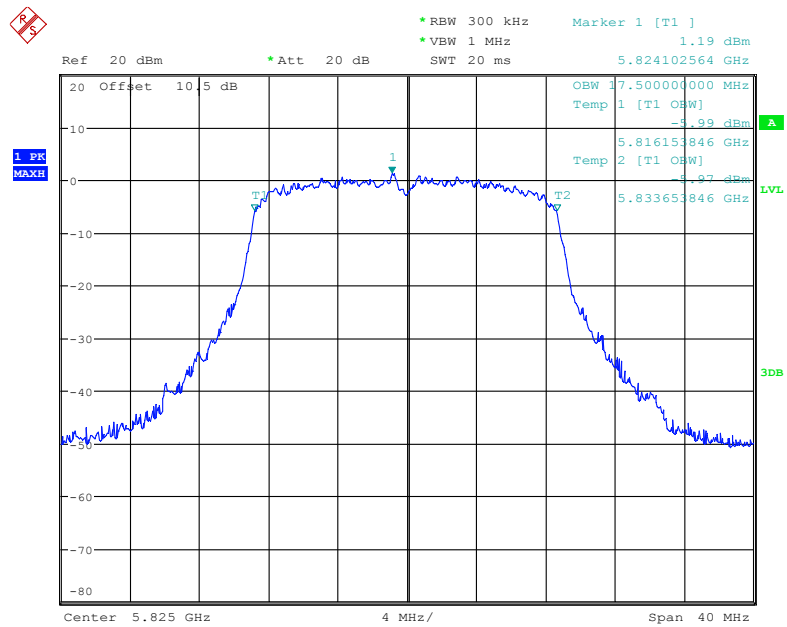


Date: 14.AUG.2018 22:22:29

802.11n40 mode, 99% Occupied Bandwidth, 5755 MHz

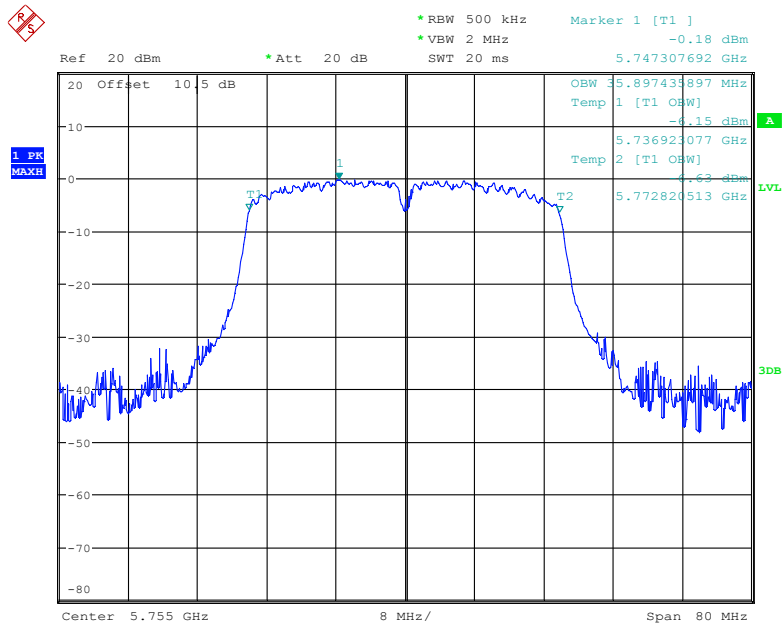


Date: 14.AUG.2018 22:14:56

802.11n40 mode, 99% Occupied Bandwidth, 5795 MHz

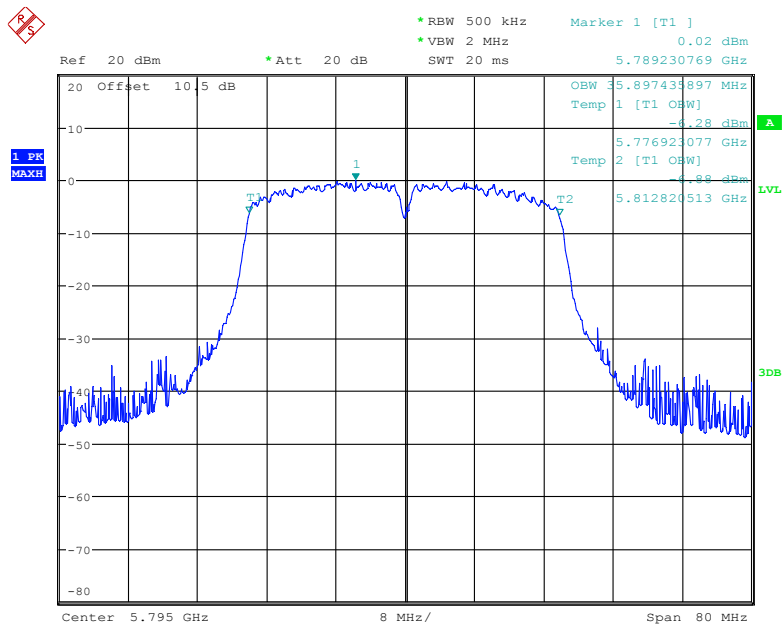


Date: 14.AUG.2018 22:15:41

802.11ac20 mode, 99% Occupied Bandwidth, 5745 MHz

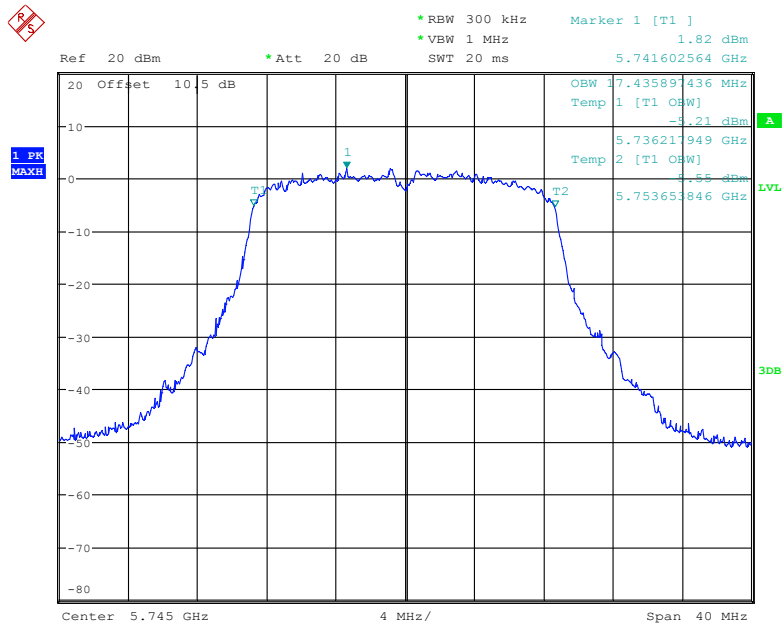


Date: 14.AUG.2018 22:23:18

802.11ac20 mode, 99% Occupied Bandwidth, 5785 MHz

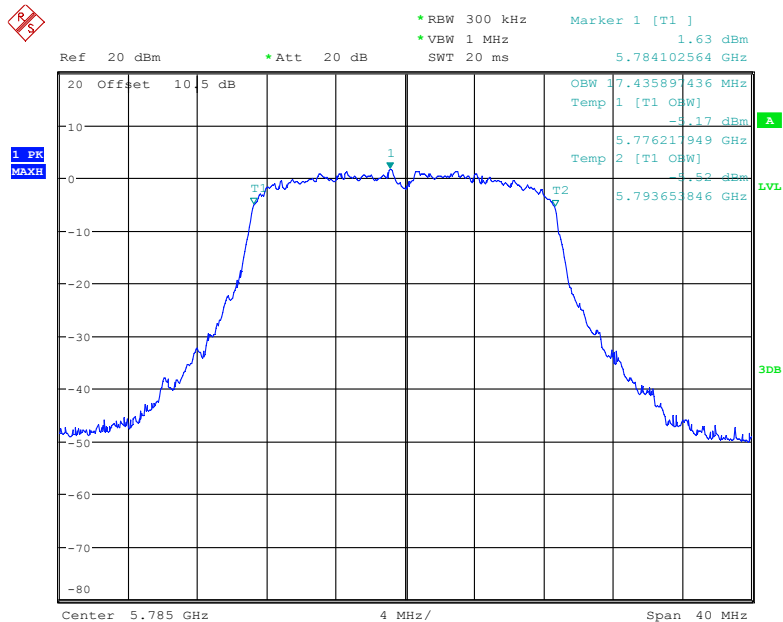


Date: 14.AUG.2018 22:24:47

802.11ac20 mode, 99% Occupied Bandwidth, 5825 MHz

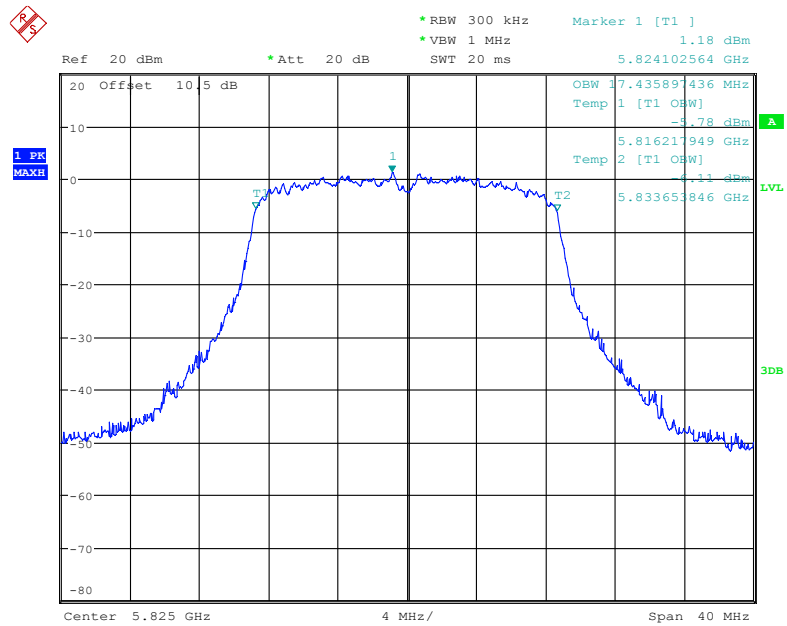


Date: 14.AUG.2018 22:25:15

802.11ac40 mode, 99% Occupied Bandwidth, 5755 MHz

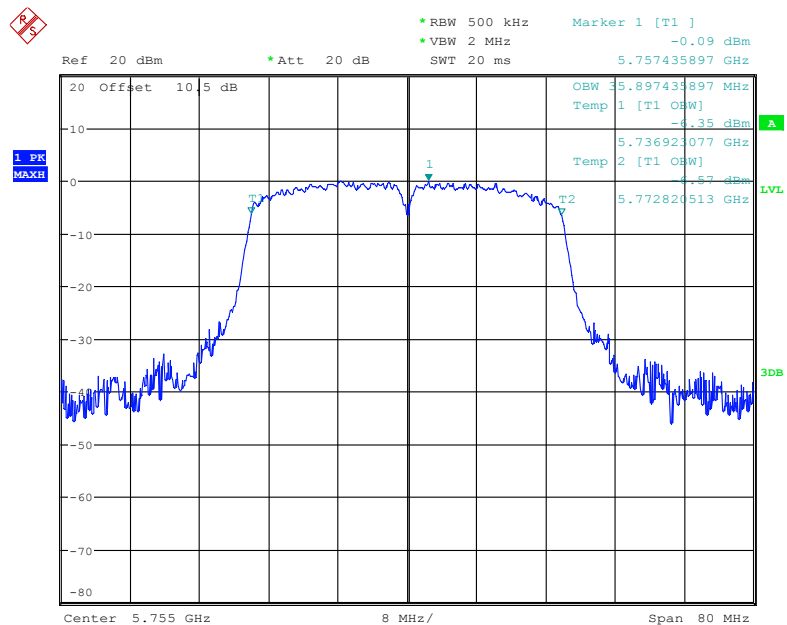


Date: 14.AUG.2018 22:16:47

802.11ac40 mode, 99% Occupied Bandwidth, 5795 MHz

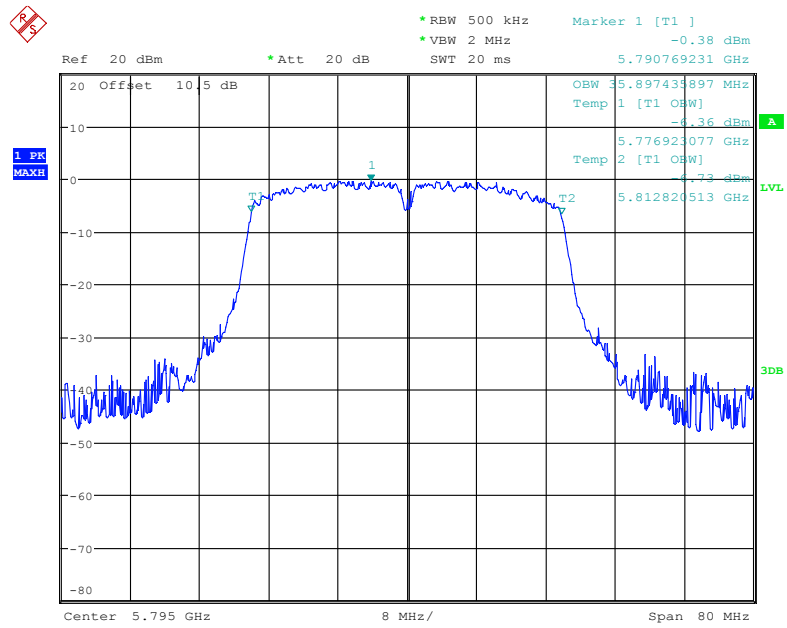

Date: 14.AUG.2018 22:17:21

802.11ac80 mode, 99% Occupied Bandwidth, 5775 MHz

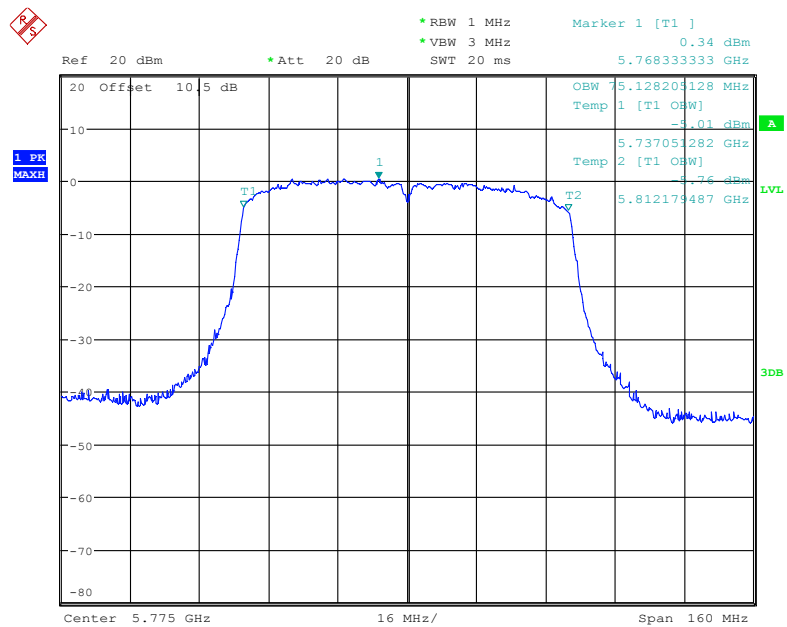


Date: 14.AUG.2018 22:12:25

Antenna 1:

5150 MHz - 5250 MHz:


Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)	Remark
802.11a			No transmitted signal in the 99% bandwidth extends into the U-NII-2A band
5180	19.103	16.346	
5200	18.974	16.410	
5240	19.231	16.346	
802.11n20			
5180	20.385	17.436	
5200	20.128	17.436	
5240	20.449	17.436	
802.11n40			
5190	40.897	35.897	
5230	40.897	35.897	
802.11ac20			
5180	20.449	17.436	
5200	20.320	17.436	
5240	20.449	17.436	
802.11ac40			
5190	40.897	35.769	
5230	41.026	35.769	
802.11ac80			
5210	82.821	75.128	

802.11a mode, 26 dB Emissions, 5180 MHz

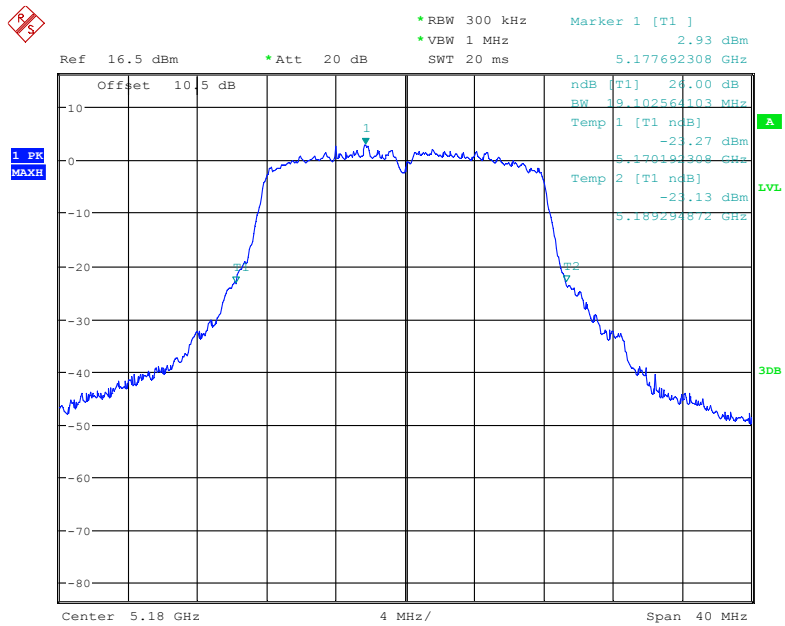


Date: 14.AUG.2018 19:39:48

802.11a mode, 26 dB Emissions, 5200 MHz

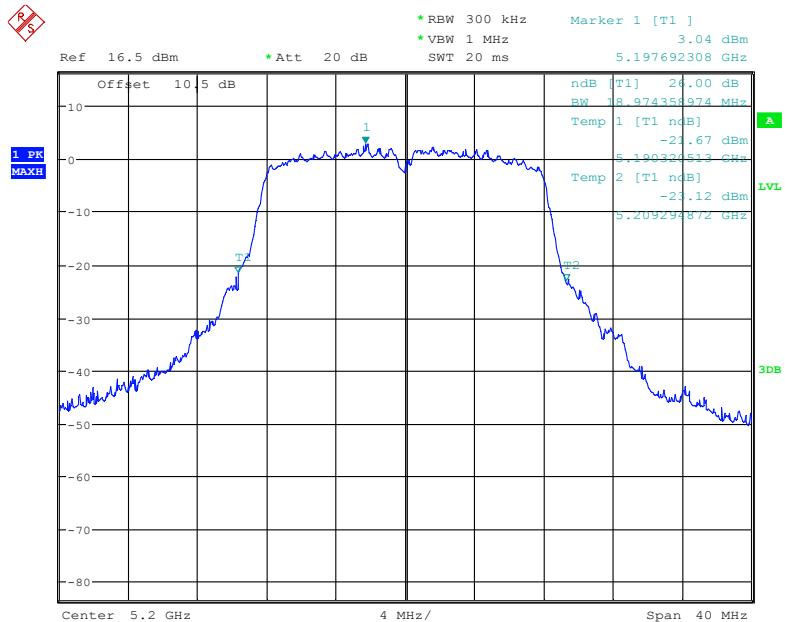


Date: 14.AUG.2018 19:40:34

802.11a mode, 26 dB Emissions, 5240 MHz

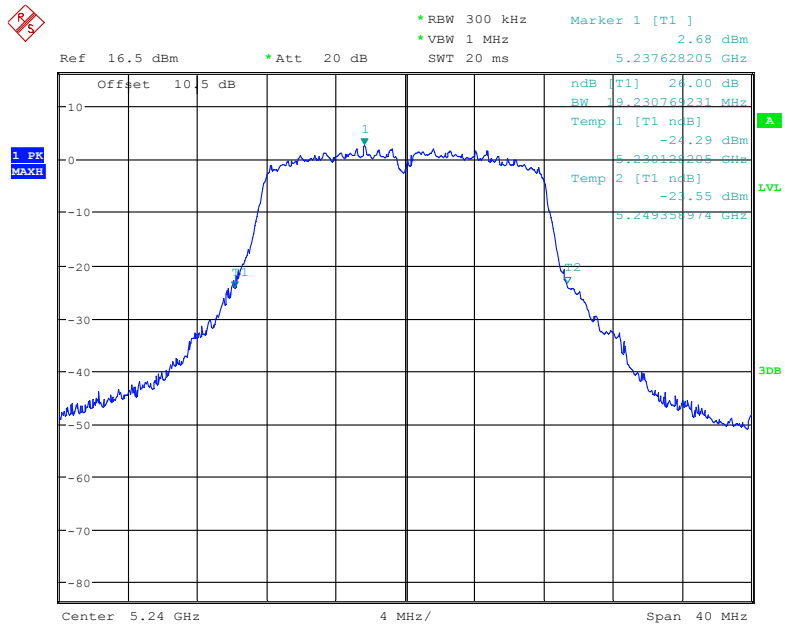


Date: 14.AUG.2018 19:40:56

802.11n20 mode, 26 dB Emissions, 5180 MHz

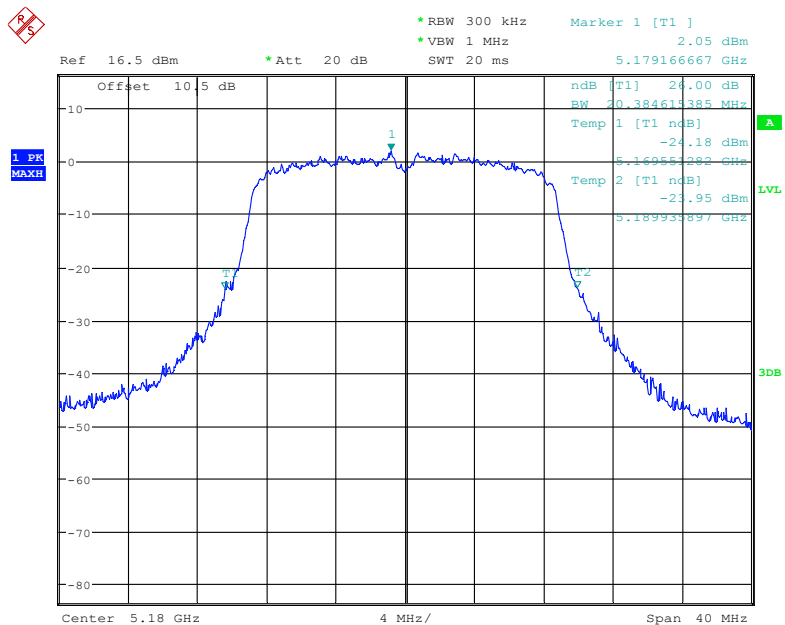


Date: 14.AUG.2018 19:41:21

802.11n20 mode, 26 dB Emissions, 5200 MHz

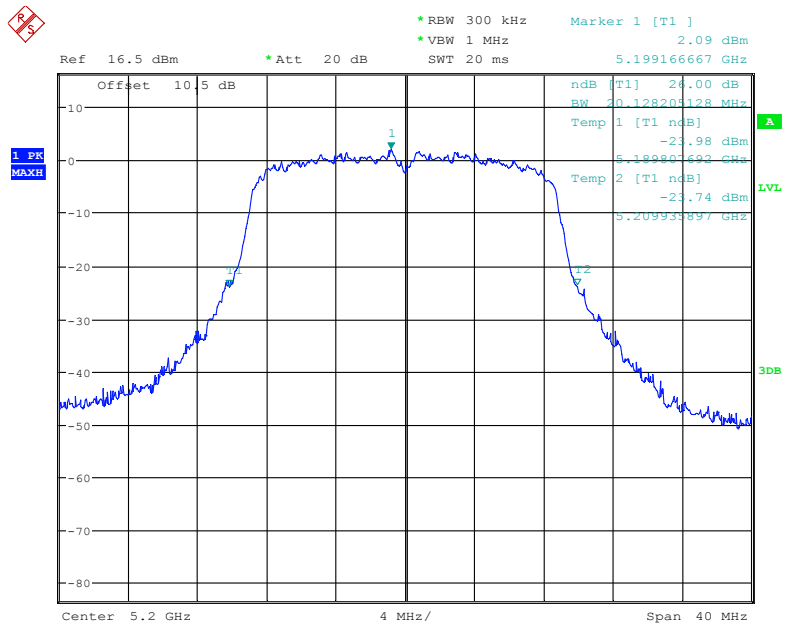


Date: 14.AUG.2018 19:41:49

802.11n20 mode, 26 dB Emissions, 5240 MHz

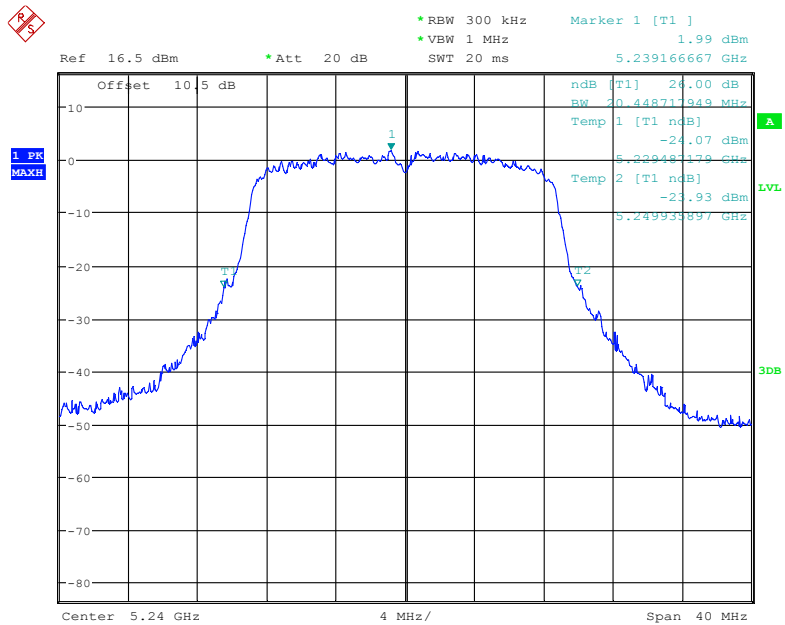


Date: 14.AUG.2018 19:42:12

802.11n40 mode, 26 dB Emissions, 5190 MHz

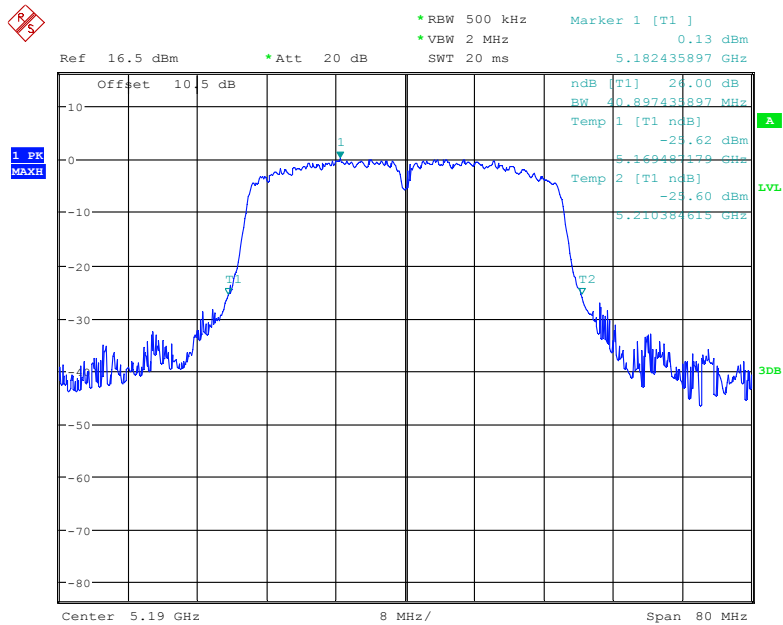


Date: 14.AUG.2018 19:36:55

802.11n40 mode, 26 dB Emissions, 5230 MHz

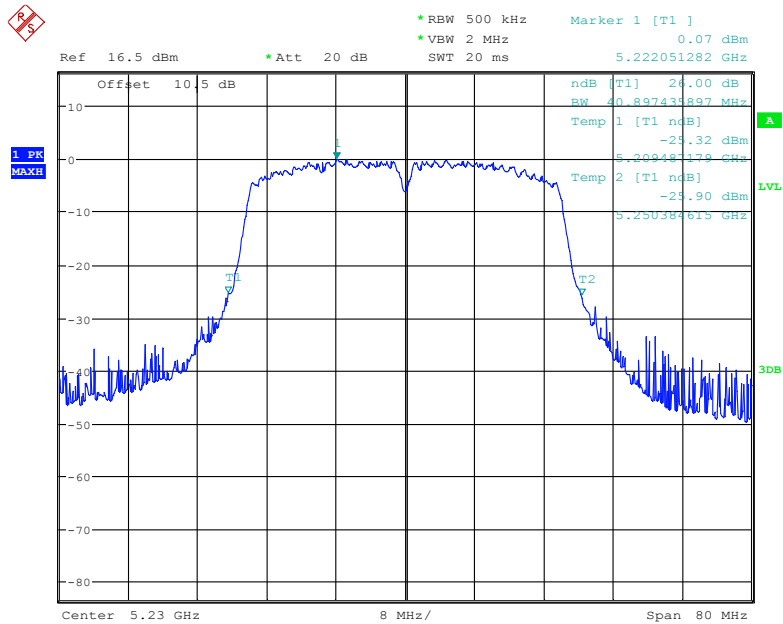


Date: 14.AUG.2018 19:37:36

802.11ac20 mode, 26 dB Emissions, 5180 MHz

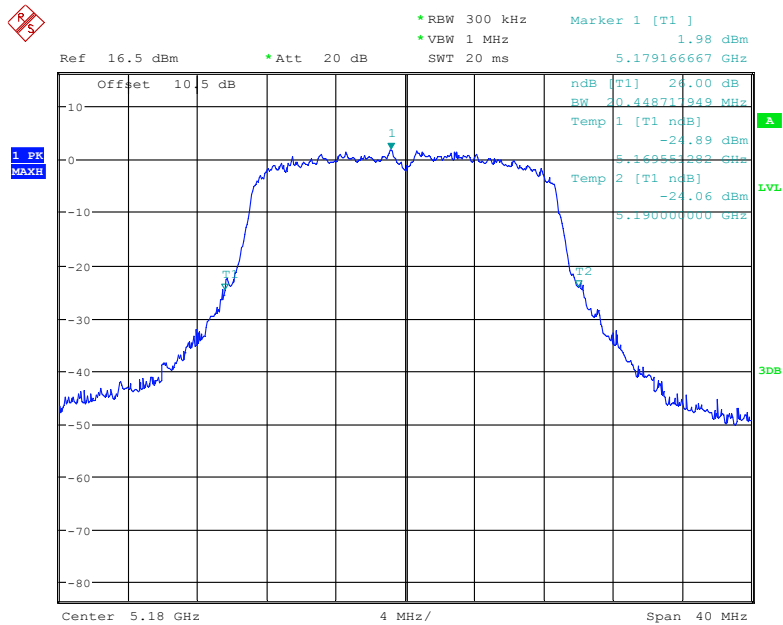


Date: 14.AUG.2018 19:42:42

802.11ac20 mode, 26 dB Emissions, 5200 MHz

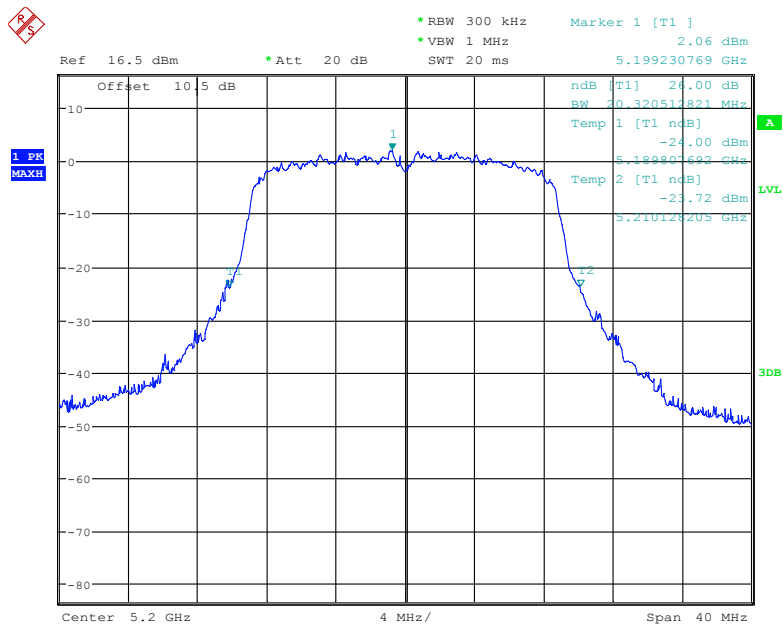


Date: 14.AUG.2018 19:43:17

802.11ac20 mode, 26 dB Emissions, 5240 MHz

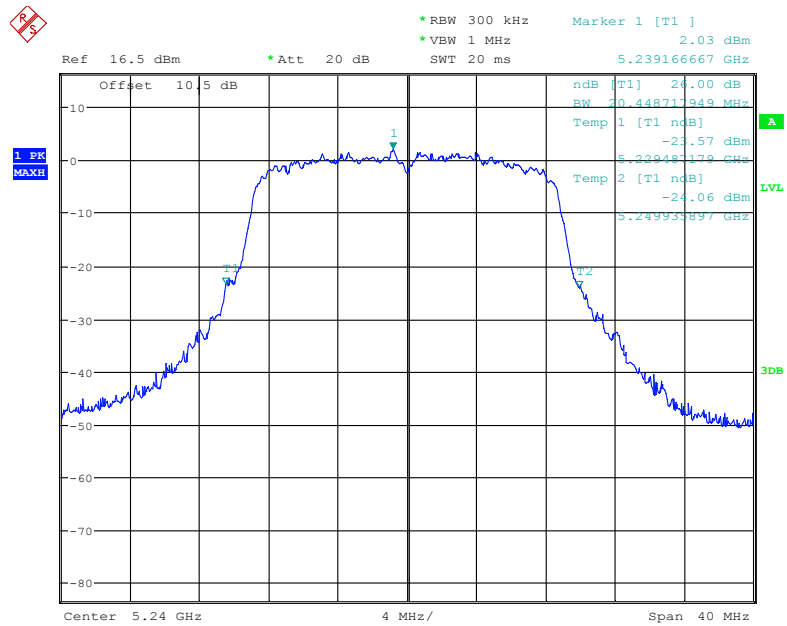


Date: 14.AUG.2018 19:43:40

802.11ac40 mode, 26 dB Emissions, 5190 MHz

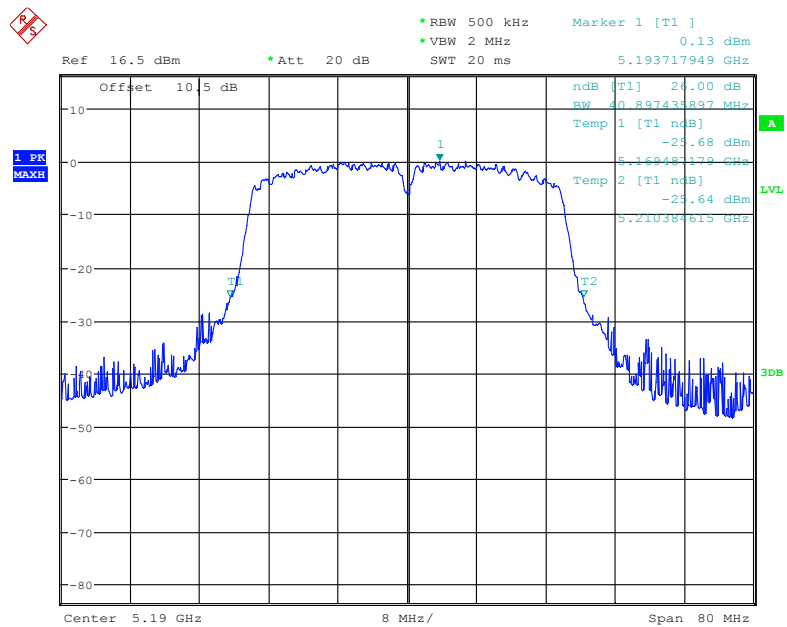


Date: 14.AUG.2018 19:38:24

802.11ac40 mode, 26 dB Emissions, 5230 MHz

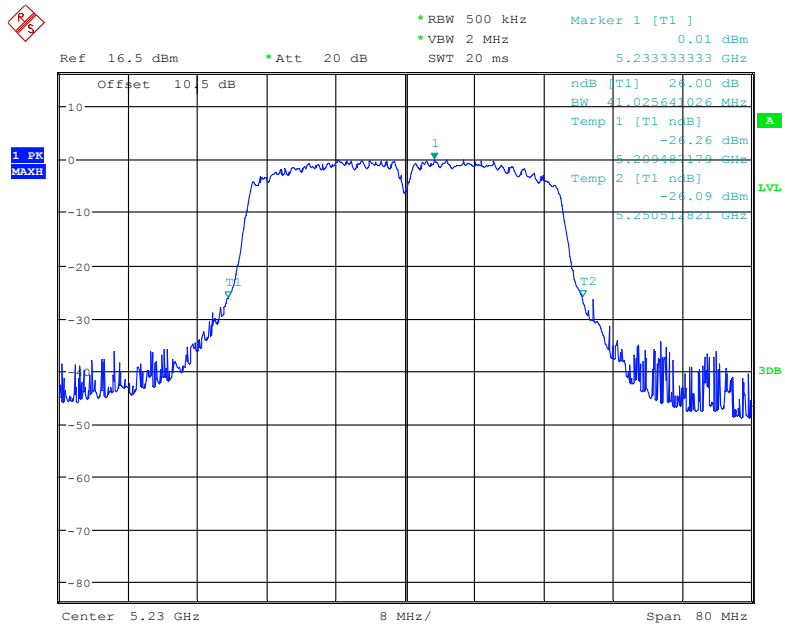


Date: 14.AUG.2018 19:39:01

802.11ac80 mode, 26 dB Emissions, 5210 MHz

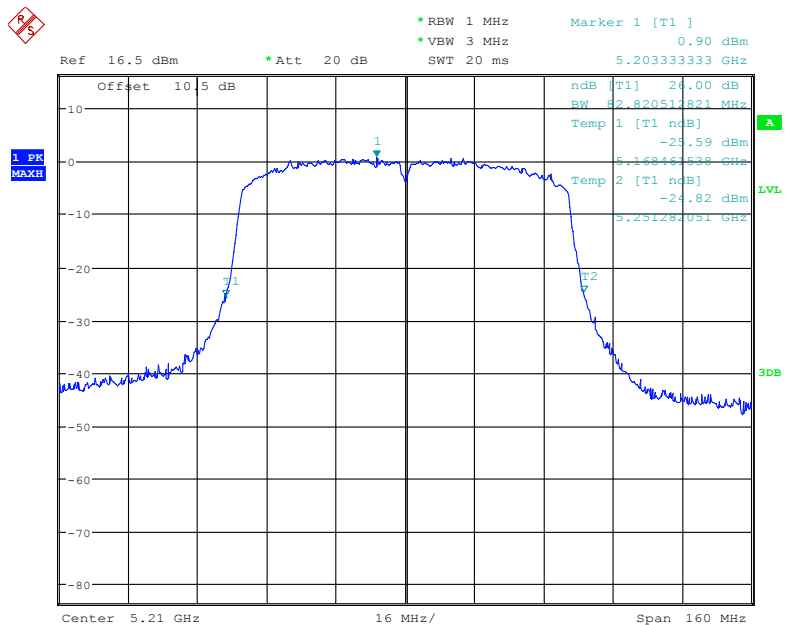


Date: 14.AUG.2018 19:35:48

802.11a mode, 99% Occupied Bandwidth, 5180 MHz

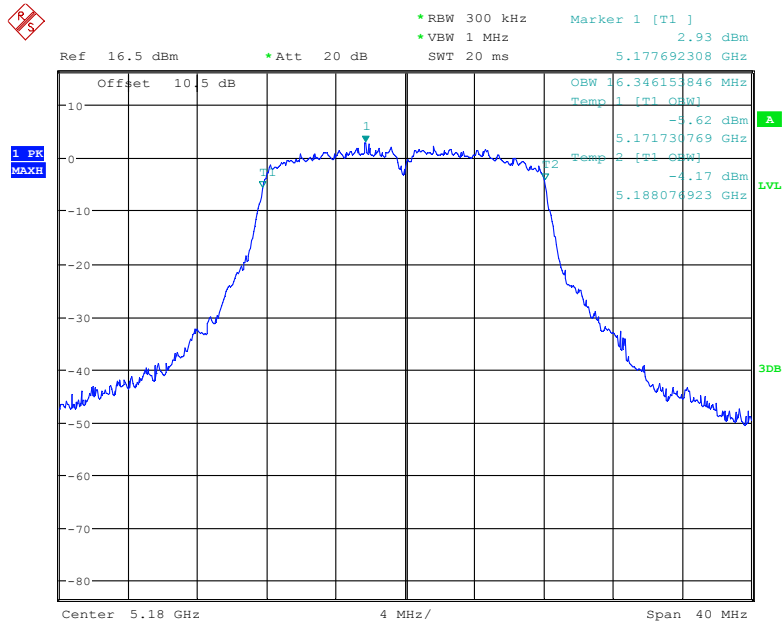


Date: 14.AUG.2018 19:26:48

802.11a mode, 99% Occupied Bandwidth, 5200 MHz

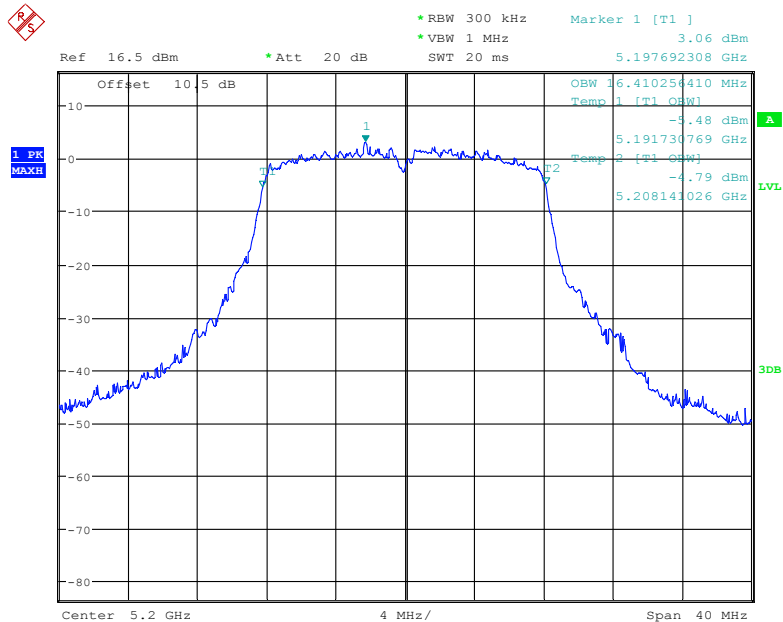


Date: 14.AUG.2018 19:27:22

802.11a mode, 99% Occupied Bandwidth, 5240 MHz

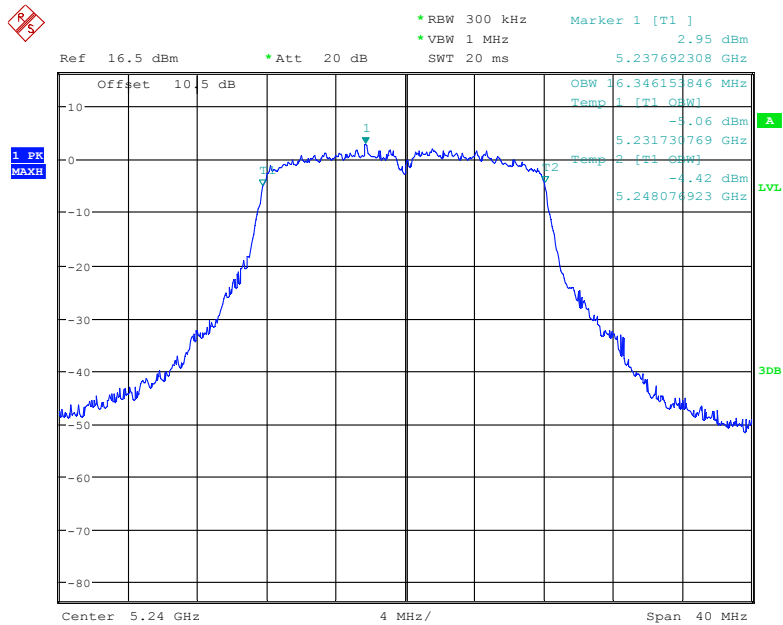


Date: 14.AUG.2018 19:27:43

802.11n20 mode, 99% Occupied Bandwidth, 5180 MHz

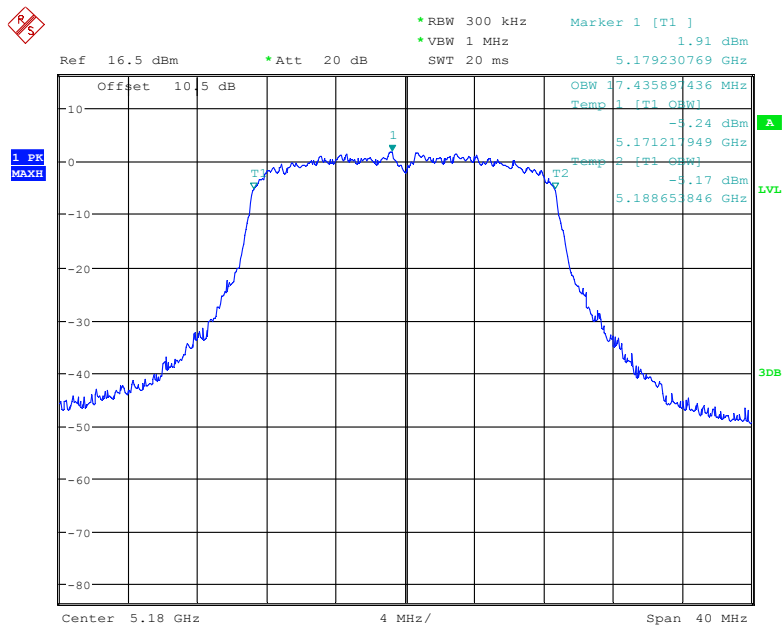


Date: 14.AUG.2018 19:28:48

802.11n20 mode, 99% Occupied Bandwidth, 5200 MHz

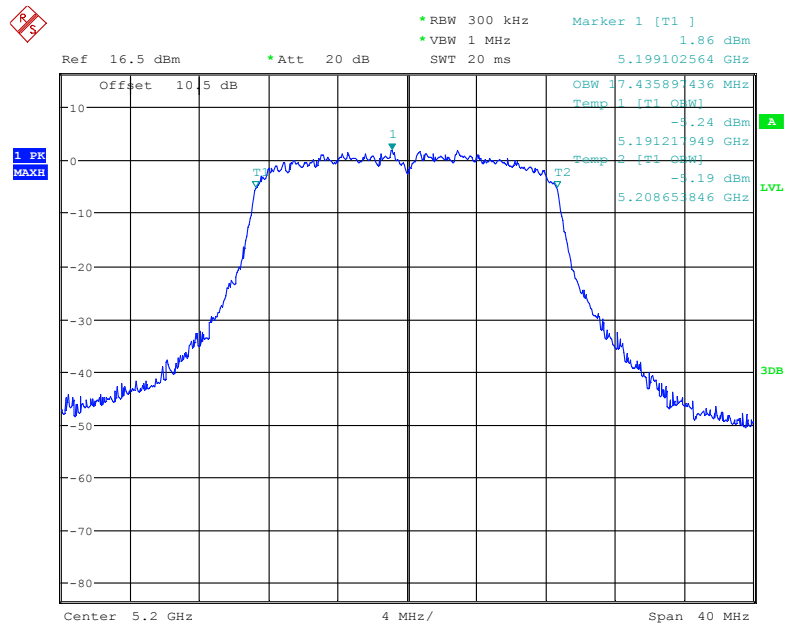


Date: 14.AUG.2018 19:29:42

802.11n20 mode, 99% Occupied Bandwidth, 5240 MHz

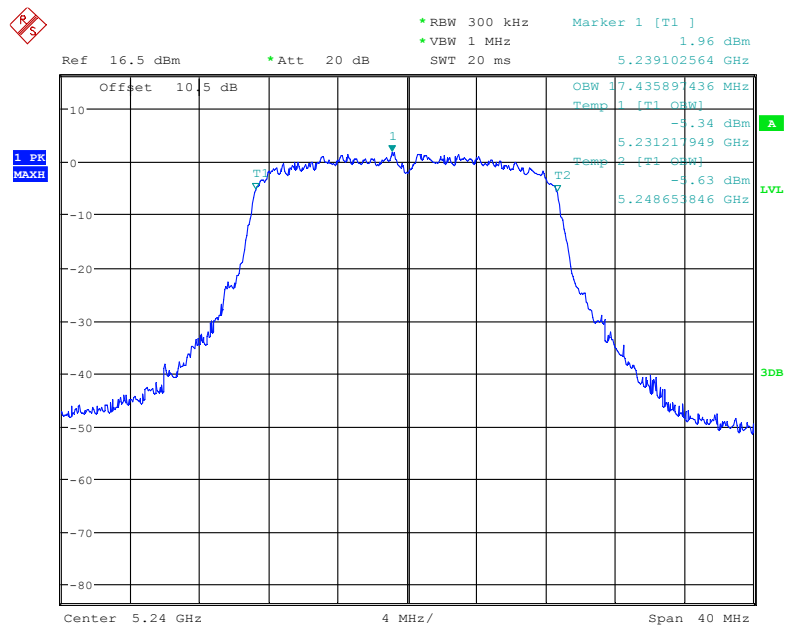


Date: 14.AUG.2018 19:30:05

802.11n40 mode, 99% Occupied Bandwidth, 5190 MHz

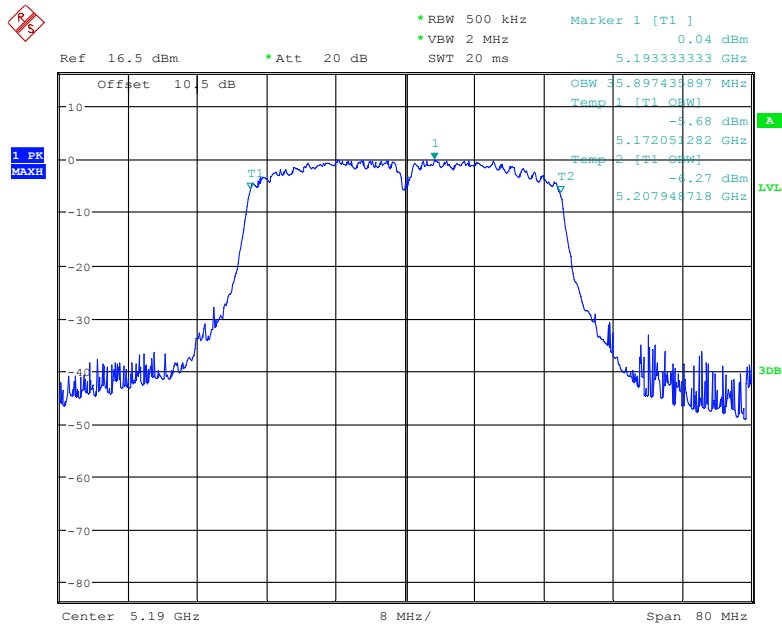


Date: 14.AUG.2018 19:32:13

802.11n40 mode, 99% Occupied Bandwidth, 5230 MHz

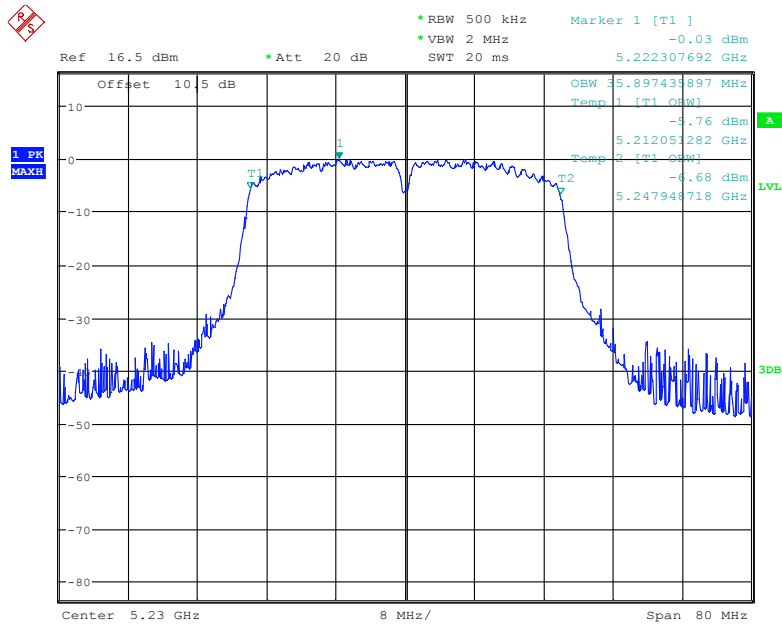


Date: 14.AUG.2018 19:32:49

802.11ac20 mode, 99% Occupied Bandwidth, 5180 MHz

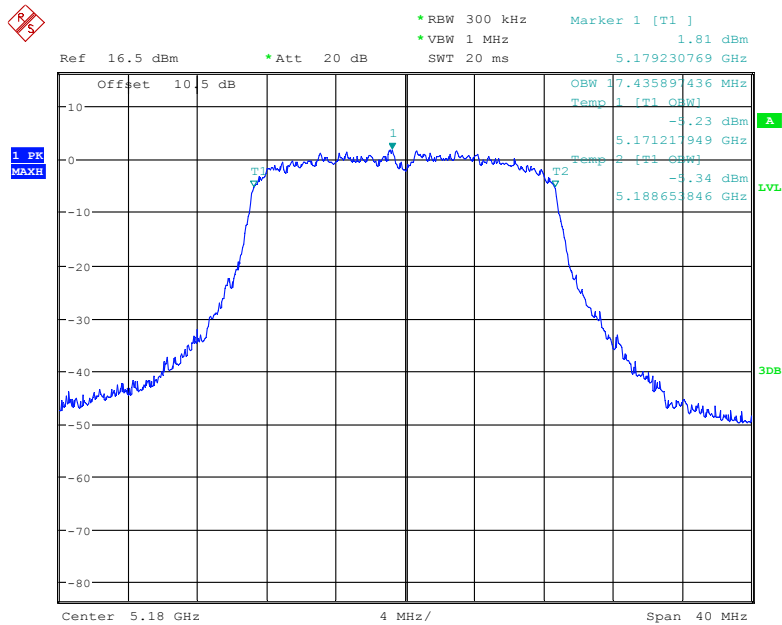


Date: 14.AUG.2018 19:30:36

802.11ac20 mode, 99% Occupied Bandwidth, 5200 MHz

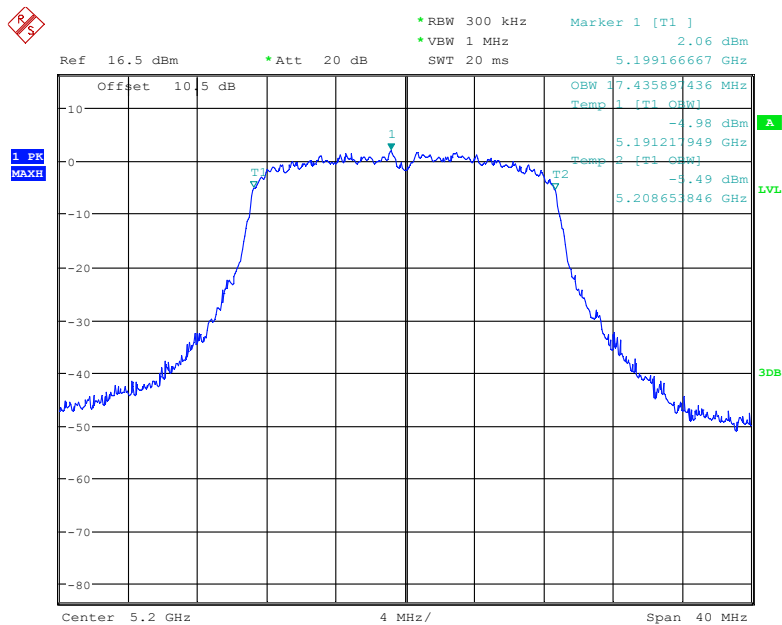


Date: 14.AUG.2018 19:31:04

802.11ac20 mode, 99% Occupied Bandwidth, 5240 MHz

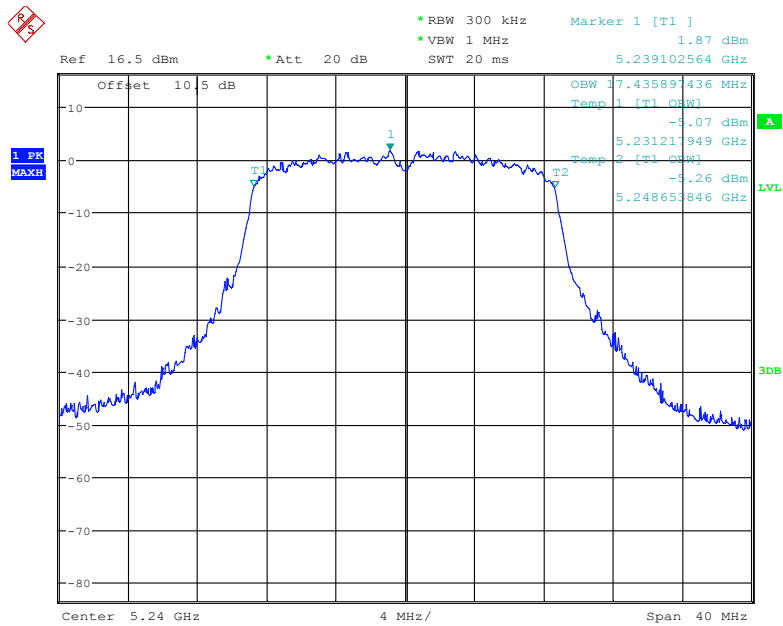


Date: 14.AUG.2018 19:31:23

802.11ac40 mode, 99% Occupied Bandwidth, 5190 MHz

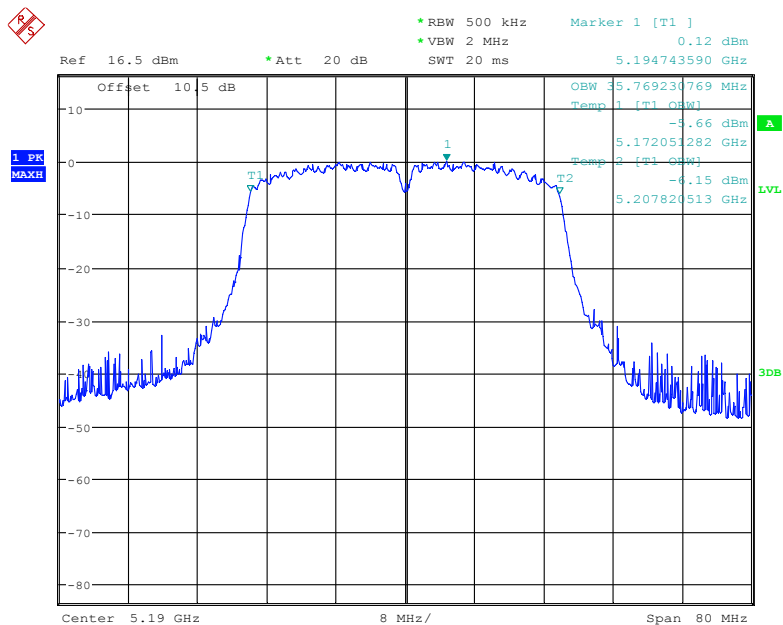


Date: 14.AUG.2018 19:33:19

802.11ac40 mode, 99% Occupied Bandwidth, 5230 MHz

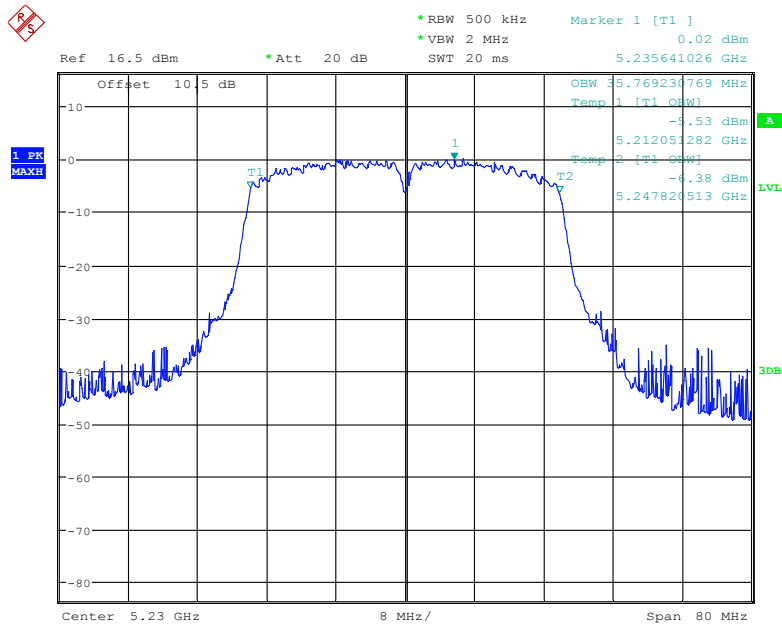

Date: 14.AUG.2018 19:33:45

802.11ac80 mode, 99% Occupied Bandwidth, 5210 MHz

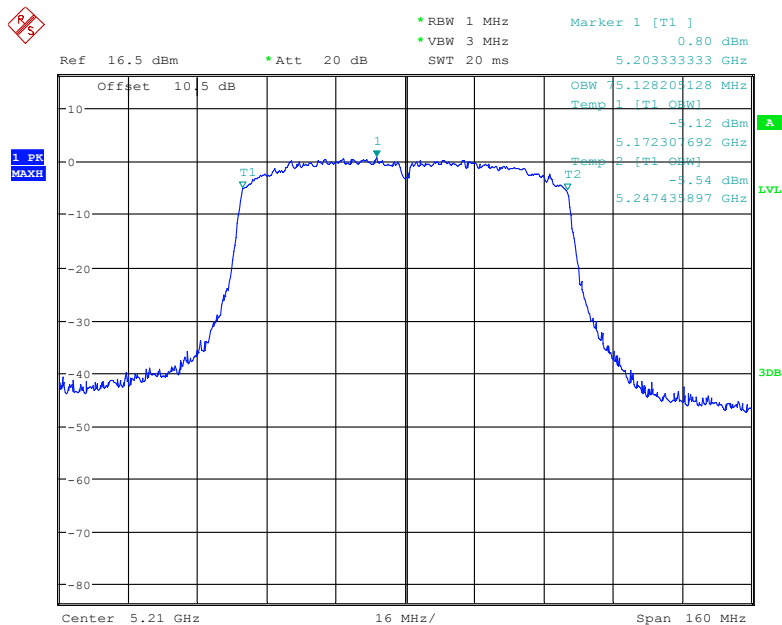


Date: 14.AUG.2018 19:35:08

5725 MHz – 5850 MHz:


Frequency (MHz)	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)	Remark
802.11a				No transmitted signal in the 99% bandwidth extends into the U-NII-2C band
5745	15.385	16.346	0.5	
5785	15.256	16.346	0.5	
5825	15.321	16.346	0.5	
802.11n20				
5745	15.256	17.436	0.5	
5785	15.256	17.436	0.5	
5825	15.256	17.500	0.5	
802.11n40				
5755	35.166	35.897	0.5	
5795	35.128	35.897	0.5	
802.11ac20				
5745	15.705	17.436	0.5	
5785	15.513	17.436	0.5	
5825	15.513	17.500	0.5	
802.11ac40				
5755	35.256	35.897	0.5	
5795	35.128	35.897	0.5	
802.11ac80				
5775	75.641	74.769	0.5	

802.11a mode, 6dB Emission Bandwidth, 5745 MHz

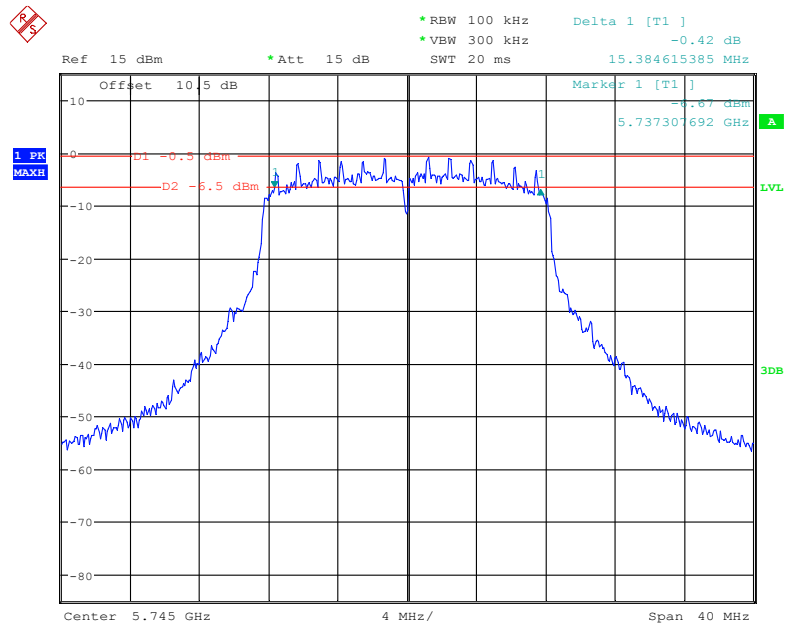


Date: 10.AUG.2018 00:03:10

802.11a mode, 6dB Emission Bandwidth, 5785 MHz

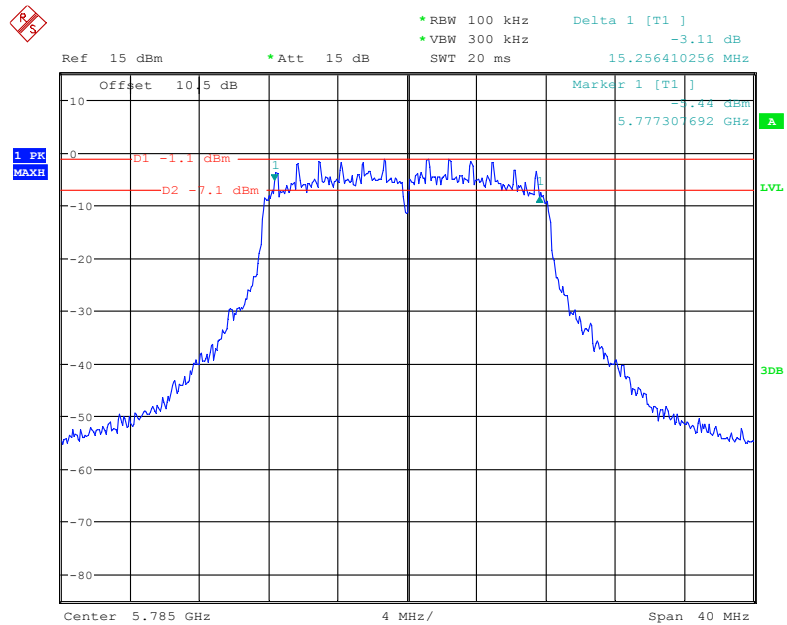


Date: 10.AUG.2018 00:05:02

802.11a mode, 6dB Emission Bandwidth, 5825 MHz

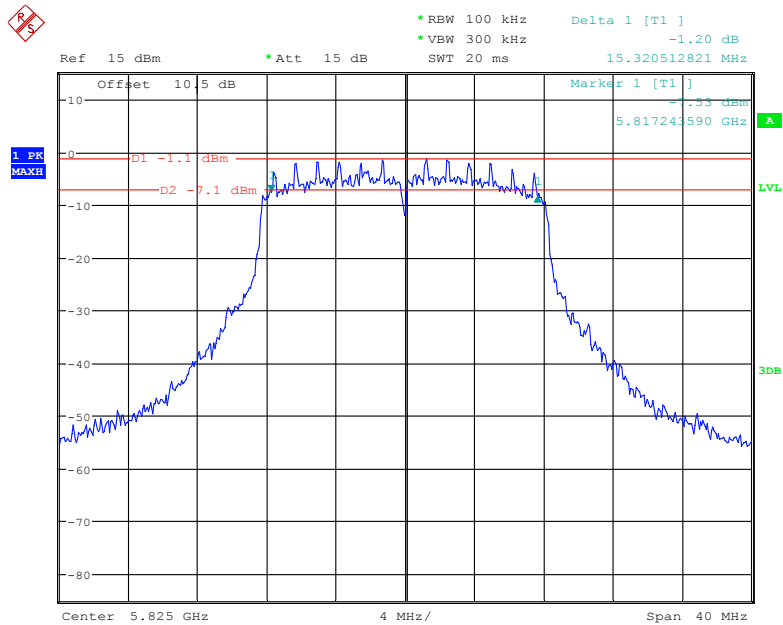


Date: 10.AUG.2018 00:05:59

802.11n20 mode, 6dB Emission Bandwidth, 5745 MHz

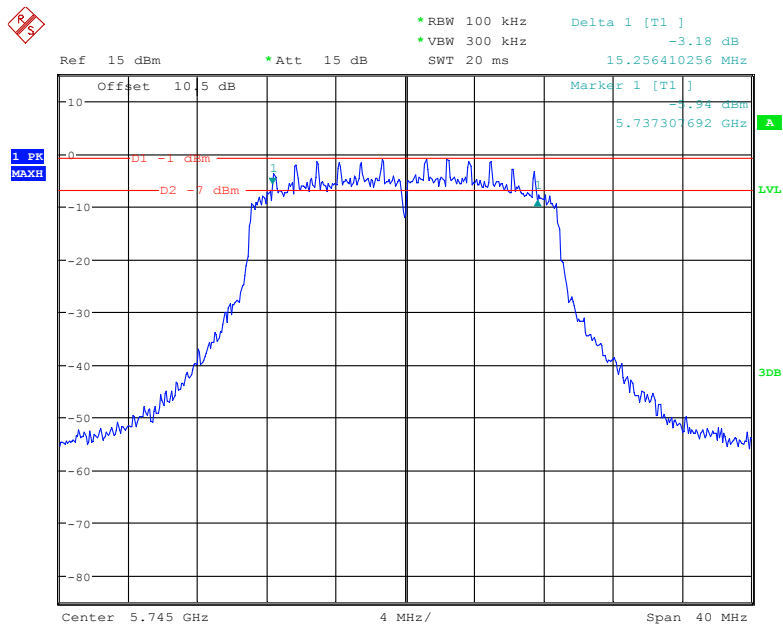


Date: 10.AUG.2018 00:08:23

802.11n20 mode, 6dB Emission Bandwidth, 5785 MHz

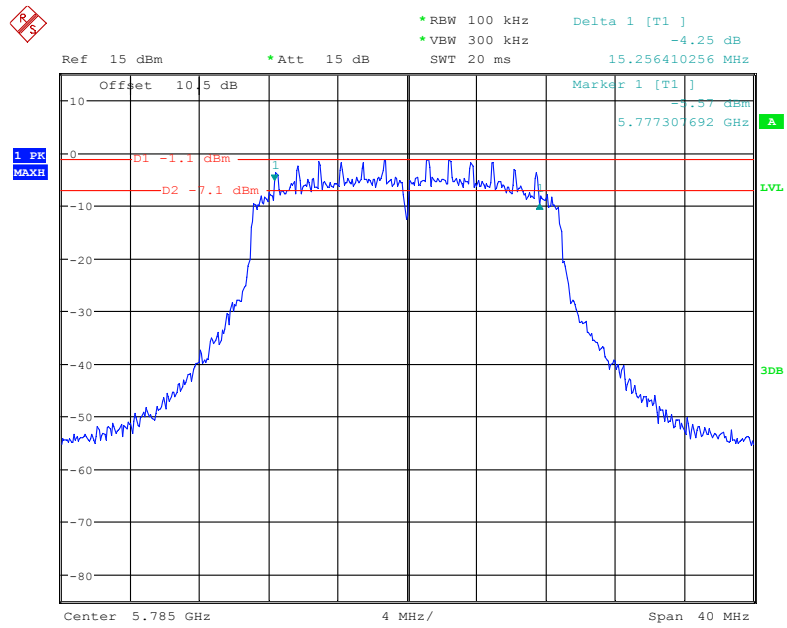


Date: 10.AUG.2018 00:09:35

802.11n20 mode, 6dB Emission Bandwidth, 5825 MHz

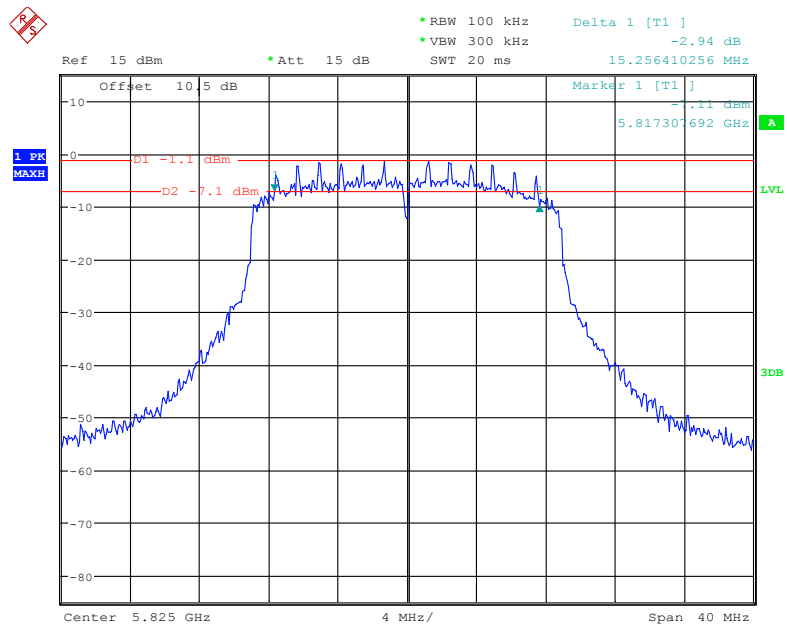


Date: 10.AUG.2018 00:10:35

802.11n40 mode, 6dB Emission Bandwidth, 5755 MHz

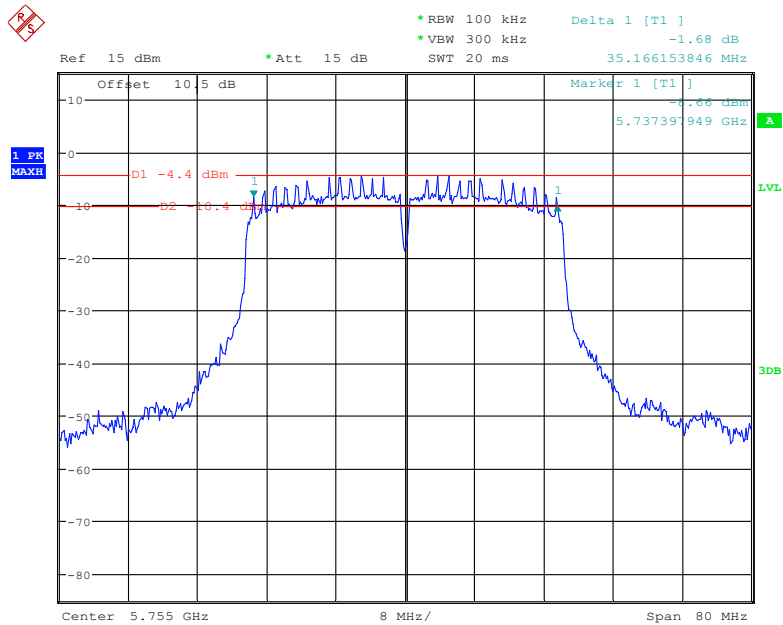


Date: 9.AUG.2018 23:53:42

802.11n40 mode, 6dB Emission Bandwidth, 5795 MHz

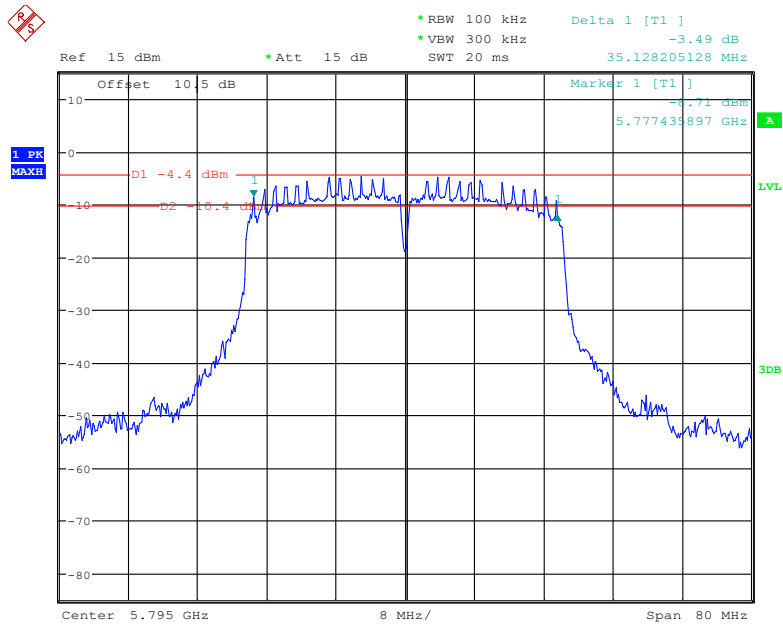


Date: 9.AUG.2018 23:55:37

802.11ac20 mode, 6dB Emission Bandwidth, 5745 MHz

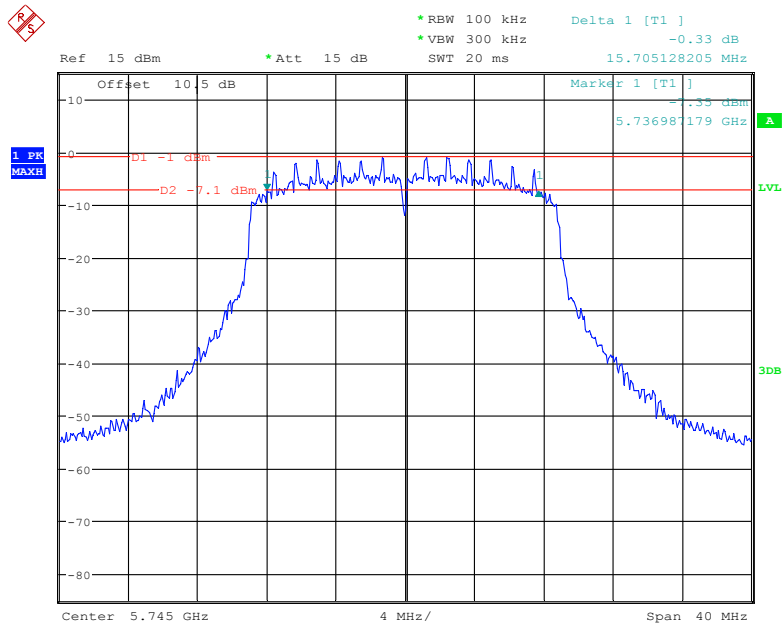


Date: 10.AUG.2018 00:13:58

802.11ac20 mode, 6dB Emission Bandwidth, 5785 MHz

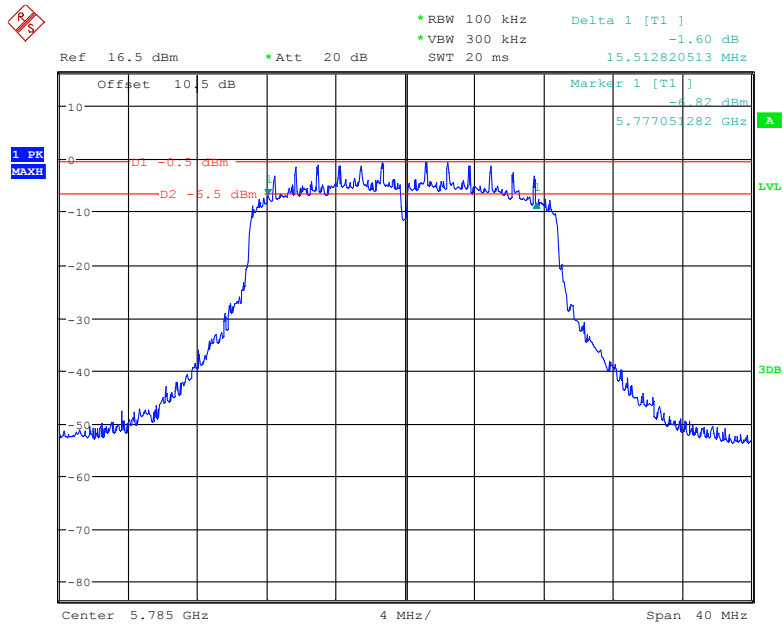


Date: 14.AUG.2018 19:59:32

802.11ac20 mode, 6dB Emission Bandwidth, 5825 MHz

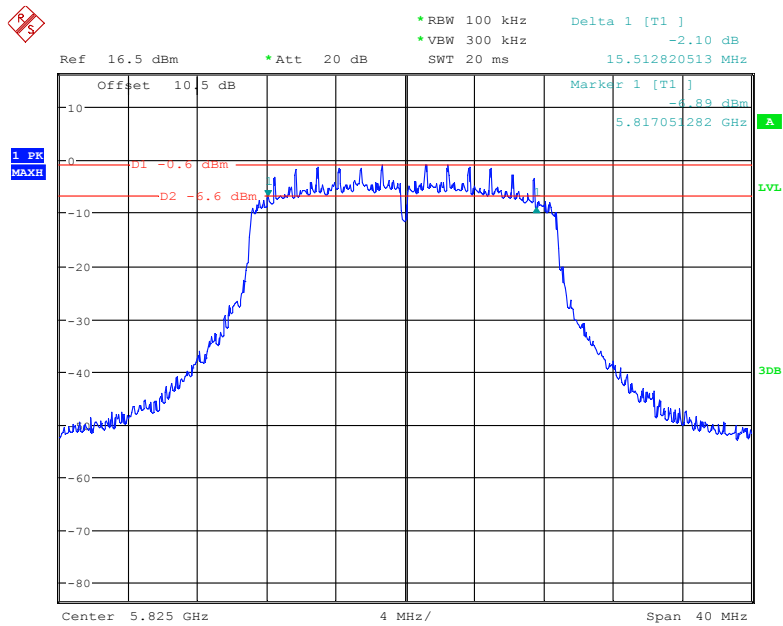


Date: 14.AUG.2018 20:02:42

802.11ac40 mode, 6dB Emission Bandwidth, 5755 MHz

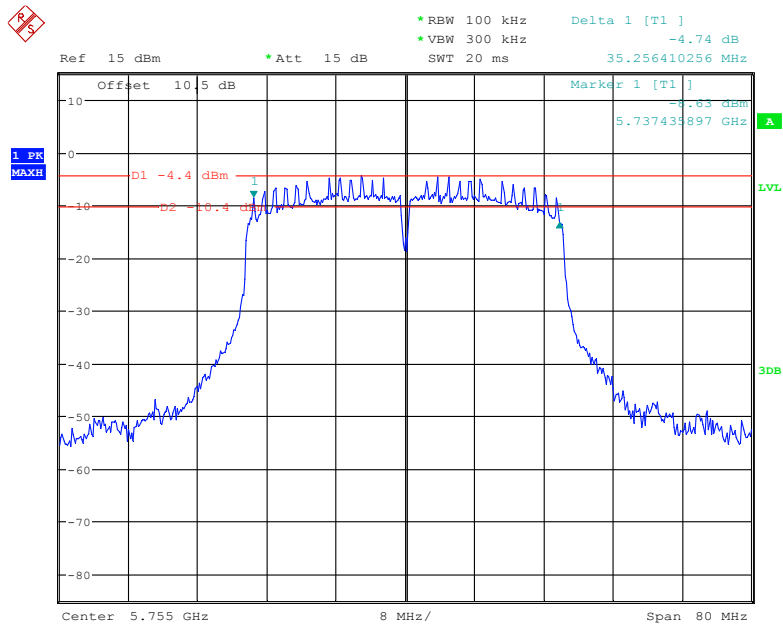


Date: 9.AUG.2018 23:59:43

802.11ac40 mode, 6dB Emission Bandwidth, 5795 MHz

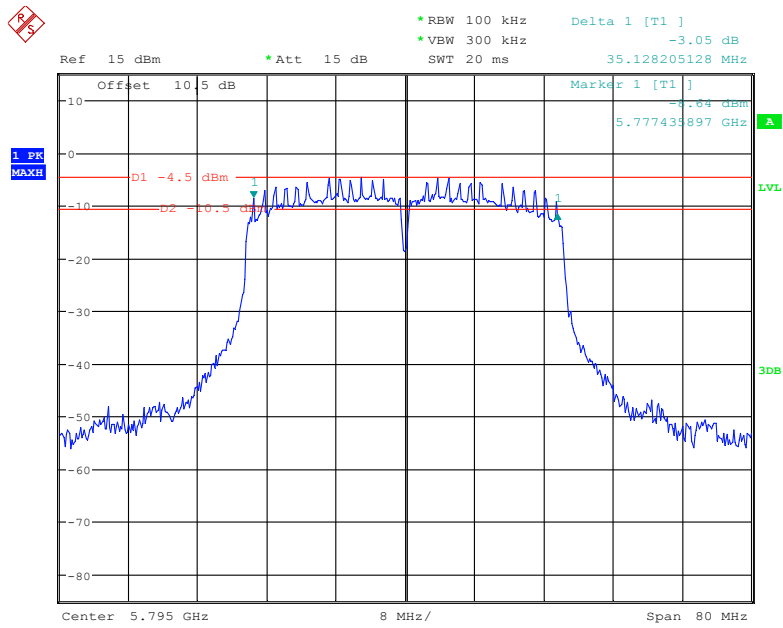


Date: 10.AUG.2018 00:01:13

802.11ac80 mode, 6dB Emission Bandwidth, 5775 MHz

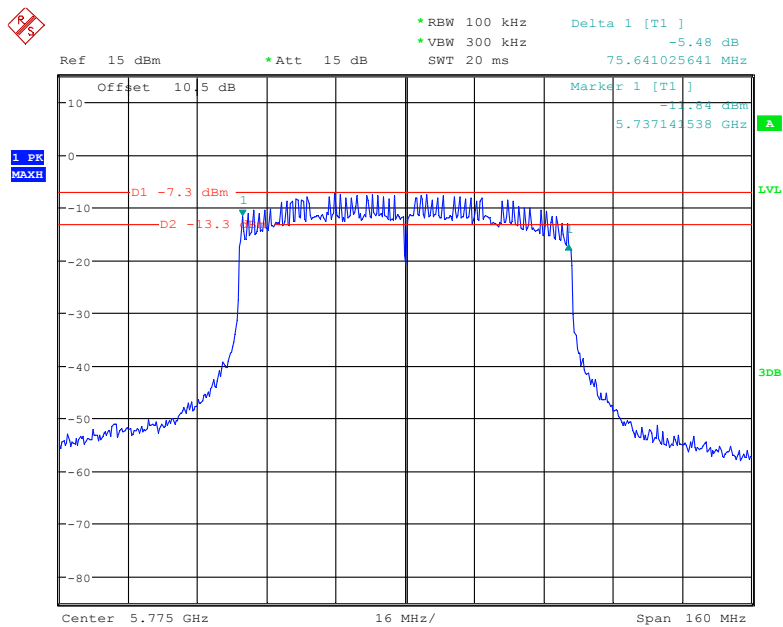


Date: 9.AUG.2018 23:51:52

802.11a mode, 99% Occupied Bandwidth, 5745 MHz

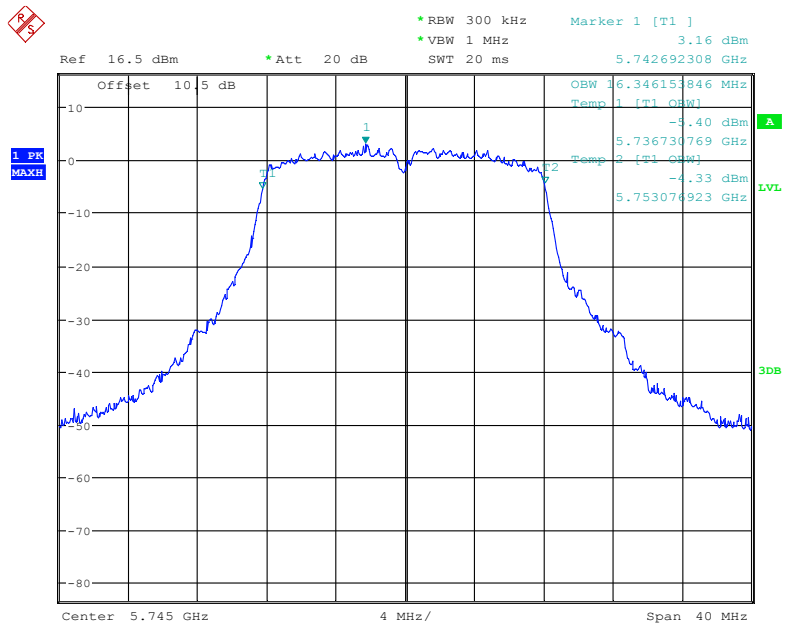


Date: 14.AUG.2018 20:17:06

802.11a mode, 99% Occupied Bandwidth, 5785 MHz

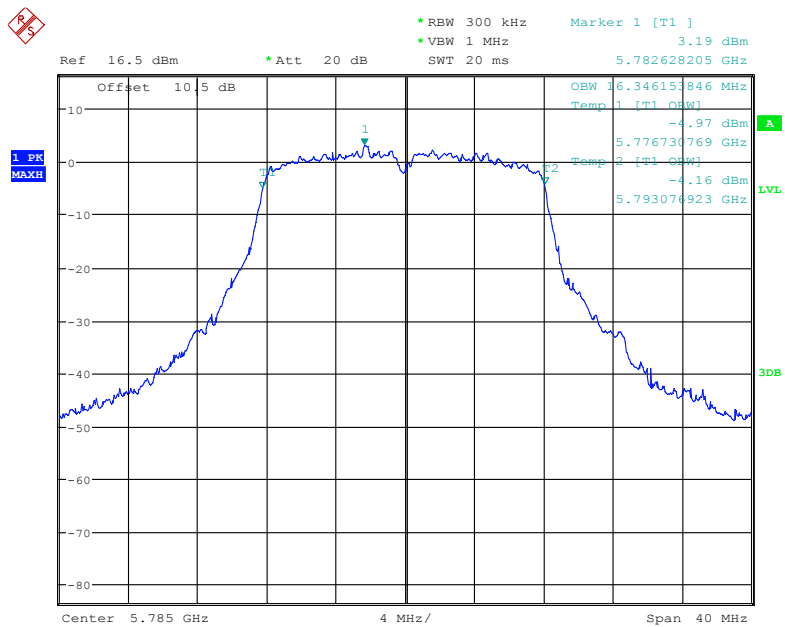


Date: 14.AUG.2018 20:18:17

802.11a mode, 99% Occupied Bandwidth, 5825 MHz

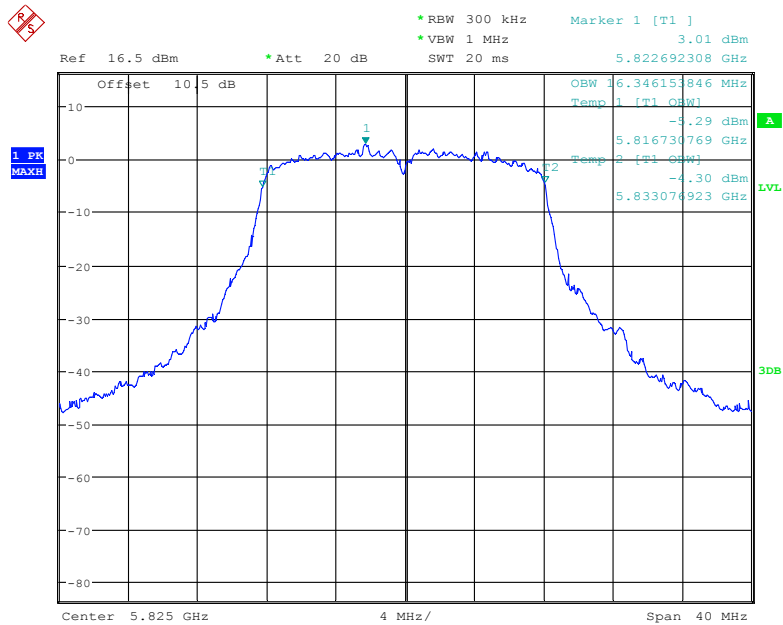


Date: 14.AUG.2018 20:19:15

802.11n20 mode, 99% Occupied Bandwidth, 5745 MHz

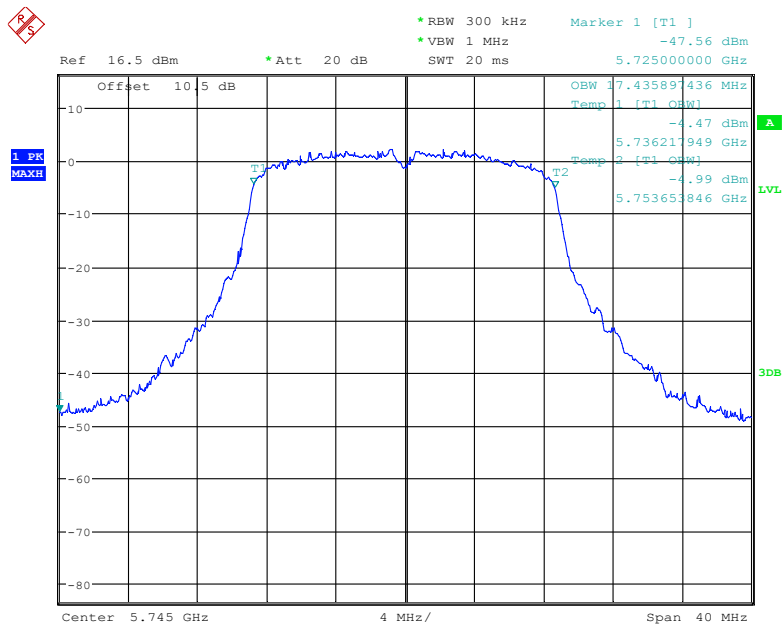


Date: 14.AUG.2018 20:15:26

802.11n20 mode, 99% Occupied Bandwidth, 5785 MHz

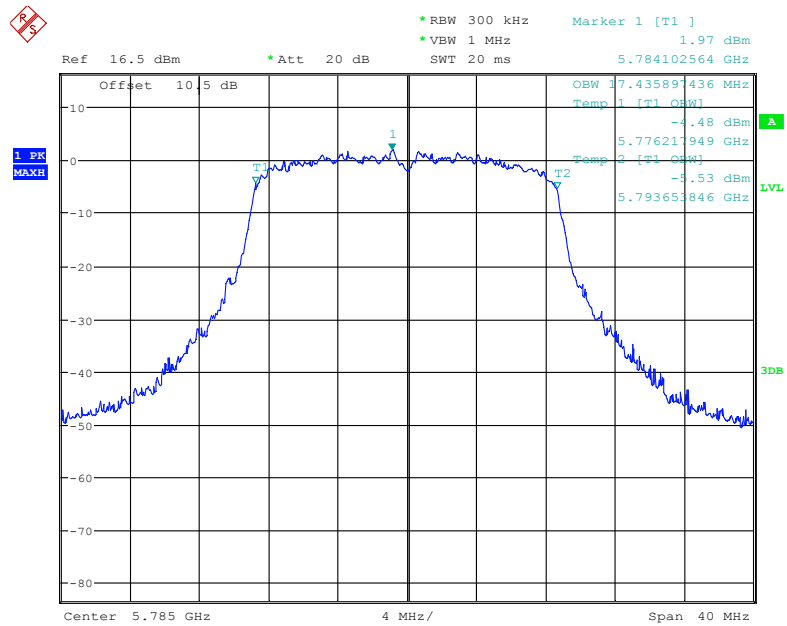


Date: 14.AUG.2018 20:15:47

802.11n20 mode, 99% Occupied Bandwidth, 5825 MHz

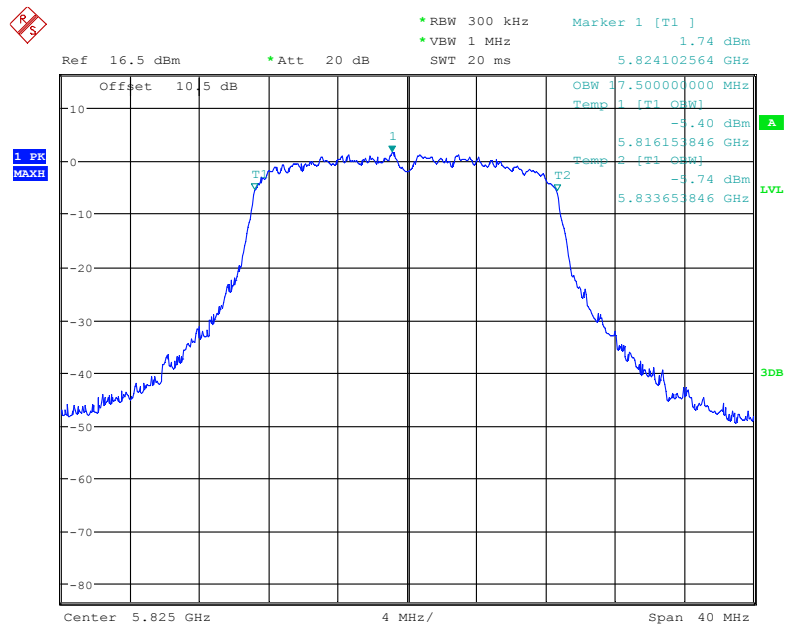


Date: 14.AUG.2018 20:16:18

802.11n40 mode, 99% Occupied Bandwidth, 5755 MHz

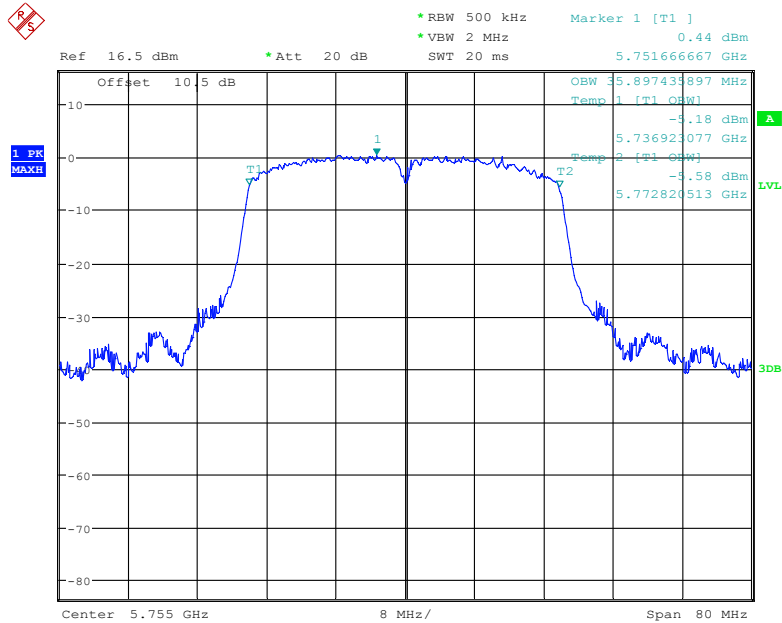


Date: 14.AUG.2018 20:21:49

802.11n40 mode, 99% Occupied Bandwidth, 5795 MHz

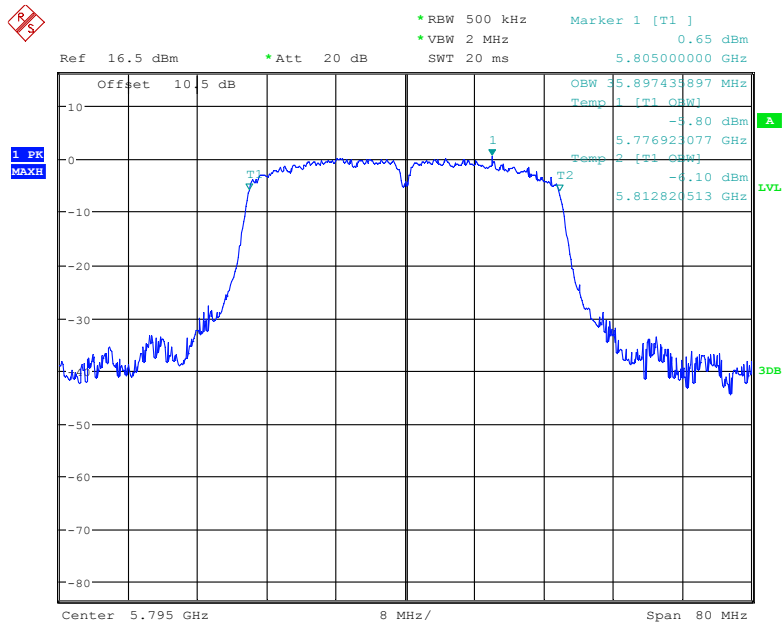


Date: 14.AUG.2018 20:23:35


802.11ac20 mode, 99% Occupied Bandwidth, 5745 MHz

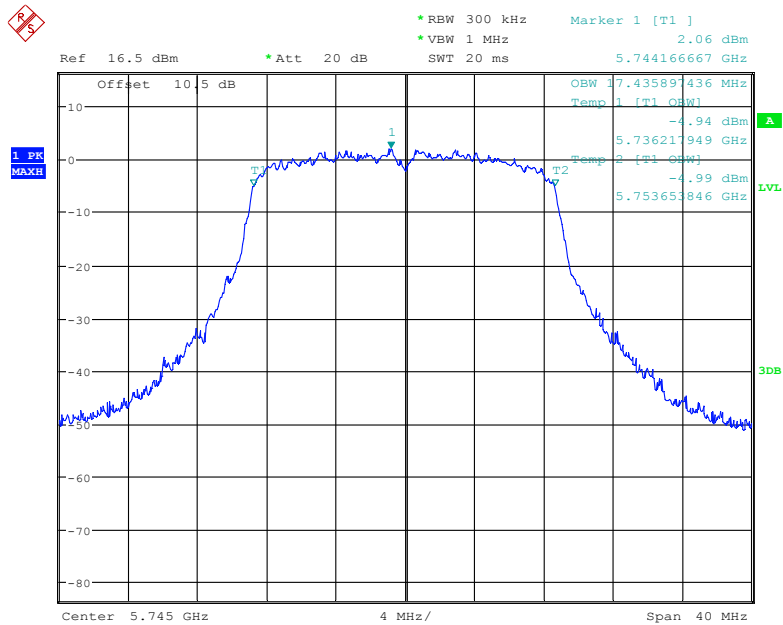

802.11ac20 mode, 99% Occupied Bandwidth, 5785 MHz

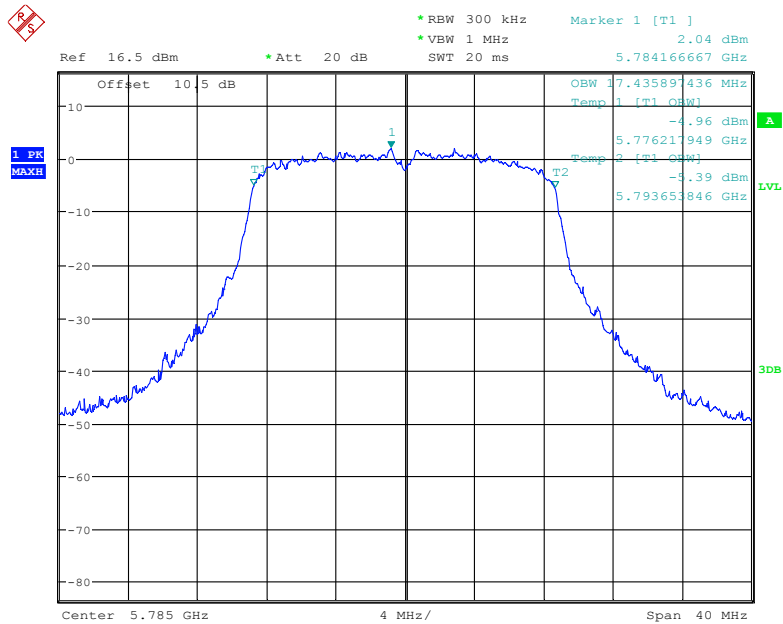


802.11ac20 mode, 99% Occupied Bandwidth, 5825 MHz

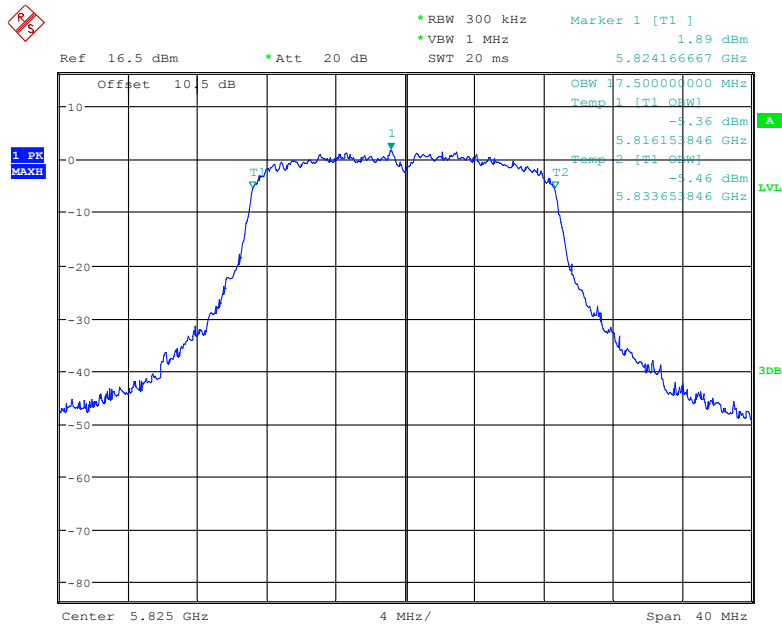

Date: 14.AUG.2018 20:04:09

802.11ac40 mode, 99% Occupied Bandwidth, 5755 MHz

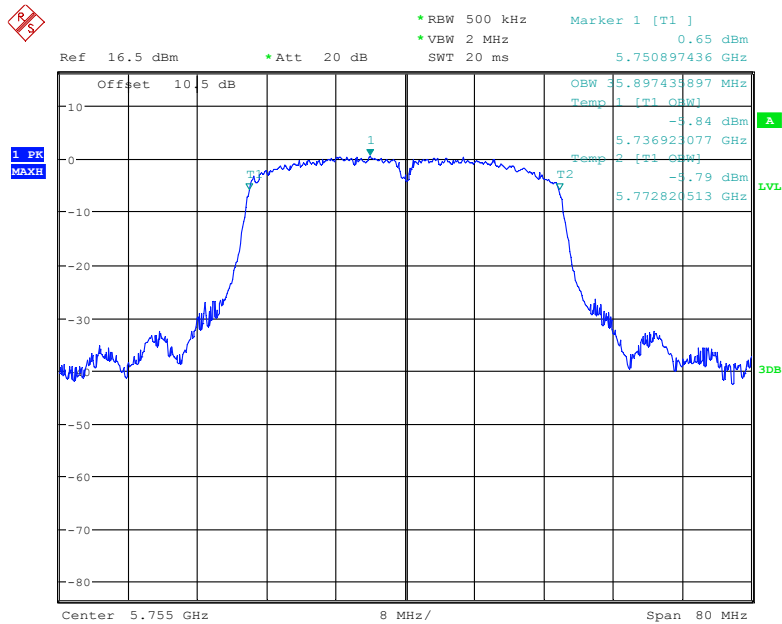

Date: 14.AUG.2018 20:27:19

**1 PK
MAX**

Parameter	Value
Ref	16.5 dBm
*Att	20 dB
*RBW	500 kHz
*VBW	2 MHz
SWT	20 ms
Marker 1 [T1]	1.00 dBm
	5.79000000 GHz

Offset 10.5 dB

OBW 5.89743897 MHz
Temp 1 [T1 OBW] -5.89 dBm
5.776923077 GHz

T1
T2

Temp 2 [T1 OBW] -5.96 dBm
5.812820513 GHz

LVL
3DB

Center 5.795 GHz 8 MHz/
Span 80 MHz

Date: 14.AUG.2018 20:30:51

Ref 16.5 dBm *Att 20 dB SWT 20 ms

*RBW 1 MHz *VBW 3 MHz

Marker 1 [T1] 1.15 dBm 5.768250000 GHz

Offset 10.5 dB

OBW 4.769230769 MHz

Temp 1 [T1 OBW] -4.26 dBm 5.737359769 GHz

Temp 2 [T1 OBW] -5.83 dBm 5.812125000 GHz

1 PK MAXH

Center 5.775 GHz 16.2 MHz/ Span 162 MHz

Date: 14.AUG.2018 20:33:09

FCC §15.407(a) (1) (3) – CONDUCTED TRANSMITTER OUTPUT POWER**Applicable Standard**


For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

The testing was performed by Tracy Hu on 2018-08-09.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the following tables.

Note: (1) This Device Emploies Cyclic Delay Diversity.

When determining reductions in conducted power limits, array gain is calculated as follows:

As to this device, $N_{ANT} \leq 4$, Array Gain = 0 dB.

Total directional gain (dBi) = gain of individual transmit antennas (dBi) + 0 (dB) = 5dBi.

(2) This device can be master or client device, the strictest limit was used herein.

(3) The duty cycle factor please refers to “Duty cycle” section of this report.

5150 MHz – 5250 MHz:

Frequency (MHz)	Antenna Port	Average Output Power (dBm)	Total Power (dBm)	Duty cycle factor (dB)	Power (dBm)	Limit (dBm)
802.11a						
5180	0	9.61	/	0.16	9.77	24
	1	9.74		0.16	9.9	
5200	0	9.82	/	0.16	9.98	
	1	9.22		0.16	9.38	
5240	0	9.65	/	0.16	9.81	
	1	10.03		0.16	10.19	
802.11n20						
5180	0	9.30	12.58	0.14	12.72	24
	1	9.83				
5200	0	9.58	12.82	0.14	12.96	
	1	10.03				
5240	0	9.65	12.84	0.14	12.98	
	1	10.00				
802.11n40						
5190	0	9.01	12.21	0.36	12.57	24
	1	9.39				
5230	0	9.14	12.29	0.36	12.65	
	1	9.42				
802.11ac20						
5180	0	9.31	12.60	0.19	12.79	24
	1	9.86				
5200	0	9.61	12.83	0.19	13.02	
	1	10.02				
5240	0	9.75	12.89	0.19	13.08	
	1	10.01				
802.11ac40						
5190	0	9.00	12.25	0.35	12.60	24
	1	9.47				
5230	0	9.22	12.37	0.35	12.72	
	1	9.49				
802.11ac80						
5210	0	8.96	12.22	0.72	12.94	24
	1	9.45				

5725 MHz – 5825 MHz:

Frequency	Antenna Port	Average Output Power	Total Power	Dutycycle Factor	Power	Limit
(MHz)		(dBm)	(dBm)	(dB)	(dBm)	(dBm)
802.11a						
5745	0	9.96	/	0.16	10.12	30
	1	9.75		0.16	9.91	
5785	0	9.91	/	0.16	10.07	
	1	9.49		0.16	9.65	
5825	0	9.53	/	0.16	9.69	
	1	9.29		0.16	9.45	
802.11n20						
5745	0	9.95	12.80	0.14	12.94	30
	1	9.63				
5785	0	9.75	12.59	0.14	12.73	
	1	9.40				
5825	0	9.43	12.36	0.14	12.5	
	1	9.26				
802.11n40						
5755	0	9.41	12.31	0.36	12.67	30
	1	9.19				
5795	0	9.26	12.18	0.36	12.54	
	1	9.08				
802.11ac20						
5745	0	9.89	12.76	0.19	12.95	30
	1	9.61				
5785	0	9.81	12.65	0.19	12.84	
	1	9.47				
5825	0	9.43	12.29	0.19	12.48	
	1	9.13				
802.11ac40						
5755	0	9.39	12.38	0.35	12.73	30
	1	9.34				
5795	0	9.28	12.18	0.35	12.53	
	1	9.05				
802.11ac80						
5775	0	9.33	12.31	0.72	13.03	30
	1	9.26				

FCC §15.407(a) (1) (3) - POWER SPECTRAL DENSITY

Applicable Standard

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.1.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500 \text{ kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Test Data**Environmental Conditions**

Temperature:	23~26 °C
Relative Humidity:	52~55 %
ATM Pressure:	100~101 kPa

The testing was performed by Tracy Hu on 2018-08-09 to 2018-08-14.

EUT operation mode: Transmitting

Test Result: Pass

Note: (1) This Device Emploies Cyclic Delay Diversity.

When determining reductions in power spectral density limits, array gain is calculated as follows:

Array gain = $10 \log (N_{\text{ANT}}/N_{\text{ss}})$, where N_{ANT} is the number of transmit antennas is 2,

and N_{ss} = the number of independent spatial streams of data=2.

Total directional gain (dBi) = gain of individual transmit antennas (dBi) +0 (dB) =5dBi.

(2) This device can be master or client device, the strictest limit was used herein.

(3) The duty cycle factor please refers to “Duty cycle” section of this report.


Please refer to the following tables and plots.

5150 MHz – 5250 MHz :

Frequency (MHz)	Antenna Port	Power Spectral Density (dBm/MHz)	Total Power Spectral Density (dBm/MHz)	duty cycle factor (dB)	Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)
802.11a						
5180	0	-1.00	/	0.16	-0.84	11
	1	-0.79		0.16	-0.63	
5200	0	-0.97	/	0.16	-0.81	
	1	-0.59		0.16	-0.43	
5240	0	-0.67	/	0.16	-0.51	
	1	-0.80		0.16	-0.64	
802.11n20						
5180	0	-1.22	1.99	0.14	2.13	11
	1	-0.82				
5200	0	-1.29	1.93	0.14	2.07	
	1	-0.88				
5240	0	-1.01	2.22	0.14	2.36	
	1	-0.59				
802.11n40						
5190	0	-4.97	-1.71	0.36	-1.35	11
	1	-4.48				
5230	0	-4.67	-1.59	0.36	-1.23	
	1	-4.54				
802.11ac20						
5180	0	-1.22	1.95	0.19	2.14	11
	1	-0.90				
5200	0	-0.91	2.33	0.19	2.52	
	1	-0.46				
5240	0	-1.10	2.26	0.19	2.45	
	1	-0.42				
802.11ac40						
5190	0	-5.07	-1.82	0.35	-1.47	11
	1	-4.61				
5230	0	-4.87	-1.65	0.35	-1.30	
	1	-4.46				
802.11ac80						
5210	0	-7.66	-4.44	0.72	-3.72	11
	1	-7.25				


Antenna 0:

802.11a mode, Power Spectral Density, 5180 MHz

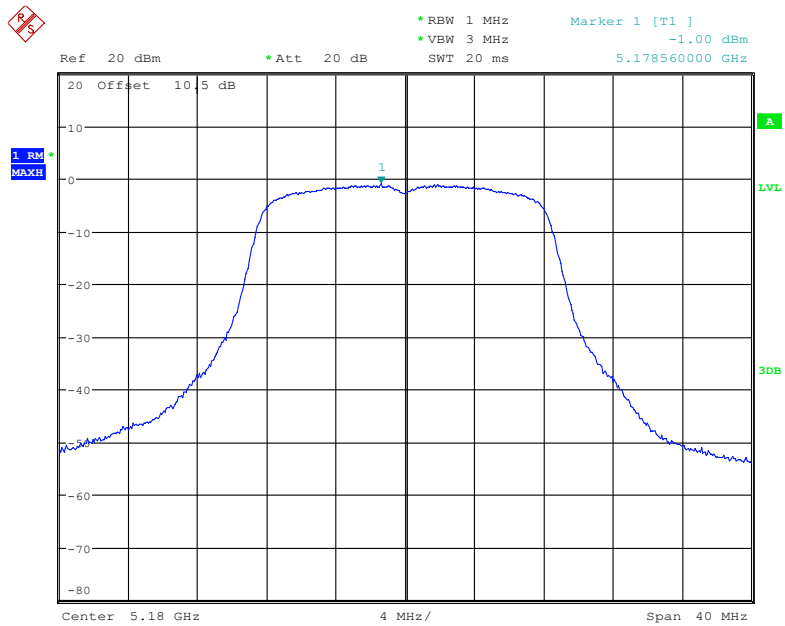


Date: 9.AUG.2018 21:02:51

802.11a mode, Power Spectral Density, 5200 MHz

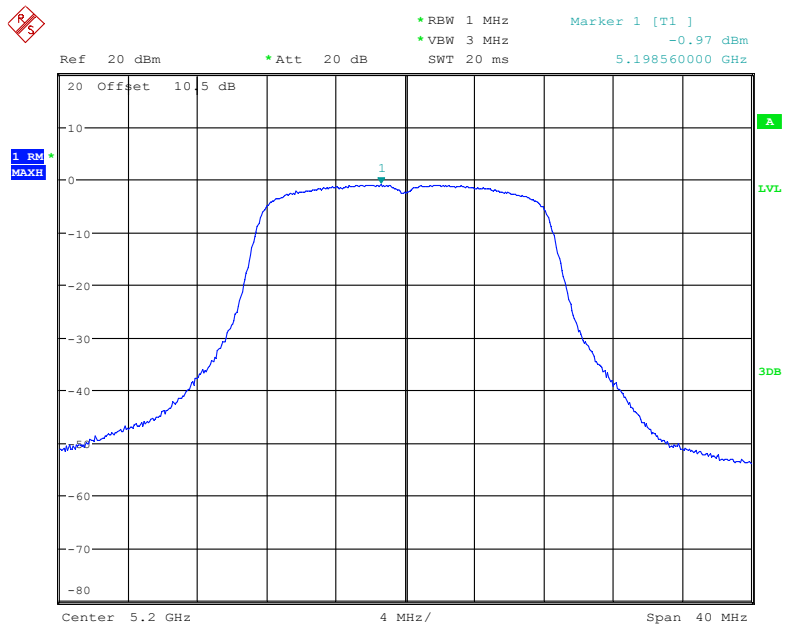


Date: 9.AUG.2018 20:59:28

802.11a mode, Power Spectral Density, 5240 MHz

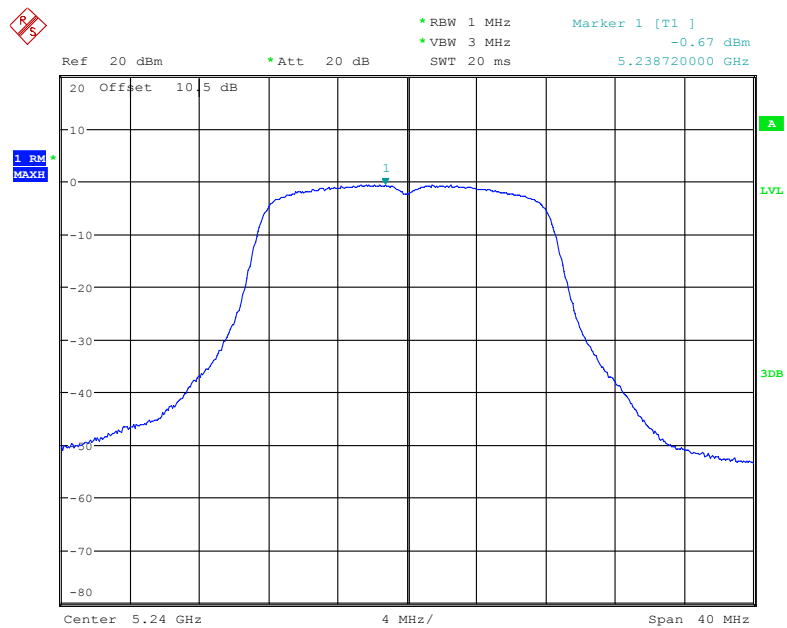


Date: 9.AUG.2018 20:58:16

802.11n20 mode, Power Spectral Density, 5180 MHz

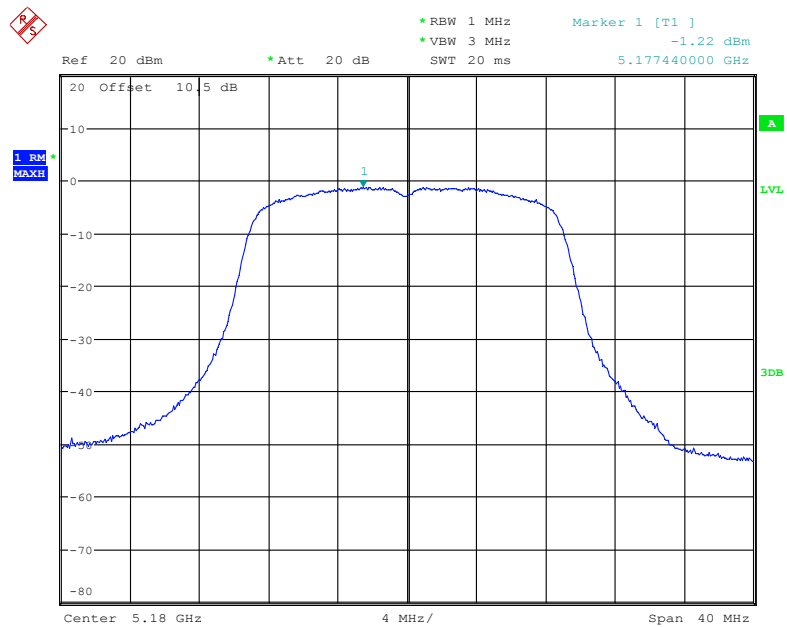


Date: 9.AUG.2018 21:04:08

802.11n20 mode, Power Spectral Density, 5200 MHz

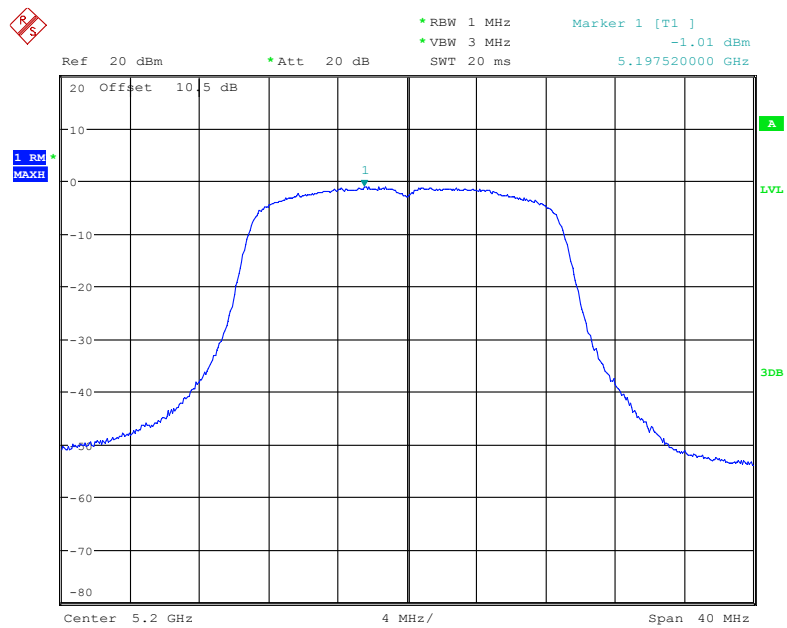


Date: 9.AUG.2018 21:04:31

802.11n20 mode, Power Spectral Density, 5240 MHz

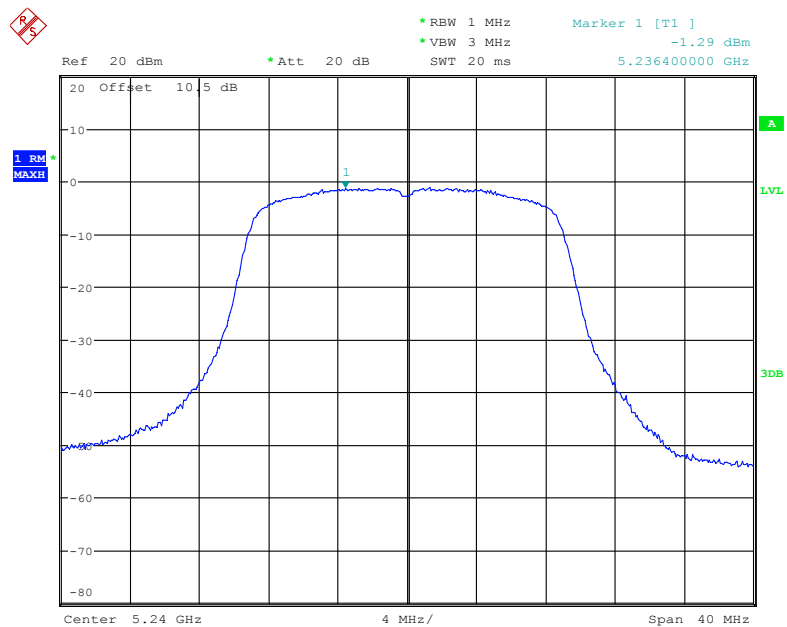


Date: 9.AUG.2018 21:04:51

802.11n40 mode, Power Spectral Density, 5190 MHz

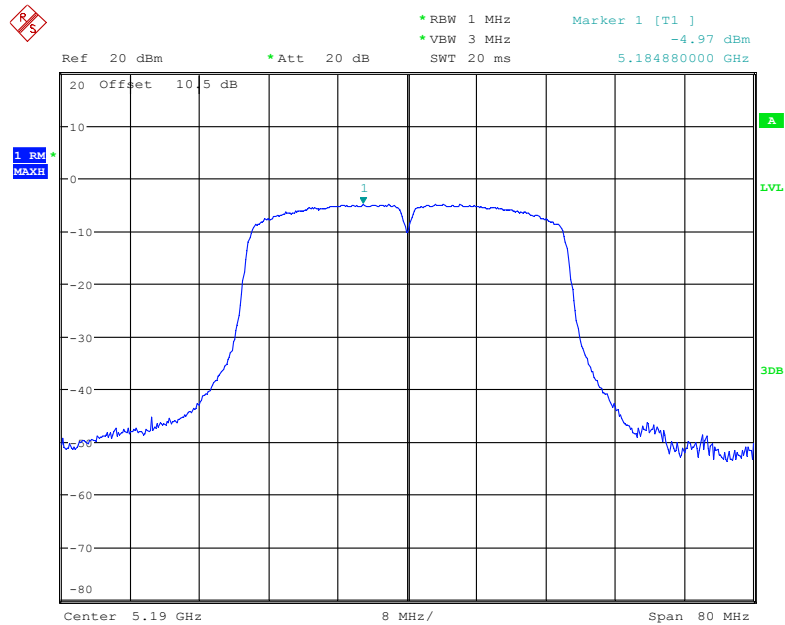


Date: 9.AUG.2018 21:08:06

802.11n40 mode, Power Spectral Density, 5230 MHz

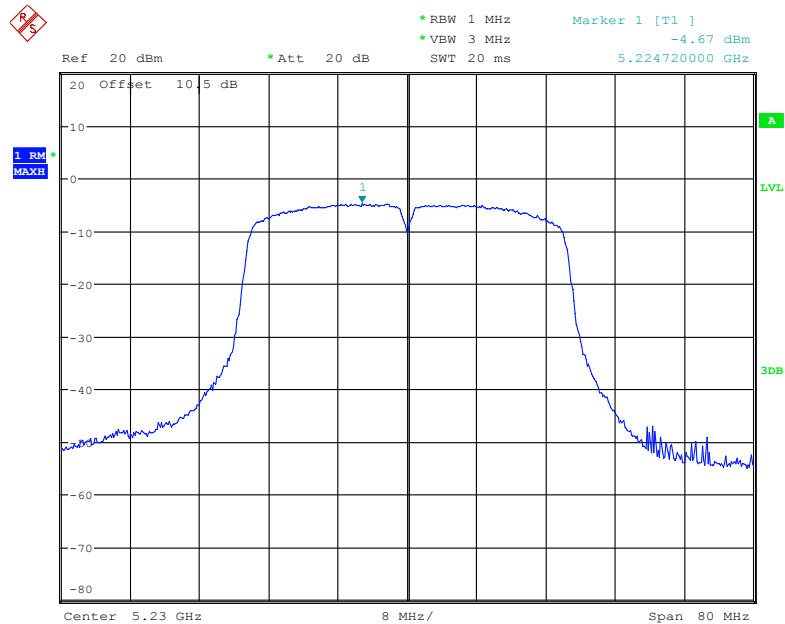


Date: 9.AUG.2018 21:08:40

802.11ac20 mode, Power Spectral Density, 5180 MHz

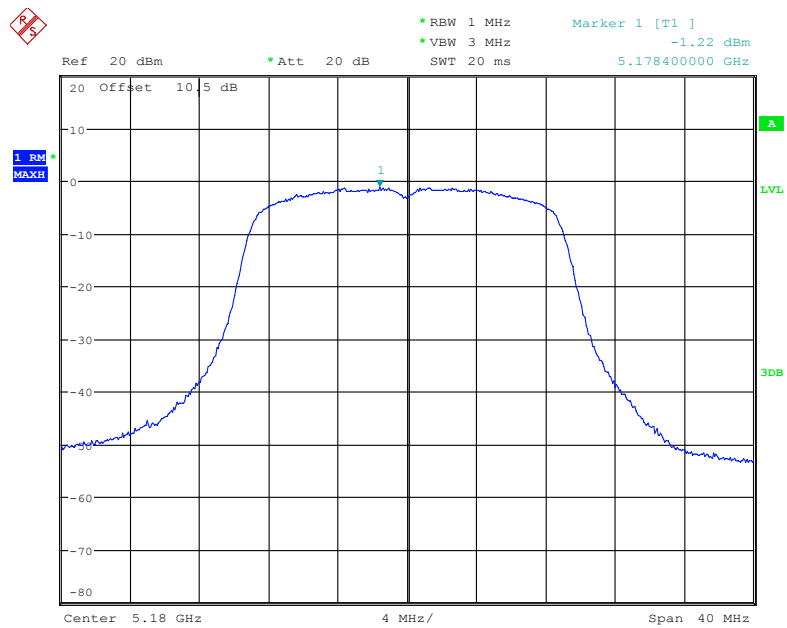


Date: 9.AUG.2018 21:06:14

802.11ac20 mode, Power Spectral Density, 5200 MHz

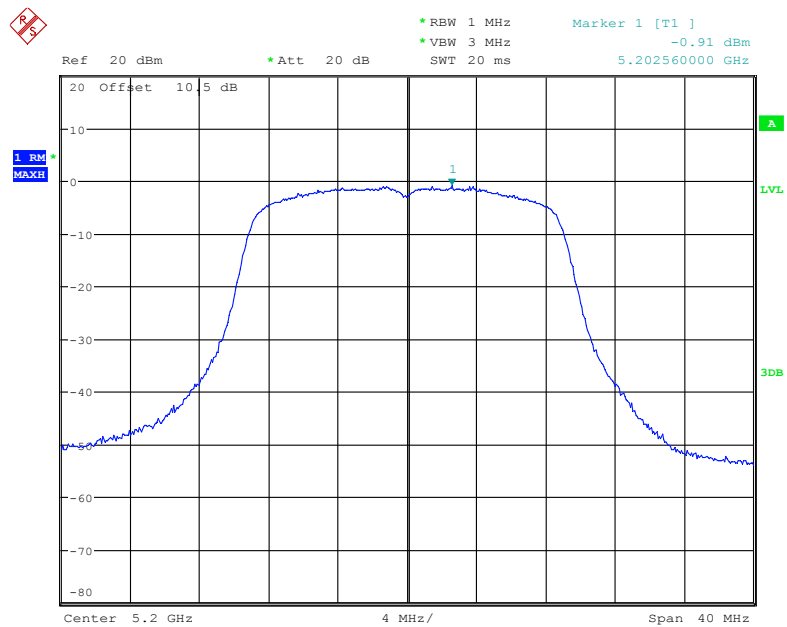


Date: 9.AUG.2018 21:06:47

802.11ac20 mode, Power Spectral Density, 5240 MHz

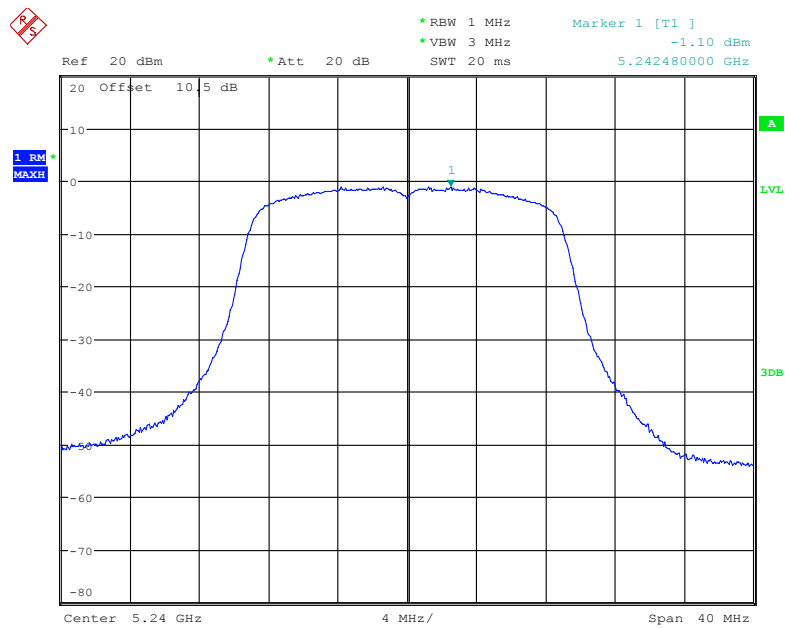


Date: 9.AUG.2018 21:07:09

802.11ac40 mode, Power Spectral Density, 5190 MHz

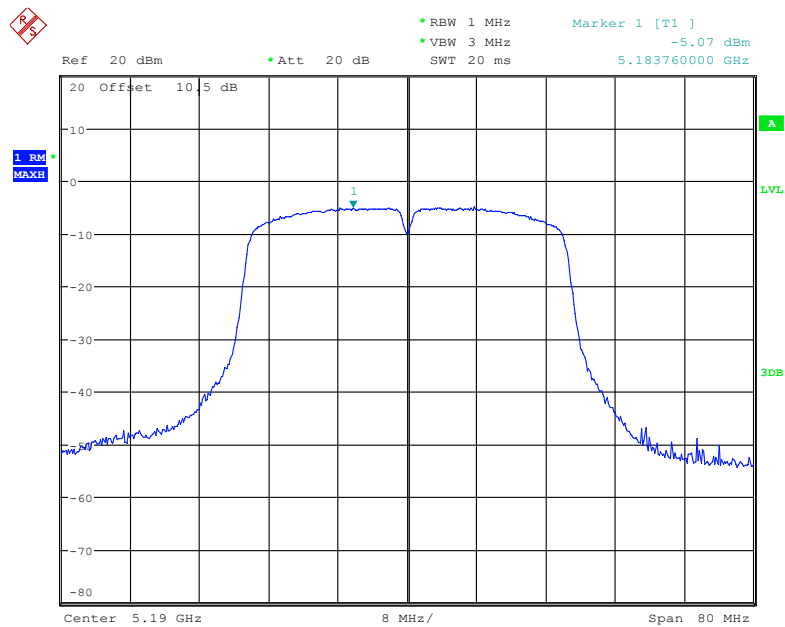


Date: 9.AUG.2018 21:09:12

802.11ac40 mode, Power Spectral Density, 5230 MHz

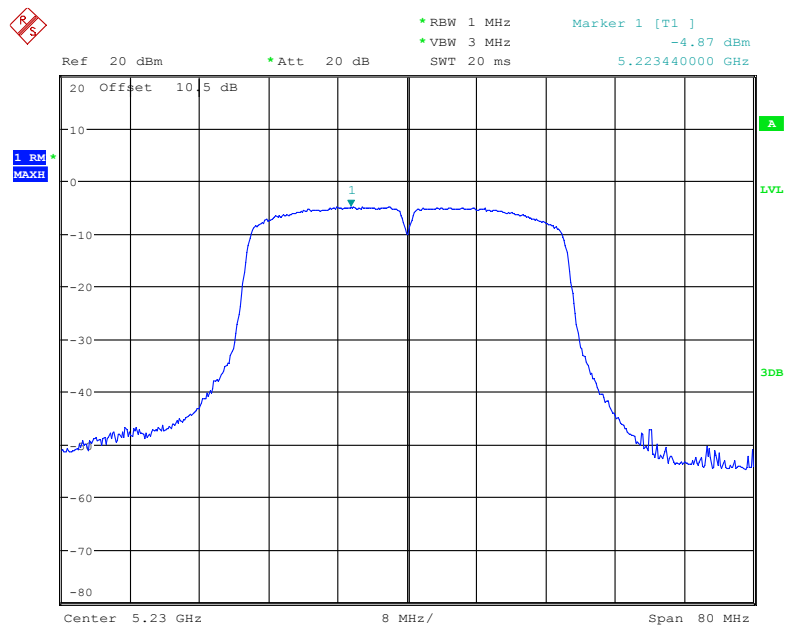

Date: 9.AUG.2018 21:09:44


802.11ac80 mode, Power Spectral Density, 5210 MHz

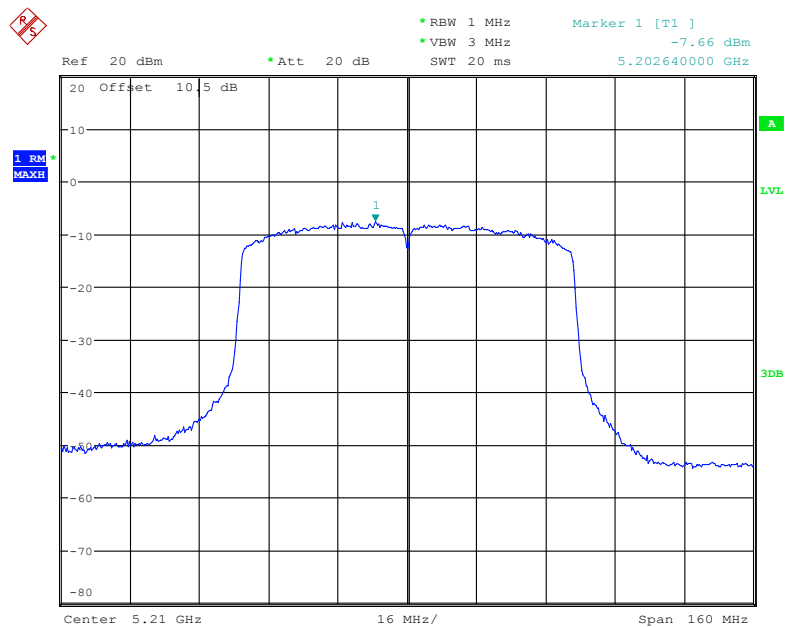

Date: 9.AUG.2018 21:10:27


Antenna 1:

802.11a mode, Power Spectral Density, 5180 MHz

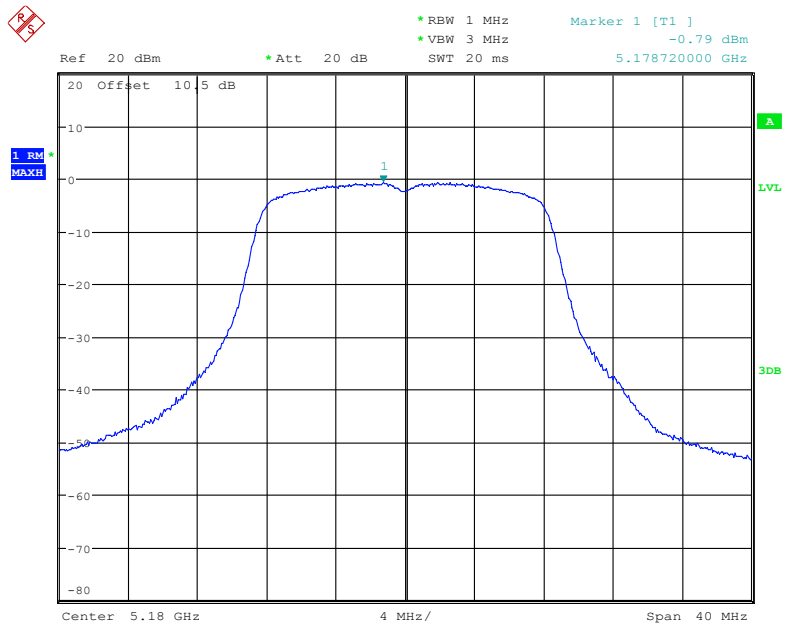


Date: 9.AUG.2018 23:04:38

802.11a mode, Power Spectral Density, 5200 MHz

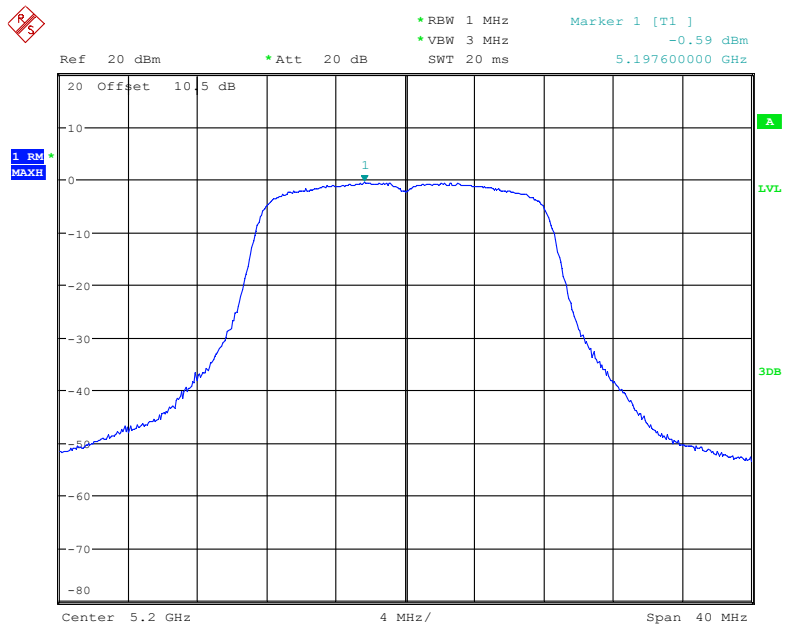


Date: 9.AUG.2018 23:05:05

802.11a mode, Power Spectral Density, 5240 MHz

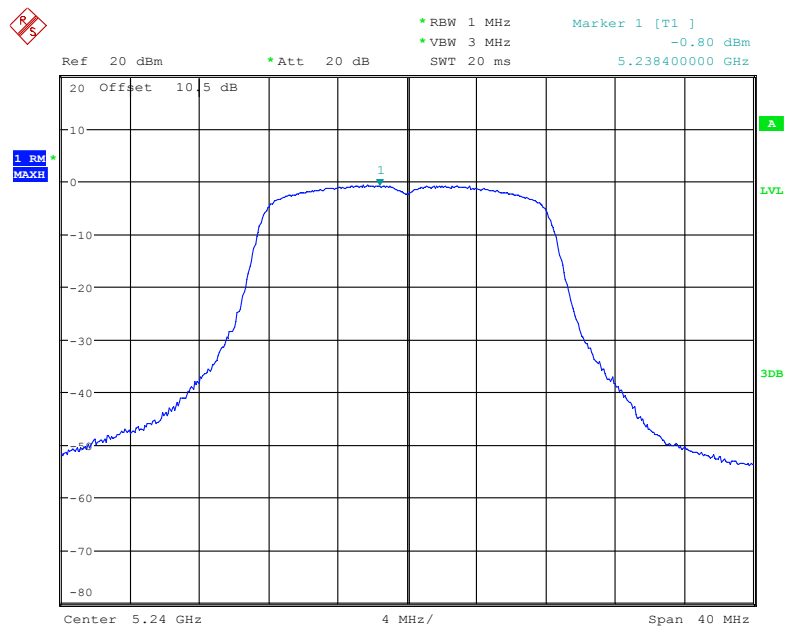


Date: 9.AUG.2018 23:05:24

802.11n20 mode, Power Spectral Density, 5180 MHz

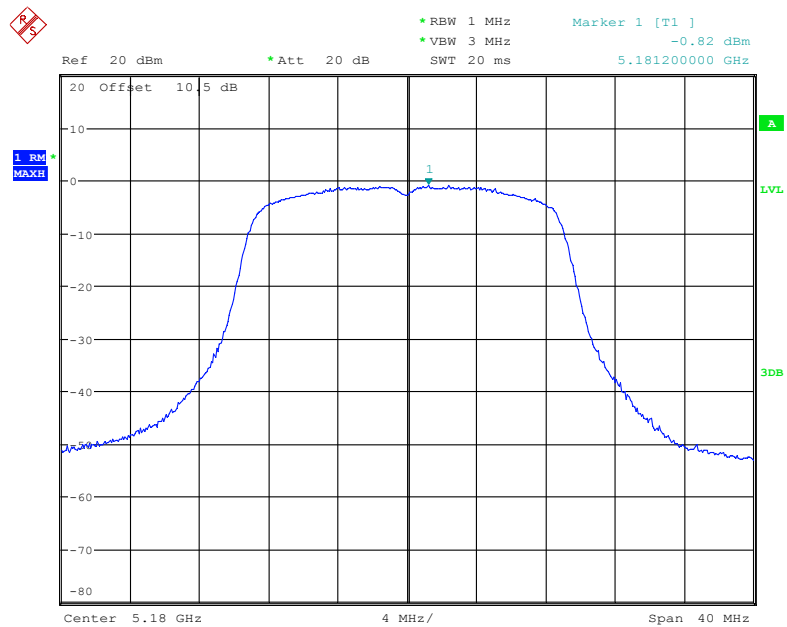


Date: 9.AUG.2018 23:03:17

802.11n20 mode, Power Spectral Density, 5200 MHz

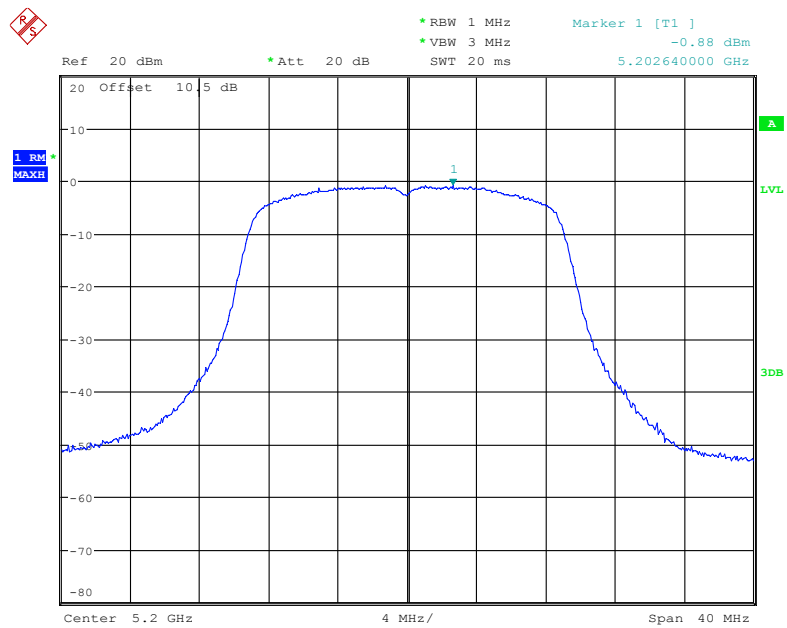


Date: 9.AUG.2018 23:03:38

802.11n20 mode, Power Spectral Density, 5240 MHz

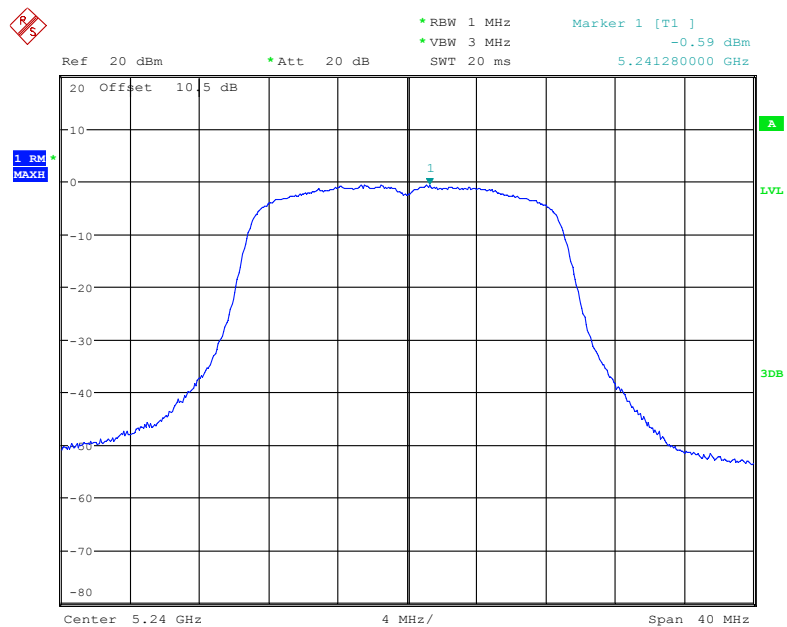


Date: 9.AUG.2018 23:04:13

802.11n40 mode, Power Spectral Density, 5190 MHz

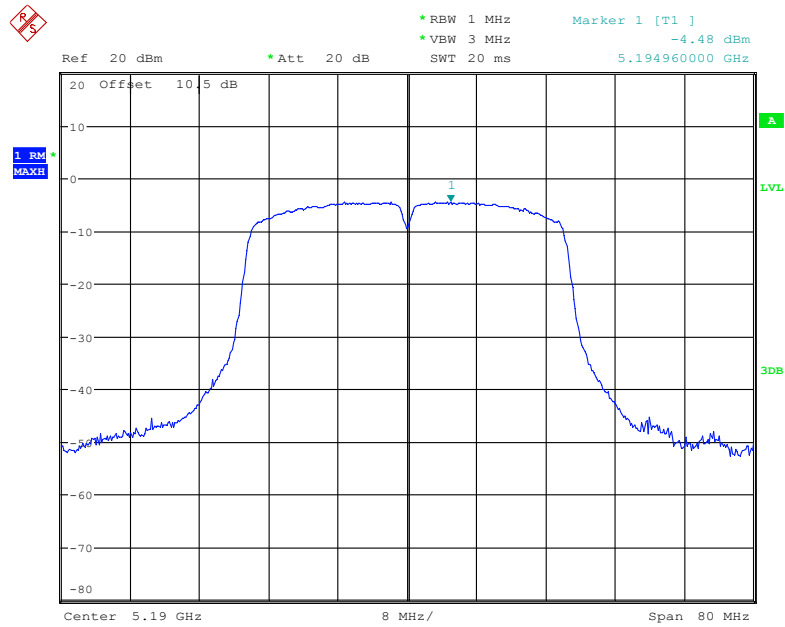


Date: 9.AUG.2018 23:06:43

802.11n40 mode, Power Spectral Density, 5230 MHz

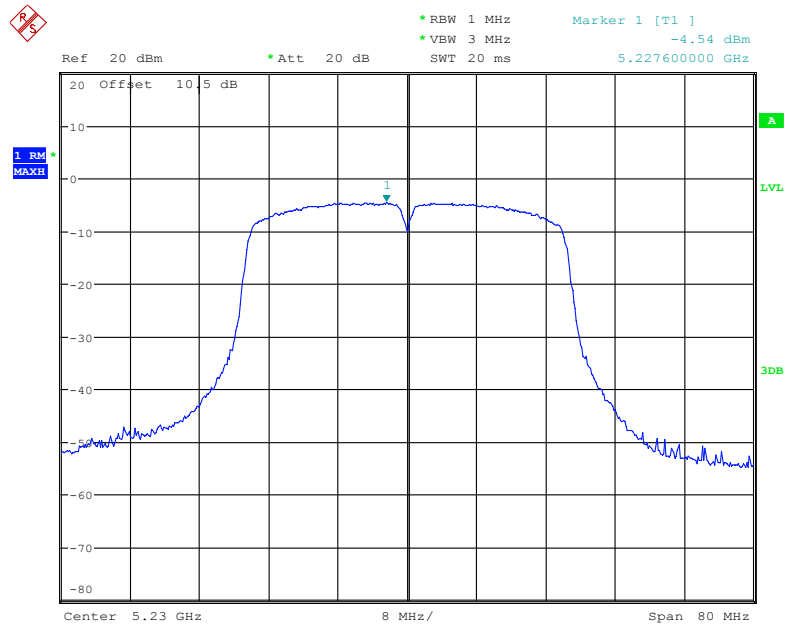


Date: 9.AUG.2018 23:07:07

802.11ac20 mode, Power Spectral Density, 5180 MHz

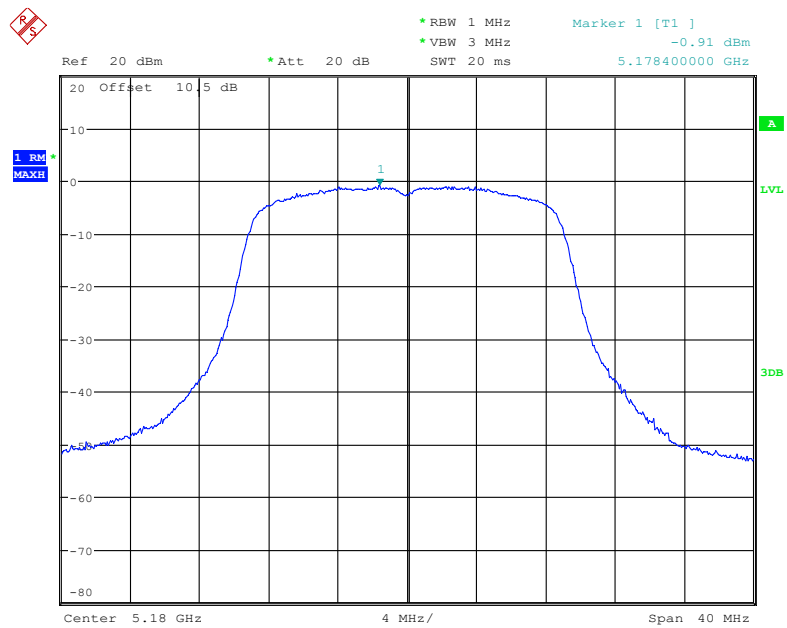


Date: 9.AUG.2018 23:01:52

802.11ac20 mode, Power Spectral Density, 5200 MHz

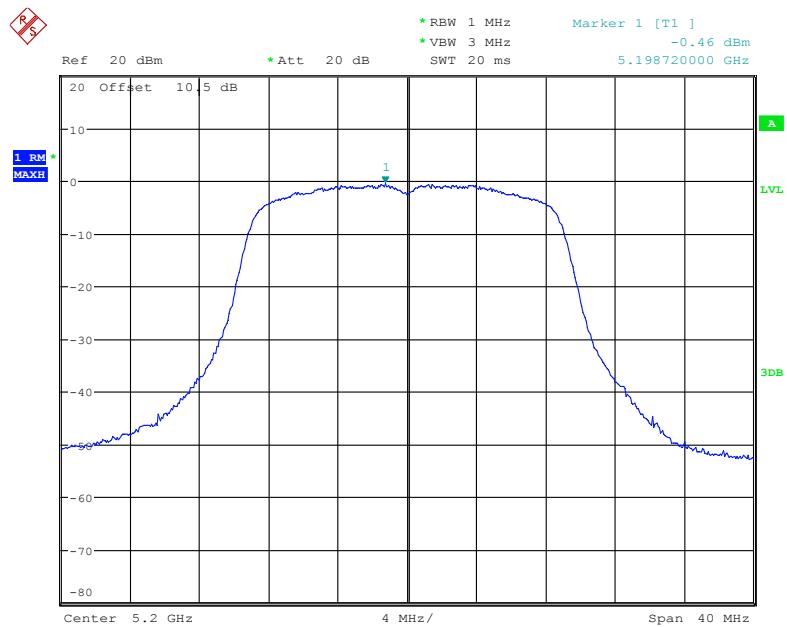


Date: 9.AUG.2018 23:01:25

802.11ac20 mode, Power Spectral Density, 5240 MHz

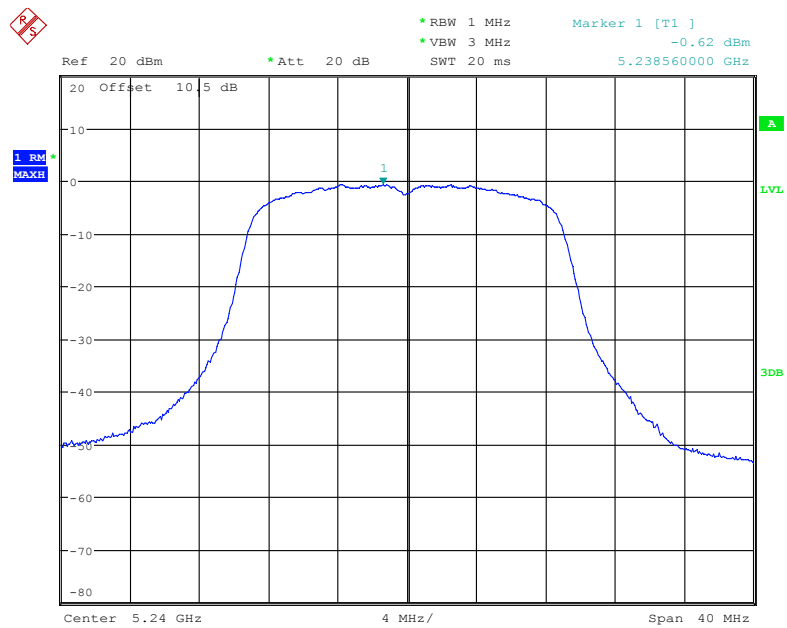


Date: 9.AUG.2018 23:00:38


802.11ac40 mode, Power Spectral Density, 5190 MHz

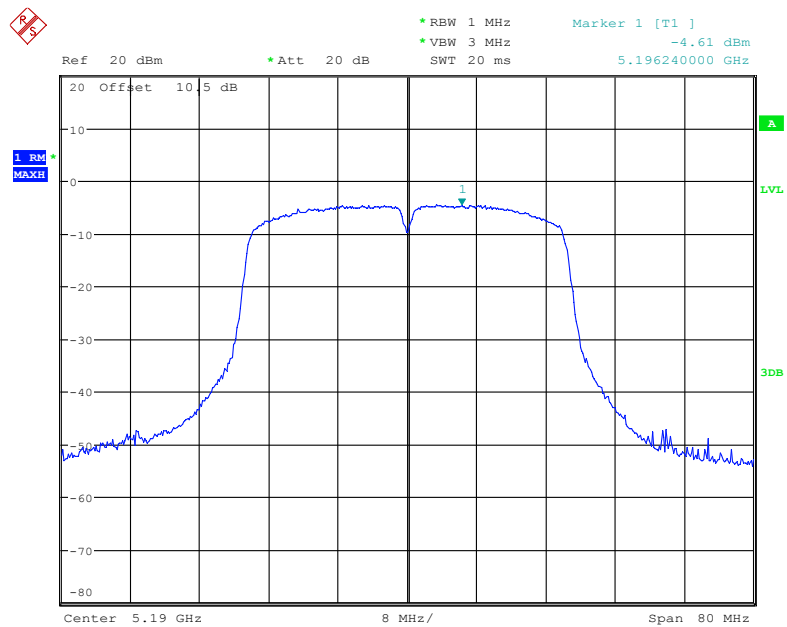

Date: 9.AUG.2018 23:07:40

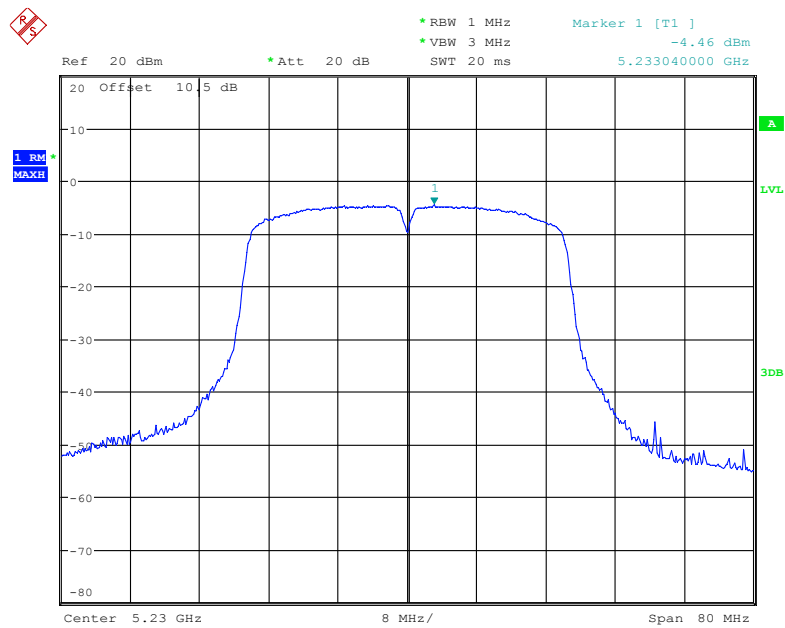802.11ac40 mode, Power Spectral Density, 5230 MHz

Date: 9.AUG.2018 23:08:06

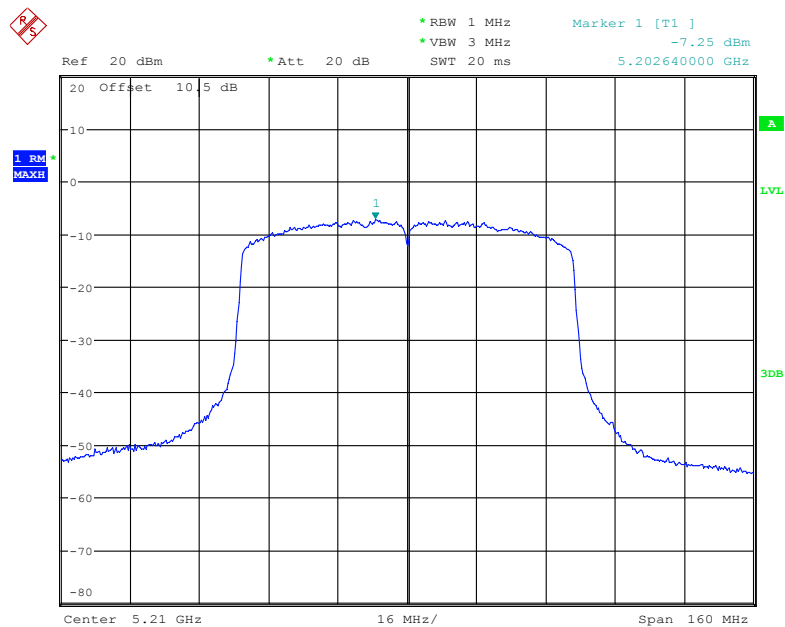802.11ac80 mode, Power Spectral Density, 5210 MHz


Date: 9.AUG.2018 23:08:48

5725 MHz – 5825 MHz:

Frequency (MHz)	Antenna Port	Power Spectral Density (dBm/500kHz)	Total Power Spectral Density (dBm/500kHz)	duty cycle factor	Power Spectral Density (dBm/500kHz)	Limit (dBm/500kHz)
802.11a						
5745	0	-2.58	/	0.16	-2.42	30
	1	-2.38		0.16	-2.22	
5785	0	-3.15	/	0.16	-2.99	
	1	-2.17		0.16	-2.01	
5825	0	-3.57	/	0.16	-3.41	
	1	-2.60		0.16	-2.44	
802.11n20						
5745	0	-2.66	0.71	0.14	0.85	30
	1	-1.96				
5785	0	-3.06	0.21	0.14	0.35	
	1	-2.55				
5825	0	-3.18	0.25	0.14	0.39	
	1	-2.37				
802.11n40						
5755	0	-6.11	-2.78	0.36	-2.42	30
	1	-5.50				
5795	0	-6.31	-2.99	0.36	-2.63	
	1	-5.72				
802.11ac20						
5745	0	-2.45	0.79	0.19	0.98	30
	1	-2.00				
5785	0	-2.92	0.33	0.19	0.52	
	1	-2.45				
5825	0	-3.04	0.43	0.19	0.62	
	1	-2.16				
802.11ac40						
5755	0	-6.40	-3.07	0.35	-2.72	30
	1	-5.79				
5795	0	-6.29	-2.99	0.35	-2.64	
	1	-5.73				
802.11ac80						
5775	0	-9.14	-5.74	0.72	-5.02	30
	1	-8.39				


Antenna 0:

802.11a mode, Power Spectral Density, 5745 MHz

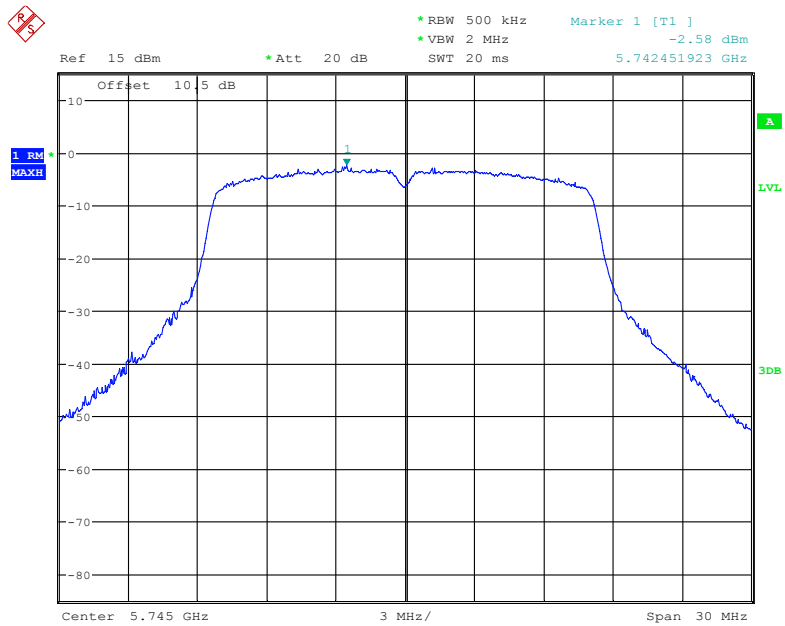


Date: 14.AUG.2018 22:57:48

802.11a mode, Power Spectral Density, 5785 MHz

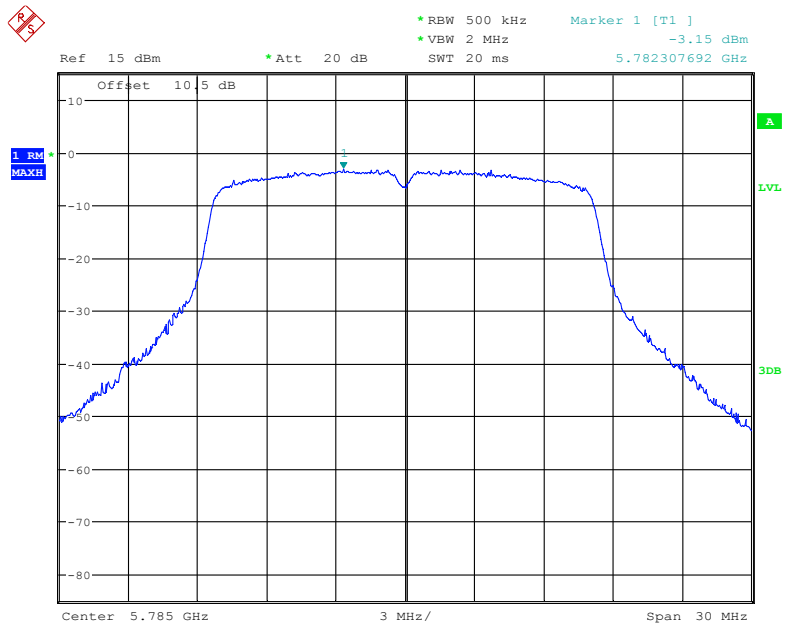


Date: 14.AUG.2018 22:58:13

802.11a mode, Power Spectral Density, 5825 MHz

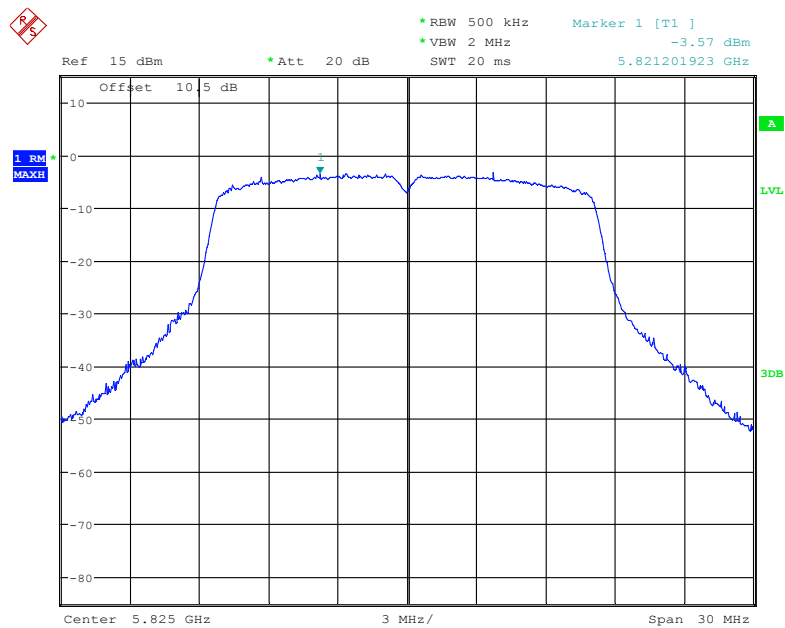


Date: 14.AUG.2018 22:58:31

802.11n20 mode, Power Spectral Density, 5745 MHz

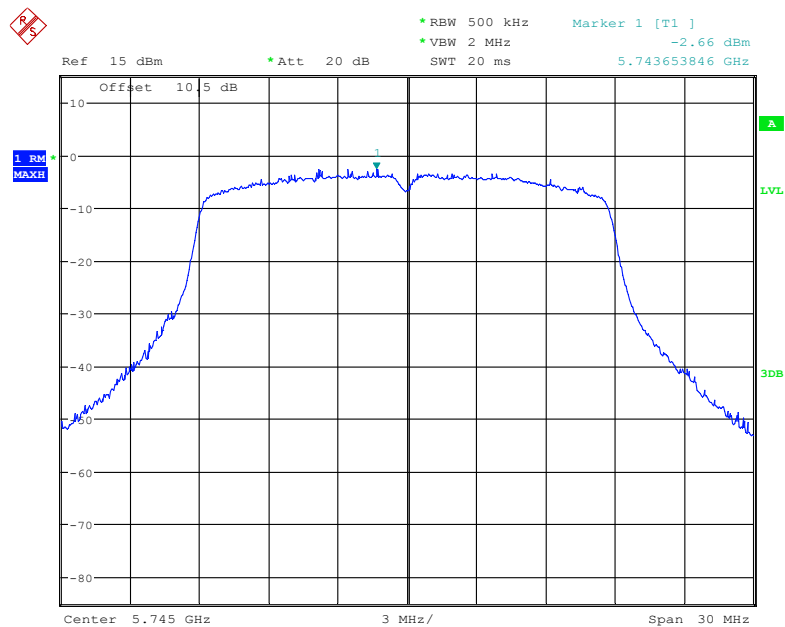


Date: 14.AUG.2018 22:58:56

802.11n20 mode, Power Spectral Density, 5785 MHz

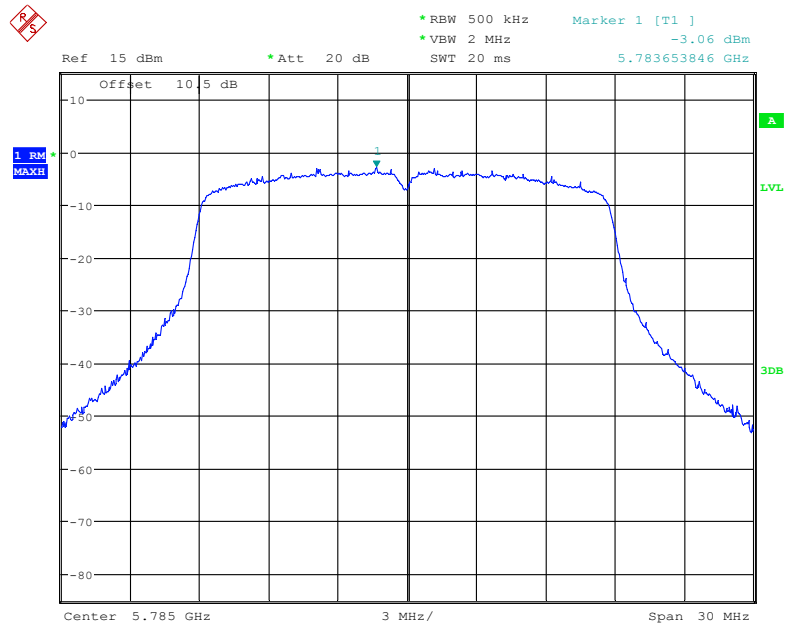


Date: 14.AUG.2018 22:59:17

802.11n20 mode, Power Spectral Density, 5825 MHz

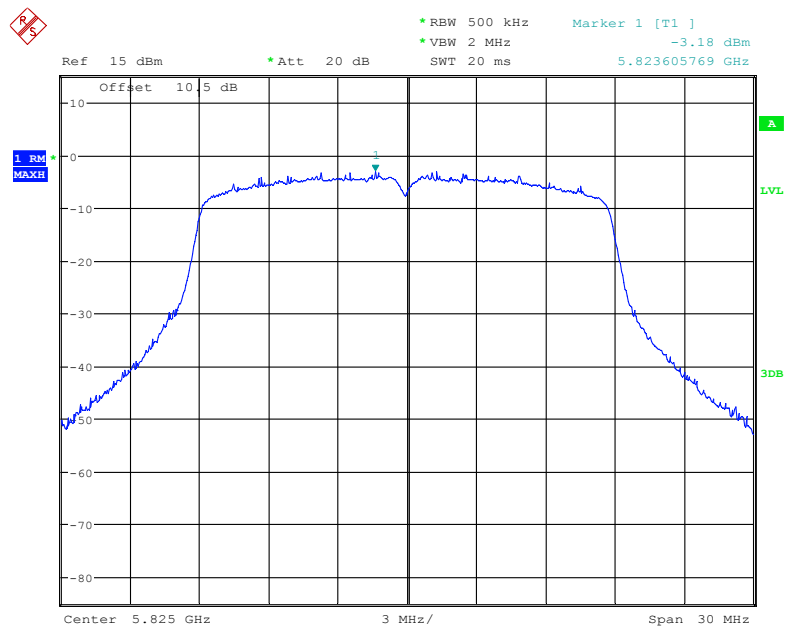


Date: 14.AUG.2018 22:59:42

802.11n40 mode, Power Spectral Density, 5755 MHz

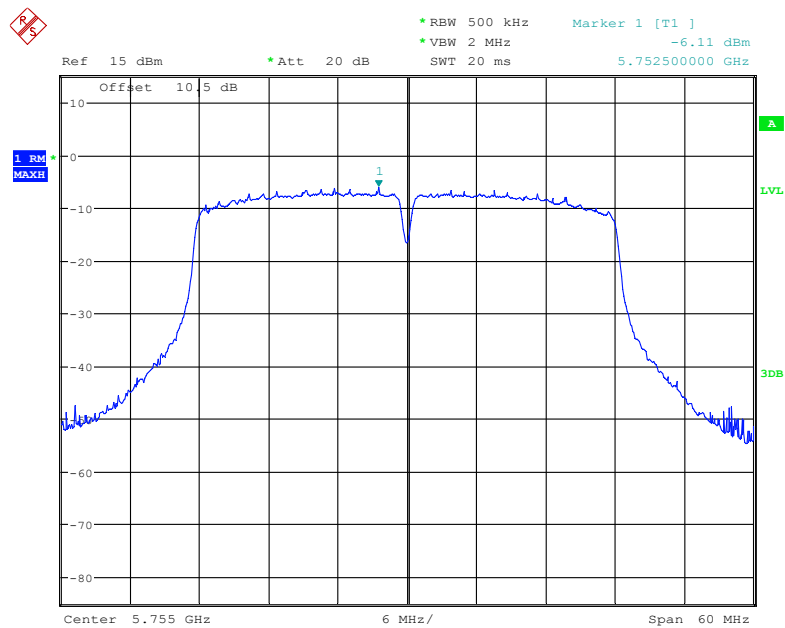


Date: 14.AUG.2018 22:54:43

802.11n40 mode, Power Spectral Density, 5795 MHz

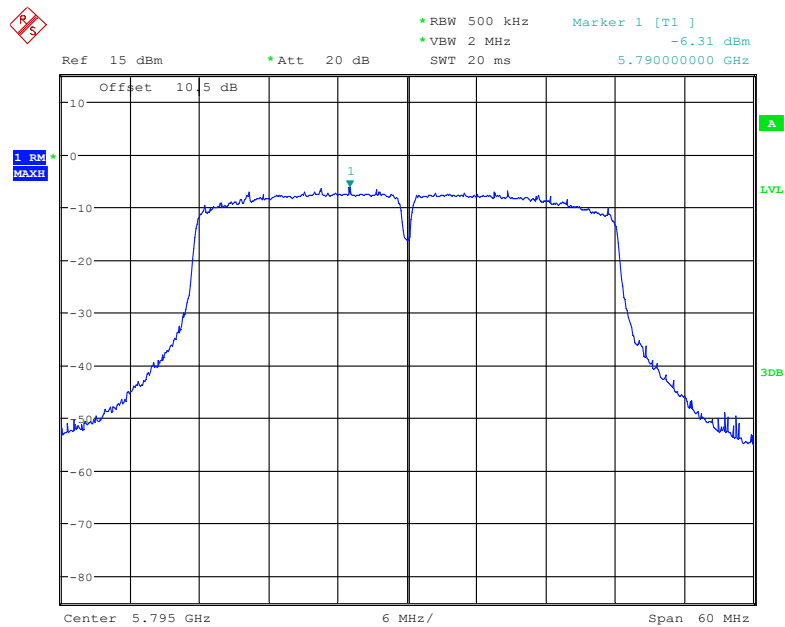


Date: 14.AUG.2018 22:55:10

802.11ac20 mode, Power Spectral Density, 5745 MHz

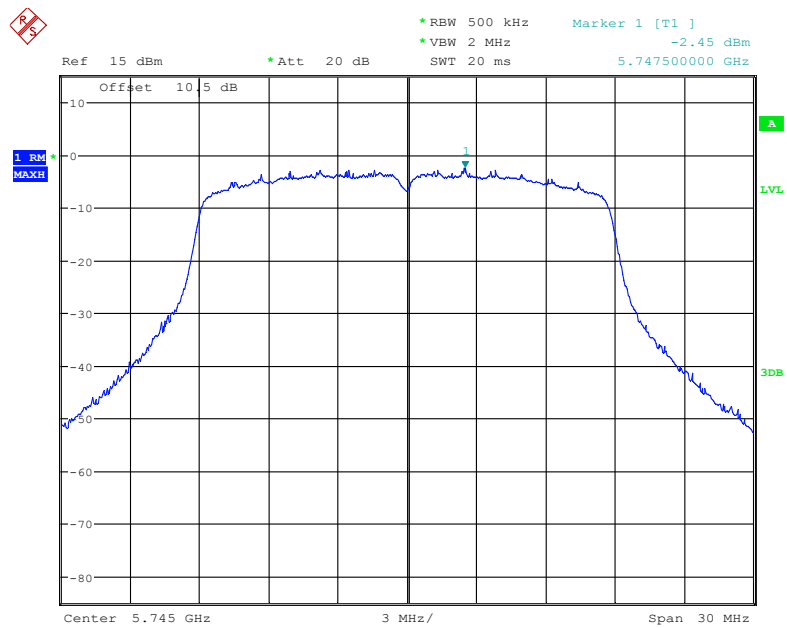


Date: 14.AUG.2018 23:01:02

802.11ac20 mode, Power Spectral Density, 5785 MHz

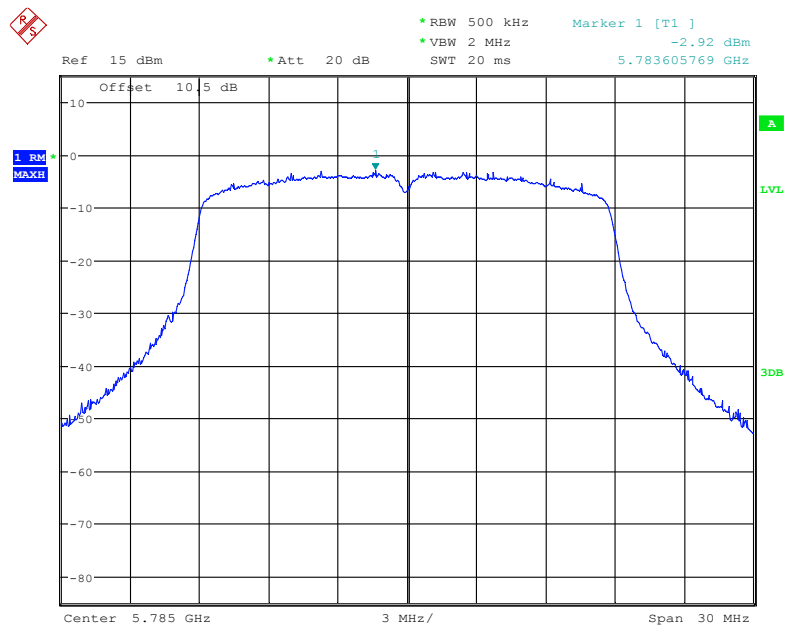


Date: 14.AUG.2018 23:01:42

802.11ac20 mode, Power Spectral Density, 5825 MHz

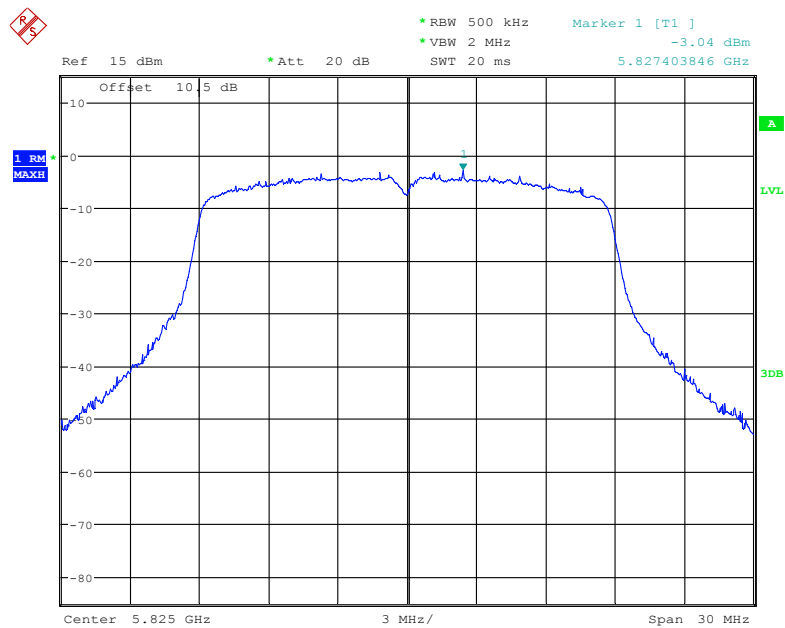


Date: 14.AUG.2018 23:02:02

802.11ac40 mode, Power Spectral Density, 5755 MHz

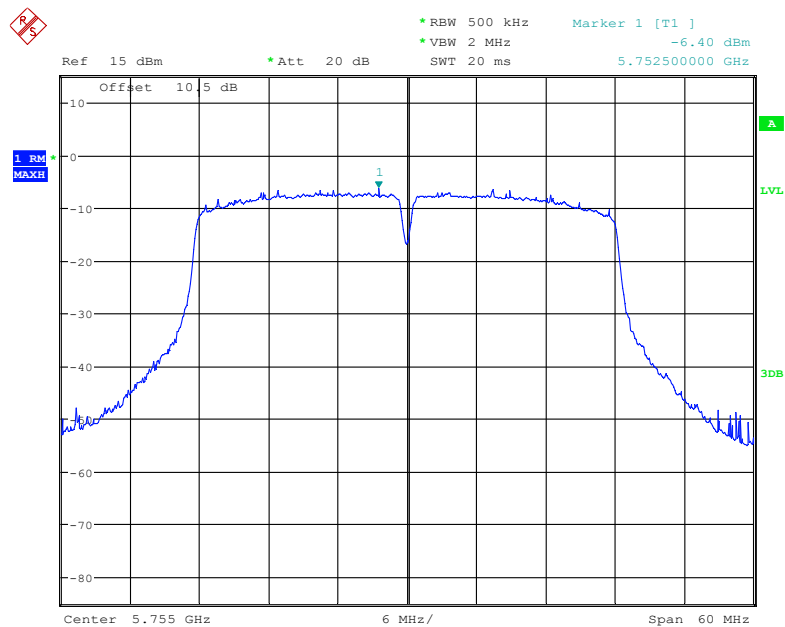


Date: 14.AUG.2018 22:55:44

802.11ac40 mode, Power Spectral Density, 5795 MHz

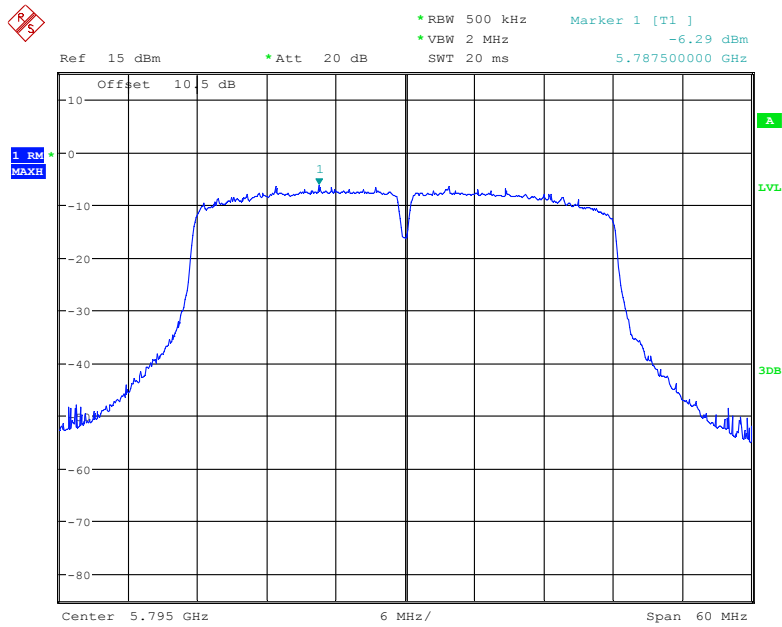

Date: 14.AUG.2018 22:56:32


802.11ac80 mode, Power Spectral Density, 5775 MHz

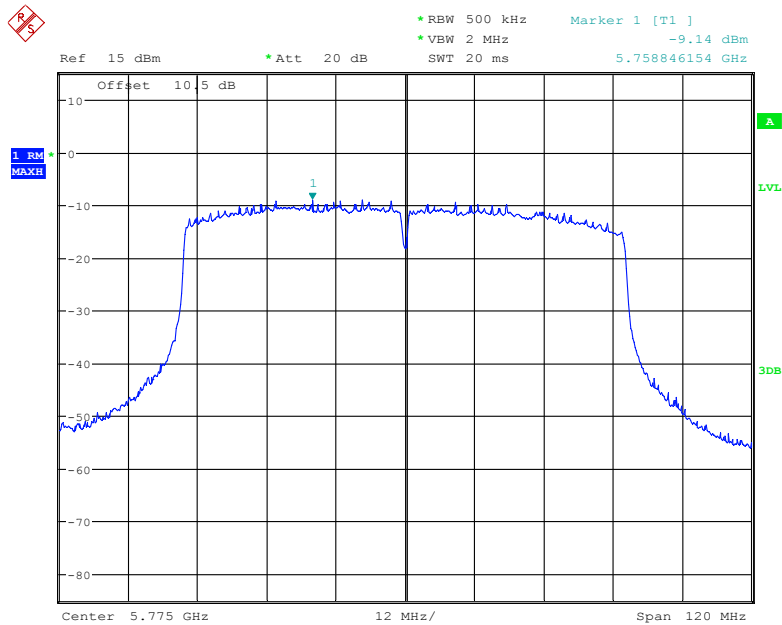

Date: 14.AUG.2018 22:53:19


Antenna 1:

802.11a mode, Power Spectral Density, 5745 MHz

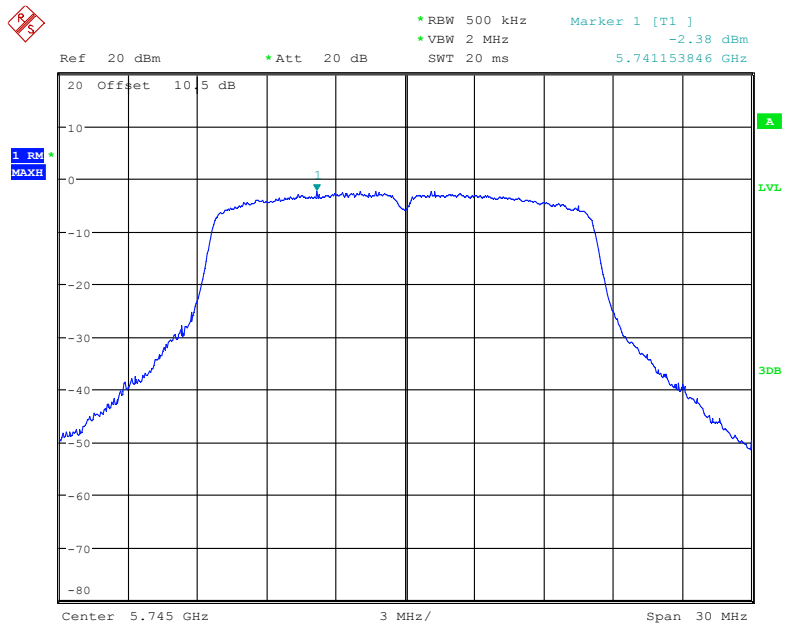


Date: 14.AUG.2018 21:20:18


802.11a mode, Power Spectral Density, 5785 MHz

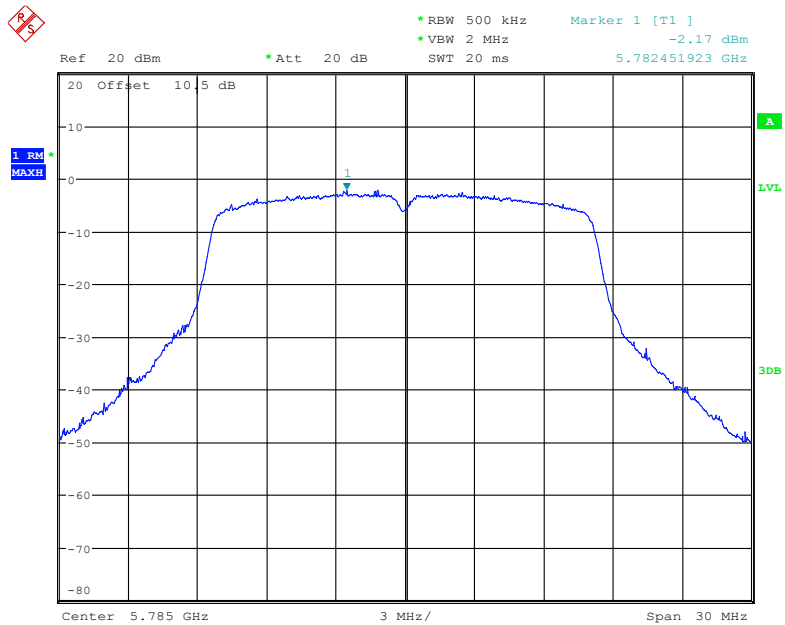

Date: 14.AUG.2018 21:20:50

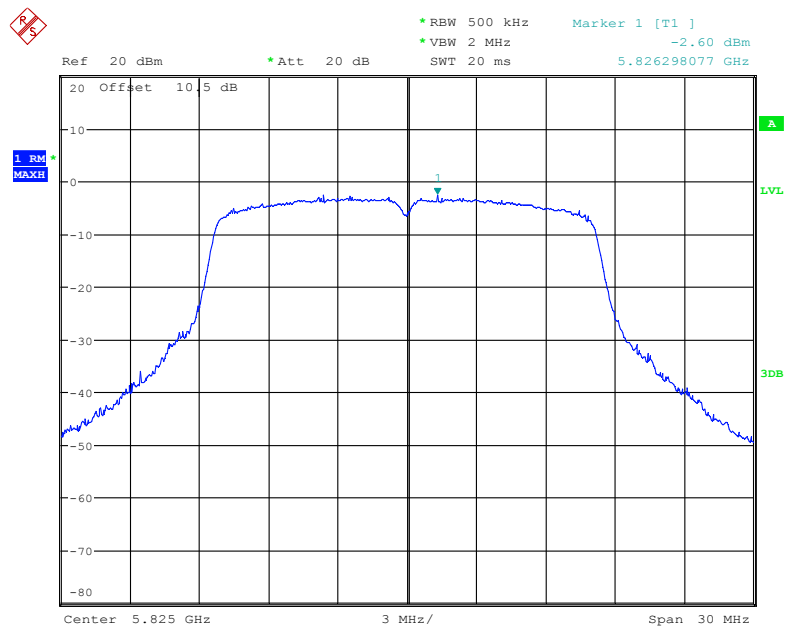
802.11a mode, Power Spectral Density, 5825 MHz

Date: 14.AUG.2018 21:21:34

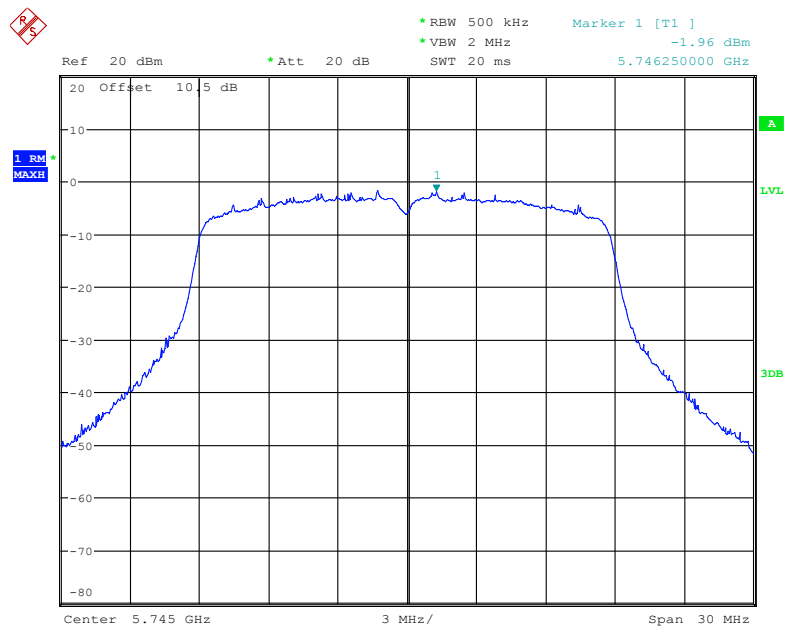802.11n20 mode, Power Spectral Density, 5745 MHz


Date: 14.AUG.2018 21:22:49

802.11n20 mode, Power Spectral Density, 5785 MHz

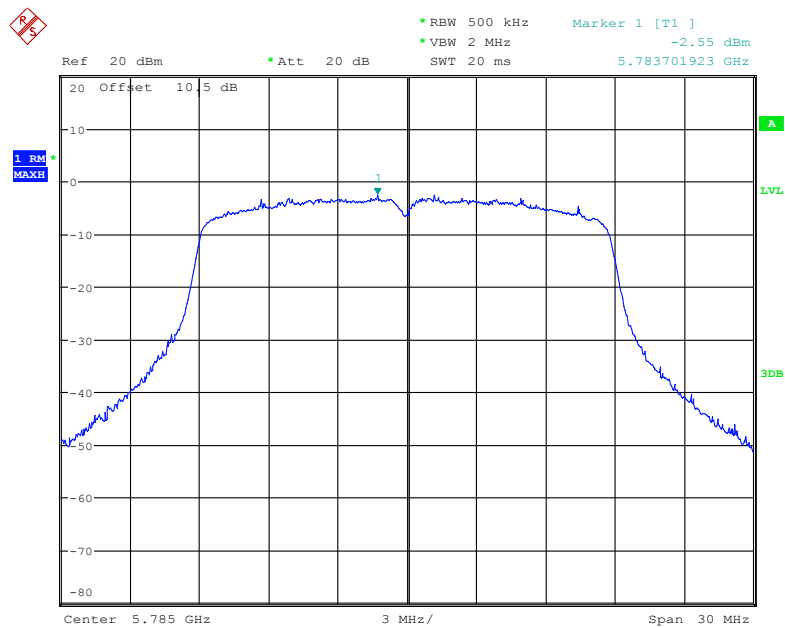


Date: 14.AUG.2018 21:23:18


802.11n20 mode, Power Spectral Density, 5825 MHz

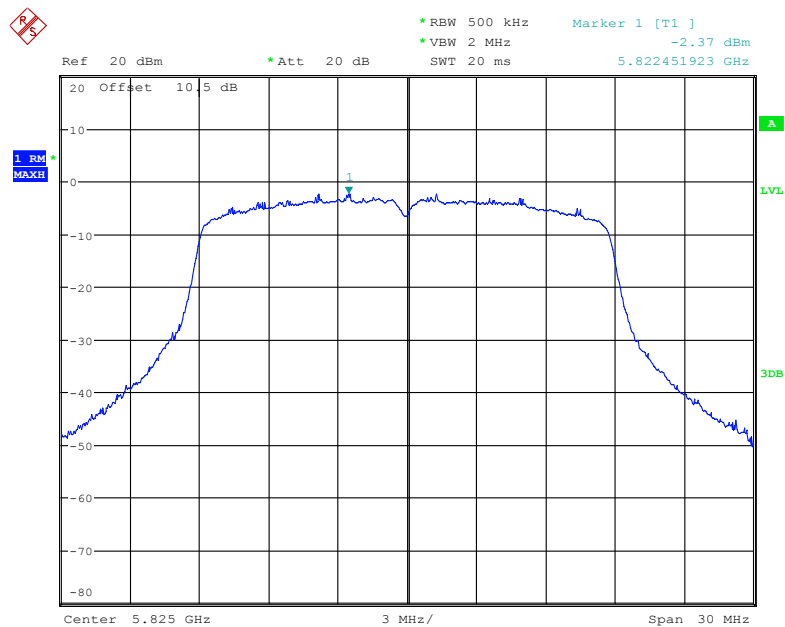

Date: 14.AUG.2018 21:23:42

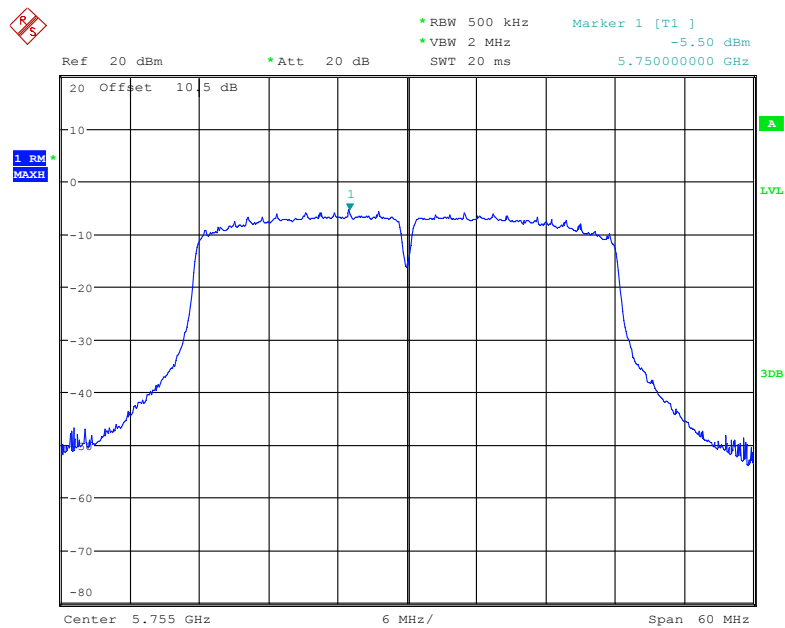
802.11n40 mode, Power Spectral Density, 5755 MHz

Date: 14.AUG.2018 21:15:18

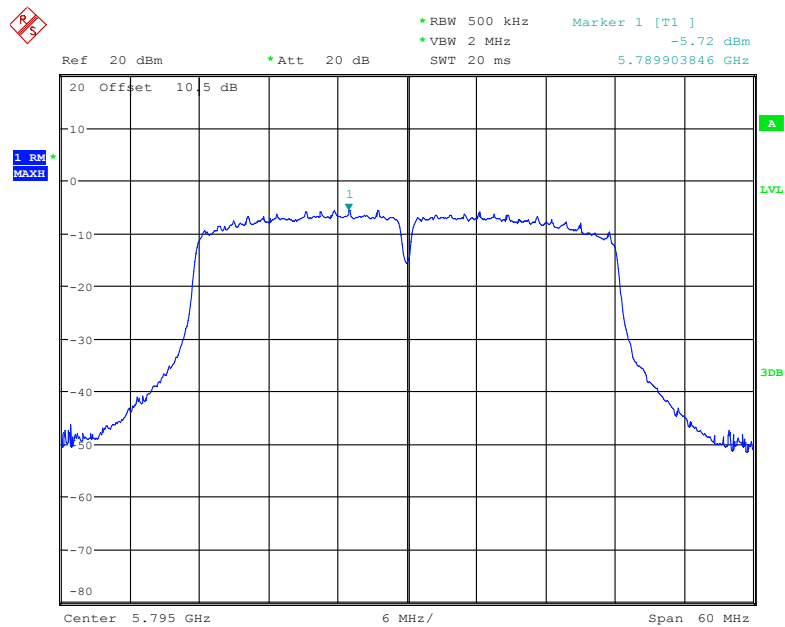802.11n40 mode, Power Spectral Density, 5795 MHz


Date: 14.AUG.2018 21:16:49

802.11ac20 mode, Power Spectral Density, 5745 MHz

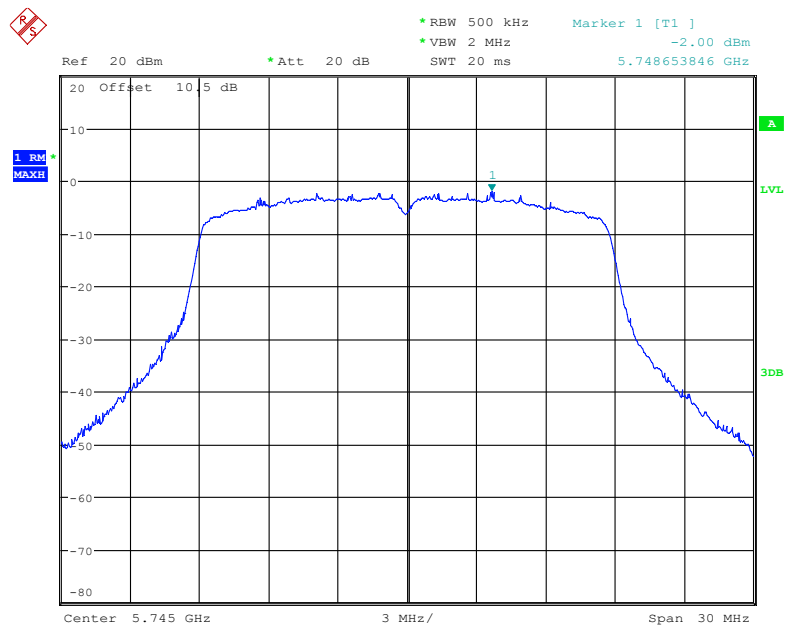


Date: 14.AUG.2018 21:24:56


802.11ac20 mode, Power Spectral Density, 5785 MHz

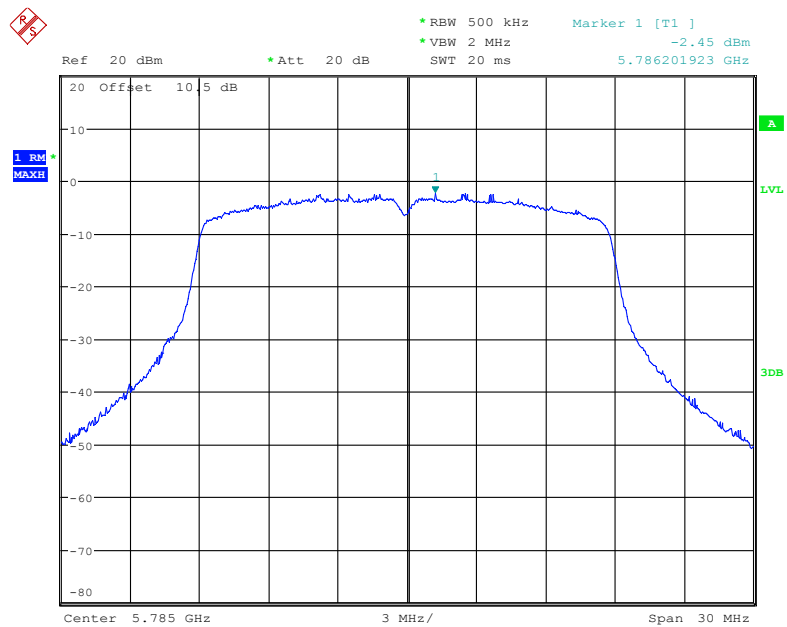


Date: 14.AUG.2018 21:25:43

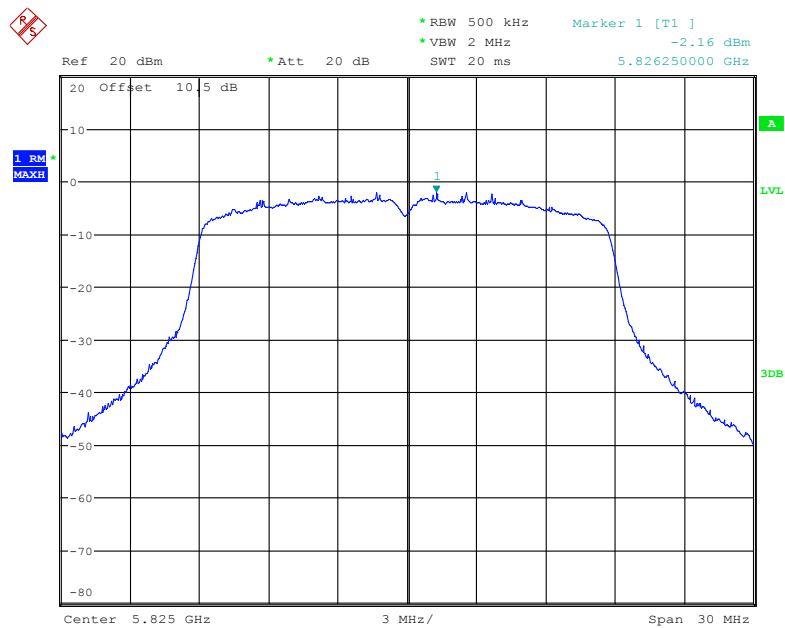802.11ac20 mode, Power Spectral Density, 5825 MHz


Date: 14.AUG.2018 21:26:23

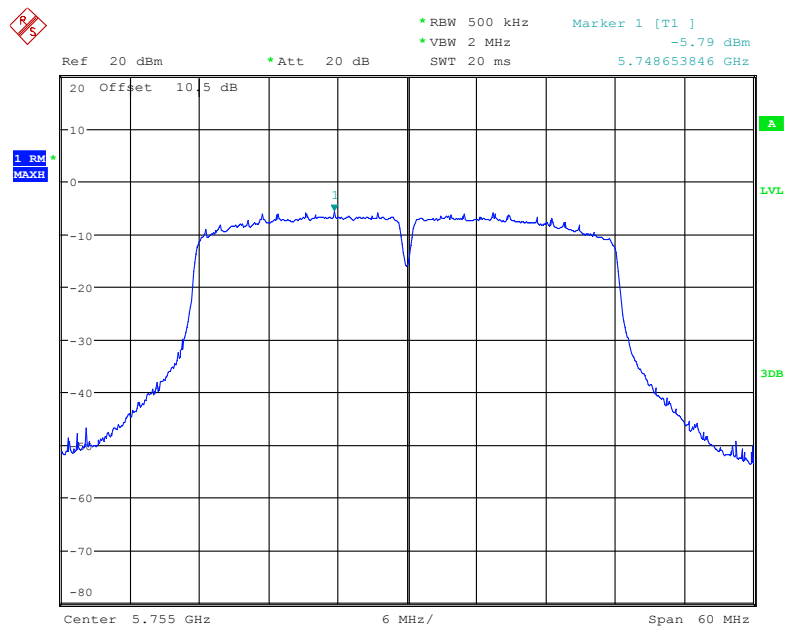802.11ac40 mode, Power Spectral Density, 5755 MHz

Date: 14.AUG.2018 21:18:17

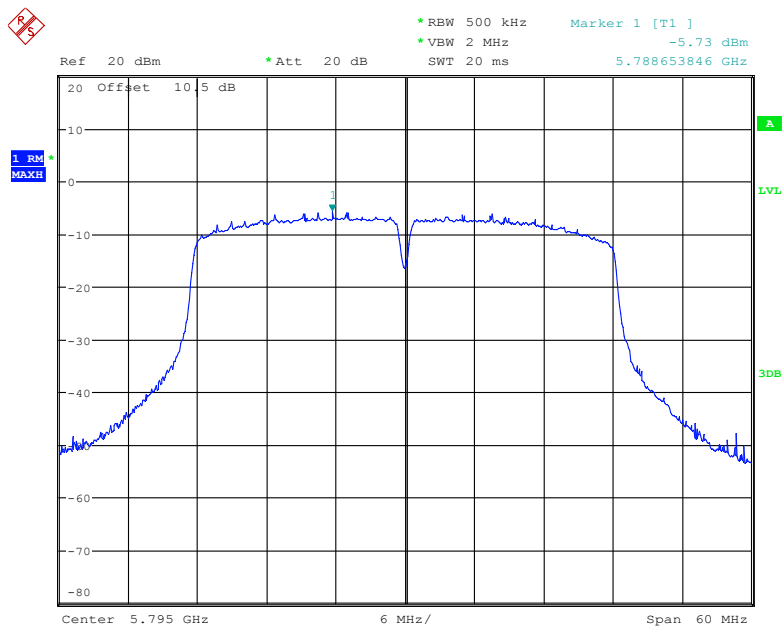802.11ac40 mode, Power Spectral Density, 5795 MHz

Date: 14.AUG.2018 21:19:04

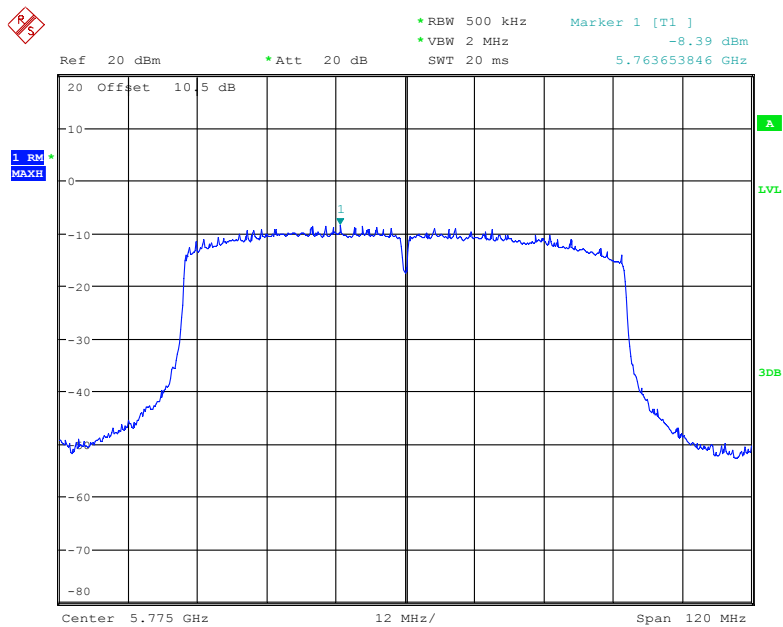802.11ac80 mode, Power Spectral Density, 5775 MHz

Date: 14.AUG.2018 21:07:47

******* END OF REPORT *******