

Specification Of TLS 2200@/TLS PC Link™ BradyBondz™ Labels

Agency Approval(s)/Compliance: CSA Approved, UL Recognized

Size: 2.35" W x 1.42" H (59.8 mm W x 36.1 mm H)

Color: Silver

Finish: Matte

Material Type: Polyester

Material Description: Ultra Aggressive Metallized Polyester

Surface: Highly Textured, Low Surface Energy, Smooth, Textured/Rough

Special Properties: Designed for powder coated surfaces, Ultra-aggressive adhesive

RoHS Compatibility: Compliant with RoHS Directive. NOTE: All statements concerning

RoHS Directive compliance refer to 2005/618/EC MCV amendment to RoHS Directive

2002/95/EC. Product compliance is based upon information provided by suppliers of the raw


materials used by Brady to manufacture these products, or by independent laboratory testing of

these products. As such, Brady makes no independent representations or warranties, express or

implied, and assumes no liability in connection with the use of this information.

REVISIONS				
REV	ECO #	DESCRIPTION	DATE	APPRVD
A		INITIAL RELEASE	09-SEP-2024	

HELVETICA NEUE



**Trimble**
+1 (888) 819 4355 | +1 (281) 664 1330
www.trimble.com/liftingsolutions

PMN:GS020-V2
HVIN:MB106_M-03

IC: 5817A-GS000B**FCC ID: S9E-GS200B**

This Device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditons:

1. This device may not cause harmful interference, and
2. This device must accept any interference in received,
including interference that may cause undesired operation.

THIS DOCUMENT CONTAINS TRIMBLE INFORMATION AND SHALL NOT BE DUPLICATED, DISCLOSED TO OTHERS, OR USED FOR PURPOSES OTHER THAN TO CARRY OUT THE INTENT FOR WHICH THIS MATERIAL IS DELIVERED UNLESS WRITTEN CONSENT IS FIRST OBTAINED FROM TRIMBLE.						Trimble Inc. 935 Stewart Drive Sunnyvale, California 94085	
TOLERANCES UNLESS OTHERWISE SPECIFIED		THIRD ANGLE PROJECTION		FCC LABEL - GS SERIES SENSORS			
.X ± .06 mm:X. ± 1.0				SIZE C	DWG. NO. UB250-GS020-V2	REV A	
.XX ± .015 mm: .X ± .70							
.XXX ± .005 mm: .XX± .40		DRAWING PREPARED IN ACCORDANCE WITH ASME Y14.5M-1994		SCALE 5:1	SHEET 1	OF 1	
SURF. FIN:63 ✓ ANGLES:± 1 °		TREATMENT					
FINISH		DRAWN BY: PMR					
		ENGINEER:					



4

3

2

1

REVISIONS				
REV	ECO #	DESCRIPTION	DATE	APPRVD
A		PRELIMINARY RELEASE	27/10/2023	

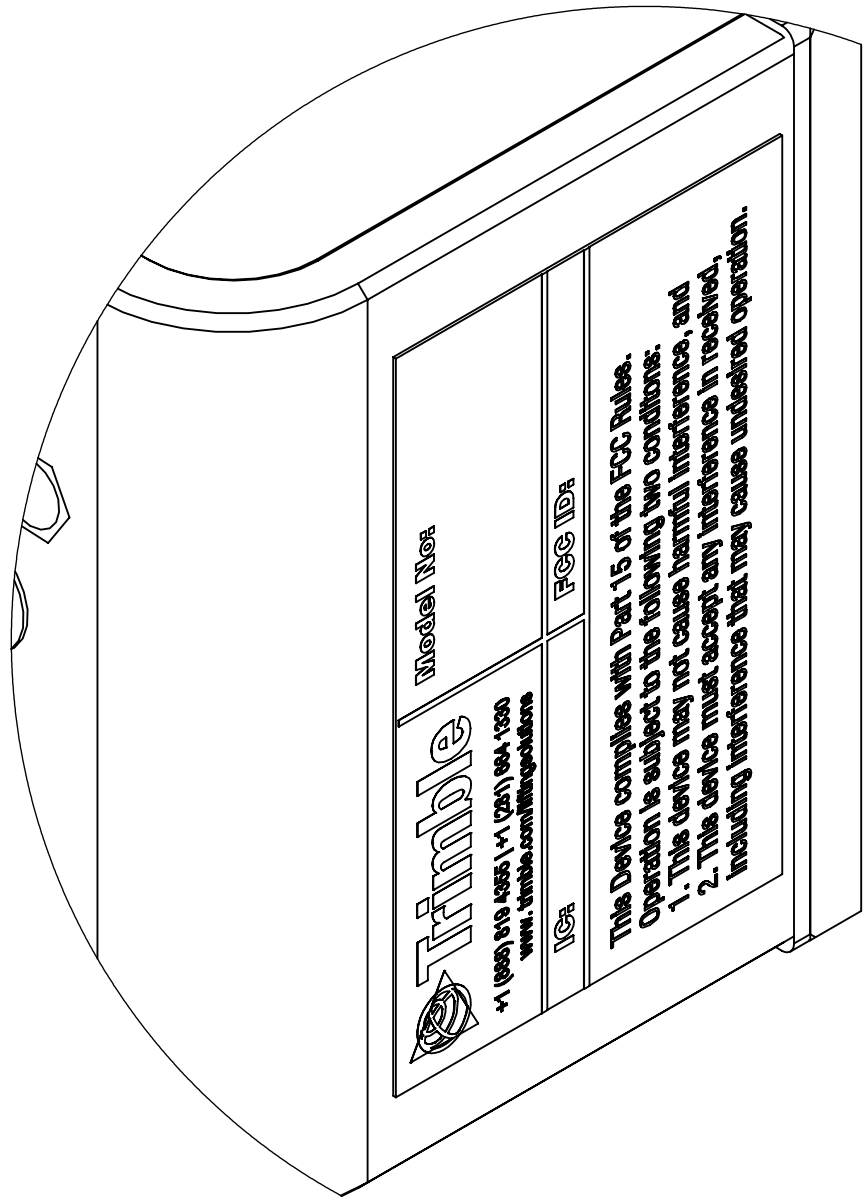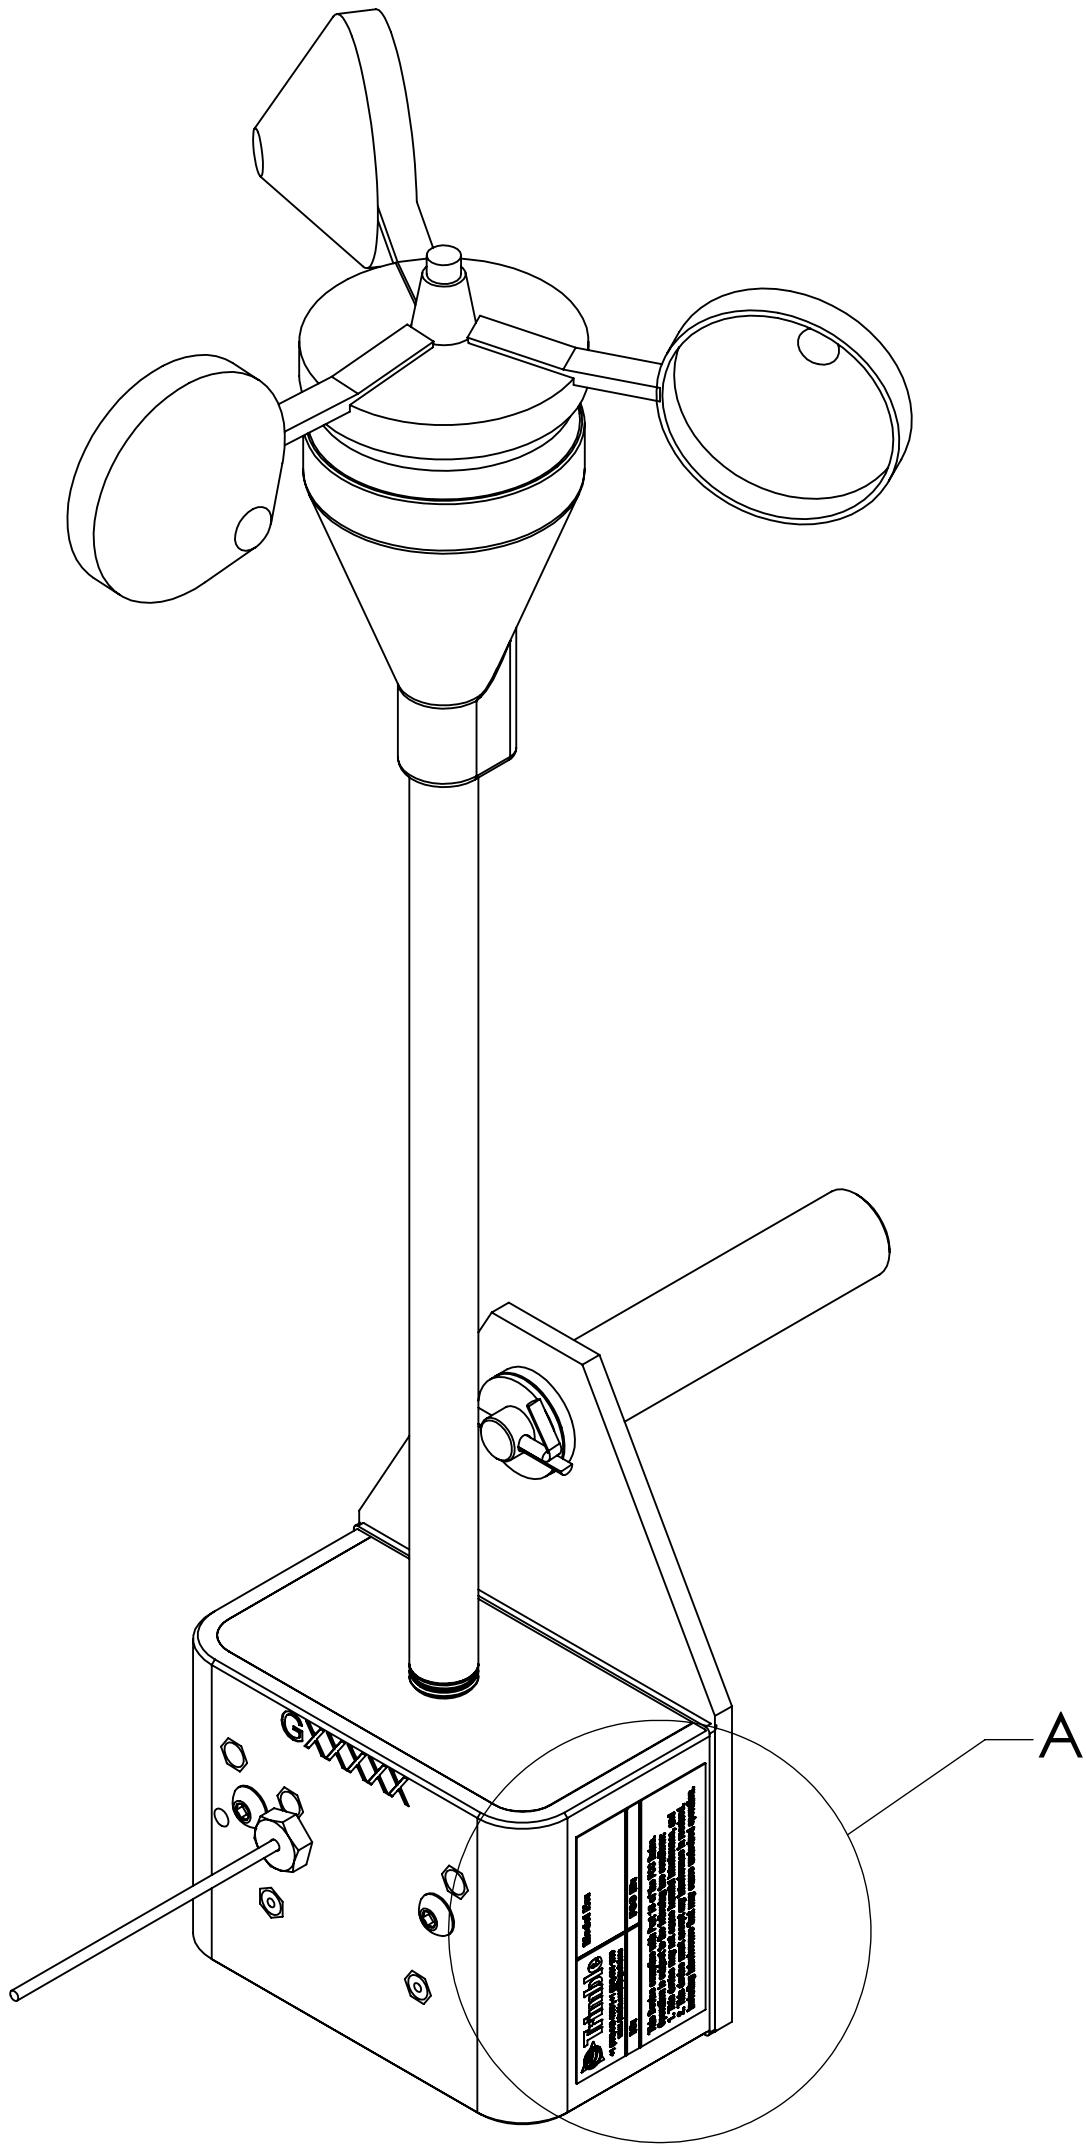

DETAIL A
SCALE 2 : 1

THIS DOCUMENT CONTAINS TRIMBLE CONFIDENTIAL INFORMATION AND SHALL NOT BE DUPLICATED, DISCLOSED TO OTHERS, OR USED FOR PURPOSES OTHER THAN TO CARRY OUT THE INTENT FOR WHICH THIS MATERIAL IS DELIVERED UNLESS WRITTEN CONSENT IS FIRST OBTAINED FROM TRIMBLE.		Trimble		Trimble Inc. 935 Stewart Drive Sunnyvale, California 94085	
TOLERANCES UNLESS OTHERWISE SPECIFIED		THIRD ANGLE PROJECTION		LABEL LOCATION GS SERIES WIND SPEED SENSOR	
.X ± .06	mm: X. ± 1.0		DRAWING PREPARED IN ACCORDANCE WITH ASME Y14.5M-1994	SIZE	REV
.XX ± .015	mm: .X ± .70			C	A
.XXX ± .005	mm: .XX ± .40			DWG. NO.	
SURF. FIN: 63 ✓	ANGLES: ± 1 °	DRAWN BY:	PMR	SCALE	
FINISH		ENGINEER:		1:5	
				SHEET	OF
				1	1

4

3

2

1