

Note: 1. Below 30MHZ no Spurious found and Above is the worst mode data.

2. As no emission found in standby or receive mode, no recording in this report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Page 54 of 79

#### 13. RADIATED SPURIOUS EMISSION

#### 13.1. PROVISIONS APPLICABLE


(A) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm.

At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

(B) For specific criteria, please refer to the description in section 9.2 of the report for corresponding evaluation.

#### 13.2. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.





- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- 11. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT.

The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;

Result(dBm) = Pg(dBm) + Factor(dB)

Factor(dB) = Ant Gain(dB)-Cable Loss(dB) + Power Splitter(dB) (Above 1GHz)

Factor(dB) = Ant Gain(dB)-Cable Loss(dB) (Below 1GHz)


Where: Pgis the generator output power into the substitution antenna.

If the fundalmatal frequency is below 1GHz, RF output power has been converted to EIRP.


EIRP(dBm) = ERP(dBm) + 2.15

#### 13.3. MEASUREMENT setup

#### Radiated Emissions 30MHz to 1GHz Test setup

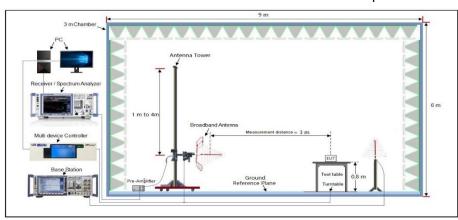

#### Radiated Emissions Above 1GHz Test setup

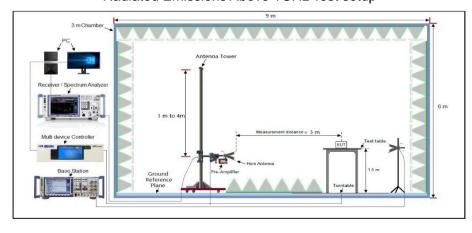

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




Page 56 of 79

## 13.4 MEASUREMENT RESULT

The measurement Below 1GHz data as follows:

			G	SM 850			
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
			GSM_ L	owest Channe	1		
No.		-65.85	15.52	-50.33	-13.00	-37.33	Horizontal
2	240.144	-62.39	16.75	-45.64	-13.00	-32.64	Horizontal
3	754.963	-58.99	19.35	-39.64	-13.00	-26.64	Horizontal
4	46.708	-64.89	10.44	-54.45	-13.00	-41.45	Vertical
5	433.340	-61.55	17.75	-43.80	-13.00	-30.80	Vertical
6	502.247	-58.86	18.66	-40.20	-13.00	-27.20	Vertical
			GSM_ N	liddle Channe	l		
1	31.735	-63.29	9.78	-53.51	-13.00	-40.51	Horizontal
2	159.759	-63.50	13.75	-49.75	-13.00	-36.75	Horizontal
3	240.144	-61.87	16.75	-45.12	-13.00	-32.12	Horizontal
4	43.233	-63.97	10.23	-53.74	-13.00	-40.74	Vertical
5	433.340	-62.48	17.75	-44.73	-13.00	-31.73	Vertical
6	498.730	-59.58	18.02	-41.56	-13.00	-28.56	Vertical
			GSM_ Hi	ighest Channe	el		
1	159.759	-64.19	13.75	-50.44	-13.00	-37.44	Horizontal
2	240.144	-62.73	16.75	-45.98	-13.00	-32.98	Horizontal
3	679.435	-59.18	19.01	-40.17	-13.00	-27.17	Horizontal
4	43.233	-63.64	10.23	-53.41	-13.00	-40.41	Vertical
5	433.340	-61.37	17.75	-43.62	-13.00	-30.62	Vertical
6	498.730	-59.41	18.02	-41.39	-13.00	-28.39	Vertical





			P	CS 1900			
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	7
	,		GSM_ L	owest Channe	1		
1	159.759	-66.32	15.52	-50.80	-13.00	-37.8	Horizontal
2	240.144	-62.82	16.75	-46.07	-13.00	-33.07	Horizontal
3	754.963	-59.06	19.35	-39.71	-13.00	-26.71	Horizontal
4	46.708	-64.70	10.44	-54.26	-13.00	-41.26	Vertical
5	433.340	-61.31	17.75	-43.56	-13.00	-30.56	Vertical
6	502.247	-59.01	18.66	-40.35	-13.00	-27.35	Vertical
			GSM_ N	liddle Channe	l		
1	31.735	-62.82	9.78	-53.04	-13.00	-40.04	Horizontal
2	159.759	-64.13	13.75	-50.38	-13.00	-37.38	Horizontal
3	240.144	-61.22	16.75	-44.47	-13.00	-31.47	Horizontal
4	43.233	-63.80	10.23	-53.57	-13.00	-40.57	Vertical
5	433.340	-62.98	17.75	-45.23	-13.00	-32.23	Vertical
6	498.730	-58.77	18.02	-40.75	-13.00	-27.75	Vertical
			GSM_ Hi	ighest Channe	el		
1	159.759	-62.87	13.75	-49.12	-13.00	-36.12	Horizontal
2	240.144	-60.65	16.75	-43.90	-13.00	-30.9	Horizontal
3	679.435	-57.55	19.01	-38.54	-13.00	-25.54	Horizontal
4	43.233	-61.77	10.23	-51.54	-13.00	-38.54	Vertical
5	433.340	-61.54	17.75	-43.79	-13.00	-30.79	Vertical
6	498.730	-58.65	18.02	-40.63	-13.00	-27.63	Vertical



Page 58 of 79

			WCD	MA Band II			
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
			RMC 12.2kbp	s_ Lowest Ch	annel		
1	159.759	-66.83	15.52	-51.31	-13.00	-38.31	Horizontal
2	240.144	-62.76	16.75	-46.01	-13.00	-33.01	Horizontal
3	754.963	-59.54	19.35	-40.19	-13.00	-27.19	Horizontal
4	46.708	-64.63	10.44	-54.19	-13.00	-41.19	Vertical
5	433.340	-62.79	17.75	-45.04	-13.00	-32.04	Vertical
6	502.247	-59.26	18.66	-40.60	-13.00	-27.6	Vertical
			RMC 12.2kbp	s_ Middle Ch	annel		
1	31.735	-63.23	9.78	-53.45	-13.00	-40.45	Horizontal
2	159.759	-63.76	13.75	-50.01	-13.00	-37.01	Horizontal
3	240.144	-61.93	16.75	-45.18	-13.00	-32.18	Horizontal
4	43.233	-63.85	10.23	-53.62	-13.00	-40.62	Vertical
5	433.340	-62.33	17.75	-44.58	-13.00	-31.58	Vertical
6	498.730	-59.49	18.02	-41.47	-13.00	-28.47	Vertical
			RMC 12.2kbp	s_ Highest Ch	nannel		
1	159.759	-63.50	13.75	-49.75	-13.00	-36.75	Horizontal
2	240.144	-62.82	16.75	-46.07	-13.00	-33.07	Horizontal
3	679.435	-59.43	19.01	-40.42	-13.00	-27.42	Horizontal
4	43.233	-63.54	10.23	-53.31	-13.00	-40.31	Vertical
5	433.340	-61.81	17.75	-44.06	-13.00	-31.06	Vertical
6	498.730	-59.20	18.02	-41.18	-13.00	-28.18	Vertical



Page 59 of 79

			WCD	MA Band IV			
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
			RMC 12.2kbp	s_ Lowest Ch	annel		
1	159.759	-65.81	15.52	-50.29	-13.00	-37.29	Horizontal
2	240.144	-62.24	16.75	-45.49	-13.00	-32.49	Horizontal
3	754.963	-58.95	19.35	-39.60	-13.00	-26.60	Horizontal
4	46.708	-64.41	10.44	-53.97	-13.00	-40.97	Vertical
5	433.340	-61.63	17.75	-43.88	-13.00	-30.88	Vertical
6	502.247	-58.70	18.66	-40.04	-13.00	-27.04	Vertical
			RMC 12.2kbp	s_ Middle Ch	annel		
1	31.735	-63.53	9.78	-53.75	-13.00	-40.75	Horizontal
2	159.759	-63.41	13.75	-49.66	-13.00	-36.66	Horizontal
3	240.144	-61.84	16.75	-45.09	-13.00	-32.09	Horizontal
4	43.233	-63.56	10.23	-53.33	-13.00	-40.33	Vertical
5	433.340	-62.59	17.75	-44.84	-13.00	-31.84	Vertical
6	498.730	-59.53	18.02	-41.51	-13.00	-28.51	Vertical
			RMC 12.2kbp	s_ Highest Ch	annel		
1	159.759	-64.10	13.75	-50.35	-13.00	-37.35	Horizontal
2	240.144	-61.82	16.75	-45.07	-13.00	-32.07	Horizontal
3	679.435	-59.90	19.01	-40.89	-13.00	-27.89	Horizontal
4	43.233	-63.97	10.23	-53.74	-13.00	-40.74	Vertical
5	433.340	-61.73	17.75	-43.98	-13.00	-30.98	Vertical
6	498.730	-59.41	18.02	-41.39	-13.00	-28.39	Vertical



Page 60 of 79

			WCD	MA Band V			
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	7
			RMC 12.2kbp	s_ Lowest Ch	annel		
1	159.759	-62.88	15.52	-47.36	-13.00	-36.94	Horizontal
2	240.144	-58.09	16.75	-41.34	-13.00	-32.77	Horizontal
3	754.963	-55.66	19.35	-36.31	-13.00	-27.03	Horizontal
4	46.708	-60.46	10.44	-50.02	-13.00	-41.11	Vertical
5	433.340	-58.47	17.75	-40.72	-13.00	-31.18	Vertical
6	502.247	-55.86	18.66	-37.20	-13.00	-26.87	Vertical
			RMC 12.2kbp	s_ Middle Ch	annel		
1	31.735	-61.34	9.78	-51.56	-13.00	-40.55	Horizontal
2	159.759	-62.24	13.75	-48.49	-13.00	-37.18	Horizontal
3	240.144	-61.26	16.75	-44.51	-13.00	-31.69	Horizontal
4	43.233	-61.53	10.23	-51.30	-13.00	-40.57	Vertical
5	433.340	-59.95	17.75	-42.20	-13.00	-31.96	Vertical
6	498.730	-57.20	18.02	-39.18	-13.00	-28.61	Vertical
			RMC 12.2kbp	s_ Highest Ch	nannel		
1	159.759	-61.47	13.75	-47.72	-13.00	-36.9	Horizontal
2	240.144	-58.74	16.75	-41.99	-13.00	-32.83	Horizontal
3	679.435	-59.02	19.01	-40.01	-13.00	-27.17	Horizontal
4	43.233	-60.84	10.23	-50.61	-13.00	-40.72	Vertical
5	433.340	-61.05	17.75	-43.30	-13.00	-30.97	Vertical
6	498.730	-55.76	18.02	-37.74	-13.00	-28.51	Vertical



Page 61 of 79

## The measurement Above 1GHz data as follows:

			G	SM 850			
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	7
			GSM_ Lo	owest Channe	d		
1	1648.400	-88.11	23.50	-64.61	-13.00	-51.61	Horizontal
2	2472.600	-88.10	29.47	-58.63	-13.00	-45.63	Horizontal
3	1648.400	-89.22	23.72	-65.50	-13.00	-52.50	Vertical
4	2472.600	-88.85	29.47	-59.38	-13.00	-46.38	Vertical
			GSM_ M	liddle Channe	l		
1	1673.200	-89.54	23.50	-66.04	-13.00	-53.04	Horizontal
2	2509.800	-91.39	29.47	-61.92	-13.00	-48.92	Horizontal
3	1673.200	-90.56	23.72	-66.84	-13.00	-53.84	Vertical
4	2509.800	-93.38	29.47	-63.91	-13.00	-50.91	Vertical
			GSM_ Hi	ghest Channe	el		
1	1697.600	-90.96	23.50	-67.46	-13.00	-54.46	Horizontal
2	2546.400	-92.28	29.47	-62.81	-13.00	-49.81	Horizontal
3	1697.600	-91.55	23.72	-67.83	-13.00	-54.83	Vertical
4	2546.400	-92.61	29.47	-63.14	-13.00	-50.14	Vertical



Page 62 of 79

			P	CS 1900			
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	7 (11)
			GSM_ Lo	owest Channe	el		
1	3700.400	-88.01	32.11	-55.90	-13.00	-42.9	Horizontal
2	5550.600	-87.73	33.21	-54.52	-13.00	-41.52	Horizontal
3	3700.400	-89.75	32.09	-57.66	-13.00	-44.66	Vertical
4	5550.600	-86.58	34.03	-52.55	-13.00	-39.55	Vertical
			GSM_ M	liddle Channe	I		
1	3760.000	-83.38	32.11	-51.27	-13.00	-38.27	Horizontal
2	5640.000	-86.46	33.21	-53.25	-13.00	-40.25	Horizontal
3	3760.000	-90.65	32.09	-58.56	-13.00	-45.56	Vertical
4	5640.000	-87.11	34.03	-53.08	-13.00	-40.08	Vertical
			GSM_ Hi	ghest Channe	el		
1	3819.600	-88.14	32.11	-56.03	-13.00	-43.03	Horizontal
2	5729.400	-87.37	33.21	-54.16	-13.00	-41.16	Horizontal
3	3819.600	-89.37	32.09	-57.28	-13.00	-44.28	Vertical
4	5729.400	-88.14	34.03	-54.11	-13.00	-41.11	Vertical



Page 63 of 79

			WCD	MA Band II			
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	7 7
			RMC 12.2kbp	s_ Lowest Ch	annel		
1	3704.800	-83.00	31.09	-51.91	-13.00	-38.91	Horizontal
2	5557.200	-89.63	34.14	-55.49	-13.00	-42.49	Horizontal
3	3704.800	-81.03	33.13	-47.90	-13.00	-34.9	Vertical
4	5557.200	-85.32	32.66	-52.66	-13.00	-39.66	Vertical
			RMC 12.2kbp	s_ Middle Cha	annel		
1	3760.000	-79.33	31.09	-48.24	-13.00	-35.24	Horizontal
2	5640.000	-88.43	34.14	-54.29	-13.00	-41.29	Horizontal
3	3760.000	-79.89	33.13	-46.76	-13.00	-33.76	Vertical
4	5640.000	-84.69	32.66	-52.03	-13.00	-39.03	Vertical
			RMC 12.2kbp	s_ Highest Ch	annel		
1	3815.200	-82.87	31.09	-51.78	-13.00	-38.78	Horizontal
2	5722.800	-85.81	34.14	-51.67	-13.00	-38.67	Horizontal
3	3815.200	-82.19	33.13	-49.06	-13.00	-36.06	Vertical
4	5722.800	-83.44	32.66	-50.78	-13.00	-37.78	Vertical



Page 64 of 79

			WCDI	MA Band IV			
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
140.	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	7
			RMC 12.2kbp	s_ Lowest Ch	annel		
1	3424.800	-89.7	32.11	-57.59	-13.00	-44.59	Horizontal
2	5137.200	-88.76	34.13	-54.63	-13.00	-41.63	Horizontal
3	3424.800	-89.95	32.11	-57.84	-13.00	-44.84	Vertical
4	5137.200	-87.32	34.13	-53.19	-13.00	-40.19	Vertical
			RMC 12.2kbp	s_ Middle Ch	annel		
1	3464.800	-88.62	32.11	-56.51	-13.00	-43.51	Horizontal
2	5197.200	-87.34	34.13	-53.21	-13.00	-40.21	Horizontal
3	3464.800	-90.01	32.11	-57.9	-13.00	-44.90	Vertical
4	5197.200	-86.78	34.13	-52.65	-13.00	-39.65	Vertical
			RMC 12.2kbp	s_ Highest Ch	annel		
1	3505.200	-88.72	32.11	-56.61	-13.00	-43.61	Horizontal
2	5257.800	-87.18	34.13	-53.05	-13.00	-40.05	Horizontal
3	3505.200	-88.68	32.11	-56.57	-13.00	-43.57	Vertical
4	5257.800	-86.22	34.13	-52.09	-13.00	-39.09	Vertical



Report No.: AGC14559220601FE02 Page 65 of 79

			WCD	MA Band V			
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
1101	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	/ unca i On
			RMC 12.2kbp	s_ Lowest Ch	annel		
1	1652.800	-83.99	23.12	-60.87	-13.00	-47.87	Horizontal
2	2479.200	-85.97	28.47	-57.50	-13.00	-44.50	Horizontal
3	1652.800	-82.98	23.12	-59.86	-13.00	-46.86	Vertical
4	2479.200	-83.20	28.47	-54.73	-13.00	-41.73	Vertical
			RMC 12.2kbp	s_ Middle Ch	annel		
1	1672.800	-81.58	23.12	-58.46	-13.00	-45.46	Horizontal
2	2509.200	-83.45	28.47	-54.98	-13.00	-41.98	Horizontal
3	1672.800	-83.26	23.12	-60.14	-13.00	-47.14	Vertical
4	2509.200	-81.65	28.47	-53.18	-13.00	-40.18	Vertical
			RMC 12.2kbp	s_ Highest Ch	annel		
1	1693.200	-80.47	23.12	-57.35	-13.00	-44.35	Horizontal
2	2539.800	-82.10	28.47	-53.63	-13.00	-40.63	Horizontal
3	1693.200	-80.70	23.12	-57.58	-13.00	-44.58	Vertical
4	2539.800	-80.92	28.47	-52.45	-13.00	-39.45	Vertical

#### Note:

- 1.Correct Factor = Antenna Factor + Cable Loss Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
- 2.Result = Reading + Correct Factor.
- 3.Margin = Result Limit
- 4.he device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test. Subsequently, only the worst case emissions are reported.



Page 66 of 79

## 14. FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

#### 14.1 PROVISIONS APPLICABLE

#### 14.1.1 For Hand carried battery powered equipment

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.


#### 14.1.2 For equipment powered by primary supply voltage

- 1 The carrier frequency of the transmitter is measured at room temperature (20°C to provide a
- 2 reference).
- 3 The equipment is turned on in a "standby" condition for fifteen minutes before applying power to
- 4 the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 5 Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at
- 6 least one half-hour is provided to allow stabilization of the equipment at each temperature level.

#### **14.2 MEASUREMENT METHOD**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

- 7 Measure the carrier frequency at room temperature.
- 8 Subject the EUT to overnight soak at -30°C. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on channel 20175 for LTE band 4 measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 9 Repeat the above measurements at  $10^{\circ}$ C increments from  $-30^{\circ}$ C to  $+50^{\circ}$ C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 10 Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from






minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.

- 11 Subject the EUT to overnight soak at +50°C.
- 12 With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 13 Repeat the above measurements at 10°C increments from +50°C to -30°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 14 At all temperature levels hold the temperature to +/-  $0.5^{\circ}$ C during the measurement procedure.

#### **14.3 MEASUREMENT SETUP**

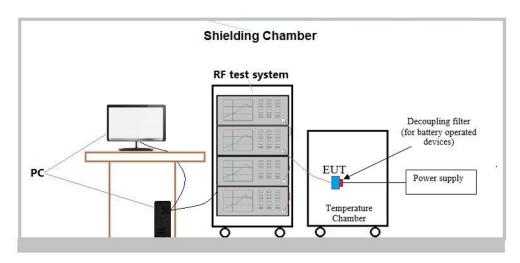



Page 68 of 79

## **14.4 MEASUREMENT RESULT**

## Frequency Error vs. Voltage:

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channel	Temp.	Volt.(V)	(Hz)	(ppm)	(ppm)	verdict
			TN	VL	3.81	0.004623	±2.5	PASS
		LCH	TN	VN	7.23	0.008772	±2.5	PASS
			TN	VH	3.36	0.004077	±2.5	PASS
			TN	VL	8.20	0.009802	±2.5	PASS
GSM850	GSM	MCH	TN	VN	9.23	0.011033	±2.5	PASS
			TN	VH	8.78	0.010495	±2.5	PASS
			TN	VL	6.01	0.007081	±2.5	PASS
		нсн	TN	VN	3.29	0.003876	±2.5	PASS
			TN	VH	4.78	0.005631	±2.5	PASS

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	\/a nali a4
Band	Mode	Channel	Temp.	Volt.(V)	(Hz)	(ppm)	(ppm)	Verdict
			TN	VL	-6.81	-0.008263	±2.5	PASS
		LCH	TN	VN	-3.20	-0.003883	±2.5	PASS
			TN	VH	-3.97	-0.004817	±2.5	PASS
	EDGE		TN	VL	-1.26	-0.001506	±2.5	PASS
GSM850		GE MCH	TN	VN	-2.03	-0.002426	±2.5	PASS
			TN	VH	-1.49	-0.001781	±2.5	PASS
			TN	VL	-5.59	-0.006586	±2.5	PASS
		HCH	TN	VN	-0.68	-0.000801	±2.5	PASS
			TN	VH	-3.33	-0.003923	±2.5	PASS



Report No.: AGC14559220601FE02 Page 69 of 79

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	\/ordiot
Band	Mode	Channel	Temp.	Volt. (V)	(Hz)	(ppm)	Verdict
			TN	VL	14.72	0.007956	PASS
		LCH	TN	VN	14.08	0.007610	PASS
			TN	VH	17.69	0.009561	PASS
			TN	VL	21.89	0.011644	PASS
PCS1900	GSM	MCH	TN	VN	20.79	0.011059	PASS
			TN	VH	19.57	0.010410	PASS
			TN	VL	18.21	0.009535	PASS
		HCH	TN	VN	14.85	0.007776	PASS
			TN	VH	15.05	0.007880	PASS

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Vardiet
Band	Mode	Channel	Temp.	Volt. (V)	(Hz)	(ppm)	Verdict
			TN	VL	13.30	0.007188	PASS
		LCH	TN	VN	19.31	0.010437	PASS
			TN	VH	18.82	0.010172	PASS
			TN	VL	20.92	0.011128	PASS
PCS1900	EDGE	MCH	TN	VN	24.25	0.012899	PASS
			TN	VH	25.31	0.013463	PASS
			TN	VL	20.31	0.010635	PASS
		HCH	TN	VN	17.40	0.009111	PASS
			TN	VH	18.69	0.009786	PASS


Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very samll. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperture and voltage range as tested.



Page 70 of 79


## Frequency Error vs. Temperature:

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Vardiat	Test
Band	Mode	Channel	Temp.	Volt. (V)	(Hz)	(ppm)	Verdict	Band
			VN	-30	3.94	0.004780	±2.5	PASS
			VN	-20	5.62	0.006819	±2.5	PASS
			VN	-10	4.58	0.005557	±2.5	PASS
			VN	0	1.81	0.002196	±2.5	PASS
GSM850	GSM	LCH	VN	10	1.16	0.001407	±2.5	PASS
			VN	20	3.68	0.004465	±2.5	PASS
			VN	30	6.13	0.007438	±2.5	PASS
			VN	40	2.45	0.002973	±2.5	PASS
			VN	50	5.17	0.006273	±2.5	PASS
			VN	-30	7.43	0.008881	±2.5	PASS
			VN	-20	7.10	0.008487	±2.5	PASS
			VN	-10	7.62	0.009108	±2.5	PASS
			VN	0	8.72	0.010423	±2.5	PASS
GSM850	GSM	MCH	VN	10	7.04	0.008415	±2.5	PASS
			VN	20	7.04	0.008415	±2.5	PASS
			VN	30	5.81	0.006945	±2.5	PASS
			VN	40	7.04	0.008415	±2.5	PASS
			VN	50	7.62	0.009108	±2.5	PASS
			VN	-30	4.71	0.005549	±2.5	PASS
			VN	-20	3.55	0.004182	±2.5	PASS
			VN	-10	2.26	0.002663	±2.5	PASS
			VN	0	7.49	0.008824	±2.5	PASS
GSM850	GSM	HCH	VN	10	4.33	0.005101	±2.5	PASS
			VN	20	2.84	0.003346	±2.5	PASS
		VN	30	1.81	0.002132	±2.5	PASS	
			VN	40	3.75	0.004418	±2.5	PASS
			VN	50	2.97	0.003499	±2.5	PASS





Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \
Band	Mode	Channel	Volt.	Temp.	(Hz)	(ppm)	(ppm)	Verdict
			VN	-30	-3.49	-0.004234	±2.5	PASS
			VN	-20	-2.58	-0.003130	±2.5	PASS
			VN	-10	-5.68	-0.006892	±2.5	PASS
			VN	0	4.00	0.004853	±2.5	PASS
GSM850	EDGE	LCH	VN	10	2.78	0.003373	±2.5	PASS
			VN	20	2.16	0.002621	±2.5	PASS
			VN	30	1.36	0.001650	±2.5	PASS
			VN	40	-2.97	-0.003603	±2.5	PASS
			VN	50	2.78	0.003373	±2.5	PASS
			VN	-30	-0.36	-0.000430	±2.5	PASS
			VN	-20	-2.87	-0.003431	±2.5	PASS
			VN	-10	0.55	0.000657	±2.5	PASS
			VN	0	-3.00	-0.003586	±2.5	PASS
GSM850	EDGE	MCH	VN	10	-13.69	-0.016364	±2.5	PASS
			VN	20	-5.75	-0.006873	±2.5	PASS
			VN	30	-6.13	-0.007327	±2.5	PASS
			VN	40	-7.62	-0.009108	±2.5	PASS
			VN	50	-6.62	-0.007913	±2.5	PASS
			VN	-30	-3.33	-0.003923	±2.5	PASS
			VN	-20	-1.87	-0.002203	±2.5	PASS
			VN	-10	-4.26	-0.005019	±2.5	PASS
			VN	0	1.52	0.001791	±2.5	PASS
GSM850	EDGE	HCH	VN	10	-0.52	-0.000613	±2.5	PASS
			VN	20	-0.97	-0.001143	±2.5	PASS
			VN	30	-5.91	-0.006963	±2.5	PASS
			VN	40	-0.48	-0.000566	±2.5	PASS
			VN	50	0.90	0.001060	±2.5	PASS





Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	\/;;
Band	Mode	Channel	Volt.	Temp.	(Hz)	(ppm)	(ppm)	Verdict
			VN	-30	15.82	0.008550	±2.5	PASS
			VN	-20	16.40	0.008864	±2.5	PASS
			VN	-10	16.66	0.009004	±2.5	PASS
			VN	0	14.33	0.007745	±2.5	PASS
GSM1900	GSM	LCH	VN	10	14.72	0.007956	±2.5	PASS
			VN	20	17.11	0.009248	±2.5	PASS
			VN	30	14.27	0.007713	±2.5	PASS
			VN	40	14.92	0.008064	±2.5	PASS
			VN	50	17.69	0.009561	±2.5	PASS
			VN	-30	21.83	0.011612	±2.5	PASS
			VN	-20	18.34	0.009755	±2.5	PASS
			VN	-10	21.76	0.011574	±2.5	PASS
			VN	0	21.18	0.011266	±2.5	PASS
GSM1900	GSM	MCH	VN	10	22.79	0.012122	±2.5	PASS
			VN	20	16.59	0.008824	±2.5	PASS
			VN	30	21.70	0.011543	±2.5	PASS
			VN	40	21.18	0.011266	±2.5	PASS
			VN	50	19.24	0.010234	±2.5	PASS
			VN	-30	19.18	0.010043	±2.5	PASS
			VN	-20	13.50	0.007069	±2.5	PASS
			VN	-10	17.24	0.009027	±2.5	PASS
			VN	0	18.73	0.009807	±2.5	PASS
GSM1900	GSM	HCH	VN	10	19.24	0.010074	±2.5	PASS
			VN	20	18.92	0.009907	±2.5	PASS
			VN	30	16.79	0.008791	±2.5	PASS
		<u> </u>	VN	40	19.63	0.010279	±2.5	PASS
			VN	50	16.98	0.008891	±2.5	PASS



Page 73 of 79

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	\/a vali at
Band	Mode	Channel	Volt.	Temp.	(Hz)	(ppm)	(ppm)	Verdict
			VN	-30	22.21	0.012004	±2.5	PASS
			VN	-20	21.76	0.011761	±2.5	PASS
			VN	-10	36.45	0.019701	±2.5	PASS
			VN	0	39.13	0.021149	±2.5	PASS
GSM1900	EDGE	LCH	VN	10	34.09	0.018425	±2.5	PASS
			VN	20	36.84	0.019911	±2.5	PASS
			VN	30	32.93	0.017798	±2.5	PASS
			VN	40	42.39	0.022911	±2.5	PASS
			VN	50	38.71	0.020922	±2.5	PASS
			VN	-30	19.11	0.010165	±2.5	PASS
			VN	-20	20.60	0.010957	±2.5	PASS
			VN	-10	34.03	0.018101	±2.5	PASS
			VN	0	25.28	0.013447	±2.5	PASS
GSM1900	EDGE	MCH	VN	10	30.67	0.016314	±2.5	PASS
			VN	20	30.15	0.016037	±2.5	PASS
			VN	30	29.77	0.015835	±2.5	PASS
			VN	40	27.02	0.014372	±2.5	PASS
			VN	50	27.25	0.014495	±2.5	PASS
			VN	-30	20.73	0.010855	±2.5	PASS
			VN	-20	18.69	0.009786	±2.5	PASS
			VN	-10	19.82	0.010378	±2.5	PASS
			VN	0	29.02	0.015195	±2.5	PASS
GSM1900	EDGE	HCH	VN	10	24.83	0.013001	±2.5	PASS
		VN	20	12.62	0.006608	±2.5	PASS	
			VN	30	34.09	0.017850	±2.5	PASS
		VN	40	19.37	0.010142	±2.5	PASS	
			VN	50	15.56	0.008147	±2.5	PASS

Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperture and voltage range as tested.

#### Frequency Error vs. Voltage:



Report No.: AGC14559220601FE02 Page 74 of 79

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	\/ordiat
Band	Mode	Channel	Volt.	Temp.	(Hz)	(ppm)	(ppm)	Verdict
			TN	VL	-10.16	-0.01	±2.5	PASS
		LCH	TN	VN	-5.34	-0.01	±2.5	PASS
			TN	VH	-9.32	-0.01	±2.5	PASS
			TN	VL	-10.62	-0.01	±2.5	PASS
WCDMA850	UMTS	MCH	TN	VN	-12.89	-0.02	±2.5	PASS
			TN	VH	-9.35	-0.01	±2.5	PASS
			TN	VL	-10.96	-0.01	±2.5	PASS
		HCH	TN	VN	-8.35	-0.01	±2.5	PASS
			TN	VH	-8.01	-0.01	±2.5	PASS

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Verdict
Band	Mode	Channel	Temp.	Volt.(V)	(Hz)	(ppm)	verdict
			TN	VL	-16.80	-0.01	PASS
		LCH	TN	VN	-20.07	-0.01	PASS
			TN	VH	-18.81	-0.01	PASS
			TN	VL	-23.07	-0.01	PASS
WCDMA1700	UMTS	MCH	TN	VN	-17.01	-0.01	PASS
			TN	VH	-21.96	-0.01	PASS
			TN	VL	-14.59	-0.01	PASS
		HCH	TN	VN	-19.82	-0.01	PASS
			TN	VH	-19.18	-0.01	PASS

Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperture and voltage range as tested.



Page 75 of 79

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Vardiat
Band	Mode	Channel	Temp.	Volt.(V)	(Hz)	(ppm)	Verdict
			TN	VL	-19.82	-0.01	PASS
		LCH	TN	VN	-19.65	-0.01	PASS
			TN	VH	-17.72	-0.01	PASS
			TN	VL	-23.85	-0.01	PASS
WCDMA1900	UMTS	MCH	TN	VN	-20.10	-0.01	PASS
			TN	VH	-22.43	-0.01	PASS
			TN	VL	-22.43	-0.01	PASS
		HCH	TN	VN	-15.85	-0.01	PASS
			TN	VH	-12.31	-0.01	PASS

Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very samll. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted duing the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperture and voltage range as tested.



Page 76 of 79

## Frequency Error vs. Temperature:

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict											
Band	Mode	Channel	Volt.	Temp.	(Hz)	(ppm)	(ppm)	verdict											
			VN	-30	-10.06	-0.01	±2.5	PASS											
			VN	-20	-11.34	-0.01	±2.5	PASS											
			VN	-10	-13.90	-0.02	±2.5	PASS											
MCDMA			VN	0	-11.72	-0.01	±2.5	PASS											
WCDMA 850	TM1	LCH	VN	10	-11.69	-0.01	±2.5	PASS											
050			VN	20	-11.02	-0.01	±2.5	PASS											
			VN	30	-8.73	-0.01	±2.5	PASS											
			VN	40	-7.31	-0.01	±2.5	PASS											
			VN	50	-6.38	-0.01	±2.5	PASS											
			VN	-30	-14.92	-0.02	±2.5	PASS											
		MCH		VN	-20	-7.87	-0.01	±2.5	PASS										
			VN	-10	-10.68	-0.01	±2.5	PASS											
MODMA			VN	0	-13.60	-0.02	±2.5	PASS											
WCDMA	TM1		MCH	VN	10	-7.86	-0.01	±2.5	PASS										
850			VN	20	-7.02	-0.01	±2.5	PASS											
			VN	30	-3.56	0.00	±2.5	PASS											
			VN	40	-12.44	-0.01	±2.5	PASS											
			VN	50	-14.48	-0.02	±2.5	PASS											
			VN	-30	-9.89	-0.01	±2.5	PASS											
			VN	-20	-12.22	-0.01	±2.5	PASS											
											-			VN	-10	-11.54	-0.01	±2.5	PASS
MCDMA																			
	WCDMA 850 TM1	HCH	VN	10	-12.74	-0.02	±2.5	PASS											
000			VN	20	-13.23	-0.02	±2.5	PASS											
			VN	30	-11.87	-0.01	±2.5	PASS											
			VN	40	-9.77	-0.01	±2.5	PASS											
			VN	50	-8.21	-0.01	±2.5	PASS											



Page 77 of 79

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	\/
Band	Mode	Channel	Volt.	Temp.	(Hz)	(ppm)	(ppm)	Verdict
			VN	-30	-20.05	-0.01	±2.5	PASS
			VN	-20	-16.68	-0.01	±2.5	PASS
			VN	-10	-16.10	-0.01	±2.5	PASS
MCDMA			VN	0	-17.94	-0.01	±2.5	PASS
WCDMA 1700	TM1	LCH	VN	10	-17.24	-0.01	±2.5	PASS
1700			VN	20	-16.66	-0.01	±2.5	PASS
			VN	30	-27.10	-0.02	±2.5	PASS
			VN	40	-16.25	-0.01	±2.5	PASS
			VN	50	-18.91	-0.01	±2.5	PASS
			VN	-30	-20.74	-0.01	±2.5	PASS
			VN	-20	-16.62	-0.01	±2.5	PASS
		MCH	VN	-10	-23.21	-0.01	±2.5	PASS
WCDMA			VN	0	-23.36	-0.01	±2.5	PASS
1700	TM1		VN	10	-23.16	-0.01	±2.5	PASS
1700			VN	20	-16.98	-0.01	±2.5	PASS
			VN	30	-17.41	-0.01	±2.5	PASS
			VN	40	-18.60	-0.01	±2.5	PASS
			VN	50	-18.78	-0.01	±2.5	PASS
			VN	-30	-19.96	-0.01	±2.5	PASS
			VN	-20	-18.60	-0.01	±2.5	PASS
			VN	-10	-20.52	-0.01	±2.5	PASS
WCDMA			VN	0	-14.10	-0.01	±2.5	PASS
	WCDMA 1700 TM1	HCH	VN	10	-19.38	-0.01	±2.5	PASS
1700			VN	20	-18.31	-0.01	±2.5	PASS
			VN	30	-17.36	-0.01	±2.5	PASS
			VN	40	-17.61	-0.01	±2.5	PASS
			VN	50	-11.83	-0.01	±2.5	PASS

Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperture and voltage range as tested.



Page 78 of 79

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	\/a vali at												
Band	Mode	Channel	Volt.	Temp.	(Hz)	(ppm)	(ppm)	Verdict												
			VN	-30	-18.81	-0.01	±2.5	PASS												
			VN	-20	-9.19	0.00	±2.5	PASS												
			VN	-10	-13.31	-0.01	±2.5	PASS												
MODMA			VN	0	-13.14	-0.01	±2.5	PASS												
WCDMA 1900	TM1	LCH	VN	10	-20.60	-0.01	±2.5	PASS												
1900			VN	20	-14.72	-0.01	±2.5	PASS												
			VN	30	-18.25	-0.01	±2.5	PASS												
			VN	40	-16.49	-0.01	±2.5	PASS												
			VN	50	-14.39	-0.01	±2.5	PASS												
			VN	-30	-16.89	-0.01	±2.5	PASS												
			VN	-20	-14.92	-0.01	±2.5	PASS												
		MCH	VN	-10	-13.44	-0.01	±2.5	PASS												
WCDMA			VN	0	-19.70	-0.01	±2.5	PASS												
1900	TM1		VN	10	-17.90	-0.01	±2.5	PASS												
1900			VN	20	-15.29	-0.01	±2.5	PASS												
			VN	30	-24.19	-0.01	±2.5	PASS												
			VN	40	-17.44	-0.01	±2.5	PASS												
			VN	50	-17.50	-0.01	±2.5	PASS												
			VN	-30	-16.02	-0.01	±2.5	PASS												
			VN	-20	-18.07	-0.01	±2.5	PASS												
			VN	-10	-24.12	-0.01	±2.5	PASS												
MCDMA															VN	0	-19.68	-0.01	±2.5	PASS
	WCDMA 1900 TM1	HCH	VN	10	-19.29	-0.01	±2.5	PASS												
1300			VN	20	-21.80	-0.01	±2.5	PASS												
			VN	30	-16.98	-0.01	±2.5	PASS												
			VN	40	-17.47	-0.01	±2.5	PASS												
			VN	50	-18.25	-0.01	±2.5	PASS												

Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperture and voltage range as tested.



Page 79 of 79

## **APPENDIX I: PHOTOGRAPHS OF TEST SETUP**

Refer to the Report No.: AGC14559220601AP01

**APPENDIX II: PHOTOGRAPHS OF EUT** 

Refer to the Report No.: AGC14559220601AP02

----END OF REPORT----



# Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd. (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.