

FCC

RF

TEST REPORT


ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
MatchX Core

ISSUED TO
MatchX GmbH

Alexander Str.7 10178 Berlin. GERMANY.

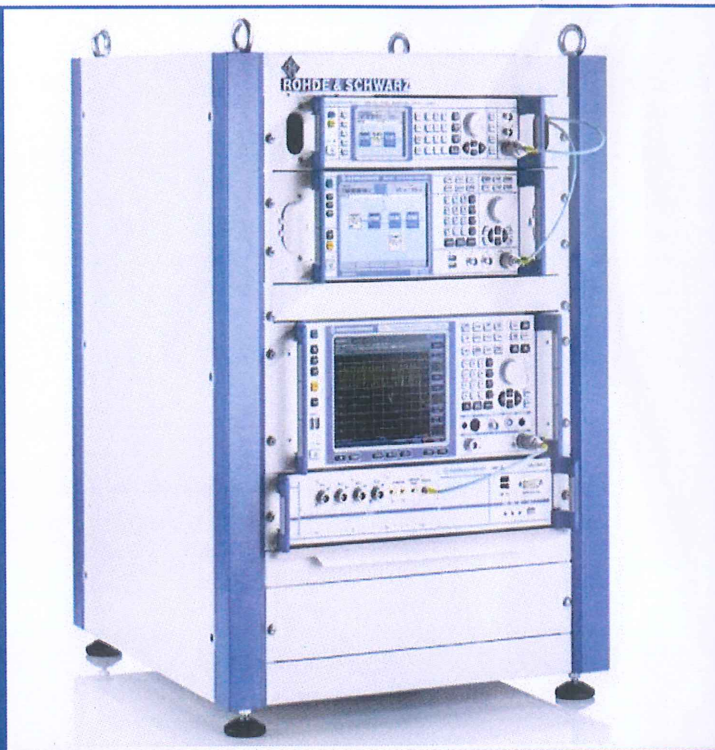

Tested by: 
Heng Alping
(Engineer)

Date: Mar 14, 2019

Approved by: 
Wei Yanquan
(Chief Engineer)

Date: Mar 14, 2019

Report No.: BL-HK18B0380-601

EUT Name: MatchX Core

Model Name: MX1731

Brand Name: MatchX

Test Standard: 47 CFR Part 15 Subpart C

FCC ID: 2AMPF-MX1731

Test Conclusion: Pass

Test Date: Nov. 28, 2018 ~ Dec. 07, 2018

Date of Issue: Mar. 14, 2019

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Feb. 22, 2019</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Mar. 14, 2019</u>	<u>Add the internal photo</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	6
1.1	Identification of the Testing Laboratory	6
1.2	Identification of the Responsible Testing Location	6
1.3	Laboratory Condition	6
1.4	Announce	6
2	PRODUCT INFORMATION	7
2.1	Applicant Information	7
2.2	Manufacturer Information	7
2.3	Factory Information	7
2.4	General Description for Equipment under Test (EUT)	7
2.5	Ancillary Equipment	7
2.6	Technical Information	8
2.7	Additional Instructions	9
3	SUMMARY OF TEST RESULTS	10
3.1	Test Standards	10
3.2	Verdict	11
4	GENERAL TEST CONFIGURATIONS	12
4.1	Test Environments	12
4.2	Test Equipment List	12
4.3	Measurement Uncertainty	13
4.4	Description of Test Setup	14
4.4.1	For Antenna Port Test	14
4.4.2	For AC Power Supply Port Test	14
4.4.3	For Radiated Test (Below 30 MHz)	15
4.4.4	For Radiated Test (30 MHz-1 GHz)	15
4.4.5	For Radiated Test (Above 1 GHz)	16
4.5	Measurement Results Explanation Example	17

4.5.1	For conducted test items:	17
4.5.2	For radiated band edges and spurious emission test:.....	17
5	TEST ITEMS.....	18
5.1	Antenna Requirements.....	18
5.1.1	Relevant Standards.....	18
5.1.2	Antenna Anti-Replacement Construction	18
5.1.3	Antenna Gain	19
5.2	Number of Hopping Frequencies	20
5.2.1	Limit.....	20
5.2.2	Test Procedure.....	20
5.2.3	Test Result	20
5.3	Peak Output Power and E.I.R.P.....	21
5.3.1	Test Limit.....	21
5.3.2	Test Setup.....	21
5.3.3	Test Procedure.....	21
5.3.4	Test Result	21
5.4	Occupied Bandwidth	22
5.4.1	Limit.....	22
5.4.2	Test Setup.....	22
5.4.3	Test Procedure.....	22
5.4.4	Test Result	22
5.5	Carrier Frequency Separation	23
5.5.1	Limit.....	23
5.5.2	Test Setup.....	23
5.5.3	Test Procedure.....	23
5.5.4	Test Result	23
5.6	Time of Occupancy (Dwell time)	24
5.6.1	Limit.....	24
5.6.2	Test Setup.....	24
5.6.3	Test Procedure.....	24
5.6.4	Test Result	24
5.7	Conducted Spurious Emission & Authorized-band band-edge	25

5.7.1	Limit.....	25
5.7.2	Test Setup.....	25
5.7.3	Test Procedure.....	25
5.7.4	Test Result	25
5.8	Conducted Emission	26
5.8.1	Limit.....	26
5.8.2	Test Setup.....	26
5.8.3	Test Procedure.....	26
5.8.4	Test Result	26
5.9	Radiated Spurious Emission	27
5.9.1	Limit.....	27
5.9.2	Test Setup.....	27
5.9.3	Test Procedure.....	27
5.9.4	Test Result	28
5.10	Band Edge (Restricted-band band-edge).....	29
5.10.1	Limit.....	29
5.10.2	Test Setup	29
5.10.3	Test Procedure	29
5.10.4	Test Result	29
5.11	Power Spectral density (PSD).....	30
5.11.1	Limit.....	30
5.11.2	Test Setup	30
5.11.3	Test Procedure.....	30
5.11.4	Test Result	30
ANNEX A	TEST RESULT	31
A.1	Number of Hopping Frequency	31
A.2	Peak Output Power	31
A.3	20 dB and 99% bandwidth	33
A.4	Hopping Frequency Separation.....	36
A.5	Average Time of Occupancy	37
A.6	Conducted Spurious Emissions & Authorized-band band-edge	38
A.7	Conducted Emissions.....	41

A.8	Radiated Spurious Emission	43
A.9	Band Edge (Restricted-band band-edge).....	61
A.10	Power Spectral Density (PSD)	61
ANNEX B	TEST SETUP PHOTOS	62
ANNEX C	EUT EXTERNAL PHOTOS	62

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100
Fax Number	+86 755 6182 4271

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory is a testing organization accredited by American Association for Laboratory Accreditation (A2LA) according to ISO/IEC 17025. The accreditation certificate is 4344.01. The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v2.2.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	MatchX GmbH
Address	Alexander Str.7 10178 Berlin. GERMANY.

2.2 Manufacturer Information

Manufacturer	MatchX GmbH
Address	Alexander Str.7 10178 Berlin. GERMANY.

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Name	MatchX Core
Model Name Under Test	MX1731
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	1.2
Software Version	1.2.8
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Ancillary Equipment

Ancillary Equipment 1	Antenna	
Ancillary Equipment 2	TYPE-C Cable	
	Length (Approx.)	1.0 m

2.6 Technical Information

Network and Wireless connectivity	Bluetooth 4.0 BLE LoRa, GPS
-----------------------------------	--------------------------------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	Frequency hopping system, Hybrid system
Modulation Type	Chirp Spread Spectrum
Product Type	☒ Mobile ☐ Portable ☐ Fix Location
Frequency Range	The frequency range used is 902 MHz to 928 MHz.
Number of channel	64
Tested Channel	125KHz: 0 (902.3 MHz), 31 (908.5 MHz), 63 (914.9 MHz) 500KHz: 1 (903.0 MHz), 4 (907.8 MHz), 8 (914.2 MHz)
Antenna Type	Dipole Antenna
Antenna Gain	2.5 dBi (In test items related to antenna gain, the final results reflect this figure.)
Antenna System(MIMO Smart Antenna)	N/A
About the Product	The EUT is supply the DTS, Frequency hopping system and Hybrid system, only the frequency hopping system and hybrid system were tested in this report.

All channel was listed on the following table:

125KHz

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
0	902.3	20	906.3	40	910.3	60	914.3
1	902.5	21	906.5	41	910.5	61	914.5
2	902.7	22	906.7	42	910.7	62	914.7
3	902.9	23	906.9	43	910.9	63	914.9
4	903.1	24	907.1	44	911.1	-	-
5	903.3	25	907.3	45	911.3	-	-
6	903.5	26	907.5	46	911.5	-	-
7	903.7	27	907.7	47	911.7	-	-
8	903.9	28	907.9	48	911.9	-	-
9	904.1	29	908.1	49	912.1	-	-
10	904.3	30	908.3	50	912.3	-	-
11	904.5	31	908.5	51	912.5	-	-
12	904.7	32	908.7	52	912.7	-	-
13	904.9	33	908.9	53	912.9	-	-
14	905.1	34	909.1	54	913.1	-	-
15	905.3	35	909.3	55	913.3	-	-
16	905.5	36	909.5	56	913.5	-	-
17	905.7	37	909.7	57	913.7	-	-
18	905.9	38	909.9	58	913.9	-	-
19	906.1	39	910.1	59	914.1	-	-

500KHz

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
1	903.0	3	906.2	5	909.4	7	912.6
2	904.6	4	907.8	6	911.0	8	914.2

2.7 Additional Instructions


EUT Software Settings:

Mode	☒ Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power level setup in software		
Test Software Version	N/A	
Mode	Channel	Soft Set
LoRa	ALL	6

Run Software

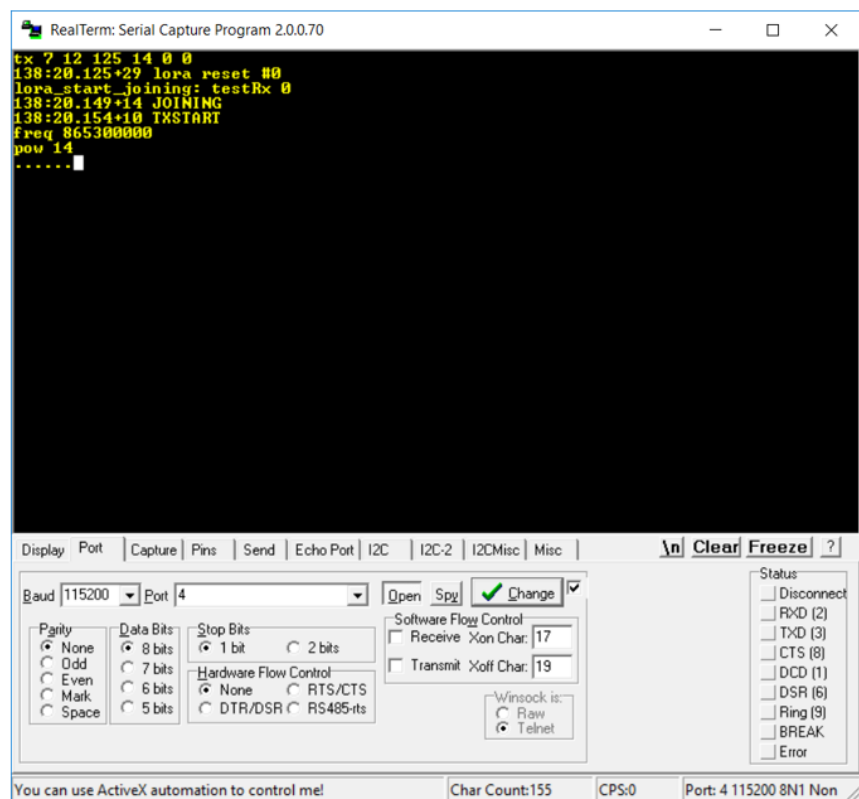

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Miscellaneous Wireless Communications Services
2	FCC PUBLIC NOTICE DA 00-705 (Mar. 30, 2000)	Filling and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB Publication 558074 D01v05	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES

3.2 Verdict

No.	Description	FCC Part No.	Modulation Technology	Channel	Test Result	Verdict	Remark
1	Antenna Requirement	15.203	N/A	N/A	--	Pass	Note ¹
2	Number of Hopping Frequencies	15.247(a)	Frequency hopping system	Hopping Mode	ANNEX A.1	N/A	--
3	Peak Output Power	15.247(b)	Frequency hopping system, Hybrid system	Low/Middle/High	ANNEX A.2	Pass	--
4	Occupied Bandwidth	15.247(a)	Frequency hopping system, Hybrid system	Low/Middle/High	ANNEX A.3	Pass	--
5	Carrier Frequency Separation	15.247(a)	Frequency hopping system, Hybrid system	Hopping Mode	ANNEX A.4	Pass	--
6	Time of Occupancy (Dwell time)	15.247(a)	Frequency hopping system, Hybrid system	Hopping Mode	ANNEX A.5	Pass	--
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	Frequency hopping system, Hybrid system	Low/Middle/High, Hopping Mode	ANNEX A.6	Pass	--
8	Conducted Emission	15.207	Frequency hopping system, Hybrid system	Low/Middle/High	ANNEX A.7	Pass	--
9	Radiated Spurious Emission	15.209 15.247(d)	Frequency hopping system, Hybrid system	Low/Middle/High, Hopping Mode	ANNEX A.8	Pass	--
10	Band Edge (Restricted-band band-edge)	15.209 15.247(d)	Frequency hopping system, Hybrid system	Low/Middle/High, Hopping Mode	ANNEX A.9	Pass	--
11	Power spectral density (PSD)	15.247(e)	--	--	ANNEX A.10	Pass	--

Note ¹: Please refer to section 5.1

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	5 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2018.06.15	2019.06.14
Vector Signal Generator	ROHDE&SCHWARZ	SMBV100A	260592	2018.06.15	2019.06.14
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2018.06.15	2019.06.14
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2018.06.15	2019.06.14
Spectrum Analyzer	AGILENT	E4440A	MY45304434	2018.11.01	2019.10.31
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2018.06.13	2019.06.12
LISN	SCHWARZBECK	NSLK 8127	8127-687	2018.06.13	2019.06.12
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2018.06.15	2019.06.14
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2018.06.15	2019.06.14
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2018.06.14	2019.06.13
Temperature Chamber	ANGELANTIONI SCIENCE	NTH64-40A	1310	2018.06.26	2019.06.25
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2017.11.09	2019.11.08
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2017.07.22	2019.07.21
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2018.07.11	2020.07.10
Test Antenna-Horn(15-26.5 GHz)	SCHWARZBECK	BBHA 9170	9170-305	2018.06.21	2019.06.20
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2017.01.06	2019.01.05
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2019.02.20
Anechoic Chamber	EMC TECHNOLOGY LTD	21.1m*11.6m*7.35m	N/A	2017.08.08	2019.08.07
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2018.06.15	2019.06.14
Power Amplifier	OPHIR RF	5225F	1037	2018.02.16	2019.02.15
Power Amplifier	OPHIR RF	5273F	1016	2018.02.16	2019.02.15

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A
Feld Strength Meter	Narda	EP601	511WX51129	2018.05.21	2019.05.20
Amplifier	COM-MW	KL_LNA_18-40G-01	N/A	2018.06.26	2019.06.25
RF Cable 1	ROHDE&SCHWARZ	JUNFLON	APR0914004	2018.07.10	2019.10.09
RF Cable 2	Huber&suhner	RG_400_/U	N/A	2018.07.10	2019.10.09
RF Cable 3	Huber&suhner	RG_400_/U	N/A	2018.07.10	2019.10.09
RF Cable 4	Huber&suhner	SX_04172_B-60	N/A	2018.07.10	2019.10.09
RF Cable 5	COM-MW	RFJA360-2.92mm-J/J3M	N/A	2018.07.10	2019.10.09
Note: The calibration period on the Cable is three month.					

4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Occupied Channel Bandwidth	±4%
RF output power, conducted	±1.4 dB
Power Spectral Density, conducted	±2.5 dB
Unwanted Emissions, conducted	±2.8 dB
All emissions, radiated	±5.4 dB
Temperature	±1°C
Humidity	±4%


4.4 Description of Test Setup

4.4.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

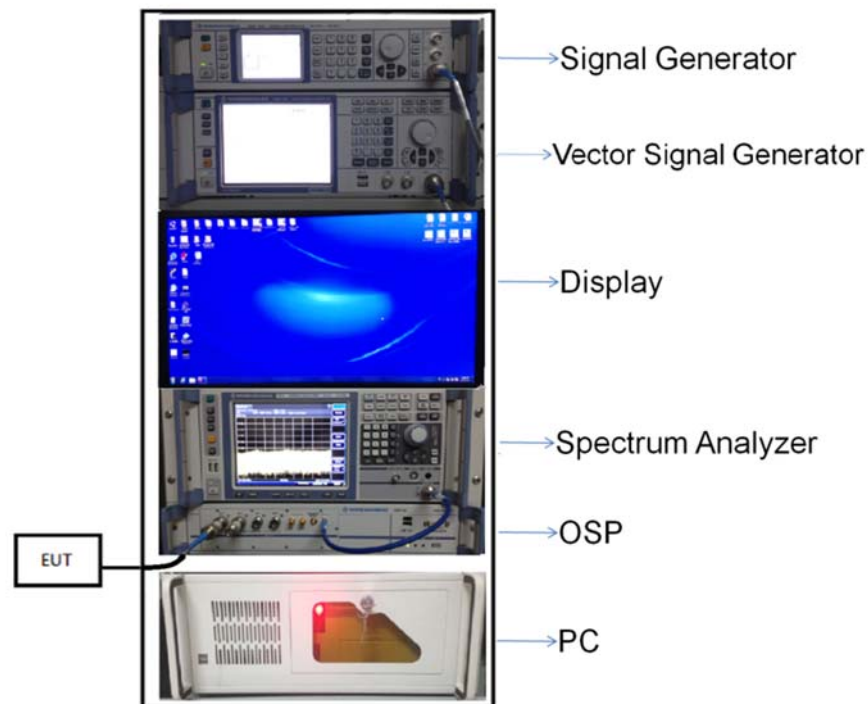


(Diagram 1)

4.4.2 For AC Power Supply Port Test

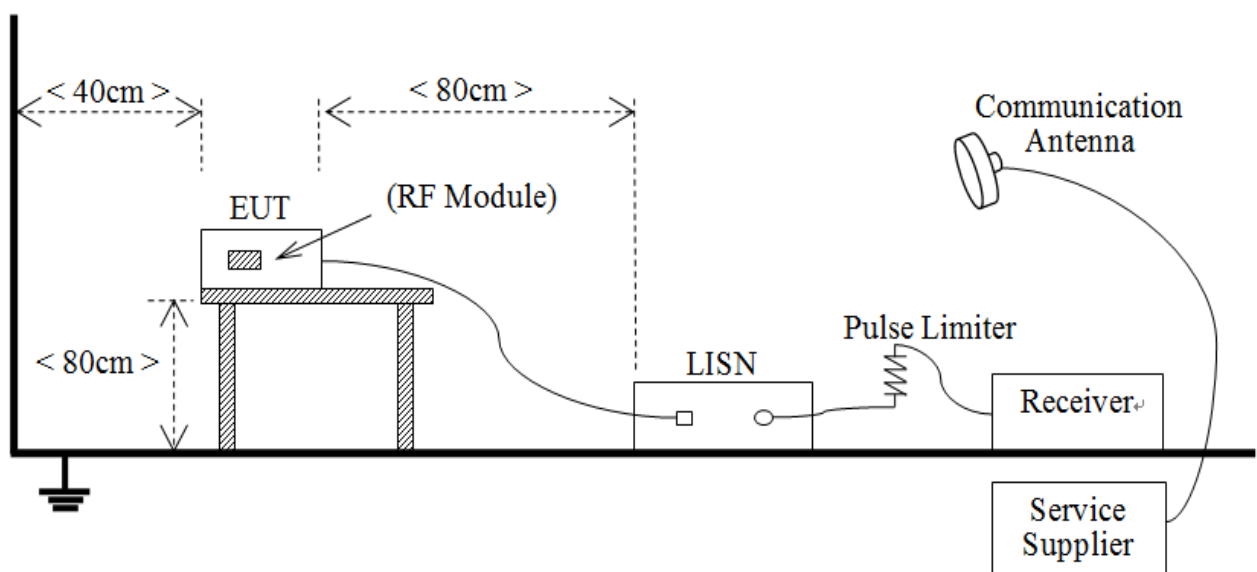


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

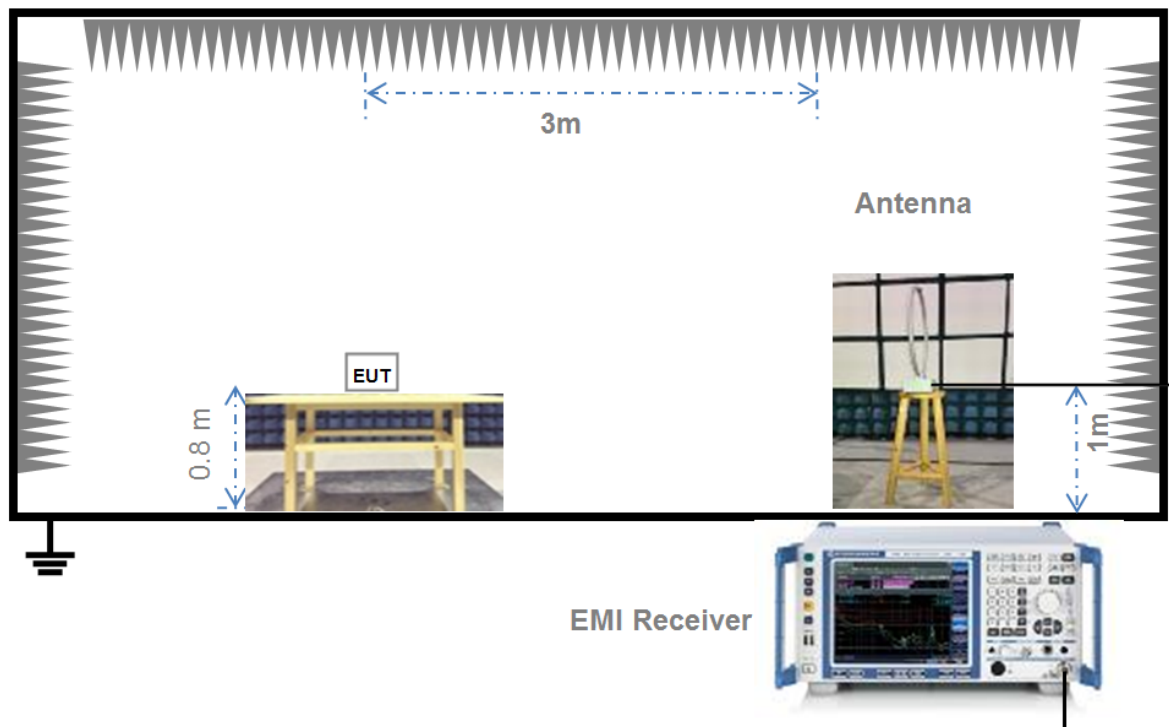


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

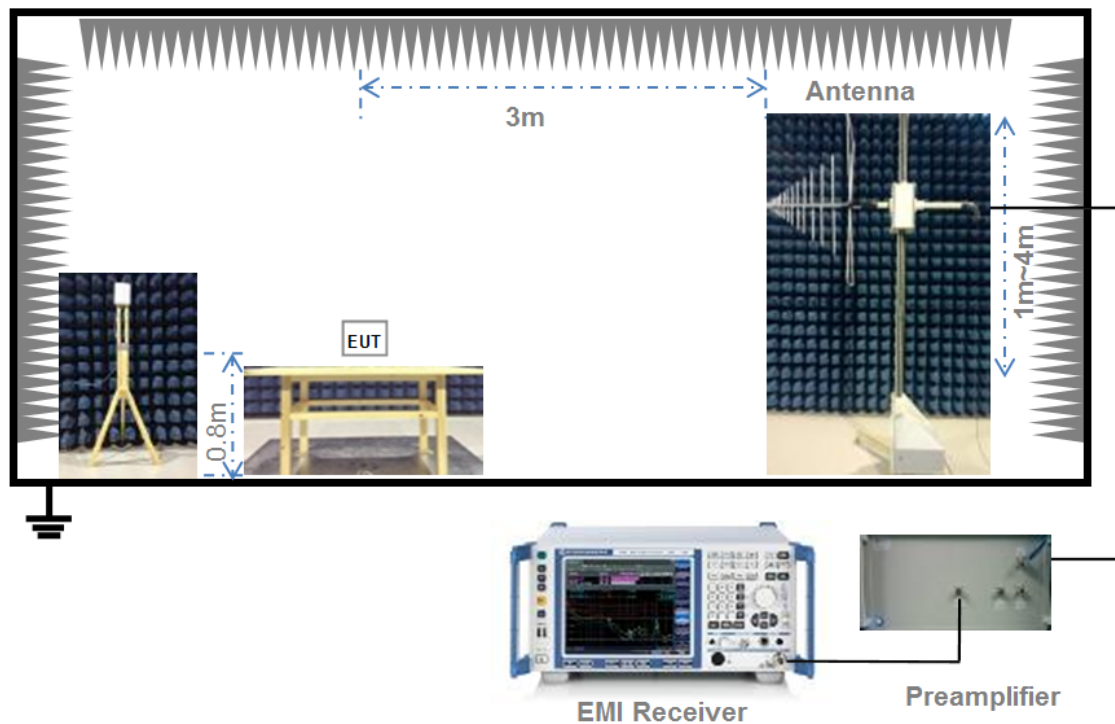

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

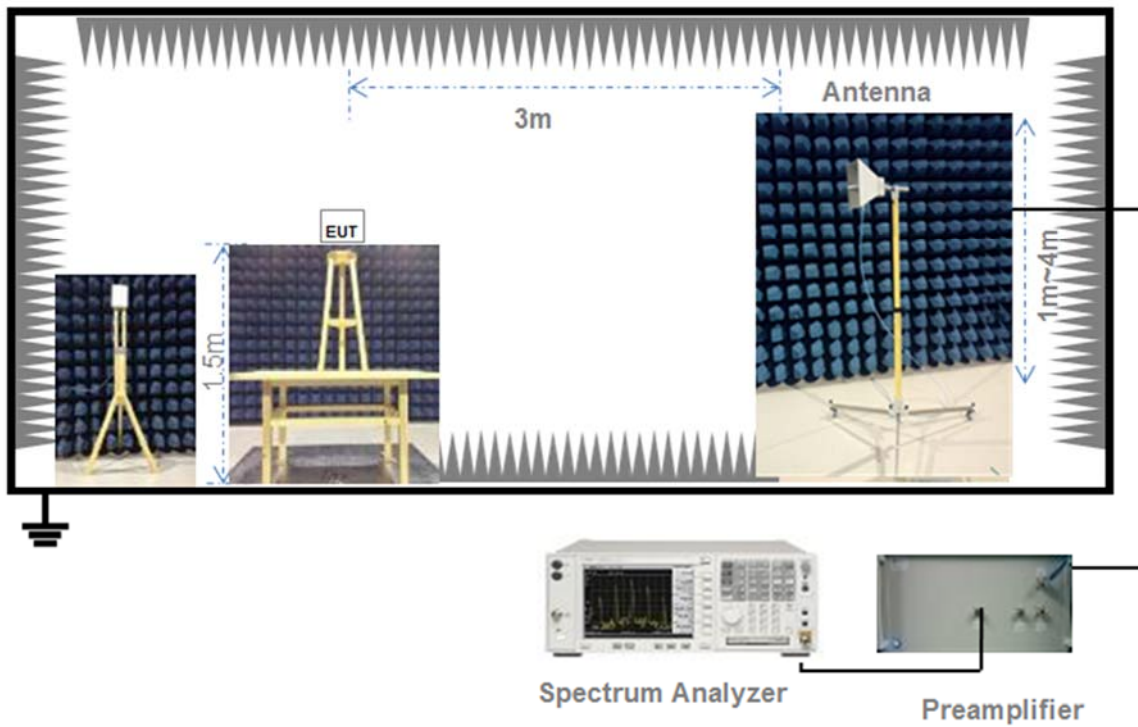

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.5.2 For radiated band edges and spurious emission test:

Per part 15.35(c), the EUT Bluetooth average emission level could be determined by the peak emission level applying duty cycle correction factor, to represent averaging over the whole pulse train.

The average level is derived from the peak level corrected with "Duty cycle correction factor".

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + Duty cycle correction factor (dB)

Duty cycle correction factor (dB) = $20 * \log (\text{Duty cycle})$.

Duty cycle = on time / 100 milliseconds

On time = dwell time * hopping number in 100 ms

For example: bluetooth with dwell time 2.9 ms and 3 hops in 100 ms, then

Duty cycle correction factor (dB) = $20 * \log ((2.9 * 3) / 100) = -21.21 \text{ dB}$

Following shows an average computation example with duty cycle correction factor = -21.21 dB, and the peak emission level is 45.61 dBuV/m.

Example:

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + duty cycle correction factor (dB)

= $45.61 + (-21.21) = 24.4 \text{ (dBuV/m)}$

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (6)


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product	The antenna is welded on the mainboard, can't be replaced by the consumer

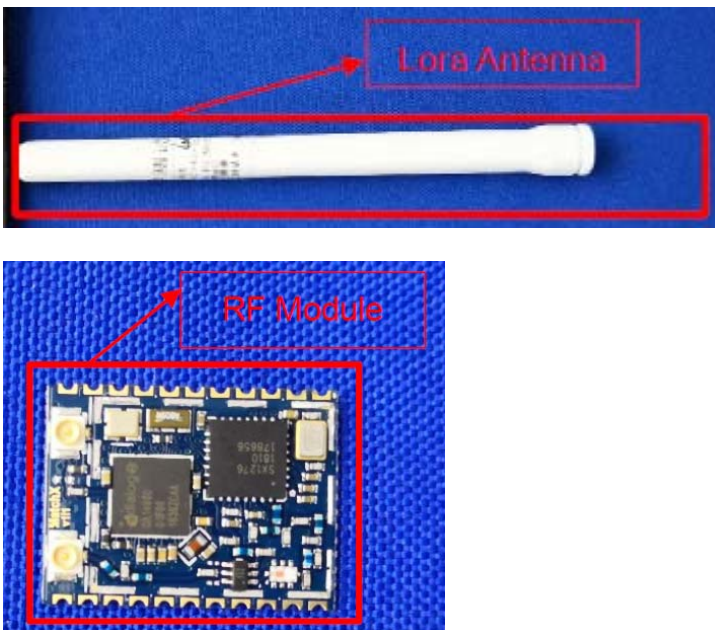Reference Documents	Item
Photo	 The top photograph shows a white, cylindrical Lora Antenna. A red arrow points to it, and a red box is drawn around it. The bottom photograph shows a blue printed circuit board (PCB) with various electronic components, including a central chip. A red arrow points to it, and a red box is drawn around it.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Number of Hopping Frequencies

5.2.1 Limit

FCC §15.247(a) (1) (i); RSS-247, 5.1 (4)

For frequency hopping systems operating in the 902-928 MHz band: the system shall use at least 50 hopping frequencies.

Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.2 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.2.3 Test Result

Please refer to ANNEX A.1.

5.3 Peak Output Power and E.I.R.P

5.3.1 Test Limit

FCC § 15.247(b)(1)

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

RSS-247, 5.4 (2)

For FHSs operating in the band 902-928 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W and the e.i.r.p. shall not exceed 0.5 W if the hopset uses less than 75 hopping channels (see Section 5.4(5) for exceptions).

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Occupied Bandwidth

5.4.1 Limit

FCC §15.247(a)(1)(i); RSS-247, 5.1 (1)

Measurement of the 20dB bandwidth of the modulated signal. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Carrier Frequency Separation

5.5.1 Limit

FCC §15.247(a)(1); RSS-247, 5.1 (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Time of Occupancy (Dwell time)

5.6.1 Limit

FCC §15.247(a)(1)(i); RSS-247, 5.1 (4)

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

5.6.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.6.4 Test Result

Please refer to ANNEX A.5

5.7 Conducted Spurious Emission & Authorized-band band-edge

5.7.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.7.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.7.4 Test Result

Please refer to ANNEX A.6 and A.7

5.8 Conducted Emission

5.8.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.8.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Radiated Spurious Emission

5.9.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	902/F(kHz)	300
0.490 - 1.705	9020/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength (dB $\mu\text{V}/\text{m}$) = $20 \cdot \log[\text{Field Strength } (\mu\text{V}/\text{m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dB $\mu\text{V}/\text{m}@3\text{m}$ (AV) and 74dB $\mu\text{V}/\text{m}@3\text{m}$ (PK).

5.9.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.9.4 Test Result

Please refer to ANNEX A.8.

5.10 Band Edge (Restricted-band band-edge)

5.10.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.10.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.9.

5.11 Power Spectral density (PSD)

5.11.1 Limit

FCC §15.247(e); RSS-247, 5.2 (2)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of Section 5.4(4), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

5.11.2 Test Setup

See section 4.4.1 (Diagram 1) for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.11.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.

Set the VBW $\geq 3 \text{ RBW}$.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.11.4 Test Result

Please refer to ANNEX A.10.

ANNEX A TEST RESULT

A.1 Number of Hopping Frequency

Note: Not applicable.

A.2 Peak Output Power

Peak Power Test Data

125KHz

Channel	Measured Output Peak Power		Limit		Verdict
	LoRa		dBm	mW	
	dBm	mW			
Low	25.05	319.89	30	1000	Pass
Middle	23.86	243.22			Pass
High	23.81	240.44			Pass


500KHz

Channel	Measured Output Peak Power		Limit		Verdict
	LoRa		dBm	mW	
	dBm	mW			
Low	20.86	121.90	30	1000	Pass
Middle	21.03	126.77			Pass
High	20.94	124.17			Pass

Test plots


125KHz

LOW CHANNEL

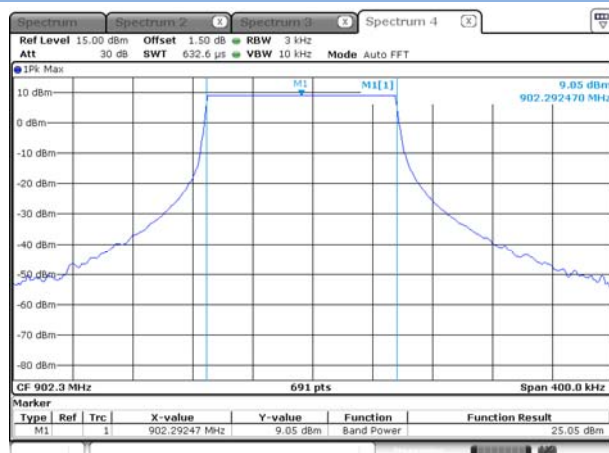


Date: 7 DEC 2018 14:31:57

MIDDLE CHANNEL

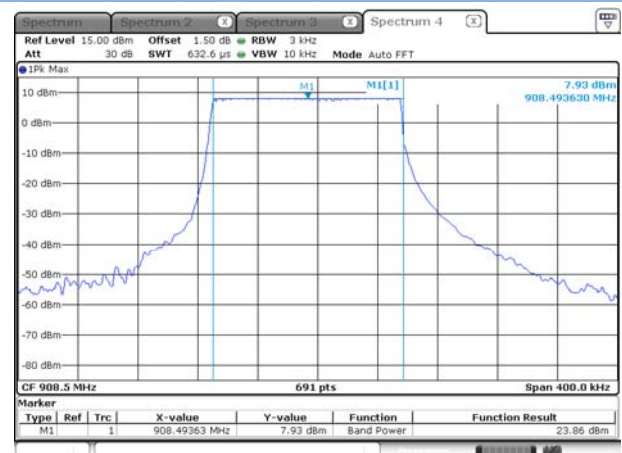


Date: 7 DEC 2018 15:06:37

HIGH CHANNEL

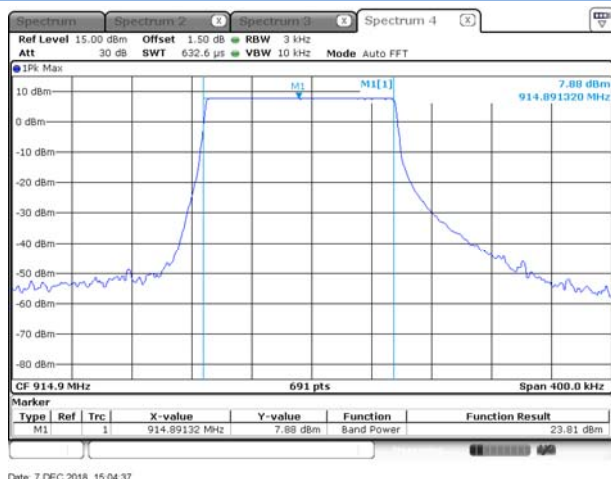


500KHz


LOW CHANNEL

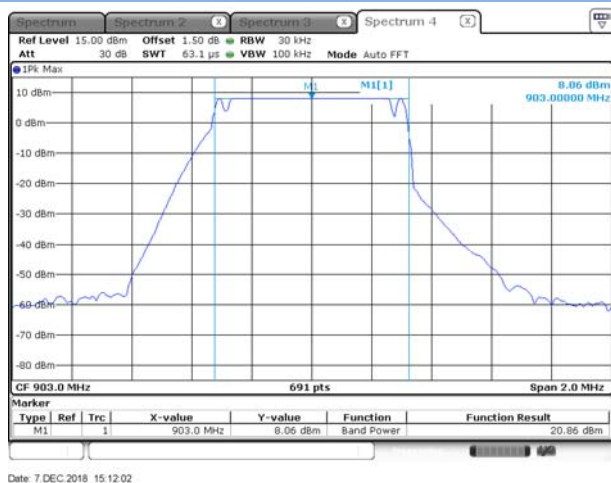

MIDDLE CHANNEL

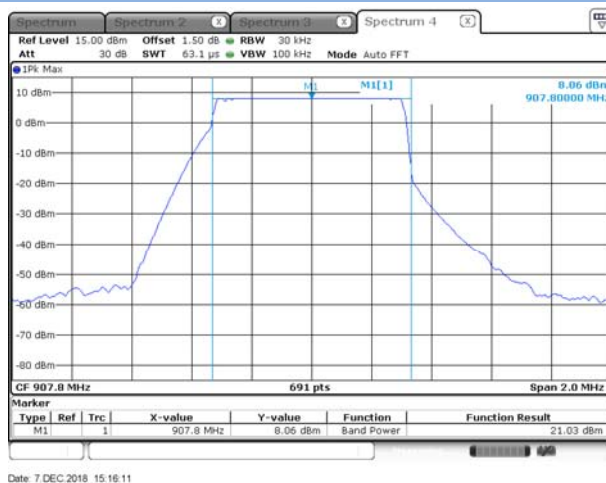

HIGH CHANNEL

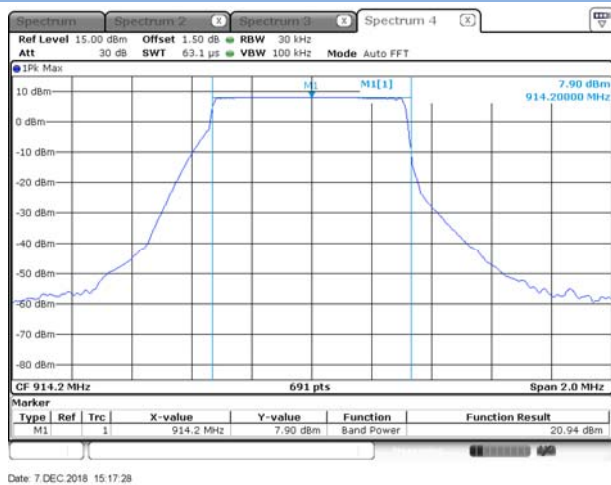

A.3 20 dB and 99% bandwidth

Test Data

125KHz

LoRa			
Channel	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)	Verdict
Low	140.090	127.352	Pass
Middle	137.190	126.773	Pass
High	135.460	126.773	Pass

500KHz

LoRa			
Channel	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)	Verdict
Low	/	662.808	Pass
Middle	/	645.441	Pass
High	/	657.019	Pass

Test Plots


20 dB Bandwidth

125KHz


LOW CHANNEL



MIDDLE CHANNEL

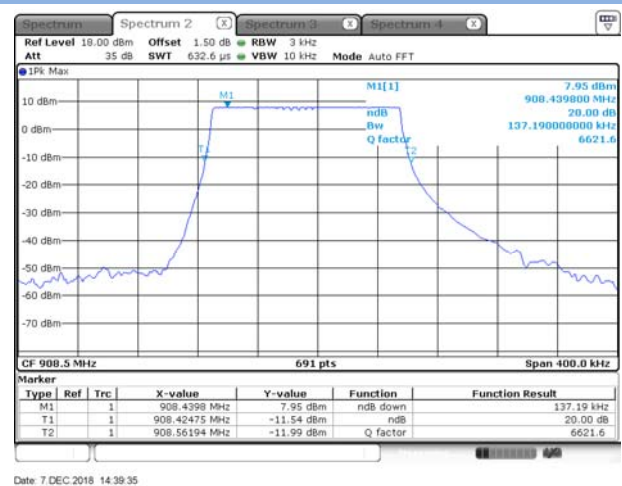

HIGH CHANNEL

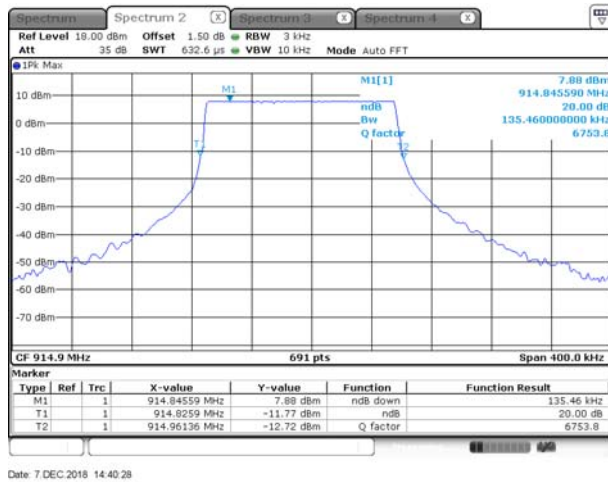

99% Bandwidth

125KHz

LOW CHANNEL



MIDDLE CHANNEL



HIGH CHANNEL



500KHz

LOW CHANNEL



Date: 7 DEC 2018 15:10:09

MIDDLE CHANNEL



Date: 7 DEC 2018 15:15:07

HIGH CHANNEL



Date: 7 DEC 2018 15:18:07


A.4 Hopping Frequency Separation

Test Data


Mode	Frequency separation (KHz)	Max 20 dB Bandwidth (KHz)	Verdict
LoRa	200	140.090	Pass
	200	137.190	Pass
	200	135.460	Pass

Test Plots

LOW CHANNEL

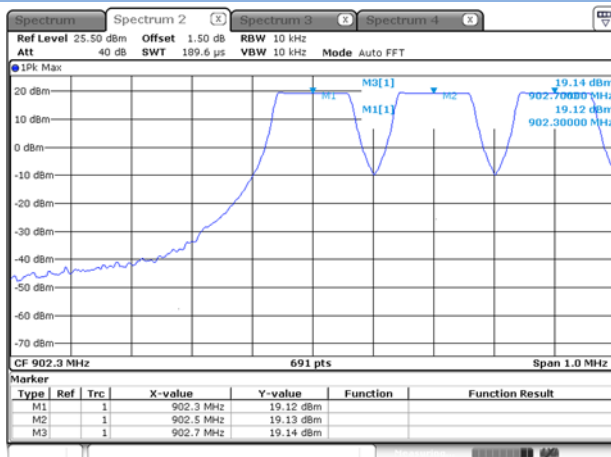


MIDDLE CHANNEL

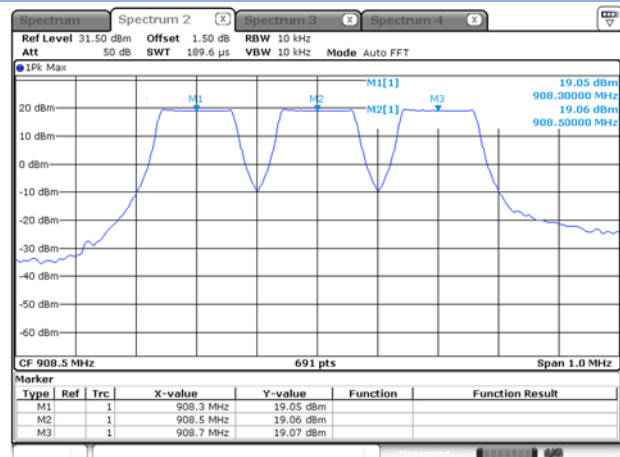

Date: 22.NOV.2018 15:19:33

HIGH CHANNEL

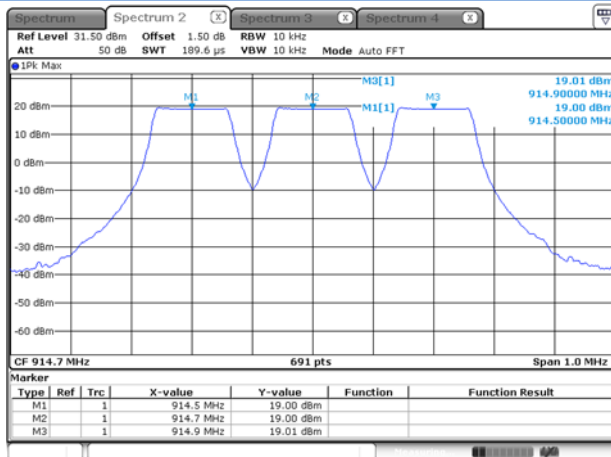



Date: 22.NOV.2018 15:20:58

A.5 Average Time of Occupancy

Test Data

Total of Dwell(ms)	Limit(sec)	Verdict
1.7971	0.4	Pass

Test Plots

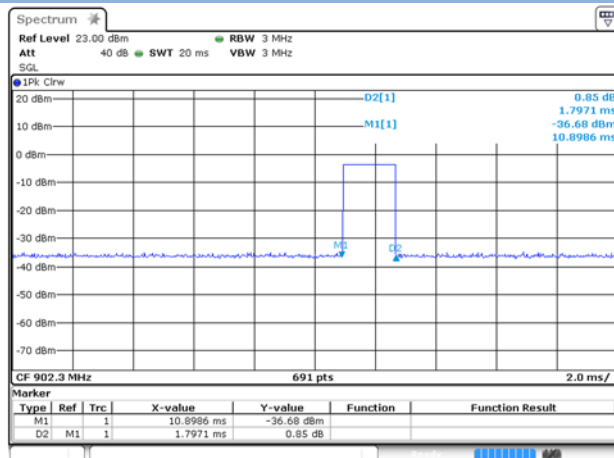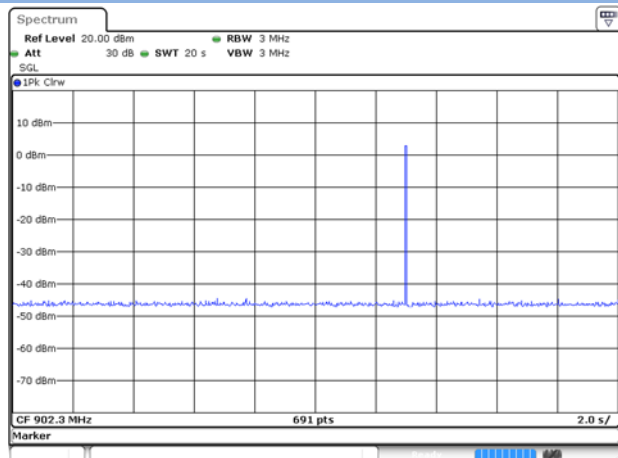

A.6 Conducted Spurious Emissions & Authorized-band band-edge

Test Data


LoRa				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-48.02	8.05	-11.95	Pass
Middle	-47.36	8.04	-11.96	Pass
High	-51.43	7.91	-12.09	Pass

Test Plots


LOW CHANNEL, CARRIER LEVEL



LOW CHANNEL, Band Edge

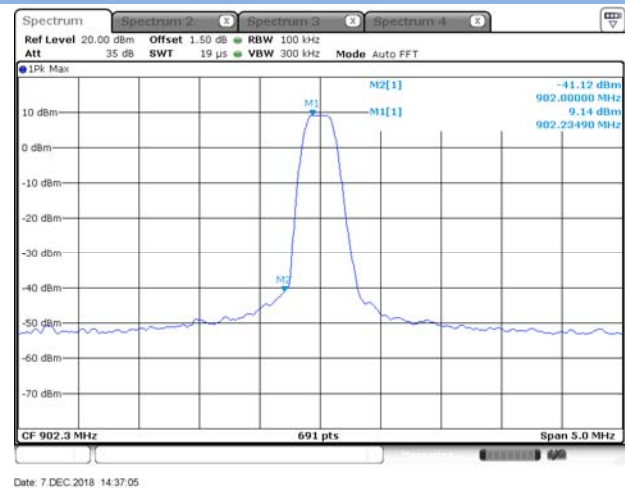

LOW CHANNEL, SPURIOUS 30 MHz ~ 10 GHz

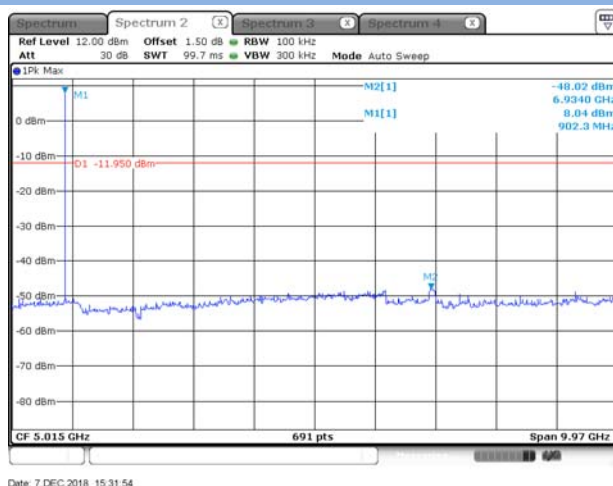


MIDDLE CHANNEL, CARRIER LEVEL



Date: 7 DEC 2018 15:25:55

MIDDLE CHANNEL, SPURIOUS 30 MHz~10 GHz

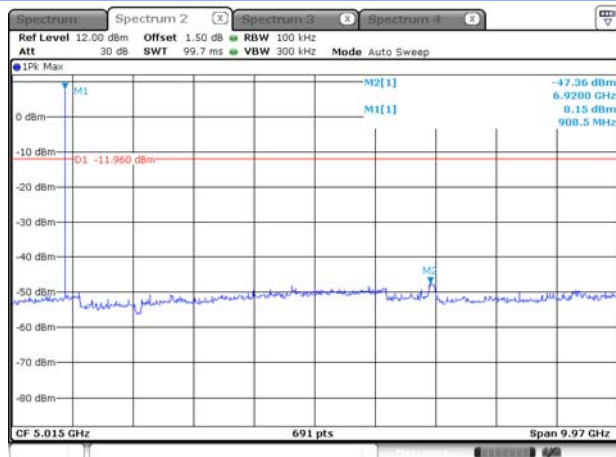


Date: 7 DEC 2018 15:30:51

HIGH CHANNEL, CARRIER LEVEL




Date: 7 DEC 2018 15:27:31

HIGH CHANNEL, BAND EDGE

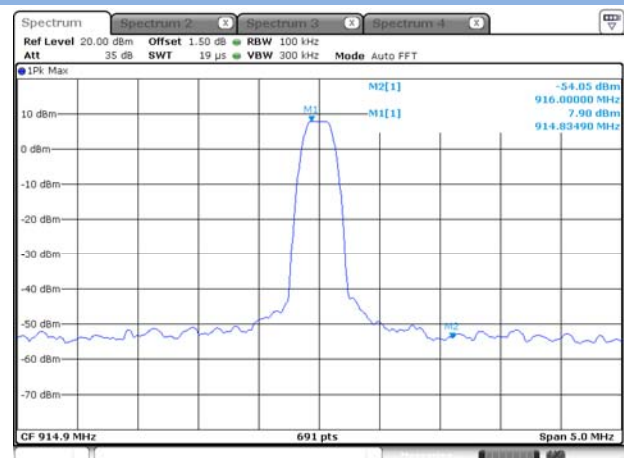

Date: 7 DEC 2018 15:02:07

HIGH CHANNEL , SPURIOUS 30 MHz ~ 10 GHz

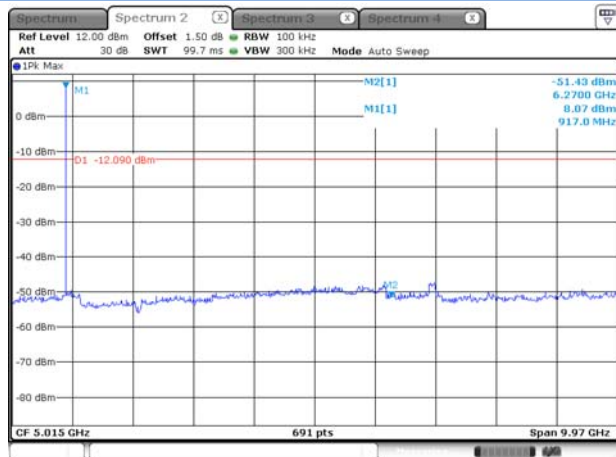

Date: 7 DEC 2018 15:29:27

A.7 Conducted Emissions


Note¹: The EUT is working in the Normal link mode.

Note²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)


Test Data and Plots

PHASE L

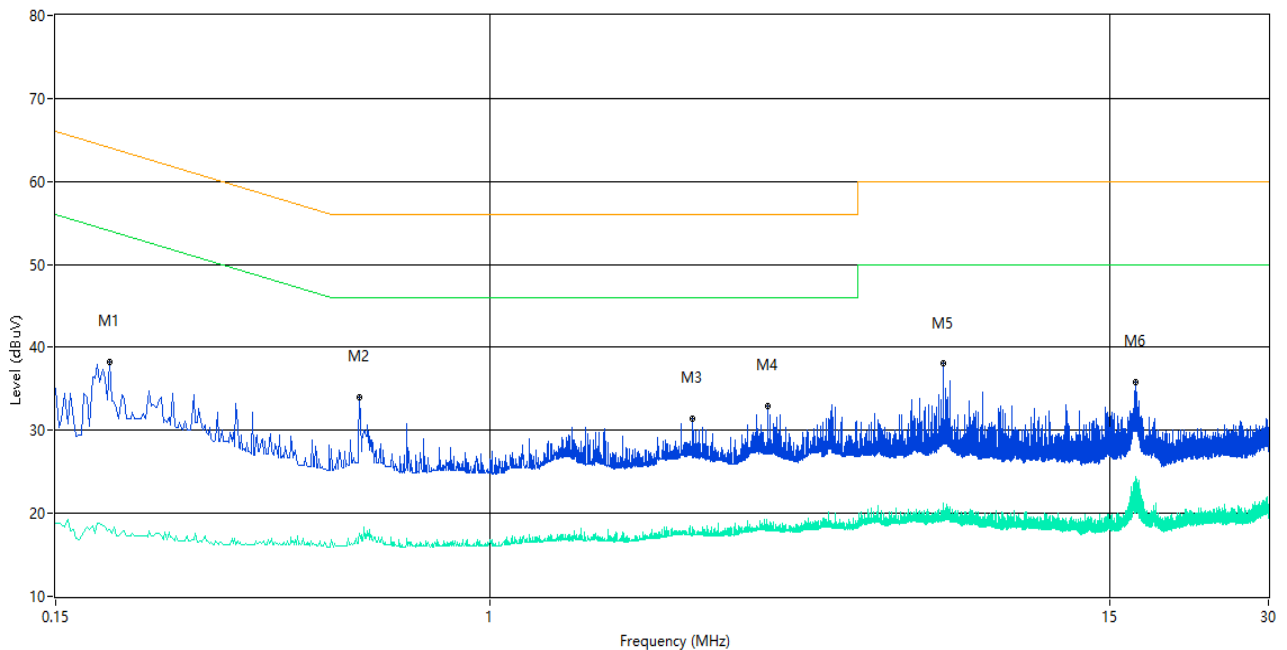

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.190	38.2	10.01	64.0	-25.80	Peak	L Line	Pass
1**	0.190	18.0	10.01	54.0	-36.00	AV	L Line	Pass
2	0.566	34.0	10.01	56.0	-22.00	Peak	L Line	Pass
2**	0.566	17.6	10.01	46.0	-28.40	AV	L Line	Pass
3	2.424	31.3	10.06	56.0	-24.70	Peak	L Line	Pass
3**	2.424	18.3	10.06	46.0	-27.70	AV	L Line	Pass
4	3.370	32.9	10.08	56.0	-23.10	Peak	L Line	Pass
4**	3.370	18.1	10.08	46.0	-27.90	AV	L Line	Pass
5	7.256	38.1	10.15	60.0	-21.90	Peak	L Line	Pass
5**	7.256	21.2	10.15	50.0	-28.80	AV	L Line	Pass
6	16.824	35.8	10.22	60.0	-24.20	Peak	L Line	Pass
6**	16.824	23.5	10.22	50.0	-26.50	AV	L Line	Pass

PHASE N

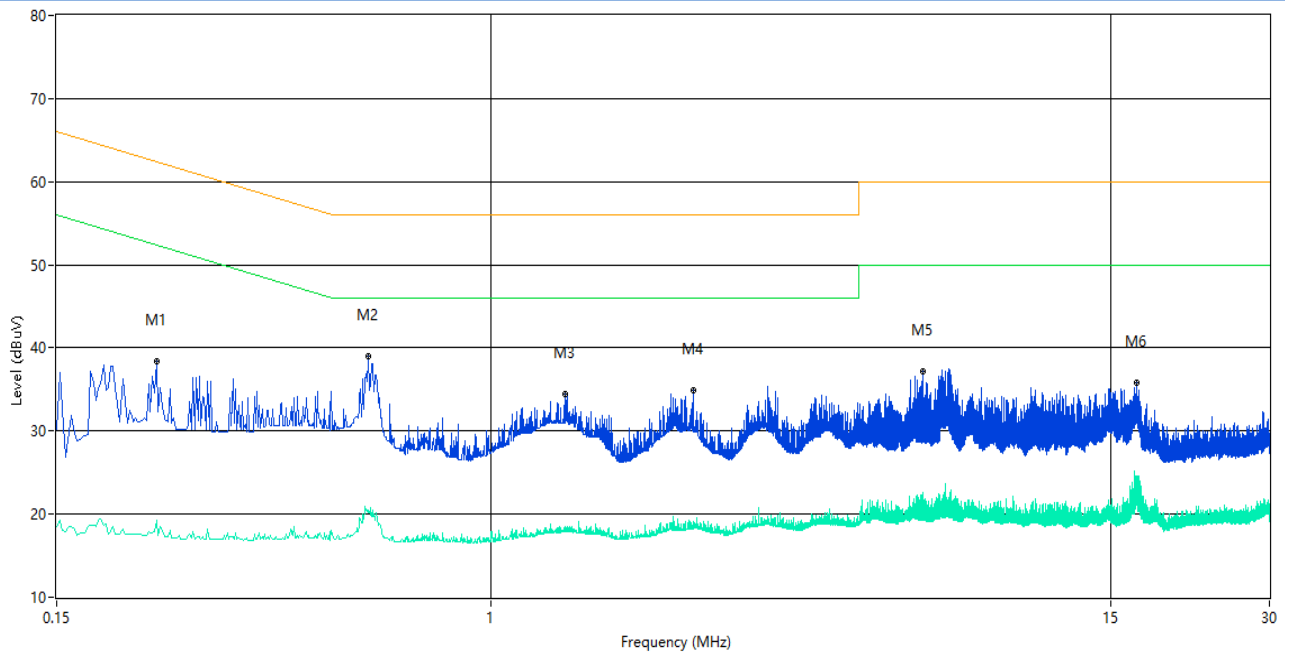

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.232	38.3	10.01	62.4	-24.10	Peak	N Line	Pass
1**	0.232	19.3	10.01	52.4	-33.10	AV	N Line	Pass
2	0.586	39.0	10.01	56.0	-17.00	Peak	N Line	Pass
2**	0.586	20.6	10.01	46.0	-25.40	AV	N Line	Pass
3	1.380	34.4	10.05	56.0	-21.60	Peak	N Line	Pass
3**	1.380	18.5	10.05	46.0	-27.50	AV	N Line	Pass
4	2.420	34.9	10.06	56.0	-21.10	Peak	N Line	Pass
4**	2.420	19.1	10.06	46.0	-26.90	AV	N Line	Pass
5	6.606	37.2	10.14	60.0	-22.80	Peak	N Line	Pass
5**	6.606	21.4	10.14	50.0	-28.60	AV	N Line	Pass
6	16.806	35.8	10.22	60.0	-24.20	Peak	N Line	Pass
6**	16.806	24.6	10.22	50.0	-25.40	AV	N Line	Pass

A.8 Radiated Spurious Emission

Note¹: The symbol of “--” in the table which means not application.

Note²: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note³: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


Note⁴: The marked spikes near 900 MHz with circle should be ignored because they are Lora carrier frequency.

Test Data and Plots

125KHz

LOW CHANNEL ANT V


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

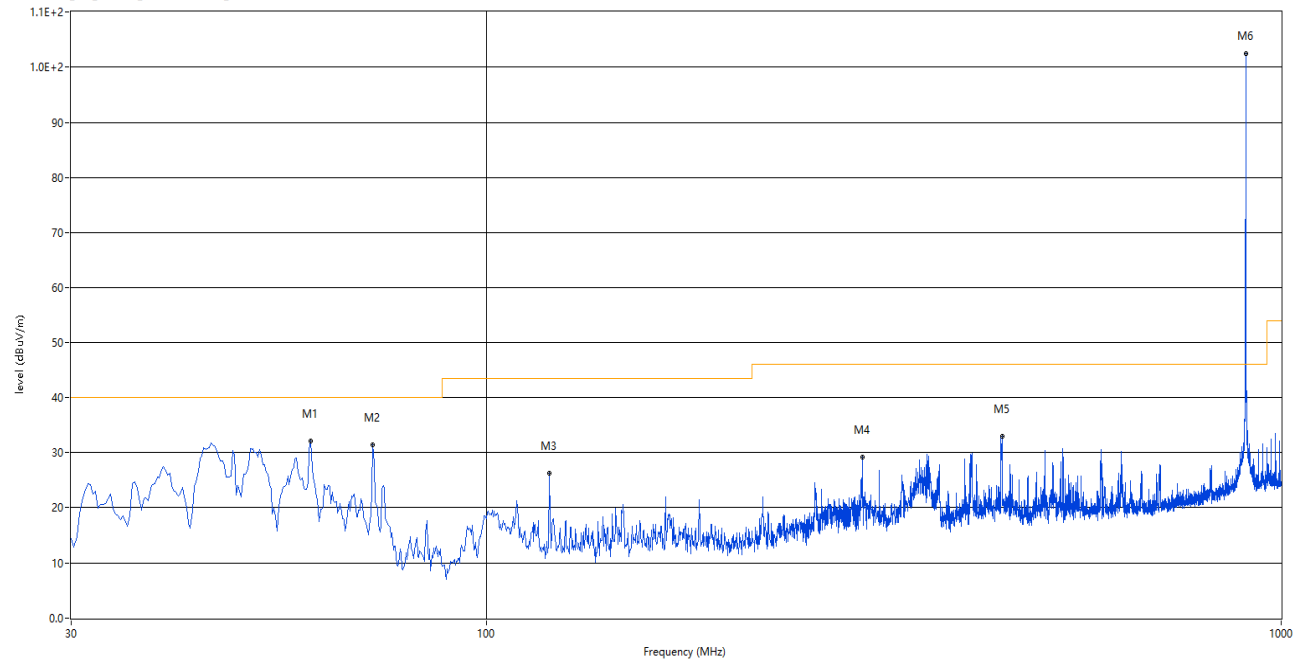

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	60.070	32.16	-27.29	40.0	-7.84	Peak	257.00	100	Vertical	Pass
2	71.952	31.43	-29.27	40.0	-8.57	Peak	337.00	100	Vertical	Pass
3	119.967	26.21	-27.16	43.5	-17.29	Peak	205.00	100	Vertical	Pass
4	296.992	29.10	-24.38	46.0	-16.90	Peak	0.00	100	Vertical	Pass
5	445.645	32.96	-19.86	46.0	-13.04	Peak	179.00	100	Vertical	Pass
6	902.273	102.38	-11.33	46.0	56.38	Peak	2.00	100	Vertical	N/A

LOW CHANNEL, ANT H


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

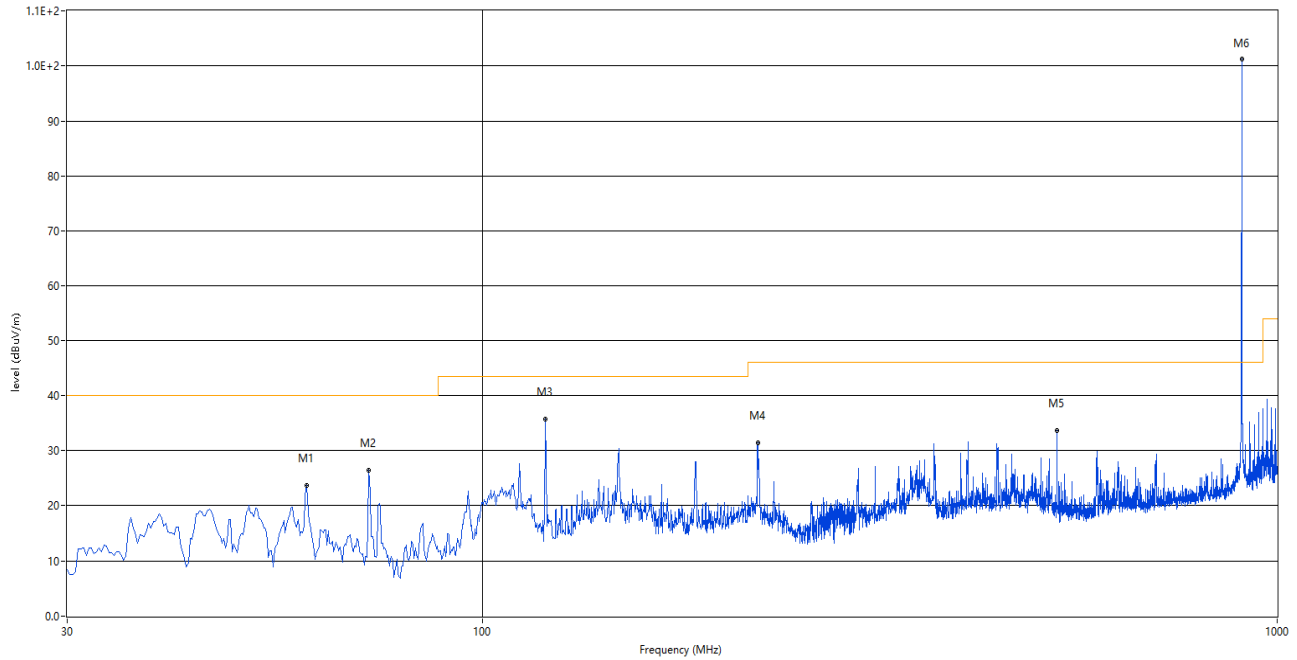

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	60.070	23.64	-27.29	40.0	-16.36	Peak	281.00	100	Horizontal	Pass
2	71.952	26.49	-29.27	40.0	-13.51	Peak	268.00	100	Horizontal	Pass
3	119.967	35.68	-27.16	43.5	-7.82	Peak	228.00	100	Horizontal	Pass
4	222.060	31.42	-27.32	46.0	-14.58	Peak	360.00	100	Horizontal	Pass
5	528.338	33.64	-18.11	46.0	-12.36	Peak	40.00	100	Horizontal	Pass
6	902.273	101.33	-11.33	46.0	55.33	Peak	336.00	100	Horizontal	N/A

MIDDLE CHANNEL ANT V


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

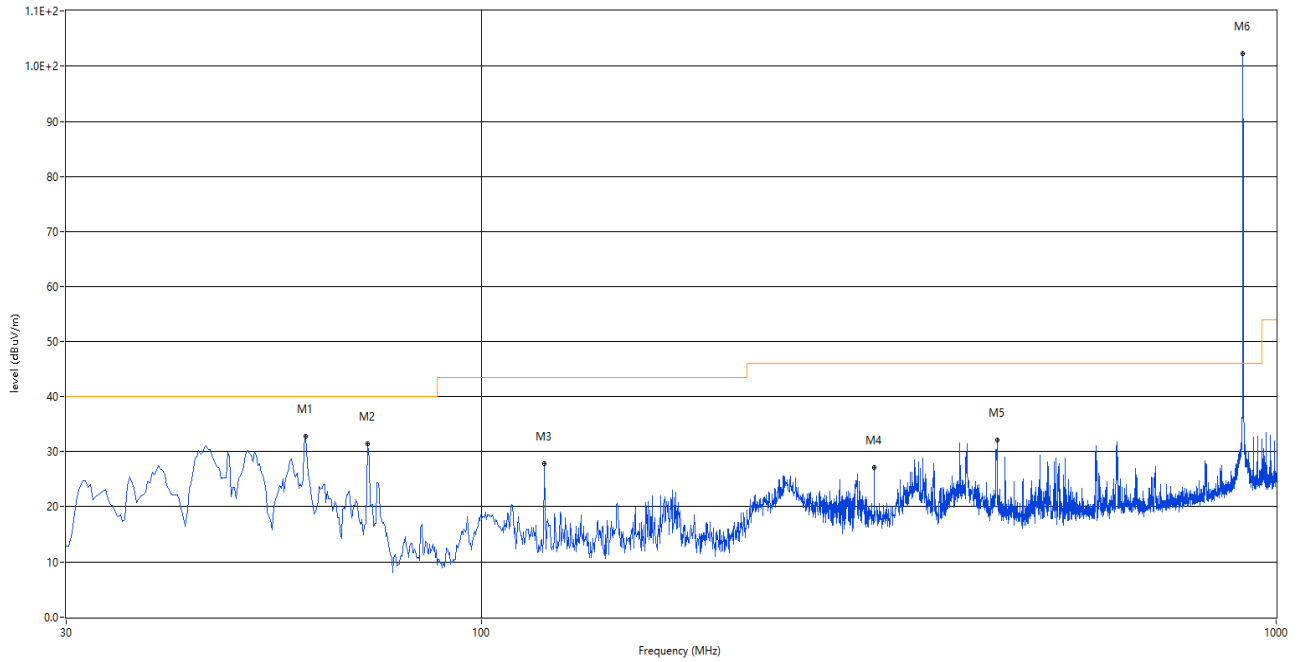

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	60.070	32.71	-27.29	40.0	-7.29	Peak	167.00	100	Vertical	Pass
2	71.952	31.34	-29.27	40.0	-8.66	Peak	360.00	100	Vertical	Pass
3	119.967	27.79	-27.16	43.5	-15.71	Peak	167.00	100	Vertical	Pass
4	312.027	27.03	-24.05	46.0	-18.97	Peak	41.00	100	Vertical	Pass
5	445.645	32.13	-19.86	46.0	-13.87	Peak	167.00	100	Vertical	Pass
6	908.578	102.26	-11.37	46.0	56.26	Peak	117.00	100	Vertical	N/A

MIDDLE CHANNEL, ANT H


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

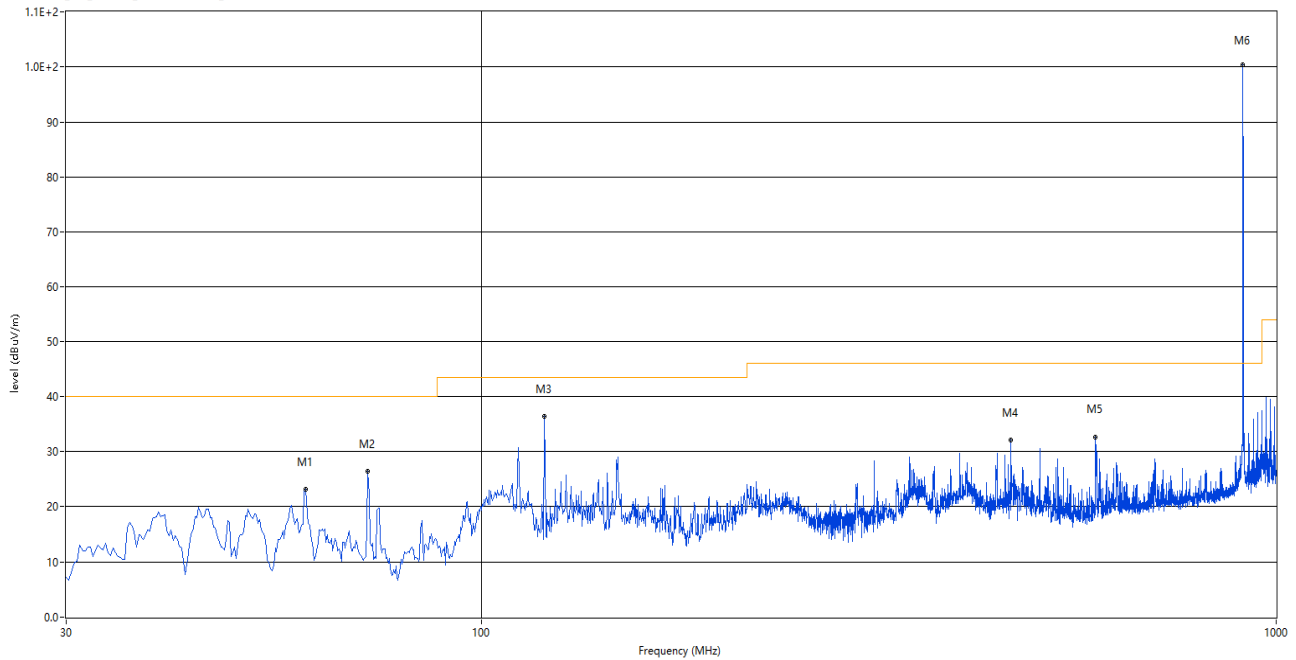

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	60.070	23.23	-27.29	40.0	-16.77	Peak	115.00	100	Horizontal	Pass
2	71.952	26.45	-29.27	40.0	-13.55	Peak	265.00	100	Horizontal	Pass
3	119.967	36.38	-27.16	43.5	-7.12	Peak	189.00	100	Horizontal	Pass
4	463.347	32.12	-19.63	46.0	-13.88	Peak	189.00	100	Horizontal	Pass
5	591.630	32.67	-16.77	46.0	-13.33	Peak	215.00	100	Horizontal	Pass
6	908.335	100.46	-11.37	46.0	54.46	Peak	265.00	100	Horizontal	N/A

HIGH CHANNEL ANT V


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

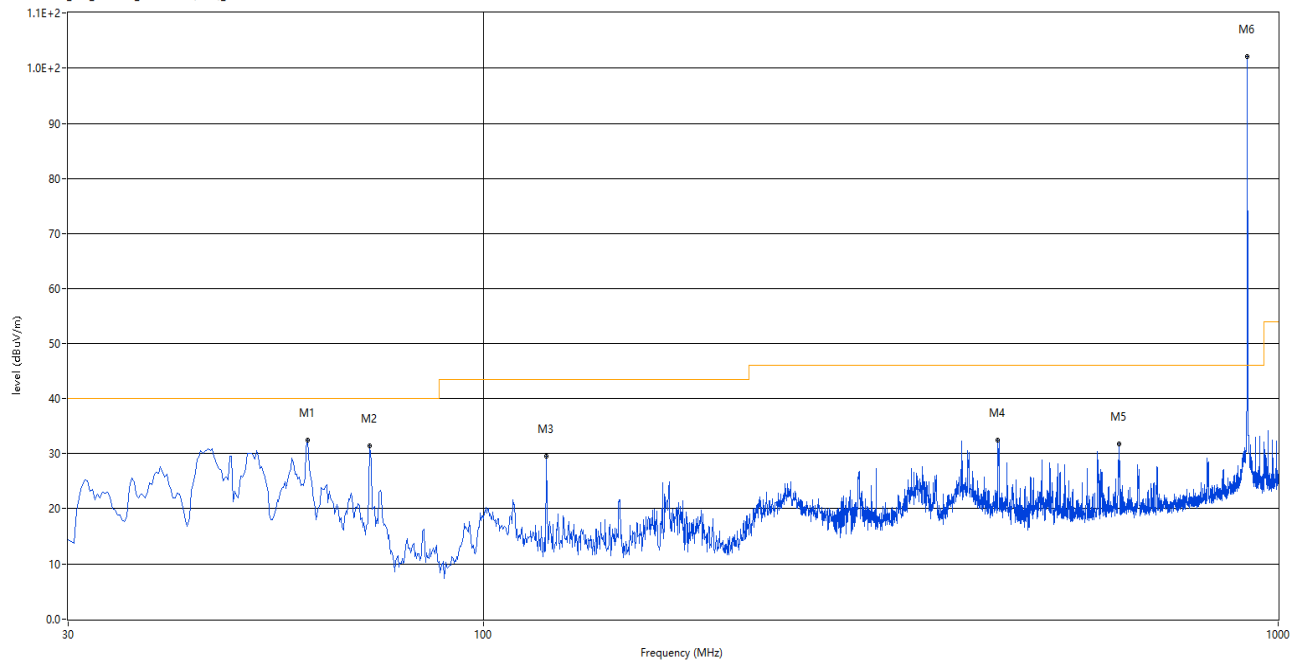

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	60.070	32.41	-27.29	40.0	-7.59	Peak	335.00	100	Vertical	Pass
2	71.952	31.39	-29.27	40.0	-8.61	Peak	-1.00	100	Vertical	Pass
3	119.967	29.44	-27.16	43.5	-14.06	Peak	110.00	100	Vertical	Pass
4	443.948	32.45	-20.01	46.0	-13.55	Peak	187.00	100	Vertical	Pass
5	631.157	31.69	-15.49	46.0	-14.31	Peak	187.00	100	Vertical	Pass
6	914.882	102.10	-11.47	46.0	56.10	Peak	86.00	100	Vertical	N/A

HIGH CHANNEL, ANT H

RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

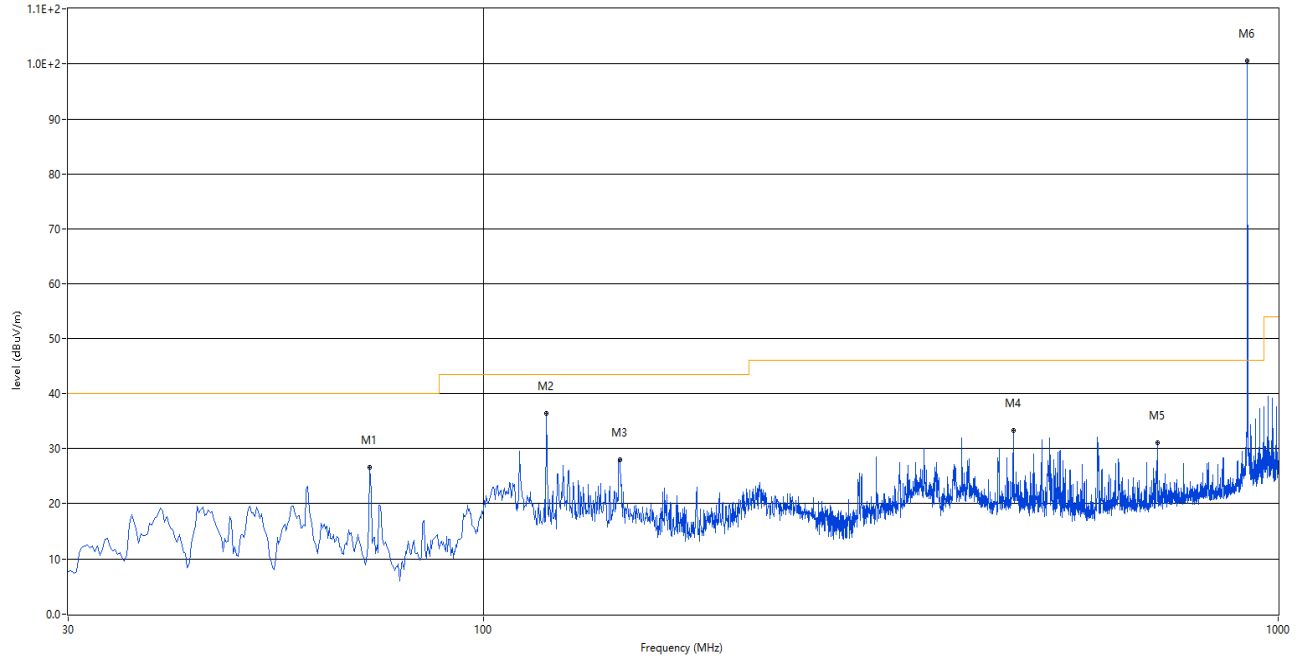


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	71.952	26.65	-29.27	40.0	-13.35	Peak	276.00	100	Horizontal	Pass
2	119.967	36.34	-27.16	43.5	-7.16	Peak	200.00	100	Horizontal	Pass
3	148.340	27.91	-24.91	43.5	-15.59	Peak	326.00	100	Horizontal	Pass
4	464.075	33.32	-19.62	46.0	-12.68	Peak	226.00	100	Horizontal	Pass
5	705.362	31.00	-14.52	46.0	-15.00	Peak	300.00	100	Horizontal	Pass
6	914.882	100.51	-11.47	46.0	54.51	Peak	300.00	100	Horizontal	N/A

500KHz

LOW CHANNEL ANT V


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

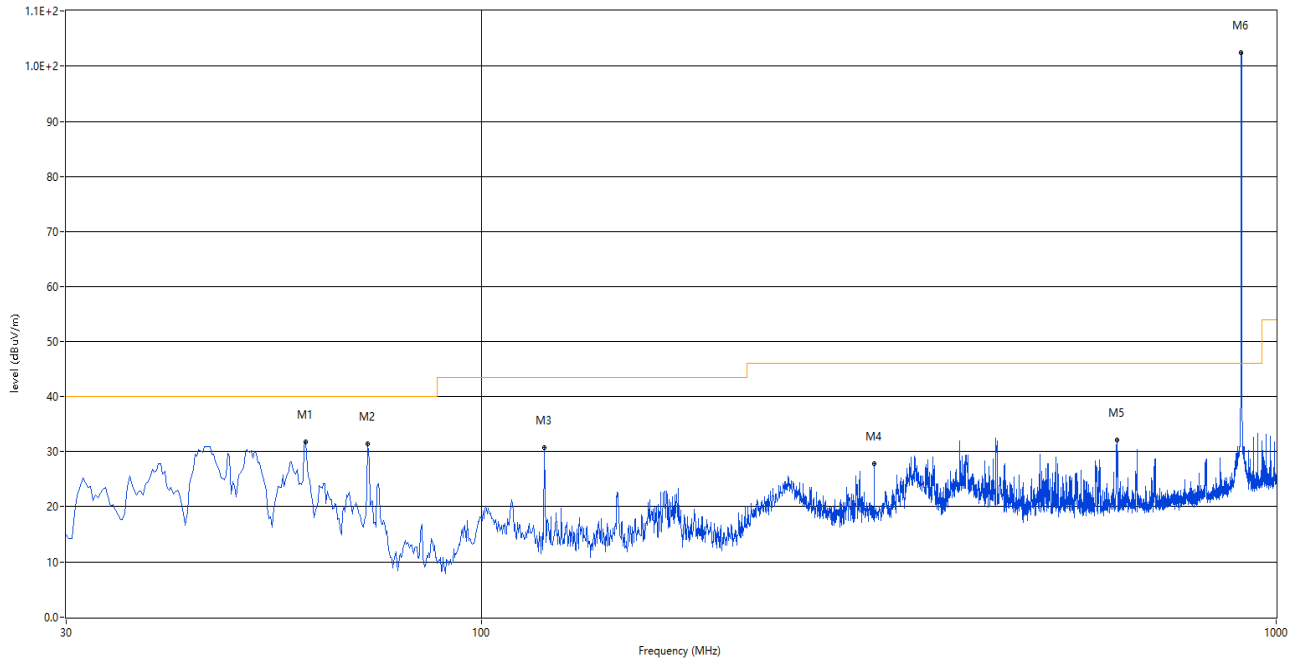

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	60.070	31.76	-27.29	40.0	-8.24	Peak	202.00	100	Vertical	Pass
2	71.952	31.41	-29.27	40.0	-8.59	Peak	0.00	100	Vertical	Pass
3	119.967	30.77	-27.16	43.5	-12.73	Peak	150.00	100	Vertical	Pass
4	312.027	27.79	-24.05	46.0	-18.21	Peak	22.00	100	Vertical	Pass
5	631.157	32.05	-15.49	46.0	-13.95	Peak	227.00	100	Vertical	Pass
6	903.970	102.49	-11.14	46.0	56.49	Peak	125.00	100	Vertical	N/A

LOW CHANNEL, ANT H


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

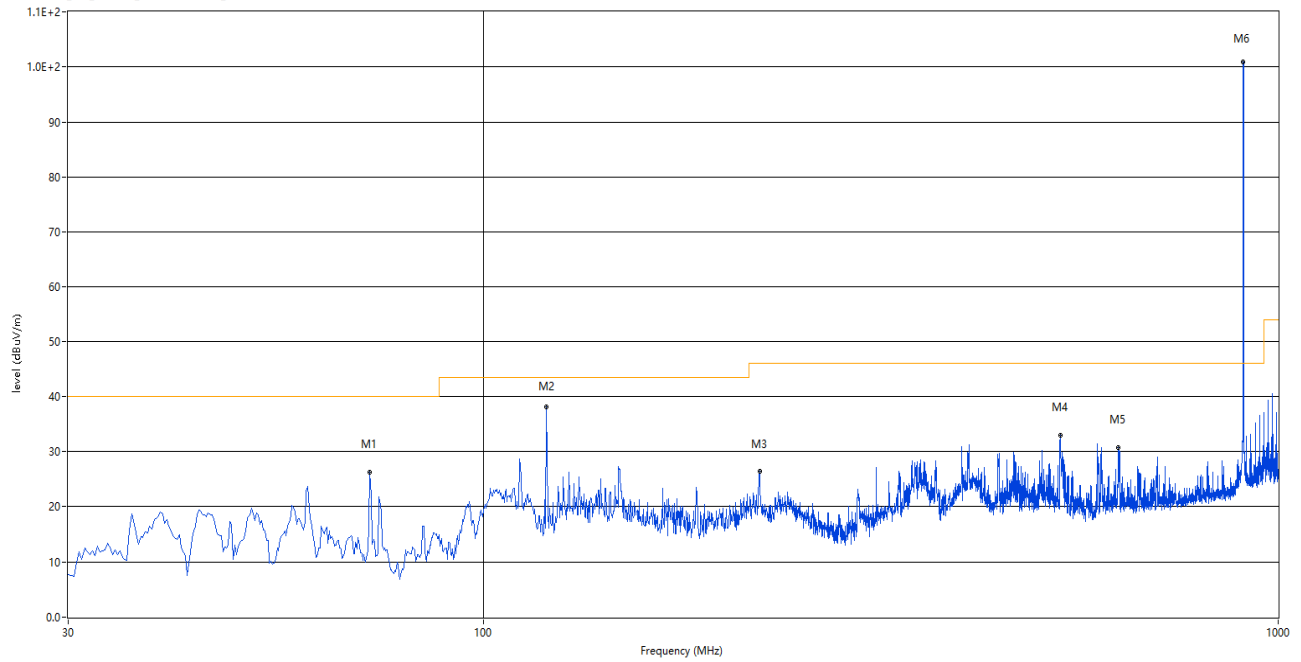

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	71.952	26.34	-29.27	40.0	-13.66	Peak	244.00	100	Horizontal	Pass
2	119.967	38.08	-27.16	43.5	-5.42	Peak	195.00	100	Horizontal	Pass
3	222.545	26.36	-27.29	46.0	-19.64	Peak	161.00	100	Horizontal	Pass
4	531.732	33.01	-17.96	46.0	-12.99	Peak	195.00	100	Horizontal	Pass
5	628.732	30.80	-15.43	46.0	-15.20	Peak	228.00	100	Horizontal	Pass
6	903.727	100.99	-11.14	46.0	54.99	Peak	329.00	100	Horizontal	N/A

MIDDLE CHANNEL ANT V


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

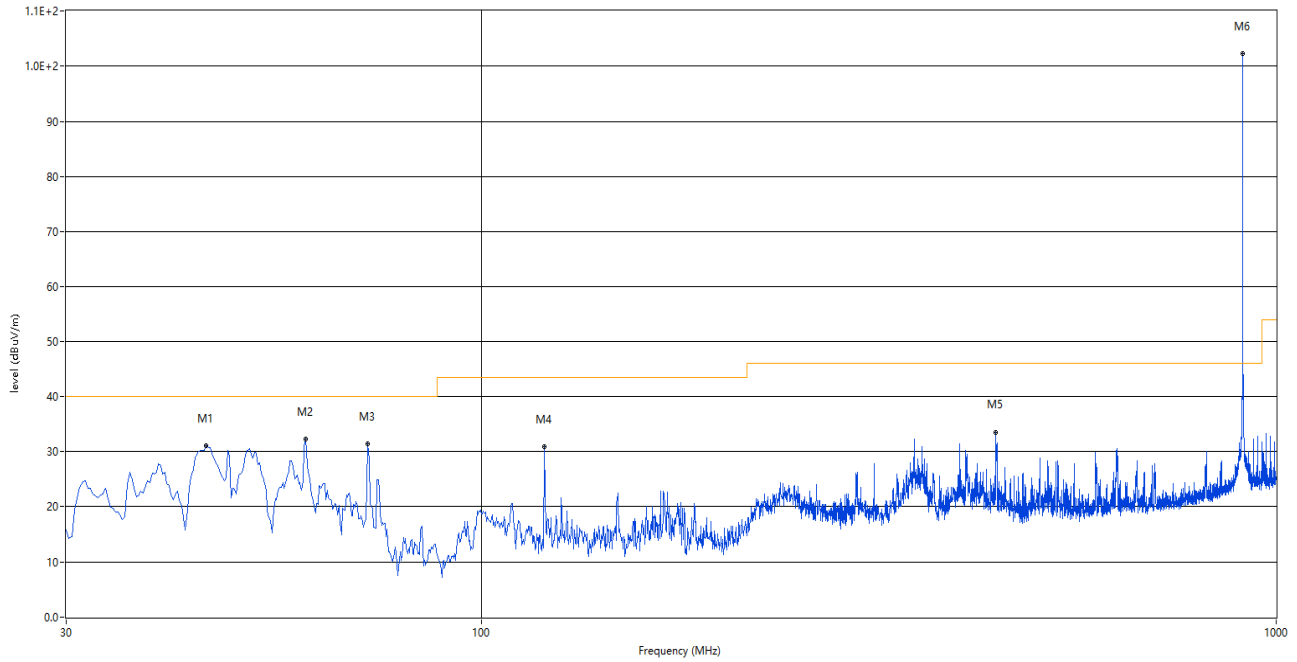

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	45.035	31.11	-26.64	40.0	-8.89	Peak	154.00	100	Vertical	Pass
2	60.070	32.29	-27.29	40.0	-7.71	Peak	207.00	100	Vertical	Pass
3	71.952	31.40	-29.27	40.0	-8.60	Peak	336.00	100	Vertical	Pass
4	119.967	30.94	-27.16	43.5	-12.56	Peak	128.00	100	Vertical	Pass
5	443.948	33.55	-20.01	46.0	-12.45	Peak	154.00	100	Vertical	Pass
6	907.607	102.21	-11.38	46.0	56.21	Peak	77.00	100	Vertical	N/A

MIDDLE CHANNEL, ANT H


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

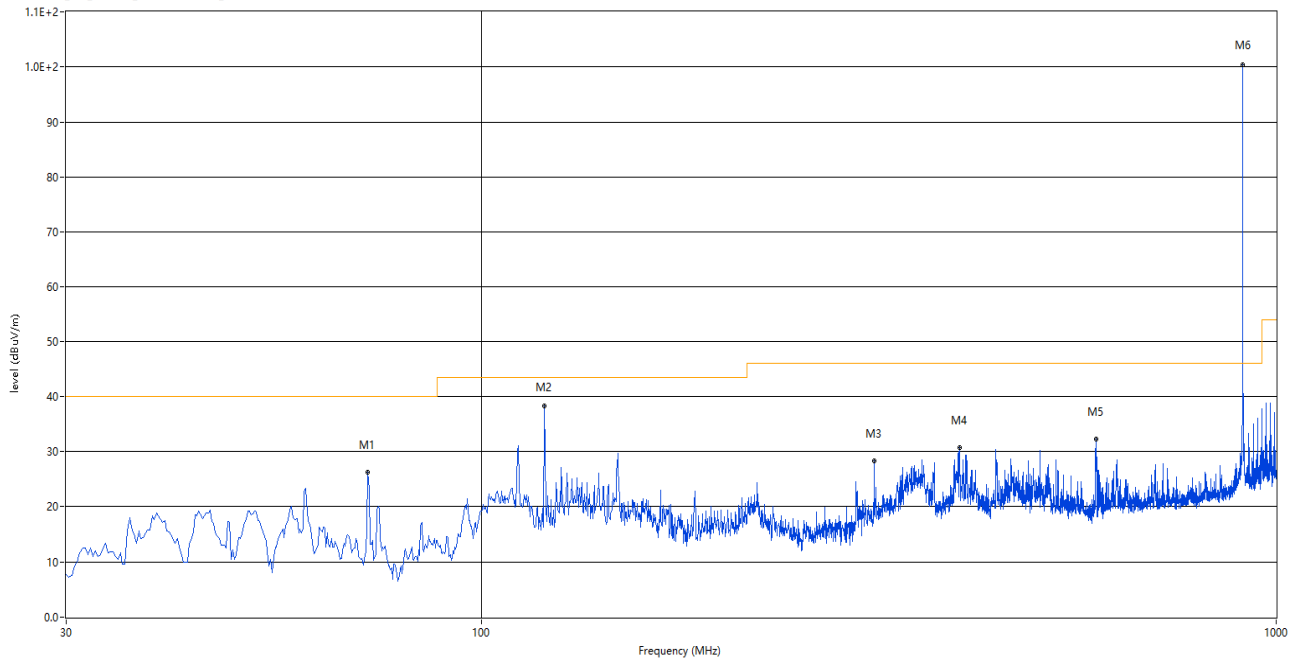

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	71.952	26.23	-29.27	40.0	-13.77	Peak	281.00	100	Horizontal	Pass
2	119.967	38.28	-27.16	43.5	-5.22	Peak	205.00	100	Horizontal	Pass
3	312.027	28.27	-24.05	46.0	-17.73	Peak	230.00	100	Horizontal	Pass
4	400.055	30.64	-21.31	46.0	-15.36	Peak	281.00	100	Horizontal	Pass
5	594.055	32.20	-16.76	46.0	-13.80	Peak	256.00	100	Horizontal	Pass
6	907.850	100.32	-11.38	46.0	54.32	Peak	307.00	100	Horizontal	N/A

HIGH CHANNEL ANT V


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

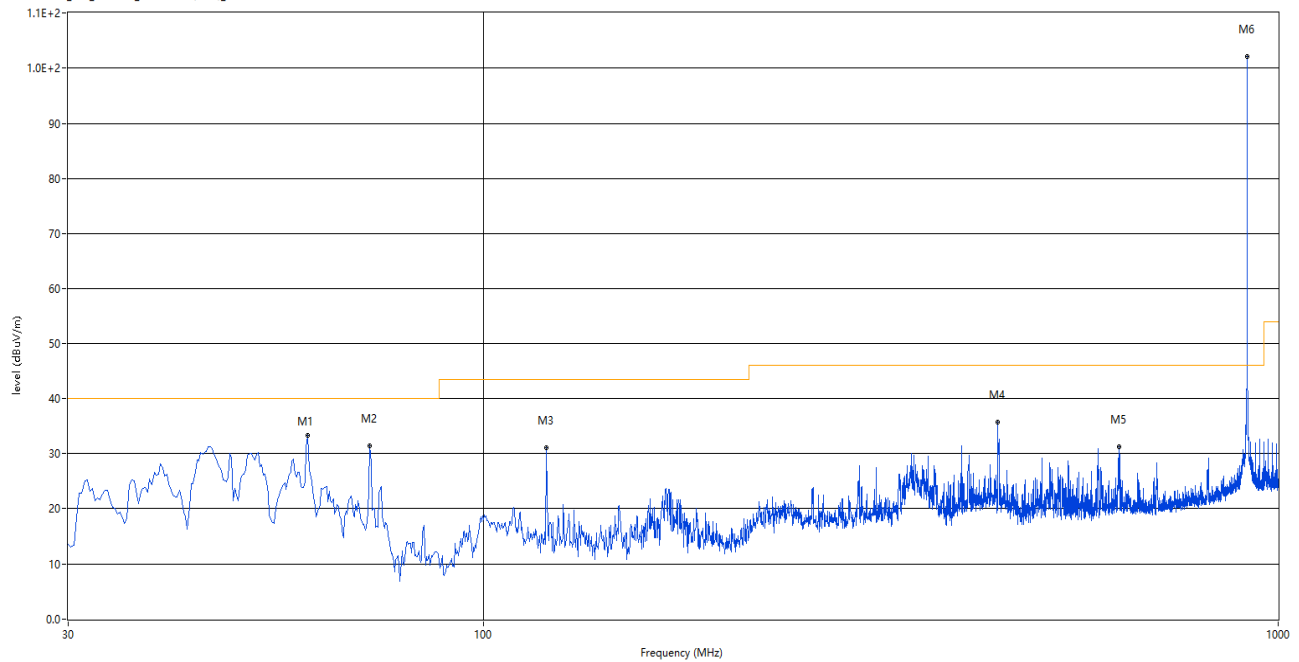

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	60.070	33.33	-27.29	40.0	-6.67	Peak	184.00	100	Vertical	Pass
2	71.952	31.45	-29.27	40.0	-8.55	Peak	1.00	100	Vertical	Pass
3	119.967	31.02	-27.16	43.5	-12.48	Peak	159.00	100	Vertical	Pass
4	443.705	35.67	-20.02	46.0	-10.33	Peak	184.00	100	Vertical	Pass
5	631.157	31.20	-15.49	46.0	-14.80	Peak	237.00	100	Vertical	Pass
6	914.398	102.05	-11.52	46.0	56.05	Peak	159.00	100	Vertical	N/A

HIGH CHANNEL, ANT H

RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

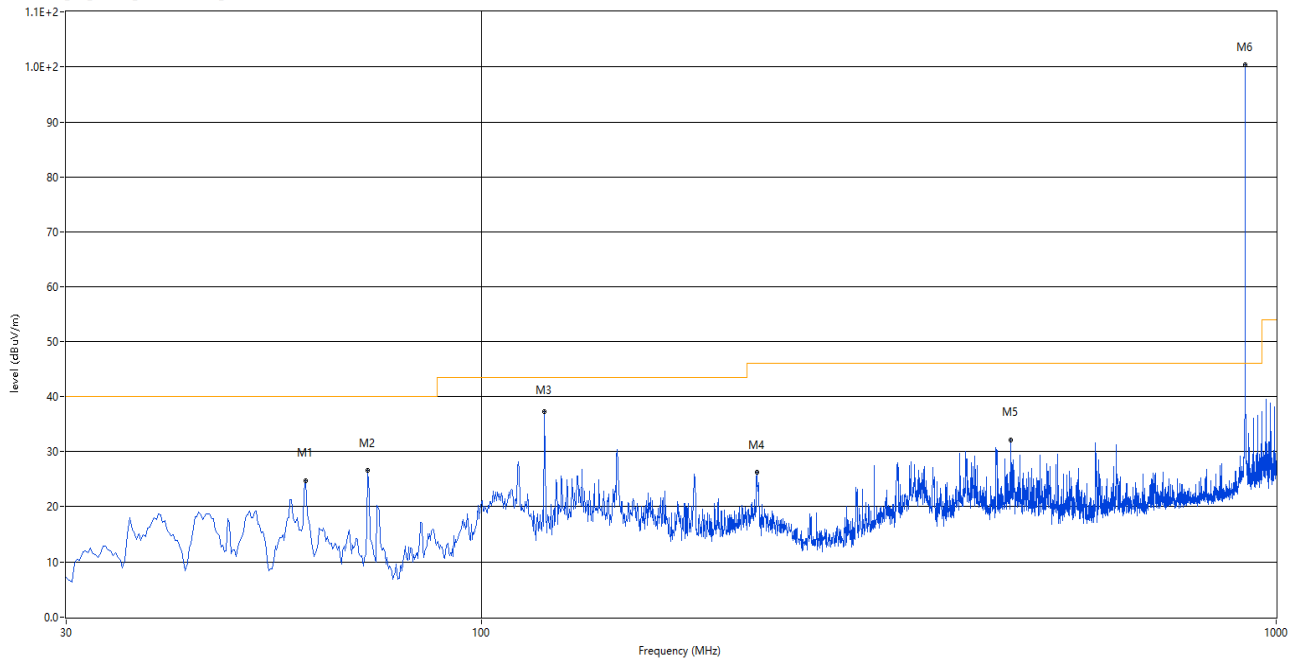

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	60.070	24.78	-27.29	40.0	-15.22	Peak	96.00	100	Horizontal	Pass
2	71.952	26.53	-29.27	40.0	-13.47	Peak	253.00	100	Horizontal	Pass
3	119.967	37.31	-27.16	43.5	-6.19	Peak	200.00	100	Horizontal	Pass
4	222.060	26.26	-27.32	46.0	-19.74	Peak	174.00	100	Horizontal	Pass
5	463.590	32.17	-19.63	46.0	-13.83	Peak	200.00	100	Horizontal	Pass
6	914.155	100.39	-11.55	46.0	54.39	Peak	278.00	100	Horizontal	N/A

125KHz

LOW CHANNEL 1 GHz to 10 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1633.000	29.32	-14.92	54.0	-24.68	AV	57.00	150	Vertical	Pass
1	1633.000	44.45	-14.92	74.0	-29.55	Peak	57.00	150	Vertical	Pass
2**	2124.000	28.55	-12.09	54.0	-25.45	AV	222.00	150	Vertical	Pass
2	2124.000	40.96	-12.09	74.0	-33.04	Peak	222.00	150	Vertical	Pass
3**	3176.000	32.12	-6.46	54.0	-21.88	AV	264.00	150	Vertical	Pass
3	3176.000	43.84	-6.46	74.0	-30.16	Peak	264.00	150	Vertical	Pass
4**	4228.000	34.96	-4.02	54.0	-19.04	AV	91.00	150	Vertical	Pass
4	4228.000	46.23	-4.02	74.0	-27.77	Peak	91.00	150	Vertical	Pass
5**	6986.000	39.34	3.29	54.0	-14.66	AV	309.00	150	Vertical	Pass
5	6986.000	51.32	3.29	74.0	-22.68	Peak	309.00	150	Vertical	Pass
6**	9281.313	35.26	17.91	54.0	-18.74	AV	68.00	150	Vertical	Pass
6	9281.313	50.93	17.91	74.0	-23.07	Peak	68.00	150	Vertical	Pass

LOW CHANNEL 1 GHz to 10 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1663.000	28.47	-15.41	54.0	-25.53	AV	58.00	150	Horizontal	Pass
1	1663.000	44.09	-15.41	74.0	-29.91	Peak	58.00	150	Horizontal	Pass
2**	2347.500	28.79	-10.55	54.0	-25.21	AV	240.00	150	Horizontal	Pass
2	2347.500	40.05	-10.55	74.0	-33.95	Peak	240.00	150	Horizontal	Pass
3**	3723.000	34.14	-4.78	54.0	-19.86	AV	258.00	150	Horizontal	Pass
3	3723.000	44.97	-4.78	74.0	-29.03	Peak	258.00	150	Horizontal	Pass
4**	5699.000	38.55	-0.58	54.0	-15.45	AV	25.00	150	Horizontal	Pass
4	5699.000	49.62	-0.58	74.0	-24.38	Peak	25.00	150	Horizontal	Pass
5**	6907.000	39.20	3.39	54.0	-14.80	AV	241.00	150	Horizontal	Pass
5	6907.000	50.63	3.39	74.0	-23.37	Peak	241.00	150	Horizontal	Pass
6**	9416.438	34.94	18.25	54.0	-19.06	AV	0.00	150	Horizontal	Pass
6	9416.438	51.01	18.25	74.0	-22.99	Peak	0.00	150	Horizontal	Pass

MIDDLE CHANNEL 1 GHz to 10 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1610.500	25.96	-15.46	54.0	-28.04	AV	48.00	150	Vertical	Pass
1	1610.500	43.46	-15.46	74.0	-30.54	Peak	48.00	150	Vertical	Pass
2**	2128.500	29.80	-12.19	54.0	-24.20	AV	261.00	150	Vertical	Pass
2	2128.500	40.49	-12.19	74.0	-33.51	Peak	261.00	150	Vertical	Pass
3**	3143.000	32.81	-7.33	54.0	-21.19	AV	0.00	150	Vertical	Pass
3	3143.000	43.37	-7.33	74.0	-30.63	Peak	0.00	150	Vertical	Pass
4**	4433.000	35.95	-2.89	54.0	-18.05	AV	360.00	150	Vertical	Pass
4	4433.000	46.54	-2.89	74.0	-27.46	Peak	360.00	150	Vertical	Pass
5**	6648.000	39.72	3.79	54.0	-14.28	AV	67.00	150	Vertical	Pass
5	6648.000	51.37	3.79	74.0	-22.63	Peak	67.00	150	Vertical	Pass
6**	9140.437	35.75	18.72	54.0	-18.25	AV	0.00	150	Vertical	Pass
6	9140.437	50.79	18.72	74.0	-23.21	Peak	0.00	150	Vertical	Pass

MIDDLE CHANNEL 1 GHz to 10 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1652.000	26.25	-15.52	54.0	-27.75	AV	64.00	150	Horizontal	Pass
1	1652.000	44.78	-15.52	74.0	-29.22	Peak	64.00	150	Horizontal	Pass
2**	2127.500	31.70	-12.19	54.0	-22.30	AV	214.00	150	Horizontal	Pass
2	2127.500	40.79	-12.19	74.0	-33.21	Peak	214.00	150	Horizontal	Pass
3**	3253.000	31.94	-7.36	54.0	-22.06	AV	174.00	150	Horizontal	Pass
3	3253.000	43.56	-7.36	74.0	-30.44	Peak	174.00	150	Horizontal	Pass
4**	4171.000	34.87	-3.81	54.0	-19.13	AV	252.00	150	Horizontal	Pass
4	4171.000	45.52	-3.81	74.0	-28.48	Peak	252.00	150	Horizontal	Pass
5**	5387.000	38.41	-0.78	54.0	-15.59	AV	110.00	150	Horizontal	Pass
5	5387.000	49.45	-0.78	74.0	-24.55	Peak	110.00	150	Horizontal	Pass
6**	6975.000	40.01	4.22	54.0	-13.99	AV	151.00	150	Horizontal	Pass
6	6975.000	50.64	4.22	74.0	-23.36	Peak	151.00	150	Horizontal	Pass

HIGH CHANNEL 1 GHz to 10 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1428.000	26.40	-15.05	54.0	-27.60	AV	189.00	150	Vertical	Pass
1	1428.000	40.70	-15.05	74.0	-33.30	Peak	189.00	150	Vertical	Pass
2**	1662.000	28.45	-15.44	54.0	-25.55	AV	142.00	150	Vertical	Pass
2	1662.000	42.71	-15.44	74.0	-31.29	Peak	142.00	150	Vertical	Pass
3**	2126.000	31.13	-12.15	54.0	-22.87	AV	338.00	150	Vertical	Pass
3	2126.000	43.40	-12.15	74.0	-30.60	Peak	338.00	150	Vertical	Pass
4**	4105.000	34.47	-4.37	54.0	-19.53	AV	334.00	150	Vertical	Pass
4	4105.000	45.87	-4.37	74.0	-28.13	Peak	334.00	150	Vertical	Pass
5**	6437.000	39.66	2.97	54.0	-14.34	AV	281.00	150	Vertical	Pass
5	6437.000	51.63	2.97	74.0	-22.37	Peak	281.00	150	Vertical	Pass
6**	9264.062	35.91	18.19	54.0	-18.09	AV	217.00	150	Vertical	Pass
6	9264.062	50.87	18.19	74.0	-23.13	Peak	217.00	150	Vertical	Pass

HIGH CHANNEL 1 GHz to 10 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1605.500	33.50	-14.41	54.0	-20.50	AV	57.00	150	Horizontal	Pass
1	1605.500	45.23	-14.41	74.0	-28.77	Peak	57.00	150	Horizontal	Pass
2**	2426.500	29.01	-9.98	54.0	-24.99	AV	231.00	150	Horizontal	Pass
2	2426.500	45.38	-9.98	74.0	-28.62	Peak	231.00	150	Horizontal	Pass
3**	3062.000	32.47	-7.42	54.0	-21.53	AV	-3.00	150	Horizontal	Pass
3	3062.000	43.85	-7.42	74.0	-30.15	Peak	-3.00	150	Horizontal	Pass
4**	4194.000	35.31	-4.32	54.0	-18.69	AV	237.00	150	Horizontal	Pass
4	4194.000	46.47	-4.32	74.0	-27.53	Peak	237.00	150	Horizontal	Pass
5**	5378.000	37.97	-0.54	54.0	-16.03	AV	2.00	150	Horizontal	Pass
5	5378.000	49.06	-0.54	74.0	-24.94	Peak	2.00	150	Horizontal	Pass
6**	7992.250	35.02	18.28	54.0	-18.98	AV	123.00	150	Horizontal	Pass
6	7992.250	50.45	18.28	74.0	-23.55	Peak	123.00	150	Horizontal	Pass

500KHz

LOW CHANNEL 1 GHz to 10 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1672.500	27.17	-14.48	54.0	-26.83	AV	32.00	150	Vertical	Pass
1	1672.500	43.77	-14.48	74.0	-30.23	Peak	32.00	150	Vertical	Pass
2**	2124.000	29.63	-10.98	54.0	-24.37	AV	222.00	150	Vertical	Pass
2	2124.000	41.63	-10.98	74.0	-32.37	Peak	222.00	150	Vertical	Pass
3**	3190.000	32.10	-6.45	54.0	-21.90	AV	143.00	150	Vertical	Pass
3	3190.000	43.61	-6.45	74.0	-30.39	Peak	143.00	150	Vertical	Pass
4**	5242.000	37.27	-0.90	54.0	-16.73	AV	347.00	150	Vertical	Pass
4	5242.000	48.60	-0.90	74.0	-25.40	Peak	347.00	150	Vertical	Pass
5**	6666.000	39.72	4.06	54.0	-14.28	AV	25.00	150	Vertical	Pass
5	6666.000	50.84	4.06	74.0	-23.16	Peak	25.00	150	Vertical	Pass
6**	8797.750	34.16	17.65	54.0	-19.84	AV	142.00	150	Vertical	Pass
6	8797.750	50.85	17.65	74.0	-23.15	Peak	142.00	150	Vertical	Pass

LOW CHANNEL 1 GHz to 10 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1440.000	27.73	-14.24	54.0	-26.27	AV	204.00	150	Horizontal	Pass
1	1440.000	41.50	-14.24	74.0	-32.50	Peak	204.00	150	Horizontal	Pass
2**	2124.000	29.27	-10.98	54.0	-24.73	AV	229.00	150	Horizontal	Pass
2	2124.000	41.50	-10.98	74.0	-32.50	Peak	229.00	150	Horizontal	Pass
3**	3359.000	32.97	-7.51	54.0	-21.03	AV	141.00	150	Horizontal	Pass
3	3359.000	43.23	-7.51	74.0	-30.77	Peak	141.00	150	Horizontal	Pass
4**	4962.000	36.76	-1.77	54.0	-17.24	AV	312.00	150	Horizontal	Pass
4	4962.000	47.42	-1.77	74.0	-26.58	Peak	312.00	150	Horizontal	Pass
5**	6898.000	38.86	3.18	54.0	-15.14	AV	0.00	150	Horizontal	Pass
5	6898.000	50.56	3.18	74.0	-23.44	Peak	0.00	150	Horizontal	Pass
6**	9134.500	35.19	18.56	54.0	-18.81	AV	192.00	150	Horizontal	Pass
6	9134.500	50.87	18.56	74.0	-23.13	Peak	192.00	150	Horizontal	Pass

MIDDLE CHANNEL 1 GHz to 10 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1440.000	26.48	-14.24	54.0	-27.52	AV	247.00	150	Vertical	Pass
1	1440.000	41.57	-14.24	74.0	-32.43	Peak	247.00	150	Vertical	Pass
2**	1661.500	29.55	-14.72	54.0	-24.45	AV	52.00	150	Vertical	Pass
2	1661.500	43.79	-14.72	74.0	-30.21	Peak	52.00	150	Vertical	Pass
3**	2125.000	32.31	-11.06	54.0	-21.69	AV	247.00	150	Vertical	Pass
3	2125.000	43.24	-11.06	74.0	-30.76	Peak	247.00	150	Vertical	Pass
4**	3071.000	33.07	-6.99	54.0	-20.93	AV	2.00	150	Vertical	Pass
4	3071.000	43.48	-6.99	74.0	-30.52	Peak	2.00	150	Vertical	Pass
5**	4989.000	36.92	-1.52	54.0	-17.08	AV	2.00	150	Vertical	Pass
5	4989.000	48.35	-1.52	74.0	-25.65	Peak	2.00	150	Vertical	Pass
6**	8050.750	34.82	18.28	54.0	-19.18	AV	64.00	150	Vertical	Pass
6	8050.750	50.49	18.28	74.0	-23.51	Peak	64.00	150	Vertical	Pass

MIDDLE CHANNEL 1 GHz to 10 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1111.500	26.28	-15.27	54.0	-27.72	AV	260.00	150	Horizontal	Pass
1	1111.500	37.33	-15.27	74.0	-36.67	Peak	260.00	150	Horizontal	Pass
2**	1617.000	27.50	-15.32	54.0	-26.50	AV	57.00	150	Horizontal	Pass
2	1617.000	42.79	-15.32	74.0	-31.21	Peak	57.00	150	Horizontal	Pass
3**	2681.000	29.50	-9.60	54.0	-24.50	AV	66.00	150	Horizontal	Pass
3	2681.000	41.26	-9.60	74.0	-32.74	Peak	66.00	150	Horizontal	Pass
4**	3959.000	33.84	-5.27	54.0	-20.16	AV	57.00	150	Horizontal	Pass
4	3959.000	44.37	-5.27	74.0	-29.63	Peak	57.00	150	Horizontal	Pass
5**	5772.000	38.29	-0.08	54.0	-15.71	AV	216.00	150	Horizontal	Pass
5	5772.000	49.57	-0.08	74.0	-24.43	Peak	216.00	150	Horizontal	Pass
6**	9281.313	35.26	17.91	54.0	-18.74	AV	68.00	150	Horizontal	Pass
6	9281.313	50.93	17.91	74.0	-23.07	Peak	68.00	150	Horizontal	Pass

HIGH CHANNEL 1 GHz to 10 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1428.000	26.25	-14.31	54.0	-27.75	AV	261.00	150	Vertical	Pass
1	1428.000	40.68	-14.31	74.0	-33.32	Peak	261.00	150	Vertical	Pass
2**	1605.500	33.50	-14.41	54.0	-20.50	AV	57.00	150	Vertical	Pass
2	1605.500	45.23	-14.41	74.0	-28.77	Peak	57.00	150	Vertical	Pass
3**	2128.500	32.02	-11.26	54.0	-21.98	AV	231.00	150	Vertical	Pass
3	2128.500	41.55	-11.26	74.0	-32.45	Peak	231.00	150	Vertical	Pass
4**	3062.000	32.47	-7.42	54.0	-21.53	AV	-3.00	150	Vertical	Pass
4	3062.000	43.84	-7.42	74.0	-30.16	Peak	-3.00	150	Vertical	Pass
5**	4935.000	37.11	-1.58	54.0	-16.89	AV	30.00	150	Vertical	Pass
5	4935.000	47.59	-1.58	74.0	-26.41	Peak	30.00	150	Vertical	Pass
6**	7992.250	35.02	18.28	54.0	-18.98	AV	123.00	150	Vertical	Pass
6	7992.250	50.45	18.28	74.0	-23.55	Peak	123.00	150	Vertical	Pass

HIGH CHANNEL 1 GHz to 10 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1440.000	26.48	-14.24	54.0	-27.52	AV	247.00	150	Horizontal	Pass
1	1440.000	41.57	-14.24	74.0	-32.43	Peak	247.00	150	Horizontal	Pass
2**	1678.000	26.90	-14.61	54.0	-27.10	AV	78.00	150	Horizontal	Pass
2	1678.000	42.86	-14.61	74.0	-31.14	Peak	78.00	150	Horizontal	Pass
3**	2894.500	32.12	-7.10	54.0	-21.88	AV	359.00	150	Horizontal	Pass
3	2894.500	43.03	-7.10	74.0	-30.97	Peak	359.00	150	Horizontal	Pass
4**	4176.000	35.30	-3.84	54.0	-18.70	AV	335.00	150	Horizontal	Pass
4	4176.000	45.12	-3.84	74.0	-28.88	Peak	335.00	150	Horizontal	Pass
5**	5381.000	38.18	-0.61	54.0	-15.82	AV	38.00	150	Horizontal	Pass
5	5381.000	48.81	-0.61	74.0	-25.19	Peak	38.00	150	Horizontal	Pass
6**	9141.250	35.19	18.68	54.0	-18.81	AV	293.00	150	Horizontal	Pass
6	9141.250	51.06	18.68	74.0	-22.94	Peak	293.00	150	Horizontal	Pass

A.9 Band Edge (Restricted-band band-edge)

Pass

Note: The adjacent to the restricted frequency band (608-614MHz and 960-1240MHz) is far away the fundamental, it is noise only. Please refer to Section A.8 for test data.

A.10 Power Spectral Density (PSD)


Test Data

500KHz

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	6.32	8	Pass
Middle Channel	6.55	8	Pass
High Channel	6.30	8	Pass


Test plots

LOW CHANNEL

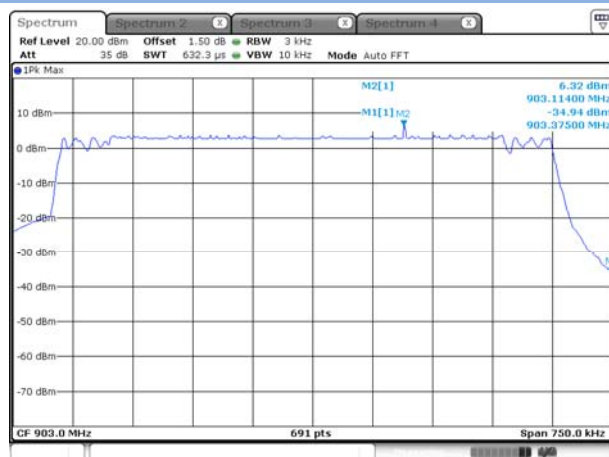


Date: 7 DEC 2018 15:13:02

MIDDLE CHANNEL

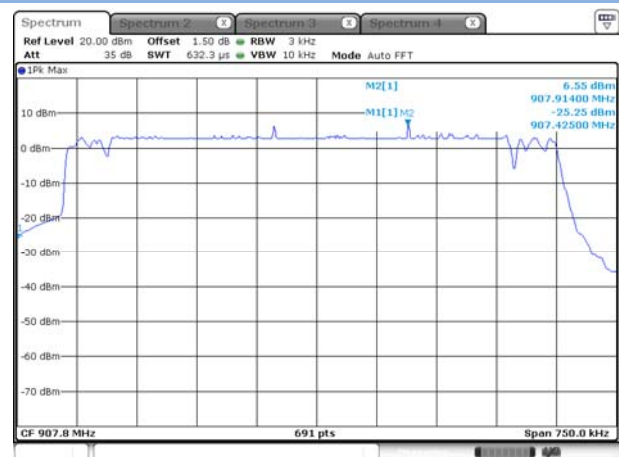

Date: 7 DEC 2018 15:14:18

HIGH CHANNEL

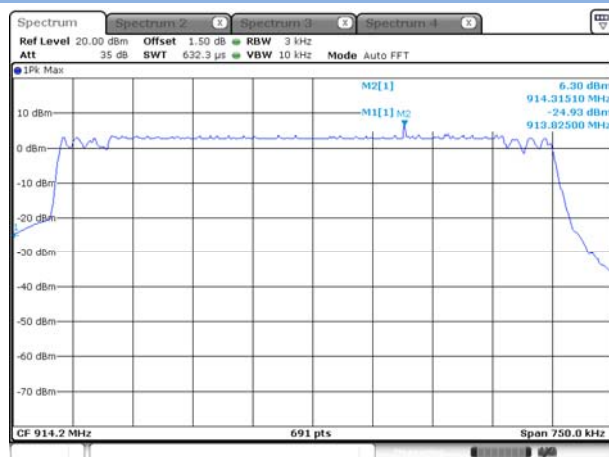

Date: 7 DEC 2018 15:18:56

ANNEX B TEST SETUP PHOTOS

Please refer the document "BL-HK18A0020-AR.PDF".

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document "BL-HK18A0020-AW2.PDF".

ANNEX D EUT INTERNAL PHOTOS

Please refer the document "BL-HK18A0020-AI.PDF".

--END OF REPORT--