

Rev: 01

Page: 1 of 13

Appendix B - DAE & Probe Calibration Certificate

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client SGS (Auden)

Certificate No: DAE4-1336_Aug21

| CALIBRATION | CERTIFICATE | | |
|---|---|--|--|
| Object | DAE4 - SD 000 D | 04 BM - SN: 1336 | |
| Calibration procedure(s) | QA CAL-06.v30 Calibration proceed | dure for the data acquisition elec | ctronics (DAE) |
| Calibration date: | August 20, 2021 | | |
| The measurements and the unce | ertainties with confidence pro | nal standards, which realize the physical uni obability are given on the following pages an | d are part of the certificate. |
| Calibration Equipment used (M& | TE critical for calibration) | facility: environment temperature (22 ± 3)°(| |
| Calibration Equipment used (M& Primary Standards | | facility: environment temperature (22 ± 3)°0 Cal Date (Certificate No.) 07-Sep-20 (No:28647) | Scheduled Calibration Sep-21 |
| Calibration Equipment used (M& Primary Standards Keithley Multimeter Type 2001 | TE critical for calibration) ID # SN: 0810278 | Cal Date (Certificate No.) 07-Sep-20 (No:28647) | Scheduled Calibration Sep-21 |
| Callbration Equipment used (M& Primary Standards Keithley Multimeter Type 2001 Secondary Standards | TE critical for calibration) ID # SN: 0810278 | Cal Date (Certificate No.) 07-Sep-20 (No:28647) Check Date (in house) | Scheduled Calibration Sep-21 Scheduled Check |
| Calibration Equipment used (M& Primary Standards Keithley Multimeter Type 2001 Secondary Standards Auto DAE Calibration Unit | ID # SE UWS 053 AA 1001 | Cal Date (Certificate No.) 07-Sep-20 (No:28647) Check Date (in house) | Scheduled Calibration Sep-21 |
| All calibrations have been condu Calibration Equipment used (M& Primary Standards Keithley Multimeter Type 2001 Secondary Standards Auto DAE Calibration Unit Calibrator Box V2.1 Calibrated by: | ID # SE UWS 053 AA 1001 | Cal Date (Certificate No.) 07-Sep-20 (No:28647) Check Date (in house) 07-Jan-21 (in house check) | Scheduled Calibration Sep-21 Scheduled Check In house check: Jan-22 In house check: Jan-22 |
| Calibration Equipment used (M& Primary Standards Keithley Multimeter Type 2001 Secondary Standards Auto DAE Calibration Unit Calibrator Box V2.1 | ID # SE UWS 053 AA 1001 SE UMS 006 AA 1002 | Cal Date (Certificate No.) 07-Sep-20 (No:28647) Check Date (in house) 07-Jan-21 (in house check) 07-Jan-21 (in house check) | Scheduled Calibration Sep-21 Scheduled Check In house check: Jan-22 In house check: Jan-22 |
| Calibration Equipment used (M& Primary Standards Keithley Multimeter Type 2001 Secondary Standards Auto DAE Calibration Unit Calibrator Box V2.1 | ID # SN: 0810278 ID # SE UWS 053 AA 1001 SE UMS 006 AA 1002 Name Dominique Steffen | Cal Date (Certificate No.) 07-Sep-20 (No:28647) Check Date (in house) 07-Jan-21 (in house check) 07-Jan-21 (in house check) Function Laboratory Technician | Scheduled Calibration Sep-21 Scheduled Check In house check: Jan-22 In house check: Jan-22 |

Certificate No: DAE4-1336_Aug21

Page 1 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,併報告結果僅享到計算之樣品負責,同時什樣品僅保留仍天。木報告未經木公司惠面許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Rev: 01

Page: 2 of 13

Calibration Laboratory of Schmid & Partner Engineering AG eughausstrasse 43, 8004 Zurich, Switzerland





C

Schweizerischer Kalibrierdienst Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates Accreditation No.: SCS 0108

Glossary

DAE data acquisition electronics

Connector angle information used in DASY system to align probe sensor X to the robot

coordinate system.

Methods Applied and Interpretation of Parameters

- DC Voltage Measurement: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- Connector angle: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty
 - DC Voltage Measurement Linearity: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this
 - Common mode sensitivity: Influence of a positive or negative common mode voltage on the differential measurement.
 - Channel separation: Influence of a voltage on the neighbor channels not subject to an
 - AD Converter Values with inputs shorted: Values on the internal AD converter corresponding to zero input voltage
 - Input Offset Measurement: Output voltage and statistical results over a large number of zero voltage measurements.
 - Input Offset Current: Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - Input resistance: Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - Low Battery Alarm Voltage: Typical value for information. Below this voltage, a battery alarm signal is generated.
 - Power consumption: Typical value for information. Supply currents in various operating

Certificate No: DAE4-1336 Aug21

Page 2 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Rev: 01

Page: 3 of 13

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = $6.1\mu V$, full range = -100...+300 mV Low Range: 1LSB = 61nV, full range = -1.....+3mV DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | Х | Υ | Z |
|---------------------|-----------------------|-----------------------|-----------------------|
| High Range | 403.395 ± 0.02% (k=2) | 403,699 ± 0.02% (k=2) | 403.181 ± 0.02% (k=2) |
| Low Range | 3.95140 ± 1.50% (k=2) | 3.98832 ± 1.50% (k=2) | 3.99675 ± 1.50% (k=2) |

Connector Angle

| Connector Angle to be used in DASY system | 337.0 ° ± 1 ° |
|--|---------------|
| Connector Angle to be used in DAG 1 System | 337.U I |

Certificate No: DAE4-1336_Aug21

Page 3 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此數告結果僅對測試之樣品負責,同時此樣品僅保留仍天。本數告未經本公司惠面許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Rev: 01

Page: 4 of 13

Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

| High Range | Reading (μV) | Difference (μV) | Error (%) |
|-------------------|--------------|-----------------|-----------|
| Channel X + Input | 199994.87 | -0.57 | -0.00 |
| Channel X + Input | 20003.04 | 1.02 | 0.01 |
| Channel X - Input | -19999.60 | 2.19 | -0.01 |
| Channel Y + Input | 199994.43 | -0.97 | -0.00 |
| Channel Y + Input | 20000.24 | -1.68 | -0.01 |
| Channel Y - Input | -20003.86 | -1.89 | 0.01 |
| Channel Z | 199996,97 | 1.15 | 0.00 |
| Channel Z + Input | 19999.88 | -1.94 | -0.01 |
| Channel Z - Input | -20003.19 | -1.35 | 0.01 |

| Low Range | Reading (μV) | Difference (µV) | Error (%) |
|-------------------|--------------|-----------------|-----------|
| Channel X + Input | 2001.13 | 0.09 | 0.00 |
| Channel X + Input | 201.77 | 0.46 | 0.23 |
| Channel X - Input | -198.03 | 0.61 | -0.31 |
| Channel Y + Input | 2001.20 | 0.17 | 0.01 |
| Channel Y + Input | 200.67 | -0.66 | -0.33 |
| Channel Y - Input | -199.32 | -0.62 | 0.31 |
| Channel Z + Input | 2001.02 | 0.19 | 0.01 |
| Channel Z + Input | 200.18 | -0.91 | -0.45 |
| Channel Z - Input | -199.41 | -0.56 | 0.28 |

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| | Common mode Input Voltage (mV) | High Range Average Reading (μV) | Low Range Average Reading (μV) |
|-----------|-----------------------------------|------------------------------------|-----------------------------------|
| Channel X | 200 | 6.13 | 5.08 |
| | - 200 | -3.78 | -5.13 |
| Channel Y | 200 | -4.25 | -4.17 |
| | - 200 | 1.79 | 1.85 |
| Channel Z | 200 | 22.60 | 22.64 |
| | - 200 | -24.87 | -24.70 |

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec: Measuring time:

| | Input Voltage (mV) | Channel X (μV) | Channel Y (µV) | Channel Z (μV) |
|-----------|--------------------|----------------|----------------|----------------|
| Channel X | 200 | | 5.23 | -0.98 |
| Channel Y | 200 | 9.11 | 14- | 6,48 |
| Channel Z | 200 | 8.79 | 6.41 | 19 |

Certificate No: DAE4-1336_Aug21

Page 4 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Rev: 01

Page: 5 of 13

4. AD-Converter Values with inputs shorted

| | High Range (LSB) | Low Range (LSB) |
|-----------|------------------|-----------------|
| Channel X | 15667 | 16718 |
| Channel Y | 15908 | 15798 |
| Channel Z | 15845 | 14611 |

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec Input 10MΩ

| | Average (μV) | min. Offset (μV) | max. Offset (μV) | Std, Deviation (µV) |
|-----------|--------------|------------------|------------------|---------------------|
| Channel X | 1.60 | 0.77 | 2.53 | 0.32 |
| Channel Y | -0.38 | -1.24 | 0.77 | 0.34 |
| Channel Z | -0.59 | -1.74 | 0.43 | 0.38 |

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

| | Zeroing (kOhm) | Measuring (MOhm) |
|-----------|----------------|------------------|
| Channel X | 200 | 200 |
| Channel Y | 200 | 200 |
| Channel Z | 200 | 200 |

8. Low Battery Alarm Voltage (Typical values for information)

| Typical values | Alarm Level (VDC) | |
|----------------|-------------------|--|
| Supply (+ Vcc) | +7.9 | |
| Supply (- Vcc) | -7.6 | |

9. Power Consumption (Typical values for information)

| Typical values | Switched off (mA) | Stand by (mA) | Transmitting (mA) |
|----------------|-------------------|---------------|-------------------|
| Supply (+ Vcc) | +0.01 | +6 | +14 |
| Supply (- Vcc) | -0.01 | -8 | -9 |

Certificate No: DAE4-1336_Aug21

Page 5 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Rev: 01

Page: 6 of 13

Calibration Laboratory of Schmid & Partner Engineering AG eughausstrasse 43, 8004 Zurich, Switzerlan





Schweizerischer Kalibrierdienst Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

SGS-TW (Auden)

Certificate No: EX3-7509_Apr21

CALIBRATION CERTIFICATE

EX3DV4 - SN:7509

QA CAL-01.v9, QA CAL-14.v6, QA CAL-23.v5, QA CAL-25.v7 Calibration procedure(s)

Calibration procedure for dosimetric E-field probes

April 26, 2021 Calibration date

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (Si). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certi-

All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70%

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|------------------|-----------------------------------|------------------------|
| Power meter NRP | SN: 104778 | 09-Apr-21 (No. 217-03291/03292) | Apr-22 |
| Power sensor NRP-Z91 | SN: 103244 | 09-Apr-21 (No. 217-03291) | Apr-22 |
| Power sensor NRP-Z91 | SN: 103245 | 09-Apr-21 (No. 217-03292) | Apr-22 |
| Reference 20 dB Attenuator | SN: CC2552 (20x) | 09-Apr-21 (No. 217-03343) | Apr-22 |
| DAE4 | SN: 660 | 23-Dec-20 (No. DAE4-660_Dec20) | Dec-21 |
| Reference Probe ES3DV2 | SN: 3013 | 30-Dec-20 (No. ES3-3013_Dec20) | Dec-21 |
| Secondary Standards | iD | Check Date (in house) | Scheduled Check |
| Power meter E4419B | SN: GB41293874 | 06-Apr-16 (in house check Jun-20) | In house check: Jun-22 |
| Power sensor E4412A | SN: MY41498087 | 06-Apr-16 (in house check Jun-20) | In house check: Jun-22 |
| Power sensor E4412A | SN: 000110210 | 06-Apr-16 (in house check Jun-20) | in house check: Jun-22 |
| RF generator HP 8648C | SN: US3642U01700 | 04-Aug-99 (in house check Jun-20) | In house check: Jun-22 |
| Network Analyzer E8358A | SN: US41080477 | 31-Mar-14 (in house check Oct-20) | In house check: Oct-21 |
| | | | |

| | Name | Function | Signature |
|----------------|----------------|-----------------------|----------------------|
| Calibrated by: | Jeton Kastrati | Laboratory Technician | delle |
| Approved by | Kalja Pokovic | Technical Manager | sees |
| | | | Issued: May 13, 2021 |

Certificate No: EX3-7509_Apr21

Page 1 of 9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format

documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Rev: 01

Page: 7 of 13

April 26, 2021 EX3DV4 - SN.7509

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7509

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|--|----------|----------|----------|-----------|
| Norm (µV/(V/m) ²) ^A | 0.59 | 0.63 | 0.69 | ± 10.1 % |
| DCP (mV) ⁸ | 105.0 | 104.2 | 103.1 | |

Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB√μV | C | D dB | VR mV | Unc (k=2) |
|-----|---------------------------|---|---------|------------|-----|---------|----------|-----------|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 139.5 | ±3.3 % |
| | | Y | 0.0 | 0.0 | 1.0 | | 140.4 | |
| | | 7 | 0.0 | 0.0 | 1.0 | | 129.2 | |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No. EX3-7509 Apr21

Page 3 of 9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

[&]quot;The uncertainties of Norm X,Y,Z do not affect the E*-liefd uncertainty inside TSL (see Page 5)
"Numerical linearization parameter: uncertainty not required.

**Uncertainty is determined using the max, deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Rev: 01

Page: 8 of 13

EX3DV4- SN:7509 April 26, 2021

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7509

Other Probe Parameters

| Sensor Arrangement | Triangular |
|---|------------|
| Connector Angle (°) | -67.4 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 9 mm |
| Tip Diameter | 2.5 mm |
| Probe Tip to Sensor X Calibration Point | 1 mm |
| Probe Tip to Sensor Y Calibration Point | 1 mm |
| Probe Tip to Sensor Z Calibration Point | 1 mm |
| Recommended Measurement Distance from Surface | 1.4 mm |

Note: Measurement distance from surface can be increased to 3-4 mm for an Area Scan job.

Certificate No: EX3-7509_Apr21

Page 4 of 9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,此報告結果僅至剛剛之業品負責,同時此樣品僅是即何天。木報告未經木公司書面許可,不可無份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Rev: 01

Page: 9 of 13

EX3DV4-SN:7509 April 26, 2021

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7509

Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) C | Relative Permittivity | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth (mm) | Unc (k=2) |
|-----------|--------------------------|------------------------------------|---------|---------|---------|--------------------|------------|--------------|
| 750 | 41.9 | 0.89 | 10.29 | 10.29 | 10.29 | 0.42 | 0.96 | ± 12.0 9 |
| 835 | 41.5 | 0.90 | 9.97 | 9.97 | 9.97 | 0.48 | 0.85 | ± 12.0 9 |
| 900 | 41.5 | 0.97 | 9.78 | 9.78 | 9.78 | 0.31 | 1.11 | ± 12.0 9 |
| 1750 | 40.1 | 1,37 | 9.11 | 9.11 | 9.11 | 0.32 | 0.86 | ± 12.0 % |
| 1900 | 40.0 | 1.40 | 8.74 | 8.74 | 8.74 | 0.38 | 0.86 | ± 12.0 9 |
| 2000 | 40.0 | 1.40 | 8.64 | 8.64 | 8.64 | 0.34 | 0.86 | ± 12.0 9 |
| 2300 | 39.5 | 1.67 | 8.31 | 8,31 | 8.31 | 0.28 | 0.90 | ± 12.0 9 |
| 2450 | 39.2 | 1.80 | 8.18 | 8.18 | 8.18 | 0.33 | 0.90 | ± 12.0 9 |
| 2600 | 39.0 | 1.96 | 7.97 | 7.97 | 7.97 | 0.38 | 0.90 | ± 12.0 9 |
| 3300 | 38.2 | 2.71 | 7.40 | 7.40 | 7.40 | 0.30 | 1.35 | ± 13.1 5 |
| 3500 | 37.9 | 2.91 | 7.26 | 7.26 | 7.26 | 0.35 | 1.35 | ± 13.15 |
| 3700 | 37.7 | 3.12 | 7.10 | 7.10 | 7.10 | 0.35 | 1.35 | ± 13.1 9 |
| 3900 | 37.5 | 3.32 | 6.85 | 6.85 | 6.85 | 0.40 | 1.60 | ±13.19 |
| 4100 | 37.2 | 3.53 | 6.70 | 6.70 | 6.70 | 0.40 | 1.60 | ±13.19 |
| 4200 | 37.1 | 3.63 | 6.60 | 6.60 | 6.60 | 0.40 | 1.60 | ± 13.1 |
| 4400 | 36.9 | 3.84 | 6.45 | 6.45 | 6.45 | 0.40 | 1.60 | ±13.19 |
| 4600 | 36,7 | 4.04 | 6.39 | 6.39 | 6.39 | 0.40 | 1.60 | ± 13.1 9 |
| 4800 | 36.4 | 4.25 | 6.42 | 6.42 | 6.42 | 0.45 | 1.80 | ± 13.19 |
| 4950 | 36.3 | 4.40 | 6.21 | 6.21 | 6.21 | 0.40 | 1.80 | ± 13.1 9 |
| 5200 | 36.0 | 4.66 | 5.70 | 5.70 | 5.70 | 0.40 | 1.80 | ± 13.1 9 |
| 5300 | 35.9 | 4.76 | 5,45 | 5,45 | 5.45 | 0.40 | 1.80 | ± 13.1 9 |
| 5600 | 35.5 | 5.07 | 5.10 | 5.10 | 5.10 | 0.40 | 1.80 | ±.13:19 |
| 5800 | 35.3 | 5.27 | 5.20 | 5.20 | 5.20 | 0.40 | 1.80 | ± 13.1.5 |

Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at delibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessment at 30, 64, 126, 150 and 220 MHz respectively. Validity of ConvF assessment at 13 MHz is 4-19 MHz. Above 5 GHz frequency validity are extended to ≥ 110 MHz. In 110 MHz. At frequencies below 3 GHz, the validity of tissue parameters 6, and a) can be released to ≥ 10½ if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz the validity of tissue parameters (and a) is restricted to ≥ 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated larget issue parameters.

Apha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe-liquid dameter from the boundary.

Certificate No: EX3-7509 Apr21

Page 5 of 9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Rev: 01

Page: 10 of 13

EX3DV4- SN:7509 April 26, 2021

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

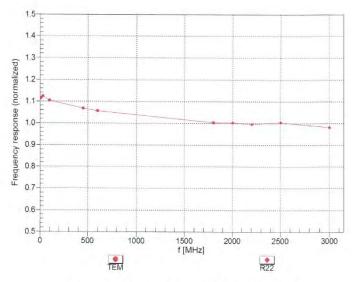

Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

Certificate No: EX3-7509 Apr21

Page 6 of 9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Rev: 01

Page: 11 of 13

EX3DV4- SN:7509 April 26, 2021

Receiving Pattern (ϕ), $\vartheta = 0^{\circ}$

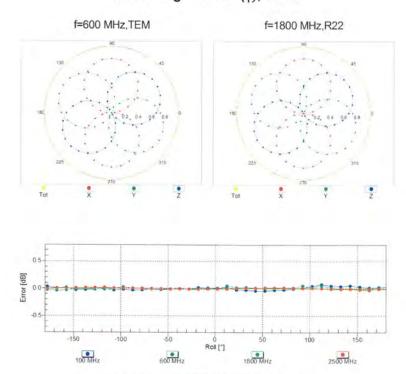

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

Certificate No: EX3-7509_Apr21

Page 7 of 9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law





Rev: 01

Page: 12 of 13

EX3DV4- SN:7509 April 26, 2021

Dynamic Range f(SAR_{head}) (TEM cell , feval= 1900 MHz)





Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Certificate No: EX3-7509_Apr21

Page 8 of 9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law




Rev: 01


Page: 13 of 13

EX3DV4- SN:7509 April 26, 2021

Conversion Factor Assessment

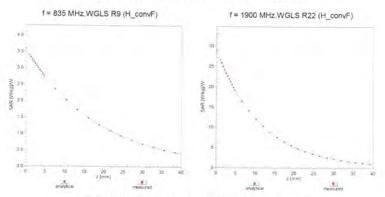

Deviation from Isotropy in Liquid Error (φ, θ), f = 900 MHz



Certificate No: EX3-7509_Apr21

Page 9 of 9

- End of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非见有论明,此都华结里倚影测述之缘是台香,同時件操是倚保留句子。木都华丰德木公司事而纯可,不可驾份推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.