


FCC/MELLON

FEB 08 1999

ENGINEERING TEST REPORT



**VHF/UHF FM MOBILE TRANSCEIVER
MODEL NO.: TFM-500**

FCC ID: IMATFM-500

**FCC PART 2 & PART 90, SUBPART I
RADIO SERVICES FOR COMMERCIAL/INDUSTRIAL USES**

UltraTech's FILE NO.: TIL10FT

Tested for:

TECHNISONIC INDUSTRIES LIMITED

250 Watline Avenue
Mississauga, Ontario
Canada, L4Z 1P4

Tested by:

UltraTech - Group of Labs

4181 Sladeview Crescent, Unit 33
Mississauga, Ontario
Canada L5L 5R2

Report Prepared by: Dan Huynh

DATE: Jan. 25, 1999

UltraTech

33-4181 Sladeview Crescent, Mississauga, Ontario, Canada, L5L 5R2

Telephone (905) 569-2550 Facsimile (905) 569-2480

Web Site: www.ultratech-labs.com Email: vhk.ultratech@sympatico.ca

TABLE OF CONTENTS

1. EXHIBIT 1 – SUMMARY OF TEST RESULTS & GENERAL STATEMENT OF CERTIFICATION	3
2. EXHIBIT 2 - GENERAL INFORMATION.....	5
2.1. APPLICANT	5
2.2. MANUFACTURER	5
2.3. DESCRIPTION OF EQUIPMENT UNDER TESTS.....	5
2.4. RELATED SUBMITTALS)/GRANT	7
2.5. TEST METHODOLOGY.....	7
2.6. TEST FACILITY	7
2.7. UNITS OF MEASUREMENTS.....	7
3. EXHIBIT 3 - SYSTEM TEST CONFIGURATION.....	8
3.1. TEST SYSTEM DETAILS.....	8
3.2. BLOCK DIAGRAMS OF TEST SET-UP	9
3.3. PHOTOGRAPHS FOR TEST SETUP AT OFTS FOR RADIATED EMISSIONS MEASUREMENTS.....	10
3.4. JUSTIFICATION.....	11
3.5. EUT OPERATING CONDITION	11
3.6. SPECIAL ACCESSORIES	11
3.7. EQUIPMENT MODIFICATIONS.....	11
4. EXHIBIT 4 - TEST DATA.....	12
4.1. POWER AND ANTENNA HEIGHT @ FCC 90.205	12
4.2. FREQUENCY STABILITY @ FCC 90.213	14
4.3. AUDIO FREQUENCY RESPONSE @ FCC 2.987(A) & 90.242(B)(8)	24
4.4. MODULATION LIMITING @ FCC 90.210	33
4.5. EMISSION MASKS @ FCC 90.210	42
4.6. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS @ FCC 90.210.....	44
4.7. TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS @ FCC 90.210	49
4.8. TRANSIENT FREQUENCY BEHAVIOR.....	58
5. EXHIBIT 5 - GENERAL TEST PROCEDURES.....	64
5.1. AC POWERLINE CONDUCTED EMISSIONS MEASUREMENTS - GENERAL TEST METHOD.....	64
5.2. ELECTRICAL FIELD RADIATED EMISSIONS MEASUREMENTS - GENERAL TEST METHOD	65
6. EXHIBIT 6 - INFORMATION RELATED TO EQUIPMENT UNDER TESTS.....	68
6.1. FCC ID LABELLING AND SKETCH OF FCC LABEL LOCATION	68
6.2. PHOTOGRAPHS OF EQUIPMENT UNDER TEST	68
6.3. SYSTEM BLOCK DIAGRAM(S).....	68
6.4. SCHEMATIC DIAGRAMS.....	68
6.5. USER'S MANUAL WITH "FCC INFORMATION TO USER STATEMENTS"	68

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

1. EXHIBIT 1 – SUMMARY OF TEST RESULTS & GENERAL STATEMENT OF CERTIFICATION

FCC PARAGRAPH.	TEST REQUIREMENTS	COMPLIANCE (YES/NO)
90.205 & 2.985	RF Power Output	Yes
90.213 & 2.995	Frequency Stability	Yes
90.242(b)(8) & 2.987(a)	Audio Frequency Response	Not applicable to new standard. However, tests are attempted to be done due to FCC's recommendation.
90.210 & 2.987(b)	Modulation Limiting	Yes
90.210 & 2.989	Emission Masks	Yes
90.210, 2.997 & 2.991	Emission Limits - Spurious Emissions at Antenna Terminal	Yes
90.210, 2.997 & 2.993	Emission Limits - Field Strength of Spurious Emissions	Yes
90.214	Transient Frequency Behavior	Yes

VHF/UHF FM MOBILE TRANSCEIVER, Model No.: TFM-500, by TECHNISONIC INDUSTRIES LIMITED has also been tested and found to comply with **FCC Part 15, Subpart B - Radio Receivers and Class A Digital Devices**. The engineering test report has been documented and kept in file and it is available anytime upon FCC request.

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

TESTIMONIAL AND STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY:

- 1) *THAT the application was prepared either by, or under the direct supervision of the undersigned.*
- 2) *THAT the measurement data supplied with the application was taken under my direction and supervision.*
- 3) *THAT the data was obtained on representative production units, representative.*
- 4) *THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.*

Certified by:


Tri Minh Luu, P. Eng.
V.P., Engineering

DATE: Jan. 25, 1999

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2

Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

2. EXHIBIT 2 - GENERAL INFORMATION

2.1. APPLICANT

TECHNISONIC INDUSTRIES LIMITED
250 Watline Avenue
Mississauga, Ontario
Canada, L4Z 1P4

Applicant's Representative: Mr. Steve McIntosh

2.2. MANUFACTURER

TECHNISONIC INDUSTRIES LIMITED
250 Watline Avenue
Mississauga, Ontario
Canada, L4Z 1P4

2.3. DESCRIPTION OF EQUIPMENT UNDER TESTS

PRODUCT NAME:	VHF/UHF FM MOBILE TRANSCEIVER
MODEL NO.:	TFM-500
SERIAL NUMBER:	Pre-production
TYPE OF EQUIPMENT:	Radio Services Transmitters
SERVICES AREAS:	Commercial/Industrial
OPERATING FREQ.:	138-174 MHz and 403-512 MHz
CHANNEL SPACINGS	12.5 kHz and 25 kHz
POWER RATING:	10 Watts max.
OUTPUT IMPEDANCE:	50 Ohms
DUTY CYCLE:	Continuous
99% BANDWIDTH:	13.8 kHz (for 25 kHz Channeling) and 9.8 kHz (12.5 kHz Channeling)
EMISSION DESIGNATION:	9K8F3E and 13K8F3E

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-669-2550, Fax. #: 905-669-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

(i) For FM Voice Modulation:

- Channel Spacing = 12.5 kHz and 25 kHz, D = 1.9 KHz max. measured, K = 1, M = 3 KHz
 $B_n = 2M + 2DK = 2(3) + 2(1.9)(1) = \underline{9.8 \text{ KHz}}$
emission designation: 9K8F3E
- Channel Spacing = 25 kHz and 25 kHz, D = 3.9 KHz max. measured, K = 1, M = 3 KHz
 $B_n = 2M + 2DK = 2(3) + 2(3.9)(1) = \underline{13.8 \text{ KHz}}$
emission designation: 13K8F3E

INPUT SUPPLY: 28 Vdc

ASSOCIATED DEVICES: N/A

FCC ID: IMATFM-500

INTERFACE PORTS: (1) UHF RF IN/OUT (BNC)
(2) VHF RF IN/OUT (BNC)
(3) DB9 Port

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2

Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

2.4. RELATED SUBMITTALS)/GRANT

Not applicable

2.5. TEST METHODOLOGY

These tests were conducted on a sample of the equipment for the purpose of certification compliance with Code of Federal Regulations, Parts 2 & 90, Subpart I, Radio Services Operating in the Frequency Bands 138-174 MHz and 403-512 MHz.

Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 - American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

2.6. TEST FACILITY

AC Powerline Conducted Emissions were performed in UltraTech's shielded room, 16'(L) by 12'(W) by 12'(H).

Radiated Emissions were performed at the Ultratech's 3 Meter Open Field Test Site (OFTS) situated in the Town of Oakville, province of Ontario.

The above sites have been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville Open Field Test Site has been filed with FCC office (FCC File No.: 31040/SIT 1300B3) and Industry Canada office (Industry Canada File No.: IC2049). Last Date of Site Calibration: September 20, 1998.

The above test site is also filed with Interference Technology International Ltd (ITI - An EC Directive on EMC).

2.7. UNITS OF MEASUREMENTS

Measurements of conducted emissions are reported in units of dB referenced to one microvolt [dB(uV)].

Measurements of radiated emissions are reported in units of dB referenced to one microvolt per meter [dB(uV)/m] at the distance specified in the report, wherever it is applicable.

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

3. EXHIBIT 3 - SYSTEM TEST CONFIGURATION

3.1. TEST SYSTEM DETAILS

The following peripherals, FCC identifiers and types interconnecting cables were used with the EUT for testing:

- (1) **EUT:** TECHNISONIC INDUSTRIES LIMITED, VHF/UHF FM MOBILE TRANSCEIVER, Model : TFM-500,
RF Cable: Shielded
Power Supply Cable: Non-shielded
- (2) **TEST JIG:** Technisonic Test Jig for Voice Radio Transmitter and Receivers


ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

3.2. BLOCK DIAGRAMS OF TEST SET-UP

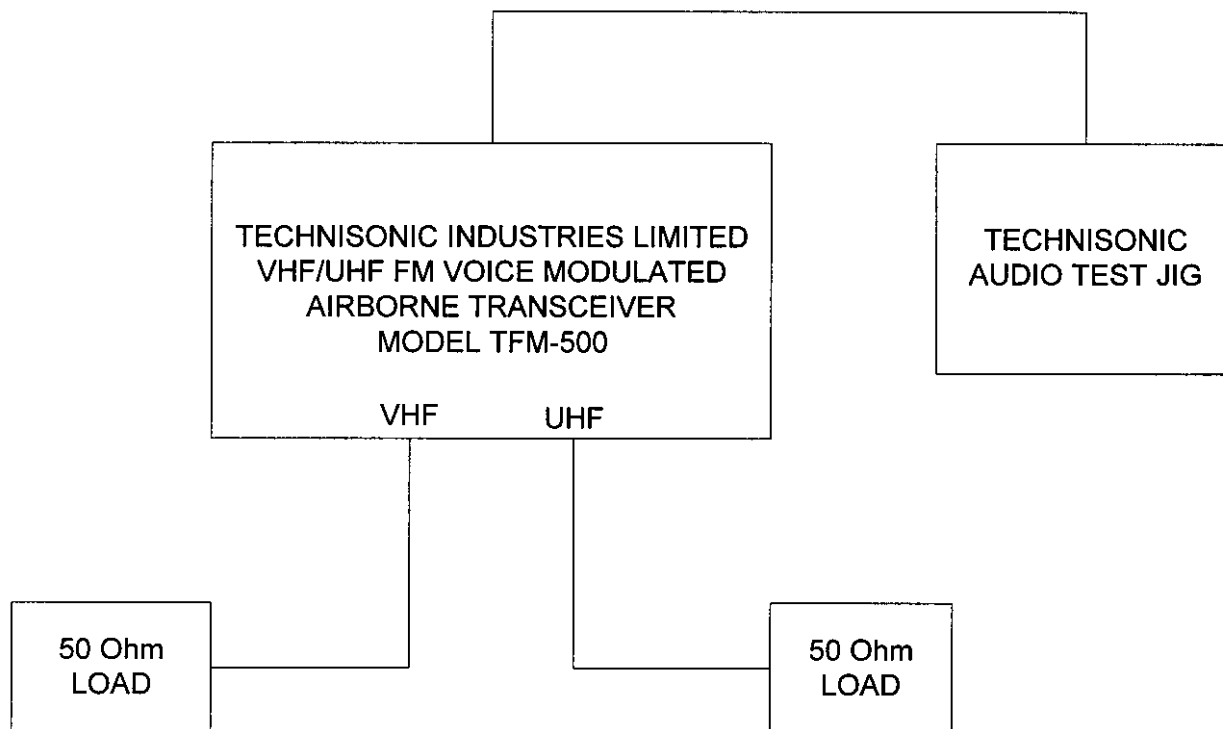

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2

Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

3.4. JUSTIFICATION

No deviation, in both configuration and operation manners, different from normal operation were required.

3.5. EUT OPERATING CONDITION

Transmitter was turned on continuously for testing. The transmitter's carrier was modulated with modulating signal as mentioned in the test data.

3.6. SPECIAL ACCESSORIES

No special accessories were required.

3.7. EQUIPMENT MODIFICATIONS

Not required.

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

4. EXHIBIT 4 - TEST DATA

4.1. POWER AND ANTENNA HEIGHT @ FCC 90.205

PRODUCT NAME: VHF/UHF FM MOBILE TRANSCEIVER,
Model No.: TFM-500

FCC REQUIREMENTS:

FCC Part 90, Para. 90.205:- Please refer to FCC CFR 47, Part 80 to End, Para. 90.205 for specification details.

CLIMATE CONDITION:

Standard Temperature and Humidity:

- Ambient temperature: 21 °C
- Relative humidity: 43%

POWER INPUT:

28 Vdc.

TEST EQUIPMENT:


- Advantest Spectrum Analyzer, Model R3271, S/N: 15050203
- Bird Attenuator, 50 Ohm IN/OUT

METHOD OF MEASUREMENTS:

Refer to FCC @ 2.985

- (a) For transmitter other than single sideband, independent sideband and controlled carrier radiotelephone, power rf output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of the current and voltage on the circuit elements specified in 2.983(d)(5). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

TEST ARRANGEMENT



TEST RESULTS: Conforms.

TESTED PERSONNEL: Hung Trinh, RFI Technician

DATE: January 12, 1999

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

MEASUREMENT DATA

PEAK POWER MEASUREMENT AT THE ANTENNA TERMINAL

TEST CONFIGURATION

- The transmitter terminal was coupled to the Spectrum Analyzer through a 30 dB attenuator
- Power of the transmitter channel near the lowest, middle and highest of each frequency block/band were measured using the power meter, and the reading was corrected by added the calibrated attenuator's attenuation value and cable loss.
- The RF Output was turned on with no modulation.

TRANSMITTER CHANNEL OUTPUT	FUNDAMENTAL FREQUENCY (MHz)	MEASURED PEAK POWER (Watts)	PEAK POWER RATING (Watts)
--	138.000	10	10
--	150.000	10	10
--	174.000	10	10
--	406.125	10	10
--	450.000	10	10
--	470.000	10	10

ERP Measurements: -Appropriate antenna type, and adjustment of power output for effective radiated power (ERP) to meet FCC limits will be performed by the manufacturer at location of installation.

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

4.2. FREQUENCY STABILITY @ FCC 90.213

PRODUCT NAME: VHF/UHF FM MOBILE TRANSCEIVER,
Model No.: TFM-500

FCC REQUIREMENTS:

FCC Part 90, Sub. I, Para. 90.213

The carrier frequency of each transmitter shall be maintained within the following tolerances from the assigned frequencies.

FREQUENCY RANGE (MHz)	FIXED & BASE STATIONS (ppm)			MOBILE STATIONS (ppm)					
				> 2 W			≤ 2 W		
	6.25 kHz	12.5 kHz	25 kHz	6.25 kHz	12.5 kHz	25 kHz	6.25 kHz	12.5 kHz	25 kHz
150 – 174 MHz	1.0	2.5	5.0	2.0	5.0	5.0	2.0	5.0	*50.0
403 – 512 MHz	0.5	1.5	2.5	1.0	2.5	5.0	1.0	2.5	5.0

* Stations operating in the 154.45 to 154.49 MHz or the 173.2 to 173.4 MHz bands must have a frequency stability of 5ppm.

CLIMATE CONDITION:

Standard Temperature and Humidity: Please refer to Measurement Data

POWER INPUT:

28 Vdc.

TEST EQUIPMENT:

- Advantest Spectrum Analyzer, Model R3271, S/N: 15050203
- Tenney Temp. & Humidity Chamber, Model T5, S/N: 9723B
- Bird Attenuator, 50 Ohm IN/OUT

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999


- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

METHOD OF MEASUREMENTS:

Refer to FCC @ 2.995

- (a) The frequency stability shall be measured with variation of ambient temperature as follows:
- From -30 to +50 centigrade except that specified in subparagraph (2) & (3) of this paragraph.
- (b) Frequency measurements shall be made at extremes of the specified temperature range and at intervals of not more than 10 centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stability circuitry need be subjected to the temperature variation test.
- (d) The frequency stability supply shall be measured with variation of primary supply voltage as follows:
- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
 - (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
 - (3) The supply voltage shall be measured at the input to the cable normally provide with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.
- (e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) and (d) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment).

TEST ARRANGEMENT

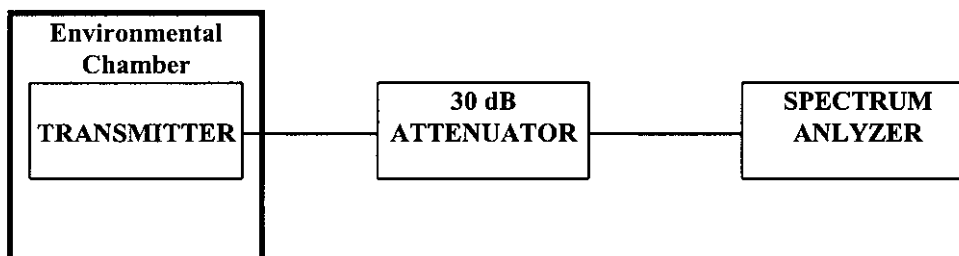

TEST RESULTS: Conforms.

TESTED PERSONNEL: Hung Trinh, RFI Technician

DATE: January 18, 1999

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

MEASUREMENT DATA

FREQUENCY STABILITY

TEST CONFIGURATION

- The transmitter was placed inside the environmental chamber, and its output terminal was coupled to the Spectrum Analyzer through a 30 dB attenuator.
- One transmitter channel frequency was tested.
- The DUT was supplied by a variable power supply.
- The environmental chamber was cycled down to -30° C. When the chamber reaches -30° C, the EUT was powered on with the nominal voltage level, with the transmitter keyed off. The terminal remained in the chamber at -30° C for a period of 1 hour. After 1 hour the transmitter was continuously keyed on, at full power. The transmitter frequency of the terminal was measured from the spectrum analyzer every minute for a period of 10 minutes.
- After 10 minutes the variable power supply was adjusted to supply the EUT with voltage of 85% nominal voltage level and measurement was repeated.
- After 10 minutes the variable power supply was adjusted to supply the EUT with voltage of 115% nominal voltage level and measurement was repeated.
- When the measurement complete, the transmitter was keyed off and the chamber was cycled up to 10° C steps. The EUT remained powered up (unkeyed) at -20° C for a minimum period of 1 hour, after which the measurements will be made as outlined above.
- The above was repeated for -10, 0, 20, 30, 40 and 50 degrees Celsius.

Product Name	VHF/UHF FM MOBILE TRANSCEIVER
Model No.	TFM-500
Center Frequency	138 MHz
Full Power Level	10 Watts
Frequency Tolerance Limit	690 Hz or 0.0005 % @ 138 MHz
Max. Frequency Tolerance Measured	217 Hz or 0.00016% @ 138 MHz
Base/Mobile/Portable	-30 to +50 degree C, 85% to 115%

AMBIENT TEMP. (°C)	KEYED-ON TIME (Minutes)	CENTRE FREQUENCY & RF POWER OUTPUT VARIATION					
		Supply Voltage (Nominal) 28 Volts dc		Supply Voltage (85% of Nominal) 23.8 Volts dc		Supply Voltage (115% of Nominal) 32.2 Volts dc	
		Hz	dB	Hz	dB	Hz	dB
-30	0	-106	N/A	N/A	N/A	N/A	N/A
	1	-99	N/A	N/A	N/A	N/A	N/A
	2	-113	N/A	N/A	N/A	N/A	N/A
	3	-99	N/A	N/A	N/A	N/A	N/A
	4	-106	N/A	N/A	N/A	N/A	N/A
	5	-99	N/A	N/A	N/A	N/A	N/A
	6	-92	N/A	N/A	N/A	N/A	N/A
	7	-106	N/A	N/A	N/A	N/A	N/A
	8	-99	N/A	N/A	N/A	N/A	N/A
	9	-106	N/A	N/A	N/A	N/A	N/A
	10	-99	N/A	N/A	N/A	N/A	N/A

Continued..

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

AMBIENT TEMP. (°C)	KEYED-ON TIME (Minutes)	CENTRE FREQUENCY & RF POWER OUTPUT VARIATION					
		Supply Voltage (Nominal) 28 Volts dc		Supply Voltage (85% of Nominal) 23.8 Volts dc		Supply Voltage (115% of Nominal) 32.2 Volts dc	
		Hz	dB	Hz	dB	Hz	dB
-20	0	-49	N/A	N/A	N/A	N/A	N/A
	1	-42	N/A	N/A	N/A	N/A	N/A
	2	-56	N/A	N/A	N/A	N/A	N/A
	3	-49	N/A	N/A	N/A	N/A	N/A
	4	-42	N/A	N/A	N/A	N/A	N/A
	5	-56	N/A	N/A	N/A	N/A	N/A
	6	-42	N/A	N/A	N/A	N/A	N/A
	7	-35	N/A	N/A	N/A	N/A	N/A
	8	-35	N/A	N/A	N/A	N/A	N/A
	9	-42	N/A	N/A	N/A	N/A	N/A
	10	-27	N/A	N/A	N/A	N/A	N/A
-10	0	151	N/A	N/A	N/A	N/A	N/A
	1	137	N/A	N/A	N/A	N/A	N/A
	2	158	N/A	N/A	N/A	N/A	N/A
	3	151	N/A	N/A	N/A	N/A	N/A
	4	151	N/A	N/A	N/A	N/A	N/A
	5	144	N/A	N/A	N/A	N/A	N/A
	6	151	N/A	N/A	N/A	N/A	N/A
	7	144	N/A	N/A	N/A	N/A	N/A
	8	158	N/A	N/A	N/A	N/A	N/A
	9	151	N/A	N/A	N/A	N/A	N/A
	10	144	N/A	N/A	N/A	N/A	N/A
0	0	151	N/A	N/A	N/A	N/A	N/A
	1	165	N/A	N/A	N/A	N/A	N/A
	2	151	N/A	N/A	N/A	N/A	N/A
	3	158	N/A	N/A	N/A	N/A	N/A
	4	165	N/A	N/A	N/A	N/A	N/A
	5	151	N/A	N/A	N/A	N/A	N/A
	6	158	N/A	N/A	N/A	N/A	N/A
	7	165	N/A	N/A	N/A	N/A	N/A
	8	173	N/A	N/A	N/A	N/A	N/A
	9	158	N/A	N/A	N/A	N/A	N/A
	10	173	N/A	N/A	N/A	N/A	N/A

Continued..

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

AMBIENT TEMP. (°C)	KEYED-ON TIME (Minutes)	CENTRE FREQUENCY & RF POWER OUTPUT VARIATION					
		Supply Voltage (Nominal) 28 Volts dc		Supply Voltage (85% of Nominal) 23.8 Volts dc		Supply Voltage (115% of Nominal) 32.2 Volts dc	
		Hz	dB	Hz	dB	Hz	dB
+10	0	201	N/A	N/A	N/A	N/A	N/A
	1	187	N/A	N/A	N/A	N/A	N/A
	2	201	N/A	N/A	N/A	N/A	N/A
	3	208	N/A	N/A	N/A	N/A	N/A
	4	201	N/A	N/A	N/A	N/A	N/A
	5	194	N/A	N/A	N/A	N/A	N/A
	6	208	N/A	N/A	N/A	N/A	N/A
	7	201	N/A	N/A	N/A	N/A	N/A
	8	194	N/A	N/A	N/A	N/A	N/A
	9	187	N/A	N/A	N/A	N/A	N/A
	10	208	N/A	N/A	N/A	N/A	N/A
+25	0	0	0	134	-3.4	137	-0.9
	1	0	0	144	-3.4	137	-0.9
	2	0	0	151	-3.4	144	-0.9
	3	-17	0	137	-3.4	123	-0.9
	4	-5	0	144	-3.4	130	-0.9
	5	-8	0	151	-3.4	123	-0.9
	6	-5	0	144	-3.4	130	-0.9
	7	-8	0	151	-3.4	115	-0.9
	8	-11	0	144	-3.4	108	-0.9
	9	-5	0	158	-3.4	101	-0.9
	10	-8	0	151	-3.4	101	-0.9
+30	0	51	N/A	N/A	N/A	N/A	N/A
	1	43	N/A	N/A	N/A	N/A	N/A
	2	46	N/A	N/A	N/A	N/A	N/A
	3	51	N/A	N/A	N/A	N/A	N/A
	4	43	N/A	N/A	N/A	N/A	N/A
	5	46	N/A	N/A	N/A	N/A	N/A
	6	34	N/A	N/A	N/A	N/A	N/A
	7	31	N/A	N/A	N/A	N/A	N/A
	8	29	N/A	N/A	N/A	N/A	N/A
	9	37	N/A	N/A	N/A	N/A	N/A
	10	26	N/A	N/A	N/A	N/A	N/A

Continued..

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

AMBIENT TEMP. (°C)	KEYED-ON TIME (Minutes)	CENTRE FREQUENCY & RF POWER OUTPUT VARIATION					
		Supply Voltage (Nominal) 28 Volts dc		Supply Voltage (85% of Nominal) 23.8 Volts dc		Supply Voltage (115% of Nominal) 32.2 Volts dc	
		Hz	dB	Hz	dB	Hz	dB
+40	0	-29	N/A	N/A	N/A	N/A	N/A
	1	-34	N/A	N/A	N/A	N/A	N/A
	2	-40	N/A	N/A	N/A	N/A	N/A
	3	-40	N/A	N/A	N/A	N/A	N/A
	4	-31	N/A	N/A	N/A	N/A	N/A
	5	-43	N/A	N/A	N/A	N/A	N/A
	6	-57	N/A	N/A	N/A	N/A	N/A
	7	-49	N/A	N/A	N/A	N/A	N/A
	8	-43	N/A	N/A	N/A	N/A	N/A
	9	-51	N/A	N/A	N/A	N/A	N/A
	10	-63	N/A	N/A	N/A	N/A	N/A
+50	0	-180	N/A	N/A	N/A	N/A	N/A
	1	-186	N/A	N/A	N/A	N/A	N/A
	2	-180	N/A	N/A	N/A	N/A	N/A
	3	-194	N/A	N/A	N/A	N/A	N/A
	4	-197	N/A	N/A	N/A	N/A	N/A
	5	-200	N/A	N/A	N/A	N/A	N/A
	6	-197	N/A	N/A	N/A	N/A	N/A
	7	-211	N/A	N/A	N/A	N/A	N/A
	8	-217	N/A	N/A	N/A	N/A	N/A
	9	-211	N/A	N/A	N/A	N/A	N/A
	10	-217	N/A	N/A	N/A	N/A	N/A

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Product Name	VHF/UHF FM MOBILE TRANSCEIVER
Model No.	MODEL NO.: TFM-500
Centre Frequency	406.125 MHz
Full Power Level	10 Watts
Frequency Tolerance Limit	1015 Hz or 0.00025% @ 406.125 MHz
Max. Frequency Tolerance Measured	842 Hz or 0.00021% @ 406.125 MHz
Base/Mobile/Portable	-30 to +50 degree C, 85% to 115%

		CENTRE FREQUENCY & RF POWER OUTPUT VARIATION					
AMBIENT TEMP. (°C)	KEYED-ON TIME (Minutes)	Supply Voltage (Nominal) 28 Volts dc		Supply Voltage (85% of Nominal) 23.8 Volts dc		Supply Voltage (115% of Nominal) 32.2 Volts dc	
		Hz	dB	Hz	dB	Hz	dB
-30	0	-834	N/A	N/A	N/A	N/A	N/A
	1	-832	N/A	N/A	N/A	N/A	N/A
	2	-834	N/A	N/A	N/A	N/A	N/A
	3	-827	N/A	N/A	N/A	N/A	N/A
	4	-820	N/A	N/A	N/A	N/A	N/A
	5	-834	N/A	N/A	N/A	N/A	N/A
	6	-842	N/A	N/A	N/A	N/A	N/A
	7	-842	N/A	N/A	N/A	N/A	N/A
	8	-834	N/A	N/A	N/A	N/A	N/A
	9	-827	N/A	N/A	N/A	N/A	N/A
	10	-842	N/A	N/A	N/A	N/A	N/A
-20	0	-499	N/A	N/A	N/A	N/A	N/A
	1	-492	N/A	N/A	N/A	N/A	N/A
	2	-482	N/A	N/A	N/A	N/A	N/A
	3	-484	N/A	N/A	N/A	N/A	N/A
	4	-499	N/A	N/A	N/A	N/A	N/A
	5	-477	N/A	N/A	N/A	N/A	N/A
	6	-470	N/A	N/A	N/A	N/A	N/A
	7	-463	N/A	N/A	N/A	N/A	N/A
	8	-463	N/A	N/A	N/A	N/A	N/A
	9	-442	N/A	N/A	N/A	N/A	N/A
	10	-442	N/A	N/A	N/A	N/A	N/A

Continued..

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

AMBIENT TEMP. (°C)	KEYED-ON TIME (Minutes)	CENTRE FREQUENCY & RF POWER OUTPUT VARIATION					
		Supply Voltage (Nominal) Volts		Supply Voltage (85% of Nominal) Volts		Supply Voltage (115% of Nominal) Volts	
		Hz	dB	Hz	dB	Hz	dB
-10	0	15	N/A	N/A	N/A	N/A	N/A
	1	8	N/A	N/A	N/A	N/A	N/A
	2	15	N/A	N/A	N/A	N/A	N/A
	3	23	N/A	N/A	N/A	N/A	N/A
	4	-6	N/A	N/A	N/A	N/A	N/A
	5	30	N/A	N/A	N/A	N/A	N/A
	6	23	N/A	N/A	N/A	N/A	N/A
	7	30	N/A	N/A	N/A	N/A	N/A
	8	23	N/A	N/A	N/A	N/A	N/A
	9	30	N/A	N/A	N/A	N/A	N/A
	10	44	N/A	N/A	N/A	N/A	N/A
0	0	237	N/A	N/A	N/A	N/A	N/A
	1	244	N/A	N/A	N/A	N/A	N/A
	2	250	N/A	N/A	N/A	N/A	N/A
	3	244	N/A	N/A	N/A	N/A	N/A
	4	230	N/A	N/A	N/A	N/A	N/A
	5	230	N/A	N/A	N/A	N/A	N/A
	6	244	N/A	N/A	N/A	N/A	N/A
	7	237	N/A	N/A	N/A	N/A	N/A
	8	244	N/A	N/A	N/A	N/A	N/A
	9	230	N/A	N/A	N/A	N/A	N/A
	10	237	N/A	N/A	N/A	N/A	N/A
+10	0	237	N/A	N/A	N/A	N/A	N/A
	1	208	N/A	N/A	N/A	N/A	N/A
	2	215	N/A	N/A	N/A	N/A	N/A
	3	230	N/A	N/A	N/A	N/A	N/A
	4	208	N/A	N/A	N/A	N/A	N/A
	5	223	N/A	N/A	N/A	N/A	N/A
	6	230	N/A	N/A	N/A	N/A	N/A
	7	244	N/A	N/A	N/A	N/A	N/A
	8	251	N/A	N/A	N/A	N/A	N/A
	9	258	N/A	N/A	N/A	N/A	N/A
	10	244	N/A	N/A	N/A	N/A	N/A

Continued..

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

AMBIENT TEMP. (°C)	KEYED-ON TIME (Minutes)	CENTRE FREQUENCY & RF POWER OUTPUT VARIATION					
		Supply Voltage (Nominal) 28 Volts dc		Supply Voltage (85% of Nominal) 23.8 Volts dc		Supply Voltage (115% of Nominal) 32.2 Volts dc	
		Hz	dB	Hz	dB	Hz	dB
+25	0	0	-0.2	-13	-0.8	273	-0.8
	1	-11	-0.2	-20	-0.8	265	-0.8
	2	-26	-0.3	8	-0.8	258	-0.8
	3	-34	-0.3	65	-0.8	265	-0.8
	4	-29	-0.3	80	-0.8	258	-0.8
	5	-37	-0.3	87	-0.8	265	-0.8
	6	-31	-0.3	94	-0.8	258	-0.8
	7	-37	-0.3	108	-0.8	251	-0.8
	8	-34	-0.3	123	-0.8	258	-0.8
	9	-40	-0.3	137	-0.8	251	-0.8
	10	-43	-0.3	144	-0.8	244	-0.8
+30	0	60	N/A	N/A	N/A	N/A	N/A
	1	57	N/A	N/A	N/A	N/A	N/A
	2	49	N/A	N/A	N/A	N/A	N/A
	3	46	N/A	N/A	N/A	N/A	N/A
	4	43	N/A	N/A	N/A	N/A	N/A
	5	37	N/A	N/A	N/A	N/A	N/A
	6	31	N/A	N/A	N/A	N/A	N/A
	7	26	N/A	N/A	N/A	N/A	N/A
	8	23	N/A	N/A	N/A	N/A	N/A
	9	17	N/A	N/A	N/A	N/A	N/A
	10	3	N/A	N/A	N/A	N/A	N/A
+40	0	-157	N/A	N/A	N/A	N/A	N/A
	1	-163	N/A	N/A	N/A	N/A	N/A
	2	-167	N/A	N/A	N/A	N/A	N/A
	3	-166	N/A	N/A	N/A	N/A	N/A
	4	-160	N/A	N/A	N/A	N/A	N/A
	5	-163	N/A	N/A	N/A	N/A	N/A
	6	-166	N/A	N/A	N/A	N/A	N/A
	7	-177	N/A	N/A	N/A	N/A	N/A
	8	-183	N/A	N/A	N/A	N/A	N/A
	9	-186	N/A	N/A	N/A	N/A	N/A
	10	-189	N/A	N/A	N/A	N/A	N/A

Continued..

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

AMBIENT TEMP. (°C)	KEYED-ON TIME (Minutes)	CENTRE FREQUENCY & RF POWER OUTPUT VARIATION					
		Supply Voltage (Nominal) 28 Volts dc		Supply Voltage (85% of Nominal) 23.8 Volts dc		Supply Voltage (115% of Nominal) 32.2 Volts dc	
		Hz	dB	Hz	dB	Hz	dB
+50	0	-369	N/A	N/A	N/A	N/A	N/A
	1	-377	N/A	N/A	N/A	N/A	N/A
	2	-371	N/A	N/A	N/A	N/A	N/A
	3	-380	N/A	N/A	N/A	N/A	N/A
	4	-403	N/A	N/A	N/A	N/A	N/A
	5	-409	N/A	N/A	N/A	N/A	N/A
	6	-414	N/A	N/A	N/A	N/A	N/A
	7	-423	N/A	N/A	N/A	N/A	N/A
	8	-426	N/A	N/A	N/A	N/A	N/A
	9	-431	N/A	N/A	N/A	N/A	N/A
	10	-443	N/A	N/A	N/A	N/A	N/A

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2

Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

4.3. AUDIO FREQUENCY RESPONSE @ FCC 2.987(A) & 90.242(B)(8)

PRODUCT NAME: VHF/UHF FM MOBILE TRANSCEIVER,
Model No.: TFM-500

FCC REQUIREMENTS:

FCC Part 2, Sub. J, Para. 2.987(a) & 90.242(b)(8)

No longer required by FCC. However, FCC recommends the Audio Frequency Response to be tested to observe the roll-off curve at 3 kHz.

The attenuation of lowpass filter between the frequencies of 3 KHz and 20 KHz shall be greater than the attenuation at 1KHz by at least: $60\text{Log}_{10}(f/3)$ decibels where "f" is the frequency in KHz. At frequency above 20 KHz, the attenuation shall be 50 dB greater than the attenuation at 1 KHz.

CLIMATE CONDITION:

Standard Temperature and Humidity:

- Ambient temperature: 21 °C
- Relative humidity: 43%

POWER INPUT:

28 Vdc.


TEST EQUIPMENT:

- Audio Oscillator, HP, Model 204C, OUT FREQ.: 0-1.2 MHz, S/N: 0989A08798
- FFT (Audio) Spectrum Analyzer, Advantest, Model R9211E, Input Impedance: 1M-Ohms, Freq. Range: 10 mHz - 100 kHz.

METHOD OF MEASUREMENTS:

The rated audio input signal was applied to the input of the audio lowpass filter (or of all modulation stages) using an audio oscillator, this input signal level and its corresponding output signal of audio lowpass filter (or of all modulation stages) were then measured and recorded using the FFT (Audio) spectrum analyzer. Tests were repeated at different audio signal frequencies from 0 to 50 kHz.

TEST ARRANGEMENT

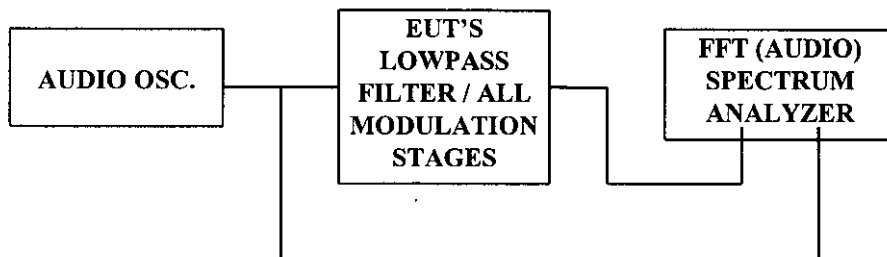

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

TEST RESULTS: Conforms.

TESTED PERSONNEL: Hung Trinh, RFI Technician

DATE: January 20, 1999

MEASUREMENT DATA

AUDIO FREQUENCY RESPONSE OF ALL MODULATION STATES

Carrier Frequency: 138 MHz

Channel Spacing: 12.5 kHz

FREQUENCY (kHz)	AUDIO IN (dBV)	AUDIO OUT (dBV)	ATTEN. (OUT - IN) (dB)	ATTEN. Wrt. 1kHz (dB)	RSS-119, ISSUE 5, SEC. 6.6 TABLE 4 LIMIT (dB)	PASS/ FAIL
0.10	-16.0	<-50.0	<-34.0	<-35.0	0.0	NO LIMIT
0.20	-16.2	-57.0	-40.8	-41.8	0.0	NO LIMIT
0.40	-16.2	-50.0	-33.8	-34.8	0.0	NO LIMIT
0.60	-16.3	-47.0	-30.7	-31.7	0.0	NO LIMIT
0.80	-16.2	-44.5	-28.3	-29.3	0.0	NO LIMIT
1.00	-16.6	-42.9	-26.3	-27.3	0.0	NO LIMIT
2.00	-16.3	-37.5	-21.2	-22.2	0.0	NO LIMIT
3.00	-16.2	-37.2	-21.0	-22.0	0.0	NO LIMIT
3.50	-16.9	-38.6	-21.7	-22.7	-6.7	NO LIMIT
4.00	-16.2	-39.4	-23.2	-24.2	-12.5	NO LIMIT
4.50	-16.9	-42.1	-25.2	-26.2	-17.6	NO LIMIT
5.00	-16.9	-43.4	-26.5	-27.5	-22.2	NO LIMIT
6.00	-16.9	-46.8	-29.9	-30.9	-30.1	NO LIMIT
7.00	-16.5	-49.5	-33.0	-34.0	-36.8	NO LIMIT
8.00	-16.9	-52.9	-36.0	-37.0	-42.6	NO LIMIT
9.00	-16.3	-55.3	-39.0	-40.0	-47.7	NO LIMIT
10.00	-16.3	-57.8	-41.5	-42.5	-52.3	NO LIMIT
12.00	-16.6	-63.1	-46.5	-47.5	-60.2	NO LIMIT
14.00	-16.9	-100.0	-100.0	-100.0	-66.9	NO LIMIT
16.00	-16.9	-100.0	-100.0	-100.0	-72.7	NO LIMIT
18.00	-16.5	-100.0	-100.0	-100.0	-77.8	NO LIMIT
20.00	-16.5	-100.0	-100.0	-100.0	-82.4	NO LIMIT
25.00	-16.3	-100.0	-100.0	-100.0	-82.4	NO LIMIT
30.00	-16.7	-100.0	-100.0	-100.0	-82.4	NO LIMIT
35.00	-16.7	-100.0	-100.0	-100.0	-82.4	NO LIMIT
40.00	-16.6	-100.0	-100.0	-100.0	-82.4	NO LIMIT
45.00	-16.4	-100.0	-100.0	-100.0	-82.4	NO LIMIT
50.00	-16.9	-100.0	-100.0	-100.0	-82.4	NO LIMIT

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2


Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

AUDIO FREQUENCY RESPONSE
(12.5 kHz Channel Spacing)
TECHNISONIC TFM-500 VHF TRANSCEIVER
Carrier Frequency: 138 MHz

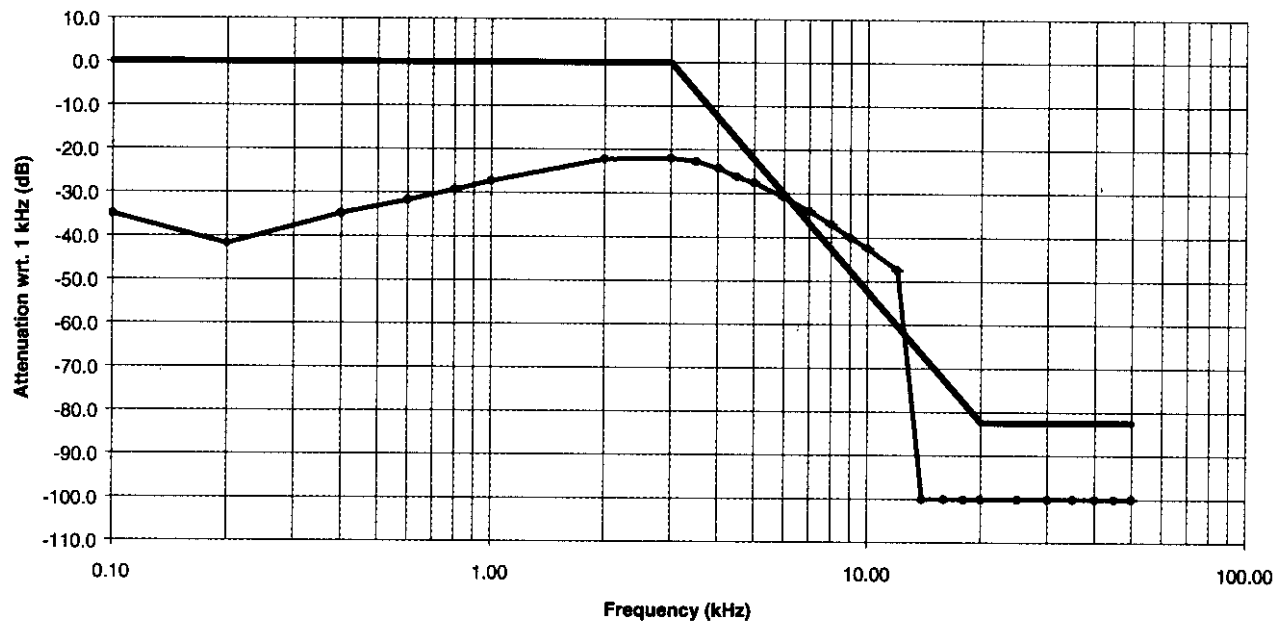

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2

Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Carrier Frequency: 138 MHz
Channel Spacing: 25 kHz

FREQUENCY (kHz)	AUDIO IN (dBV)	AUDIO OUT (dBV)	ATTEN. (OUT - IN) (dB)	ATTEN. Wrt. 1kHz (dB)	RSS-119, ISSUE 5, SEC. 6.6 TABLE 3 LIMIT (dB)	PASS/ FAIL
0.10	-13.1	-18.0	-4.9	-5.9	0.0	NO LIMIT
0.20	-13.3	-8.5	4.8	3.8	0.0	NO LIMIT
0.40	-13.3	-1.9	11.4	10.4	0.0	NO LIMIT
0.60	-13.3	1.6	14.9	13.9	0.0	NO LIMIT
0.80	-13.5	3.9	17.4	16.4	0.0	NO LIMIT
1.00	-13.5	5.9	19.4	18.4	0.0	NO LIMIT
2.00	-13.6	9.3	22.9	21.9	0.0	NO LIMIT
3.00	-13.8	8.5	22.3	21.3	0.0	NO LIMIT
3.50	-13.3	8.2	21.5	20.5	-2.7	NO LIMIT
4.00	-13.4	6.8	20.2	19.2	-5.0	NO LIMIT
4.50	-13.5	5.0	18.5	17.5	-7.0	NO LIMIT
5.00	-13.5	3.1	16.6	15.6	-8.9	NO LIMIT
6.00	-13.4	-0.1	13.3	12.3	-12.0	NO LIMIT
7.00	-13.4	-2.8	10.6	9.6	-14.7	NO LIMIT
8.00	-14.0	-5.9	8.1	7.1	-17.0	NO LIMIT
9.00	-13.3	-7.8	5.5	4.5	-19.1	NO LIMIT
10.00	-13.3	-9.9	3.4	2.4	-20.9	NO LIMIT
12.00	-13.5	-14.6	-1.1	-2.1	-24.1	NO LIMIT
14.00	-13.4	-19.3	-5.9	-6.9	-26.8	NO LIMIT
16.00	-13.4	-23.5	-10.1	-11.1	-28.0	NO LIMIT
18.00	-14.1	-28.1	-14.0	-15.0	-28.0	NO LIMIT
20.00	-13.8	-27.5	-13.7	-14.7	-28.0	NO LIMIT
25.00	-13.4	-37.8	-24.4	-25.4	-28.0	NO LIMIT
30.00	-13.6	-43.0	-29.4	-30.4	-28.0	NO LIMIT
35.00	-13.4	-100.0	-100.0	-100.0	-28.0	NO LIMIT
40.00	-13.7	-100.0	-100.0	-100.0	-28.0	NO LIMIT
45.00	-13.5	-100.0	-100.0	-100.0	-28.0	NO LIMIT
50.00	-13.5	-100.0	-100.0	-100.0	-28.0	NO LIMIT

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2


Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

AUDIO FREQUENCY REPSONSE
(25 kHz Channel Spacing)
TECHNISONIC TFM-500 VHF TRANSCEIVER
Carrier Frequency: 138 MHz

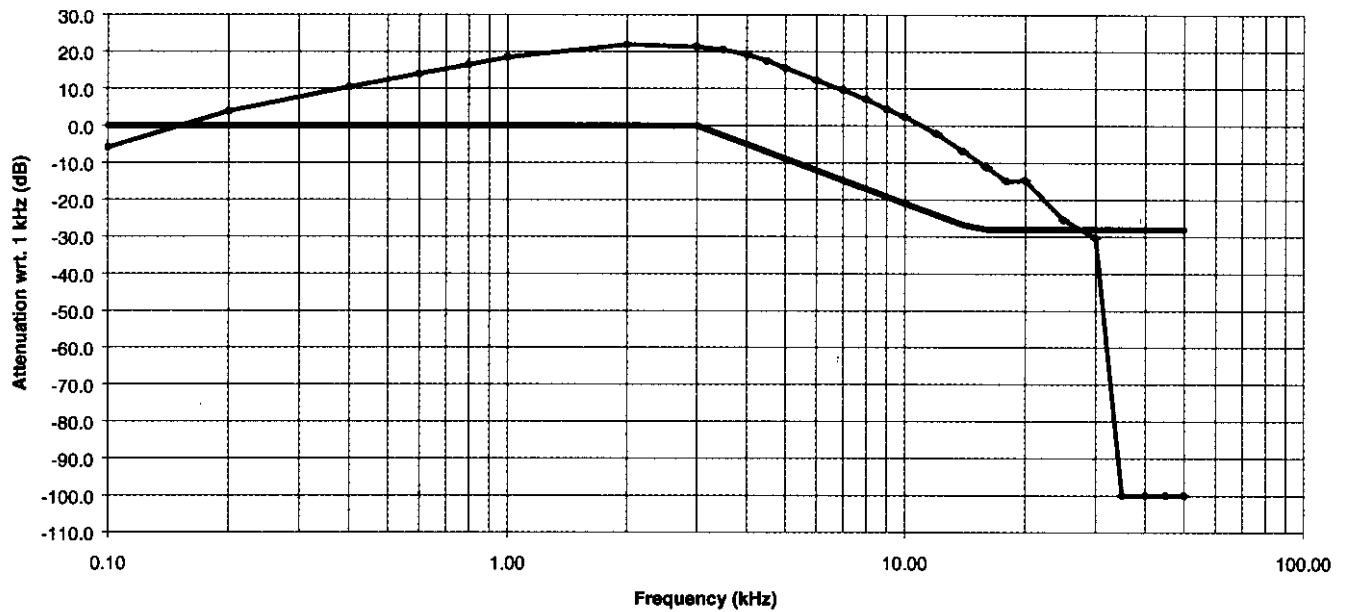

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk@ultratech.com, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Carrier Frequency: 406.125 MHz

Channel Spacing: 12.5 kHz

FREQUENCY (kHz)	AUDIO IN (dBV)	AUDIO OUT (dBV)	ATTEN. (OUT - IN) (dB)	ATTEN. Wrt. 1kHz (dB)	RSS-119, ISSUE 5, SEC. 6.6 TABLE 4 LIMIT (dB)	PASS/ FAIL
0.10	-18.1	<-50.0	<-31.9	<-32.9	0.0	NO LIMIT
0.20	-18.1	<-50.0	<-31.9	<-32.9	0.0	NO LIMIT
0.40	-18.3	-63.2	-44.9	-45.9	0.0	NO LIMIT
0.60	-18.4	-59.5	-41.1	-42.1	0.0	NO LIMIT
0.80	-18.3	-56.8	-38.5	-39.5	0.0	NO LIMIT
1.00	-18.5	-55.3	-36.8	-37.8	0.0	NO LIMIT
2.00	-18.9	-49.9	-31.0	-32.0	0.0	NO LIMIT
3.00	-18.8	-48.9	-30.1	-31.1	0.0	NO LIMIT
3.50	-18.5	-49.5	-31.0	-32.0	-6.7	NO LIMIT
4.00	-18.7	-51.4	-32.7	-33.7	-12.5	NO LIMIT
4.50	-18.5	-53.3	-34.8	-35.8	-17.6	NO LIMIT
5.00	-19.1	-55.5	-36.4	-37.4	-22.2	NO LIMIT
6.00	-19.0	-59.0	-40.0	-41.0	-30.1	NO LIMIT
7.00	-18.4	-61.7	-43.3	-44.3	-36.8	NO LIMIT
8.00	-18.9	-65.5	-46.6	-47.6	-42.6	NO LIMIT
9.00	-18.6	-68.4	-49.8	-50.8	-47.7	NO LIMIT
10.00	-18.9	-50.1	-31.2	-32.2	-52.3	NO LIMIT
12.00	-18.5	-54.1	-35.6	-36.6	-60.2	NO LIMIT
14.00	-18.4	-58.0	-39.6	-40.6	-66.9	NO LIMIT
16.00	-18.9	-100.0	-100.0	-100.0	-72.7	NO LIMIT
18.00	-19.0	-100.0	-100.0	-100.0	-77.8	NO LIMIT
20.00	-18.5	-100.0	-100.0	-100.0	-82.4	NO LIMIT
25.00	-18.8	-100.0	-100.0	-100.0	-82.4	NO LIMIT
30.00	-18.6	-100.0	-100.0	-100.0	-82.4	NO LIMIT
35.00	-18.8	-100.0	-100.0	-100.0	-82.4	NO LIMIT
40.00	-18.8	-100.0	-100.0	-100.0	-82.4	NO LIMIT
45.00	-19.2	-100.0	-100.0	-100.0	-82.4	NO LIMIT
50.00	-20.2	-100.0	-100.0	-100.0	-82.4	NO LIMIT

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2


Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

AUDIO FREQUENCY RESPONSE
(12.5 kHz Channel Spacing)
TECHNISONIC TFM-500 VHF TRANSCEIVER
Carrier Frequency: 406.125 MHz

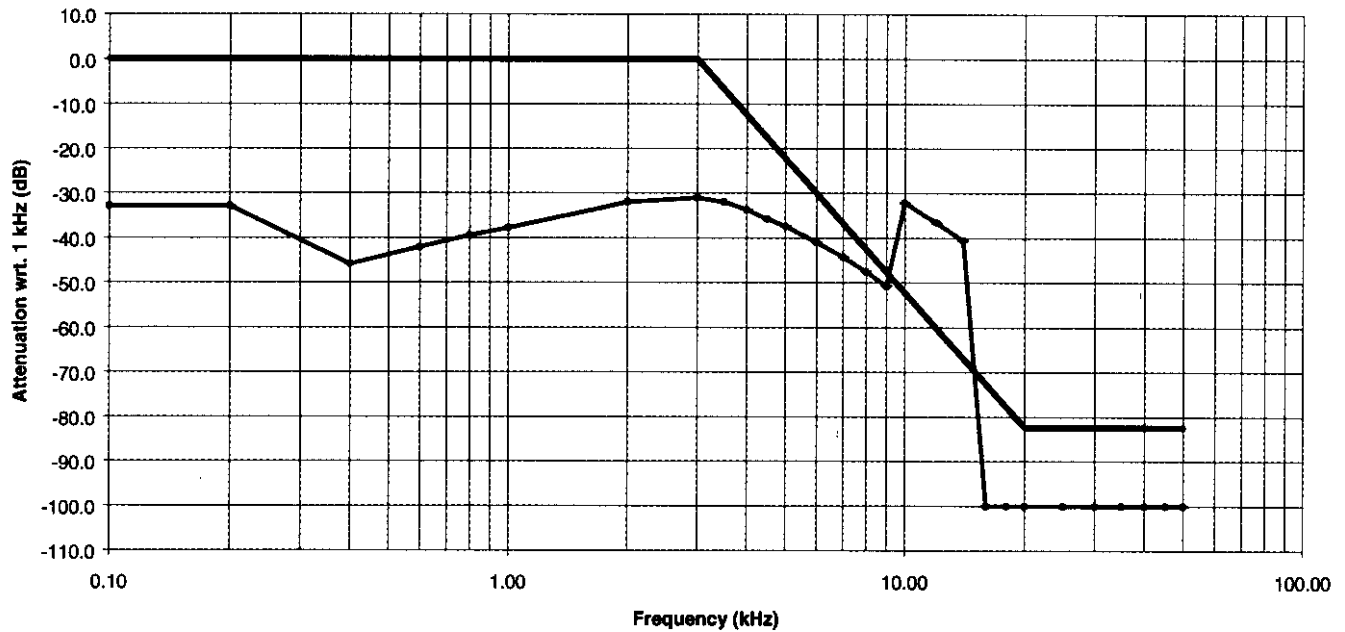

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2

Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk@ultratech.com, Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Carrier Frequency: 406.125 MHz
Channel Spacing: 25 kHz

FREQUENCY (kHz)	AUDIO IN (dBV)	AUDIO OUT (dBV)	ATTEN. (OUT - IN) (dB)	ATTEN. Wrt. 1 kHz (dB)	RSS-119, ISSUE 5, SEC. 6.6 TABLE 3 LIMIT (dB)	PASS/ FAIL
0.10	-13.1	-54.4	-41.3	-42.3	0.0	NO LIMIT
0.20	-13.2	-39.9	-26.7	-27.7	0.0	NO LIMIT
0.40	-13.3	-30.6	-17.3	-18.3	0.0	NO LIMIT
0.60	-13.3	1.3	14.6	13.6	0.0	NO LIMIT
0.80	-13.3	3.7	17.0	16.0	0.0	NO LIMIT
1.00	-13.5	5.7	19.2	18.2	0.0	NO LIMIT
2.00	-13.3	8.8	22.1	21.1	0.0	NO LIMIT
3.00	-13.3	8.4	21.7	20.7	0.0	NO LIMIT
3.50	-13.4	7.4	20.8	19.8	-4.0	NO LIMIT
4.00	-13.3	6.0	19.3	18.3	-7.5	NO LIMIT
4.50	-13.4	4.3	17.7	16.7	-10.6	NO LIMIT
5.00	-13.3	2.3	15.6	14.6	-13.3	NO LIMIT
6.00	-13.3	-0.9	12.4	11.4	-18.1	NO LIMIT
7.00	-13.7	-4.1	9.6	8.6	-22.1	NO LIMIT
8.00	-13.5	-6.6	6.9	5.9	-25.6	NO LIMIT
9.00	-13.3	-8.9	4.4	3.4	-28.6	NO LIMIT
10.00	-13.3	-11.6	1.7	0.7	-31.4	NO LIMIT
12.00	-13.5	-15.6	-2.1	-3.1	-36.1	NO LIMIT
14.00	-13.5	-20.1	-6.6	-7.6	-40.1	NO LIMIT
16.00	-13.3	-24.1	-10.8	-11.8	-43.6	NO LIMIT
18.00	-13.5	-28.1	-14.6	-15.6	-46.7	NO LIMIT
20.00	-13.7	-30.3	-16.6	-17.6	-49.4	NO LIMIT
25.00	-13.9	-100.0	-100.0	-100.0	-50.0	NO LIMIT
30.00	-14.1	-100.0	-100.0	-100.0	-50.0	NO LIMIT
35.00	-13.4	-100.0	-100.0	-100.0	-50.0	NO LIMIT
40.00	-13.4	-100.0	-100.0	-100.0	-50.0	NO LIMIT
45.00	-14.2	-100.0	-100.0	-100.0	-50.0	NO LIMIT
50.00	-13.6	-100.0	-100.0	-100.0	-50.0	NO LIMIT

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2


Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

AUDIO FREQUENCY RESPONSE
(25 kHz Channel Spacing)
TECHNISONIC TFM-500 VHF TRANSCEIVER
Carrier Frequency: 406.125 MHz

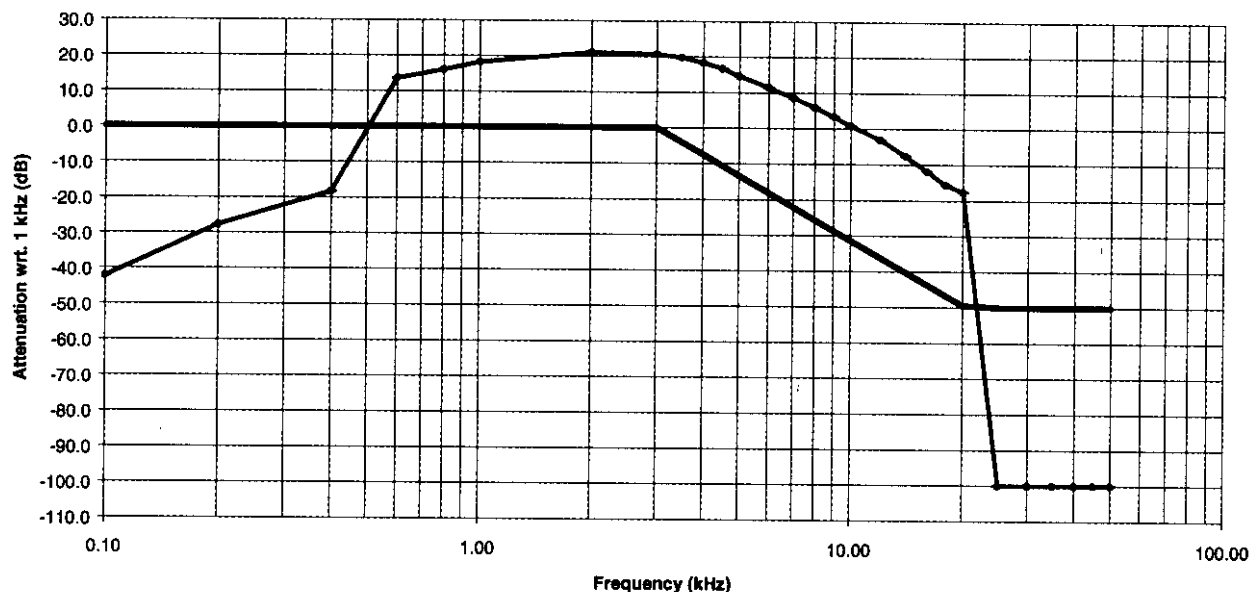

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2

Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

4.4. MODULATION LIMITING @ FCC 90.210

PRODUCT NAME: VHF/UHF FM MOBILE TRANSCEIVER,
Model No.: TFM-500

FCC REQUIREMENTS:

FCC Part 2, Sub. J, Para. 2.987(b) & FCC Part 90, Subpart I, Para. 90.210

The EUT shall be installed with a modulation limiter which limits the deviation of the FM carrier less than manufacturer's setting provided that the rf output spectrum must meet the required MASK (recommended: 1.25 kHz for 6.25 kHz Channel Spacing System, 2.5 kHz for 12.5 kHz and 25 kHz Channel Spacing, and 5 kHz for 25 kHz Channel Spacing System).

CLIMATE CONDITION:

Standard Temperature and Humidity:

- Ambient temperature: 21 °C
- Relative humidity: 43%

POWER INPUT:

28 Vdc.

TEST EQUIPMENT:


- Communication Analyzer, Rohde & Schawrz, Model SMFO2, S/N: 879988/057, 0.4 - 1000 MHz including AF & RF Signal Generators, SINAD, DISTORTION, DEVIATION meters and etc...

METHOD OF MEASUREMENTS:

For Audio Transmitter:- The carrier frequency deviation was measured with the tone input signal level varied from 0 Vp to audio input rating level plus 16 dB at frequencies 0.1, 0.5, 1.0, 3.0 and 5.0 kHz. The maximum deviation was recorded at each test condition.

For Data Transmitter with Maximum Frequency Deviation set by Factory:- The EUT was set at maximum frequency deviation, and its peak frequency deviation was then measured using EUT's internal random data source.

TEST ARRANGEMENT

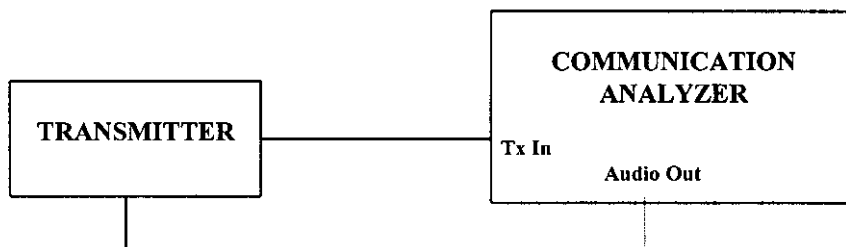

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

TEST RESULTS: Conforms.

TESTED PERSONNEL: Hung Trinh, RFI Technician

DATE: January 19, 1999

MEASUREMENT DATA

MODULATION LIMITING FOR AN AUDIO TRANSMITTER

Carrier Frequency: 138 MHz

Channel Spacing: 12.5 kHz

MODULATING SIGNAL LEVEL (Vrms)	PEAK FREQUENCY DEVIATION (kHz) at the following modulating frequency:					SUGGESTED LIMIT (KHz)
	0.1 KHz	0.5 KHz	1.0 KHz	3.0 KHz	5.0 KHz	
0.01	0.1	0.1	0.2	0.3	0.2	2.5
0.02	0.1	0.2	0.2	0.4	0.2	2.5
0.04	0.1	0.2	0.3	0.7	0.4	2.5
0.06	0.1	0.3	0.5	0.9	0.5	2.5
0.08	0.2	0.3	0.6	1.2	0.7	2.5
0.10	0.2	0.4	0.7	1.5	0.8	2.5
0.20	0.2	0.7	1.4	1.7	1.1	2.5
0.30	0.2	1.0	1.7	1.7	1.1	2.5
0.40	0.2	1.4	1.8	1.7	1.1	2.5
0.50	0.3	1.7	1.8	1.7	1.1	2.5
0.60	0.4	1.8	1.8	1.8	1.1	2.5
0.70	0.4	1.8	1.8	1.8	1.1	2.5
0.80	0.5	1.8	1.8	1.8	1.2	2.5
0.90	0.6	1.8	1.8	1.8	1.2	2.5
1.00	0.7	1.8	1.8	1.8	1.2	2.5
1.20	0.9	1.8	1.9	1.8	1.2	2.5

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Carrier Frequency: 138 MHz
Channel Spacing: 12.5 kHz

MODULATING FREQUENCY (KHz)	PEAK FREQUENCY DEVIATION (KHz)	SUGGESTED LIMIT (KHz)
0.1	0.2	2.5
0.2	0.3	2.5
0.4	0.6	2.5
0.6	0.8	2.5
0.8	1.1	2.5
1.0	1.3	2.5
1.2	1.6	2.5
1.4	1.7	2.5
1.6	1.8	2.5
1.8	1.8	2.5
2.0	1.8	2.5
2.5	1.8	2.5
3.0	1.8	2.5
3.5	1.7	2.5
4.0	1.6	2.5
4.5	1.3	2.5
5.0	1.1	2.5
6.0	0.7	2.5
7.0	0.6	2.5
8.0	0.4	2.5
9.0	0.4	2.5
10.0	0.3	2.5

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Carrier Frequency: 138 MHz
Channel Spacing: 25 kHz

MODULATING SIGNAL LEVEL (Vrms)	PEAK FREQUENCY DEVIATION (kHz) at the following modulating frequency:					MAXIMUM LIMIT (KHz)
	0.1 KHz	0.5 KHz	1.0 KHz	3.0 KHz	5.0 KHz	
0.01	0.1	0.2	0.2	0.4	0.3	5.0
0.02	0.1	0.2	0.4	0.7	0.4	5.0
0.04	0.1	0.4	0.6	1.3	0.7	5.0
0.06	0.2	0.5	0.9	1.9	1.0	5.0
0.08	0.2	0.6	1.2	2.5	1.3	5.0
0.10	0.2	0.8	1.5	3.1	1.6	5.0
0.20	0.3	1.4	2.9	3.7	2.2	5.0
0.30	0.3	2.1	3.7	3.7	2.3	5.0
0.40	0.4	2.9	3.8	3.7	2.3	5.0
0.50	0.5	3.7	3.8	3.7	2.3	5.0
0.60	0.7	3.8	3.8	3.7	2.4	5.0
0.70	0.9	3.8	3.8	3.7	2.4	5.0
0.80	1.0	3.8	3.9	3.7	2.4	5.0
0.90	1.2	3.8	3.9	3.8	2.4	5.0
1.00	1.4	3.8	3.9	3.8	2.4	5.0
1.20	1.8	3.8	3.9	3.8	2.4	5.0

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Carrier Frequency: 138 MHz

Channel Spacing: 25 kHz

MODULATING FREQUENCY (KHz)	PEAK FREQUENCY DEVIATION (KHz)	MAXIMUM LIMIT (KHz)
0.1	0.3	5.0
0.2	0.6	5.0
0.4	1.2	5.0
0.6	1.7	5.0
0.8	2.3	5.0
1.0	2.8	5.0
1.2	3.4	5.0
1.4	3.7	5.0
1.6	3.7	5.0
1.8	3.7	5.0
2.0	3.7	5.0
2.5	3.8	5.0
3.0	3.7	5.0
3.5	3.6	5.0
4.0	3.3	5.0
4.5	2.7	5.0
5.0	2.2	5.0
6.0	1.5	5.0
7.0	1.1	5.0
8.0	0.8	5.0
9.0	0.6	5.0
10.0	0.6	5.0

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2

Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Carrier Frequency: 406.125 MHz
Channel Spacing: 12.5 kHz

MODULATING SIGNAL LEVEL (Vrms)	PEAK FREQUENCY DEVIATION (kHz) at the following modulating frequency:					MAXIMUM LIMIT (KHz)
	0.1 KHz	0.5 KHz	1.0 KHz	3.0 KHz	5.0 KHz	
0.01	0.3	0.4	0.4	0.4	0.4	2.5
0.02	0.3	0.4	0.4	0.6	0.4	2.5
0.04	0.3	0.4	0.5	0.8	0.5	2.5
0.06	0.4	0.5	0.6	1.0	0.7	2.5
0.08	0.4	0.5	0.8	1.3	0.8	2.5
0.10	0.4	0.6	0.9	1.6	0.9	2.5
0.20	0.4	0.9	1.5	1.8	1.1	2.5
0.30	0.4	1.2	1.8	1.8	1.2	2.5
0.40	0.4	1.5	1.9	1.8	1.2	2.5
0.50	0.5	1.8	1.9	1.8	1.2	2.5
0.60	0.5	1.9	1.9	1.8	1.2	2.5
0.70	0.6	1.9	1.9	1.9	1.2	2.5
0.80	0.7	1.9	1.9	1.9	1.2	2.5
0.90	0.7	1.9	1.9	1.9	1.2	2.5
1.00	0.8	1.9	1.9	1.9	1.2	2.5
1.20	1.0	1.9	1.9	1.9	1.2	2.5

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Carrier Frequency: 406.125 MHz

Channel Spacing: 12.5 kHz

MODULATING FREQUENCY (KHz)	PEAK FREQUENCY DEVIATION (KHz)	MAXIMUM LIMIT (KHz)
0.1	0.4	2.5
0.2	0.5	2.5
0.4	0.8	2.5
0.6	1.0	2.5
0.8	1.3	2.5
1.0	1.5	2.5
1.2	1.8	2.5
1.4	1.8	2.5
1.6	1.9	2.5
1.8	1.9	2.5
2.0	1.9	2.5
2.5	1.9	2.5
3.0	1.8	2.5
3.5	1.8	2.5
4.0	1.6	2.5
4.5	1.3	2.5
5.0	1.1	2.5
6.0	0.8	2.5
7.0	0.6	2.5
8.0	0.6	2.5
9.0	0.5	2.5
10.0	0.5	2.5

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2

Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Carrier Frequency: 406.125 MHz

Channel Spacing: 25 kHz

MODULATING SIGNAL LEVEL (Vrms)	PEAK FREQUENCY DEVIATION (kHz) at the following modulating frequency:					MAXIMUM LIMIT (KHz)
	0.1 KHz	0.5 KHz	1.0 KHz	3.0 KHz	5.0 KHz	
0.01	0.3	0.4	0.4	0.6	0.4	5.0
0.02	0.3	0.4	0.5	0.9	0.6	5.0
0.04	0.3	0.5	0.8	1.5	0.8	5.0
0.06	0.4	0.6	1.0	2.0	1.1	5.0
0.08	0.4	0.8	1.3	2.6	1.4	5.0
0.10	0.4	0.9	1.6	3.2	1.6	5.0
0.20	0.4	1.6	2.9	3.5	2.1	5.0
0.30	0.5	2.2	3.5	3.5	2.2	5.0
0.40	0.6	3.1	3.6	3.5	2.2	5.0
0.50	0.7	3.5	3.6	3.5	2.2	5.0
0.60	0.8	3.6	3.7	3.5	2.2	5.0
0.70	1.0	3.6	3.7	3.6	2.2	5.0
0.80	1.2	3.6	3.7	3.6	2.2	5.0
0.90	1.3	3.6	3.7	3.6	2.2	5.0
1.00	1.6	3.6	3.7	3.6	2.2	5.0
1.20	1.9	3.6	3.8	3.6	2.2	5.0

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Carrier Frequency: 406.125 MHz

Channel Spacing: 25 kHz

MODULATING FREQUENCY (KHz)	PEAK FREQUENCY DEVIATION (KHz)	MAXIMUM LIMIT (KHz)
0.1	0.4	5.0
0.2	0.7	5.0
0.4	1.3	5.0
0.6	1.8	5.0
0.8	2.4	5.0
1.0	2.9	5.0
1.2	3.4	5.0
1.4	3.5	5.0
1.6	3.6	5.0
1.8	3.6	5.0
2.0	3.6	5.0
2.5	3.6	5.0
3.0	3.5	5.0
3.5	3.5	5.0
4.0	3.1	5.0
4.5	2.6	5.0
5.0	2.1	5.0
6.0	1.5	5.0
7.0	1.1	5.0
8.0	0.9	5.0
9.0	0.8	5.0
10.0	0.7	5.0

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2

Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

4.5. EMISSION MASKS @ FCC 90.210

PRODUCT NAME: VHF/UHF FM MOBILE TRANSCEIVER,
Model No.: TFM-500

FCC REQUIREMENTS:

FCC Part 90, Sub. I, Para. 90.210

Emissions shall be attenuated below the mean output power of the transmitter as follows:

FREQUENCY RANGE (MHz)	Recommended OBW (KHz)	CHANNEL SPACING (KHz)	Recommended FREQ. DEVIATION (KHz)	FCC APPLICABLE MASK
150-174 / 403-512	20	25.0	5.0	90.210(b): Mask B – Audio & Voice
150-174 / 403-512	10	12.5	2.5	90.210(d): Mask D – Audio & Voice

FCC RULES	FREQUENCY RANGE	ATTENUATION LIMIT (dBc)
90.210(d): Mask D – Voice	$> F_c - 5.625 \text{ kHz} - < F_c + 5.625 \text{ kHz}$ $F_c \pm 5.625 \text{ kHz} - F_c \pm 12.5 \text{ kHz}$ $> F_c - 12.5 \text{ kHz} - < F_c + 12.5 \text{ kHz}$	0 $7.27(f_d - 2.88 \text{ kHz})$ $50 + 10\log_{10}(P)$ or 70 dB whichever is less.

CLIMATE CONDITION:

Standard Temperature and Humidity:

- Ambient temperature: 21 °C
- Relative humidity: 43%

POWER INPUT:

28 Vdc.

TEST EQUIPMENT:

- Advantest Spectrum Analyzer, Model R3271, S/N: 15050203
- Bird Attenuator, 50 Ohm IN/OUT
- Audio Oscillator, HP, Model 204C, SN: 0989A08798, Output: 0-1.2 MHz, 5 Vrms.

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

METHOD OF MEASUREMENTS:


FCC CFR 47, Para. 2.989 - Out-of-Band Emissions:

The Emission Masks was measured with the Spectrum Analyzer controls set as shown on the test results (RBW $\geq$ 300 Hz, VBW $\geq$ 300 Hz and SWEEP TIME = AUTO). The transmitter was operated at a full rated power output, and modulated as follows:

Voice or Digital Modulation Through a Voice Input Port @ 2.989(c)(1):- The transmitter was modulated by a 2.5 KHz tone signal at an input level 16 dB greater than that required to produce 50% modulation (e.g.: ± 2.5 KHz peak deviation at 1 KHz modulating frequency). The input level was established at the frequency of maximum response of the audio modulating circuit.

Digital Modulation Through a Data Input Port @ 2.989(h):- Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the Emission Masks shall be shown for operation with any devices used for modifying the spectrum when such devices are operational at the discretion of the user.

TEST ARRANGEMENT



TEST RESULTS: Conforms.

TESTED PERSONNEL: Hung Trinh, RFI Technician

DATE: January 12 & 20 1999

MEASUREMENT DATA

Please see attached plots for detailed measurements.

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCIVER, MODEL TFM-500

Frequency: 138 MHz, Power Rating: 100 W, Channel Spacing: 25 kHz

Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 24, 1999
Tested by: Hung Trinh

hp

09: 11: 24 JAN 16, 1995

ACTV DET: PEAK

No user

MEAS DET: PEAK QP AVG

Menu


MKR 138.0000 MHz

39.04 dBm

REF OFFST 30.0 dB

REF 40.0 dBm

MASK B

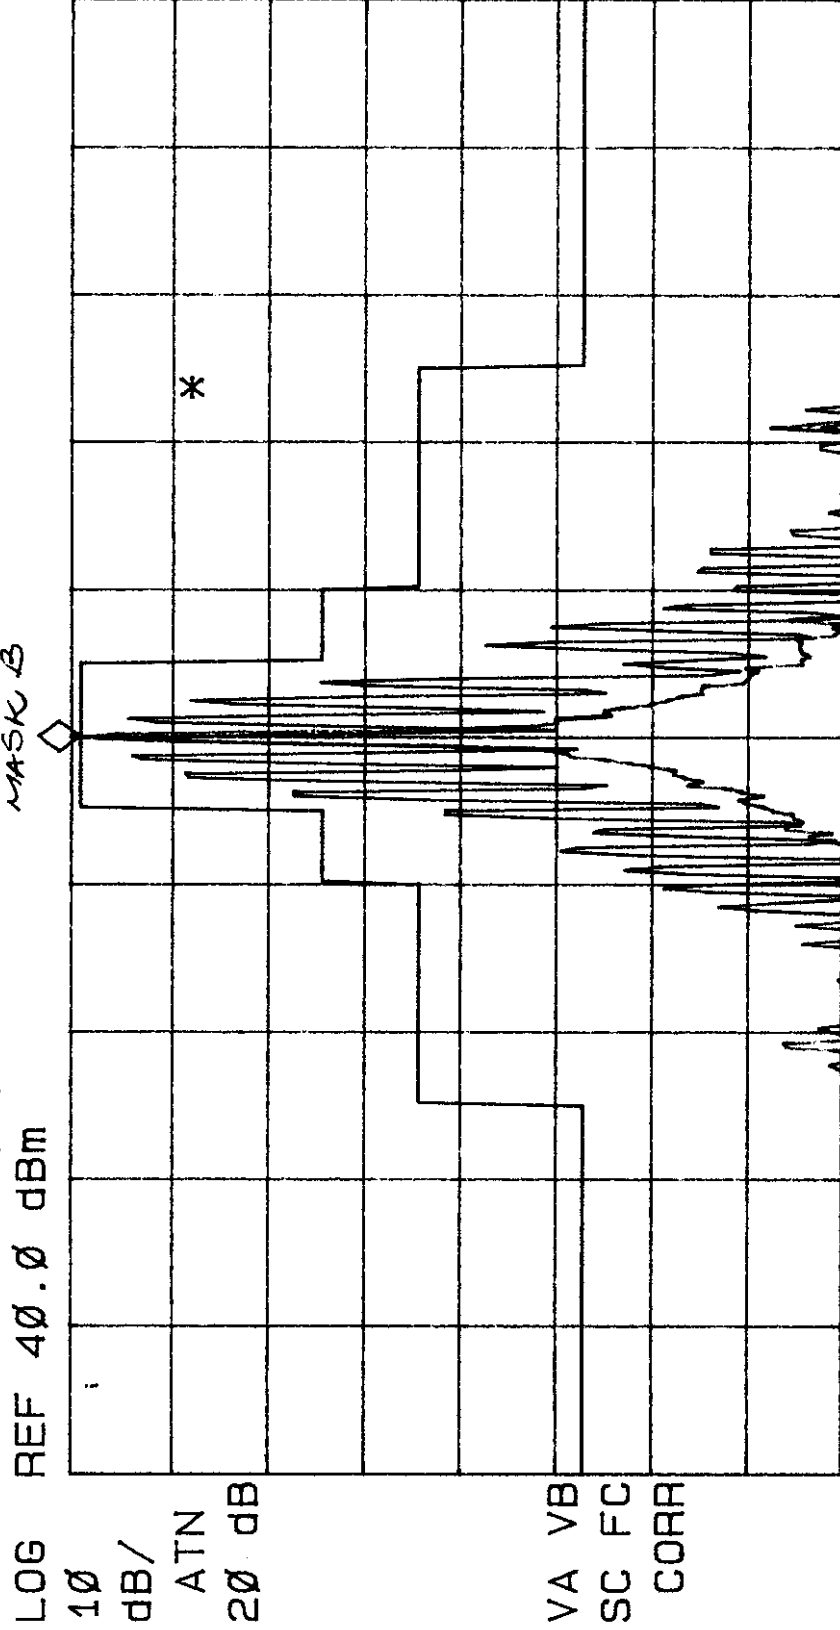

CENTER 138.0000 MHz

SPAN 200.0 kHz

#IF BW 300 Hz

AVG BW 300 Hz

SWP 6.67

sec



UltraTech
Engineering Labs Inc.

TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500

Frequency: 150 MHz, Power Rating: 10.0 W, Channel Spacing: 25 kHz
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 14, 1999
Tested by: Hung Trinh

hp

Ø9: 11: 24 JAN 16. 1995

ACTV DET: PEAK

No user

MEAS DET: PEAK QP AVG


Menu

MKR 150.0000 MHz

38.84 dBm

REF OFFST 30.0 dB MASK B

LOG 10 dB/ ATN 20 dB

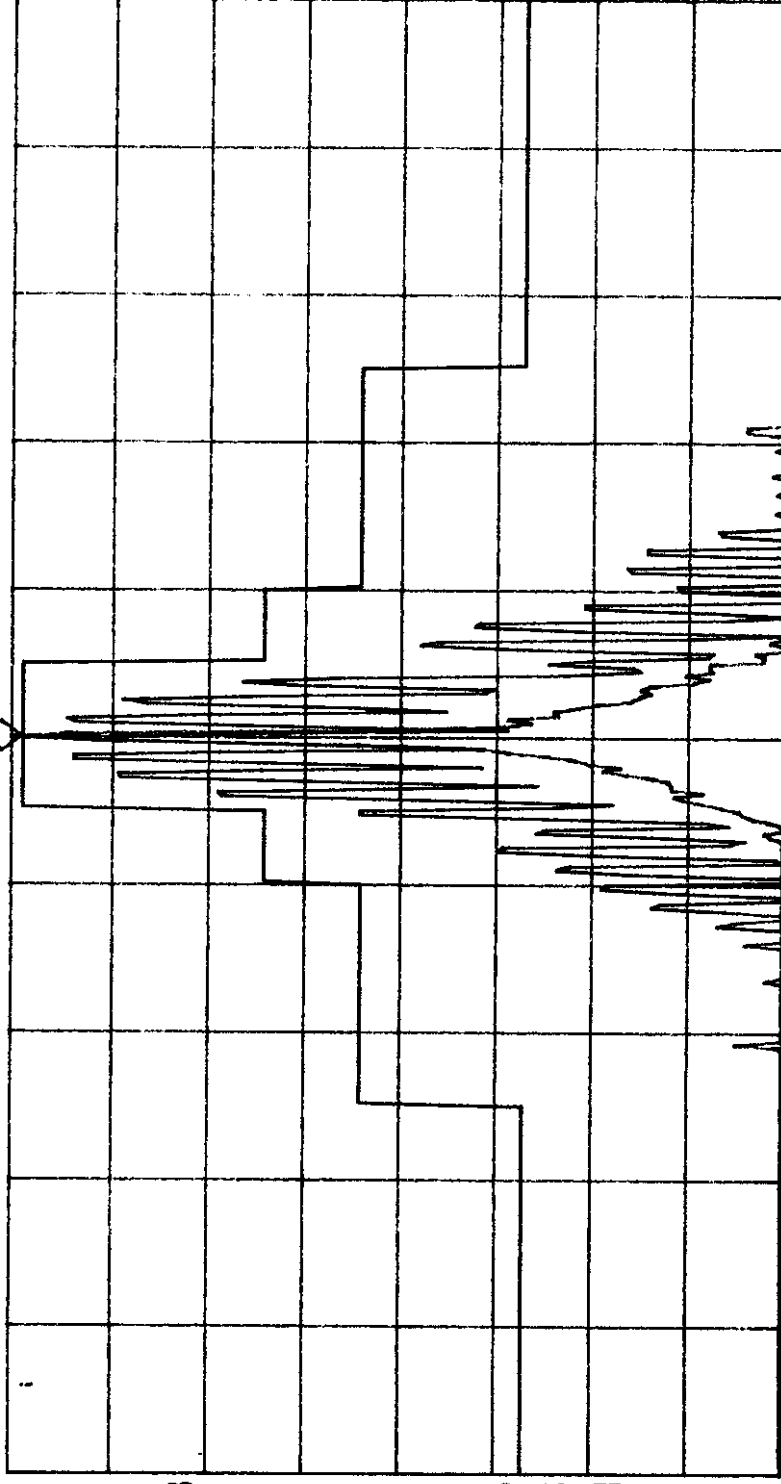

CENTER 150.0000 MHz

#IF BW 300 Hz

AVG BW 300 Hz

SPAN 200.0 kHz

SWP 6.67 sec



UltraTech
Engineering Labs Inc.

hp

TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500

Frequency: 174 MHz, Power Rating: 10.0 W, Channel Spacing: 25 kHz

Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 14, 1999
Tested by: Hung Trinh

SPAN

200.0 kHz

ACTV DET: PEAK

No user

MEAS DET: PEAK QP AVG

Menu

MKR 174.0000 MHz

39.13 dBm

REF OFFST 30.0 dB

REF 40.3 dBm

MASK B

LOG

10

dB/


ATN

30 dB

VA VB

SC FC

CORR

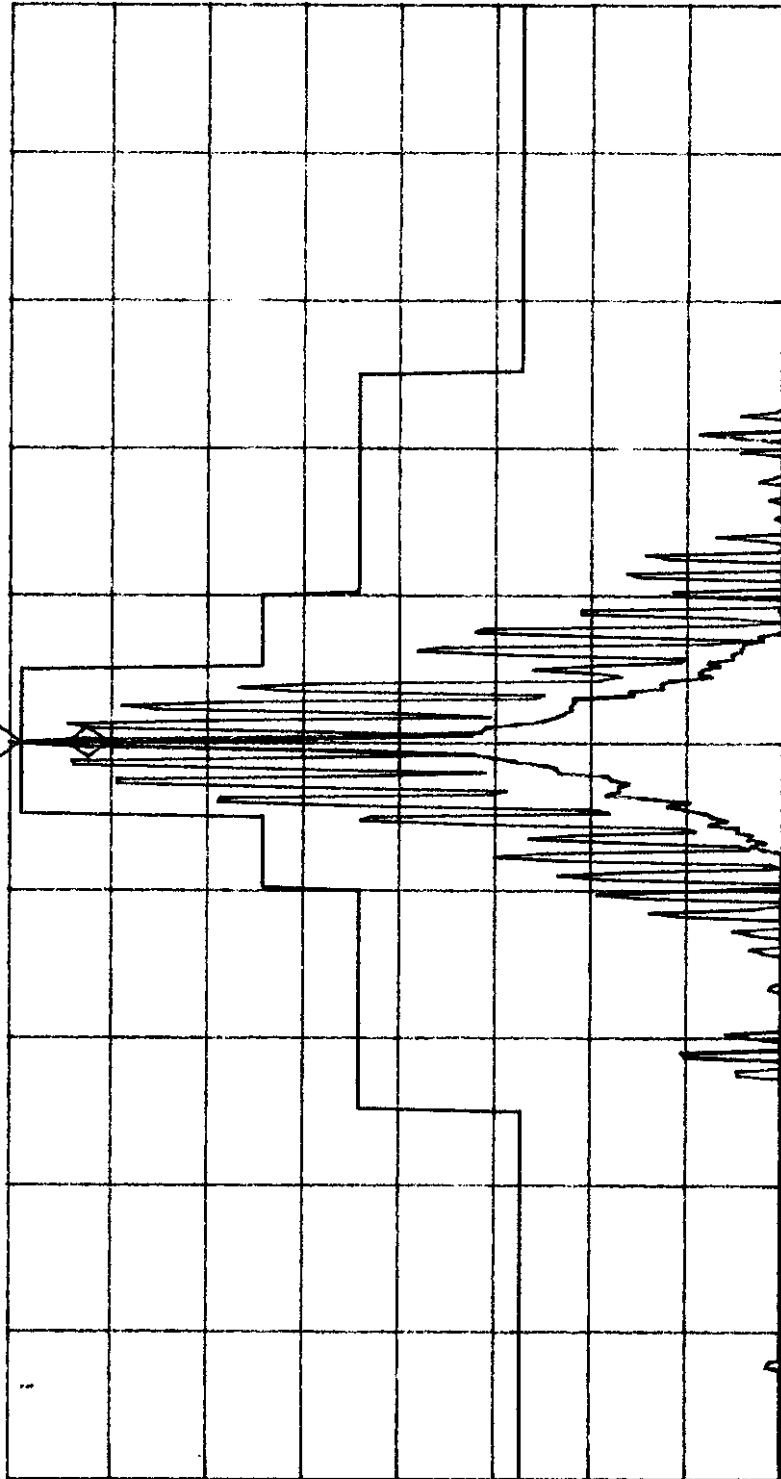

CENTER 174.0000 MHz

#IF BW 300 Hz

SPAN 200.0 kHz

AVG BW 300 Hz

SWP 6.67 sec



UltraTech
Engineering Labs Inc.

hp

TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCIVER, MODEL TFM-500

Frequency: 406.125 MHz, Power Rating: 10.0 W, Channel Spacing: 25 kHz

Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 14, 1999
Tested by: Hung Trinh

REF LEVEL
39.9 dBm

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

MKR 406.1250 MHz

38.77 dBm

No user
Menu

REF OFFST 30.0 dB

REF 39.9 dBm

MASK B

LOG

10

dB/


ATN

20 dB

VA VB

SC FC

CORR

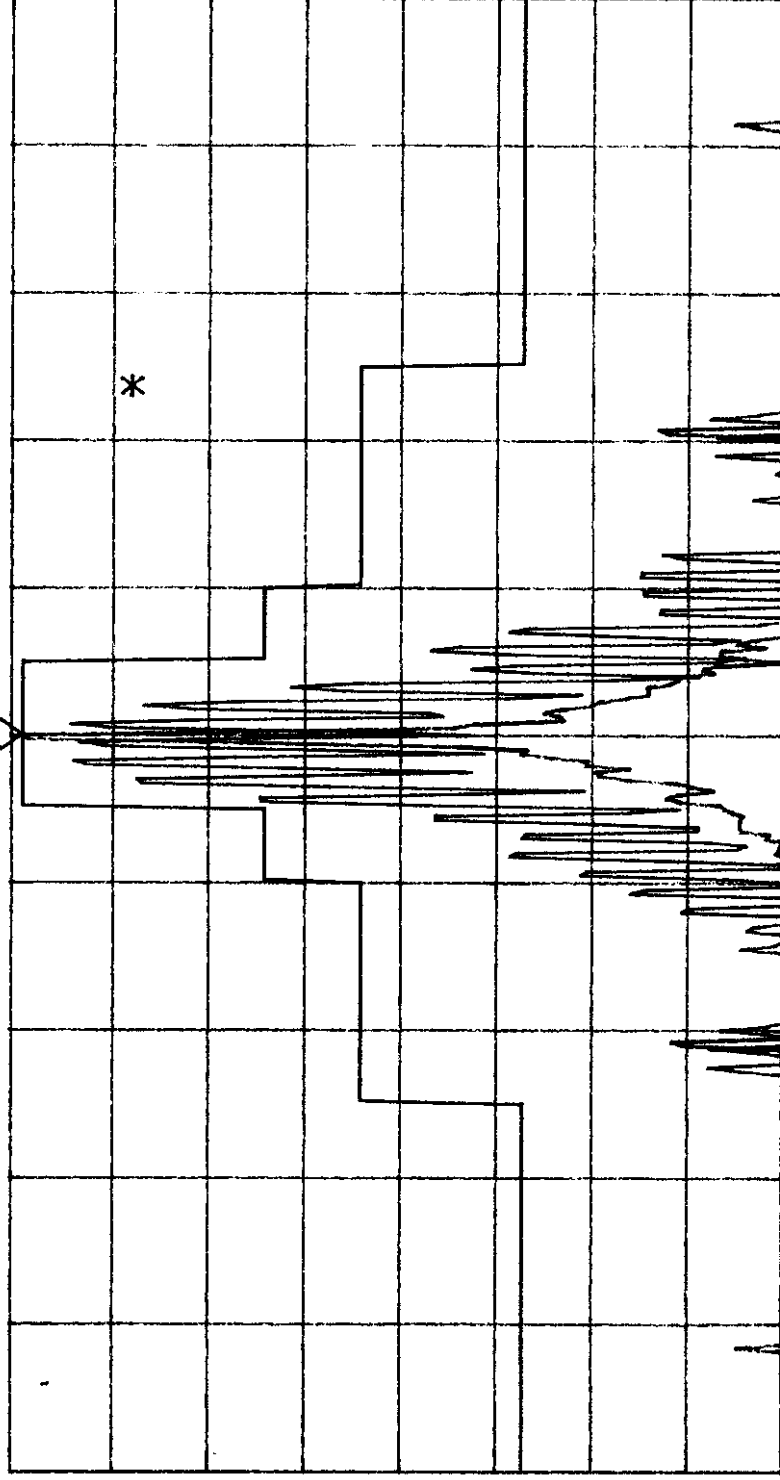

CENTER 406.1250 MHz

#IF BW 300 Hz

AVG BW 300 Hz

SPAN 200.0 kHz

SWP 6.67 sec



UltraTech
Engineering Labs Inc.

hp

TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCIVER, MODEL TFM-500

Frequency: 449.0 MHz, Power Rating: 10.0 W, Channel Spacing: 25 kHz

Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 14, 1999
Tested by: Hung Trinh

REF LEVEL
39.8 dBm

ACTV DET: PEAK

No user
Menu

MEAS DET: PEAK QP AVG

MKR 449.9995 MHz

38.70 dBm

REF OFFST 30.0 dB

REF 39.8 dBm

MASK B

LOG

10

dB/


ATN

20 dB

VA VB

SC FC

CORR

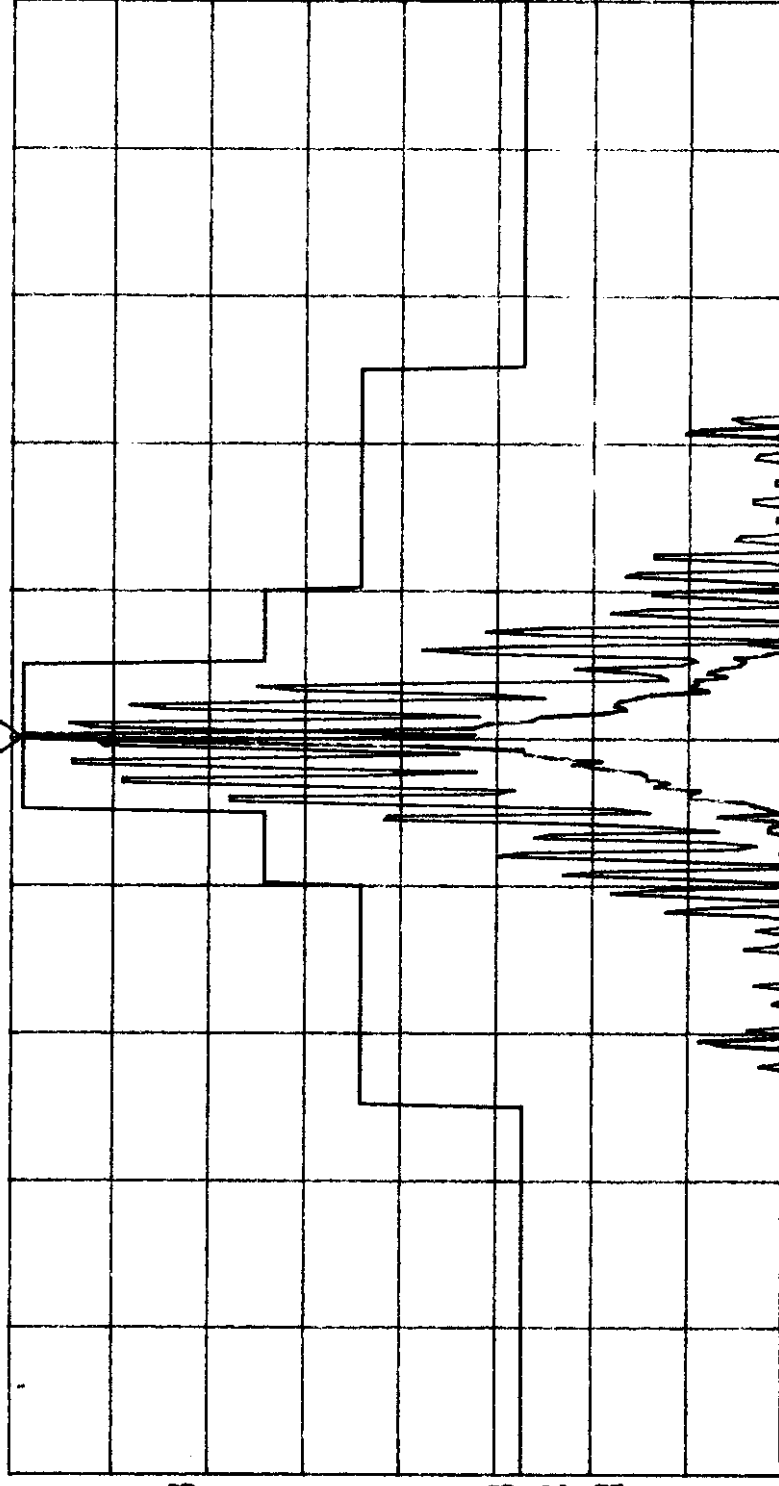

CENTER 449.9995 MHz

SPAN 200.0 KHZ

#IF BW 300 Hz

AVG BW 300 Hz

SWP 6.67 sec



UltraTech
Engineering Labs Inc.

hp

TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCIVER, MODEL TFM-500

Frequency: 470 MHz, Power Rating: 10.0 W, Channel Spacing: 25 kHz

Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 14, 1999
Tested by: Hung Trinh

REF LEVEL
39.9 dBm

ACTV DET: PEAK

No user
Menu

MEAS DET: PEAK QP AVG

MKR 470.0000 MHz

38.72 dBm

REF OFFST 30.0 dB

REF 39.9 dBm

MASK B

LOG

10

dB/


ATN

20 dB

VA VB

SC FC

CORR

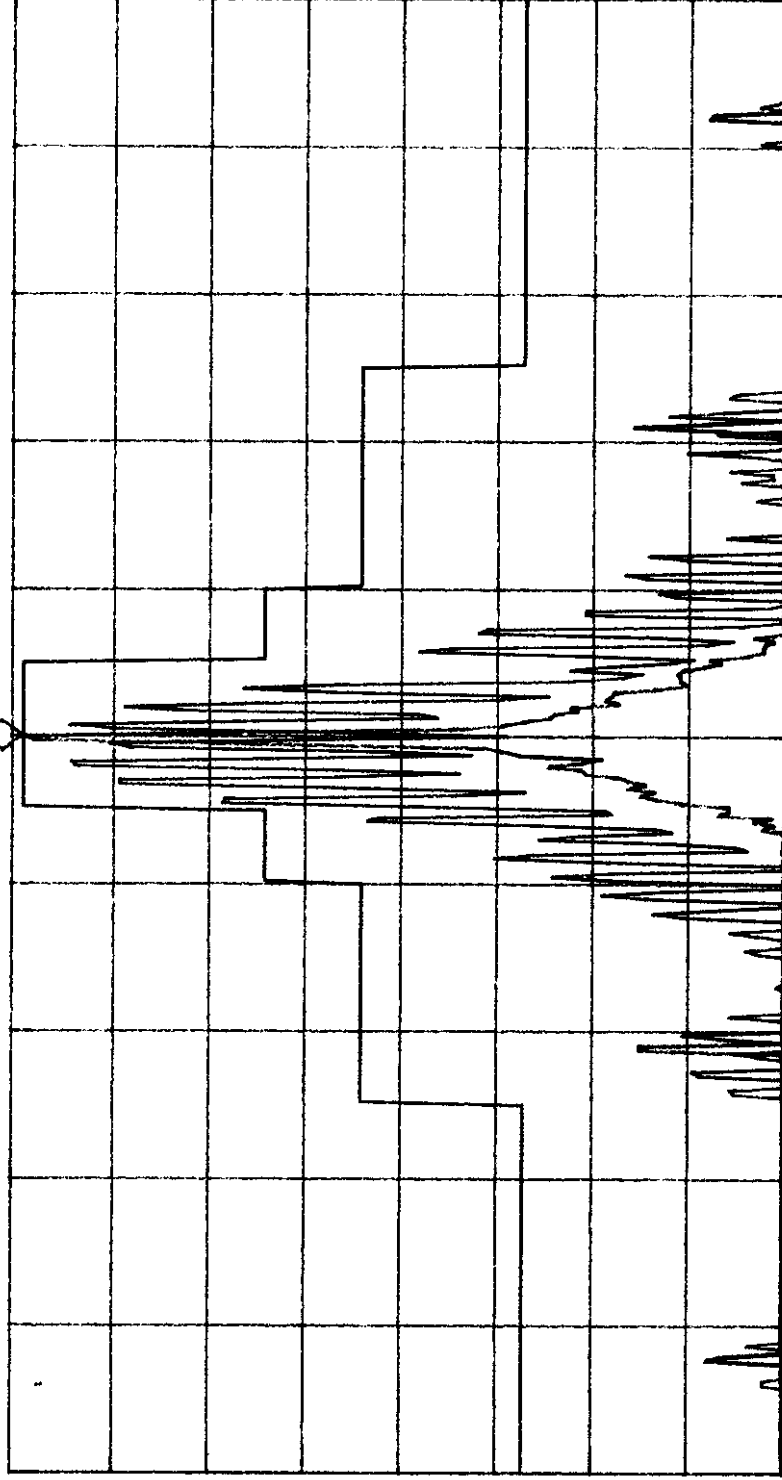

CENTER 470.0000 MHz

#IF BW 300 Hz

AVG BW 300 Hz

SWP 6.67 sec

SPAN 200.0 kHz



UltraTech
Engineering Labs Inc.

hp

TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCIVER, MODEL TFM-500

Frequency: 138 MHz, Power Rating: 0.0 W, Channel Spacing: 12.5 kHz
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 20, 1999
Tested by: Hung Trinh


MARKER Δ
9.25 kHz
- .95 dB

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 9.25 kHz
- .95 dB

No user
Menu

REF OFFST 30.0 dB
REF 40.0 dBm

LOG 10 dB/ ATN 20 dB

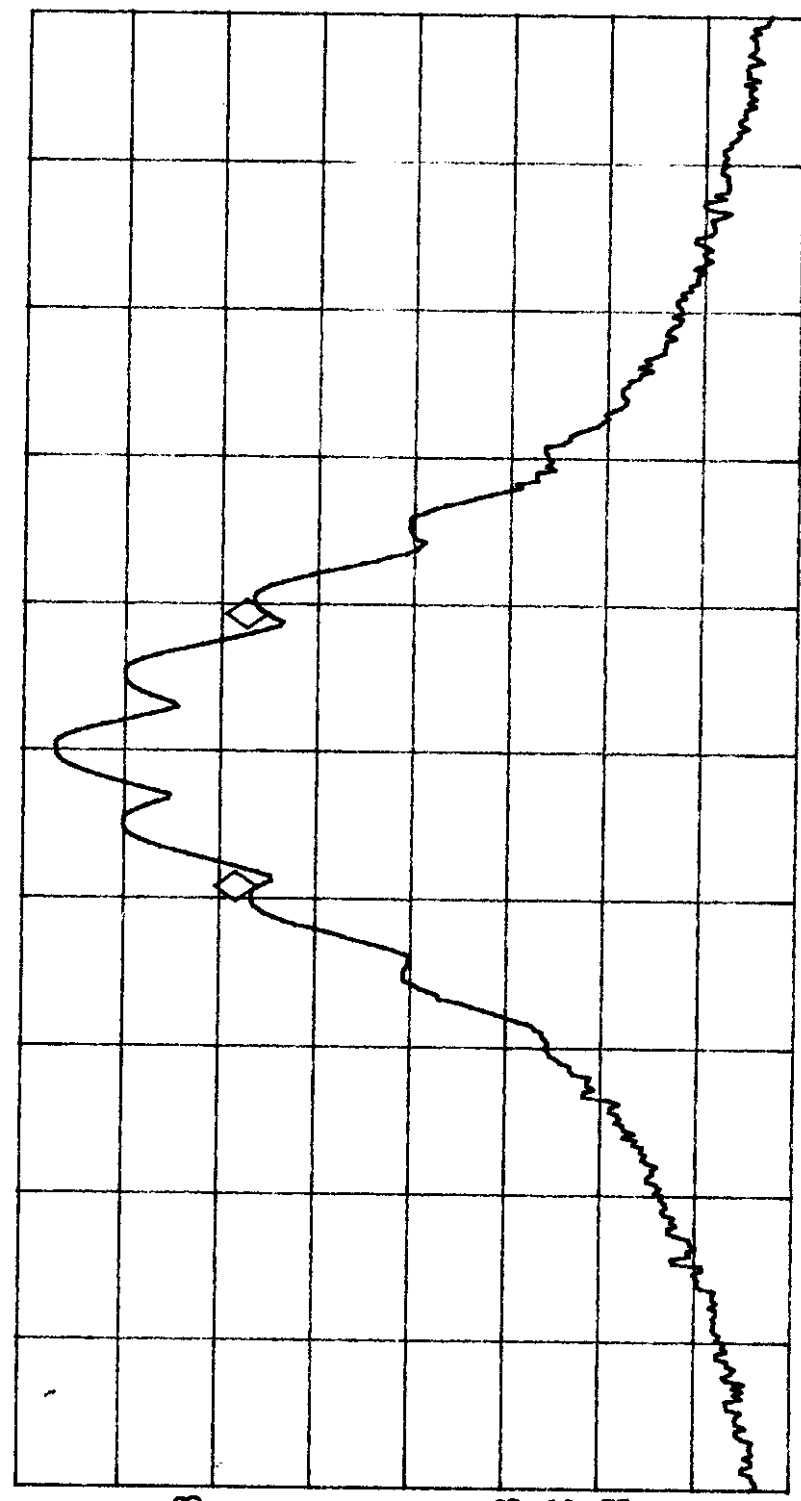

MA SB
SC FC
CORR

CENTER 138.00000 MHz
#IF BW 1.0 kHz
#AVG BW 1 kHz
SPAN 50.00 kHz
SWP 300 msec



TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500

Frequency: 138 MHz, Power Rating: 10.0 W, Channel Spacing: 25 kHz
Modulation: 1.5 M modulation with 2.5 kHz Sine Wave Signal

Date: Jan. , 1999
Tested by: Hung Trinh


MARKER Δ
13.69 kHz
- .42 dB

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 13.69 kHz
- .42 dB

No user
Menu

REF OFFST 30.0 dB
REF 40.0 dBm

LOG
10
dB/
ATN
20 dB

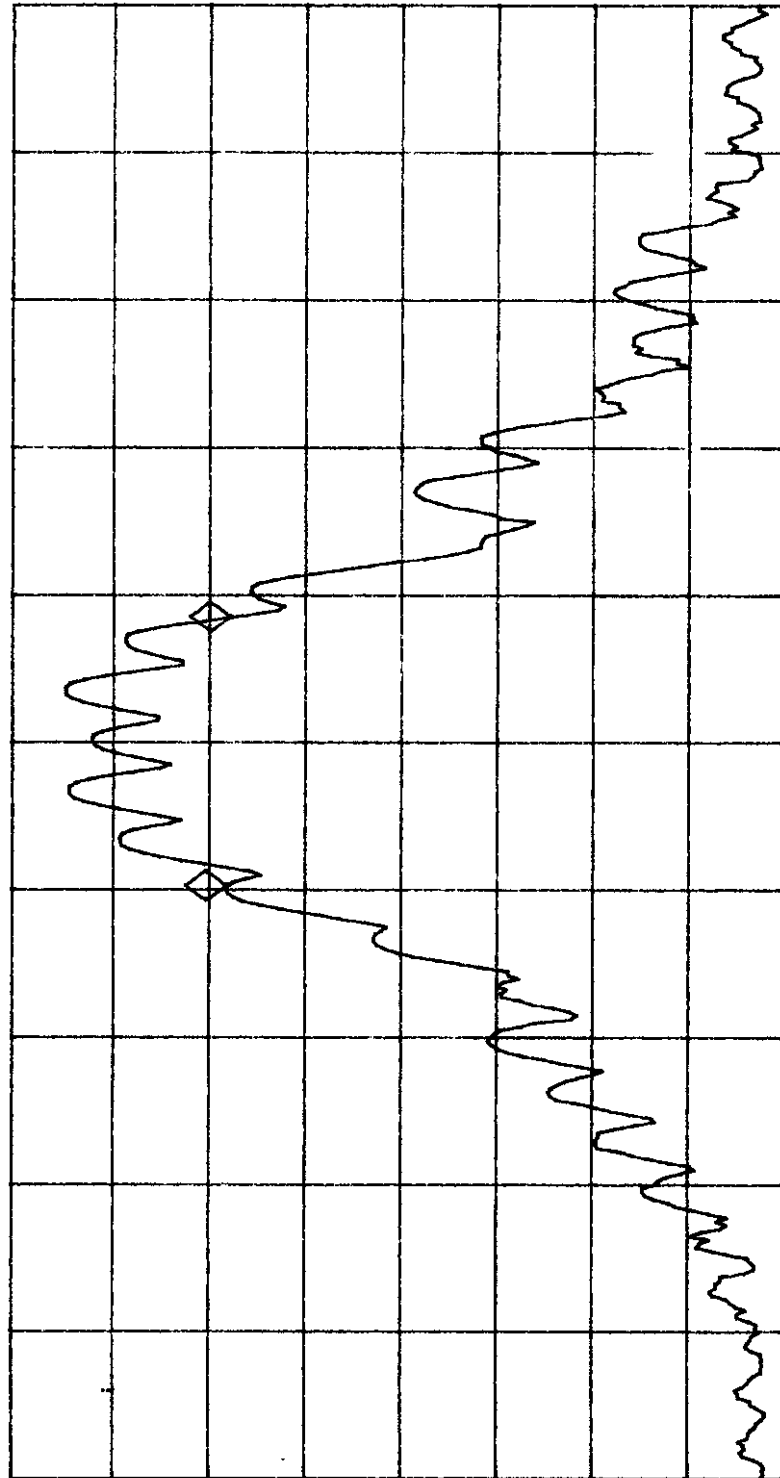

VA SB
SC FC
CORR

CENTER 138.00000 MHz
#IF BW 1.0 kHz

AVG BW 1 kHz

SPAN 75.00 kHz
SWP 300 msec



UltraTech
Engineering Labs Inc.

TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCIVER, MODEL TFM-500


Frequency: 138 MHz, Power Rating: 0.0 W, Channel Spacing: 12.5 kHz
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 20, 1999
Tested by: Hung Trinh

hp

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 138.00000 MHz
38.74 dBm

No user
Menu

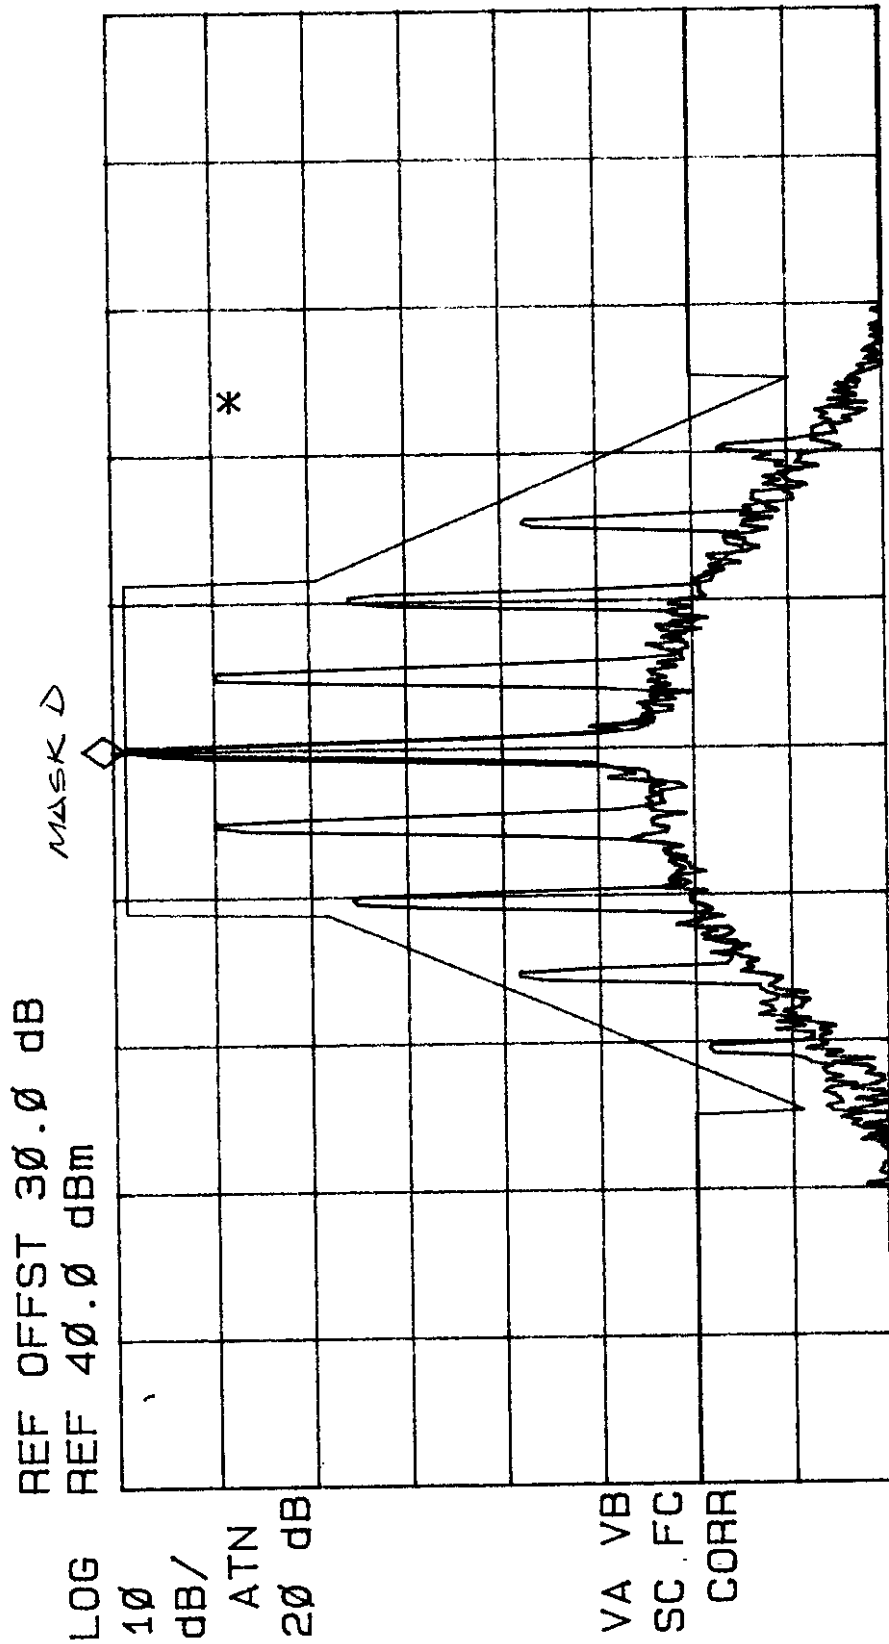

CENTER 138.00000 MHz
#IF BW 100 Hz
#AVG BW 100 Hz
SPAN 50.00 kHz
SWP 15.0 sec

REF LEVEL
39.5 dBm

ACTV DET: PEAK

No user
Menu


MEAS DET: PEAK QP AVG

MKR 150.00000 MHz
38.28 dBm

REF OFFST 30.0 dB
REF 39.5 dBm

LOG 10
dB/
ATN
20 dB

MASK D

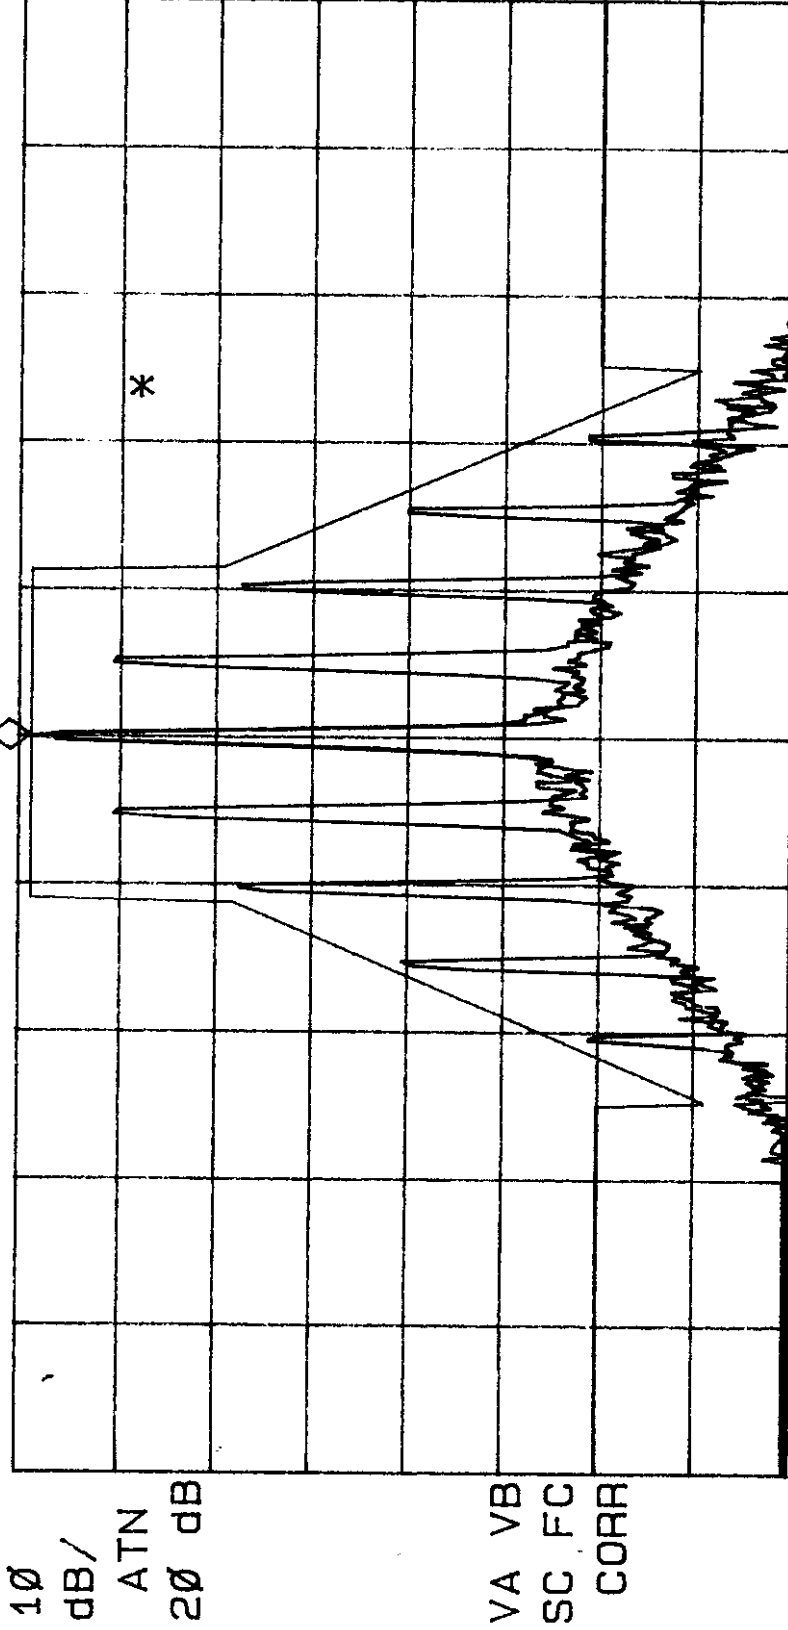

VA VB
SC FC
CORR

CENTER 150.00000 MHz

SPAN 50.00 kHz

#IF BW 100 Hz

#AVG BW 100 Hz

SWP 15.0 sec




Date: Jan. 20, 1999
Tested by: Ilung Trinh

TECHNISONIC INDUSTRIES LTD.
VHF/UHF AIRBORNE TRANSCIVER, MODEL TFM-500
Frequency: 124.4 MHz, Power Rating: 10.0 W, Channel Spacing: 12.5 kHz
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

REF LEVEL
39.9 dBm

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 174.00000 MHz
38.59 dBm

No user
Menu

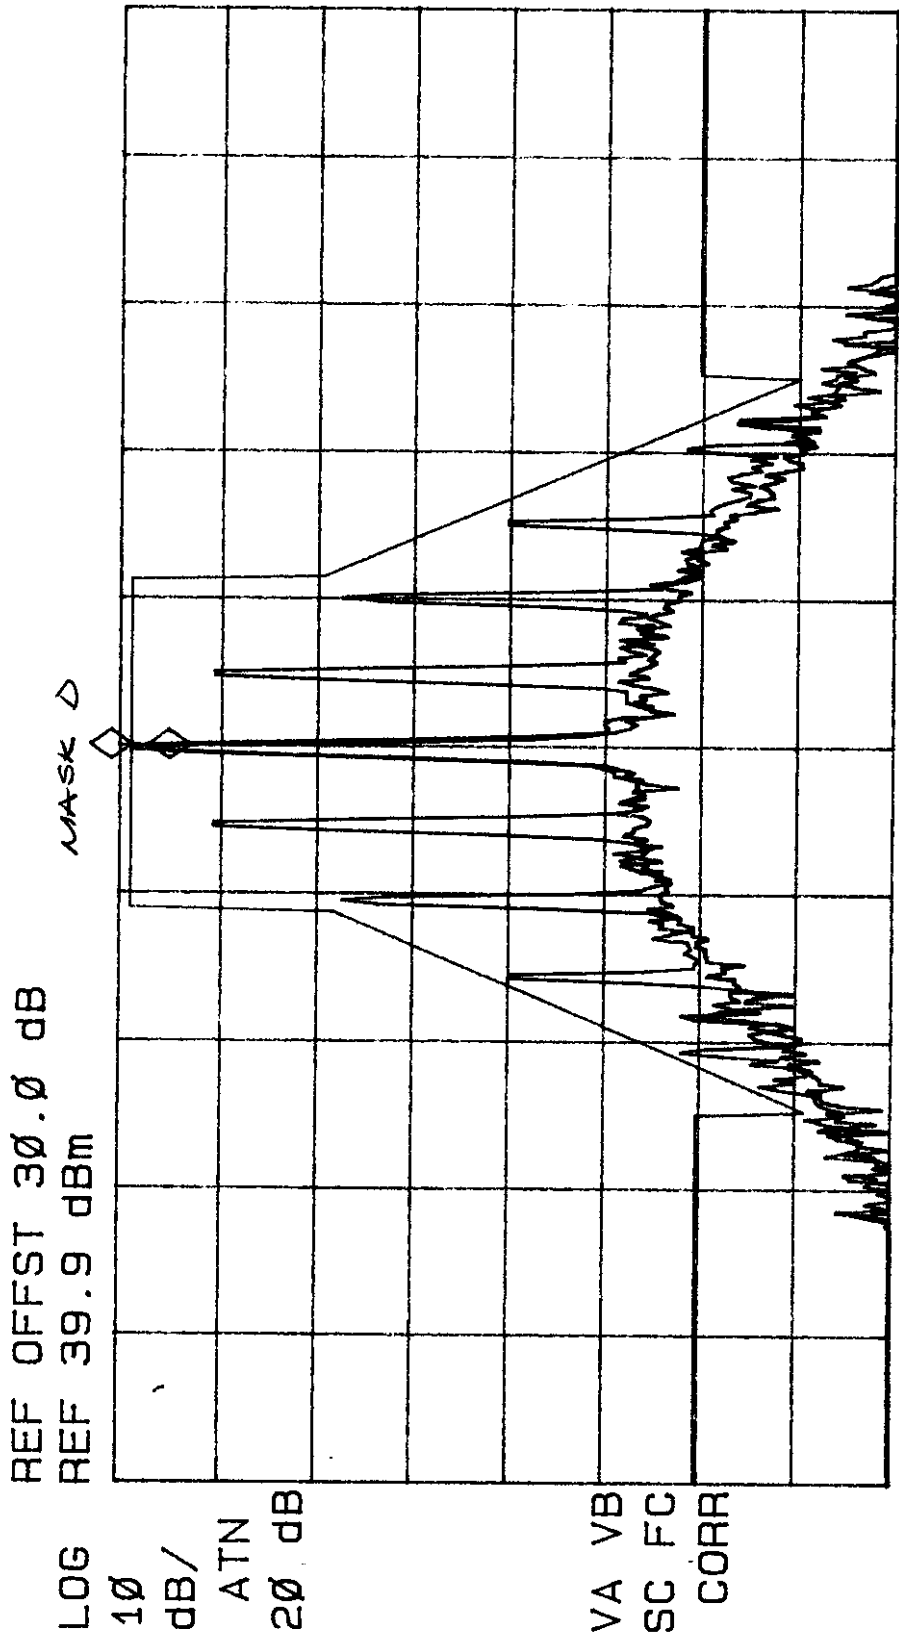

CENTER 174.00000 MHz
#IF BW 100 Hz
#AVG BW 100 Hz
SPAN 50.00 kHz
SWP 15.0 sec



UltraTech
Engineering Labs Inc.

hp

TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCIVER, MODEL TFM-500

Frequency: 406.125 MHz, Power Rating: 10.0 W, Channel Spacing: 12.5 kHz

Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 20, 1999
Tested by: Hung Trinh

REF LEVEL
39.6 dBm

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

MKR 406.12450 MHz

38.04 dBm

No user

Menu

REF OFFST 30.0 dB
REF 39.6 dBm

MASK D

LOG

10

dB/


ATN

20 dB

VA VB

SC FC

CORR

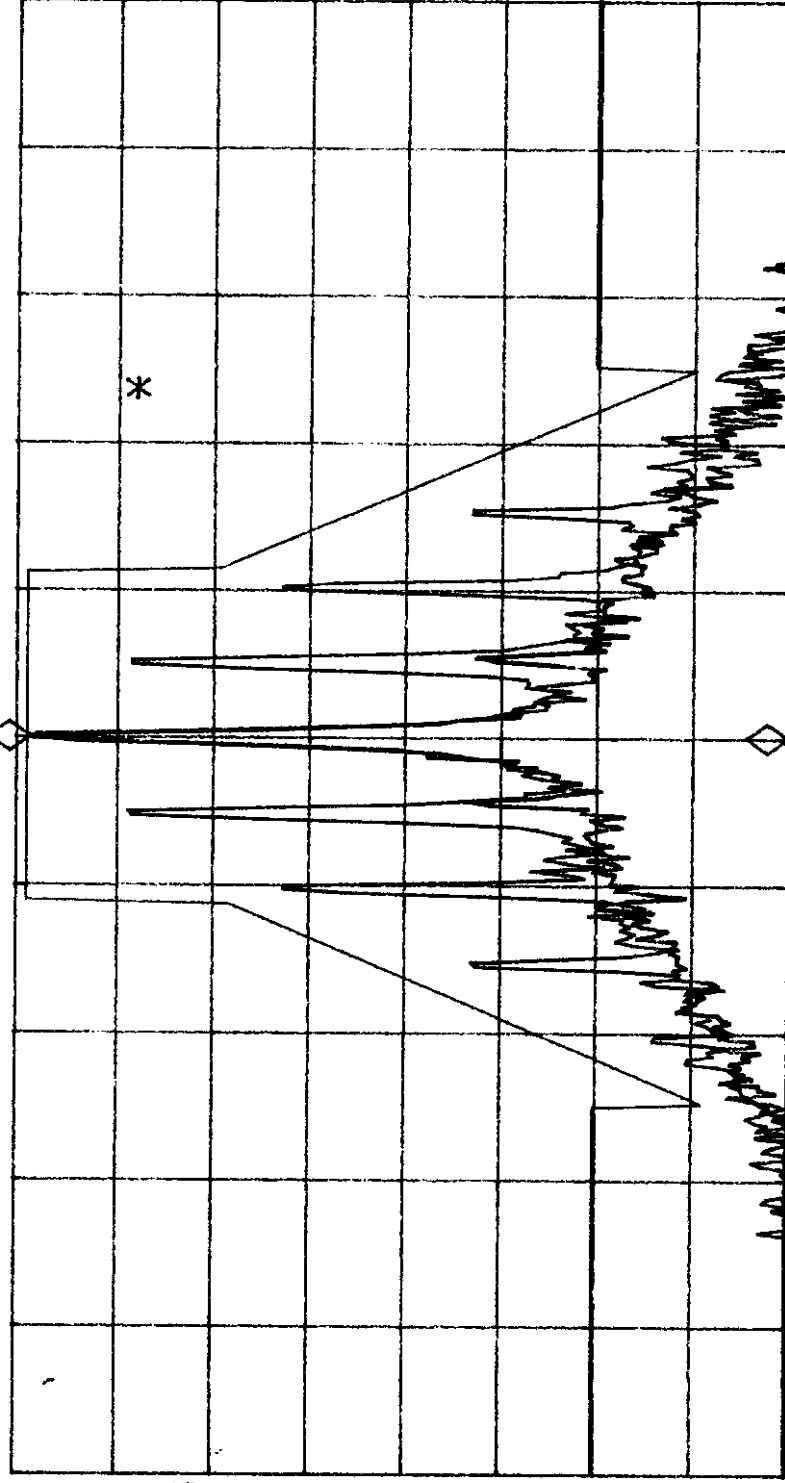

CENTER 406.12450 MHz

#IF BW 100 Hz

#AVG BW 100 Hz

SPAN 50.00 KHz

SWP 15.0 sec




UltraTech
Engineering Labs Inc.

TECHNISONIC INDUSTRIES LTD.
VHF/UHF AIRBORNE TRANSCIVER, MODEL TFM-500
Frequency: 450 MHz, Power Rating: 10.0 W, Channel Spacing: 12.5 kHz
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 20, 1999
Tested by: Hung Trinh

hp

REF LEVEL 39.2 dBm
ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 449.99950 MHz
37.50 dBm
No user Menu

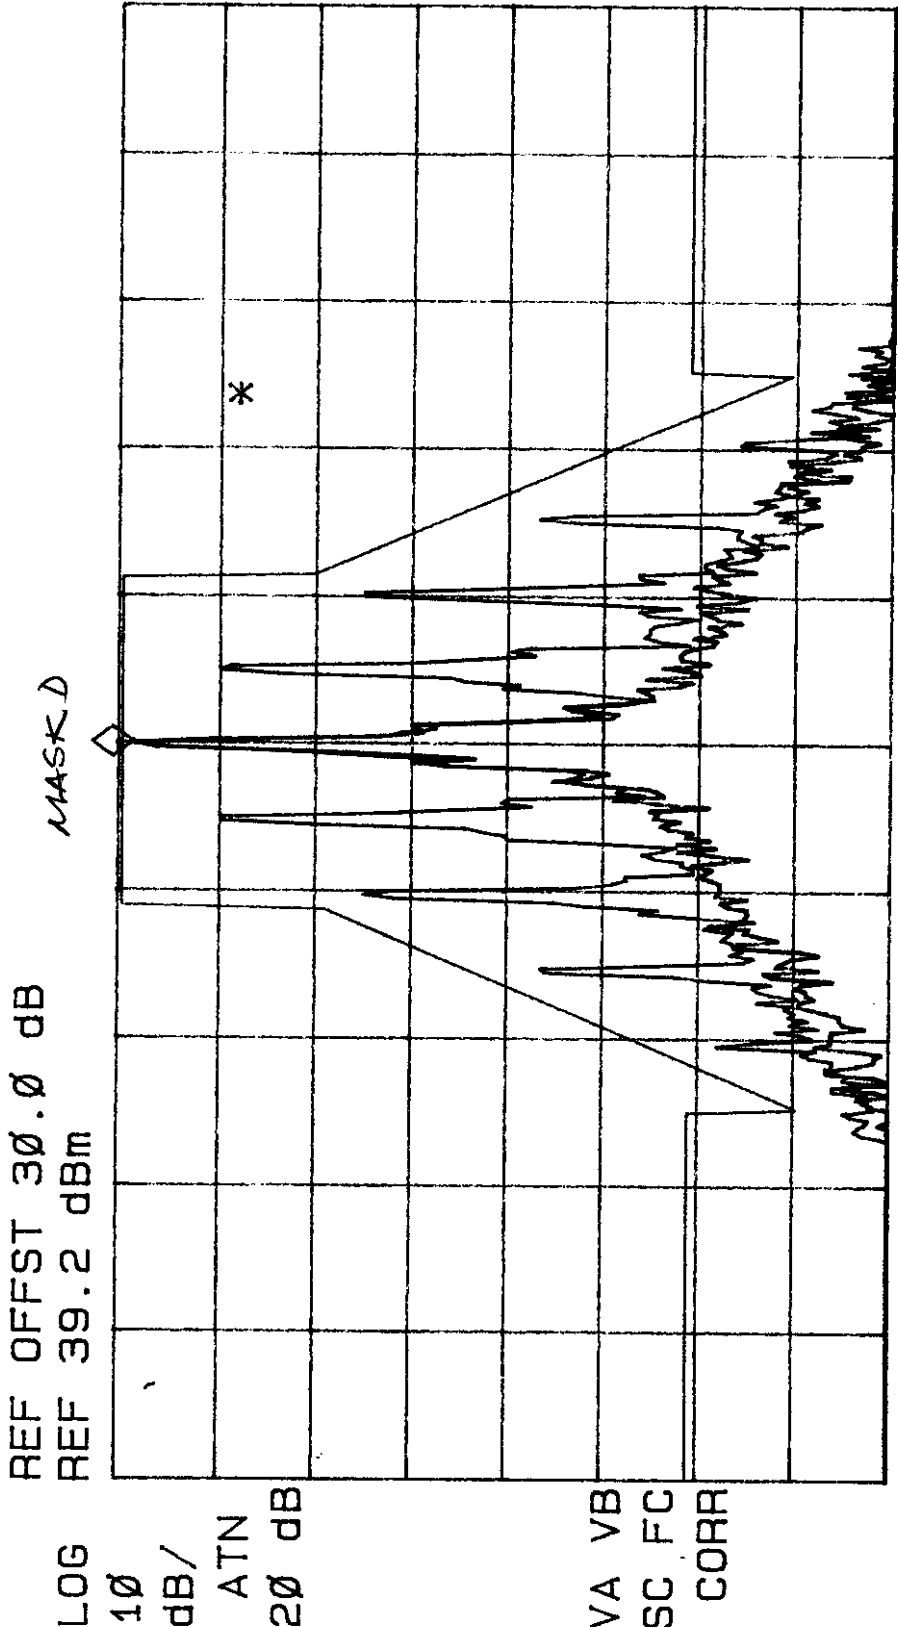

CENTER 449.99950 MHz
#IF BW 100 Hz
#AVG BW 100 Hz
SPAN 50.00 kHz
SWP 15.0 sec

TECHNISONIC INDUSTRIES LTD.
VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500
Frequency: 470 MHz, Power Rating: 100 W, Channel Spacing: 12.5 kHz
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

REF LEVEL
39.4 dBm


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 469.99963 MHz
38.32 dBm

No user
Menu

REF OFFST 30.0 dB
REF 39.4 dBm

MASK

LOG 10 dB/ ATN 20 dB

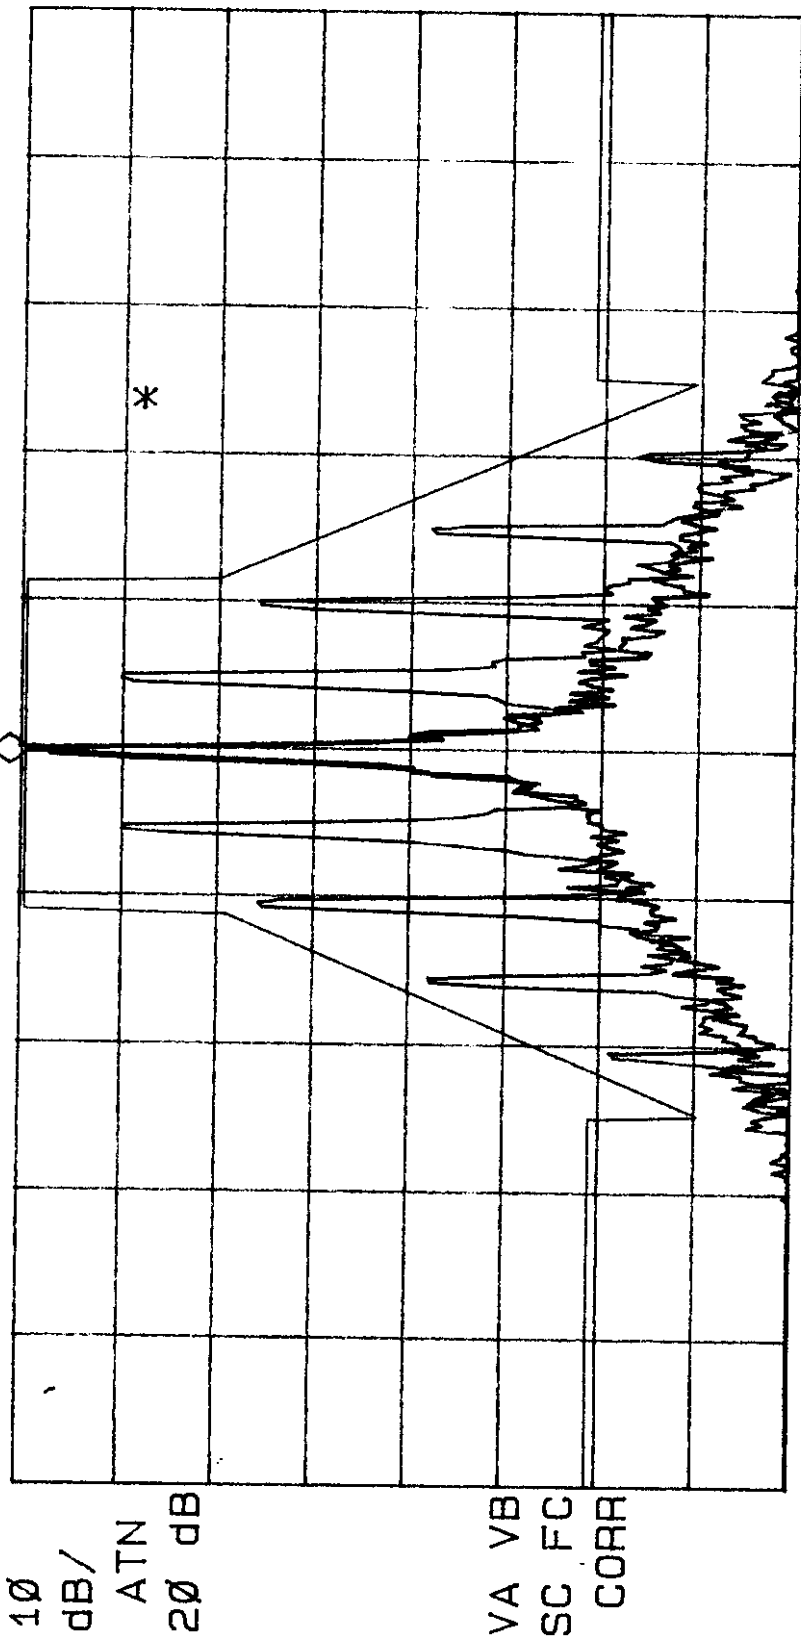

CENTER 469.99975 MHz
#IF BW 100 Hz

SPAN 50.00 KHz
SWP 15.0 sec

#AVG BW 100 Hz

4.6. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS @ FCC 90.210

PRODUCT NAME: VHF/UHF FM MOBILE TRANSCEIVER,
Model No.: TFM-500

FCC REQUIREMENTS:

FCC Part 90, Sub. I, Para. 90.210

Emissions shall be attenuated below the mean output power of the transmitter as follows:

FREQUENCY RANGE (MHz)	Recommended OBW (KHz)	CHANNEL SPACING (KHz)	Recommended FREQ. DEVIATION (KHz)	FCC SPECIFICATION LIMITS (Para. No.)
150-174 / 403-512	20	25.0	5.0	90.210(b): Mask B – Audio & Voice
150-174 / 403-512	10	12.5	2.5	90.210(d): Mask D – Audio & Voice

CLIMATE CONDITION:

Standard Temperature and Humidity:

- Ambient temperature: 21 °C
- Relative humidity: 43%

POWER INPUT:

28 Vdc.

TEST EQUIPMENT:

- Advantest Spectrum Analyzer, Model R3271, S/N: 15050203
- Bird Attenuator, 50 Ohm IN/OUT
- Hihpass Filter, Microphase, P/N: CR220HIB, S/N: IITI11000AB, cut-off freq.: 600 MHz.
- Audio Oscillator, HP, Model 204C, SN: 0989A08798, Output: 0-1.2 MHz, 5 Vrms.

METHOD OF MEASUREMENTS:

With transmitter modulation characteristics described in Out-of-Band Emissions measurements @ 2.989, the transmitter spurious and harmonic emissions were scanned. The spurious and harmonic emissions were measured with the Spectrum Analyzer controls set as RBW = 100 kHz, VBW = 100 kHz and SWEEP TIME = AUTO). The transmitter was operated at a full rated power output, and modulated as follows:

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhik.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>


File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

FCC CFR 47, Para. 2.997 - Frequency spectrum to be investigated:- The spectrum was investigated from the lowest radio generated in the equipment up to at least the 10th harmonic of the carrier frequency or to the highest frequency practicable in the present state of the art of measuring techniques, whichever is lower. Particular attention should be paid to harmonics and subharmonics of the carrier frequency. Radiation at the frequencies of multiplier stages should be checked. The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

FCC CFR 47, Para. 2.991 - Spurious Emissions at Antenna Terminal:- The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of the harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in 2.989 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

TEST ARRANGEMENT

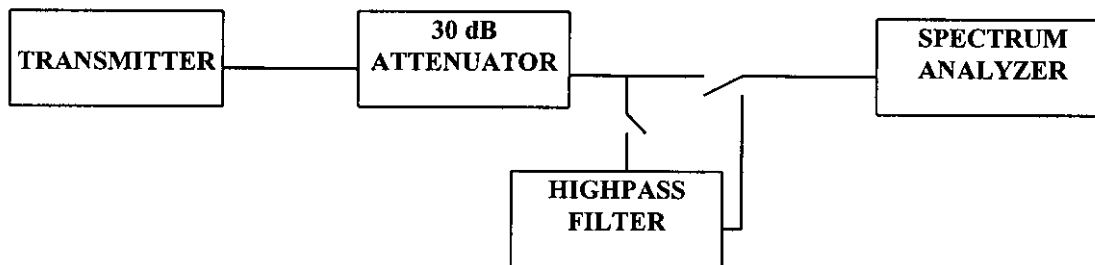

TEST RESULTS: Conforms.

TESTED PERSONNEL: Hung Trinh, RFI Technician

DATE: January 12, 1999

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

MEASUREMENT DATA

SPURIOUS & HARMONIC EMISSIONS AT THE TRANSMITTER ANTENNA TERMINAL

TEST CONFIGURATION

- The transmitter was coupled to the Spectrum Analyzer through a 30 dB attenuator.
- The insertion loss between the transmitter output terminal and the spectrum analyzer was measured to be 30 dB
- The channel frequencies (Low, Middle and High) was established on the extreme edges of the operating band, both upper and lower at its full rated output power. The emissions was investigated up to the tenth harmonic of the fundamental emissions in each case.

* **Remark:** Since the only difference between 12.5 kHz and 25 kHz Channel Spacing operation is the adjustment of frequency deviation limiter (only can be done by software), tests was done with 25 kHz Channel Spacing operation and the results were compared against the limits for 12.5 kHz Channel Spacing operation to represent the worst case.

Fundamental Frequency: 138 MHz, 25 kHz Channel Spacing
RF Output Power: 10 Watts
Modulation: FM modulation with 2.5 kHz Sine Wave signal, freq. Dev. = 3.9 kHz

FREQUENCY (MHz)	RF LEVEL (dBm)	* LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
277.3	-25.1	-20.0	-5.1	PASS
415.9	-21.3	-20.0	-1.3	PASS
2054.0	-29.8	-20.0	-9.8	PASS
2708.0	-30.0	-20.0	-10.0	PASS

The emissions were scanned from 10 MHz to 5 GHz and all emissions less 30 dB below the limits were recorded.

Fundamental Frequency: 150 MHz, 25 kHz Channel Spacing, 25 kHz Channel Spacing
RF Output Power: 10 Watts
Modulation: FM modulation with 2.5 kHz Sine Wave signal, freq. Dev. = 3.9 kHz

FREQUENCY (MHz)	RF LEVEL (dBm)	* LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
302.1	-24.2	-20.0	-4.2	PASS
453.0	-24.4	-20.0	-4.4	PASS
2223.0	-30.3	-20.0	-10.3	PASS
2899.0	-29.9	-20.0	-9.9	PASS

The emissions were scanned from 10 MHz to 5 GHz and all emissions less 30 dB below the limits were recorded.

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Fundamental Frequency: 174 MHz, 25 kHz Channel Spacing RF Output Power: 10 Watts Modulation: FM modulation with 2.5 kHz Sine Wave signal, freq. Dev. = 3.9 kHz				
FREQUENCY (MHz)	RF LEVEL (dBm)	*LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
349.1	-23.7	-20.0	-3.7	PASS
524.8	-24.8	-20.0	-4.8	PASS
1840.0	-30.3	-20.0	-10.3	PASS
2760.0	-30.3	-20.0	-10.3	PASS
The emissions were scanned from 10 MHz to 5 GHz and all emissions less 30 dB below the limits were recorded.				

Fundamental Frequency: 406.125 MHz, 25 kHz Channel Spacing RF Output Power: 10 Watts Modulation: FM modulation with 2.5 kHz Sine Wave signal, freq. Dev. = 3.9 kHz				
FREQUENCY (MHz)	RF LEVEL (dBm)	*LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
428.3	-28.8	-20.0	-8.8	PASS
475.3	-26.3	-20.0	-6.3	PASS
1221.0	-26.3	-20.0	-6.3	PASS
2847.0	-27.2	-20.0	-7.2	PASS
The emissions were scanned from 10 MHz to 5 GHz and all emissions less 30 dB below the limits were recorded.				

Fundamental Frequency: 450 MHz, 25 kHz Channel Spacing RF Output Power: 10 Watts Modulation: FM modulation with 2.5 kHz Sine Wave signal, freq. Dev. = 3.9 kHz				
FREQUENCY (MHz)	RF LEVEL (dBm)	*LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
428.3	-21.7	-20.0	-1.7	PASS
475.3	-22.4	-20.0	-2.4	PASS
901.0	-27.4	-20.0	-7.4	PASS
1353.0	-27.0	-20.0	-7.0	PASS
2702	-27.7	-20.0	-7.7	PASS
The emissions were scanned from 10 MHz to 5 GHz and all emissions less 30 dB below the limits were recorded.				

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2

Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Fundamental Frequency: 470 MHz, 25 kHz Channel Spacing RF Output Power: 10 Watts Modulation: FM modulation with 2.5 kHz Sine Wave signal, freq. Dev. = 3.9 kHz				
FREQUENCY (MHz)	RF LEVEL (dBm)	*LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
940.6	-27.5	-20.0	-7.5	PASS
1413.0	-20.8	-20.0	-0.8	PASS
2350.0	-22.5	-20.0	-2.5	PASS
2824.0	-25.8	-20.0	-5.8	PASS
3764.0	-25.4	-20.0	-5.4	PASS
The emissions were scanned from 10 MHz to 5 GHz and all emissions less 30 dB below the limits were recorded.				

Note: The transmitter conducted emissions measurements at the antenna terminal were also pre-scans with the transmitter operated in 12.5 kHz channel-spacing configuration and the results were found to be identical with those operates in 25 kHz spacing configuration.

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



UltraTech
Engineering Labs Inc.

TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500

Frequency: 138 MHz, Power Rating: 100 W, Channel Spacing: 25 kHz

Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 12, 1999
Tested by: Hung Trinh

ACTV DET: PEAK

No user

MEAS DET: PEAK QP AVG

Menu

MKR 141.2 MHz

38.57 dBm

REF OFFST 30.0 dB

REF 40.0 dBm

LOG

10

dB/


ATN

20 dB

MA SB

SC FC

CORR

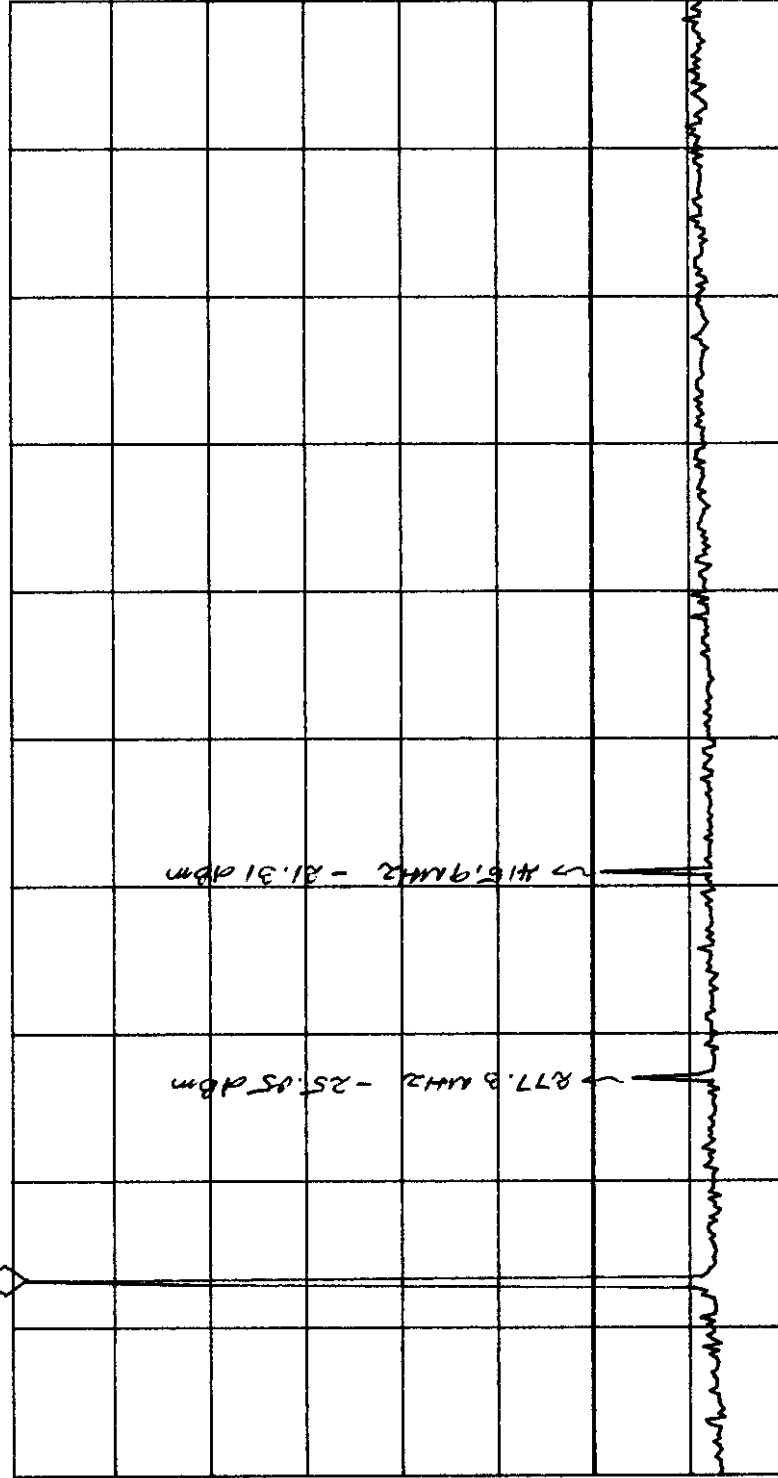

START 10.0 MHz

STOP 1.0000 GHz

IF BW 120 kHz

AVG BW 300 kHz

SWP 206 msec

STOP

2.500 GHZ

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

No user

Menu

MKR 2.054 GHZ

-29.80 dBm

REF OFFST 30.0 dB

REF 40.0 dBm

LOG

10

dB/


ATN

20 dB

MA SB

SC FC

CORR

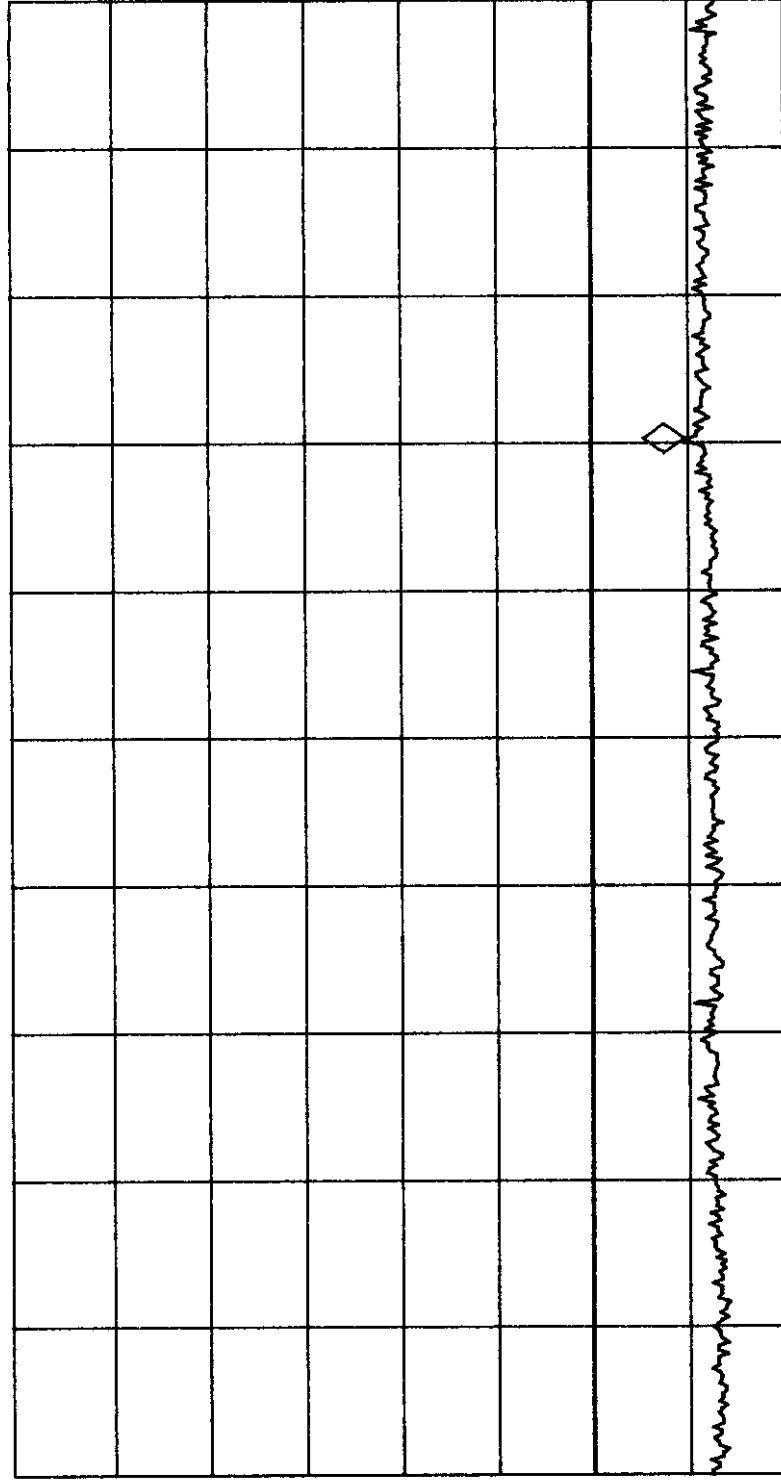

START 1.000 GHZ

IF BW 120 KHZ

AVG BW 300 KHZ

STOP 2.500 GHZ

SWP 313 msec



TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500

Frequency: 138 MHz, Power Rating: 100 W, Channel Spacing: 25 kHz

Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 12, 1999
Tested by: Hung Trinh

STOP

5.000 GHz

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

MKR 2.708 GHz

-29.95 dBm

No user

Menu

REF OFFST 30.0 dB

REF 40.0 dBm

LOG

10

dB/


ATN

20 dB

MA SB

SC FC

CORR

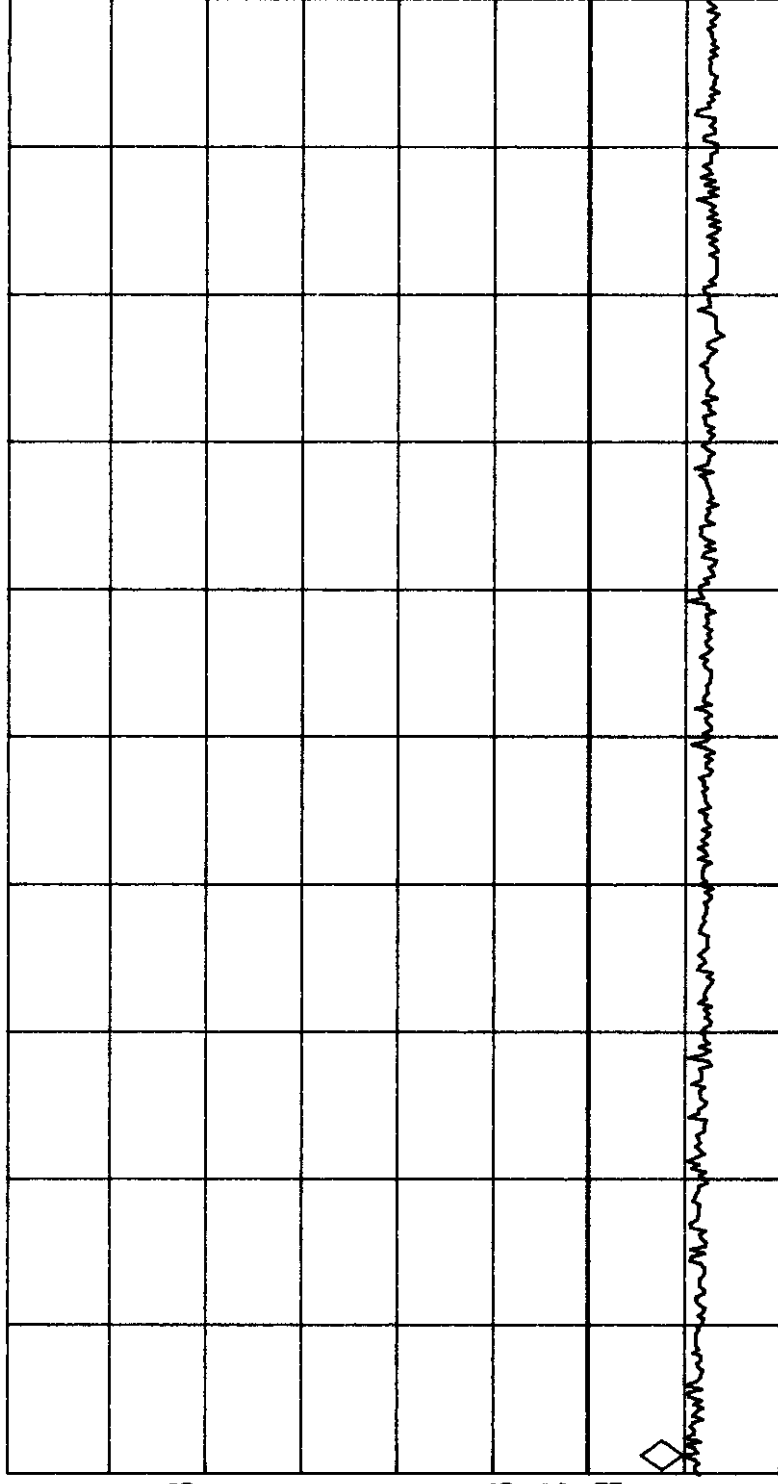

START 2.679 GHz

IF BW 120 KHz

AVG BW 300 KHz

STOP 5.000 GHz

SWP 484 msec

STOP

1.0000 GHz

ACTV DET: PEAK

No user

MEAS DET: PEAK QP AVG

Menu

MKR 153.6 MHz

38.35 dBm

REF OFFST 30.0 dB

REF 40.0 dBm

LOG

10

dB/


ATN

20 dB

MA SB

SC FC

CORR

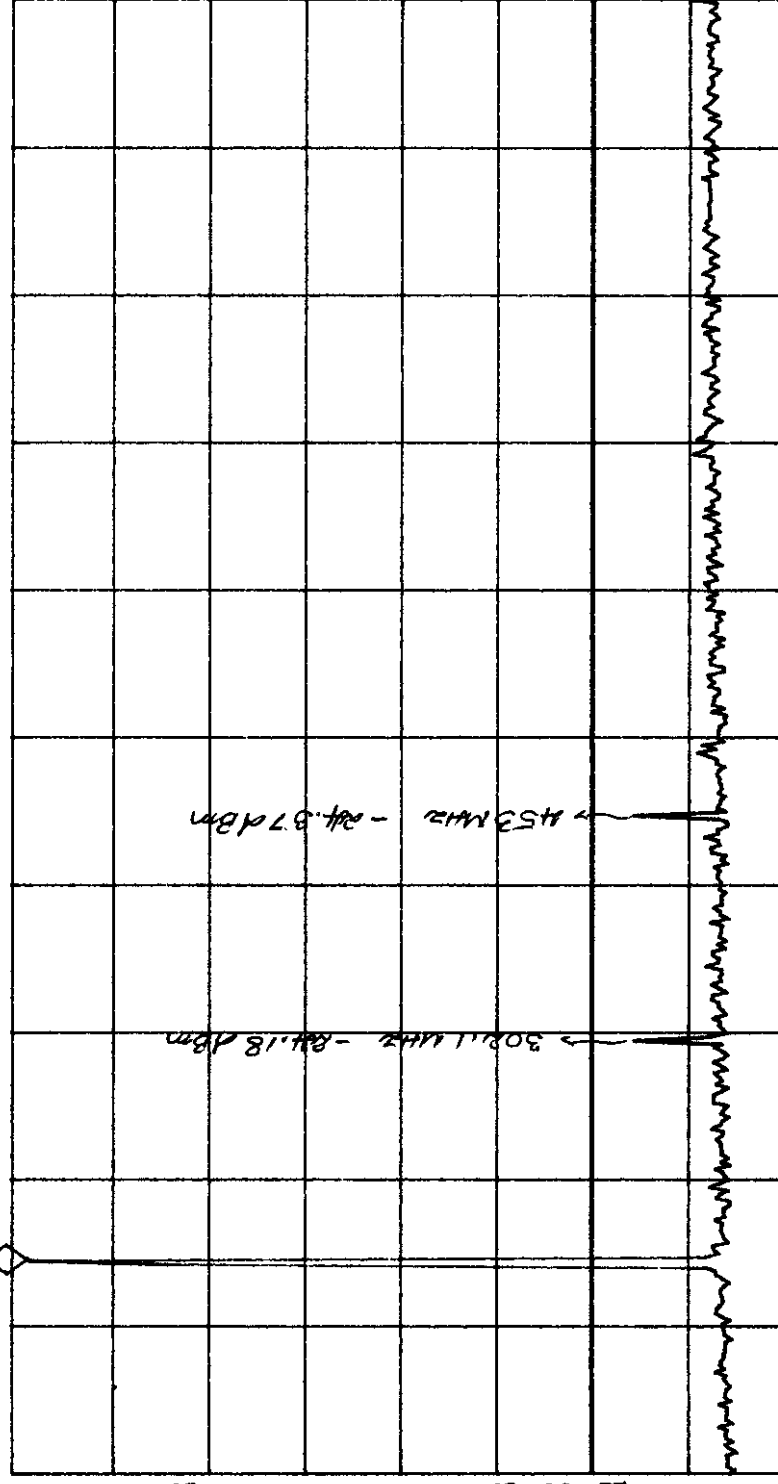

START 10.0 MHz

IF BW 120 KHz

AVG BW 300 KHz

STOP 1.0000 GHz

SWP 206 msec



UltraTech
Engineering Labs Inc.

TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500

Frequency: 150 MHz, Power Rating: 12.0 W, Channel Spacing: 25 kHz

Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 22, 1999
Tested by: Hung Trinh

STOP

2.500 GHz

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

MKR 2.223 GHz

-30.31 dBm

No user
Menu

REF OFFST 30.0 dB

REF 40.0 dBm

LOG

10

dB/


ATN

20 dB

MA SB

SC FC

CORR

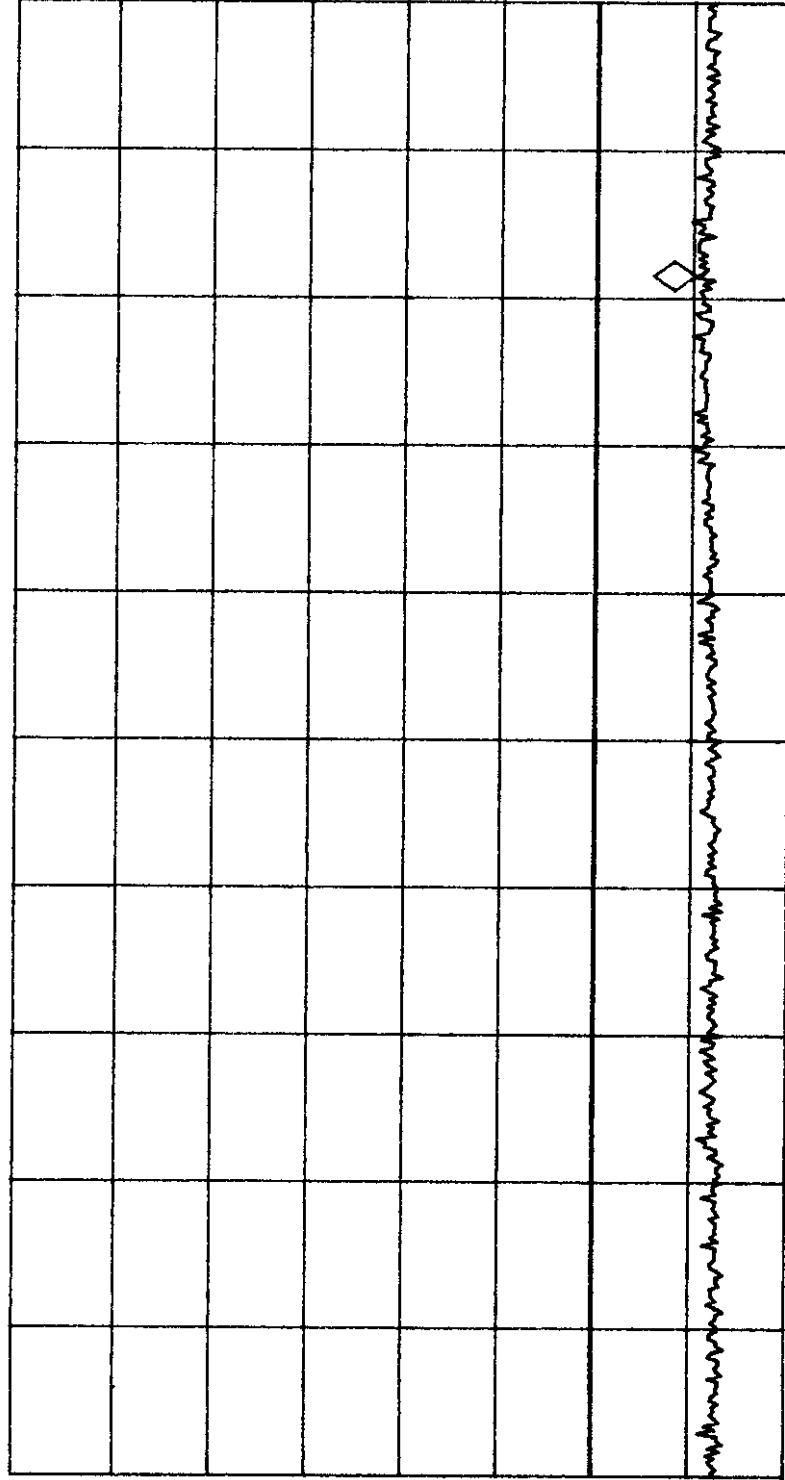

START 1.000 GHz

IF BW 120 kHz

AVG BW 300 kHz

STOP 2.500 GHz

SWP 313 msec




Date: Jan. 12, 1999
Tested by: Hung Trinh

TECHNISONIC INDUSTRIES LTD.
VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500
Frequency: 150 MHz, Power Rating: 100 W, Channel Spacing: 25 kHz
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

STOP 5.000 GHZ
REF OFFST 30.0 dB
REF 40.0 dBm
LOG 10 dB/ ATN 20 dB
MA SB
SC FC
CORR

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 2.899 GHZ
-29.94 dBm

No user
Menu

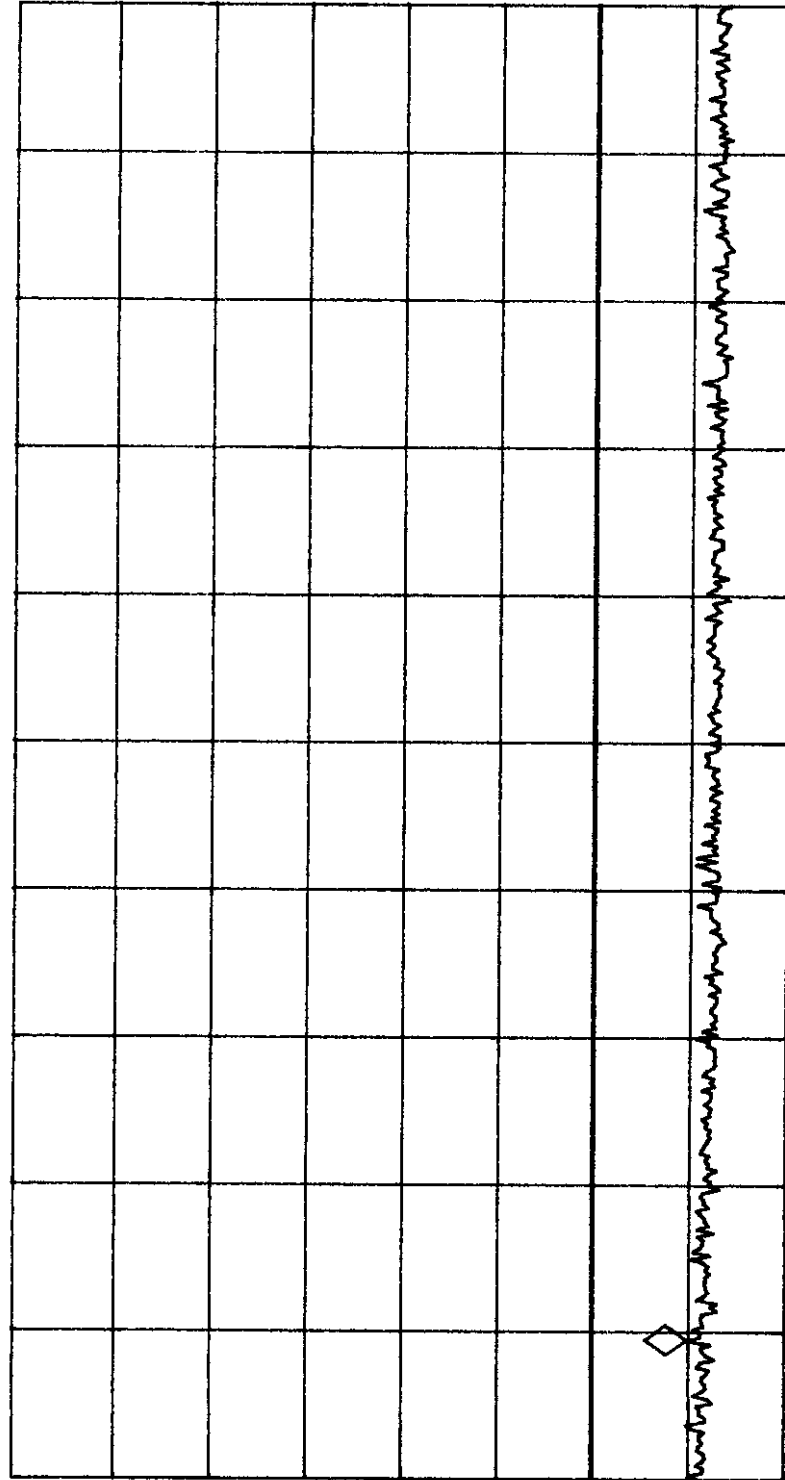

START 2.679 GHZ
IF BW 120 KHZ
AVG BW 300 KHZ
STOP 5.000 GHZ
SWP 484 msec




Date: Jan. 12, 1999
Tested by: Hung Trinh

TECHNISONIC INDUSTRIES LTD.
VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500
Frequency: 174 MHz, Power Rating: 20 W, Channel Spacing: 25 kHz
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

MARKER
175.8 MHz
38.67 dBm
REF OFFST 30.0 dB
REF 40.0 dBm

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 175.8 MHz
38.67 dBm

No user
Menu

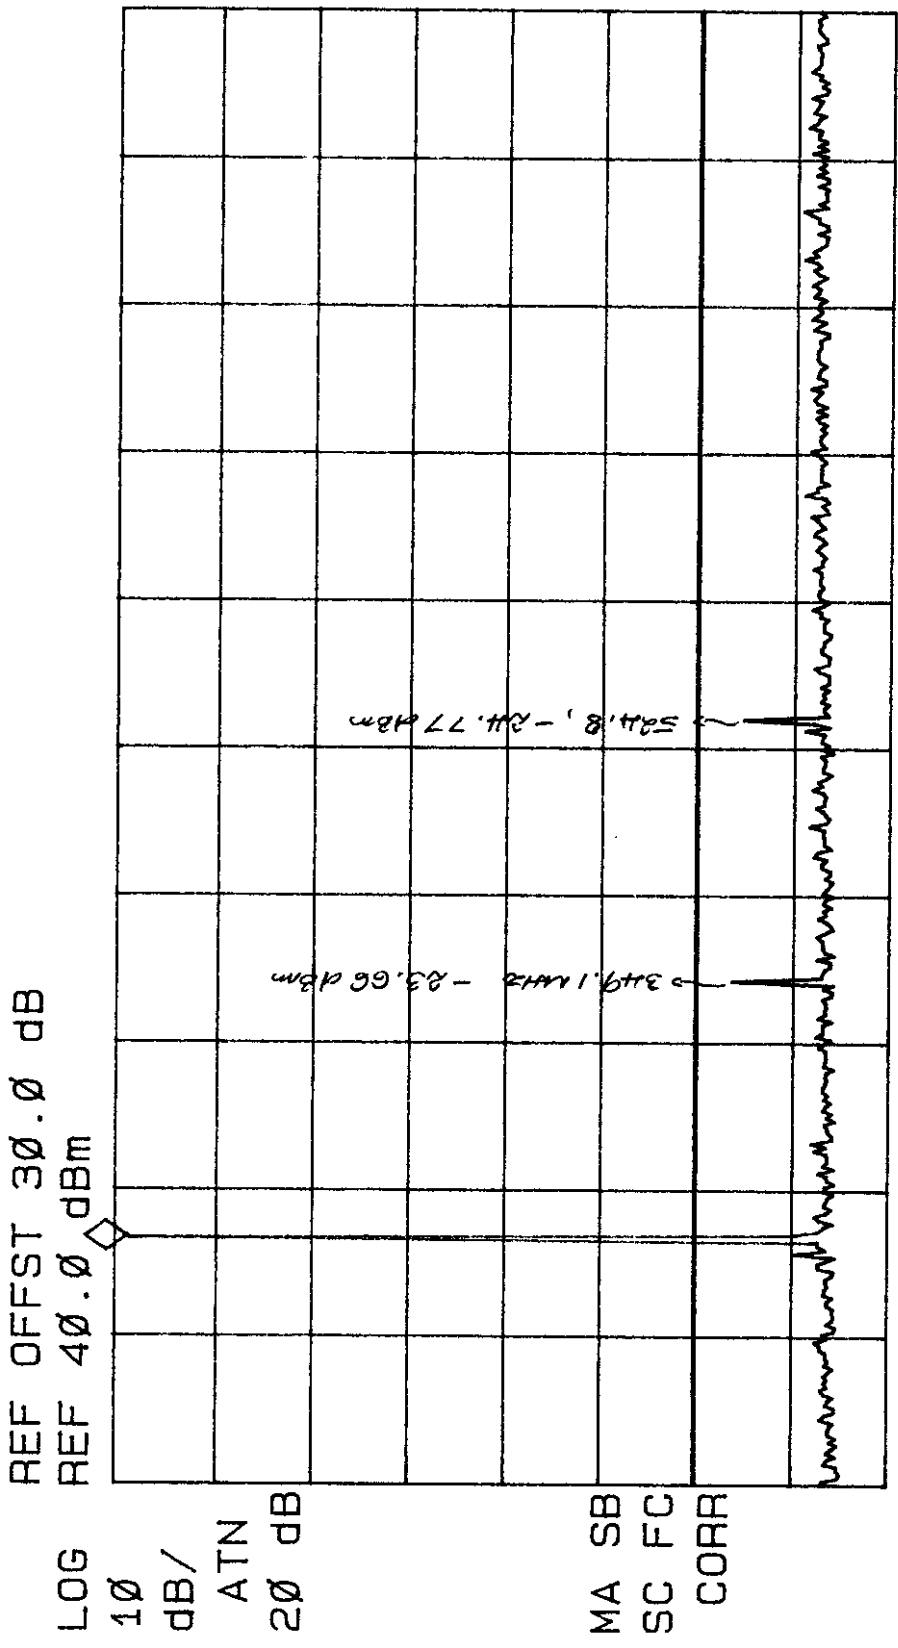

START 10.0 MHz
IF BW 120 kHz
STOP 1.0000 GHz
AVG BW 300 kHz
SWP 206 msec



UltraTech
Engineering Labs Inc.

TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500

Frequency: 174 MHz, Power Rating: 100 W, Channel Spacing: 25 kHz

Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 12, 1999
Tested by: Hung Trinh

REF LEVEL

40.0 dBm

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

No USER
Menu

MKR 1.840 GHZ

-30.28 dBm

REF OFFST 30.0 dB

REF 40.0 dBm


LOG

10

dB/

ATN

20 dB

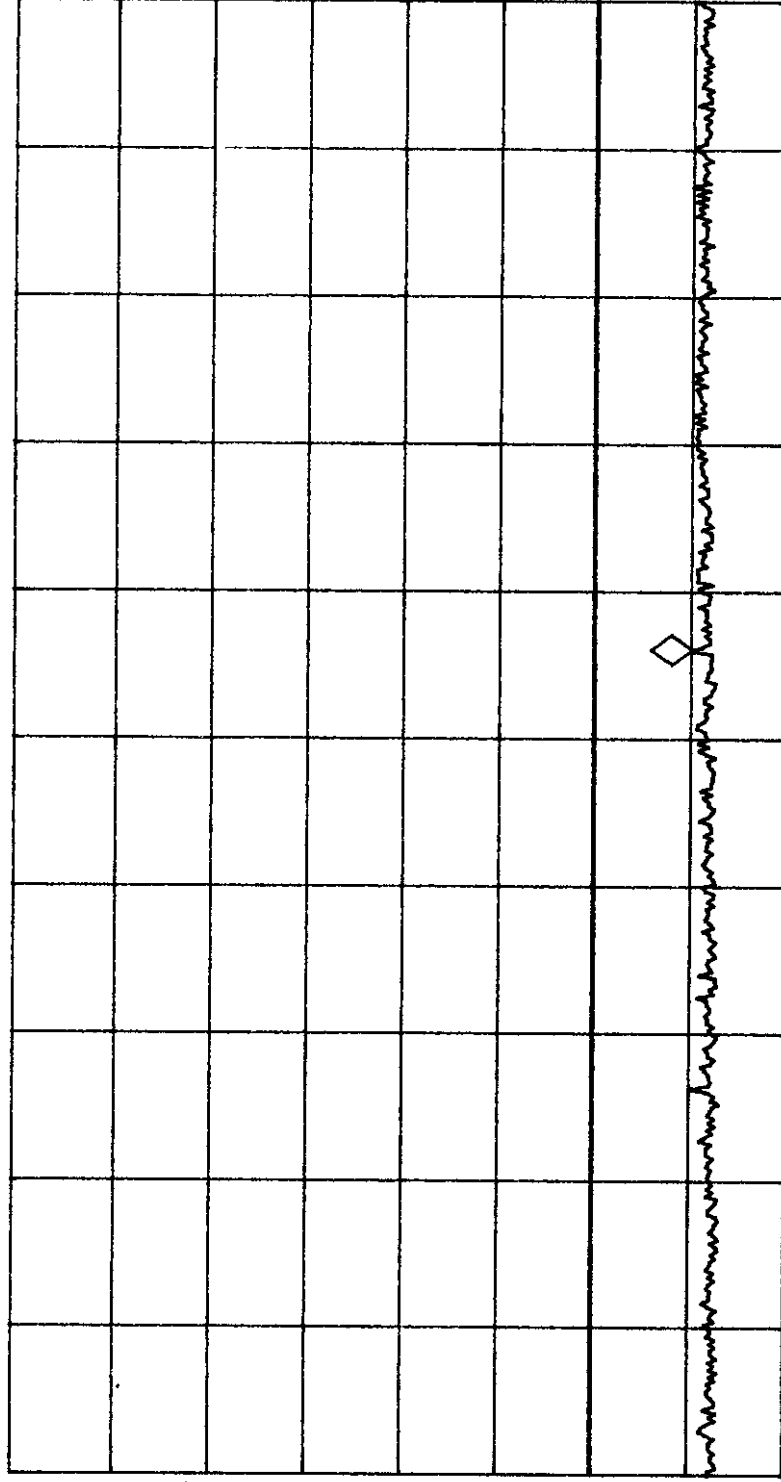

MA SB

SC FC

CORR

START 1.000 GHZ

IF BW 120 KHZ

AVG BW 300 KHZ

STOP 2.500 GHZ

SWP 313 msec



TECHNISONIC INDUSTRIES LTD.
VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500
Frequency: 174 MHz, Power Rating: 100 W, Channel Spacing: 25 kHz
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 22, 1999
Tested by: Hung Trinh

STOP

5.000 GHZ

ACTV DET: PEAK

No user

MEAS DET: PEAK QP AVG

Menu


MKR 2.760 GHZ

-30.32 dBm

REF OFFST 30.0 dB

REF 40.0 dBm

LOG 10 dB/ ATN 20 dB

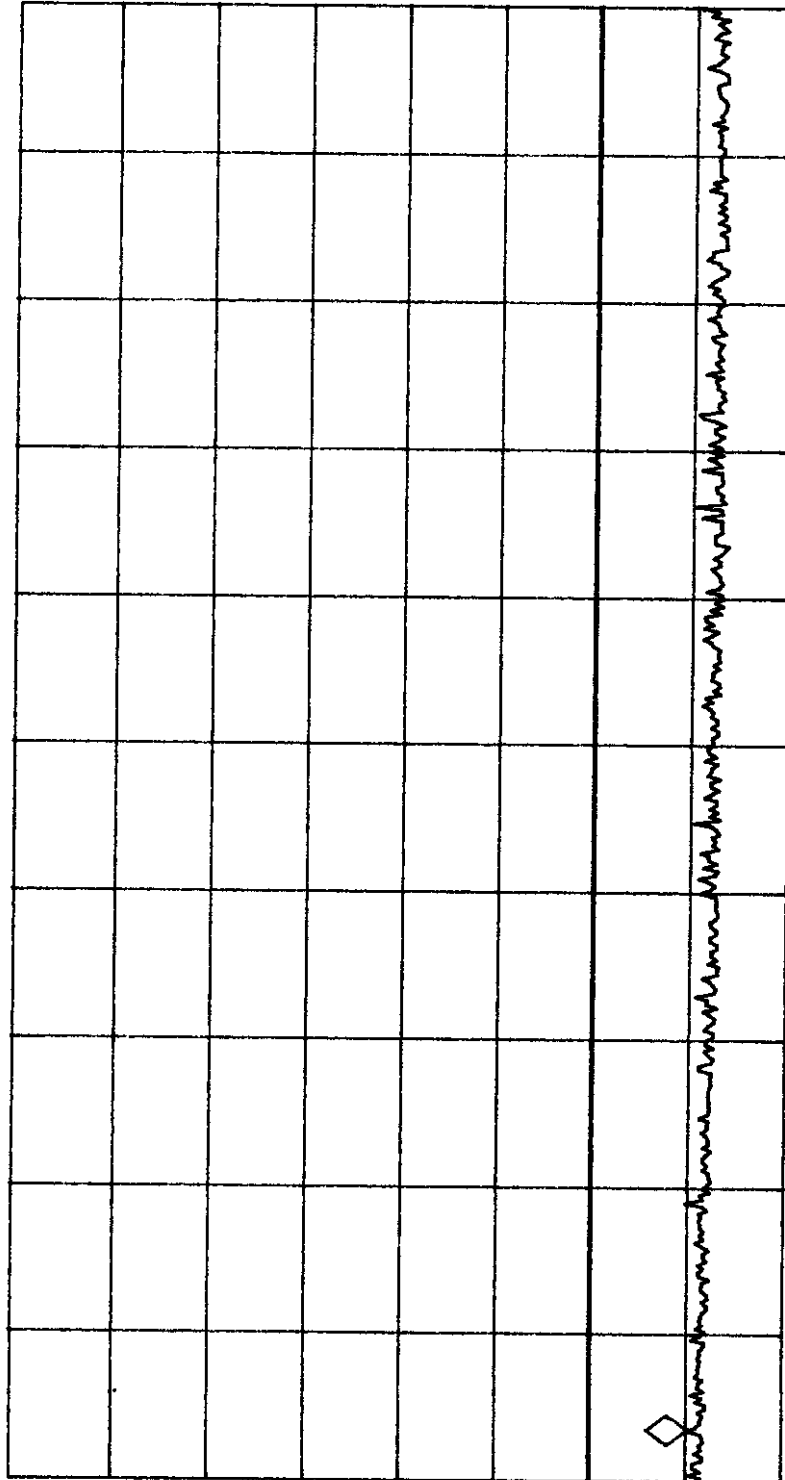

START 2.679 GHZ

IF BW 120 KHZ

AVG BW 300 KHZ

STOP 5.000 GHZ


SWP 484 msec

TECHNISONIC INDUSTRIES LTD.
VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500
Frequency: 408.125 MHz, Power Rating: 10 W, Channel Spacing: 25 kHz
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

STOP 1.0000 GHz
REF OFFST 30.0 dB
REF 40.0 dBm
LOG 10 dB/ ATN 20 dB
MA SB
SC FC
CORR

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 408.5 MHz
38.44 dBm

No user Menu

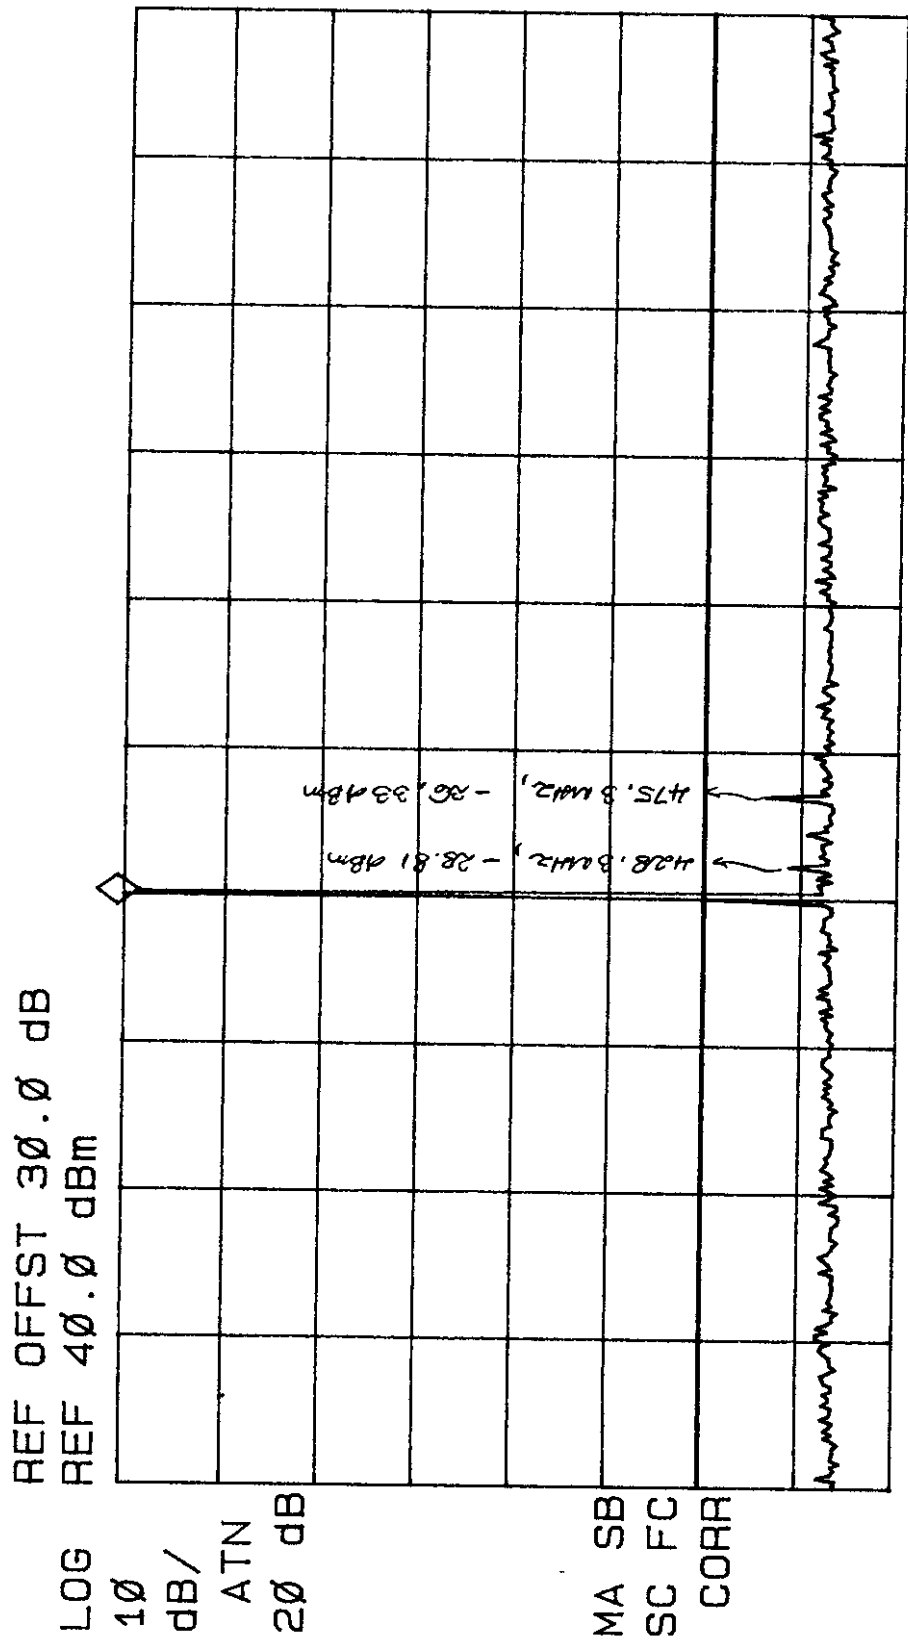

START 10.0 MHz
IF BW 120 kHz
AVG BW 300 kHz
STOP 1.0000 GHz
SWP 206 msec



UltraTech
Engineering Labs Inc.

TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500

Frequency: 406.135 MHz, Power Rating: 10.0 W, Channel Spacing: 25 kHz

Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 12, 1999
Tested by: Hung Trinh

STOP

2.500 GHz

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

No user
Menu

MKR 1.221 GHz

-26.26 dBm

REF OFFST 30.0 dB

REF 40.0 dBm


LOG

10

dB/

ATN

20 dB

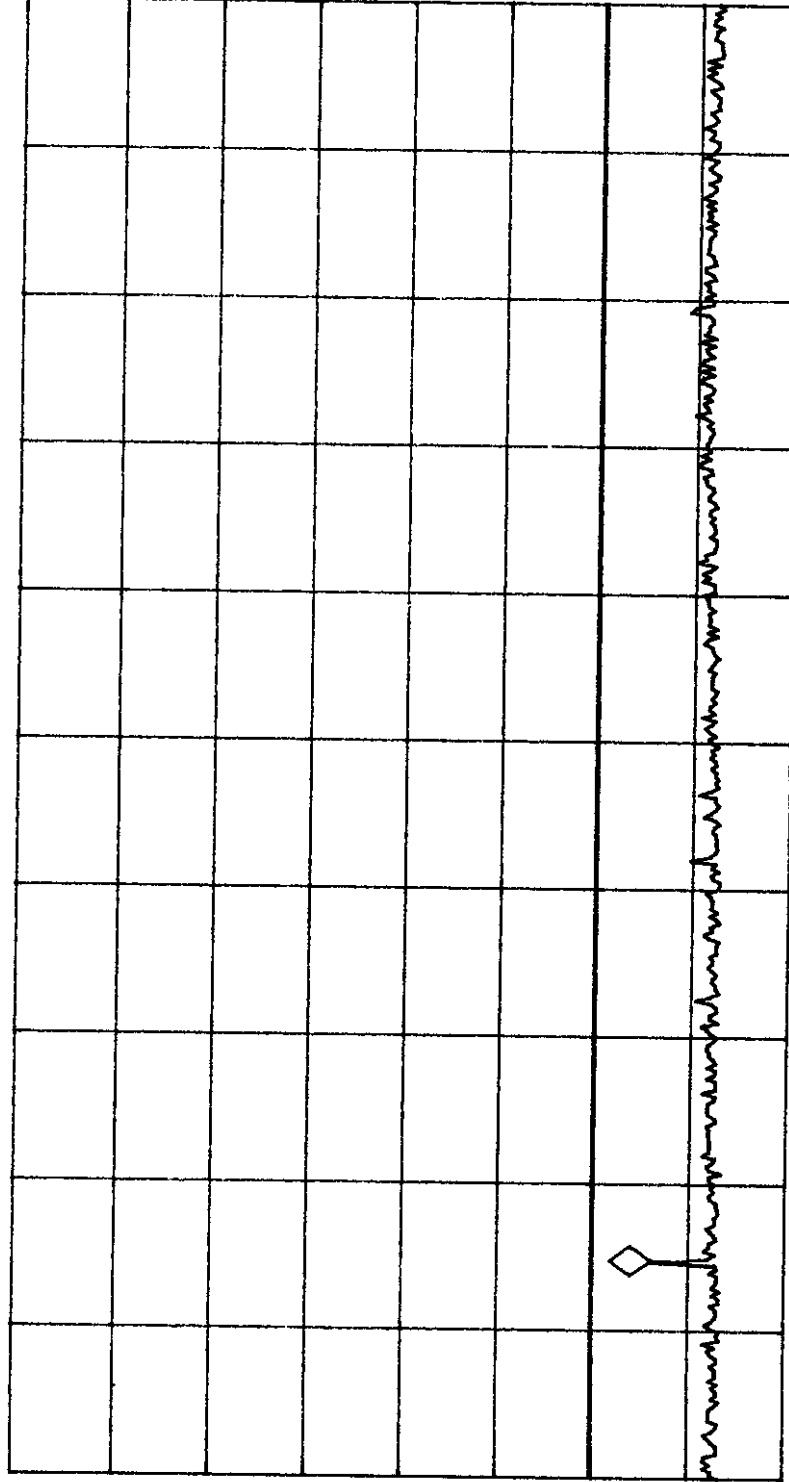

MA SB

SC FC

CORR

START 1.000 GHz

IF BW 120 KHz

AVG BW 300 KHz

STOP 2.500 GHz

SWP 313 msec



Date: Jan. 22, 1999
Tested by: Hung Trinh

TECHNISONIC INDUSTRIES LTD.
VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500
Frequency: 406.125 MHz, Power Rating: 0.0 W, Channel Spacing: 25 kHz
Modulation: FM modulation with 2.5 kHz Sine Wave Signal


STOP
5.000 GHz

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 2.847 GHz
-27.19 dBm

No user
Menu

REF OFFST 30.0 dB
REF 40.0 dBm

LOG 10
dB/
ATN
20 dB

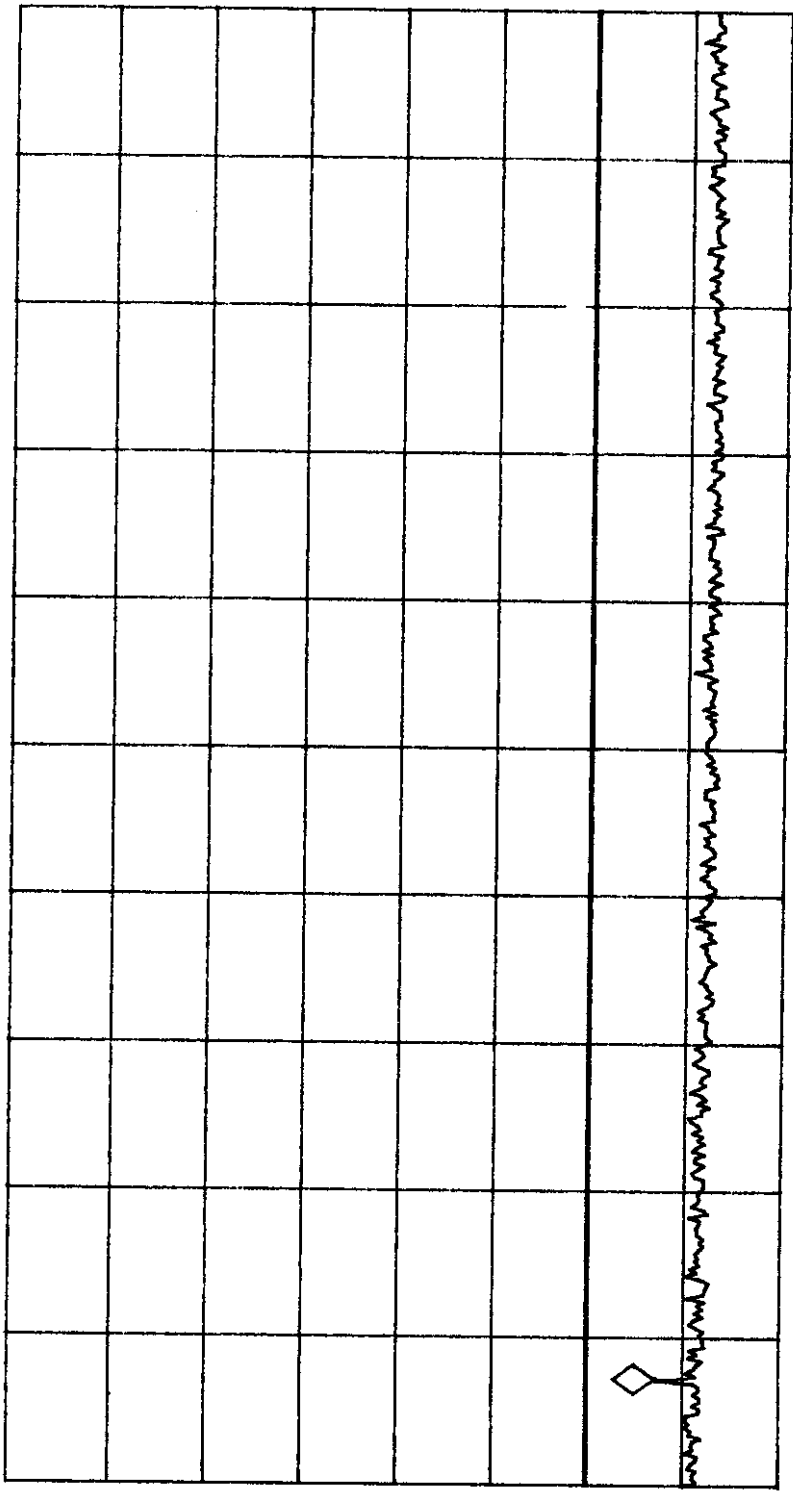

MA SB
SC FC
CORR


START 2.679 GHz
IF BW 120 kHz
STOP 5.000 GHz
AVG BW 300 kHz
SWP 484 msec



Date: Jan. 22, 1999
Tested by: Hung Trinh

TECHNISONIC INDUSTRIES LTD.
VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500
Frequency: 450 MHz, Power Rating: 100 W, Channel Spacing: 25 kHz
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

REF LEVEL 40.0 dBm
ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 453.0 MHz
38.46 dBm

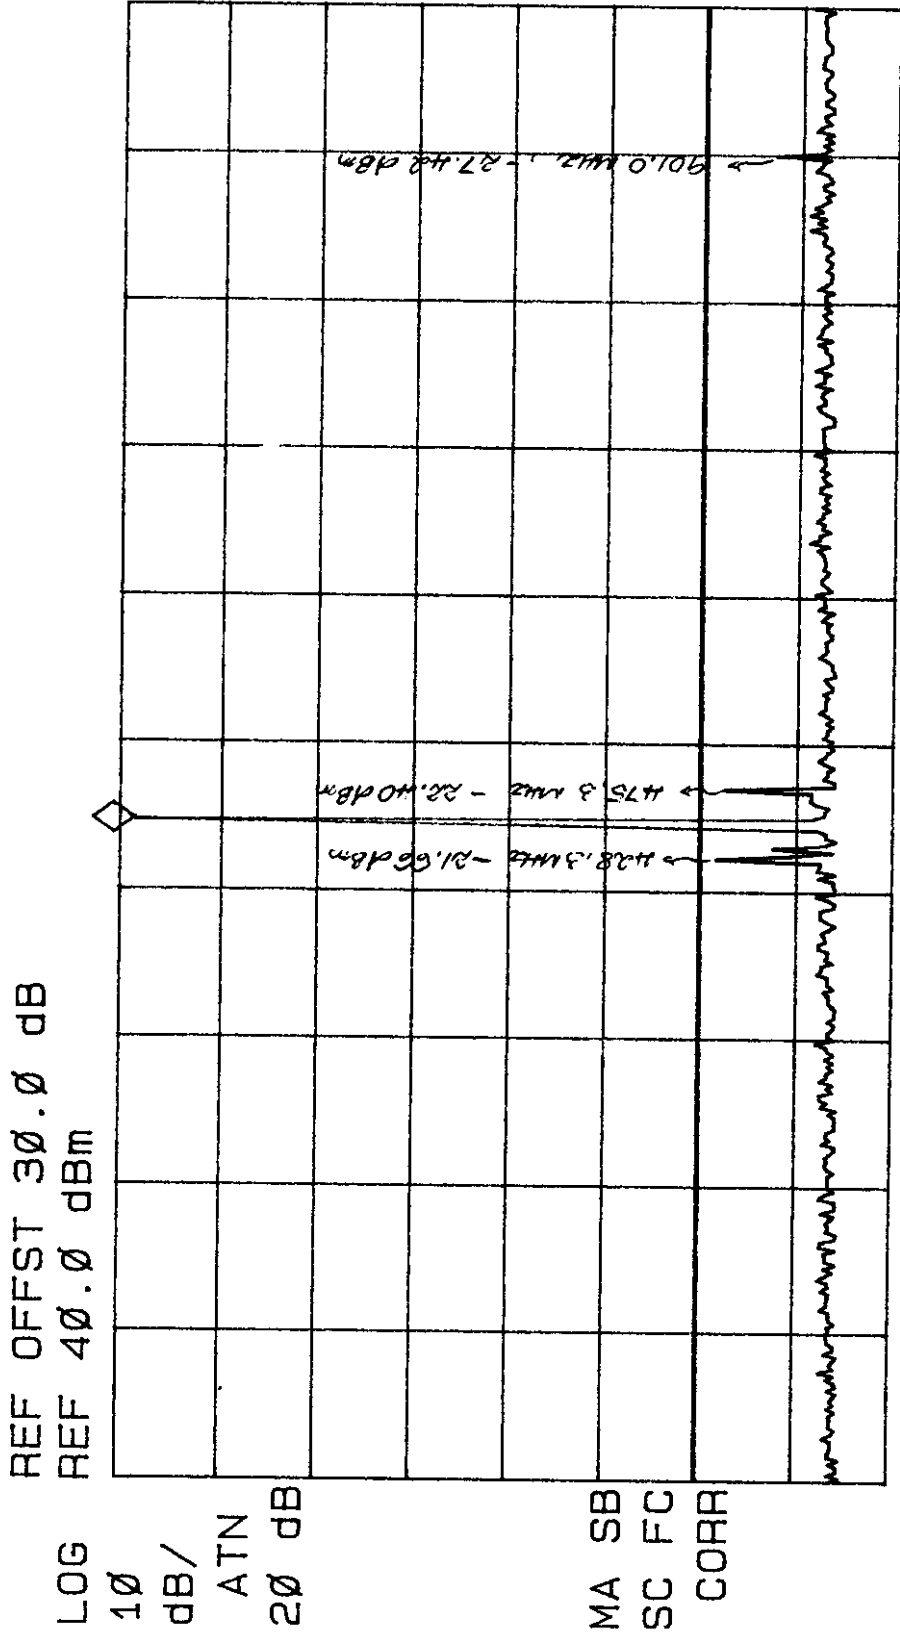

START 10.0 MHz
IF BW 120 kHz
STOP 1.0000 GHz
AVG BW 300 kHz
SWP 206 msec



TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500

Frequency: 4450 MHz, Power Rating: 17.0 W, Channel Spacing: 25 kHz
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 12, 1999
Tested by: Hung Trinh

STOP

2.500 GHz

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

No user
Menu

MKR 1.353 GHz
-26.97 dBm

REF OFFST 30.0 dB

REF 40.0 dBm

LOG

10

dB/


ATN

20 dB

MA SB

SC FC

CORR

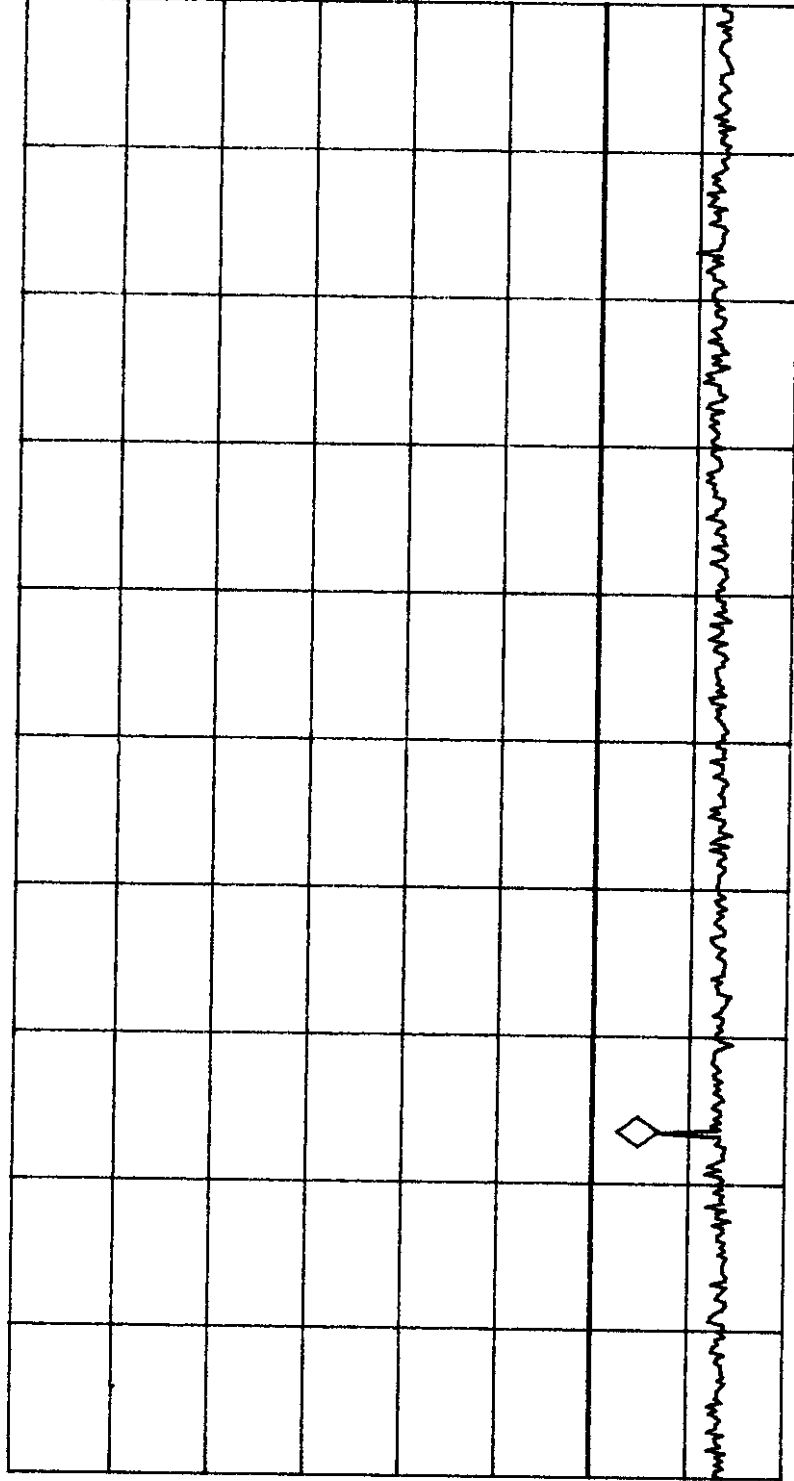

START 1.000 GHz

IF BW 120 kHz

AVG BW 300 kHz

STOP 2.500 GHz

SWP 313 msec



UltraTech
Engineering Labs Inc.

TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCIEVER, MODEL TFM-500

Frequency: 450 MHz, Power Rating: 10.0 W, Channel Spacing: 25 kHz

Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 12, 1999
Tested by: Hung Trinh

STOP

5.000 GHz

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

No user
Menu

MKR 2.702 GHz

-27.66 dBm

REF OFFST 30.0 dB

REF 40.0 dBm


LOG

10

dB/

ATN

20 dB

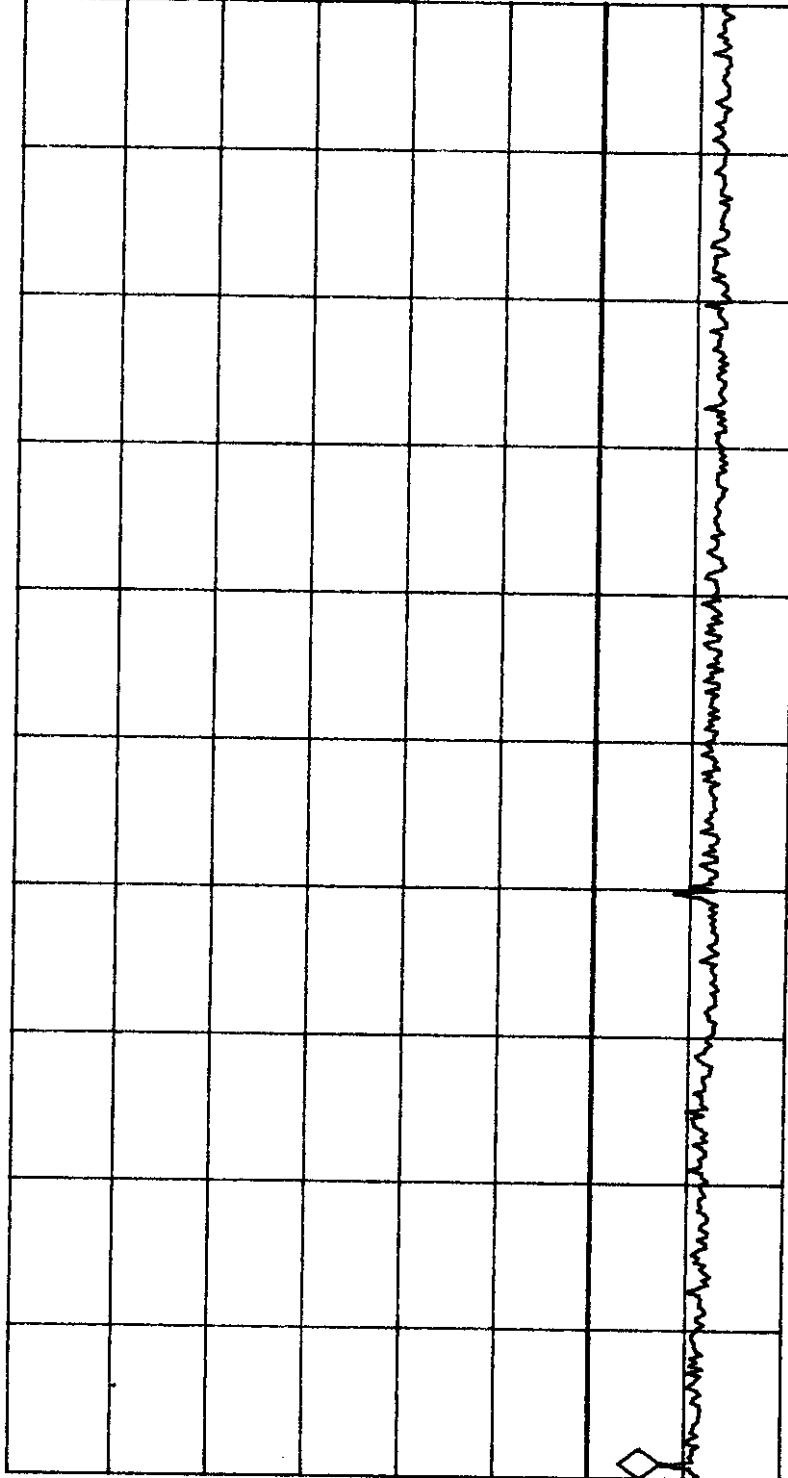

MA SB

SC FC

CORR

START 2.679 GHz

IF BW 120 kHz

AVG BW 300 kHz

STOP 5.000 GHz

SWP 484 msec



TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500

Frequency: 470 MHz, Power Rating: 100 W, Channel Spacing: 25 kHz
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 22, 1999
Tested by: Hung Trinh

STOP

1.00000 GHz

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

No user
Menu

MKR 472.8 MHz
38.53 dBm

REF OFFST 30.0 dB


REF 40.0 dBm

LOG 10

dB/

ATN

20 dB

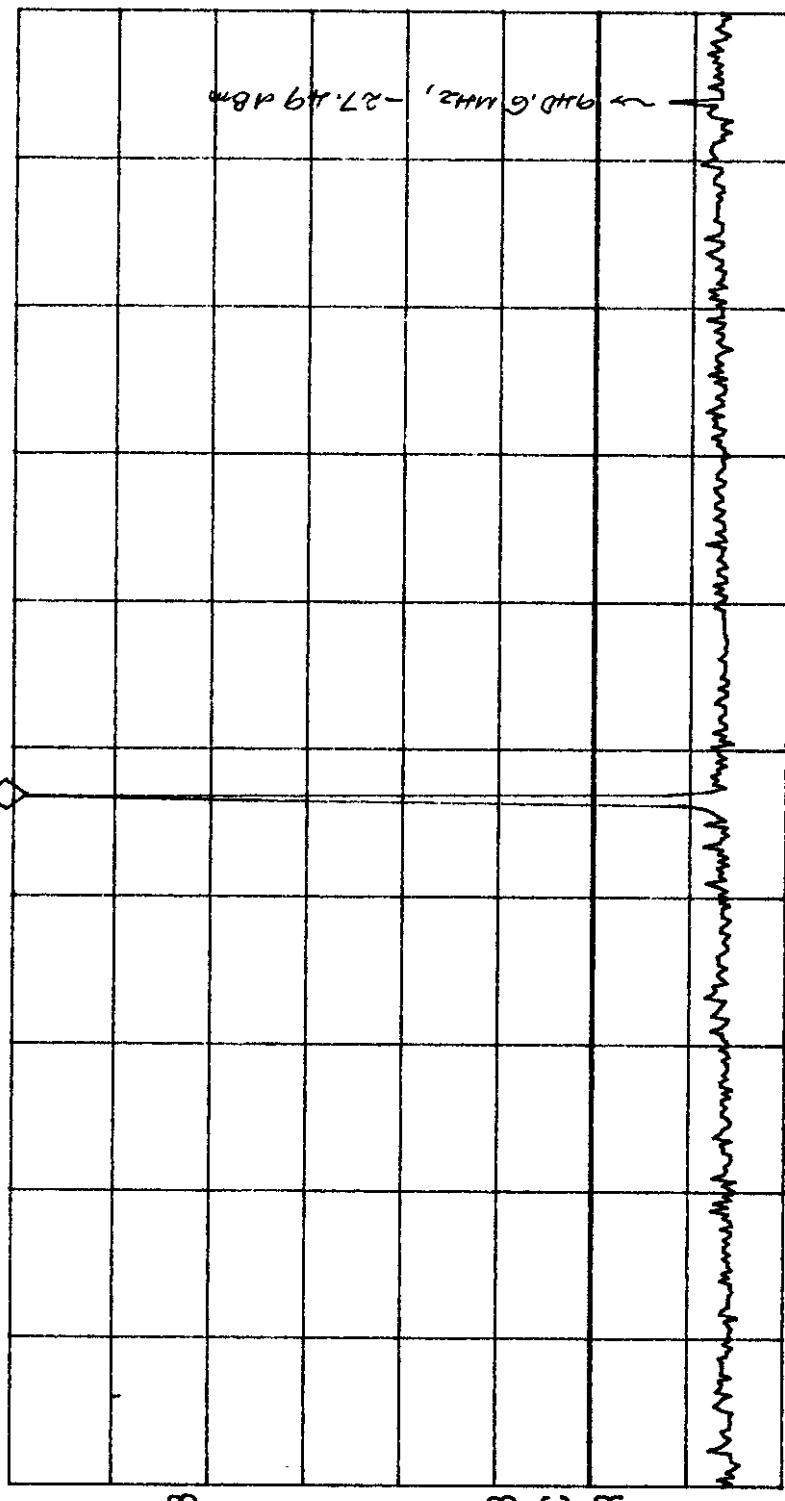

MA SB

SC FC

CORR

START 10.0 MHz

IF BW 120 kHz

AVG BW 300 kHz

STOP 1.00000 GHz

SWP 206 msec



TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCIVER, MODEL TFM-500

Frequency: 470 MHz, Power Rating: 10.0 W, Channel Spacing: 25 kHz
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

Date: Jan. 12, 1999
Tested by: Hung Trinh

STOP

2.500 GHz

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

No user
Menu

MKR 1.413 GHz

-20.84 dBm

REF OFFST 30.0 dB

REF 40.0 dBm

LOG

10

dB/


ATN

20 dB

MA SB

SC FC

CORR

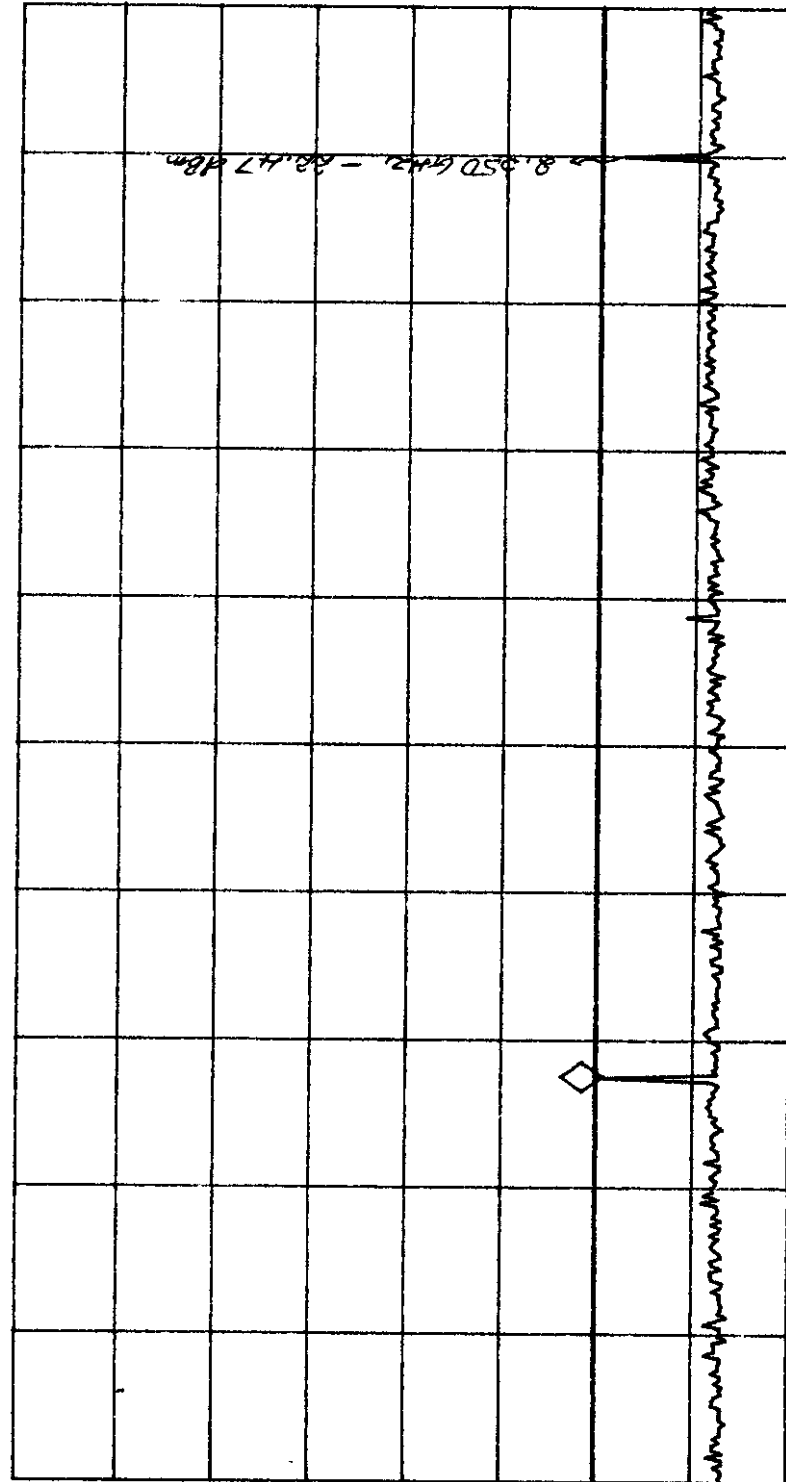

START 1.000 GHz

IF BW 120 KHZ

AVG BW 300 KHZ

STOP 2.500 GHz

SWP 313 msec



TECHNISONIC INDUSTRIES LTD.

VHF/UHF AIRBORNE TRANSCEIVER, MODEL TFM-500

Frequency: 470 MHz, Power Rating: 12.0 W, Channel Spacing: 25 kHz
Modulation: FM modulation with 2.5 kHz Sine Wave Signal

STOP

5.000 GHz

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

MKR 3.764 GHz

-25.44 dBm

No user
Menu

REF OFFST 30.0 dB

REF 40.0 dBm

LOG

10

dB/


ATN

20 dB

MA SB

SC FC

CORR

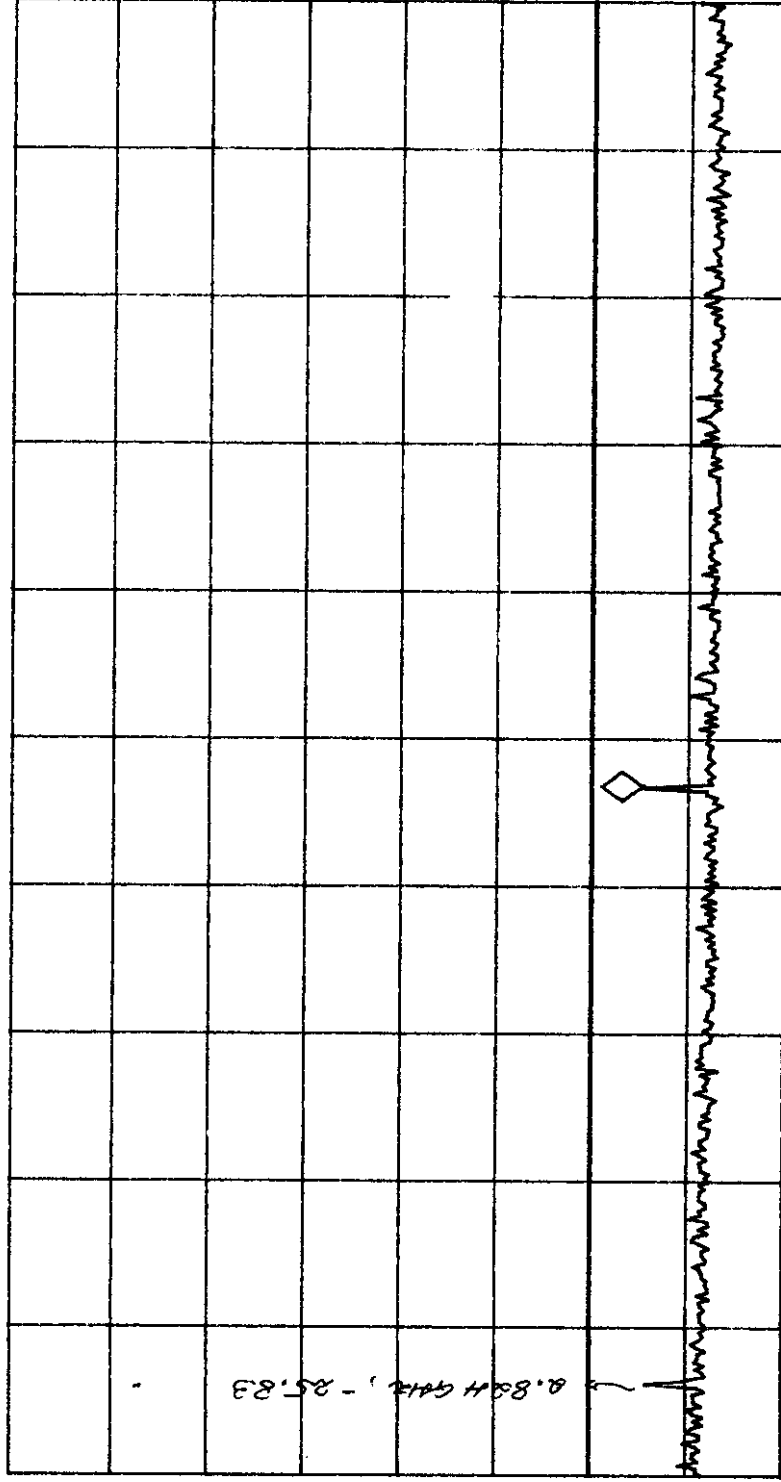

START 2.679 GHz

IF BW 120 kHz

AVG BW 300 kHz

STOP 5.000 GHz

SWP 484 msec

4.7. TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS @ FCC 90.210

PRODUCT NAME: VHF/UHF FM MOBILE TRANSCEIVER,
Model No.: TFM-500

FCC REQUIREMENTS:

FCC Part 90, Sub. I, Para. 90.210

Emissions shall be attenuated below the mean output power of the transmitter as follows:

FREQUENCY RANGE (MHz)	Recommended OBW (KHz)	CHANNEL SPACING (KHz)	Recommended FREQ. DEVIATION (KHz)	FCC SPECIFICATION LIMITS (Para. No.)
150-174 / 403-512	20	25.0	5.0	90.210(b): Mask B – Audio & Voice
150-174 / 403-512	10	12.5	2.5	90.210(d): Mask D – Audio & Voice

FCC RULES	FREQUENCY RANGE	ATTENUATION LIMIT (dBc)
Worst Case: 90.210(d): Mask D – Voice	Lowest frequency generated from the transmitter circuit to 10 th harmonic of the fundamental frequency	Worst Case: $50 + 10\log_{10}(P)$ or 70 dB whichever is less

CLIMATE CONDITION:

Standard Temperature and Humidity:

- Ambient temperature: 21 °C
- Relative humidity: 43%

POWER INPUT:

28 Vdc.

TEST EQUIPMENT:

1. EMI Receiver System/Spectrum Analyzer, Hewlett Packard, Model 8546A, Input +25dBm max., 9KHz-5.6GHz, 50 Ohms, built-in Peak, Quasi-Peak & Average Detectors, Pre-Amplifier and Tracking Signal Generator. This System includes: (1) HP 85460A RF Filter Section, S/N: 3448A00236 and (2) HP 85462A Receiver RF Section/Display, S/N: 3520A00248.
2. Spectrum Analyzer, Advantest, Model R3271, S/N: 15050203, 100 Hz to 32 GHz)
3. Microwave Amplifier, HP, Model 83017A, Frequency Range 1 to 22GHz, 30dB gain nominal, low noise floor type.
4. Active Loop Antenna, Emco, Model 6502, SN 9104-2611, Frequency Range 1 KHz - 30 MHz, @ 50 Ohms.
5. BiconiLog Antenna, Emco, Model 3142, SN 10005, 30-2000 MHz @ 50 Ohms.
6. Log Periodic Antenna, AH System, Model SAS-200/518, SN: 343, Frequency Range: 1GHz-18GHz.

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

7. FCC Listed Open Field Test Site.
8. Audio Oscillator, HP, Model 204C, SN: 0989A08798, Output: 0-1.2 MHz, 5 Vrms.

9. **METHOD OF MEASUREMENTS:**

Refer to ANSI 63.4, Para. 8 for detailed radiated emissions measurement procedures.

With transmitter modulation characteristics described in Out-of-Band Emissions measurements @ 2.989, the transmitter spurious and harmonic emissions were scanned. The spurious and harmonic emissions were measured with the Spectrum Analyzer controls set as RBW = 100 kHz, VBW = 100 kHz and SWEEP TIME = AUTO). The transmitter was operated at a full rated power output, and modulated as follows:

FCC CFR 47, Para. 2.997 - Frequency spectrum to be investigated

The spectrum was investigated from the lowest radio generated in the equipment up to at least the 10th harmonic of the carrier frequency or to the highest frequency practicable in the present state of the art of measuring techniques, whichever is lower. Particular attention should be paid to harmonics and subharmonics of the carrier frequency. Radiation at the frequencies of multiplier stages should be checked. The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

FCC CFR 47, Para. 2.993 - Field Strength Spurious Emissions

- (a) Measurements was made to detect spurious emissions radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data were supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph 2.989(c) as appropriate. For equipment operating on frequencies below 1 GHz, an Open Field Test is normally required, with the measuring instrument antenna located in the far field at all test frequencies. In event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurement will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with the reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.
- (b) Measurements specified in paragraph (a) of this section shall be made for the following equipment:
 - (1) Those in which the spurious emission are required to be 60 dB or more below the mean power of the transmitter.
 - (2) All equipment operating on frequencies higher than 25 MHz
 - (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
 - (4) Other types of equipment as required, when deemed necessary by the Commission.

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

METHOD OF CALCULATION FOR TRANSMITTED POWER (P) FROM THE MEASURED FIELD STRENGTH LEVEL (E):

According to IEC 801-3, the power density can be calculated as follows:

$$S = P / (4\pi D^2) \quad \text{Where: } S: \text{ Power density in watts per square meter}$$

P : Transmitted power in watts
 π : 3.1415
 D : Distance in meters

The power density S (W/m^2) and electric field E (V/m) is related by:

$$S = E^2 / (120\pi)$$

Accordingly, the field intensity of isotropic radiator in free space can be expressed as follows:

$$E = (30\sqrt{P}) / D = 5.5\sqrt{P} / D$$

For Halfwave dipole antenna or other antennas correlated to dipole in direction of maximum radiation:

$$S = (1.64\sqrt{P}) / (4\pi D^2)$$
$$E = (49.2\sqrt{P}) / D = 7.01\sqrt{P} / D$$

$$P = (E \times D / 7.01)^2$$

Calculation of transmitted power P (dBm) given a measured field intensity E (dBuV/m):

$$\begin{aligned} P(W) &= [E(V/m) \times D / 7.01]^2 \\ P(mW) &= P(W) \times 1000 \\ \Rightarrow P(dBm) &= 10\log P(mW) \\ &= 20\log E(V/m) + 20\log(D) - 20\log(7.01) + 10\log 1000 \\ &= E(dBV/m) + 20\log D + 13 \\ &= E(dBuV/m) - 120 + 20\log(D) + 13 \\ &= E(dBuV/m) + 20\log(D) - 107 \end{aligned}$$

The Transmitted Power @ $D = 3$ Meters

$$P(dBm) = E(dBuV/m) - 97.5$$

TEST RESULTS: Conforms.

TESTED PERSONNEL: Hung Trinh, RFI Technician

DATE: January 13, 1999

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

MEASUREMENT DATA

RADIATED EMISSIONS MEASUREMENTS @ 3 METERS

TEST CONFIGURATION

- The channel frequencies (Low, Middle and High) was established at its full rated output power. The emissions was investigated up to the tenth harmonic of the fundamental emissions in each case. the measured level of the carrier was recorded and compared to the level of the emissions as required in Part 90.238(a). The absolute level of each emission shall not be greater than -20 dBm.
- For measuring radiated emissions at frequencies below 1 GHz, the Spectrum Analyzer was set as 100 kHz RBW, 100 KHz VBW, SWEEP TIME: AUTO, PEAK DETECTOR.
- For measuring radiated emissions at frequencies above 1 GHz, the Spectrum Analyzer was set as 1 MHz RBW, 1 MHz VBW, SWEEP TIME: AUTO, PEAK DETECTOR.
- All rf emissions from the lowest frequency generated by the transmitter (...) upto the 10th harmonic of fundamental were scanned, and only emissions less than 20 dB below the limits (-20 dBm) were recorded.

* **Remark:** Since the only difference between 12.5 kHz and 25 kHz Channel Spacing operation is the adjustment of frequency deviation limiter (only can be done by software), tests was done with 25 kHz Channel Spacing operation and the results were compared against the limits for 12.5 kHz Channel Spacing operation to represent the worst case.

Fundamental Frequency: 138 MHz, 25 kHz Channel Spacing							
RF Output Power: 10 Watts							
Modulation: FM modulation with 2.5 kHz Sine Wave Signal, Freq. Dev. = 3.9 kHz.							
FREQUENCY (MHz)	RF LEVEL (dBuV/m)	RF LEVEL (dBm)	DETECTOR USED (PEAK/QP)	ANTENNA PLANE (H/V)	* LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
276.0	32.9	-64.6	PEAK	V	-20.0	-44.6	PASS
276.0	34.3	-63.2	PEAK	H	-20.0	-43.2	PASS
414.0	34.7	-62.8	PEAK	V	-20.0	-42.8	PASS
414.0	33.6	-63.9	PEAK	H	-20.0	-43.9	PASS
552.0	38.8	-58.7	PEAK	V	-20.0	-38.7	PASS
552.0	38.6	-58.9	PEAK	H	-20.0	-38.9	PASS
690.0	39.0	-58.5	PEAK	V	-20.0	-38.5	PASS
690.0	41.1	-56.4	PEAK	H	-20.0	-36.4	PASS
828.0	32.3	-65.2	PEAK	V	-20.0	-45.2	PASS
828.0	31.7	-65.8	PEAK	H	-20.0	-45.8	PASS
966.0	54.7	-42.8	PEAK	V	-20.0	-22.8	PASS
966.0	52.3	-45.3	PEAK	H	-20.0	-25.3	PASS
1104.0	54.3	-43.2	PEAK	V	-20.0	-23.2	PASS
1104.0	49.4	-48.1	PEAK	H	-20.0	-28.1	PASS
1242.0	54.6	-42.9	PEAK	V	-20.0	-22.9	PASS
1242.0	53.1	-44.4	PEAK	H	-20.0	-24.4	PASS
1380.0	65.7	-31.8	PEAK	V	-20.0	-11.8	PASS
1380.0	57.6	-39.9	PEAK	H	-20.0	-19.9	PASS
No other significant rf radiated emissions from the transmitter were found in the frequency band from 10 MHz to 1380 MHz. All other emissions must be more than 40 dB below the FCC limits.							

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Fundamental Frequency: 150 MHz, 25 kHz Channel Spacing							
RF Output Power: 10 Watts							
Modulation: FM modulation with 2.5 kHz Sine Wave Signal, Freq. Dev. = 3.9 kHz.							
FREQUENCY (MHz)	RF LEVEL (dBuV/m)	RF LEVEL (dBm)	DETECTOR USED (PEAK/QP)	ANTENNA PLANE (H/V)	*LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
300.0	37.1	-60.4	PEAK	V	-20.0	-40.4	PASS
300.0	36.9	-60.6	PEAK	H	-20.0	-40.6	PASS
450.0	34.7	-62.8	PEAK	V	-20.0	-42.8	PASS
450.0	33.1	-64.4	PEAK	H	-20.0	-44.4	PASS
600.0	48.8	-48.7	PEAK	V	-20.0	-28.7	PASS
600.0	43.8	-53.8	PEAK	H	-20.0	-33.8	PASS
750.0	41.7	-55.8	PEAK	V	-20.0	-35.8	PASS
750.0	48.1	-49.4	PEAK	H	-20.0	-29.4	PASS
900.0	37.7	-59.8	PEAK	V	-20.0	-39.8	PASS
900.0	35.7	-61.8	PEAK	H	-20.0	-41.8	PASS
1050.0	55.1	-42.4	PEAK	V	-20.0	-22.4	PASS
1050.0	47.0	-50.5	PEAK	H	-20.0	-30.5	PASS
1200.0	60.8	-36.7	PEAK	V	-20.0	-16.7	PASS
1200.0	51.5	-46.0	PEAK	H	-20.0	-26.0	PASS
1350.0	59.3	-38.2	PEAK	V	-20.0	-18.2	PASS
1350.0	59.6	-37.9	PEAK	H	-20.0	-17.9	PASS
1500.0	58.5	-39.0	PEAK	V	-20.0	-19.0	PASS
1500.0	53.8	-43.7	PEAK	H	-20.0	-23.7	PASS
No other significant rf radiated emissions from the transmitter were found in the frequency band from 10 MHz to 1500 MHz. All other emissions must be more than 40 dB below the FCC limits.							

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Fundamental Frequency: 174 MHz, 25 kHz Channel Spacing							
RF Output Power: 10 Watts							
Modulation: FM modulation with 2.5 kHz Sine Wave Signal, Freq. Dev. = 3.9 kHz.							
FREQUENCY (MHz)	RF LEVEL (dBuV/m)	RF LEVEL (dBm)	DETECTOR USED (PEAK/QP)	ANTENNA PLANE (H/V)	*LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
348.0	38.8	-58.7	PEAK	V	-20.0	-38.7	PASS
348.0	36.3	-61.3	PEAK	H	-20.0	-41.3	PASS
522.0	43.3	-54.2	PEAK	V	-20.0	-34.2	PASS
522.0	38.4	-59.1	PEAK	H	-20.0	-39.1	PASS
696.0	35.1	-62.4	PEAK	V	-20.0	-42.4	PASS
696.0	34.8	-62.7	PEAK	H	-20.0	-42.7	PASS
870.0	44.6	-52.9	PEAK	V	-20.0	-32.9	PASS
870.0	40.2	-57.3	PEAK	H	-20.0	-37.3	PASS
1044.0	57.4	-40.1	PEAK	V	-20.0	-20.1	PASS
1044.0	50.7	-46.8	PEAK	H	-20.0	-26.8	PASS
1218.0	60.3	-37.2	PEAK	V	-20.0	-17.2	PASS
1218.0	54.3	-43.2	PEAK	H	-20.0	-23.2	PASS
1392.0	66.9	-30.6	PEAK	V	-20.0	-10.6	PASS
1392.0	60.8	-36.7	PEAK	H	-20.0	-16.7	PASS
1566.0	52.8	-44.7	PEAK	V	-20.0	-24.7	PASS
1566.0	50.7	-46.8	PEAK	H	-20.0	-26.8	PASS
1740.0	48.4	-49.1	PEAK	V	-20.0	-29.1	PASS
1740.0	46.6	-50.9	PEAK	H	-20.0	-30.9	PASS
No other significant rf radiated emissions from the transmitter were found in the frequency band from 10 MHz to 1740 MHz. All other emissions must be more than 40 dB below the FCC limits.							

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Fundamental Frequency: 406.125 MHz, 25 kHz Channel Spacing							
RF Output Power: 10 Watts							
Modulation: FM modulation with 2.5 kHz Sine Wave Signal, Freq. Dev. = 3.9 kHz.							
FREQUENCY (MHz)	RF LEVEL (dBuV/m)	RF LEVEL (dBm)	DETECTOR USED (PEAK/QP)	ANTENNA PLANE (H/V)	*LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
812.3	29.5	-68.0	PEAK	V	-20.0	-48.0	PASS
812.3	30.6	-66.9	PEAK	H	-20.0	-46.9	PASS
1218.4	54.9	-42.6	PEAK	V	-20.0	-22.6	PASS
1218.4	51.0	-46.5	PEAK	H	-20.0	-26.5	PASS
1624.5	54.3	-43.2	PEAK	V	-20.0	-23.2	PASS
1624.5	52.7	-44.8	PEAK	H	-20.0	-24.8	PASS
2030.6	64.0	-33.5	PEAK	V	-20.0	-13.5	PASS
2030.6	64.4	-33.1	PEAK	H	-20.0	-13.1	PASS
2436.8	61.0	-36.5	PEAK	V	-20.0	-16.5	PASS
2436.8	59.9	-37.6	PEAK	H	-20.0	-17.6	PASS
2842.9	54.3	-43.2	PEAK	V	-20.0	-23.2	PASS
2842.9	55.1	-42.4	PEAK	H	-20.0	-22.4	PASS
3249.0	66.2	-31.3	PEAK	V	-20.0	-11.3	PASS
3249.0	72.4	-25.1	PEAK	H	-20.0	-5.1	PASS
3655.1	61.0	-36.5	PEAK	V	-20.0	-16.5	PASS
3655.1	69.1	-28.4	PEAK	H	-20.0	-8.4	PASS
4061.3	49.9	-47.6	PEAK	V	-20.0	-27.6	PASS
4061.3	72.8	-24.7	PEAK	H	-20.0	-4.7	PASS
No other significant rf radiated emissions from the transmitter were found in the frequency band from 10 MHz to 4061.3 MHz. All other emissions must be more than 40 dB below the FCC limits.							

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Fundamental Frequency: 450 MHz, 25 kHz Channel Spacing							
RF Output Power: 10 Watts							
Modulation: FM modulation with 2.5 kHz Sine Wave Signal, Freq. Dev. = 3.9 kHz.							
FREQUENCY (MHz)	RF LEVEL (dBuV/m)	RF LEVEL (dBm)	DETECTOR USED (PEAK/QP)	ANTENNA PLANE (H/V)	*LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
900.0	48.8	-48.7	PEAK	V	-20.0	-28.7	PASS
900.0	48.6	-48.9	PEAK	H	-20.0	-28.9	PASS
1350.0	55.2	-42.3	PEAK	V	-20.0	-22.3	PASS
1350.0	53.4	-44.1	PEAK	H	-20.0	-24.1	PASS
1800.0	50.4	-47.1	PEAK	V	-20.0	-27.1	PASS
1800.0	49.1	-48.4	PEAK	H	-20.0	-28.4	PASS
2250.0	63.8	-33.7	PEAK	V	-20.0	-13.7	PASS
2250.0	58.6	-38.9	PEAK	H	-20.0	-18.9	PASS
2700.0	57.0	-40.5	PEAK	V	-20.0	-20.5	PASS
2700.0	58.4	-39.1	PEAK	H	-20.0	-19.1	PASS
3150.0	54.1	-43.4	PEAK	V	-20.0	-23.4	PASS
3150.0	58.2	-39.3	PEAK	H	-20.0	-19.3	PASS
3600.0	66.2	-31.3	PEAK	V	-20.0	-11.3	PASS
3600.0	75.2	-22.3	PEAK	H	-20.0	-2.3	PASS
4050.0	52.3	-45.2	PEAK	V	-20.0	-25.2	PASS
4050.0	50.7	-46.8	PEAK	H	-20.0	-26.8	PASS
No other significant rf radiated emissions from the transmitter were found in the frequency band from 10 MHz to 4050 MHz. All other emissions must be more than 40 dB below the FCC limits.							

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Fundamental Frequency: 470 MHz, 25 kHz Channel Spacing							
RF Output Power: 10 Watts							
Modulation: FM modulation with 2.5 kHz Sine Wave Signal, Freq. Dev. = 3.9 kHz.							
FREQUENCY (MHz)	RF LEVEL (dBuV/m)	RF LEVEL (dBm)	DETECTOR USED (PEAK/QP)	ANTENNA PLANE (H/V)	*LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
940.0	56.0	-41.5	PEAK	V	-20.0	-21.5	PASS
940.0	55.3	-42.3	PEAK	H	-20.0	-22.3	PASS
1410.0	53.9	-43.6	PEAK	V	-20.0	-23.6	PASS
1410.0	54.0	-43.5	PEAK	H	-20.0	-23.5	PASS
1880.0	60.7	-36.8	PEAK	V	-20.0	-16.8	PASS
1880.0	62.0	-35.5	PEAK	H	-20.0	-15.5	PASS
2350.0	67.5	-30.0	PEAK	V	-20.0	-10.0	PASS
2350.0	67.0	-30.5	PEAK	H	-20.0	-10.5	PASS
2820.0	56.7	-40.8	PEAK	V	-20.0	-20.8	PASS
2820.0	53.8	-43.7	PEAK	H	-20.0	-23.7	PASS
3290.0	68.5	-29.0	PEAK	V	-20.0	-9.0	PASS
3290.0	73.4	-24.1	PEAK	H	-20.0	-4.1	PASS
3760.0	69.0	-28.5	PEAK	V	-20.0	-8.5	PASS
3760.0	74.8	-22.7	PEAK	H	-20.0	-2.7	PASS
4230.0	51.9	-45.6	PEAK	V	-20.0	-25.6	PASS
4230.0	54.2	-43.3	PEAK	H	-20.0	-23.3	PASS
4700.0	54.7	-42.8	PEAK	V	-20.0	-22.8	PASS
4700.0	56.1	-41.4	PEAK	H	-20.0	-21.4	PASS
No other significant rf radiated emissions from the transmitter were found in the frequency band from 10 MHz to 4700 MHz. All other emissions must be more than 40 dB below the FCC limits.							

Note: The transmitter radiated emissions measurements were also pre-scans with the transmitter operated in 12.5 kHz channel-spacing configuration and the results were found to be identical with those operates in 25 kHz spacing configuration.

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2

Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

4.8. TRANSIENT FREQUENCY BEHAVIOR

PRODUCT NAME: VHF/UHF FM MOBILE TRANSCEIVER,
Model No.: TFM-500

FCC REQUIREMENTS:

FCC Part 90, Sub. I, Para. 90.214

Transient frequencies must be within the maximum frequency difference limits during the time intervals indicated:

		All Equipment	
Time Interval ^{1,2}	Maximum Frequency Difference ³	150 to 174 MHz	421 to 512 MHz
Transient Frequency behavior for Equipment Designed to Operate on 25 kHz Channels			
t ₁ ⁴	± 25.0 kHz	5.0 ms	10.0 ms
t ₂	± 12.5 kHz	20.0 ms	25.0 ms
t ₃ ⁴	± 25.0 kHz	5.0 ms	10.0 ms
Transient Frequency behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t ₁ ⁴	± 12.5 kHz	5.0 ms	10.0 ms
t ₂	± 6.25 kHz	20.0 ms	25.0 ms
t ₃ ⁴	± 12.5 kHz	5.0 ms	10.0 ms

- (1) t_{on} : the instant when a 1 KHz test signal is completely suppressed, including any capture time due to phasing.
 t_1 : time period immediately after t_{on}
 t_2 : time period after t_1
 t_3 : time period from the instant when the transmitter is turned off until t_{off}
 t_{off} : the instant when the 1 KHz test signal starts to rise.
- (2) During the time from the end of t_2 to the beginning of t_3 , the frequency difference must not exceed the limits specified in @ 90.213
- (3) Difference between the actual transmitter frequency and assigned transmitter frequency.
- (4) If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

CLIMATE CONDITION:

Standard Temperature and Humidity:

- Ambient temperature: 21 °C
- Relative humidity: 43%

POWER INPUT:

28 Vdc.


- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

TEST EQUIPMENT:

- 1) **RF Synthesized RF Signal Generator**, Fluke, Model 6061A, frequency range 10KHz-1050MHz, power output 13dBm max.
- 2) **Communication Analyzer (Test Receiver)**, Rohde & Schwarz, SMFP2, SN 879988/047, 0.4-1000 MHz, including SINAD, S/N, Modulation meters, AF & RF signal generators and etc....
- 3) **Network Combiner**, Minicircuit, P/N: 15542 (7dB loss)
- 4) **Digital Storage Oscilloscope**, by Phillips, model 3320A, SN DQ 646.
- 5) **67297 RF Detector**, by Herotex, P/N: DZ122-553, S/N: 63400

METHOD OF MEASUREMENTS:

Refer to ANSI/TIA/EIA - 603 - 1992, Sec. 2.2.19, Page 83

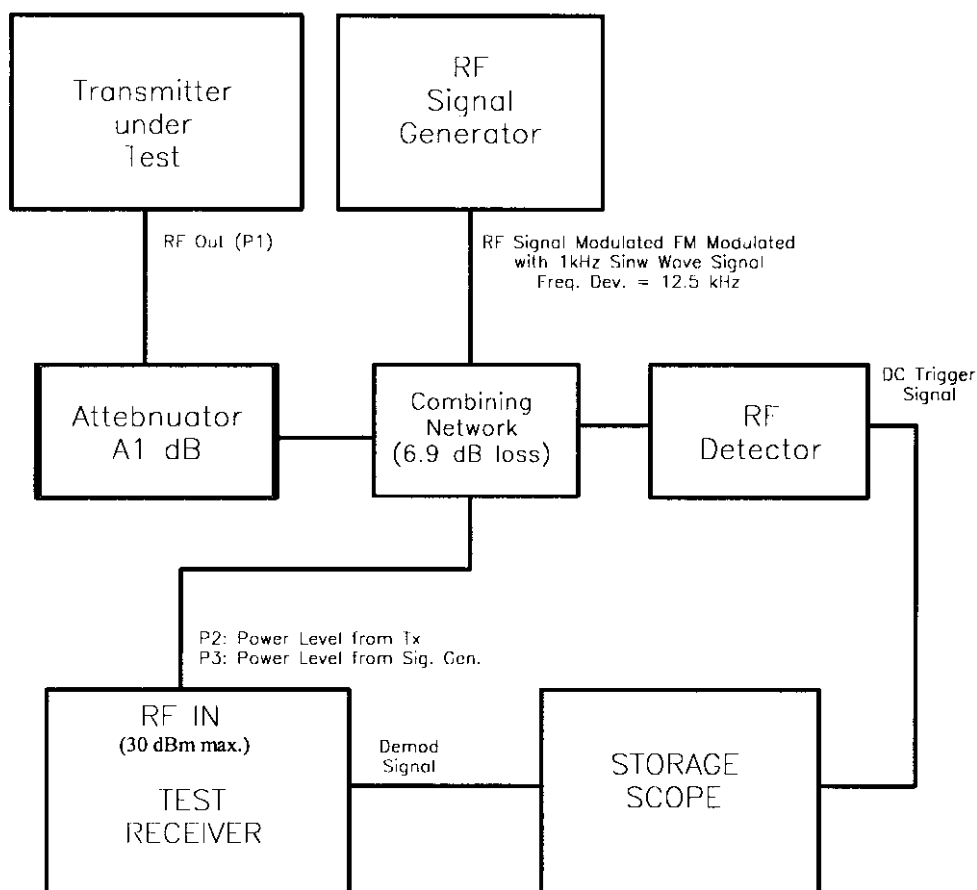

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

1. Connect the transmitter under tests as shown in the above block diagram
2. Set the signal generator to the assigned frequency and modulate with a 1 kHz tone at ± 12.5 kHz deviation and its output level to be 50 dB below the transmitter rf output at the test receiver end.
3. Set the horizontal sweep rate on the storage scope to 10 milliseconds per division and adjust the display to continuously view the 1000 Hz tone from the Demodulator Output Port (DOP) of the Test Receiver. Adjust the vertical scale amplitude control of the scope to display the 1000 Hz at ± 4 divisions vertical Center at the display.
4. Adjust the scope so it will trigger on an increasing magnitude from the RF trigger signal of the transmitter under test when the transmitter was turned on. Set the controls to store the display.
5. The output at the DOP, due to the change in the ratio of the power between the signal generator input power and transmitter output power will, because of the capture effect of the test receiver, produce a change in display: For the first part of the sweep it will show the 1 kHz test signal. Then once the receiver's demodulator has been captured by the transmitter power, the display will show the frequency difference from the assigned frequency to the actual transmitter frequency versus time. The instant when the 1 kHz test signal is completely suppressed (including any capture time due to phasing) is considered to be t_{on} . The trace should be maintained within the allowed divisions during the period t_1 and t_2 .
6. During the time from the end of t_2 to the beginning of t_3 the frequency difference should not exceed the limits set by the FCC in Part 90.214 and the outlined in the Carrier Frequency Stability sections. The allowed limit is equal to the transmitter frequency times its FCC frequency tolerance times ± 4 display divisions divided by 25 kHz (eg. at transmitter assigned frequency of 406 MHz, limit = $406 \times 0.0015 \times 4 / 12.5 = 0.02$ div.
7. Repeat the above steps when the transmitter was turned off for measuring t_3 .

TEST RESULTS: Conforms.

TESTED PERSONNEL: Tri M. Luu, P.Eng.

DATE: January 27, 1999

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

MEASUREMENT DATA

Attenuator A1 = 20 dB

Measured Transmitter RF Output P1: 40 dBm

Measured Transmitter RF Output P2 @ Standard Test Receiver (Max. RF IN: 30 dBm): 13 dBm

Measured Signal generator Output P3 @ Standard Test Receiver (Max. RF IN: 30 dBm): -37 dBm

Test Configuration # 1: VHF Radio, 12.5kHz Channeling, Unmodulated.

Time Interval	Transient Frequency	Transient Frequency Limit
t1 (5 mS) SWITCH ON CONDITION	-3.9 kHz	12.5 kHz
t2 (20 mS) SWITCH ON CONDITION	-5.1 kHz	6.25 kHz
After t2 (20 mS) SWITCH ON CONDITION	0	FCC Limit = ± 690 Hz (0.0005% @138 MHz)
Before t3 (20 mS) SWITCH OFF CONDITION	0	FCC Limit = ± 690 Hz (0.0005% @ 138 MHz)
t3 (5 mS) SWITCH OFF CONDITION	0	12.5 kHz
<i>Please refer to attached plots for detailed measurements.</i>		

Test Configuration # 2: VHF Radio, 12.5kHz Channeling, FM modulation with 2.5 kHz Sine Wave, Freq. Dev: 1.9 kHz

Time Interval	Transient Frequency	Transient Frequency Limit
t1 (5 mS) SWITCH ON CONDITION	+3.5 kHz	12.5 kHz
t2 (20 mS) SWITCH ON CONDITION	+5.9 kHz	6.25 kHz
After t2 (20 mS) SWITCH ON CONDITION	0	FCC Limit = ± 690 Hz (0.0005% @138 MHz)
Before t3 (20 mS) SWITCH OFF CONDITION	0	FCC Limit = ± 690 Hz (0.0005% @ 138 MHz)
t3 (5 mS) SWITCH OFF CONDITION	0	12.5 kHz
<i>Please refer to attached plots for detailed measurements.</i>		

ULTRATECH GROUP OF LABS

4181 Stadelview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Test Configuration # 3: VHF Radio, 25kHz Channeling, Unmodulated.

Time Interval	Transient Frequency	Transient Frequency Limit
t1 (5 mS) SWITCH ON CONDITION	-6.3 kHz	25 kHz
t2 (20 mS) SWITCH ON CONDITION	-10.2 kHz	12.5 kHz
After t2 (20 mS) SWITCH ON CONDITION	0	FCC Limit = ± 690 Hz (0.0005% @138 MHz)
Before t3 (20 mS) SWITCH OFF CONDITION	0	FCC Limit = ± 690 Hz (0.0005% @ 138 MHz)
t3 (5 mS) SWITCH OFF CONDITION	0	25 kHz
<i>Please refer to attached plots for detailed measurements.</i>		

**Test Configuration # 4: VHF Radio, 25 kHz Channeling, FM modulation with 2.5kHz Sine Wave,
Freq. Dev.: 3.9kHz**

Time Interval	Transient Frequency	Transient Frequency Limit
t1 (5 mS) SWITCH ON CONDITION	-9.4 kHz	25 kHz
t2 (20 mS) SWITCH ON CONDITION	+3.9 kHz	12.5 kHz
After t2 (20 mS) SWITCH ON CONDITION	0	FCC Limit = ± 690 Hz (0.0005% @138 MHz)
Before t3 (20 mS) SWITCH OFF CONDITION	0	FCC Limit = ± 690 Hz (0.0005% @ 138 MHz)
t3 (5 mS) SWITCH OFF CONDITION	0	25 kHz
<i>Please refer to attached plots for detailed measurements.</i>		

Test Configuration # 5: UHF Radio, 12.5 kHz Channeling, Unmodulated.

Time Interval	Transient Frequency	Transient Frequency Limit
t1 (10 mS) SWITCH ON CONDITION	+5.5 kHz	12.5 kHz
t2 (25 mS) SWITCH ON CONDITION	+1.2 kHz	6.25 kHz
After t2 (25 mS) SWITCH ON CONDITION	0	FCC Limit = ± 1.015 Hz (0.00025% @ 406.125 MHz)
Before t3 (25 mS) SWITCH OFF CONDITION	0	FCC Limit = ± 1.015 Hz (0.00025% @ 406.125 MHz)
t3 (10 mS) SWITCH OFF CONDITION	0	12.5 kHz
<i>Please refer to attached plots for detailed measurements.</i>		

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT

Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**Test Configuration # 6: UHF Radio, 12.5 kHz Channeling, FM modulation with 2.5kHz Sine Wave,
Freq. Dev.: 1.9kHz**

Time Interval	Transient Frequency	Transient Frequency Limit
t1 (10 mS) SWITCH ON CONDITION	+5.5 kHz	12.5 kHz
t2 (25 mS) SWITCH ON CONDITION	+1.6 kHz	6.25 kHz
After t2 (25 mS) SWITCH ON CONDITION	0	FCC Limit = ± 1.015 Hz (0.00025% @ 406.125 MHz)
Before t3 (25 mS) SWITCH OFF CONDITION	0	FCC Limit = ± 1.015 Hz (0.00025% @ 406.125 MHz)
t3 (10 mS) SWITCH OFF CONDITION	0	12.5 kHz
<i>Please refer to attached plots for detailed measurements.</i>		

Test Configuration # 7: UHF Radio, 25 kHz Channeling, Unmodulated.

Time Interval	Transient Frequency	Transient Frequency Limit
t1 (10 mS) SWITCH ON CONDITION	+4.7 kHz	25 kHz
t2 (25 mS) SWITCH ON CONDITION	+3.9 kHz	12.5 kHz
After t2 (25 mS) SWITCH ON CONDITION	0	FCC Limit = ± 1.015 Hz (0.00025% @ 406.125 MHz)
Before t3 (25 mS) SWITCH OFF CONDITION	0	FCC Limit = ± 1.015 Hz (0.00025% @ 406.125 MHz)
t3 (10 mS) SWITCH OFF CONDITION	0	25 kHz
<i>Please refer to attached plots for detailed measurements.</i>		

ULTRATECH GROUP OF LABS


4181 Siadeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

OSCILLOSCOPE


VHF, 130MHz, 12.5 Channel Spacing, Tx ON without Modulation

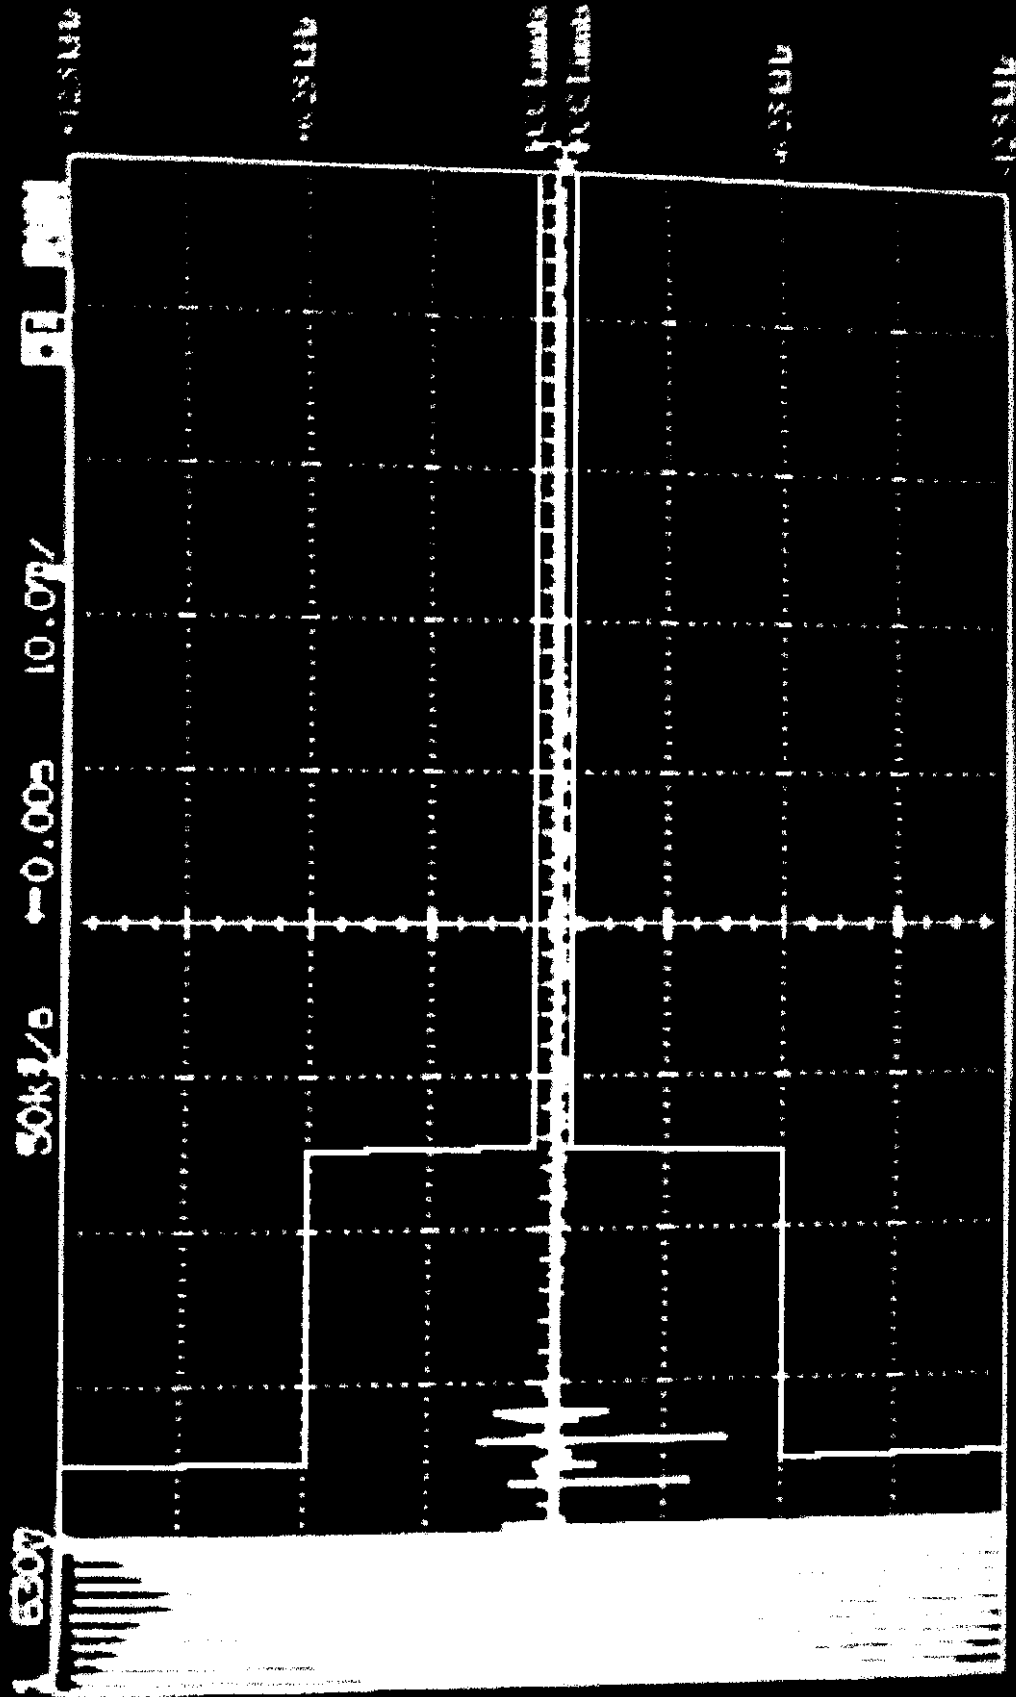

Slope f ☐ No 12.5 ReJ ☐ On

Reject LF ☐ H ☐

VHF, 130MHz, 12.5 Channel Spacing, TX OFF without Modulation

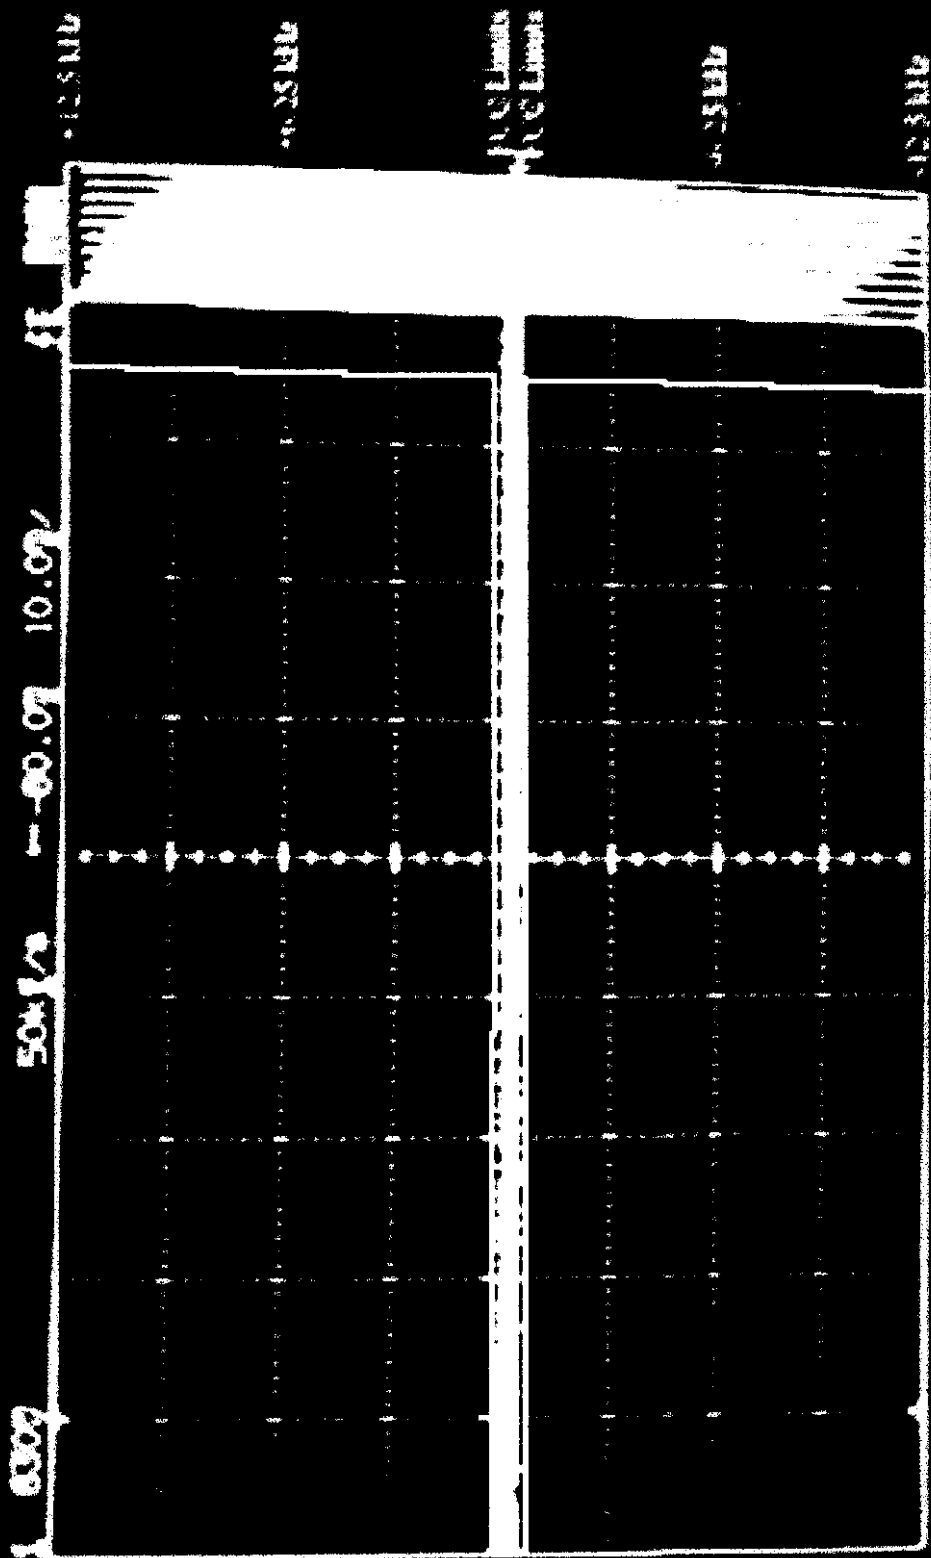

Slope

Project

Noise Rej


On

PERKINS 840100
OSCILLOSCOPE

2.050 V
100 PEAK DETECT

500 MHz

VHF, 150MHz, 12.5 Channel Spacing, TX ON with Modulation

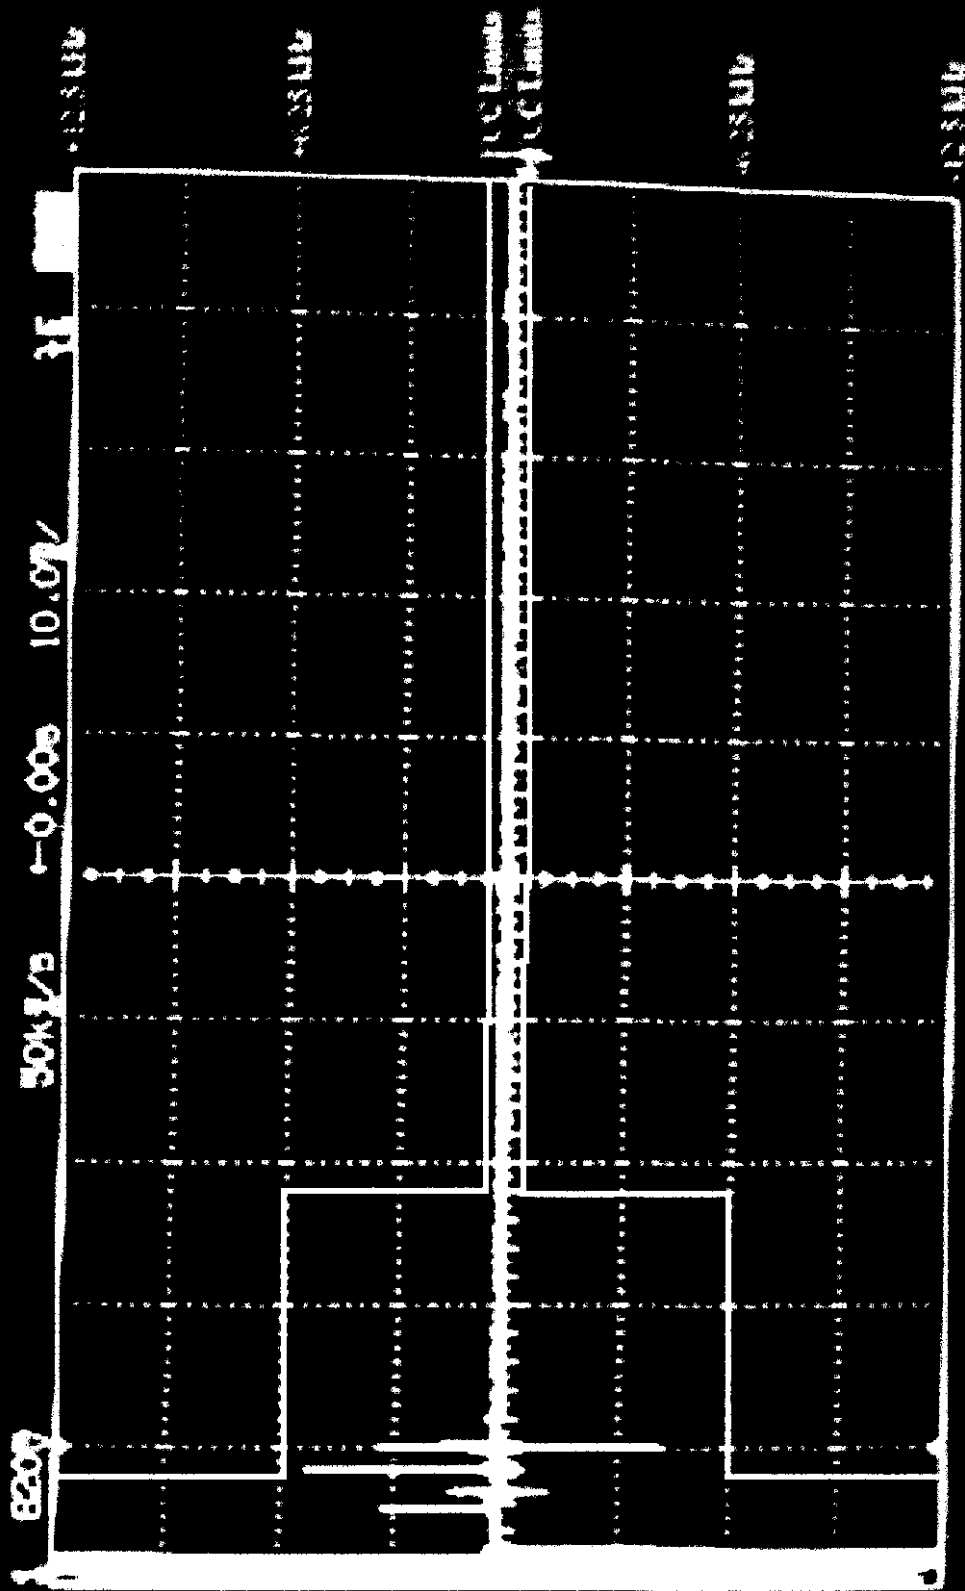


Slope f

Reject LF HF

Noise Rej On

VHF, 150MHz, 12.5 Channel Spacing, Tx OFF with Modulation

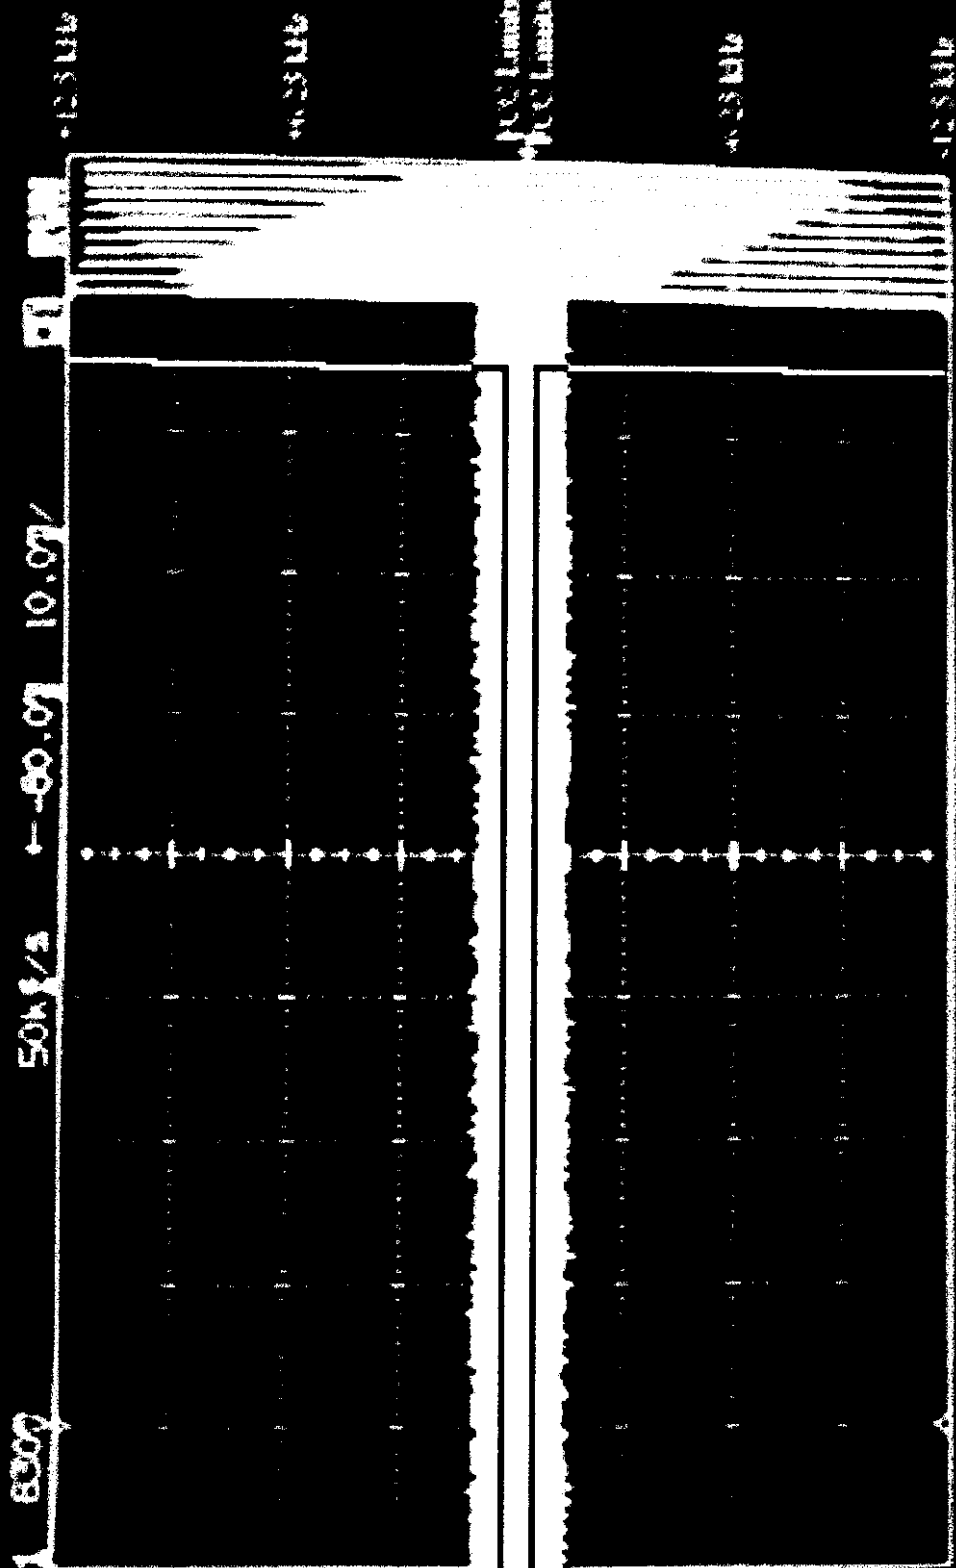

Slope ☐ ☐ Reject ☐ HF

Noise ☐ On

The image is a high-contrast, black and white scan of a document page. It is mostly blank, with a prominent vertical line running down the center. There are some faint, illegible markings and a small, dark, irregular shape near the bottom center.

28
 29
 30
 31
 32
 33
 34
 35
 36
 37
 38
 39
 40
 41
 42
 43
 44
 45
 46
 47
 48
 49
 50
 51
 52
 53
 54
 55
 56
 57
 58
 59
 60
 61
 62
 63
 64
 65
 66
 67
 68
 69
 70
 71
 72
 73
 74
 75
 76
 77
 78
 79
 80
 81
 82
 83
 84
 85
 86
 87
 88
 89
 90
 91
 92
 93
 94
 95
 96
 97
 98
 99
 100
 101
 102
 103
 104
 105
 106
 107
 108
 109
 110
 111
 112
 113
 114
 115
 116
 117
 118
 119
 120
 121
 122
 123
 124
 125
 126
 127
 128
 129
 130
 131
 132
 133
 134
 135
 136
 137
 138
 139
 140
 141
 142
 143
 144
 145
 146
 147
 148
 149
 150
 151
 152
 153
 154
 155
 156
 157
 158
 159
 160
 161
 162
 163
 164
 165
 166
 167
 168
 169
 170
 171
 172
 173
 174
 175
 176
 177
 178
 179
 180
 181
 182
 183
 184
 185
 186
 187
 188
 189
 190
 191
 192
 193
 194
 195
 196
 197
 198
 199
 200
 201
 202
 203
 204
 205
 206
 207
 208
 209
 210
 211
 212
 213
 214
 215
 216
 217
 218
 219
 220
 221
 222
 223
 224
 225
 226
 227
 228
 229
 230
 231
 232
 233
 234
 235
 236
 237
 238
 239
 240
 241
 242
 243
 244
 245
 246
 247
 248
 249
 250
 251
 252
 253
 254
 255
 256
 257
 258
 259
 260
 261
 262
 263
 264
 265
 266
 267
 268
 269
 270
 271
 272
 273
 274
 275
 276
 277
 278
 279
 280
 281
 282
 283
 284
 285
 286
 287
 288
 289
 290
 291
 292
 293
 294
 295
 296
 297
 298
 299
 300
 301
 302
 303
 304
 305
 306
 307
 308
 309
 310
 311
 312
 313
 314
 315
 316
 317
 318
 319
 320
 321
 322
 323
 324
 325
 326
 327
 328
 329
 330
 331
 332
 333
 334
 335
 336
 337
 338
 339
 340
 341
 342
 343
 344
 345
 346
 347
 348
 349
 350
 351
 352
 353
 354
 355
 356
 357
 358
 359
 360
 361
 362
 363
 364
 365
 366
 367
 368
 369
 370
 371
 372
 373
 374
 375
 376
 377
 378
 379
 380
 381
 382
 383
 384
 385
 386
 387
 388
 389
 390
 391
 392
 393
 394
 395
 396
 397
 398
 399
 400
 401
 402
 403
 404
 405
 406
 407
 408
 409
 410
 411
 412
 413
 414
 415
 416
 417
 418
 419
 420
 421
 422
 423
 424
 425
 426
 427
 428
 429
 430
 431
 432
 433
 434
 435
 436
 437
 438
 439
 440
 441
 442
 443
 444
 445
 446
 447
 448
 449
 450
 451
 452
 453
 454
 455
 456
 457
 458
 459
 460
 461
 462
 463
 464
 465
 466
 467
 468
 469
 470
 471
 472
 473
 474
 475
 476
 477
 478
 479
 480
 481
 482
 483
 484
 485
 486
 487
 488
 489
 490
 491
 492
 493
 494
 495
 496
 497
 498
 499
 500
 501
 502
 503
 504
 505
 506
 507
 508
 509
 510
 511
 512
 513
 514
 515
 516
 517
 518
 519
 520
 521
 522
 523
 524
 525
 526
 527
 528
 529
 530
 531
 532
 533
 534
 535
 536
 537
 538
 539
 540
 541
 542
 543
 544
 545
 546
 547
 548


50M1/8

10.07

6209


Project _____ No. as Proj _____ On _____

VHF, 150MHz, 25kHz Channel Spacing, TX OFF with Modulation

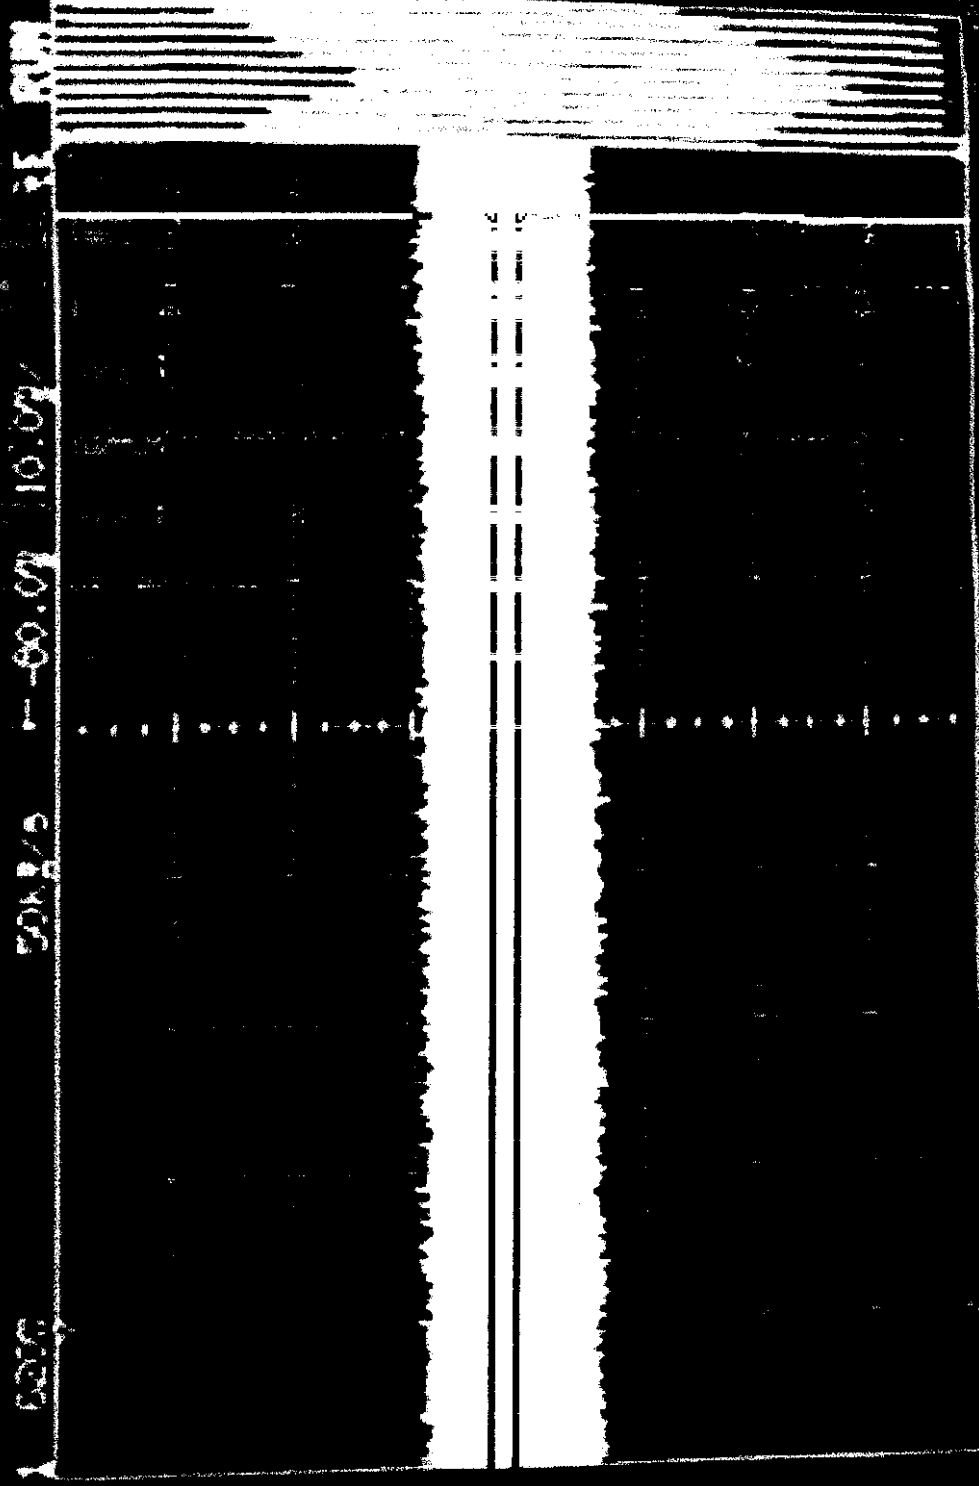


Stage 1 B
Reject LF HF
Noise Floor

UHF 450MHz 12.5 Channel Spacing. Tx ON without Modulation

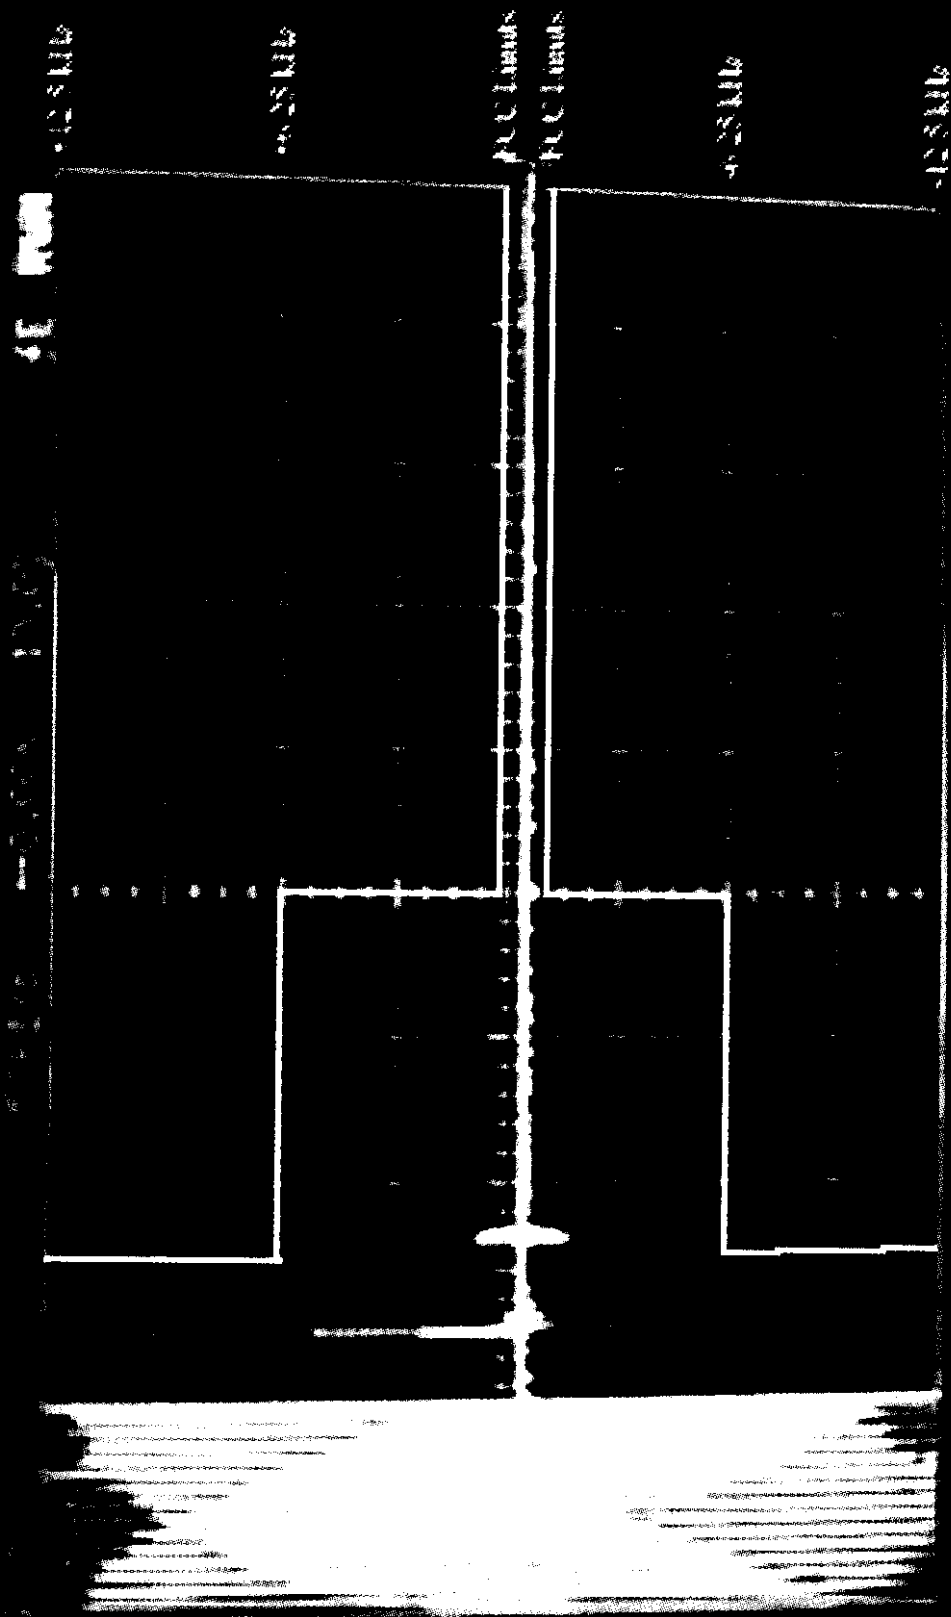

NOTE
THE SCOPE IS DL LEVEL SETTING WAS A BIT
OFF FROM THE CENTER LINE BEFORE TEST.
THE RESULT SHALL BE OK.

UHF, 450MHz 12.5 Channel Spacing, Tx OFF without Modulation

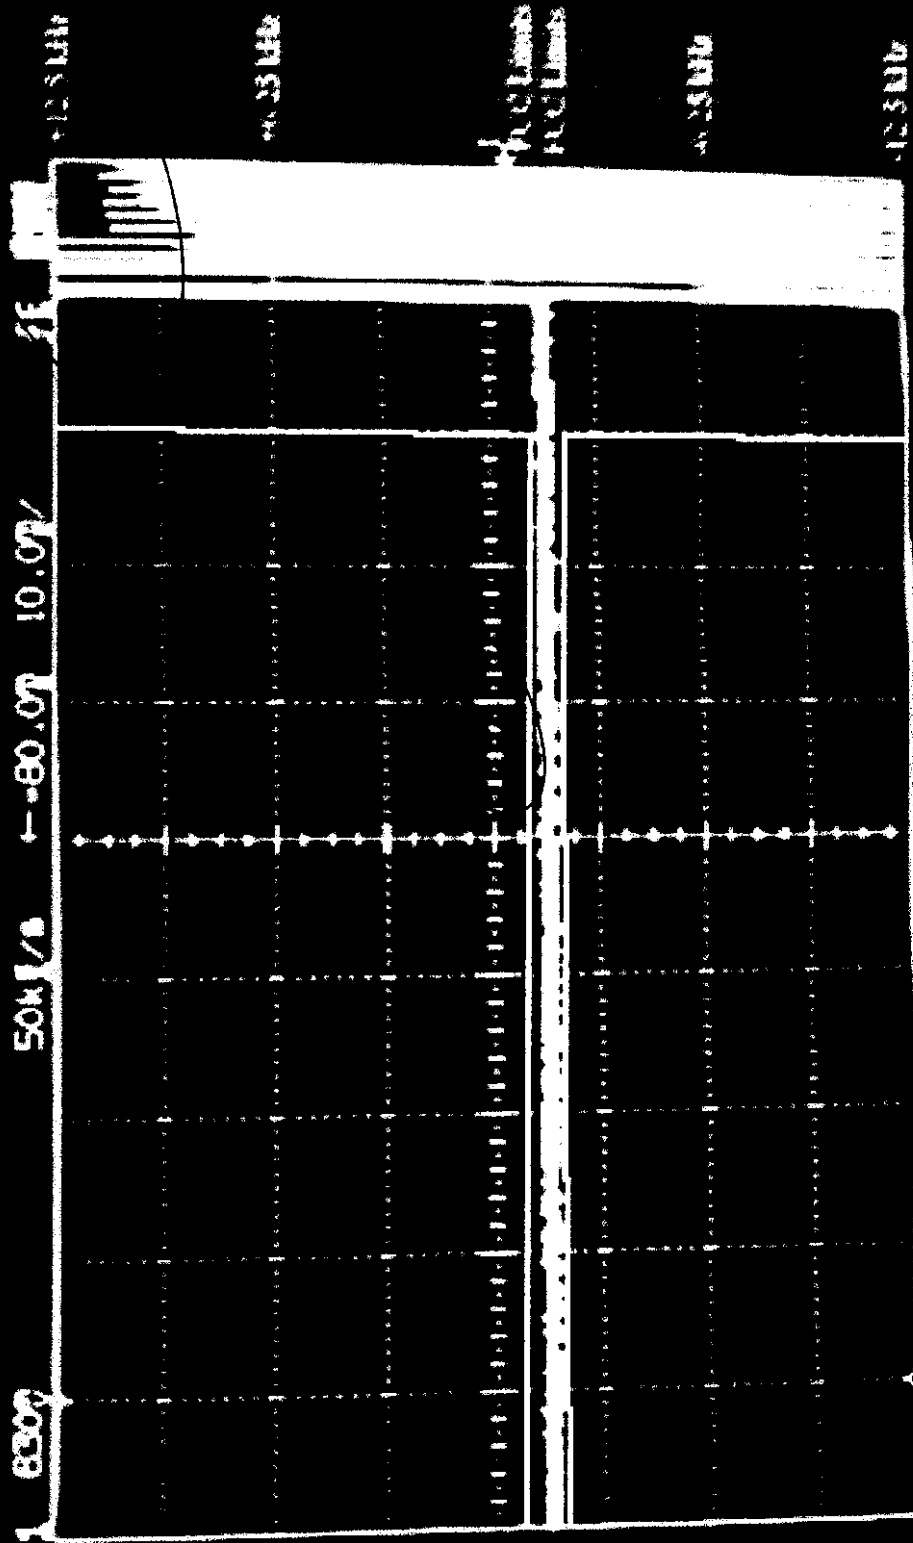

Next Menu

Vertical Off

Lim On


Coupling AC

Input 500

1 Off


* NOTE
THE SCALE'S PL LEVEL SETTING WAS A HIT
OFF FROM THE CENTER LINE BEFORE TESTS
THE RESULT SHALL BE OK.

UHF 450MHz 12.5KHz Channel Spacing, FN ON with Modulation

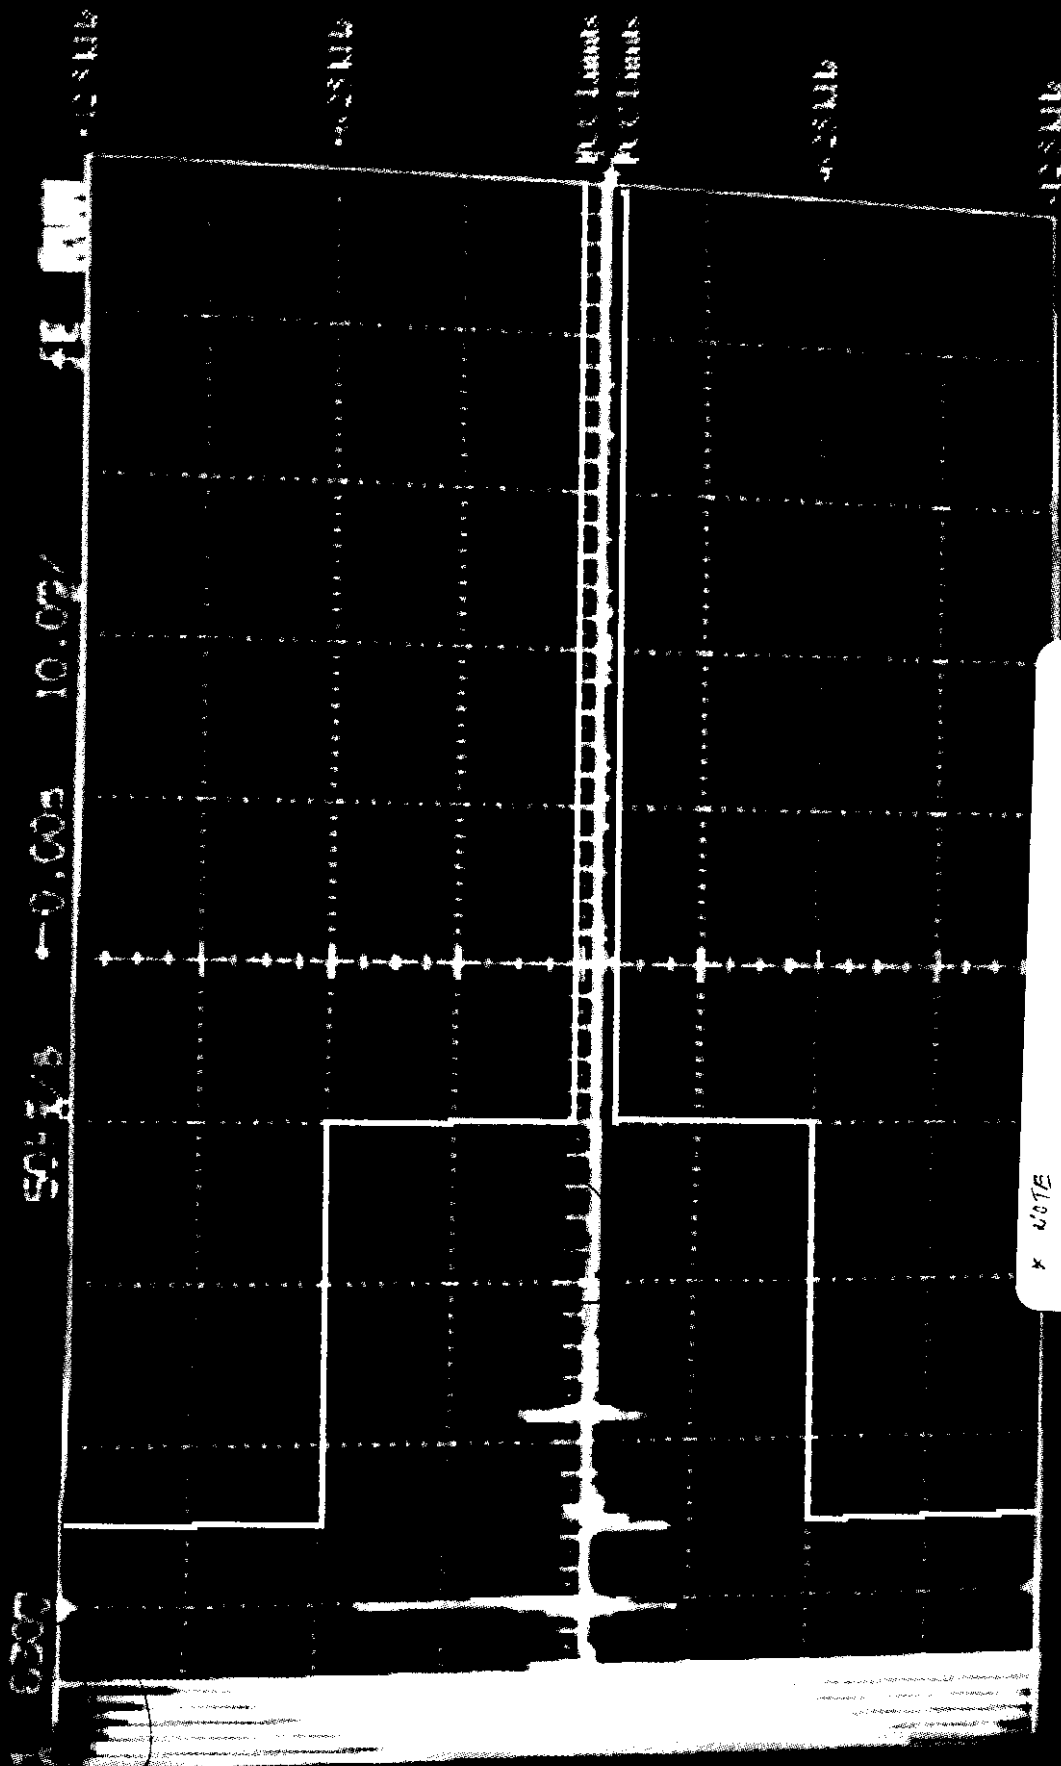

* NOTE
THE SCOPE'S DC LEVEL SETTING WAS A BIT
OFF FROM THE CENTER LINE BEFORE TESTS.
THE RESULT SHALL BE OK.


UHF, 450MHz, 12.5kHz channel spacing, Tx OFF with Modulation

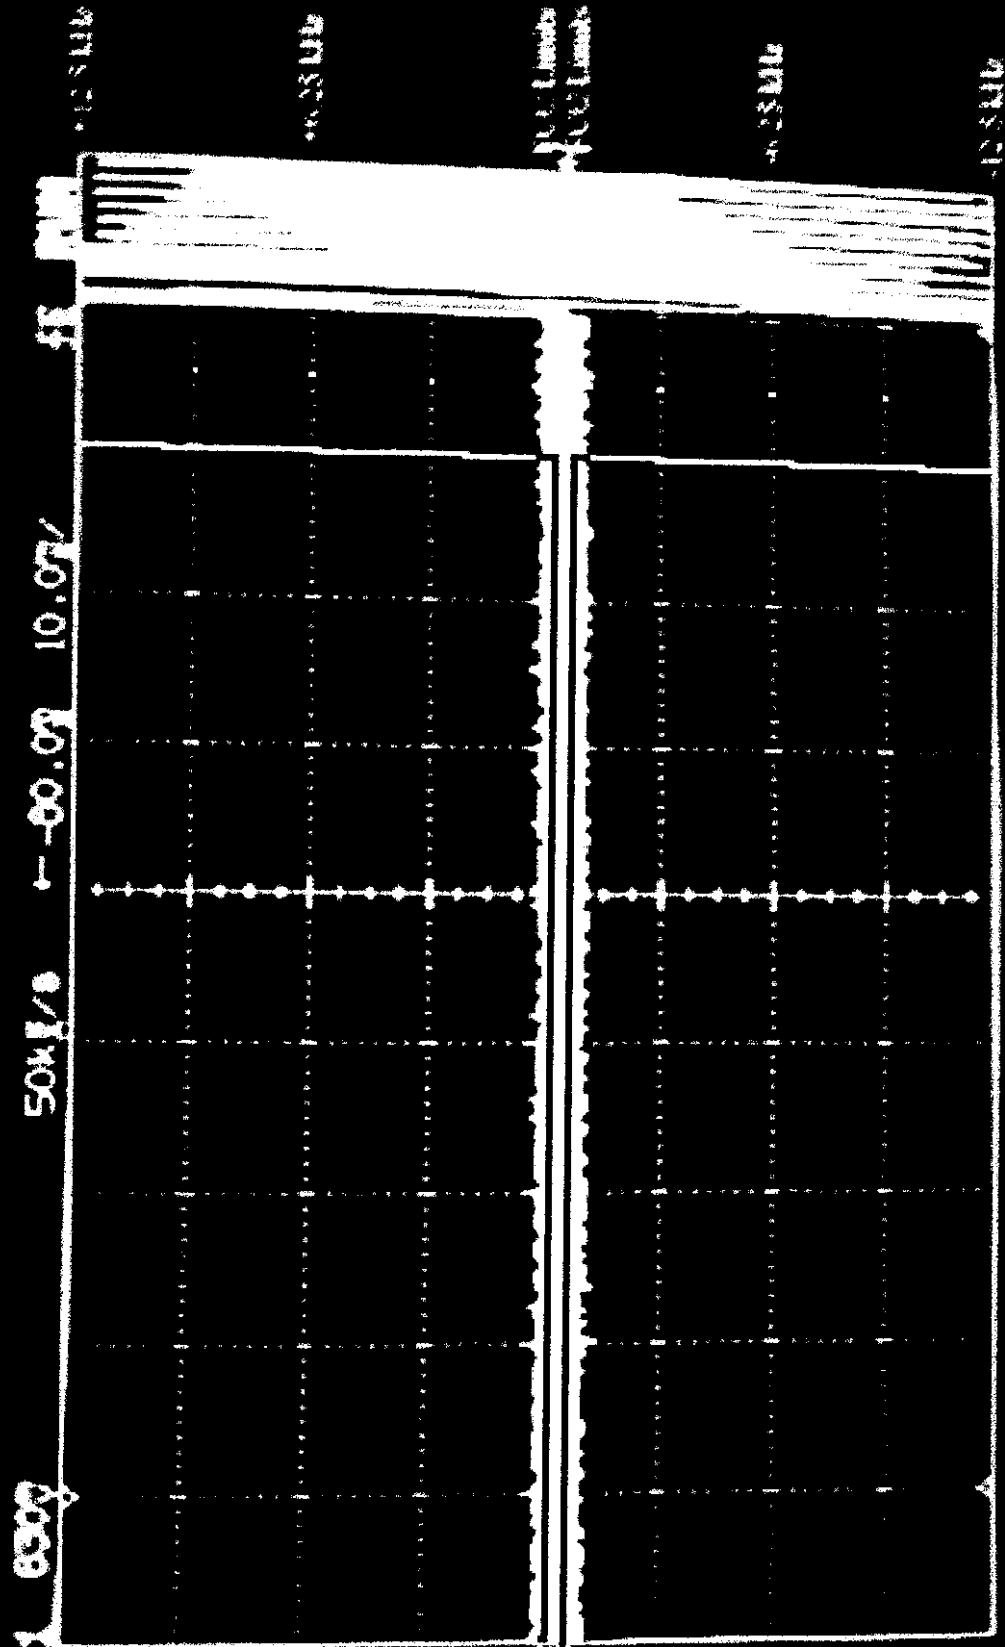

0.1 ☐ Input 500 ☐ Coupling AC ☐ BW Lim On ☐ Vernier Off ☐ Next Menu


UHF 450MHz 25kHz Channel Spacing, Fx ON with No Modulation

50kZ/s -0.004 10.000 RUN

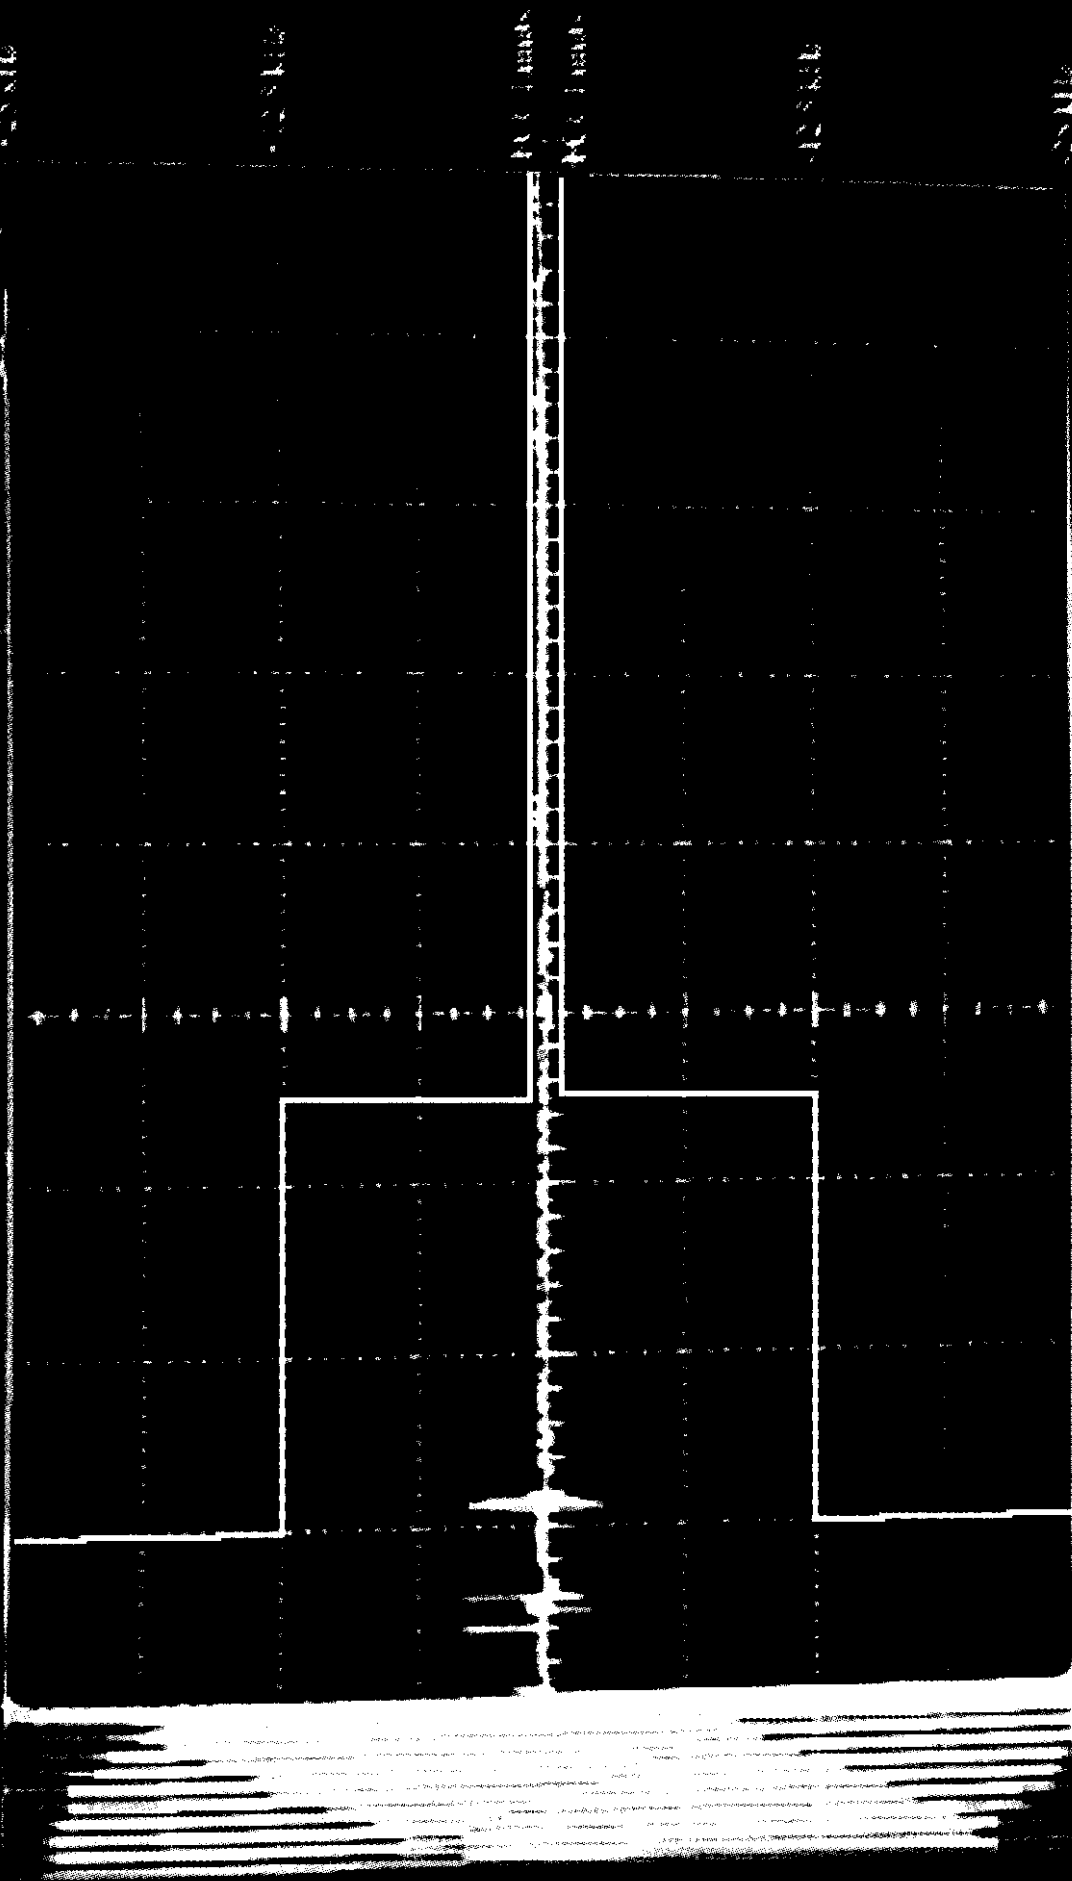

1 Input Coupling BW Lim Vertical 10.000

UHF, 450MHz, 25kHz Channel Spacing, TX OFF with No Modulation

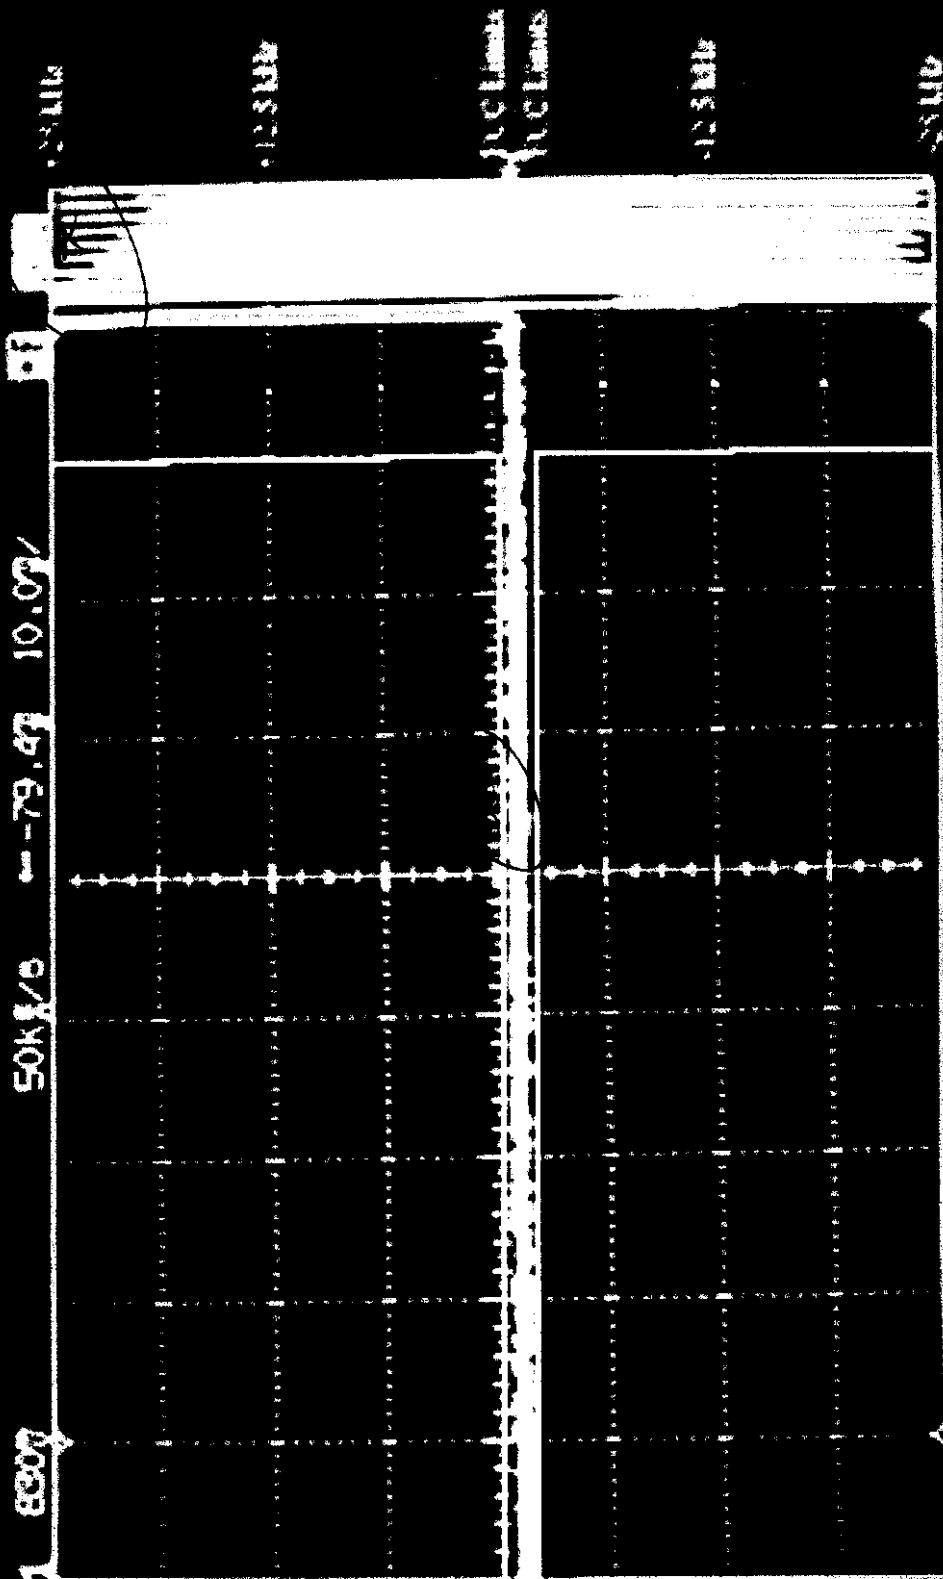

Next Menu

Vernier

Full


Carroll

Input 500

off


* NOTE
THE SCOPE'S DC LEVEL SETTING WAS A BIT
OFF FROM THE CENTER LINE BEFORE TESTS.
THE RESULT SHALL BE OK.

UHF, 450MHz, 25kHz Channel Spacing, TX ON with Modulation

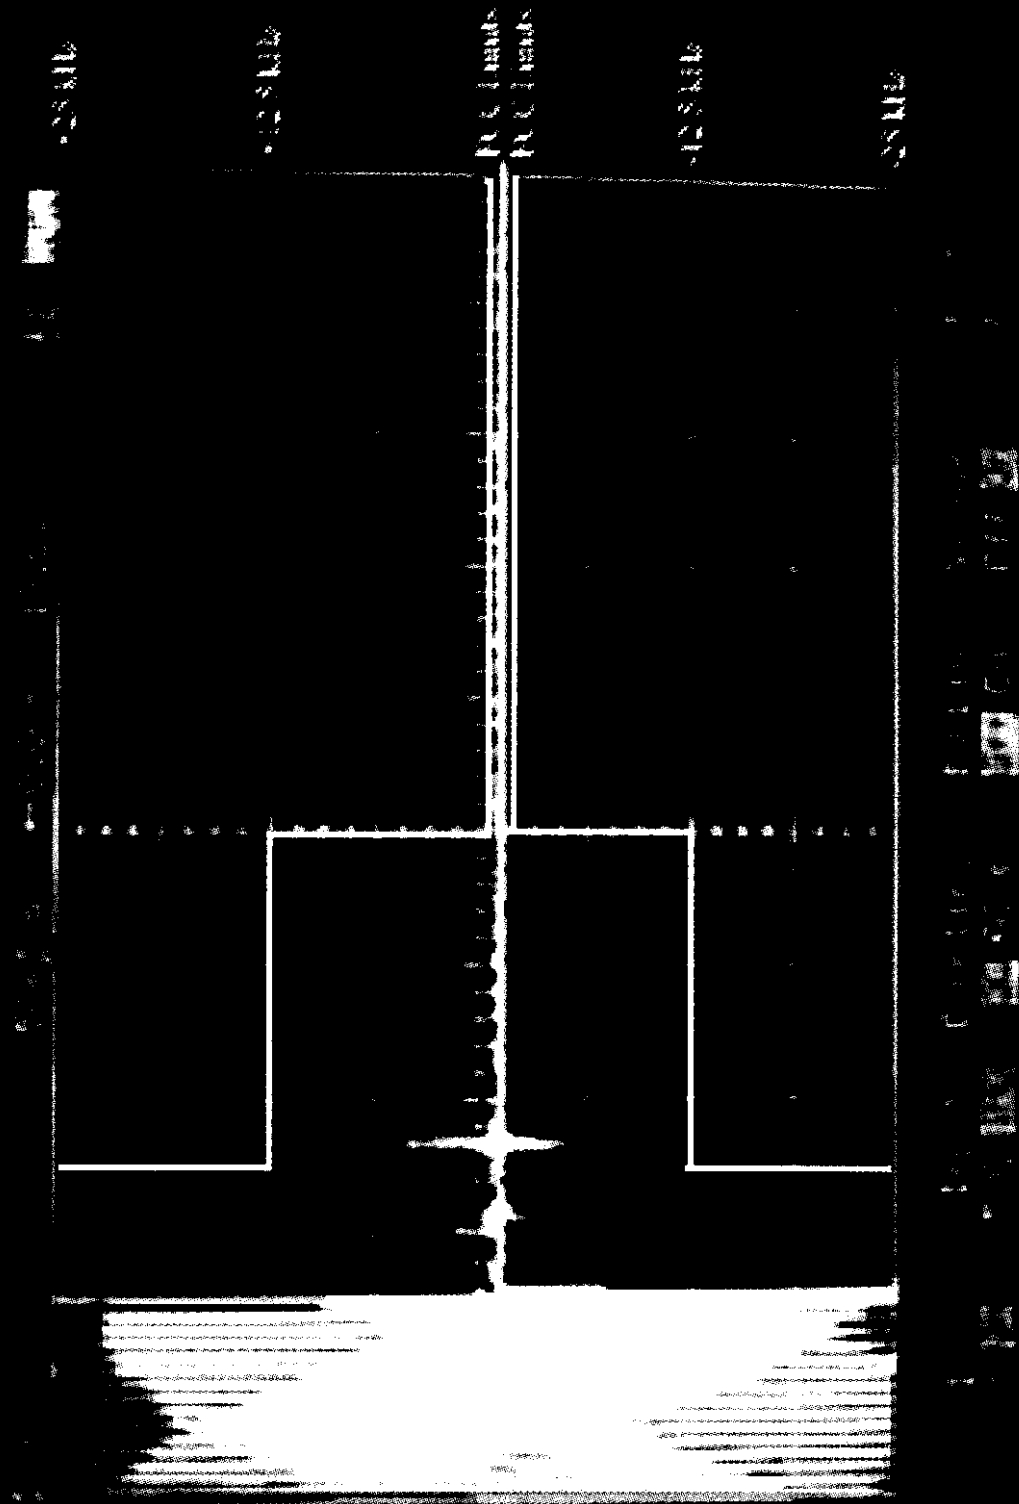

★ NOTE
THE SCOPE'S DLABEL SETTING WAS A BIT
OFF FROM THE CENTER LINE BEFORE TESTS.
THE RESULT SHALL BE OK.

UHF, 450MHz, 25kHz Channel Spacing, Tx OFF with Modulation

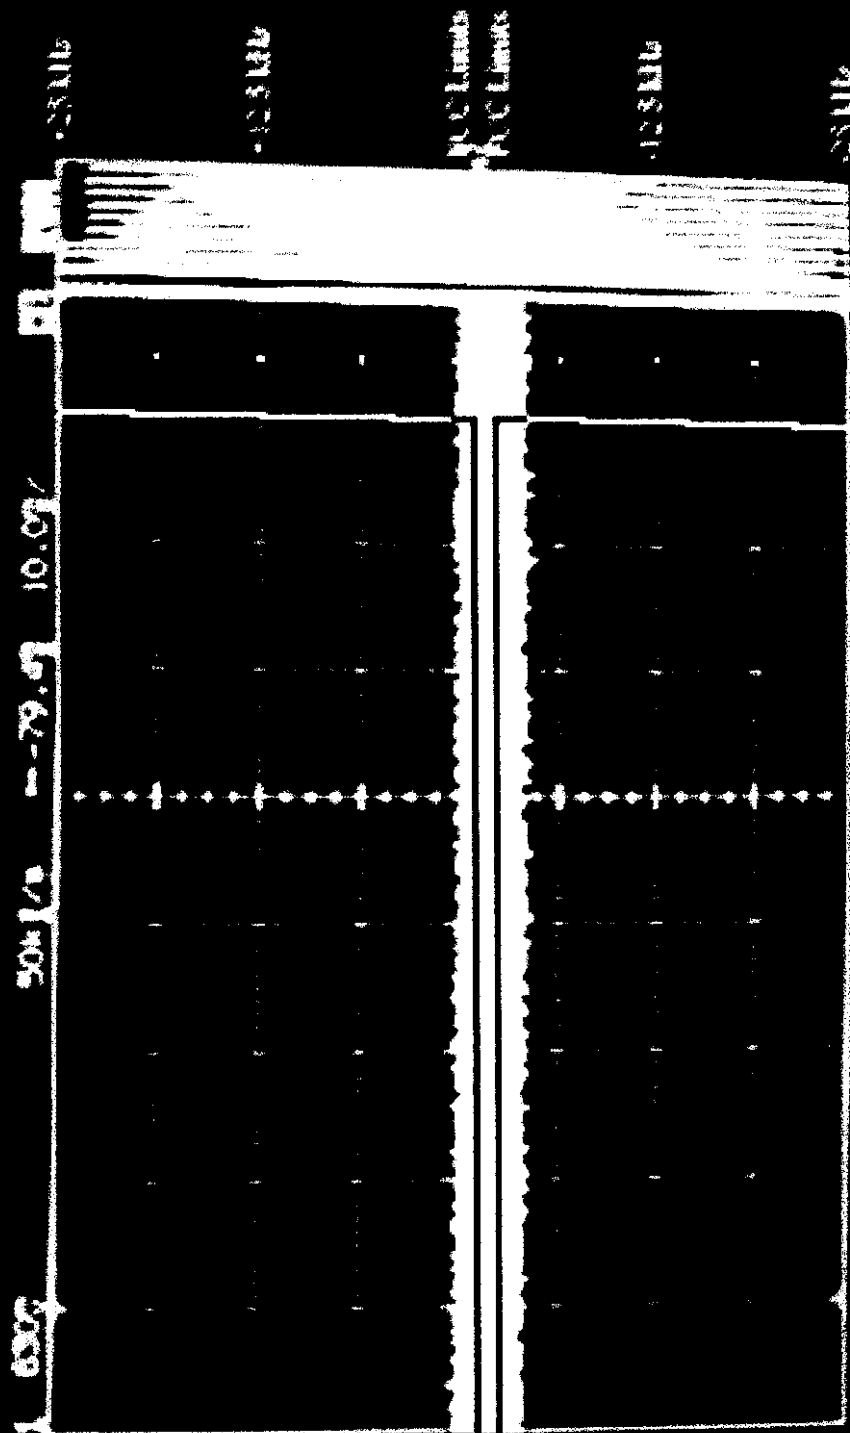

Or: ☐ Input 500 ☐ Coupling ☐ AC ☐ BW Lim ☐ On ☐ Varnier ☐ Off ☐ Menu

5. EXHIBIT 5 - GENERAL TEST PROCEDURES

5.1. AC POWERLINE CONDUCTED EMISSIONS MEASUREMENTS - GENERAL TEST METHOD

- AC Powerline Conducted Emissions were performed in the shielded room, 16'(L) by 12'(W) by 12'(H).
- Conducted power-line measurements were made over the frequency range from 450 KHz to 30 MHz to determine the line-to-ground radio noise voltage which was conducted from the EUT power-input terminals that were directly connected to a public power network.
- The EUT normally received power from another device that connects to the public utility ac power lines, measurements would be made on that device with the EUT in operation to ensure that the device continues to comply with the appropriate limits while providing the EUT with power.
- If the EUT operates only from internal or dedicated batteries, with no provisions for connection to the public utility ac power lines, ac power-line conducted measurements are not required.
- Table-top devices were placed on a platform of nominal size 1 m by 1.5m raised 80 cm above the conducting ground plane.
- The EUT current-carrying power lead, except the ground (safety) lead, was individually connected through a LISN to the power source. All unused 50-Ohm connectors of the LISN was terminated in 50-ohm when not connected to the measuring instruments.
- The line cord of the EUT connected to one LISN which was connected to the measuring instrument. Those power cords for the units of devices not under measurement were connected to a separate multiple ac outlets. Drawings and photographs of typically conducted emission test setups were shown in the Test Report. Each current-carrying conductor of the EUT shall be individually tested.
- The EUT was normally operated with a ground (safety) connection, the EUT was connected to the ground at the LISN through a conductor provided in the lead from the ac power mains to the LISN.
- The excess length of the power cord was folded back and forth in an 8-shape on a wooden strip with a vertical prong located on the top of the LISN case.
- The EUT was set-up in its typical configuration and operated in its various modes as described in 3.2 of the test report.
- A preliminary scan was made by using spectrum analyzer system with the detector function set to PEAK mode (10 KHz RBW, 10 KHz VBW), frequency span 450KHz-30MHz.
- The maximum conducted emission for a given mode of operation was found by using the following step-by-step procedure:

Step1. Monitor the frequency range of interest at a fixed EUT azimuth.

Step2. Manipulate the system cables and peripheral devices to produce highest amplitude signal relative to the limit. Note the amplitude and frequency of the suspect signal.

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

- Step3. The effects of various modes of operation is examined. This is done by varying equipment operation modes as step 2 is being performed.
- Step4. After completing step 1 through 3, record EUT and peripheral device configuration, mode of operation, cable configuration, signal levels and frequencies for final test.
- Each highest signal level at the maximized test configuration was zoomed in a small frequency span on the spectrum analyzer's display (the manipulation of cables and peripheral devices and EUT operation modes might have to be repeated to obtain the highest signal level with the spectrum analyzer set to PEAK detector mode 10 KHz RBW and 10 KHz VBW). The spectrum analyzer was then set to CISPR QUASI-PEAK detector mode (9 KHz RBW, 1 MHz VBW) and the final highest RF signal level and frequency was record.
- **Broad-band ac powerline conducted emissions:-** If the EUT exhibits ac powerline conducted emissions that exceed the limit with the instrument set to the quasi-peak mode, then measurements should be made in the average mode. If the amplitude measured in the quasi-peak mode is at least 6 dB higher than the amplitude measured in the average mode, the level measured in quasi peak mode may be reduced by 13 dB before comparing it to the limit.

5.2. ELECTRICAL FIELD RADIATED EMISSIONS MEASUREMENTS - GENERAL TEST METHOD

- The radiated emission measurements were performed at the Ultratech's 3 Meter Open Field Test Site (OFTS) situated in the Town of Oakville, province of Ontario. The Attenuation Characteristics of OFTS have been filed to FCC.
- Radiated emissions measurements were made using the following test instruments:
 - 1. Calibrated EMCO biconilogl antenna in the frequency range from 30 MHz to 2000 MHz.
 - 2. Calibrated A.H. Systems log periodic antenna in the frequency range above 1000 MHz (1GHz - 18 GHz).
 - 3. Calibrated EMI receiver or spectrum analyzer and pre-selector. In general, the spectrum analyzer would be used as follows:
 - The rf electric field levels were measured with the spectrum analyzer set to PEAK detector (100 KHz RBW and 100 KHz VBW).
 - If any rf emission was observed to be a broadBand noise, the spectrum analyzer's CISPR QUASI-PEAK detector (120 KHz RBW and 1MHz VBW) was then set to measure the signal level.
 - If the signal being measured was narrowband and the ambient field was broadBand, the bandwidth of the spectrum analyzer was reduced.
- The EUT was set-up in its typical configuration and operated in its various modes as described in 3.2 of the test report.
- The frequencies of emissions was first detected. Then the amplitude of the emissions was measured at the specified measurement distance using required antenna height, polarization, and detector characteristics.
- During this process, cables and peripheral devices were manipulated within the range of likely configuration.
- For each mode of operation required to be tested, the frequency spectrum was monitored. Variations in antenna heights (from 1 meter to 4 meters above the ground plane), antenna polarization (horizontal plane and vertical

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

plane), cable placement and peripheral placement (each variable within bounds specified elsewhere) were explored to produce the highest amplitude signal relative to the limit.

The maximum radiated emission for a given mode of operation was found by using the following step-by-step procedure:

- Step1: Monitor the frequency range of interest at a fixed antenna height and EUT azimuth.
- Step2: Manipulate the system cables to produce highest amplitude signal relative to the limit. Note the amplitude and frequency of the suspect signal.
- Step3: Rotate the EUT 360 degrees to maximize the suspected highest amplitude signal. If the signal or another at a different frequency is observed to exceed the previously noted highest amplitude signal by 1 dB or more, go back to the azimuth and repeat Step 2. Otherwise, orient the EUT azimuth to repeat the highest amplitude observation and proceed.
- Step4: Move the antenna over its full allowed range of travel (1 to 4 meters) to maximize the suspected highest amplitude signal. If the signal or another at a different frequency is observed to exceed the previously noted highest amplitude signal by 1 dB or more, return to Step 2 with the highest amplitude observation and proceed.
- Step5: Change the polarization of the antenna and repeat Step 2 through 4. Compare the resulting suspected highest amplitude signal with that found for the other polarization. Select and note the higher of the two signals. This signal is termed the highest observed signal with respect to the limit for this EUT operational mode.
- Step6: The effects of various modes of operation is examined. This is done by varying the equipment modes as steps 2 through 5 are being performed.
- Step7: After completing steps 1 through 6, record the final highest emission level, frequency, antenna polarization and detector mode of the measuring instrument.

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vik.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Calculation of Field Strength:

The field strength is calculated by adding the calibrated antenna factor and cable factor, and subtracting the Amplifier gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where	FS	=	Field Strength
	RA	=	Receiver/Analyzer Reading
	AF	=	Antenna Factor
	CF	=	Cable Attenuation Factor
	AG	=	Amplifier Gain

Example: If a receiver reading of 60.0 dBuV is obtained, the antenna factor of 7.0 dB/m and cable factor of 1.0 dB are added, and the amplifier gain of 30 dB is subtracted. The actual field strength will be:.

Field Level = $60 + 7.0 + 1.0 - 30 = 38.0$ dBuV/m.

Field Level = $10^{(38/20)} = 79.43$ uV/m.

Notes: The frequency and amplitude of at least six highest conducted emissions relative to the limit are recorded unless such emissions are more than 20 dB below the limit. If less than six emissions are within 20dB of the limit, the background or receiver noise level shall be reported at representative frequencies.

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6. EXHIBIT 6 - INFORMATION RELATED TO EQUIPMENT UNDER TESTS

6.1. FCC ID LABELLING AND SKETCH OF FCC LABEL LOCATION

Refer to the attached sheets

6.2. PHOTOGRAPHS OF EQUIPMENT UNDER TEST

Refer to the attached photographs

6.3. SYSTEM BLOCK DIAGRAM(S)

Refer to the attached sheets

6.4. SCHEMATIC DIAGRAMS

Refer to the attached sheets

6.5. USER'S MANUAL WITH "FCC INFORMATION TO USER STATEMENTS"

Refer to the attached Users' manual

ULTRATECH GROUP OF LABS

4181 Sladeview Cres., Unit 33, Mississauga, Ontario, Canada L5L 5R2
Tel. #: 905-569-2550, Fax. #: 905-569-2480, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: TIL10FT
Jan. 25, 1999

- Accredited by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)