



Report No.: TW2011230-03E File Reference No.: 2020-12-14

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Product: Tablet PC with Keyboard

Model No.: A102N, N1000

Trademark: PACKARD BELL

Test Standards: FCC Part 15.247

Test Result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for

the evaluation of electromagnetic compatibility

Approved By

Jack Chung

Manager

Dated: December 14, 2020

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: TW2011230-03E Page 2 of 45

Date: 2020-12-14



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) —**Registration No.:5205A**

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number: 5013.01

Page 3 of 45

Report No.: TW2011230-03E

Date: 2020-12-14



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result	9
6.0	Radiated Emission test	12
5.1	Test Method and Test Procedure.	12
5.2	Configuration of the EUT	13
5.3	EUT Operation Condition.	13
5.4	Radiated Emission Limit	13
7.0	6dB Bandwidth Measurement Bandwidth	23
8.0	Maximum Peak Output Power	28
9.0	Power Spectral Density Measurement.	30
10.0	Out of Band Measurement	35
11.0	Antenna Requirement.	42
12.0	FCC ID Label	43
13.0	Photo of Test Setup and EUT View	44

Date: 2020-12-14



General Details 1.0

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

1.2 Applicant Details

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 6F, Bldg.4, Jinghua Square, No. 168, Zhenzhong Rd., Fuqiang Community, Huaqiangbei,

Futian District, Shenzhen

0755-84688843 Telephone:

Fax:

1.3 Description of EUT

Product: Tablet PC with Keyboard

Manufacturer: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 6F, Bldg.4, Jinghua Square, No. 168, Zhenzhong Rd., Fuqiang Community,

Huaqiangbei, Futian District, Shenzhen

PACKARD BELL Brand Name:

Additional Brand Name: N/A Model Number: A102N

Additional Model Number: N1000

Remark: These models are identical in interior structure, electrical circuits and components, different model

names for the marketing requirement. Hardware Version: EM_A8811_366B_V3.0

Software Version: windows

Serial No.: 10002011000001~ 10002011002005 Type of Modulation GFSK (Bluetooth BLE)

Frequency range 2402-2480MHz **Frequency Selection** By software

Channel Number 40 Input Voltage: DC12V

Battey: DC7.4V === 3000mAh, 22.2Wh;

Power Supply: Model: FJ-SW1202000U; Input:100-240V~, 50/60Hz, 0.6A Max;

Output: DC12V, 2000mA

Submitted Sample: 1 Samples

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Report No.: TW2011230-03E Page 5 of 45

Date: 2020-12-14



1.5 Test Duration

2020-11-17 to 2020-12-14

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

Test Engineer

The sample tested by

Print Name: Terry Tang

Date: 2020-12-14



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2020-06-23	2021-06-22
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2020-06-23	2021-06-22
Loop Antenna	EMCO	6507	00078608	2018-06-25	2021-06-24
Spectrum	R&S	FSIQ26	100292	2020-06-23	2021-06-22
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2019-06-21	2021-06-20
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-07-09	2021-07-08
Power meter	Anritsu	ML2487A	6K00003613	2020-06-23	2021-06-22
Power sensor	Anritsu	MA2491A	32263	2020-06-23	2021-06-22
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2021-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2020-06-23	2021-06-22
EMI Test Receiver	RS	ESH3	860904/006	2020-06-23	2021-06-22
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2020-06-23	2021-06-22
Spectrum	HP/Agilent	E4407B	MY50441392	2020-06-23	2021-06-22
Spectrum	RS	FSP	1164.4391.38	2020-01-16	2021-01-15
RF Cable	7h an a di	ZT26-NJ-NJ-8		2020-06-23	2021-06-22
RF Cable	Zhengdi	M/FA			
RF Cable	Zhengdi	7m		2020-06-23	2021-06-22
RF Switch	EM	EMSW18	060391	2020-06-23	2021-06-22
Pre-Amplifier	Schwarebeck	BBV9743	#218	2020-06-23	2021-06-22
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2020-06-23	2021-06-22
LISN	SCHAFFNER	NNB42	00012	2020-01-07	2021-01-06

2.2 Automation Test Software

For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

2.3 Bluetooth Test Software:

Name: RTLBTAPP Power Setting: Level 3

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2020-12-14



3.0 Technical Details

3.1 Summary of test results

Standard	Test Type	Result	Notes
CC Part 15, Paragraph 15.107 & 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	PASS	Complies

3.2 Test Standards

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 EUT Modification


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Date: 2020-12-14



5.Power Line Conducted Emission Test

5.1 Schematics of the test

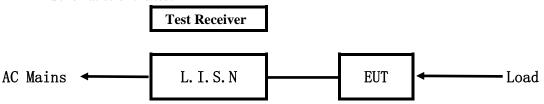


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10 –2013.

Test Voltage: DC7.4V, 60Hz Block diagram of Test setup

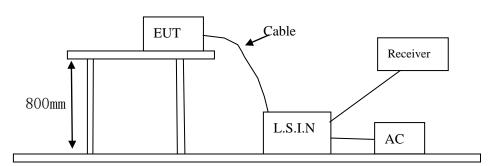

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device		Manufacturer	Model	FCC ID
Tablet PC with I	Keyboard	Shenzhen Jingwah Information Technology Co., Ltd.	A102N, N1000	RBD-A102N

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2011230-03E Page 9 of 45

Date: 2020-12-14



B. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	Rating

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Class B Limits (dB μ V)				
(MHz)	Quasi-peak Level	Average Level			
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*			
$0.50 \sim 5.00$	56.0	46.0			
5.00 ~ 30.00	60.0	50.0			

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2020-12-14



A: Conducted Emission on Live Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Results: PASS

Please refer to following diagram for individual

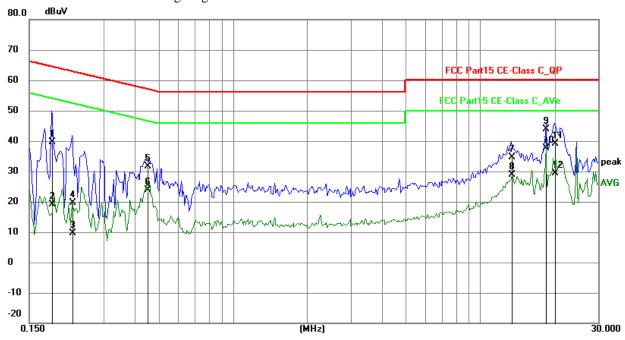

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1850	29.88	9.76	39.64	64.26	-24.62	QP	Р
2	0.1850	9.44	9.76	19.20	54.26	-35.06	AVG	Р
3	0.2241	0.00	9.75	9.75	62.67	-52.92	QP	Р
4	0.2241	9.82	9.75	19.57	52.67	-33.10	AVG	Р
5	0.4503	21.88	9.77	31.65	56.87	-25.22	QP	Р
6	0.4503	14.20	9.77	23.97	46.87	-22.90	AVG	Р
7	13.3584	24.20	10.31	34.51	60.00	-25.49	QP	Р
8	13.3584	18.48	10.31	28.79	50.00	-21.21	AVG	Р
9	18.4323	33.27	10.59	43.86	60.00	-16.14	QP	Р
10	18.4323	27.02	10.59	37.61	50.00	-12.39	AVG	Р
11	19.9533	28.50	10.68	39.18	60.00	-20.82	QP	Р
12	19.9533	18.76	10.68	29.44	50.00	-20.56	AVG	Р

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2020-12-14



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


EUT Operating Environment

Humidity: 65%RH Atmospheric Pressure: 101 KPa Temperature: 26°C

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass

Please refer to following diagram for individual

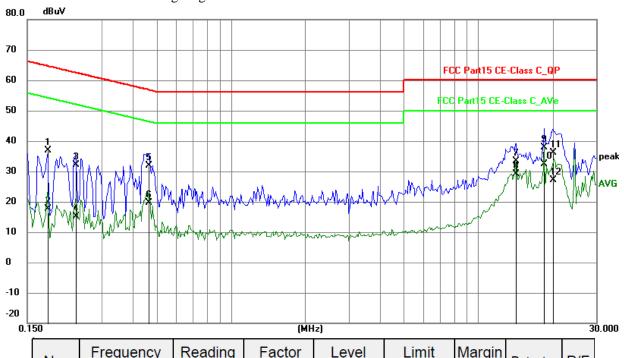

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1812	27.06	9.76	36.82	64.43	-27.61	QP	Р
2	0.1812	7.97	9.76	17.73	54.43	-36.70	AVG	Р
3	0.2358	22.50	9.75	32.25	62.24	-29.99	QP	Р
4	0.2358	5.48	9.75	15.23	52.24	-37.01	AVG	Р
5	0.4659	22.19	9.77	31.96	56.59	-24.63	QP	Р
6	0.4659	9.88	9.77	19.65	46.59	-26.94	AVG	Р
7	14.2125	23.06	10.35	33.41	60.00	-26.59	QP	Р
8	14.2125	18.83	10.35	29.18	50.00	-20.82	AVG	Р
9	18.4284	27.31	10.59	37.90	60.00	-22.10	QP	Р
10	18.4284	21.76	10.59	32.35	50.00	-17.65	AVG	Р
11	20.0274	25.38	10.68	36.06	60.00	-23.94	QP	Р
12	20.0274	16.37	10.68	27.05	50.00	-22.95	AVG	Р

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Report No.: TW2011230-03E Page 12 of 45

Date: 2020-12-14




6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. F For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

For radiated emissions from 9kHz to 30MHz

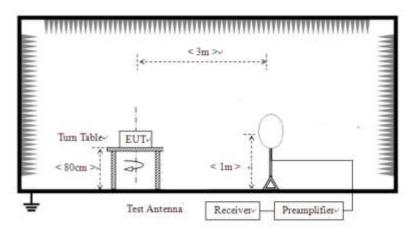


Page 13 of 45

Report No.: TW2011230-03E


Date: 2020-12-14



For radiated emissions from 30MHz to1GHz

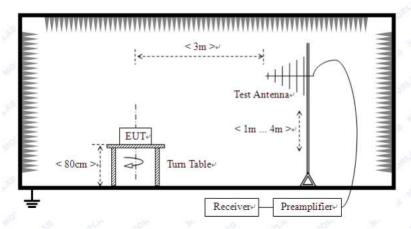

For radiated emissions above 1GHz

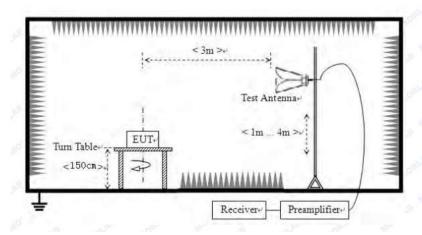

6.2 Configuration of The EUT Same as section 5.3 of this report

6.3 EUT Operating Condition Same as section 5.4 of this report.

6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Report No.: TW2011230-03E Page 14 of 45

Date: 2020-12-14



Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Page 15 of 45

Report No.: TW2011230-03E

Date: 2020-12-14



Test result


General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass

Test Figure:

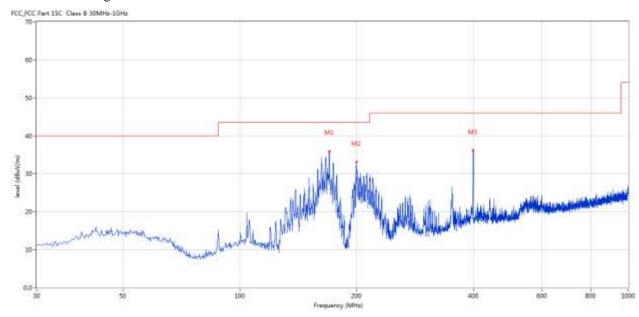

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
1	170.130	35.89	-15.99	43.5	-7.61	Peak	79.00	200	Horizontal	Pass
2	199.465	33.03	-13.50	43.5	-10.47	Peak	0.00	200	Horizontal	Pass
3	398.265	36.06	-8.67	46.0	-9.94	Peak	277.00	200	Horizontal	Pass

Page 16 of 45

Report No.: TW2011230-03E

Date: 2020-12-14



Test result


General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

Test Figure:

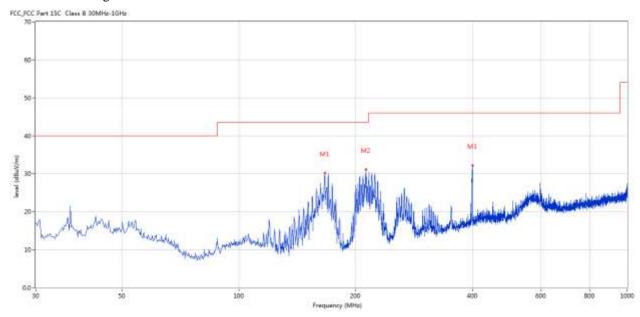

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
1	166.493	30.18	-16.05	43.5	-13.32	Peak	0.00	200	Vertical	Pass
2	212.314	31.14	-13.67	43.5	-12.36	Peak	32.00	100	Vertical	Pass
3	399.720	32.11	-8.57	46.0	-13.89	Peak	284.00	100	Vertical	Pass

Report No.: TW2011230-03E Page 17 of 45


Date: 2020-12-14



Test Figures above 1GHz:

Please refer to the following test plots for details:

Low Channel: Vertical

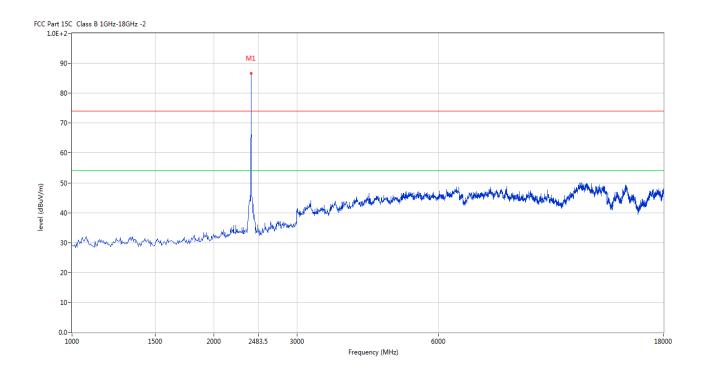


Report No.: TW2011230-03E Page 18 of 45

Date: 2020-12-14



Low Channel: Horizontal

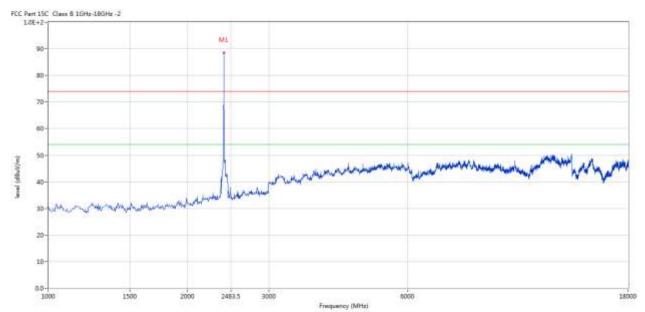


Page 19 of 45

Date: 2020-12-14

Report No.: TW2011230-03E



Middle Channel: Vertical

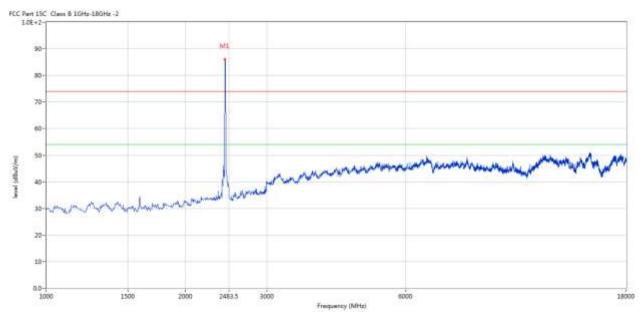


Report No.: TW2011230-03E Page 20 of 45

Date: 2020-12-14



Middle Channel: Horizontal

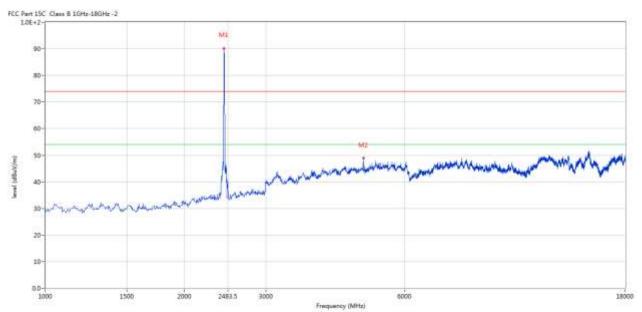


Page 21 of 45

Report No.: TW2011230-03E

Date: 2020-12-14



High Channel: Vertical

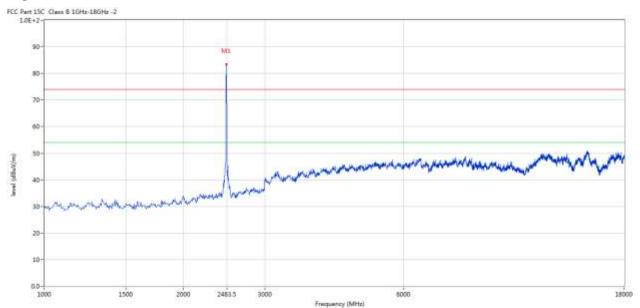


Report No.: TW2011230-03E Page 22 of 45

Date: 2020-12-14



High Channel: Horizontal

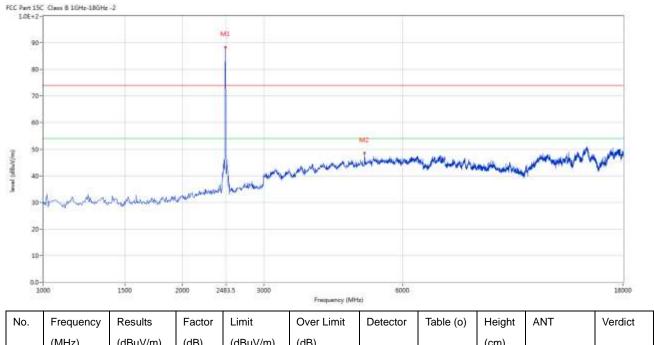

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
2	4961.000	48.57	3.36	54.0	-5.43	Peak	329.00	100	Horizontal	Pass

Note: 1. Level = Reading + AF + Cable - Preamp

- 2. For the radiated emissions above 18G and below 30MHz, it is the floor noise.
- 3. The measured PK value less than the AV limit, no necessary to take down the AV measurement result.

Page 23 of 45


Report No.: TW2011230-03E

Date: 2020-12-14



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Report No.: TW2011230-03E Page 24 of 45

Date: 2020-12-14



6dB BW

342 2								
EUT	Tablet	PC with	Neyboard	Model			A102N	
Mode	Ke	ep Trans	smitting	nitting Input Voltage		DC7.4V		
Temperati	nperature 24 de		. C,	Humidity			56% RH	
Channel	Channel Freq (MHz)			andwidth Hz)	M	inimum Limit (MHz)	Pass/ Fail	
Low	2402		5	53		0.5	Pass	
Middle	2440		5	53		0.5	Pass	
High	2480		5	53		0.5	Pass	

Page 25 of 45


Report No.: TW2011230-03E

Date: 2020-12-14



Test Figure:

1. Condition: Low Channel

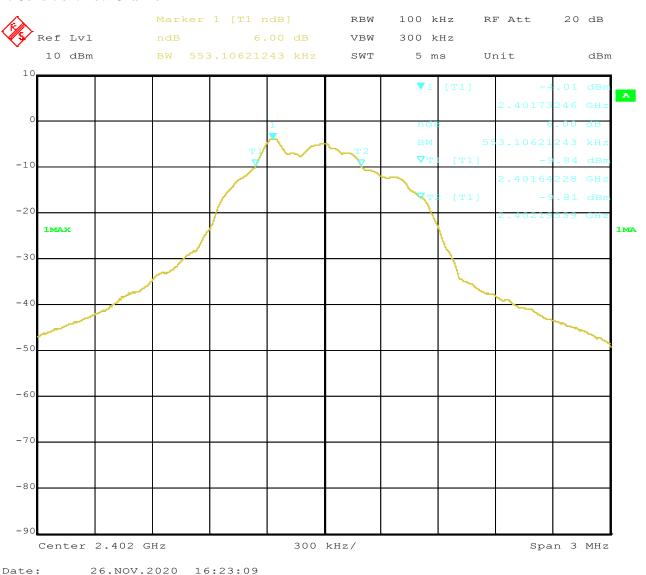


Report No.: TW2011230-03E Page 26 of 45

Date: 2020-12-14



2. Condition: Middle Channel

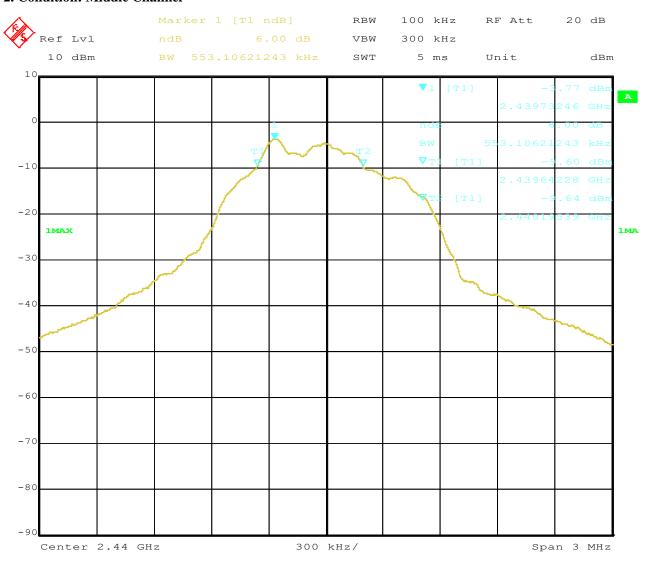


Date: 26.NOV.2020 16:24:12

Report No.: TW2011230-03E Page 27 of 45

Date: 2020-12-14



3. High Channel

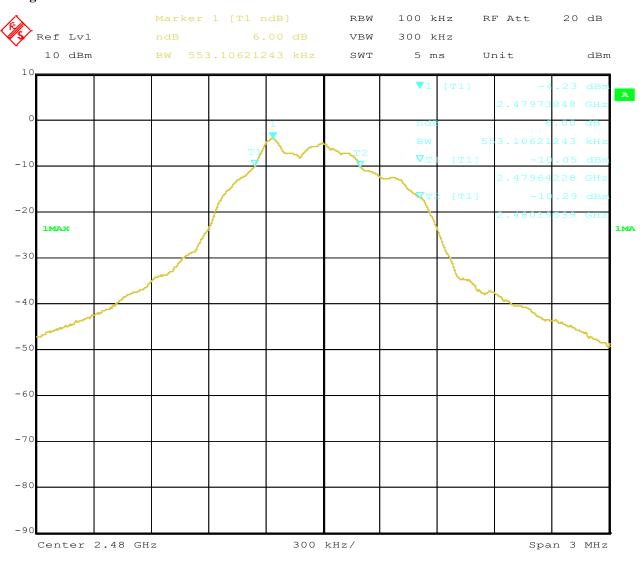

Date: 26.NOV.2020 16:25:12


Report No.: TW2011230-03E Page 28 of 45

Date: 2020-12-14



8. Maximum Output Power

8.1 Test Setup



8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the Peak power were measured.

Report No.: TW2011230-03E Page 29 of 45

Date: 2020-12-14



8.4Test Results

EUT		Tablet PC with I	Keyboard	Model		A102N	
Mode		Keep Transm	nitting	Input Voltage		DC7.4V	/
Temperatu	re	24 deg. (Ξ,	Humidity		56% RF	ł
Channel	Cł	nannel Frequency	Max	x. Power Output (dB)	m)	Peak Power Limit	Pass/ Fail
Chamier		(MHz)		Peak		(dBm)	
Low		2402		-3.61		30	Pass
Middle		2440		-3.35		30	Pass
High		2480		-3.84		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator


Page 30 of 45 Report No.: TW2011230-03E

Date: 2020-12-14



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm/3kHz.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be $\leq 8 \text{ dBm/3kHz}$.

Report No.: TW2011230-03E Page 31 of 45

Date: 2020-12-14



9.4Test Result

EUT		Tablet	PC with Ke	yboard	Model	A	102N
Mode		Ke	ep Transmitt	ing	Input	DO	C7.4V
					Voltage		
Temperat	ure		24 deg. C,		Humidity	56	% RH
	Peak	Power	Cable	Final Po	wer Spectral	Maximum	
Channel	Re	ading	Loss	D	ensity	Limit	Pass/ Fail
	(d	lBm)	(dB)	(dBn	n/10kHz)	(dBm/3kHz)	
Low	-1	4.79	0.2	-	14.59	8	Pass
Middle	-1	4.52	0.2	-	14.32	8	Pass
High	-1	5.00	0.2	-	14.80	8	Pass

Note: The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss

Page 32 of 45


Report No.: TW2011230-03E

Date: 2020-12-14



Test Figure:

1. Condition: Low Channel

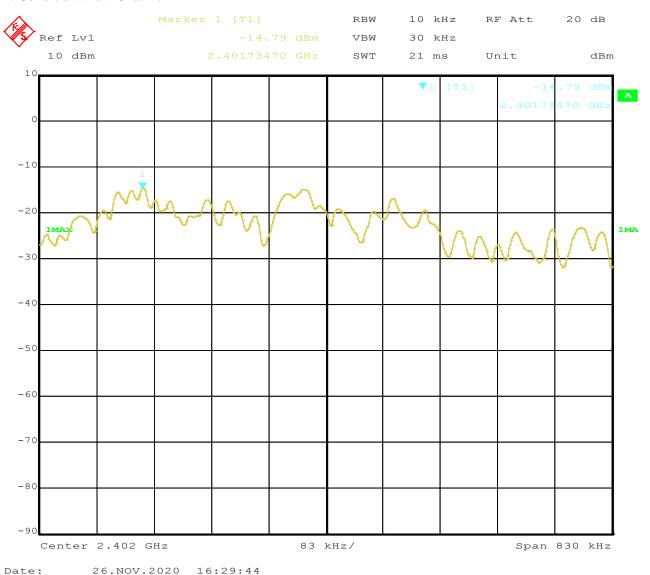


Page 33 of 45

Report No.: TW2011230-03E

Date: 2020-12-14



2. Condition: Middle Channel

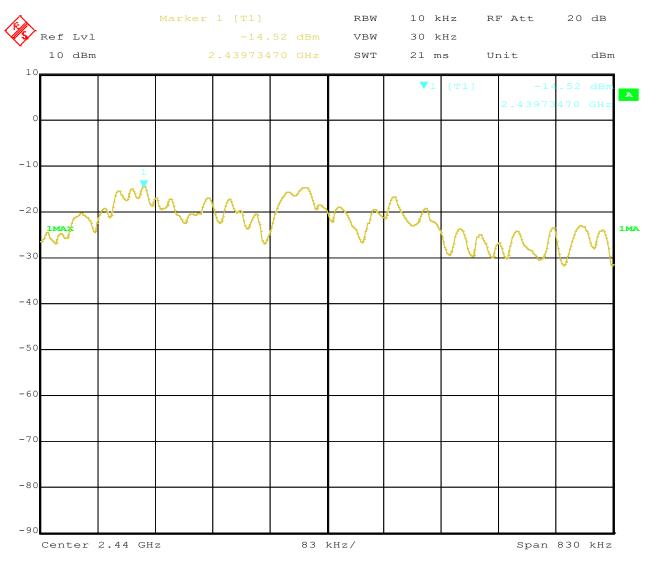


Date: 26.NOV.2020 16:30:26

Report No.: TW2011230-03E Page 34 of 45

Date: 2020-12-14



3. High Channel

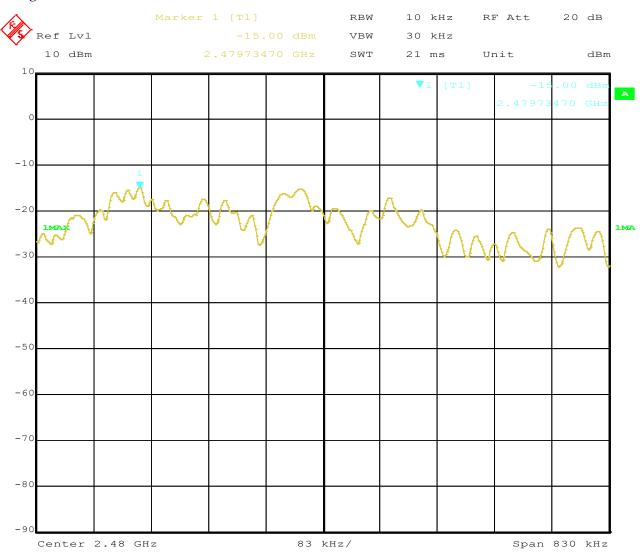


Date: 26.NOV.2020 16:31:10

Report No.: TW2011230-03E Page 35 of 45

Date: 2020-12-14



10 Out of Band Measurement 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of Radiated emission test. (Peak values with RBW=1MHz, VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector)

For bandage test, the spectrum set as follows: RBW=100 kHz, VBW=300 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule. 2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Report No.: TW2011230-03E Page 36 of 45


Date: 2020-12-14



10.4 Band-edge Measurement

EUT	Tablet PC with Keyboard	Model	A102N
Mode	Keep Transmitting	Input Voltage	DC7.4V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

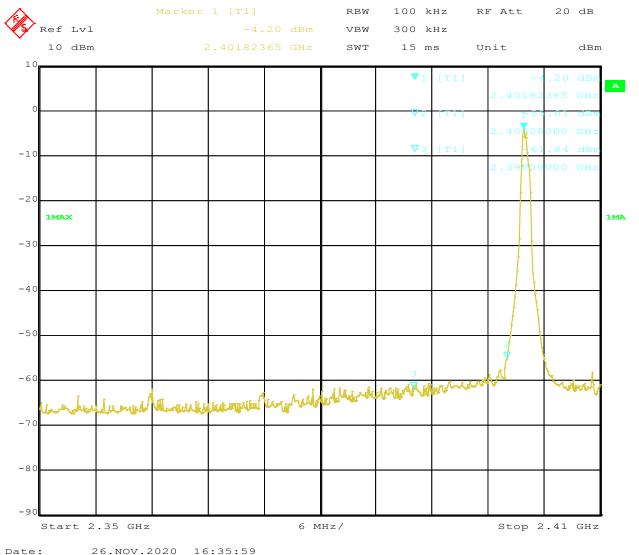

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2011230-03E Page 37 of 45


Date: 2020-12-14



10.4 Band-edge Measurement

EUT	Tablet PC with Keyboard	Model	A102N
Mode	Keeping Transmitting	Input Voltage	DC7.4V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

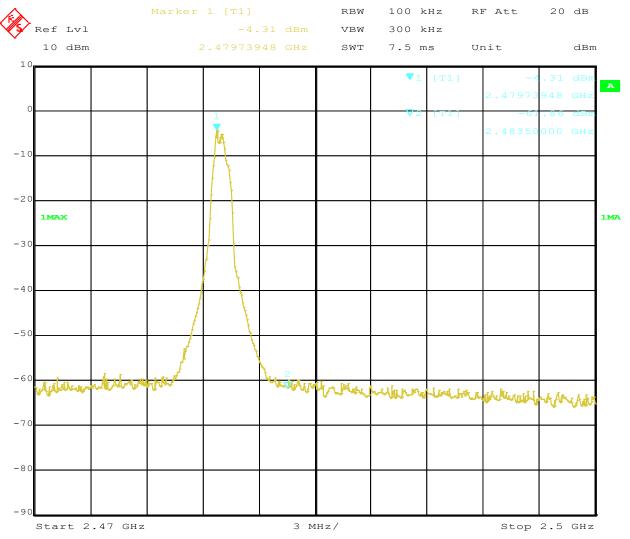

26.NOV.2020 16:37:19 Date:

Page 38 of 45 Report No.: TW2011230-03E

Date: 2020-12-14



10.4 Restrict Band Measurement

	EUT	Tablet F	PC with Keyboa	ard Mode	el		A10	2N	
	Mode	Kee	p Transmitting	Input Vo	ltage		DC7	.4V	
Tei	mperature		24 deg. C,	Humid	ity		56%	RH	
Te	st Result:		Pass						
2 Part 1 1.0E+2	5C Class B 1GHz-18GHz	-2							
								M1	
90	0-							M	
80	0-							+	
70	0-								
60	0_							/ \	
Ü.	0-						/		
50	0-						N. O. A. A. B.	- Vun	l Middle Latha Baran
	_		maria da carante da mada da ma				The Heatherth,	"11	
40	0-			י ייניינון: רווייי בן קווס וי בירווסוקיויאויי ו	H11 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	1			
40	المنطورة والاسترارية والربي المتارية			ulcidiataral a	- 1 '1				
30				ulictilistere (ili	- '				
				ulc (d) alara (1)	- '				
30				ulc (d) alara (1)	-				
30 20 10				ule I di a la ra a a a	- 1 1				
20				Frequency (Mi	tz)				2410
30 20 10		Results	Factor Limit	Frequency (MI	Hz) Detector	Table (o)	Height	ANT	2410 Verdic
30 20 10 0.0	0-	Results (dBuV/m)	Factor Limit	Over Limit		Table (o)	Height (cm)	ANT	T

Report No.: TW2011230-03E Page 39 of 45

Date: 2020-12-14



Pastrict Rand Massurament

	EUT	Table	t PC wit	h Keyboard		Model			A102N	
	Mode	K	eep Tran	smitting	Inp	ut Voltage			DC7.4V	
Ter	mperature		24 deg	g. C,	I	Iumidity			56% RH	
Tes	st Result:		Pas	S						
C Part 15 1.0E+2	9C Class 8 16Hz-18GHz	-2								
90	3-								MI	
									\wedge	
80									/ \	
70)-									
60	50-							1		
50									1	-21.000000000
50 50 40				and a positivistativist	A-matrix rates		CAL STATE STATES	-	1	My William
BeV/va	o-	enjamistiku sairi		WHITE THE PERSON	January Market	A villa tralaga	Cal Anti-Anti-	And and	1	NEW YORK
Elizabli 40	and the state of t	danja mindelatura sirin	nikiri mini	West of the second	A Labertako de Lab	A visit miles	La Supanion	ANIAL MA		og handeled
u/Angpl 40	and the state of t	garjaniya ku xaasiy	n industrial Park	AND THE PERSON NAMED IN	A A HAVING THE PARTY OF THE PAR	A sea mean	LA BURNINA	and and	•	aliya ya y
Elizabli 40	o	enina printerior de la constitución	ninken meter	Y MANTHA PARTIES	Maring Paring Pa	AL VALL LANGENIA	La Allegania		•	akiriyiriyi
300 20 0.0		ganjaringskilet, s	n Video in Maria	A NA WALLAND AND A STATE OF THE PARTY OF THE	u a hada a kanana a	ALVAL INTERIOR	ha day a same			2410
20 10 0.0 2	3- 3- 3- 3- 3- 3- 3- 3- 3- 3- 3- 3- 3- 3	engarjariya kiladi. xi. adiriq	a Maria Maria	WARREN AND THE	Frequency (MH		ra godina			15-000
300 20 0.0	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	2410 Verdict
30 20 10	3- 3- 3- 3- 3- 3- 3- 3- 3- 3- 3- 3- 3- 3	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m) 54.0	THE CONTRACT		Table (o)	Height (cm)	ANT	3433

Report No.: TW2011230-03E Page 40 of 45

Date: 2020-12-14



10.4 Restrict Band Measurement

	EUT	Tablet 1	PC with	Keyboard	Mo	odel			A102N	
	Mode	Kee	p Transr	nitting	Input	Voltage]	DC7.4V	
Te	emperature		24 deg.	C,	Hun	nidity		4	56% RH	
T	est Result:		Pass							
CC Part 1.0E	15C Class 8 1GHz-18GHz	-2								
	90-									
	77		1							
	30 -									
	70-			1						
-	60-		/	1	·					
	50-	The second second second								
	SO MANAGEMENT	University of the second			WHITE THE PERSON	Marina	leterania de	Anthornous control	tir takuri monivisana	tu triinut
lavel (dBoV/m)	40-	chlandshim			- Militario	PATE TOTAL	ALMANA MA	ALEANAN ALEANAN	Y MY YOU WHICH THE	Mary Mary
lavel (dBoV/m)	SO MANAGEMENT	de la Maria			- Miles	New Property of	A PARTIE A	ALL MANAGE	THE PRINT	Musidin.
level (dBuV/mi)	40-	challican	/		- Million	Tri o positi	A PARTICIPATION OF THE PERSON	*Property	THE PRINT	To a single
level (dBuV/m)	50 40-	oka ka dalah sang	/		- Million		THE PROPERTY OF THE PARTY OF TH	THE PERSON NAMED IN	P HTTP Milant	(Preign
Ternal (sid ButV/sm)	30 - 20 - 10 - 10 - 10 - 10 - 10 - 10 - 1	delin Hilliam					A PARTINIAN PROPERTY	***********	Y HYTOPPINATI	
Ternal (sid ButV/sm)	30- 20-	charling			2483.5 Frequency (Mr	To The Top of the	AT PERSONAL PROPERTY.	ALL MAN	Y ATTO MICHAEL	2500
Ternal (sid ButV/sm)	30 - 20 - 10 - 10 - 10 - 10 - 10 - 10 - 1	Results	Factor	Limit		Detector	Table (o)	Height	ANT	2500 Verdict
level (dBut//mi)	30- 20- 20- 2470	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Frequency (Mir		Table (o)	Height (cm)	ANT	2000

Page 41 of 45

Report No.: TW2011230-03E

Date: 2020-12-14



10.4 Restrict Band Measurement

]	EUT	Tablet P	C with F	Keyboard	Model			A10	02N	
	N	Mode	Keep	Transm	nitting	Input Voltag	.ge		DC	7.4V	
7	Tem	nperature		24 deg. C	Ξ,	Humidity	7		56%	RH	
,	Test	t Result:		Pass							
	90- 80-	Class S IGHz-18GHz	2								
	70-										
dany/mag	50-	in de la contrata de	o sistempla property			assales/adverte	-	hariahan/girariha	Hard States	hi ndrajnajo likajo	Removed the
Starfungsti seam	92.7	भारत हो भी पोर्ड में पार्की	THE REPORT OF THE PERSON NAMED IN			and the banks when	etalen generalis	Herzajdok (Arieka) ka	mala dest	kapanan ana ana ana ana ana ana ana ana a	Marin Salay
flus Famouti sease	50- 40- 30-	170	and the first second			2483.5 Frequency (MHz)	oliekati ke njembeljen	hanna para para para para para para para	ng dang kapahir dir	hametrate and a second	2500
No.	50- 40- 30- 20- 10- 24	170	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Frequency (MHz)	Detector	Table (o)	Height (cm)	ANT	2500 Verdict

Note: The measured PK value less than the AV limit, no necessary to take down the AV measurement result.

Date: 2020-12-14



Page 42 of 45

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

Integral antenna used. The gain of the antennas is 2.0dBi.

Report No.: TW2011230-03E Page 43 of 45

Date: 2020-12-14




12.0 FCC ID Label

FCC ID: RBD-A102N

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

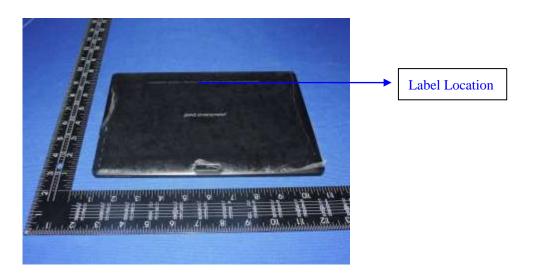

Page 44 of 45

Report No.: TW2011230-03E

Date: 2020-12-14



13.0 **Photo of testing**


Conducted Emission Test Setup:



Date: 2020-12-14



Radiated Emission Test Setup:

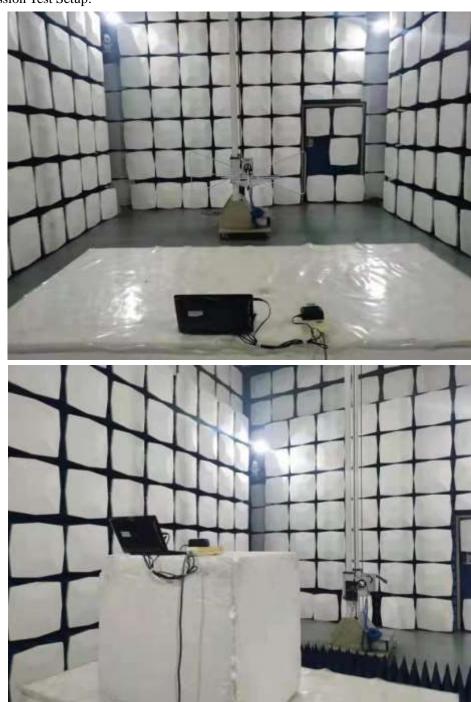

Photographs - EUT

Please refer test report TW2011230-01E

End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.