

TEST REPORT

Applicant: Autel Robotics Co., Ltd.

Address: 601,701,801,901, Block B1, Nanshan iPark, No. 1001 Xueyuan Avenue, Nanshan District, Shenzhen, Guangdong, 518055, China

Product Name: EVO Max 4T, EVO Max 4N, EVO Max 4T Pro, EVO Max 4T XE


FCC ID: 2AGNTMDX600958S

Standard(s): 47 CFR Part 15, Subpart C(15.255)
ANSI C63.10-2020 +Cor.1-2023

Report Number: 2502P42420E-RF-00B


Report Date: 2025/2/10

The above device has been tested and found compliant with the requirement of the relative standards by Bay Area Compliance Laboratories Corp. (Dongguan).



Reviewed By: Pedro Yun

Title: Project Engineer



Approved By: Gavin Xu

Title: RF Supervisor

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

CONTENTS

DOCUMENT REVISION HISTORY	4
1. GENERAL INFORMATION	5
1.1 GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST	5
1.2 ACCESSORY INFORMATION.....	5
1.3 ANTENNA INFORMATION DETAIL▲	6
1.4 EQUIPMENT MODIFICATIONS	6
2. SUMMARY OF TEST RESULTS	7
3. DESCRIPTION OF TEST CONFIGURATION	8
3.1 EUT OPERATION CONDITION.....	8
3.2 EUT EXERCISE SOFTWARE.....	8
3.3 SUPPORT EQUIPMENT LIST AND DETAILS	8
3.4 SUPPORT CABLE LIST AND DETAILS	8
3.5 BLOCK DIAGRAM OF TEST SETUP	9
3.6 TEST FACILITY.....	10
3.7 MEASUREMENT UNCERTAINTY	10
4. REQUIREMENTS TEST RESULTS	11
4.1 AC LINE CONDUCTED EMISSIONS.....	11
4.2 PEAK EIRP AND TRANSMITTER OFF-TIMES	12
4.2.1 Applicable Standard.....	12
4.2.2 EUT Setup.....	12
4.2.3 Test Procedure	13
4.2.4 Test Result	14
4.3 EMISSION BANDWIDTH:	18
4.3.1 Applicable Standard.....	18
4.3.2 EUT Setup.....	18
4.3.3 Test Procedure	19
4.3.4 Test Data	20
4.4 RADIATED EMISSIONS	24
4.4.1 Applicable Standard.....	24
4.4.2 EUT Setup.....	24
4.4.3 EMI Test Receiver & Spectrum Analyzer Setup	27
4.4.4 Test Procedure	28
4.4.5 Corrected Amplitude & Margin Calculation.....	29
4.4.6 Test Data	30
4.5 FREQUENCY STABILITY.....	40
4.5.1 Applicable Standard.....	40
4.5.2 EUT Setup Block Diagram	40

4.5.3 Test Procedure	40
4.5.3 Test Result	41
4.6 OPERATION RESTRICTION AND GROUP INSTALLATION.....	44
4.6.1 Applicable Standard.....	44
4.6.2 Result	44
4.7 ANTENNA REQUIREMENT.....	45
4.7.1 Applicable Standard.....	45
4.7.2 Judgment.....	45
EXHIBIT A - EUT PHOTOGRAPHS.....	46
EXHIBIT B - TEST SETUP PHOTOGRAPHS	47

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2502P42420E-RF-00B	Original Report	2025/2/10

1. GENERAL INFORMATION

1.1 General Description of Equipment under Test

EUT Name:	EVO Max 4T, EVO Max 4N, EVO Max 4T Pro , EVO Max 4T XE
EUT Model:	MDX
Operation Frequency Range:	60.99-61.84 GHz
Maximum Peak EIRP:	19.98 dBm
Modulation Type:	FMCW
Chirp Time▲:	93.6 μs
Emission Designator:	N0N
Rated Input Voltage▲:	DC 14.76V or DC 14.88V from battery
Serial Number:	2XO3-2
EUT Received Date:	2025/1/17
EUT Received Status:	Good
Note: The device can install 4 difference Gimbal cameras and 3 difference batteries, test was only performed with Gimbal camera 4#(Fusion 4T XE) and battery 2#(model: ABX40) since 2.4G Wi-Fi report test, radiated emissions test with Gimbal camera (Fusion 4TXE) & Battery 2#(model: ABX40) was the worst.	

1.2 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
Adapter	Shenzhen Esun Power Technology Co., Ltd	MDX120W	Input: AC100-240V 50/60Hz 3.0A Output: Main:17Vdc.7.06A; USB-C: 5.0V,3.0A;9.0V,3.0A;12.0V,2.5A Total Output Power:120.02W Max
Battery 1#	Xiamen Ampace Technology Limited	MDX_8070_1488	DC 14.88V
Battery 2#	Xiamen Ampace Technology Limited	ABX40	DC 14.88V
Battery 3#	Xiamen Ampace Technology Limited	ABX41	DC 14.76V
Gimbal camera 1#	Autel Robotics Co., Ltd.	Fusion 4T	/
Gimbal camera 2#	Autel Robotics Co., Ltd.	Fusion 4N	/
Gimbal camera 3#	Autel Robotics Co., Ltd.	Fusion 4T Pro	/
Gimbal camera 4#	Autel Robotics Co., Ltd.	Fusion 4T XE	/
Note: For Battery, model MDX_8070_1488 and model ABX40 are only different model name. For Gimbal camera, model Fusion 4T Pro and model Fusion 4T XE are only different model name.			

1.3 Antenna Information Detail▲

Antenna Type	input impedance (Ohm)	Antenna Gain	Frequency Range
Microstrip Antenna	50	9.6dBi	60-64 GHz
The design of compliance with §15.203:			
<input checked="" type="checkbox"/> Unit uses a permanently attached antenna.			
<input type="checkbox"/> Unit uses a unique coupling to the intentional radiator.			
<input type="checkbox"/> Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.			

1.4 Equipment Modifications

No modifications are made to the EUT during all test items.

2. SUMMARY OF TEST RESULTS

Standard(s)/Rule(s)	Description of Test	Result
§15.207(a)	AC Line Conducted Emissions	Not Applicable
§15.255(b)(3)	Peak EIRP and Transmitter Off-times	Compliant
§15.215, §15.255 (e)	Occupied Bandwidth	Compliant
§15.205, §15.209, §15.255(d)	Radiated Spurious Emissions	Compliant
§15.255 (f)	Frequency Stability	Compliant
§15.255 (a),(b),(h)	Operation Restriction And Group Installation	Compliant
§15.203	Antenna Requirement	Compliant
Not applicable for AC Line Conducted Emissions, the EUT was power by battery.		

3. DESCRIPTION OF TEST CONFIGURATION

3.1 EUT Operation Condition

The system was configured for testing in production version with highest transmitter activity (on time), which was provided by the manufacturer. According to 15.31(c) and KDB 364244 D01 Meas 15.255 Radars v01, the device tested at Swept mode for FMCW modulation. The device was built in 6 radar modules, each module was tested separately except radiation emissions below 40GHz test simultaneously.

3.2 EUT Exercise Software

No software was used in test. The EUT transmit when EUT was power up.

3.3 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
SAMSUNG	Mircro TF Card	Unknown	2WO3-4

3.4 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
/	/	/	/	/	/

3.5 Block Diagram of Test Setup

Radiated Spurious emissions:

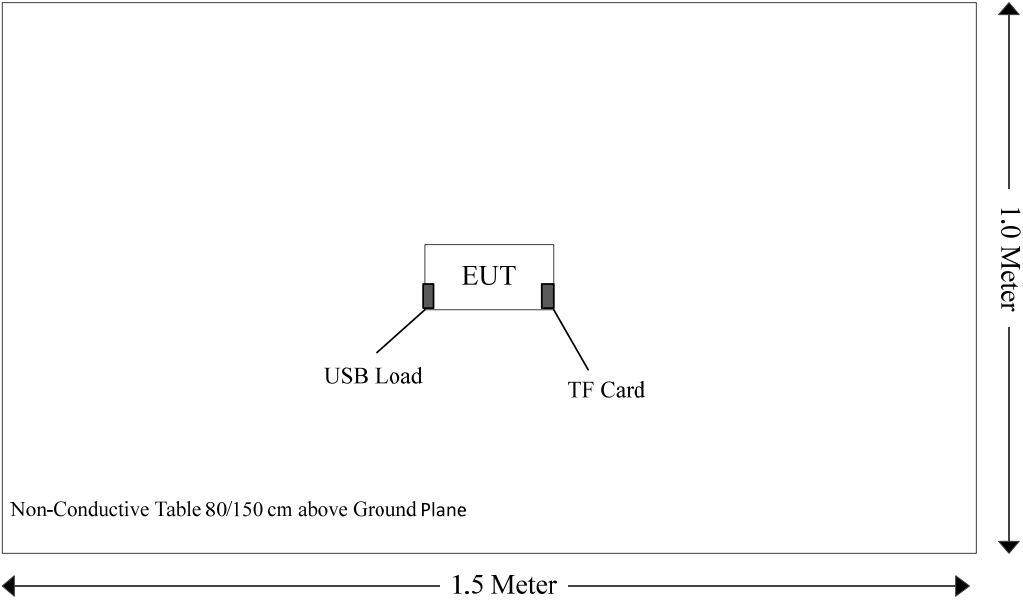

3.6 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

3.7 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
Unwanted Emissions, radiated	9kHz~30MHz: 3.3dB, 30MHz~200MHz: 4.55 dB, 200MHz~1GHz: 5.92 dB, 1GHz~6GHz: 4.98 dB, 6GHz~18GHz: 5.89 dB, 18GHz~26.5GHz: 5.47 dB, 26.5GHz~40GHz: 5.63 dB, 40~60G: 4.83dB, 60G~90G: 4.94dB, 90G-140G: 5.46dB, 140G-220G: 6.00dB, 220G-325G: 7.35dB
EIRP	4.94dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.11 dB (150 kHz to 30 MHz)

4. REQUIREMENTS TEST RESULTS

4.1 AC Line Conducted Emissions

Not Applicable, the device was powered by battery when operating.


4.2 Peak EIRP And Transmitter Off-times

4.2.1 Applicable Standard

FCC §15.255(b)(3)

Field disturbance sensors/radar devices deployed on unmanned aircraft may operate within the frequency band 60 – 64 GHz, provided that the transmitter not exceed 20 dBm peak EIRP. The sum of continuous transmitter off-times of at least two milliseconds shall equal at least 16.5 milliseconds within any contiguous interval of 33 milliseconds. Operation shall be limited to a maximum of 121.92 meters (400 feet) above ground level.

4.2.2 EUT Setup

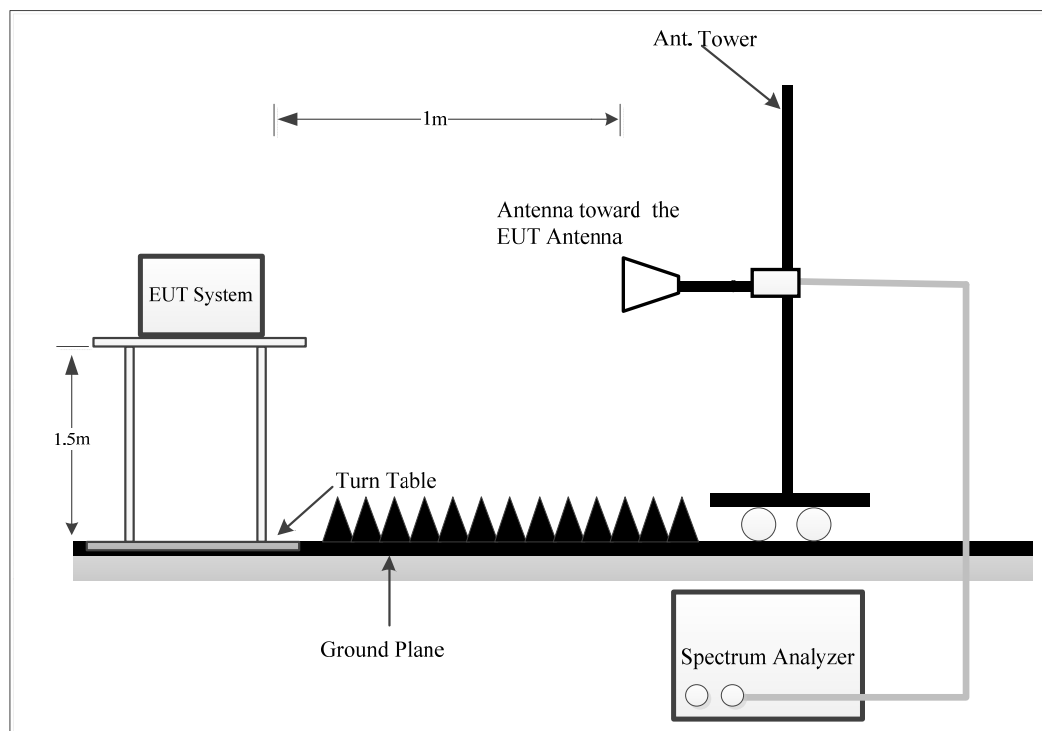

Place the measurement antenna at a measurement distance that is in the far-field of the measurement antenna, in the far-field of the EUT antenna. The EIRP test was performed at 1m distance, which was larger than the minimum test distance, please refer to section 4.4.4 for more detail.

4.2.3 Test Procedure

Refer to ANSI C63.10-2020 Clause 9.8

For radiated measurements:

- 1) Place the measurement antenna at a measurement distance that is in the far-field of the measurement antenna, in the far-field of the EUT antenna, and meets the measurement distance requirements for final radiated measurements as specified in 9.1.4.
- 2) Place the measurement antenna in the main beam of the EUT then maximize the fundamental emission using the procedures of 9.7, noting that multiple peaks can be found at different beam orientations and/or polarizations.
- 3) Correct the power reading from the spectrum analyzer for any external gain and/or attenuation between the measurement antenna and the spectrum analyzer. This is the power at the output of the measurement antenna
- 4) Calculate the EIRP from the power at the output of the measurement antenna using Equation (22), and then convert to linear form using Equation (24).

$$EIRP = 21.98 - 20 \log(\lambda) + 20 \log(d_{Meas}) + P - G \quad (22)$$

where

$EIRP$	is the equivalent isotropic radiated power, in dBm
λ	is the wavelength of the emission under investigation $[300/f(\text{MHz})]$, in m
d_{Meas}	is the measurement distance, in m
P	is the power measured at the output of the measurement antenna, in dBm
G	is the gain of the measurement antenna, in dBi

NOTE—The measured power P includes all applicable instrument correction factors up to the connection to the measurement antenna.

- 5) Where applicable, calculate conducted output power from the EIRP using Equation (27).

For FMCW emissions, the procedures in 4.1.5.2.8 and Annex L shall be used.

4.2.4 Test Result

Serial Number:	2XO3-2	Test Date:	2025/1/16~2025/1/23
Test Site:	Chamber B	Test Mode:	Swept
Tester:	Bill Yang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	19.4~21.4	Relative Humidity: (%)	44~55	ATM Pressure: (kPa)	101.1
----------------------	-----------	---------------------------	-------	---------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Waveguide Mixer	11970V	2521A011767	2023/2/16	2026/2/15
Flann Microwave	Horn Antenna	861V/385	736	2023/2/27	2026/2/26
Resenberger	Coaxial Cable	LU7-022-1000	0031	2024/3/1	2025/2/28
Resenberger	Coaxial Cable	LU7-022-1000	0032	2024/3/1	2025/2/28
Agilent	Spectrum Analyzer	E4440A	MY44303352	2024/10/22	2025/10/21

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:
Chirps Correction Factor

Radar	Chirps Time (μs)	BW _{chirp} (MHz)	RBW (MHz)	Chirps Correction Factor (dB)
Right	93.6	840.93	1	6.12
Left	93.6	843.26	1	6.13
Front	93.6	843.26	1	6.13
Rear	93.6	840.93	1	6.12
Top	93.6	843.26	1	6.13
Bottom	93.6	843.26	1	6.13

Refer to ANSI C63.10-2020/cor 1-2023 Annex L.1. The chirps correction factor was calculated using the formula:

$$\alpha = \frac{1}{\left(1 + \left[\left(\frac{2 \times \ln(2)}{\pi}\right)^2 \times \left(\frac{BW_{\text{Chirp}}}{T_{\text{Chirp}} \times RBW^2}\right)^2\right]\right)^{0.25}}$$

where

α is the reduction in amplitude
 BW_{Chirp} is the FMCW Chirp Bandwidth
 T_{Chirp} is the FMCW Chirp Time

EIRP:

Radar	Reading (dBμV)	Detector	Polar (H/V)	Chirps Correction Factor (dB)	Antenna Factor (dB/m)	E-Field@1m (dBμV/m)	EIRP (dBm)	Limit (dBm)
Right	75.77	PK	V	6.12	42.13	124.02	19.22	20.00
Left	76.48	PK	V	6.13	42.13	124.74	19.94	20.00
Front	76.42	PK	V	6.13	42.13	124.68	19.88	20.00
Rear	75.50	PK	V	6.12	42.13	123.75	18.95	20.00
Top	76.29	PK	V	6.13	42.13	124.55	19.75	20.00
Bottom	76.52	PK	V	6.13	42.13	124.78	19.98	20.00

The Mixers and it's RF cables is compose a system for calibration and already added into the reading.

E-Field = Reading + Chirps Correction Factor + Antenna Factor

EIRP = E-Field + 20log(Measurement distance) - 104.8

Measurement distance = 1m


The test data recorded was the maximum polarization.

Transmitter Off-times


Radar	Transmitter On (ms)	Observation Time (ms)	Sum of continuous transmitter off-times (ms)	Limit (ms)
Right	16.05	33	16.95	≥16.5
Left	16.05	33	16.95	≥16.5
Front	16.2	33	16.8	≥16.5
Rear	16.05	33	16.95	≥16.5
Top	16.05	33	16.95	≥16.5
Bottom	16.05	33	16.95	≥16.5

Note: Sum of Continuous Transmitter Off-times= Observation Time(33ms) - Ton


Right Radar

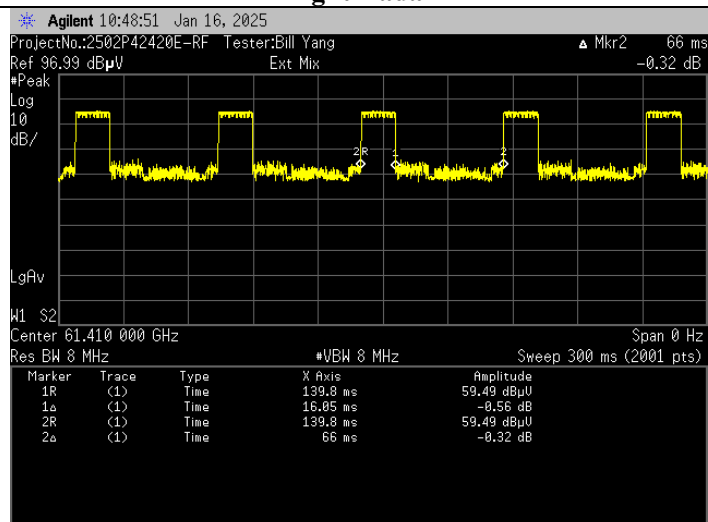


Left Radar

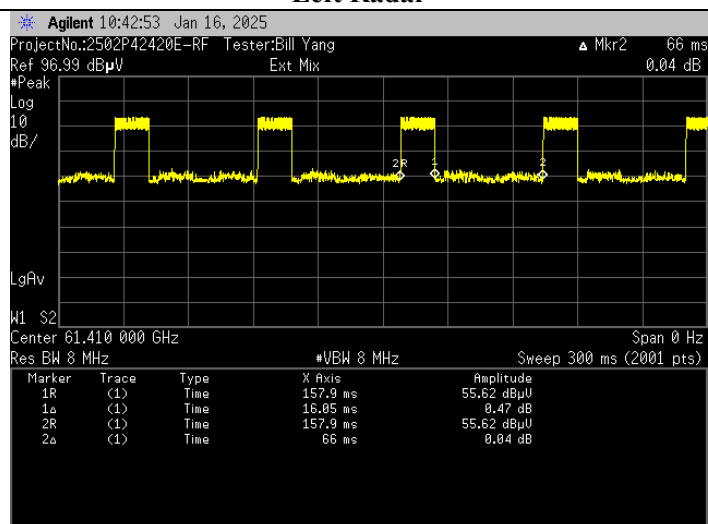


Front Radar

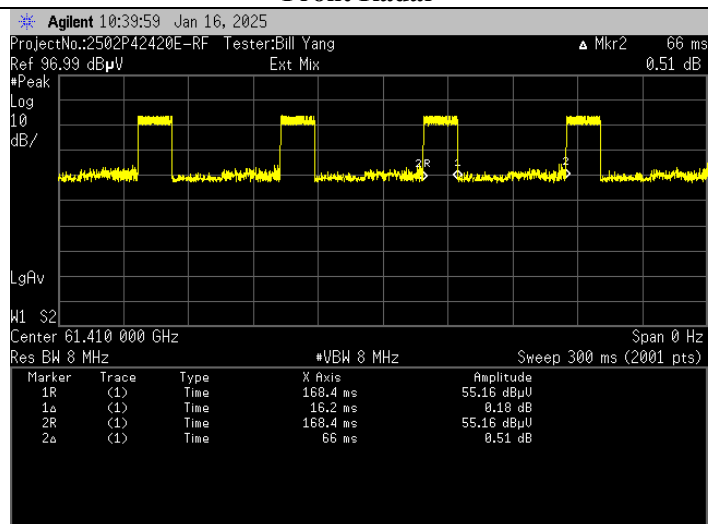


Rear Radar

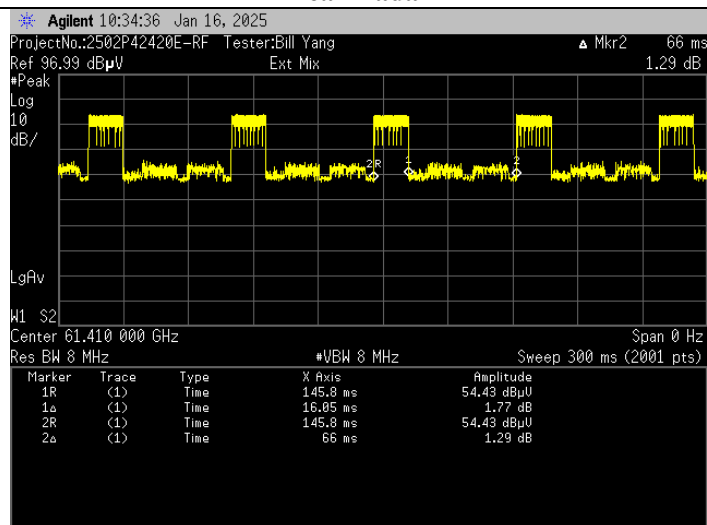

Top Radar

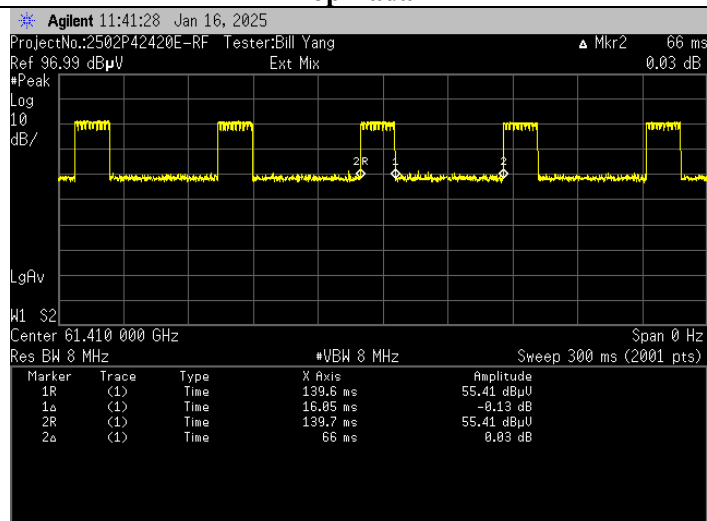

Bottom Radar

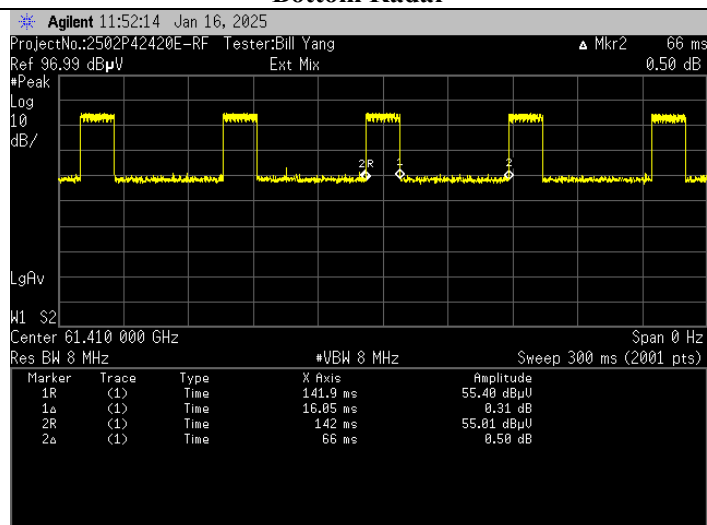


4.3 Emission Bandwidth:

4.3.1 Applicable Standard

KDB 364244 D01 Meas 15.255 Radars v01

For other than pulsed radar transmitters, the fundamental emission bandwidth is presumed to be “...the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage $\beta/2$ of the total mean power of a given emission. Unless otherwise specified in an ITU-R Recommendation for the appropriate class of emission, the value of $\beta/2$ should be taken as 0.5%,” as defined in §2.1(c) of the FCC rules. This is also known as the 99% occupied bandwidth (OBW).

4.3.2 EUT Setup

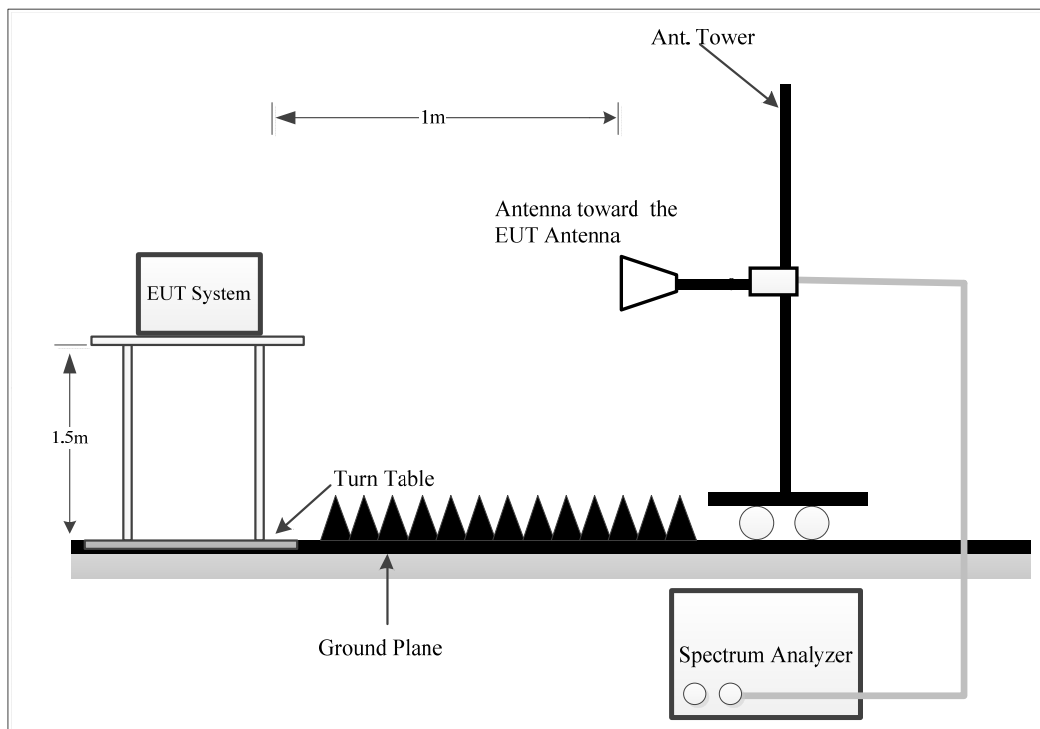

Place the measurement antenna in the main beam of the EUT then maximize the fundamental emission, noting that multiple peaks can be found at different beam orientations and/or polarizations.

4.3.3 Test Procedure

KDB 364244 D01 Meas 15.255 Radars v01

Clauses 9.3 and 9.4 of C63.10-2020 provide standardized procedures recognized by the FCC for measuring both the relative (-10 dB) bandwidth and the 99% OBW.

The occupied bandwidth (OBW) is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

a) The following procedure shall be used for measuring 99% power bandwidth: Use the following spectrum analyzer settings:

- 1) Span equal to approximately 1.5 times the OBW, centered on the carrier frequency
 - 2) RBW, prefer 1% to 5% of OBW, or a minimum of 1 MHz if this is not possible due to a large OBW
 - 3) VBW approximately $3 \times$ RBW
 - 4) Set the reference level of the instrument as required to reduce the chance of the signal amplitude exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.1.6.
 - 5) Sweep = No faster than coupled (auto) time.
 - 6) Detector function = peak.
 - 7) Trace = max-hold.
- b) The EUT shall be transmitting at its maximum data rate. Allow the trace to stabilize.
- c) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.
- d) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).
- e) Repeat this test for each modulation scheme using the guidance of 5.6.2.1.

4.3.4 Test Data

Serial Number:	2XO3-2	Test Date:	2025/1/23
Test Site:	Chamber B	Test Mode:	Swept
Tester:	Bill Yang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	21.4	Relative Humidity: (%)	55	ATM Pressure: (kPa)	101.1
----------------------	------	---------------------------	----	---------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Waveguide Mixer	11970V	2521A011767	2023/2/16	2026/2/15
Flann Microwave	Horn Antenna	861V/385	736	2023/2/27	2026/2/26
Agilent	Spectrum Analyzer	E4440A	MY44303352	2024/10/22	2025/10/21
Resenberger	Coaxial Cable	LU7-022-1000	0031	2024/3/1	2025/2/28
Resenberger	Coaxial Cable	LU7-022-1000	0032	2024/3/1	2025/2/28

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*


Test Data:

Radar	99% Occupied Bandwidth (MHz)	F _L (GHz)	Limit F _L (GHz)	F _H (GHz)	Limit F _H (GHz)
Right	840.932	60.9935	60	61.8344	64
Left	843.261	60.9912	60	61.8344	64
Front	843.261	60.9912	60	61.8344	64
Rear	840.932	60.9935	60	61.8344	64
Top	843.261	60.9935	60	61.8368	64
Bottom	843.261	60.9912	60	61.8344	64


99% Occupied Bandwidth-Right

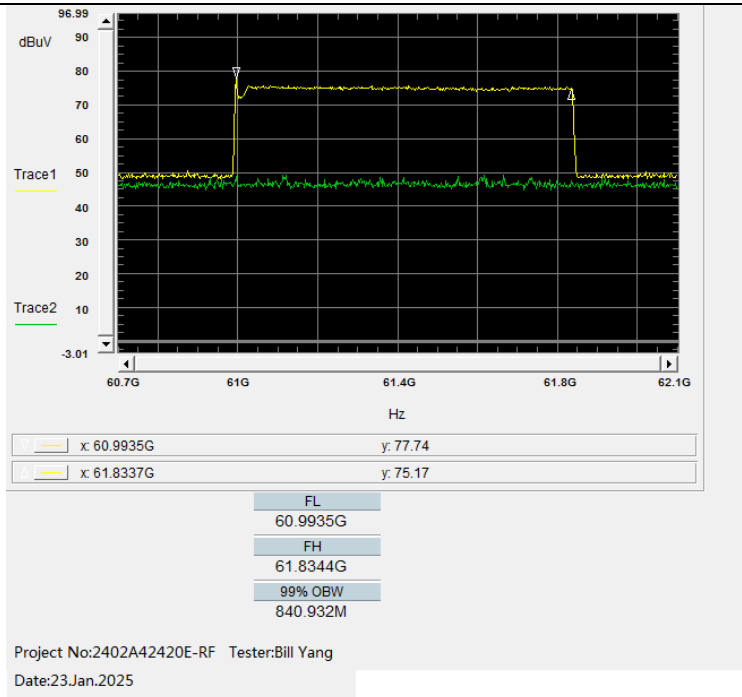


99% Occupied Bandwidth-Left

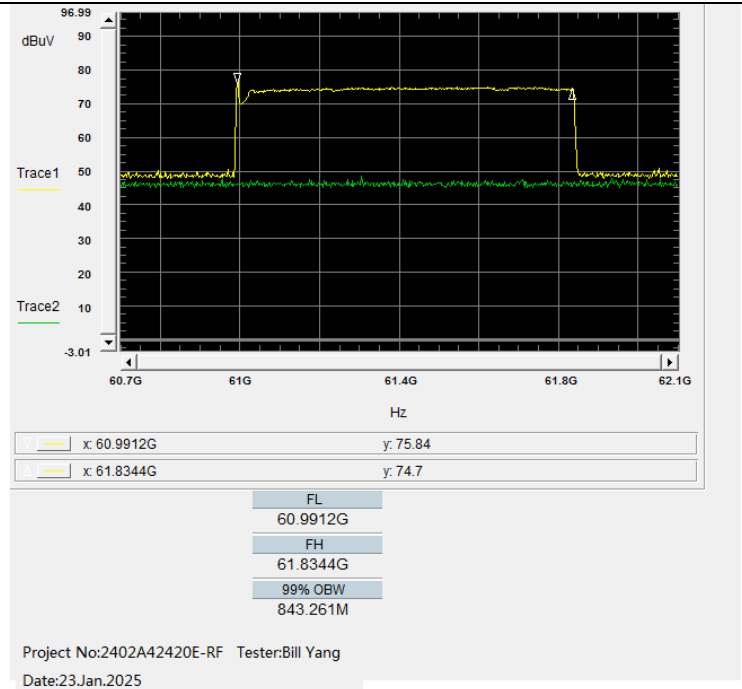


99% Occupied Bandwidth-Front

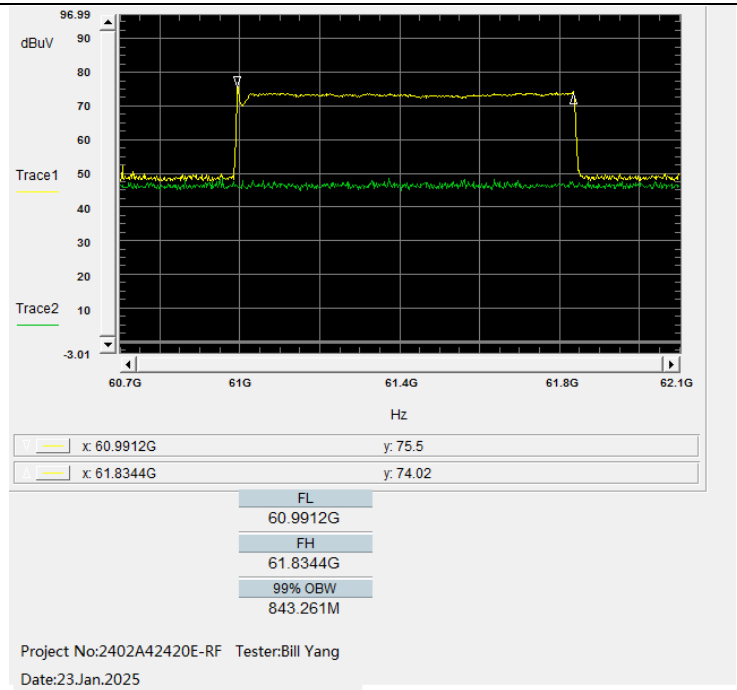

99% Occupied Bandwidth-Rear

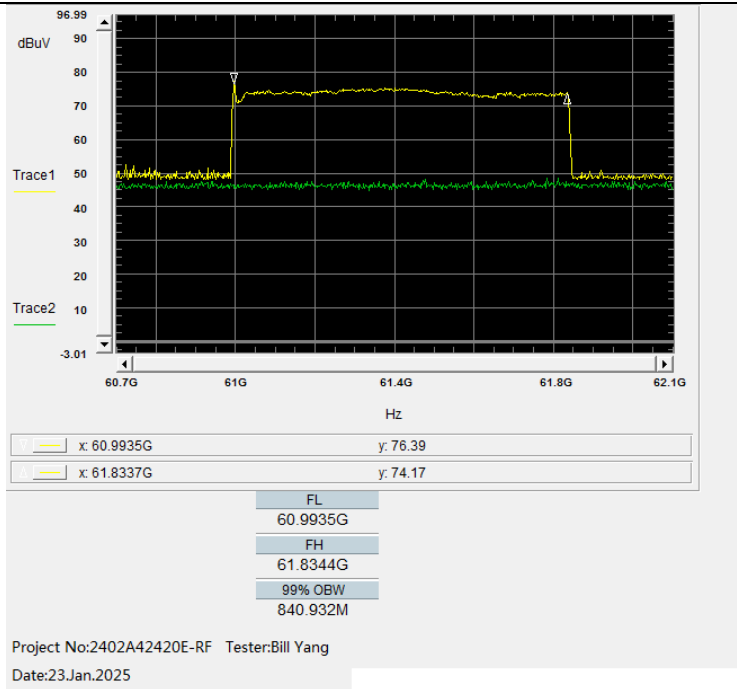


99% Occupied Bandwidth-Top

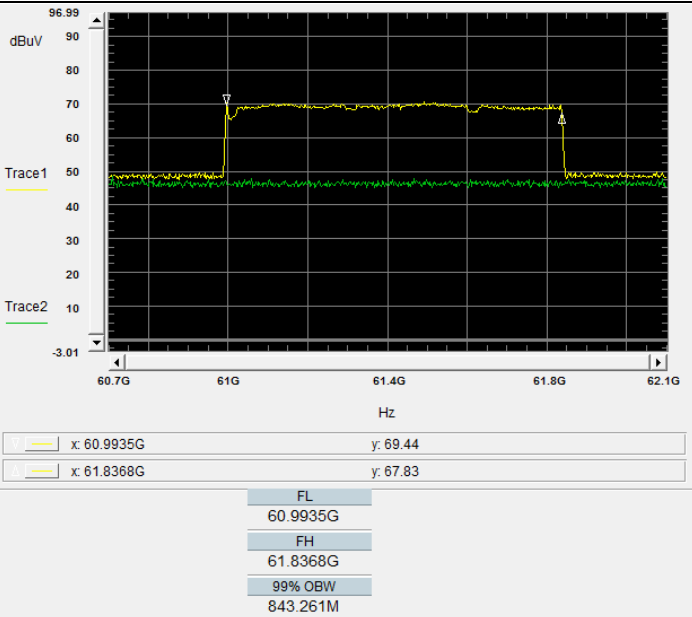

Project No:2402A42420E-RF Tester:Bill Yang
Date:23.Jan.2025

99% Occupied Bandwidth-Bottom

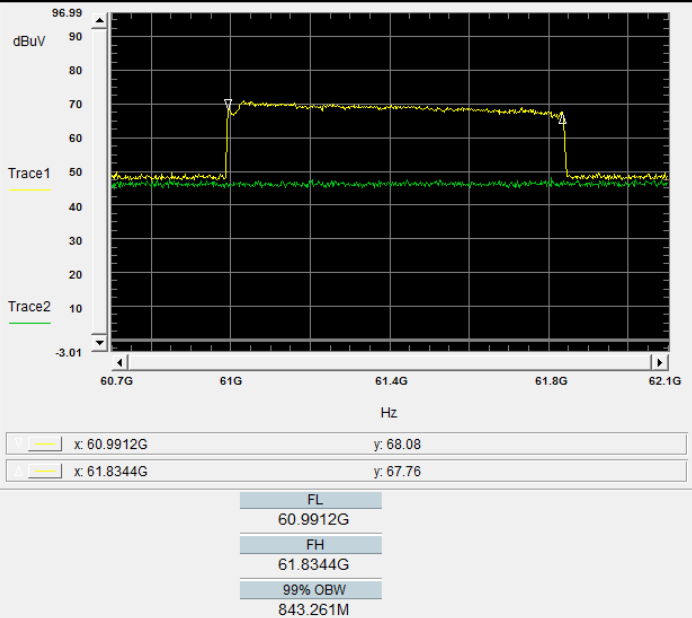

Project No:2402A42420E-RF Tester:Bill Yang
Date:23.Jan.2025

4.4 Radiated Emissions

4.4.1 Applicable Standard


FCC §15.255(d)

Limits on spurious emissions:


- (1) The power density of any emissions outside the 57-71 GHz band shall consist solely of spurious emissions.
- (2) Radiated emissions below 40 GHz shall not exceed the general limits in § 15.209.
- (3) Between 40 GHz and 200 GHz, the level of these emissions shall not exceed 90 pW/cm^2 at a distance of 3 meters.
- (4) The levels of the spurious emissions shall not exceed the level of the fundamental emission.

4.4.2 EUT Setup


9kHz-30MHz:

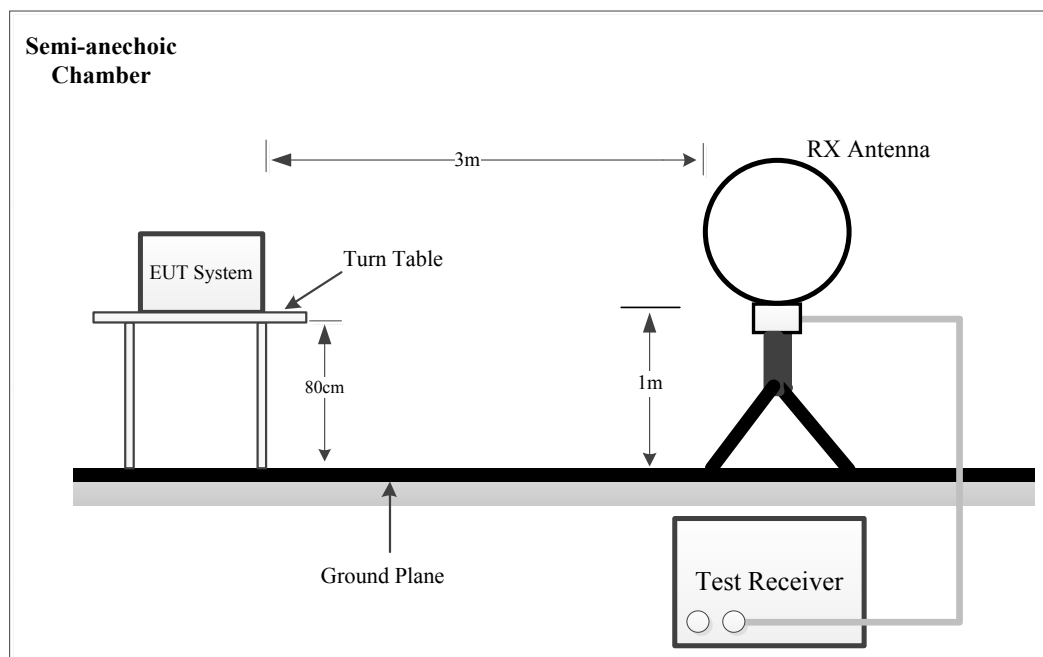


30MHz~1GHz:

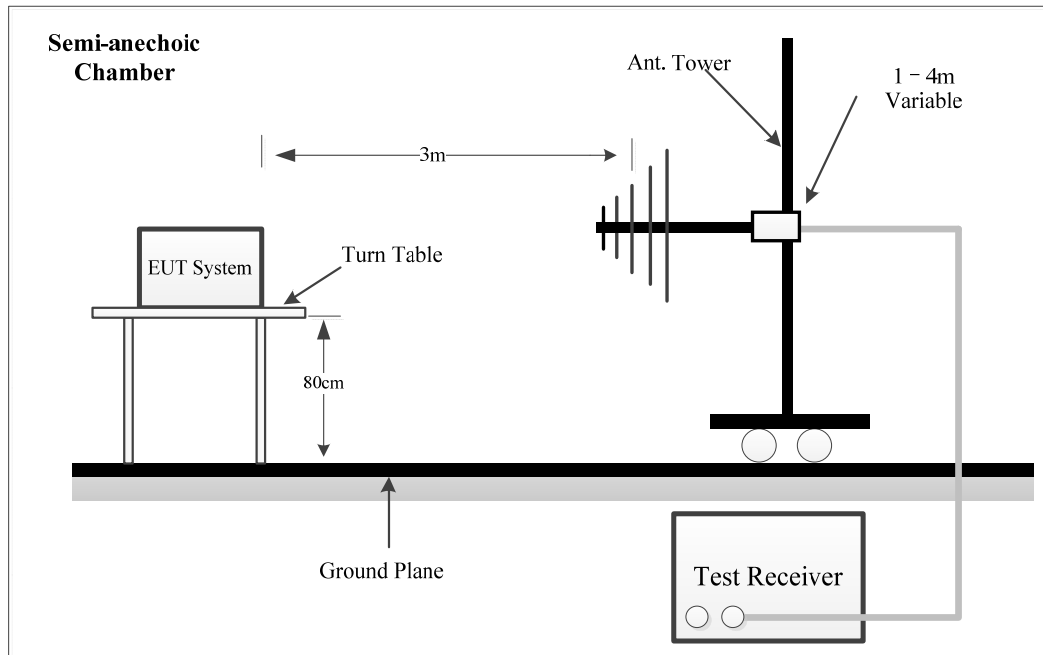


1~26.5 GHz:

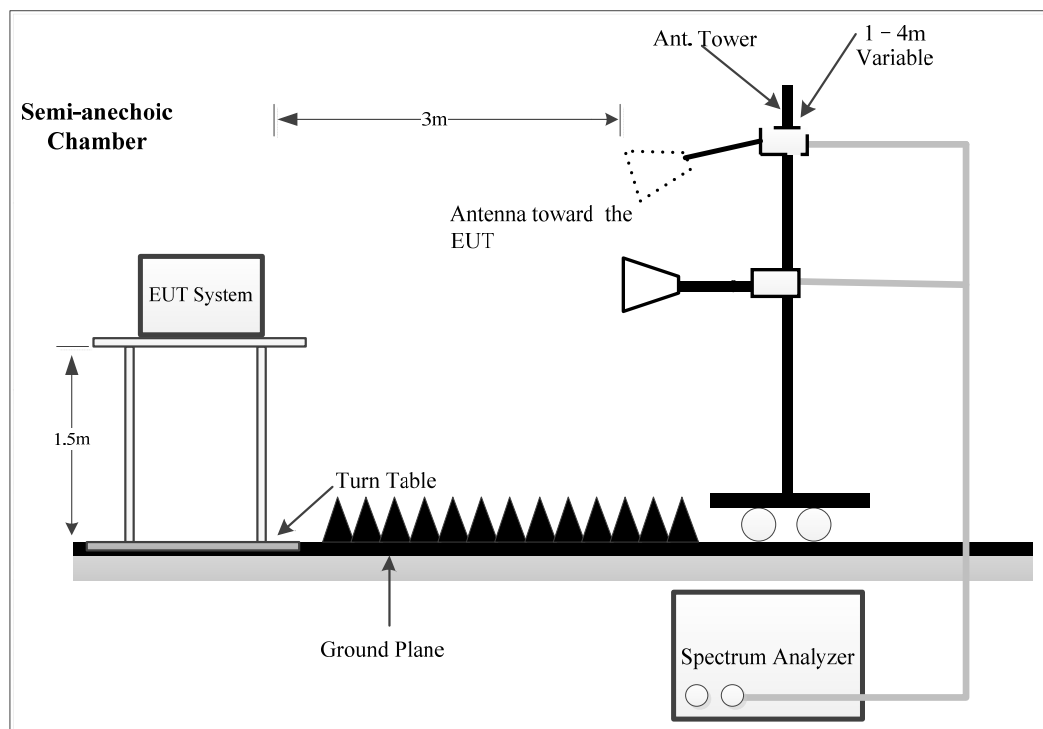


26.5~40 GHz:

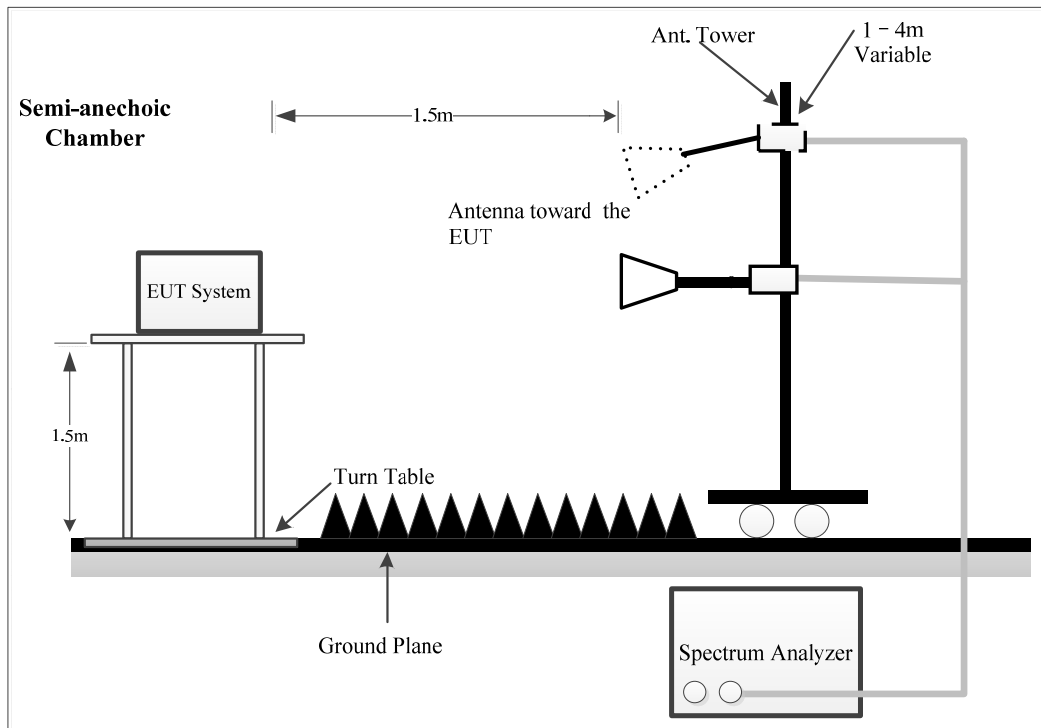

40~90 GHz:

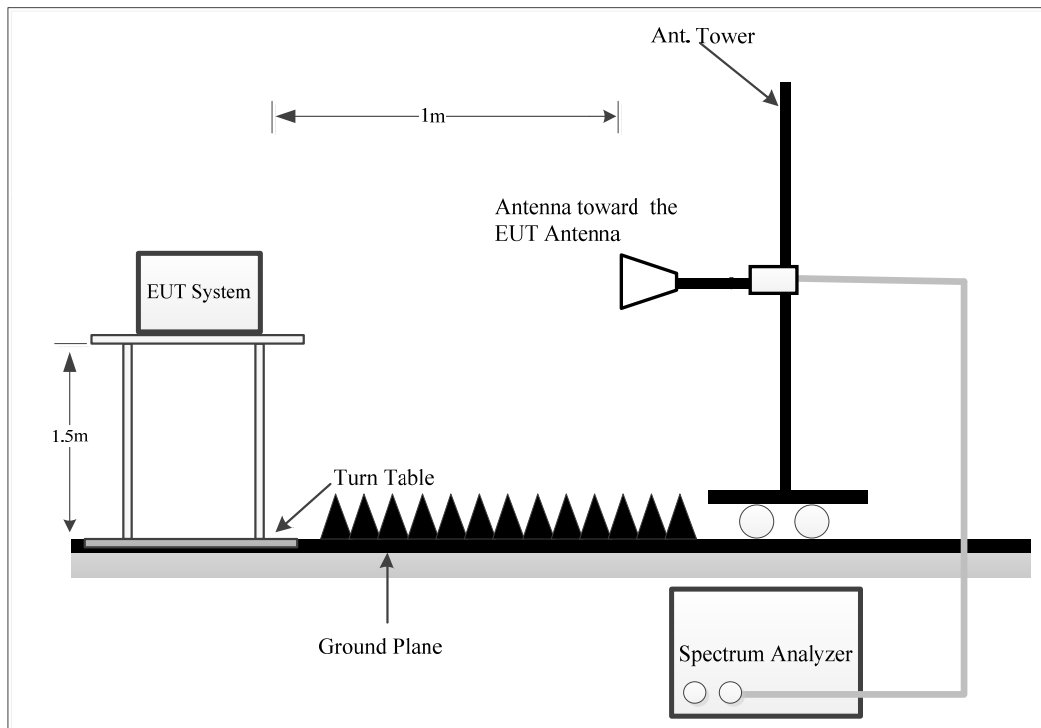

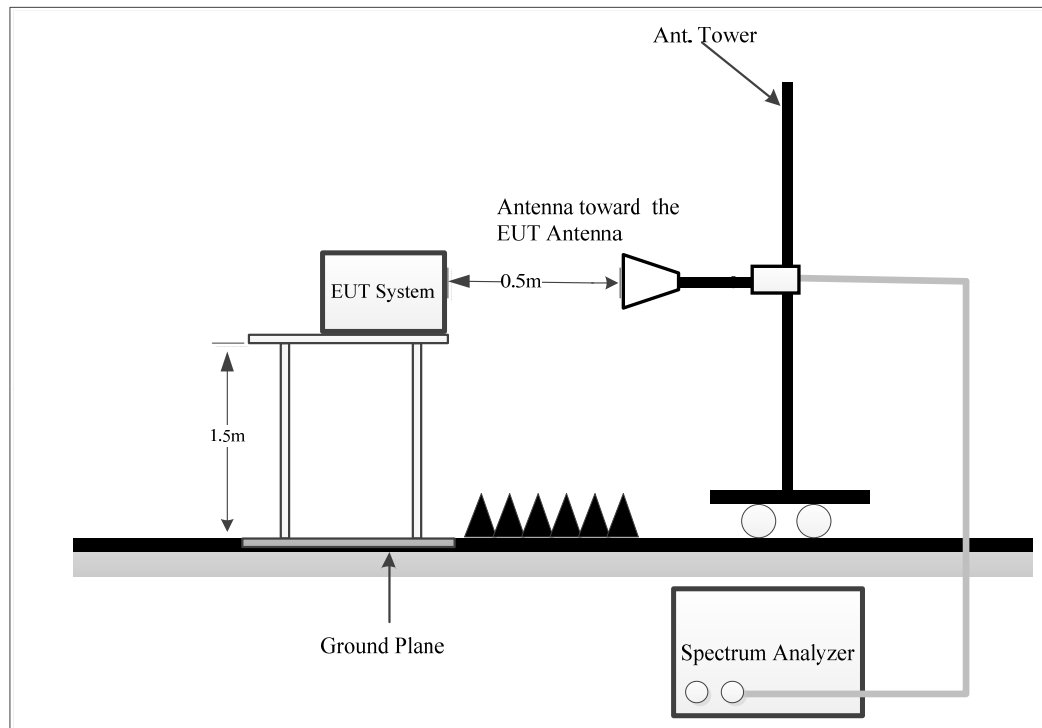90~200 GHz:**Above 40GHz:**

The antenna is scanned around the entire perimeter surface of the EUT, in both horizontal and vertical polarizations, at the distance of 1.0 m from 40 GHz to 90 GHz, and 0.5 m from 90 GHz to 200 GHz.

The radiated emission and out of band emission tests were performed in the 3 meters chamber, using the setup accordance with the ANSI C63.10-2020 The specification used was the FCC 15.209/15.205/15.255 limits.

4.4.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 200 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:
9kHz-1000MHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement	Detector
9 kHz – 150 kHz	200 Hz	1 kHz	200 Hz	QP/Average	QP/Average
150 kHz – 30 MHz	9 kHz	30 kHz	9 kHz	QP/Average	QP/Average
30 MHz – 1000 MHz	/	/	120 kHz	QP	QP
	100 kHz	300 kHz	/	PK	PK

1-40GHz:

Pre-scan:

Frequency Range	Measurement	RBW	Video B/W	Detector
1-40 GHz	Peak	1MHz	3 MHz	PK
	AV	1MHz	5kHz	PK

Final measurement for emission identified during the pre-scan:

Frequency Range	Measurement	RBW	Video B/W	Detector
1-40 GHz	Peak	1MHz	3 MHz	PK
	AV	1MHz	10Hz	PK

Above 40GHz:

Frequency Range	Measurement	RBW	Video B/W	Detector
Above 40GHz	AV	1MHz	3MHz	AV

Note: Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz-30MHz except 9 – 90 kHz, 110 – 490 kHz, employing an average detector.

4.4.4 Test Procedure

Refer to ANSI C63.10-2020 Clauses 9.10, and 9.11.

A Maximizing procedure was performed to ensure that the highest emissions from the EUT were actually measured in all of the Test Arrangements of the EUT and Local Support Equipment.

All emissions under the average limit and under the noise floor have not recorded in the report.

According to C63.10, the 26.5-40GHz test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m

Distance extrapolation factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB= 6.0 dB

For above 40GHz:

External harmonic mixers are utilized. The antenna is scanned around the entire perimeter surface of the EUT, in both horizontal and vertical polarizations. The Mixers and it's RF cables is compose a system for calibration, the conversion factor was added into the test Spectrum Analyzer in testing.

The far-field boundary is given in ANSI C63.10-2020:

$$R_m = 2D^2 / \lambda$$

Where:

D is the largest dimension of the antenna aperture in m and

λ is the free-space wavelength in m at the frequency of measurement.

The minimum test distance for the frequency range 40GHz-200GHz determine as below:

Model	Frequency Range (GHz)	Largest Dimension of the Horn Antenna (mm)	Minimum Test Distance R_m (m)
M19RH	40-60	46.3	0.86
861/385	50-75	43.7	0.95
M12RH	60-90	30.02	0.54
M08RH	90-140	19.7	0.36
M05RH	140-220	12.5	0.23

Note: the test distances used were 1.0 m from 40 GHz to 90 GHz, and 0.5 m from 90 GHz to 200GHz, it can be seen that the EUT was always in the Far-field of the Receive Antenna during all Radiated Emissions Tests.

4.4.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

For 9kHz-26.5GHz:

Result = Reading + Factor

For 26.5GHz-40GHz

Result = Reading + Factor-Distance extrapolation Factor

Note: the antenna JB3 was calibrated with 6dB Attenuator, the antenna factor includes the insertion loss of the Attenuator.

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.4.6 Test Data

Serial Number:	2XO3-2	Test Date:	Below 1GHz:2025/2/5 Above 1GHz: 2025/1/23~2025/2/5
Test Site:	Chamber B, Chamber 10m	Test Mode:	Swept
Tester:	Bill Yang, Leesin Xiang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	19.4~21.4	Relative Humidity: (%)	43~55	ATM Pressure: (kPa)	101.1
----------------------	-----------	------------------------------	-------	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
9kHz~1000MHz					
EMCO	Passive Loop Antenna	6512	9706-1206	2023/10/25	2026/10/24
Sunol Sciences	Hybrid Antenna	JB3	A060611-1	2023/9/6	2026/9/5
Narda	Coaxial Attenuator	779-6dB	04269	2023/9/6	2026/9/5
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-04	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2024/7/1	2025/6/30
Sonoma	Amplifier	310N	185914	2024/8/26	2025/8/25
R&S	EMI Test Receiver	ESCI	100224	2024/8/26	2025/8/25
Audix	Test Software	E3	191218 V9	N/A	N/A
Above 1GHz					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2023/9/7	2026/9/6
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2023/2/22	2026/2/21
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2023/2/22	2026/2/21
Xinhang Macrowave	Coaxial Cable	XH750A-N/J-SMA/J-10M	20231117004 #0001	2024/11/17	2025/11/16
Xinhang Macrowave	Coaxial Cable	XH360A-2.92/J-2.92/J-6M-A	20231208001 #0001	2024/12/9	2025/12/8
AH	Preamplifier	PAM-0118P	469	2024/4/15	2025/4/14
AH	Preamplifier	PAM-1840VH	191	2024/9/5	2025/9/4
R&S	Spectrum Analyzer	FSV40	101944	2024/9/6	2025/9/5
Audix	Test Software	E3	191218 (V9)	N/A	N/A
OML	Waveguide Mixer	WR19/M19HWD	U60313-1	2023/2/16	2026/2/15
OML	Horn Antenna	M19RH	11648-01	2023/2/27	2026/2/26
OML	Waveguide Mixer	WR12/M12HWD	E60120-1	2023/2/16	2026/2/15
OML	Horn Antenna	M12RH	E60120-2	2023/2/27	2026/2/26
OML	Waveguide Mixer	WR08/M08HWD	F60313-1	2023/2/16	2026/2/15
OML	Horn Antenna	M08RH	F60313-2	2023/2/27	2026/2/26
OML	Waveguide Mixer	WR05/M05HWD	G60106-1	2023/2/16	2026/2/15
OML	Horn Antenna	M05RH	G60106-2	2023/2/27	2026/2/26

Resenberger	Coaxial Cable	LU7-022-1000	0031	2024/3/1	2025/2/28
-------------	---------------	--------------	------	----------	-----------

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Please refer to the below table and plots.


1) 9kHz~30MHz(All Radar Modules transmit simultaneously)

Three antenna orientations (parallel, perpendicular, and ground-parallel) was measured, the worst orientations was below:

Project No.: 2502P42420E-RF
Polarization: Parallel
Test Mode: Transmitting
Note:

Serial No.: 2X03-2
Tester: Leesin Xiang

RBW:300Hz VBW:1kHz

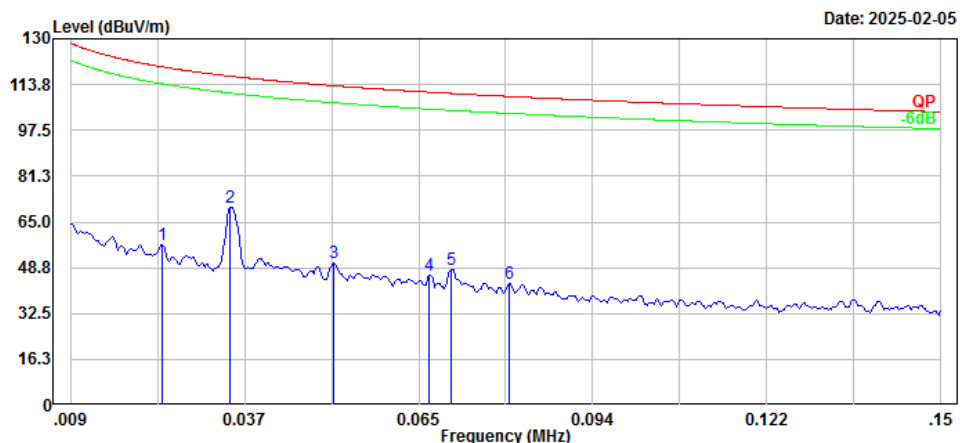


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.024	7.75	49.05	56.80	120.02	63.22	Peak
2	0.035	23.67	46.67	70.34	116.74	46.40	Peak
3	0.052	6.59	43.78	50.37	113.35	62.98	Peak
4	0.067	5.09	41.10	46.19	111.07	64.88	Peak
5	0.071	7.83	40.46	48.29	110.61	62.32	Peak
6	0.080	4.35	38.91	43.26	109.54	66.28	Peak

Project No.: 2502P42420E-RF
Polarization: Parallel
Test Mode: Transmitting
Note:
RBW:10kHz VBW:30kHz

Serial No.: 2X03-2
Tester: Leesin Xiang

Date: 2025-02-05

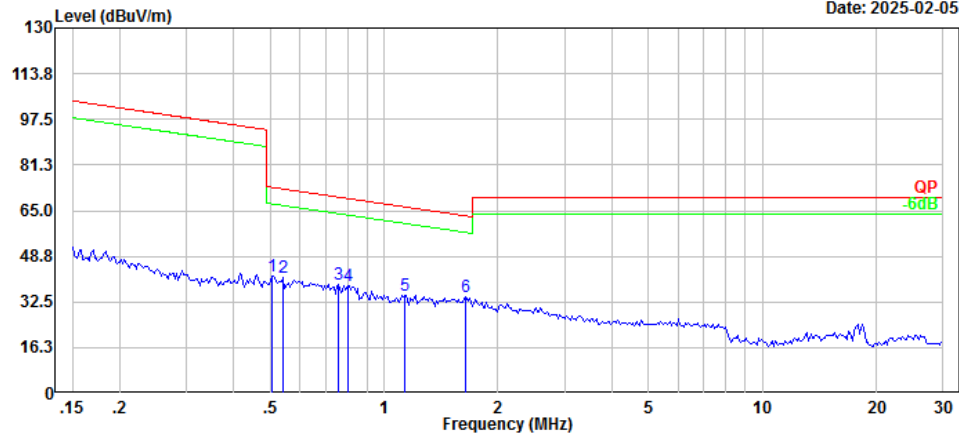

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.507	18.17	23.45	41.62	73.49	31.87	Peak
2	0.541	18.00	23.10	41.10	72.93	31.83	Peak
3	0.759	17.87	20.93	38.80	69.92	31.12	Peak
4	0.800	17.81	20.56	38.37	69.45	31.08	Peak
5	1.135	18.90	15.96	34.86	66.35	31.49	Peak
6	1.645	20.79	13.70	34.49	63.06	28.57	Peak

2) 30MHz-1GHz(All Radar Modules transmit simultaneously)

Project No.: 2502P42420E-RF

Serial No.: 2X03-2


Polarization: Horizontal

Tester: Leesin Xiang

Test Mode: Transmitting

Note:

RBW:100kHz VBW:300kHz

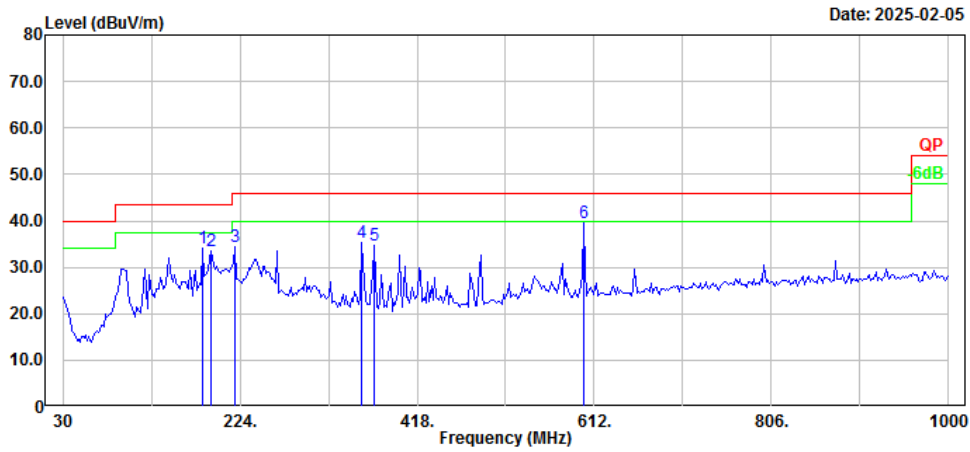

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	183.26	46.51	-12.29	34.22	43.50	9.28	Peak
2	192.96	45.38	-11.94	33.44	43.50	10.06	Peak
3	218.18	47.02	-12.51	34.51	46.00	11.49	Peak
4	357.86	43.88	-8.42	35.46	46.00	10.54	Peak
5	371.44	42.72	-7.94	34.78	46.00	11.22	Peak
6	600.36	42.60	-2.91	39.69	46.00	6.31	Peak

Project No.: 2502P42420E-RF

Serial No.: 2X03-2


Polarization: Vertical

Tester: Leesin Xiang

Test Mode: Transmitting


Note:

RBW:100kHz VBW:300kHz

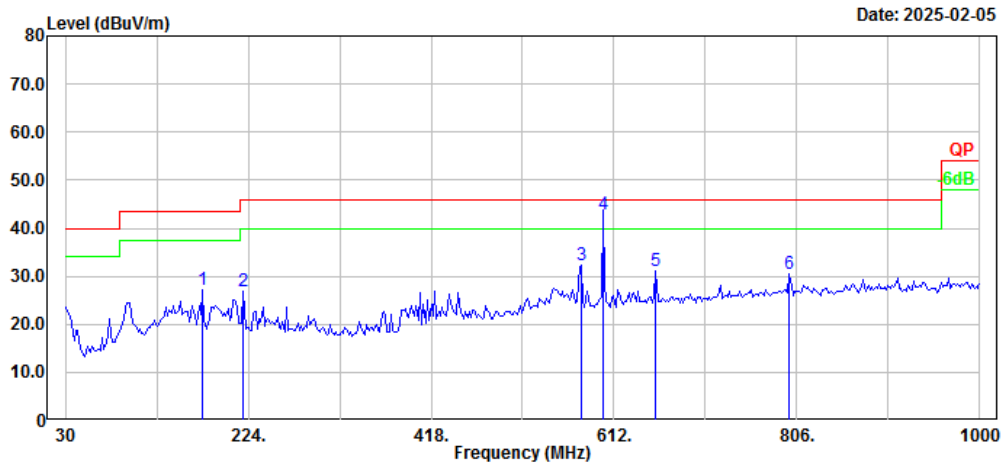

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	175.50	39.22	-12.10	27.12	43.50	16.38	Peak
2	218.18	39.26	-12.51	26.75	46.00	19.25	Peak
3	577.08	35.40	-3.16	32.24	46.00	13.76	Peak
4	600.36	45.70	-2.91	42.79	46.00	3.21	QP
5	656.62	32.79	-1.79	31.00	46.00	15.00	Peak
6	798.24	29.92	0.43	30.35	46.00	15.65	Peak

2) 1GHz-40GHz(All Radar Modules transmit simultaneously):

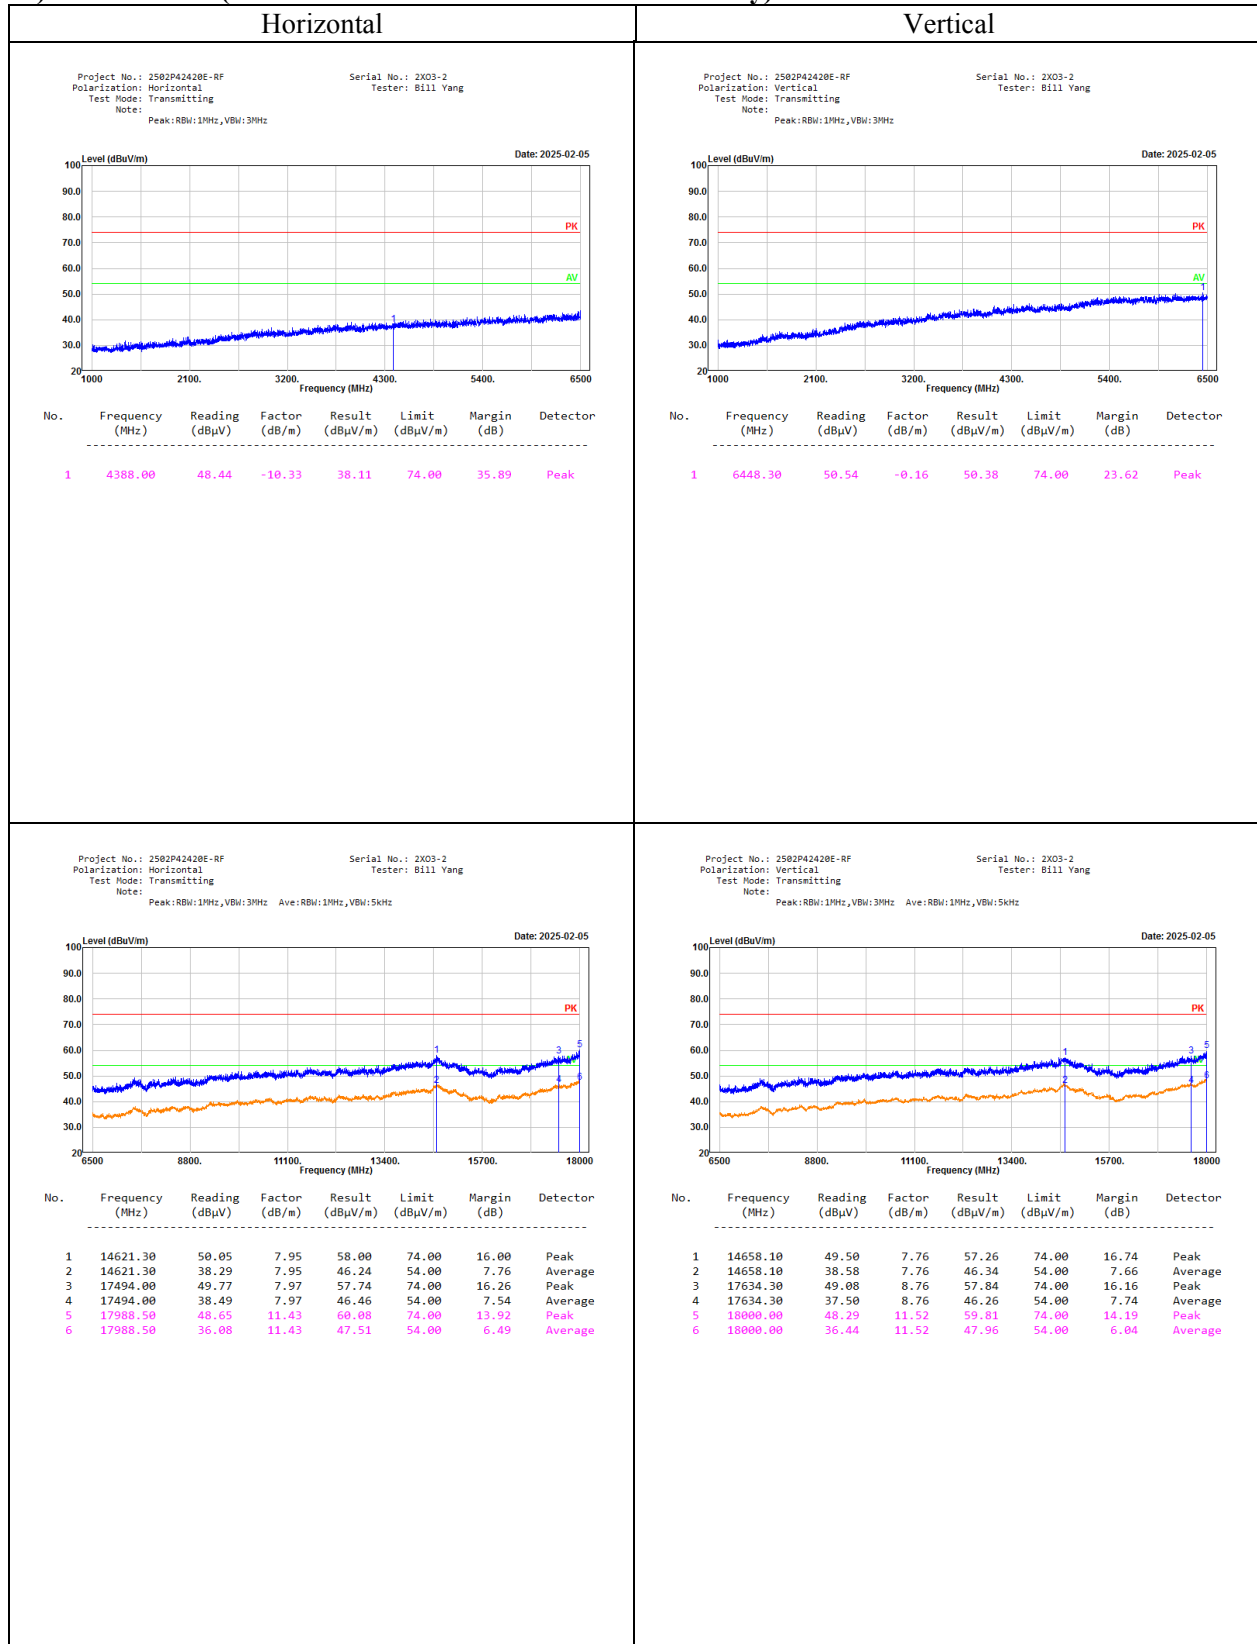


Horizontal

Project No.: 2502P42420E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note:
Peak: RBW: 1MHz, VBW: 3MHz

Serial No.: 2X03-2
Tester: Bill Yang

Date: 2025-02-05

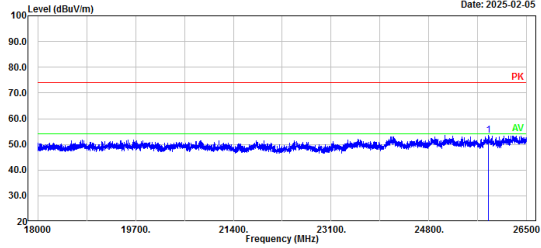


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	25835.30	42.45	11.04	53.49	74.00	20.51	Peak

Vertical

Project No.: 2502P42420E-RF
Polarization: Vertical
Test Mode: Transmitting
Note:
Peak: RBW: 1MHz, VBW: 3MHz

Serial No.: 2X03-2
Tester: Bill Yang

Date: 2025-02-05

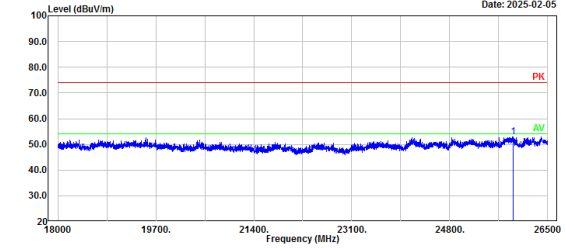


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	25899.90	42.17	10.75	52.92	74.00	21.08	Peak

Project No.: 2502P42420E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note:
Peak: RBW: 1MHz, VBW: 3MHz Ave: RBW: 1MHz, VBW: 5kHz

Serial No.: 2X03-2
Tester: Bill Yang

Date: 2025-02-05

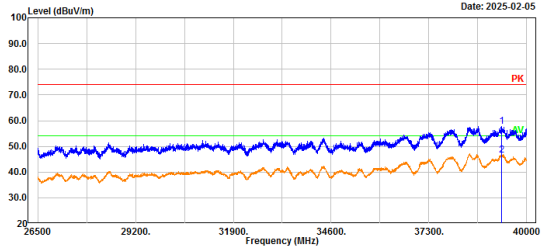


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	39306.10	45.60	12.27	57.87	74.00	16.13	Peak
2	39306.10	34.16	12.27	46.43	54.00	7.57	Average

Project No.: 2502P42420E-RF
Polarization: Vertical
Test Mode: Transmitting
Note:
Peak: RBW: 1MHz, VBW: 3MHz Ave: RBW: 1MHz, VBW: 5kHz

Serial No.: 2X03-2
Tester: Bill Yang

Date: 2025-02-05

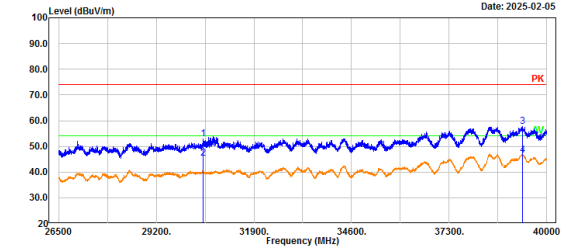

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30496.00	46.71	6.14	52.85	74.00	21.15	Peak
2	30496.00	39.26	6.14	45.40	54.00	8.60	Average
3	39330.40	45.15	12.51	57.66	74.00	16.34	Peak
4	39330.40	34.11	12.51	46.62	54.00	7.38	Average

3) 40GHz-200GHz:**Right Radar****61.41 GHz**

Frequency (GHz)	Receiver Reading (dBμV)	Polar (H/V)	Factor (dB/m)	Field Strength (dBμV/m)	Power Density (pW/cm ²)	Limit (pW/cm ²)
40.354	52.79	H	38.85	82.10	43.02	90.00
40.540	53.14	V	38.87	82.47	46.84	90.00
90.775	53.51	H	45.20	83.15	54.78	90.00
90.330	53.22	V	45.15	82.81	50.66	90.00
140.225	50.55	H	48.90	83.89	64.96	90.00
140.420	50.75	V	48.91	84.10	68.18	90.00

Left Radar**61.41 GHz**

Frequency (GHz)	Receiver Reading (dBμV)	Polar (H/V)	Factor (dB/m)	Field Strength (dBμV/m)	Power Density (pW/cm ²)	Limit (pW/cm ²)
40.250	53.15	H	38.83	82.44	46.52	90.00
40.675	53.49	V	38.90	82.85	51.13	90.00
90.540	52.47	H	45.17	82.08	42.82	90.00
90.345	53.13	V	45.15	82.72	49.62	90.00
140.525	50.12	H	48.92	83.48	59.11	90.00
140.462	50.15	V	48.91	83.50	59.38	90.00

Front Radar**61.41 GHz**

Frequency (GHz)	Receiver Reading (dBμV)	Polar (H/V)	Factor (dB/m)	Field Strength (dBμV/m)	Power Density (pW/cm ²)	Limit (pW/cm ²)
40.560	53.49	H	38.88	82.83	50.89	90.00
40.490	53.16	V	38.87	82.49	47.06	90.00
90.126	52.52	H	45.12	82.08	42.82	90.00
90.260	52.22	V	45.14	81.80	40.15	90.00
140.250	50.56	H	48.90	83.90	65.11	90.00
140.460	50.69	V	48.91	84.04	67.24	90.00

Rear Radar**61.41 GHz**

Frequency (GHz)	Receiver Reading (dBμV)	Polar (H/V)	Factor (dB/m)	Field Strength (dBμV/m)	Power Density (pW/cm ²)	Limit (pW/cm ²)
40.620	53.05	H	38.89	82.40	46.10	90.00
40.390	53.36	V	38.85	82.67	49.05	90.00
90.510	52.41	H	45.17	82.02	42.23	90.00
90.635	53.30	V	45.18	82.92	51.96	90.00
140.457	50.27	H	48.91	83.62	61.05	90.00
140.845	50.55	V	48.93	83.92	65.41	90.00

Top Radar**61.41 GHz**

Frequency (GHz)	Receiver Reading (dBμV)	Polar (H/V)	Factor (dB/m)	Field Strength (dBμV/m)	Power Density (pW/cm ²)	Limit (pW/cm ²)
40.545	53.44	H	38.88	82.78	50.31	90.00
40.210	53.28	V	38.82	82.56	47.83	90.00
90.580	52.65	H	45.18	82.27	44.74	90.00
90.338	53.12	V	45.15	82.71	49.51	90.00
140.590	50.37	H	48.92	83.73	62.61	90.00
140.810	50.52	V	48.93	83.89	64.96	90.00

Bottom Radar**61.41 GHz**

Frequency (GHz)	Receiver Reading (dBμV)	Polar (H/V)	Factor (dB/m)	Field Strength (dBμV/m)	Power Density (pW/cm ²)	Limit (pW/cm ²)
40.750	53.32	H	38.91	82.69	49.28	90.00
40.460	53.09	V	38.86	82.41	46.20	90.00
90.738	52.54	H	45.20	82.18	43.82	90.00
90.395	53.27	V	45.15	82.86	51.25	90.00
140.186	50.29	H	48.90	83.63	61.19	90.00
140.574	50.44	V	48.92	83.80	63.63	90.00

Note:

Factor = Antenna Factor

Field Strength = Reading + Factor + 20log($d_{Meas}/d_{SpecLimit}$)

d_{Meas} is the measurement distance, in m

$d_{SpecLimit}$ is the distance specified by the limit, in m

$$PD = \frac{E_{SpecLimit}^2}{377}$$

where

PD is the power density at the distance specified by the limit, in W/m²

$E_{SpecLimit}$ is the field strength at the distance specified by the limit, in V/m

The Specified distance is 3m.


4.5 Frequency Stability

4.5.1 Applicable Standard

FCC §15.255(f)

(f) Frequency stability. Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range -20 to $+50$ degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.

4.5.2 EUT Setup Block Diagram

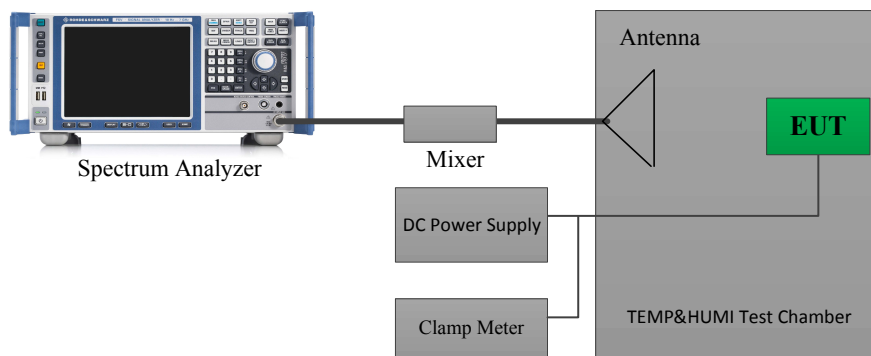

4.5.3 Test Procedure

Refer to ANSI C63.10-2020 Clauses 9.5.

The following procedure shall be used for determining frequency stability of millimeter-wave systems:

- Arrange EUT and test equipment as shown in Figure 21. Some temperature chambers have a window or other opening that permits locating the receive antenna outside the chamber.
- With the EUT at ambient temperature (approximately 25°C) and voltage source set to the EUT nominal operating voltage (100%), record the spectrum mask of the EUT emission on the spectrum analyzer.
- Vary EUT power supply between 85% and 115% of nominal, and record the frequency excursion of the EUT emission mask.
- Set the power supply to 100% nominal setting, and raise EUT operating temperature to 50°C . Record the frequency excursion of the EUT emission mask.
- Repeat step d) at each 10°C increment down to -20°C .

4.5.3 Test Result

Serial Number:	2X03-2	Test Date:	2025/1/23
Test Site:	RF	Test Mode:	Transmitting
Tester:	Bill Yang	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	22.7	Relative Humidity: (%)	63	ATM Pressure: (kPa)	101.1

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Waveguide Mixer	11970V	2521A011767	2023/2/16	2026/2/15
Flann Microwave	Horn Antenna	861V/385	736	2023/2/27	2026/2/26
Agilent	Spectrum Analyzer	E4440A	MY44303352	2024/10/22	2025/10/21
Resenberger	Coaxial Cable	LU7-022-1000	0031	2024/3/1	2025/2/28
Resenberger	Coaxial Cable	LU7-022-1000	0032	2024/3/1	2025/2/28
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30173	2024/9/6	2025/9/5
All-sun	Clamp Meter	EM305A	8348897	2024/8/16	2025/8/15
TDK-Lambda	DC Power Supply	Z+60-14	F-08-EM038-1	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Right Radar

Temperature	Voltage	Frequency (GHz)			
°C	V _{DC}	f _L	f _H	f _L Limit	f _H Limit
-20	14.88	60.9947	61.8346	60	64
-10	14.88	60.9921	61.8335	60	64
0	14.88	60.9954	61.8335	60	64
10	14.88	60.9930	61.8345	60	64
20	14.88	60.9935	61.8344	60	64
30	14.88	60.9953	61.8349	60	64
40	14.88	60.9962	61.8343	60	64
50	14.88	60.9953	61.8368	60	64
20	12	60.9930	61.8341	60	64
20	17	60.9943	61.8352	60	64

Left Radar

Temperature	Voltage	Frequency (GHz)			
℃	V _{DC}	f _L	f _H	f _L Limit	f _H Limit
-20	14.88	60.9941	61.8335	60	64
-10	14.88	60.9945	61.8352	60	64
0	14.88	60.9916	61.8348	60	64
10	14.88	60.9918	61.8342	60	64
20	14.88	60.9912	61.8344	60	64
30	14.88	60.9919	61.8340	60	64
40	14.88	60.9925	61.8334	60	64
50	14.88	60.9938	61.8384	60	64
20	12	60.9935	61.8340	60	64
20	17	60.9953	61.8347	60	64

Front Radar

Temperature	Voltage	Frequency (GHz)			
℃	V _{DC}	f _L	f _H	f _L Limit	f _H Limit
-20	14.88	60.9945	61.8336	60	64
-10	14.88	60.9970	61.8351	60	64
0	14.88	60.9954	61.8335	60	64
10	14.88	60.9917	61.8349	60	64
20	14.88	60.9912	61.8344	60	64
30	14.88	60.9915	61.8340	60	64
40	14.88	60.9935	61.8374	60	64
50	14.88	60.9962	61.8347	60	64
20	12	60.9971	61.8328	60	64
20	17	60.9950	61.8316	60	64

Rear Radar

Temperature	Voltage	Frequency (GHz)			
℃	V _{DC}	f _L	f _H	f _L Limit	f _H Limit
-20	14.88	60.9940	61.8335	60	64
-10	14.88	60.9945	61.8352	60	64
0	14.88	60.9938	61.8362	60	64
10	14.88	60.9948	61.8351	60	64
20	14.88	60.9935	61.8344	60	64
30	14.88	60.9937	61.8340	60	64
40	14.88	60.9943	61.8357	60	64
50	14.88	60.9913	61.8383	60	64
20	12	60.9952	61.8363	60	64
20	17	60.9930	61.8349	60	64

Top Radar

Temperature	Voltage	Frequency (GHz)			
°C	V _{DC}	f _L	f _H	f _L Limit	f _H Limit
-20	14.88	60.9942	61.8354	60	64
-10	14.88	60.9928	61.8362	60	64
0	14.88	60.9945	61.8327	60	64
10	14.88	60.9939	61.8362	60	64
20	14.88	60.9935	61.8368	60	64
30	14.88	60.9931	61.8365	60	64
40	14.88	60.9928	61.8373	60	64
50	14.88	60.9937	61.8364	60	64
20	12	60.9944	61.8335	60	64
20	17	60.9952	61.8384	60	64

Bottom Radar

Temperature	Voltage	Frequency (GHz)			
°C	V _{DC}	f _L	f _H	f _L Limit	f _H Limit
-20	14.88	60.9941	61.8376	60	64
-10	14.88	60.9958	61.8364	60	64
0	14.88	60.9952	61.8333	60	64
10	14.88	60.9928	61.8338	60	64
20	14.88	60.9932	61.8344	60	64
30	14.88	60.9945	61.8363	60	64
40	14.88	60.9944	61.8382	60	64
50	14.88	60.9936	61.8385	60	64
20	12	60.9940	61.8353	60	64
20	17	60.9938	61.8347	60	64

Note: The Voltage range was declared by manufacturer ▲.

4.6 Operation Restriction and Group Installation

4.6.1 Applicable Standard

§15.255 (a) General. Operation under the provisions of this section is not permitted for equipment used on satellites.

§15.255 (b) Operation on aircraft. Operation on aircraft is permitted under the following conditions:

(1) When the aircraft is on the ground.

(2) While airborne, only in closed exclusive on-board communication networks within the aircraft, with the following exceptions:

(i) Equipment shall not be used in wireless avionics intra-communication (WAIC) applications where external structural sensors or external cameras are mounted on the outside of the aircraft structure.

(ii) Except as permitted in paragraph (b)(3) of this section, equipment shall not be used on aircraft where there is little attenuation of RF signals by the body/fuselage of the aircraft.

(iii) Field disturbance sensor/radar devices may only operate in the frequency band 59.3–71.0 GHz while installed in passengers' personal portable electronic equipment (e.g., smartphones, tablets) and shall comply with paragraph (b)(2)(i) of this section, and relevant requirements of paragraphs (c)(2) through (c)(4) of this section.

(3) Field disturbance sensors/radar devices deployed on unmanned aircraft may operate within the frequency band 60–64 GHz, provided that the transmitter not exceed 20 dBm peak EIRP. The sum of continuous transmitter off-times of at least two milliseconds shall equal at least 16.5 milliseconds within any contiguous interval of 33 milliseconds. Operation shall be limited to a maximum of 121.92 meters (400 feet) above ground level.

§15.255 (h) Any transmitter that has received the necessary FCC equipment authorization under the rules of this chapter may be mounted in a group installation for simultaneous operation with one or more other transmitter(s) that have received the necessary FCC equipment authorization, without any additional equipment authorization. However, no transmitter operating under the provisions of this section may be equipped with external phase-locking inputs that permit beam-forming arrays to be realized.

4.6.2 Result

15.255(a), the device is a unmanned aircraft. Not used on satellites.

15.255(b)(1), the Radar Operation on aircraft when the aircraft is on the ground.

15.255(b)(2), not applicable, the device is a unmanned aircraft.

15.255(b)(3), Operation be limited to a maximum of 121.92 meters (400 feet) above ground level. Please refer to the user manual.

§15.255 (h), No equipped with external phase-locking inputs that permit beam-forming arrays to be realized.

4.7 Antenna Requirement

4.7.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

4.7.2 Judgment

Please refer to the Antenna Information detail in Section 1.3.

EXHIBIT A - EUT PHOTOGRAPHS

Please refer to the attachment 2503P42421E-RF-EXP EUT external photographs and 2503P42421E-RF-INP EUT internal photographs.

EXHIBIT B - TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2502P42420E-RF-00B-TSP test setup photographs.

******* END OF REPORT *******