


FCC SAR Test Report


APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2113-2,XT2113-5
FCC ID : IHDT56ZF2
STANDARD : FCC 47 CFR Part 2 (2.1093)

The product was received on Aug. 24, 2020 and testing was started from Sep. 01, 2020 and completed on Oct. 07, 2020. We, Sporton International (Kunshan) Inc, would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Reviewed by: Rose Wang / Supervisor



Approved by: Kat Yin / Manager



Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China

Table of Contents

1. Statement of Compliance	4
2. Administration Data	6
3. Guidance Applied	6
4. Equipment Under Test (EUT) Information.....	7
4.1 General Information	7
4.2 General LTE SAR Test and Reporting Considerations.....	9
5. Proximity Sensor Triggering Test	12
5.1 Proximity sensor triggering distances(Per KDB616217\$6.2)	12
6. RF Exposure Limits	24
6.1 Uncontrolled Environment.....	24
6.2 Controlled Environment	24
7. Specific Absorption Rate (SAR)	25
7.1 Introduction	25
7.2 SAR Definition	25
8. System Description and Setup	26
8.1 E-Field Probe	27
8.2 Data Acquisition Electronics (DAE)	27
8.3 Phantom	28
8.4 Device Holder	29
9. Measurement Procedures	30
9.1 Spatial Peak SAR Evaluation.....	30
9.2 Power Reference Measurement	31
9.3 Area Scan	31
9.4 Zoom Scan	32
9.5 Volume Scan Procedures	32
9.6 Power Drift Monitoring	32
10. Test Equipment List.....	33
11. System Verification.....	34
11.1 Tissue Simulating Liquids.....	34
11.2 Tissue Verification	35
11.3 System Performance Check Results.....	36
12. RF Exposure Positions.....	38
12.1 Ear and handset reference point.....	38
12.2 Definition of the cheek position	39
12.3 Definition of the tilt position	40
12.4 Body Worn Accessory.....	41
12.5 Product Specific 10g SAR Exposure.....	42
12.6 Wireless Router	42
13. Conducted RF Output Power (Unit: dBm).....	43
14. Antenna Location.....	60
15. SAR Test Results	61
15.1 Head SAR	64
15.2 Hotspot SAR	73
15.3 Body Worn Accessory SAR.....	87
15.4 Product specific 10g SAR	97
15.5 Repeated SAR Measurement	105
15.6 TDD B41 Linearity Data Analysis	106
16. Simultaneous Transmission Analysis.....	107
16.1 Head Exposure Conditions	108
16.2 Hotspot Exposure Conditions	114
16.3 Body-Worn Accessory Exposure Conditions.....	121
16.4 Product specific 10g SAR Exposure Conditions	126
16.5 SPLSR Evaluation and Analysis	129
17. Supplemental Tuner Tests Results	133
17.1 Supplemental Tuner Head & Body SAR Results	133
18. Uncertainty Assessment	134
19. References.....	135
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	
Appendix E. Conducted RF Output Power Table	
Appendix F. Supplemental Tuner SAR Results	



Sporton International (Kunshan) Inc.

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Mobility LLC, Mobile Cellular Phone, XT2113-2,XT2113-5**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 5mm)	Body-worn (Separation 5mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.90	1.13	0.79	1.59
		GSM1900	<0.10	1.43	1.43	
	WCDMA	Band II	<0.10	1.24	1.13	
		Band IV	<0.10	1.30	1.30	
		Band V	0.86	1.09	0.91	
	CDMA	CDMA2000 BC0	1.18	1.04	0.83	
		CDMA2000 BC1	<0.10	1.41	1.39	
		CDMA2000 BC10	0.85	0.97	0.73	
	LTE	Band 7	<0.10	1.37	1.37	
		Band 12/Band 17	1.01	0.75	0.75	
		Band 13	0.16	0.67	0.67	
		Band 14	0.18	0.63	0.63	
		Band 25/Band 2	0.42	1.21	1.21	
		Band 26/Band 5	1.17	0.95	0.61	
		Band 30	<0.10	1.36	1.30	
		Band 66/Band 4	0.47	1.39	1.22	
		Band 71	0.86	0.57	0.57	
		Band 41/Band 38	<0.10	1.43	1.41	
	5G NR	n5	0.35	0.55	0.55	
		n25/n2	0.59	1.34	1.22	
		n41	0.10	1.22	1.22	
		n66	0.51	1.38	1.18	
		n71	0.45	0.44	0.44	
DTS	WLAN	2.4GHz WLAN	0.56	0.29	0.71	1.59
NII		5GHz WLAN	0.50	0.40	1.19	1.58
DSS	Bluetooth	2.4GHz Bluetooth	0.24	0.23	0.23	1.53

Highest 10g SAR Summary				
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)	Highest Simultaneous Transmission 10g SAR (W/kg)
Licensed	GSM	GSM1900	3.25	3.91
	WCDMA	Band II	3.56	
		Band IV	3.57	
	CDMA	CDMA2000 BC1	3.12	
	LTE	Band 7	3.23	
		Band 25/Band 2	2.87	
		Band 30	3.33	
		Band 66/Band 4	2.62	
		Band 41/Band 38	3.36	
	5G NR	n25/n2	3.56	
		n41	3.58	
n66		3.41		
NII	WLAN	5GHz WLAN	3.49	3.91
Date of Testing:			2020/9/1~2020/10/7	
Remark:				
1. This device supports LTE B2 / B4 / B5 / B17 / B38 and B25 / B66 / B26 / B12 / B41. Since the supported frequency span for LTE B2 / B4 / B5 / B17 / B38 falls completely within the supports frequency span for LTE B25 / B66 / B26 / B12 / B41, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B25 / B66 / B26 / B12 / B41.				
2. This device supports 5GNR n2 and 5GNR n25. Since the supported frequency span for 5GNR n2 falls completely within the supports frequency span for 5GNR n25, both 5GNR bands have the same target power, and both 5GNR bands share the same transmission path; therefore, SAR was only assessed for 5GNR n25.				
Declaration of Conformity:				
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.				
Comments and Explanations:				
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.				

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Administration Data

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory		
Test Firm	Sporton International (Kunshan) Inc.	
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958	
Test Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CN1257	314309

Applicant	
Company Name	Motorola Mobility LLC
Address	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

Manufacturer	
Company Name	Motorola Mobility LLC
Address	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2113-2,XT2113-5
FCC ID	IHDT56ZF2
IMEI Code	351505880002889
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz CDMA2000 BC0: 824.7 MHz ~ 848.31 MHz CDMA 2000 BC1: 1851.25 MHz ~ 1908.75 MHz CDMA 2000 BC10: 817.9 MHz ~ 823.1 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 14: 790.5 MHz ~ 795.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 30: 2307.5 MHz ~ 2312.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz LTE Band 71: 665.5 MHz ~ 695.5 MHz 5G NR n2 : 1852.5 MHz ~ 1907.5 MHz 5G NR n5 : 826.5 MHz ~ 846.5 MHz 5G NR n25 : 1852.5 MHz ~ 1912.5 MHz 5G NR n41 : 2506.02MHz ~ 2679.99MHz 5G NR n66 : 1712.5 MHz ~ 1777.5 MHz 5G NR n71 : 665.5 MHz ~ 695.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+(16QAM uplink is not supported) CDMA2000 : 1xRTT/1xEv-Do(Rel.0)/1xEv-Do(Rev.A) LTE: QPSK, 16QAM, 64QAM 5G NR : CP-OFDM / DFT-s-OFDM, PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC:ASK
HW Version	DVT2

SW Version	QZK30.Q4-16
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype

Remark:

- 802.11n-HT40 is not supported in 2.4GHz WLAN.
- WLAN operation in 5600 MHz ~ 5650 MHz is notched
- This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
- This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
- This device 2.4GHz WLAN/5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only).
- This device does not support DTM operation and supports GRPS/EGPRS mode up to multi-slot class 12.
- The device implements Proximity sensors/receiver detect mechanism/hotspot trigger reduced power for the power management for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity). The device will invoke corresponding work scenarios power level, which are provided in the operational description.
- For Some WWAN bands, sensor on reduced power level higher than hotspot reduced power level, so front/back sensor on SAR can represent hotspot conservatively.
- For WLAN when transmit simultaneous with WWAN LAT or UAT, power reduction will be activated to head / hotspot / body-worn / extremity.
- The 2.4GHz/5GHz WLAN can transmit in MIMO antenna mode only and it has no SISO antenna mode.
- This device implements antenna tuning techniques for several WWAN (cellular) operating modes and frequencies for the purpose of improving antenna efficiency over a broad range of frequencies. Specifically, these techniques are employed in the WCDMA, CDMA, LTE and 5GNR modes. In this report SAR was measured according to the normally required SAR configurations with the tuner active and worst tune state (auto tune) was used for SAR testing. The detail descriptions of the antenna tuner and supplemental data for additional information on section16.
- NSA and SA mode performed SAR separately.
- For 5G NR test, using FTM (Factory Test Mode) to perform SAR with default 100% transmission.
- LTE Band 41 and 5GNR n41 supports HPUE, HPUE power and SAR testing performed separately. LTE Band 41C not supported HPUE.
- For 5GNR n41 power level class 2 is higher than power level class 3, so performed full SAR testing with class 2.
- 5G NR supports CP-OFDM and DFT-s-OFDM modulation, for DFT-s-OFDM power is higher than CP-OFDM, so only show DFT-s-OFDM power table and chose DFT-s-OFDM to perform SAR testing.
- For DFT-s-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for the CP-OFDM mode will not higher than DFT-s-OFDM mode, therefore, CP-OFDM measurement is unnecessary.
- This device supports 5GNR FR1 bands as following table, including NSA mode and SA mode.

<5G NR>

Mode	Band	Duplex	SCS(KHz)	Bandwidths(BW)
NSA	n2/n25	FDD	15	5, 10, 15, 20
	n5	FDD	15	5, 10, 15, 20
	n66	FDD	15	5, 10, 15, 20
	n71	FDD	15	5, 10, 15, 20
	n41	TDD	30	20, 40, 50, 60, 80, 90, 100
SA	n2/n25	FDD	15	5, 10, 15, 20
	n66	FDD	15	5, 10, 15, 20
	n71	FDD	15	5, 10, 15, 20
	n41	TDD	30	20, 40, 50, 60, 80, 90, 100

4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																																										
FCC ID		IHDT56ZF2																																																																								
Equipment Name		Mobile Cellular Phone																																																																								
Operating Frequency Range of each LTE transmission band		LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 14: 790.5 MHz ~ 795.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 30: 2307.5 MHz ~ 2312.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz LTE Band 71: 665.5 MHz ~695.5 MHz																																																																								
Channel Bandwidth		LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 14: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 30: 5MHz, 10MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 71: 5MHz, 10MHz, 15MHz, 20MHz																																																																								
uplink modulations used		QPSK / 16QAM / 64QAM																																																																								
LTE Voice / Data requirements		Voice and Data																																																																								
LTE Release Version		R15, Cat12																																																																								
CA Support		Supported, Uplink and Downlink																																																																								
LTE MPR permanently built-in by design		<table><tr><th colspan="8">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr><tr><td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr></table>			Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3								Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3																																																																										
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																																			
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																				
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																			
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																			
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																			
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																			
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																			
256 QAM	≥ 1						≤ 5																																																																			
LTE A-MPR		In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																																								
Spectrum plots for RB configuration		A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																								
Power reduction applied to satisfy SAR compliance		Yes, head/body-worn/ hotspot/extremity will trigger reduced power for some LTE bands, the detail please referred to section 13.																																																																								
LTE Carrier Aggregation Combinations		Inter-Band and Intra-Band possible combinations and the detail power verification please referred to section 13.																																																																								
LTE Carrier Aggregation Additional Information		1. This device supports LTE Carrier Aggregation (CA) in the uplink for 41C with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per FCC Guidance. 2. This device supports maximum of 4 carriers in the downlink and 2 carriers in the uplink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																																								

Transmission (H, M, L) channel numbers and frequencies in each LTE band


LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)					
L	23205		779.5		23230		782					
M	23230		782									
H	23255		784.5									
LTE Band 14												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Channel #		Channel #		Freq.(MHz)					
L	23305		790.5		23330		793					
M	23330		793									
H	23355		795.5									
LTE Band 17												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)					
L	23755		706.5		23780		709					
M	23790		710		23790		710					
H	23825		713.5		23800		711					
LTE Band 25												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905

LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5		
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		
LTE Band 30												
	Bandwidth 5 MHz					Bandwidth 10 MHz						
	Channel #		Freq.(MHz)			Channel #		Freq.(MHz)				
L	27685		2307.5			27710		2310				
M	27710		2310									
H	27735		2312.5									
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580				
M	38000	2595	38000	2595	38000	2595	38000	2595				
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610				
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
LM	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2593	40620	2593	40620	2593				
HM	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770
LTE Band 71												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	133147	665.5	133172	668	133197	670.5	133222	673				
M	133297	680.5	133297	680.5	133297	680.5	133297	680.5				
H	133447	695.5	133422	693	133397	690.5	133372	688				

5. Proximity Sensor Triggering Test


5.1 Proximity sensor triggering distances(Per KDB616217§6.2)


1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (5825MHz) and lowest (750MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensor placed coincident with antenna elements at the bottom end of the phone are utilized to determine when the device comes in proximity of the user's body at the front or back or bottom or left side surface of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna.
3. When the proximity sensor is active, GSM1900, WCDMA band II/IV, CDMA BC1, LTE band 2/4/7/13/25/30/66/38/41/41HPUE, 5GNR n2 / n5 / n25 / n66 / n41 / n41HPUE and WLAN5.2GHz / 5.3GHz / 5.5GHz / 5.8GHz reduced power will be active for front/ back body worn SAR.
4. P-sensor can detect handheld state, WCDMA band II/IV, CDMA BC1, LTE band 2/4/7/25/30/66/38/41/41HPUE, 5GNR n2 / n25 / n66 / n41 / n41HPUE for front/back/bottom/top sides of product specific 10g SAR condition reduced powers will be active for handheld SAR.
5. The proximity sensors used to detect the proximity of the user's body at the front or back or bottom side surface of the device use a detection threshold distance. The data shown in the sections below shows the distance(s).
6. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed for body worn:
Front: [12 mm](#)
Back: [24 mm](#)
7. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed for handheld:
Front: [9 mm](#)
Back: [16 mm](#)
Bottom side: [17 mm](#)
Top Side: [17 mm](#)

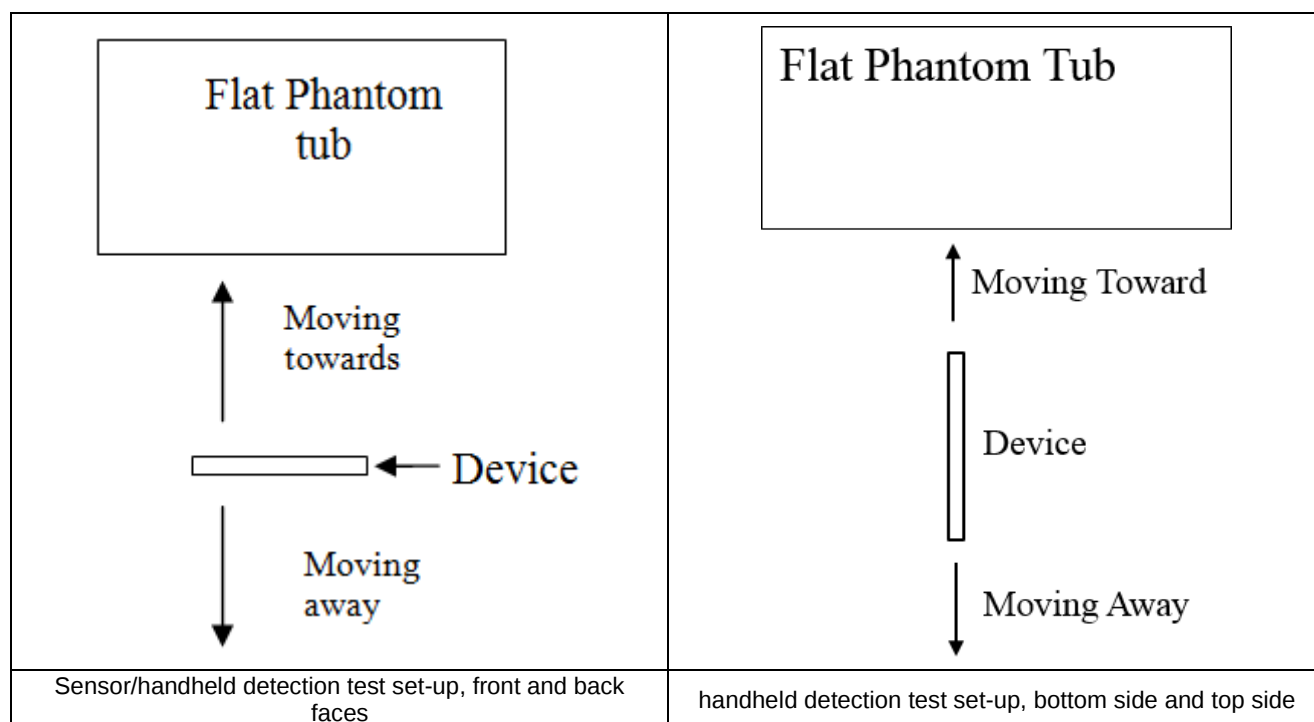



<P-Sensor>

Proximity Sensor Triggering Distance (mm)				
Position	Front		Back	
	Moving towards	Moving away	Moving towards	Moving away
Minimum	13	15	25	27

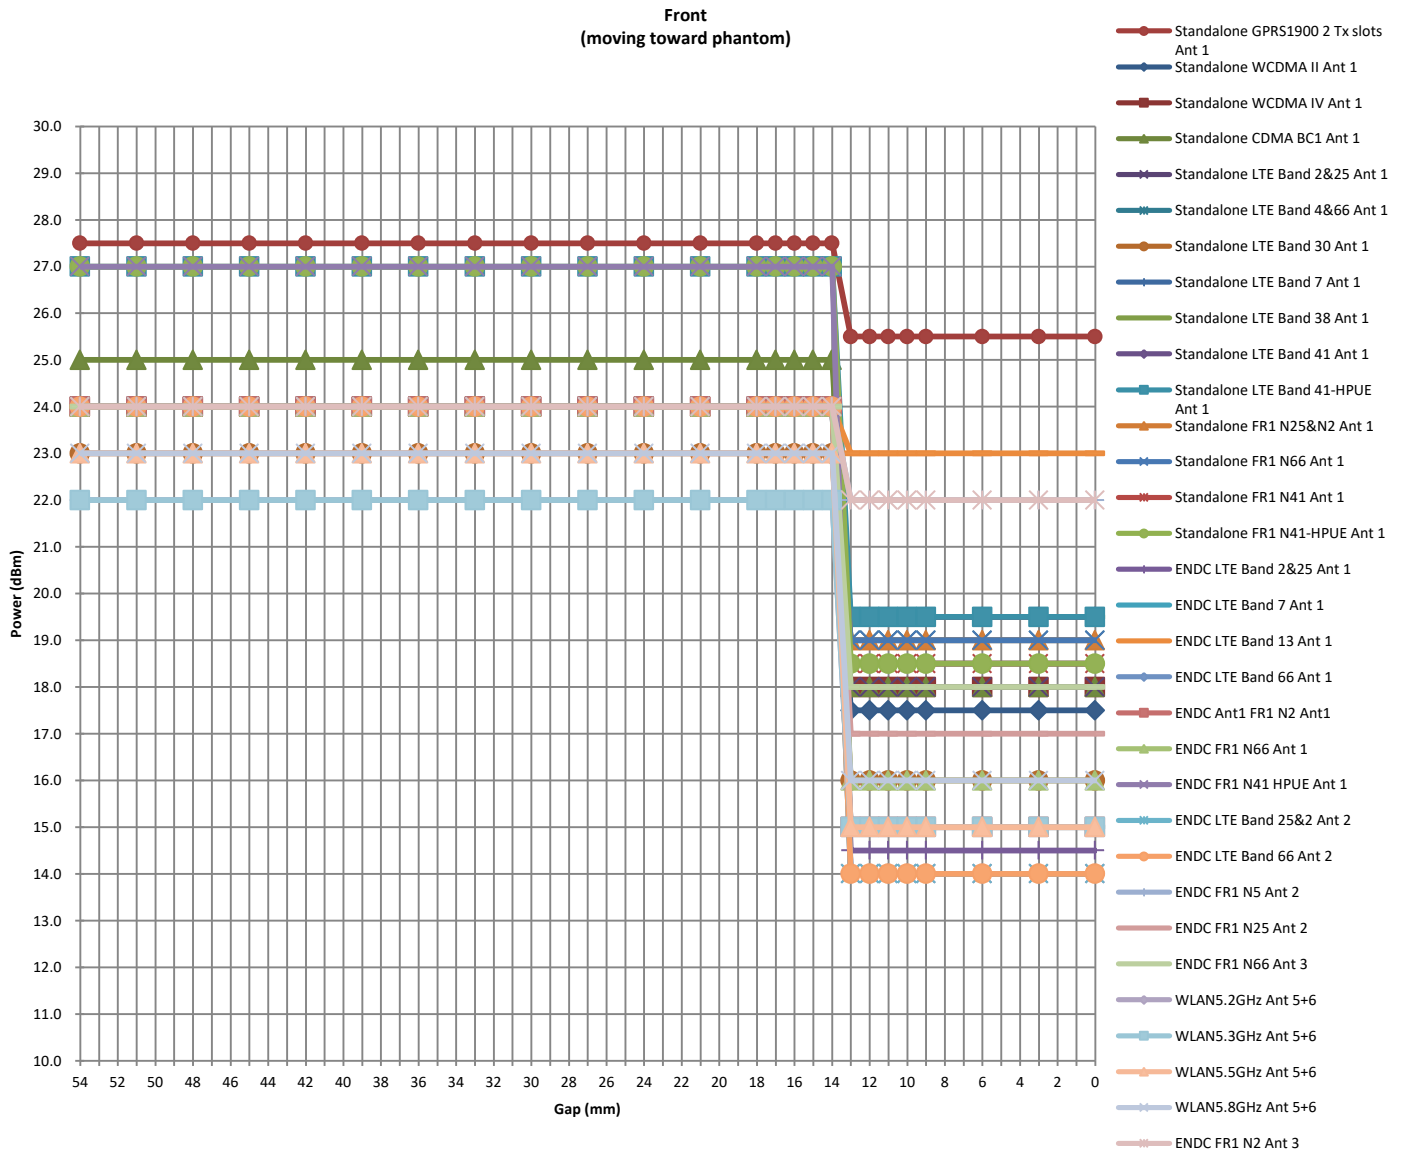**Front
(moving toward phantom)**

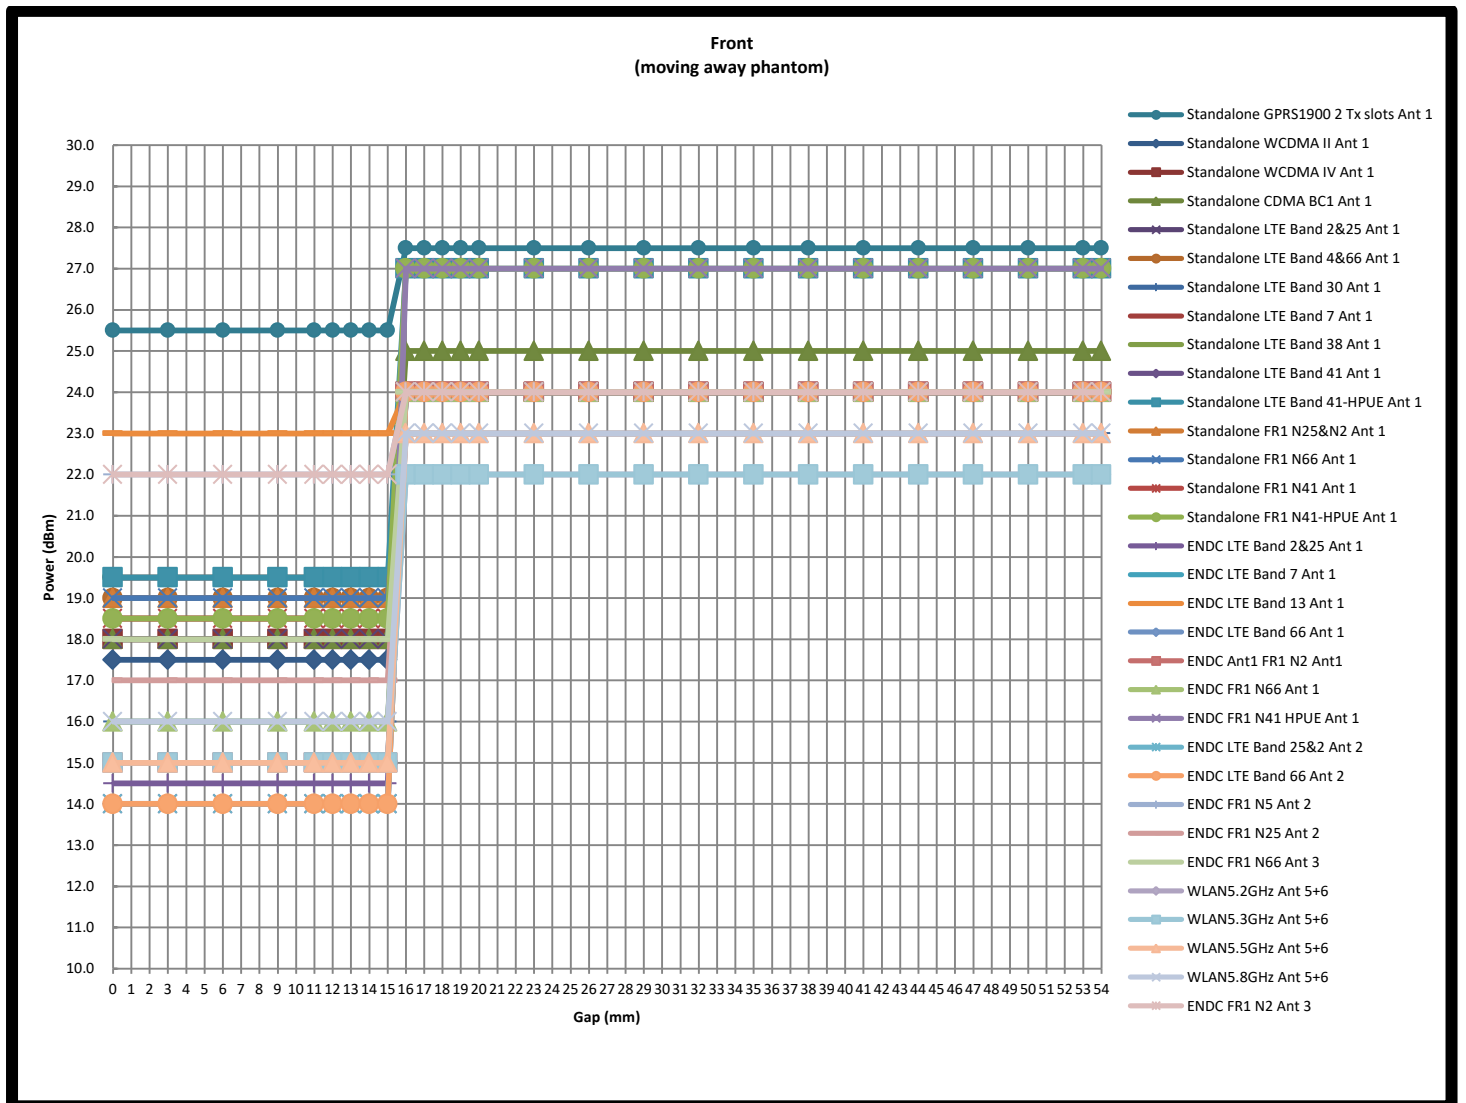
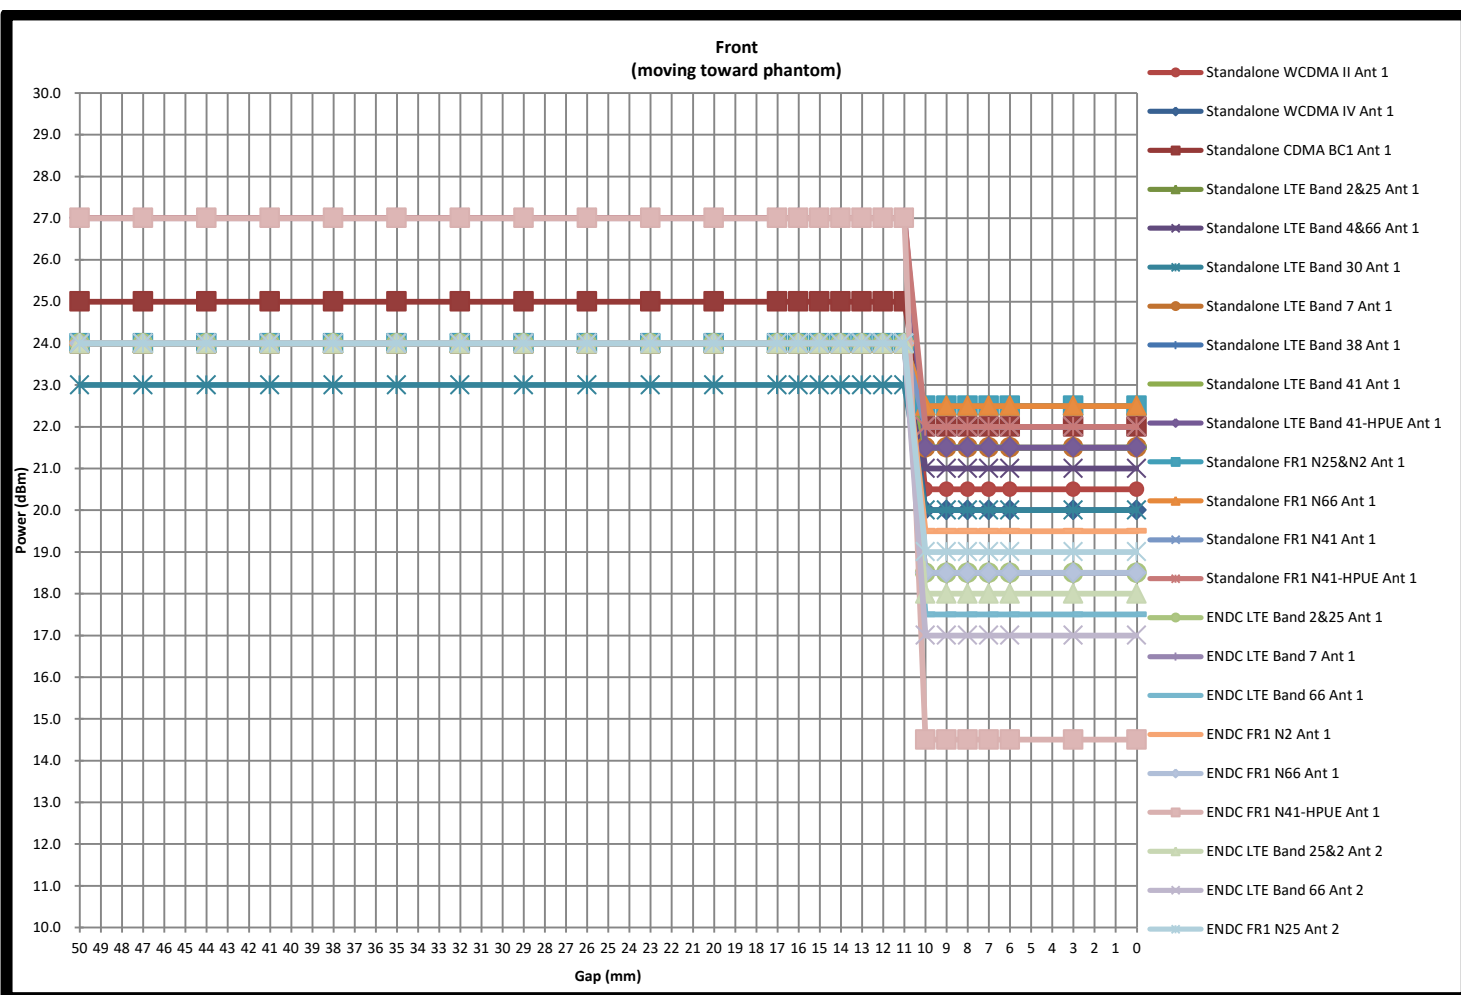


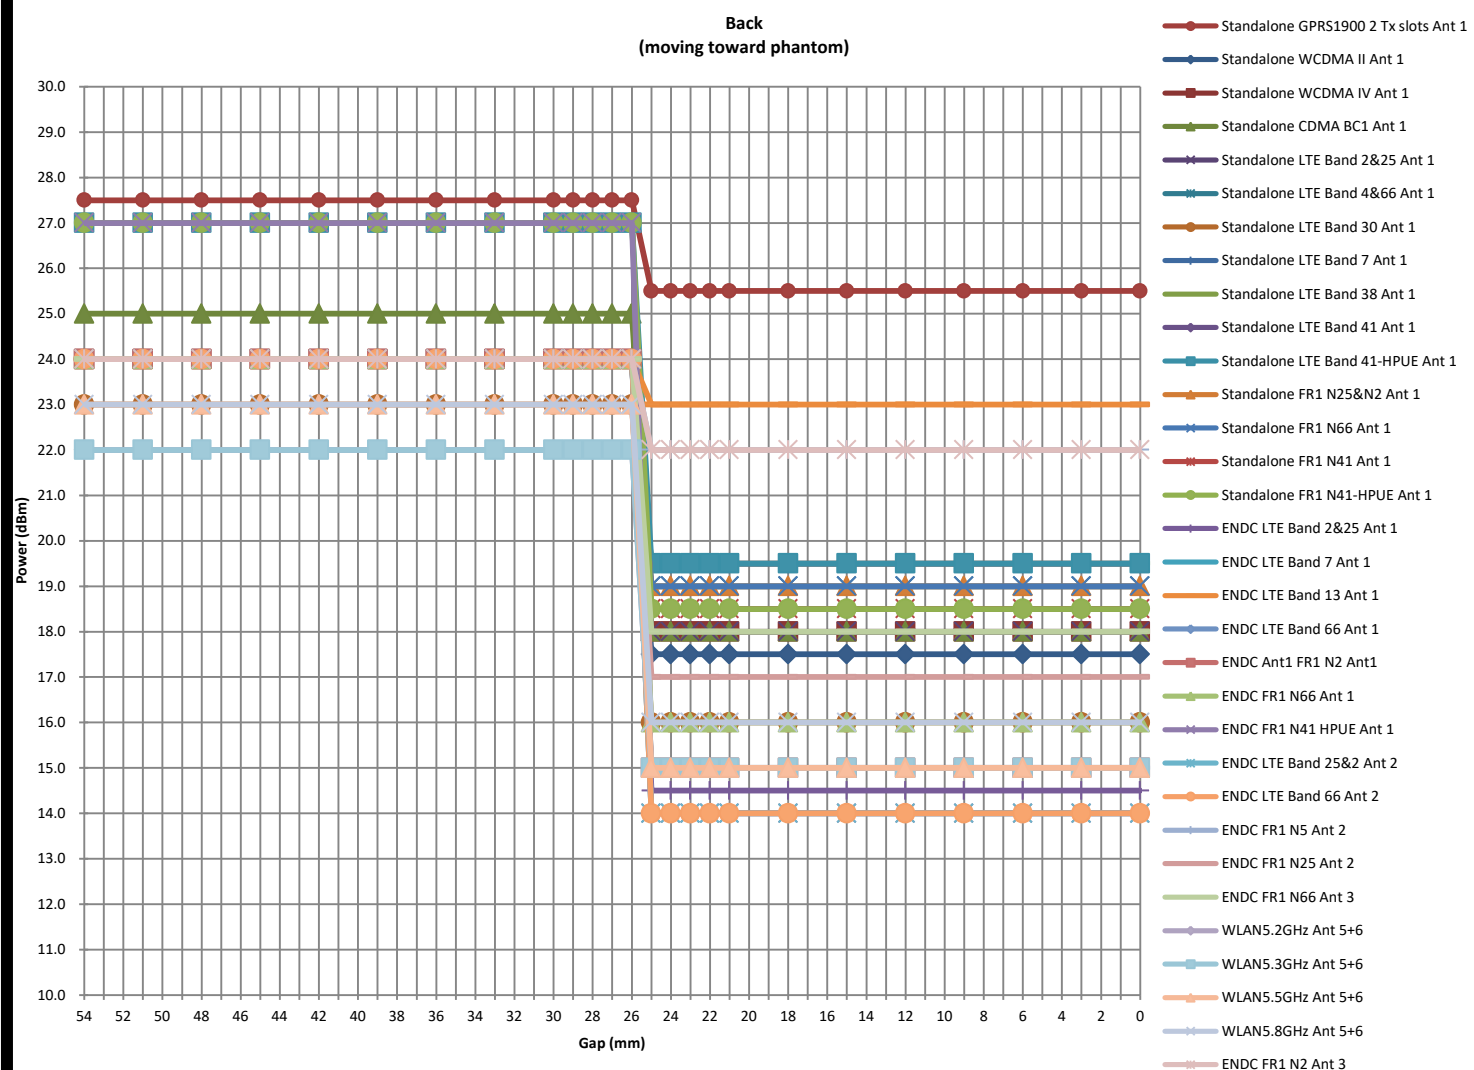

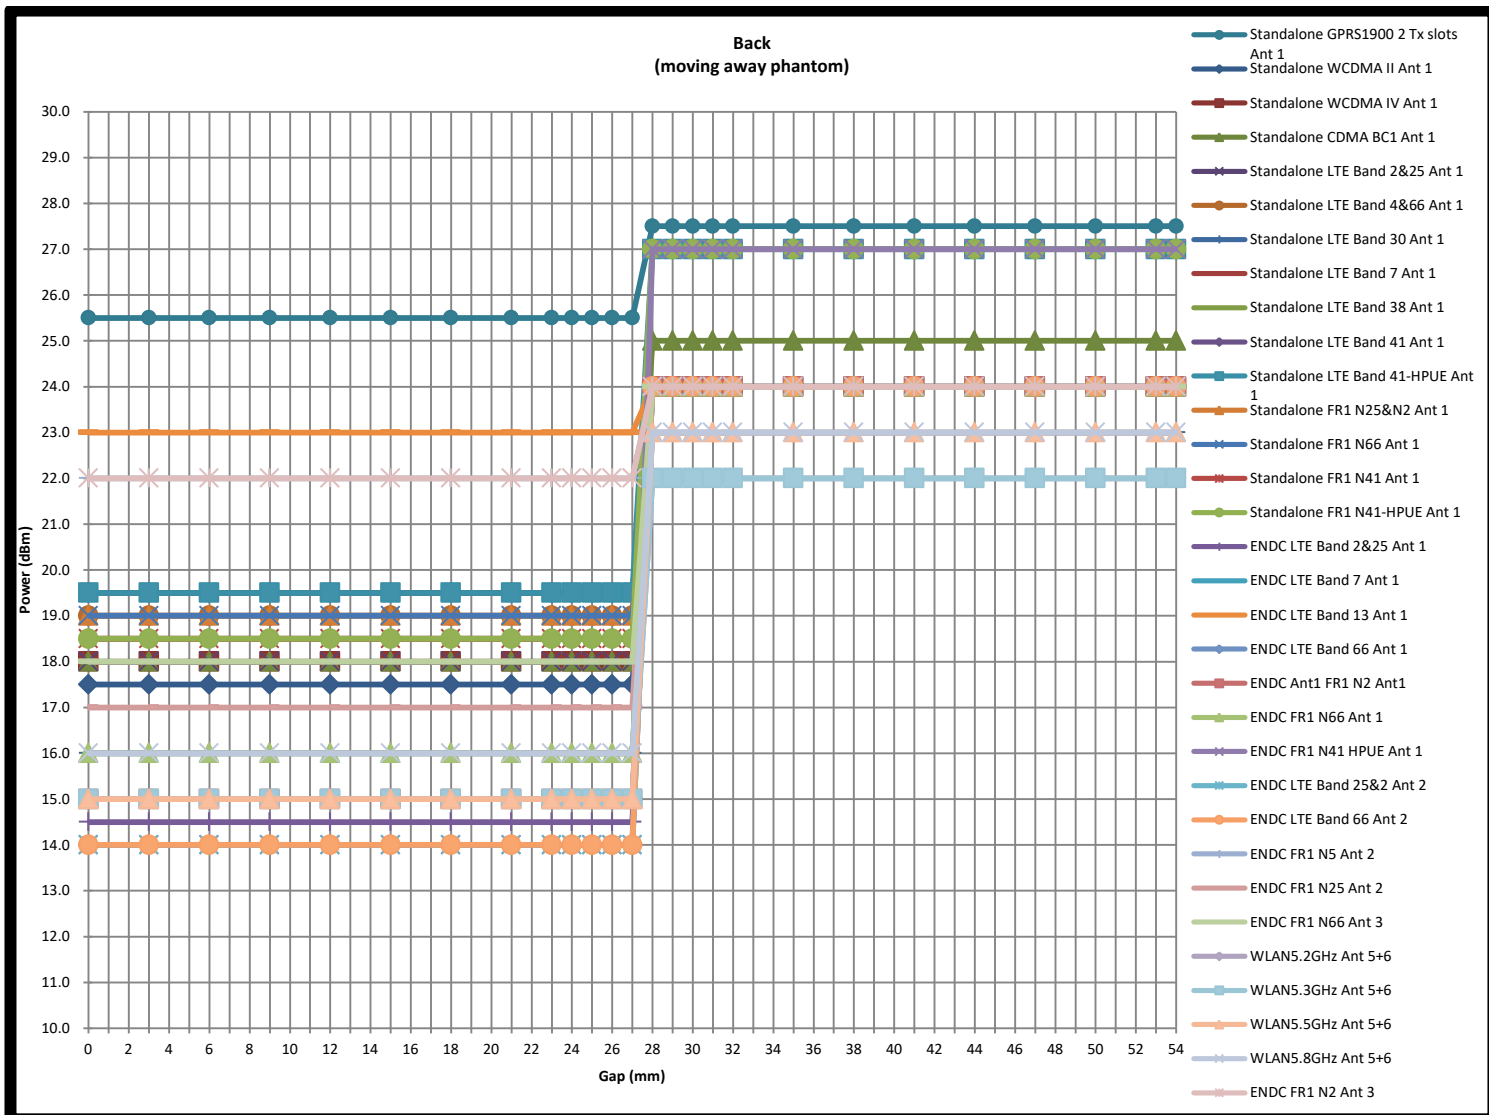



<Handheld>


Position	Front		Back		Bottom Side		Top Side	
	Moving towards	Moving away	Moving towards	Moving towards	Moving towards	Moving away	Moving towards	Moving away
Minimum	10	12	17	21	18	24	19	22





Front
(moving away phantom)

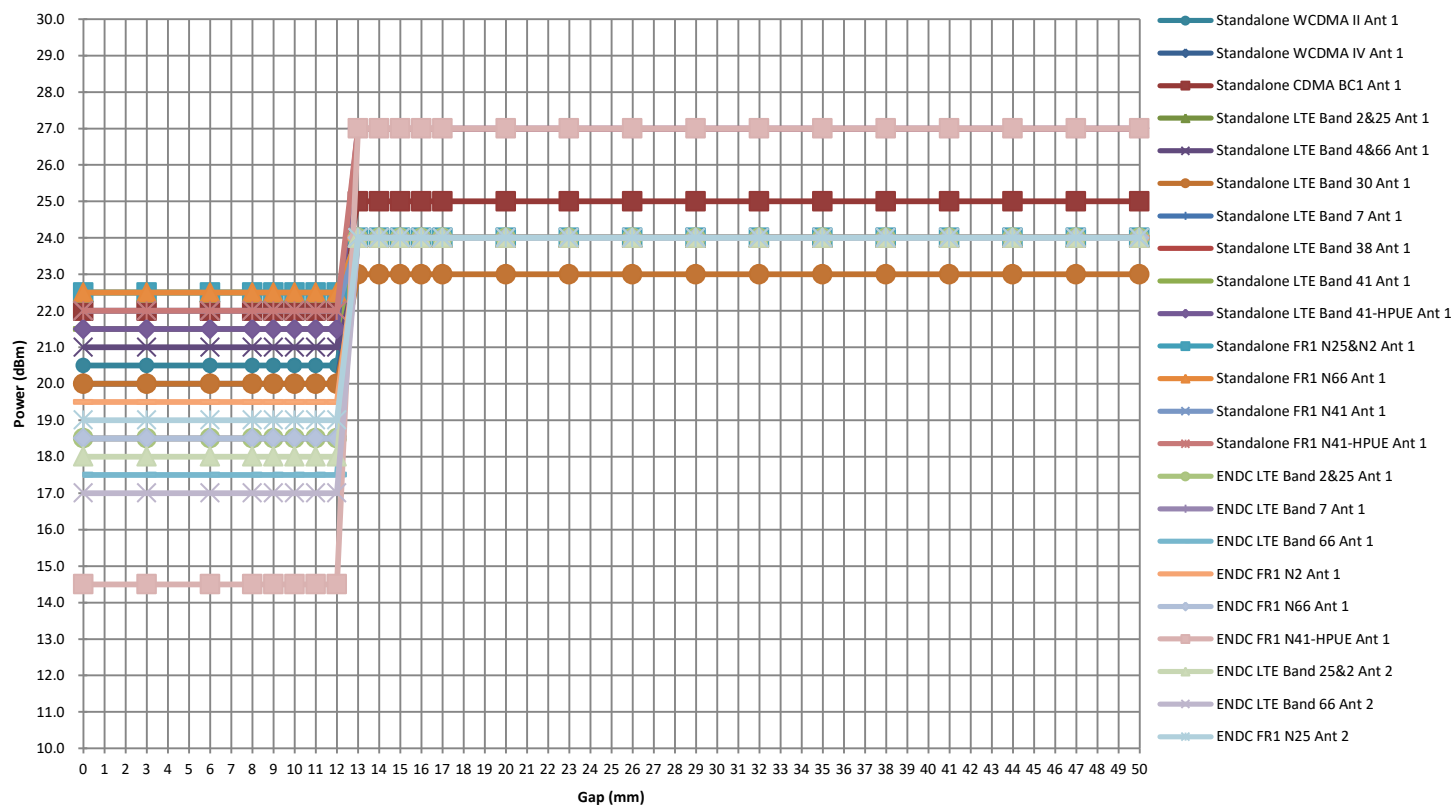

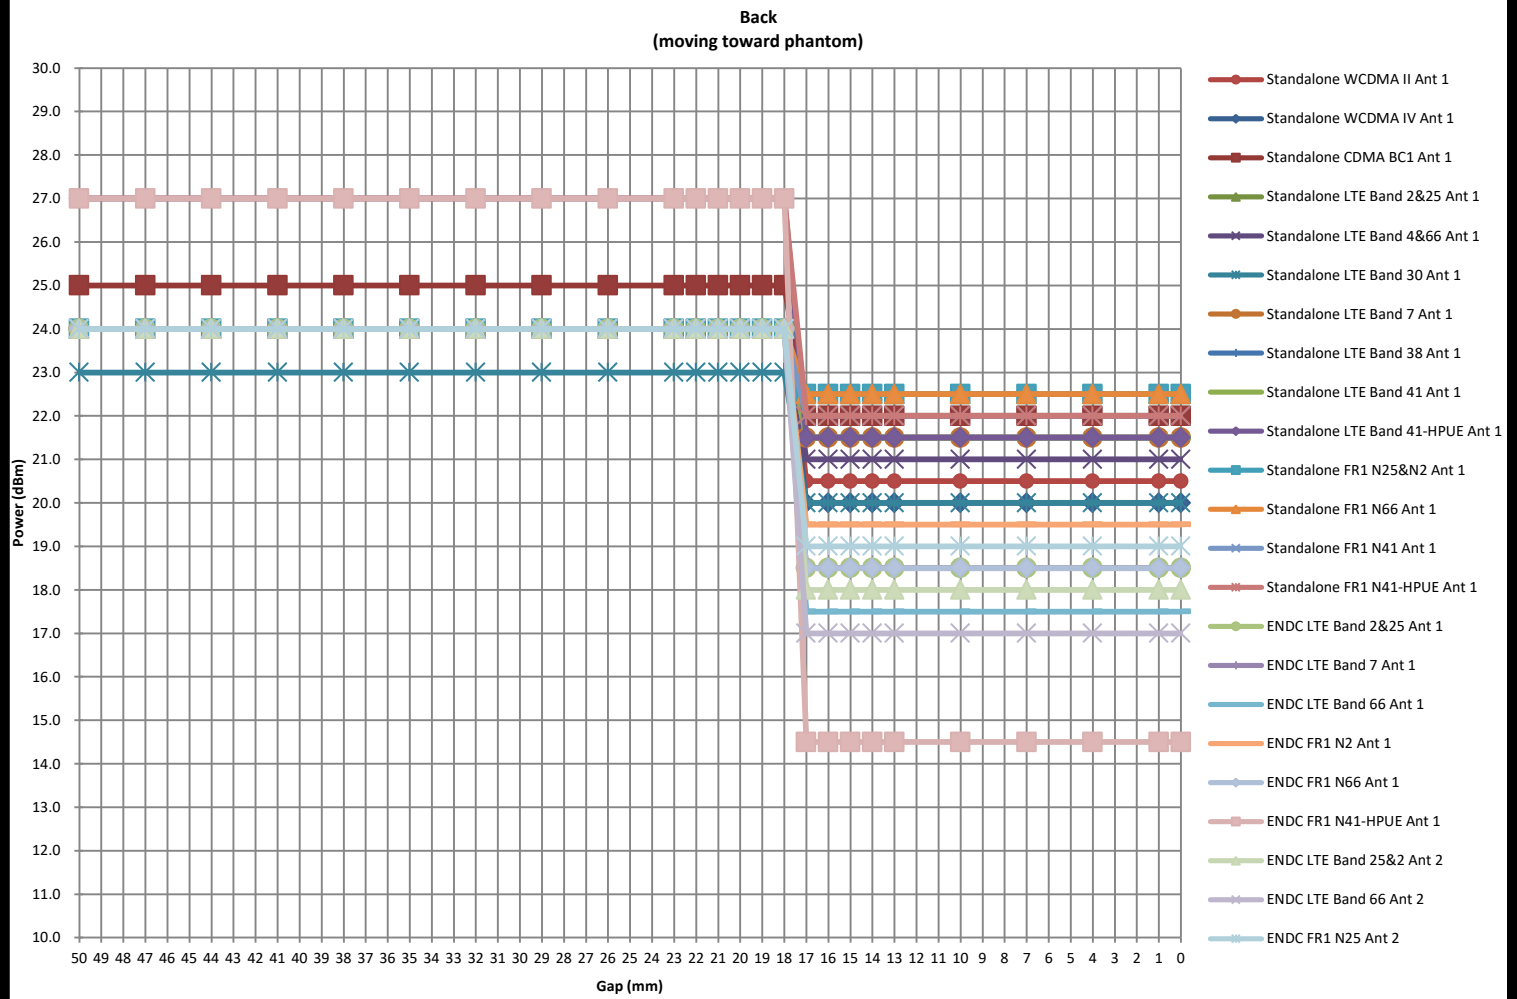


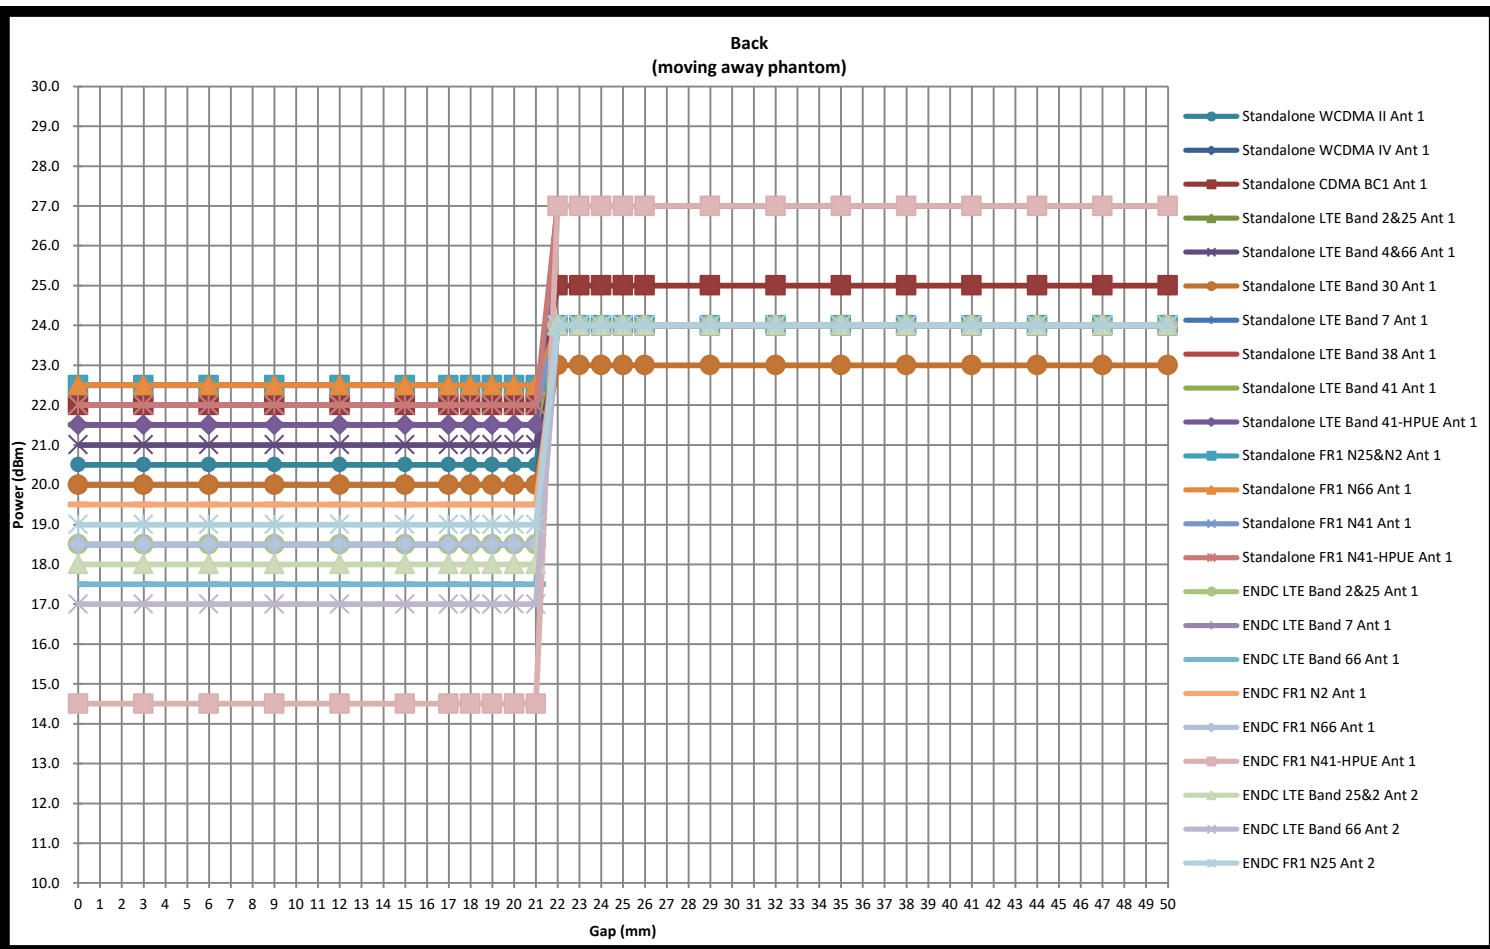

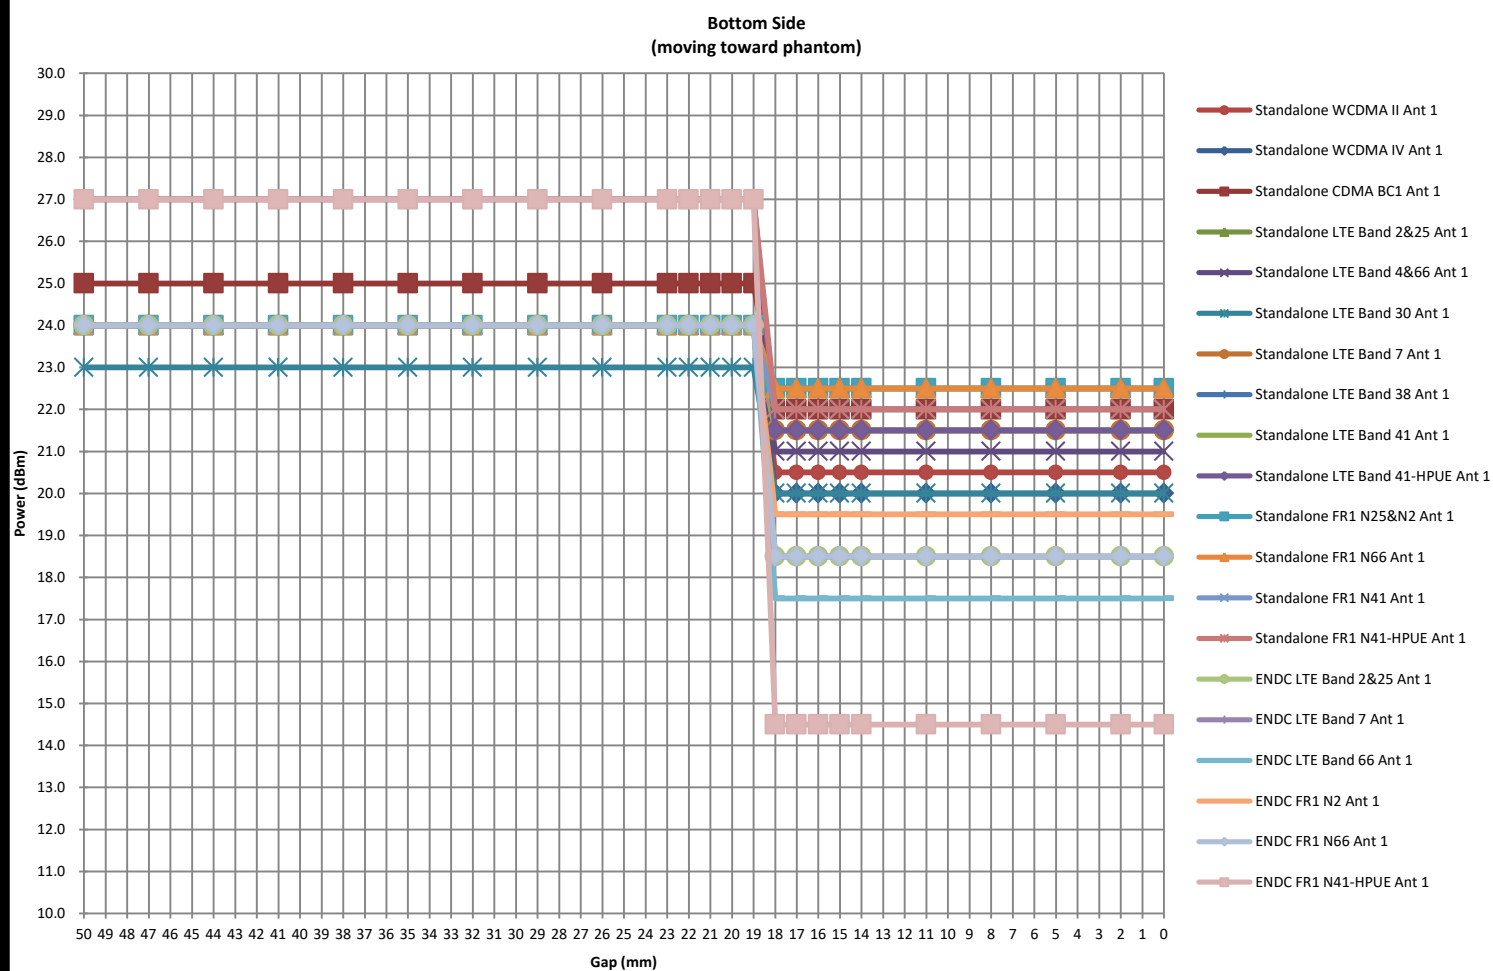


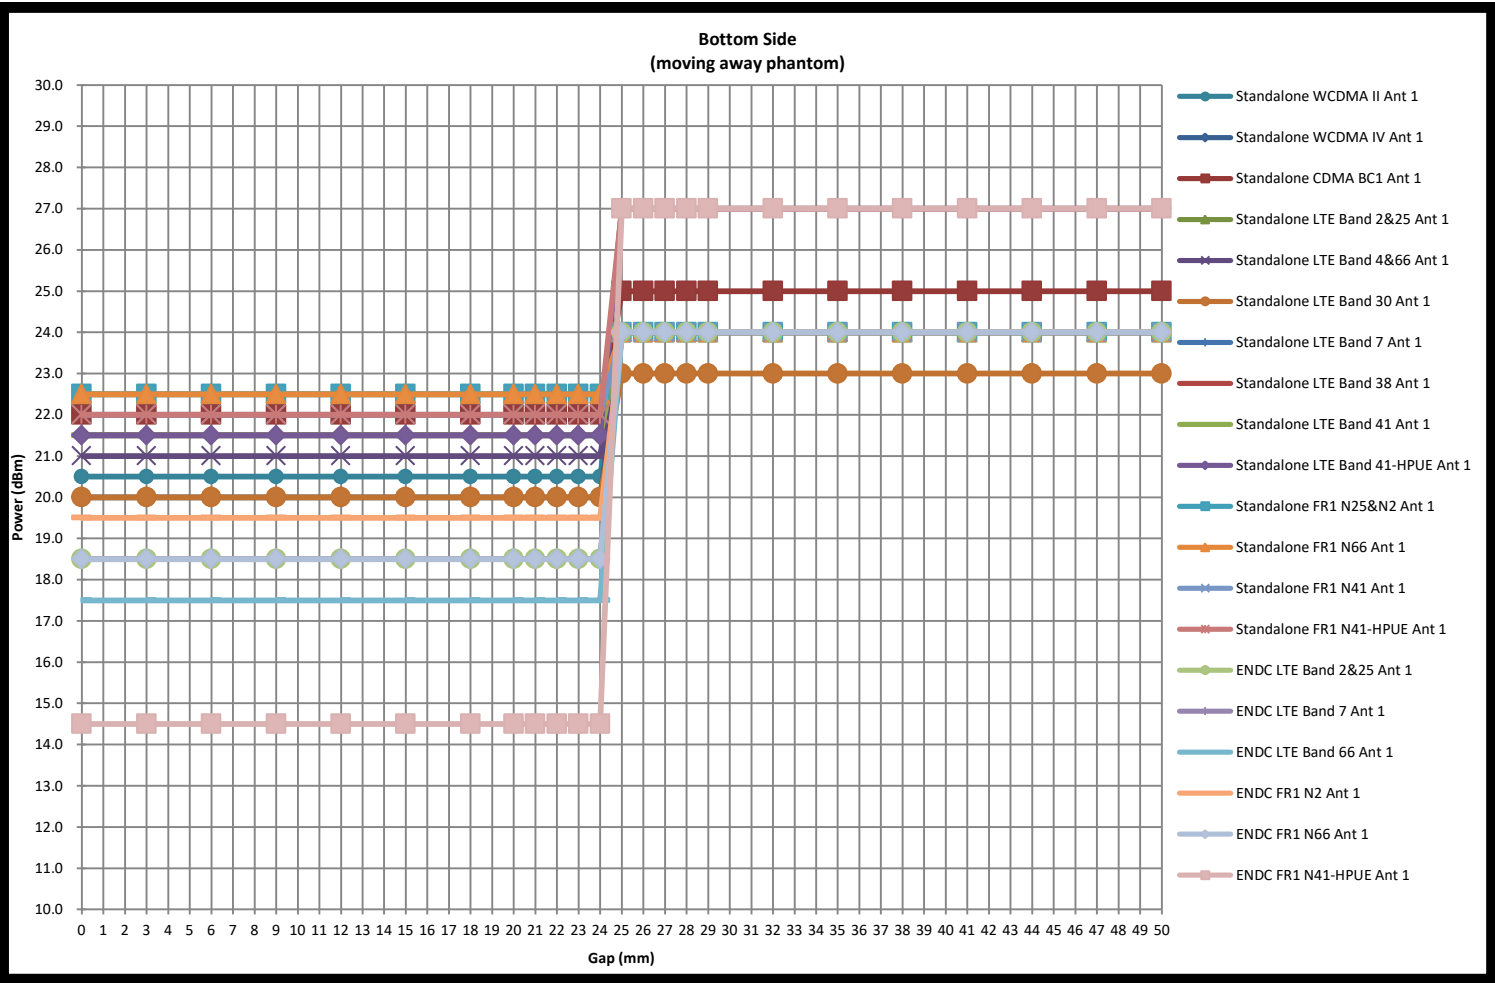

**Top Side
(moving toward phantom)**

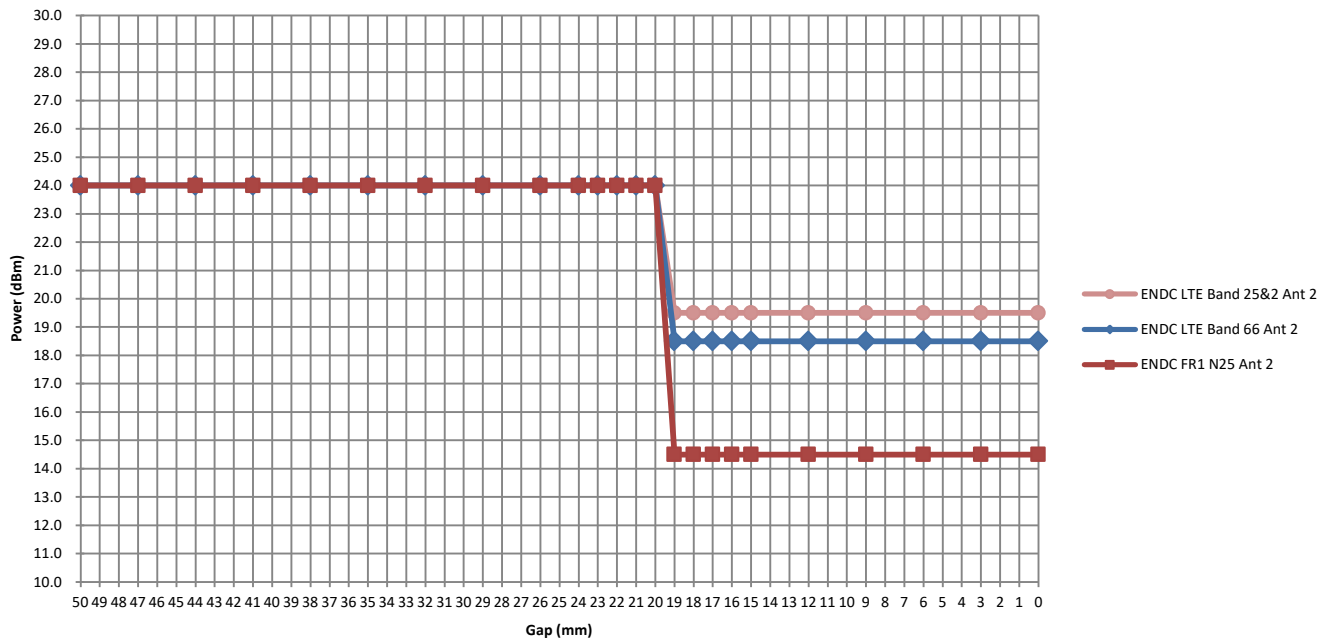

**Top Side
(moving away phantom)**

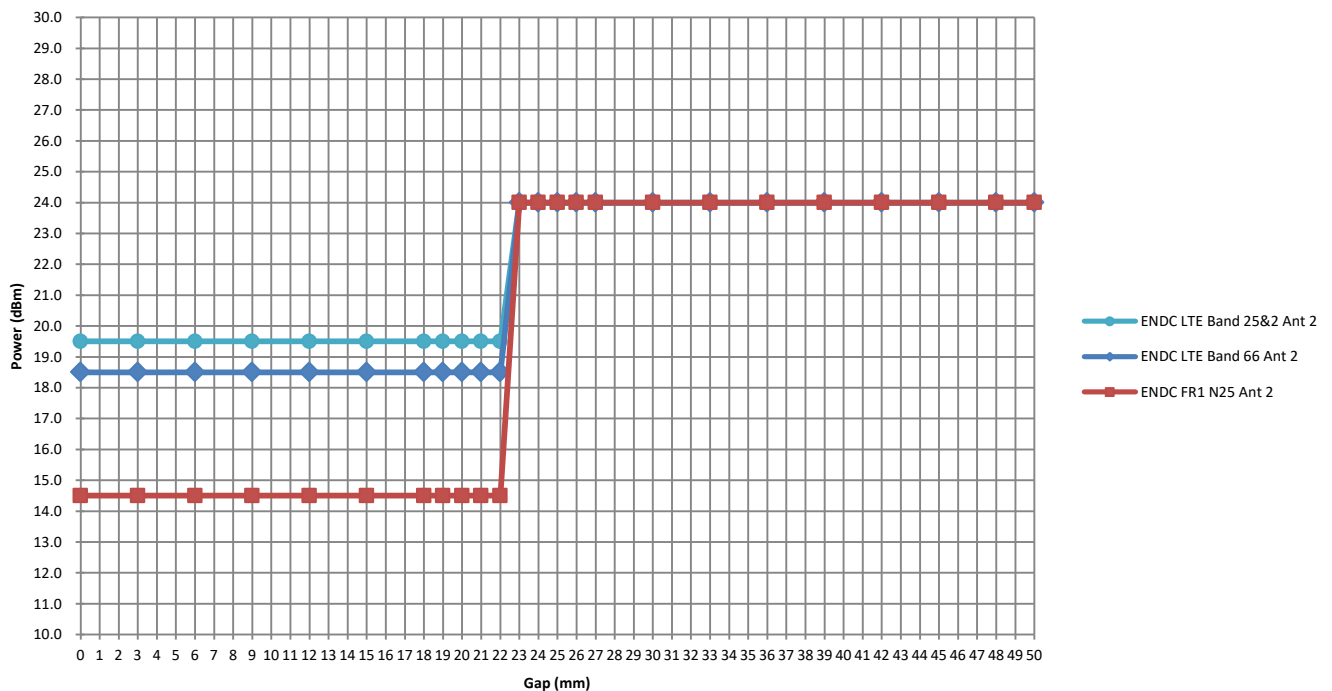

6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

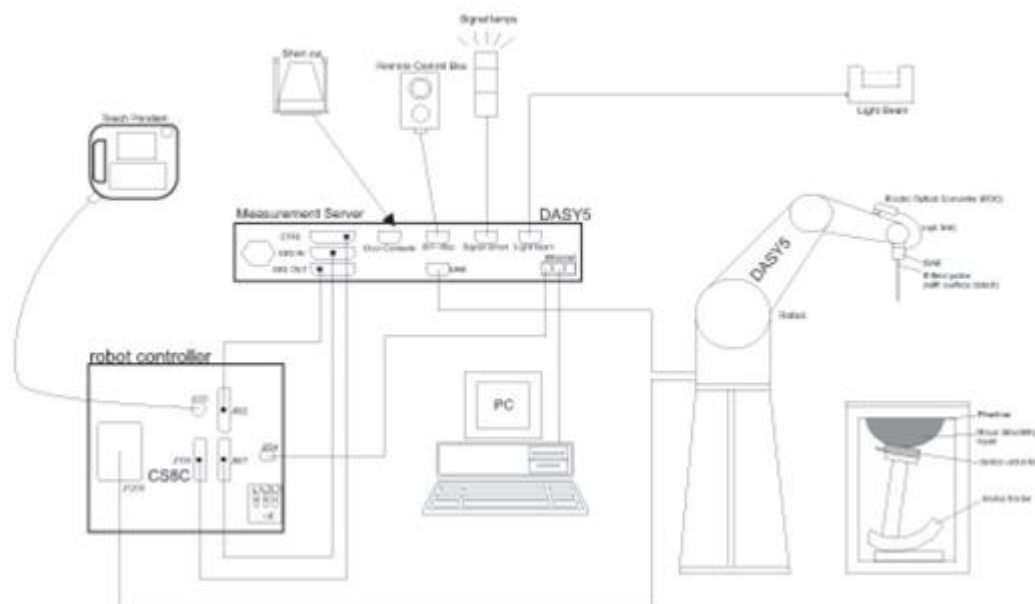

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE


8.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

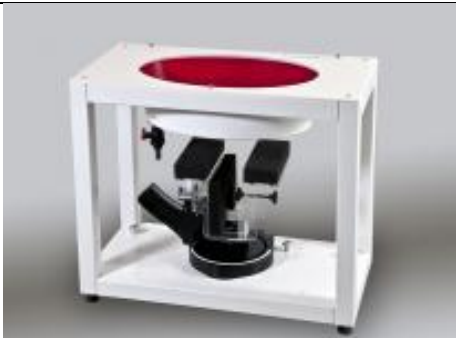Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values form the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1087	2019/3/27	2022/3/26
SPEAG	835MHz System Validation Kit	D835V2	4d151	2019/3/27	2022/3/26
SPEAG	1750MHz System Validation Kit	D1750V2	1090	2019/3/27	2022/3/26
SPEAG	1900MHz System Validation Kit	D1900V2	5d170	2019/3/26	2022/3/25
SPEAG	2300MHz System Validation Kit	D2300V2	1055	2018/9/20	2021/9/19
SPEAG	2450MHz System Validation Kit	D2450V2	908	2019/3/25	2022/3/24
SPEAG	2600MHz System Validation Kit	D2600V2	1061	2018/12/7	2021/12/6
SPEAG	5000MHz System Validation Kit	D5GHzV2	1128	2019/12/16	2020/12/15
SPEAG	Data Acquisition Electronics	DAE4	656	2019/12/17	2020/12/16
SPEAG	Data Acquisition Electronics	DAE4	1303	2020/7/7	2021/7/6
SPEAG	Dosimetric E-Field Probe	EX3DV4	7592	2020/5/22	2021/5/21
SPEAG	Dosimetric E-Field Probe	ES3DV3	3279	2020/6/2	2021/6/1
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1503	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1697	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio Communication Analyzer	MT8821C	6201432831	2020/4/14	2021/4/13
Agilent	Wireless Communication Test Set	E5515C	MY52102706	2020/5/19	2021/5/18
Agilent	ENA Series Network Analyzer	E5071C	MY46106933	2020/8/1	2021/7/31
SPEAG	Dielectric Probe Kit	DAK-3.5	1138	2020/5/19	2021/5/18
Anritsu	Vector Signal Generator	MG3710A	6201682672	2020/1/8	2021/1/7
Rohde & Schwarz	Power Meter	NRVD	102081	2020/8/13	2021/8/12
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2020/8/13	2021/8/12
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	2020/8/13	2021/8/12
R&S	CBT BLUETOOTH TESTER	CBT	101246	2020/4/14	2021/4/13
EXA	Spectrum Analyzer	FSV7	101631	2020/1/8	2021/1/7
Testo	Hygrometer	608-H1	1241332088	2020/1/8	2021/1/7
FLUKE	DIGITAC THERMOMETER	51II	97240029	2020/8/14	2021/8/13
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note 1	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note 1	
ARRA	Power Divider	A3200-2	N/A	Note 1	
MCL	Attenuation1	BW-S10W5+	N/A	Note 1	
MCL	Attenuation2	BW-S10W5+	N/A	Note 1	
MCL	Attenuation3	BW-S10W5+	N/A	Note 1	
Agilent	Dual Directional Coupler	778D	20500	Note 1	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note 1	

Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check
2. Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

11. System Verification

11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.2.

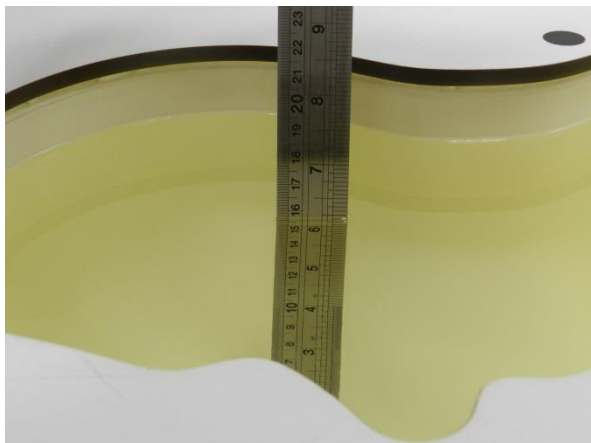


Fig 11.1 Photo of Liquid Height for Head SAR

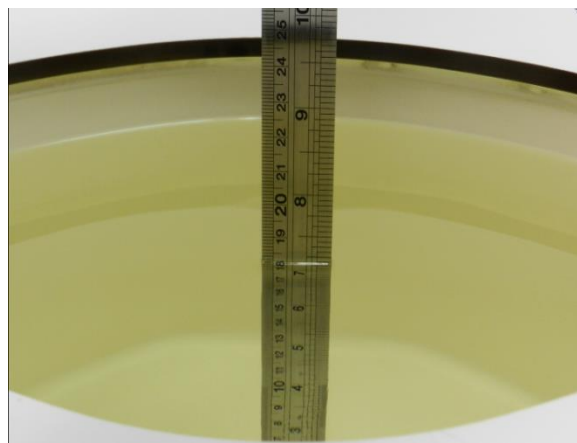


Fig 11.2 Photo of Liquid Height for Body SAR

11.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	Head	22.6	0.919	43.032	0.89	41.90	3.26	2.70	±5	2020/9/1
835	Head	22.8	0.902	41.838	0.90	41.50	0.22	0.81	±5	2020/9/5
1750	Head	22.7	1.371	39.315	1.37	40.10	0.07	-1.96	±5	2020/9/10
1900	Head	22.8	1.437	40.277	1.40	40.00	2.64	0.69	±5	2020/9/14
2300	Head	22.6	1.672	38.792	1.67	39.50	0.12	-1.79	±5	2020/9/18
2600	Head	22.9	2.053	37.669	1.96	39.00	4.74	-3.41	±5	2020/9/22
750	Head	22.7	0.911	43.491	0.89	41.90	2.36	3.80	±5	2020/9/3
835	Head	22.9	0.905	41.314	0.90	41.50	0.56	-0.45	±5	2020/9/7
1750	Head	22.7	1.363	39.029	1.37	40.10	-0.51	-2.67	±5	2020/9/12
1900	Head	22.9	1.403	39.091	1.40	40.00	0.21	-2.27	±5	2020/9/16
2300	Head	22.8	1.690	39.237	1.67	39.50	1.20	-0.67	±5	2020/9/22
2600	Head	22.6	2.032	37.935	1.96	39.00	3.67	-2.73	±5	2020/9/26
2450	Head	22.7	1.856	39.103	1.80	39.20	3.11	-0.25	±5	2020/9/28
5250	Head	22.9	4.556	35.437	4.71	35.90	-3.27	-1.29	±5	2020/10/3
5600	Head	22.6	4.941	34.836	5.07	35.50	-2.54	-1.87	±5	2020/10/5
5750	Head	22.8	5.122	34.563	5.22	35.40	-1.88	-2.36	±5	2020/10/7

11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2020/9/1	750	Head	250	1087	3279	1303	2.18	8.36	8.72	4.31
2020/9/5	835	Head	250	4d151	3279	1303	2.45	9.30	9.8	5.38
2020/9/10	1750	Head	250	1090	3279	1303	8.94	36.40	35.76	-1.76
2020/9/14	1900	Head	250	5d170	3279	1303	10.00	39.00	40	2.56
2020/9/18	2300	Head	250	1055	3279	1303	11.8	48.70	47.2	-3.08
2020/9/22	2600	Head	250	1061	3279	1303	14.10	57.70	56.4	-2.25
2020/9/3	750	Head	250	1087	3279	1303	2.16	8.36	8.64	3.35
2020/9/7	835	Head	250	4d151	3279	1303	2.46	9.30	9.84	5.81
2020/9/12	1750	Head	250	1090	3279	1303	8.89	36.40	35.56	-2.31
2020/9/16	1900	Head	250	5d170	3279	1303	9.76	39.00	39.04	0.10
2020/9/22	2300	Head	250	1055	3279	1303	11.90	48.70	47.6	-2.26
2020/9/26	2600	Head	250	1061	3279	1303	14.10	57.70	56.4	-2.25
2020/9/28	2450	Head	250	908	7592	656	12.80	52.80	51.2	-3.03
2020/10/3	5250	Head	100	1128	7592	656	7.51	80.00	75.1	-6.13
2020/10/5	5600	Head	100	1128	7592	656	8.41	82.40	84.1	2.06
2020/10/7	5750	Head	100	1128	7592	656	7.65	79.10	76.5	-3.29

<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2020/9/1	750	Head	250	1087	3279	1303	1.42	5.65	5.68	0.53
2020/9/5	835	Head	250	4d151	3279	1303	1.60	6.16	6.4	3.90
2020/9/10	1750	Head	250	1090	3279	1303	4.81	19.20	19.24	0.21
2020/9/14	1900	Head	250	5d170	3279	1303	5.27	20.30	21.08	3.84
2020/9/18	2300	Head	250	1055	3279	1303	5.74	23.20	22.96	-1.03
2020/9/22	2600	Head	250	1061	3279	1303	6.43	25.90	25.72	-0.69
2020/9/3	750	Head	250	1087	3279	1303	1.40	5.65	5.6	-0.88
2020/9/7	835	Head	250	4d151	3279	1303	1.61	6.16	6.44	4.55
2020/9/12	1750	Head	250	1090	3279	1303	4.78	19.20	19.12	-0.42
2020/9/16	1900	Head	250	5d170	3279	1303	5.15	20.30	20.6	1.48
2020/9/22	2300	Head	250	1055	3279	1303	5.80	23.20	23.2	0.00
2020/9/26	2600	Head	250	1061	3279	1303	6.45	25.90	25.8	-0.39
2020/9/28	2450	Head	250	908	7592	656	6.01	24.20	24.04	-0.66
2020/10/3	5250	Head	100	1128	7592	656	2.19	22.90	21.9	-4.37
2020/10/5	5600	Head	100	1128	7592	656	2.43	23.60	24.3	2.97
2020/10/7	5750	Head	100	1128	7592	656	2.22	22.60	22.2	-1.77

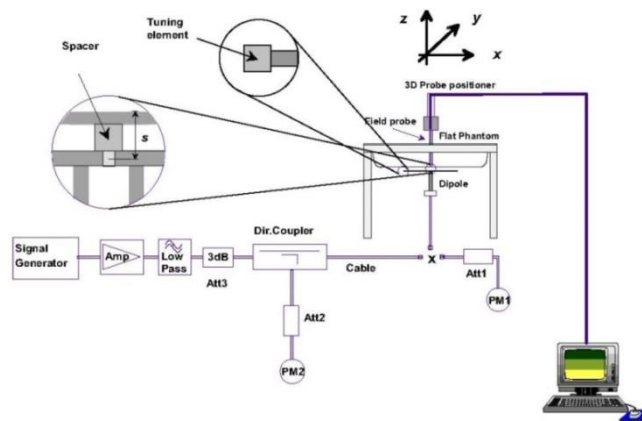


Fig 11.3.1 System Performance Check Setup



Fig 11.3.2 Setup Photo

12. RF Exposure Positions

12.1 Ear and handset reference point

Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2. The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

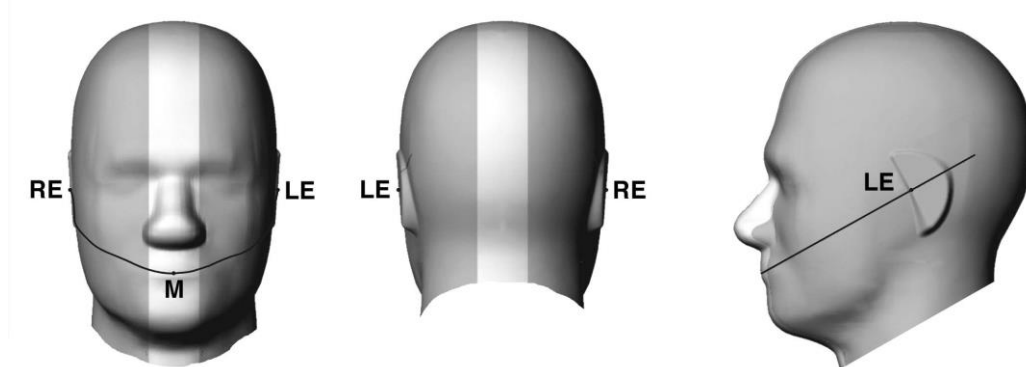


Fig 12.1.1 Front, back, and side views of SAM twin phantom

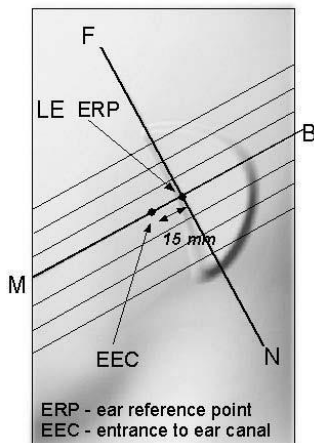


Fig 12.1.2 Close-up side view of phantom showing the ear region.

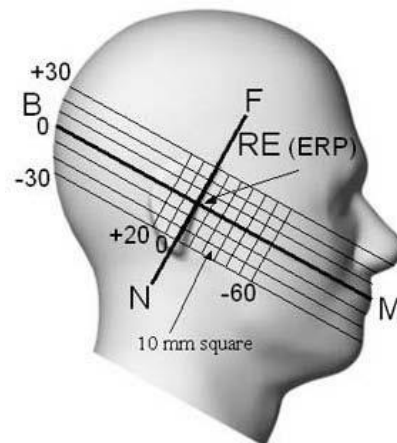


Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

12.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

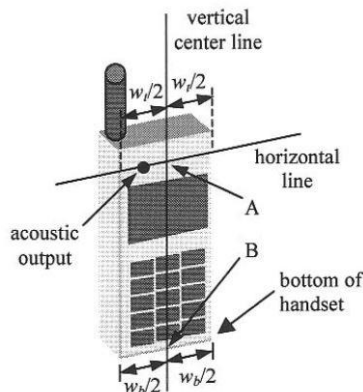


Fig 12.2.1 Handset vertical and horizontal reference lines—"fixed case"

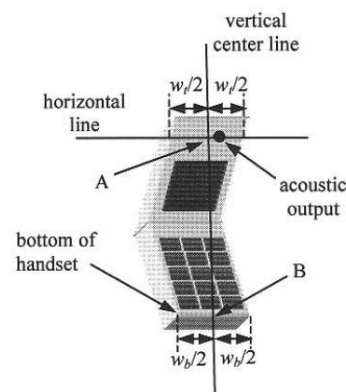


Fig 12.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

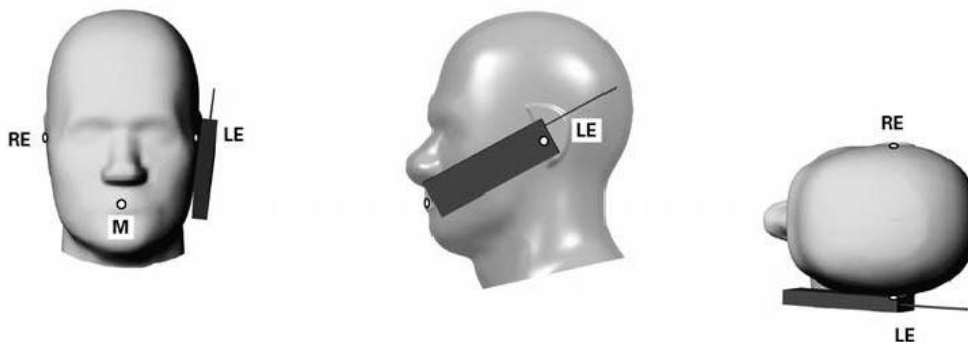


Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

12.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

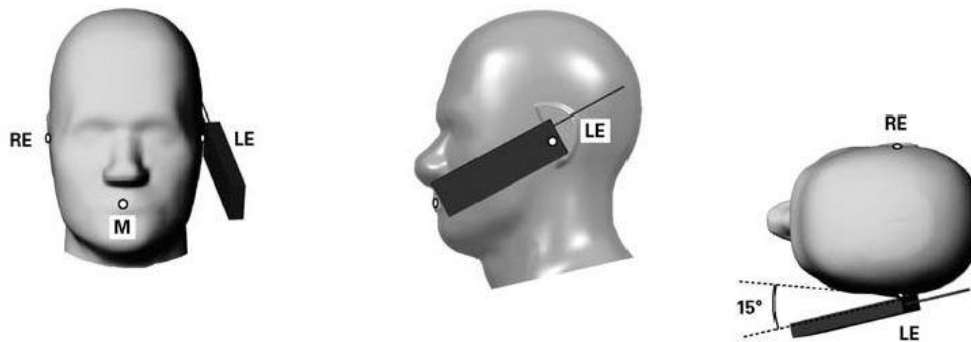


Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

12.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 12.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

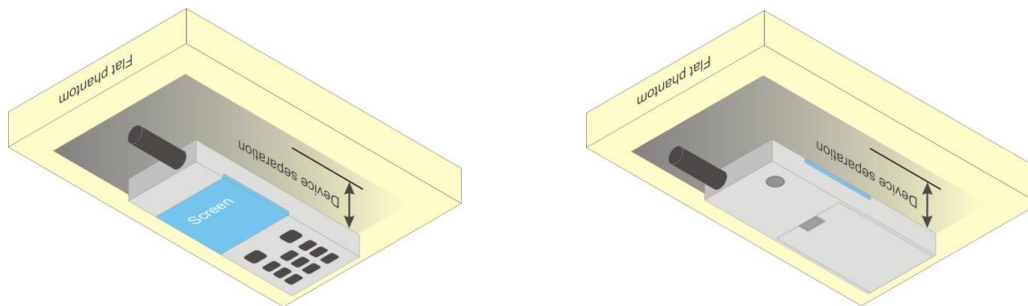


Fig 12.4 Body Worn Position

12.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.⁶ The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

12.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

13. Conducted RF Output Power (Unit: dBm)

The detailed conducted power table can refer to Appendix E.

<GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 3Tx slots for GSM850/GSM1900 are considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$. Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF0) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration


DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12
Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

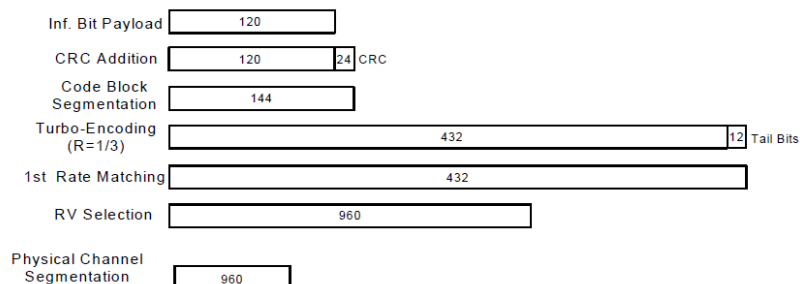
Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)
Setup Configuration

<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA

<CDMA2000 Conducted Power>


General Note:

1. Per KDB 941225 D01v03r01, SAR for head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55.
2. Per KDB 941225 D01v03r01, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.
3. Per KDB 941225 D01v03r01, for Body-worn accessory SAR is measured in RC3 with the handset configured in TDSO/SO32 to transmit at full rate on FCH only with all other code channels disabled. The body-worn accessory procedures in KDB Publication 447498 are applied. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH), with FCH only as the primary mode.


<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B12 / B17 / B26 / B38 / B71 and 5G NR n5 / n41 / n71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE B2 / B4 / B5 / B17 / B38 SAR test was covered by B25 / B66 / B26 / B12 / B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

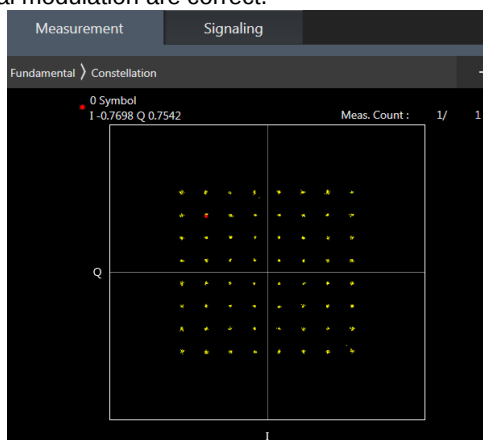

64QAM

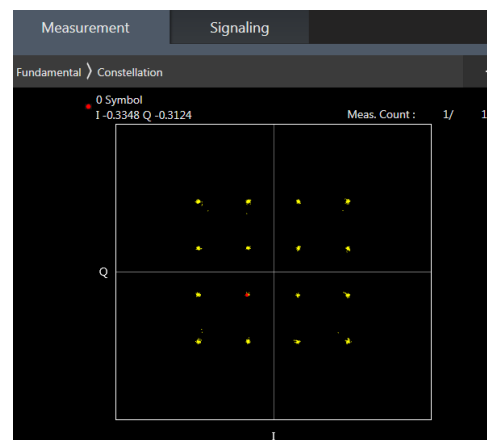

16QAM

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

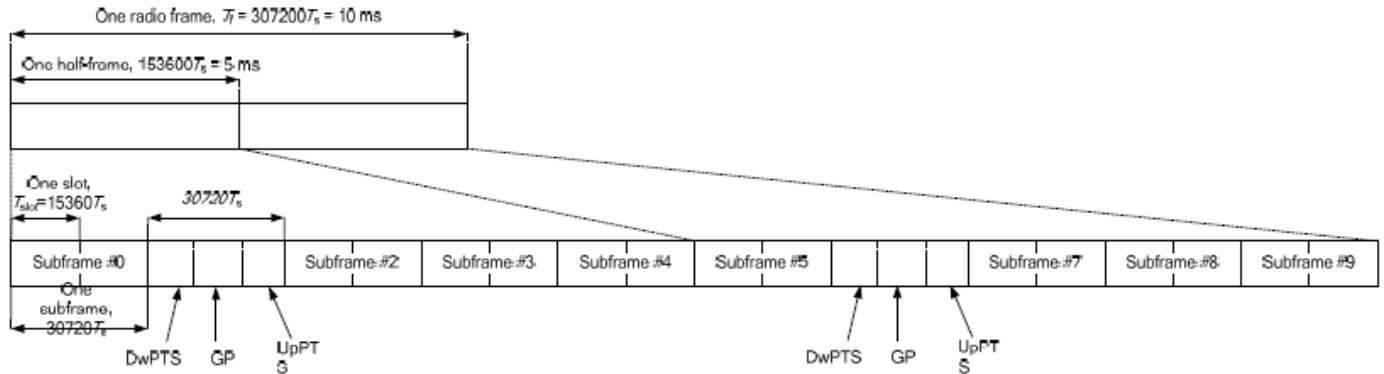


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

For LTE Band 41 Power class 2

- Uplink-downlink configuration: 1. In a half-frame consisted of 5 subframes, uplink operation is in 2 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(2+0.167)/5 = 43.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(2+0.143)/5 = 42.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:2.33 (42.9 %) was used perform testing and considering the theoretical duty cycle of 43.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 42.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $43.3\%/42.9\% = 1.009$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

For LTE Band 41 Power class 3

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

The device can adjust uplink/downlink configuration automatically according to the transmitting power class level, as followings:

LTE TDD Band	Power Class level	support uplink/downlink configuration
LTE Band 41	> 23	1,2,3,4,5
	=23	0,1,2,3,4,5,6
	< 23	0,1,2,3,4,5,6

<LTE Carrier Aggregation>

General Note:

1. This device supports Carrier Aggregation on downlink for inter and intra band. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.
2. In applying the existing power measurement procedures of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of frequency bands and CCs in each row need combination, and for this device that all the configurations were choose to power measurement.
3. The gray color table is covered by other combinations and no need to verify power.
4. All permutations exist. No restrictions on Pcell & Scell combinations. Only LTE Band 29A is limited to Scell.

2CC Downlink Carrier Aggregation			3CC Downlink Carrier Aggregation		
Number	Combination	Covered by Measurement Superset	Number	Combination	Covered by Measurement Superset
2CC #1	CA_2C	3CC #3	3CC #1	CA_2A_2A_4A	4CC #1
2CC #2	CA_2A_2A	3CC #1	3CC #2	CA_2A_2A_5A	4CC #2
2CC #3	CA_2A_4A	3CC #1	3CC #3	CA_2C_12A	
2CC #4	CA_2A_5A	3CC #2	3CC #4	CA_2A_2A_12A	4CC #3
2CC #5	CA_2A_12A	3CC #4	3CC #5	CA_2A_2A_14A	4CC #4
2CC #6	CA_2A_14A	3CC #5	3CC #6	CA_2A_2A_29A	
2CC #7	CA_2A_29A	3CC #6	3CC #7	CA_2A_2A_30A	
2CC #8	CA_2A_30A	3CC #7	3CC #8	CA_2C_66A	4CC #5
2CC #9	CA_2A_66A	3CC #9	3CC #9	CA_2A_2A_66A	4CC #9
2CC #10	CA_2A_71A	3CC #10	3CC #10	CA_2A_2A_71A	4CC #9
2CC #11	CA_4A_4A	3CC #11	3CC #11	CA_2A_4A_4A	4CC #10
2CC #12	CA_4A_5A	3CC #12	3CC #12	CA_2A_4A_5A	
2CC #13	CA_4A_12A	3CC #13	3CC #13	CA_2A_4A_12A	4CC #10
2CC #14	CA_4A_29A	3CC #14	3CC #14	CA_2A_4A_29A	
2CC #15	CA_4A_30A	3CC #15	3CC #15	CA_2A_4A_30A	
2CC #16	CA_4A_71A	3CC #16	3CC #16	CA_2A_4A_71A	4CC #1
2CC #17	CA_5B	3CC #22	3CC #17	CA_41D	4CC #16
2CC #18	CA_5A_30A	3CC #23	3CC #18	CA_41A-41C	
2CC #19	CA_5A_41A		3CC #19	CA_66A-66C	
2CC #20	CA_5A_66A	3CC #40	3CC #20	CA_66A-66A-66A	
2CC #21	CA_12A_30A	3CC #24	3CC #21	CA_66C-71A	4CC #14
2CC #22	CA_12A_66A	3CC #25	3CC #22	CA_2A-5B	
2CC #23	CA_13A_66A	3CC #58	3CC #23	CA_2A-5A-30A	
2CC #24	CA_14A-30A	3CC #26	3CC #24	CA_2A-12A-30A	
2CC #25	CA_14A-66A	3CC #27	3CC #25	CA_2A-12A-66A	4CC #3
2CC #26	CA_25A_25A	3CC #53	3CC #26	CA_2A-14A-30A	
2CC #27	CA_25A_26A	3CC #53	3CC #27	CA_2A-14A-66A	4CC #4
2CC #28	CA_25A_41A		3CC #28	CA_2A-29A-30A	
2CC #29	CA_26A_41A		3CC #29	CA_2A-30A-66A	
2CC #30	CA_29A_30A	3CC #46	3CC #30	CA_2A-66B	4CC #6
2CC #31	CA_29A_66A	3CC #56	3CC #31	CA_2A-66C	4CC #7
2CC #32	CA_30A_66A	3CC #29	3CC #32	CA_2A-66A-66A	4CC #8
2CC #33	CA_41C	3CC #18	3CC #33	CA_2A-66A-71A	4CC #9
2CC #34	CA_41A_41A		3CC #34	CA_4A-4A-5A	
2CC #35	CA_66B	3CC #30	3CC #35	CA_4A-4A-12A	4CC #10
2CC #36	CA_66C	3CC #31	3CC #36	CA_4A-4A-29A	
2CC #37	CA_66A_66A	3CC #38	3CC #37	CA_4A-4A-30A	
2CC #38	CA_66A_71A	3CC #38	3CC #38	CA_66A-66A-71A	4CC #15
2CC #39	CA_2A-7A	3CC #41	3CC #39	CA_2A-5A-66A	4CC #11
2CC #40	CA_7A-7A	3CC #41	3CC #40	CA_5A-66A-66A	4CC #11
2CC #41	CA_2A-13A	3CC #59	3CC #41	CA_2A-7A-7A	
			3CC #42	CA_66A-66B	
			3CC #43	CA_4A-4A-71A	



			3CC #44	CA_4A-5A-30A	
			3CC #45	CA_4A-12A-30A	
			3CC #46	CA_4A-29A-30A	
			3CC #47	CA_5A-30A-66A	
			3CC #48	CA_12A-30A-66A	
			3CC #49	CA_12A-66C	4CC #12
			3CC #50	CA_12A-66A-66A	4CC #13
			3CC #51	CA_14A-30A-66A	
			3CC #52	CA_14A-66A-66A	
			3CC #53	CA_25A-25A-26A	
			3CC #54	CA_25A-41C	
			3CC #55	CA_26A-41C	
			3CC #56	CA_29A-66A-66A	
			3CC #57	CA_30A-66A-66A	
			3CC #58	CA_13A-66A-66A	
			3CC #59	CA_2A-2A-13A	
			3CC #60	CA_5B-66A	

4CC Downlink Carrier Aggregation		
Number	Combination	Covered by Measurement Superset
4CC #1	CA_2A-2A-4A-71A	
4CC #2	CA_2A-2A-5A-66A	
4CC #3	CA_2A-2A-12A-66A	
4CC #4	CA_2A-2A-14A-66A	
4CC #5	CA_2C-66A-66A	
4CC #6	CA_2A-2A-66B	
4CC #7	CA_2A-2A-66C	
4CC #8	CA_2A-2A-66A-66A	
4CC #9	CA_2A-2A-66A-71A	
4CC #10	CA_2A-4A-4A-12A	
4CC #11	CA_2A-5A-66A-66A	
4CC #12	CA_2A-12A-66C	
4CC #13	CA_2A-12A-66A-66A	
4CC #14	CA_2A-66C-71A	
4CC #15	CA_2A-66A-66A-71A	
4CC #16	CA_25A-41D	
4CC #17	CA_41C-41C	
4CC #18	CA_41A-41D	

4X4 MIMO	WWAN Band
	LTE Band: B2 / B4 / B7 / B25 / B30 / B41 / B66


LTE Carrier Aggregation Conducted Power (Downlink)

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For inter-band CA, the SCC selected highest bandwidth and near the middle of its transmission band. For SCC DL RB size and offset will base on the PCC corresponding RB allocation.
- vi. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vii. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

LTE Carrier Aggregation Conducted Power (Uplink)

1. This device supports uplink carrier aggregation for LTE CA_41C with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 Table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. For the non-contiguously allocated resource blocks which the MPR level is determined by various RB separation and RB sizes requirement, and the allowed MPR levels, settings and the conducted powers are permanently implemented in this device per the 3GPP 36.36.101 section 6.2.3A.1.3 requirements.
2. According to FCC guidance, the output power with uplink CA active was measured for the high / middle / low channel configuration with the highest reported SAR for each exposure condition, the power was measured with wideband signal integration over both component carriers.
3. In applying the power measurement procedures of KDB 941225 D05A for DL CA to qualify for UL SAR test exclusion, power measurement is required only for the subset in each row with the largest combination of frequency bands and CCs
4. Maximum output power measurement is required for each UL CA configuration for the required test channels described in KDB 941225 D05. The required test channel should be associated with the UL PCC. For channels at the ends of a frequency band, the SCC and subsequent CCs are added to the side within the transmission band. Otherwise, the CCs should be added alternatively to either side of the PCC.

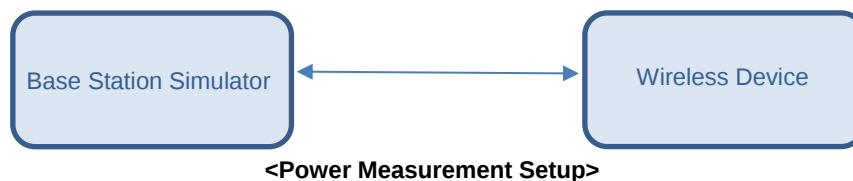

5G NR Output Power (Unit: dBm)

General Note:

1. 5G NR n2 / n5 / n25 / n66 / n71 / n41 is NSA mode.
2. 5G NR n2 / n25 / n66 / n71 / n41 also supports SA mode.
3. NR implementation of n2, n5, n25, n66, n71, and n41 is limited to EN-DC operations only (NSA), with LTE Bands 2/5/7/12/13/25/66 acting as anchor bands, SAR tests for NR Bands and LTE Anchors Bands were performed separately due to limitations in SAR probe calibration factors.
4. Following 5G NR n2/n5/n25/n66/n71 support SCS 15KHz DFT/CP-OFDM, PI/2 BPSK/QPSK/16QAM/64QAM/ 256QAM, Bandwidth 5M/10M/15M/20M.
5. Following 5G NR n41 support SCS 30KHz DFT/CP-OFDM, PI/2 BPSK/QPSK/16QAM/64QAM/256QAM, Bandwidth 20M/40M/50M/60M/80M/90M/100M.
6. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. For DFT-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class2 and 3, the CP-OFDM mode will not higher than DFT-OFDM mode, therefore, similar FCC KDB 941225 D05 procedure for other modulation output power for each RB allocation configuration is > not ½ dB higher than the same configuration in DFT-QPSK and the reported SAR for the DFT-QPSK configuration is ≤ 1.45 W/kg; CP-OFDM testing is not required.
 - b. For DFT-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class2 and 3, for 16QAM/64QAM/256QAM and smaller bandwidth output power will spot check largest channel bandwidth worst RB configuration to ensure the 16QAM/64QAM/256QAM and smaller bandwidth output power will not ½ dB higher than the same configuration in the largest supported bandwidth.
 - c. SAR testing start with the largest channel bandwidth and measure SAR for PI/2 BPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel
 - d. 50% RB allocation for PI/2 BPSK SAR testing follows 1RB PI/2 BPSK allocation procedure
 - e. PI/2 BPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested
 - f. QPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not ½ dB higher than the same configuration in PI/2 BPSK, also reported SAR for the PI/2 BPSK configuration is less than 1.45 W/kg, QPSK/16QAM/64QAM/256QAM SAR testing are not required.
 - g. Smaller bandwidth output power for each RB allocation configuration for this device will not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
7. Due to test setup limitations, SAR testing for NR was performed using Factory Test Mode software to establish the connection and perform SAR with 100% transmission.

<3GPP 38.101 MPR for EN-DC>
Table 6.2.2-1 Maximum power reduction (MPR) for power class 3

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	$\leq 3.5^1$	$\leq 1.2^1$	$\leq 0.2^1$
		$\leq 0.5^2$	$\leq 0.5^2$	0 ²
	QPSK		≤ 1	0
	16 QAM		≤ 2	≤ 1
	64 QAM		≤ 2.5	
CP-OFDM	256 QAM		≤ 4.5	
	QPSK	≤ 3		≤ 1.5
	16 QAM	≤ 3		≤ 2
	64 QAM		≤ 3.5	
	256 QAM		≤ 6.5	

NOTE 1: Applicable for UE operating in TDD mode with Pi/2 BPSK modulation and UE indicates support for UE capability powerBoosting-pi2BPSK and if the IE powerBoostPi2BPSK is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79. The reference power of 0 dB MPR is 26 dBm.

NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n41, n77, n78 and n79 with Pi/2 BPSK modulation and if the IE powerBoostPi2BPSK is set to 0 and if more than 40 % of slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79.

Table 6.2.2-2 Maximum power reduction (MPR) for power class 2

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	≤ 3.5	≤ 0.5	0
	QPSK	≤ 3.5	≤ 1	0
	16 QAM	≤ 3.5	≤ 2	≤ 1
	64 QAM	≤ 3.5	≤ 2.5	
	256 QAM		≤ 4.5	
CP-OFDM	QPSK	≤ 3.5	≤ 3	≤ 1.5
	16 QAM	≤ 3.5	≤ 3	≤ 2
	64 QAM		≤ 3.5	
	256 QAM		≤ 6.5	

EN-DC configuration	UL LTE UL LTE TX Ant	UL NR UL NR Ant	EN-DC configuration	EN-DC configuration
DC_2A_n5A	LTE2 Ant1	n5 Ant2	DC_2C_n41A	DC_2A-66A_n71A
DC_2A_n41A	LTE2 Ant2	n41 Ant1	DC_2C_n71A	DC_2A-66A_n25A
DC_2A_n66A	LTE2 Ant2	n66 Ant1	DC_2A-2A_n71A	DC_2A-66A_n41A
DC_2A_n71A	LTE2 Ant1	n71 Ant2	DC_2A-5A_n66A	DC_12A-66A_n25A
DC_5A_n2A	LTE5 Ant2	n2 Ant1	DC_2A-12A_n66A	DC_66A-66A_n71A
DC_5A_n66A	LTE5 Ant2	n66 Ant1	DC_2A-66A_n5A	DC_2A-7A_n71A
DC_12A_n2A	LTE12 Ant2	n2 Ant1	DC_2A_(n)71AA	DC_2A-66A_n66A
DC_12A_n25A		n25 Ant1	DC_12A-66A_n2A	DC_13A-66A-n66A
DC_12A_n66A	LTE12 Ant2	n66 Ant1	DC_66C_n71A	DC_66A-66A_n5A
DC_25A_n41A	LTE25 Ant2	n41 Ant1	DC_66A_(n)71AA	DC_13A-66A-66A_n2A
DC_66A_n5A	LTE66 Ant1	n5 Ant2	DC_2C-66A_n71A	DC_13A-66A-66A_n66A
DC_66A_n25A	LTE66 Ant1	n25 Ant2	DC_2A-2A-66A_n71A	DC_2A-2A-13A_n66A
DC_66A_n71A	LTE66 Ant1	n71 Ant2	DC_2A-66C_n71A	DC_2A-2A-5A_n66A
DC_66A_n41A	LTE66 Ant2	n41 Ant1	DC_66C_(n)71AA	DC_2A-2A-66A_n5A
DC_13A_n66A	LTE 13 Ant 1	n66 Ant3	DC_13A-66A_n2A	DC_2A-5B_n2A
DC_66A_n2A	LTE66 Ant2	n2 Ant1	DC_2A-13A_n2A	DC_2A-5B_n66A
DC_7A_n71A	LTE 7 Ant1	n71 Ant2	DC_2A-13A_n66A	DC_2A-66A-66A_n5A
DC_13A_n2A	LTE 13 Ant 1	n2 Ant3	DC_2A-2A_n5A	DC_5A-66A-66A_n2A
			DC_2A-5A_n2A	DC_5B-66A_n2A
			DC_5A-66A_n2A	DC_5B-66A_n66A
			DC_5A-66A_n66A	DC_66A-66A-66A_n5A
			DC_5B_n2A	DC_2A-2A-66A-66A_n5A
			DC_5B_n66A	

EDNC										
TX. freq.	ANT	Default	Head		Body worn		Hotspot		Handheld	
		max. tune up limit	max. tune up limit	power reduction (dB)	max. tune up limit	power reduction (dB)	max. tune up limit	power reduction (dB)	max. tune up limit	power reduction (dB)
LTE Band 2&25 ENDC	1	24.00	24.00		14.50	9.50	13.00	11.00	18.50	5.50
LTE Band 7 ENDC	1	24.00	24.00		15.00	9.00	12.00	12.00	18.50	5.50
LTE Band 13 ENDC	1	24.00	24.00		23.00	1.00	23.00	1.00	24.00	
LTE Band 66 ENDC	1	24.00	24.00		14.00	10.00	13.00	11.00	17.50	6.50
FR1 N2-ENDC	1	24.00	24.00		15.00	9.00	14.50	9.50	19.50	4.50
FR1 N66-ENDC	1	24.00	24.00		16.00	8.00	14.50	9.50	18.50	5.50
FR1 N41-Hpue-ENDC	1	27.00	27.00		14.00	13.00	12.00	15.00	14.50	12.50
LTE Band 5 ENDC	2	23.00	19.00	4.00	23.00		20.00	3.00	23.00	
LTE Band 12 ENDC	2	24.00	21.00	3.00	24.00		23.00	1.00	24.00	
LTE Band 25&2 ENDC	2	24.00	13.00	11.00	14.00	10.00	12.50	11.50	18.00	6.00
LTE Band 66 ENDC	2	24.00	12.00	12.00	14.00	10.00	12.50	11.50	17.00	7.00
FR1 N5-ENDC	2	24.00	21.50	2.50	22.00	2.00	21.00	3.00	24.00	
FR1 N25-ENDC	2	24.00	14.00	10.00	17.00	7.00	14.50	9.50	19.00	5.00
FR1 N71-ENDC	2	25.00	23.00	2.00	25.00		25.00		25.00	
FR1 N66-ENDC	3	24.00	18.50	5.50	18.00	6.00	18.00	6.00	24.00	
FR1 N2-ENDC	3	24.00	21.00	3.00	22.00	2.00	20.00	4.00	24.00	

Note:

1. For EN-DC component, LTE band 2/25/66 for ANT 2(top antenna) is limited to EN-DC active and they will act as anchor mode. When EN-DC is not active, LTE band 2/25/66 will not transmit.
2. For EN-DC component, FR1 N2/N66 for ANT 3 is limited to EN-DC active and they will act as anchor mode. When EN-DC is not active, FR1 N2/N66 will not transmit.

<WLAN Conducted Power>


General Note:

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle is 77.23 % as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation

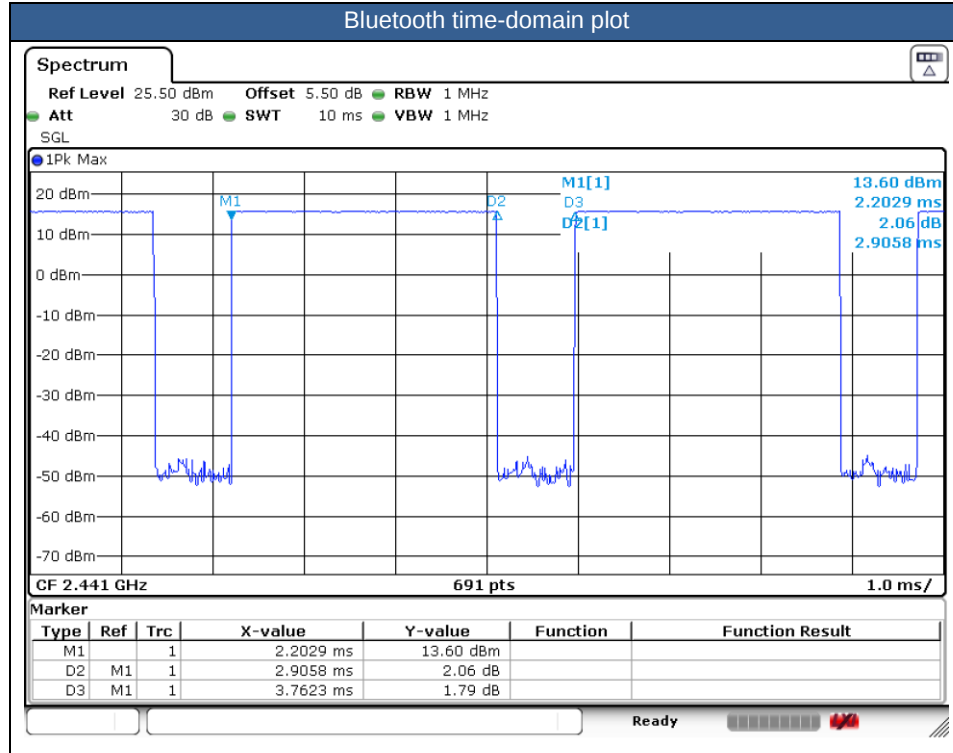



14. Antenna Location

The detailed antenna location information can refer to SAR Test Setup Photos.

15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For BT/WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. Per KDB648474 D04v01r03, when the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset. When headset SAR is less than or equal than without headset SAR, no need to verify the remaining channels for headset SAR.
5. The device implements Proximity sensors/receiver detect mechanism/hotspot trigger reduced power for the power management for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity).
6. The device will invoke corresponding work scenarios power level, which are provided in the operational description.
7. For Some WWAN bands, sensor on reduced power level higher than hotspot reduced power level, so front/back sensor on SAR can represent hotspot conservatively.
8. For WLAN when transmit simultaneous with WWAN LAT or UAT, power reduction will be activated to head / hotspot / body-worn / extremity.
9. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power (for handheld on state, the maximum full power means reduced power), including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
 - a. For this device SAR for WWAN/WLAN transmitter scaled to maximum output power mode for product specific 10g SAR is higher than 1.2W/kg of GSM1900, CDMA2000 BC1, WCDMA Band II/IV, LTE Band 2/4/7/25/30/38/41/66, 5GNR n2/n25/n66/n41 and WLAN 5.2/5.8GHz therefore product specific 10g SAR is necessary.
 - b. WLAN 5.3/5.5GHz tested the product specific 10g SAR since it has no hotspot mode.
 - c. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.
10. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed for body worn:

Front: [12 mm](#)
Back: [24 mm](#)
11. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed for handheld:

Front: [9 mm](#)
Back: [16 mm](#)
Bottom side: [17 mm](#)
Top Side: [17 mm](#)
12. The following table "n/a" means the measured SAR is too small to find the 1g cube SAR.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 3Tx slots for GSM850/GSM1900 are considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. This device supports HPUE for LTE band 41 with class 2 level, so HPUE SAR has been performed.
7. For LTE B4 / B5 / B12 / B17 / B26 / B38 / B71 and 5GNR n5 / n41 / n71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
8. LTE B2 / B4 / B5 / B17 / B38 SAR test was covered by LTE B25 / B66 / B26 / B12 / B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - c. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - d. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

WLAN/Bluetooth Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.
6. Based on WLAN 2.4GHz and Bluetooth share the same antenna, so Bluetooth RF exposure evaluation chose the worst position of WLAN 2.4GHz Ant to perform Bluetooth SAR test, and used this Bluetooth SAR value conservatively represent other position do co-located analysis with WWAN.

15.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850_Ant1	GPRS 3 Tx slots	Right Cheek	Full	189	836.4	27.84	28.50	1.164	0.01	0.138	0.161
	GSM850_Ant1	GPRS 3 Tx slots	Right Cheek	Full	128	824.2	27.83	28.50	1.167	0.02	0.091	0.106
	GSM850_Ant1	GPRS 3 Tx slots	Right Cheek	Full	251	848.8	27.35	28.50	1.303	-0.08	0.049	0.064
	GSM850_Ant1	GPRS 3 Tx slots	Right Tilted	Full	189	836.4	27.84	28.50	1.164	0.01	0.081	0.094
	GSM850_Ant1	GPRS 3 Tx slots	Left Cheek	Full	189	836.4	27.84	28.50	1.164	0.08	0.107	0.125
	GSM850_Ant1	GPRS 3 Tx slots	Left Tilted	Full	189	836.4	27.84	28.50	1.164	0.09	0.068	0.079
	GSM850_Ant2	GPRS 3 Tx slots	Right Cheek	Reduced	189	836.4	25.70	26.50	1.202	-0.01	0.423	0.509
	GSM850_Ant2	GPRS 3 Tx slots	Right Tilted	Reduced	189	836.4	25.70	26.50	1.202	0.02	0.438	0.527
01	GSM850_Ant2	GPRS 3 Tx slots	Left Cheek	Reduced	189	836.4	25.70	26.50	1.202	0.06	0.747	0.898
	GSM850_Ant2	GPRS 3 Tx slots	Left Cheek	Reduced	128	824.2	25.52	26.50	1.253	0.05	0.712	0.892
	GSM850_Ant2	GPRS 3 Tx slots	Left Cheek	Reduced	251	848.8	25.67	26.50	1.211	-0.05	0.732	0.886
	GSM850_Ant2	GPRS 3 Tx slots	Left Tilted	Reduced	189	836.4	25.70	26.50	1.202	0.01	0.544	0.654
	GSM1900_Ant1	GPRS 3 Tx slots	Right Cheek	Full	661	1880	25.22	26.00	1.197	-0.07	0.027	0.033
	GSM1900_Ant1	GPRS 3 Tx slots	Right Tilted	Full	661	1880	25.22	26.00	1.197	0.11	0.029	0.034
	GSM1900_Ant1	GPRS 3 Tx slots	Left Cheek	Full	661	1880	25.22	26.00	1.197	0.06	0.033	0.039
02	GSM1900_Ant1	GPRS 3 Tx slots	Left Cheek	Full	512	1850.2	24.79	26.00	1.321	0.08	0.031	0.041
	GSM1900_Ant1	GPRS 3 Tx slots	Left Cheek	Full	810	1909.8	25.21	26.00	1.199	0.04	0.028	0.034
	GSM1900_Ant1	GPRS 3 Tx slots	Left Tilted	Full	661	1880	25.22	26.00	1.197	0.09	0.033	0.039

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_Ant1	RMC 12.2Kbps	Right Cheek	Full	9400	1880	22.17	24.00	1.524	0.02	0.005	0.008
	WCDMA II_Ant1	RMC 12.2Kbps	Right Tilted	Full	9400	1880	22.17	24.00	1.524	0.04	0.001	0.002
	WCDMA II_Ant1	RMC 12.2Kbps	Left Cheek	Full	9400	1880	22.17	24.00	1.524	-0.06	0.013	0.020
	WCDMA II_Ant1	RMC 12.2Kbps	Left Tilted	Full	9400	1880	22.17	24.00	1.524	0.06	0.012	0.018
03	WCDMA II_Ant1	RMC 12.2Kbps	Left Cheek	Full	9262	1852.4	22.14	24.00	1.535	0.09	0.021	0.032
	WCDMA II_Ant1	RMC 12.2Kbps	Left Cheek	Full	9538	1907.6	22.03	24.00	1.574	0.07	0.015	0.024
	WCDMA IV_Ant1	RMC 12.2Kbps	Right Cheek	Full	1413	1732.6	22.35	24.00	1.462	0.11	0.046	0.067
	WCDMA IV_Ant1	RMC 12.2Kbps	Right Tilted	Full	1413	1732.6	22.35	24.00	1.462	0.06	0.037	0.054
	WCDMA IV_Ant1	RMC 12.2Kbps	Left Cheek	Full	1413	1732.6	22.35	24.00	1.462	0.04	0.057	0.083
	WCDMA IV_Ant1	RMC 12.2Kbps	Left Tilted	Full	1413	1732.6	22.35	24.00	1.462	0.01	0.044	0.064
04	WCDMA IV_Ant1	RMC 12.2Kbps	Left Cheek	Full	1312	1712.4	22.13	24.00	1.538	0.03	0.056	0.086
	WCDMA IV_Ant1	RMC 12.2Kbps	Left Cheek	Full	1513	1752.6	22.34	24.00	1.466	0.07	0.059	0.086
	WCDMA V_Ant1	RMC 12.2Kbps	Right Cheek	Full	4182	836.4	22.28	24.00	1.486	0.03	0.062	0.092
	WCDMA V_Ant1	RMC 12.2Kbps	Right Tilted	Full	4182	836.4	22.28	24.00	1.486	0.05	0.039	0.058
	WCDMA V_Ant1	RMC 12.2Kbps	Left Cheek	Full	4182	836.4	22.28	24.00	1.486	0.05	0.068	0.101
	WCDMA V_Ant1	RMC 12.2Kbps	Left Tilted	Full	4182	836.4	22.28	24.00	1.486	0.06	0.032	0.048
	WCDMA V_Ant1	RMC 12.2Kbps	Left Cheek	Full	4132	826.4	22.27	24.00	1.489	0.08	0.076	0.113
	WCDMA V_Ant1	RMC 12.2Kbps	Left Cheek	Full	4233	846.6	22.22	24.00	1.507	0.04	0.090	0.136
	WCDMA V_Ant2	RMC 12.2Kbps	Right Cheek	Reduced	4182	836.4	22.70	23.00	1.072	0.11	0.539	0.578
	WCDMA V_Ant2	RMC 12.2Kbps	Right Tilted	Reduced	4182	836.4	22.70	23.00	1.072	0.04	0.550	0.589
	WCDMA V_Ant2	RMC 12.2Kbps	Left Cheek	Reduced	4182	836.4	22.70	23.00	1.072	0.01	0.677	0.725
	WCDMA V_Ant2	RMC 12.2Kbps	Left Tilted	Reduced	4182	836.4	22.70	23.00	1.072	-0.06	0.717	0.768
05	WCDMA V_Ant2	RMC 12.2Kbps	Left Tilted	Reduced	4132	826.4	22.68	23.00	1.076	-0.09	0.798	0.859
	WCDMA V_Ant2	RMC 12.2Kbps	Left Tilted	Reduced	4233	846.6	22.59	23.00	1.099	-0.03	0.764	0.840

<CDMA SAR>

Plot No.	Band	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA2000 BC0_Ant1	RC3 SO55	Right Cheek	Full	384	836.52	24.16	25.00	1.213	0.06	0.082	0.099
	CDMA2000 BC0_Ant1	RC3 SO55	Right Tilted	Full	384	836.52	24.16	25.00	1.213	0.09	0.059	0.072
	CDMA2000 BC0_Ant1	RC3 SO55	Left Cheek	Full	384	836.52	24.16	25.00	1.213	0.06	0.145	0.176
	CDMA2000 BC0_Ant1	RC3 SO55	Left Tilted	Full	384	836.52	24.16	25.00	1.213	-0.08	0.045	0.055
	CDMA2000 BC0_Ant1	RC3 SO55	Left Cheek	Full	1013	824.7	24.12	25.00	1.225	0.07	0.087	0.107
	CDMA2000 BC0_Ant1	RC3 SO55	Left Cheek	Full	777	848.31	23.94	25.00	1.276	0.06	0.095	0.121
	CDMA2000 BC0_Ant2	RC3 SO55	Right Cheek	Reduced	384	836.52	23.70	24.00	1.072	0.08	0.734	0.786
	CDMA2000 BC0_Ant2	RC3 SO55	Right Tilted	Reduced	384	836.52	23.70	24.00	1.072	0.06	0.698	0.748
	CDMA2000 BC0_Ant2	RC3 SO55	Left Cheek	Reduced	384	836.52	23.70	24.00	1.072	0.02	0.921	0.987
	CDMA2000 BC0_Ant2	RC3 SO55	Left Tilted	Reduced	384	836.52	23.70	24.00	1.072	0.09	0.859	0.920
	CDMA2000 BC0_Ant2	RC3 SO55	Left Cheek	Reduced	1013	824.7	23.67	24.00	1.079	-0.06	0.796	0.859
06	CDMA2000 BC0_Ant2	RC3 SO55	Left Cheek	Reduced	777	848.31	23.45	24.00	1.135	0.08	1.040	1.180
	CDMA2000 BC1_Ant1	RC3 SO55	Right Cheek	Full	600	1880	24.14	25.00	1.219	0.05	0.049	0.060
	CDMA2000 BC1_Ant1	RC3 SO55	Right Tilted	Full	600	1880	24.14	25.00	1.219	0.04	0.044	0.053
07	CDMA2000 BC1_Ant1	RC3 SO55	Left Cheek	Full	600	1880	24.14	25.00	1.219	0.06	0.076	0.093
	CDMA2000 BC1_Ant1	RC3 SO55	Left Tilted	Full	600	1880	24.14	25.00	1.219	0.16	0.054	0.065
	CDMA2000 BC1_Ant1	RC3 SO55	Left Cheek	Full	25	1851.25	24.09	25.00	1.233	-0.09	0.044	0.055
	CDMA2000 BC1_Ant1	RC3 SO55	Left Cheek	Full	1175	1908.75	24.03	25.00	1.250	0.07	0.051	0.064
	CDMA2000 BC10_Ant1	RC3 SO55	Right Cheek	Full	580	820.5	24.40	25.00	1.148	0.01	0.151	0.173
	CDMA2000 BC10_Ant1	RC3 SO55	Right Tilted	Full	580	820.5	24.40	25.00	1.148	0.02	0.081	0.093
	CDMA2000 BC10_Ant1	RC3 SO55	Left Cheek	Full	580	820.5	24.40	25.00	1.148	0.07	0.101	0.116
	CDMA2000 BC10_Ant1	RC3 SO55	Left Tilted	Full	580	820.5	24.40	25.00	1.148	0.06	0.068	0.078
	CDMA2000 BC10_Ant1	RC3 SO55	Right Cheek	Full	476	817.9	23.99	25.00	1.262	0.05	0.145	0.183
	CDMA2000 BC10_Ant1	RC3 SO55	Right Cheek	Full	684	823.1	24.34	25.00	1.164	-0.04	0.157	0.183
	CDMA2000 BC10_Ant2	RC3 SO55	Right Cheek	Reduced	580	820.5	23.93	24.00	1.016	0.04	0.642	0.652
	CDMA2000 BC10_Ant2	RC3 SO55	Right Tilted	Reduced	580	820.5	23.93	24.00	1.016	0.06	0.590	0.600
08	CDMA2000 BC10_Ant2	RC3 SO55	Left Cheek	Reduced	580	820.5	23.93	24.00	1.016	-0.11	0.838	0.852
	CDMA2000 BC10_Ant2	RC3 SO55	Left Tilted	Reduced	580	820.5	23.93	24.00	1.016	-0.02	0.813	0.826
	CDMA2000 BC10_Ant2	RC3 SO55	Left Cheek	Reduced	476	817.9	23.70	24.00	1.072	-0.04	0.781	0.837
	CDMA2000 BC10_Ant2	RC3 SO55	Left Cheek	Reduced	684	823.1	23.84	24.00	1.038	0.08	0.760	0.789



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7_Ant1	20M	QPSK	1	0	Right Cheek	Full	21100	2535	22.45	24.00	1.429	0.07	0.051	0.073
	LTE Band 7_Ant1	20M	QPSK	50	0	Right Cheek	Full	21100	2535	21.34	23.00	1.466	-0.05	0.028	0.041
	LTE Band 7_Ant1	20M	QPSK	1	0	Right Tilted	Full	21100	2535	22.45	24.00	1.429	0.03	0.025	0.035
	LTE Band 7_Ant1	20M	QPSK	50	0	Right Tilted	Full	21100	2535	21.34	23.00	1.466	0.06	0.021	0.030
	LTE Band 7_Ant1	20M	QPSK	1	0	Left Cheek	Full	21100	2535	22.45	24.00	1.429	-0.04	0.034	0.049
	LTE Band 7_Ant1	20M	QPSK	50	0	Left Cheek	Full	21100	2535	21.34	23.00	1.466	0.08	0.028	0.041
	LTE Band 7_Ant1	20M	QPSK	1	0	Left Tilted	Full	21100	2535	22.45	24.00	1.429	0.06	0.014	0.020
	LTE Band 7_Ant1	20M	QPSK	50	0	Left Tilted	Full	21100	2535	21.34	23.00	1.466	-0.06	0.020	0.029
	LTE Band 7_Ant1	20M	QPSK	1	0	Right Cheek	Full	20850	2510	22.23	24.00	1.503	-0.05	0.050	0.075
09	LTE Band 7_Ant1	20M	QPSK	1	0	Right Cheek	Full	21350	2560	22.35	24.00	1.462	0.03	0.057	0.083
	LTE Band 12_Ant1	10M	QPSK	1	0	Right Cheek	Full	23095	707.5	22.95	24.00	1.274	0.04	0.141	0.180
	LTE Band 12_Ant1	10M	QPSK	25	0	Right Cheek	Full	23095	707.5	22.12	23.00	1.225	0.04	0.108	0.132
	LTE Band 12_Ant1	10M	QPSK	1	0	Right Tilted	Full	23095	707.5	22.95	24.00	1.274	0.09	0.078	0.099
	LTE Band 12_Ant1	10M	QPSK	25	0	Right Tilted	Full	23095	707.5	22.12	23.00	1.225	-0.03	0.065	0.080
	LTE Band 12_Ant1	10M	QPSK	1	0	Left Cheek	Full	23095	707.5	22.95	24.00	1.274	-0.06	0.121	0.154
	LTE Band 12_Ant1	10M	QPSK	25	0	Left Cheek	Full	23095	707.5	22.12	23.00	1.225	0.09	0.095	0.116
	LTE Band 12_Ant1	10M	QPSK	1	0	Left Tilted	Full	23095	707.5	22.95	24.00	1.274	0.07	0.072	0.092
	LTE Band 12_Ant1	10M	QPSK	25	0	Left Tilted	Full	23095	707.5	22.12	23.00	1.225	-0.05	0.059	0.072
	LTE Band 12_Ant2	10M	QPSK	1	0	Right Cheek	Full	23095	707.5	22.62	24.00	1.374	-0.01	0.430	0.591
	LTE Band 12_Ant2	10M	QPSK	25	0	Right Cheek	Full	23095	707.5	21.70	23.00	1.349	0.06	0.210	0.283
	LTE Band 12_Ant2	10M	QPSK	1	0	Right Tilted	Full	23095	707.5	22.62	24.00	1.374	-0.06	0.270	0.371
	LTE Band 12_Ant2	10M	QPSK	25	0	Right Tilted	Full	23095	707.5	21.70	23.00	1.349	0.07	0.201	0.271
	LTE Band 12_Ant2	10M	QPSK	1	0	Left Cheek	Full	23095	707.5	22.62	24.00	1.374	0.01	0.695	0.955
	LTE Band 12_Ant2	10M	QPSK	25	0	Left Cheek	Full	23095	707.5	21.70	23.00	1.349	0.01	0.537	0.724
	LTE Band 12_Ant2	10M	QPSK	50	0	Left Cheek	Full	23095	707.5	21.70	23.00	1.349	0.06	0.528	0.712
10	LTE Band 12_Ant2	10M	QPSK	1	0	Left Tilted	Full	23095	707.5	22.62	24.00	1.374	0.04	0.734	1.009
	LTE Band 12_Ant2	10M	QPSK	25	0	Left Tilted	Full	23095	707.5	21.70	23.00	1.349	0.08	0.568	0.766
	LTE Band 12_Ant2	10M	QPSK	50	0	Left Tilted	Full	23095	707.5	21.70	23.00	1.349	0.01	0.561	0.757
EN-DC															
	LTE Band 12_Ant2	10M	QPSK	1	0	Right Cheek	Reduced	23095	707.5	19.86	21.00	1.300	-0.06	0.289	0.376
	LTE Band 12_Ant2	10M	QPSK	25	0	Right Cheek	Reduced	23095	707.5	19.74	21.00	1.337	0.09	0.294	0.393
	LTE Band 12_Ant2	10M	QPSK	1	0	Right Tilted	Reduced	23095	707.5	19.86	21.00	1.300	-0.11	0.254	0.330
	LTE Band 12_Ant2	10M	QPSK	25	0	Right Tilted	Reduced	23095	707.5	19.74	21.00	1.337	0.08	0.257	0.344
	LTE Band 12_Ant2	10M	QPSK	1	0	Left Cheek	Reduced	23095	707.5	19.86	21.00	1.300	0.09	0.299	0.389
	LTE Band 12_Ant2	10M	QPSK	25	0	Left Cheek	Reduced	23095	707.5	19.74	21.00	1.337	0.08	0.318	0.425
	LTE Band 12_Ant2	10M	QPSK	1	0	Left Tilted	Reduced	23095	707.5	19.86	21.00	1.300	-0.08	0.317	0.412
	LTE Band 12_Ant2	10M	QPSK	25	0	Left Tilted	Reduced	23095	707.5	19.74	21.00	1.337	-0.09	0.322	0.430
11	LTE Band 13_Ant1	10M	QPSK	1	0	Right Cheek	Full	23230	782	22.58	24.00	1.387	-0.06	0.113	0.157
	LTE Band 13_Ant1	10M	QPSK	25	0	Right Cheek	Full	23230	782	22.1	23.00	1.230	0.08	0.084	0.103
	LTE Band 13_Ant1	10M	QPSK	1	0	Right Tilted	Full	23230	782	22.58	24.00	1.387	-0.01	0.054	0.075
	LTE Band 13_Ant1	10M	QPSK	25	0	Right Tilted	Full	23230	782	22.1	23.00	1.230	-0.11	0.047	0.058
	LTE Band 13_Ant1	10M	QPSK	1	0	Left Cheek	Full	23230	782	22.58	24.00	1.387	0.09	0.084	0.116
	LTE Band 13_Ant1	10M	QPSK	25	0	Left Cheek	Full	23230	782	22.1	23.00	1.230	0.06	0.075	0.092
	LTE Band 13_Ant1	10M	QPSK	1	0	Left Tilted	Full	23230	782	22.58	24.00	1.387	0.04	0.052	0.072
	LTE Band 13_Ant1	10M	QPSK	25	0	Left Tilted	Full	23230	782	22.1	23.00	1.230	0.09	0.037	0.046



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
12	LTE Band 14_Ant1	10M	QPSK	1	0	Right Cheek	Full	23330	793	23.09	24.00	1.233	0.02	0.142	0.175
	LTE Band 14_Ant1	10M	QPSK	25	0	Right Cheek	Full	23330	793	22.06	23.00	1.242	0.03	0.116	0.144
	LTE Band 14_Ant1	10M	QPSK	1	0	Right Tilted	Full	23330	793	23.09	24.00	1.233	0.01	0.086	0.106
	LTE Band 14_Ant1	10M	QPSK	25	0	Right Tilted	Full	23330	793	22.06	23.00	1.242	0.11	0.064	0.079
	LTE Band 14_Ant1	10M	QPSK	1	0	Left Cheek	Full	23330	793	23.09	24.00	1.233	0.09	0.127	0.157
	LTE Band 14_Ant1	10M	QPSK	25	0	Left Cheek	Full	23330	793	22.06	23.00	1.242	-0.08	0.110	0.137
	LTE Band 14_Ant1	10M	QPSK	1	0	Left Tilted	Full	23330	793	23.09	24.00	1.233	0.08	0.074	0.091
	LTE Band 14_Ant1	10M	QPSK	25	0	Left Tilted	Full	23330	793	22.06	23.00	1.242	0.11	0.056	0.070
	LTE Band25_Ant1	20M	QPSK	1	0	Right Cheek	Full	26340	1880	22.39	24.00	1.449	0.02	0.048	0.070
	LTE Band25_Ant1	20M	QPSK	50	0	Right Cheek	Full	26340	1880	21.33	23.00	1.469	0.06	0.021	0.031
	LTE Band25_Ant1	20M	QPSK	1	0	Right Tilted	Full	26340	1880	22.39	24.00	1.449	0.09	0.027	0.039
	LTE Band25_Ant1	20M	QPSK	50	0	Right Tilted	Full	26340	1880	21.33	23.00	1.469	0.07	0.013	0.019
	LTE Band25_Ant1	20M	QPSK	1	0	Left Cheek	Full	26340	1880	22.39	24.00	1.449	0.08	0.052	0.075
	LTE Band25_Ant1	20M	QPSK	50	0	Left Cheek	Full	26340	1880	21.33	23.00	1.469	0.04	0.042	0.062
	LTE Band25_Ant1	20M	QPSK	1	0	Left Tilted	Full	26340	1880	22.39	24.00	1.449	0.02	0.058	0.084
	LTE Band25_Ant1	20M	QPSK	50	0	Left Tilted	Full	26340	1880	21.33	23.00	1.469	0.01	0.026	0.038
	LTE Band25_Ant1	20M	QPSK	1	0	Left Tilted	Full	26140	1860	22.27	24.00	1.489	-0.06	0.064	0.096
	LTE Band25_Ant1	20M	QPSK	1	0	Left Tilted	Full	26590	1905	22.32	24.00	1.472	0.07	0.050	0.074
EN-DC															
	LTE Band25_Ant2	20M	QPSK	1	0	Right Cheek	Reduced	26340	1880	12.36	13.00	1.159	0.08	0.151	0.175
	LTE Band25_Ant2	20M	QPSK	50	0	Right Cheek	Reduced	26340	1880	12.34	13.00	1.164	0.04	0.152	0.177
	LTE Band25_Ant2	20M	QPSK	1	0	Right Tilted	Reduced	26340	1880	12.36	13.00	1.159	0.06	0.196	0.227
	LTE Band25_Ant2	20M	QPSK	50	0	Right Tilted	Reduced	26340	1880	12.34	13.00	1.164	-0.02	0.198	0.230
	LTE Band25_Ant2	20M	QPSK	1	0	Left Cheek	Reduced	26340	1880	12.36	13.00	1.159	0.03	0.300	0.348
	LTE Band25_Ant2	20M	QPSK	50	0	Left Cheek	Reduced	26340	1880	12.34	13.00	1.164	0.03	0.302	0.352
	LTE Band25_Ant2	20M	QPSK	1	0	Left Tilted	Reduced	26340	1880	12.36	13.00	1.159	-0.08	0.359	0.416
13	LTE Band25_Ant2	20M	QPSK	50	0	Left Tilted	Reduced	26340	1880	12.34	13.00	1.164	0.08	0.360	0.419
	LTE Band25_Ant2	20M	QPSK	50	0	Left Tilted	Reduced	26140	1860	12.27	13.00	1.183	0.06	0.330	0.390
	LTE Band25_Ant2	20M	QPSK	50	0	Left Tilted	Reduced	26590	1905	12.15	13.00	1.216	0.07	0.328	0.399
	LTE Band26_Ant1	15M	QPSK	1	0	Right Cheek	Full	26865	831.5	22.94	24.00	1.276	0.06	0.087	0.111
	LTE Band26_Ant1	15M	QPSK	36	0	Right Cheek	Full	26865	831.5	21.87	23.00	1.297	0.01	0.075	0.097
	LTE Band26_Ant1	15M	QPSK	1	0	Right Tilted	Full	26865	831.5	22.94	24.00	1.276	0.08	0.033	0.042
	LTE Band26_Ant1	15M	QPSK	36	0	Right Tilted	Full	26865	831.5	21.87	23.00	1.297	0.08	0.033	0.043
	LTE Band26_Ant1	15M	QPSK	1	0	Left Cheek	Full	26865	831.5	22.94	24.00	1.276	0.09	0.053	0.068
	LTE Band26_Ant1	15M	QPSK	36	0	Left Cheek	Full	26865	831.5	21.87	23.00	1.297	0.06	0.061	0.079
	LTE Band26_Ant1	15M	QPSK	1	0	Left Tilted	Full	26865	831.5	22.94	24.00	1.276	-0.01	0.034	0.043
	LTE Band26_Ant1	15M	QPSK	36	0	Left Tilted	Full	26865	831.5	21.87	23.00	1.297	0.04	0.031	0.040
	LTE Band26_Ant2	15M	QPSK	1	0	Right Cheek	Full	26865	831.5	22.70	24.00	1.349	0.01	0.725	0.978
	LTE Band26_Ant2	15M	QPSK	36	0	Right Cheek	Full	26865	831.5	21.57	23.00	1.390	0.02	0.545	0.758
	LTE Band26_Ant2	15M	QPSK	75	0	Right Cheek	Full	26865	831.5	21.48	23.00	1.419	0.05	0.512	0.727
	LTE Band26_Ant2	15M	QPSK	1	0	Right Tilted	Full	26865	831.5	22.70	24.00	1.349	0.16	0.715	0.965
	LTE Band26_Ant2	15M	QPSK	36	0	Right Tilted	Full	26865	831.5	21.57	23.00	1.390	0.06	0.546	0.759
	LTE Band26_Ant2	15M	QPSK	75	0	Right Tilted	Full	26865	831.5	21.48	23.00	1.419	0.02	0.532	0.755
14	LTE Band26_Ant2	15M	QPSK	1	0	Left Cheek	Full	26865	831.5	22.70	24.00	1.349	0.04	0.869	1.172
	LTE Band26_Ant2	15M	QPSK	36	0	Left Cheek	Full	26865	831.5	21.57	23.00	1.390	0.09	0.725	1.008
	LTE Band26_Ant2	15M	QPSK	75	0	Left Cheek	Full	26865	831.5	21.48	23.00	1.419	0.09	0.702	0.996
	LTE Band26_Ant2	15M	QPSK	1	0	Left Tilted	Full	26865	831.5	22.70	24.00	1.349	0.08	0.862	1.163
	LTE Band26_Ant2	15M	QPSK	36	0	Left Tilted	Full	26865	831.5	21.57	23.00	1.390	-0.01	0.735	1.022
	LTE Band26_Ant2	15M	QPSK	75	0	Left Tilted	Full	26865	831.5	21.48	23.00	1.419	0.04	0.721	1.023
EN-DC															
	LTE Band 5_Ant2	10M	QPSK	1	0	Right Cheek	Reduced	20525	836.5	18.36	19.00	1.159	0.09	0.252	0.292
	LTE Band 5_Ant2	10M	QPSK	25	0	Right Cheek	Reduced	20525	836.5	18.32	19.00	1.169	0.07	0.261	0.305
	LTE Band 5_Ant2	10M	QPSK	1	0	Right Tilted	Reduced	20525	836.5	18.36	19.00	1.159	0.04	0.257	0.298



FCC SAR Test Report

Report No. : FA082402

	LTE Band 5_Ant2	10M	QPSK	25	0	Right Tilted	Reduced	20525	836.5	18.32	19.00	1.169	0.06	0.271	0.317
	LTE Band 5_Ant2	10M	QPSK	1	0	Left Cheek	Reduced	20525	836.5	18.36	19.00	1.159	0.08	0.336	0.389
	LTE Band 5_Ant2	10M	QPSK	25	0	Left Cheek	Reduced	20525	836.5	18.32	19.00	1.169	-0.05	0.364	0.426
	LTE Band 5_Ant2	10M	QPSK	1	0	Left Tilted	Reduced	20525	836.5	18.36	19.00	1.159	-0.09	0.346	0.401
	LTE Band 5_Ant2	10M	QPSK	25	0	Left Tilted	Reduced	20525	836.5	18.32	19.00	1.169	-0.02	0.374	0.437

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band30_Ant1	10M	QPSK	1	0	Right Cheek	Full	27710	2310	21.7	23.00	1.349	0.06	0.010	0.013
	LTE Band30_Ant1	10M	QPSK	25	0	Right Cheek	Full	27710	2310	21.43	22.00	1.140	-0.08	0.008	0.009
	LTE Band30_Ant1	10M	QPSK	1	0	Right Tilted	Full	27710	2310	21.7	23.00	1.349	0.11	0.001	0.001
	LTE Band30_Ant1	10M	QPSK	25	0	Right Tilted	Full	27710	2310	21.43	22.00	1.140	0.08	0.001	0.001
15	LTE Band30_Ant1	10M	QPSK	1	0	Left Cheek	Full	27710	2310	21.7	23.00	1.349	0.05	0.011	0.015
	LTE Band30_Ant1	10M	QPSK	25	0	Left Cheek	Full	27710	2310	21.43	22.00	1.140	0.01	0.009	0.010
	LTE Band30_Ant1	10M	QPSK	1	0	Left Tilted	Full	27710	2310	21.7	23.00	1.349	0.08	0.008	0.011
	LTE Band30_Ant1	10M	QPSK	25	0	Left Tilted	Full	27710	2310	21.43	22.00	1.140	0.06	0.001	0.001
	LTE Band66_Ant1	20M	QPSK	1	0	Right Cheek	Full	132322	1745	22.57	24.00	1.390	0.04	0.077	0.107
	LTE Band66_Ant1	20M	QPSK	50	0	Right Cheek	Full	132322	1745	21.86	23.00	1.300	0.05	0.058	0.075
	LTE Band66_Ant1	20M	QPSK	1	0	Right Tilted	Full	132322	1745	22.57	24.00	1.390	0.02	0.064	0.089
	LTE Band66_Ant1	20M	QPSK	50	0	Right Tilted	Full	132322	1745	21.86	23.00	1.300	-	n/a	n/a
	LTE Band66_Ant1	20M	QPSK	1	0	Left Cheek	Full	132322	1745	22.57	24.00	1.390	0.09	0.082	0.114
	LTE Band66_Ant1	20M	QPSK	50	0	Left Cheek	Full	132322	1745	21.86	23.00	1.300	0.04	0.062	0.081
	LTE Band66_Ant1	20M	QPSK	1	0	Left Tilted	Full	132322	1745	22.57	24.00	1.390	0.12	0.068	0.095
	LTE Band66_Ant1	20M	QPSK	50	0	Left Tilted	Full	132322	1745	21.86	23.00	1.300	0.03	0.046	0.060
	LTE Band66_Ant1	20M	QPSK	1	0	Left Cheek	Full	132072	1720	22.45	24.00	1.429	0.09	0.065	0.093
	LTE Band66_Ant1	20M	QPSK	1	0	Left Cheek	Full	132572	1770	22.45	24.00	1.429	0.01	0.089	0.127
EN-DC															
	LTE Band66_Ant2	20M	QPSK	1	0	Right Cheek	Reduced	132322	1745	10.90	12.00	1.288	0.05	0.159	0.205
	LTE Band66_Ant2	20M	QPSK	50	0	Right Cheek	Reduced	132322	1745	10.82	12.00	1.312	-0.03	0.169	0.222
	LTE Band66_Ant2	20M	QPSK	1	0	Right Tilted	Reduced	132322	1745	10.90	12.00	1.288	0.08	0.196	0.252
	LTE Band66_Ant2	20M	QPSK	50	0	Right Tilted	Reduced	132322	1745	10.82	12.00	1.312	0.06	0.206	0.270
	LTE Band66_Ant2	20M	QPSK	1	0	Left Cheek	Reduced	132322	1745	10.90	12.00	1.288	0.03	0.322	0.415
	LTE Band66_Ant2	20M	QPSK	50	0	Left Cheek	Reduced	132322	1745	10.82	12.00	1.312	0.01	0.335	0.440
	LTE Band66_Ant2	20M	QPSK	1	0	Left Tilted	Reduced	132322	1745	10.90	12.00	1.288	0.02	0.338	0.435
16	LTE Band66_Ant2	20M	QPSK	50	0	Left Tilted	Reduced	132322	1745	10.82	12.00	1.312	0.09	0.358	0.470
	LTE Band66_Ant2	20M	QPSK	50	0	Left Tilted	Reduced	132072	1720	10.80	12.00	1.318	0.1	0.328	0.432
	LTE Band66_Ant2	20M	QPSK	50	0	Left Tilted	Reduced	132572	1770	10.70	12.00	1.349	0.06	0.331	0.447
	LTE Band71_Ant1	20M	QPSK	1	0	Right Cheek	Full	133322	683	22.89	24.00	1.291	0.17	0.134	0.173
	LTE Band71_Ant1	20M	QPSK	50	0	Right Cheek	Full	133322	683	21.83	23.00	1.309	0.06	0.118	0.154
	LTE Band71_Ant1	20M	QPSK	1	0	Right Tilted	Full	133322	683	22.89	24.00	1.291	0.08	0.073	0.094
	LTE Band71_Ant1	20M	QPSK	50	0	Right Tilted	Full	133322	683	21.83	23.00	1.309	0.04	0.050	0.065
	LTE Band71_Ant1	20M	QPSK	1	0	Left Cheek	Full	133322	683	22.89	24.00	1.291	0.09	0.131	0.169
	LTE Band71_Ant1	20M	QPSK	50	0	Left Cheek	Full	133322	683	21.83	23.00	1.309	0.05	0.110	0.144
	LTE Band71_Ant1	20M	QPSK	1	0	Left Tilted	Full	133322	683	22.89	24.00	1.291	0.06	0.063	0.081
	LTE Band71_Ant1	20M	QPSK	50	0	Left Tilted	Full	133322	683	21.83	23.00	1.309	-0.04	0.039	0.051
	LTE Band71_Ant2	20M	QPSK	1	0	Right Cheek	Full	133322	683	22.46	24.00	1.426	0.09	0.380	0.542
	LTE Band71_Ant2	20M	QPSK	50	0	Right Cheek	Full	133322	683	21.57	23.00	1.390	0.04	0.330	0.459
	LTE Band71_Ant2	20M	QPSK	1	0	Right Tilted	Full	133322	683	22.46	24.00	1.426	0.08	0.388	0.553
	LTE Band71_Ant2	20M	QPSK	50	0	Right Tilted	Full	133322	683	21.57	23.00	1.390	-0.06	0.332	0.461
	LTE Band71_Ant2	20M	QPSK	1	0	Left Cheek	Full	133322	683	22.46	24.00	1.426	0.06	0.529	0.754
	LTE Band71_Ant2	20M	QPSK	50	0	Left Cheek	Full	133322	683	21.57	23.00	1.390	0.05	0.452	0.628
17	LTE Band71_Ant2	20M	QPSK	1	0	Left Tilted	Full	133322	683	22.46	24.00	1.426	-0.08	0.606	0.864
	LTE Band71_Ant2	20M	QPSK	50	0	Left Tilted	Full	133322	683	21.57	23.00	1.390	0.15	0.503	0.699
	LTE Band71_Ant2	20M	QPSK	100	0	Left Tilted	Full	133322	683	21.56	23.00	1.393	0.01	0.488	0.680

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : IHDT56ZF2

Page 68 of 135

Issued Date : Dec. 04, 2020

Form version. : 181113



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band41_Ant1	20M	QPSK	1	0	Right Cheek	Full	40620	2593	22.68	24.00	1.355	62.9	1.006	0.03	0.032	0.044
	LTE Band41C_Ant1	20M	QPSK	1	0	Right Cheek	Full	40620+40422	2593+2573.2	22.27	24.00	1.489	62.9	1.006	0.01	0.026	0.039
	LTE Band41_Ant1	20M	QPSK	50	0	Right Cheek	Full	40620	2593	21.70	23.00	1.349	62.9	1.006	0.05	0.031	0.041
	LTE Band41_Ant1	20M	QPSK	1	0	Right Tilted	Full	40620	2593	22.68	24.00	1.355	62.9	1.006	0.08	0.023	0.031
	LTE Band41_Ant1	20M	QPSK	50	0	Right Tilted	Full	40620	2593	21.70	23.00	1.349	62.9	1.006	-0.15	0.019	0.026
	LTE Band41_Ant1	20M	QPSK	1	0	Left Cheek	Full	40620	2593	22.68	24.00	1.355	62.9	1.006	-0.03	0.022	0.030
	LTE Band41_Ant1	20M	QPSK	50	0	Left Cheek	Full	40620	2593	21.70	23.00	1.349	62.9	1.006	-0.11	0.016	0.022
	LTE Band41_Ant1	20M	QPSK	1	0	Left Tilted	Full	40620	2593	22.68	24.00	1.355	62.9	1.006	-0.1	0.023	0.031
	LTE Band41_Ant1	20M	QPSK	50	0	Left Tilted	Full	40620	2593	21.70	23.00	1.349	62.9	1.006	-0.07	0.018	0.024
	LTE Band41_Ant1	20M	QPSK	1	0	Right Cheek	Full	39750	2506	22.43	24.00	1.435	62.9	1.006	0.06	0.028	0.040
	LTE Band41_Ant1	20M	QPSK	1	0	Right Cheek	Full	41490	2680	22.47	24.00	1.422	62.9	1.006	0.16	0.023	0.033
	LTE Band41_Ant1	20M	QPSK	1	0	Right Cheek	Full	40185	2549.5	22.54	24.00	1.400	62.9	1.006	0.02	0.019	0.027
	LTE Band41_Ant1	20M	QPSK	1	0	Right Cheek	Full	41055	2636.5	22.50	24.00	1.413	62.9	1.006	0.06	0.031	0.044
18	LTE Band41_Ant1-HPUE	20M	QPSK	1	0	Right Cheek	Full	40620	2593	25.53	27.00	1.403	42.9	1.009	-0.08	0.044	0.062
	LTE Band41_Ant1-HPUE	20M	QPSK	1	0	Right Cheek	Full	39750	2506	25.47	27.00	1.422	42.9	1.009	-0.05	0.032	0.046
	LTE Band41_Ant1-HPUE	20M	QPSK	1	0	Right Cheek	Full	40185	2549.5	25.21	27.00	1.510	42.9	1.009	-0.01	0.033	0.050
	LTE Band41_Ant1-HPUE	20M	QPSK	1	0	Right Cheek	Full	41055	2636.5	25.37	27.00	1.455	42.9	1.009	0.01	0.031	0.046
	LTE Band41_Ant1-HPUE	20M	QPSK	1	0	Right Cheek	Full	41490	2680	25.30	27.00	1.479	42.9	1.009	-0.12	0.030	0.045



<5GNR SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n5_Ant2 EN-DC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Cheek	Reduced	167300	836.5	21.30	21.50	1.047	-0.01	0.236	0.247
	FR1 n5_Ant2 EN-DC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Right Cheek	Reduced	167300	836.5	21.27	21.50	1.054	0.01	0.283	0.298
	FR1 n5_Ant2 EN-DC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Tilted	Reduced	167300	836.5	21.30	21.50	1.047	0.01	0.213	0.223
19	FR1 n5_Ant2 EN-DC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Right Tilted	Reduced	167300	836.5	21.27	21.50	1.054	0.03	0.328	0.346
	FR1 n5_Ant2 EN-DC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Left Cheek	Reduced	167300	836.5	21.30	21.50	1.047	0.08	0.320	0.335
	FR1 n5_Ant2 EN-DC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Left Cheek	Reduced	167300	836.5	21.27	21.50	1.054	0.04	0.281	0.296
	FR1 n5_Ant2 EN-DC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Left Tilted	Reduced	167300	836.5	21.30	21.50	1.047	0.09	0.277	0.290
	FR1 n5_Ant2 EN-DC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Left Tilted	Reduced	167300	836.5	21.27	21.50	1.054	-0.08	0.272	0.287
	FR1 n25&2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Cheek	Full	376500	1882.5	23.39	24.00	1.151	0.01	0.048	0.056
	FR1 n25&2_Ant1	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Right Cheek	Full	376500	1882.5	23.01	24.00	1.256	-0.04	0.042	0.053
	FR1 n25&2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Tilted	Full	376500	1882.5	23.39	24.00	1.151	0.02	0.036	0.041
	FR1 n25&2_Ant1	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Right Tilted	Full	376500	1882.5	23.01	24.00	1.256	-0.05	0.032	0.040
	FR1 n25&2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Left Cheek	Full	376500	1882.5	23.39	24.00	1.151	0.09	0.068	0.078
	FR1 n25&2_Ant1	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Left Cheek	Full	376500	1882.5	23.01	24.00	1.256	-0.08	0.059	0.074
	FR1 n25&2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Left Tilted	Full	376500	1882.5	23.39	24.00	1.151	0.05	0.068	0.078
	FR1 n25&2_Ant1	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Left Tilted	Full	376500	1882.5	23.01	24.00	1.256	0.06	0.065	0.082
	FR1 n25&2_Ant1	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Left Tilted	Full	372000	1860	22.97	24.00	1.268	0.09	0.071	0.090
	FR1 n25&2_Ant1	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Left Tilted	Full	381000	1905	22.67	24.00	1.358	0.11	0.065	0.088
	FR1 n25_Ant2 EN-DC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Cheek	Reduced	376500	1882.5	13.23	14.00	1.194	-0.01	0.131	0.156
	FR1 n25_Ant2 EN-DC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Right Cheek	Reduced	376500	1882.5	13.02	14.00	1.253	0.08	0.139	0.174
	FR1 n25_Ant2 EN-DC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Tilted	Reduced	376500	1882.5	13.23	14.00	1.194	0.03	0.165	0.197
	FR1 n25_Ant2 EN-DC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Right Tilted	Reduced	376500	1882.5	13.02	14.00	1.253	0.05	0.185	0.232
	FR1 n25_Ant2 EN-DC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Left Cheek	Reduced	376500	1882.5	13.23	14.00	1.194	0.07	0.292	0.349
	FR1 n25_Ant2 EN-DC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Left Cheek	Reduced	376500	1882.5	13.02	14.00	1.253	-0.16	0.283	0.355
	FR1 n25_Ant2 EN-DC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Left Tilted	Reduced	376500	1882.5	13.23	14.00	1.194	0.06	0.329	0.393
	FR1 n25_Ant2 EN-DC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Left Tilted	Reduced	376500	1882.5	13.02	14.00	1.253	0.09	0.328	0.411
20	FR1 n25_Ant2 EN-DC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Left Tilted	Reduced	372000	1860	13.04	14.00	1.247	0.04	0.471	0.588
	FR1 n25_Ant2 EN-DC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Left Tilted	Reduced	381000	1905	13.10	14.00	1.230	0.06	0.297	0.365
	FR1 n2_Ant3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Cheek	Reduced	376000	1880	20.92	21.00	1.019	0.03	0.490	0.499
	FR1 n2_Ant3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Right Cheek	Reduced	376000	1880	20.79	21.00	1.050	-0.02	0.488	0.512
	FR1 n2_Ant3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Tilted	Reduced	376000	1880	20.92	21.00	1.019	0.01	0.482	0.491
	FR1 n2_Ant3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Right Tilted	Reduced	376000	1880	20.79	21.00	1.050	0.11	0.487	0.511
	FR1 n2_Ant3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Left Cheek	Reduced	376000	1880	20.92	21.00	1.019	0.08	0.343	0.349
	FR1 n2_Ant3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Left Cheek	Reduced	376000	1880	20.79	21.00	1.050	0.06	0.345	0.362
	FR1 n2_Ant3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Left Tilted	Reduced	376000	1880	20.92	21.00	1.019	0.03	0.349	0.355
	FR1 n2_Ant3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Left Tilted	Reduced	376000	1880	20.79	21.00	1.050	0.03	0.356	0.374
	FR1 n2_Ant3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Right Cheek	Reduced	372000	1860	20.57	21.00	1.104	-0.10	0.507	0.560
	FR1 n2_Ant3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Right Cheek	Reduced	380000	1900	20.37	21.00	1.156	0.02	0.456	0.527
	FR1 n41 Ant1-HPUE	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Right Cheek	Full	518598	2592.99	26.30	27.00	1.175	0.04	0.082	0.096
21	FR1 n41 Ant1-HPUE	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Right Cheek	Full	518598	2592.99	26.22	27.00	1.197	-0.03	0.084	0.101
	FR1 n41 Ant1-HPUE	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Right Tilted	Full	518598	2592.99	26.30	27.00	1.175	0.04	0.050	0.059
	FR1 n41 Ant1-HPUE	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Right Tilted	Full	518598	2592.99	26.22	27.00	1.197	0.01	0.042	0.050
	FR1 n41 Ant1-HPUE	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Left Cheek	Full	518598	2592.99	26.30	27.00	1.175	0.06	0.071	0.083
	FR1 n41 Ant1-HPUE	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Left Cheek	Full	518598	2592.99	26.22	27.00	1.197	0.09	0.069	0.083
	FR1 n41 Ant1-HPUE	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Left Tilted	Full	518598	2592.99	26.30	27.00	1.175	0.05	0.054	0.063
	FR1 n41 Ant1-HPUE	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Left Tilted	Full	518598	2592.99	26.22	27.00	1.197	0.06	0.073	0.087
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Cheek	Full	349000	1745	23.70	24.00	1.072	0.01	0.083	0.089
	FR1 n66_Ant1	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Right Cheek	Full	349000	1745	23.24	24.00	1.191	0.04	0.063	0.075
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Tilted	Full	349000	1745	23.70	24.00	1.072	0.05	0.063	0.068
	FR1 n66_Ant1	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Right Tilted	Full	349000	1745	23.24	24.00	1.191	0.06	0.047	0.056
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Left Cheek	Full	349000	1745	23.70	24.00	1.072	-0.04	0.069	0.074
	FR1 n66_Ant1	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Left Cheek	Full	349000	1745	23.24	24.00	1.191	0.04	0.066	0.079
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Left Tilted	Full	349000	1745	23.70	24.00	1.072	0.09	0.072	0.077
	FR1 n66_Ant1	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Left Tilted	Full	349000	1745	23.24	24.00	1.191	0.07	0.051	0.061
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Cheek	Full	344000	1720	23.53	24.00	1.114	0.04	0.083	0.092
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Cheek	Full	354000	1770	23.64	24.00	1.086	0.09	0.080	0.087
	FR1 n66_Ant 3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Cheek	Reduced	349000	1745	17.56	18.50	1.242	0.08	0.380	0.472
22	FR1 n66_Ant 3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Right Cheek	Reduced	349000	1745	17.28	18.50	1.324	0.01	0.388	0.514



FCC SAR Test Report

Report No. : FA082402

FR1 n66_Ant 3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Tilted	Reduced	349000	1745	17.56	18.50	1.242	-0.13	0.367	0.456
FR1 n66_Ant 3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Right Tilted	Reduced	349000	1745	17.28	18.50	1.324	0.08	0.366	0.485
FR1 n66_Ant 3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Left Cheek	Reduced	349000	1745	17.56	18.50	1.242	0.07	0.265	0.329
FR1 n66_Ant 3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Left Cheek	Reduced	349000	1745	17.28	18.50	1.324	-0.05	0.254	0.336
FR1 n66_Ant 3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Left Tilted	Reduced	349000	1745	17.56	18.50	1.242	0.04	0.341	0.423
FR1 n66_Ant 3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Left Tilted	Reduced	349000	1745	17.28	18.50	1.324	0.02	0.305	0.404
FR1 n66_Ant 3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Cheek	Reduced	344000	1720	17.43	18.50	1.279	-0.05	0.379	0.485
FR1 n66_Ant 3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Cheek	Reduced	354000	1770	17.50	18.50	1.259	0.02	0.390	0.491

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n71_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Cheek	Full	136100	680.5	23.43	24.00	1.140	0.07	0.069	0.079
	FR1 n71_Ant1	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Right Cheek	Full	136100	680.5	23.46	24.00	1.132	0.05	0.074	0.084
	FR1 n71_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Tilted	Full	136100	680.5	23.43	24.00	1.140	0.02	0.051	0.058
	FR1 n71_Ant1	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Right Tilted	Full	136100	680.5	23.46	24.00	1.132	0.02	0.046	0.052
	FR1 n71_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Left Cheek	Full	136100	680.5	23.43	24.00	1.140	0.09	0.075	0.086
	FR1 n71_Ant1	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Left Cheek	Full	136100	680.5	23.46	24.00	1.132	-0.06	0.087	0.099
	FR1 n71_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Left Tilted	Full	136100	680.5	23.43	24.00	1.140	0.02	0.059	0.067
	FR1 n71_Ant1	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Left Tilted	Full	136100	680.5	23.46	24.00	1.132	-0.07	0.065	0.074
	FR1 n71_Ant2	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Cheek	Reduced	136100	680.5	22.95	23.00	1.012	0.08	0.254	0.257
	FR1 n71_Ant2	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Right Cheek	Reduced	136100	680.5	22.74	23.00	1.062	0.08	0.247	0.262
	FR1 n71_Ant2	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Tilted	Reduced	136100	680.5	22.95	23.00	1.012	0.06	0.232	0.235
	FR1 n71_Ant2	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Right Tilted	Reduced	136100	680.5	22.74	23.00	1.062	-0.11	0.269	0.286
	FR1 n71_Ant2	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Left Cheek	Reduced	136100	680.5	22.95	23.00	1.012	-0.06	0.381	0.385
23	FR1 n71_Ant2	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Left Cheek	Reduced	136100	680.5	22.74	23.00	1.062	0.11	0.423	0.449
	FR1 n71_Ant2	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Left Tilted	Reduced	136100	680.5	22.95	23.00	1.012	0.01	0.344	0.348
	FR1 n71_Ant2	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Left Tilted	Reduced	136100	680.5	22.74	23.00	1.062	0.15	0.409	0.434

<WLAN2.4G SAR>

Plot No.	Band	Mode	Test Position	Antenna	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	Ant 3+6	Full	1	2412	22.35	23.00	1.162	100	1.000	0.01	0.342	0.397
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	Ant 3+6	Full	1	2412	22.35	23.00	1.162	100	1.000	0.07	0.146	0.170
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Ant 3+6	Full	1	2412	22.35	23.00	1.162	100	1.000	0.08	0.249	0.289
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	Ant 3+6	Full	1	2412	22.35	23.00	1.162	100	1.000	0.02	0.087	0.101
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	Ant 3+6	Simultaneous Reduced	1	2412	19.21	20.00	1.199	100	1.000	0.06	0.168	0.202
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	Ant 3+6	Simultaneous Reduced	1	2412	19.21	20.00	1.199	100	1.000	0.01	0.075	0.090
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Ant 3+6	Simultaneous Reduced	1	2412	19.21	20.00	1.199	100	1.000	0.05	0.126	0.151
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	Ant 3+6	Simultaneous Reduced	1	2412	19.21	20.00	1.199	100	1.000	0.01	0.157	0.188
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	Ant 3+6	Full	6	2437	22.27	23.00	1.182	100	1.000	0.05	0.401	0.474
24	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	Ant 3+6	Full	11	2462	21.84	23.00	1.306	100	1.000	0.01	0.432	0.564

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : IHDT56ZF2

Page 71 of 135

Issued Date : Dec. 04, 2020

Form version. : 181113



<WLAN5G SAR>

Plot No.	Band	Mode	Test Position	Antenna	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.3GHz	802.11a 6Mbps	Right Cheek	Ant 5+6	Full	56	5280	21.15	22.00	1.216	97.94	1.021	0.07	0.146	0.181
	WLAN5.3GHz	802.11a 6Mbps	Right Tilted	Ant 5+6	Full	56	5280	21.15	22.00	1.216	97.94	1.021	0.06	0.206	0.256
	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	Ant 5+6	Full	56	5280	21.15	22.00	1.216	97.94	1.021	0.09	0.095	0.118
	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	Ant 5+6	Full	56	5280	21.15	22.00	1.216	97.94	1.021	0.11	0.163	0.202
	WLAN5.3GHz	802.11a 6Mbps	Right Tilted	Ant 5+6	Full	52	5260	20.14	22.00	1.535	97.94	1.021	0.09	0.231	0.362
25	WLAN5.3GHz	802.11a 6Mbps	Right Tilted	Ant 5+6	Full	60	5300	20.20	22.00	1.514	97.94	1.021	0.09	0.297	0.459
	WLAN5.3GHz	802.11a 6Mbps	Right Tilted	Ant 5+6	Full	64	5320	20.30	22.00	1.479	97.94	1.021	0.06	0.223	0.337
	WLAN5.5GHz	802.11a 6Mbps	Right Cheek	Ant 5+6	Full	132	5660	22.44	23.00	1.138	97.94	1.021	0.03	0.233	0.271
	WLAN5.5GHz	802.11a 6Mbps	Right Tilted	Ant 5+6	Full	132	5660	22.44	23.00	1.138	97.94	1.021	0.07	0.304	0.353
	WLAN5.5GHz	802.11a 6Mbps	Left Cheek	Ant 5+6	Full	132	5660	22.44	23.00	1.138	97.94	1.021	0.01	0.155	0.180
	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	Ant 5+6	Full	132	5660	22.44	23.00	1.138	97.94	1.021	0.11	0.241	0.280
26	WLAN5.5GHz	802.11a 6Mbps	Right Tilted	Ant 5+6	Full	100	5500	20.57	21.00	1.104	97.94	1.021	0.04	0.319	0.360
	WLAN5.5GHz	802.11a 6Mbps	Right Tilted	Ant 5+6	Full	140	5700	20.67	21.00	1.079	97.94	1.021	0.11	0.286	0.315
	WLAN5.8GHz	802.11a 6Mbps	Right Cheek	Ant 5+6	Full	157	5785	22.24	23.00	1.190	97.94	1.021	0.05	0.256	0.311
	WLAN5.8GHz	802.11a 6Mbps	Right Tilted	Ant 5+6	Full	157	5785	22.24	23.00	1.190	97.94	1.021	0.06	0.363	0.441
	WLAN5.8GHz	802.11a 6Mbps	Left Cheek	Ant 5+6	Full	157	5785	22.24	23.00	1.190	97.94	1.021	0.08	0.253	0.307
	WLAN5.8GHz	802.11a 6Mbps	Left Tilted	Ant 5+6	Full	157	5785	22.24	23.00	1.190	97.94	1.021	0.09	0.286	0.348
	WLAN5.8GHz	802.11a 6Mbps	Right Cheek	Ant 5+6	Simultaneous Reduced	157	5785	20.14	21.00	1.219	97.94	1.021	-0.01	0.211	0.263
	WLAN5.8GHz	802.11a 6Mbps	Right Tilted	Ant 5+6	Simultaneous Reduced	157	5785	20.14	21.00	1.219	97.94	1.021	0.04	0.271	0.337
	WLAN5.8GHz	802.11a 6Mbps	Left Cheek	Ant 5+6	Simultaneous Reduced	157	5785	20.14	21.00	1.219	97.94	1.021	0.06	0.143	0.178
	WLAN5.8GHz	802.11a 6Mbps	Left Tilted	Ant 5+6	Simultaneous Reduced	157	5785	20.14	21.00	1.219	97.94	1.021	0.09	0.195	0.243
27	WLAN5.8GHz	802.11a 6Mbps	Right Tilted	Ant 5+6	Full	149	5745	22.15	23.00	1.215	97.94	1.021	-0.02	0.404	0.501
	WLAN5.8GHz	802.11a 6Mbps	Right Tilted	Ant 5+6	Full	165	5825	22.07	23.00	1.239	97.94	1.021	0.08	0.387	0.490

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Antenna	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	Ant 3	Full	0	2402	16.86	17.5	1.158	77.23	1.079	0.07	0.185	0.231
	Bluetooth	1Mbps	Right Cheek	Ant 3	Full	39	2441	16.95	17.5	1.134	77.23	1.079	0.08	0.159	0.195
28	Bluetooth	1Mbps	Right Cheek	Ant 3	Full	78	2480	15.90	17.5	1.445	77.23	1.079	0.02	0.151	0.235

15.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850_Ant1	GPRS 3 Tx slots	Front	5mm	Full	189	836.4	27.84	28.50	1.164	0.01	0.311	0.362
	GSM850_Ant1	GPRS 3 Tx slots	Back	5mm	Full	189	836.4	27.84	28.50	1.164	0.03	0.494	0.575
	GSM850_Ant1	GPRS 3 Tx slots	Back	5mm	Full	128	824.2	27.83	28.50	1.167	0.05	0.515	0.601
	GSM850_Ant1	GPRS 3 Tx slots	Back	5mm	Full	251	848.8	27.35	28.50	1.303	-0.03	0.603	0.786
	GSM850_Ant1	GPRS 3 Tx slots	Left Side	5mm	Full	189	836.4	27.84	28.50	1.164	0.04	0.083	0.097
	GSM850_Ant1	GPRS 3 Tx slots	Right Side	5mm	Full	189	836.4	27.84	28.50	1.164	0.16	0.120	0.140
	GSM850_Ant1	GPRS 3 Tx slots	Bottom Side	5mm	Full	189	836.4	27.84	28.50	1.164	0.09	0.461	0.537
	GSM850_Ant2	GPRS 3 Tx slots	Front	5mm	Full	189	836.4	27.43	28.50	1.279	0.11	0.426	0.545
	GSM850_Ant2	GPRS 3 Tx slots	Back	5mm	Full	189	836.4	27.43	28.50	1.279	-0.01	0.523	0.669
	GSM850_Ant2	GPRS 3 Tx slots	Back	5mm	Full	128	824.2	27.06	28.50	1.393	0.08	0.467	0.651
	GSM850_Ant2	GPRS 3 Tx slots	Back	5mm	Full	251	848.8	27.01	28.50	1.409	0.04	0.501	0.706
	GSM850_Ant2	GPRS 3 Tx slots	Left Side	5mm	Full	189	836.4	27.43	28.50	1.279	0.06	0.176	0.225
	GSM850_Ant2	GPRS 3 Tx slots	Right Side	5mm	Full	189	836.4	27.43	28.50	1.279	0.08	0.276	0.353
	GSM850_Ant2	GPRS 3 Tx slots	Top Side	5mm	Full	189	836.4	27.43	28.50	1.279	0.09	0.799	1.022
29	GSM850_Ant2	GPRS 3 Tx slots	Top Side	5mm	Full	128	824.2	27.06	28.50	1.393	-0.01	0.809	1.127
	GSM850_Ant2	GPRS 3 Tx slots	Top Side	5mm	Full	251	848.8	27.01	28.50	1.409	-0.06	0.685	0.965
	GSM1900_Ant1	GPRS 3 Tx slots	Front	5mm	Reduced	661	1880	23.33	24.00	1.167	-0.05	0.657	0.767
	GSM1900_Ant1	GPRS 3 Tx slots	Back	5mm	Reduced	661	1880	23.33	24.00	1.167	0.04	1.040	1.213
	GSM1900_Ant1	GPRS 3 Tx slots	Back	5mm	Reduced	512	1850.2	23.2	24.00	1.202	0.06	0.924	1.111
30	GSM1900_Ant1	GPRS 3 Tx slots	Back	5mm	Reduced	810	1909.8	23.3	24.00	1.175	0.08	1.220	1.433
	GSM1900_Ant1	GPRS 3 Tx slots	Left Side	5mm	Reduced	661	1880	20.82	22.00	1.312	0.04	0.043	0.056
	GSM1900_Ant1	GPRS 3 Tx slots	Right Side	5mm	Reduced	661	1880	20.82	22.00	1.312	0.1	0.060	0.079
	GSM1900_Ant1	GPRS 3 Tx slots	Bottom Side	5mm	Reduced	661	1880	20.82	22.00	1.312	0.01	1.040	1.365
	GSM1900_Ant1	GPRS 3 Tx slots	Bottom Side	5mm	Reduced	512	1850.2	20.77	22.00	1.327	0.03	1.050	1.394
	GSM1900_Ant1	GPRS 3 Tx slots	Bottom Side	5mm	Reduced	810	1909.8	21.11	22.00	1.227	0.08	1.060	1.301

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_Ant1	RMC 12.2Kbps	Front	5mm	Reduced	9400	1880	16.32	17.50	1.312	0.08	0.590	0.774
	WCDMA II_Ant1	RMC 12.2Kbps	Back	5mm	Reduced	9400	1880	16.32	17.50	1.312	0.04	0.863	1.132
	WCDMA II_Ant1	RMC 12.2Kbps	Back	5mm	Reduced	9262	1852.4	16.17	17.50	1.358	0.12	0.798	1.084
	WCDMA II_Ant1	RMC 12.2Kbps	Back	5mm	Reduced	9538	1907.6	16.29	17.50	1.321	0.06	0.721	0.953
	WCDMA II_Ant1	RMC 12.2Kbps	Left Side	5mm	Reduced	9400	1880	16.32	17.50	1.312	-0.08	0.053	0.070
	WCDMA II_Ant1	RMC 12.2Kbps	Right Side	5mm	Reduced	9400	1880	16.32	17.50	1.312	0.09	0.047	0.062
31	WCDMA II_Ant1	RMC 12.2Kbps	Bottom Side	5mm	Reduced	9400	1880	16.32	17.50	1.312	0.01	0.947	1.243
	WCDMA II_Ant1	RMC 12.2Kbps	Bottom Side	5mm	Reduced	9262	1852.4	16.17	17.50	1.358	-0.18	0.783	1.064
	WCDMA II_Ant1	RMC 12.2Kbps	Bottom Side	5mm	Reduced	9538	1907.6	16.29	17.50	1.321	0.06	0.817	1.079
	WCDMA IV_Ant1	RMC 12.2Kbps	Front	5mm	Reduced	1413	1732.6	16.27	18.00	1.489	0.05	0.638	0.950
	WCDMA IV_Ant1	RMC 12.2Kbps	Front	5mm	Reduced	1312	1712.4	16.21	18.00	1.510	0.02	0.428	0.646
	WCDMA IV_Ant1	RMC 12.2Kbps	Front	5mm	Reduced	1513	1752.6	16.19	18.00	1.517	0.01	0.616	0.935
32	WCDMA IV_Ant1	RMC 12.2Kbps	Back	5mm	Reduced	1413	1732.6	16.27	18.00	1.489	0.09	0.874	1.302
	WCDMA IV_Ant1	RMC 12.2Kbps	Back	5mm	Reduced	1312	1712.4	16.21	18.00	1.510	-0.18	0.548	0.828
	WCDMA IV_Ant1	RMC 12.2Kbps	Back	5mm	Reduced	1513	1752.6	16.19	18.00	1.517	0.09	0.834	1.265
	WCDMA IV_Ant1	RMC 12.2Kbps	Left Side	5mm	Reduced	1413	1732.6	14.73	16.00	1.340	-0.08	0.043	0.058
	WCDMA IV_Ant1	RMC 12.2Kbps	Right Side	5mm	Reduced	1413	1732.6	14.73	16.00	1.340	0.04	0.056	0.075
	WCDMA IV_Ant1	RMC 12.2Kbps	Bottom Side	5mm	Reduced	1413	1732.6	14.73	16.00	1.340	-0.05	0.789	1.057
	WCDMA IV_Ant1	RMC 12.2Kbps	Bottom Side	5mm	Reduced	1312	1712.4	14.56	16.00	1.393	-0.06	0.478	0.666
	WCDMA IV_Ant1	RMC 12.2Kbps	Bottom Side	5mm	Reduced	1513	1752.6	14.61	16.00	1.377	0.08	0.892	1.228
	WCDMA V_Ant1	RMC 12.2Kbps	Front	5mm	Full	4182	836.4	22.28	24.00	1.486	0.16	0.244	0.363
	WCDMA V_Ant1	RMC 12.2Kbps	Back	5mm	Full	4182	836.4	22.28	24.00	1.486	0.09	0.526	0.782
	WCDMA V_Ant1	RMC 12.2Kbps	Back	5mm	Full	4132	826.4	22.27	24.00	1.489	0.08	0.608	0.906
	WCDMA V_Ant1	RMC 12.2Kbps	Back	5mm	Full	4233	846.6	22.22	24.00	1.507	0.09	0.581	0.875
	WCDMA V_Ant1	RMC 12.2Kbps	Left Side	5mm	Full	4182	836.4	22.28	24.00	1.486	0.04	0.031	0.046
	WCDMA V_Ant1	RMC 12.2Kbps	Right Side	5mm	Full	4182	836.4	22.28	24.00	1.486	0.07	0.200	0.297
	WCDMA V_Ant1	RMC 12.2Kbps	Bottom Side	5mm	Full	4182	836.4	22.28	24.00	1.486	0.04	0.478	0.710
	WCDMA V_Ant2	RMC 12.2Kbps	Front	5mm	Full	4182	836.4	22.96	24.00	1.271	0.06	0.496	0.630
	WCDMA V_Ant2	RMC 12.2Kbps	Back	5mm	Full	4182	836.4	22.96	24.00	1.271	0.07	0.498	0.633
	WCDMA V_Ant2	RMC 12.2Kbps	Back	5mm	Full	4132	826.4	22.95	24.00	1.274	0.01	0.467	0.595
	WCDMA V_Ant2	RMC 12.2Kbps	Back	5mm	Full	4233	846.6	22.89	24.00	1.291	0.09	0.435	0.562
	WCDMA V_Ant2	RMC 12.2Kbps	Right Side	5mm	Full	4182	836.4	22.96	24.00	1.271	0.06	0.345	0.438
	WCDMA V_Ant2	RMC 12.2Kbps	Top Side	5mm	Full	4182	836.4	22.96	24.00	1.271	0.11	0.810	1.029
33	WCDMA V_Ant2	RMC 12.2Kbps	Top Side	5mm	Full	4132	826.4	22.95	24.00	1.274	0.08	0.857	1.091
	WCDMA V_Ant2	RMC 12.2Kbps	Top Side	5mm	Full	4233	846.6	22.89	24.00	1.291	-0.06	0.740	0.956



<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA2000 BC0_Ant1	RTAP 153.6Kbps	Front	5mm	Full	1013	824.7	24.11	25.00	1.227	0.06	0.418	0.513
	CDMA2000 BC0_Ant1	RTAP 153.6Kbps	Back	5mm	Full	1013	824.7	24.11	25.00	1.227	-0.04	0.680	0.835
	CDMA2000 BC0_Ant1	RTAP 153.6Kbps	Back	5mm	Full	384	836.52	24.09	25.00	1.233	0.03	0.778	0.959
	CDMA2000 BC0_Ant1	RTAP 153.6Kbps	Back	5mm	Full	777	848.31	23.89	25.00	1.291	0.08	0.730	0.943
	CDMA2000 BC0_Ant1	RTAP 153.6Kbps	Left Side	5mm	Full	1013	824.7	24.11	25.00	1.227	0.07	0.049	0.060
	CDMA2000 BC0_Ant1	RTAP 153.6Kbps	Right Side	5mm	Full	1013	824.7	24.11	25.00	1.227	0.09	0.136	0.167
	CDMA2000 BC0_Ant1	RTAP 153.6Kbps	Bottom Side	5mm	Full	1013	824.7	24.11	25.00	1.227	0.04	0.552	0.678
	CDMA2000 BC0_Ant2	RTAP 153.6Kbps	Front	5mm	Full	384	836.52	24.52	25.00	1.117	0.03	0.510	0.570
	CDMA2000 BC0_Ant2	RTAP 153.6Kbps	Back	5mm	Full	384	836.52	24.52	25.00	1.117	-0.11	0.500	0.558
	CDMA2000 BC0_Ant2	RTAP 153.6Kbps	Right Side	5mm	Full	384	836.52	24.52	25.00	1.117	0.09	0.301	0.336
	CDMA2000 BC0_Ant2	RTAP 153.6Kbps	Top Side	5mm	Full	384	836.52	24.52	25.00	1.117	0.08	0.770	0.860
	CDMA2000 BC0_Ant2	RTAP 153.6Kbps	Top Side	5mm	Full	1013	824.7	24.51	25.00	1.119	0.04	0.780	0.873
34	CDMA2000 BC0_Ant2	RTAP 153.6Kbps	Top Side	5mm	Full	777	848.31	24.32	25.00	1.169	0.06	0.893	1.044
	CDMA2000 BC1_Ant1	RTAP 153.6Kbps	Front	5mm	Reduced	600	1880	15.38	17.00	1.452	0.09	0.429	0.623
	CDMA2000 BC1_Ant1	RTAP 153.6Kbps	Back	5mm	Reduced	600	1880	15.38	17.00	1.452	0.06	0.695	1.009
	CDMA2000 BC1_Ant1	RTAP 153.6Kbps	Back	5mm	Reduced	25	1851.25	15.18	17.00	1.521	0.04	0.619	0.941
	CDMA2000 BC1_Ant1	RTAP 153.6Kbps	Back	5mm	Reduced	1175	1908.75	15.23	17.00	1.503	-0.07	0.737	1.108
	CDMA2000 BC1_Ant1	RTAP 153.6Kbps	Left Side	5mm	Reduced	600	1880	15.38	17.00	1.452	0.06	0.032	0.046
	CDMA2000 BC1_Ant1	RTAP 153.6Kbps	Right Side	5mm	Reduced	600	1880	15.38	17.00	1.452	0.09	0.049	0.071
	CDMA2000 BC1_Ant1	RTAP 153.6Kbps	Bottom Side	5mm	Reduced	600	1880	15.38	17.00	1.452	0.08	0.758	1.101
	CDMA2000 BC1_Ant1	RTAP 153.6Kbps	Bottom Side	5mm	Reduced	25	1851.25	15.18	17.00	1.521	0.04	0.766	1.165
35	CDMA2000 BC1_Ant1	RTAP 153.6Kbps	Bottom Side	5mm	Reduced	1175	1908.75	15.23	17.00	1.503	0.09	0.937	1.408
	CDMA2000 BC10_Ant1	RTAP 153.6Kbps	Front	5mm	Full	684	823.1	24.39	25.00	1.151	0.09	0.416	0.479
	CDMA2000 BC10_Ant1	RTAP 153.6Kbps	Back	5mm	Full	684	823.1	24.39	25.00	1.151	-0.01	0.594	0.684
	CDMA2000 BC10_Ant1	RTAP 153.6Kbps	Back	5mm	Full	476	817.9	24.00	25.00	1.259	0.07	0.624	0.786
	CDMA2000 BC10_Ant1	RTAP 153.6Kbps	Back	5mm	Full	580	820.5	24.23	25.00	1.194	-0.16	0.642	0.767
	CDMA2000 BC10_Ant1	RTAP 153.6Kbps	Left Side	5mm	Full	684	823.1	24.39	25.00	1.151	-0.13	0.105	0.121
	CDMA2000 BC10_Ant1	RTAP 153.6Kbps	Right Side	5mm	Full	684	823.1	24.39	25.00	1.151	0.09	0.177	0.204
	CDMA2000 BC10_Ant1	RTAP 153.6Kbps	Bottom Side	5mm	Full	684	823.1	24.39	25.00	1.151	0.08	0.552	0.635
	CDMA2000 BC10_Ant2	RTAP 153.6Kbps	Front	5mm	Full	580	820.5	24.79	25.00	1.050	0.04	0.469	0.492
	CDMA2000 BC10_Ant2	RTAP 153.6Kbps	Back	5mm	Full	580	820.5	24.79	25.00	1.050	-0.08	0.469	0.492
	CDMA2000 BC10_Ant2	RTAP 153.6Kbps	Right Side	5mm	Full	580	820.5	24.79	25.00	1.050	0.07	0.279	0.293
	CDMA2000 BC10_Ant2	RTAP 153.6Kbps	Top Side	5mm	Full	580	820.5	24.79	25.00	1.050	0.06	0.800	0.840
36	CDMA2000 BC10_Ant2	RTAP 153.6Kbps	Top Side	5mm	Full	476	817.9	24.56	25.00	1.107	0.04	0.873	0.966
	CDMA2000 BC10_Ant2	RTAP 153.6Kbps	Top Side	5mm	Full	684	823.1	24.76	25.00	1.057	0.03	0.874	0.924



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7_Ant1	20M	QPSK	1	0	Front	5mm	Reduced	21100	2535	17.26	18.50	1.330	-0.08	0.522	0.694
	LTE Band 7_Ant1	20M	QPSK	50	0	Front	5mm	Reduced	21100	2535	17.25	18.50	1.334	0.09	0.535	0.713
37	LTE Band 7_Ant1	20M	QPSK	1	0	Back	5mm	Reduced	21100	2535	17.26	18.50	1.330	0.04	1.030	1.370
	LTE Band 7_Ant1	20M	QPSK	1	0	Back	5mm	Reduced	20850	2510	17.16	18.50	1.361	0.02	0.970	1.321
	LTE Band 7_Ant1	20M	QPSK	1	0	Back	5mm	Reduced	21350	2560	17.21	18.50	1.346	0.01	0.889	1.196
	LTE Band 7_Ant1	20M	QPSK	50	0	Back	5mm	Reduced	21100	2535	17.25	18.50	1.334	-0.06	0.994	1.326
	LTE Band 7_Ant1	20M	QPSK	50	0	Back	5mm	Reduced	20850	2510	17.09	18.50	1.384	0.08	0.907	1.255
	LTE Band 7_Ant1	20M	QPSK	50	0	Back	5mm	Reduced	21350	2560	17.21	18.50	1.346	0.16	0.775	1.043
	LTE Band 7_Ant1	20M	QPSK	100	0	Back	5mm	Reduced	21100	2535	17.19	18.50	1.352	-0.13	0.833	1.126
	LTE Band 7_Ant1	20M	QPSK	1	0	Left Side	5mm	Reduced	21100	2535	14.20	15.00	1.202	-0.08	0.001	0.001
	LTE Band 7_Ant1	20M	QPSK	50	0	Left Side	5mm	Reduced	21100	2535	14.19	15.00	1.205	0.04	0.001	0.001
	LTE Band 7_Ant1	20M	QPSK	1	0	Right Side	5mm	Reduced	21100	2535	14.20	15.00	1.202	0.09	0.027	0.032
	LTE Band 7_Ant1	20M	QPSK	50	0	Right Side	5mm	Reduced	21100	2535	14.19	15.00	1.205	0.08	0.072	0.087
	LTE Band 7_Ant1	20M	QPSK	1	0	Bottom Side	5mm	Reduced	21100	2535	14.20	15.00	1.202	0.01	0.977	1.175
	LTE Band 7_Ant1	20M	QPSK	1	0	Bottom Side	5mm	Reduced	20850	2510	14.02	15.00	1.253	0.18	0.777	0.974
	LTE Band 7_Ant1	20M	QPSK	1	0	Bottom Side	5mm	Reduced	21350	2560	14.00	15.00	1.259	0.09	0.622	0.783
	LTE Band 7_Ant1	20M	QPSK	50	0	Bottom Side	5mm	Reduced	21100	2535	14.19	15.00	1.205	0.06	0.971	1.170
	LTE Band 7_Ant1	20M	QPSK	50	0	Bottom Side	5mm	Reduced	20850	2510	14.13	15.00	1.222	0.07	0.767	0.937
	LTE Band 7_Ant1	20M	QPSK	50	0	Bottom Side	5mm	Reduced	21350	2560	14.12	15.00	1.225	0.06	0.630	0.772
	LTE Band 7_Ant1	20M	QPSK	100	0	Bottom Side	5mm	Reduced	21100	2535	14.12	15.00	1.225	-0.06	0.700	0.857
EN-DC																
	LTE Band 7_Ant1	20M	QPSK	1	0	Front	5mm	Reduced	21100	2535	14.65	15.00	1.084	-0.08	0.240	0.260
	LTE Band 7_Ant1	20M	QPSK	50	0	Front	5mm	Reduced	21100	2535	14.48	15.00	1.127	0.05	0.250	0.282
	LTE Band 7_Ant1	20M	QPSK	1	0	Back	5mm	Reduced	21100	2535	14.65	15.00	1.084	0.04	0.413	0.448
	LTE Band 7_Ant1	20M	QPSK	50	0	Back	5mm	Reduced	21100	2535	14.48	15.00	1.127	0.06	0.444	0.500
	LTE Band 7_Ant1	20M	QPSK	1	0	Left Side	5mm	Reduced	21100	2535	11.21	11.50	1.069	-0.02	0.024	0.026
	LTE Band 7_Ant1	20M	QPSK	50	0	Left Side	5mm	Reduced	21100	2535	11.19	11.50	1.074	0.04	0.009	0.010
	LTE Band 7_Ant1	20M	QPSK	1	0	Right Side	5mm	Reduced	21100	2535	11.21	11.50	1.069	-0.03	0.024	0.026
	LTE Band 7_Ant1	20M	QPSK	50	0	Right Side	5mm	Reduced	21100	2535	11.19	11.50	1.074	0.03	0.034	0.037
	LTE Band 7_Ant1	20M	QPSK	1	0	Bottom Side	5mm	Reduced	21100	2535	11.21	11.50	1.069	0.08	0.351	0.375
	LTE Band 7_Ant1	20M	QPSK	50	0	Bottom Side	5mm	Reduced	21100	2535	11.19	11.50	1.074	0.09	0.367	0.394



FCC SAR Test Report

Report No. : FA082402

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
38	LTE Band 12_Ant1	10M	QPSK	1	0	Front	5mm	Full	23095	707.5	22.95	24.00	1.274	0.08	0.408	0.520
	LTE Band 12_Ant1	10M	QPSK	25	0	Front	5mm	Full	23095	707.5	22.12	23.00	1.225	0.04	0.341	0.418
	LTE Band 12_Ant1	10M	QPSK	1	0	Back	5mm	Full	23095	707.5	22.95	24.00	1.274	0.03	0.589	0.750
	LTE Band 12_Ant1	10M	QPSK	25	0	Back	5mm	Full	23095	707.5	22.12	23.00	1.225	0.09	0.506	0.620
	LTE Band 12_Ant1	10M	QPSK	1	0	Left Side	5mm	Full	23095	707.5	22.95	24.00	1.274	0.07	0.238	0.303
	LTE Band 12_Ant1	10M	QPSK	25	0	Left Side	5mm	Full	23095	707.5	22.12	23.00	1.225	-0.04	0.194	0.238
	LTE Band 12_Ant1	10M	QPSK	1	0	Right Side	5mm	Full	23095	707.5	22.95	24.00	1.274	-0.09	0.246	0.313
	LTE Band 12_Ant1	10M	QPSK	25	0	Right Side	5mm	Full	23095	707.5	22.12	23.00	1.225	0.06	0.205	0.251
	LTE Band 12_Ant1	10M	QPSK	1	0	Bottom Side	5mm	Full	23095	707.5	22.95	24.00	1.274	-0.09	0.560	0.713
	LTE Band 12_Ant1	10M	QPSK	25	0	Bottom Side	5mm	Full	23095	707.5	22.12	23.00	1.225	0.06	0.451	0.552
	LTE Band 12_Ant2	10M	QPSK	1	0	Front	5mm	Full	23095	707.5	22.62	24.00	1.374	0.07	0.404	0.555
	LTE Band 12_Ant2	10M	QPSK	25	0	Front	5mm	Full	23095	707.5	21.70	23.00	1.349	0.06	0.318	0.429
	LTE Band 12_Ant2	10M	QPSK	1	0	Back	5mm	Full	23095	707.5	22.62	24.00	1.374	0.18	0.412	0.566
	LTE Band 12_Ant2	10M	QPSK	25	0	Back	5mm	Full	23095	707.5	21.70	23.00	1.349	0.08	0.404	0.545
	LTE Band 12_Ant2	10M	QPSK	1	0	Right Side	5mm	Full	23095	707.5	22.62	24.00	1.374	0.05	0.456	0.627
	LTE Band 12_Ant2	10M	QPSK	25	0	Right Side	5mm	Full	23095	707.5	21.70	23.00	1.349	0.09	0.355	0.479
	LTE Band 12_Ant2	10M	QPSK	1	0	Top Side	5mm	Full	23095	707.5	22.12	23.00	1.225	0.08	0.506	0.620
	LTE Band 12_Ant2	10M	QPSK	25	0	Top Side	5mm	Full	23095	707.5	22.07	23.00	1.239	0.07	0.500	0.619
EN-DC																
39	LTE Band 12_Ant2 ENDC	10M	QPSK	1	0	Front	5mm	Full	23095	707.5	22.62	24.00	1.374	0.01	0.404	0.555
	LTE Band 12_Ant2 ENDC	10M	QPSK	25	0	Front	5mm	Full	23095	707.5	21.70	23.00	1.349	0.08	0.318	0.429
	LTE Band 12_Ant2 ENDC	10M	QPSK	1	0	Back	5mm	Full	23095	707.5	22.62	24.00	1.374	0.13	0.412	0.566
	LTE Band 12_Ant2 ENDC	10M	QPSK	25	0	Back	5mm	Full	23095	707.5	21.70	23.00	1.349	0.06	0.404	0.545
	LTE Band 12_Ant2 ENDC	10M	QPSK	1	0	Right Side	5mm	Reduced	23095	707.5	22.12	23.00	1.225	-0.08	0.332	0.407
	LTE Band 12_Ant2 ENDC	10M	QPSK	25	0	Right Side	5mm	Reduced	23095	707.5	22.07	23.00	1.239	0.06	0.263	0.326
	LTE Band 12_Ant2 ENDC	10M	QPSK	1	0	Top Side	5mm	Reduced	23095	707.5	22.12	23.00	1.225	0.15	0.433	0.530
	LTE Band 12_Ant2 ENDC	10M	QPSK	25	0	Top Side	5mm	Reduced	23095	707.5	22.07	23.00	1.239	0.05	0.431	0.534
	LTE Band 13_Ant1	10M	QPSK	1	0	Front	5mm	Full	23230	782	22.58	24.00	1.387	0.15	0.313	0.434
	LTE Band 13_Ant1	10M	QPSK	25	0	Front	5mm	Full	23230	782	22.10	23.00	1.230	-0.06	0.303	0.373
	LTE Band 13_Ant1	10M	QPSK	1	0	Back	5mm	Full	23230	782	22.58	24.00	1.387	0.07	0.482	0.668
	LTE Band 13_Ant1	10M	QPSK	25	0	Back	5mm	Full	23230	782	22.10	23.00	1.230	0.09	0.410	0.504
	LTE Band 13_Ant1	10M	QPSK	1	0	Left Side	5mm	Full	23230	782	22.58	24.00	1.387	0.08	0.128	0.178
	LTE Band 13_Ant1	10M	QPSK	25	0	Left Side	5mm	Full	23230	782	22.10	23.00	1.230	0.06	0.129	0.159
	LTE Band 13_Ant1	10M	QPSK	1	0	Right Side	5mm	Full	23230	782	22.58	24.00	1.387	0.19	0.174	0.241
	LTE Band 13_Ant1	10M	QPSK	25	0	Right Side	5mm	Full	23230	782	22.10	23.00	1.230	-0.06	0.179	0.220
	LTE Band 13_Ant1	10M	QPSK	1	0	Bottom Side	5mm	Full	23230	782	22.58	24.00	1.387	0.04	0.327	0.453
	LTE Band 13_Ant1	10M	QPSK	25	0	Bottom Side	5mm	Full	23230	782	22.10	23.00	1.230	-0.05	0.303	0.373
EN-DC																
	LTE Band 13_Ant1	10M	QPSK	1	0	Front	5mm	Reduced	23230	782	21.74	23.00	1.337	0.08	0.253	0.338
	LTE Band 13_Ant1	10M	QPSK	25	0	Front	5mm	Reduced	23230	782	21.63	23.00	1.371	0.07	0.221	0.303
	LTE Band 13_Ant1	10M	QPSK	1	0	Back	5mm	Reduced	23230	782	21.74	23.00	1.337	0.16	0.402	0.537
	LTE Band 13_Ant1	10M	QPSK	25	0	Back	5mm	Reduced	23230	782	21.63	23.00	1.371	0.09	0.391	0.536
	LTE Band 13_Ant1	10M	QPSK	1	0	Left Side	5mm	Reduced	23230	782	21.74	23.00	1.337	-0.09	0.103	0.138
	LTE Band 13_Ant1	10M	QPSK	25	0	Left Side	5mm	Reduced	23230	782	21.63	23.00	1.371	0.07	0.101	0.138
	LTE Band 13_Ant1	10M	QPSK	1	0	Right Side	5mm	Reduced	23230	782	21.74	23.00	1.337	0.01	0.129	0.172
	LTE Band 13_Ant1	10M	QPSK	25	0	Right Side	5mm	Reduced	23230	782	21.63	23.00	1.371	0.06	0.112	0.154
	LTE Band 13_Ant1	10M	QPSK	1	0	Bottom Side	5mm	Reduced	23230	782	21.74	23.00	1.337	0.09	0.243	0.325
	LTE Band 13_Ant1	10M	QPSK	25	0	Bottom Side	5mm	Reduced	23230	782	21.63	23.00	1.371	0.08	0.201	0.276



FCC SAR Test Report

Report No. : FA082402

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 14_Ant1	10M	QPSK	1	0	Front	5mm	Full	23330	793	23.09	24.00	1.233	0.05	0.475	0.586
	LTE Band 14_Ant1	10M	QPSK	25	0	Front	5mm	Full	23330	793	22.06	23.00	1.242	0.16	0.332	0.412
40	LTE Band 14_Ant1	10M	QPSK	1	0	Back	5mm	Full	23330	793	23.09	24.00	1.233	-0.09	0.508	0.626
	LTE Band 14_Ant1	10M	QPSK	25	0	Back	5mm	Full	23330	793	22.06	23.00	1.242	0.08	0.425	0.528
	LTE Band 14_Ant1	10M	QPSK	1	0	Left Side	5mm	Full	23330	793	23.09	24.00	1.233	0.03	0.197	0.243
	LTE Band 14_Ant1	10M	QPSK	25	0	Left Side	5mm	Full	23330	793	22.06	23.00	1.242	0.04	0.168	0.209
	LTE Band 14_Ant1	10M	QPSK	1	0	Right Side	5mm	Full	23330	793	23.09	24.00	1.233	0.06	0.263	0.324
	LTE Band 14_Ant1	10M	QPSK	25	0	Right Side	5mm	Full	23330	793	22.06	23.00	1.242	0.08	0.212	0.263
	LTE Band 14_Ant1	10M	QPSK	1	0	Bottom Side	5mm	Full	23330	793	23.09	24.00	1.233	0.09	0.333	0.411
	LTE Band 14_Ant1	10M	QPSK	25	0	Bottom Side	5mm	Full	23330	793	22.06	23.00	1.242	0.03	0.204	0.253
	LTE Band25_Ant1	20M	QPSK	1	0	Front	5mm	Reduced	26340	1880	16.93	18.00	1.279	0.06	0.530	0.678
	LTE Band25_Ant1	20M	QPSK	50	0	Front	5mm	Reduced	26340	1880	16.9	18.00	1.288	-0.07	0.533	0.687
	LTE Band25_Ant1	20M	QPSK	1	0	Back	5mm	Reduced	26340	1880	16.93	18.00	1.279	0.03	0.928	1.187
	LTE Band25_Ant1	20M	QPSK	1	0	Back	5mm	Reduced	26140	1860	16.72	18.00	1.343	0.04	0.708	0.951
41	LTE Band25_Ant1	20M	QPSK	1	0	Back	5mm	Reduced	26590	1905	16.8	18.00	1.318	0.02	0.918	1.210
	LTE Band25_Ant1	20M	QPSK	50	0	Back	5mm	Reduced	26340	1880	16.9	18.00	1.288	-0.02	0.931	1.199
	LTE Band25_Ant1	20M	QPSK	50	0	Back	5mm	Reduced	26140	1860	16.83	18.00	1.309	0.09	0.490	0.641
	LTE Band25_Ant1	20M	QPSK	50	0	Back	5mm	Reduced	26590	1905	16.77	18.00	1.327	0.08	0.890	1.181
	LTE Band25_Ant1	20M	QPSK	100	0	Back	5mm	Reduced	26340	1880	16.7	18.00	1.349	-0.01	0.891	1.202
	LTE Band25_Ant1	20M	QPSK	1	0	Left Side	5mm	Reduced	26340	1880	15.95	16.50	1.135	0.04	0.039	0.044
	LTE Band25_Ant1	20M	QPSK	50	0	Left Side	5mm	Reduced	26340	1880	15.91	16.50	1.146	0.06	0.024	0.027
	LTE Band25_Ant1	20M	QPSK	1	0	Right Side	5mm	Reduced	26340	1880	15.95	16.50	1.135	-0.12	0.047	0.053
	LTE Band25_Ant1	20M	QPSK	50	0	Right Side	5mm	Reduced	26340	1880	15.91	16.50	1.146	0.04	0.049	0.056
	LTE Band25_Ant1	20M	QPSK	1	0	Bottom Side	5mm	Reduced	26340	1880	15.95	16.50	1.135	0.01	0.871	0.989
	LTE Band25_Ant1	20M	QPSK	1	0	Bottom Side	5mm	Reduced	26140	1860	15.67	16.50	1.211	0.06	0.797	0.965
	LTE Band25_Ant1	20M	QPSK	1	0	Bottom Side	5mm	Reduced	26590	1905	15.78	16.50	1.180	-0.02	0.942	1.112
	LTE Band25_Ant1	20M	QPSK	50	0	Bottom Side	5mm	Reduced	26340	1880	15.91	16.50	1.146	0.09	0.919	1.053
	LTE Band25_Ant1	20M	QPSK	50	0	Bottom Side	5mm	Reduced	26140	1860	15.73	16.50	1.194	0.06	0.847	1.011
	LTE Band25_Ant1	20M	QPSK	50	0	Bottom Side	5mm	Reduced	26590	1905	15.75	16.50	1.189	0.07	0.978	1.162
	LTE Band25_Ant1	20M	QPSK	100	0	Bottom Side	5mm	Reduced	26340	1880	15.8	16.50	1.175	0.06	0.940	1.104
EN-DC																
	LTE Band25_Ant1	20M	QPSK	1	0	Front	5mm	Reduced	26340	1880	13.72	14.50	1.197	-0.03	0.275	0.329
	LTE Band25_Ant1	20M	QPSK	50	0	Front	5mm	Reduced	26340	1880	13.64	14.50	1.219	0.07	0.272	0.332
	LTE Band25_Ant1	20M	QPSK	1	0	Back	5mm	Reduced	26340	1880	13.72	14.50	1.197	0.08	0.473	0.566
	LTE Band25_Ant1	20M	QPSK	50	0	Back	5mm	Reduced	26340	1880	13.64	14.50	1.219	0.01	0.452	0.551
	LTE Band25_Ant1	20M	QPSK	1	0	Left Side	5mm	Reduced	26340	1880	12.26	13.00	1.186	0.03	0.038	0.045
	LTE Band25_Ant1	20M	QPSK	50	0	Left Side	5mm	Reduced	26340	1880	12.16	13.00	1.213	0.05	0.028	0.034
	LTE Band25_Ant1	20M	QPSK	1	0	Right Side	5mm	Reduced	26340	1880	12.26	13.00	1.186	-0.07	0.021	0.025
	LTE Band25_Ant1	20M	QPSK	50	0	Right Side	5mm	Reduced	26340	1880	12.16	13.00	1.213	-0.02	0.020	0.024
	LTE Band25_Ant1	20M	QPSK	1	0	Bottom Side	5mm	Reduced	26340	1880	12.26	13.00	1.186	0.02	0.407	0.483
	LTE Band25_Ant1	20M	QPSK	50	0	Bottom Side	5mm	Reduced	26340	1880	12.16	13.00	1.213	0.03	0.427	0.518
	LTE Band25_Ant2	20M	QPSK	1	0	Front	5mm	Reduced	26340	1880	13.21	14.00	1.199	-0.05	0.236	0.283
	LTE Band25_Ant2	20M	QPSK	50	0	Front	5mm	Reduced	26340	1880	13.12	14.00	1.225	0.01	0.221	0.271
	LTE Band25_Ant2	20M	QPSK	1	0	Back	5mm	Reduced	26340	1880	13.21	14.00	1.199	0.04	0.302	0.362
	LTE Band25_Ant2	20M	QPSK	50	0	Back	5mm	Reduced	26140	1860	12.99	14.00	1.262	-0.03	0.263	0.332
	LTE Band25_Ant2	20M	QPSK	50	0	Back	5mm	Reduced	26590	1905	12.95	14.00	1.274	0.05	0.273	0.348
	LTE Band25_Ant2	20M	QPSK	50	0	Back	5mm	Reduced	26340	1880	13.12	14.00	1.225	0.01	0.304	0.372
	LTE Band25_Ant2	20M	QPSK	1	0	Right Side	5mm	Reduced	26340	1880	11.85	12.50	1.161	-	n/a	n/a
	LTE Band25_Ant2	20M	QPSK	50	0	Right Side	5mm	Reduced	26340	1880	11.82	12.50	1.169	0.08	0.034	0.040
	LTE Band25_Ant2	20M	QPSK	1	0	Top Side	5mm	Reduced	26340	1880	11.85	12.50	1.161	0.09	0.398	0.462
	LTE Band25_Ant2	20M	QPSK	50	0	Top Side	5mm	Reduced	26340	1880	11.82	12.50	1.169	0.08	0.410	0.479
	LTE Band25_Ant2	20M	QPSK	50	0	Top Side	5mm	Reduced	26140	1860	11.75	14.00	1.679	-0.01	0.364	0.611
	LTE Band25_Ant2	20M	QPSK	50	0	Top Side	5mm	Reduced	26590	1905	11.72	14.00	1.690	-0.02	0.381	0.644

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band26_Ant1	15M	QPSK	1	0	Front	5mm	Full	26865	831.5	22.94	24.00	1.276	-0.01	0.346	0.442
	LTE Band26_Ant1	15M	QPSK	36	0	Front	5mm	Full	26865	831.5	21.87	23.00	1.297	0.07	0.205	0.266
	LTE Band26_Ant1	15M	QPSK	1	0	Back	5mm	Full	26865	831.5	22.94	24.00	1.276	-0.08	0.445	0.568
	LTE Band26_Ant1	15M	QPSK	36	0	Back	5mm	Full	26865	831.5	21.87	23.00	1.297	0.06	0.326	0.423
	LTE Band26_Ant1	15M	QPSK	1	0	Left Side	5mm	Full	26865	831.5	22.94	24.00	1.276	-0.05	0.064	0.082
	LTE Band26_Ant1	15M	QPSK	36	0	Left Side	5mm	Full	26865	831.5	21.87	23.00	1.297	0.15	0.062	0.080
	LTE Band26_Ant1	15M	QPSK	1	0	Right Side	5mm	Full	26865	831.5	22.94	24.00	1.276	0.16	0.071	0.091
	LTE Band26_Ant1	15M	QPSK	36	0	Right Side	5mm	Full	26865	831.5	21.87	23.00	1.297	0.06	0.074	0.096
	LTE Band26_Ant1	15M	QPSK	1	0	Bottom Side	5mm	Full	26865	831.5	22.94	24.00	1.276	0.01	0.338	0.431
	LTE Band26_Ant1	15M	QPSK	36	0	Bottom Side	5mm	Full	26865	831.5	21.87	23.00	1.297	0.03	0.284	0.368
	LTE Band26_Ant2	15M	QPSK	1	0	Front	5mm	Full	26865	831.5	22.70	24.00	1.349	0.05	0.423	0.571
	LTE Band26_Ant2	15M	QPSK	36	0	Front	5mm	Full	26865	831.5	21.57	23.00	1.390	-0.01	0.348	0.484
	LTE Band26_Ant2	15M	QPSK	1	0	Back	5mm	Full	26865	831.5	22.70	24.00	1.349	-0.04	0.454	0.612
	LTE Band26_Ant2	15M	QPSK	36	0	Back	5mm	Full	26865	831.5	21.57	23.00	1.390	0.12	0.365	0.507
	LTE Band26_Ant2	15M	QPSK	1	0	Right Side	5mm	Full	26865	831.5	22.70	24.00	1.349	0.13	0.281	0.379
	LTE Band26_Ant2	15M	QPSK	36	0	Right Side	5mm	Full	26865	831.5	21.57	23.00	1.390	-0.08	0.256	0.356
42	LTE Band26_Ant2	15M	QPSK	1	0	Top Side	5mm	Full	26865	831.5	22.70	24.00	1.349	0.06	0.705	0.951
	LTE Band26_Ant2	15M	QPSK	36	0	Top Side	5mm	Full	26865	831.5	21.57	23.00	1.390	0.08	0.565	0.785
	LTE Band26_Ant2	15M	QPSK	75	0	Top Side	5mm	Full	26865	831.5	21.48	23.00	1.419	0.07	0.541	0.768
EN-DC																
	LTE Band 5_Ant2	10M	QPSK	1	0	Front	5mm	Full	20525	836.5	21.76	23.00	1.330	0.06	0.238	0.317
	LTE Band 5_Ant2	10M	QPSK	25	0	Front	5mm	Full	20525	836.5	21.39	22.00	1.151	-0.02	0.281	0.323
	LTE Band 5_Ant2	10M	QPSK	1	0	Back	5mm	Full	20525	836.5	21.76	23.00	1.330	-0.06	0.275	0.366
	LTE Band 5_Ant2	10M	QPSK	25	0	Back	5mm	Full	20525	836.5	21.39	22.00	1.151	0.07	0.287	0.330
	LTE Band 5_Ant2	10M	QPSK	1	0	Right Side	5mm	Reduced	20525	836.5	19.34	20.00	1.164	0.04	0.202	0.235
	LTE Band 5_Ant2	10M	QPSK	25	0	Right Side	5mm	Reduced	20525	836.5	19.15	20.00	1.216	0.05	0.193	0.235
	LTE Band 5_Ant2	10M	QPSK	1	0	Top Side	5mm	Reduced	20525	836.5	19.34	20.00	1.164	0.01	0.487	0.567
	LTE Band 5_Ant2	10M	QPSK	25	0	Top Side	5mm	Reduced	20525	836.5	19.15	20.00	1.216	0.08	0.477	0.580
	LTE Band30_Ant1	10M	QPSK	1	0	Front	5mm	Reduced	27710	2310	15.13	16.00	1.222	0.08	0.585	0.715
	LTE Band30_Ant1	10M	QPSK	25	0	Front	5mm	Reduced	27710	2310	15.11	16.00	1.227	0.09	0.585	0.718
	LTE Band30_Ant1	10M	QPSK	1	0	Back	5mm	Reduced	27710	2310	15.13	16.00	1.222	0.08	1.060	1.295
	LTE Band30_Ant1	10M	QPSK	25	0	Back	5mm	Reduced	27710	2310	15.11	16.00	1.227	0.03	1.050	1.289
	LTE Band30_Ant1	10M	QPSK	50	0	Back	5mm	Reduced	27710	2310	14.92	16.00	1.282	0.06	0.980	1.257
	LTE Band30_Ant1	10M	QPSK	1	0	Left Side	5mm	Reduced	27710	2310	12.86	14.00	1.300	-0.01	0.017	0.022
	LTE Band30_Ant1	10M	QPSK	25	0	Left Side	5mm	Reduced	27710	2310	12.74	14.00	1.337	-	n/a	n/a
	LTE Band30_Ant1	10M	QPSK	1	0	Right Side	5mm	Reduced	27710	2310	12.86	14.00	1.300	0.01	0.079	0.103
	LTE Band30_Ant1	10M	QPSK	25	0	Right Side	5mm	Reduced	27710	2310	12.74	14.00	1.337	0.16	0.084	0.112
	LTE Band30_Ant1	10M	QPSK	1	0	Bottom Side	5mm	Reduced	27710	2310	12.86	14.00	1.300	0.11	1.000	1.300
43	LTE Band30_Ant1	10M	QPSK	25	0	Bottom Side	5mm	Reduced	27710	2310	12.74	14.00	1.337	0.13	1.020	1.363
	LTE Band30_Ant1	10M	QPSK	50	0	Bottom Side	5mm	Reduced	27710	2310	12.56	14.00	1.393	0.04	0.960	1.337



FCC SAR Test Report

Report No. : FA082402

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band66_Ant1	20M	QPSK	1	0	Front	5mm	Reduced	132322	1745	18.15	19.00	1.216	0.04	0.641	0.780
	LTE Band66_Ant1	20M	QPSK	50	0	Front	5mm	Reduced	132322	1745	18.11	19.00	1.227	0.02	0.529	0.649
	LTE Band66_Ant1	20M	QPSK	1	0	Back	5mm	Reduced	132322	1745	18.15	19.00	1.216	0.01	0.955	1.161
	LTE Band66_Ant1	20M	QPSK	1	0	Back	5mm	Reduced	132072	1720	18.11	19.00	1.227	0.02	0.661	0.811
	LTE Band66_Ant1	20M	QPSK	1	0	Back	5mm	Reduced	132572	1770	18.02	19.00	1.253	-0.04	0.971	1.217
	LTE Band66_Ant1	20M	QPSK	50	0	Back	5mm	Reduced	132322	1745	18.11	19.00	1.227	0.14	0.784	0.962
	LTE Band66_Ant1	20M	QPSK	50	0	Back	5mm	Reduced	132072	1720	18.00	19.00	1.259	0.08	0.677	0.852
	LTE Band66_Ant1	20M	QPSK	50	0	Back	5mm	Reduced	132572	1770	18.10	19.00	1.230	0.06	0.764	0.940
	LTE Band66_Ant1	20M	QPSK	100	0	Back	5mm	Reduced	132322	1745	18.04	19.00	1.247	0.01	0.955	1.191
	LTE Band66_Ant1	20M	QPSK	1	0	Left Side	5mm	Reduced	132322	1745	15.30	17.00	1.479	0.05	0.031	0.046
	LTE Band66_Ant1	20M	QPSK	50	0	Left Side	5mm	Reduced	132322	1745	15.28	17.00	1.486	0.08	0.031	0.046
	LTE Band66_Ant1	20M	QPSK	1	0	Right Side	5mm	Reduced	132322	1745	15.30	17.00	1.479	0.04	0.064	0.095
	LTE Band66_Ant1	20M	QPSK	50	0	Right Side	5mm	Reduced	132322	1745	15.28	17.00	1.486	-0.09	0.050	0.074
	LTE Band66_Ant1	20M	QPSK	1	0	Bottom Side	5mm	Reduced	132322	1745	15.30	17.00	1.479	0.08	0.879	1.300
	LTE Band66_Ant1	20M	QPSK	1	0	Bottom Side	5mm	Reduced	132072	1720	15.16	17.00	1.528	0.09	0.718	1.097
44	LTE Band66_Ant1	20M	QPSK	1	0	Bottom Side	5mm	Reduced	132572	1770	15.18	17.00	1.521	0.07	0.914	1.390
	LTE Band66_Ant1	20M	QPSK	50	0	Bottom Side	5mm	Reduced	132322	1745	15.28	17.00	1.486	0.16	0.696	1.034
	LTE Band66_Ant1	20M	QPSK	50	0	Bottom Side	5mm	Reduced	132072	1720	15.02	17.00	1.578	-0.06	0.583	0.920
	LTE Band66_Ant1	20M	QPSK	50	0	Bottom Side	5mm	Reduced	132572	1770	15.25	17.00	1.496	0.09	0.726	1.086
	LTE Band66_Ant1	20M	QPSK	100	0	Bottom Side	5mm	Reduced	132322	1745	15.26	17.00	1.493	0.06	0.796	1.188
EN-DC																
	LTE Band66_Ant1	20M	QPSK	1	0	Front	5mm	Reduced	132322	1745	12.80	14.00	1.318	0.09	0.235	0.310
	LTE Band66_Ant1	20M	QPSK	50	0	Front	5mm	Reduced	132322	1745	12.72	14.00	1.343	-0.05	0.269	0.361
	LTE Band66_Ant1	20M	QPSK	1	0	Back	5mm	Reduced	132322	1745	12.80	14.00	1.318	0.06	0.282	0.372
	LTE Band66_Ant1	20M	QPSK	50	0	Back	5mm	Reduced	132322	1745	12.72	14.00	1.343	0.08	0.394	0.529
	LTE Band66_Ant1	20M	QPSK	1	0	Left Side	5mm	Reduced	132322	1745	11.80	13.00	1.318	0.07	0.001	0.001
	LTE Band66_Ant1	20M	QPSK	50	0	Left Side	5mm	Reduced	132322	1745	11.63	13.00	1.371	0.09	0.001	0.001
	LTE Band66_Ant1	20M	QPSK	1	0	Right Side	5mm	Reduced	132322	1745	11.80	13.00	1.318	0.11	0.001	0.001
	LTE Band66_Ant1	20M	QPSK	50	0	Right Side	5mm	Reduced	132322	1745	11.63	13.00	1.371	0.06	0.001	0.001
	LTE Band66_Ant1	20M	QPSK	1	0	Bottom Side	5mm	Reduced	132322	1745	11.80	13.00	1.318	0.07	0.402	0.530
	LTE Band66_Ant1	20M	QPSK	50	0	Bottom Side	5mm	Reduced	132322	1745	11.63	13.00	1.371	0.02	0.422	0.579
	LTE Band66_Ant2	20M	QPSK	1	0	Front	5mm	Reduced	132322	1745	12.76	14.00	1.330	0.06	0.239	0.318
	LTE Band66_Ant2	20M	QPSK	50	0	Front	5mm	Reduced	132322	1745	12.74	14.00	1.337	0.05	0.254	0.339
	LTE Band66_Ant2	20M	QPSK	1	0	Back	5mm	Reduced	132322	1745	12.76	14.00	1.330	-0.11	0.420	0.559
	LTE Band66_Ant2	20M	QPSK	50	0	Back	5mm	Reduced	132322	1745	12.74	14.00	1.337	-0.05	0.348	0.465
	LTE Band66_Ant2	20M	QPSK	1	0	Back	5mm	Reduced	132072	1720	12.43	14.00	1.435	0.03	0.368	0.528
	LTE Band66_Ant2	20M	QPSK	1	0	Back	5mm	Reduced	132572	1770	12.75	14.00	1.334	0.01	0.331	0.441
	LTE Band66_Ant2	20M	QPSK	1	0	Right Side	5mm	Reduced	132322	1745	11.43	12.50	1.279	0.01	0.043	0.055
	LTE Band66_Ant2	20M	QPSK	50	0	Right Side	5mm	Reduced	132322	1745	11.40	12.50	1.288	0.03	0.040	0.052
	LTE Band66_Ant2	20M	QPSK	1	0	Top Side	5mm	Reduced	132322	1745	11.43	12.50	1.279	0.06	0.355	0.454
	LTE Band66_Ant2	20M	QPSK	50	0	Top Side	5mm	Reduced	132322	1745	11.40	12.50	1.288	0.08	0.396	0.510
	LTE Band71_Ant1	20M	QPSK	1	0	Front	5mm	Full	133322	683	22.89	24.00	1.291	0.04	0.204	0.263
	LTE Band71_Ant1	20M	QPSK	50	0	Front	5mm	Full	133322	683	21.83	23.00	1.309	-0.16	0.195	0.255
45	LTE Band71_Ant1	20M	QPSK	1	0	Back	5mm	Full	133322	683	22.89	24.00	1.291	-0.15	0.439	0.567
	LTE Band71_Ant1	20M	QPSK	50	0	Back	5mm	Full	133322	683	21.83	23.00	1.309	0.08	0.380	0.497
	LTE Band71_Ant1	20M	QPSK	1	0	Left Side	5mm	Full	133322	683	22.89	24.00	1.291	-0.09	0.178	0.230
	LTE Band71_Ant1	20M	QPSK	50	0	Left Side	5mm	Full	133322	683	21.83	23.00	1.309	0.08	0.153	0.200
	LTE Band71_Ant1	20M	QPSK	1	0	Right Side	5mm	Full	133322	683	22.89	24.00	1.291	0.02	0.210	0.271
	LTE Band71_Ant1	20M	QPSK	50	0	Right Side	5mm	Full	133322	683	21.83	23.00	1.309	0.06	0.183	0.240
	LTE Band71_Ant1	20M	QPSK	1	0	Bottom Side	5mm	Full	133322	683	22.89	24.00	1.291	0.08	0.388	0.501
	LTE Band71_Ant1	20M	QPSK	50	0	Bottom Side	5mm	Full	133322	683	21.83	23.00	1.309	0.15	0.365	0.478
	LTE Band71_Ant2	20M	QPSK	1	0	Front	5mm	Full	133322	683	22.46	24.00	1.426	-0.05	0.166	0.237
	LTE Band71_Ant2	20M	QPSK	50	0	Front	5mm	Full	133322	683	21.57	23.00	1.390	0.1	0.166	0.231
	LTE Band71_Ant2	20M	QPSK	1	0	Back	5mm	Full	133322	683	22.46	24.00	1.426	0.04	0.211	0.301
	LTE Band71_Ant2	20M	QPSK	50	0	Back	5mm	Full	133322	683	21.57	23.00	1.390	0.06	0.227	0.316
	LTE Band71_Ant2	20M	QPSK	1	0	Right Side	5mm	Full	133322	683	22.46	24.00	1.426	-0.16	0.202	0.288
	LTE Band71_Ant2	20M	QPSK	50	0	Right Side	5mm	Full	133322	683	21.57	23.00	1.390	0.08	0.213	0.296
	LTE Band71_Ant2	20M	QPSK	1	0	Top Side	5mm	Full	133322	683	22.46	24.00	1.426	0.05	0.360	0.513
	LTE Band71_Ant2	20M	QPSK	50	0	Top Side	5mm	Full	133322	683	21.57	23.00	1.390	0.06	0.312	0.434

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : IHDT56ZF2

Page 80 of 135

Issued Date : Dec. 04, 2020

Form version. : 181113



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
FCC	LTE Band41_Ant1	20M	QPSK	1	0	Front	5mm	Reduced	40620	2593	18.39	19.50	1.291	62.9	1.006	-0.04	0.557	0.724
	LTE Band41_Ant1	20M	QPSK	1	0	Front	5mm	Reduced	39750	2506	18.30	19.50	1.318	62.9	1.006	0.11	0.534	0.708
	LTE Band41_Ant1	20M	QPSK	1	0	Front	5mm	Reduced	40185	2549.5	18.14	19.50	1.368	62.9	1.006	0.08	0.456	0.627
	LTE Band41_Ant1	20M	QPSK	1	0	Front	5mm	Reduced	41055	2636.5	18.13	19.50	1.371	62.9	1.006	0.06	0.417	0.575
	LTE Band41_Ant1	20M	QPSK	1	0	Front	5mm	Reduced	41490	2680	18.33	19.50	1.309	62.9	1.006	0.16	0.478	0.630
	LTE Band41_Ant1	20M	QPSK	50	0	Front	5mm	Reduced	40620	2593	18.34	19.50	1.306	62.9	1.006	-0.09	0.530	0.696
	LTE Band41_Ant1	20M	QPSK	50	0	Front	5mm	Reduced	39750	2506	18.12	19.50	1.374	62.9	1.006	0.06	0.527	0.728
	LTE Band41_Ant1	20M	QPSK	50	0	Front	5mm	Reduced	40185	2549.5	18.09	19.50	1.384	62.9	1.006	0.11	0.457	0.636
	LTE Band41_Ant1	20M	QPSK	50	0	Front	5mm	Reduced	41055	2636.5	18.11	19.50	1.377	62.9	1.006	0.06	0.429	0.594
	LTE Band41_Ant1	20M	QPSK	50	0	Front	5mm	Reduced	41490	2680	18.13	19.50	1.371	62.9	1.006	0.05	0.493	0.680
	LTE Band41_Ant1	20M	QPSK	100	0	Front	5mm	Reduced	40620	2593	18.3	19.50	1.318	62.9	1.006	-0.06	0.531	0.704
	LTE Band41_Ant1	20M	QPSK	1	0	Back	5mm	Reduced	40620	2593	18.39	19.50	1.291	62.9	1.006	0.01	0.972	1.263
	LTE Band41_Ant1	20M	QPSK	1	0	Back	5mm	Reduced	39750	2506	18.30	19.50	1.318	62.9	1.006	0.11	0.941	1.248
	LTE Band41_Ant1	20M	QPSK	1	0	Back	5mm	Reduced	40185	2549.5	18.14	19.50	1.368	62.9	1.006	0.19	0.967	1.331
	LTE Band41_Ant1	20M	QPSK	1	0	Back	5mm	Reduced	41055	2636.5	18.13	19.50	1.371	62.9	1.006	0.05	0.899	1.240
	LTE Band41_Ant1	20M	QPSK	1	0	Back	5mm	Reduced	41490	2680	18.33	19.50	1.309	62.9	1.006	-0.11	0.900	1.185
	LTE Band41_Ant1	20M	QPSK	50	0	Back	5mm	Reduced	40620	2593	18.34	19.50	1.306	62.9	1.006	-0.14	0.930	1.222
	LTE Band41_Ant1	20M	QPSK	50	0	Back	5mm	Reduced	39750	2506	18.12	19.50	1.374	62.9	1.006	0.03	0.969	1.339
	LTE Band41_Ant1	20M	QPSK	50	0	Back	5mm	Reduced	40185	2549.5	18.09	19.50	1.384	62.9	1.006	0.06	1.010	1.406
	LTE Band41C_Ant1	20M	QPSK	50	0	Back	5mm	Reduced	40185+39987	2549.5+2529.7	18.18	19.50	1.355	62.9	1.006	0.02	0.835	1.138
	LTE Band41_Ant1	20M	QPSK	50	0	Back	5mm	Reduced	41055	2636.5	18.11	19.50	1.377	62.9	1.006	0.06	0.903	1.251
	LTE Band41_Ant1	20M	QPSK	50	0	Back	5mm	Reduced	41490	2680	18.13	19.50	1.371	62.9	1.006	-0.06	0.945	1.303
	LTE Band41_Ant1	20M	QPSK	100	0	Back	5mm	Reduced	40620	2593	18.3	19.50	1.318	62.9	1.006	0.11	1.040	1.379
	LTE Band41_Ant1-HPUE	20M	QPSK	50	0	Back	5mm	Reduced	40620	2593	18.39	19.50	1.291	42.9	1.009	0.19	0.666	0.868
	LTE Band41_Ant1-HPUE	20M	QPSK	50	0	Back	5mm	Reduced	39750	2506	18.16	19.50	1.361	42.9	1.009	0.03	0.527	0.724
	LTE Band41_Ant1-HPUE	20M	QPSK	50	0	Back	5mm	Reduced	40185	2549.5	18.2	19.50	1.349	42.9	1.009	-0.11	0.516	0.702
	LTE Band41_Ant1-HPUE	20M	QPSK	50	0	Back	5mm	Reduced	41055	2636.5	18.32	19.50	1.312	42.9	1.009	0.08	0.608	0.805
	LTE Band41_Ant1-HPUE	20M	QPSK	50	0	Back	5mm	Reduced	41490	2680	18.32	19.50	1.312	42.9	1.009	-0.02	0.493	0.653
	LTE Band41_Ant1	20M	QPSK	1	0	Left Side	5mm	Reduced	40620	2593	16.31	17.00	1.172	62.9	1.006	0.01	0.026	0.031
	LTE Band41_Ant1	20M	QPSK	50	0	Left Side	5mm	Reduced	40620	2593	16.09	17.00	1.233	62.9	1.006	-0.05	0.024	0.030
	LTE Band41_Ant1	20M	QPSK	1	0	Right Side	5mm	Reduced	40620	2593	16.31	17.00	1.172	62.9	1.006	0.01	0.114	0.134
	LTE Band41_Ant1	20M	QPSK	50	0	Right Side	5mm	Reduced	40620	2593	16.09	17.00	1.233	62.9	1.006	0.02	0.109	0.135
	LTE Band41_Ant1	20M	QPSK	1	0	Bottom Side	5mm	Reduced	40620	2593	16.31	17.00	1.172	62.9	1.006	0.08	1.110	1.309
	LTE Band41_Ant1	20M	QPSK	1	0	Bottom Side	5mm	Reduced	39750	2506	16.06	17.00	1.242	62.9	1.006	0.07	1.140	1.424
	LTE Band41_Ant1	20M	QPSK	1	0	Bottom Side	5mm	Reduced	40185	2549.5	16.03	17.00	1.250	62.9	1.006	-0.02	1.100	1.384
	LTE Band41_Ant1	20M	QPSK	1	0	Bottom Side	5mm	Reduced	41055	2636.5	16.20	17.00	1.202	62.9	1.006	0.19	0.865	1.046
	LTE Band41_Ant1	20M	QPSK	1	0	Bottom Side	5mm	Reduced	41490	2680	16.05	17.00	1.245	62.9	1.006	0.16	0.971	1.216
	LTE Band41_Ant1	20M	QPSK	50	0	Bottom Side	5mm	Reduced	40620	2593	16.09	17.00	1.233	62.9	1.006	0.05	1.070	1.327
	LTE Band41_Ant1	20M	QPSK	50	0	Bottom Side	5mm	Reduced	39750	2506	15.89	17.00	1.291	62.9	1.006	-0.02	1.020	1.325
46	LTE Band41_Ant1	20M	QPSK	50	0	Bottom Side	5mm	Reduced	40185	2549.5	15.92	17.00	1.282	62.9	1.006	-0.01	1.110	1.432
	LTE Band41C_Ant1	20M	QPSK	50	0	Bottom Side	5mm	Reduced	40185+39987	2549.5+2529.7	15.89	17.00	1.291	62.9	1.006	0.03	0.823	1.069
	LTE Band41_Ant1	20M	QPSK	50	0	Bottom Side	5mm	Reduced	41055	2636.5	16.06	17.00	1.242	62.9	1.006	0.04	0.869	1.085
	LTE Band41_Ant1	20M	QPSK	50	0	Bottom Side	5mm	Reduced	41490	2680	16.03	17.00	1.250	62.9	1.006	0.06	0.979	1.231
	LTE Band41_Ant1	20M	QPSK	100	0	Bottom Side	5mm	Reduced	40620	2593	16.03	17.00	1.250	62.9	1.006	0.04	1.020	1.283
	LTE Band41_Ant1-HPUE	20M	QPSK	50	0	Bottom Side	5mm	Reduced	40620	2593	15.93	17.00	1.279	42.9	1.009	-0.11	0.821	1.060
	LTE Band41_Ant1-HPUE	20M	QPSK	50	0	Bottom Side	5mm	Reduced	39750	2506	15.84	17.00	1.306	42.9	1.009	-0.04	0.820	1.081
	LTE Band41_Ant1-HPUE	20M	QPSK	50	0	Bottom Side	5mm	Reduced	40185	2549.5	15.78	17.00	1.324	42.9	1.009	0.06	0.688	0.919
	LTE Band41_Ant1-HPUE	20M	QPSK	50	0	Bottom Side	5mm	Reduced	41055	2636.5	15.88	17.00	1.294	42.9	1.009	0.08	0.547	0.714
	LTE Band41_Ant1-HPUE	20M	QPSK	50	0	Bottom Side	5mm	Reduced	41490	2680	15.77	17.00	1.327	42.9	1.009	0.07	0.742	0.994


<5G NR SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n5_Ant2 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	5mm	Reduced	167300	836.5	21.83	22.00	1.040	-0.04	0.364	0.379
	FR1 n5_Ant2 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Front	5mm	Reduced	167300	836.5	21.65	22.00	1.084	0.11	0.347	0.376
	FR1 n5_Ant2 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	167300	836.5	21.83	22.00	1.040	0.06	0.490	0.510
47	FR1 n5_Ant2 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	167300	836.5	21.65	22.00	1.084	0.18	0.511	0.554
	FR1 n5_Ant2 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Side	5mm	Reduced	167300	836.5	20.79	21.00	1.050	0.06	0.217	0.228
	FR1 n5_Ant2 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Right Side	5mm	Reduced	167300	836.5	20.61	21.00	1.094	0.08	0.140	0.153
	FR1 n5_Ant2 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Top Side	5mm	Reduced	167300	836.5	20.79	21.00	1.050	0.05	0.486	0.510
	FR1 n5_Ant2 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Top Side	5mm	Reduced	167300	836.5	20.61	21.00	1.094	0.15	0.417	0.456
	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	5mm	Reduced	376500	1882.5	18.30	19.00	1.175	0.18	0.698	0.820
	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	5mm	Reduced	372000	1860	18.09	19.00	1.233	0.02	0.680	0.839
	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	5mm	Reduced	381000	1905	18.24	19.00	1.191	0.09	0.610	0.727
	FR1 n25&N2_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Front	5mm	Reduced	376500	1882.5	18.29	19.00	1.178	-0.14	0.704	0.829
	FR1 n25&N2_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Front	5mm	Reduced	372000	1860	18.16	19.00	1.213	0.08	0.700	0.849
	FR1 n25&N2_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Front	5mm	Reduced	381000	1905	18.25	19.00	1.189	0.07	0.690	0.820
	FR1 n25&N2_Ant1	20M	QPSK	100	0	DFT-s-OFDM SCS15KHz	Front	5mm	Reduced	376500	1882.5	18.27	19.00	1.183	0.06	0.635	0.751
	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	376500	1882.5	18.30	19.00	1.175	0.09	1.040	1.222
	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	372000	1860	18.09	19.00	1.233	0.03	0.930	1.147
	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	381000	1905	18.24	19.00	1.191	0.09	0.950	1.132
	FR1 n25&N2_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	376500	1882.5	18.29	19.00	1.178	0.06	0.970	1.142
	FR1 n25&N2_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	372000	1860	18.16	19.00	1.213	0.08	0.963	1.168
	FR1 n25&N2_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	381000	1905	18.25	19.00	1.189	0.04	0.930	1.105
	FR1 n25&N2_Ant1	20M	QPSK	100	0	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	376500	1882.5	18.27	19.00	1.183	0.02	0.910	1.077
	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Left Side	5mm	Reduced	376500	1882.5	17.03	18.00	1.250	-0.09	0.065	0.081
	FR1 n25&N2_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Left Side	5mm	Reduced	376500	1882.5	16.88	18.00	1.294	0.07	0.068	0.088
	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Side	5mm	Reduced	376500	1882.5	17.03	18.00	1.250	0.06	0.064	0.080
	FR1 n25&N2_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Right Side	5mm	Reduced	376500	1882.5	16.88	18.00	1.294	0.05	0.058	0.075
	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Bottom Side	5mm	Reduced	376500	1882.5	17.03	18.00	1.250	0.01	0.834	1.043
48	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Bottom Side	5mm	Reduced	372000	1860	16.94	18.00	1.276	0.06	1.050	1.340
	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Bottom Side	5mm	Reduced	381000	1905	16.80	18.00	1.318	0.08	1.010	1.331
	FR1 n25&N2_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Bottom Side	5mm	Reduced	376500	1882.5	16.88	18.00	1.294	0.07	0.904	1.170
	FR1 n25&N2_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Bottom Side	5mm	Reduced	372000	1860	16.63	18.00	1.371	0.09	0.882	1.209
	FR1 n25&N2_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Bottom Side	5mm	Reduced	381000	1905	16.63	18.00	1.371	0.08	0.922	1.264
	FR1 n25&N2_Ant1	20M	QPSK	100	0	DFT-s-OFDM SCS15KHz	Bottom Side	5mm	Reduced	376500	1882.5	17.00	18.00	1.259	0.04	0.899	1.132
	FR1 n25&N2_Ant1 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	5mm	Reduced	376500	1882.5	14.11	15.00	1.227	0.02	0.312	0.383
	FR1 n25&N2_Ant1 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Front	5mm	Reduced	376500	1882.5	14.00	15.00	1.259	0.06	0.317	0.399
	FR1 n25&N2_Ant1 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	376500	1882.5	14.11	15.00	1.227	-0.03	0.449	0.551
	FR1 n25&N2_Ant1 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	376500	1882.5	14.00	15.00	1.259	0.08	0.448	0.564
	FR1 n25&N2_Ant1 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Left Side	5mm	Reduced	376500	1882.5	13.65	14.50	1.216	0.02	0.027	0.033
	FR1 n25&N2_Ant1 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Left Side	5mm	Reduced	376500	1882.5	13.52	14.50	1.253	0.01	0.029	0.036
	FR1 n25&N2_Ant1 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Side	5mm	Reduced	376500	1882.5	13.65	14.50	1.216	0.16	0.023	0.028
	FR1 n25&N2_Ant1 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Right Side	5mm	Reduced	376500	1882.5	13.52	14.50	1.253	-0.03	0.021	0.026
	FR1 n25&N2_Ant1 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Bottom Side	5mm	Reduced	376500	1882.5	13.65	14.50	1.216	0.08	0.402	0.489
	FR1 n25&N2_Ant1 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Bottom Side	5mm	Reduced	376500	1882.5	13.52	14.50	1.253	0.07	0.376	0.471
	FR1 n25_Ant2 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	5mm	Reduced	376500	1882.5	16.67	17.00	1.079	0.08	0.335	0.361
	FR1 n25_Ant2 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Front	5mm	Reduced	376500	1882.5	16.54	17.00	1.112	0.05	0.324	0.360
	FR1 n25_Ant2 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	376500	1882.5	16.67	17.00	1.079	0.11	0.511	0.551
	FR1 n25_Ant2 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	376500	1882.5	16.54	17.00	1.112	0.01	0.538	0.598
	FR1 n25_Ant2 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Side	5mm	Reduced	376500	1882.5	14.17	14.50	1.079	0.09	0.040	0.043
	FR1 n25_Ant2 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Right Side	5mm	Reduced	376500	1882.5	13.93	14.50	1.140	0.09	0.020	0.023
	FR1 n25_Ant2 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Top Side	5mm	Reduced	376500	1882.5	14.17	14.50	1.079	0.06	0.431	0.465
	FR1 n25_Ant2 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Top Side	5mm	Reduced	376500	1882.5	13.93	14.50	1.140	-0.07	0.406	0.463
	FR1 n25_Ant2 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Top Side	5mm	Reduced	372000	1860	14.09	14.50	1.099	0.07	0.517	0.568
	FR1 n25_Ant2 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Top Side	5mm	Reduced	381000	1905	14.04	14.50	1.112	0.08	0.478	0.531



FCC SAR Test Report

Report No. : FA082402

FR1 n2_Ant3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	5mm	Reduced	376000	1880	21.89	22.00	1.026	0.05	0.328	0.336
FR1 n2_Ant3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Front	5mm	Reduced	376000	1880	21.75	22.00	1.059	0.04	0.329	0.348
FR1 n2_Ant3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	376000	1880	21.89	22.00	1.026	-0.01	0.456	0.468
FR1 n2_Ant3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	376000	1880	21.75	22.00	1.059	-0.01	0.401	0.425
FR1 n2_Ant3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Left Side	5mm	Reduced	376000	1880	19.82	20.00	1.042	0.03	0.104	0.108
FR1 n2_Ant3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Left Side	5mm	Reduced	376000	1880	19.75	20.00	1.059	0.01	0.097	0.103
FR1 n2_Ant3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Side	5mm	Reduced	376000	1880	19.82	20.00	1.042	0.05	0.058	0.060
FR1 n2_Ant3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Right Side	5mm	Reduced	376000	1880	19.75	20.00	1.059	0.03	0.063	0.067
FR1 n2_Ant3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Top Side	5mm	Reduced	376000	1880	19.82	20.00	1.042	-0.02	0.411	0.428
FR1 n2_Ant3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Top Side	5mm	Reduced	376000	1880	19.75	20.00	1.059	0.01	0.433	0.459
FR1 n2_Ant3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Top Side	5mm	Reduced	372000	1860	19.71	20.00	1.069	-0.04	0.444	0.475
FR1 n2_Ant3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Top Side	5mm	Reduced	380000	1900	19.43	20.00	1.140	-0.02	0.349	0.398

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n41 Ant1-HPUE	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Front	5mm	Reduced	518598	2592.99	17.83	18.50	1.167	0.03	0.511	0.596
	FR1 n41 Ant1-HPUE	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Front	5mm	Reduced	518598	2592.99	17.69	18.50	1.205	0.11	0.496	0.598
	FR1 n41 Ant1-HPUE	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Back	5mm	Reduced	518598	2592.99	17.83	18.50	1.167	0.01	0.991	1.156
49	FR1 n41 Ant1-HPUE	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Back	5mm	Reduced	518598	2592.99	17.69	18.50	1.205	0.04	1.010	1.217
	FR1 n41 Ant1-HPUE	100M	QPSK	270	0	DFT-s-OFDM SCS30KHz	Back	5mm	Reduced	518598	2592.99	17.66	18.50	1.213	0.03	0.856	1.039
	FR1 n41 Ant1-HPUE	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Left Side	5mm	Reduced	518598	2592.99	14.74	15.50	1.191	0.01	0.031	0.037
	FR1 n41 Ant1-HPUE	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Left Side	5mm	Reduced	518598	2592.99	14.62	15.50	1.225	-0.06	0.036	0.044
	FR1 n41 Ant1-HPUE	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Right Side	5mm	Reduced	518598	2592.99	14.74	15.50	1.191	0.01	0.114	0.136
	FR1 n41 Ant1-HPUE	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Right Side	5mm	Reduced	518598	2592.99	14.62	15.50	1.225	0.01	0.115	0.141
	FR1 n41 Ant1-HPUE	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Bottom Side	5mm	Reduced	518598	2592.99	14.74	15.50	1.191	0.03	1.000	1.191
	FR1 n41 Ant1-HPUE	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Bottom Side	5mm	Reduced	518598	2592.99	14.62	15.50	1.225	0.01	0.980	1.200
	FR1 n41 Ant1-HPUE	100M	QPSK	270	0	DFT-s-OFDM SCS30KHz	Bottom Side	5mm	Reduced	518598	2592.99	14.57	15.50	1.239	0.02	0.964	1.194
	FR1 n41 Ant1-HPUE ENDC	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Front	5mm	Reduced	518598	2592.99	12.96	14.00	1.271	0.05	0.213	0.271
	FR1 n41 Ant1-HPUE ENDC	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Front	5mm	Reduced	518598	2592.99	12.82	14.00	1.312	-0.02	0.214	0.281
	FR1 n41 Ant1-HPUE ENDC	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Back	5mm	Reduced	518598	2592.99	12.96	14.00	1.271	0.01	0.382	0.485
	FR1 n41 Ant1-HPUE ENDC	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Back	5mm	Reduced	518598	2592.99	12.82	14.00	1.312	-0.03	0.392	0.514
	FR1 n41 Ant1-HPUE ENDC	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Left Side	5mm	Reduced	518598	2592.99	11.88	12.00	1.028	-0.01	0.035	0.036
	FR1 n41 Ant1-HPUE ENDC	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Left Side	5mm	Reduced	518598	2592.99	11.68	12.00	1.076	0.01	0.032	0.034
	FR1 n41 Ant1-HPUE ENDC	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Right Side	5mm	Reduced	518598	2592.99	11.88	12.00	1.028	0.03	0.059	0.061
	FR1 n41 Ant1-HPUE ENDC	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Right Side	5mm	Reduced	518598	2592.99	11.68	12.00	1.076	0.01	0.053	0.057
	FR1 n41 Ant1-HPUE ENDC	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Bottom Side	5mm	Reduced	518598	2592.99	11.88	12.00	1.028	0.08	0.420	0.432
	FR1 n41 Ant1-HPUE ENDC	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Bottom Side	5mm	Reduced	518598	2592.99	11.68	12.00	1.076	0.03	0.485	0.522



FCC SAR Test Report

Report No. : FA082402

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	5mm	Reduced	349000	1745	17.95	19.00	1.274	-0.05	0.621	0.791
	FR1 n66_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Front	5mm	Reduced	349000	1745	17.67	19.00	1.358	-0.02	0.578	0.785
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	349000	1745	17.95	19.00	1.274	0.01	0.874	1.113
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	344000	1720	17.82	19.00	1.312	0.06	0.820	1.076
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	354000	1770	17.89	19.00	1.291	0.01	0.859	1.109
	FR1 n66_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	349000	1745	17.67	19.00	1.358	0.05	0.732	0.994
	FR1 n66_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	344000	1720	17.63	19.00	1.371	0.03	0.862	1.182
	FR1 n66_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	354000	1770	17.66	19.00	1.361	0.01	0.441	0.600
	FR1 n66_Ant1	20M	QPSK	100	0	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	349000	1745	17.50	19.00	1.413	0.03	0.718	1.014
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Left Side	5mm	Reduced	349000	1745	16.67	17.50	1.211	0.01	0.042	0.051
	FR1 n66_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Left Side	5mm	Reduced	349000	1745	16.39	17.50	1.291	-0.02	0.055	0.071
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Side	5mm	Reduced	349000	1745	16.67	17.50	1.211	-0.03	0.074	0.090
	FR1 n66_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Right Side	5mm	Reduced	349000	1745	16.39	17.50	1.291	0.03	0.075	0.097
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Bottom Side	5mm	Reduced	349000	1745	16.67	17.50	1.211	0.01	1.050	1.271
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Bottom Side	5mm	Reduced	344000	1720	16.54	17.50	1.247	0.08	0.838	1.045
50	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Bottom Side	5mm	Reduced	354000	1770	16.61	17.50	1.227	0.01	1.120	1.375
	FR1 n66_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Bottom Side	5mm	Reduced	349000	1745	16.39	17.50	1.291	0.03	0.876	1.131
	FR1 n66_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Bottom Side	5mm	Reduced	344000	1720	16.35	17.50	1.303	0.05	0.326	0.425
	FR1 n66_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Bottom Side	5mm	Reduced	354000	1770	16.38	17.50	1.294	0.06	0.422	0.546
	FR1 n66_Ant1	20M	QPSK	100	0	DFT-s-OFDM SCS15KHz	Bottom Side	5mm	Reduced	349000	1745	16.22	17.50	1.343	0.01	0.383	0.514
	FR1 n66_Ant1 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	5mm	Reduced	349000	1745	15.17	16.00	1.211	-0.01	0.328	0.397
	FR1 n66_Ant1 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Front	5mm	Reduced	349000	1745	14.89	16.00	1.291	0.03	0.303	0.391
	FR1 n66_Ant1 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	349000	1745	15.17	16.00	1.211	0.05	0.438	0.530
	FR1 n66_Ant1 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	349000	1745	14.89	16.00	1.291	0.01	0.408	0.527
	FR1 n66_Ant1 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Left Side	5mm	Reduced	349000	1745	13.90	14.50	1.148	0.01	0.021	0.024
	FR1 n66_Ant1 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Left Side	5mm	Reduced	349000	1745	13.37	14.50	1.297	0.03	0.024	0.031
	FR1 n66_Ant1 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Side	5mm	Reduced	349000	1745	13.90	14.50	1.148	0.01	0.033	0.038
	FR1 n66_Ant1 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Right Side	5mm	Reduced	349000	1745	13.37	14.50	1.297	0.06	0.039	0.051
	FR1 n66_Ant1 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Bottom Side	5mm	Reduced	349000	1745	13.90	14.50	1.148	0.01	0.497	0.571
	FR1 n66_Ant1 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Bottom Side	5mm	Reduced	349000	1745	13.37	14.50	1.297	0.03	0.421	0.546
	FR1 n66_Ant 3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	5mm	Reduced	349000	1745	17.32	18.00	1.169	0.05	0.193	0.226
	FR1 n66_Ant 3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Front	5mm	Reduced	349000	1745	17.20	18.00	1.202	0.04	0.177	0.213
	FR1 n66_Ant 3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	349000	1745	17.32	18.00	1.169	-0.06	0.272	0.318
	FR1 n66_Ant 3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	349000	1745	17.20	18.00	1.202	0.04	0.236	0.284
	FR1 n66_Ant 3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	344000	1720	16.89	18.00	1.291	0.01	0.232	0.300
	FR1 n66_Ant 3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	Reduced	354000	1770	17.15	18.00	1.216	0.07	0.235	0.286
	FR1 n66_Ant 3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Left Side	5mm	Reduced	349000	1745	17.32	18.00	1.169	0.01	0.089	0.104
	FR1 n66_Ant 3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Left Side	5mm	Reduced	349000	1745	17.20	18.00	1.202	0.06	0.079	0.095
	FR1 n66_Ant 3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Side	5mm	Reduced	349000	1745	17.32	18.00	1.169	0.03	0.050	0.058
	FR1 n66_Ant 3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Right Side	5mm	Reduced	349000	1745	17.20	18.00	1.202	0.05	0.020	0.024
	FR1 n66_Ant 3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Top Side	5mm	Reduced	349000	1745	17.32	18.00	1.169	0.01	0.411	0.481
	FR1 n66_Ant 3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Top Side	5mm	Reduced	349000	1745	17.20	18.00	1.202	0.05	0.408	0.491
	FR1 n66_Ant 3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Top Side	5mm	Reduced	344000	1720	17.12	18.00	1.225	0.07	0.370	0.453
	FR1 n66_Ant 3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Top Side	5mm	Reduced	354000	1770	16.80	18.00	1.318	0.11	0.365	0.481



FCC SAR Test Report

Report No. : FA082402

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n71_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	5mm	Full	136100	680.5	23.43	24.00	1.140	0.08	0.161	0.184
	FR1 n71_Ant1	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Front	5mm	Full	136100	680.5	23.46	24.00	1.132	-0.13	0.196	0.222
	FR1 n71_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	Full	136100	680.5	23.43	24.00	1.140	0.06	0.349	0.398
	FR1 n71_Ant1	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Back	5mm	Full	136100	680.5	23.46	24.00	1.132	0.05	0.345	0.391
	FR1 n71_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Left Side	5mm	Full	136100	680.5	23.43	24.00	1.140	0.03	0.125	0.143
	FR1 n71_Ant1	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Left Side	5mm	Full	136100	680.5	23.46	24.00	1.132	-0.02	0.134	0.152
	FR1 n71_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Side	5mm	Full	136100	680.5	23.43	24.00	1.140	0.07	0.150	0.171
	FR1 n71_Ant1	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Right Side	5mm	Full	136100	680.5	23.46	24.00	1.132	0.12	0.161	0.182
	FR1 n71_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Bottom Side	5mm	Full	136100	680.5	23.43	24.00	1.140	0.01	0.270	0.308
	FR1 n71_Ant1	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Bottom Side	5mm	Full	136100	680.5	23.46	24.00	1.132	0.12	0.353	0.400
	FR1 n71_Ant2	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	5mm	Full	136100	680.5	24.16	25.00	1.213	0.06	0.246	0.298
	FR1 n71_Ant2	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Front	5mm	Full	136100	680.5	24.13	25.00	1.222	0.07	0.189	0.231
51	FR1 n71_Ant2	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	Full	136100	680.5	24.16	25.00	1.213	-0.01	0.363	0.440
	FR1 n71_Ant2	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Back	5mm	Full	136100	680.5	24.13	25.00	1.222	0.05	0.275	0.336
	FR1 n71_Ant2	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Right Side	5mm	Full	136100	680.5	24.16	25.00	1.213	0.05	0.294	0.357
	FR1 n71_Ant2	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Right Side	5mm	Full	136100	680.5	24.13	25.00	1.222	0.05	0.224	0.274
	FR1 n71_Ant2	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Top Side	5mm	Full	136100	680.5	24.16	25.00	1.213	0.05	0.332	0.403
	FR1 n71_Ant2	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Top Side	5mm	Full	136100	680.5	24.13	25.00	1.222	-0.03	0.316	0.386

<WLAN2.4G SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	Ant 3+6	Simultaneous Reduced	1	2412	18.69	19.50	1.205	0.08	0.117	0.141
52	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 3+6	Simultaneous Reduced	1	2412	18.69	19.50	1.205	-0.13	0.241	0.290
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 3+6	Simultaneous Reduced	6	2437	18.68	19.50	1.208	0.06	0.214	0.258
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 3+6	Simultaneous Reduced	11	2462	18.46	19.50	1.270	0.05	0.205	0.260
	WLAN2.4GHz	802.11b 1Mbps	Left Side	5mm	Ant 3+6	Simultaneous Reduced	1	2412	18.69	19.50	1.205	0.03	0.037	0.045
	WLAN2.4GHz	802.11b 1Mbps	Right Side	5mm	Ant 3+6	Simultaneous Reduced	1	2412	18.69	19.50	1.205	-0.02	0.101	0.122
	WLAN2.4GHz	802.11b 1Mbps	Top Side	5mm	Ant 3+6	Simultaneous Reduced	1	2412	18.69	19.50	1.205	0.07	0.223	0.269

<WLAN5G SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.2GHz	802.11a 6Mbps	Front	5mm	Ant 5+6	Simultaneous Reduced	40	5200	9.52	10.00	1.117	97.94	1.021	0.12	0.077	0.088
53	WLAN5.2GHz	802.11a 6Mbps	Back	5mm	Ant 5+6	Simultaneous Reduced	40	5200	9.52	10.00	1.117	97.94	1.021	0.06	0.339	0.387
	WLAN5.2GHz	802.11a 6Mbps	Back	5mm	Ant 5+6	Simultaneous Reduced	48	5240	8.95	10.00	1.274	97.94	1.021	0.07	0.281	0.365
	WLAN5.2GHz	802.11a 6Mbps	Back	5mm	Ant 5+6	Simultaneous Reduced	36	5180	8.98	10.00	1.265	97.94	1.021	-0.01	0.276	0.356
	WLAN5.2GHz	802.11a 6Mbps	Left Side	5mm	Ant 5+6	Simultaneous Reduced	40	5200	9.52	10.00	1.117	97.94	1.021	0.05	0.064	0.073
	WLAN5.2GHz	802.11a 6Mbps	Right Side	5mm	Ant 5+6	Simultaneous Reduced	40	5200	9.52	10.00	1.117	97.94	1.021	0.05	0.079	0.090
	WLAN5.2GHz	802.11a 6Mbps	Top Side	5mm	Ant 5+6	Simultaneous Reduced	40	5200	9.52	10.00	1.117	97.94	1.021	0.05	0.060	0.068
	WLAN5.8GHz	802.11a 6Mbps	Front	5mm	Ant 5+6	Simultaneous Reduced	157	5785	10.13	11.00	1.222	97.94	1.021	0.03	0.089	0.111
54	WLAN5.8GHz	802.11a 6Mbps	Back	5mm	Ant 5+6	Simultaneous Reduced	157	5785	10.13	11.00	1.222	97.94	1.021	0.01	0.320	0.399
	WLAN5.8GHz	802.11a 6Mbps	Left Side	5mm	Ant 5+6	Simultaneous Reduced	157	5785	10.13	11.00	1.222	97.94	1.021	0.02	0.097	0.121
	WLAN5.8GHz	802.11a 6Mbps	Right Side	5mm	Ant 5+6	Simultaneous Reduced	157	5785	10.13	11.00	1.222	97.94	1.021	0.01	0.101	0.126
	WLAN5.8GHz	802.11a 6Mbps	Top Side	5mm	Ant 5+6	Simultaneous Reduced	157	5785	10.13	11.00	1.222	97.94	1.021	0.03	0.119	0.148
	WLAN5.8GHz	802.11a 6Mbps	Back	5mm	Ant 5+6	Simultaneous Reduced	149	5745	9.89	10.00	1.026	97.94	1.021	-0.12	0.366	0.383
	WLAN5.8GHz	802.11a 6Mbps	Back	5mm	Ant 5+6	Simultaneous Reduced	165	5825	9.94	10.00	1.014	97.94	1.021	0.01	0.292	0.302

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Back	5mm	Ant 3	Full	0	2402	16.86	17.5	1.158	77.23	1.079	0.01	0.157	0.196
	Bluetooth	1Mbps	Back	5mm	Ant 3	Full	39	2441	16.95	17.5	1.134	77.23	1.079	0.03	0.148	0.181
55	Bluetooth	1Mbps	Back	5mm	Ant 3	Full	78	2480	15.90	17.5	1.445	77.23	1.079	0.01	0.145	0.226

15.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850_Ant1	GPRS 3 Tx slots	Front	5mm	-	Full	189	836.4	27.84	28.50	1.164	0.01	0.311	0.362
	GSM850_Ant1	GPRS 3 Tx slots	Back	5mm	-	Full	189	836.4	27.84	28.50	1.164	0.03	0.494	0.575
	GSM850_Ant1	GPRS 3 Tx slots	Back	5mm	-	Full	128	824.2	27.83	28.50	1.167	0.05	0.515	0.601
56	GSM850_Ant1	GPRS 3 Tx slots	Back	5mm	-	Full	251	848.8	27.35	28.50	1.303	-0.03	0.603	0.786
	GSM850_Ant2	GPRS 3 Tx slots	Front	5mm	-	Full	189	836.4	27.43	28.50	1.279	0.11	0.426	0.545
	GSM850_Ant2	GPRS 3 Tx slots	Back	5mm	-	Full	189	836.4	27.43	28.50	1.279	-0.01	0.523	0.669
	GSM850_Ant2	GPRS 3 Tx slots	Back	5mm	-	Full	128	824.2	27.06	28.50	1.393	0.08	0.467	0.651
	GSM850_Ant2	GPRS 3 Tx slots	Back	5mm	-	Full	251	848.8	27.01	28.50	1.409	0.04	0.501	0.706
	GSM1900_Ant1	GPRS 3 Tx slots	Front	5mm	-	Reduced	661	1880	23.33	24.00	1.167	-0.05	0.657	0.767
	GSM1900_Ant1	GPRS 3 Tx slots	Back	5mm	-	Reduced	661	1880	23.33	24.00	1.167	0.04	1.040	1.213
	GSM1900_Ant1	GPRS 3 Tx slots	Back	5mm	-	Reduced	512	1850.2	23.2	24.00	1.202	0.06	0.924	1.111
57	GSM1900_Ant1	GPRS 3 Tx slots	Back	5mm	-	Reduced	810	1909.8	23.3	24.00	1.175	0.08	1.220	1.433
	GSM1900_Ant1	GPRS 3 Tx slots	Back	5mm	Headset	Reduced	810	1909.8	23.3	24.00	1.175	0.06	1.080	1.269
	GSM1900_Ant1	GPRS 3 Tx slots	Front	12mm	-	Full	661	1880	25.22	26.00	1.197	0.02	0.502	0.601
	GSM1900_Ant1	GPRS 3 Tx slots	Back	24mm	-	Full	810	1909.8	25.21	26.00	1.199	-0.01	0.286	0.343

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_Ant1	RMC 12.2Kbps	Front	5mm	-	Reduced	9400	1880	16.32	17.50	1.312	0.08	0.590	0.774
58	WCDMA II_Ant1	RMC 12.2Kbps	Back	5mm	-	Reduced	9400	1880	16.32	17.50	1.312	0.04	0.863	1.132
	WCDMA II_Ant1	RMC 12.2Kbps	Back	5mm	-	Reduced	9262	1852.4	16.17	17.50	1.358	0.12	0.798	1.084
	WCDMA II_Ant1	RMC 12.2Kbps	Back	5mm	-	Reduced	9538	1907.6	16.29	17.50	1.321	0.06	0.721	0.953
	WCDMA II_Ant1	RMC 12.2Kbps	Front	12mm	-	Full	9400	1880	22.17	24.00	1.524	0.08	0.416	0.634
	WCDMA II_Ant1	RMC 12.2Kbps	Back	24mm	-	Full	9400	1880	22.17	24.00	1.524	0.04	0.235	0.358
	WCDMA IV_Ant1	RMC 12.2Kbps	Front	5mm	-	Reduced	1413	1732.6	16.27	18.00	1.489	0.05	0.638	0.950
	WCDMA IV_Ant1	RMC 12.2Kbps	Front	5mm	-	Reduced	1312	1712.4	16.21	18.00	1.510	0.02	0.428	0.646
	WCDMA IV_Ant1	RMC 12.2Kbps	Front	5mm	-	Reduced	1513	1752.6	16.19	18.00	1.517	0.01	0.616	0.935
59	WCDMA IV_Ant1	RMC 12.2Kbps	Back	5mm	-	Reduced	1413	1732.6	16.27	18.00	1.489	0.09	0.874	1.302
	WCDMA IV_Ant1	RMC 12.2Kbps	Back	5mm	-	Reduced	1312	1712.4	16.21	18.00	1.510	-0.18	0.548	0.828
	WCDMA IV_Ant1	RMC 12.2Kbps	Back	5mm	-	Reduced	1513	1752.6	16.19	18.00	1.517	0.09	0.834	1.265
	WCDMA IV_Ant1	RMC 12.2Kbps	Back	5mm	Headset	Reduced	1413	1732.6	16.27	18.00	1.489	0.08	0.830	1.236
	WCDMA IV_Ant1	RMC 12.2Kbps	Front	12mm	-	Full	1413	1732.6	22.35	24.00	1.462	0.06	0.421	0.616
	WCDMA IV_Ant1	RMC 12.2Kbps	Back	24mm	-	Full	1413	1732.6	22.35	24.00	1.462	0.01	0.216	0.316
	WCDMA V_Ant1	RMC 12.2Kbps	Front	5mm	-	Full	4182	836.4	22.28	24.00	1.486	0.16	0.244	0.363
	WCDMA V_Ant1	RMC 12.2Kbps	Back	5mm	-	Full	4182	836.4	22.28	24.00	1.486	0.09	0.526	0.782
60	WCDMA V_Ant1	RMC 12.2Kbps	Back	5mm	-	Full	4132	826.4	22.27	24.00	1.489	0.08	0.608	0.906
	WCDMA V_Ant1	RMC 12.2Kbps	Back	5mm	-	Full	4233	846.6	22.22	24.00	1.507	0.09	0.581	0.875
	WCDMA V_Ant2	RMC 12.2Kbps	Front	5mm	-	Full	4182	836.4	22.96	24.00	1.271	0.06	0.496	0.630
	WCDMA V_Ant2	RMC 12.2Kbps	Back	5mm	-	Full	4182	836.4	22.96	24.00	1.271	0.07	0.498	0.633
	WCDMA V_Ant2	RMC 12.2Kbps	Back	5mm	-	Full	4132	826.4	22.95	24.00	1.274	0.01	0.467	0.595
	WCDMA V_Ant2	RMC 12.2Kbps	Back	5mm	-	Full	4233	846.6	22.89	24.00	1.291	0.09	0.435	0.562



<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA2000 BC0_Ant1	RC3 SO32 (F+SCH)	Front	5mm	-	Full	384	836.52	24.12	25.00	1.225	0.1	0.448	0.549
	CDMA2000 BC0_Ant1	RC3 SO32 (F+SCH)	Back	5mm	-	Full	384	836.52	24.12	25.00	1.225	0.04	0.593	0.726
	CDMA2000 BC0_Ant1	RC3 SO32 (F+SCH)	Back	5mm	-	Full	1013	824.7	24.09	25.00	1.233	-0.18	0.633	0.781
61	CDMA2000 BC0_Ant1	RC3 SO32 (F+SCH)	Back	5mm	-	Full	777	848.31	23.94	25.00	1.276	-0.01	0.652	0.832
	CDMA2000 BC0_Ant2	RC3 SO32 (F+SCH)	Front	5mm	-	Full	384	836.52	24.55	25.00	1.109	0.06	0.582	0.646
	CDMA2000 BC0_Ant2	RC3 SO32 (F+SCH)	Back	5mm	-	Full	384	836.52	24.55	25.00	1.109	0.15	0.631	0.700
	CDMA2000 BC0_Ant2	RC3 SO32 (F+SCH)	Back	5mm	-	Full	1013	824.7	24.52	25.00	1.117	0.02	0.620	0.692
	CDMA2000 BC0_Ant2	RC3 SO32 (F+SCH)	Back	5mm	-	Full	777	848.31	24.37	25.00	1.156	0.05	0.713	0.824
	CDMA2000 BC1_Ant1	RC3 SO32 (F+SCH)	Front	5mm	-	Reduced	600	1880	16.38	18.00	1.452	0.06	0.554	0.804
	CDMA2000 BC1_Ant1	RC3 SO32 (F+SCH)	Front	5mm	-	Reduced	25	1851.25	16.33	18.00	1.469	0.09	0.211	0.310
	CDMA2000 BC1_Ant1	RC3 SO32 (F+SCH)	Front	5mm	-	Reduced	1175	1908.75	16.38	18.00	1.452	0.02	0.482	0.700
62	CDMA2000 BC1_Ant1	RC3 SO32 (F+SCH)	Back	5mm	-	Reduced	600	1880	16.38	18.00	1.452	0.08	0.957	1.390
	CDMA2000 BC1_Ant1	RC3 SO32 (F+SCH)	Back	5mm	Headset	Reduced	600	1880	16.38	18.00	1.452	0.03	0.830	1.205
	CDMA2000 BC1_Ant1	RC3 SO32 (F+SCH)	Back	5mm	-	Reduced	25	1851.25	16.33	18.00	1.469	0.03	0.711	1.044
	CDMA2000 BC1_Ant1	RC3 SO32 (F+SCH)	Back	5mm	-	Reduced	1175	1908.75	16.38	18.00	1.452	0.02	0.905	1.314
	CDMA2000 BC1_Ant1	RC3 SO32 (F+SCH)	Front	12mm	-	Full	600	1880	23.98	25.00	1.265	0.06	0.356	0.450
	CDMA2000 BC1_Ant1	RC3 SO32 (F+SCH)	Back	24mm	-	Full	600	1880	23.98	25.00	1.265	0.02	0.187	0.237
	CDMA2000 BC10_Ant1	RC3 SO32 (F+SCH)	Front	5mm	-	Full	684	823.1	24.33	25.00	1.167	0.01	0.418	0.488
	CDMA2000 BC10_Ant1	RC3 SO32 (F+SCH)	Back	5mm	-	Full	580	820.5	24.23	25.00	1.194	-0.06	0.605	0.722
	CDMA2000 BC10_Ant1	RC3 SO32 (F+SCH)	Back	5mm	-	Full	476	817.9	24.00	25.00	1.259	0.09	0.554	0.697
	CDMA2000 BC10_Ant1	RC3 SO32 (F+SCH)	Back	5mm	-	Full	684	823.1	24.33	25.00	1.167	0.04	0.600	0.700
	CDMA2000 BC10_Ant2	RC3 SO32 (F+SCH)	Front	5mm	-	Full	580	820.5	24.81	25.00	1.045	0.03	0.613	0.640
63	CDMA2000 BC10_Ant2	RC3 SO32 (F+SCH)	Back	5mm	-	Full	580	820.5	24.81	25.00	1.045	0.01	0.698	0.729
	CDMA2000 BC10_Ant2	RC3 SO32 (F+SCH)	Back	5mm	-	Full	476	817.9	24.56	25.00	1.107	0.05	0.637	0.705
	CDMA2000 BC10_Ant2	RC3 SO32 (F+SCH)	Back	5mm	-	Full	684	823.1	24.78	25.00	1.052	0.01	0.314	0.330



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Headset	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7_Ant1	20M	QPSK	1	0	Front	5mm	-	Reduced	21100	2535	17.26	18.50	1.330	-0.08	0.522	0.694
	LTE Band 7_Ant1	20M	QPSK	50	0	Front	5mm	-	Reduced	21100	2535	17.25	18.50	1.334	0.09	0.535	0.713
64	LTE Band 7_Ant1	20M	QPSK	1	0	Back	5mm	-	Reduced	21100	2535	17.26	18.50	1.330	0.04	1.030	1.370
	LTE Band 7_Ant1	20M	QPSK	1	0	Back	5mm	Headset	Reduced	21100	2535	17.26	18.50	1.330	0.11	0.948	1.261
	LTE Band 7_Ant1	20M	QPSK	1	0	Back	5mm	-	Reduced	20850	2510	17.16	18.50	1.361	0.02	0.970	1.321
	LTE Band 7_Ant1	20M	QPSK	1	0	Back	5mm	-	Reduced	21350	2560	17.21	18.50	1.346	0.01	0.889	1.196
	LTE Band 7_Ant1	20M	QPSK	50	0	Back	5mm	-	Reduced	21100	2535	17.25	18.50	1.334	-0.06	0.994	1.326
	LTE Band 7_Ant1	20M	QPSK	50	0	Back	5mm	-	Reduced	20850	2510	17.09	18.50	1.384	0.08	0.907	1.255
	LTE Band 7_Ant1	20M	QPSK	50	0	Back	5mm	-	Reduced	21350	2560	17.21	18.50	1.346	0.16	0.775	1.043
	LTE Band 7_Ant1	20M	QPSK	100	0	Back	5mm	-	Reduced	21100	2535	17.19	18.50	1.352	-0.13	0.833	1.126
	LTE Band 7_Ant1	20M	QPSK	1	0	Front	12mm	-	Full	21100	2535	22.45	24.00	1.429	-0.06	0.311	0.444
	LTE Band 7_Ant1	20M	QPSK	1	0	Back	24mm	-	Full	21100	2535	22.45	24.00	1.429	-0.08	0.189	0.270
EN-DC																	
	LTE Band 7_Ant1	20M	QPSK	1	0	Front	5mm	-	Reduced	21100	2535	14.65	15.00	1.084	-0.08	0.240	0.260
	LTE Band 7_Ant1	20M	QPSK	50	0	Front	5mm	-	Reduced	21100	2535	14.48	15.00	1.127	0.05	0.250	0.282
	LTE Band 7_Ant1	20M	QPSK	1	0	Back	5mm	-	Reduced	21100	2535	14.65	15.00	1.084	0.04	0.413	0.448
	LTE Band 7_Ant1	20M	QPSK	50	0	Back	5mm	-	Reduced	21100	2535	14.48	15.00	1.127	0.06	0.444	0.500
	LTE Band 12_Ant1	10M	QPSK	1	0	Front	5mm	-	Full	23095	707.5	22.95	24.00	1.274	0.08	0.408	0.520
	LTE Band 12_Ant1	10M	QPSK	25	0	Front	5mm	-	Full	23095	707.5	22.12	23.00	1.225	0.04	0.341	0.418
65	LTE Band 12_Ant1	10M	QPSK	1	0	Back	5mm	-	Full	23095	707.5	22.95	24.00	1.274	0.03	0.589	0.750
	LTE Band 12_Ant1	10M	QPSK	25	0	Back	5mm	-	Full	23095	707.5	22.12	23.00	1.225	0.09	0.506	0.620
	LTE Band 12_Ant2	10M	QPSK	1	0	Front	5mm	-	Full	23095	707.5	22.62	24.00	1.374	0.07	0.404	0.555
	LTE Band 12_Ant2	10M	QPSK	25	0	Front	5mm	-	Full	23095	707.5	21.70	23.00	1.349	0.06	0.318	0.429
	LTE Band 12_Ant2	10M	QPSK	1	0	Back	5mm	-	Full	23095	707.5	22.62	24.00	1.374	0.18	0.412	0.566
	LTE Band 12_Ant2	10M	QPSK	25	0	Back	5mm	-	Full	23095	707.5	21.70	23.00	1.349	0.08	0.404	0.545
	LTE Band 13_Ant1	10M	QPSK	1	0	Front	5mm	-	Full	23230	782	22.58	24.00	1.387	0.15	0.313	0.434
	LTE Band 13_Ant1	10M	QPSK	25	0	Front	5mm	-	Full	23230	782	22.10	23.00	1.230	-0.06	0.303	0.373
66	LTE Band 13_Ant1	10M	QPSK	1	0	Back	5mm	-	Full	23230	782	22.58	24.00	1.387	0.07	0.482	0.668
	LTE Band 13_Ant1	10M	QPSK	25	0	Back	5mm	-	Full	23230	782	22.10	23.00	1.230	0.09	0.410	0.504
EN-DC																	
	LTE Band 13_Ant1	10M	QPSK	1	0	Front	5mm	-	Reduced	23230	782	21.74	23.00	1.337	0.08	0.253	0.338
	LTE Band 13_Ant1	10M	QPSK	25	0	Front	5mm	-	Reduced	23230	782	21.63	23.00	1.371	0.07	0.221	0.303
	LTE Band 13_Ant1	10M	QPSK	1	0	Back	5mm	-	Reduced	23230	782	21.74	23.00	1.337	0.16	0.402	0.537
	LTE Band 13_Ant1	10M	QPSK	25	0	Back	5mm	-	Reduced	23230	782	21.63	23.00	1.371	0.09	0.391	0.536
	LTE Band 13_Ant1	10M	QPSK	1	0	Front	12mm	-	Full	23230	782	22.58	24.00	1.387	0.04	0.136	0.189
	LTE Band 13_Ant1	10M	QPSK	1	0	Back	24mm	-	Full	23230	782	22.58	24.00	1.387	0.06	0.070	0.097
	LTE Band 14_Ant1	10M	QPSK	1	0	Front	5mm	-	Full	23330	793	23.09	24.00	1.233	0.05	0.475	0.586
	LTE Band 14_Ant1	10M	QPSK	25	0	Front	5mm	-	Full	23330	793	22.06	23.00	1.242	0.16	0.332	0.412
67	LTE Band 14_Ant1	10M	QPSK	1	0	Back	5mm	-	Full	23330	793	23.09	24.00	1.233	-0.09	0.508	0.626
	LTE Band 14_Ant1	10M	QPSK	25	0	Back	5mm	-	Full	23330	793	22.06	23.00	1.242	0.08	0.425	0.528



FCC SAR Test Report

Report No. : FA082402

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Headset	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band25_Ant1	20M	QPSK	1	0	Front	5mm	-	Reduced	26340	1880	16.93	18.00	1.279	0.06	0.530	0.678
	LTE Band25_Ant1	20M	QPSK	50	0	Front	5mm	-	Reduced	26340	1880	16.9	18.00	1.288	-0.07	0.533	0.687
	LTE Band25_Ant1	20M	QPSK	1	0	Back	5mm	-	Reduced	26340	1880	16.93	18.00	1.279	0.03	0.928	1.187
	LTE Band25_Ant1	20M	QPSK	1	0	Back	5mm	-	Reduced	26140	1860	16.72	18.00	1.343	0.04	0.708	0.951
68	LTE Band25_Ant1	20M	QPSK	1	0	Back	5mm	-	Reduced	26590	1905	16.8	18.00	1.318	0.02	0.918	1.210
	LTE Band25_Ant1	20M	QPSK	1	0	Back	5mm	Headset	Reduced	26590	1905	16.8	18.00	1.318	0.03	0.907	1.196
	LTE Band25_Ant1	20M	QPSK	50	0	Back	5mm	-	Reduced	26340	1880	16.9	18.00	1.288	-0.02	0.931	1.199
	LTE Band25_Ant1	20M	QPSK	50	0	Back	5mm	-	Reduced	26140	1860	16.83	18.00	1.309	0.09	0.490	0.641
	LTE Band25_Ant1	20M	QPSK	50	0	Back	5mm	-	Reduced	26590	1905	16.77	18.00	1.327	0.08	0.890	1.181
	LTE Band25_Ant1	20M	QPSK	100	0	Back	5mm	-	Reduced	26340	1880	16.7	18.00	1.349	-0.01	0.891	1.202
	LTE Band25_Ant1	20M	QPSK	1	0	Front	12mm	-	Full	26340	1880	22.39	24.00	1.449	-0.03	0.311	0.451
	LTE Band25_Ant1	20M	QPSK	1	0	Back	24mm	-	Full	26590	1905	22.32	24.00	1.472	0.07	0.196	0.289
EN-DC																	
	LTE Band25_Ant1	20M	QPSK	1	0	Front	5mm	-	Reduced	26340	1880	13.72	14.50	1.197	-0.03	0.275	0.329
	LTE Band25_Ant1	20M	QPSK	50	0	Front	5mm	-	Reduced	26340	1880	13.64	14.50	1.219	0.07	0.272	0.332
	LTE Band25_Ant1	20M	QPSK	1	0	Back	5mm	-	Reduced	26340	1880	13.72	14.50	1.197	0.08	0.473	0.566
	LTE Band25_Ant1	20M	QPSK	50	0	Back	5mm	-	Reduced	26340	1880	13.64	14.50	1.219	0.01	0.452	0.551
	LTE Band25_Ant2	20M	QPSK	1	0	Front	5mm	-	Reduced	26340	1880	13.21	14.00	1.199	-0.05	0.236	0.283
	LTE Band25_Ant2	20M	QPSK	50	0	Front	5mm	-	Reduced	26340	1880	13.12	14.00	1.225	0.01	0.221	0.271
	LTE Band25_Ant2	20M	QPSK	1	0	Back	5mm	-	Reduced	26340	1880	13.21	14.00	1.199	0.04	0.302	0.362
	LTE Band25_Ant2	20M	QPSK	50	0	Back	5mm	-	Reduced	26140	1860	12.99	14.00	1.262	-0.03	0.263	0.332
	LTE Band25_Ant2	20M	QPSK	50	0	Back	5mm	-	Reduced	26590	1905	12.95	14.00	1.274	0.05	0.273	0.348
	LTE Band25_Ant2	20M	QPSK	50	0	Back	5mm	-	Reduced	26340	1880	13.12	14.00	1.225	0.01	0.304	0.372
	LTE Band25_Ant2	20M	QPSK	1	0	Front	12mm	-	Full	26340	1880	22.91	24.00	1.285	0.05	0.198	0.254
	LTE Band25_Ant2	20M	QPSK	1	0	Back	24mm	-	Full	26340	1880	22.91	24.00	1.285	-0.03	0.086	0.111
	LTE Band26_Ant1	15M	QPSK	1	0	Front	5mm	-	Full	26865	831.5	22.94	24.00	1.276	-0.01	0.346	0.442
	LTE Band26_Ant1	15M	QPSK	36	0	Front	5mm	-	Full	26865	831.5	21.87	23.00	1.297	0.07	0.205	0.266
	LTE Band26_Ant1	15M	QPSK	1	0	Back	5mm	-	Full	26865	831.5	22.94	24.00	1.276	-0.08	0.445	0.568
	LTE Band26_Ant1	15M	QPSK	36	0	Back	5mm	-	Full	26865	831.5	21.87	23.00	1.297	0.06	0.326	0.423
	LTE Band26_Ant2	15M	QPSK	1	0	Front	5mm	-	Full	26865	831.5	22.70	24.00	1.349	0.05	0.423	0.571
	LTE Band26_Ant2	15M	QPSK	36	0	Front	5mm	-	Full	26865	831.5	21.57	23.00	1.390	-0.01	0.348	0.484
69	LTE Band26_Ant2	15M	QPSK	1	0	Back	5mm	-	Full	26865	831.5	22.70	24.00	1.349	-0.04	0.454	0.612
	LTE Band26_Ant2	15M	QPSK	36	0	Back	5mm	-	Full	26865	831.5	21.57	23.00	1.390	0.12	0.365	0.507
EN-DC																	
	LTE Band 5_Ant2	10M	QPSK	1	0	Front	5mm	-	Full	20525	836.5	21.76	23.00	1.330	0.06	0.238	0.317
	LTE Band 5_Ant2	10M	QPSK	25	0	Front	5mm	-	Full	20525	836.5	21.39	22.00	1.151	-0.02	0.281	0.323
	LTE Band 5_Ant2	10M	QPSK	1	0	Back	5mm	-	Full	20525	836.5	21.76	23.00	1.330	-0.06	0.275	0.366
	LTE Band 5_Ant2	10M	QPSK	25	0	Back	5mm	-	Full	20525	836.5	21.39	22.00	1.151	0.07	0.287	0.330
	LTE Band30_Ant1	10M	QPSK	1	0	Front	5mm	-	Reduced	27710	2310	15.13	16.00	1.222	0.08	0.585	0.715
	LTE Band30_Ant1	10M	QPSK	25	0	Front	5mm	-	Reduced	27710	2310	15.11	16.00	1.227	0.09	0.585	0.718
70	LTE Band30_Ant1	10M	QPSK	1	0	Back	5mm	-	Reduced	27710	2310	15.13	16.00	1.222	0.08	1.060	1.295
	LTE Band30_Ant1	10M	QPSK	1	0	Back	5mm	Headset	Reduced	27710	2310	15.13	16.00	1.222	0.02	1.010	1.234
	LTE Band30_Ant1	10M	QPSK	25	0	Back	5mm	-	Reduced	27710	2310	15.11	16.00	1.227	0.03	1.050	1.289
	LTE Band30_Ant1	10M	QPSK	50	0	Back	5mm	-	Reduced	27710	2310	14.92	16.00	1.282	0.06	0.980	1.257
	LTE Band30_Ant1	10M	QPSK	1	0	Front	12mm	-	Full	27710	2310	21.70	23.00	1.349	0.13	0.311	0.420
	LTE Band30_Ant1	10M	QPSK	1	0	Back	24mm	-	Full	27710	2310	21.70	23.00	1.349	0.04	0.242	0.326



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Headset	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band66_Ant1	20M	QPSK	1	0	Front	5mm	-	Reduced	132322	1745	18.15	19.00	1.216	0.04	0.641	0.780
	LTE Band66_Ant1	20M	QPSK	50	0	Front	5mm	-	Reduced	132322	1745	18.11	19.00	1.227	0.02	0.529	0.649
	LTE Band66_Ant1	20M	QPSK	1	0	Back	5mm	-	Reduced	132322	1745	18.15	19.00	1.216	0.01	0.955	1.161
	LTE Band66_Ant1	20M	QPSK	1	0	Back	5mm	-	Reduced	132072	1720	18.11	19.00	1.227	0.02	0.661	0.811
71	LTE Band66_Ant1	20M	QPSK	1	0	Back	5mm	-	Reduced	132572	1770	18.02	19.00	1.253	-0.04	0.971	1.217
	LTE Band66_Ant1	20M	QPSK	1	0	Back	5mm	Headset	Reduced	132572	1770	18.02	19.00	1.253	0.02	0.938	1.175
	LTE Band66_Ant1	20M	QPSK	50	0	Back	5mm	-	Reduced	132322	1745	18.11	19.00	1.227	0.14	0.784	0.962
	LTE Band66_Ant1	20M	QPSK	50	0	Back	5mm	-	Reduced	132072	1720	18.00	19.00	1.259	0.08	0.677	0.852
	LTE Band66_Ant1	20M	QPSK	50	0	Back	5mm	-	Reduced	132572	1770	18.10	19.00	1.230	0.06	0.764	0.940
	LTE Band66_Ant1	20M	QPSK	100	0	Back	5mm	-	Reduced	132322	1745	18.04	19.00	1.247	0.01	0.955	1.191
	LTE Band66_Ant1	20M	QPSK	1	0	Front	12mm	-	Full	132322	1745	22.57	24.00	1.390	0.09	0.326	0.453
	LTE Band66_Ant1	20M	QPSK	1	0	Back	24mm	-	Full	132572	1770	22.45	24.00	1.429	0.06	0.125	0.179
EN-DC																	
	LTE Band66_Ant1	20M	QPSK	1	0	Front	5mm	-	Reduced	132322	1745	12.80	14.00	1.318	0.09	0.235	0.310
	LTE Band66_Ant1	20M	QPSK	50	0	Front	5mm	-	Reduced	132322	1745	12.72	14.00	1.343	-0.05	0.269	0.361
	LTE Band66_Ant1	20M	QPSK	1	0	Back	5mm	-	Reduced	132322	1745	12.80	14.00	1.318	0.06	0.282	0.372
	LTE Band66_Ant1	20M	QPSK	50	0	Back	5mm	-	Reduced	132322	1745	12.72	14.00	1.343	0.08	0.394	0.529
	LTE Band66_Ant2	20M	QPSK	1	0	Front	5mm	-	Reduced	132322	1745	12.76	14.00	1.330	0.06	0.239	0.318
	LTE Band66_Ant2	20M	QPSK	50	0	Front	5mm	-	Reduced	132322	1745	12.74	14.00	1.337	0.05	0.254	0.339
	LTE Band66_Ant2	20M	QPSK	1	0	Back	5mm	-	Reduced	132322	1745	12.76	14.00	1.330	-0.11	0.420	0.559
	LTE Band66_Ant2	20M	QPSK	50	0	Back	5mm	-	Reduced	132322	1745	12.74	14.00	1.337	-0.05	0.348	0.465
	LTE Band66_Ant2	20M	QPSK	1	0	Back	5mm	-	Reduced	132072	1720	12.43	14.00	1.435	0.03	0.368	0.528
	LTE Band66_Ant2	20M	QPSK	1	0	Back	5mm	-	Reduced	132572	1770	12.75	14.00	1.334	0.01	0.331	0.441
	LTE Band66_Ant2	20M	QPSK	1	0	Front	12mm	-	Full	132322	1745	22.45	24.00	1.429	0.08	0.211	0.301
	LTE Band66_Ant2	20M	QPSK	1	0	Back	24mm	-	Full	132322	1745	22.45	24.00	1.429	0.01	0.096	0.137
	LTE Band71_Ant1	20M	QPSK	1	0	Front	5mm	-	Full	133322	683	22.89	24.00	1.291	0.04	0.204	0.263
	LTE Band71_Ant1	20M	QPSK	50	0	Front	5mm	-	Full	133322	683	21.83	23.00	1.309	-0.16	0.195	0.255
72	LTE Band71_Ant1	20M	QPSK	1	0	Back	5mm	-	Full	133322	683	22.89	24.00	1.291	-0.15	0.439	0.567
	LTE Band71_Ant1	20M	QPSK	50	0	Back	5mm	-	Full	133322	683	21.83	23.00	1.309	0.08	0.380	0.497
	LTE Band71_Ant2	20M	QPSK	1	0	Front	5mm	-	Full	133322	683	22.46	24.00	1.426	-0.05	0.166	0.237
	LTE Band71_Ant2	20M	QPSK	50	0	Front	5mm	-	Full	133322	683	21.57	23.00	1.390	0.1	0.166	0.231
	LTE Band71_Ant2	20M	QPSK	1	0	Back	5mm	-	Full	133322	683	22.46	24.00	1.426	0.04	0.211	0.301
	LTE Band71_Ant2	20M	QPSK	50	0	Back	5mm	-	Full	133322	683	21.57	23.00	1.390	0.06	0.227	0.316



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Headset	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band41_Ant1	20M	QPSK	1	0	Front	5mm	-	Reduced	40620	2593	18.39	19.50	1.291	62.9	1.006	-0.04	0.557	0.724
	LTE Band41_Ant1	20M	QPSK	1	0	Front	5mm	-	Reduced	39750	2506	18.30	19.50	1.318	62.9	1.006	0.11	0.534	0.708
	LTE Band41_Ant1	20M	QPSK	1	0	Front	5mm	-	Reduced	40185	2549.5	18.14	19.50	1.368	62.9	1.006	0.08	0.456	0.627
	LTE Band41_Ant1	20M	QPSK	1	0	Front	5mm	-	Reduced	41055	2636.5	18.13	19.50	1.371	62.9	1.006	0.06	0.417	0.575
	LTE Band41_Ant1	20M	QPSK	1	0	Front	5mm	-	Reduced	41490	2680	18.33	19.50	1.309	62.9	1.006	0.16	0.478	0.630
	LTE Band41_Ant1	20M	QPSK	50	0	Front	5mm	-	Reduced	40620	2593	18.34	19.50	1.306	62.9	1.006	-0.09	0.530	0.696
	LTE Band41_Ant1	20M	QPSK	50	0	Front	5mm	-	Reduced	39750	2506	18.12	19.50	1.374	62.9	1.006	0.06	0.527	0.728
	LTE Band41_Ant1	20M	QPSK	50	0	Front	5mm	-	Reduced	40185	2549.5	18.09	19.50	1.384	62.9	1.006	0.11	0.457	0.636
	LTE Band41_Ant1	20M	QPSK	50	0	Front	5mm	-	Reduced	41055	2636.5	18.11	19.50	1.377	62.9	1.006	0.06	0.429	0.594
	LTE Band41_Ant1	20M	QPSK	50	0	Front	5mm	-	Reduced	41490	2680	18.13	19.50	1.371	62.9	1.006	0.05	0.493	0.680
	LTE Band41_Ant1	20M	QPSK	100	0	Front	5mm	-	Reduced	40620	2593	18.3	19.50	1.318	62.9	1.006	-0.06	0.531	0.704
	LTE Band41_Ant1	20M	QPSK	1	0	Back	5mm	-	Reduced	40620	2593	18.39	19.50	1.291	62.9	1.006	0.01	0.972	1.263
	LTE Band41_Ant1	20M	QPSK	1	0	Back	5mm	-	Reduced	39750	2506	18.30	19.50	1.318	62.9	1.006	0.11	0.941	1.248
	LTE Band41_Ant1	20M	QPSK	1	0	Back	5mm	-	Reduced	40185	2549.5	18.14	19.50	1.368	62.9	1.006	0.19	0.967	1.331
	LTE Band41_Ant1	20M	QPSK	1	0	Back	5mm	-	Reduced	41055	2636.5	18.13	19.50	1.371	62.9	1.006	0.05	0.899	1.240
	LTE Band41_Ant1	20M	QPSK	1	0	Back	5mm	-	Reduced	41490	2680	18.33	19.50	1.309	62.9	1.006	-0.11	0.900	1.185
	LTE Band41_Ant1	20M	QPSK	50	0	Back	5mm	-	Reduced	40620	2593	18.34	19.50	1.306	62.9	1.006	-0.14	0.930	1.222
	LTE Band41_Ant1	20M	QPSK	50	0	Back	5mm	-	Reduced	39750	2506	18.12	19.50	1.374	62.9	1.006	0.03	0.969	1.339
73	LTE Band41_Ant1	20M	QPSK	50	0	Back	5mm	-	Reduced	40185	2549.5	18.09	19.50	1.384	62.9	1.006	0.06	1.010	1.406
	LTE Band41C_Ant1	20M	QPSK	50	0	Back	5mm	-	Reduced	40185+39987	2549.5+2529.7	18.18	19.50	1.355	62.9	1.006	0.02	0.835	1.138
	LTE Band41_Ant1	20M	QPSK	50	0	Back	5mm	Headset	Reduced	40185	2549.5	18.09	19.50	1.384	62.9	1.006	0.08	0.980	1.364
	LTE Band41_Ant1	20M	QPSK	50	0	Back	5mm	-	Reduced	41055	2636.5	18.11	19.50	1.377	62.9	1.006	0.06	0.903	1.251
	LTE Band41_Ant1	20M	QPSK	50	0	Back	5mm	-	Reduced	41490	2680	18.13	19.50	1.371	62.9	1.006	-0.06	0.945	1.303
	LTE Band41_Ant1	20M	QPSK	100	0	Back	5mm	-	Reduced	40620	2593	18.3	19.50	1.318	62.9	1.006	0.11	1.040	1.379
	LTE Band41_Ant1-HPUE	20M	QPSK	50	0	Back	5mm	-	Reduced	40620	2593	18.39	19.50	1.291	42.9	1.009	0.19	0.666	0.868
	LTE Band41_Ant1-HPUE	20M	QPSK	50	0	Back	5mm	-	Reduced	39750	2506	18.16	19.50	1.361	42.9	1.009	0.03	0.527	0.724
	LTE Band41_Ant1-HPUE	20M	QPSK	50	0	Back	5mm	-	Reduced	40185	2549.5	18.2	19.50	1.349	42.9	1.009	-0.11	0.516	0.702
	LTE Band41_Ant1-HPUE	20M	QPSK	50	0	Back	5mm	-	Reduced	41055	2636.5	18.32	19.50	1.312	42.9	1.009	0.08	0.608	0.805
	LTE Band41_Ant1-HPUE	20M	QPSK	50	0	Back	5mm	-	Reduced	41490	2680	18.32	19.50	1.312	42.9	1.009	-0.02	0.493	0.653
FCC	LTE Band41_Ant1	20M	QPSK	1	0	Front	12mm	-	Full	39750	2506	22.43	24.00	1.435	62.9	1.006	0.02	0.219	0.316
	LTE Band41_Ant1	20M	QPSK	1	0	Back	24mm	-	Full	40185	2549.5	22.54	24.00	1.400	62.9	1.006	0.08	0.111	0.156



<5GNR SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Headset	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n5_Ant2 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	5mm	-	Reduced	167300	836.5	21.83	22.00	1.040	-0.04	0.364	0.379
	FR1 n5_Ant2 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Front	5mm	-	Reduced	167300	836.5	21.65	22.00	1.084	0.11	0.347	0.376
	FR1 n5_Ant2 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	-	Reduced	167300	836.5	21.83	22.00	1.040	0.06	0.490	0.510
74	FR1 n5_Ant2 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Back	5mm	-	Reduced	167300	836.5	21.65	22.00	1.084	0.18	0.511	0.554
	FR1 n5_Ant2 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	12mm	-	Full	167300	836.5	23.70	24.00	1.072	0.02	0.186	0.199
	FR1 n5_Ant2 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Back	24mm	-	Full	167300	836.5	23.54	24.00	1.112	0.03	0.085	0.094
	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	5mm	-	Reduced	376500	1882.5	18.30	19.00	1.175	0.18	0.698	0.820
	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	5mm	-	Reduced	372000	1860	18.09	19.00	1.233	0.02	0.680	0.839
	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	5mm	-	Reduced	381000	1905	18.24	19.00	1.191	0.09	0.610	0.727
	FR1 n25&N2_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Front	5mm	-	Reduced	376500	1882.5	18.29	19.00	1.178	-0.14	0.704	0.829
	FR1 n25&N2_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Front	5mm	-	Reduced	372000	1860	18.16	19.00	1.213	0.08	0.700	0.849
	FR1 n25&N2_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Front	5mm	-	Reduced	381000	1905	18.25	19.00	1.189	0.07	0.690	0.820
	FR1 n25&N2_Ant1	20M	QPSK	100	0	DFT-s-OFDM SCS15KHz	Front	5mm	-	Reduced	376500	1882.5	18.27	19.00	1.183	0.06	0.635	0.751
75	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	-	Reduced	376500	1882.5	18.30	19.00	1.175	0.09	1.040	1.222
	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	Headset	Reduced	376500	1882.5	18.30	19.00	1.175	0.02	0.950	1.116
	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	-	Reduced	372000	1860	18.09	19.00	1.233	0.03	0.930	1.147
	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	-	Reduced	381000	1905	18.24	19.00	1.191	0.09	0.950	1.132
	FR1 n25&N2_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Back	5mm	-	Reduced	376500	1882.5	18.29	19.00	1.178	0.06	0.970	1.142
	FR1 n25&N2_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Back	5mm	-	Reduced	372000	1860	18.16	19.00	1.213	0.08	0.963	1.168
	FR1 n25&N2_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Back	5mm	-	Reduced	381000	1905	18.25	19.00	1.189	0.04	0.930	1.105
	FR1 n25&N2_Ant1	20M	QPSK	100	0	DFT-s-OFDM SCS15KHz	Back	5mm	-	Reduced	376500	1882.5	18.27	19.00	1.183	0.02	0.910	1.077
	FR1 n25&N2_Ant1 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	5mm	-	Reduced	376500	1882.5	14.11	15.00	1.227	0.02	0.312	0.383
	FR1 n25&N2_Ant1 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Front	5mm	-	Reduced	376500	1882.5	14.00	15.00	1.259	0.06	0.317	0.399
	FR1 n25&N2_Ant1 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	-	Reduced	376500	1882.5	14.11	15.00	1.227	-0.03	0.449	0.551
	FR1 n25&N2_Ant1 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Back	5mm	-	Reduced	376500	1882.5	14.00	15.00	1.259	0.08	0.448	0.564
	FR1 n25&N2_Ant1	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Front	12mm	-	Full	372000	1860	22.97	24.00	1.268	0.09	0.417	0.529
	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	24mm	-	Full	376500	1882.5	23.39	24.00	1.151	0.08	0.249	0.287
	FR1 n25_Ant2 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	5mm	-	Reduced	376500	1882.5	16.67	17.00	1.079	0.08	0.335	0.361
	FR1 n25_Ant2 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Front	5mm	-	Reduced	376500	1882.5	16.54	17.00	1.112	0.05	0.324	0.360
	FR1 n25_Ant2 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	-	Reduced	376500	1882.5	16.67	17.00	1.079	0.11	0.511	0.551
	FR1 n25_Ant2 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Back	5mm	-	Reduced	376500	1882.5	16.54	17.00	1.112	0.01	0.538	0.598
	FR1 n25_Ant2 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	12mm	-	Full	376500	1882.5	23.22	24.00	1.197	0.01	0.202	0.242
	FR1 n25_Ant2 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Back	24mm	-	Full	376500	1882.5	23.16	24.00	1.213	0.04	0.128	0.155
	FR1 n2_Ant3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	5mm	-	Reduced	376000	1880	21.89	22.00	1.026	0.05	0.328	0.336
	FR1 n2_Ant3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Front	5mm	-	Reduced	376000	1880	21.75	22.00	1.059	0.04	0.329	0.348
	FR1 n2_Ant3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	-	Reduced	376000	1880	21.89	22.00	1.026	-0.01	0.456	0.468
	FR1 n2_Ant3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Back	5mm	-	Reduced	376000	1880	21.75	22.00	1.059	-0.01	0.401	0.425
	FR1 n2_Ant3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Front	12mm	-	Full	376000	1880	23.61	24.00	1.094	0.04	0.149	0.163
	FR1 n2_Ant3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	24mm	-	Full	376000	1880	23.76	24.00	1.057	0.01	0.056	0.059
	FR1 n41 Ant1-HPUE	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Front	5mm	-	Reduced	518598	2592.99	17.83	18.50	1.167	0.03	0.511	0.596
	FR1 n41 Ant1-HPUE	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Front	5mm	-	Reduced	518598	2592.99	17.69	18.50	1.205	0.11	0.496	0.598
	FR1 n41 Ant1-HPUE	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Back	5mm	-	Reduced	518598	2592.99	17.83	18.50	1.167	0.01	0.991	1.156
76	FR1 n41 Ant1-HPUE	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Back	5mm	-	Reduced	518598	2592.99	17.69	18.50	1.205	0.04	1.010	1.217
	FR1 n41 Ant1-HPUE	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Back	5mm	Headset	Reduced	518598	2592.99	17.69	18.50	1.205	0.06	0.889	1.071
	FR1 n41 Ant1-HPUE	100M	QPSK	270	0	DFT-s-OFDM SCS30KHz	Back	5mm	-	Reduced	518598	2592.99	17.66	18.50	1.213	0.03	0.856	1.039
	FR1 n41 Ant1-HPUE ENDC	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Front	5mm	-	Reduced	518598	2592.99	12.96	14.00	1.271	0.05	0.213	0.271
	FR1 n41 Ant1-HPUE ENDC	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Front	5mm	-	Reduced	518598	2592.99	12.82	14.00	1.312	-0.02	0.214	0.281
	FR1 n41 Ant1-HPUE ENDC	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Back	5mm	-	Reduced	518598	2592.99	12.96	14.00	1.271	0.01	0.382	0.485
	FR1 n41 Ant1-HPUE ENDC	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Back	5mm	-	Reduced	518598	2592.99	12.82	14.00	1.312	-0.03	0.392	0.514
	FR1 n41 Ant1-HPUE	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Front	12mm	-	Full	518598	2592.99	26.22	27.00	1.197	0.05	0.369	0.442
	FR1 n41 Ant1-HPUE	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Back	24mm	-	Full	518598	2592.99	26.22	27.00	1.197	-0.02	0.187	0.224



FCC SAR Test Report

Report No. : FA082402

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Headset	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	5mm	-	Reduced	349000	1745	17.95	19.00	1.274	-0.05	0.621	0.791
	FR1 n66_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Front	5mm	-	Reduced	349000	1745	17.67	19.00	1.358	-0.02	0.578	0.785
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	-	Reduced	349000	1745	17.95	19.00	1.274	0.01	0.874	1.113
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	-	Reduced	344000	1720	17.82	19.00	1.312	0.06	0.820	1.076
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	-	Reduced	354000	1770	17.89	19.00	1.291	0.01	0.859	1.109
	FR1 n66_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Back	5mm	-	Reduced	349000	1745	17.67	19.00	1.358	0.05	0.732	0.994
77	FR1 n66_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Back	5mm	-	Reduced	344000	1720	17.63	19.00	1.371	0.03	0.862	1.182
	FR1 n66_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Back	5mm	-	Reduced	354000	1770	17.66	19.00	1.361	0.01	0.441	0.600
	FR1 n66_Ant1	20M	QPSK	100	0	DFT-s-OFDM SCS15KHz	Back	5mm	-	Reduced	349000	1745	17.50	19.00	1.413	0.03	0.718	1.014
	FR1 n66_Ant1 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	5mm	-	Reduced	349000	1745	15.17	16.00	1.211	-0.01	0.328	0.397
	FR1 n66_Ant1 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Front	5mm	-	Reduced	349000	1745	14.89	16.00	1.291	0.03	0.303	0.391
	FR1 n66_Ant1 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	-	Reduced	349000	1745	15.17	16.00	1.211	0.05	0.438	0.530
	FR1 n66_Ant1 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Back	5mm	-	Reduced	349000	1745	14.89	16.00	1.291	0.01	0.408	0.527
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	12mm	-	Full	349000	1745	23.70	24.00	1.072	0.01	0.349	0.374
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	24mm	-	Full	344000	1720	23.53	24.00	1.114	-0.01	0.151	0.168
	FR1 n66_Ant 3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	5mm	-	Reduced	349000	1745	17.32	18.00	1.169	0.05	0.193	0.226
	FR1 n66_Ant 3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Front	5mm	-	Reduced	349000	1745	17.20	18.00	1.202	0.04	0.177	0.213
	FR1 n66_Ant 3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	-	Reduced	349000	1745	17.32	18.00	1.169	-0.06	0.272	0.318
	FR1 n66_Ant 3 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Back	5mm	-	Reduced	349000	1745	17.20	18.00	1.202	0.04	0.236	0.284
	FR1 n66_Ant 3 ENDC	20M	QPSK	1	1	FR1 n66_Ant 3 ENDC	Back	5mm	-	Reduced	344000	1720	16.89	18.00	1.291	0.01	0.232	0.300
	FR1 n66_Ant 3 ENDC	20M	QPSK	1	1	FR1 n66_Ant 3 ENDC	Back	5mm	-	Reduced	354000	1770	17.15	18.00	1.216	0.07	0.235	0.286
	FR1 n66_Ant 3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	12mm	-	Full	349000	1745	23.81	24.00	1.045	0.06	0.141	0.147
	FR1 n66_Ant 3 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	24mm	-	Full	349000	1745	23.81	24.00	1.045	0.09	0.053	0.055
	FR1 n71_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	5mm	-	Full	136100	680.5	23.43	24.00	1.140	0.08	0.161	0.184
	FR1 n71_Ant1	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Front	5mm	-	Full	136100	680.5	23.46	24.00	1.132	-0.13	0.196	0.222
	FR1 n71_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	-	Full	136100	680.5	23.43	24.00	1.140	0.06	0.349	0.398
	FR1 n71_Ant1	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Back	5mm	-	Full	136100	680.5	23.46	24.00	1.132	0.05	0.345	0.391
	FR1 n71_Ant2	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	5mm	-	Full	136100	680.5	24.16	25.00	1.213	0.06	0.246	0.298
	FR1 n71_Ant2	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Front	5mm	-	Full	136100	680.5	24.13	25.00	1.222	0.07	0.189	0.231
78	FR1 n71_Ant2	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	5mm	-	Full	136100	680.5	24.16	25.00	1.213	-0.01	0.363	0.440
	FR1 n71_Ant2	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Back	5mm	-	Full	136100	680.5	24.13	25.00	1.222	0.05	0.275	0.336

<WLAN2.4G SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Antenna	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	-	Ant 3+6	Full	1	2412	22.35	23.00	1.162	100	1.000	0.05	0.234	0.272
79	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	-	Ant 3+6	Full	1	2412	22.35	23.00	1.162	100	1.000	0.01	0.611	0.710
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	-	Ant 3+6	Full	6	2437	22.27	23.00	1.182	100	1.000	-0.09	0.355	0.420
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	-	Ant 3+6	Full	11	2462	21.84	23.00	1.306	100	1.000	-0.07	0.318	0.415
	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	-	Ant 3+6	Simultaneous Reduced	1	2412	18.69	19.50	1.205	100	1.000	0.04	0.117	0.141
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	-	Ant 3+6	Simultaneous Reduced	1	2412	18.69	19.50	1.205	100	1.000	0.03	0.241	0.290

<WLAN5G SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Antenna	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.3GHz	802.11a 6Mbps	Front	5mm	-	Ant 5+6	Reduced	52	5260	13.98	15.00	1.265	97.94	1.021	0.05	0.069	0.089
	WLAN5.3GHz	802.11a 6Mbps	Back	5mm	-	Ant 5+6	Reduced	52	5260	13.98	15.00	1.265	97.94	1.021	0.04	0.718	0.927
80	WLAN5.3GHz	802.11a 6Mbps	Back	5mm	-	Ant 5+6	Reduced	60	5300	13.87	15.00	1.297	97.94	1.021	0.08	0.892	1.181
	WLAN5.3GHz	802.11a 6Mbps	Back	5mm	-	Ant 5+6	Reduced	64	5320	13.81	15.00	1.315	97.94	1.021	0.06	0.729	0.979
	WLAN5.3GHz	802.11a 6Mbps	Front	5mm	-	Ant 5+6	Simultaneous Reduced	52	5260	8.67	10.00	1.358	97.94	1.021	-0.01	0.054	0.075
	WLAN5.3GHz	802.11a 6Mbps	Back	5mm	-	Ant 5+6	Simultaneous Reduced	52	5260	8.67	10.00	1.358	97.94	1.021	0.08	0.233	0.323
	WLAN5.3GHz	802.11a 6Mbps	Front	12mm	-	Ant 5+6	Full	56	5280	21.15	22.00	1.216	97.94	1.021	0.06	0.048	0.060
	WLAN5.3GHz	802.11a 6Mbps	Back	24mm	-	Ant 5+6	Full	56	5280	21.15	22.00	1.216	97.94	1.021	-0.04	0.940	1.167
	WLAN5.5GHz	802.11a 6Mbps	Front	5mm	-	Ant 5+6	Reduced	140	5700	14.08	15.00	1.236	97.94	1.021	0.03	0.065	0.082
	WLAN5.5GHz	802.11a 6Mbps	Back	5mm	-	Ant 5+6	Reduced	140	5700	14.08	15.00	1.236	97.94	1.021	0.07	0.602	0.760
	WLAN5.5GHz	802.11a 6Mbps	Back	5mm	-	Ant 5+6	Reduced	100	5500	13.82	15.00	1.312	97.94	1.021	-0.11	0.828	1.109
81	WLAN5.5GHz	802.11a 6Mbps	Back	5mm	-	Ant 5+6	Reduced	132	5660	13.92	15.00	1.282	97.94	1.021	0.09	0.911	1.193
	WLAN5.5GHz	802.11a 6Mbps	Front	5mm	-	Ant 5+6	Simultaneous Reduced	116	5580	8.44	10.00	1.432	97.94	1.021	0.08	0.063	0.092
	WLAN5.5GHz	802.11a 6Mbps	Back	5mm	-	Ant 5+6	Simultaneous Reduced	116	5580	8.44	10.00	1.432	97.94	1.021	0.04	0.250	0.366
	WLAN5.5GHz	802.11a 6Mbps	Front	12mm	-	Ant 5+6	Full	132	5660	22.44	23.00	1.138	97.94	1.021	0.05	0.064	0.074
	WLAN5.5GHz	802.11a 6Mbps	Back	24mm	-	Ant 5+6	Full	132	5660	22.44	23.00	1.138	97.94	1.021	0.04	0.970	1.127
	WLAN5.8GHz	802.11a 6Mbps	Front	5mm	-	Ant 5+6	Reduced	157	5785	15.00	16.00	1.259	97.94	1.021	0.07	0.121	0.156
	WLAN5.8GHz	802.11a 6Mbps	Back	5mm	-	Ant 5+6	Reduced	157	5785	15.00	16.00	1.259	97.94	1.021	0.07	0.839	1.078
82	WLAN5.8GHz	802.11a 6Mbps	Back	5mm	-	Ant 5+6	Reduced	149	5745	14.93	16.00	1.279	97.94	1.021	-0.07	0.910	1.189
	WLAN5.8GHz	802.11a 6Mbps	Back	5mm	-	Ant 5+6	Reduced	165	5825	14.88	16.00	1.294	97.94	1.021	0.08	0.809	1.069
	WLAN5.8GHz	802.11a 6Mbps	Front	5mm	-	Ant 5+6	Simultaneous Reduced	157	5785	10.13	11.00	1.222	97.94	1.021	0.04	0.089	0.111
	WLAN5.8GHz	802.11a 6Mbps	Back	5mm	-	Ant 5+6	Simultaneous Reduced	157	5785	10.13	11.00	1.222	97.94	1.021	0.08	0.320	0.399
	WLAN5.8GHz	802.11a 6Mbps	Front	12mm	-	Ant 5+6	Full	157	5785	22.24	23.00	1.191	97.94	1.021	0.06	0.042	0.050
	WLAN5.8GHz	802.11a 6Mbps	Back	24mm	-	Ant 5+6	Full	157	5785	22.24	23.00	1.191	97.94	1.021	-0.02	0.613	0.746

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Back	5mm	-	Ant 3	0	2402	16.86	17.5	1.158	77.23	1.079	0.01	0.157	0.196
	Bluetooth	1Mbps	Back	5mm	-	Ant 3	39	2441	16.95	17.5	1.134	77.23	1.079	0.03	0.148	0.181
83	Bluetooth	1Mbps	Back	5mm	-	Ant 3	78	2480	15.90	17.5	1.445	77.23	1.079	0.01	0.145	0.226

15.4 Product specific 10g SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	GSM1900_Ant1	GPRS 3 Tx slots	Front	0mm	Full	661	1880	25.22	26.00	1.197	0.11	2.074	2.482
	GSM1900_Ant1	GPRS 3 Tx slots	Front	0mm	Full	810	1909.8	25.21	26.00	1.199	-0.02	1.674	2.008
	GSM1900_Ant1	GPRS 3 Tx slots	Front	0mm	Full	512	1850.2	24.79	26.00	1.321	0.06	1.880	2.484
	GSM1900_Ant1	GPRS 3 Tx slots	Back	0mm	Full	810	1909.8	25.21	26.00	1.199	0.08	2.199	2.638
84	GSM1900_Ant1	GPRS 3 Tx slots	Back	0mm	Full	512	1850.2	24.79	26.00	1.321	0.09	2.460	3.250
	GSM1900_Ant1	GPRS 3 Tx slots	Back	0mm	Full	661	1880	25.22	26.00	1.197	0.07	2.205	2.639
	GSM1900_Ant1	GPRS 3 Tx slots	Bottom Side	0mm	Full	661	1880	25.22	26.00	1.197	0.16	1.532	1.833

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA II_Ant1	RMC 12.2Kbps	Front	0mm	Reduced	9400	1880	18.97	20.50	1.422	0.09	2.290	3.257
	WCDMA II_Ant1	RMC 12.2Kbps	Front	0mm	Reduced	9262	1852.4	18.95	20.50	1.429	-0.05	2.210	3.158
85	WCDMA II_Ant1	RMC 12.2Kbps	Front	0mm	Reduced	9538	1907.6	18.84	20.50	1.466	0.06	2.430	3.561
	WCDMA II_Ant1	RMC 12.2Kbps	Back	0mm	Reduced	9400	1880	18.97	20.50	1.422	0.08	1.900	2.702
	WCDMA II_Ant1	RMC 12.2Kbps	Back	0mm	Reduced	9262	1852.4	18.95	20.50	1.429	0.07	2.330	3.329
	WCDMA II_Ant1	RMC 12.2Kbps	Back	0mm	Reduced	9538	1907.6	18.84	20.50	1.466	-0.05	1.960	2.872
	WCDMA II_Ant1	RMC 12.2Kbps	Bottom Side	0mm	Reduced	9400	1880	18.97	20.50	1.422	0.04	1.260	1.792
	WCDMA II_Ant1	RMC 12.2Kbps	Front	9mm	Full	9538	1907.6	22.03	24.00	1.574	-0.08	0.963	1.516
	WCDMA II_Ant1	RMC 12.2Kbps	Back	16mm	Full	9262	1852.4	22.14	24.00	1.535	0.09	0.623	0.956
	WCDMA II_Ant1	RMC 12.2Kbps	Bottom Side	17mm	Full	9400	1880	22.17	24.00	1.524	0.01	0.862	1.314
	WCDMA IV_Ant1	RMC 12.2Kbps	Front	0mm	Reduced	1413	1732.6	18.59	20.00	1.384	0.07	1.438	1.990
	WCDMA IV_Ant1	RMC 12.2Kbps	Back	0mm	Reduced	1413	1732.6	18.59	20.00	1.384	-0.09	2.389	3.305
	WCDMA IV_Ant1	RMC 12.2Kbps	Back	0mm	Reduced	1312	1712.4	18.48	20.00	1.419	0.05	2.106	2.989
86	WCDMA IV_Ant1	RMC 12.2Kbps	Back	0mm	Reduced	1513	1752.6	18.51	20.00	1.409	0.08	2.530	3.566
	WCDMA IV_Ant1	RMC 12.2Kbps	Bottom Side	0mm	Reduced	1413	1732.6	18.59	20.00	1.384	0.06	1.902	2.632
	WCDMA IV_Ant1	RMC 12.2Kbps	Bottom Side	0mm	Reduced	1312	1712.4	18.48	20.00	1.419	0.07	1.999	2.837
	WCDMA IV_Ant1	RMC 12.2Kbps	Bottom Side	0mm	Reduced	1513	1752.6	18.51	20.00	1.409	0.02	1.742	2.455
	WCDMA IV_Ant1	RMC 12.2Kbps	Front	9mm	Full	1413	1732.6	22.35	24.00	1.462	0.08	0.861	1.259
	WCDMA IV_Ant1	RMC 12.2Kbps	Back	16mm	Full	1513	1752.6	22.34	24.00	1.466	0.06	0.618	0.906
	WCDMA IV_Ant1	RMC 12.2Kbps	Bottom Side	17mm	Full	1312	1712.4	22.13	24.00	1.538	0.01	0.852	1.311

<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	CDMA2000 BC1_Ant1	RTAP 153.6Kbps	Back	0mm	Reduced	600	1880	21.25	22.00	1.189	0.11	2.370	2.817
	CDMA2000 BC1_Ant1	RTAP 153.6Kbps	Back	0mm	Reduced	25	1851.25	20.97	22.00	1.268	0.09	2.350	2.979
87	CDMA2000 BC1_Ant1	RTAP 153.6Kbps	Back	0mm	Reduced	1175	1908.75	21.14	22.00	1.219	0.06	2.560	3.121
	CDMA2000 BC1_Ant1	RTAP 153.6Kbps	Bottom Side	0mm	Reduced	600	1880	21.25	22.00	1.189	0.01	1.510	1.795
	CDMA2000 BC1_Ant1	RTAP 153.6Kbps	Bottom Side	0mm	Reduced	25	1851.25	20.97	22.00	1.268	0.01	1.500	1.901
	CDMA2000 BC1_Ant1	RTAP 153.6Kbps	Bottom Side	0mm	Reduced	1175	1908.75	21.14	22.00	1.219	0.06	1.930	2.353
	CDMA2000 BC1_Ant1	RTAP 153.6Kbps	Back	16mm	Full	1175	1908.75	24.05	25.00	1.245	0.06	0.631	0.785
	CDMA2000 BC1_Ant1	RTAP 153.6Kbps	Bottom Side	17mm	Full	1175	1908.75	24.05	25.00	1.245	0.04	0.811	1.009



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 7_Ant1	20M	QPSK	1	0	Front	0mm	Reduced	21100	2535	20.86	21.50	1.159	0.06	1.590	1.842
	LTE Band 7_Ant1	20M	QPSK	50	0	Front	0mm	Reduced	21100	2535	20.82	21.50	1.169	0.02	1.360	1.591
	LTE Band 7_Ant1	20M	QPSK	1	0	Back	0mm	Reduced	21100	2535	20.86	21.50	1.159	-0.06	2.580	2.990
88	LTE Band 7_Ant1	20M	QPSK	1	0	Back	0mm	Reduced	20850	2510	20.69	21.50	1.205	0.08	2.680	3.229
	LTE Band 7_Ant1	20M	QPSK	1	0	Back	0mm	Reduced	21350	2560	20.83	21.50	1.167	0.07	2.650	3.092
	LTE Band 7_Ant1	20M	QPSK	50	0	Back	0mm	Reduced	21100	2535	20.82	21.50	1.169	0.11	2.110	2.468
	LTE Band 7_Ant1	20M	QPSK	50	0	Back	0mm	Reduced	20850	2510	20.62	21.50	1.225	0.06	2.100	2.572
	LTE Band 7_Ant1	20M	QPSK	50	0	Back	0mm	Reduced	21350	2560	20.80	21.50	1.175	-0.06	2.010	2.362
	LTE Band 7_Ant1	20M	QPSK	100	0	Back	0mm	Reduced	21100	2535	20.78	21.50	1.180	0.08	2.080	2.455
	LTE Band 7_Ant1	20M	QPSK	1	0	Bottom Side	0mm	Reduced	21100	2535	20.86	21.50	1.159	0.01	2.330	2.700
	LTE Band 7_Ant1	20M	QPSK	1	0	Bottom Side	0mm	Reduced	20850	2510	20.69	21.50	1.205	0.06	2.440	2.940
	LTE Band 7_Ant1	20M	QPSK	1	0	Bottom Side	0mm	Reduced	21350	2560	20.83	21.50	1.167	0.01	2.040	2.380
	LTE Band 7_Ant1	20M	QPSK	50	0	Bottom Side	0mm	Reduced	21100	2535	20.82	21.50	1.169	0.06	1.520	1.778
	LTE Band 7_Ant1	20M	QPSK	100	0	Bottom Side	0mm	Reduced	21100	2535	20.78	21.50	1.180	0.15	1.520	1.794
	LTE Band 7_Ant1	20M	QPSK	1	0	Front	9mm	Full	21100	2535	22.45	24.00	1.429	0.07	0.510	0.729
	LTE Band 7_Ant1	20M	QPSK	1	0	Back	16mm	Full	20850	2510	22.23	24.00	1.503	0.11	0.451	0.678
	LTE Band 7_Ant1	20M	QPSK	1	0	Bottom Side	17mm	Full	20850	2510	22.23	24.00	1.503	0.06	0.499	0.750
EN-DC																
	LTE Band 7_Ant1	20M	QPSK	1	0	Front	0mm	Reduced	21100	2535	17.67	18.50	1.211	0.05	0.608	0.736
	LTE Band 7_Ant1	20M	QPSK	50	0	Front	0mm	Reduced	21100	2535	17.55	18.50	1.245	0.06	0.631	0.785
	LTE Band 7_Ant1	20M	QPSK	1	0	Back	0mm	Reduced	21100	2535	17.67	18.50	1.211	0.15	0.906	1.097
	LTE Band 7_Ant1	20M	QPSK	50	0	Back	0mm	Reduced	21100	2535	17.55	18.50	1.245	-0.06	0.938	1.167
	LTE Band 7_Ant1	20M	QPSK	1	0	Bottom Side	0mm	Reduced	21100	2535	17.67	18.50	1.211	0.08	0.665	0.805
	LTE Band 7_Ant1	20M	QPSK	50	0	Bottom Side	0mm	Reduced	21100	2535	17.55	18.50	1.245	-0.08	0.687	0.855



FCC SAR Test Report

Report No. : FA082402

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band25_Ant1	20M	QPSK	1	0	Front	0mm	Reduced	26340	1880	21.4	22.50	1.288	0.06	1.630	2.100
	LTE Band25_Ant1	20M	QPSK	1	0	Front	0mm	Reduced	26140	1860	21.34	22.50	1.306	0.05	1.300	1.698
	LTE Band25_Ant1	20M	QPSK	1	0	Front	0mm	Reduced	26590	1905	21.32	22.50	1.312	0.01	1.520	1.995
	LTE Band25_Ant1	20M	QPSK	50	0	Front	0mm	Reduced	26340	1880	21.34	22.50	1.306	-0.02	1.330	1.737
	LTE Band25_Ant1	20M	QPSK	100	0	Front	0mm	Reduced	26340	1880	21.32	22.50	1.312	0.19	1.340	1.758
	LTE Band25_Ant1	20M	QPSK	1	0	Back	0mm	Reduced	26340	1880	21.4	22.50	1.288	0.01	1.380	1.778
	LTE Band25_Ant1	20M	QPSK	1	0	Back	0mm	Reduced	26140	1860	21.34	22.50	1.306	0.06	1.970	2.573
89	LTE Band25_Ant1	20M	QPSK	1	0	Back	0mm	Reduced	26590	1905	21.32	22.50	1.312	0.05	2.190	2.874
	LTE Band25_Ant1	20M	QPSK	50	0	Back	0mm	Reduced	26340	1880	21.34	22.50	1.306	0.01	1.460	1.907
	LTE Band25_Ant1	20M	QPSK	50	0	Back	0mm	Reduced	26140	1860	21.23	22.50	1.340	-0.03	1.600	2.143
	LTE Band25_Ant1	20M	QPSK	50	0	Back	0mm	Reduced	26590	1905	21.3	22.50	1.318	0.19	1.650	2.175
	LTE Band25_Ant1	20M	QPSK	100	0	Back	0mm	Reduced	26340	1880	21.32	22.50	1.312	0.01	1.420	1.863
	LTE Band25_Ant1	20M	QPSK	1	0	Bottom Side	0mm	Reduced	26340	1880	21.4	22.50	1.288	0.05	1.720	2.216
	LTE Band25_Ant1	20M	QPSK	1	0	Bottom Side	0mm	Reduced	26140	1860	21.34	22.50	1.306	-0.19	1.880	2.456
	LTE Band25_Ant1	20M	QPSK	1	0	Bottom Side	0mm	Reduced	26590	1905	21.32	22.50	1.312	0.08	1.890	2.480
	LTE Band25_Ant1	20M	QPSK	50	0	Bottom Side	0mm	Reduced	26340	1880	21.34	22.50	1.306	0.07	1.700	2.220
	LTE Band25_Ant1	20M	QPSK	50	0	Bottom Side	0mm	Reduced	26140	1860	21.23	22.50	1.340	0.09	1.220	1.634
	LTE Band25_Ant1	20M	QPSK	50	0	Bottom Side	0mm	Reduced	26590	1905	21.3	22.50	1.318	-0.09	1.420	1.872
	LTE Band25_Ant1	20M	QPSK	100	0	Bottom Side	0mm	Reduced	26340	1880	21.32	22.50	1.312	0.06	1.760	2.309
	LTE Band25_Ant1	20M	QPSK	1	0	Front	9mm	Full	26340	1880	22.39	24.00	1.449	0.08	0.611	0.885
	LTE Band25_Ant1	20M	QPSK	1	0	Back	16mm	Full	26590	1905	22.32	24.00	1.472	-0.01	0.368	0.542
	LTE Band25_Ant1	20M	QPSK	1	0	Bottom Side	17mm	Full	26590	1905	22.32	24.00	1.472	-0.02	0.561	0.826
EN-DC																
	LTE Band25_Ant1	20M	QPSK	1	0	Front	0mm	Reduced	26340	1880	17.38	18.50	1.294	-0.06	0.869	1.125
	LTE Band25_Ant1	20M	QPSK	50	0	Front	0mm	Reduced	26340	1880	17.24	18.50	1.337	0.05	0.769	1.028
	LTE Band25_Ant1	20M	QPSK	1	0	Back	0mm	Reduced	26340	1880	17.38	18.50	1.294	-0.03	1.000	1.294
	LTE Band25_Ant1	20M	QPSK	50	0	Back	0mm	Reduced	26340	1880	17.24	18.50	1.337	0.06	1.010	1.350
	LTE Band25_Ant1	20M	QPSK	1	0	Bottom Side	0mm	Reduced	26340	1880	17.38	18.50	1.294	0.11	0.919	1.189
	LTE Band25_Ant1	20M	QPSK	50	0	Bottom Side	0mm	Reduced	26340	1880	17.24	18.50	1.337	0.06	1.100	1.470
	LTE Band25_Ant1	20M	QPSK	50	0	Bottom Side	0mm	Reduced	26140	1860	17.03	18.50	1.403	-0.06	0.838	1.176
	LTE Band25_Ant1	20M	QPSK	50	0	Bottom Side	0mm	Reduced	26590	1905	17.11	18.50	1.377	0.16	0.987	1.359
	LTE Band25_Ant2	20M	QPSK	1	0	Front	0mm	Reduced	26340	1880	17.22	18.00	1.197	0.11	0.708	0.847
	LTE Band25_Ant2	20M	QPSK	50	0	Front	0mm	Reduced	26340	1880	17.00	18.00	1.259	0.05	0.802	1.010
	LTE Band25_Ant2	20M	QPSK	1	0	Back	0mm	Reduced	26340	1880	17.22	18.00	1.197	0.03	0.741	0.887
	LTE Band25_Ant2	20M	QPSK	50	0	Back	0mm	Reduced	26340	1880	17.00	18.00	1.259	-0.03	0.840	1.057
	LTE Band25_Ant2	20M	QPSK	1	0	Top Side	0mm	Reduced	26340	1880	17.22	18.00	1.197	0.08	1.130	1.352
	LTE Band25_Ant2	20M	QPSK	50	0	Top Side	0mm	Reduced	26340	1880	17.00	18.00	1.259	0.05	1.150	1.448
	LTE Band25_Ant2	20M	QPSK	50	0	Top Side	0mm	Reduced	26140	1860	16.89	18.00	1.291	-0.01	1.060	1.369
	LTE Band25_Ant2	20M	QPSK	50	0	Top Side	0mm	Reduced	26590	1905	16.87	18.00	1.297	0.08	1.100	1.427
	LTE Band25_Ant2	20M	QPSK	1	0	Front	9mm	Full	26340	1880	22.91	24.00	1.285	0.06	0.632	0.812
	LTE Band25_Ant2	20M	QPSK	1	0	Back	16mm	Full	26340	1880	22.91	24.00	1.285	0.01	0.421	0.541
	LTE Band25_Ant2	20M	QPSK	1	0	Top Side	17mm	Full	26340	1880	22.91	24.00	1.285	0.03	0.514	0.661
	LTE Band30_Ant1	10M	QPSK	1	0	Front	0mm	Reduced	27710	2310	18.54	20.00	1.400	-0.01	1.690	2.365
	LTE Band30_Ant1	10M	QPSK	25	0	Front	0mm	Reduced	27710	2310	18.34	20.00	1.466	0.1	1.420	2.081
	LTE Band30_Ant1	10M	QPSK	50	0	Front	0mm	Reduced	27710	2310	18.29	20.00	1.483	0.13	1.510	2.239
90	LTE Band30_Ant1	10M	QPSK	1	0	Back	0mm	Reduced	27710	2310	18.54	20.00	1.400	0.08	2.380	3.331
	LTE Band30_Ant1	10M	QPSK	25	0	Back	0mm	Reduced	27710	2310	18.34	20.00	1.466	0.01	1.590	2.330
	LTE Band30_Ant1	10M	QPSK	50	0	Back	0mm	Reduced	27710	2310	18.29	20.00	1.483	0.04	1.580	2.342
	LTE Band30_Ant1	10M	QPSK	1	0	Bottom Side	0mm	Reduced	27710	2310	18.54	20.00	1.400	0.05	1.760	2.463
	LTE Band30_Ant1	10M	QPSK	25	0	Bottom Side	0mm	Reduced	27710	2310	18.34	20.00	1.466	0.02	1.250	1.832
	LTE Band30_Ant1	10M	QPSK	50	0	Bottom Side	0mm	Reduced	27710	2310	18.29	20.00	1.483	0.13	1.240	1.838
	LTE Band30_Ant1	10M	QPSK	1	0	Front	9mm	Full	27710	2310	21.70	23.00	1.349	0.13	0.756	1.020
	LTE Band30_Ant1	10M	QPSK	1	0	Back	16mm	Full	27710	2310	21.70	23.00	1.349	0.08	0.521	0.703
	LTE Band30_Ant1	10M	QPSK	1	0	Bottom Side	17mm	Full	27710	2310	21.70	23.00	1.349	0.01	0.711	0.959

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : IHDT56ZF2

Page 99 of 135

Issued Date : Dec. 04, 2020

Form version. : 181113



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band66_Ant1	20M	QPSK	1	0	Front	0mm	Reduced	132322	1745	19.59	21.00	1.384	0.06	1.020	1.411
	LTE Band66_Ant1	20M	QPSK	50	0	Front	0mm	Reduced	132322	1745	19.45	21.00	1.429	0.04	1.040	1.486
	LTE Band66_Ant1	20M	QPSK	1	0	Back	0mm	Reduced	132322	1745	19.59	21.00	1.384	-0.01	1.660	2.297
	LTE Band66_Ant1	20M	QPSK	1	0	Back	0mm	Reduced	132072	1720	19.37	21.00	1.455	0.05	1.550	2.256
	LTE Band66_Ant1	20M	QPSK	1	0	Back	0mm	Reduced	132572	1770	19.28	21.00	1.486	0.02	1.690	2.511
	LTE Band66_Ant1	20M	QPSK	50	0	Back	0mm	Reduced	132322	1745	19.45	21.00	1.429	0.02	1.710	2.443
	LTE Band66_Ant1	20M	QPSK	50	0	Back	0mm	Reduced	132072	1720	19.32	21.00	1.472	0.05	1.620	2.385
	LTE Band66_Ant1	20M	QPSK	50	0	Back	0mm	Reduced	132572	1770	19.32	21.00	1.472	0.02	1.710	2.518
91	LTE Band66_Ant1	20M	QPSK	100	0	Back	0mm	Reduced	132322	1745	19.23	21.00	1.503	0.09	1.740	2.615
	LTE Band66_Ant1	20M	QPSK	1	0	Bottom Side	0mm	Reduced	132322	1745	19.59	21.00	1.384	0.01	1.570	2.172
	LTE Band66_Ant1	20M	QPSK	1	0	Bottom Side	0mm	Reduced	132072	1720	19.37	21.00	1.455	0.06	1.360	1.979
	LTE Band66_Ant1	20M	QPSK	1	0	Bottom Side	0mm	Reduced	132572	1770	19.28	21.00	1.486	0.17	1.550	2.303
	LTE Band66_Ant1	20M	QPSK	50	0	Bottom Side	0mm	Reduced	132322	1745	19.45	21.00	1.429	0.05	1.580	2.258
	LTE Band66_Ant1	20M	QPSK	50	0	Bottom Side	0mm	Reduced	132072	1720	19.32	21.00	1.472	0.06	1.410	2.076
	LTE Band66_Ant1	20M	QPSK	50	0	Bottom Side	0mm	Reduced	132572	1770	19.32	21.00	1.472	-0.05	1.530	2.253
	LTE Band66_Ant1	20M	QPSK	100	0	Bottom Side	0mm	Reduced	132322	1745	19.23	21.00	1.503	0.14	1.620	2.435
	LTE Band66_Ant1	20M	QPSK	1	0	Front	9mm	Full	132322	1745	22.57	24.00	1.390	-0.01	0.626	0.870
	LTE Band66_Ant1	20M	QPSK	1	0	Back	16mm	Full	132322	1745	22.57	24.00	1.390	0.05	0.436	0.606
	LTE Band66_Ant1	20M	QPSK	1	0	Bottom Side	17mm	Full	132322	1745	22.57	24.00	1.390	0.02	0.711	0.988
EN-DC																
	LTE Band66_Ant1	20M	QPSK	1	0	Front	0mm	Reduced	132322	1745	16.00	17.50	1.413	0.08	0.666	0.941
	LTE Band66_Ant1	20M	QPSK	50	0	Front	0mm	Reduced	132322	1745	15.74	17.50	1.500	0.11	0.591	0.886
	LTE Band66_Ant1	20M	QPSK	1	0	Back	0mm	Reduced	132322	1745	16.00	17.50	1.413	0.09	0.999	1.411
	LTE Band66_Ant1	20M	QPSK	50	0	Back	0mm	Reduced	132322	1745	15.74	17.50	1.500	0.06	0.942	1.413
	LTE Band66_Ant1	20M	QPSK	1	0	Bottom Side	0mm	Reduced	132322	1745	16.00	17.50	1.413	-0.05	0.944	1.333
	LTE Band66_Ant1	20M	QPSK	1	0	Bottom Side	0mm	Reduced	132072	1720	15.93	17.50	1.435	0.14	0.810	1.163
	LTE Band66_Ant1	20M	QPSK	1	0	Bottom Side	0mm	Reduced	132572	1770	15.87	17.50	1.455	-0.04	0.973	1.416
	LTE Band66_Ant1	20M	QPSK	50	0	Bottom Side	0mm	Reduced	132322	1745	15.74	17.50	1.500	0.05	0.967	1.450
	LTE Band66_Ant2	20M	QPSK	1	0	Front	0mm	Reduced	132322	1745	16.26	17.00	1.186	0.15	0.634	0.752
	LTE Band66_Ant2	20M	QPSK	50	0	Front	0mm	Reduced	132322	1745	16.18	17.00	1.208	-0.05	0.660	0.797
	LTE Band66_Ant2	20M	QPSK	1	0	Back	0mm	Reduced	132322	1745	16.26	17.00	1.186	-0.11	0.699	0.829
	LTE Band66_Ant2	20M	QPSK	50	0	Back	0mm	Reduced	132322	1745	16.18	17.00	1.208	0.08	0.714	0.862
	LTE Band66_Ant2	20M	QPSK	1	0	Top Side	0mm	Reduced	132322	1745	16.26	17.00	1.186	0.01	1.010	1.198
	LTE Band66_Ant2	20M	QPSK	1	0	Top Side	0mm	Reduced	132072	1720	16.21	17.00	1.199	0.11	0.923	1.107
	LTE Band66_Ant2	20M	QPSK	1	0	Top Side	0mm	Reduced	132572	1770	16.08	17.00	1.236	0.08	0.998	1.233
	LTE Band66_Ant2	20M	QPSK	50	0	Top Side	0mm	Reduced	132322	1745	16.18	17.00	1.208	0.06	0.943	1.139
	LTE Band66_Ant2	20M	QPSK	1	0	Front	9mm	Full	132322	1745	22.45	24.00	1.429	-0.11	0.552	0.789
	LTE Band66_Ant2	20M	QPSK	1	0	Back	16mm	Full	132322	1745	22.45	24.00	1.429	0.08	0.451	0.644
	LTE Band66_Ant2	20M	QPSK	1	0	Top Side	17mm	Full	132572	1770	22.37	24.00	1.455	0.01	0.624	0.908



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band41_Ant1	20M	QPSK	1	0	Back	0mm	Reduced	40620	2593	20.28	21.50	1.324	62.9	1.006	0.09	2.480	3.304
	LTE Band41_Ant1	20M	QPSK	1	0	Back	0mm	Reduced	39750	2506	19.95	21.50	1.429	62.9	1.006	0.15	2.190	3.148
92	LTE Band41_Ant1	20M	QPSK	1	0	Back	0mm	Reduced	41490	2680	20.08	21.50	1.387	62.9	1.006	0.09	2.410	3.362
	LTE Band41C_Ant1	20M	QPSK	1	0	Back	0mm	Reduced	41490+41292	2680+2660.2	19.83	21.50	1.469	62.9	1.006	0.02	2.120	3.133
	LTE Band41_Ant1	20M	QPSK	1	0	Back	0mm	Reduced	40185	2549.5	19.98	21.50	1.419	62.9	1.006	0.07	2.150	3.069
	LTE Band41_Ant1	20M	QPSK	1	0	Back	0mm	Reduced	41055	2636.5	20.04	21.50	1.400	62.9	1.006	0.08	1.900	2.675
	LTE Band41_Ant1	20M	QPSK	50	0	Back	0mm	Reduced	40620	2593	20	21.50	1.413	62.9	1.006	0.04	2.130	3.027
	LTE Band41_Ant1	20M	QPSK	50	0	Back	0mm	Reduced	39750	2506	19.9	21.50	1.445	62.9	1.006	0.11	2.030	2.952
	LTE Band41_Ant1	20M	QPSK	50	0	Back	0mm	Reduced	41490	2680	20.2	21.50	1.349	62.9	1.006	0.06	2.270	3.081
	LTE Band41_Ant1	20M	QPSK	50	0	Back	0mm	Reduced	40185	2549.5	19.89	21.50	1.449	62.9	1.006	0.08	2.030	2.959
	LTE Band41_Ant1	20M	QPSK	50	0	Back	0mm	Reduced	41055	2636.5	20.15	21.50	1.365	62.9	1.006	-0.07	2.110	2.897
	LTE Band41_Ant1	20M	QPSK	100	0	Back	0mm	Reduced	40620	2593	20.06	21.50	1.393	62.9	1.006	0.06	2.066	2.896
	LTE Band41_Ant1-HPUE	20M	QPSK	1	0	Back	0mm	Reduced	40620	2593	20.61	21.50	1.227	42.9	1.009	0.08	1.510	1.870
	LTE Band41_Ant1-HPUE	20M	QPSK	1	0	Back	0mm	Reduced	39750	2506	20.18	21.50	1.355	42.9	1.009	-0.04	1.520	2.078
	LTE Band41_Ant1-HPUE	20M	QPSK	1	0	Back	0mm	Reduced	41490	2680	20.53	21.50	1.250	42.9	1.009	0.11	1.480	1.867
	LTE Band41_Ant1-HPUE	20M	QPSK	1	0	Back	0mm	Reduced	40185	2549.5	20.25	21.50	1.334	42.9	1.009	0.08	1.370	1.843
	LTE Band41_Ant1-HPUE	20M	QPSK	1	0	Back	0mm	Reduced	41055	2636.5	20.55	21.50	1.245	42.9	1.009	0.01	1.680	2.110
	LTE Band41_Ant1	20M	QPSK	1	0	Bottom Side	0mm	Reduced	40620	2593	20.28	21.50	1.324	62.9	1.006	0.01	2.180	2.904
	LTE Band41_Ant1	20M	QPSK	1	0	Bottom Side	0mm	Reduced	39750	2506	19.95	21.50	1.429	62.9	1.006	0.09	2.310	3.321
	LTE Band41_Ant1	20M	QPSK	1	0	Bottom Side	0mm	Reduced	41490	2680	20.08	21.50	1.387	62.9	1.006	0.06	1.760	2.455
	LTE Band41_Ant1	20M	QPSK	1	0	Bottom Side	0mm	Reduced	40185	2549.5	19.98	21.50	1.419	62.9	1.006	0.09	1.990	2.841
	LTE Band41_Ant1	20M	QPSK	1	0	Bottom Side	0mm	Reduced	41055	2636.5	20.04	21.50	1.400	62.9	1.006	0.05	1.820	2.563
	LTE Band41_Ant1	20M	QPSK	50	0	Bottom Side	0mm	Reduced	40620	2593	20	21.50	1.413	62.9	1.006	0.14	1.910	2.714
	LTE Band41_Ant1	20M	QPSK	50	0	Bottom Side	0mm	Reduced	39750	2506	19.9	21.50	1.445	62.9	1.006	0.03	1.670	2.428
	LTE Band41_Ant1	20M	QPSK	50	0	Bottom Side	0mm	Reduced	41490	2680	20.2	21.50	1.349	62.9	1.006	0.06	1.720	2.334
	LTE Band41_Ant1	20M	QPSK	50	0	Bottom Side	0mm	Reduced	40185	2549.5	19.89	21.50	1.449	62.9	1.006	0.01	1.560	2.274
	LTE Band41_Ant1	20M	QPSK	50	0	Bottom Side	0mm	Reduced	41055	2636.5	20.15	21.50	1.365	62.9	1.006	0.05	1.710	2.347
	LTE Band41_Ant1	20M	QPSK	100	0	Bottom Side	0mm	Reduced	40620	2593	20.06	21.50	1.393	62.9	1.006	0.01	1.890	2.649
	LTE Band41_Ant1	20M	QPSK	1	0	Back	16mm	Full	41490	2680	22.47	24.00	1.422	62.9	1.006	0.06	0.852	1.219
	LTE Band41_Ant1	20M	QPSK	1	0	Bottom Side	17mm	Full	39750	2506	22.43	24.00	1.435	62.9	1.006	0.01	0.951	1.373



<5GNR SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	0mm	Reduced	376500	1882.5	21.61	22.50	1.227	0.05	1.920	2.357
	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	0mm	Reduced	372000	1860	21.55	22.50	1.245	0.01	2.030	2.526
	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	0mm	Reduced	381000	1905	21.43	22.50	1.279	0.02	2.150	2.751
	FR1 n25&N2_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Front	0mm	Reduced	376500	1882.5	21.60	22.50	1.230	-0.13	1.720	2.116
	FR1 n25&N2_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Front	0mm	Reduced	372000	1860	21.34	22.50	1.306	0.09	1.640	2.142
	FR1 n25&N2_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Front	0mm	Reduced	381000	1905	21.47	22.50	1.268	0.04	1.740	2.206
	FR1 n25&N2_Ant1	20M	QPSK	100	0	DFT-s-OFDM SCS15KHz	Front	0mm	Reduced	376500	1882.5	21.59	22.50	1.233	-0.03	1.760	2.170
	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	0mm	Reduced	376500	1882.5	21.61	22.50	1.227	0.02	2.550	3.130
	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	0mm	Reduced	372000	1860	21.55	22.50	1.245	-0.01	2.780	3.460
93	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	0mm	Reduced	381000	1905	21.43	22.50	1.279	0.02	2.780	3.557
	FR1 n25&N2_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Back	0mm	Reduced	376500	1882.5	21.60	22.50	1.230	-0.04	2.280	2.805
	FR1 n25&N2_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Back	0mm	Reduced	372000	1860	21.34	22.50	1.306	-0.02	2.280	2.978
	FR1 n25&N2_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Back	0mm	Reduced	381000	1905	21.47	22.50	1.268	0.03	2.230	2.827
	FR1 n25&N2_Ant1	20M	QPSK	100	0	DFT-s-OFDM SCS15KHz	Back	0mm	Reduced	376500	1882.5	21.59	22.50	1.233	0.04	2.280	2.811
	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Bottom Side	0mm	Reduced	376500	1882.5	21.61	22.50	1.227	0.02	1.460	1.792
	FR1 n25&N2_Ant1	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Bottom Side	0mm	Reduced	376500	1882.5	21.60	22.50	1.230	0.01	1.270	1.562
	FR1 n25&N2_Ant1 END C	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	0mm	Reduced	376500	1882.5	18.72	19.50	1.197	0.05	0.848	1.015
	FR1 n25&N2_Ant1 END C	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Front	0mm	Reduced	376500	1882.5	18.70	19.50	1.202	0.08	0.949	1.141
	FR1 n25&N2_Ant1 END C	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	0mm	Reduced	376500	1882.5	18.72	19.50	1.197	0.02	1.126	1.348
	FR1 n25&N2_Ant1 END C	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Back	0mm	Reduced	376500	1882.5	18.70	19.50	1.202	-0.01	1.300	1.563
	FR1 n25&N2_Ant1 END C	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Bottom Side	0mm	Reduced	376500	1882.5	18.72	19.50	1.197	0.07	0.645	0.772
	FR1 n25&N2_Ant1 END C	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Bottom Side	0mm	Reduced	376500	1882.5	18.70	19.50	1.202	-0.12	0.901	1.083
	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	9mm	Full	381000	1905	23.11	24.00	1.227	0.03	0.711	0.873
	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	16mm	Full	381000	1905	23.11	24.00	1.227	0.04	0.523	0.642
	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Bottom Side	17mm	Full	376500	1882.5	23.39	24.00	1.151	0.02	0.496	0.571
	FR1 n41 Ant1-HPUE	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Front	0mm	Reduced	518598	2592.99	20.85	22.00	1.303	0.05	1.730	2.254
	FR1 n41 Ant1-HPUE	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Front	0mm	Reduced	518598	2592.99	20.80	22.00	1.318	0.06	1.640	2.162
	FR1 n41 Ant1-HPUE	100M	QPSK	270	0	DFT-s-OFDM SCS30KHz	Front	0mm	Reduced	518598	2592.99	20.68	22.00	1.355	0.12	1.570	2.128
94	FR1 n41 Ant1-HPUE	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Back	0mm	Reduced	518598	2592.99	20.85	22.00	1.303	0.03	2.750	3.584
	FR1 n41 Ant1-HPUE	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Back	0mm	Reduced	518598	2592.99	20.80	22.00	1.318	0.01	2.510	3.309
	FR1 n41 Ant1-HPUE	100M	QPSK	270	0	DFT-s-OFDM SCS30KHz	Back	0mm	Reduced	518598	2592.99	20.68	22.00	1.355	0.05	2.450	3.320
	FR1 n41 Ant1-HPUE	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Bottom Side	0mm	Reduced	518598	2592.99	20.85	22.00	1.303	0.01	2.090	2.724
	FR1 n41 Ant1-HPUE	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Bottom Side	0mm	Reduced	518598	2592.99	20.80	22.00	1.318	0.06	2.430	3.203
	FR1 n41 Ant1-HPUE	100M	QPSK	270	0	DFT-s-OFDM SCS30KHz	Bottom Side	0mm	Reduced	518598	2592.99	20.68	22.00	1.355	0.08	1.820	2.466
	FR1 n41 Ant1-HPUE END C	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Front	0mm	Reduced	518598	2592.99	14.33	14.50	1.040	0.06	0.760	0.790
	FR1 n41 Ant1-HPUE END C	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Front	0mm	Reduced	518598	2592.99	14.26	14.50	1.057	0.01	0.854	0.903
	FR1 n41 Ant1-HPUE END C	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Back	0mm	Reduced	518598	2592.99	14.33	14.50	1.040	0.05	1.030	1.071
	FR1 n41 Ant1-HPUE END C	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Back	0mm	Reduced	518598	2592.99	14.26	14.50	1.057	0.01	1.270	1.342
	FR1 n41 Ant1-HPUE END C	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Bottom Side	0mm	Reduced	518598	2592.99	14.33	14.50	1.040	0.01	0.785	0.816
	FR1 n41 Ant1-HPUE END C	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Bottom Side	0mm	Reduced	518598	2592.99	14.26	14.50	1.057	0.03	1.020	1.078
	FR1 n41 Ant1-HPUE	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Front	9mm	Full	518598	2592.99	26.30	27.00	1.175	0.01	0.786	0.923
	FR1 n41 Ant1-HPUE	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Back	16mm	Full	518598	2592.99	26.30	27.00	1.175	0.06	0.389	0.457
	FR1 n41 Ant1-HPUE	100M	QPSK	135	0	DFT-s-OFDM SCS30KHz	Bottom Side	17mm	Full	518598	2592.99	26.22	27.00	1.197	0.08	0.714	0.854



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	0mm	Reduced	349000	1745	21.78	22.50	1.180	0.03	1.790	2.113
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	0mm	Reduced	344000	1720	21.73	22.50	1.194	0.08	1.600	1.910
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	0mm	Reduced	354000	1770	21.73	22.50	1.194	0.06	2.000	2.388
	FR1 n66_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Front	0mm	Reduced	349000	1745	21.57	22.50	1.239	0.09	1.510	1.871
	FR1 n66_Ant1	20M	QPSK	100	0	DFT-s-OFDM SCS15KHz	Front	0mm	Reduced	349000	1745	21.40	22.50	1.288	0.08	1.530	1.971
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	0mm	Reduced	349000	1745	21.78	22.50	1.180	0.06	2.770	3.269
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	0mm	Reduced	344000	1720	21.73	22.50	1.194	-0.08	2.470	2.949
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	0mm	Reduced	354000	1770	21.73	22.50	1.194	0.11	2.520	3.009
	FR1 n66_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Back	0mm	Reduced	349000	1745	21.57	22.50	1.239	0.04	2.390	2.961
	FR1 n66_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Back	0mm	Reduced	344000	1720	21.53	22.50	1.250	0.01	2.240	2.801
	FR1 n66_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Back	0mm	Reduced	354000	1770	21.56	22.50	1.242	0.08	2.400	2.980
	FR1 n66_Ant1	20M	QPSK	100	0	DFT-s-OFDM SCS15KHz	Back	0mm	Reduced	349000	1745	21.40	22.50	1.288	-0.11	2.330	3.002
95	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Bottom Side	0mm	Reduced	349000	1745	21.78	22.50	1.180	0.01	2.890	3.411
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Bottom Side	0mm	Reduced	344000	1720	21.73	22.50	1.194	0.03	2.830	3.379
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Bottom Side	0mm	Reduced	354000	1770	21.73	22.50	1.194	0.05	2.800	3.343
	FR1 n66_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Bottom Side	0mm	Reduced	349000	1745	21.57	22.50	1.239	0.13	2.440	3.023
	FR1 n66_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Bottom Side	0mm	Reduced	344000	1720	21.53	22.50	1.250	0.03	2.180	2.726
	FR1 n66_Ant1	20M	QPSK	50	0	DFT-s-OFDM SCS15KHz	Bottom Side	0mm	Reduced	354000	1770	21.56	22.50	1.242	0.01	2.270	2.819
	FR1 n66_Ant1	20M	QPSK	100	0	DFT-s-OFDM SCS15KHz	Bottom Side	0mm	Reduced	349000	1745	21.40	22.50	1.288	0.03	2.400	3.092
	FR1 n66_Ant1 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	0mm	Reduced	349000	1745	17.43	18.50	1.279	0.05	0.736	0.942
	FR1 n66_Ant1 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Front	0mm	Reduced	349000	1745	16.81	18.50	1.476	0.05	0.793	1.170
	FR1 n66_Ant1 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	0mm	Reduced	349000	1745	17.43	18.50	1.279	0.01	1.190	1.522
	FR1 n66_Ant1 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Back	0mm	Reduced	349000	1745	16.81	18.50	1.476	0.03	1.030	1.520
	FR1 n66_Ant1 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Bottom Side	0mm	Reduced	349000	1745	17.43	18.50	1.279	0.03	1.240	1.586
	FR1 n66_Ant1 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Bottom Side	0mm	Reduced	344000	1720	17.29	18.50	1.321	0.02	1.190	1.572
	FR1 n66_Ant1 ENDC	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Bottom Side	0mm	Reduced	354000	1770	17.39	18.50	1.291	0.01	1.140	1.472
	FR1 n66_Ant1 ENDC	20M	QPSK	50	28	DFT-s-OFDM SCS15KHz	Bottom Side	0mm	Reduced	349000	1745	16.81	18.50	1.476	0.13	1.020	1.505
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Front	9mm	Full	354000	1770	23.64	24.00	1.086	0.04	0.612	0.665
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	16mm	Full	349000	1745	23.70	24.00	1.072	0.01	0.326	0.349
	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Bottom Side	17mm	Full	349000	1745	23.70	24.00	1.072	0.08	0.511	0.548



<WLAN5G SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5.2GHz	802.11a 6Mbps	Back	0mm	Ant 5+6	Full	40	5200	21.74	22.00	1.062	97.94	1.021	0.05	2.180	2.363
96	WLAN5.2GHz	802.11a 6Mbps	Back	0mm	Ant 5+6	Full	36	5180	20.05	22.00	1.565	97.94	1.021	-0.03	2.180	3.484
	WLAN5.2GHz	802.11a 6Mbps	Back	0mm	Ant 5+6	Full	48	5240	20.29	22.00	1.481	97.94	1.021	0.07	2.260	3.418
	WLAN5.2GHz	802.11a 6Mbps	Back	0mm	Ant 5+6	Full	44	5220	20.59	22.00	1.384	97.94	1.021	0.07	2.010	2.839
	WLAN5.2GHz	802.11a 6Mbps	Back	0mm	Ant 5+6	Simultaneous Reduced	36	5180	16.18	17.00	1.208	97.94	1.021	0.03	0.642	0.792
	WLAN5.3GHz	802.11a 6Mbps	Front	0mm	Ant 5+6	Full	56	5280	21.15	22.00	1.216	97.94	1.021	0.01	0.087	0.108
97	WLAN5.3GHz	802.11a 6Mbps	Back	0mm	Ant 5+6	Full	56	5280	21.15	22.00	1.216	97.94	1.021	0.05	2.280	2.831
	WLAN5.3GHz	802.11a 6Mbps	Back	0mm	Ant 5+6	Full	52	5260	20.14	22.00	1.535	97.94	1.021	0.02	1.760	2.758
	WLAN5.3GHz	802.11a 6Mbps	Back	0mm	Ant 5+6	Full	64	5320	20.30	22.00	1.479	97.94	1.021	0.01	1.830	2.764
	WLAN5.3GHz	802.11a 6Mbps	Left Side	0mm	Ant 5+6	Full	56	5280	21.15	22.00	1.216	97.94	1.021	0.03	0.119	0.148
	WLAN5.3GHz	802.11a 6Mbps	Right Side	0mm	Ant 5+6	Full	56	5280	21.15	22.00	1.216	97.94	1.021	0.06	0.406	0.504
	WLAN5.3GHz	802.11a 6Mbps	Top Side	0mm	Ant 5+6	Full	56	5280	21.15	22.00	1.216	97.94	1.021	0.06	0.383	0.476
	WLAN5.3GHz	802.11a 6Mbps	Front	0mm	Ant 5+6	Simultaneous Reduced	56	5280	15.25	16.00	1.189	97.94	1.021	0.03	0.024	0.029
	WLAN5.3GHz	802.11a 6Mbps	Back	0mm	Ant 5+6	Simultaneous Reduced	56	5280	15.25	16.00	1.189	97.94	1.021	0.05	0.649	0.788
	WLAN5.3GHz	802.11a 6Mbps	Left Side	0mm	Ant 5+6	Simultaneous Reduced	56	5280	15.25	16.00	1.189	97.94	1.021	0.06	0.022	0.027
	WLAN5.3GHz	802.11a 6Mbps	Right Side	0mm	Ant 5+6	Simultaneous Reduced	56	5280	15.25	16.00	1.189	97.94	1.021	0.07	0.098	0.119
	WLAN5.3GHz	802.11a 6Mbps	Top Side	0mm	Ant 5+6	Simultaneous Reduced	56	5280	15.25	16.00	1.189	97.94	1.021	0.03	0.088	0.107
	WLAN5.5GHz	802.11a 6Mbps	Front	0mm	Ant 5+6	Full	132	5660	22.44	23.00	1.138	97.94	1.021	0.01	0.118	0.137
98	WLAN5.5GHz	802.11a 6Mbps	Back	0mm	Ant 5+6	Full	132	5660	22.44	23.00	1.138	97.94	1.021	0.03	3.000	3.487
	WLAN5.5GHz	802.11a 6Mbps	Back	0mm	Ant 5+6	Full	100	5500	20.57	21.00	1.104	97.94	1.021	0.05	1.990	2.243
	WLAN5.5GHz	802.11a 6Mbps	Back	0mm	Ant 5+6	Full	140	5700	20.67	21.00	1.079	97.94	1.021	0.03	1.850	2.038
	WLAN5.5GHz	802.11a 6Mbps	Left Side	0mm	Ant 5+6	Full	132	5660	22.44	23.00	1.138	97.94	1.021	0.01	0.116	0.135
	WLAN5.5GHz	802.11a 6Mbps	Right Side	0mm	Ant 5+6	Full	132	5660	22.44	23.00	1.138	97.94	1.021	0.02	0.337	0.392
	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Ant 5+6	Full	132	5660	22.44	23.00	1.138	97.94	1.021	0.07	0.457	0.531
	WLAN5.5GHz	802.11a 6Mbps	Front	0mm	Ant 5+6	Simultaneous Reduced	132	5660	15.55	16.50	1.245	97.94	1.021	0.07	0.035	0.044
	WLAN5.5GHz	802.11a 6Mbps	Back	0mm	Ant 5+6	Simultaneous Reduced	132	5660	15.55	16.50	1.245	97.94	1.021	0.08	0.622	0.790
	WLAN5.5GHz	802.11a 6Mbps	Left Side	0mm	Ant 5+6	Simultaneous Reduced	132	5660	15.55	16.50	1.245	97.94	1.021	0.09	0.047	0.060
	WLAN5.5GHz	802.11a 6Mbps	Right Side	0mm	Ant 5+6	Simultaneous Reduced	132	5660	15.55	16.50	1.245	97.94	1.021	0.01	0.112	0.142
	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Ant 5+6	Simultaneous Reduced	132	5660	15.55	16.50	1.245	97.94	1.021	0.06	0.145	0.184
	WLAN5.8GHz	802.11a 6Mbps	Back	0mm	Ant 5+6	Full	157	5785	22.24	23.00	1.190	97.94	1.021	0.05	1.930	2.345
99	WLAN5.8GHz	802.11a 6Mbps	Back	0mm	Ant 5+6	Full	149	5745	22.15	23.00	1.215	97.94	1.021	0.06	2.050	2.544
	WLAN5.8GHz	802.11a 6Mbps	Back	0mm	Ant 5+6	Full	165	5825	22.07	23.00	1.239	97.94	1.021	-0.03	1.500	1.898
	WLAN5.8GHz	802.11a 6Mbps	Back	0mm	Ant 5+6	Simultaneous Reduced	149	5745	15.69	16.50	1.205	97.94	1.021	0.02	0.619	0.762

15.5 Repeated SAR Measurement

<1g>

No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	CDMA2000 BC0_Ant2	-	-	-	-	RC3 SO55	Left Cheek	0mm	Reduced	777	848.31	23.45	24.00	1.135	-	1.000	0.08	1.040	1	1.180
2nd	CDMA2000 BC0_Ant2	-	-	-	-	RC3 SO55	Left Cheek	0mm	Reduced	777	848.31	23.45	24.00	1.135	-	1.000	0.02	0.911	1.142	1.034
1st	GSM1900_Ant1	-	-	-	-	GPRS 3 Tx slots	Back	5mm	Reduced	810	1909.8	23.3	24.00	1.175	-	1.000	0.08	1.220	1	1.433
2nd	GSM1900_Ant1	-	-	-	-	GPRS 3 Tx slots	Back	5mm	Reduced	810	1909.8	23.3	24.00	1.175	-	1.000	0.02	1.150	1.061	1.351
1st	LTE Band41_Ant1	20M	QPSK	1	0	-	Bottom Side	5mm	Reduced	39750	2506	16.06	17.00	1.242	62.9	1.006	0.07	1.140	1	1.424
2nd	LTE Band41_Ant1	20M	QPSK	1	0	-	Bottom Side	5mm	Reduced	39750	2506	16.06	17.00	1.242	62.9	1.006	0.02	1.080	1.056	1.349
1st	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Bottom Side	5mm	Reduced	354000	1770	16.61	17.50	1.227	-	1.000	0.01	1.120	1	1.375
2nd	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Bottom Side	5mm	Reduced	354000	1770	16.61	17.50	1.227	-	1.000	0.03	0.952	1.176	1.169
1st	LTE Band30_Ant1	10M	QPSK	1	0	-	Back	5mm	Reduced	27710	2310	15.13	16.00	1.222	-	1.000	0.08	1.060	1	1.295
2nd	LTE Band30_Ant1	10M	QPSK	1	0	-	Back	5mm	Reduced	27710	2310	15.13	16.00	1.222	-	1.000	-0.02	1.030	1.029	1.258
1st	WLAN5.3GHz	-	-	-	-	802.11a 6Mbps	Back	24mm	Full	56	5280	21.15	22.00	1.216	97.94	1.021	-0.04	0.940	1	1.167
2nd	WLAN5.3GHz	-	-	-	-	802.11a 6Mbps	Back	24mm	Full	56	5280	21.15	22.00	1.216	97.94	1.021	0.01	0.928	1.073	1.152
1st	WLAN5.5GHz	-	-	-	-	802.11a 6Mbps	Back	24mm	Full	132	5660	22.44	23.00	1.138	97.94	1.021	0.04	0.970	1	1.127
2nd	WLAN5.5GHz	-	-	-	-	802.11a 6Mbps	Back	24mm	Full	132	5660	22.44	23.00	1.138	97.94	1.021	-0.02	0.961	1.009	1.117
1st	WLAN5.8GHz	-	-	-	-	802.11a 6Mbps	Back	5mm	Reduced	149	5745	14.93	16.00	1.279	97.94	1.021	-0.07	0.910	1	1.189
2nd	WLAN5.8GHz	-	-	-	-	802.11a 6Mbps	Back	5mm	Reduced	149	5745	14.93	16.00	1.279	97.94	1.021	0.01	0.884	1.029	1.155

<10g>

No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	0mm	Reduced	381000	1905	21.43	22.50	1.279	-	1.000	0.02	2.780	1	3.557
2nd	FR1 n25&N2_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Back	0mm	Reduced	381000	1905	21.43	22.50	1.279	-	1.000	0.05	2.710	1.026	3.467
1st	FR1 n41 Ant1-Hpue	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Back	0mm	Reduced	518598	2592.99	20.85	22.00	1.303	-	1.000	0.03	2.750	1	3.584
2nd	FR1 n41 Ant1-Hpue	100M	QPSK	1	1	DFT-s-OFDM SCS30KHz	Back	0mm	Reduced	518598	2592.99	20.85	22.00	1.303	-	1.000	0.01	2.680	1.026	3.492
1st	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Bottom Side	0mm	Reduced	349000	1745	21.78	22.50	1.180	-	1.000	0.01	2.890	1	3.411
2nd	FR1 n66_Ant1	20M	QPSK	1	1	DFT-s-OFDM SCS15KHz	Bottom Side	0mm	Reduced	349000	1745	21.78	22.50	1.180	-	1.000	0.05	2.560	1.129	3.022
1st	LTE Band30_Ant1	10M	QPSK	1	0	DFT-s-OFDM SCS15KHz	Back	0mm	Reduced	27710	2310	18.54	20.00	1.400	-	1.000	0.08	2.380	1	3.331
2nd	LTE Band30_Ant1	10M	QPSK	1	0	DFT-s-OFDM SCS15KHz	Back	0mm	Reduced	27710	2310	18.54	20.00	1.400	-	1.000	-0.03	2.360	1.008	3.303
1st	WLAN5.3GHz-	-	-	-	-	802.11a 6Mbps	Back	0mm	Full	56	5280	21.15	22.00	1.216	97.94	1.021	0.05	2.280	1	2.831
2nd	WLAN5.3GHz-	-	-	-	-	802.11a 6Mbps	Back	0mm	Full	56	5280	21.15	22.00	1.216	97.94	1.021	0.01	2.190	1.041	2.719
1st	WLAN5.5GHz-	-	-	-	-	802.11a 6Mbps	Back	0mm	Full	132	5660	22.44	23.00	1.138	97.94	1.021	0.03	3.000	1	3.487
2nd	WLAN5.5GHz-	-	-	-	-	802.11a 6Mbps	Back	0mm	Full	132	5660	22.44	23.00	1.138	97.94	1.021	-0.04	2.890	1.038	3.359
1st	WLAN5.8GHz-	-	-	-	-	802.11a 6Mbps	Back	0mm	Full	149	5745	22.15	23.00	1.215	97.94	1.021	0.06	2.050	1	2.544
2nd	WLAN5.8GHz-	-	-	-	-	802.11a 6Mbps	Back	0mm	Full	149	5745	22.15	23.00	1.215	97.94	1.021	0.03	2.000	1.025	2.482

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/kg}$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/kg}$, only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated *measured* SAR.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

15.6 TDD B41 Linearity Data Analysis

General Note:

This device support Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operation is 43.3% using UL-DL configuration 1. Per FCC Guidance based on the device behavior, all SAR tests were performed using Power Class 3. Power Class 2 is tested using the highest SAR test configuration in Power Class 3 for each LTE configuration and exposure condition combination, according to the highest time averaged power for all applicable uplink-downlink configurations in Power Class 2. When the reported SAR vs. output power is linearly scaled with < 10% discrepancy between power classes and all reported SAR are < 1.4 W/kg, Separate SAR testing for Power Class 2 is not required

LTE Band 41(HPUE)-Linearity Data for Head		
	LTE Band 41 (Power Class 3)	LTE Band 41 (Power Class 2)
Maximum Tune up Power (dBm)	24.00	27.00
Reported 1g SAR (W/kg)	0.044	0.062
Duty Cycle	63.30%	43.30%
Frame Averaged (mW)	159.00	217.01
Linearity SAR (W/kg)	0.060	
% deviation from expected linearity		3.24%
LTE Band 41(HPUE)-Linearity Data for Body-worn		
	LTE Band 41 (Power Class 3)	LTE Band 41 (Power Class 2)
Maximum Tune up Power (dBm)	19.50	19.50
Reported 1g SAR (W/kg)	1.371	0.868
Duty Cycle	63.30%	43.30%
Frame Averaged (mW)	56.42	38.59
Linearity SAR (W/kg)	0.938	
% deviation from expected linearity		-7.45%
LTE Band 41(HPUE)-Linearity Data for Hotspot		
	LTE Band 41 (Power Class 3)	LTE Band 41 (Power Class 2)
Maximum Tune up Power (dBm)	17.00	17.00
Reported 1g SAR (W/kg)	1.432	1.071
Duty Cycle	63.30%	43.30%
Frame Averaged (mW)	31.73	21.70
Linearity SAR (W/kg)	0.980	
% deviation from expected linearity		9.34%
LTE Band 41(HPUE)-Linearity Data for Handheld		
	LTE Band 41 (Power Class 3)	LTE Band 41 (Power Class 2)
Maximum Tune up Power (dBm)	21.50	21.50
Reported 1g SAR (W/kg)	3.362	2.110
Duty Cycle	63.30%	43.30%
Frame Averaged (mW)	89.41	61.16
Linearity SAR (W/kg)	2.300	
% deviation from expected linearity		-8.25%

16. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product specific 10g SAR
1.	GSM Voice + 2.4GHz WLAN MIMO	Yes	Yes		Yes
2.	GPRS/EDGE + 2.4GHz WLAN MIMO	Yes	Yes	Yes	Yes
3.	WCDMA + 2.4GHz WLAN MIMO	Yes	Yes	Yes	Yes
4.	CDMA + 2.4GHz WLAN MIMO	Yes	Yes	Yes	Yes
5.	LTE + 2.4GHz WLAN MIMO	Yes	Yes	Yes	Yes
6.	GSM Voice + WLAN5.3/5.5GHz MIMO	Yes	Yes		Yes
7.	GPRS/EDGE + WLAN5.3/5.5GHz MIMO	Yes	Yes		Yes
8.	WCDMA + WLAN5.3/5.5GHz MIMO	Yes	Yes		Yes
9.	CDMA + WLAN5.3/5.5GHz MIMO	Yes	Yes		Yes
10.	LTE + WLAN5.3/5.5GHz MIMO	Yes	Yes		Yes
11.	GSM Voice + WLAN5.2/5.8GHz MIMO	Yes	Yes		Yes
12.	GPRS/EDGE + WLAN5.2/5.8GHz MIMO	Yes	Yes	Yes	Yes
13.	WCDMA + WLAN5.2/5.8GHz MIMO	Yes	Yes	Yes	Yes
14.	CDMA + WLAN5.2/5.8GHz MIMO	Yes	Yes	Yes	Yes
15.	LTE + WLAN5.2/5.8GHz MIMO	Yes	Yes	Yes	Yes
16.	GSM Voice + Bluetooth	Yes	Yes		Yes
17.	GPRS/EDGE + Bluetooth	Yes	Yes	Yes	Yes
18.	WCDMA + Bluetooth	Yes	Yes	Yes	Yes
19.	CDMA + Bluetooth	Yes	Yes	Yes	Yes
20.	LTE + Bluetooth	Yes	Yes	Yes	Yes
21.	5G NR + 2.4GHz WLAN MIMO	Yes	Yes	Yes	Yes
22.	LTE + 5G NR + 2.4GHz WLAN MIMO	Yes	Yes	Yes	Yes
23.	5G NR + WLAN5.3/5.5GHz MIMO	Yes	Yes		Yes
24.	LTE + 5G NR + WLAN5.3/5.5GHz MIMO	Yes	Yes		Yes
25.	5G NR + WLAN5.2/5.8GHz MIMO	Yes	Yes	Yes	Yes
26.	LTE + 5G NR + WLAN5.2/5.8GHz MIMO	Yes	Yes	Yes	Yes
27.	5G NR + Bluetooth	Yes	Yes	Yes	Yes
28.	LTE + 5G NR + Bluetooth	Yes	Yes	Yes	Yes

General Note:

- This device supports VoIP in GPRS, EGPRS, WCDMA, CDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
- EUT will choose each GSM, WCDMA, CDMA and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
- This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
- This device 2.4GHz WLAN/ 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WLAN Direct (GC/GO), and 5.3GHz / 5.5GHz supports WLAN Direct (GC only).
- EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment though they have independent antenna.
- WLAN 2.4GHz and Bluetooth share the same antenna so can't transmit simultaneously.
- According to the EUT character, WLAN 5GHz and Bluetooth can't transmit simultaneously.
- Chose the worst zoom scan SAR of WLAN correspondingly for co-located with WWAN analysis.
- The reported SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.
 - The SPLSR calculated results please refer to section 16.5.



16.1 Head Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3+6	5GHz WLAN Ant 5+6	Bluetooth Ant 3			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
GSM850_Ant1	Right Cheek	0.161	0.202	0.271	0.235	0.36	0.43	0.40
	Right Tilted	0.094	0.090	0.459	0.235	0.18	0.55	0.33
	Left Cheek	0.125	0.151	0.180	0.235	0.28	0.31	0.36
	Left Tilted	0.079	0.188	0.280	0.235	0.27	0.36	0.31
GSM850_Ant2	Right Cheek	0.509	0.202	0.271	0.235	0.71	0.78	0.74
	Right Tilted	0.527	0.090	0.459	0.235	0.62	0.99	0.76
	Left Cheek	0.898	0.151	0.180	0.235	1.05	1.08	1.13
	Left Tilted	0.654	0.188	0.280	0.235	0.84	0.93	0.89
GSM1900_Ant1	Right Cheek	0.033	0.202	0.271	0.235	0.24	0.30	0.27
	Right Tilted	0.034	0.090	0.459	0.235	0.12	0.49	0.27
	Left Cheek	0.041	0.151	0.180	0.235	0.19	0.22	0.28
	Left Tilted	0.039	0.188	0.280	0.235	0.23	0.32	0.27
WCDMA II_Ant1	Right Cheek	0.008	0.202	0.271	0.235	0.21	0.28	0.24
	Right Tilted	0.002	0.090	0.459	0.235	0.09	0.46	0.24
	Left Cheek	0.032	0.151	0.180	0.235	0.18	0.21	0.27
	Left Tilted	0.018	0.188	0.280	0.235	0.21	0.30	0.25
WCDMA IV_Ant1	Right Cheek	0.067	0.202	0.271	0.235	0.27	0.34	0.30
	Right Tilted	0.054	0.090	0.459	0.235	0.14	0.51	0.29
	Left Cheek	0.086	0.151	0.180	0.235	0.24	0.27	0.32
	Left Tilted	0.064	0.188	0.280	0.235	0.25	0.34	0.30
WCDMA V_Ant1	Right Cheek	0.092	0.202	0.271	0.235	0.29	0.36	0.33
	Right Tilted	0.058	0.090	0.459	0.235	0.15	0.52	0.29
	Left Cheek	0.136	0.151	0.180	0.235	0.29	0.32	0.37
	Left Tilted	0.048	0.188	0.280	0.235	0.24	0.33	0.28
WCDMA V_Ant2	Right Cheek	0.578	0.202	0.271	0.235	0.78	0.85	0.81
	Right Tilted	0.589	0.090	0.459	0.235	0.68	1.05	0.82
	Left Cheek	0.725	0.151	0.180	0.235	0.88	0.91	0.96
	Left Tilted	0.859	0.188	0.280	0.235	1.05	1.14	1.09
CDMA2000 BC0_Ant1	Right Cheek	0.099	0.202	0.271	0.235	0.30	0.37	0.33
	Right Tilted	0.072	0.090	0.459	0.235	0.16	0.53	0.31
	Left Cheek	0.176	0.151	0.180	0.235	0.33	0.36	0.41
	Left Tilted	0.055	0.188	0.280	0.235	0.24	0.34	0.29
CDMA2000 BC0_Ant2	Right Cheek	0.786	0.202	0.271	0.235	0.99	1.06	1.02
	Right Tilted	0.748	0.090	0.459	0.235	0.84	1.21	0.98
	Left Cheek	1.180	0.151	0.180	0.235	1.33	1.36	1.42
	Left Tilted	0.920	0.188	0.280	0.235	1.11	1.20	1.16
CDMA2000 BC1_Ant1	Right Cheek	0.060	0.202	0.271	0.235	0.26	0.33	0.30
	Right Tilted	0.053	0.090	0.459	0.235	0.14	0.51	0.29
	Left Cheek	0.093	0.151	0.180	0.235	0.24	0.27	0.33
	Left Tilted	0.065	0.188	0.280	0.235	0.25	0.35	0.30
CDMA2000 BC10_Ant1	Right Cheek	0.183	0.202	0.271	0.235	0.39	0.45	0.42
	Right Tilted	0.093	0.090	0.459	0.235	0.18	0.55	0.33
	Left Cheek	0.116	0.151	0.180	0.235	0.27	0.30	0.35
	Left Tilted	0.078	0.188	0.280	0.235	0.27	0.36	0.31
CDMA2000 BC10_Ant2	Right Cheek	0.652	0.202	0.271	0.235	0.85	0.92	0.89
	Right Tilted	0.600	0.090	0.459	0.235	0.69	1.06	0.84
	Left Cheek	0.852	0.151	0.180	0.235	1.00	1.03	1.09
	Left Tilted	0.826	0.188	0.280	0.235	1.01	1.11	1.06
LTE Band	Right Cheek	0.083	0.202	0.271	0.235	0.29	0.35	0.32



FCC SAR Test Report

Report No. : FA082402

7_Ant1	Right Tilted	0.035	0.090	0.459	0.235	0.13	0.49	0.27
	Left Cheek	0.049	0.151	0.180	0.235	0.20	0.23	0.28
	Left Tilted	0.029	0.188	0.280	0.235	0.22	0.31	0.26
LTE Band 12_Ant1	Right Cheek	0.180	0.202	0.271	0.235	0.38	0.45	0.42
	Right Tilted	0.099	0.090	0.459	0.235	0.19	0.56	0.33
	Left Cheek	0.154	0.151	0.180	0.235	0.31	0.33	0.39
	Left Tilted	0.092	0.188	0.280	0.235	0.28	0.37	0.33
LTE Band 12_Ant2	Right Cheek	0.591	0.202	0.271	0.235	0.79	0.86	0.83
	Right Tilted	0.371	0.090	0.459	0.235	0.46	0.83	0.61
	Left Cheek	0.955	0.151	0.180	0.235	1.11	1.14	1.19
	Left Tilted	1.009	0.188	0.280	0.235	1.20	1.29	1.24
LTE Band 13_Ant1	Right Cheek	0.157	0.202	0.271	0.235	0.36	0.43	0.39
	Right Tilted	0.075	0.090	0.459	0.235	0.17	0.53	0.31
	Left Cheek	0.116	0.151	0.180	0.235	0.27	0.30	0.35
	Left Tilted	0.072	0.188	0.280	0.235	0.26	0.35	0.31
LTE Band 14_Ant1	Right Cheek	0.175	0.202	0.271	0.235	0.38	0.45	0.41
	Right Tilted	0.106	0.090	0.459	0.235	0.20	0.57	0.34
	Left Cheek	0.157	0.151	0.180	0.235	0.31	0.34	0.39
	Left Tilted	0.091	0.188	0.280	0.235	0.28	0.37	0.33
LTE Band25_Ant1	Right Cheek	0.070	0.202	0.271	0.235	0.27	0.34	0.31
	Right Tilted	0.039	0.090	0.459	0.235	0.13	0.50	0.27
	Left Cheek	0.075	0.151	0.180	0.235	0.23	0.26	0.31
	Left Tilted	0.096	0.188	0.280	0.235	0.28	0.38	0.33
LTE Band26_Ant1	Right Cheek	0.111	0.202	0.271	0.235	0.31	0.38	0.35
	Right Tilted	0.043	0.090	0.459	0.235	0.13	0.50	0.28
	Left Cheek	0.079	0.151	0.180	0.235	0.23	0.26	0.31
	Left Tilted	0.043	0.188	0.280	0.235	0.23	0.32	0.28
LTE Band26_Ant2	Right Cheek	0.978	0.202	0.271	0.235	1.18	1.25	1.21
	Right Tilted	0.965	0.090	0.459	0.235	1.06	1.42	1.20
	Left Cheek	1.172	0.151	0.180	0.235	1.32	1.35	1.41
	Left Tilted	1.163	0.188	0.280	0.235	1.35	1.44	1.40
LTE Band30_Ant1	Right Cheek	0.013	0.202	0.271	0.235	0.22	0.28	0.25
	Right Tilted	0.001	0.090	0.459	0.235	0.09	0.46	0.24
	Left Cheek	0.015	0.151	0.180	0.235	0.17	0.20	0.25
	Left Tilted	0.011	0.188	0.280	0.235	0.20	0.29	0.25
LTE Band66_Ant1	Right Cheek	0.107	0.202	0.271	0.235	0.31	0.38	0.34
	Right Tilted	0.089	0.090	0.459	0.235	0.18	0.55	0.32
	Left Cheek	0.127	0.151	0.180	0.235	0.28	0.31	0.36
	Left Tilted	0.095	0.188	0.280	0.235	0.28	0.38	0.33
LTE Band71_Ant1	Right Cheek	0.173	0.202	0.271	0.235	0.38	0.44	0.41
	Right Tilted	0.094	0.090	0.459	0.235	0.18	0.55	0.33
	Left Cheek	0.169	0.151	0.180	0.235	0.32	0.35	0.40
	Left Tilted	0.081	0.188	0.280	0.235	0.27	0.36	0.32

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3+6	5GHz WLAN Ant 5+6	Bluetooth Ant 3			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE Band71_Ant2	Right Cheek	0.542	0.202	0.271	0.235	0.74	0.81	0.78
	Right Tilted	0.553	0.090	0.459	0.235	0.64	1.01	0.79
	Left Cheek	0.754	0.151	0.180	0.235	0.91	0.93	0.99
	Left Tilted	0.864	0.188	0.280	0.235	1.05	1.14	1.10
LTE Band41_Ant1	Right Cheek	0.062	0.202	0.271	0.235	0.26	0.33	0.30
	Right Tilted	0.031	0.090	0.459	0.235	0.12	0.49	0.27
	Left Cheek	0.030	0.151	0.180	0.235	0.18	0.21	0.27
	Left Tilted	0.031	0.188	0.280	0.235	0.22	0.31	0.27
FR1 n25&2_Ant1	Right Cheek	0.056	0.202	0.271	0.235	0.26	0.33	0.29
	Right Tilted	0.041	0.090	0.459	0.235	0.13	0.50	0.28
	Left Cheek	0.078	0.151	0.180	0.235	0.23	0.26	0.31
	Left Tilted	0.090	0.188	0.280	0.235	0.28	0.37	0.33
FR1 n41 Ant1-HPUE	Right Cheek	0.101	0.202	0.271	0.235	0.30	0.37	0.34
	Right Tilted	0.059	0.090	0.459	0.235	0.15	0.52	0.29
	Left Cheek	0.083	0.151	0.180	0.235	0.23	0.26	0.32
	Left Tilted	0.087	0.188	0.280	0.235	0.28	0.37	0.32
FR1 n66_Ant1	Right Cheek	0.092	0.202	0.271	0.235	0.29	0.36	0.33
	Right Tilted	0.068	0.090	0.459	0.235	0.16	0.53	0.30
	Left Cheek	0.079	0.151	0.180	0.235	0.23	0.26	0.31
	Left Tilted	0.077	0.188	0.280	0.235	0.27	0.36	0.31
FR1 n71_Ant1	Right Cheek	0.084	0.202	0.271	0.235	0.29	0.36	0.32
	Right Tilted	0.058	0.090	0.459	0.235	0.15	0.52	0.29
	Left Cheek	0.099	0.151	0.180	0.235	0.25	0.28	0.33
	Left Tilted	0.074	0.188	0.280	0.235	0.26	0.35	0.31
FR1 n71_Ant2	Right Cheek	0.262	0.202	0.271	0.235	0.46	0.53	0.50
	Right Tilted	0.286	0.090	0.459	0.235	0.38	0.75	0.52
	Left Cheek	0.449	0.151	0.180	0.235	0.60	0.63	0.68
	Left Tilted	0.434	0.188	0.280	0.235	0.62	0.71	0.67

WWAN Band	Exposure Position	1	2	3	4	5	1+2+5 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3+6	5GHz WLAN Ant 5+6	Bluetooth Ant 3	FR1 N2&25 Ant 2			
LTE Band66_Ant1	Right Cheek	0.107	0.202	0.271	0.235	0.174	0.48	0.55	0.52
	Right Tilted	0.089	0.090	0.459	0.235	0.232	0.41	0.78	0.56
	Left Cheek	0.127	0.151	0.180	0.235	0.355	0.63	0.66	0.72
	Left Tilted	0.095	0.188	0.280	0.235	0.588	0.87	0.96	0.92

WWAN Band	Exposure Position	1	2	3	4	5	1+2+5 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3+6	5GHz WLAN Ant 5+6	Bluetooth Ant 3	FR1 N2&25 Ant 1			
LTE Band 5_Ant2 ENDC	Right Cheek	0.305	0.202	0.271	0.235	0.056	0.56	0.63	0.60
	Right Tilted	0.317	0.090	0.459	0.235	0.041	0.45	0.82	0.59
	Left Cheek	0.426	0.151	0.180	0.235	0.078	0.66	0.68	0.74
	Left Tilted	0.437	0.188	0.280	0.235	0.090	0.72	0.81	0.76
LTE Band 12_Ant2 ENDC	Right Cheek	0.393	0.202	0.271	0.235	0.056	0.65	0.72	0.68
	Right Tilted	0.344	0.090	0.459	0.235	0.041	0.48	0.84	0.62
	Left Cheek	0.425	0.151	0.180	0.235	0.078	0.65	0.68	0.74
	Left Tilted	0.430	0.188	0.280	0.235	0.090	0.71	0.80	0.76
LTE Band66_Ant2 ENDC	Right Cheek	0.222	0.202	0.271	0.235	0.056	0.48	0.55	0.51
	Right Tilted	0.270	0.090	0.459	0.235	0.041	0.40	0.77	0.55
	Left Cheek	0.440	0.151	0.180	0.235	0.078	0.67	0.70	0.75
	Left Tilted	0.470	0.188	0.280	0.235	0.090	0.75	0.84	0.80

WWAN Band	Exposure Position	1	2	3	4	5	1+2+5 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3+6	5GHz WLAN Ant 5+6	Bluetooth Ant 3	FR1 N41 Ant 1			
LTE Band25_Ant2 ENDC	Right Cheek	0.177	0.202	0.271	0.235	0.101	0.48	0.55	0.51
	Right Tilted	0.230	0.090	0.459	0.235	0.059	0.38	0.75	0.52
	Left Cheek	0.352	0.151	0.180	0.235	0.083	0.59	0.62	0.67
	Left Tilted	0.419	0.188	0.280	0.235	0.087	0.69	0.79	0.74
LTE Band66_Ant2 ENDC	Right Cheek	0.222	0.202	0.271	0.235	0.101	0.53	0.59	0.56
	Right Tilted	0.270	0.090	0.459	0.235	0.059	0.42	0.79	0.56
	Left Cheek	0.440	0.151	0.180	0.235	0.083	0.67	0.70	0.76
	Left Tilted	0.470	0.188	0.280	0.235	0.087	0.75	0.84	0.79

WWAN Band	Exposure Position	1	2	3	4	5	1+2+5 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3+6	5GHz WLAN Ant 5+6	Bluetooth Ant 3	FR1 N66 Ant 3			
LTE Band 13_Ant1	Right Cheek	0.157	0.202	0.271	0.235	0.514	0.87	0.94	0.91
	Right Tilted	0.075	0.090	0.459	0.235	0.485	0.65	1.02	0.80
	Left Cheek	0.116	0.151	0.180	0.235	0.336	0.60	0.63	0.69
	Left Tilted	0.072	0.188	0.280	0.235	0.423	0.68	0.78	0.73

WWAN Band	Exposure Position	1	2	3	4	5	1+2+5 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3+6	5GHz WLAN Ant 5+6	Bluetooth Ant 3	FR1 N66 Ant 1			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE Band25_Ant2 ENDC	Right Cheek	0.177	0.202	0.271	0.235	0.092	0.47	0.54	0.50
	Right Tilted	0.230	0.090	0.459	0.235	0.068	0.39	0.76	0.53
	Left Cheek	0.352	0.151	0.180	0.235	0.079	0.58	0.61	0.67
	Left Tilted	0.419	0.188	0.280	0.235	0.077	0.68	0.78	0.73
LTE Band 5_Ant2 ENDC	Right Cheek	0.305	0.202	0.271	0.235	0.092	0.60	0.67	0.63
	Right Tilted	0.317	0.090	0.459	0.235	0.068	0.48	0.84	0.62
	Left Cheek	0.426	0.151	0.180	0.235	0.079	0.66	0.69	0.74
	Left Tilted	0.437	0.188	0.280	0.235	0.077	0.70	0.79	0.75
LTE Band 12_Ant2 ENDC	Right Cheek	0.393	0.202	0.271	0.235	0.092	0.69	0.76	0.72
	Right Tilted	0.344	0.090	0.459	0.235	0.068	0.50	0.87	0.65
	Left Cheek	0.425	0.151	0.180	0.235	0.079	0.66	0.68	0.74
	Left Tilted	0.430	0.188	0.280	0.235	0.077	0.70	0.79	0.74

WWAN Band	Exposure Position	1	2	3	4	5	1+2+5 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3+6	5GHz WLAN Ant 5+6	Bluetooth Ant 3	FR1 N71 Ant 2			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE Band25_Ant1	Right Cheek	0.070	0.202	0.271	0.235	0.262	0.53	0.60	0.57
	Right Tilted	0.039	0.090	0.459	0.235	0.286	0.42	0.78	0.56
	Left Cheek	0.075	0.151	0.180	0.235	0.449	0.68	0.70	0.76
	Left Tilted	0.096	0.188	0.280	0.235	0.434	0.72	0.81	0.77
LTE Band66_Ant1	Right Cheek	0.107	0.202	0.271	0.235	0.262	0.57	0.64	0.60
	Right Tilted	0.089	0.090	0.459	0.235	0.286	0.47	0.83	0.61
	Left Cheek	0.127	0.151	0.180	0.235	0.449	0.73	0.76	0.81
	Left Tilted	0.095	0.188	0.280	0.235	0.434	0.72	0.81	0.76
LTE Band 7_Ant1	Right Cheek	0.083	0.202	0.271	0.235	0.262	0.55	0.62	0.58
	Right Tilted	0.035	0.090	0.459	0.235	0.286	0.41	0.78	0.56
	Left Cheek	0.049	0.151	0.180	0.235	0.449	0.65	0.68	0.73
	Left Tilted	0.029	0.188	0.280	0.235	0.434	0.65	0.74	0.70

WWAN Band	Exposure Position	1	2	3	4	5	1+2+5 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3+6	5GHz WLAN Ant 5+6	Bluetooth Ant 3	FR1 N5 Ant 2			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE Band25_Ant1	Right Cheek	0.070	0.202	0.271	0.235	0.298	0.57	0.64	0.60
	Right Tilted	0.039	0.090	0.459	0.235	0.346	0.48	0.84	0.62
	Left Cheek	0.075	0.151	0.180	0.235	0.335	0.56	0.59	0.65
	Left Tilted	0.096	0.188	0.280	0.235	0.290	0.57	0.67	0.62
LTE Band66_Ant1	Right Cheek	0.107	0.202	0.271	0.235	0.298	0.61	0.68	0.64
	Right Tilted	0.089	0.090	0.459	0.235	0.346	0.53	0.89	0.67
	Left Cheek	0.127	0.151	0.180	0.235	0.335	0.61	0.64	0.70
	Left Tilted	0.095	0.188	0.280	0.235	0.290	0.57	0.67	0.62

WWAN Band	Exposure Position	1	2	3	4	5	1+2+5 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3+6	5GHz WLAN Ant 5+6	Bluetooth Ant 3	FR1 n2 Ant 3			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE Band 13_Ant1	Right Cheek	0.157	0.202	0.271	0.235	0.560	0.92	0.99	0.95
	Right Tilted	0.075	0.090	0.459	0.235	0.511	0.68	1.05	0.82
	Left Cheek	0.116	0.151	0.180	0.235	0.362	0.63	0.66	0.71
	Left Tilted	0.072	0.188	0.280	0.235	0.374	0.63	0.73	0.68

16.2 Hotspot Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	Case No	SPLSR	1+3 Summed 1g SAR (W/kg)	Case No	SPLSR	1+4 Summed 1g SAR (W/kg)	Case No	SPLSR
		WWAN 1g SAR (W/kg)	2.4GHz WLAN Ant 3+6 1g SAR (W/kg)	5GHz WLAN Ant 5+6 1g SAR (W/kg)	Bluetooth Ant 3 1g SAR (W/kg)									
GSM850_Ant1	Front	0.362	0.141	0.111	0.226	0.50			0.47			0.59		
	Back	0.786	0.290	0.399	0.226	1.08			1.19			1.01		
	Left side	0.097	0.045	0.121	0.226	0.14			0.22			0.32		
	Right side	0.140	0.122	0.126	0.226	0.26			0.27			0.37		
	Top side		0.269	0.148	0.226	0.27			0.15			0.23		
	Bottom side	0.537				0.54			0.54			0.54		
GSM850_Ant2	Front	0.545	0.141	0.111	0.226	0.69			0.66			0.77		
	Back	0.706	0.290	0.399	0.226	1.00			1.11			0.93		
	Left side	0.225	0.045	0.121	0.226	0.27			0.35			0.45		
	Right side	0.353	0.122	0.126	0.226	0.48			0.48			0.58		
	Top side	1.127	0.269	0.148	0.226	1.40			1.28			1.35		
	Bottom side					0.00			0.00			0.00		
GSM1900_Ant1	Front	0.767	0.141	0.111	0.226	0.91			0.88			0.99		
	Back	1.433	0.290	0.399	0.226	1.72	#01	0.02	1.83	#02	0.02	1.66	#03	0.01
	Left side	0.056	0.045	0.121	0.226	0.10			0.18			0.28		
	Right side	0.079	0.122	0.126	0.226	0.20			0.21			0.31		
	Top side		0.269	0.148	0.226	0.27			0.15			0.23		
	Bottom side	1.394				1.39			1.39			1.39		
WCDMA II_Ant1	Front	0.774	0.141	0.111	0.226	0.92			0.89			1.00		
	Back	1.132	0.290	0.399	0.226	1.42			1.53			1.36		
	Left side	0.070	0.045	0.121	0.226	0.12			0.19			0.30		
	Right side	0.062	0.122	0.126	0.226	0.18			0.19			0.29		
	Top side		0.269	0.148	0.226	0.27			0.15			0.23		
	Bottom side	1.243				1.24			1.24			1.24		
WCDMA IV_Ant1	Front	0.950	0.141	0.111	0.226	1.09			1.06			1.18		
	Back	1.302	0.290	0.399	0.226	1.59			1.70	#04	0.00	1.53		
	Left side	0.058	0.045	0.121	0.226	0.10			0.18			0.28		
	Right side	0.075	0.122	0.126	0.226	0.20			0.20			0.30		
	Top side		0.269	0.148	0.226	0.27			0.15			0.23		
	Bottom side	1.228				1.23			1.23			1.23		
WCDMA V_Ant1	Front	0.363	0.141	0.111	0.226	0.50			0.47			0.59		
	Back	0.906	0.290	0.399	0.226	1.20			1.31			1.13		
	Left side	0.046	0.045	0.121	0.226	0.09			0.17			0.27		
	Right side	0.297	0.122	0.126	0.226	0.42			0.42			0.52		
	Top side		0.269	0.148	0.226	0.27			0.15			0.23		
	Bottom side	0.710				0.71			0.71			0.71		
WCDMA V_Ant2	Front	0.630	0.141	0.111	0.226	0.77			0.74			0.86		
	Back	0.633	0.290	0.399	0.226	0.92			1.03			0.86		
	Left side		0.045	0.121	0.226	0.05			0.12			0.23		
	Right side	0.438	0.122	0.126	0.226	0.56			0.56			0.66		
	Top side	1.091	0.269	0.148	0.226	1.36			1.24			1.32		
	Bottom side					0.00			0.00			0.00		
CDMA2000 BC0_Ant1	Front	0.513	0.141	0.111	0.226	0.65			0.62			0.74		
	Back	0.959	0.290	0.399	0.226	1.25			1.36			1.19		
	Left side	0.060	0.045	0.121	0.226	0.11			0.18			0.29		
	Right side	0.167	0.122	0.126	0.226	0.29			0.29			0.39		
	Top side		0.269	0.148	0.226	0.27			0.15			0.23		
	Bottom side	0.678				0.68			0.68			0.68		
CDMA2000	Front	0.570	0.141	0.111	0.226	0.71			0.68			0.80		



FCC SAR Test Report

Report No. : FA082402

BC0_Ant2	Back	0.558	0.290	0.399	0.226	0.85			0.96			0.78		
	Left side		0.045	0.121	0.226	0.05			0.12			0.23		
	Right side	0.336	0.122	0.126	0.226	0.46			0.46			0.56		
	Top side	1.044	0.269	0.148	0.226	1.31			1.19			1.27		
	Bottom side					0.00			0.00			0.00		
CDMA2000 BC1_Ant1	Front	0.623	0.141	0.111	0.226	0.76			0.73			0.85		
	Back	1.108	0.290	0.399	0.226	1.40			1.51			1.33		
	Left side	0.046	0.045	0.121	0.226	0.09			0.17			0.27		
	Right side	0.071	0.122	0.126	0.226	0.19			0.20			0.30		
	Top side		0.269	0.148	0.226	0.27			0.15			0.23		
CDMA2000 BC10_Ant1	Bottom side	1.408				1.41			1.41			1.41		
	Front	0.479	0.141	0.111	0.226	0.62			0.59			0.71		
	Back	0.786	0.290	0.399	0.226	1.08			1.19			1.01		
	Left side	0.121	0.045	0.121	0.226	0.17			0.24			0.35		
	Right side	0.204	0.122	0.126	0.226	0.33			0.33			0.43		
CDMA2000 BC10_Ant2	Top side		0.269	0.148	0.226	0.27			0.15			0.23		
	Bottom side	0.635				0.64			0.64			0.64		
	Front	0.492	0.141	0.111	0.226	0.63			0.60			0.72		
	Back	0.492	0.290	0.399	0.226	0.78			0.89			0.72		
	Left side		0.045	0.121	0.226	0.05			0.12			0.23		
LTE Band 7_Ant1	Right side	0.293	0.122	0.126	0.226	0.42			0.42			0.52		
	Top side	0.966	0.269	0.148	0.226	1.24			1.11			1.19		
	Bottom side					0.00			0.00			0.00		
	Front	0.713	0.141	0.111	0.226	0.85			0.82			0.94		
	Back	1.370	0.290	0.399	0.226	1.66	#08	0.02	1.77	#09	0.02	1.60	#10	0.01
LTE Band 12_Ant1	Left side	0.001	0.045	0.121	0.226	0.05			0.12			0.23		
	Right side	0.087	0.122	0.126	0.226	0.21			0.21			0.31		
	Top side		0.269	0.148	0.226	0.27			0.15			0.23		
	Bottom side	1.175				1.18			1.18			1.18		
	Front	0.520	0.141	0.111	0.226	0.66			0.63			0.75		
LTE Band 12_Ant2	Back	0.750	0.290	0.399	0.226	1.04			1.15			0.98		
	Left side	0.303	0.045	0.121	0.226	0.35			0.42			0.53		
	Right side	0.313	0.122	0.126	0.226	0.44			0.44			0.54		
	Top side		0.269	0.148	0.226	0.27			0.15			0.23		
	Bottom side	0.713				0.71			0.71			0.71		
LTE Band 12_Ant2	Front	0.555	0.141	0.111	0.226	0.70			0.67			0.78		
	Back	0.566	0.290	0.399	0.226	0.86			0.97			0.79		
	Left side		0.045	0.121	0.226	0.05			0.12			0.23		
	Right side	0.627	0.122	0.126	0.226	0.75			0.75			0.85		
	Top side	0.620	0.269	0.148	0.226	0.89			0.77			0.85		
LTE Band 13_Ant1	Bottom side					0.00			0.00			0.00		
	Front	0.434	0.141	0.111	0.226	0.58			0.55			0.66		
	Back	0.668	0.290	0.399	0.226	0.96			1.07			0.89		
	Left side	0.178	0.045	0.121	0.226	0.22			0.30			0.40		
	Right side	0.241	0.122	0.126	0.226	0.36			0.37			0.47		
LTE Band 14_Ant1	Top side		0.269	0.148	0.226	0.27			0.15			0.23		
	Bottom side	0.453				0.45			0.45			0.45		
	Front	0.586	0.141	0.111	0.226	0.73			0.70			0.81		
	Back	0.626	0.290	0.399	0.226	0.92			1.03			0.85		
	Left side	0.243	0.045	0.121	0.226	0.29			0.36			0.47		
LTE Band25_Ant1	Right side	0.324	0.122	0.126	0.226	0.45			0.45			0.55		
	Top side		0.269	0.148	0.226	0.27			0.15			0.23		
	Bottom side	0.411				0.41			0.41			0.41		
LTE Band25_Ant1	Front	0.687	0.141	0.111	0.226	0.83			0.80			0.91		
	Back	1.210	0.290	0.399	0.226	1.50			1.61	#11	0.02	1.44		
	Left side	0.044	0.045	0.121	0.226	0.09			0.17			0.27		

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : IHDT56ZF2

Page 115 of 135

Issued Date : Dec. 04, 2020

Form version. : 181113



FCC SAR Test Report

Report No. : FA082402

	Right side	0.056	0.122	0.126	0.226	0.18			0.18			0.28		
	Top side		0.269	0.148	0.226	0.27			0.15			0.23		
	Bottom side	1.162				1.16			1.16			1.16		
LTE Band26_Ant1	Front	0.442	0.141	0.111	0.226	0.58			0.55			0.67		
	Back	0.568	0.290	0.399	0.226	0.86			0.97			0.79		
	Left side	0.082	0.045	0.121	0.226	0.13			0.20			0.31		
	Right side	0.096	0.122	0.126	0.226	0.22			0.22			0.32		
	Top side		0.269	0.148	0.226	0.27			0.15			0.23		
	Bottom side	0.431				0.43			0.43			0.43		
LTE Band26_Ant2	Front	0.571	0.141	0.111	0.226	0.71			0.68			0.80		
	Back	0.612	0.290	0.399	0.226	0.90			1.01			0.84		
	Left side		0.045	0.121	0.226	0.05			0.12			0.23		
	Right side	0.379	0.122	0.126	0.226	0.50			0.51			0.61		
	Top side	0.951	0.269	0.148	0.226	1.22			1.10			1.18		
	Bottom side					0.00			0.00			0.00		
LTE Band30_Ant1	Front	0.718	0.141	0.111	0.226	0.86			0.83			0.94		
	Back	1.295	0.290	0.399	0.226	1.59			1.69	#12	0.02	1.52		
	Left side	0.022	0.045	0.121	0.226	0.07			0.14			0.25		
	Right side	0.112	0.122	0.126	0.226	0.23			0.24			0.34		
	Top side		0.269	0.148	0.226	0.27			0.15			0.23		
	Bottom side	1.363				1.36			1.36			1.36		
LTE Band66_Ant1	Front	0.780	0.141	0.111	0.226	0.92			0.89			1.01		
	Back	1.217	0.290	0.399	0.226	1.51			1.62	#13	0.02	1.44		
	Left side	0.046	0.045	0.121	0.226	0.09			0.17			0.27		
	Right side	0.095	0.122	0.126	0.226	0.22			0.22			0.32		
	Top side		0.269	0.148	0.226	0.27			0.15			0.23		
	Bottom side	1.390				1.39			1.39			1.39		
LTE Band71_Ant1	Front	0.263	0.141	0.111	0.226	0.40			0.37			0.49		
	Back	0.567	0.290	0.399	0.226	0.86			0.97			0.79		
	Left side	0.230	0.045	0.121	0.226	0.28			0.35			0.46		
	Right side	0.271	0.122	0.126	0.226	0.39			0.40			0.50		
	Top side		0.269	0.148	0.226	0.27			0.15			0.23		
	Bottom side	0.501				0.50			0.50			0.50		

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	Case No	SPLSR	1+3 Summed 1g SAR (W/kg)	Case No	SPLSR	1+4 Summed 1g SAR (W/kg)	Case No	SPLSR
		WWAN 1g SAR (W/kg)	2.4GHz WLAN Ant 3+6 1g SAR (W/kg)	5GHz WLAN Ant 5+6 1g SAR (W/kg)	Bluetooth Ant 3 1g SAR (W/kg)									
LTE Band71_Ant2	Front	0.237	0.141	0.111	0.226	0.38			0.35			0.46		
	Back	0.316	0.290	0.399	0.226	0.61			0.72			0.54		
	Left side		0.045	0.121	0.226	0.05			0.12			0.23		
	Right side	0.296	0.122	0.126	0.226	0.42			0.42			0.52		
	Top side	0.513	0.269	0.148	0.226	0.78			0.66			0.74		
	Bottom side					0.00			0.00			0.00		
LTE Band41_Ant1	Front	0.728	0.141	0.111	0.226	0.87			0.84			0.95		
	Back	1.406	0.290	0.399	0.226	1.70	#14	0.02	1.81	#15	0.02	1.63	#16	0.01
	Left side	0.031	0.045	0.121	0.226	0.08			0.15			0.26		
	Right side	0.135	0.122	0.126	0.226	0.26			0.26			0.36		
	Top side		0.269	0.148	0.226	0.27			0.15			0.23		
	Bottom side	1.432				1.43			1.43			1.43		
FR1 n25&N2_Ant1	Front	0.849	0.141	0.111	0.226	0.99			0.96			1.08		
	Back	1.222	0.290	0.399	0.226	1.51			1.62	#17	0.02	1.45		
	Left side	0.088	0.045	0.121	0.226	0.13			0.21			0.31		
	Right side	0.080	0.122	0.126	0.226	0.20			0.21			0.31		
	Top side		0.269	0.148	0.226	0.27			0.15			0.23		
	Bottom side	1.340				1.34			1.34			1.34		
FR1 n41 Ant1-HPUE	Front	0.598	0.141	0.111	0.226	0.74			0.71			0.82		
	Back	1.217	0.290	0.399	0.226	1.51			1.62	#18	0.02	1.44		
	Left side	0.044	0.045	0.121	0.226	0.09			0.17			0.27		
	Right side	0.141	0.122	0.126	0.226	0.26			0.27			0.37		
	Top side		0.269	0.148	0.226	0.27			0.15			0.23		
	Bottom side	1.200				1.20			1.20			1.20		
FR1 n66_Ant1	Front	0.791	0.141	0.111	0.226	0.93			0.90			1.02		
	Back	1.182	0.290	0.399	0.226	1.47			1.58			1.41		
	Left side	0.071	0.045	0.121	0.226	0.12			0.19			0.30		
	Right side	0.097	0.122	0.126	0.226	0.22			0.22			0.32		
	Top side		0.269	0.148	0.226	0.27			0.15			0.23		
	Bottom side	1.375				1.38			1.38			1.38		
FR1 n71_Ant1	Front	0.222	0.141	0.111	0.226	0.36			0.33			0.45		
	Back	0.398	0.290	0.399	0.226	0.69			0.80			0.62		
	Left side	0.152	0.045	0.121	0.226	0.20			0.27			0.38		
	Right side	0.182	0.122	0.126	0.226	0.30			0.31			0.41		
	Top side		0.269	0.148	0.226	0.27			0.15			0.23		
	Bottom side	0.400				0.40			0.40			0.40		
FR1 n71_Ant2	Front	0.298	0.141	0.111	0.226	0.44			0.41			0.52		
	Back	0.440	0.290	0.399	0.226	0.73			0.84			0.67		
	Left side		0.045	0.121	0.226	0.05			0.12			0.23		
	Right side	0.357	0.122	0.126	0.226	0.48			0.48			0.58		
	Top side	0.403	0.269	0.148	0.226	0.67			0.55			0.63		
	Bottom side					0.00			0.00			0.00		

WWAN Band	Exposure Position	1	2	3	4	5	1+2+5 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3+6	5GHz WLAN Ant 5+6	Bluetooth Ant 3	FR1 N2&25 Ant 2			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE Band66_Ant1 ENDC	Front	0.361	0.141	0.111	0.226	0.361	0.86	0.83	0.95
	Back	0.529	0.290	0.399	0.226	0.598	1.42	1.53	1.35
	Left side	0.001	0.045	0.121	0.226		0.05	0.12	0.23
	Right side	0.001	0.122	0.126	0.226	0.043	0.17	0.17	0.27
	Top side		0.269	0.148	0.226	0.568	0.84	0.72	0.79
	Bottom side	0.579					0.58	0.58	0.58

WWAN Band	Exposure Position	1	2	3	4	5	1+2+5 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3+6	5GHz WLAN Ant 5+6	Bluetooth Ant 3	FR1 N2&25 Ant1			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE Band 5_Ant2 ENDC	Front	0.323	0.141	0.111	0.226	0.399	0.86	0.83	0.95
	Back	0.366	0.290	0.399	0.226	0.564	1.22	1.33	1.16
	Left side		0.045	0.121	0.226	0.036	0.08	0.16	0.26
	Right side	0.235	0.122	0.126	0.226	0.028	0.39	0.39	0.49
	Top side	0.580	0.269	0.148	0.226		0.85	0.73	0.81
	Bottom side					0.489	0.49	0.49	0.49
LTE Band 12_Ant2 ENDC	Front	0.555	0.141	0.111	0.226	0.399	1.10	1.07	1.18
	Back	0.566	0.290	0.399	0.226	0.564	1.42	1.53	1.36
	Left side		0.045	0.121	0.226	0.036	0.08	0.16	0.26
	Right side	0.407	0.122	0.126	0.226	0.028	0.56	0.56	0.66
	Top side	0.534	0.269	0.148	0.226		0.80	0.68	0.76
	Bottom side					0.489	0.49	0.49	0.49
LTE Band66_An t2 ENDC	Front	0.339	0.141	0.111	0.226	0.399	0.88	0.85	0.96
	Back	0.559	0.290	0.399	0.226	0.564	1.41	1.52	1.35
	Left side		0.045	0.121	0.226	0.036	0.08	0.16	0.26
	Right side	0.055	0.122	0.126	0.226	0.028	0.21	0.21	0.31
	Top side	0.510	0.269	0.148	0.226		0.78	0.66	0.74
	Bottom side					0.489	0.49	0.49	0.49

WWAN Band	Exposure Position	1	2	3	4	5	1+2+5 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3+6	5GHz WLAN Ant 5+6	Bluetooth Ant 3	FR1 N41 Ant 1			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE Band25_Ant1 ENDC	Front	0.332	0.141	0.111	0.226	0.281	0.75	0.72	0.84
	Back	0.566	0.290	0.399	0.226	0.514	1.37	1.48	1.31
	Left side	0.045	0.045	0.121	0.226	0.036	0.13	0.20	0.31
	Right side	0.025	0.122	0.126	0.226	0.061	0.21	0.21	0.31
	Top side		0.269	0.148	0.226		0.27	0.15	0.23
	Bottom side	0.518				0.522	1.04	1.04	1.04
LTE Band66_Ant1 ENDC	Front	0.361	0.141	0.111	0.226	0.281	0.78	0.75	0.87
	Back	0.529	0.290	0.399	0.226	0.514	1.33	1.44	1.27
	Left side	0.001	0.045	0.121	0.226	0.036	0.08	0.16	0.26
	Right side	0.001	0.122	0.126	0.226	0.061	0.18	0.19	0.29
	Top side		0.269	0.148	0.226		0.27	0.15	0.23
	Bottom side	0.579				0.522	1.10	1.10	1.10

WWAN Band	Exposure Position	1	2	3	4	5	1+2+5 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3+6	5GHz WLAN Ant 5+6	Bluetooth Ant 3	FR1 N66 Ant 3			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE Band 13_Ant1 ENDC	Front	0.338	0.141	0.111	0.226	0.226	0.71	0.68	0.79
	Back	0.537	0.290	0.399	0.226	0.318	1.15	1.25	1.08
	Left side	0.138	0.045	0.121	0.226	0.104	0.29	0.36	0.47
	Right side	0.172	0.122	0.126	0.226	0.058	0.35	0.36	0.46
	Top side		0.269	0.148	0.226	0.491	0.76	0.64	0.72
	Bottom side	0.325					0.33	0.33	0.33

WWAN Band	Exposure Position	1	2	3	4	5	1+2+5 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3+6	5GHz WLAN Ant 5+6	Bluetooth Ant 3	FR1 N66 Ant 1			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE Band25_Ant2 ENDC	Front	0.283	0.141	0.111	0.226	0.397	0.82	0.79	0.91
	Back	0.384	0.290	0.399	0.226	0.530	1.20	1.31	1.14
	Left side		0.045	0.121	0.226	0.031	0.08	0.15	0.26
	Right side	0.040	0.122	0.126	0.226	0.051	0.21	0.22	0.32
	Top side	0.644	0.269	0.148	0.226		0.91	0.79	0.87
	Bottom side					0.571	0.57	0.57	0.57
LTE Band 5_Ant2 ENDC	Front	0.323	0.141	0.111	0.226	0.397	0.86	0.83	0.95
	Back	0.366	0.290	0.399	0.226	0.530	1.19	1.30	1.12
	Left side		0.045	0.121	0.226	0.031	0.08	0.15	0.26
	Right side	0.235	0.122	0.126	0.226	0.051	0.41	0.41	0.51
	Top side	0.580	0.269	0.148	0.226		0.85	0.73	0.81
	Bottom side					0.571	0.57	0.57	0.57
LTE Band 12_Ant2 ENDC	Front	0.555	0.141	0.111	0.226	0.397	1.09	1.06	1.18
	Back	0.566	0.290	0.399	0.226	0.530	1.39	1.50	1.32
	Left side		0.045	0.121	0.226	0.031	0.08	0.15	0.26
	Right side	0.407	0.122	0.126	0.226	0.051	0.58	0.58	0.68
	Top side	0.534	0.269	0.148	0.226		0.80	0.68	0.76
	Bottom side					0.571	0.57	0.57	0.57

WWAN Band	Exposure Position	1	2	3	4	5	1+2+5 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3+6	5GHz WLAN Ant 5+6	Bluetooth Ant 3	FR1 N71 Ant 2			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE Band25_Ant1 ENDC	Front	0.332	0.141	0.111	0.226	0.298	0.77	0.74	0.86
	Back	0.566	0.290	0.399	0.226	0.440	1.30	1.41	1.23
	Left side	0.045	0.045	0.121	0.226		0.09	0.17	0.27
	Right side	0.025	0.122	0.126	0.226	0.357	0.50	0.51	0.61
	Top side		0.269	0.148	0.226	0.403	0.67	0.55	0.63
	Bottom side	0.518					0.52	0.52	0.52
LTE Band66_Ant1 ENDC	Front	0.361	0.141	0.111	0.226	0.298	0.80	0.77	0.89
	Back	0.529	0.290	0.399	0.226	0.440	1.26	1.37	1.20
	Left side	0.001	0.045	0.121	0.226		0.05	0.12	0.23
	Right side	0.001	0.122	0.126	0.226	0.357	0.48	0.48	0.58
	Top side		0.269	0.148	0.226	0.403	0.67	0.55	0.63
	Bottom side	0.579					0.58	0.58	0.58
LTE Band 7_Ant1 ENDC	Front	0.282	0.141	0.111	0.226	0.298	0.72	0.69	0.81
	Back	0.500	0.290	0.399	0.226	0.440	1.23	1.34	1.17
	Left side	0.026	0.045	0.121	0.226		0.07	0.15	0.25
	Right side	0.037	0.122	0.126	0.226	0.357	0.52	0.52	0.62
	Top side		0.269	0.148	0.226	0.403	0.67	0.55	0.63
	Bottom side	0.394					0.39	0.39	0.39

WWAN Band	Exposure Position	1	2	3	4	5	1+2+5 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3+6	5GHz WLAN Ant 5+6	Bluetooth Ant 3	FR1 N5 Ant 2			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE Band25_Ant1 ENDC	Front	0.332	0.141	0.111	0.226	0.379	0.85	0.82	0.94
	Back	0.566	0.290	0.399	0.226	0.554	1.41	1.52	1.35
	Left side	0.045	0.045	0.121	0.226		0.09	0.17	0.27
	Right side	0.025	0.122	0.126	0.226	0.228	0.38	0.38	0.48
	Top side		0.269	0.148	0.226	0.510	0.78	0.66	0.74
	Bottom side	0.518					0.52	0.52	0.52
LTE Band66_Ant1 ENDC	Front	0.361	0.141	0.111	0.226	0.379	0.88	0.85	0.97
	Back	0.529	0.290	0.399	0.226	0.554	1.37	1.48	1.31
	Left side	0.001	0.045	0.121	0.226		0.05	0.12	0.23
	Right side	0.001	0.122	0.126	0.226	0.228	0.35	0.36	0.46
	Top side		0.269	0.148	0.226	0.510	0.78	0.66	0.74
	Bottom side	0.579					0.58	0.58	0.58

WWAN Band	Exposure Position	1	2	3	4	5	1+2+5 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3+6	5GHz WLAN Ant 5+6	Bluetooth Ant 3	FR1 n2 Ant 3			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE Band 13_Ant1 ENDC	Front	0.338	0.141	0.111	0.226	0.348	0.83	0.80	0.91
	Back	0.537	0.290	0.399	0.226	0.468	1.30	1.40	1.23
	Left side	0.138	0.045	0.121	0.226	0.108	0.29	0.37	0.47
	Right side	0.172	0.122	0.126	0.226	0.067	0.36	0.37	0.47
	Top side		0.269	0.148	0.226	0.475	0.74	0.62	0.70
	Bottom side	0.325					0.33	0.33	0.33



16.3 Body-Worn Accessory Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	Case No	SPLSR	1+3 Summed 1g SAR (W/kg)	Case No	SPLSR	1+4 Summed 1g SAR (W/kg)	Case No	SPLSR
		WWAN 1g SAR (W/kg)	2.4GHz WLAN Ant 3+6 1g SAR (W/kg)	5GHz WLAN Ant 5+6 1g SAR (W/kg)	Bluetooth Ant 3 1g SAR (W/kg)									
GSM850_Ant1	Front	0.362	0.141	0.111	0.226	0.50			0.47			0.59		
	Back	0.786	0.290	0.399	0.226	1.08			1.19			1.01		
	Front with Headset					0.00			0.00			0.00		
	Back with Headset					0.00			0.00			0.00		
GSM850_Ant2	Front	0.545	0.141	0.111	0.226	0.69			0.66			0.77		
	Back	0.706	0.290	0.399	0.226	1.00			1.11			0.93		
	Front with Headset					0.00			0.00			0.00		
	Back with Headset					0.00			0.00			0.00		
GSM1900_Ant1	Front	0.767	0.141	0.111	0.226	0.91			0.88			0.99		
	Back	1.433	0.290	0.399	0.226	1.72	#01	0.02	1.83	#02	0.02	1.66	#03	0.01
	Front with Headset					0.00			0.00			0.00		
	Back with Headset	1.269				1.27			1.27			1.27		
WCDMA II_Ant1	Front	0.774	0.141	0.111	0.226	0.92			0.89			1.00		
	Back	1.132	0.290	0.399	0.226	1.42			1.53			1.36		
	Front with Headset					0.00			0.00			0.00		
	Back with Headset					0.00			0.00			0.00		
WCDMA IV_Ant1	Front	0.950	0.141	0.111	0.226	1.09			1.06			1.18		
	Back	1.302	0.290	0.399	0.226	1.59			1.70	#04	0.00	1.53		
	Front with Headset					0.00			0.00			0.00		
	Back with Headset	1.236				1.24			1.24			1.24		
WCDMA V_Ant1	Front	0.363	0.141	0.111	0.226	0.50			0.47			0.59		
	Back	0.906	0.290	0.399	0.226	1.20			1.31			1.13		
	Front with Headset					0.00			0.00			0.00		
	Back with Headset					0.00			0.00			0.00		
WCDMA V_Ant2	Front	0.630	0.141	0.111	0.226	0.77			0.74			0.86		
	Back	0.633	0.290	0.399	0.226	0.92			1.03			0.86		
	Front with Headset					0.00			0.00			0.00		
	Back with Headset					0.00			0.00			0.00		
CDMA2000 BC0_Ant1-	Front	0.549	0.141	0.111	0.226	0.69			0.66			0.78		
	Back	0.832	0.290	0.399	0.226	1.12			1.23			1.06		
	Front with Headset					0.00			0.00			0.00		
	Back with Headset					0.00			0.00			0.00		
CDMA2000 BC0_Ant2-	Front	0.646	0.141	0.111	0.226	0.79			0.76			0.87		
	Back	0.824	0.290	0.399	0.226	1.11			1.22			1.05		
	Front with Headset					0.00			0.00			0.00		
	Back with Headset					0.00			0.00			0.00		
CDMA2000 BC1_Ant1-	Front	0.804	0.141	0.111	0.226	0.95			0.92			1.03		
	Back	1.390	0.290	0.399	0.226	1.68	#05	0.02	1.79	#06	0.02	1.62	#07	0.01
	Front with Headset					0.00			0.00			0.00		
	Back with Headset	1.205				1.21			1.21			1.21		
CDMA2000 BC10_Ant1	Front	0.488	0.141	0.111	0.226	0.63			0.60			0.71		
	Back	0.722	0.290	0.399	0.226	1.01			1.12			0.95		
	Front with Headset					0.00			0.00			0.00		
	Back with Headset					0.00			0.00			0.00		
CDMA2000 BC10_Ant2-	Front	0.640	0.141	0.111	0.226	0.78			0.75			0.87		
	Back	0.729	0.290	0.399	0.226	1.02			1.13			0.96		
	Front with Headset					0.00			0.00			0.00		
	Back with Headset					0.00			0.00			0.00		
LTE Band	Front	0.713	0.141	0.111	0.226	0.85			0.82			0.94		



FCC SAR Test Report

Report No. : FA082402

7_Ant1	Back	1.370	0.290	0.399	0.226	1.66	#08	0.02	1.77	#09	0.02	1.60	#10	0.01
	Front with Headset					0.00			0.00			0.00		
	Back with Headset	1.261				1.26			1.26			1.26		
LTE Band 12_Ant1	Front	0.520	0.141	0.111	0.226	0.66			0.63			0.75		
	Back	0.750	0.290	0.399	0.226	1.04			1.15			0.98		
	Front with Headset					0.00			0.00			0.00		
	Back with Headset					0.00			0.00			0.00		
LTE Band 12_Ant2	Front	0.555	0.141	0.111	0.226	0.70			0.67			0.78		
	Back	0.566	0.290	0.399	0.226	0.86			0.97			0.79		
	Front with Headset					0.00			0.00			0.00		
	Back with Headset					0.00			0.00			0.00		
LTE Band 13_Ant1	Front	0.434	0.141	0.111	0.226	0.58			0.55			0.66		
	Back	0.668	0.290	0.399	0.226	0.96			1.07			0.89		
	Front with Headset					0.00			0.00			0.00		
	Back with Headset					0.00			0.00			0.00		
LTE Band 14_Ant1	Front	0.586	0.141	0.111	0.226	0.73			0.70			0.81		
	Back	0.626	0.290	0.399	0.226	0.92			1.03			0.85		
	Front with Headset					0.00			0.00			0.00		
	Back with Headset					0.00			0.00			0.00		
LTE Band25_Ant1	Front	0.687	0.141	0.111	0.226	0.83			0.80			0.91		
	Back	1.210	0.290	0.399	0.226	1.50			1.61	#11	0.02	1.44		
	Front with Headset					0.00			0.00			0.00		
	Back with Headset	1.196				1.20			1.20			1.20		
LTE Band26_Ant1	Front	0.442	0.141	0.111	0.226	0.58			0.55			0.67		
	Back	0.568	0.290	0.399	0.226	0.86			0.97			0.79		
	Front with Headset					0.00			0.00			0.00		
	Back with Headset					0.00			0.00			0.00		
LTE Band26_Ant2	Front	0.571	0.141	0.111	0.226	0.71			0.68			0.80		
	Back	0.612	0.290	0.399	0.226	0.90			1.01			0.84		
	Front with Headset					0.00			0.00			0.00		
	Back with Headset					0.00			0.00			0.00		
LTE Band30_Ant1	Front	0.718	0.141	0.111	0.226	0.86			0.83			0.94		
	Back	1.295	0.290	0.399	0.226	1.59			1.69	#12	0.02	1.52		
	Front with Headset					0.00			0.00			0.00		
	Back with Headset	1.234				1.23			1.23			1.23		
LTE Band66_Ant1	Front	0.780	0.141	0.111	0.226	0.92			0.89			1.01		
	Back	1.217	0.290	0.399	0.226	1.51			1.62	#13	0.02	1.44		
	Front with Headset					0.00			0.00			0.00		
	Back with Headset	1.175				1.18			1.18			1.18		
LTE Band71_Ant1	Front	0.263	0.141	0.111	0.226	0.40			0.37			0.49		
	Back	0.567	0.290	0.399	0.226	0.86			0.97			0.79		
	Front with Headset					0.00			0.00			0.00		
	Back with Headset					0.00			0.00			0.00		

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	Case No	SPLSR	1+3 Summed 1g SAR (W/kg)	Case No	SPLSR	1+4 Summed 1g SAR (W/kg)	Case No	SPLSR
		WWAN 1g SAR (W/kg)	2.4GHz WLAN Ant 3+6 1g SAR (W/kg)	5GHz WLAN Ant 5+6 1g SAR (W/kg)	Bluetooth Ant 3 1g SAR (W/kg)									
LTE Band71_Ant2	Front	0.237	0.141	0.111	0.226	0.38			0.35			0.46		
	Back	0.316	0.290	0.399	0.226	0.61			0.72			0.54		
	Front with Headset					0.00			0.00			0.00		
	Back with Headset					0.00			0.00			0.00		
LTE Band41_Ant1	Front	0.728	0.141	0.111	0.226	0.87			0.84			0.95		
	Back	1.406	0.290	0.399	0.226	1.70	#14	0.02	1.81	#15	0.02	1.63	#16	0.01
	Front with Headset					0.00			0.00			0.00		
	Back with Headset	1.364				1.36			1.36			1.36		
FR1 n25&N2_Ant1	Front	0.849	0.141	0.111	0.226	0.99			0.96			1.08		
	Back	1.222	0.290	0.399	0.226	1.51			1.62	#17	0.02	1.45		
	Front with Headset					0.00			0.00			0.00		
	Back with Headset	1.116				1.12			1.12			1.12		
FR1 n41 Ant1-HPUE	Front	0.598	0.141	0.111	0.226	0.74			0.71			0.82		
	Back	1.217	0.290	0.399	0.226	1.51			1.62	#18	0.02	1.44		
	Front with Headset					0.00			0.00			0.00		
	Back with Headset	1.071				1.07			1.07			1.07		
FR1 n66_Ant1	Front	0.791	0.141	0.111	0.226	0.93			0.90			1.02		
	Back	1.182	0.290	0.399	0.226	1.47			1.58			1.41		
	Front with Headset					0.00			0.00			0.00		
	Back with Headset					0.00			0.00			0.00		
FR1 n71_Ant1	Front	0.222	0.141	0.111	0.226	0.36			0.33			0.45		
	Back	0.398	0.290	0.399	0.226	0.69			0.80			0.62		
	Front with Headset					0.00			0.00			0.00		
	Back with Headset					0.00			0.00			0.00		
FR1 n71_Ant2	Front	0.298	0.141	0.111	0.226	0.44			0.41			0.52		
	Back	0.440	0.290	0.399	0.226	0.73			0.84			0.67		
	Front with Headset					0.00			0.00			0.00		
	Back with Headset					0.00			0.00			0.00		

WWAN Band	Exposure Position	1	2	4	6	5	1+2+5 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	2.4GHz WLAN Ant 3+6 1g SAR (W/kg)	5GHz WLAN Ant 5+6 1g SAR (W/kg)	Bluetooth Ant 3 1g SAR (W/kg)	FR1 N2&25 Ant 2 1g SAR (W/kg)			
LTE Band66_Ant1 ENDC	Front	0.361	0.141	0.111	0.226	0.361	0.86	0.83	0.95
	Back	0.529	0.290	0.399	0.226	0.598	1.42	1.53	1.35
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00

WWAN Band	Exposure Position	1	2	4	6	5	1+2+5 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3+6	5GHz WLAN Ant 5+6	Bluetooth Ant 3	FR1 N2&25 Ant1			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE Band 5_Ant2 ENDC	Front	0.323	0.141	0.111	0.226	0.399	0.86	0.83	0.95
	Back	0.366	0.290	0.399	0.226	0.564	1.22	1.33	1.16
LTE Band 12_Ant2 ENDC	Front	0.555	0.141	0.111	0.226	0.399	1.10	1.07	1.18
	Back	0.566	0.290	0.399	0.226	0.564	1.42	1.53	1.36
LTE Band66_Ant2 ENDC	Front	0.339	0.141	0.111	0.226	0.399	0.88	0.85	0.96
	Back	0.559	0.290	0.399	0.226	0.564	1.41	1.52	1.35

WWAN Band	Exposure Position	1	2	4	6	5	1+2+5 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3+6	5GHz WLAN Ant 5+6	Bluetooth Ant 3	FR1 N5 Ant 2			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE Band25_Ant1 ENDC	Front	0.332	0.141	0.111	0.226	0.332	0.81	0.78	0.89
	Back	0.566	0.290	0.399	0.226	0.566	1.42	1.53	1.36
LTE Band66_Ant1 ENDC	Front	0.361	0.141	0.111	0.226	0.332	0.83	0.80	0.92
	Back	0.529	0.290	0.399	0.226	0.566	1.39	1.49	1.32

WWAN Band	Exposure Position	1	2	4	6	5	1+2+5 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3+6	5GHz WLAN Ant 5+6	Bluetooth Ant 3	FR1 N66 Ant 3			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE Band 13_Ant1 ENDC	Front	0.338	0.141	0.111	0.226	0.226	0.71	0.68	0.79
	Back	0.537	0.290	0.399	0.226	0.318	1.15	1.25	1.08

WWAN Band	Exposure Position	1	2	4	6	5	1+2+5 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3+6	5GHz WLAN Ant 5+6	Bluetooth Ant 3	FR1 N66 Ant 1			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE Band25_Ant2 ENDC	Front	0.283	0.141	0.111	0.226	0.397	0.82	0.79	0.91
	Back	0.384	0.290	0.399	0.226	0.530	1.20	1.31	1.14
LTE Band 5_Ant2 ENDC	Front	0.323	0.141	0.111	0.226	0.397	0.86	0.83	0.95
	Back	0.366	0.290	0.399	0.226	0.530	1.19	1.30	1.12
LTE Band 12_Ant2 ENDC	Front	0.555	0.141	0.111	0.226	0.397	1.09	1.06	1.18
	Back	0.566	0.290	0.399	0.226	0.530	1.39	1.50	1.32

WWAN Band	Exposure Position	1	2	4	6	5	1+2+5 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3+6	5GHz WLAN Ant 5+6	Bluetooth Ant 3	FR1 N71 Ant 2			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE Band25_Ant1 ENDC	Front	0.332	0.141	0.111	0.226	0.298	0.77	0.74	0.86
	Back	0.566	0.290	0.399	0.226	0.440	1.30	1.41	1.23
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
LTE Band66_Ant1 ENDC	Front	0.361	0.141	0.111	0.226	0.298	0.80	0.77	0.89
	Back	0.529	0.290	0.399	0.226	0.440	1.26	1.37	1.20
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
LTE Band 7_Ant1 ENDC	Front	0.282	0.141	0.111	0.226	0.298	0.72	0.69	0.81
	Back	0.500	0.290	0.399	0.226	0.440	1.23	1.34	1.17
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00

WWAN Band	Exposure Position	1	2	4	6	5	1+2+5 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3+6	5GHz WLAN Ant 5+6	Bluetooth Ant 3	FR1 N5 Ant 2			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE Band25_Ant1 ENDC	Front	0.332	0.141	0.111	0.226	0.332	0.81	0.78	0.89
	Back	0.566	0.290	0.399	0.226	0.566	1.42	1.53	1.36
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
LTE Band66_Ant1 ENDC	Front	0.361	0.141	0.111	0.226	0.332	0.83	0.80	0.92
	Back	0.529	0.290	0.399	0.226	0.566	1.39	1.49	1.32
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00
FR1 n5_Ant2 ENDC	Front	0.379	0.141	0.111	0.226	0.332	0.85	0.82	0.94
	Back	0.554	0.290	0.399	0.226	0.566	1.41	1.52	1.35
	Front with Headset						0.00	0.00	0.00
	Back with Headset						0.00	0.00	0.00

WWAN Band	Exposure Position	1	2	4	6	5	1+2+5 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 3+6	5GHz WLAN Ant 5+6	Bluetooth Ant 3	FR1 n2 Ant 3			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE Band 13_Ant1 ENDC	Front	0.338	0.141	0.111	0.226	0.348	0.83	0.80	0.91
	Back	0.537	0.290	0.399	0.226	0.468	1.30	1.40	1.23

Note: For Front/Back, always chose higher SAR between 5mm SAR and sensor off distance SAR to do co-located analysis.

16.4 Product specific 10g SAR Exposure Conditions

WWAN Band	Exposure Position	1	3	1+3 Summed 10g SAR (W/kg)	Case No	SPLSR
		WWAN 10g SAR (W/kg)	5GHz WLAN Ant 5+6 10g SAR (W/kg)			
GSM1900_Ant1	Front	2.484	0.044	2.53		
	Back	3.250	0.792	4.04	#19	0.07
	Left side		0.060	0.06		
	Right side		0.142	0.14		
	Top side		0.184	0.18		
	Bottom side	1.833		1.83		
WCDMA II_Ant1	Front	3.561	0.044	3.61		
	Back	3.329	0.792	4.12	#20	0.07
	Left side		0.060	0.06		
	Right side		0.142	0.14		
	Top side		0.184	0.18		
	Bottom side	1.792		1.79		
WCDMA IV_Ant1	Front	1.990	0.044	2.03		
	Back	3.566	0.792	4.36	#27	0.08
	Left side		0.060	0.06		
	Right side		0.142	0.14		
	Top side		0.184	0.18		
	Bottom side	2.837		2.84		
CDMA2000 BC1_Ant1	Front		0.044	0.04		
	Back	3.121	0.792	3.91		
	Left side		0.060	0.06		
	Right side		0.142	0.14		
	Top side		0.184	0.18		
	Bottom side	2.353		2.35		
LTE Band 7_Ant1	Front	1.842	0.044	1.89		
	Back	3.229	0.792	4.02	#21	0.07
	Left side		0.060	0.06		
	Right side		0.142	0.14		
	Top side		0.184	0.18		
	Bottom side	2.940		2.94		
LTE Band25_Ant1	Front	2.100	0.044	2.14		
	Back	2.874	0.792	3.67		
	Left side		0.060	0.06		
	Right side		0.142	0.14		
	Top side		0.184	0.18		
	Bottom side	2.480		2.48		
LTE Band30_Ant1	Front	2.365	0.044	2.41		
	Back	3.331	0.792	4.12	#22	0.08
	Left side		0.060	0.06		
	Right side		0.142	0.14		
	Top side		0.184	0.18		
	Bottom side	2.463		2.46		
LTE Band66_Ant1	Front	1.486	0.044	1.53		
	Back	2.615	0.792	3.41		
	Left side		0.060	0.06		
	Right side		0.142	0.14		
	Top side		0.184	0.18		
	Bottom side	2.435		2.44		
LTE Band41_Ant1	Front		0.044	0.04		
	Back	3.362	0.792	4.15	#23	0.08

	Left side		0.060	0.06		
	Right side		0.142	0.14		
	Top side		0.184	0.18		
	Bottom side	3.321		3.32		
FR1 n25&N2_Ant1	Front	2.751	0.044	2.80		
	Back	3.557	0.792	4.35	#24	0.08
	Left side		0.060	0.06		
	Right side		0.142	0.14		
	Top side		0.184	0.18		
	Bottom side	1.792		1.79		
FR1 n41 Ant1-HPUE	Front	2.254	0.044	2.30		
	Back	3.584	0.792	4.38	#25	0.08
	Left side		0.060	0.06		
	Right side		0.142	0.14		
	Top side		0.184	0.18		
	Bottom side	3.203		3.20		
FR1 n66_Ant1	Front	2.388	0.044	2.43		
	Back	3.269	0.792	4.06	#26	0.07
	Left side		0.060	0.06		
	Right side		0.142	0.14		
	Top side		0.184	0.18		
	Bottom side	3.411		3.41		

WWAN Band	Exposure Position	1	3	1+3 Summed 10g SAR (W/kg)
		WWAN	5GHz WLAN Ant 5+6	
		10g SAR (W/kg)	10g SAR (W/kg)	
FR1 n25&N2_Ant1 ENDC	Front	1.141	0.044	1.19
	Back	1.563	0.792	2.36
	Left side		0.060	0.06
	Right side		0.142	0.14
	Top side		0.184	0.18
	Bottom side	1.185		1.19
FR1 n41 Ant1-HPUE ENDC	Front	0.903	0.044	0.95
	Back	1.342	0.792	2.13
	Left side		0.060	0.06
	Right side		0.142	0.14
	Top side		0.184	0.18
	Bottom side	1.078		1.08
FR1 n66_Ant1 ENDC	Front	1.170	0.044	1.21
	Back	1.522	0.792	2.31
	Left side		0.060	0.06
	Right side		0.142	0.14
	Top side		0.184	0.18
	Bottom side	1.586		1.59
LTE Band 7_Ant1 ENDC	Front	0.785	0.044	0.83
	Back	1.167	0.792	1.96
	Left side		0.060	0.06
	Right side		0.142	0.14
	Top side		0.184	0.18
	Bottom side	0.855		0.86
LTE Band25_Ant1 ENDC	Front	1.125	0.044	1.17
	Back	1.350	0.792	2.14
	Left side		0.060	0.06
	Right side		0.142	0.14
	Top side		0.184	0.18
	Bottom side	1.470		1.47
LTE Band25_Ant2 ENDC	Front	1.010	0.044	1.05
	Back	1.057	0.792	1.85
	Left side		0.060	0.06
	Right side		0.142	0.14
	Top side	1.448	0.184	1.63
	Bottom side			0.00
LTE Band66_Ant1 ENDC	Front	0.941	0.044	0.99
	Back	1.413	0.792	2.21
	Left side		0.060	0.06
	Right side		0.142	0.14
	Top side		0.184	0.18
	Bottom side	1.450		1.45
LTE Band66_Ant2 ENDC	Front	0.797	0.044	0.84
	Back	0.862	0.792	1.65
	Left side		0.060	0.06
	Right side		0.142	0.14
	Top side	1.233	0.184	1.42
	Bottom side			0.00


Remark:

1. For Bluetooth Product specific 10g stand-alone SAR is not required for a transmitter or antenna, due to 1g hotspot SAR is <1.2W/kg.
2. If SPLSR $\leq$ 0.10 for 10g SAR, simultaneously transmission SAR measurement is not necessary.
3. For Front/Back/Top/Bottom side, always chose higher SAR between 0mm 10g SAR and sensor off distance SAR to do co-located analysis.


16.5 SPLSR Evaluation and Analysis

General Note:

1. When standalone SAR is measured for both antennas in the pair, the peak location separation distance is computed by the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates in the area scans or extrapolated peak SAR locations in the zoom scans, as appropriate.
2. $SPLSR = (SAR1 + SAR2)1.5 / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.

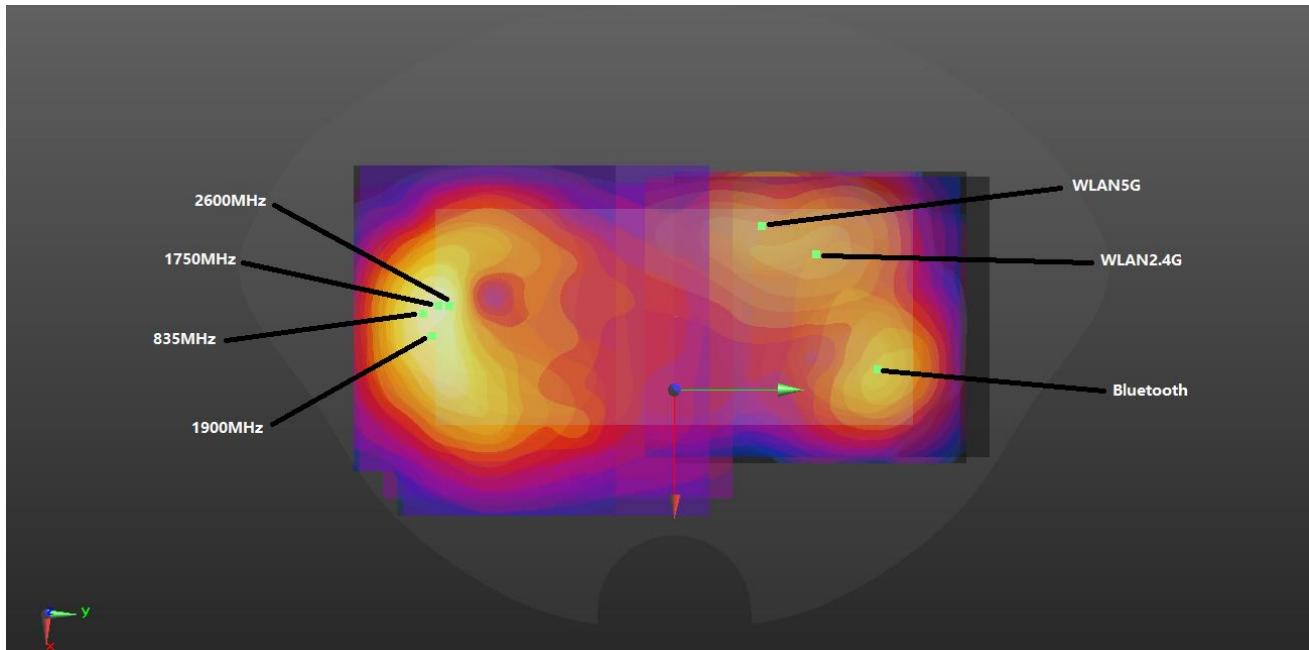

WWAN (5mm)+WLAN2.4G(5mm) Back
WWAN(5mm)+ WLAN5G(5mm) Back
WWAN(5mm)+ Bluetooth(5mm) Back

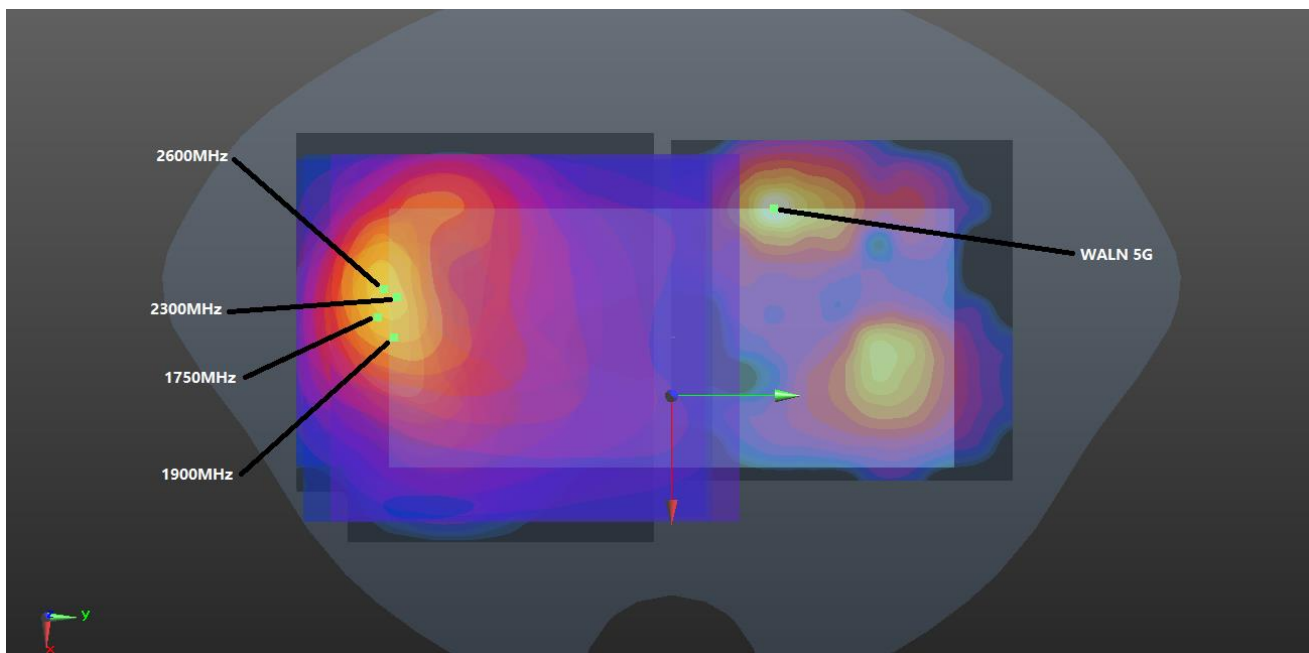

WWAN(0mm)+ WLAN5G(0mm) Back

Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 01	GSM1900_Ant1	Back	1.433	5mm	-1.5	-78.2	-2.67	126.6	1.72	0.02	Not required
	WLAN2.4GHz		0.29	5mm	-25.6	46	2.1				
Case 02	GSM1900_Ant1	Back	1.433	5mm	-1.5	-78.2	-2.67	111.5	1.83	0.02	Not required
	WLAN5GHz		0.399	5mm	-31	29.2	2.09				
Case 03	GSM1900_Ant1	Back	1.433	5mm	-1.5	-78.2	-2.67	152.0	1.66	0.01	Not required
	Bluetooth		0.226	5mm	17	72.6	2.25				
Case 04	WCDMA IV_Ant1	Back	1.302	5mm	-0.8	-794	-0.79	823.8	1.70	0.00	Not required
	WLAN5GHz		0.399	5mm	-31	29.2	2.09				
Case 05	CDMA2000 BC1_Ant1	Back	1.39	5mm	-12.2	-86	-0.81	132.7	1.68	0.02	Not required
	WLAN2.4GHz		0.29	5mm	-25.6	46	2.1				
Case 06	CDMA2000 BC1_Ant1	Back	1.39	5mm	-12.2	-86	-0.81	116.8	1.79	0.02	Not required
	Bluetooth		0.399	5mm	-31	29.2	2.09				
Case 07	CDMA2000 BC1_Ant1	Back	1.39	5mm	-12.2	-86	-0.81	161.3	1.62	0.01	Not required
	WLAN5GHz		0.226	5mm	17	72.6	2.25				
Case 08	LTE Band 7_Ant1	Back	1.37	5mm	-15.2	-77.4	-0.87	123.9	1.66	0.02	Not required
	WLAN2.4GHz		0.29	5mm	-25.6	46	2.1				
Case 09	LTE Band 7_Ant1	Back	1.37	5mm	-15.2	-77.4	-0.87	107.8	1.77	0.02	Not required
	Bluetooth		0.399	5mm	-31	29.2	2.09				
Case 10	LTE Band 7_Ant1	Back	1.37	5mm	-15.2	-77.4	-0.87	153.4	1.60	0.01	Not required
	WLAN5GHz		0.226	5mm	17	72.6	2.25				

Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 11	LTE Band25_Ant1	Back	1.21	5mm	-9.3	-78.9	-0.81	110.3	1.61	0.02	Not required
	WLAN5GHz		0.399	5mm	-31	29.2	2.09				
Case 12	LTE Band30_Ant1	Back	1.295	5mm	-12.2	-79	-0.81	109.9	1.69	0.02	Not required
	WLAN5GHz		0.399	5mm	-31	29.2	2.09				
Case 13	LTE Band66_Ant1	Back	1.217	5mm	-9.2	-84.4	-0.75	115.7	1.62	0.02	Not required
	WLAN5GHz		0.399	5mm	-31	29.2	2.09				
Case 14	LTE Band41_Ant1	Back	1.406	5mm	-13	-77.2	-0.83	123.9	1.70	0.02	Not required
	WLAN2.4GHz		0.29	5mm	-25.6	46	2.1				
Case 15	LTE Band41_Ant1	Back	1.406	5mm	-13	-77.2	-0.83	108.0	1.81	0.02	Not required
	Bluetooth		0.399	5mm	-31	29.2	2.09				
Case 16	LTE Band41_Ant1	Back	1.406	5mm	-13	-77.2	-0.83	152.8	1.63	0.01	Not required
	WLAN5GHz		0.226	5mm	17	72.6	2.25				
Case 17	FR1 n25&N2_Ant1	Back	1.222	5mm	-8.9	-79.5	1.08	110.9	1.62	0.02	Not required
	WLAN5GHz		0.399	5mm	-31	29.2	2.09				
Case 18	FR1 n41 Ant1-HPUE	Back	1.217	5mm	-21.4	-79.8	1.07	109.4	1.62	0.02	Not required
	WLAN5GHz		0.399	5mm	-31	29.2	2.09				

Case	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 19	GSM1900_Ant1	Back	3.25	0mm	-1.6	-81.5	-2.49	115.2	4.04	0.07	Not required
	WLAN5GHz		0.792	0mm	-30	30	2.62				
Case 20	WCDMA II_Ant1	Back	3.329	0mm	-15.4	-84	1.1	114.9	4.12	0.07	Not required
	WLAN5GHz		0.792	0mm	-30	30	2.62				
Case 21	LTE Band 7_Ant1	Back	3.229	0mm	-15.4	-83.4	-0.81	114.4	4.02	0.07	Not required
	WLAN5GHz		0.792	0mm	-30	30	2.62				
Case 22	LTE Band30_Ant1	Back	3.331	0mm	-15	-80.4	-0.85	111.5	4.12	0.08	Not required
	WLAN5GHz		0.792	0mm	-30	30	2.62				
Case 23	LTE Band41_Ant1	Back	3.362	0mm	-16.2	-78	-0.86	108.9	4.15	0.08	Not required
	WLAN5GHz		0.792	0mm	-30	30	2.62				
Case 24	FR1 n25&N2_Ant1	Back	3.557	0mm	-16.9	-78	1.03	108.8	4.35	0.08	Not required
	WLAN5GHz		0.792	0mm	-30	30	2.62				
Case 25	FR1 n41 Ant1-HPUE	Back	3.584	0mm	-22.6	-84.4	1.16	114.6	4.38	0.08	Not required
	WLAN5GHz		0.792	0mm	-30	30	2.62				
Case 26	FR1 n66_Ant1	Back	3.269	0mm	-8.2	-81.4	-0.85	113.6	4.06	0.07	Not required
	WLAN5GHz		0.792	0mm	-30	30	2.62				
Case 27	WCDMA IV_Ant1	Back	3.566	0mm	-9.5	-83.2	-0.6	115.1	4.36	0.08	Not required
	WLAN5GHz		0.792	0mm	-30	30	2.62				

17. Supplemental Tuner Tests Results

General Note:

1. The following test procedure was followed to demonstrate that the SAR results in this report represent the appropriate SAR test conditions. For bands with dynamic tuning implemented, SAR will be measured according to the required FCC SAR test procedures with the dynamic tuner active to allow the device to automatically tune to the antenna state for the respective RF exposure test configurations. Additional single point SAR time-sweep measurements will be evaluated for other tuner states to determine that the other tuner configurations would result in equivalent or lower SAR values. The additional tuner hardware has no influence to the antenna characteristics, other than impedance matching.
2. To evaluate all of the tuner states, the 144 tuner states are divided evenly among bands (except for GSM850/1900, LTE B2/25/71 located at Ant1; GSM850/1900, LTE B2/12/17/25/66/71 and 5GNR n5/n25/n71/n66 located at Ant 2; 5GNR n66 at Ant 3), mode and exposure combinations so that at least one single point SAR measurement is measured in each configuration. Single point time-sweep measurements will be performed at the peak SAR location determined by the zoom scan of the configuration with the highest reported SAR for each combination. The tuner state will be established remotely so that the device is not moved for the entire series of single point SAR for the tuner states in each combination. The SAR probe will remain stationary at the same position throughout the entire series of single point measurements for each combination.
3. This device supports LTE B4 / B5 / B17 /B38/5GNR n2 and B66 / B26 / B12 / B41/5GNR n25. Since the supported frequency span for LTE B4 / B5 / B17 /B38/5GNR n2 falls completely within the supports frequency span for B66 / B26 / B12 / B41/5GNR n25, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, chose LTE B66 / B26 / B12 / B41/5GNR n25 for dynamic antenna analysis.
4. According to workshop 2019, if any single point SAR measurement result is $> 1.2 \text{ W/kg}$ for a band/exposure condition combination set, all supported tuner states are evaluated with single point SAR measurements for the combination. So we verified the single point SAR that bands with SAR value high than 1.2 W/Kg .
5. The operational decryption contains more information about the design and implementation of the dynamic antenna tuning.

17.1 Supplemental Tuner Head & Body SAR Results

Please refer to Appendix F.

Test Engineer : Nick Hu, Tony Zhang, Hank Chang, Yuankai Kong

18. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

19. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [7] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [8] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [9] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [10] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [11] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [12] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [13] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [14] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.

-----THE END-----



Appendix A. Plots of System Performance Check

The plots are shown as follows.

System Check_Head_750MHz**DUT: D750V3 - SN:1087**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 750$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 43.032$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(6.44, 6.44, 6.44); Calibrated: 2020.6.2
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2020.7.7
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.80 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 45.59 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.65 W/kg

SAR(1 g) = 2.18 W/kg; SAR(10 g) = 1.42 W/kg

Maximum value of SAR (measured) = 2.87 W/kg

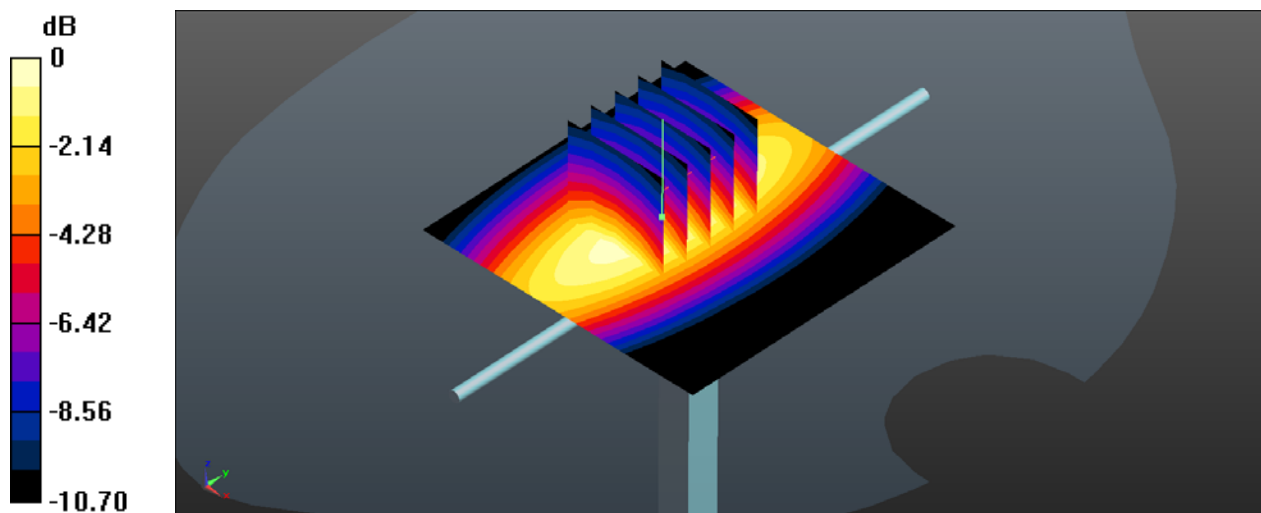

0 dB = 2.87 W/kg = 4.58 dBW/kg

System Check_Head_835MHz**DUT: D835V2 - SN:4d151**

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_835 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.902 \text{ S/m}$; $\epsilon_r = 41.838$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(6.25, 6.25, 6.25); Calibrated: 2020.6.2
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2020.7.7
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 2.85 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 57.65 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.68 W/kg

SAR(1 g) = 2.45 W/kg; SAR(10 g) = 1.6 W/kg

Maximum value of SAR (measured) = 2.87 W/kg

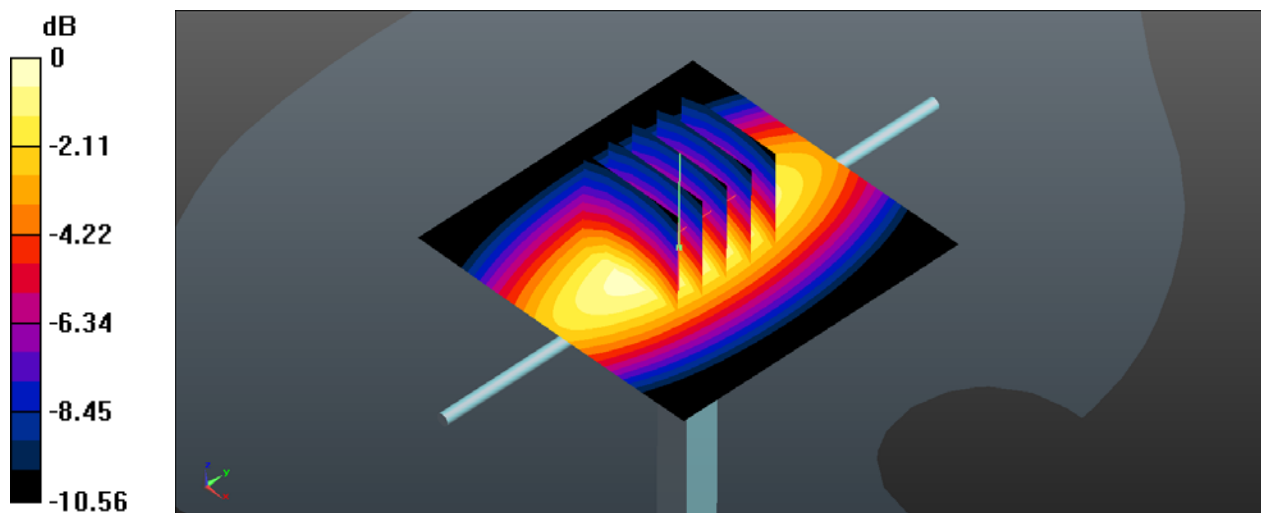

0 dB = 2.87 W/kg = 4.58 dBW/kg

System Check_Head_1750MHz**DUT: D1750V2 - SN:1090**

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: HSL_1750 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.315$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(5.4, 5.4, 5.4); Calibrated: 2020.6.2
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2020.7.7
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 12.4 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 68.49 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 8.94 W/kg; SAR(10 g) = 4.81 W/kg

Maximum value of SAR (measured) = 12.7 W/kg

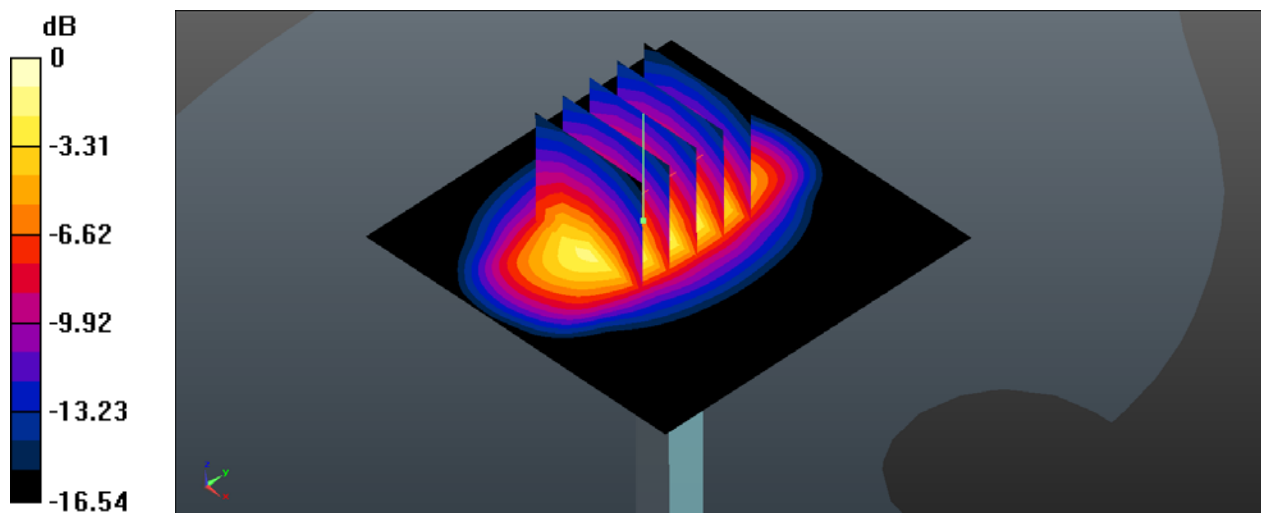

0 dB = 12.7 W/kg = 11.04 dBW/kg

System Check_Head_1900MHz**DUT: D19D1900V2 - SN:5d170**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.437$ S/m; $\epsilon_r = 40.277$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(5.16, 5.16, 5.16); Calibrated: 2020.6.2
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2020.7.7
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 12.6 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 73.09 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 17.8 W/kg

SAR(1 g) = 10 W/kg; SAR(10 g) = 5.27 W/kg

Maximum value of SAR (measured) = 12.7 W/kg

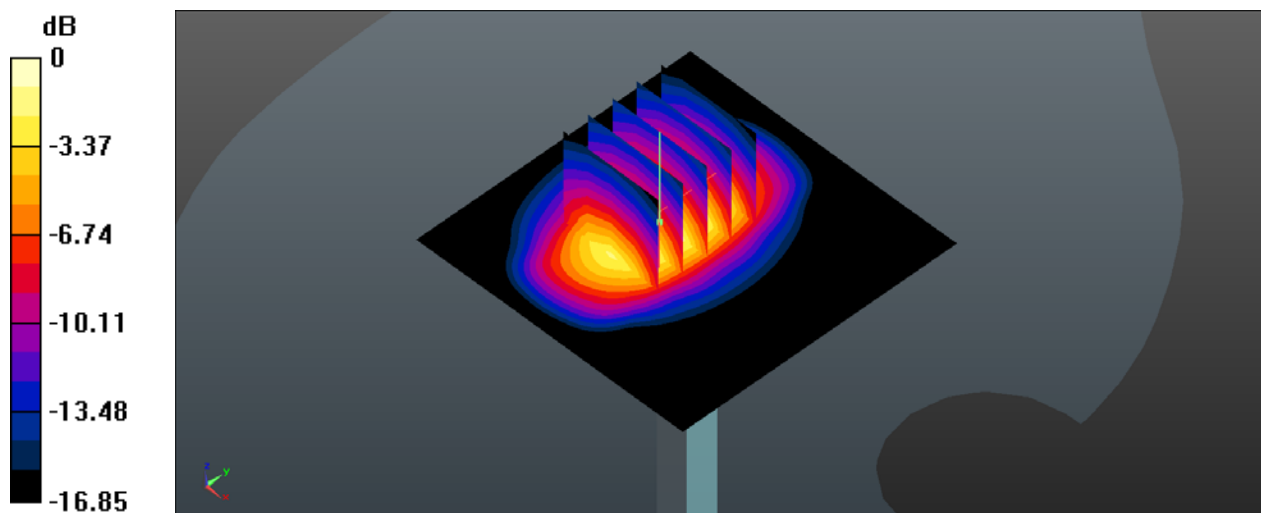

0 dB = 12.7 W/kg = 11.04 dBW/kg

System Check_Head_2300MHz**DUT: D2300V2 - SN:1055**

Communication System: UID 0, CW (0); Frequency: 2300 MHz; Duty Cycle: 1:1

Medium: HSL_2300 Medium parameters used: $f = 2300$ MHz; $\sigma = 1.672$ S/m; $\epsilon_r = 38.792$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(4.92, 4.92, 4.92); Calibrated: 2020.6.2
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2020.7.7
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 18.0 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 69.16 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 23.2 W/kg

SAR(1 g) = 11.8 W/kg; SAR(10 g) = 5.74 W/kg

Maximum value of SAR (measured) = 17.7 W/kg

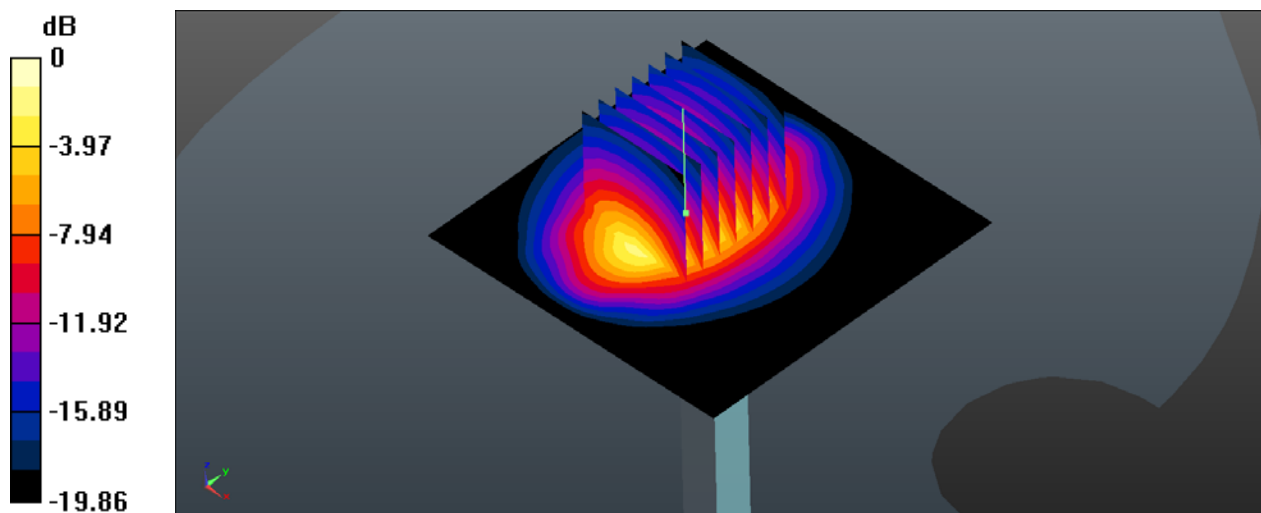

0 dB = 17.7 W/kg = 12.48 dBW/kg

System Check_Head_2600MHz**DUT: D2600V2 - SN:1061**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.053$ S/m; $\epsilon_r = 37.669$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(4.54, 4.54, 4.54); Calibrated: 2020.6.2
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2020.7.7
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 19.3 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 63.32 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 29.1 W/kg

SAR(1 g) = 14.1 W/kg; SAR(10 g) = 6.43 W/kg

Maximum value of SAR (measured) = 18.6 W/kg

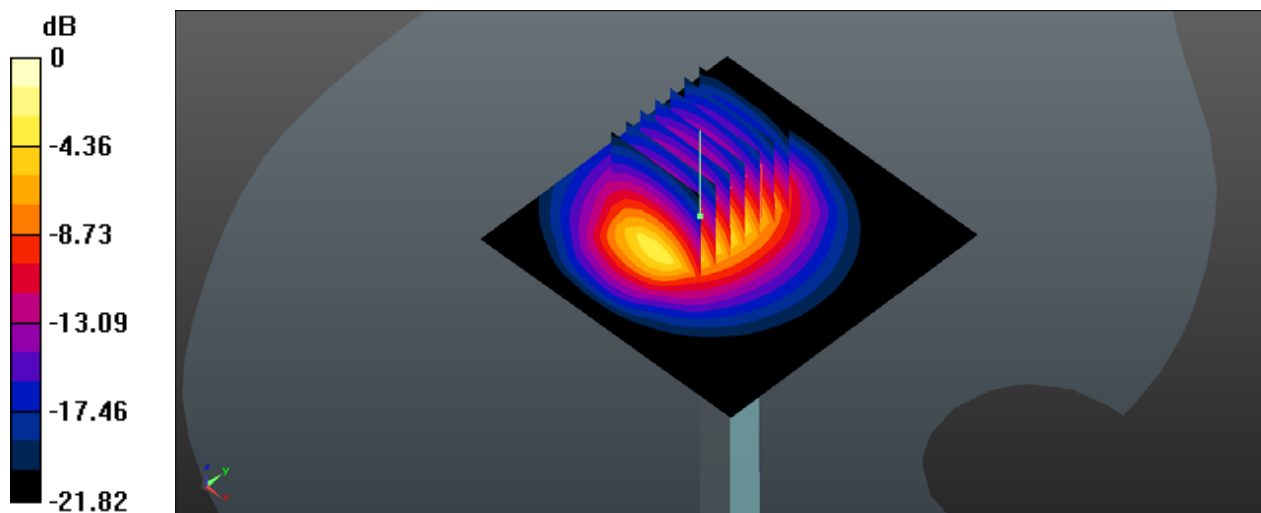

0 dB = 18.6 W/kg = 12.70 dBW/kg

System Check_Head_750MHz**DUT: D750V3 - SN:1087**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 750$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 43.491$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(6.44, 6.44, 6.44); Calibrated: 2020.6.2
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2020.7.7
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.77 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 45.59 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.60 W/kg

SAR(1 g) = 2.16 W/kg; SAR(10 g) = 1.4 W/kg

Maximum value of SAR (measured) = 2.83 W/kg

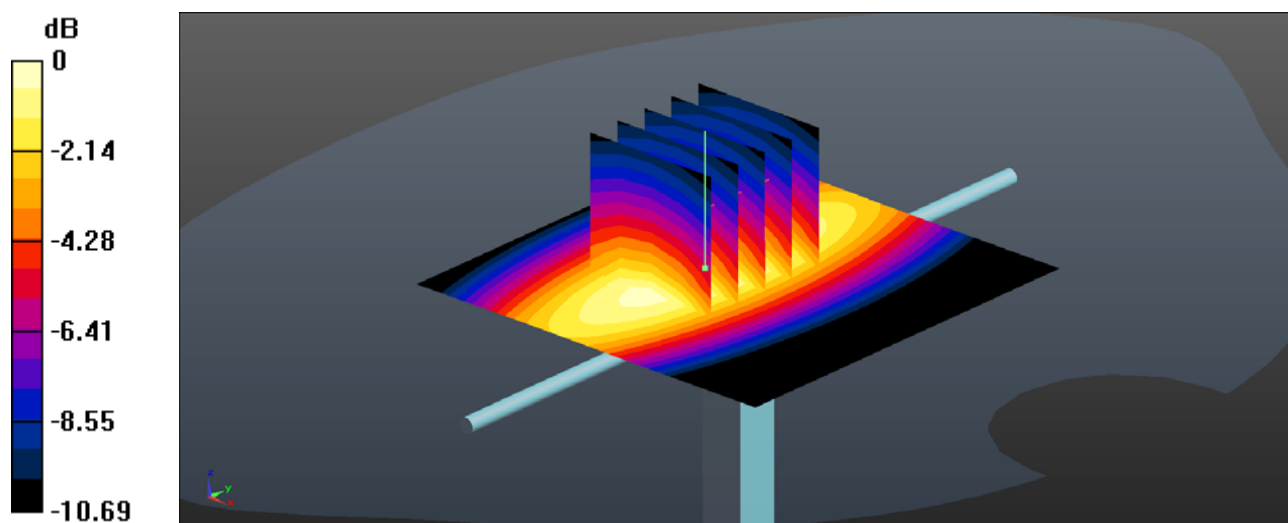

0 dB = 2.83 W/kg = 4.52 dBW/kg

System Check_Head_835MHz**DUT: D835V2 - SN:4d151**

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_835 Medium parameters used: $f = 835$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.314$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(6.25, 6.25, 6.25); Calibrated: 2020.6.2
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2020.7.7
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.86 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 57.65 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.69 W/kg

SAR(1 g) = 2.46 W/kg; SAR(10 g) = 1.61 W/kg

Maximum value of SAR (measured) = 2.88 W/kg

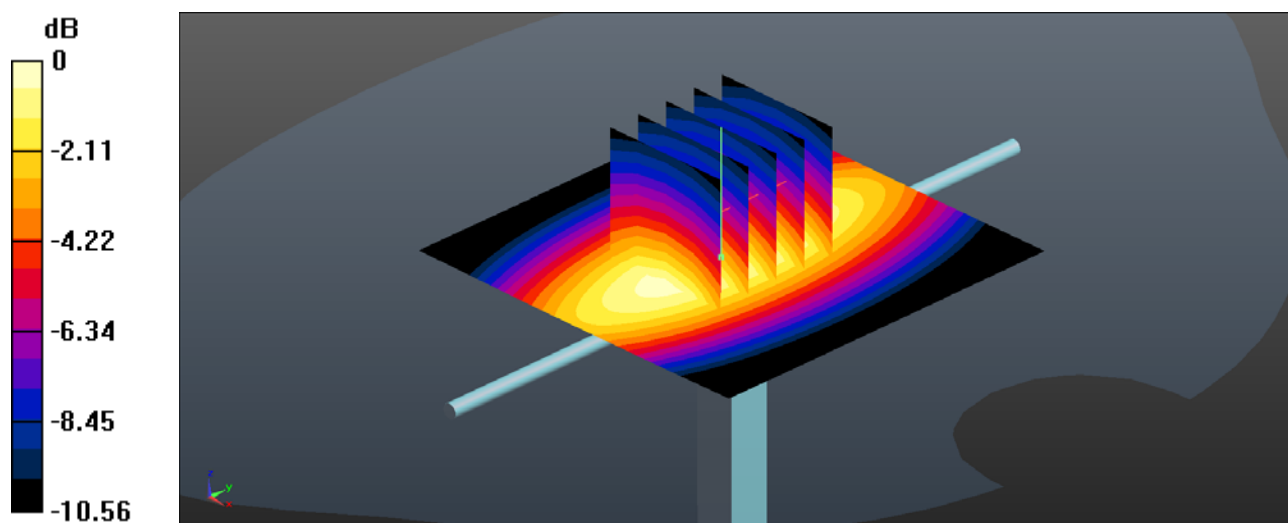

0 dB = 2.88 W/kg = 4.59 dBW/kg

System Check_Head_1750MHz**DUT: D1750V2 - SN:1090**

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: HSL_1750 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.363$ S/m; $\epsilon_r = 39.029$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(5.4, 5.4, 5.4); Calibrated: 2020.6.2
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2020.7.7
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 12.3 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 68.49 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 16.1 W/kg

SAR(1 g) = 8.89 W/kg; SAR(10 g) = 4.78 W/kg

Maximum value of SAR (measured) = 12.7 W/kg

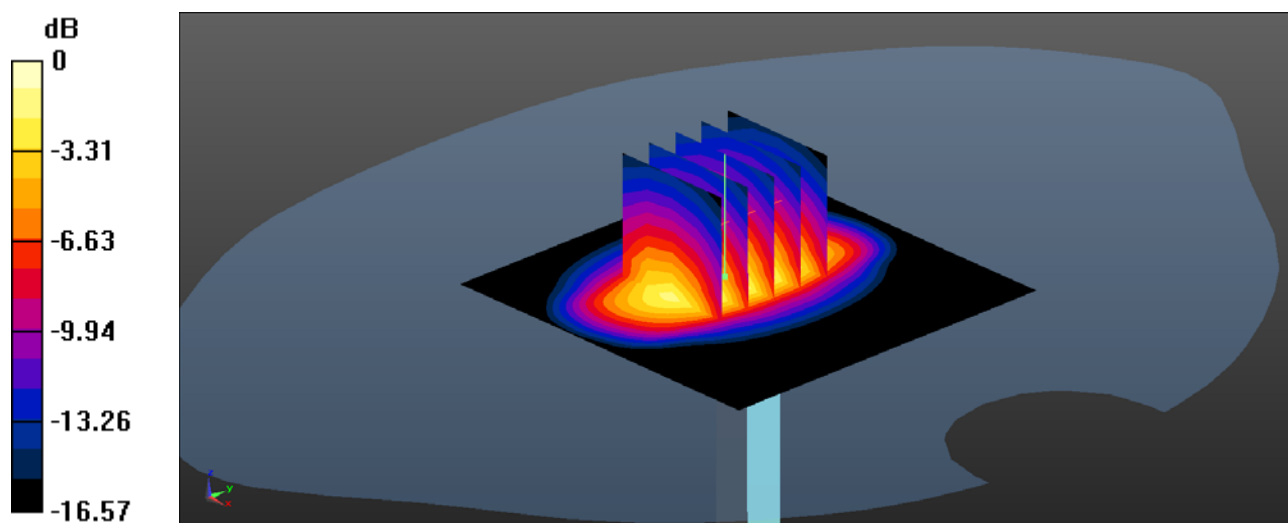

0 dB = 12.7 W/kg = 11.04 dBW/kg

System Check_Head_1900MHz**DUT: D1950V2 - SN:5d170**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 39.091$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(5.16, 5.16, 5.16); Calibrated: 2020.6.2
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2020.7.7
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 12.3 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 73.09 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 17.3 W/kg

SAR(1 g) = 9.76 W/kg; SAR(10 g) = 5.15 W/kg

Maximum value of SAR (measured) = 12.4 W/kg

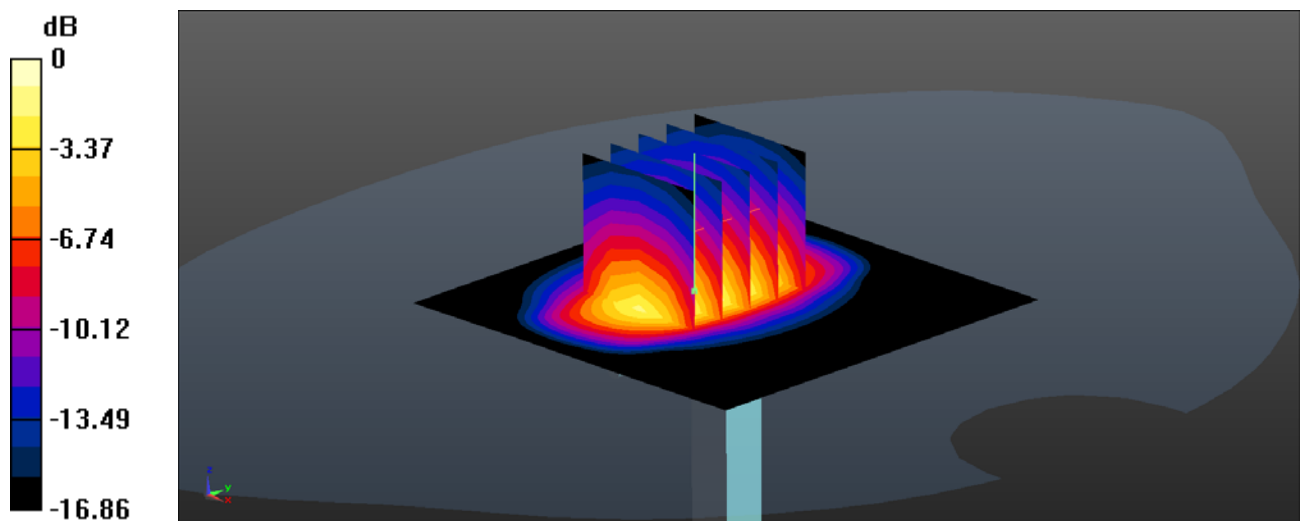

0 dB = 12.4 W/kg = 10.93 dBW/kg