

FCC PART 15.247

TEST REPORT

For

Iconnect

No.9, Aly. 58, Ln. 112, Ruiguang Rd., Neihu Dist., Taipei City, Taiwan

FCC ID: 2AB87572

Report Type: Original Report	Product Type: 802.11abgn Long-Range USB Adapter Dual-Band 2.4GHz/5GHz
Test Engineer:	Dean Liu 
Report Number:	RDG150512002-00A
Report Date:	2015-05-29
Reviewed By:	Sula Huang  RF Leader
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	7
SUPPORT EQUIPMENT LIST AND DETAILS	8
SUPPORT CABLE LIST AND DETAILS	8
CONFIGURATION OF TEST SETUP	8
SUMMARY OF TEST RESULTS.....	9
FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	10
APPLICABLE STANDARD	10
FCC §15.203 - ANTENNA REQUIREMENT.....	12
APPLICABLE STANDARD	12
ANTENNA CONNECTOR CONSTRUCTION	12
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	13
APPLICABLE STANDARD	13
MEASUREMENT UNCERTAINTY.....	13
EUT SETUP.....	13
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	14
CORRECTED AMPLITUDE & MARGIN CALCULATION	14
TEST EQUIPMENT LIST AND DETAILS.....	15
TEST RESULTS SUMMARY	15
TEST DATA	15
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	18
APPLICABLE STANDARD	18
MEASUREMENT UNCERTAINTY.....	18
EUT SETUP.....	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	19
TEST PROCEDURE	19
CORRECTED AMPLITUDE & MARGIN CALCULATION	20
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST RESULTS SUMMARY	20
TEST DATA	20
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST EQUIPMENT LIST AND DETAILS.....	38
TEST DATA	38

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	52
APPLICABLE STANDARD	52
TEST PROCEDURE	52
TEST EQUIPMENT LIST AND DETAILS.....	52
TEST DATA	52
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	54
APPLICABLE STANDARD	54
TEST PROCEDURE	54
TEST EQUIPMENT LIST AND DETAILS.....	54
TEST DATA	54
FCC §15.247(e) - POWER SPECTRAL DENSITY	63
APPLICABLE STANDARD	63
TEST PROCEDURE	63
TEST EQUIPMENT LIST AND DETAILS.....	63
TEST DATA	63
DECLARATION LETTER.....	77

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Iconnect*'s product, model number: AWUS052NH (FCC ID: 2AB87572) or ("EUT") in this report is a 802.11abgn Long-Range USB Adapter Dual-Band 2.4GHz/5GHz, which was measured approximately: 8.6 cm (L) x 6.3 cm (W) x 2.1 cm (H), rated input voltage: DC5V from USB port.

Note: The series product, model AWUS052NH, AWUS051NH V2, AWUS052NH V2, AWUS052NHS, AWUS052NHS V2, AWUS053NH, AWUS053NH V2, AWUS053NHS, AWUS053NHS V2, AWUS054NH, AWUS054NH V2, AWUS054NHS, AWUS054NHS V2, AWUS036ACH, AWUS036ACH V2, NU52, NU52 V2, NU52S, NU52S V2, NU53, NU53 V2, NU53S, NU53S V2, NU52AC, NU52AC V2, NU52ACS, NU52ACS V2, UBDO-25, UBDO-25 V2, UBDO-25t, UBDO-25t V2, UBDO-25M, UBDO-25M V2, UBDO-25Mt, UBDO-25Mt V2, Tube-U52, Tube-U52 V2, UBDO-AC, UBDO-AC V2, Tube-AC, Tube-AC V2, UBDO-ACT, UBDO-ACT V2 are electrically identical, the difference between them is just the model name, we selected AWUS052NH for fully testing, the details was explained in the attached

** All measurement and test data in this report was gathered from production sample serial number: 14BN052NH0454 (Assigned by applicant). The EUT was received on 2015-05-13.*

Objective

This report is prepared on behalf of *Iconnect* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15C NII submissions with FCC ID: 2AB87572

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in testing mode, which was provided by manufacturer. For 2.4GHz band, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11n ht20 modes were tested with Channel 1, 6 and 11. For 802.11n ht40 mode were tested with Channel 3, 6 and 9.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

The software “Ralink QA Test Program” was used for testing, which was provided by manufacturer. The worst condition (maximum power with 100% duty cycle) was setting by the software as following table:
2.4G:

Test Mode	Test Software Version	Ralink QA Test Program		
802.11b	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	(CCK)1Mbps	(CCK)1Mbps	(CCK)1Mbps
	Power Level Setting Chain 0	0	0	0
	Power Level Setting Chain 1	0	0	0
802.11g	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	(OFDM)6Mbps	(OFDM)6Mbps	(OFDM)6Mbps
	Power Level Setting Chain 0	0	0	0
	Power Level Setting Chain 1	0	0	0
802.11n ht20	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	(HT Mixmode) MCS0	(HT Mixmode) MCS0	(HT Mixmode) MCS0
	Power Level Setting Chain 0	0	0	0
	Power Level Setting Chain 1	0	0	0
802.11n ht40	Test Frequency	2422MHz	2437MHz	2452MHz
	Data Rate	(HT Mixmode) MCS0	(HT Mixmode) MCS0	(HT Mixmode) MCS0
	Power Level Setting Chain 0	0	0	0
	Power Level Setting Chain 1	0	0	0


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017
HP	Printer	C3941A	JPTVOB2337
DELL	Keyboard	L100	CNORH656658907BL05DC
SAST	Modem	AEM-2100	0293

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From	To
Serial Cable	Yes	No	1.2	Serial Port of Laptop	Modem
Parallel Cable	Yes	No	1.2	Parallel Port of Laptop	Printer
Keyboard Cable	Yes	Yes	1.8	USB Port of Laptop	Keyboard
USB Cable	Yes	No	1.5	USB Port of Laptop	EUT

Configuration of Test Setup

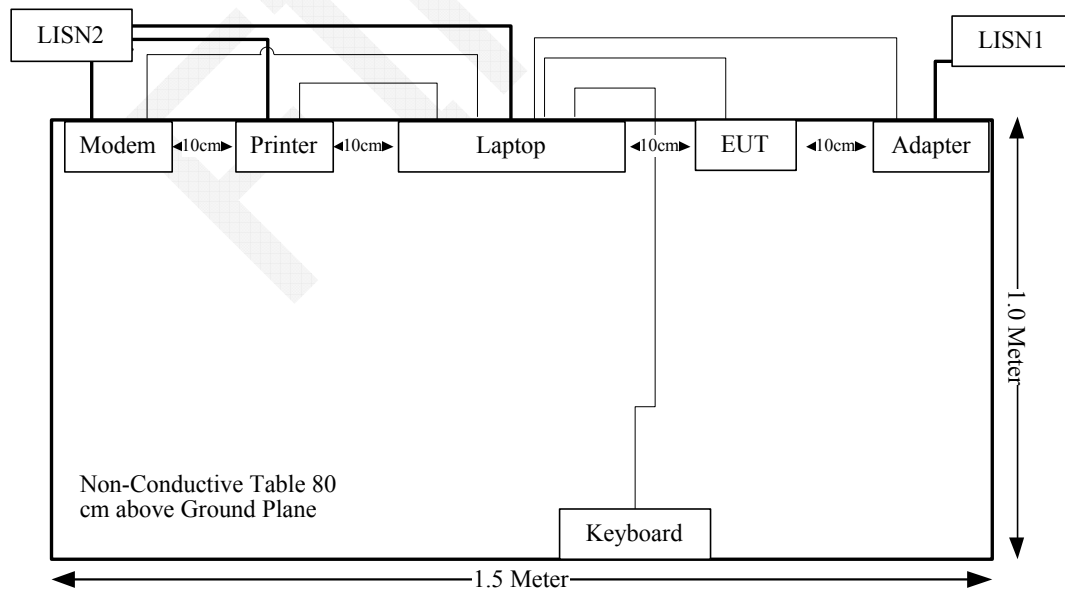

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1091	Maximum Permissible exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum conducted output power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Calculated Data:**MPE evaluation for single transmission:**

Frequency Range (MHz)	Mode	Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
			(dBi)	(numeric)	(dBm)	(mW)			
2412-2462	2.4G-802.11b	2437	2.0	1.58	14.90	30.90	20	0.010	1.0
	2.4G-802.11g	2437	2.0	1.58	16.89	48.87	20	0.015	1.0
	2.4G-802.11n HT20	2412	2.0	1.58	19.61	91.41	20	0.029	1.0
	2.4G-802.11n HT40	2452	2.0	1.58	21.56	143.22	20	0.045	1.0
5150-5250	5G-802.11a	5240	2.0	1.58	18.14	65.16	20	0.020	1.0
	5G-802.11n HT20	5240	2.0	1.58	18.30	67.61	20	0.021	1.0
	5G-802.11n HT40	5230	2.0	1.58	15.56	35.97	20	0.011	1.0
5725-5850	802.11a	5745	2.0	1.58	17.53	56.62	20	0.018	1.0
	5G-802.11n HT20	5785	2.0	1.58	17.60	57.54	20	0.018	1.0
	5G-802.11n HT40	5755	2.0	1.58	12.54	17.95	20	0.006	1.0

MPE evaluation for simultaneous transmission:

2.4 G and 5G can transmit at the same time, MPE evaluation is as below formula:

$PD1/Limit1 + PD2/Limit2 + \dots < 1$, PD (Power Density)

MPE evaluation = Max MPE of 2.4G + Max MPE of 5G = $0.045/1 + 0.021/1 = 0.066 < 1.0$

Result: MPE evaluation of single and simultaneous transmission meet the requirement of standard.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

This product used two external detachable dual band antennas and with RP-SMA female connector, the maximum gain is 2 dBi, which fulfill the requirement of this section, and please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisp} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cisp}

Measurement	U_{cisp}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

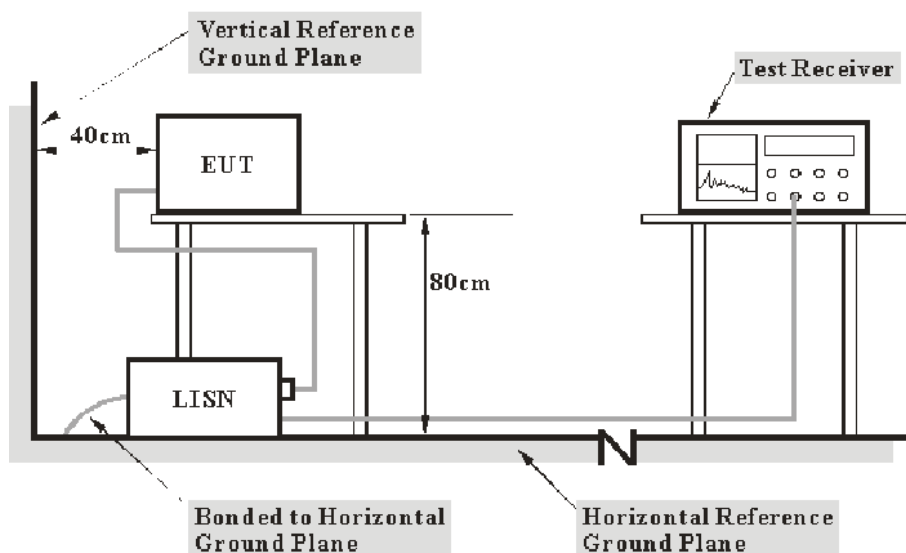

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2014-10-20	2015-10-20
R&S	L.I.S.N	ESH2-Z5	892107/021	2014-06-09	2015-06-09
R&S	Two-line V-network	ENV 216	3560.6550.12	2014-12-11	2015-12-11
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

3.3 dB at 0.150000 MHz in the Line conducted mode


Test Data**Environmental Conditions**

Temperature:	27.9 °C
Relative Humidity:	66 %
ATM Pressure:	100 kPa

The testing was performed by Dean Liu on 2015-05-20.

Test Mode: Transmitting


AC120 V, 60 Hz, Line:

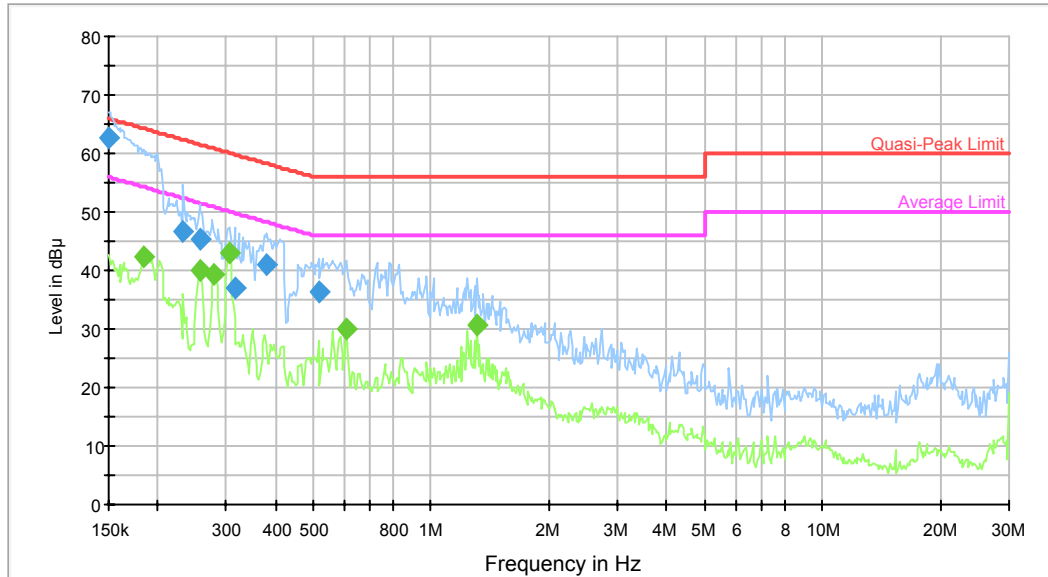

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	62.7	9.000	L1	10.2	3.3*	66.0	Compliance
0.232499	46.6	9.000	L1	10.2	15.8	62.4	Compliance
0.255827	45.4	9.000	L1	10.2	16.2	61.6	Compliance
0.314718	36.9	9.000	L1	10.3	22.9	59.8	Compliance
0.381043	41.2	9.000	L1	10.3	17.1	58.3	Compliance
0.515791	36.5	9.000	L1	10.1	19.5	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.184529	42.4	9.000	L1	10.2	11.9	54.3	Compliance
0.255827	39.9	9.000	L1	10.2	11.7	51.6	Compliance
0.279263	39.3	9.000	L1	10.3	11.5	50.8	Compliance
0.304845	43.0	9.000	L1	10.3	7.1	50.1	Compliance
0.609741	30.0	9.000	L1	10.3	16.0	46.0	Compliance
1.310256	30.6	9.000	L1	10.4	15.4	46.0	Compliance

*Within measurement uncertainty!

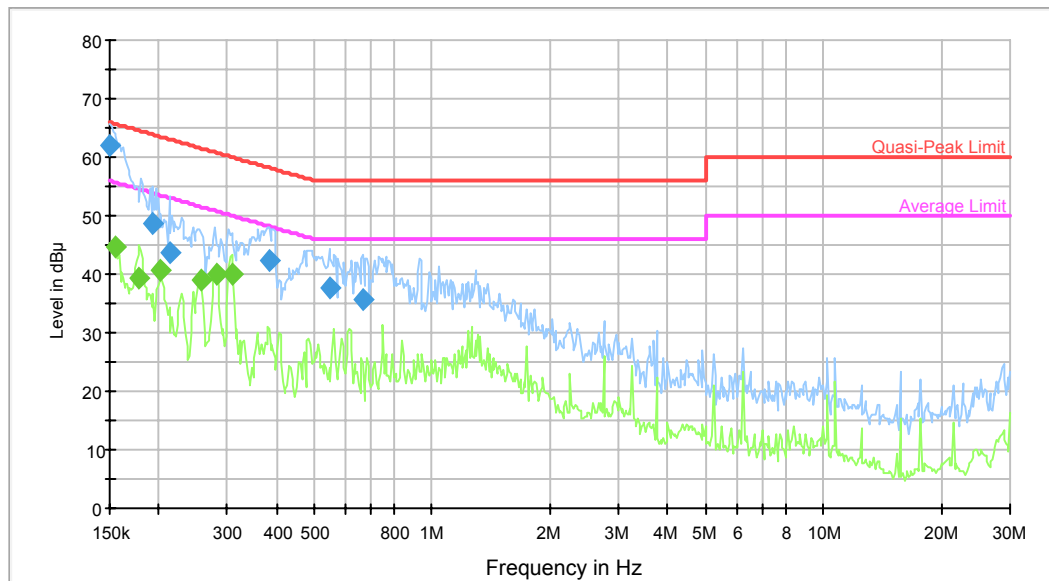AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	62.0	9.000	N	10.2	4.0	66.0	Compliance
0.193566	48.7	9.000	N	10.2	15.2	63.9	Compliance
0.212988	43.8	9.000	N	10.2	19.3	63.1	Compliance
0.384091	42.4	9.000	N	10.2	15.8	58.2	Compliance
0.545378	37.8	9.000	N	10.1	18.2	56.0	Compliance
0.665597	35.6	9.000	N	10.4	20.4	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.156097	44.6	9.000	N	10.2	11.1	55.7	Compliance
0.178741	39.4	9.000	N	10.2	15.1	54.5	Compliance
0.203045	40.6	9.000	N	10.2	12.9	53.5	Compliance
0.255827	38.9	9.000	N	10.2	12.7	51.6	Compliance
0.281497	40.0	9.000	N	10.3	10.8	50.8	Compliance
0.307284	40.0	9.000	N	10.3	10.0	50.0	Compliance

**Within measurement uncertainty!*

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisp} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB


6G~18GHz: 5.23 dB


Table 2 – Values of U_{cisp}

Measurement	U_{cisp}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

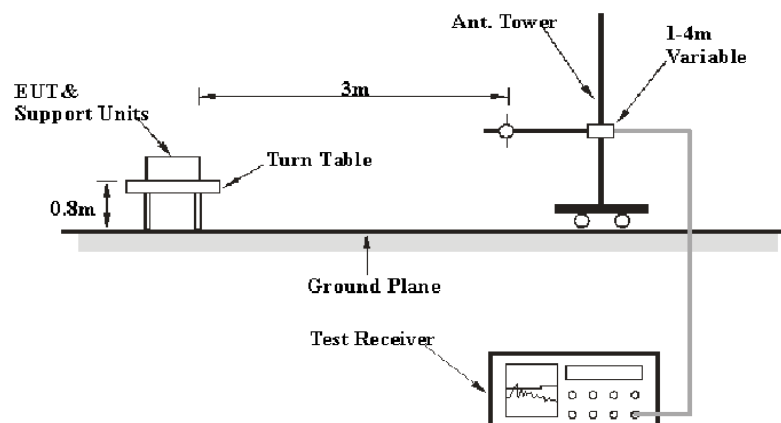

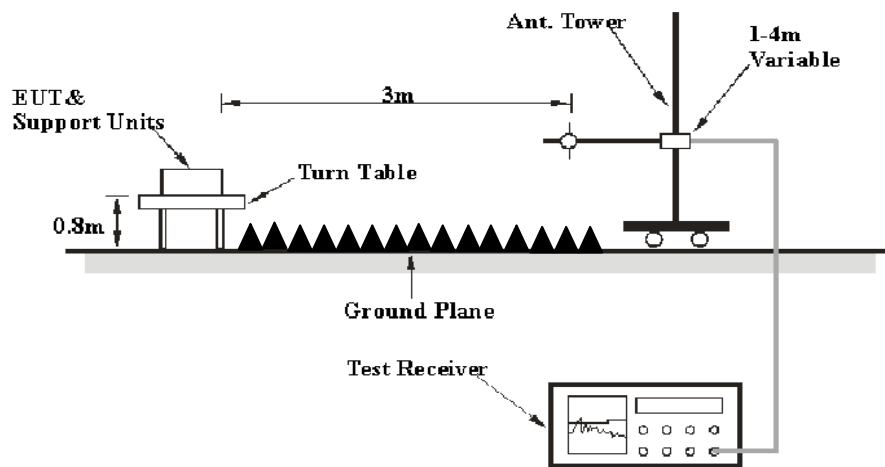Above 1GHz:

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits. The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-05-09	2016-05-09
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2014-09-01	2015-09-01
Agilent	Spectrum Analyzer	E4440A	SG43360054	2014-12-04	2015-12-04
ETS-Lindgren	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2015-02-19	2016-02-19
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2014-09-06	2015-09-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Section 15.205, 15.209 and 15.247, with the worst margin reading of:

4.18 dB at 2390MHz in the Vertical polarization for 802.11g Mode

Test Data

Environmental Conditions

Temperature:	25.3 °C
Relative Humidity:	53 %
ATM Pressure:	100 kPa

The testing was performed by Dean Liu on 2015-05-26.

Test Mode: Transmitting

802.11b Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	67.9	PK	H	25.67	3.68	0.00	97.25	N/A	N/A
2412	64.26	AV	H	25.67	3.68	0.00	93.61	N/A	N/A
2412	73.36	PK	V	25.67	3.68	0.00	102.71	N/A	N/A
2412	69.44	AV	V	25.67	3.68	0.00	98.79	N/A	N/A
2390	26.67	PK	V	25.61	3.63	0.00	55.91	74.00	18.09
2390	14.65	AV	V	25.61	3.63	0.00	43.89	54.00	10.11
4824	44.48	PK	V	30.64	5.03	27.41	52.74	74.00	21.26
4824	30.08	AV	V	30.64	5.03	27.41	38.34	54.00	15.66
7236	33.35	PK	V	34.17	6.65	25.90	48.27	74.00	25.73
7236	20.35	AV	V	34.17	6.65	25.90	35.27	54.00	18.73
9648	32.41	PK	V	36.06	8.55	27.46	49.56	74.00	24.44
9648	19.22	AV	V	36.06	8.55	27.46	36.37	54.00	17.63
3216	42.49	PK	V	27.89	6.15	27.36	49.17	74.00	24.83
3216	40.17	AV	V	27.89	6.15	27.36	46.85	54.00	7.15
227.88	34.3	QP	V	11.78	1.82	21.48	26.42	46.00	19.58
Middle Channel: 2437 MHz									
2437	67.63	PK	H	25.74	3.75	0.00	97.12	N/A	N/A
2437	64	AV	H	25.74	3.75	0.00	93.49	N/A	N/A
2437	73.15	PK	V	25.74	3.75	0.00	102.64	N/A	N/A
2437	69.15	AV	V	25.74	3.75	0.00	98.64	N/A	N/A
4874	44.52	PK	V	30.77	5.14	27.42	53.01	74.00	20.99
4874	29.95	AV	V	30.77	5.14	27.42	38.44	54.00	15.56
7311	33.26	PK	V	34.35	6.74	25.88	48.47	74.00	25.53
7311	20.24	AV	V	34.35	6.74	25.88	35.45	54.00	18.55
9748	32.44	PK	V	36.30	8.61	27.24	50.11	74.00	23.89
9748	19.19	AV	V	36.30	8.61	27.24	36.86	54.00	17.14
3249	42.41	PK	V	28.00	6.31	27.33	49.39	74.00	24.61
3249	40	AV	V	28.00	6.31	27.33	46.98	54.00	7.02
2960	35.26	PK	V	27.10	6.65	27.54	41.47	74.00	32.53
2960	22.28	AV	V	27.10	6.65	27.54	28.49	54.00	25.51
227.88	34.4	QP	V	11.78	1.82	21.48	26.52	46.00	19.48
High Channel: 2462 MHz									
2462	67.68	PK	H	25.80	3.75	0.00	97.23	N/A	N/A
2462	64.23	AV	H	25.80	3.75	0.00	93.78	N/A	N/A
2462	72.68	PK	V	25.80	3.75	0.00	102.23	N/A	N/A
2462	69.87	AV	V	25.80	3.75	0.00	99.42	N/A	N/A
2483.5	27.46	PK	V	25.86	3.67	0.00	56.99	74.00	17.01
2483.5	14.58	AV	V	25.86	3.67	0.00	44.11	54.00	9.89
4924	44.34	PK	V	30.90	5.34	27.43	53.15	74.00	20.85
4924	29.84	AV	V	30.90	5.34	27.43	38.65	54.00	15.35
7386	33.12	PK	V	34.53	6.83	25.86	48.62	74.00	25.38
7386	20.25	AV	V	34.53	6.83	25.86	35.75	54.00	18.25
9848	32.31	PK	V	36.54	8.66	26.94	50.57	74.00	23.43
9848	19.26	AV	V	36.54	8.66	26.94	37.52	54.00	16.48
3283	42.25	PK	V	28.11	5.54	27.30	48.60	74.00	25.40
3283	40.03	AV	V	28.11	5.54	27.30	46.38	54.00	7.62
227.88	34.1	QP	V	11.78	1.82	21.48	26.22	46.00	19.78

802.11g Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	75.64	PK	H	25.67	3.68	0.00	104.99	N/A	N/A
2412	71.93	AV	H	25.67	3.68	0.00	101.28	N/A	N/A
2412	81.46	PK	V	25.67	3.68	0.00	110.81	N/A	N/A
2412	77.1	AV	V	25.67	3.68	0.00	106.45	N/A	N/A
2390	29.67	PK	V	25.61	3.63	0.00	58.91	74.00	15.09
2390	20.58	AV	V	25.61	3.63	0.00	49.82	54.00	4.18 *
4824	44.73	PK	V	30.64	5.03	27.41	52.99	74.00	21.01
4824	30.47	AV	V	30.64	5.03	27.41	38.73	54.00	15.27
7236	33.68	PK	V	34.17	6.65	25.90	48.60	74.00	25.40
7236	20.89	AV	V	34.17	6.65	25.90	35.81	54.00	18.19
9648	32.98	PK	V	36.06	8.55	27.46	50.13	74.00	23.87
9648	19.75	AV	V	36.06	8.55	27.46	36.90	54.00	17.10
3216	42.88	PK	V	27.89	6.15	27.36	49.56	74.00	24.44
3216	40.73	AV	V	27.89	6.15	27.36	47.41	54.00	6.59
227.88	34.1	QP	V	11.78	1.82	21.48	26.22	46.00	19.78
Middle Channel: 2437 MHz									
2437	75.29	PK	H	25.74	3.75	0.00	104.78	N/A	N/A
2437	71.48	AV	H	25.74	3.75	0.00	100.97	N/A	N/A
2437	81.13	PK	V	25.74	3.75	0.00	110.62	N/A	N/A
2437	76.59	AV	V	25.74	3.75	0.00	106.08	N/A	N/A
4874	44.66	PK	V	30.77	5.14	27.42	53.15	74.00	20.85
4874	30.27	AV	V	30.77	5.14	27.42	38.76	54.00	15.24
7311	33.42	PK	V	34.35	6.74	25.88	48.63	74.00	25.37
7311	20.88	AV	V	34.35	6.74	25.88	36.09	54.00	17.91
9748	32.7	PK	V	36.30	8.61	27.24	50.37	74.00	23.63
9748	19.66	AV	V	36.30	8.61	27.24	37.33	54.00	16.67
3249	42.61	PK	V	28.00	6.31	27.33	49.59	74.00	24.41
3249	40.44	AV	V	28.00	6.31	27.33	47.42	54.00	6.58
2964	35.16	PK	V	27.11	6.66	27.54	41.39	74.00	32.61
2964	22.42	AV	V	27.11	6.66	27.54	28.65	54.00	25.35
227.88	33.9	QP	V	11.78	1.82	21.48	26.02	46.00	19.98
High Channel: 2462 MHz									
2462	74.78	PK	H	25.80	3.75	0.00	104.33	N/A	N/A
2462	71.08	AV	H	25.80	3.75	0.00	100.63	N/A	N/A
2462	78.26	PK	V	25.80	3.75	0.00	107.81	N/A	N/A
2462	74.06	AV	V	25.80	3.75	0.00	103.61	N/A	N/A
2483.5	27.64	PK	V	25.86	3.67	0.00	57.17	74.00	16.83
2483.5	15.03	AV	V	25.86	3.67	0.00	44.56	54.00	9.44
4924	44.58	PK	V	30.90	5.34	27.43	53.39	74.00	20.61
4924	30.24	AV	V	30.90	5.34	27.43	39.05	54.00	14.95
7386	33.36	PK	V	34.53	6.83	25.86	48.86	74.00	25.14
7386	20.58	AV	V	34.53	6.83	25.86	36.08	54.00	17.92
9848	32.49	PK	V	36.54	8.66	26.94	50.75	74.00	23.25
9848	19.42	AV	V	36.54	8.66	26.94	37.68	54.00	16.32
3283	42.39	PK	V	28.11	5.54	27.30	48.74	74.00	25.26
3283	40.36	AV	V	28.11	5.54	27.30	46.71	54.00	7.29
227.88	34.2	QP	V	11.78	1.82	21.48	26.32	46.00	19.68

*Within measurement uncertainty!

802.11n ht20 Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	72.37	PK	H	25.67	3.68	0.00	101.72	N/A	N/A
2412	66.41	AV	H	25.67	3.68	0.00	95.76	N/A	N/A
2412	78.56	PK	V	25.67	3.68	0.00	107.91	N/A	N/A
2412	72.65	AV	V	25.67	3.68	0.00	102.00	N/A	N/A
2390	27.45	PK	V	25.61	3.63	0.00	56.69	74.00	17.31
2390	15.63	AV	V	25.61	3.63	0.00	44.87	54.00	9.13
4824	49.56	PK	V	30.64	5.03	27.41	57.82	74.00	16.18
4824	34.69	AV	V	30.64	5.03	27.41	42.95	54.00	11.05
7236	33.69	PK	V	34.17	6.65	25.90	48.61	74.00	25.39
7236	21.08	AV	V	34.17	6.65	25.90	36.00	54.00	18.00
9648	33.17	PK	V	36.06	8.55	27.46	50.32	74.00	23.68
9648	19.95	AV	V	36.06	8.55	27.46	37.10	54.00	16.90
3216	42.92	PK	V	27.89	6.15	27.36	49.60	74.00	24.40
3216	40.83	AV	V	27.89	6.15	27.36	47.51	54.00	6.49
227.88	33.7	QP		11.78	1.82	21.48	25.82	46.00	20.18
Middle Channel: 2437 MHz									
2437	71.99	PK	H	25.74	3.75	0.00	101.48	N/A	N/A
2437	66.01	AV	H	25.74	3.75	0.00	95.50	N/A	N/A
2437	78.03	PK	V	25.74	3.75	0.00	107.52	N/A	N/A
2437	72.21	AV	V	25.74	3.75	0.00	101.70	N/A	N/A
4874	49.55	PK	V	30.77	5.14	27.42	58.04	74.00	15.96
4874	34.51	AV	V	30.77	5.14	27.42	43.00	54.00	11.00
7311	33.46	PK	V	34.35	6.74	25.88	48.67	74.00	25.33
7311	20.98	AV	V	34.35	6.74	25.88	36.19	54.00	17.81
9748	32.87	PK	V	36.30	8.61	27.24	50.54	74.00	23.46
9748	19.85	AV	V	36.30	8.61	27.24	37.52	54.00	16.48
3249	42.74	PK	V	28.00	6.31	27.33	49.72	74.00	24.28
3249	40.56	AV	V	28.00	6.31	27.33	47.54	54.00	6.46
2960	34.29	PK	V	27.10	6.65	27.54	40.50	74.00	33.50
2960	21.18	AV	V	27.10	6.65	27.54	27.39	54.00	26.61
227.88	33.8	QP	V	11.78	1.82	21.48	25.92	46.00	20.08
High Channel: 2462 MHz									
2462	71.5	PK	H	25.80	3.75	0.00	101.05	N/A	N/A
2462	65.47	AV	H	25.80	3.75	0.00	95.02	N/A	N/A
2462	77.85	PK	V	25.80	3.75	0.00	107.40	N/A	N/A
2462	72.86	AV	V	25.80	3.75	0.00	102.41	N/A	N/A
2483.5	27.65	PK	V	25.86	3.67	0.00	57.18	74.00	16.82
2483.5	15.48	AV	V	25.86	3.67	0.00	45.01	54.00	8.99
4924	49.41	PK	V	30.90	5.34	27.43	58.22	74.00	15.78
4924	34.33	AV	V	30.90	5.34	27.43	43.14	54.00	10.86
7386	33.21	PK	V	34.53	6.83	25.86	48.71	74.00	25.29
7386	20.75	AV	V	34.53	6.83	25.86	36.25	54.00	17.75
9848	32.76	PK	V	36.54	8.66	26.94	51.02	74.00	22.98
9848	19.65	AV	V	36.54	8.66	26.94	37.91	54.00	16.09
3283	42.54	PK	V	28.11	5.54	27.30	48.89	74.00	25.11
3283	40.5	AV	V	28.11	5.54	27.30	46.85	54.00	7.15
227.88	33.5	QP	V	11.78	1.82	21.48	25.62	46.00	20.38

802.11 n ht40 Mode


Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2422 MHz									
2422	68.32	PK	H	25.70	3.71	0.00	97.73	N/A	N/A
2422	57.49	AV	H	25.70	3.71	0.00	86.90	N/A	N/A
2422	73.36	PK	V	25.70	3.71	0.00	102.77	N/A	N/A
2422	61.67	AV	V	25.70	3.71	0.00	91.08	N/A	N/A
2390	31.44	PK	V	25.61	3.63	0.00	60.68	74.00	13.32
2390	15.55	AV	V	25.61	3.63	0.00	44.79	54.00	9.21
4844	49.36	PK	V	30.69	4.99	27.42	57.62	74.00	16.38
4844	34.45	AV	V	30.69	4.99	27.42	42.71	54.00	11.29
7266	33.41	PK	V	34.24	6.68	25.89	36.03	74.00	37.97
7266	21	AV	V	34.24	6.68	25.89	36.03	54.00	17.97
9688	33.03	PK	V	36.15	8.58	27.37	50.39	74.00	23.61
9688	19.7	AV	V	36.15	8.58	27.37	37.06	54.00	16.94
3226	42.76	PK	V	27.92	6.20	27.35	49.53	74.00	24.47
3226	40.66	AV	V	27.92	6.20	27.35	47.43	54.00	6.57
227.88	33.8	QP	V	11.78	1.82	21.48	25.92	46.00	20.08
Middle Channel: 2437 MHz									
2437	68	PK	H	25.74	3.75	0.00	97.49	N/A	N/A
2437	57.05	AV	H	25.74	3.75	0.00	86.54	N/A	N/A
2437	72.79	PK	V	25.74	3.75	0.00	102.28	N/A	N/A
2437	61.17	AV	V	25.74	3.75	0.00	90.66	N/A	N/A
4874	49.33	PK	V	30.77	5.14	27.42	57.82	74.00	16.18
4874	34.45	AV	V	30.77	5.14	27.42	42.94	54.00	11.06
7311	33.34	PK	V	34.35	6.74	25.88	48.55	74.00	25.45
7311	20.82	AV	V	34.35	6.74	25.88	36.03	54.00	17.97
9748	32.95	PK	V	36.30	8.61	27.24	50.62	74.00	23.38
9748	19.57	AV	V	36.30	8.61	27.24	37.24	54.00	16.76
3249	42.7	PK	V	28.00	6.31	27.33	49.68	74.00	24.32
3249	40.39	AV	V	28.00	6.31	27.33	47.37	54.00	6.63
2960	42.7	PK	V	27.10	6.65	27.54	48.91	74.00	25.09
2960	40.39	AV	V	27.10	6.65	27.54	46.60	54.00	7.40
227.88	33.9	QP	V	11.78	1.82	21.48	26.02	46.00	19.98
High Channel: 2452 MHz									
2452	67.65	PK	H	25.78	3.78	0.00	97.21	N/A	N/A
2452	56.54	AV	H	25.78	3.78	0.00	86.10	N/A	N/A
2452	72.65	PK	V	25.78	3.78	0.00	102.21	N/A	N/A
2452	61.38	AV	V	25.78	3.78	0.00	90.94	N/A	N/A
2483.5	30.77	PK	V	25.86	3.67	0.00	60.30	74.00	13.70
2483.5	15.68	AV	V	25.86	3.67	0.00	45.21	54.00	8.79
4904	49.14	PK	V	30.85	5.31	27.43	57.87	74.00	16.13
4904	34.33	AV	V	30.85	5.31	27.43	43.06	54.00	10.94
7356	33.17	PK	V	34.45	6.79	25.87	48.54	74.00	25.46
7356	20.62	AV	V	34.45	6.79	25.87	35.99	54.00	18.01
9808	32.88	PK	V	36.44	8.64	27.09	50.87	74.00	23.13
9808	19.37	AV	V	36.44	8.64	27.09	37.36	54.00	16.64
3263	42.4	PK	V	28.04	6.01	27.32	49.13	74.00	24.87
3263	40.39	AV	V	28.04	6.01	27.32	47.12	54.00	6.88
227.88	33.4	QP	V	11.78	1.82	21.48	25.52	46.00	20.48

Co-location Radiated Emission

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
1630	56.19	PK	H	23.86	2.76	27.77	55.04	74.00	18.96
1630	36.94	AV	H	23.86	2.76	27.77	35.79	54.00	18.21
1962.5	49.36	PK	H	24.53	3.01	27.49	49.41	74.00	24.59
1962.5	30.68	AV	H	24.53	3.01	27.49	30.73	54.00	23.27
2212.5	49.13	PK	H	25.15	3.35	27.29	50.34	74.00	23.66
2212.5	20.36	AV	H	25.15	3.35	27.29	21.57	54.00	32.43
1627.5	53.11	PK	V	23.86	2.74	27.77	51.94	74.00	22.06
1627.5	32.87	AV	V	23.86	2.74	27.77	31.70	54.00	22.30
2360	50.68	PK	V	25.54	3.57	27.31	52.48	74.00	21.52
2360	28.74	AV	V	25.54	3.57	27.31	30.54	54.00	23.46
2452.5	51.67	PK	V	25.78	3.78	27.35	53.88	74.00	20.12
2452.5	21.53	AV	V	25.78	3.78	27.35	23.74	54.00	30.26
227.88	32.90	QP	V	11.78	1.82	21.48	25.02	46.00	20.98


Conducted Spurious Emissions at Antenna Port

802.11b Low Channel - Chain0

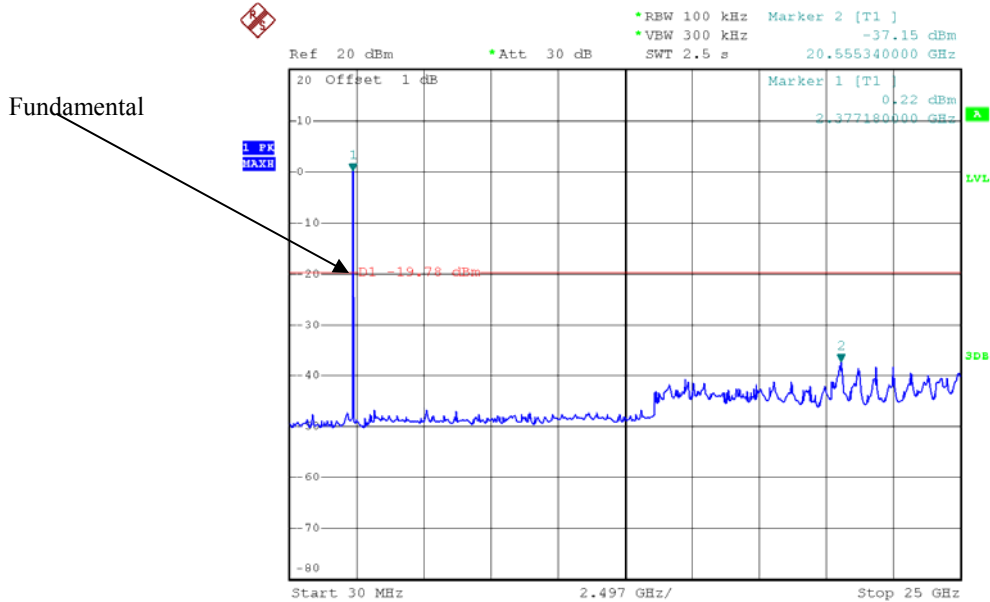


Date: 26.MAY.2015 11:22:15

802.11b Middle Channel - Chain0

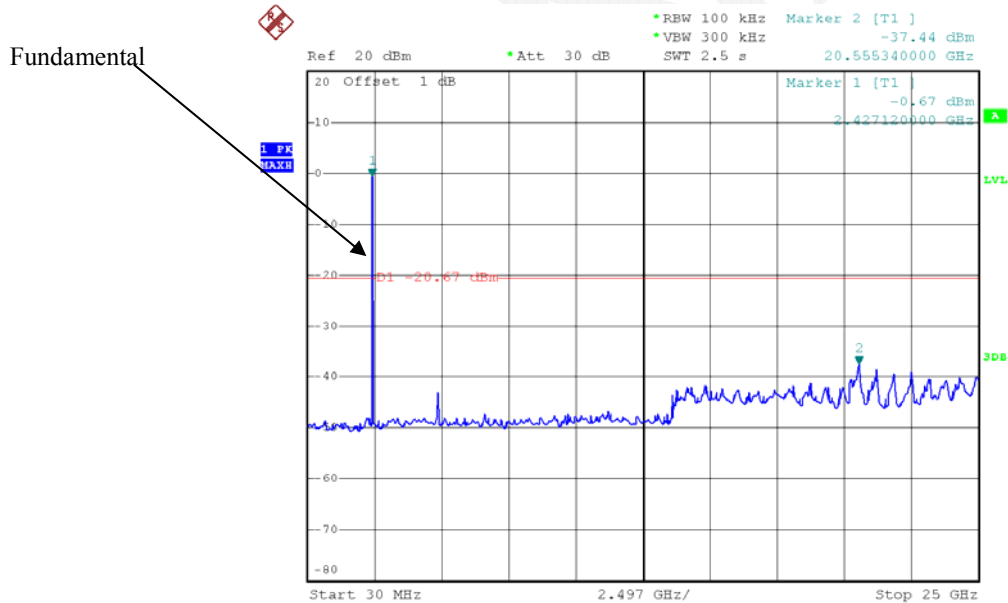


Date: 26.MAY.2015 11:25:30

802.11b High Channel - Chain0

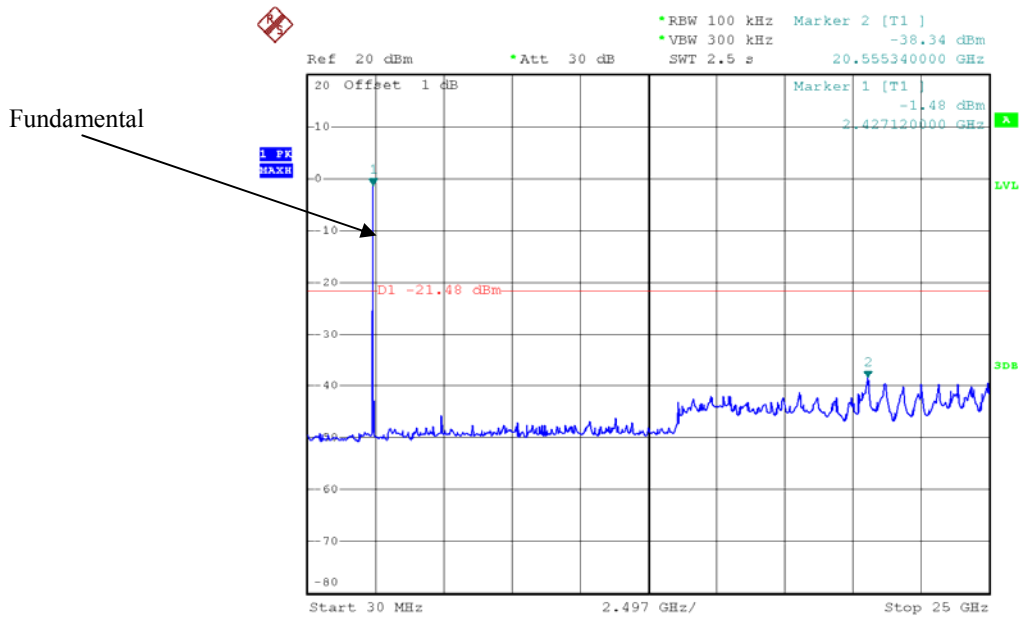


Date: 26.MAY.2015 11:27:06

802.11g Low Channel - Chain0

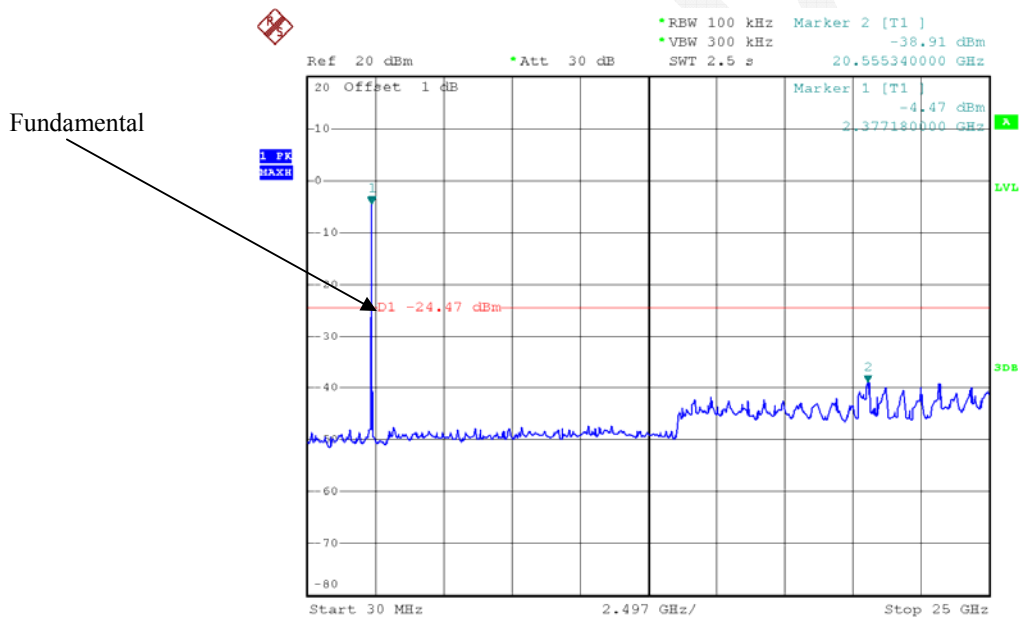


Date: 26.MAY.2015 11:28:41

802.11g Middle Channel - Chain0

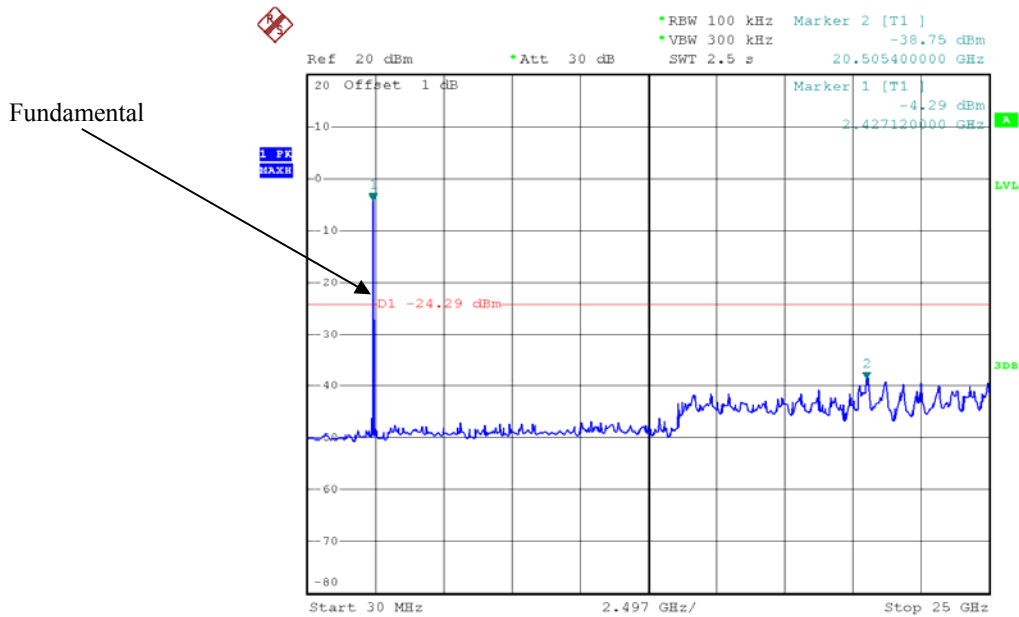


Date: 26.MAY.2015 11:30:39

802.11g High Channel - Chain0

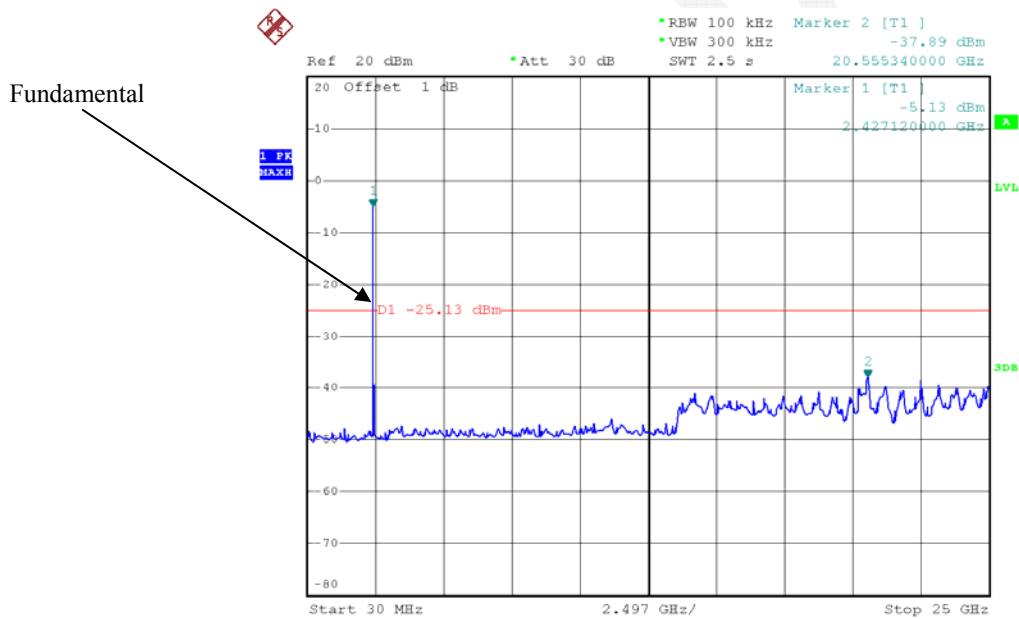


Date: 26.MAY.2015 11:33:24

802.11n ht20 Low Channel - Chain0

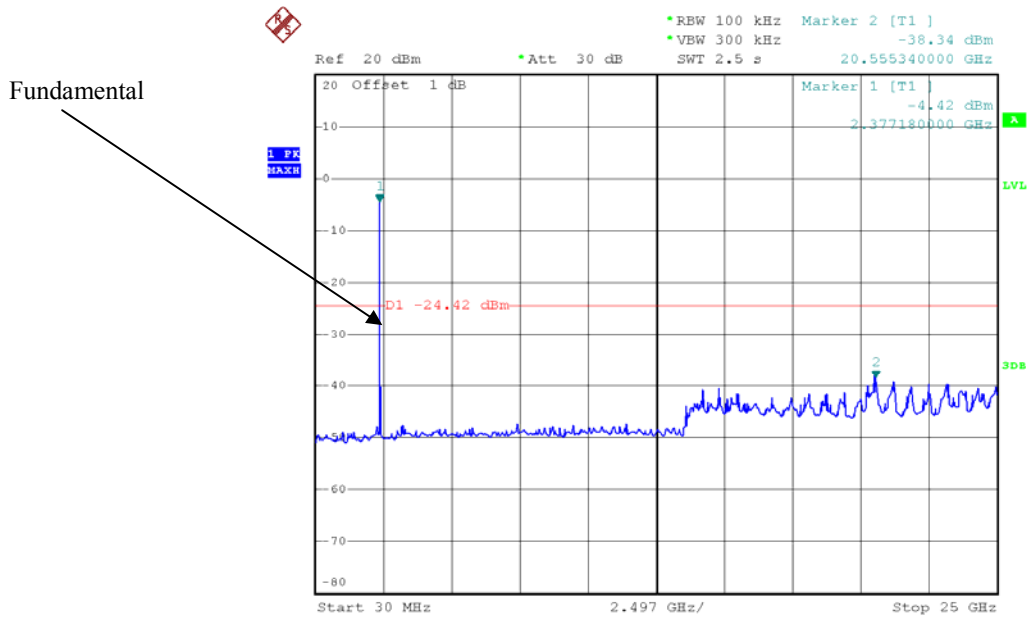


Date: 26.MAY.2015 11:34:51

802.11n ht20 Middle Channel - Chain0

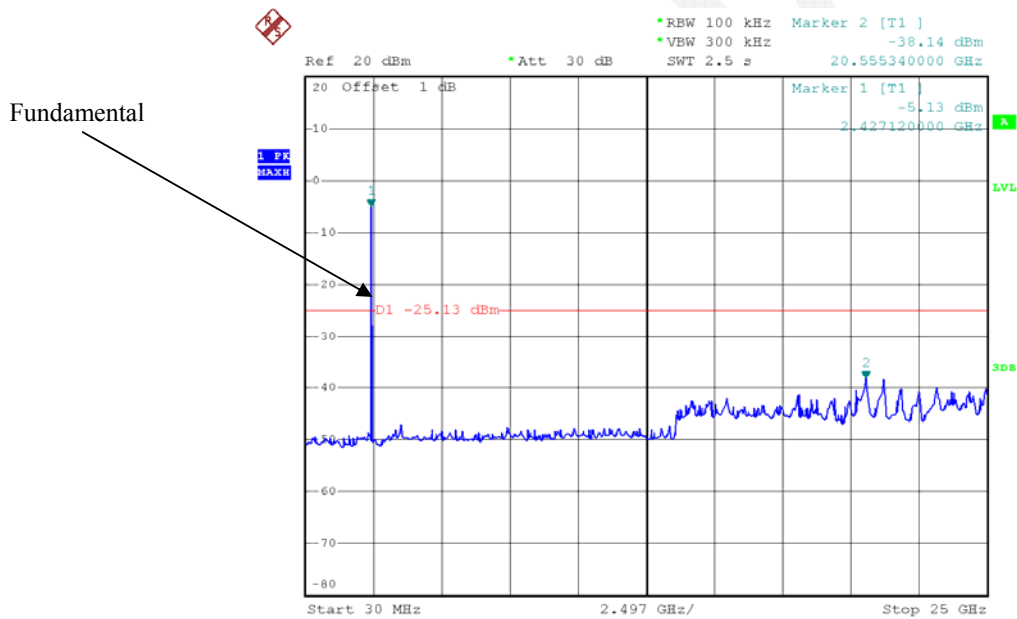


Date: 26.MAY.2015 11:36:33

802.11n ht20 High Channel - Chain0

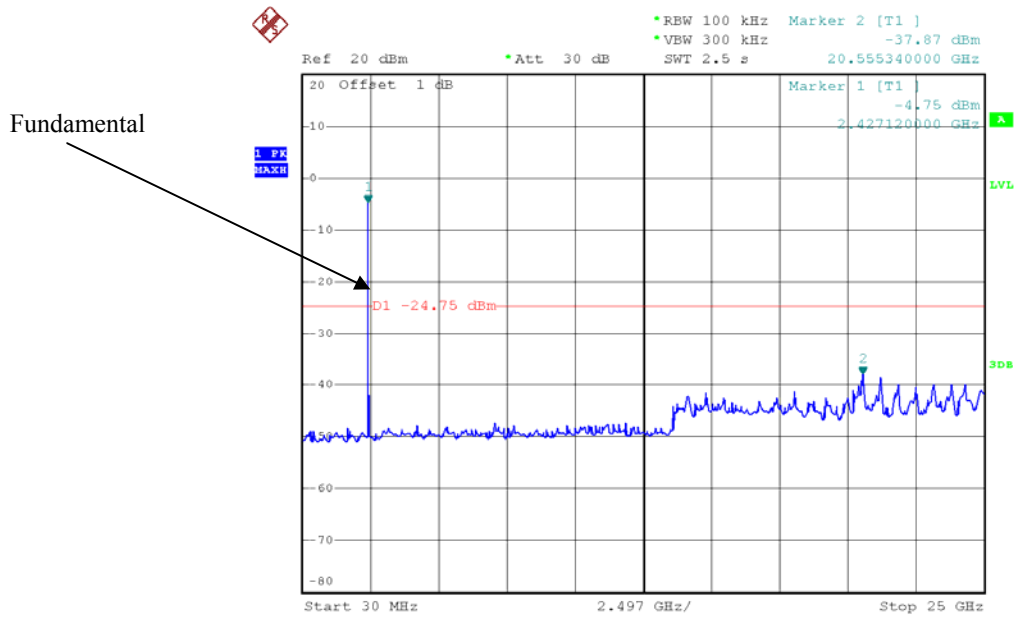


Date: 26.MAY.2015 11:38:13

802.11n ht40 Low Channel - Chain0

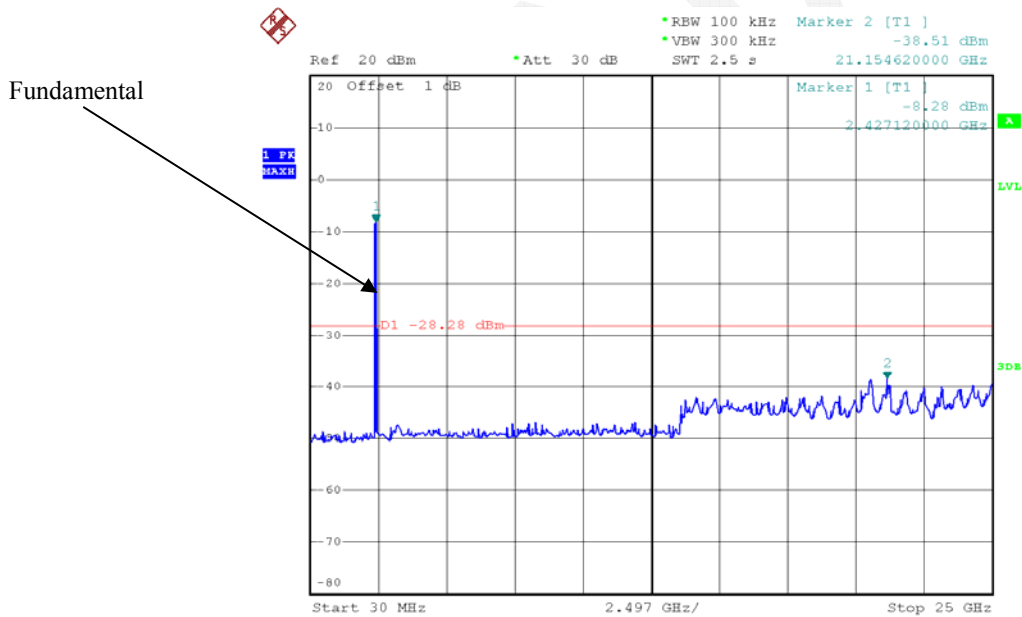


Date: 26.MAY.2015 11:40:28

802.11n ht40 Middle Channel - Chain0

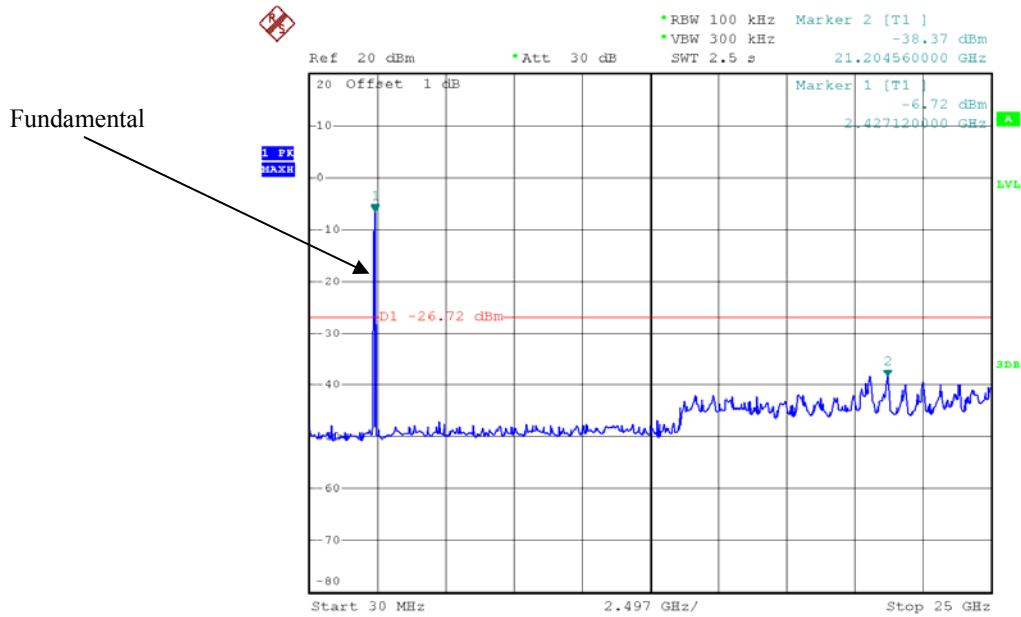


Date: 26.MAY.2015 11:44:59

802.11n ht40 High Channel - Chain0

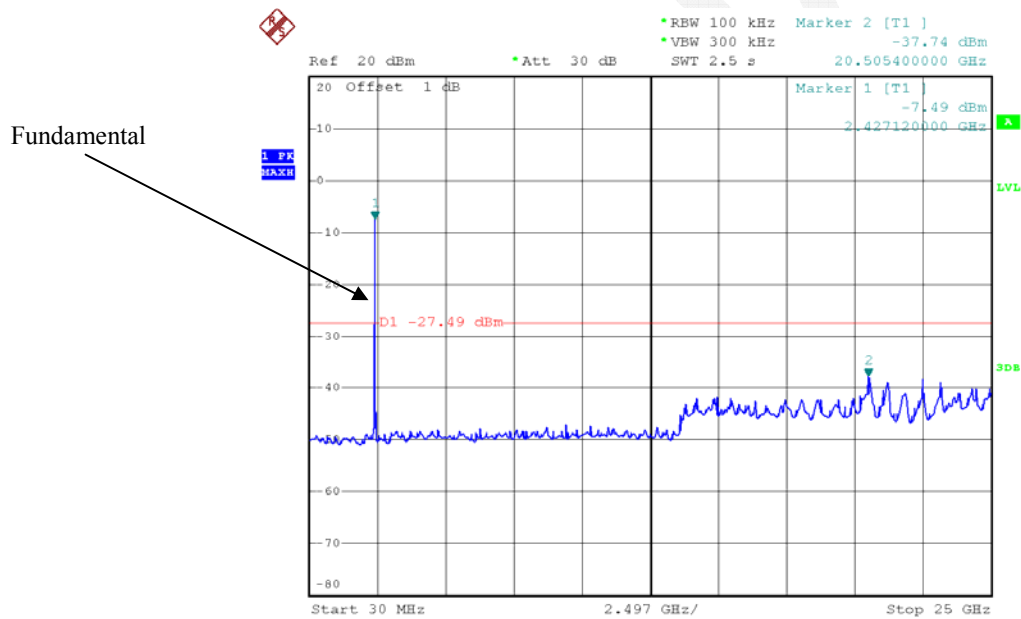


Date: 26.MAY.2015 11:51:45

802.11b Low Channel – Chain1

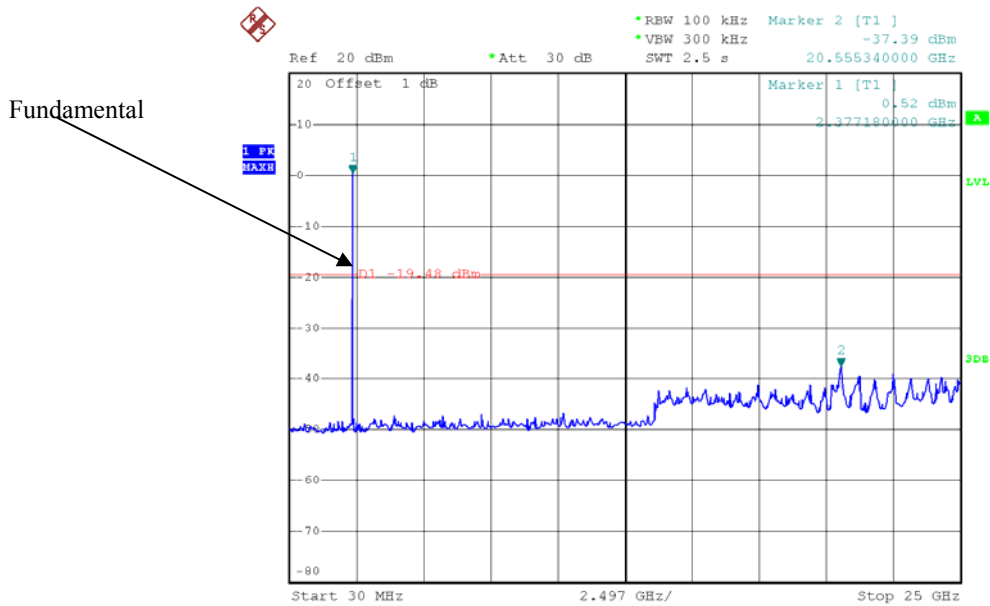


Date: 26.MAY.2015 11:24:17

802.11b Middle Channel – Chain1

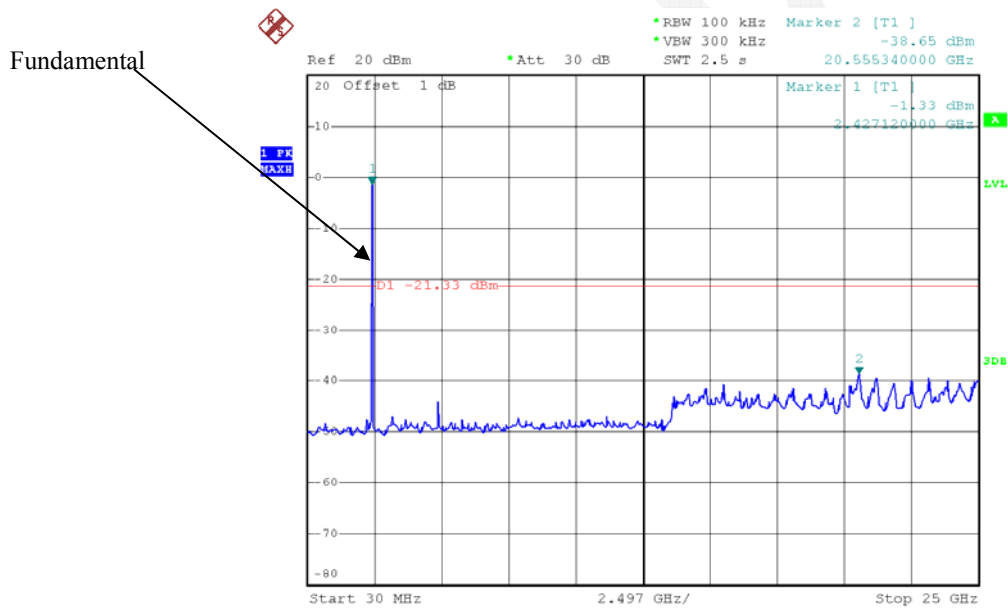


Date: 26.MAY.2015 11:26:12

802.11b High Channel – Chain1

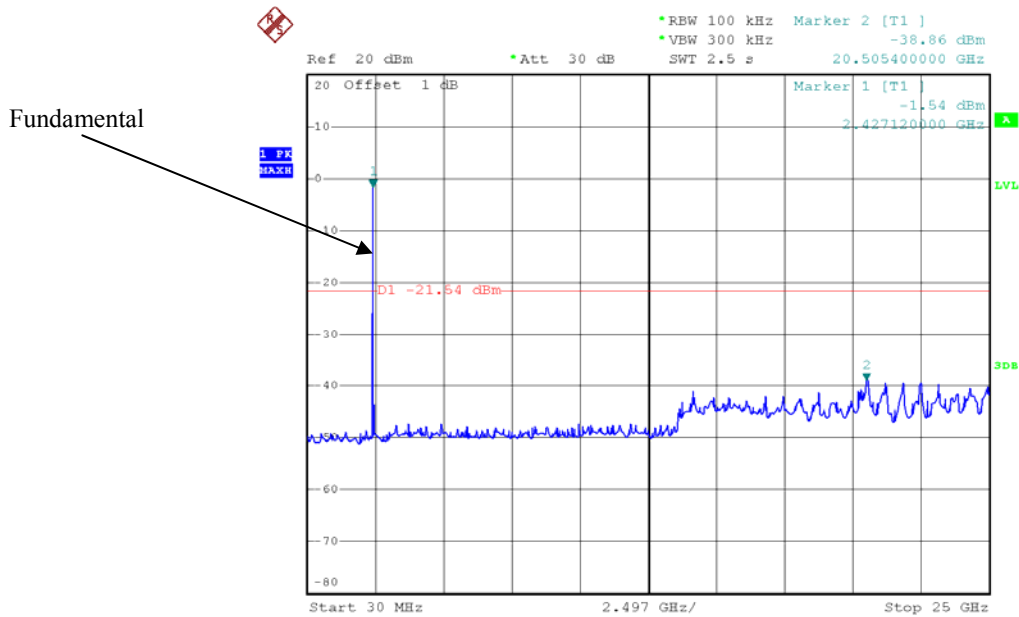


Date: 26.MAY.2015 11:27:40

802.11g Low Channel – Chain1

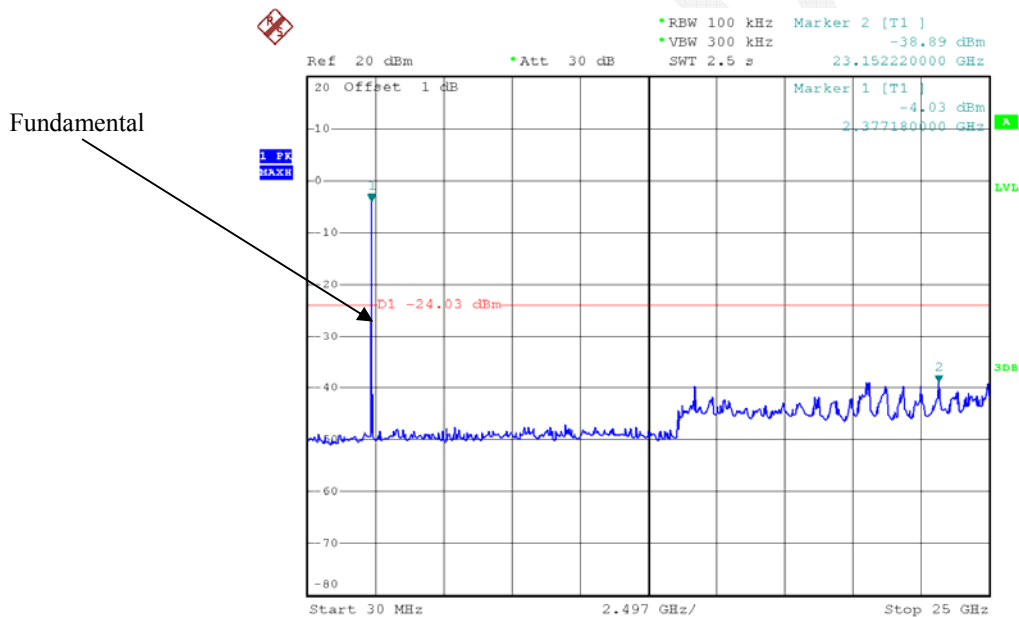


Date: 26.MAY.2015 11:29:10

802.11g Middle Channel – Chain1

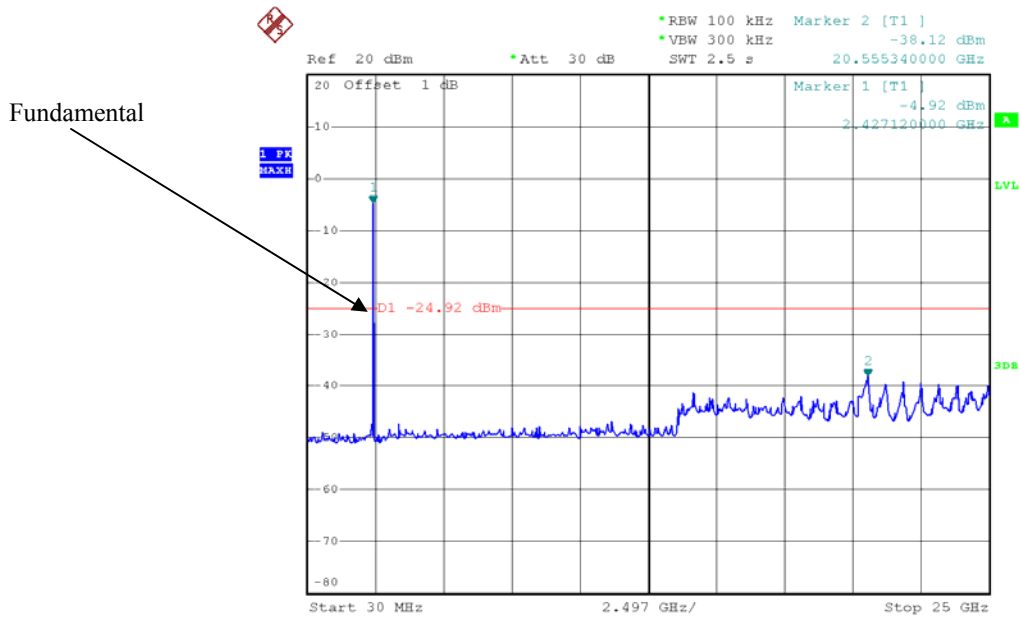

Date: 26.MAY.2015 11:31:06

802.11g High Channel – Chain1

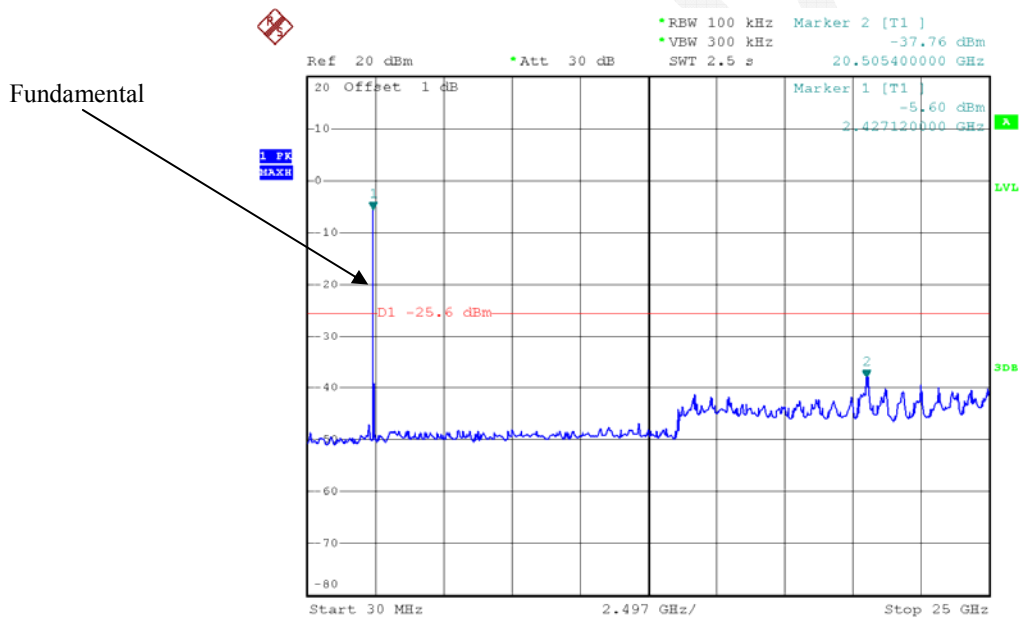

Date: 26.MAY.2015 11:33:52

Ref 20 dBm Att 30 dB

• RBW 100 kHz • VVW 300 kHz • SWT 2.5 s

Marker 2 [T1] -5.34 dBm 20.505400000 GHz

1 PK PEACH

D1 -25.34 dBm

2

Start 30 MHz 2.497 GHz/ Stop 25 GHz

Ref 20 dBm Att 30 dB

•REW 100 kHz •VW 300 kHz •SWT 2.5 s

Marker 2 [T1] -38.26 dBm 20.505400000 GHz

20 Offset 1 dB

Marker 1 [T1] -4.83 dBm 2.427120000 GHz


1 PK MAX

D1 -24.83 dBm

Start 30 MHz 2.497 GHz/ Stop 25 GHz


Page 35 of 78

802.11n ht20 High Channel – Chain1

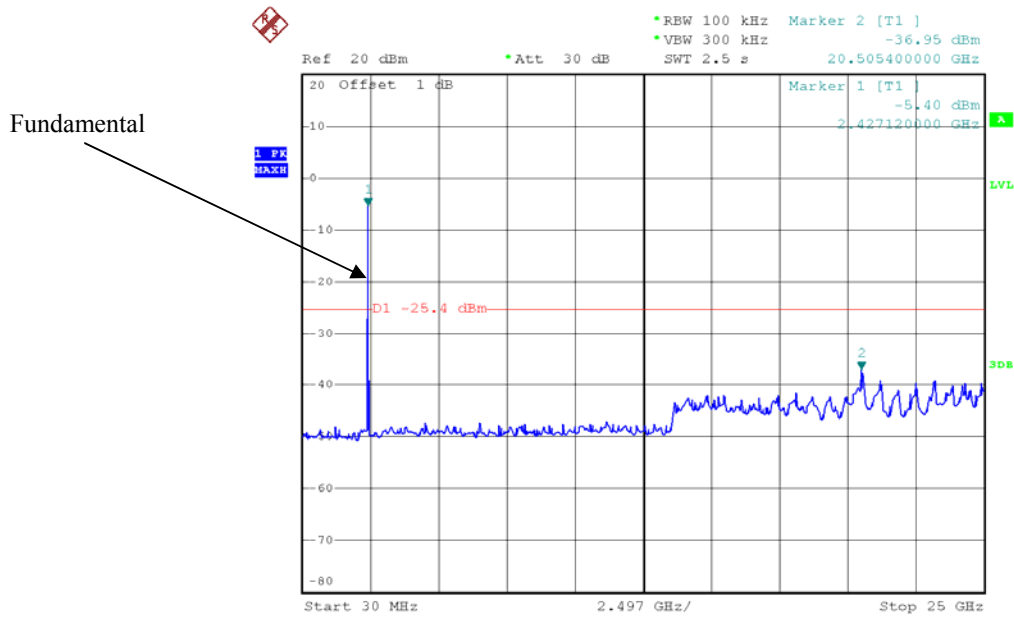


Date: 26.MAY.2015 11:39:05

802.11n ht40 Low Channel – Chain1

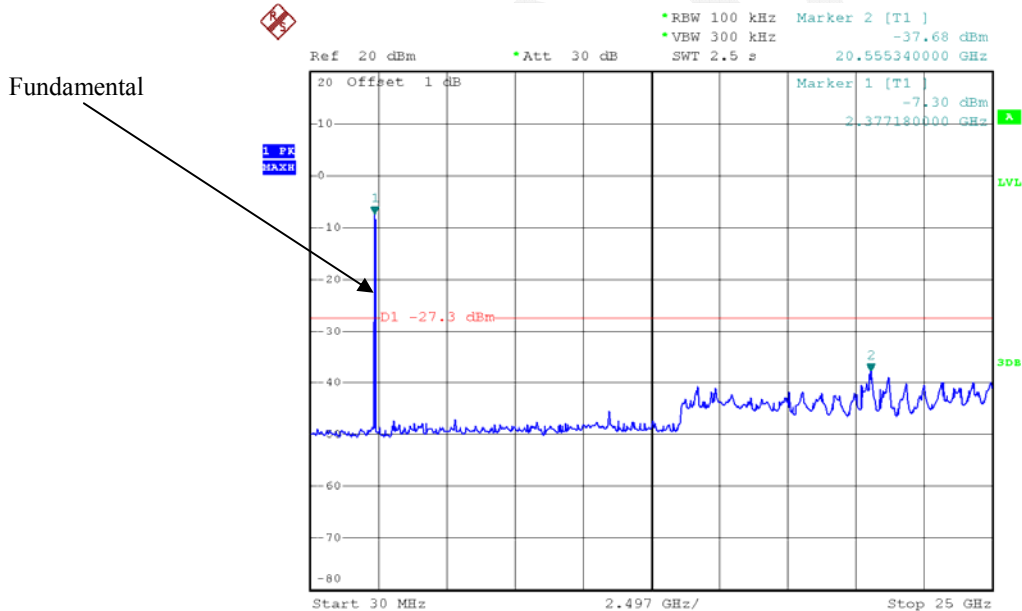


Date: 26.MAY.2015 11:41:26

802.11n ht40 Middle Channel – Chain1

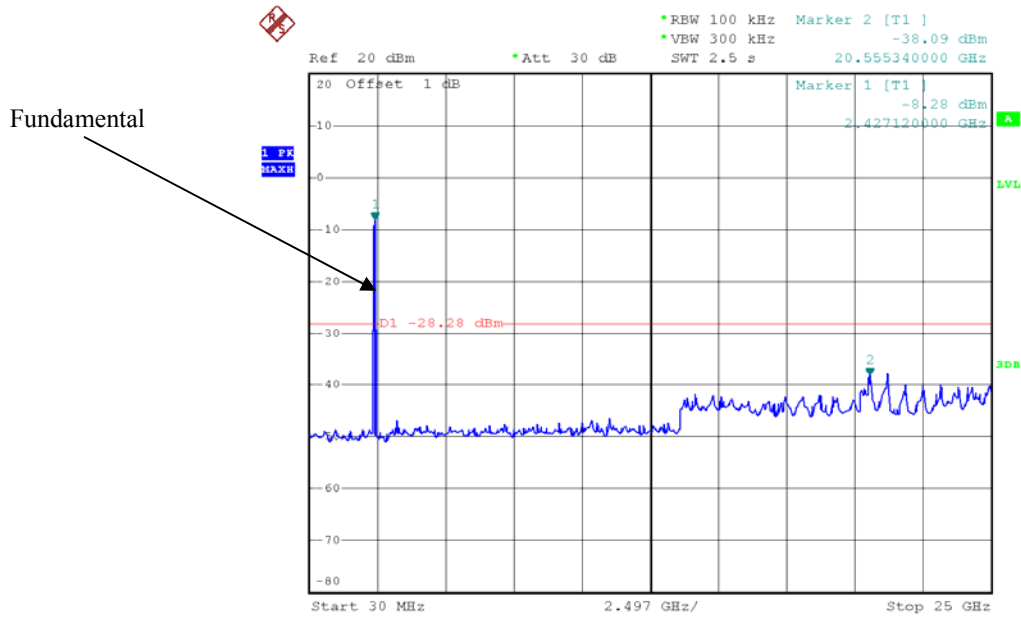

Date: 26.MAY.2015 11:45:57

802.11n ht40 High Channel – Chain1

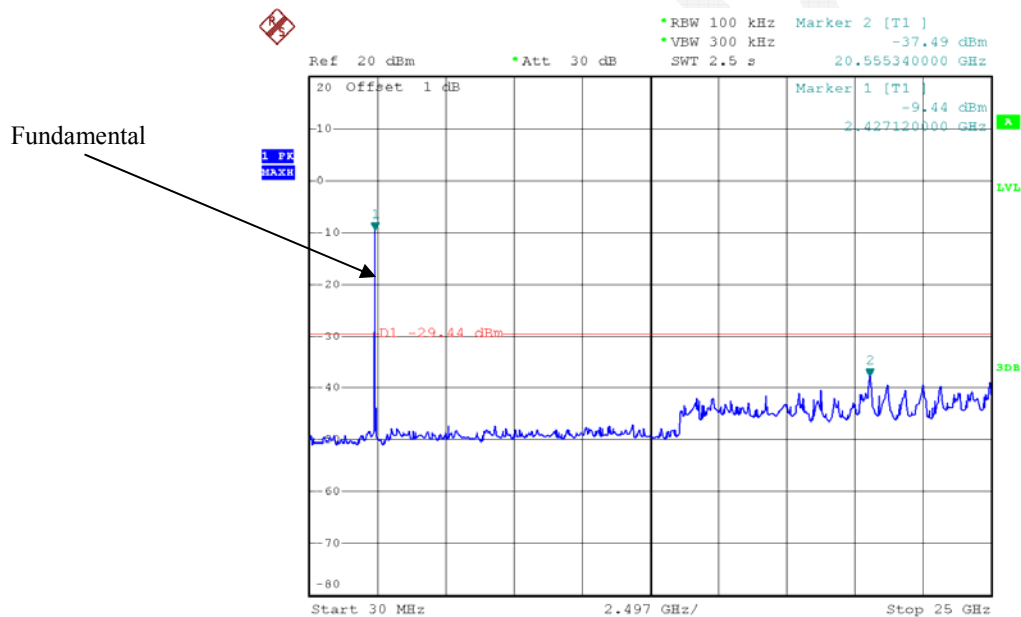

Date: 26.MAY.2015 11:52:20

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r02 clause8.1 Option 1:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.3 °C
Relative Humidity:	56 %
ATM Pressure:	100.1 kPa


The testing was performed by Dean Liu on 2015-05-24.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.


Mode	Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Limit (MHz)
			Chain0	Chain1	
802.11b	Low	2412	10.24	10.16	≥ 0.5
	Middle	2437	10.16	10.16	≥ 0.5
	High	2462	10.16	10.24	≥ 0.5
802.11g	Low	2412	16.00	15.68	≥ 0.5
	Middle	2437	15.76	15.84	≥ 0.5
	High	2462	15.52	15.60	≥ 0.5
802.11n20	Low	2412	16.24	16.32	≥ 0.5
	Middle	2437	16.00	15.84	≥ 0.5
	High	2462	16.00	16.40	≥ 0.5
802.11n40	Low	2422	35.04	35.20	≥ 0.5
	Middle	2437	35.04	35.04	≥ 0.5
	High	2452	35.20	35.20	≥ 0.5

802.11b Low Channel – Chain0

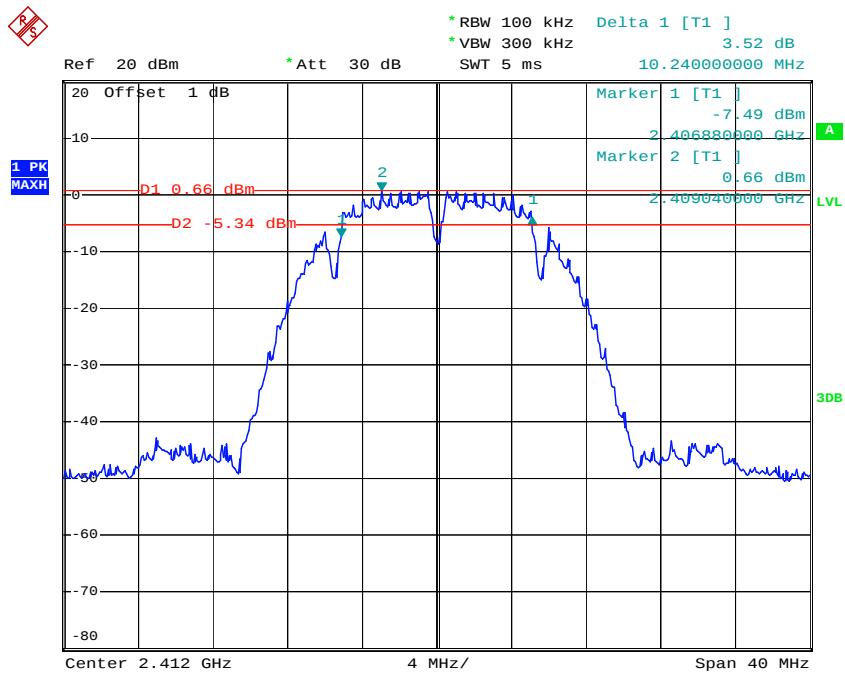


Date: 24.MAY.2015 17:32:04

802.11b Middle Channel – Chain0

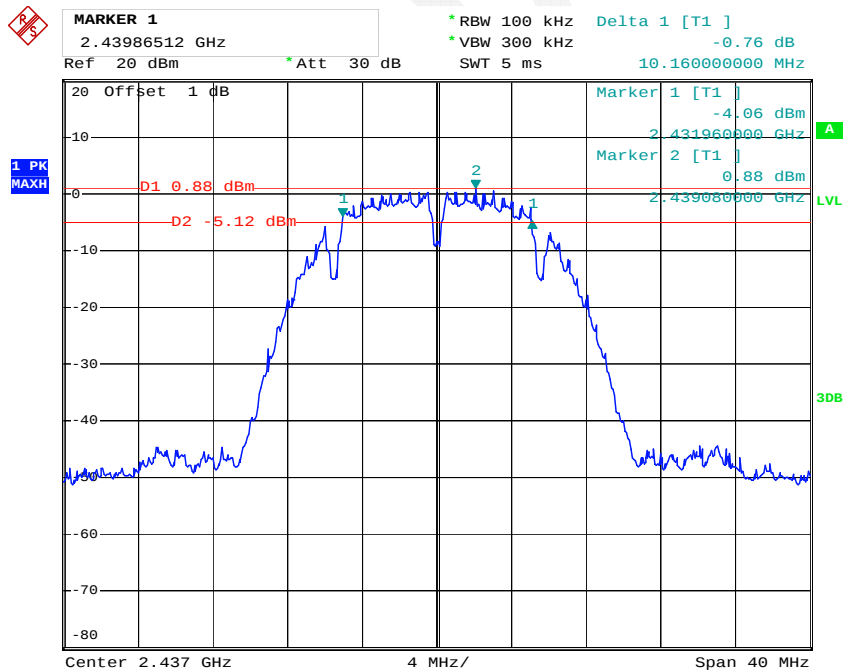


Date: 24.MAY.2015 17:30:19

802.11b High Channel – Chain0

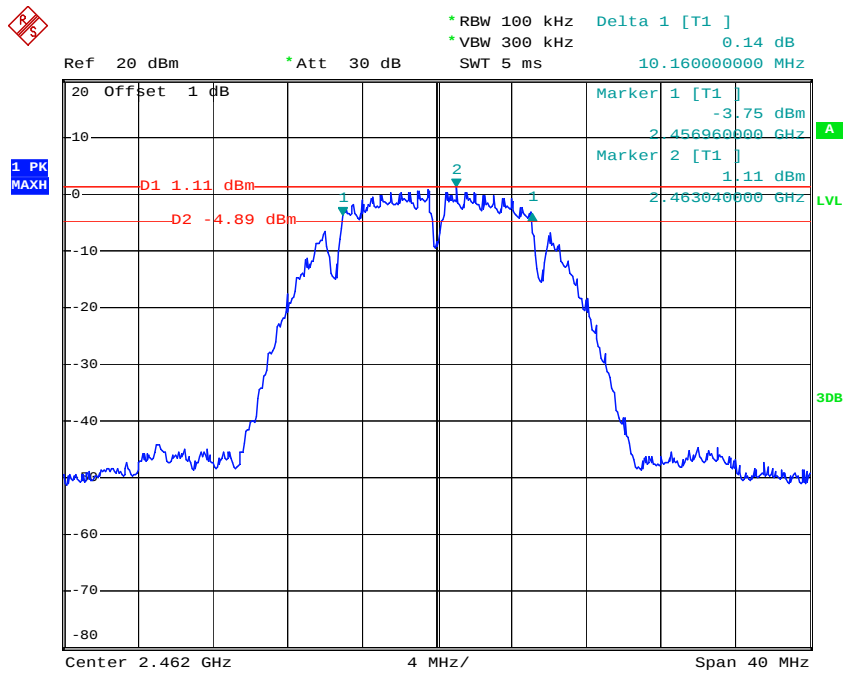


Date: 24.MAY.2015 17:22:04

802.11g Low Channel – Chain0

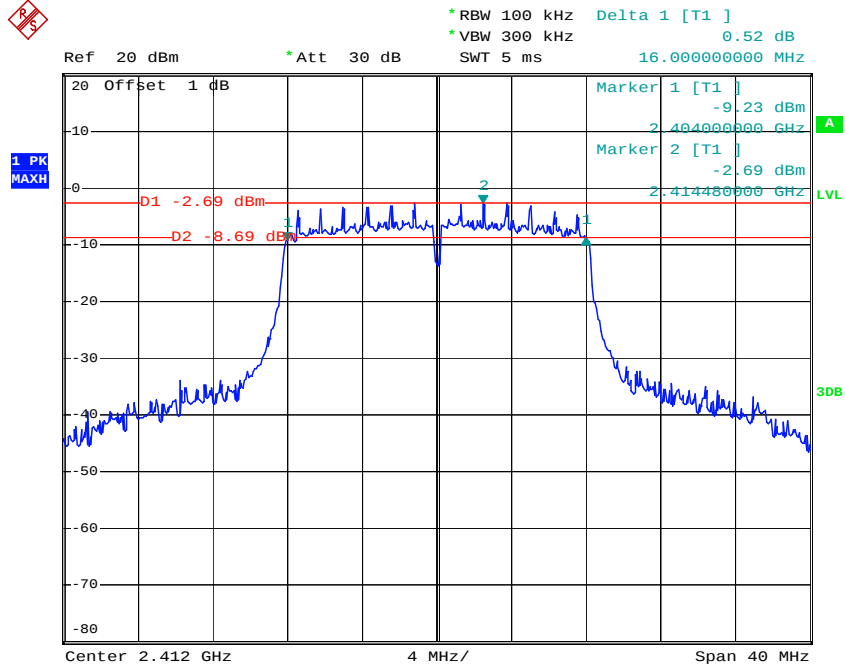


Date: 24.MAY.2015 17:06:24

802.11g Middle Channel – Chain0

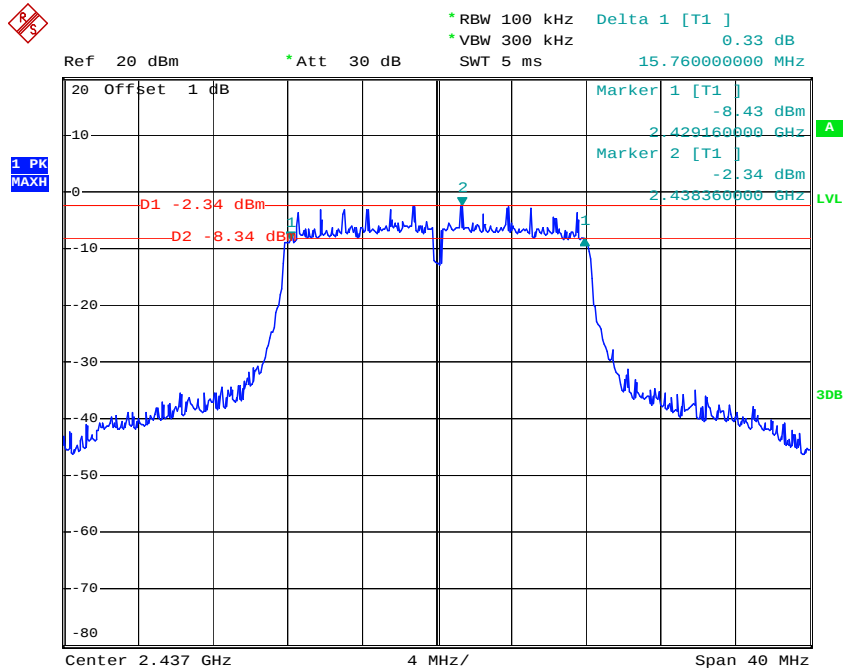


Date: 24.MAY.2015 17:09:26

802.11g High Channel – Chain0

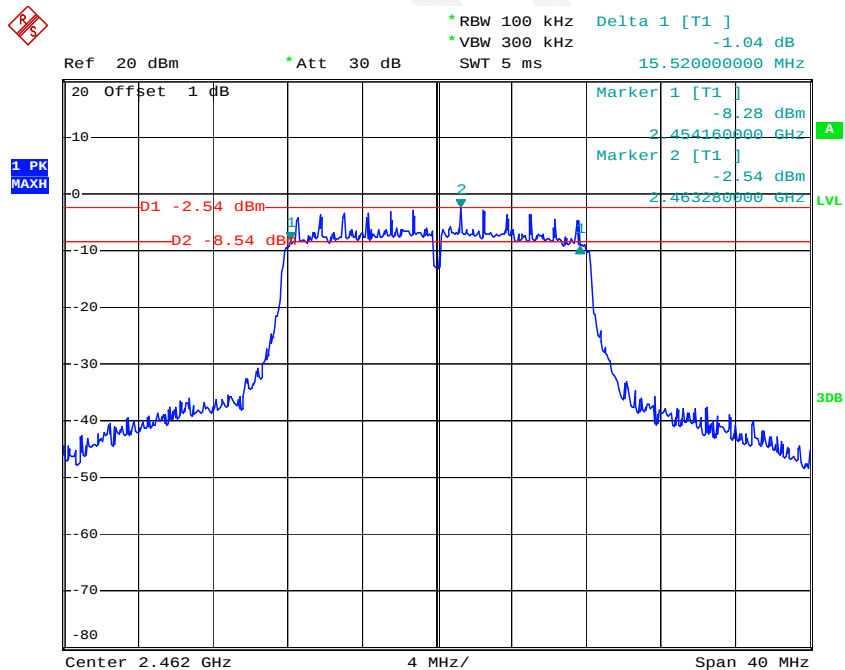


Date: 24.MAY.2015 17:12:30

802.11n ht20 Low Channel – Chain0

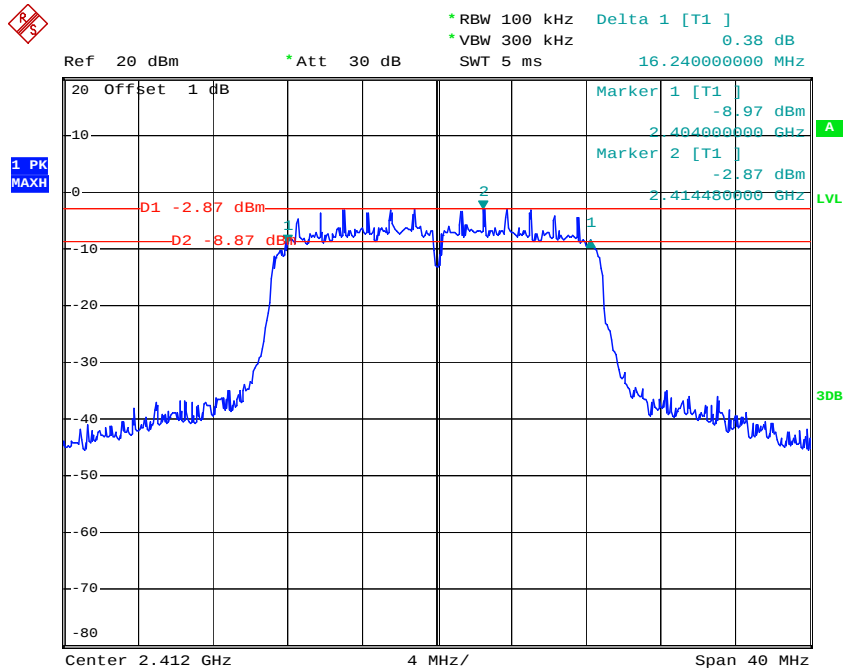


Date: 24.MAY.2015 16:53:03

802.11n ht20 Middle Channel – Chain0

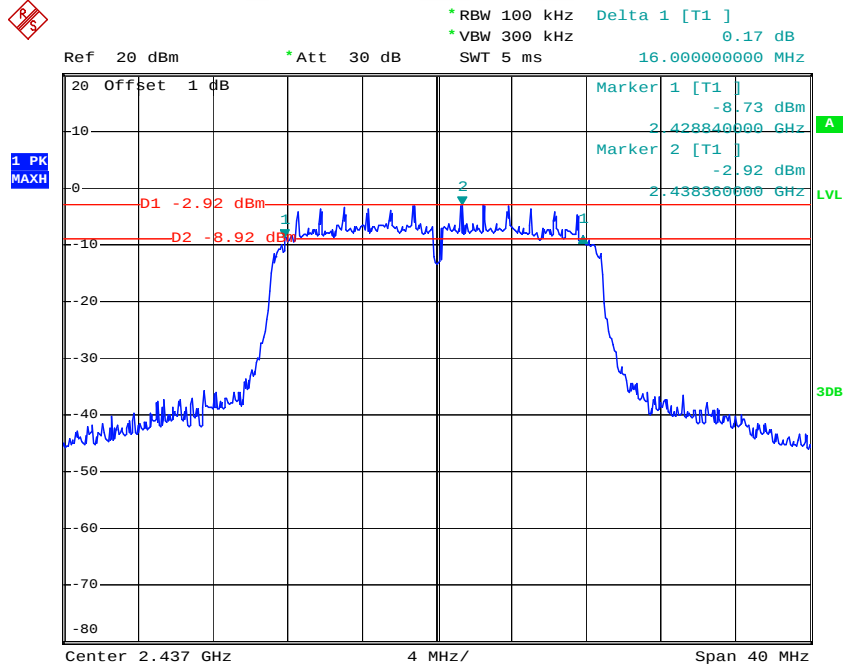


Date: 24.MAY.2015 16:59:50

802.11n ht20 High Channel – Chain0

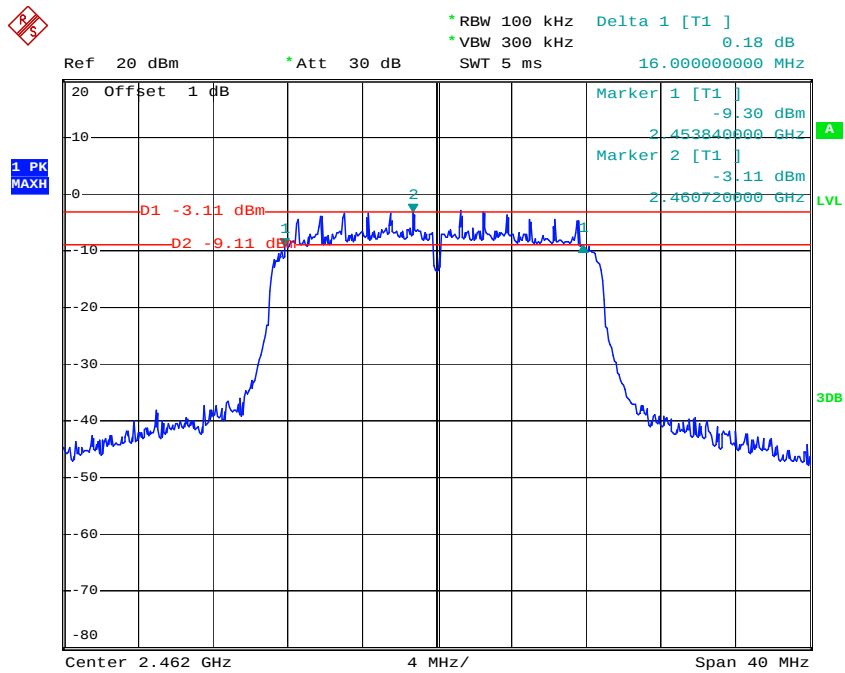


Date: 24.MAY.2015 17:02:35

802.11n ht40 Low Channel – Chain0

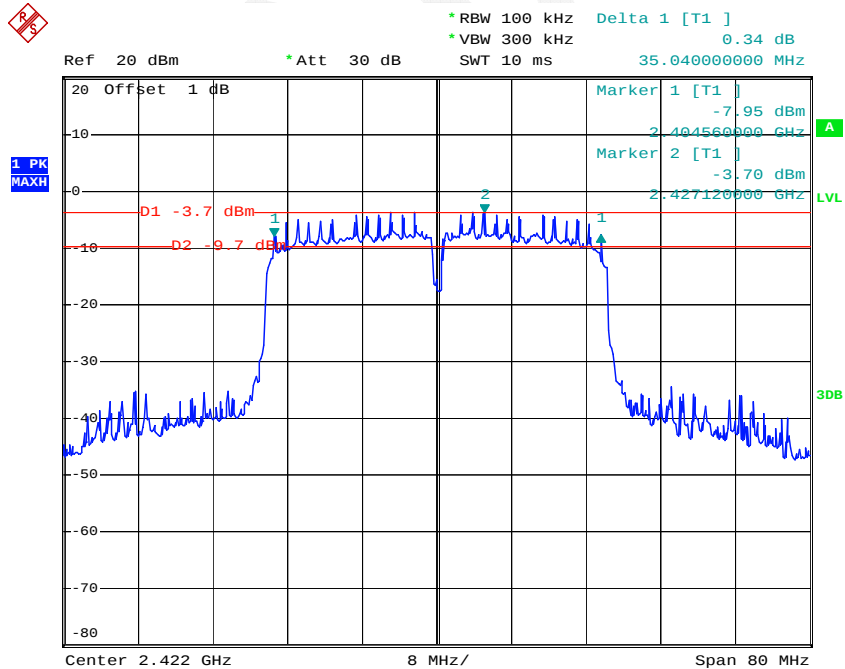


Date: 24.MAY.2015 16:45:20

802.11n ht40 Middle Channel – Chain0

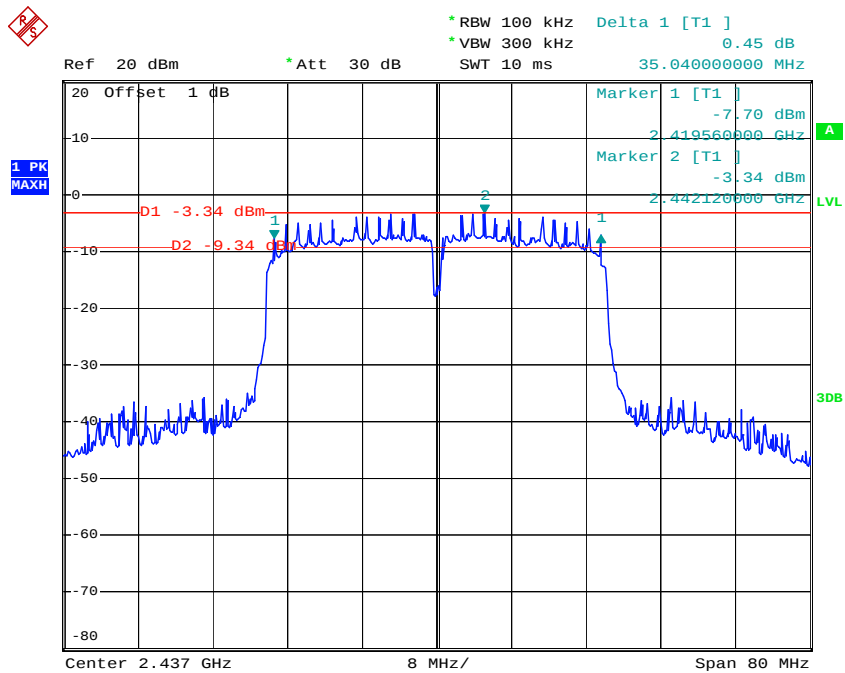


Date: 24.MAY.2015 16:41:28

802.11n ht40 High Channel – Chain0

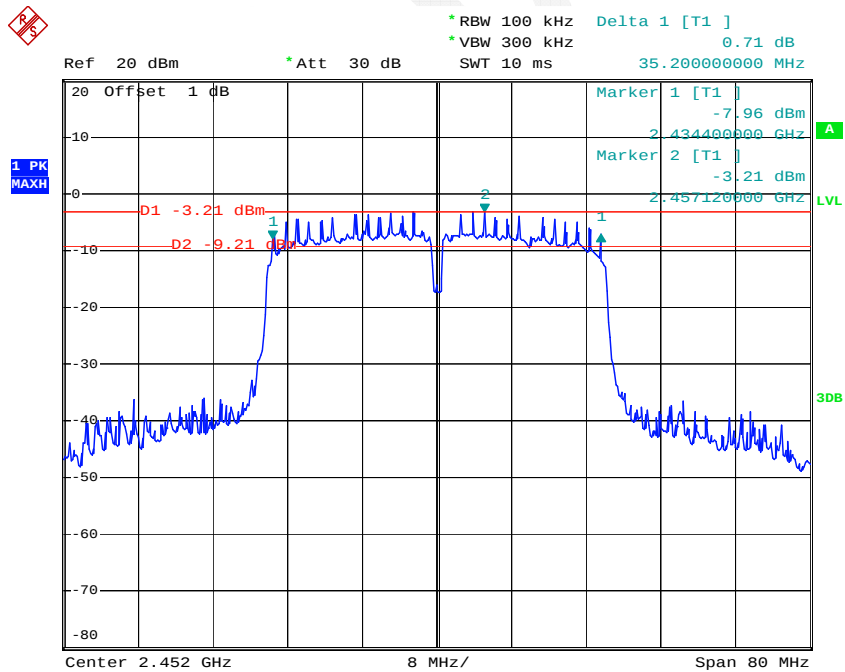


Date: 24.MAY.2015 16:39:10

802.11b Low Channel – Chain1

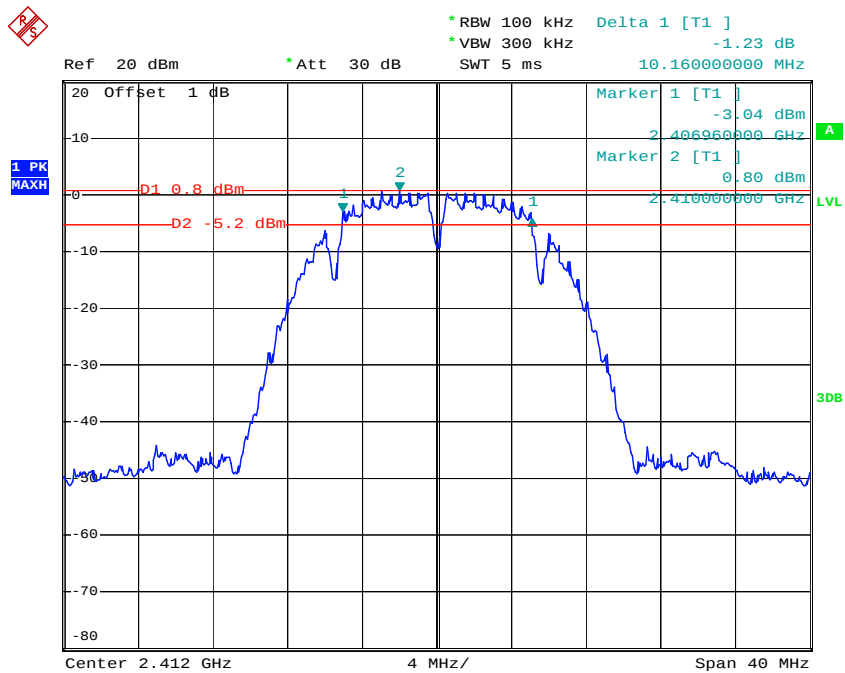


Date: 24.MAY.2015 17:43:18

802.11b Middle Channel – Chain1

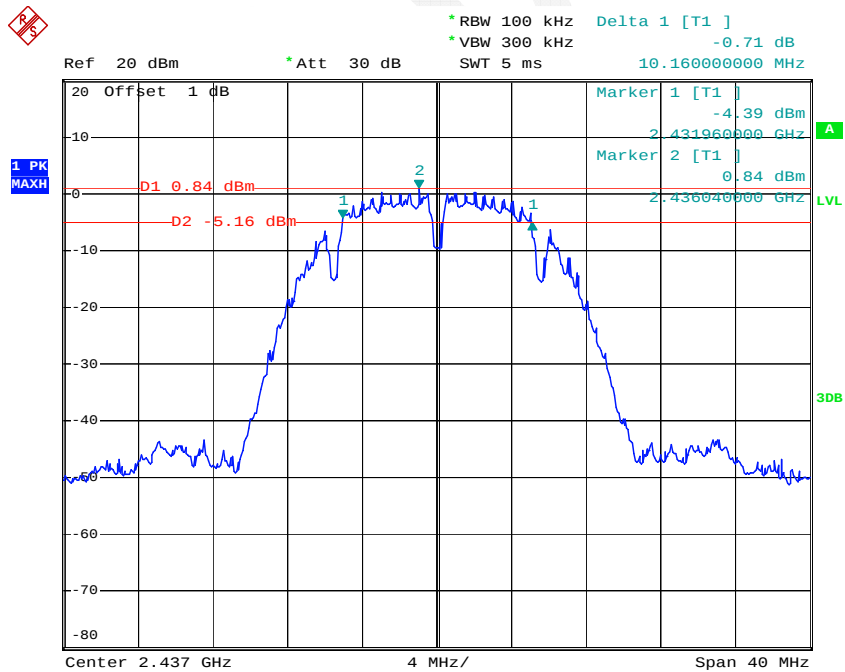


Date: 24.MAY.2015 17:50:49

802.11b High Channel – Chain1

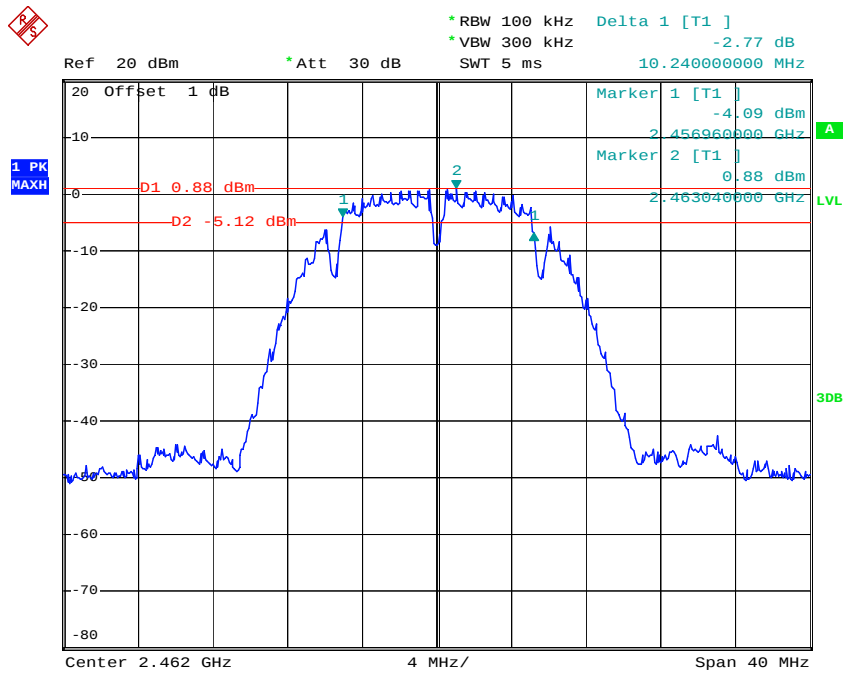


Date: 24.MAY.2015 17:58:28

802.11g Low Channel – Chain1

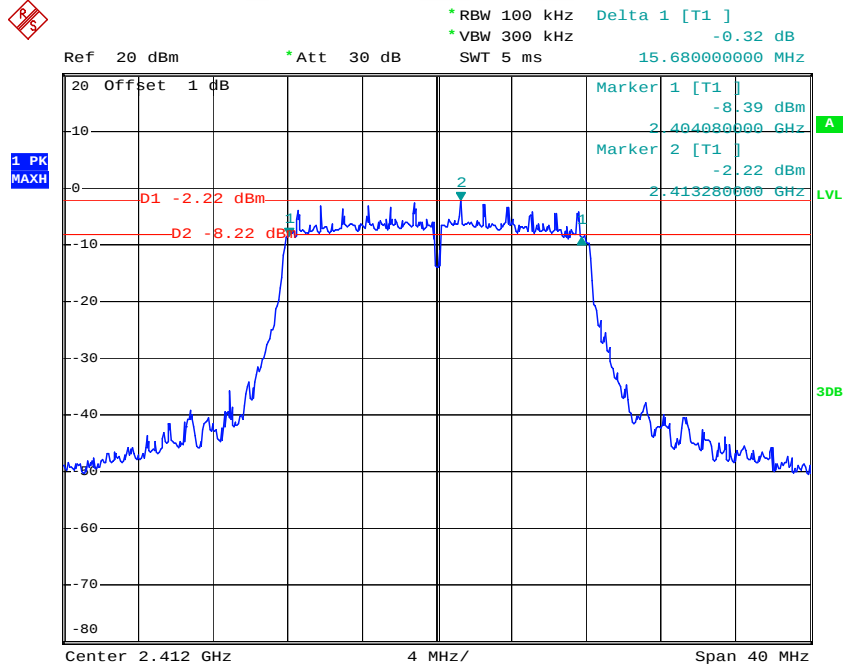


Date: 24.MAY.2015 18:29:37

802.11g Middle Channel – Chain1

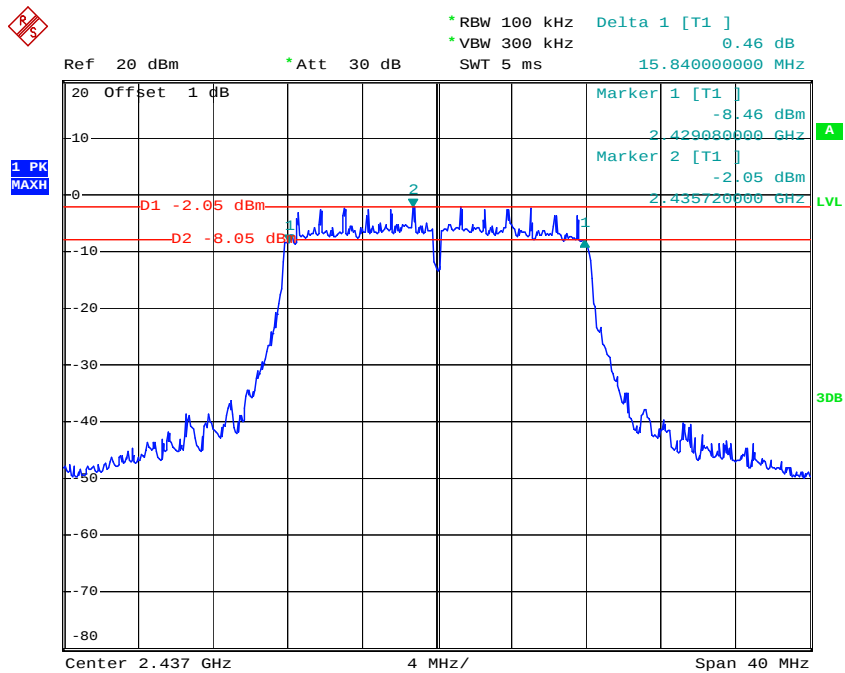


Date: 24.MAY.2015 18:33:01

802.11g High Channel – Chain1

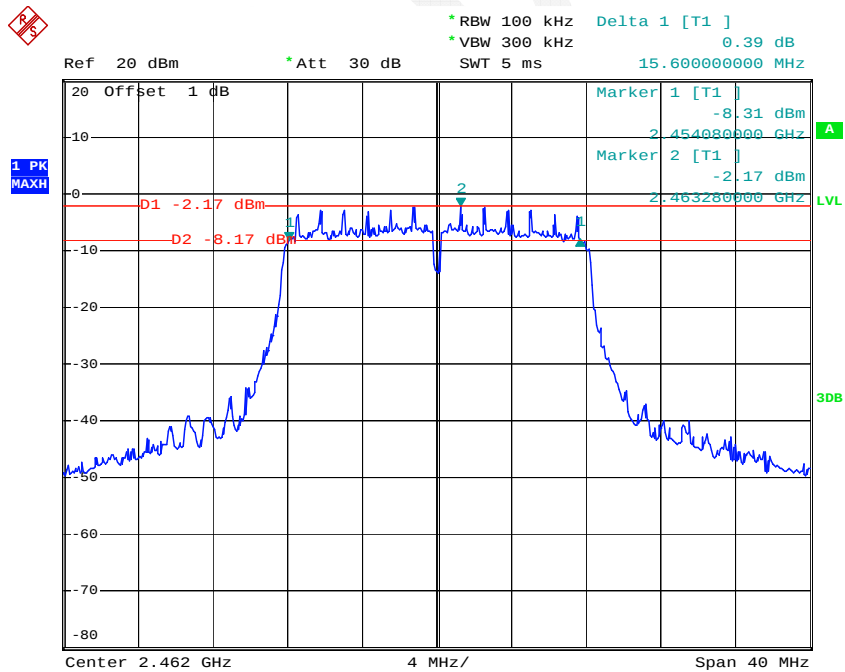


Date: 24.MAY.2015 18:36:07

802.11n ht20 Low Channel – Chain1

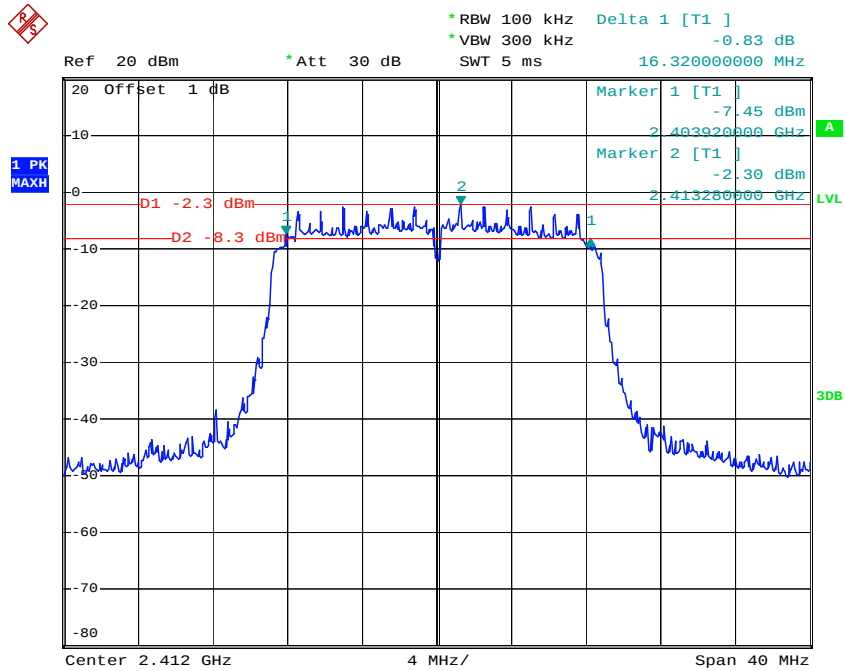


Date: 24.MAY.2015 18:52:07

802.11n ht20 Middle Channel – Chain1

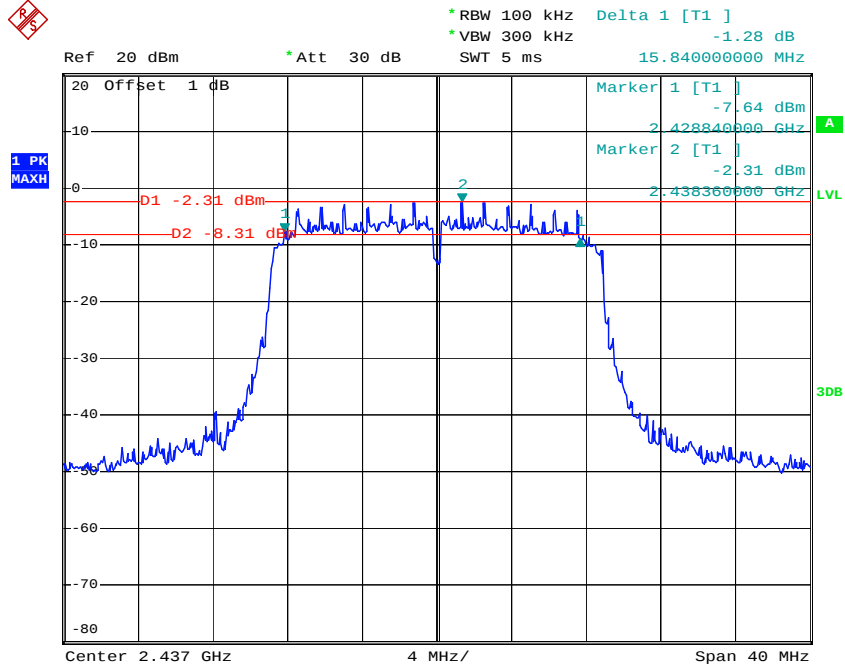


Date: 24.MAY.2015 18:46:13

802.11n ht20 High Channel – Chain1

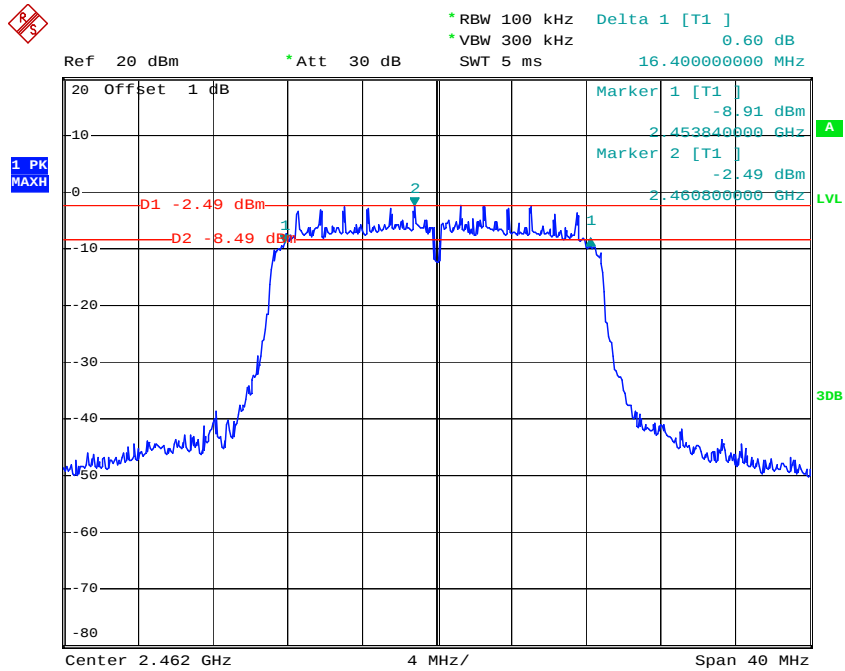


Date: 24.MAY.2015 18:39:04

802.11n ht40 Low Channel – Chain1

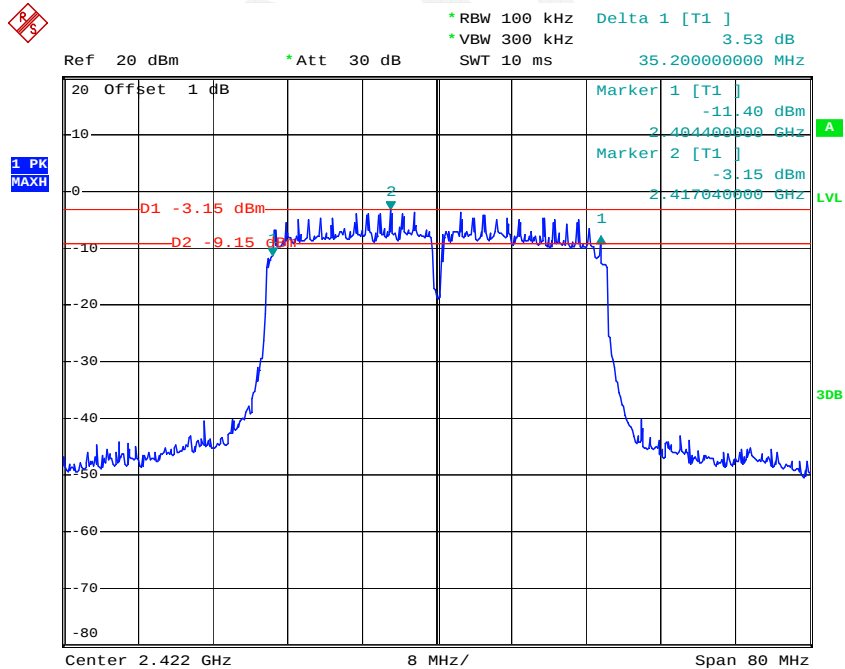


Date: 24.MAY.2015 18:59:26

802.11n ht40 Middle Channel – Chain1

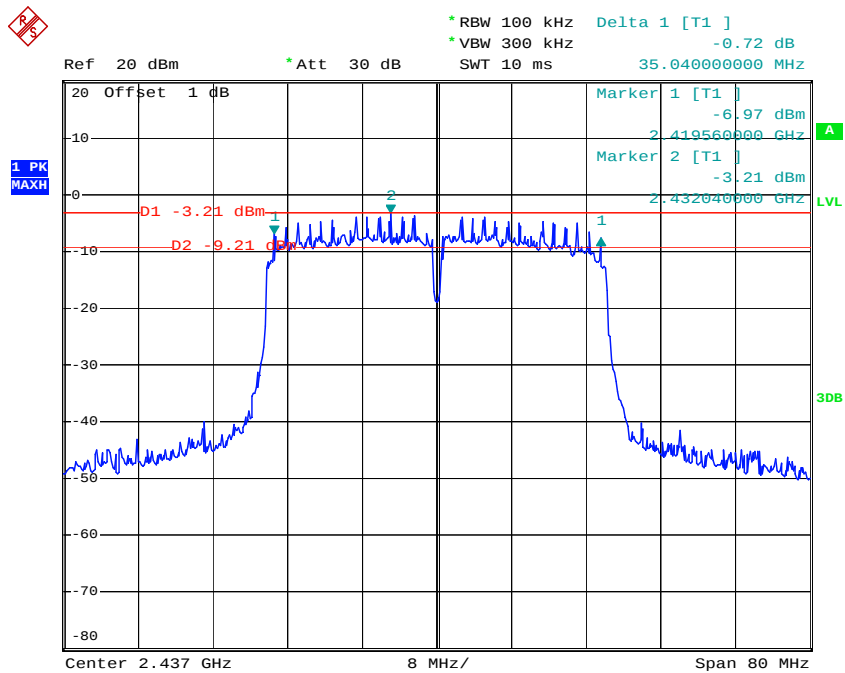

Date: 24.MAY.2015 19:03:16

802.11n ht40 High Channel – Chain1

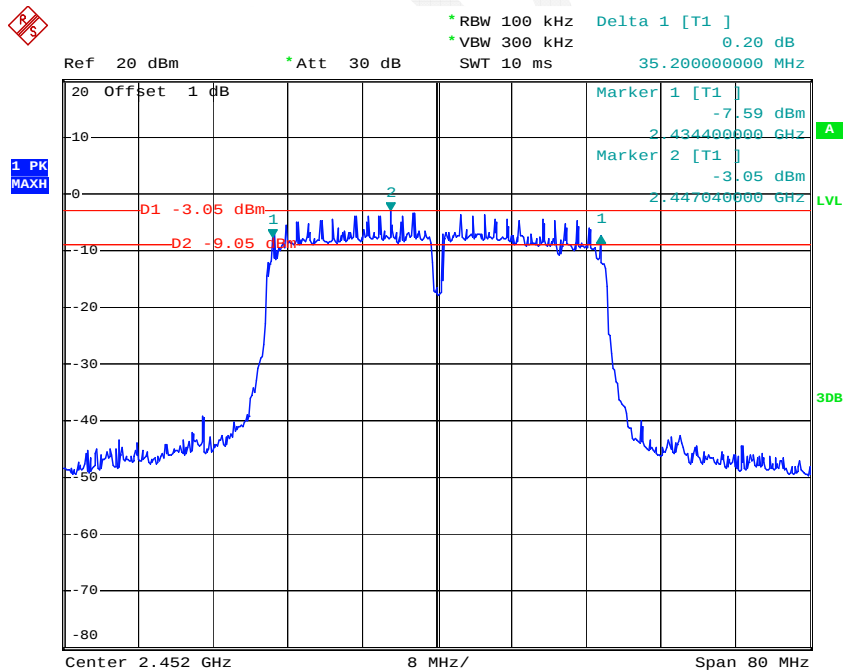

Date: 24.MAY.2015 19:07:55

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r02

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Wideband Power Sensor	N1921A	MY54210016	2014-11-03	2015-11-03
Agilent	Wideband Power Sensor	N1921A	MY54170013	2014-11-03	2015-11-03
Agilent	P-Series Power Meter	N1912A	MY5000448	2014-11-03	2015-11-03

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.3 °C
Relative Humidity:	56 %
ATM Pressure:	100.1 kPa

The testing was performed by Dean Liu on 2015-05-24.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table.

Mode	Channel	Frequency	Maximum Peak Conducted Output Power (dBm)			Limit
		MHz	Chain 0	Chain 1	Total	dBm
802.11b	Low	2412	14.76	14.60	/	30
	Middle	2437	14.90	14.88	/	30
	High	2462	14.72	14.74	/	30
802.11g	Low	2412	16.59	16.78	/	30
	Middle	2437	16.77	16.89	/	30
	High	2462	16.47	16.81	/	30
802.11n20	Low	2412	16.22	16.95	19.61	30
	Middle	2437	16.03	16.57	19.32	30
	High	2462	16.12	16.34	19.24	30
802.11n40	Low	2422	18.17	18.62	21.41	30
	Middle	2437	18.22	18.42	21.33	30
	High	2452	18.45	18.65	21.56	30

Mode	Channel	Frequency	Maximum Ave. Conducted Output Power (dBm)			Limit
		MHz	Chain 0	Chain 1	Total	dBm
802.11b	Low	2412	14.51	14.39	/	30
	Middle	2437	14.63	14.61	/	30
	High	2462	14.64	14.67	/	30
802.11g	Low	2412	12.21	12.84	/	30
	Middle	2437	12.15	12.62	/	30
	High	2462	12.28	12.73	/	30
802.11n20	Low	2412	12.29	12.43	15.37	30
	Middle	2437	12.11	12.40	15.27	30
	High	2462	12.24	12.53	15.40	30
802.11n40	Low	2422	12.06	12.50	15.30	30
	Middle	2437	12.17	12.59	15.40	30
	High	2452	12.22	12.43	15.34	30

Note: 1. Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi
 $= 5\text{dBi} < 6\text{dBi}$, so no limit reduced.

2. Duty cycle is 100%.

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	25.3 °C
Relative Humidity:	56 %
ATM Pressure:	100.1 kPa

The testing was performed by Dean Liu on 2015-05-24.

Test mode: Transmitting


Test Result: Compliant. Please refer to following plots.

802.11b: Band Edge, Left Side – Chain0

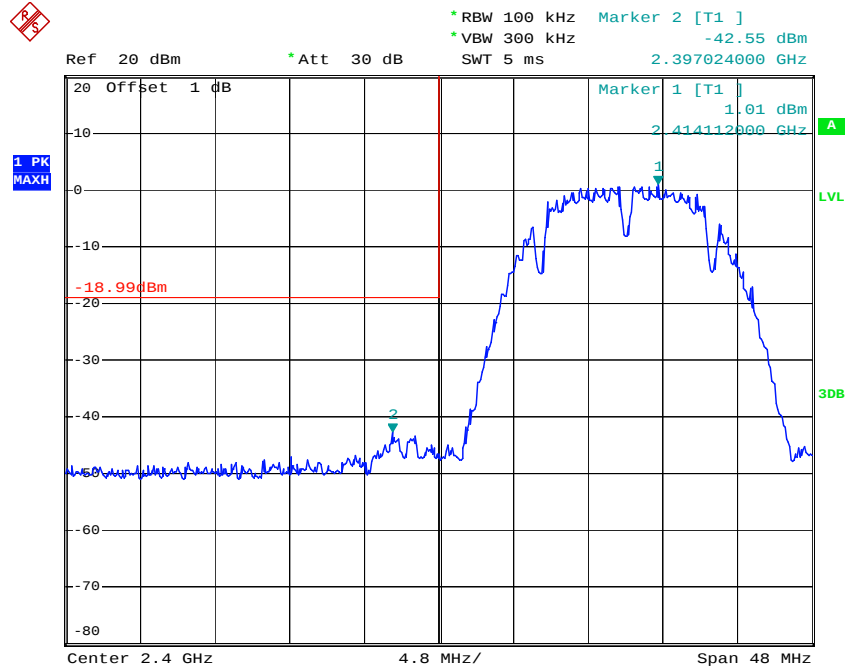


Date: 24.MAY.2015 17:33:51

802.11b: Band Edge, Right Side – Chain0

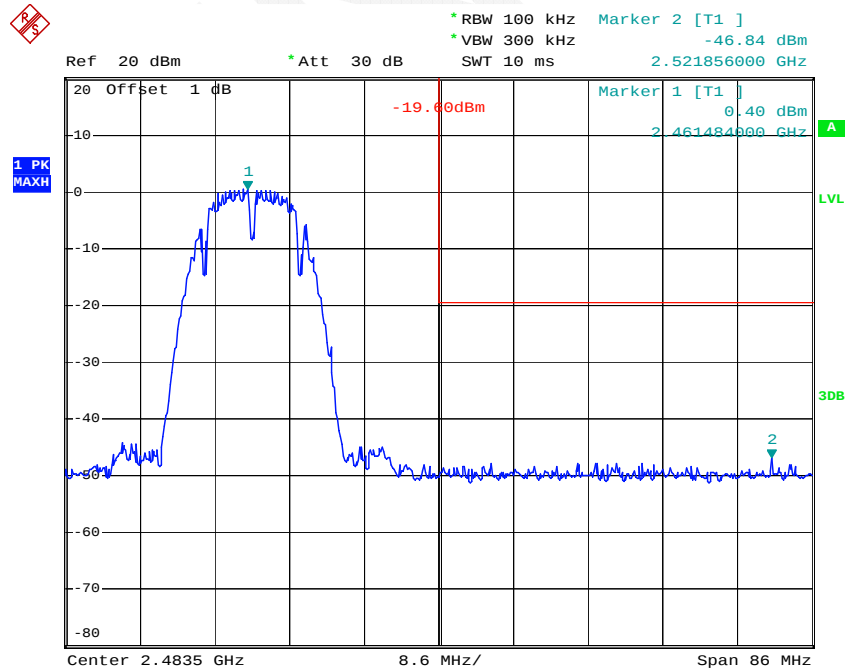


Date: 24.MAY.2015 17:23:39

802.11g: Band Edge, Left Side – Chain0

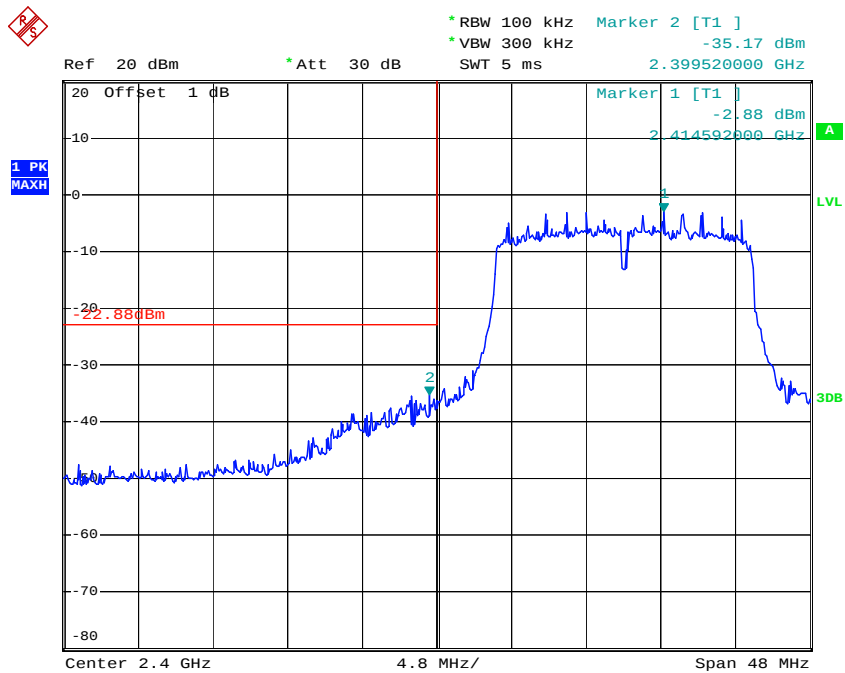


Date: 24.MAY.2015 17:08:14

802.11g: Band Edge, Right Side – Chain0

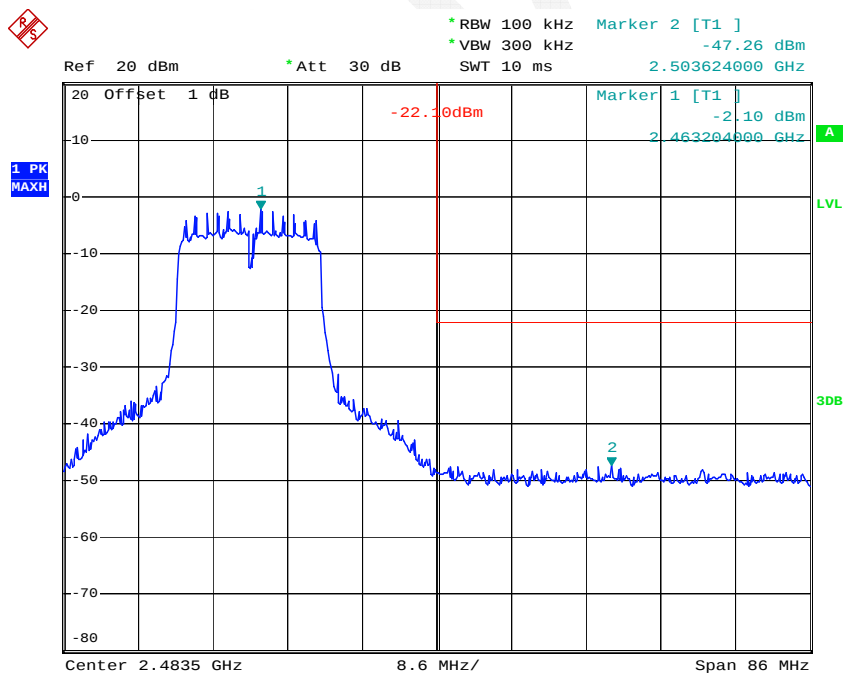


Date: 24.MAY.2015 17:14:40

802.11n ht20 Band Edge, Left Side – Chain0

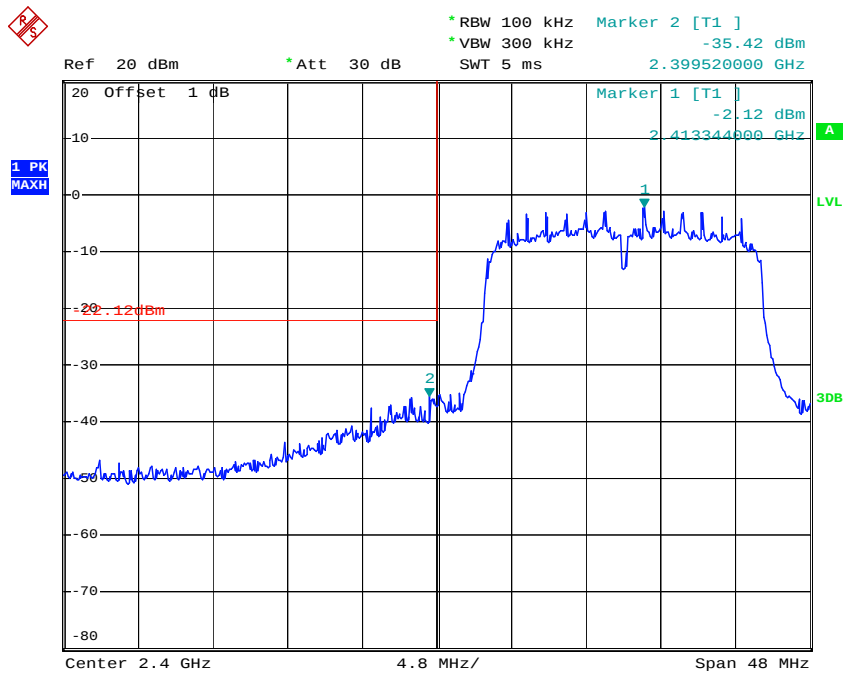


Date: 24.MAY.2015 16:54:56

802.11n ht20 Band Edge, Right Side – Chain0

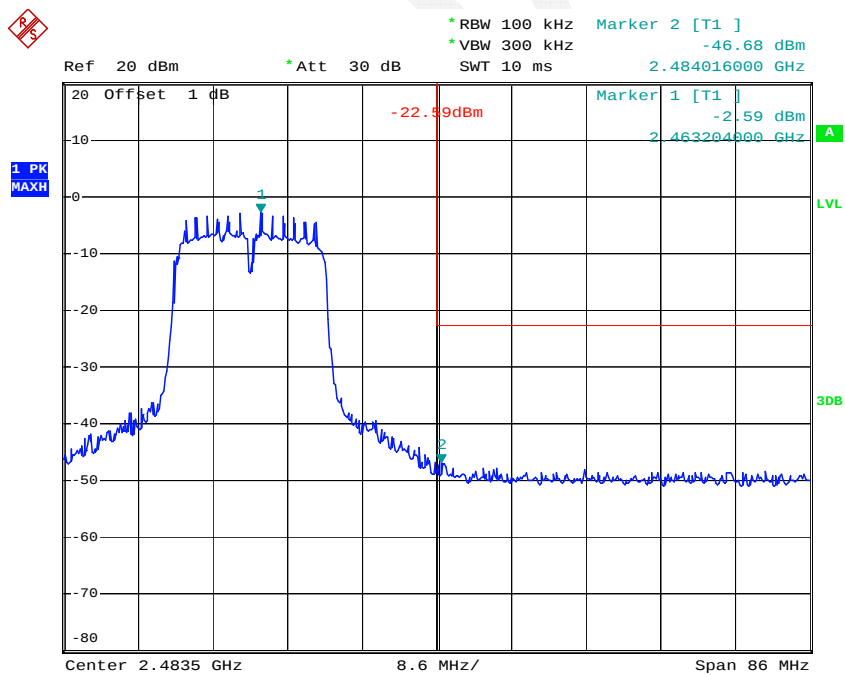


Date: 24.MAY.2015 17:04:24

802.11n ht40 Band Edge, Left Side – Chain0

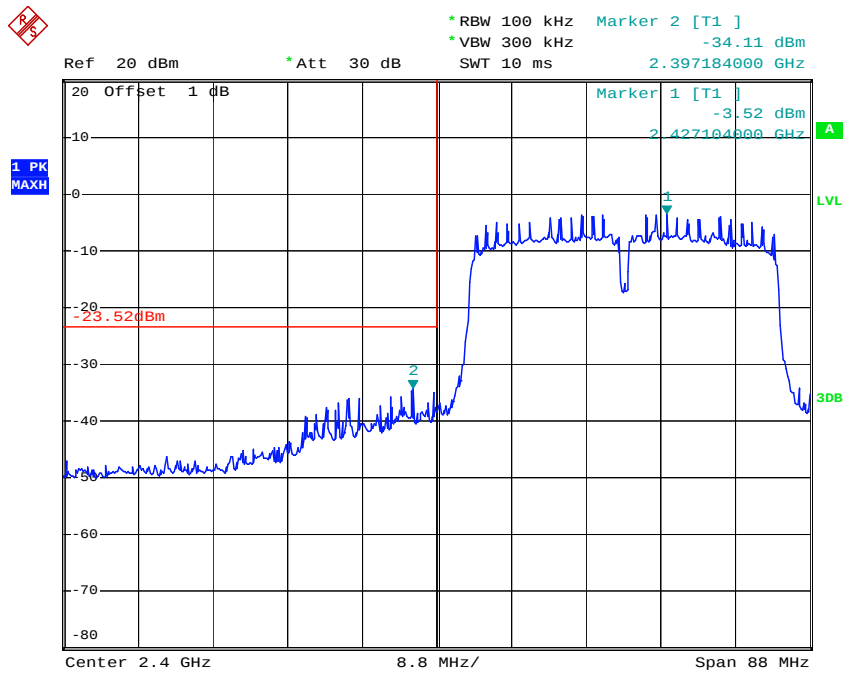


Date: 24.MAY.2015 16:47:33

802.11n ht40 Band Edge, Right Side – Chain0

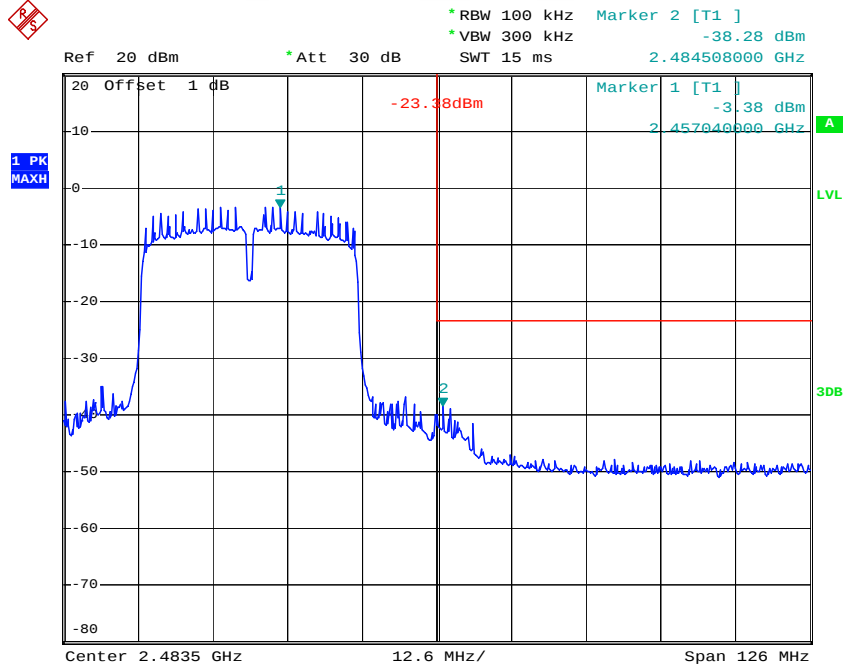


Date: 24.MAY.2015 16:37:53

802.11b: Band Edge, Left Side – Chain1

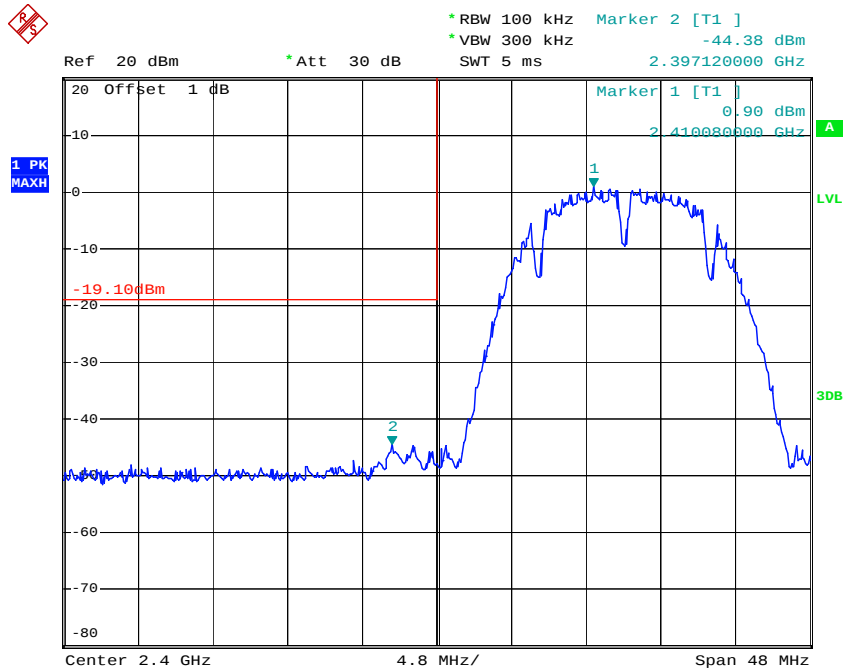


Date: 24.MAY.2015 17:44:53

802.11b: Band Edge, Right Side – Chain1

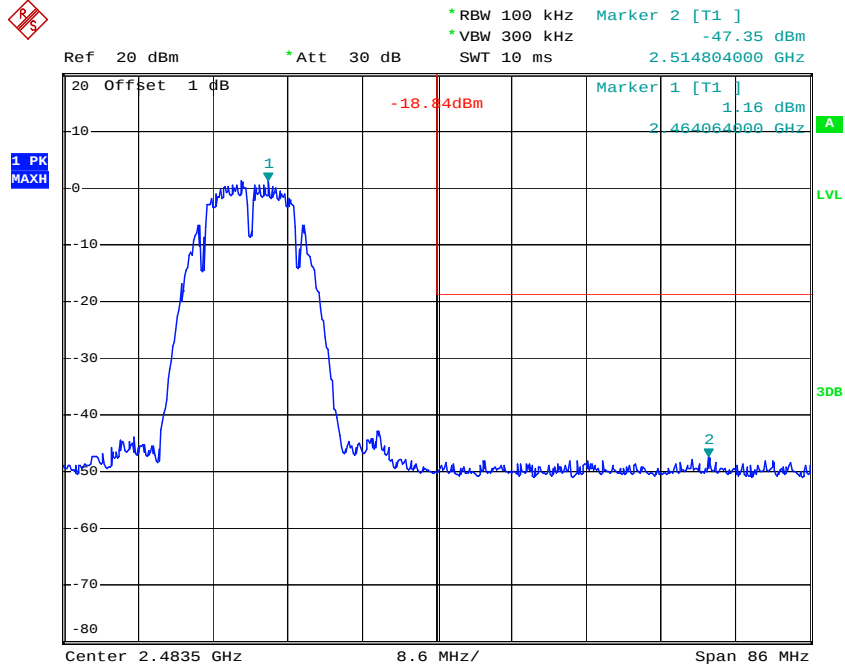


Date: 24.MAY.2015 18:00:09

802.11g: Band Edge, Left Side – Chain1

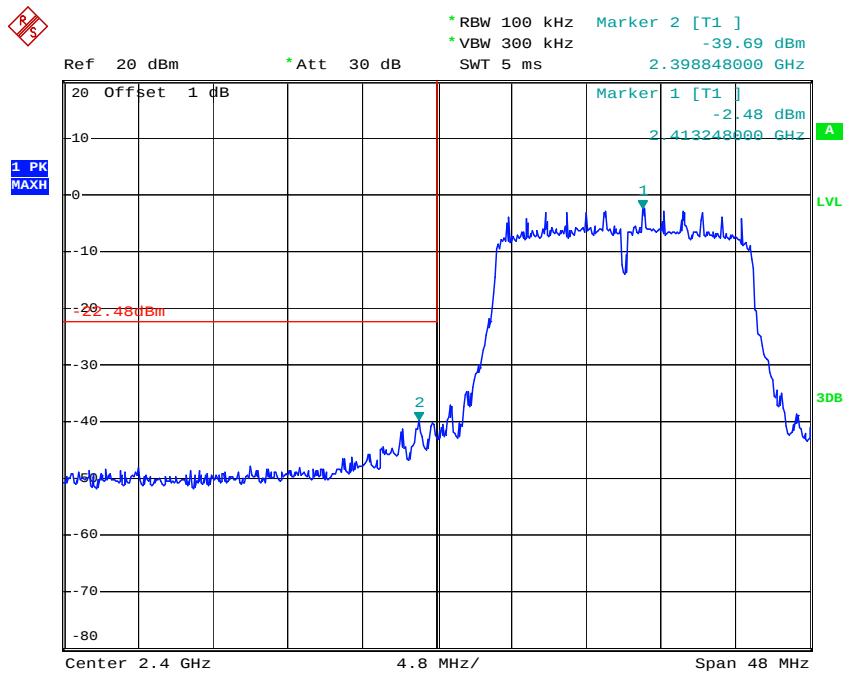


Date: 24.MAY.2015 18:31:31

802.11g: Band Edge, Right Side – Chain1

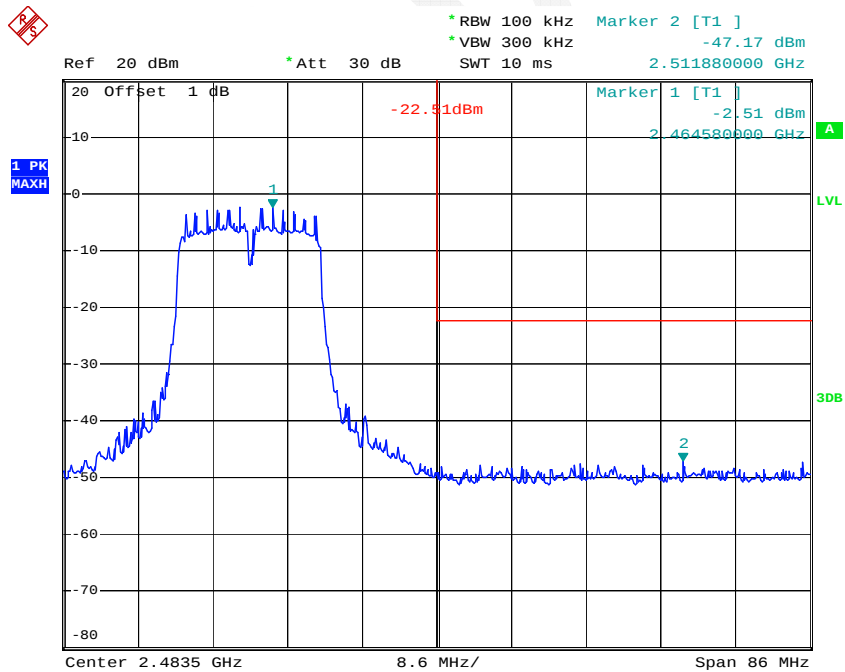


Date: 24.MAY.2015 18:37:33

802.11n ht20 Band Edge, Left Side – Chain1

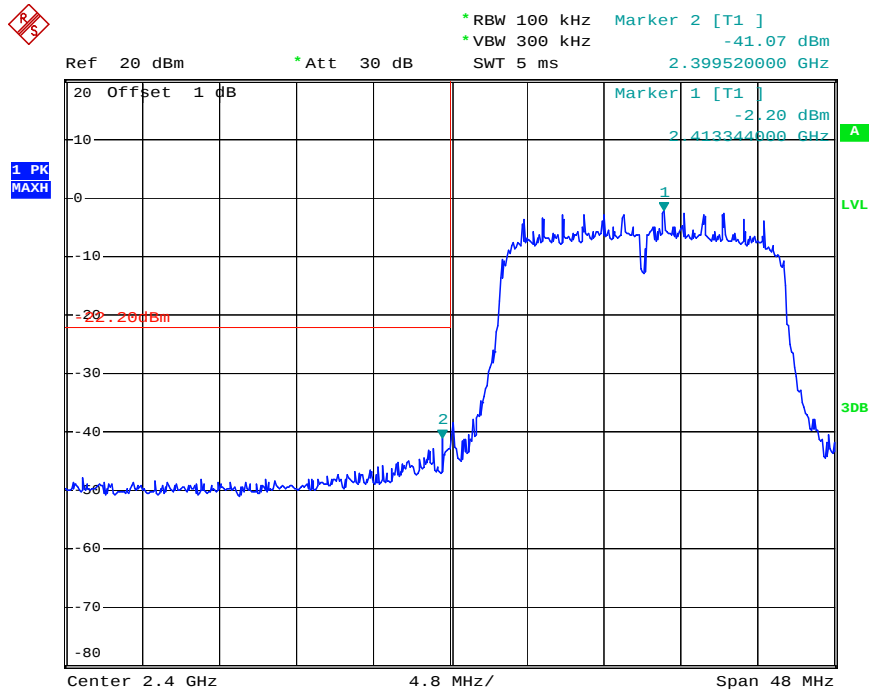


Date: 24.MAY.2015 18:54:06

802.11n ht20 Band Edge, Right Side – Chain1

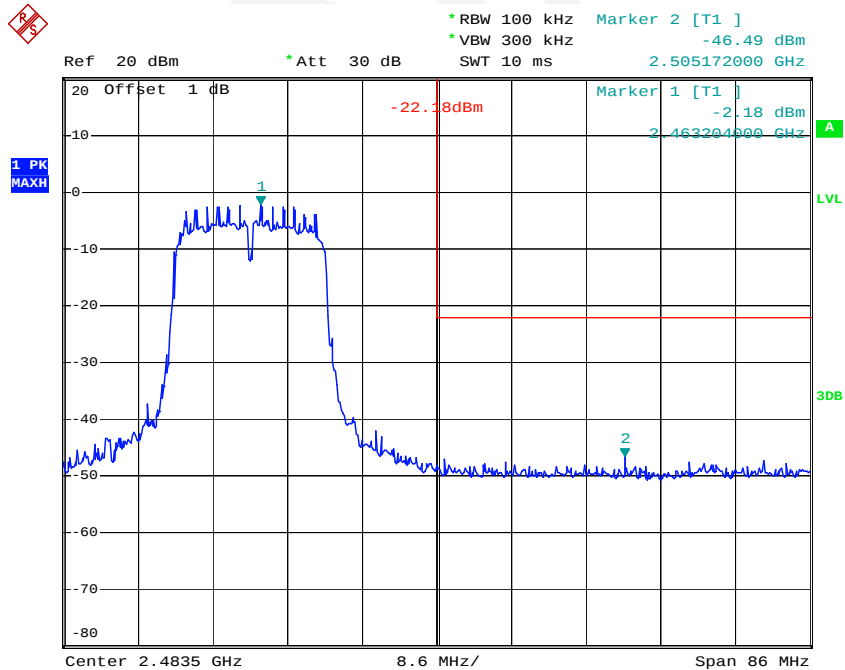


Date: 24.MAY.2015 18:41:01

802.11n ht40 Band Edge, Left Side – Chain1

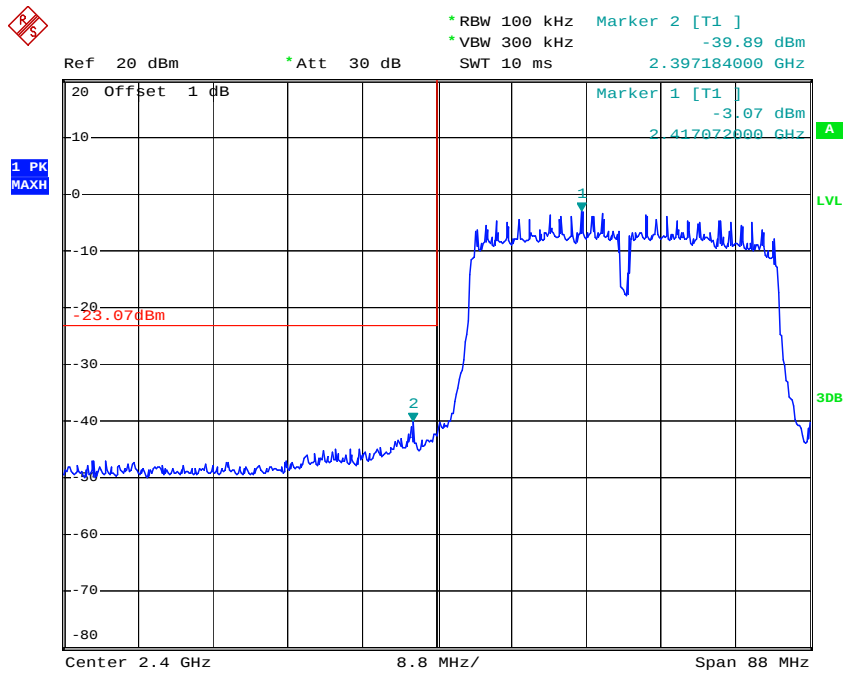

Date: 24.MAY.2015 19:01:42

802.11n ht40 Band Edge, Right Side – Chain1

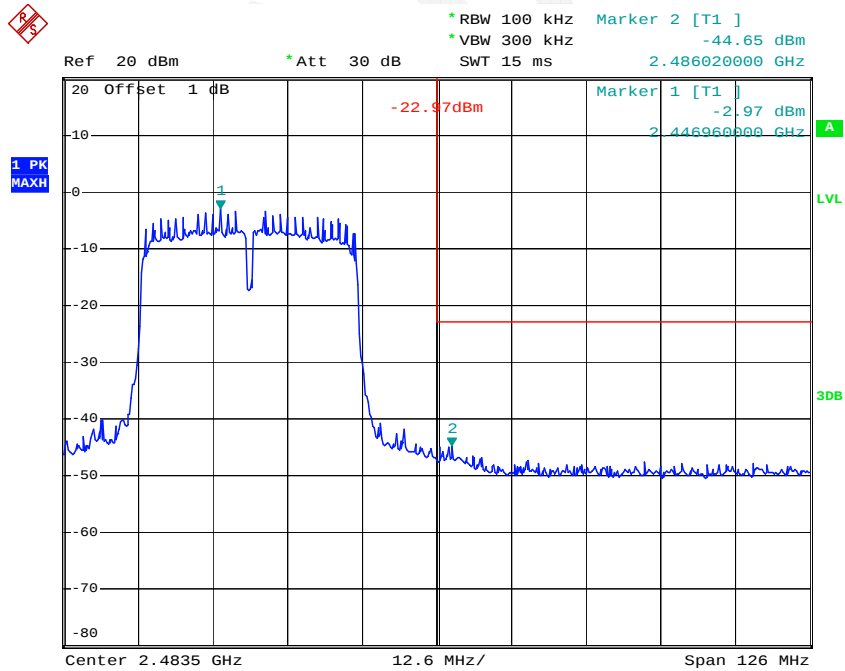

Date: 24.MAY.2015 19:09:52

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r02 clause10.2:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.3 °C
Relative Humidity:	56 %
ATM Pressure:	100.1 kPa

The testing was performed by Dean Liu on 2015-05-24.


Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots

Mode	Channel	Frequency	Power Spectral Density (dBm)			Limit
		MHz	Chain 0	Chain 1	Total	dBm/3kHz
802.11b	Low	2412	-15.19	-15.34	/	≤ 8
	Middle	2437	-15.11	-15.13	/	≤ 8
	High	2462	-15.04	-15.45	/	≤ 8
802.11g	Low	2412	-18.36	-18.27	/	≤ 8
	Middle	2437	-18.44	-18.52	/	≤ 8
	High	2462	-18.30	-18.45	/	≤ 8
802.11n20	Low	2412	-19.08	-19.21	-16.13	≤ 8
	Middle	2437	-19.40	-19.41	-16.39	≤ 8
	High	2462	-19.12	-19.14	-16.12	≤ 8
802.11n40	Low	2422	-18.56	-18.17	-15.35	≤ 8
	Middle	2437	-18.39	-18.10	-15.23	≤ 8
	High	2452	-18.10	-18.41	-15.24	≤ 8


Note: 1. Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi
 $= 5\text{dBi} < 6\text{dBi}$, so no limit reduced.
 2. Duty cycle is 100%.

Power Spectral Density, 802.11b Low Channel – Chain0

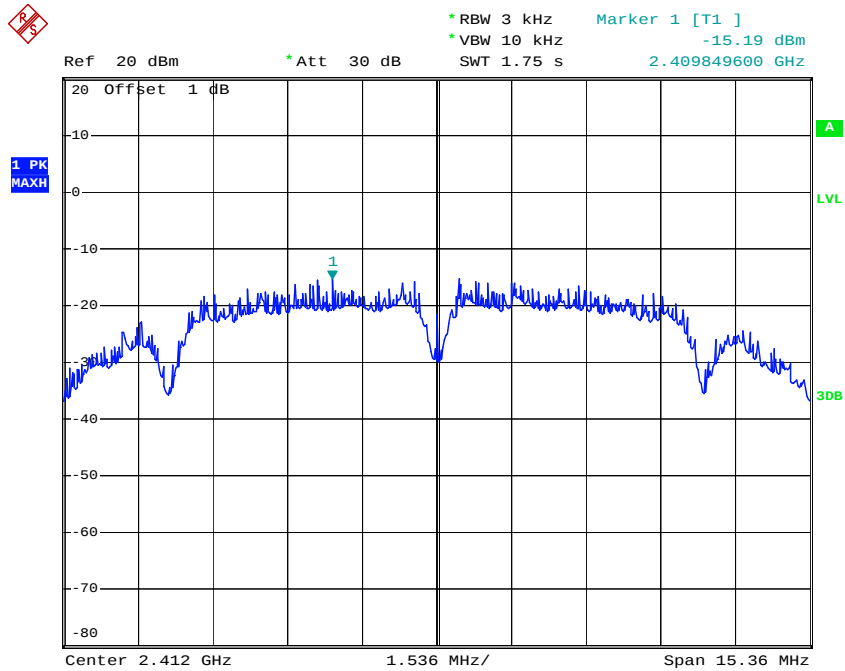


Date: 24.MAY.2015 17:33:22

Power Spectral Density, 802.11b Middle Channel – Chain0

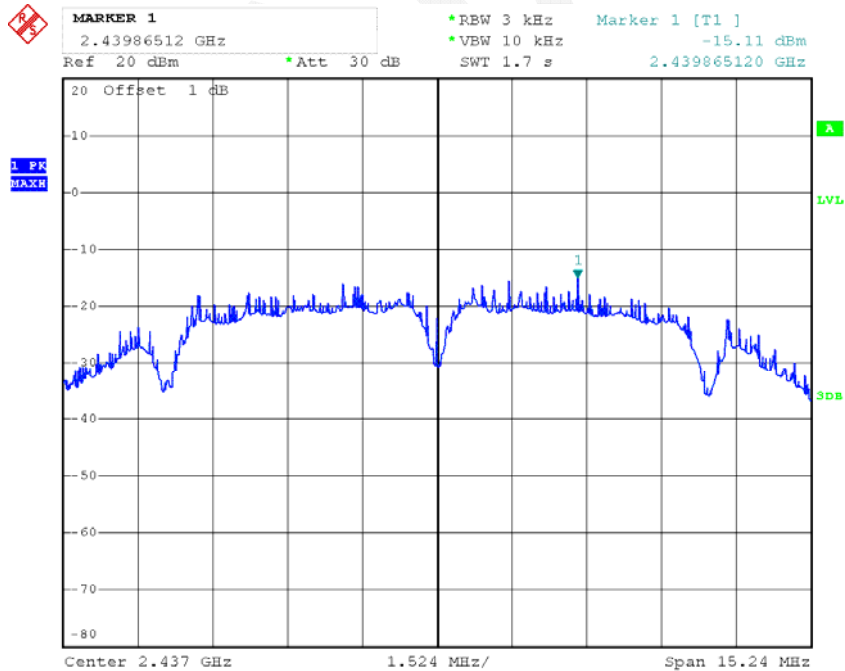


Date: 24.MAY.2015 17:28:57

Power Spectral Density, 802.11b High Channel – Chain0

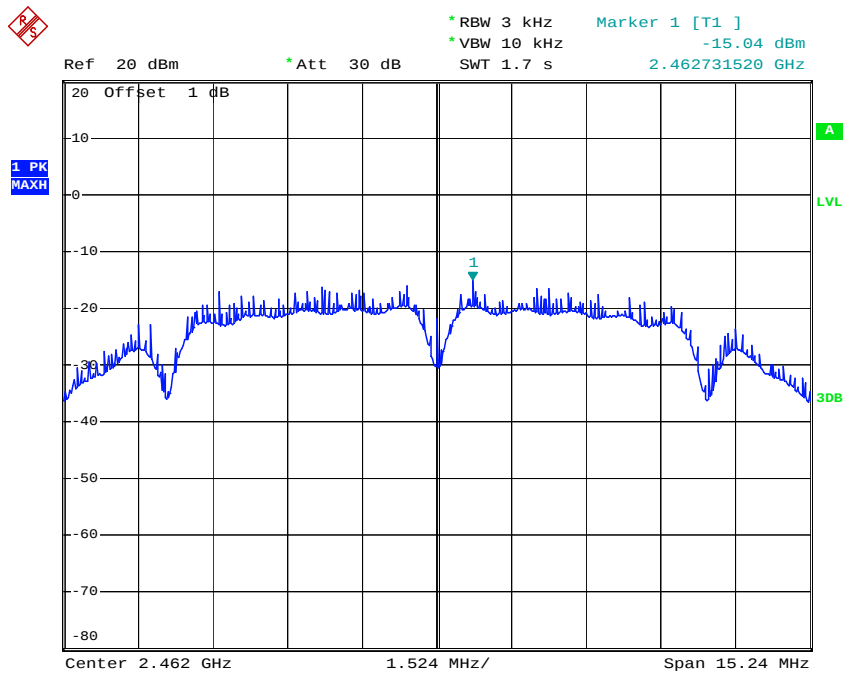


Date: 24.MAY.2015 17:23:18

Power Spectral Density, 802.11g Low Channel – Chain0

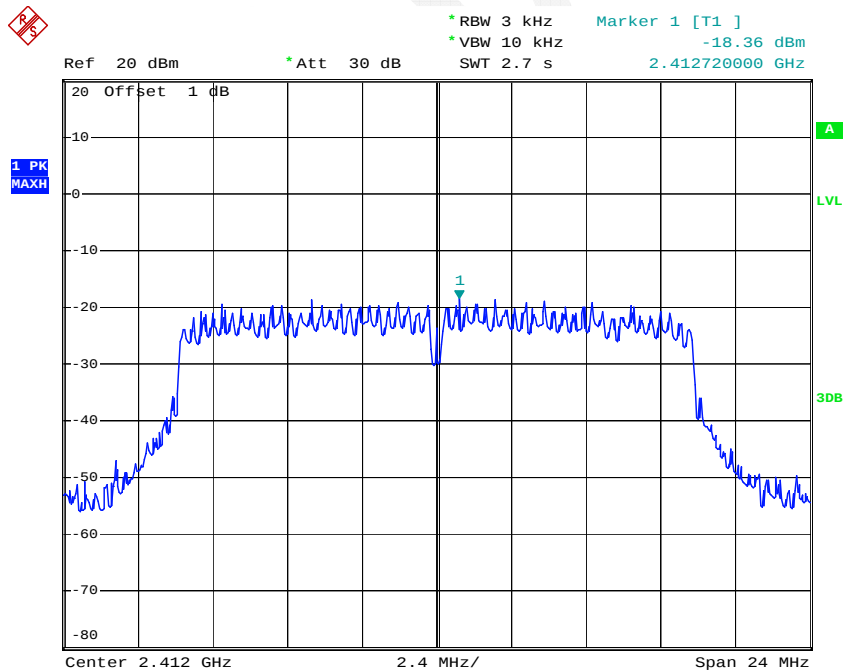


Date: 24.MAY.2015 17:07:54

Power Spectral Density, 802.11g Middle Channel – Chain0

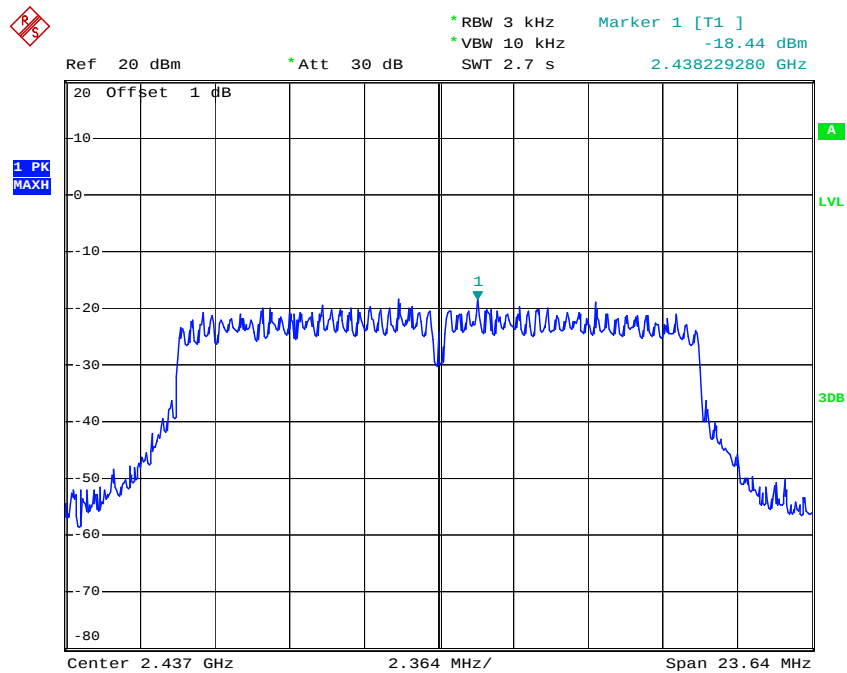


Date: 24.MAY.2015 17:10:50

Power Spectral Density, 802.11g High Channel – Chain0

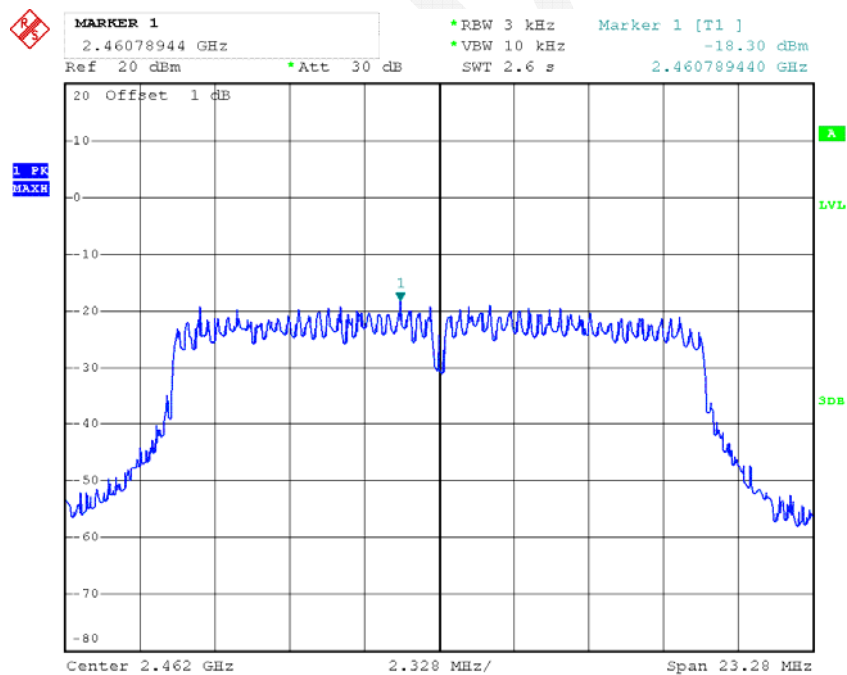


Date: 24.MAY.2015 17:18:33

Power Spectral Density, 802.11n ht20 Low Channel – Chain0

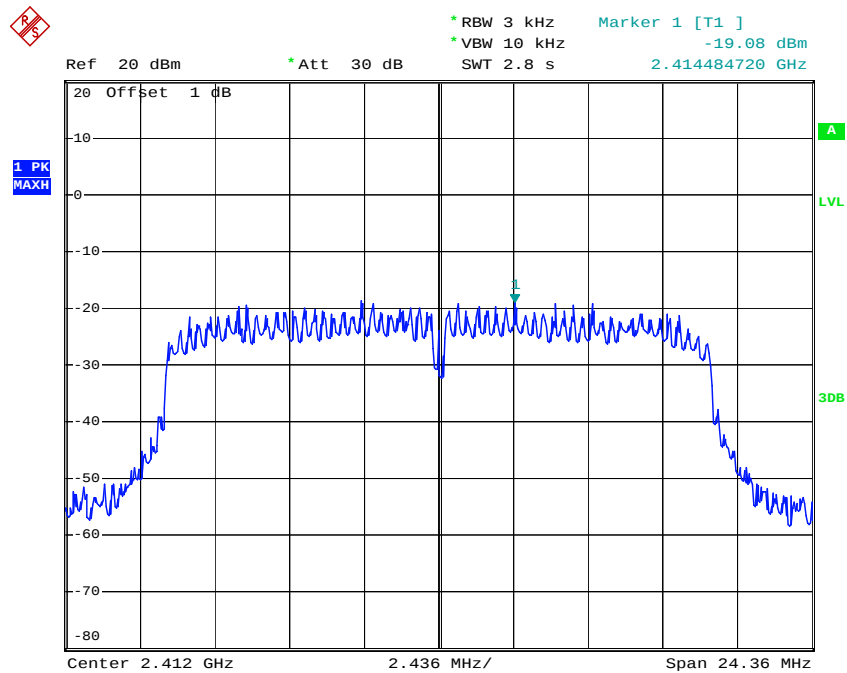


Date: 24.MAY.2015 16:54:28

Power Spectral Density, 802.11n ht20 Middle Channel – Chain0

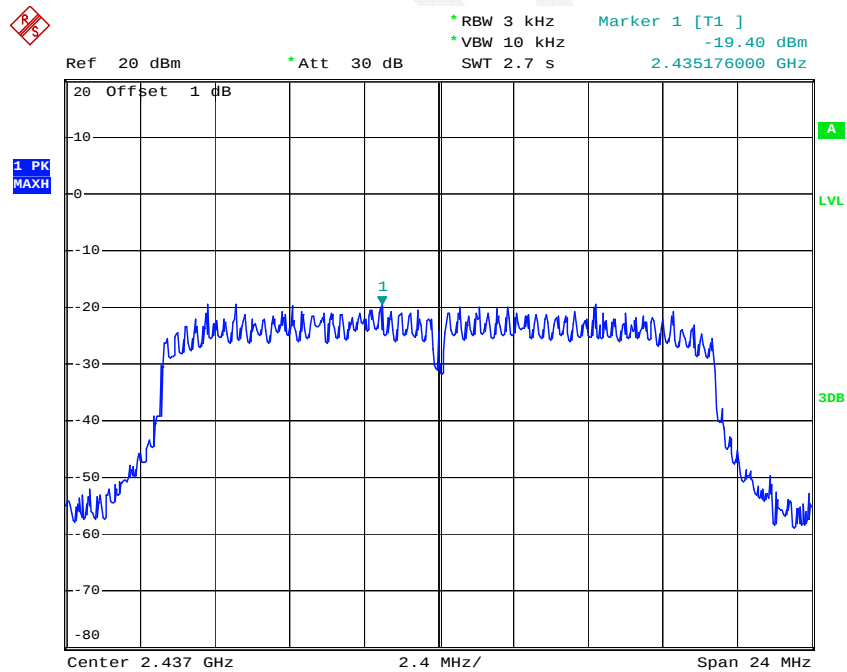


Date: 24.MAY.2015 17:01:14

Power Spectral Density, 802.11n ht20 High Channel – Chain0

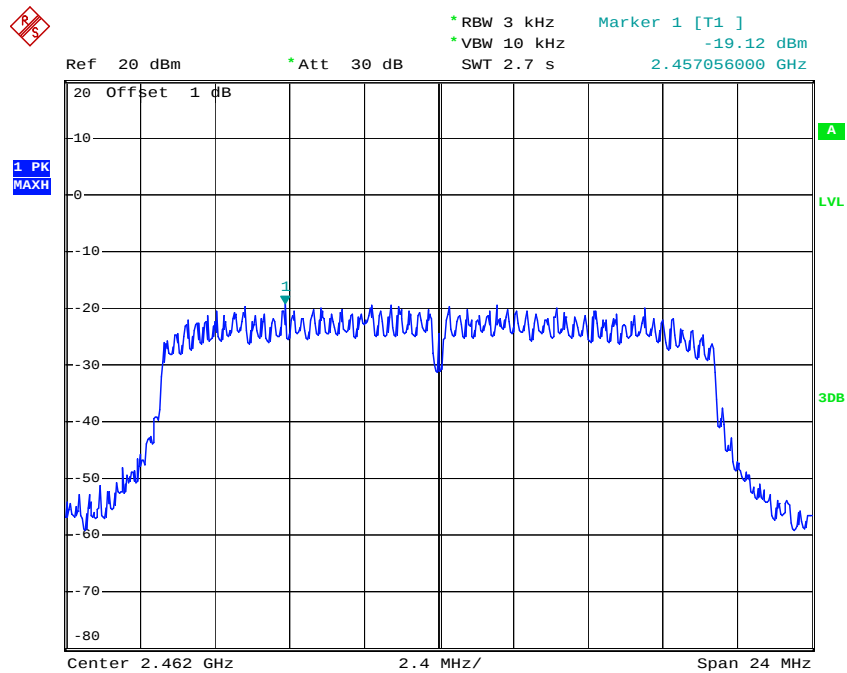


Date: 24.MAY.2015 17:04:02

Power Spectral Density, 802.11n ht40 Low Channel – Chain0

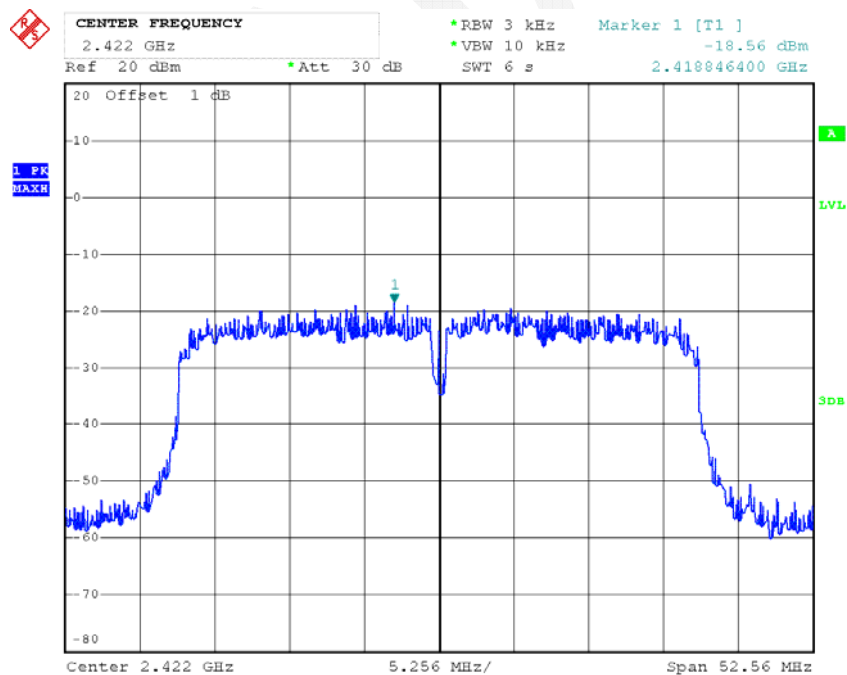


Date: 24.MAY.2015 16:48:55

Power Spectral Density, 802.11n ht40 Middle Channel – Chain0

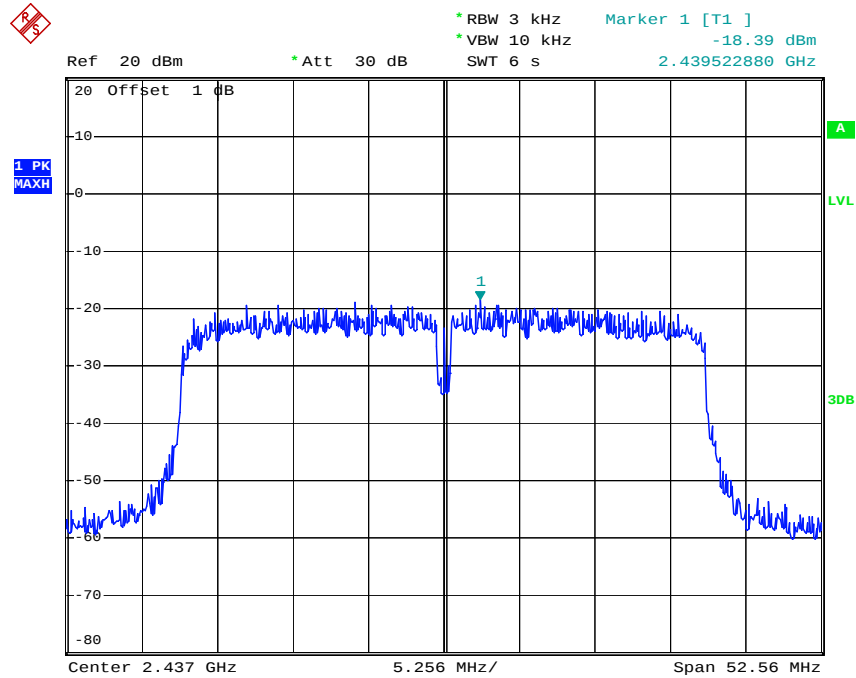


Date: 24.MAY.2015 16:43:01

Power Spectral Density, 802.11n ht40 High Channel – Chain0

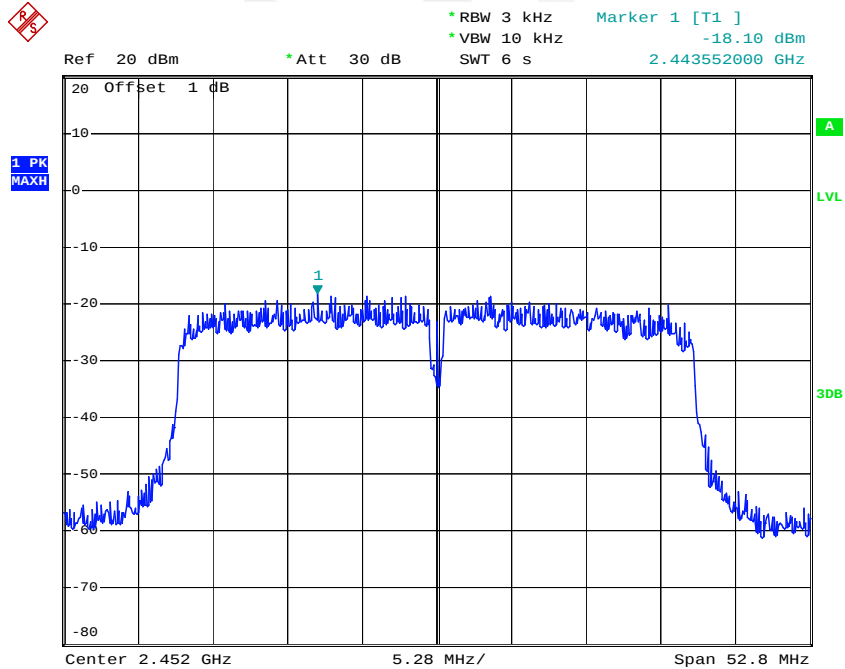


Date: 24.MAY.2015 16:37:33

Power Spectral Density, 802.11b Low Channel – Chain1

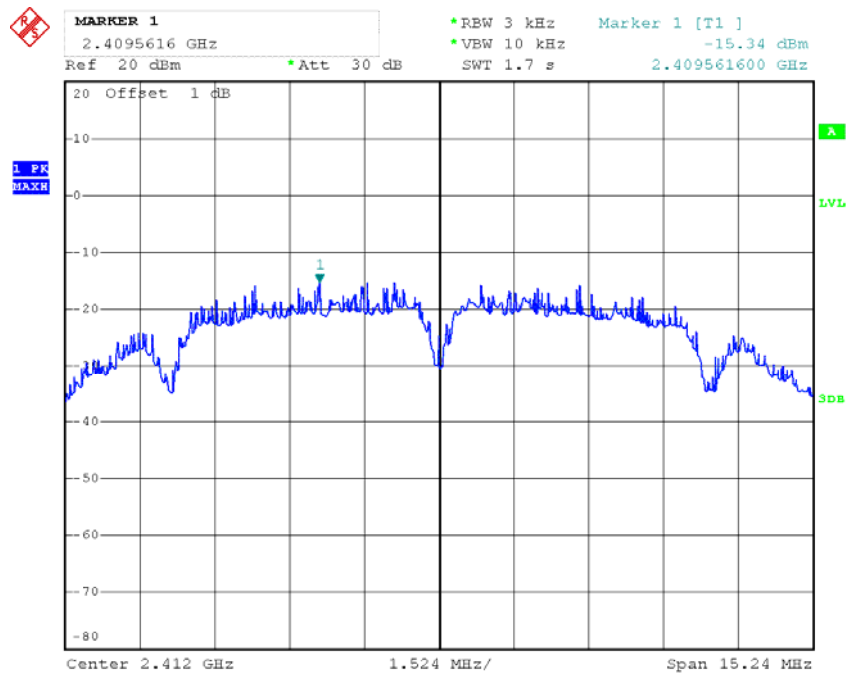


Date: 24.MAY.2015 17:47:27

Power Spectral Density, 802.11b Middle Channel – Chain1

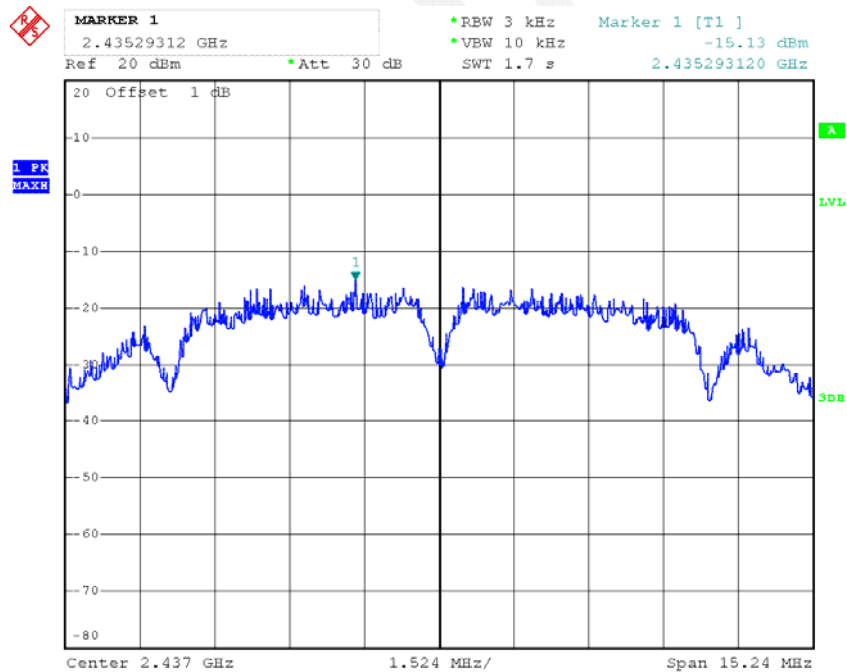


Date: 24.MAY.2015 17:52:58

Power Spectral Density, 802.11b High Channel – Chain1

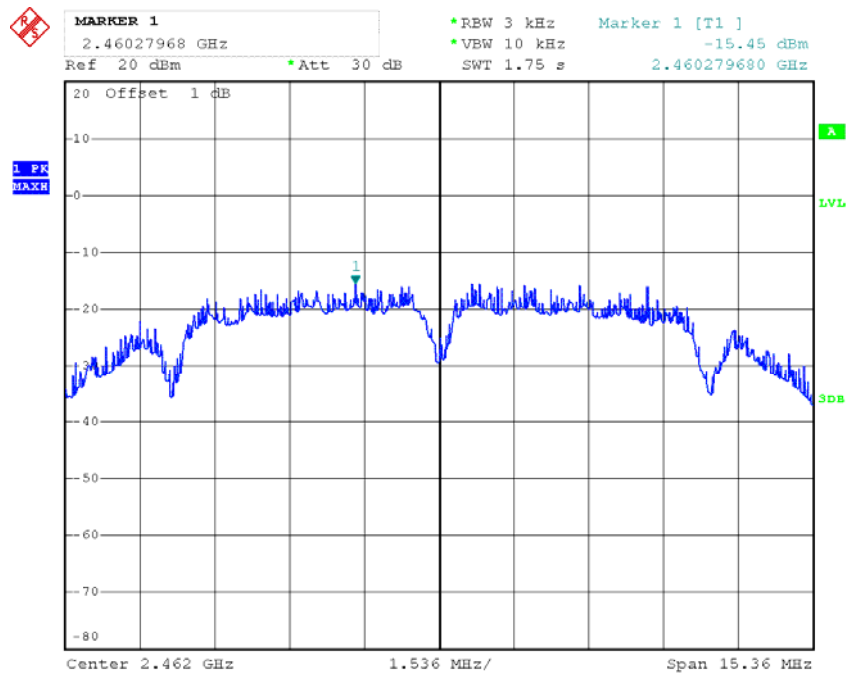


Date: 24.MAY.2015 18:01:04

Power Spectral Density, 802.11g Low Channel – Chain1

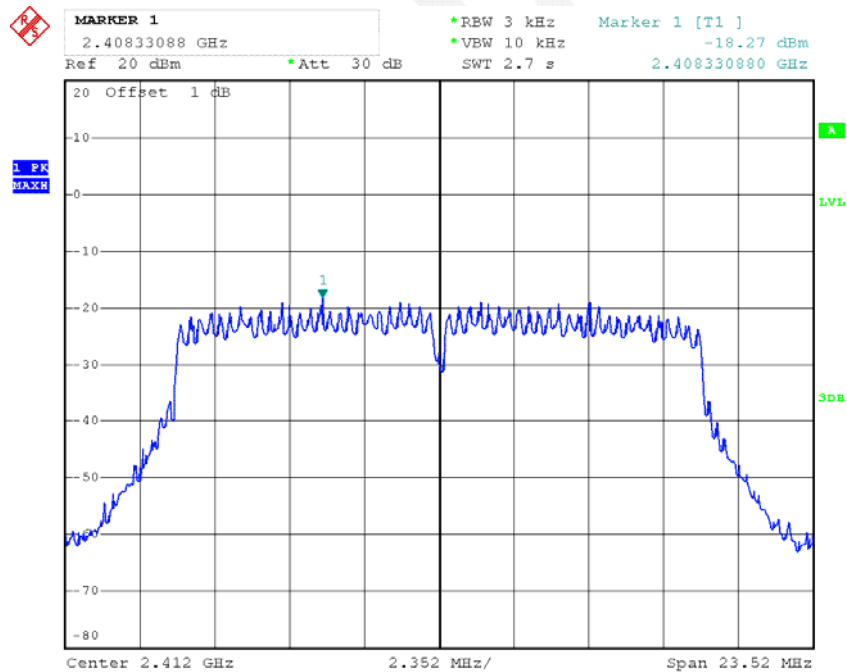


Date: 24.MAY.2015 18:14:53

Power Spectral Density, 802.11g Middle Channel – Chain1

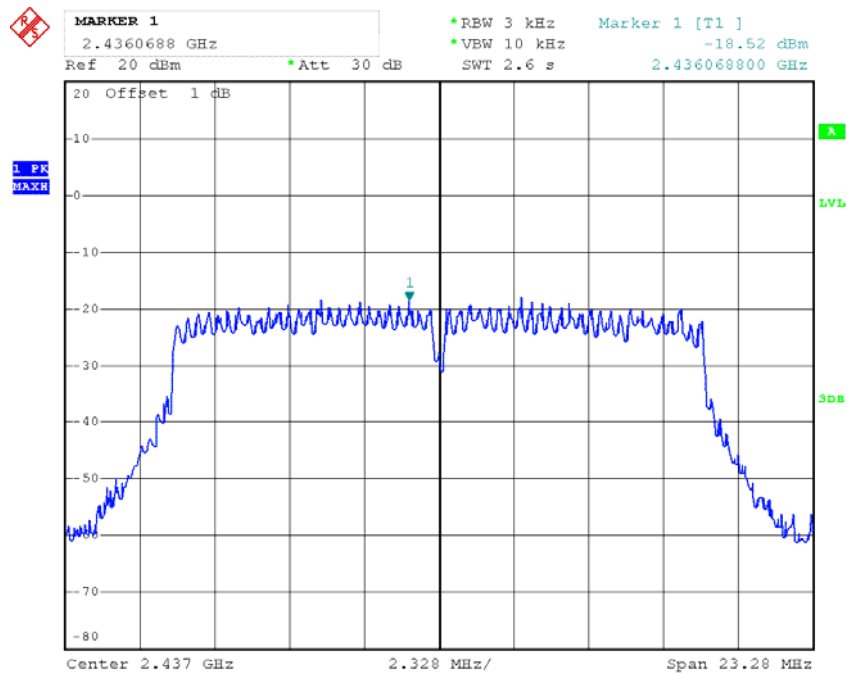


Date: 24.MAY.2015 18:20:08

Power Spectral Density, 802.11g High Channel – Chain1

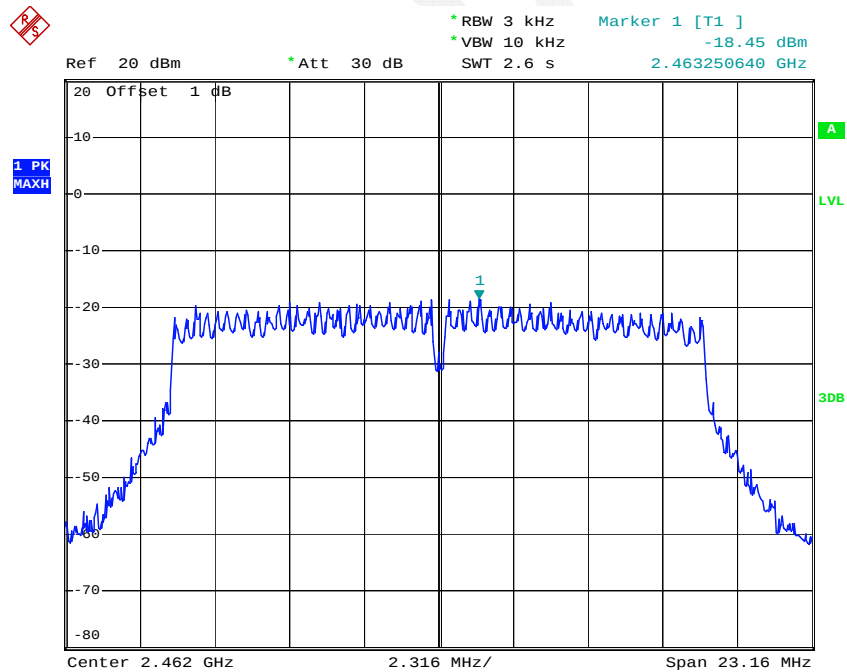


Date: 24.MAY.2015 18:24:41

Power Spectral Density, 802.11n ht20 Low Channel – Chain1

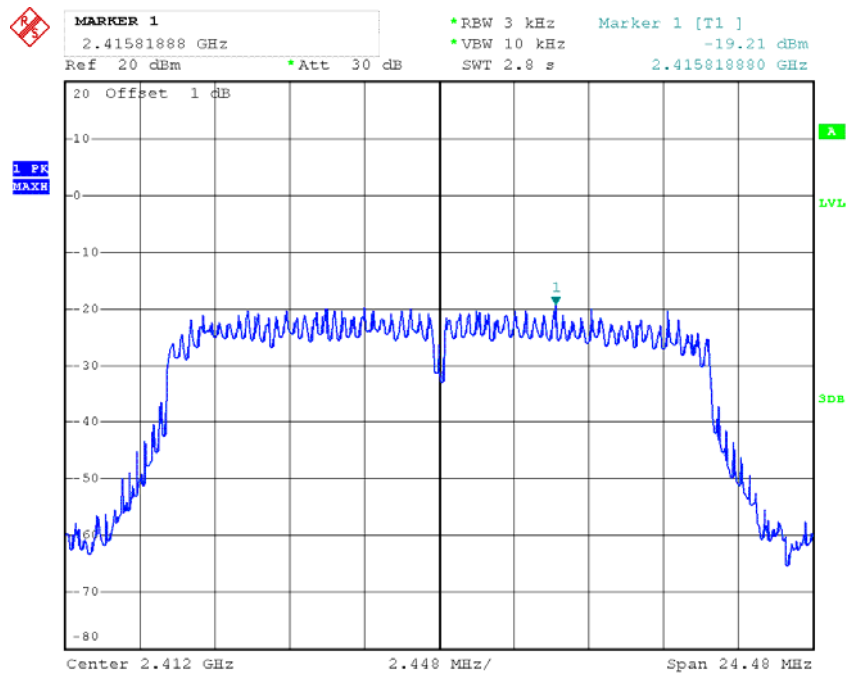


Date: 24.MAY.2015 18:55:31

Power Spectral Density, 802.11n ht20 Middle Channel – Chain1

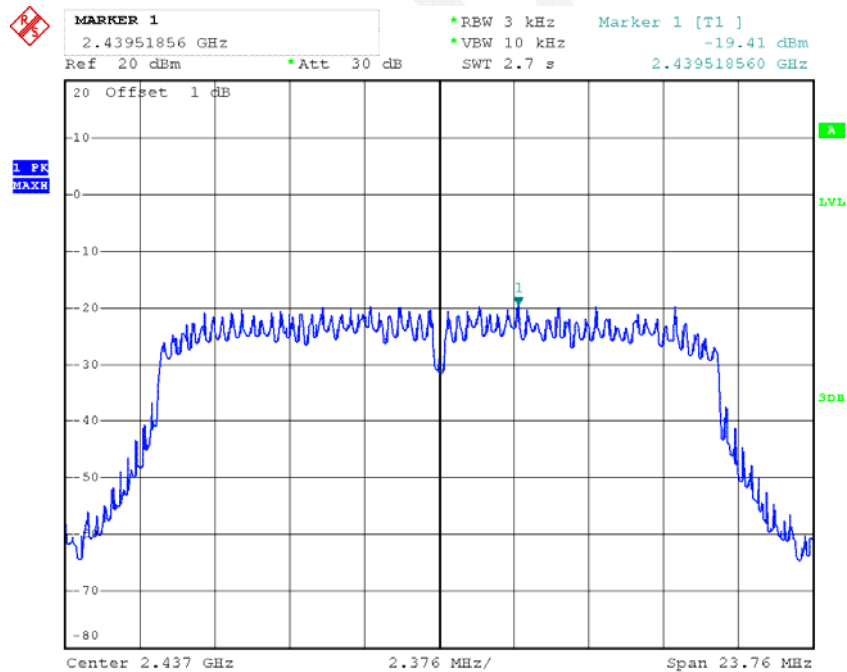


Date: 24.MAY.2015 18:49:39

Power Spectral Density, 802.11n ht20 High Channel – Chain1

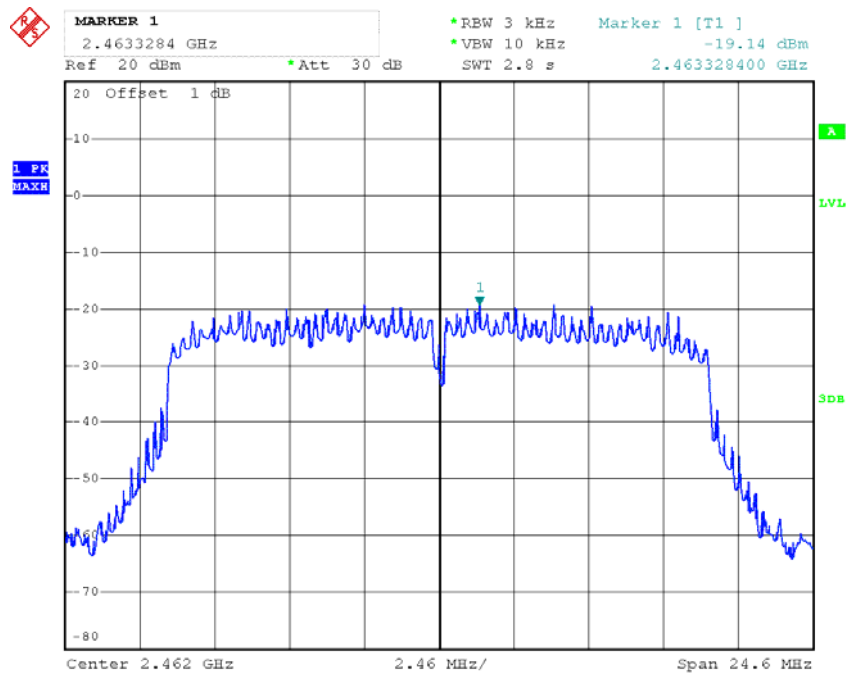


Date: 24.MAY.2015 18:42:57

Power Spectral Density, 802.11n ht40 Low Channel – Chain1

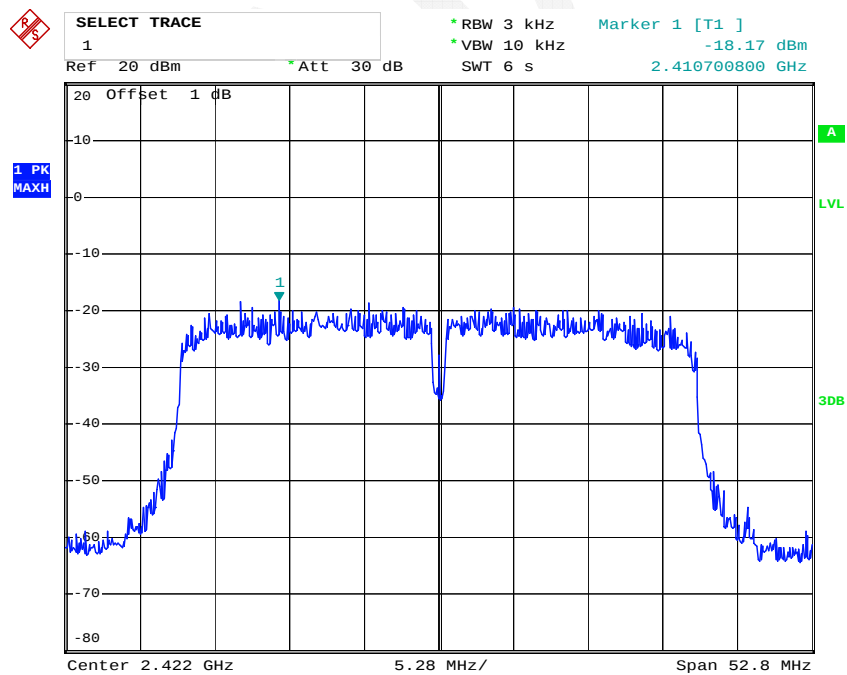


Date: 24.MAY.2015 19:01:04

Power Spectral Density, 802.11n ht40 Middle Channel – Chain1

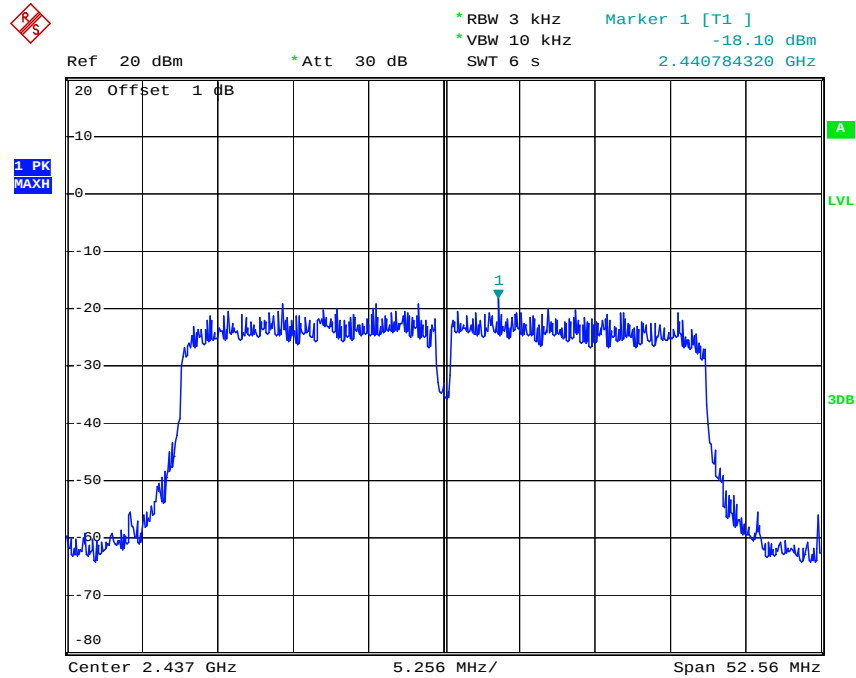

Date: 24.MAY.2015 19:04:41

Power Spectral Density, 802.11n ht40 High Channel – Chain1

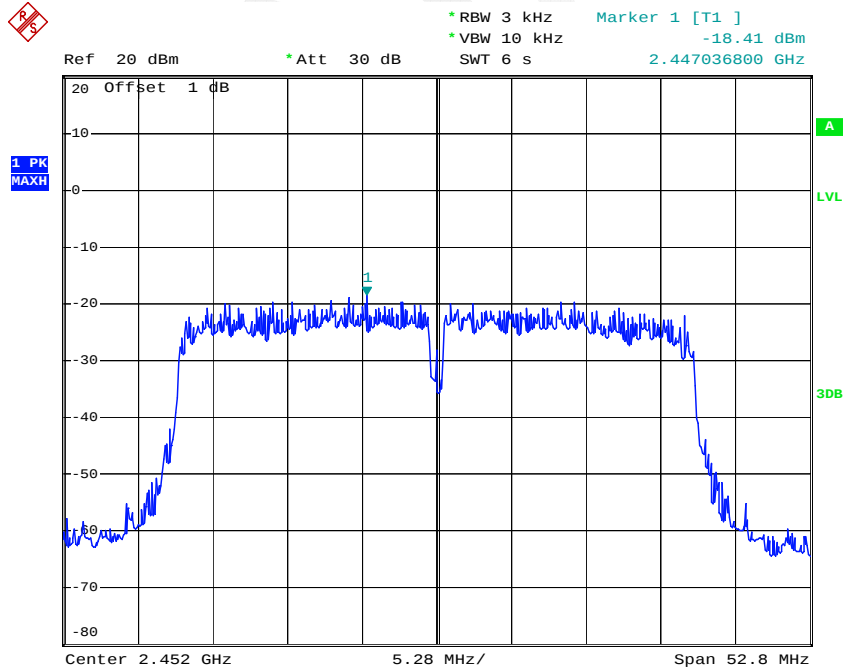

Date: 24.MAY.2015 19:09:24

DECLARATION LETTER



Declaration of Alteration

To Whom It May Concern,

We, Iconnect, hereby declare that there are some differences between our Multiple Models and testing products. Details as below:

(This is for your reference only.)

(This is for your reference only.)

Products Description	Name	802.11abgn Long-Range USB Adapter Dual-Band 2.4GHz/5GHz		
	Brand	ALFA		
	Manufacturer	Iconnect		
	Project No.	RDG150512002		
Differences Description				
Testing Products	Multiple Models		Differences Items	Details
AWUS052NH	AWUS051NH V2,AWUS052NH V2, AWUS052NHS,AWUS052NHS V2, AWUS053NH,AWUS053NH V2, AWUS053NHS,AWUS053NHS V2, AWUS054NH,AWUS054NH V2, AWUS054NHS,AWUS054NHS V2, AWUS036ACH,AWUS036ACH V2, NU52,NU52 V2,NU52S,NU52S V2, NU53,NU53 V2,NU53S,NU53S V2, NU52AC,NU52AC V2,NU52ACS, NU52ACS V2,UBDO-25,UBDO-25 V2, UBDO-25t,UBDO-25t V2,UBDO-25M, UBDO-25M V2,UBDO-25Mt,UBDO-25Mt V2,Tube-U52,Tube-U52 V2,UBDO-AC, UBDO-AC V2,Tube-AC,Tube-AC V2,UBDO-ACT,UBDO-ACT V2		Model name	They are the same product, and just have the different model name.

Notes: Testing products-the products tested by BACL

Multiple Model- have the same or similar appearance, structure, PCB, Material and function to the testing products, and only are different for little parameters.

Besides the differences in the table above, we declare the products are identical

We guarantee all the information provided above is true, and notice that we'll bear all the consequences caused by any false information or concealing

Best Regards,

Signature:

A handwritten signature in black ink, consisting of several overlapping loops and a long horizontal stroke extending to the right.

Print Name: Johnson Wang
Title: Manager

***** END OF REPORT *****