



RADIO TEST REPORT

Test Report No. : 12920932S-B-R1

Applicant : Sony Corporation
Type of Equipment : Wireless Noise Canceling Stereo Headset
Model No. : WH-H910N
FCC ID : AK8WHH910N
Test regulation : FCC Part 15 Subpart C: 2019
*Bluetooth BDR/EDR part
Test Result : Complied (Refer to SECTION 3.2)

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
6. This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. The all test items in this test report are conducted by UL Japan, Inc. Shonan EMC Lab.
8. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.
9. The information provided from the customer for this report is identified in SECTION 1.
10. This report is a revised version of 12920932S-B. 12920932S-B is replaced with this report.

Date of test: June 18 to 28, 2019

Representative test engineer:

Hiromasa Sato
Engineer
Consumer Technology Division

Approved by:

Toyokazu Imamura
Leader
Consumer Technology Division



CERTIFICATE 1266.03

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
- ☒ There is no testing item of "Non-accreditation".

UL Japan, Inc.
Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN
Telephone : +81 463 50 6400
Facsimile : +81 463 50 6401

Facsimile : +81 463 50 6401

CONTENTS	PAGE
SECTION 1: Customer information.....	4
SECTION 2: Equipment under test (E.U.T.).....	4
SECTION 3: Test specification, procedures & results.....	5
SECTION 4: Operation of E.U.T. during testing.....	8
SECTION 5: Radiated Spurious Emission	10
SECTION 6: Antenna Terminal Conducted Tests.....	12
APPENDIX 1: Test data	13
20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation.....	13
Number of Hopping Frequency	17
Dwell time.....	19
Maximum Peak Output Power	22
Average Output Power	23
Radiated Spurious Emission	25
Conducted Spurious Emission	36
Conducted Emission Band Edge compliance	42
APPENDIX 2: Test instruments	44
APPENDIX 3: Photographs of test setup	46
Radiated Spurious Emission	46
Worst Case Position	47

SECTION 1: Customer information

Company Name	:	Sony Corporation
Address	:	1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
Telephone Number	:	+604-3835075
Contact Person	:	Maizatul Akmal, Mat Zan

The information provided from the customer is as follows;

- Applicant, Type of Equipment, Model No., FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer information
- SECTION 2: Equipment under test (E.U.T.)
- SECTION 4: Operation of E.U.T. during testing

* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment	:	Wireless Noise Canceling Stereo Headset
Model No.	:	WH-H910N
Serial No.	:	Refer to SECTION 4.2
Rating	:	DC 3.7 V: Built-in lithium-ion rechargeable battery DC 5 V: When charged using USB
Receipt Date of Sample (Information from test lab.)	:	June 3, 2019
Country of Mass-production	:	Malaysia
Condition of EUT	:	Engineering prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT	:	No Modification by the test lab

2.2 Product Description

Model: WH-H910N (referred to as the EUT in this report) is a Wireless Noise Canceling Stereo Headset.

Radio Specification

Radio Type	:	Transceiver
Frequency of Operation	:	2402 MHz - 2480 MHz
Modulation	:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Power Supply (radio part input)	:	DC 1.45 V
Antenna type	:	Chip Antenna
Antenna Gain	:	1.6 dBi
Clock frequency	:	X201: 26 MHz (crystal)

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C
FCC Part 15 final revised on June 4, 2019 and effective July 5, 2019 except 15.258

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.247 Operation within the bands 902-928MHz,
2400-2483.5MHz, and 5725-5850MHz

* The revision on June 4, 2019, does not affect the test specification applied to the EUT.

* Also the EUT complies with FCC Part 15 Subpart B.

3.2 Procedures and results

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods IC: RSS-Gen 8.8	FCC: Section 15.207 IC: RSS-Gen 8.8	N/A	N/A *1)	-
Carrier Frequency Separation	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 IC: -	FCC: Section15.247(a)(1) IC: RSS-247 5.1 (b)	See data.	Complied a)	Conducted
20dB Bandwidth	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 IC: -	FCC: Section15.247(a)(1) IC: RSS-247 5.1 (a)		Complied a)	Conducted
Number of Hopping Frequency	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 IC: -	FCC: Section15.247(a)(1)(iii) IC: RSS-247 5.1 (d)		Complied b)	Conducted
Dwell time	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 IC: -	FCC: Section15.247(a)(1)(iii) IC: RSS-247 5.1 (d)		Complied c)	Conducted
Maximum Peak Output Power	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 IC: RSS-Gen 6.12	FCC: Section15.247(a)(b)(1) IC: RSS-247 5.4 (b)		Complied d)	Conducted
Spurious Emission & Band Edge Compliance	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 IC: RSS-Gen 6.13	FCC: Section15.247(d) IC: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10	9.6 dB 9764.00 MHz, AV, Hori. Mode: Tx, Hopping Off, 3DH5 2441 MHz 9920.00 MHz, AV, Ver Mode: Tx, Hopping Off, 3DH5 2480 MHz	Complied e) / f)	Conducted/ Radiated (above 30 MHz) *2)

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

*1) The EUT operates with a battery. AC Line can be connected to the EUT via other device's USB port; however, the EUT stops transmission during recharging. Therefore, the test is not applicable to the EUT.

*2) Radiated test was selected over 30 MHz based on section 15.247(d)

a) Refer to APPENDIX 1 (data of 20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation)

b) Refer to APPENDIX 1 (data of Number of Hopping Frequency)

c) Refer to APPENDIX 1 (data of Dwell time)

d) Refer to APPENDIX 1 (data of Maximum Peak Output Power)

e) Refer to APPENDIX 1 (data of Conducted Spurious Emission)

f) Refer to APPENDIX 1 (data of Radiated Spurious Emission)

Symbols:

Complied The data of this test item has enough margin, more than the measurement uncertainty.

Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.

* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

FCC Part 15.31 (e)

The EUT is a battery-operated device and test was performed with the full-charged battery. Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99% Occupied Bandwidth	RSS-Gen 6.7	IC: -	N/A	Complied a)	Conducted
Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422. a) Refer to APPENDIX 1 (data of 20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation)					

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

There is no applicable rule of uncertainty in this applied standard. Therefore, the results are derived depending on whether or not laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.

Shonan EMC Lab.

Item	Frequency range	Uncertainty (+/-)			
		No. 1 SAC / SR	No. 2 SAC / SR	No. 3 SAC / SR	No. 4 SAC / SR
Conducted emission (AC Mains) LISN	150 kHz-30 MHz	2.9 dB	2.8 dB	2.9 dB	2.9 dB
Radiated emission (Measurement distance: 3 m)	9 kHz-30 MHz	3.0 dB	3.0 dB	3.1 dB	-
	30 MHz-200 MHz	4.6 dB	4.6 dB	4.7 dB	-
	200 MHz-1 GHz	6.0 dB	6.0 dB	6.1 dB	-
	1 GHz-6 GHz	4.8 dB	4.8 dB	4.8 dB	-
	6 GHz-18 GHz	5.4 dB	5.4 dB	5.4 dB	-
Radiated emission (Measurement distance: 1 m)	18 GHz-40 GHz	5.6 dB	5.6 dB	5.6 dB	-
	1 GHz-18 GHz	5.7 dB	5.7 dB	5.7 dB	-
	18 GHz-40 GHz	5.9 dB	5.9 dB	5.9 dB	-

SAC=Semi-Anechoic Chamber

SR= Shielded Room is applied besides radiated emission

Antenna terminal test	Uncertainty (+/-)
Power Measurement above 1 GHz (Average Detector)_SPM-06	0.81 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-06	1.53 dB
Power Measurement above 1 GHz (Average Detector)_SPM-07	0.95 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-07	1.21 dB
Power Measurement above 1 GHz (Average Detector)_SPM-13	0.90 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-13	1.04 dB
Spurious emission (Conducted) below 1GHz	1.8 dB
Spurious emission (Conducted) 1 GHz-3 GHz	1.7 dB
Spurious emission (Conducted) 3 GHz-18 GHz	2.3 dB
Spurious emission (Conducted) 18 GHz-26.5 GHz	2.4 dB
Spurious emission (Conducted) 26.5 GHz-40 GHz	2.4 dB
Bandwidth Measurement	0.61 %

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

3.5 Test Location

UL Japan, Inc. Shonan EMC Lab.

1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN

Telephone: +81 463 50 6400, Facsimile: +81 463 50 6401

A2LA Certificate Number: 1266.03 (FCC Test Firm Registration Number: 626366, ISED Lab Company Number: 2973D)

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
No.1 Semi-anechoic chamber	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.2 Semi-anechoic chamber	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.3 Semi-anechoic chamber	12.7 x 7.7 x 5.35	12.7 x 7.7	5 m
No.4 Semi-anechoic chamber	8.1 x 5.1 x 3.55	8.1 x 5.1	-
No.1 Shielded room	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.2 Shielded room	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.3 Shielded room	6.3 x 4.7 x 2.7	6.3 x 4.7	-
No.4 Shielded room	4.4 x 4.7 x 2.7	4.4 x 4.7	-
No.5 Shielded room	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.6 Shielded room	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.8 shielded room	3.45 x 5.5 x 2.4	3.45 x 5.5	-
No.1 Measurement room	2.55 x 4.1 x 2.5	-	-

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 4: Operation of E.U.T. during testing


4.1 Operating Mode(s)

Bluetooth (BT): Transmitting (Tx), Payload: PRBS9

Details of Operating Mode(s)

Test Item	Mode	Tested frequency
Spurious Emission (Radiated)	Tx (Hopping Off) DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
Carrier Frequency Separation	Tx (Hopping On) DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
20dB Bandwidth	Tx (Hopping Off) DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
Number of Hopping Frequency	Tx (Hopping On) DH5, 3DH5	-
Dwell time	Tx (Hopping On), -DH1, DH3, DH5 -3DH1, 3DH3, 3DH5	-
Maximum Peak Output Power	Tx (Hopping Off) DH5, 2DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
Band Edge Compliance (Conducted)	Tx DH5, 3DH5 -Hopping On -Hopping Off	2402 MHz 2480 MHz
99% Occupied Bandwidth	Tx DH5, 3DH5 -Hopping On -Hopping Off	2402 MHz 2441 MHz 2480 MHz
*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload length (except Dwell time test) *2DH mode (2Mb/s EDR: pi/4DQPSK) was excluded for other tests than power measurement by using 3DH mode (3 Mb/s EDR: 8DPSK) as a representative. * It is considered that the non-tested packet type (e.g. inquiry) can be omitted as it is complied with above all test items based on Bluetooth Core specification. *EUT has the power settings by the software as follows; Power settings: BDR: Tx Power Level 6 EDR: Tx Power Level 6 Software: WCN Combo Tool, Ver 2.1749.00 *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.		

4.2 Configuration and peripherals



* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Wireless Noise Cancelling Stereo Headset	WH-H910N	1000079 *1) 1000073 *2)	Sony Corporation.	EUT

*1) Used for Antenna Terminal conducted test

*2) Used for Radiated Emission test

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	USB Cable	1.0	Shielded	Shielded	-
2	Audio Cable	1.0	Shielded	Shielded	-

SECTION 5: Radiated Spurious Emission

Test Procedure

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.


20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9 (IC) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (IC).

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV *1)	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	RBW: 1 MHz VBW: 1/T (T: burst length, refer to Bur rate confirmation sheet) Detector: Peak	RBW: 100 kHz VBW: 300 kHz

*1) Average Power Measurement was performed based on KDB 558074 D01 15.247 Meas Guidance v05r02.

Figure 1: Test Setup


Below 1 GHz

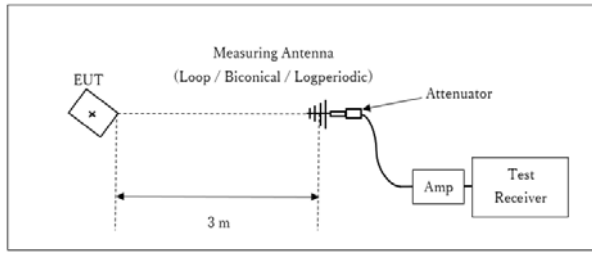

x : Center of turn table

Test Distance: 3 m

1 GHz - 13 GHz

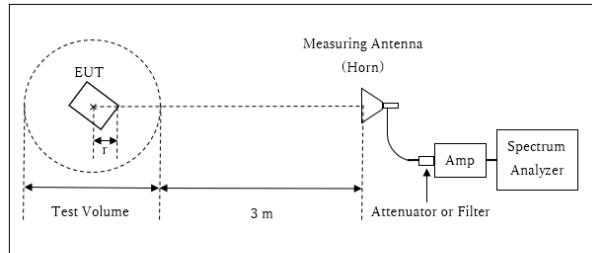

r : Radius of an outer periphery of EUT

x : Center of turn table

Distance Factor: $20 \times \log (3.91 \text{ m} / 3.0 \text{ m}) = 2.30 \text{ dB}$


* Test Distance: $(3 + \text{Test Volume} / 2) - r = 3.91 \text{ m}$

Test Volume : 2.0 m

(Test Volume has been calibrated based on CISPR 16-1-4.)

$r = 0.09 \text{ m}$

13 GHz - 26.5 GHz

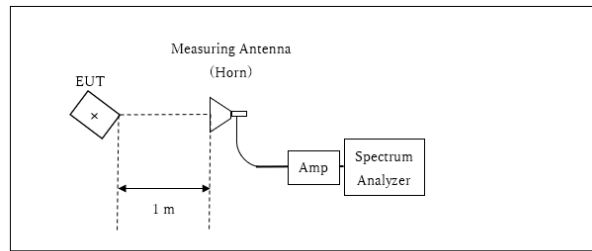

x : Center of turn table

Distance Factor: $20 \times \log (1.0 \text{ m} / 3.0 \text{ m}) = -9.54 \text{ dB}$

*Test Distance: 1 m

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Antenna polarization	Frequency				
	Below 1 GHz	1 GHz - 2.8 GHz	2.8 GHz - 13 GHz	13 GHz - 18 GHz	18 GHz - 26.5 GHz
Horizontal	Z	Z	X	X	X
Vertical	Z	X	Z	X	Z

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 30 MHz - 26.5 GHz

Test data : APPENDIX

Test result : Pass

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 6: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument used
20dB Bandwidth	3 MHz	30 kHz	100 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak Average *2)	-	Power Meter (Sensor: 160 MHz BW)
Carrier Frequency Separation	3 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Number of Hopping Frequency	30 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Dwell Time	Zero Span	100 kHz, 1 MHz	300 kHz, 3 MHz	As necessary capture the entire dwell time per hopping channel	Peak	Clear Write	Spectrum Analyzer
Conducted Spurious Emission *3)	9 kHz to 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz to 30 MHz	10 kHz	30 kHz				
	30 MHz to 25 GHz	100 kHz	300 kHz				
Conducted Spurious Emission Band Edge compliance	10 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
*1) Peak hold was applied as Worst-case measurement. *2) Reference data *3) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents. Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart. (9 kHz -150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 10kHz)							

The test results and limit are rounded off to two decimals place, so some differences might be observed.
 The equipment and cables were not used for factor 0 dB of the data sheets.

Test data : APPENDIX
 Test result : Pass

APPENDIX 1: Test data

20dB Bandwidth, 99% Occupied Bandwidth and Carrier Frequency Separation


Report No. 12920932S-B-R1
Test place Shonan EMC Lab. No.5 Shielded Room
Date June 28, 2019
Temperature / Humidity 26 deg. C / 49 % RH
Engineer Hiromasa Sato
Mode Tx, Hopping Off, Tx, Hopping On

Mode	Freq. [MHz]	20dB Bandwidth [MHz]	99% Occupied Bandwidth [kHz]	Carrier Frequency Separation [MHz]	Limit for Carrier Frequency separation [MHz]
DH5	2402.0	0.966	881.1018	1.000	≥ 0.644
DH5	2441.0	0.965	880.4522	0.995	≥ 0.643
DH5	2480.0	0.966	880.4275	0.995	≥ 0.644
DH5	Hopping On	80.866	78630.0	-	-
3DH5	2402.0	1.285	1166.2	1.000	≥ 0.857
3DH5	2441.0	1.286	1165.1	1.000	≥ 0.857
3DH5	2480.0	1.286	1165.6	0.995	≥ 0.857
3DH5	Hopping On	81.117	78765.1	-	-

Limit: Two-thirds of 20dB Bandwidth or 25kHz (whichever is greater).

No limit applies to 20dB Bandwidth.

20dB Bandwidth and 99% Occupied Bandwidth

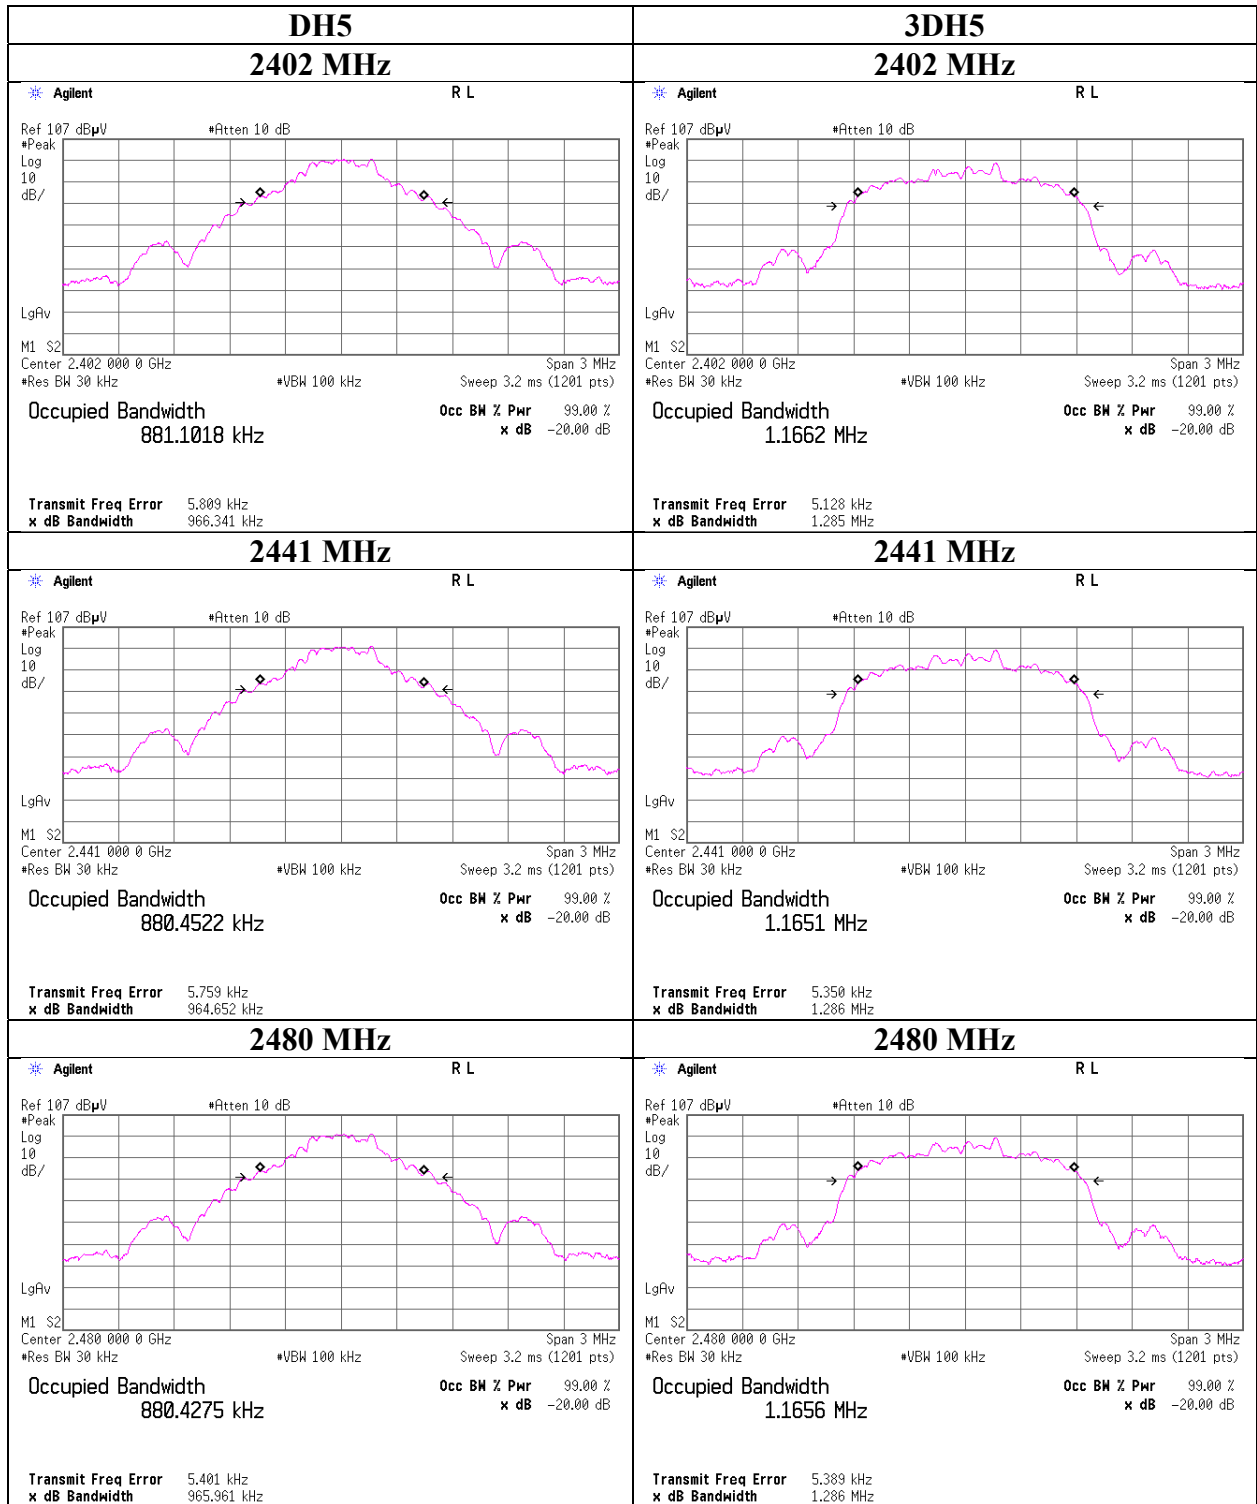

UL Japan, Inc.


Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

20dB Bandwidth and 99% Occupied Bandwidth

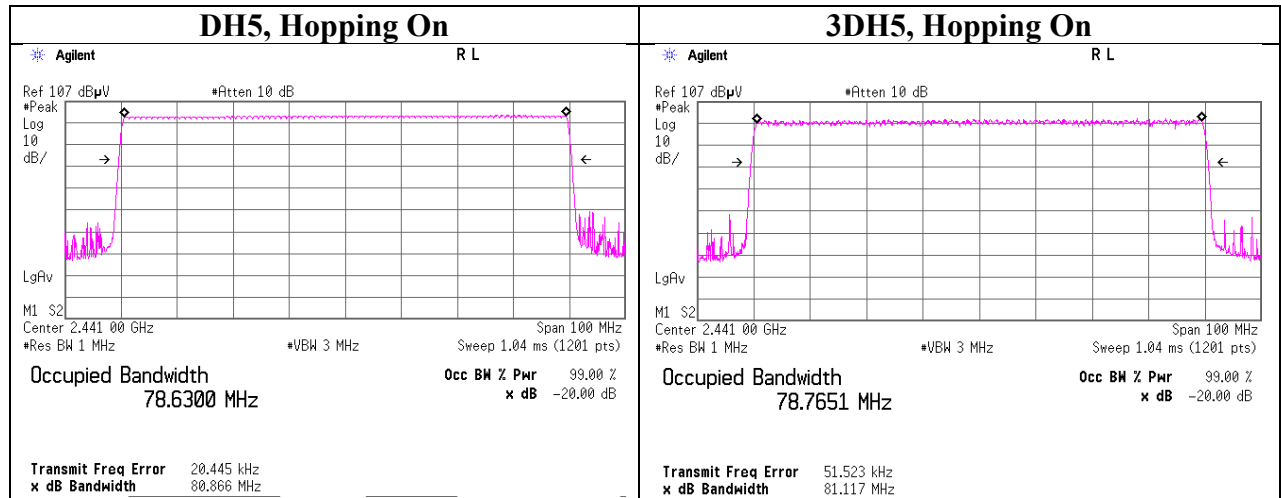

UL Japan, Inc.


Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Carrier Frequency Separation

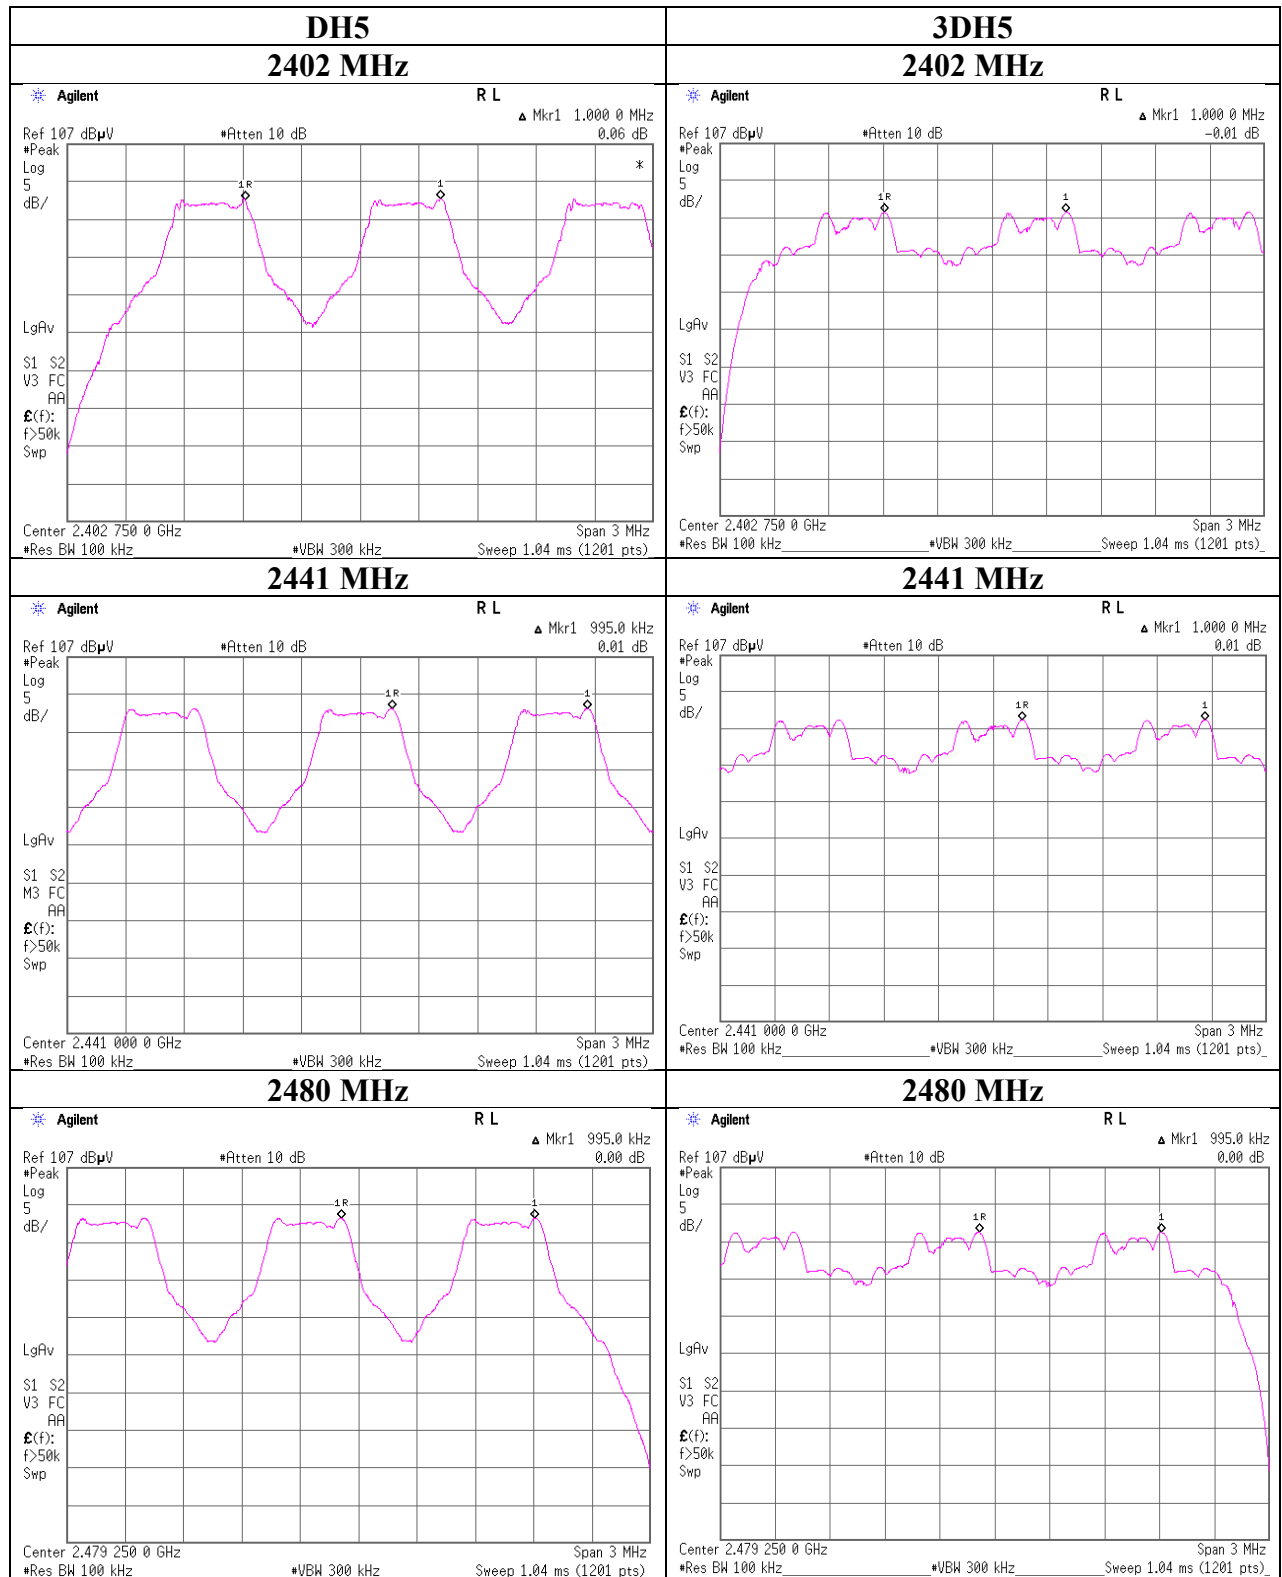

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401


Number of Hopping Frequency

Report No. 12920932S-B-R1
Test place Shonan EMC Lab. No.5 Shielded Room
Date June 28, 2019
Temperature / Humidity 26 deg. C / 49 % RH
Engineer Hiromasa Sato
Mode Tx, Hopping On

Mode	Number of channel [channels]	Limit [channels]
DH5	79	≥ 15
3DH5	79	≥ 15

Test was not performed at AFH mode whose number of hopping channel is 20 channels because this Bluetooth radio is in compliance of Bluetooth Specification.

Number of Hopping Frequency

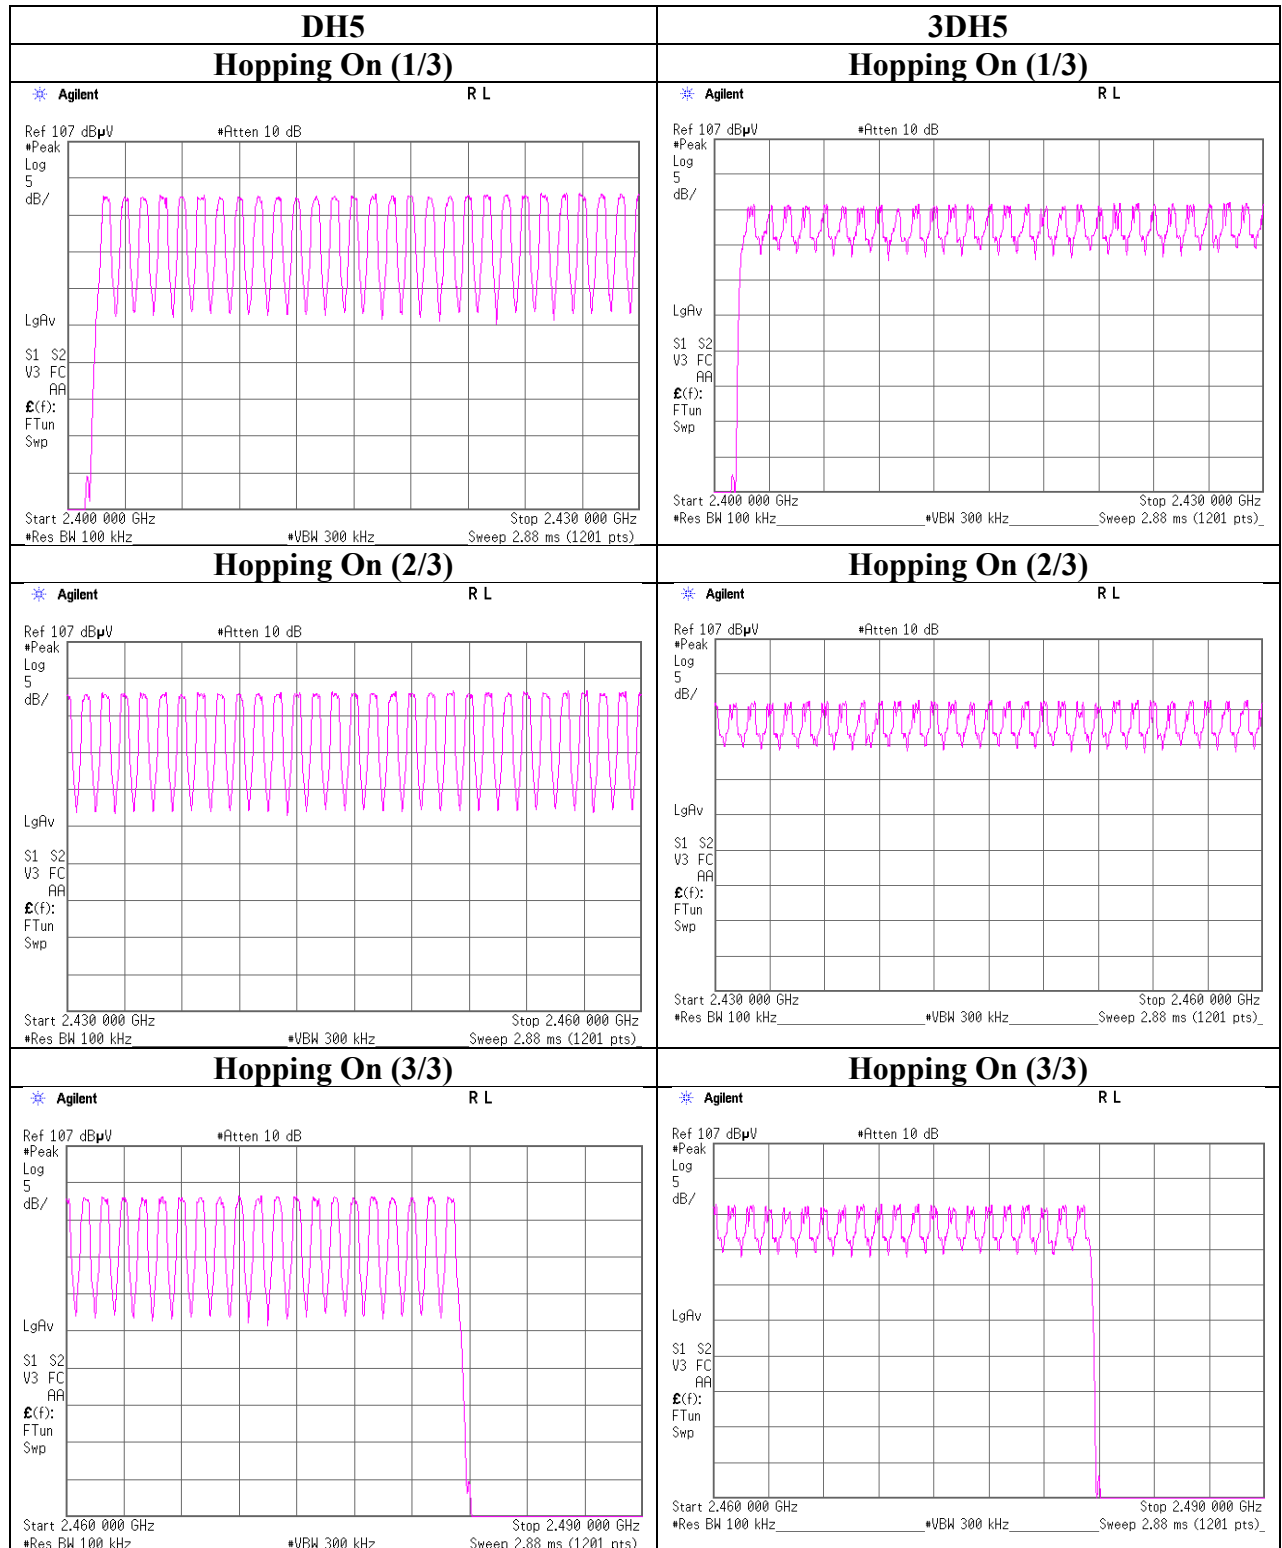

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Dwell time

Report No. 12920932S-B-R1
Test place Shonan EMC Lab. No.5 Shielded Room
Date June 28, 2019
Temperature / Humidity 26 deg. C / 49 % RH
Engineer Hiromasa Sato
Mode Tx, Hopping On

Mode	Number of transmission in a 31.6(79 Hopping x 0.4) / 12.8 (32 Hopping x 0.4) second period				Length of transmission [msec]	Result [msec]	Limit [msec]
DH1	50.2 times	/	5 sec.	x 31.6 sec. =	318 times	126	400
DH3	27.2 times	/	5 sec.	x 31.6 sec. =	172 times	284	400
DH5	20.0 times	/	5 sec.	x 31.6 sec. =	127 times	368	400
3DH1	50.0 times	/	5 sec.	x 31.6 sec. =	316 times	126	400
3DH3	24.0 times	/	5 sec.	x 31.6 sec. =	152 times	252	400
3DH5	19.6 times	/	5 sec.	x 31.6 sec. =	124 times	360	400

Sample Calculation

Result = Number of transmission x Length of transmission

*Average data of 5 tests.(except Inquiry)


Mode	Sampling [times]					Average [times]
	1	2	3	4	5	
DH1	50	49	52	52	48	50.2
DH3	29	27	28	26	26	27.2
DH5	20	21	18	22	19	20
3DH1	51	50	49	50	50	50
3DH3	23	25	26	26	20	24
3DH5	21	20	18	19	20	19.6

Sample Calculation


Average = Summation (Sampling 1 to 5) / 5

This device complies with the Bluetooth protocol for FHSS operation, employing a pseudo random channel selection and hopping rate to ensure that the occupancy time in $N \times 0.4s$, where N is the number of channels being used in the hopping sequence ($20 \leq N \leq 79$), is always less than $0.4s$ regardless of packet size. This is confirmed in the test report for $N = 79$.

Dwell time

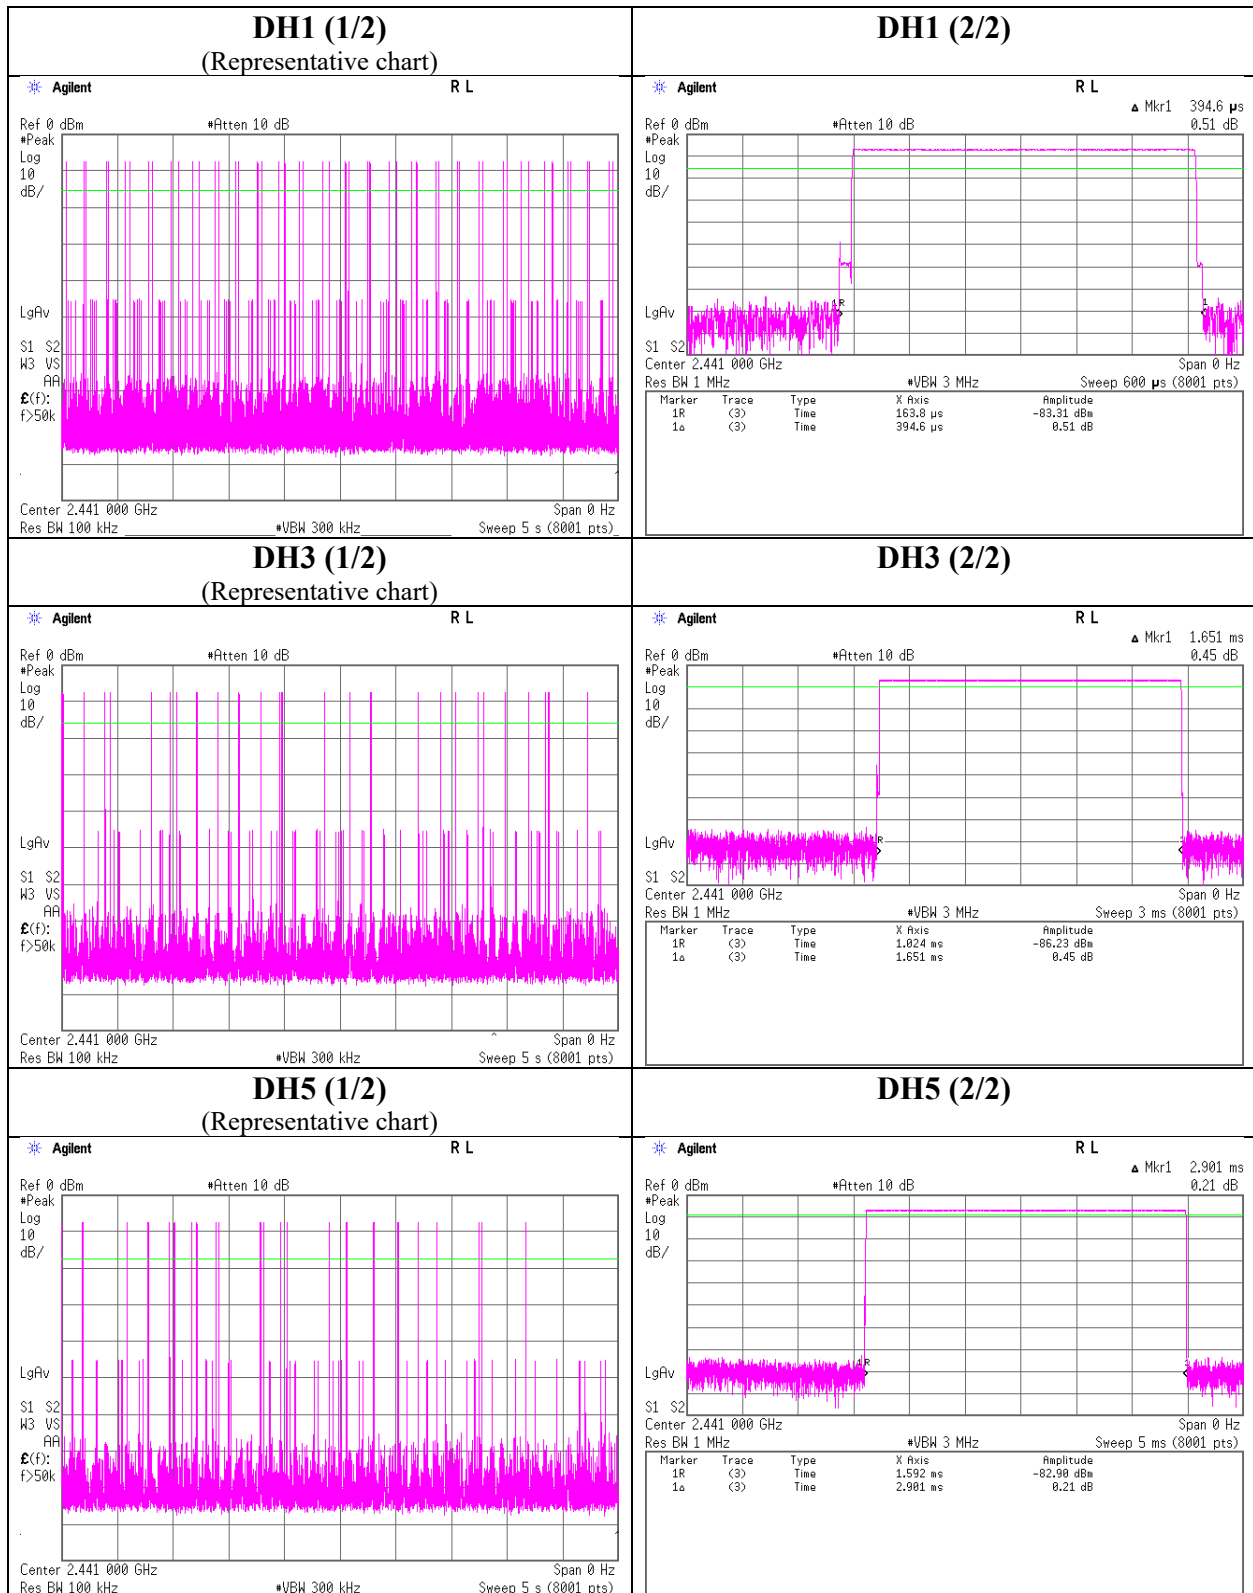

Dwell time

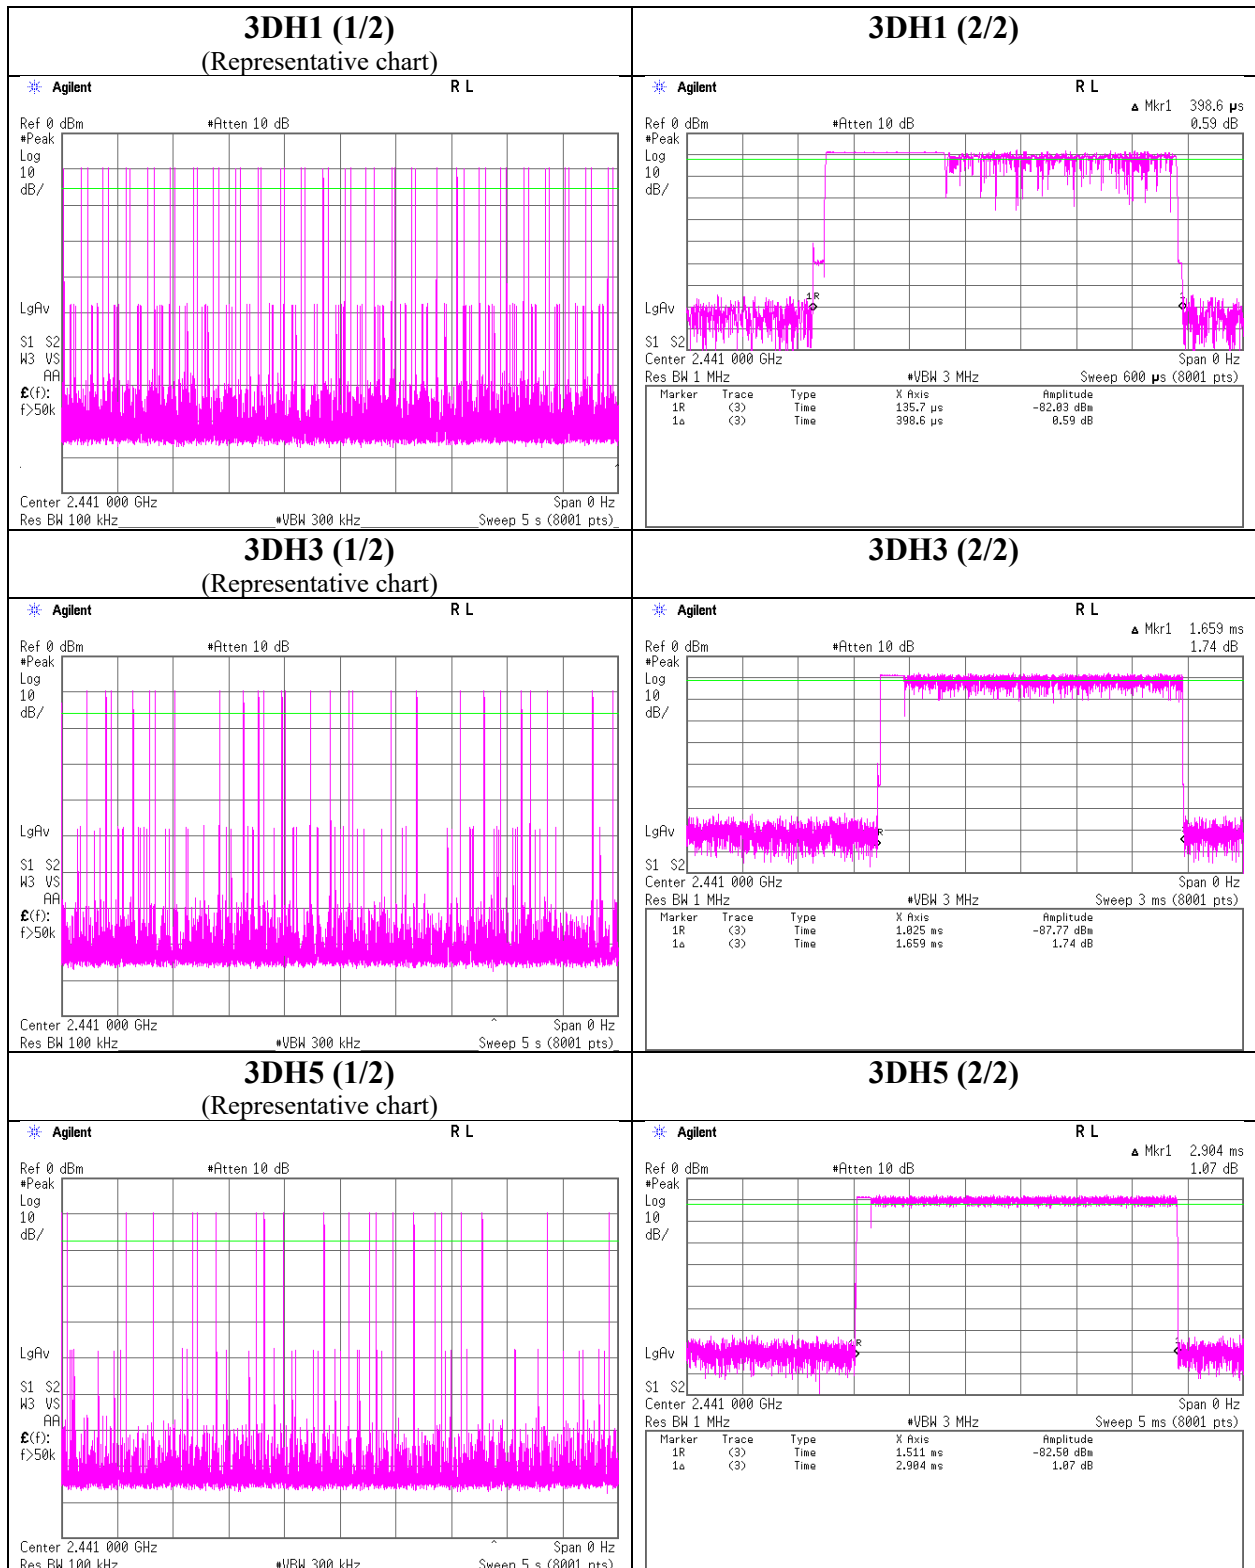

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Maximum Peak Output Power

Report No. 12920932S-B-R1
Test place Shonan EMC Lab. No.5 Shielded Room
Date June 28, 2019
Temperature / Humidity 26 deg. C / 49 % RH
Engineer Hiromasa Sato
Mode Tx, Hopping Off

					Conducted Power					e.i.r.p. for RSS-247							
Mode	Freq.	Reading	Cable Loss	Atten. Loss	Result		Limit		Margin	Antenna Gain	Result		Limit		Margin		
					[dBm]	[mW]	[dBm]	[mW]			[dB]	[dBi]	[dBm]	[mW]		[dBm]	[mW]
DH5	2402.0	-7.10	1.62	9.89	4.41	2.76	20.96	125	16.55	1.60	6.01	3.99	36.02	4000	30.01		
DH5	2441.0	-6.90	1.64	9.89	4.63	2.90	20.96	125	16.33	1.60	6.23	4.20	36.02	4000	29.79		
DH5	2480.0	-6.88	1.65	9.89	4.66	2.92	20.96	125	16.30	1.60	6.26	4.23	36.02	4000	29.76		
2DH5	2402.0	-7.76	1.62	9.89	3.75	2.37	20.96	125	17.21	1.60	5.35	3.43	36.02	4000	30.67		
2DH5	2441.0	-7.54	1.64	9.89	3.99	2.51	20.96	125	16.97	1.60	5.59	3.62	36.02	4000	30.43		
2DH5	2480.0	-7.48	1.65	9.89	4.06	2.55	20.96	125	16.90	1.60	5.66	3.68	36.02	4000	30.36		
3DH5	2402.0	-7.49	1.62	9.89	4.02	2.52	20.96	125	16.94	1.60	5.62	3.65	36.02	4000	30.40		
3DH5	2441.0	-7.10	1.64	9.89	4.43	2.77	20.96	125	16.53	1.60	6.03	4.01	36.02	4000	29.99		
3DH5	2480.0	-7.06	1.65	9.89	4.48	2.81	20.96	125	16.48	1.60	6.08	4.06	36.02	4000	29.94		

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Test was not performed at AFH mode, because the decrease of number of channel (min: 20ch) at AFH mode does not influence on the output power and bandwidth of the EUT.

As this device had AFH mode and frequency separation could not meet the requirement of over 20dB BW without 2/3 relaxation, 125mW power limit was applied to it.

Average Output Power
(Reference data for RF Exposure)

Report No. 12920932S-B-R1
Test place Shonan EMC Lab. No.5 Shielded Room
Date June 28, 2019
Temperature / Humidity 26 deg. C / 49 % RH
Engineer Hiromasa Sato
Mode Tx, Hopping Off

Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
					[dBm]	[mW]		[dBm]	[mW]
DH5	2402.0	-8.48	1.62	9.89	3.03	2.01	1.12	4.15	2.60
DH5	2441.0	-8.35	1.64	9.89	3.18	2.08	1.12	4.30	2.69
DH5	2480.0	-8.47	1.65	9.89	3.07	2.03	1.12	4.19	2.62
2DH5	2402.0	-11.82	1.62	9.89	-0.31	0.93	1.11	0.80	1.20
2DH5	2441.0	-11.54	1.64	9.89	-0.01	1.00	1.11	1.10	1.29
2DH5	2480.0	-11.55	1.65	9.89	-0.01	1.00	1.11	1.10	1.29
3DH5	2402.0	-11.73	1.62	9.89	-0.22	0.95	1.11	0.89	1.23
3DH5	2441.0	-11.51	1.64	9.89	0.02	1.00	1.11	1.13	1.30
3DH5	2480.0	-11.51	1.65	9.89	0.03	1.01	1.11	1.14	1.30

Sample Calculation:

Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss


Result (Burst power average) = Time average + Duty factor

*The equipment and cables were not used for factor 0 dB of the data sheets.


Burst Rate Confirmation

Report No. 12920932S-B-R1
Test place Shonan EMC Lab. No.5 Semi Anechoic Chamber
Date June 28, 2019
Temperature / Humidity 26 deg. C / 49 % RH
Engineer Hiromasa Sato
Mode Tx, Hopping Off


DH5

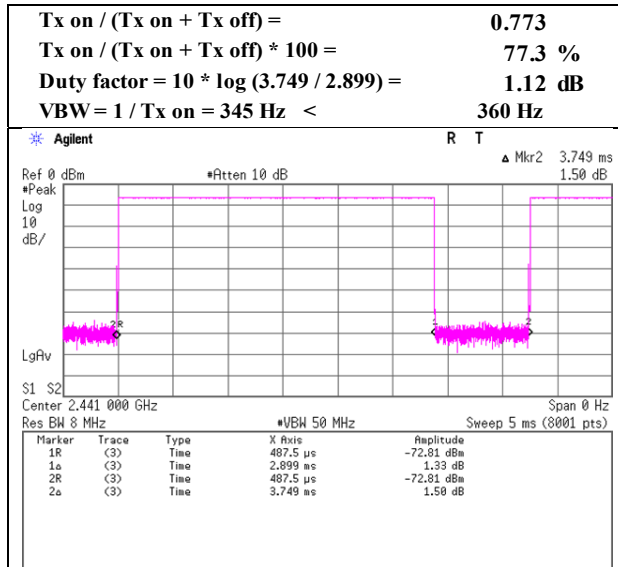

2DH5

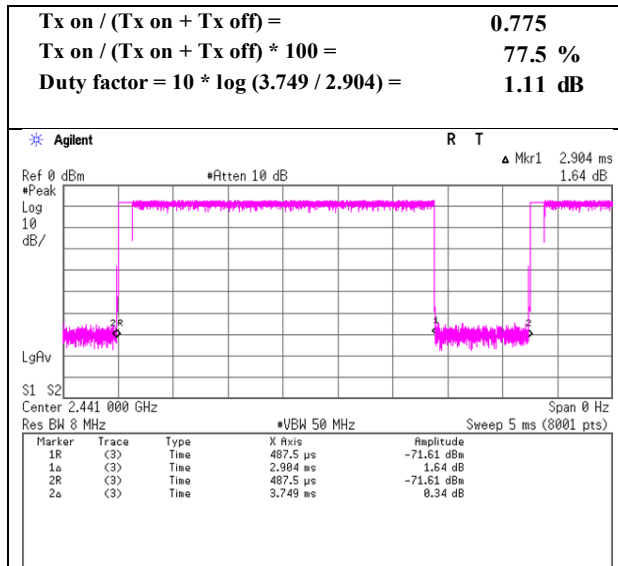

3DH5

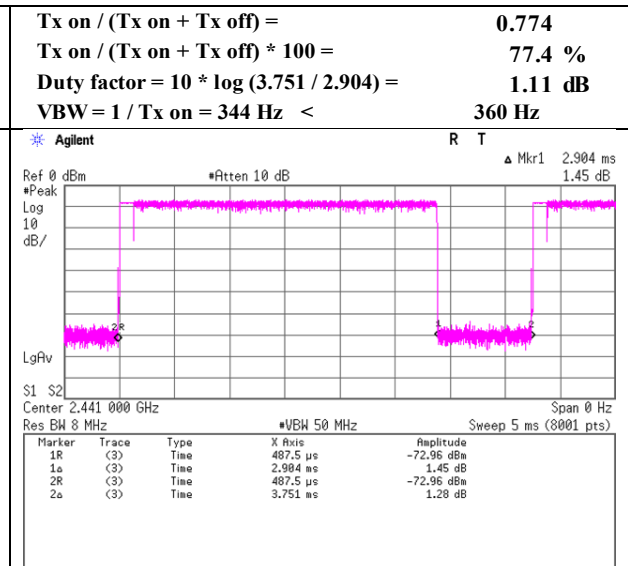

Radiated Spurious Emission

Report No.	12920932S-B-R1		
Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	June 18, 2019	June 19, 2019	June 19, 2019
Temperature / Humidity	24 deg. C / 40 % RH	21 deg. C / 56 % RH	23 deg. C / 52 % RH
Engineer	Yosuke Ishikawa	Takahiro Kawakami	Yosuke Ishikawa
	(30 MHz -1000 MHz)	(1 GHz -13 GHz)	(13 GHz -26.5 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	52.000	QP	22.30	10.37	6.79	32.19	0.00	7.27	40.00	32.7	100	0	
Hori.	78.000	QP	22.20	6.16	7.45	32.17	0.00	3.64	40.00	36.3	100	0	
Hori.	98.304	QP	22.40	9.75	7.42	32.15	0.00	7.42	43.50	36.0	100	0	
Hori.	196.608	QP	21.90	16.37	7.90	32.07	0.00	14.10	43.50	29.4	100	0	
Hori.	2390.000	PK	48.63	27.86	14.15	41.59	2.30	51.35	73.90	22.5	123	177	
Hori.	4804.000	PK	50.26	31.43	6.45	42.88	2.30	47.56	73.90	26.3	203	172	
Hori.	7206.000	PK	48.47	36.79	8.13	42.92	2.30	52.77	73.90	21.1	100	0	
Hori.	9608.000	PK	48.82	38.51	9.30	43.17	2.30	55.76	73.90	18.1	100	0	
Hori.	2390.000	AV	35.56	27.86	14.15	41.59	2.30	38.28	53.90	15.6	123	177	VBW: 360 Hz
Hori.	4804.000	AV	39.46	31.43	6.45	42.88	2.30	36.76	53.90	17.1	203	172	VBW: 360 Hz
Hori.	7206.000	AV	36.60	36.79	8.13	42.92	2.30	40.90	53.90	13.0	100	0	VBW: 360 Hz
Hori.	9608.000	AV	36.69	38.51	9.30	43.17	2.30	43.63	53.90	10.2	100	0	VBW: 360 Hz
Vert.	312.000	QP	21.70	13.70	8.85	32.00	0.00	12.25	46.00	33.7	100	0	
Vert.	624.000	QP	21.90	19.24	10.08	31.94	0.00	19.28	46.00	26.7	100	0	
Vert.	936.000	QP	21.10	21.60	11.13	30.77	0.00	23.06	46.00	22.9	100	0	
Vert.	2390.000	PK	47.36	27.86	14.15	41.59	2.30	50.08	73.90	23.8	134	41	
Vert.	4804.000	PK	51.11	31.43	6.45	42.88	2.30	48.41	73.90	25.4	145	0	
Vert.	7206.000	PK	48.47	36.79	8.13	42.92	2.30	52.77	73.90	21.1	100	0	
Vert.	9608.000	PK	49.71	38.51	9.30	43.17	2.30	56.65	73.90	17.2	100	0	
Vert.	2390.000	AV	35.58	27.86	14.15	41.59	2.30	38.30	53.90	15.6	134	41	VBW: 360 Hz
Vert.	4804.000	AV	39.19	31.43	6.45	42.88	2.30	36.49	53.90	17.4	145	0	VBW: 360 Hz
Vert.	7206.000	AV	36.70	36.79	8.13	42.92	2.30	41.00	53.90	12.9	100	0	VBW: 360 Hz
Vert.	9608.000	AV	37.00	38.51	9.30	43.17	2.30	43.94	53.90	9.9	100	0	VBW: 360 Hz

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz : $20\log(3.91\text{ m} / 3.0\text{ m}) = 2.30\text{ dB}$

13 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

* These results have sufficient margin without taking account Dwell time factor.

20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	98.77	27.86	14.16	41.60	2.30	101.49	-	-	Carrier
Hori.	2400.000	PK	40.57	27.86	14.16	41.60	2.30	43.29	81.49	38.2	
Vert.	2402.000	PK	97.76	27.86	14.16	41.60	2.30	100.48	-	-	Carrier
Vert.	2400.000	PK	40.72	27.86	14.16	41.60	2.30	43.44	80.48	37.0	

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz : $20\log(3.91\text{ m} / 3.0\text{ m}) = 2.30\text{ dB}$

13 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

UL Japan, Inc.

Shonan EMC Lab.



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Radiated Spurious Emission (Reference Plot for band-edge)

Report No.	12920932S-B-R1
Test place	Shonan EMC Lab.
Semi Anechoic Chamber	No.3
Date	June 19, 2019
Temperature / Humidity	21 deg. C / 56 % RH
Engineer	Takahiro Kawakami
	(1 GHz -13 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz

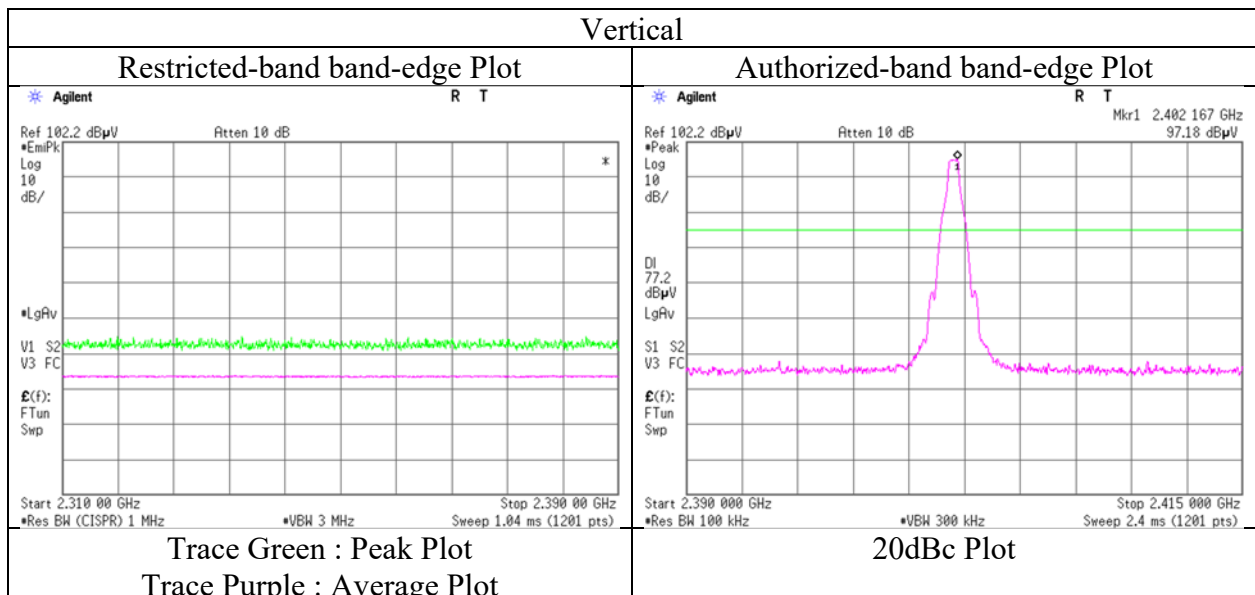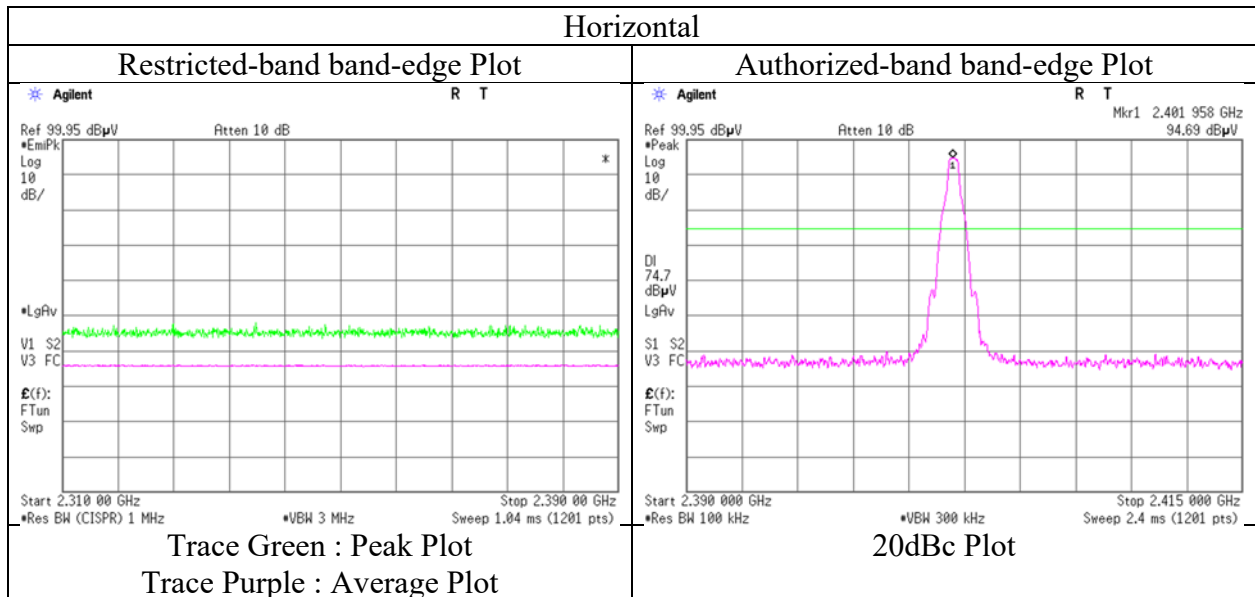

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Radiated Spurious Emission

Report No.	12920932S-B-R1		
Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	June 18, 2019	June 19, 2019	June 19, 2019
Temperature / Humidity	24 deg. C / 40 % RH	21 deg. C / 56 % RH	23 deg. C / 52 % RH
Engineer	Yosuke Ishikawa	Takahiro Kawakami	Yosuke Ishikawa
	(30 MHz -1000 MHz)	(1 GHz -13 GHz)	(13 GHz -26.5 GHz)
Mode	Tx, Hopping Off, DH5 2441 MHz		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	52.000	QP	22.30	10.37	6.79	32.19	0.00	7.27	40.00	32.7	100	0	
Hori.	78.000	QP	22.20	6.16	7.45	32.17	0.00	3.64	40.00	36.3	100	0	
Hori.	98.304	QP	22.40	9.75	7.42	32.15	0.00	7.42	43.50	36.0	100	0	
Hori.	196.608	QP	21.90	16.37	7.90	32.07	0.00	14.10	43.50	29.4	100	0	
Hori.	4882.000	PK	49.29	31.37	6.48	42.89	2.30	46.55	73.90	27.3	231	166	
Hori.	7323.000	PK	48.01	37.01	8.13	43.15	2.30	52.30	73.90	21.6	100	0	
Hori.	9764.000	PK	48.81	38.92	9.28	43.01	2.30	56.30	73.90	17.6	100	0	
Hori.	4882.000	AV	39.07	31.37	6.48	42.89	2.30	36.33	53.90	17.5	231	166	VBW: 360 Hz
Hori.	7323.000	AV	36.72	37.01	8.13	43.15	2.30	41.01	53.90	12.8	100	0	VBW: 360 Hz
Hori.	9764.000	AV	36.61	38.92	9.28	43.01	2.30	44.10	53.90	9.8	100	0	VBW: 360 Hz
Vert.	312.000	QP	21.70	13.70	8.85	32.00	0.00	12.25	46.00	33.7	100	0	
Vert.	624.000	QP	21.80	19.24	10.08	31.94	0.00	19.18	46.00	26.8	100	0	
Vert.	936.000	QP	21.10	21.60	11.13	30.77	0.00	23.06	46.00	22.9	100	0	
Vert.	4882.000	PK	49.62	31.37	6.48	42.89	2.30	46.88	73.90	27.0	131	142	
Vert.	7323.000	PK	48.37	37.01	8.13	43.15	2.30	52.66	73.90	21.2	100	0	
Vert.	9764.000	PK	47.43	38.92	9.28	43.01	2.30	54.92	73.90	18.9	100	0	
Vert.	4882.000	AV	38.58	31.37	6.48	42.89	2.30	35.84	53.90	18.0	131	142	VBW: 360 Hz
Vert.	7323.000	AV	36.74	37.01	8.13	43.15	2.30	41.03	53.90	12.8	100	0	VBW: 360 Hz
Vert.	9764.000	AV	36.52	38.92	9.28	43.01	2.30	44.01	53.90	9.8	100	0	VBW: 360 Hz

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz : $20\log(3.91\text{ m} / 3.0\text{ m}) = 2.30\text{ dB}$

13 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

* These results have sufficient margin without taking account Dwell time factor.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Radiated Spurious Emission

Report No.	12920932S-B-R1		
Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	June 18, 2019	June 19, 2019	June 19, 2019
Temperature / Humidity	24 deg. C / 40 % RH	21 deg. C / 56 % RH	23 deg. C / 52 % RH
Engineer	Yosuke Ishikawa	Takahiro Kawakami	Yosuke Ishikawa
	(30 MHz -1000 MHz)	(1 GHz -13 GHz)	(13 GHz -26.5 GHz)
Mode	Tx, Hopping Off, DH5 2480 MHz		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	52.000	QP	22.30	10.37	6.79	32.19	0.00	7.27	40.00	32.7	100	0	
Hori.	78.000	QP	22.20	6.16	7.45	32.17	0.00	3.64	40.00	36.3	100	0	
Hori.	98.304	QP	22.40	9.75	7.42	32.15	0.00	7.42	43.50	36.0	100	0	
Hori.	196.608	QP	21.90	16.37	7.90	32.07	0.00	14.10	43.50	29.4	100	0	
Hori.	2483.500	PK	55.77	27.65	14.22	41.62	2.30	58.32	73.90	15.5	235	184	
Hori.	4960.000	PK	50.72	31.54	6.51	42.91	2.30	48.16	73.90	25.7	213	161	
Hori.	7440.000	PK	49.20	37.10	8.12	43.38	2.30	53.34	73.90	20.5	100	0	
Hori.	9920.000	PK	48.38	38.97	9.28	42.84	2.30	56.09	73.90	17.8	100	0	
Hori.	2483.500	AV	36.67	27.65	14.22	41.62	2.30	39.22	53.90	14.6	235	184	VBW: 360 Hz
Hori.	4960.000	AV	39.03	31.54	6.51	42.91	2.30	36.47	53.90	17.4	213	161	VBW: 360 Hz
Hori.	7440.000	AV	37.27	37.10	8.12	43.38	2.30	41.41	53.90	12.4	100	0	VBW: 360 Hz
Hori.	9920.000	AV	36.41	38.97	9.28	42.84	2.30	44.12	53.90	9.7	100	0	VBW: 360 Hz
Vert.	312.000	QP	21.70	13.70	8.85	32.00	0.00	12.25	46.00	33.7	100	0	
Vert.	624.000	QP	21.80	19.24	10.08	31.94	0.00	19.18	46.00	26.8	100	0	
Vert.	936.000	QP	21.10	21.60	11.13	30.77	0.00	23.06	46.00	22.9	100	0	
Vert.	2483.500	PK	51.25	27.65	14.22	41.62	2.30	53.80	73.90	20.1	165	112	
Vert.	4960.000	PK	49.89	31.54	6.51	42.91	2.30	47.33	73.90	26.5	100	1	
Vert.	7440.000	PK	49.55	37.10	8.12	43.38	2.30	53.69	73.90	20.2	100	0	
Vert.	9920.000	PK	47.90	38.97	9.28	42.84	2.30	55.61	73.90	18.2	100	0	
Vert.	2483.500	AV	36.33	27.65	14.22	41.62	2.30	38.88	53.90	15.0	165	112	VBW: 360 Hz
Vert.	4960.000	AV	38.77	31.54	6.51	42.91	2.30	36.21	53.90	17.6	100	1	VBW: 360 Hz
Vert.	7440.000	AV	37.32	37.10	8.12	43.38	2.30	41.46	53.90	12.4	100	0	VBW: 360 Hz
Vert.	9920.000	AV	36.45	38.97	9.28	42.84	2.30	44.16	53.90	9.7	100	0	VBW: 360 Hz

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor



Distance factor : 1 GHz - 13 GHz : $20\log(3.91\text{ m} / 3.0\text{ m}) = 2.30\text{ dB}$

13 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

* These results have sufficient margin without taking account Dwell time factor.

Radiated Spurious Emission (Reference Plot for band-edge)

Report No.	12920932S-B-R1
Test place	Shonan EMC Lab.
Semi Anechoic Chamber	No.3
Date	June 19, 2019
Temperature / Humidity	21 deg. C / 56 % RH
Engineer	Takahiro Kawakami
	(1 GHz -13 GHz)
Mode	Tx, Hopping Off, DH5 2480 MHz

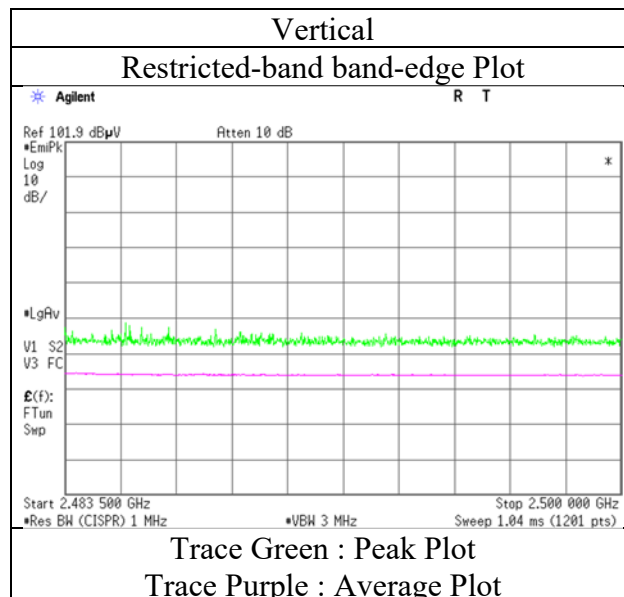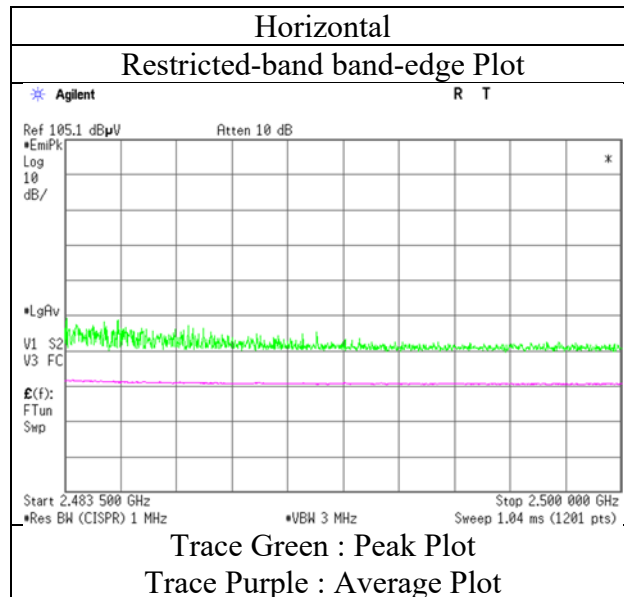

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Report No.	12920932S-B-R1		
Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	June 18, 2019	June 19, 2019	June 19, 2019
Temperature / Humidity	24 deg. C / 40 % RH	21 deg. C / 56 % RH	23 deg. C / 52 % RH
Engineer	Yosuke Ishikawa	Takahiro Kawakami	Yosuke Ishikawa
	(30 MHz -1000 MHz)	(1 GHz -13 GHz)	(13 GHz -26.5 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	52.000	QP	22.30	10.37	6.79	32.19	0.00	7.27	40.00	32.7	100	0	
Hori.	78.000	QP	22.30	6.16	7.45	32.17	0.00	3.74	40.00	36.2	100	0	
Hori.	98.304	QP	22.30	9.75	7.42	32.15	0.00	7.32	43.50	36.1	100	0	
Hori.	196.608	QP	21.90	16.37	7.90	32.07	0.00	14.10	43.50	29.4	100	0	
Hori.	2390.000	PK	47.30	27.86	14.15	41.59	2.30	50.02	73.90	23.8	214	193	
Hori.	4804.000	PK	50.20	31.43	6.45	42.88	2.30	47.50	73.90	26.4	205	180	
Hori.	7206.000	PK	48.40	36.79	8.13	42.92	2.30	52.70	73.90	21.2	100	0	
Hori.	9608.000	PK	49.12	38.51	9.30	43.17	2.30	56.06	73.90	17.8	100	0	
Hori.	2390.000	AV	35.71	27.86	14.15	41.59	2.30	38.43	53.90	15.4	214	193	VBW: 360 Hz
Hori.	4804.000	AV	39.02	31.43	6.45	42.88	2.30	36.32	53.90	17.5	205	180	VBW: 360 Hz
Hori.	7206.000	AV	36.68	36.79	8.13	42.92	2.30	40.98	53.90	12.9	100	0	VBW: 360 Hz
Hori.	9608.000	AV	37.11	38.51	9.30	43.17	2.30	44.05	53.90	9.8	100	0	VBW: 360 Hz
Vert.	312.000	QP	21.70	13.70	8.85	32.00	0.00	12.25	46.00	33.7	100	0	
Vert.	624.000	QP	21.90	19.24	10.08	31.94	0.00	19.28	46.00	26.7	100	0	
Vert.	936.000	QP	21.10	21.60	11.13	30.77	0.00	23.06	46.00	22.9	100	0	
Vert.	2390.000	PK	47.79	27.86	14.15	41.59	2.30	50.51	73.90	23.3	220	47	
Vert.	4804.000	PK	50.77	31.43	6.45	42.88	2.30	48.07	73.90	25.8	145	1	
Vert.	7206.000	PK	49.18	36.79	8.13	42.92	2.30	53.48	73.90	20.4	100	0	
Vert.	9608.000	PK	49.22	38.51	9.30	43.17	2.30	56.16	73.90	17.7	100	0	
Vert.	2390.000	AV	35.58	27.86	14.15	41.59	2.30	38.30	53.90	15.6	220	47	VBW: 360 Hz
Vert.	4804.000	AV	38.59	31.43	6.45	42.88	2.30	35.89	53.90	18.0	145	1	VBW: 360 Hz
Vert.	7206.000	AV	36.68	36.79	8.13	42.92	2.30	40.98	53.90	12.9	100	0	VBW: 360 Hz
Vert.	9608.000	AV	36.89	38.51	9.30	43.17	2.30	43.83	53.90	10.0	100	0	VBW: 360 Hz

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz : $20\log(3.91\text{ m} / 3.0\text{ m}) = 2.30\text{ dB}$

13 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

* These results have sufficient margin without taking account Dwell time factor.

20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	95.99	27.86	14.16	41.60	2.30	98.71	-	-	Carrier
Hori.	2400.000	PK	39.92	27.86	14.16	41.60	2.30	42.64	78.71	36.0	
Vert.	2402.000	PK	95.91	27.86	14.16	41.60	2.30	98.63	-	-	Carrier
Vert.	2400.000	PK	41.92	27.86	14.16	41.60	2.30	44.64	78.63	33.9	

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz : $20\log(3.91\text{ m} / 3.0\text{ m}) = 2.30\text{ dB}$

13 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

UL Japan, Inc.

Shonan EMC Lab.



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Radiated Spurious Emission (Reference Plot for band-edge)

Report No.	12920932S-B-R1
Test place	Shonan EMC Lab.
Semi Anechoic Chamber	No.3
Date	June 19, 2019
Temperature / Humidity	21 deg. C / 56 % RH
Engineer	Takahiro Kawakami
	(1 GHz -13 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz

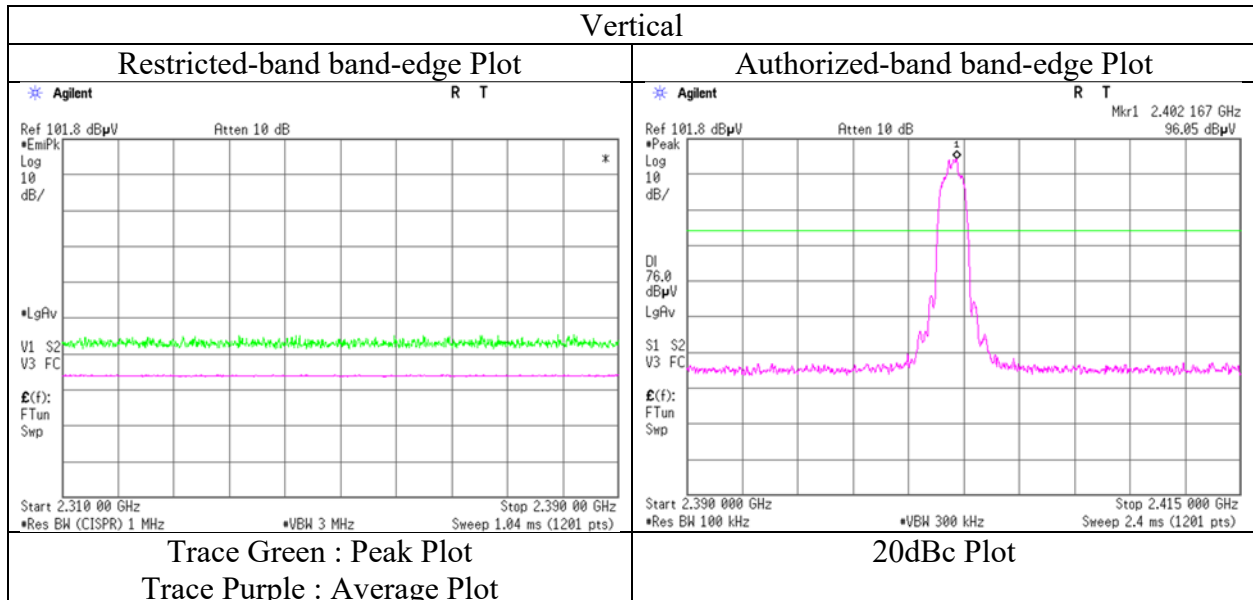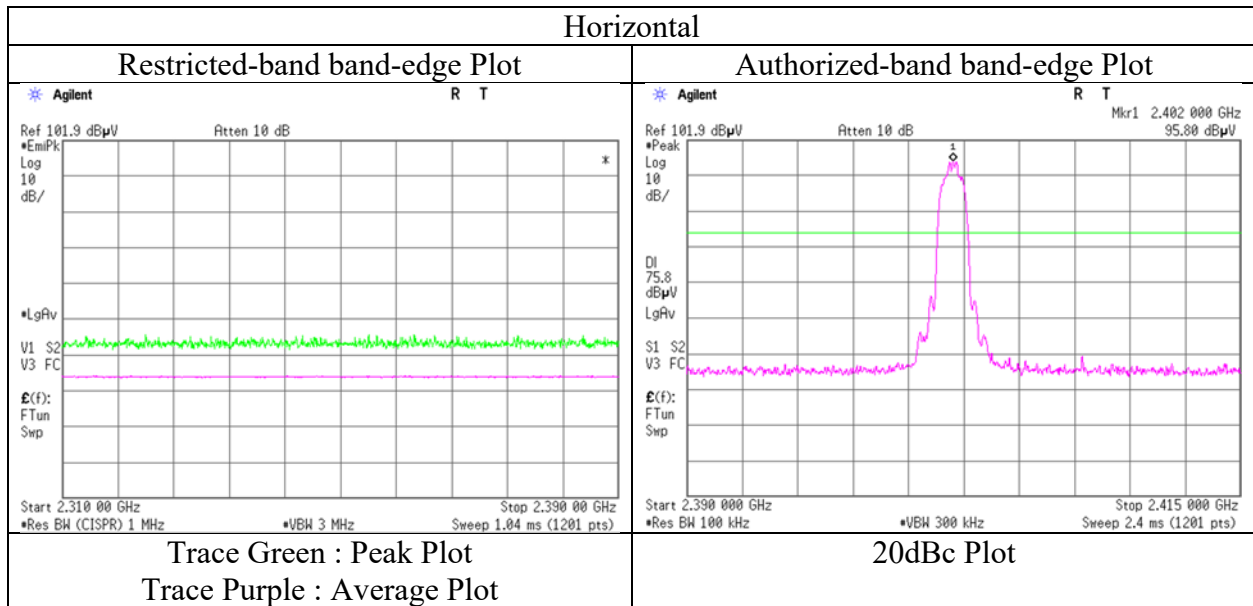

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Radiated Spurious Emission

Report No.	12920932S-B-R1		
Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	June 18, 2019	June 19, 2019	June 19, 2019
Temperature / Humidity	24 deg. C / 40 % RH	21 deg. C / 56 % RH	23 deg. C / 52 % RH
Engineer	Yosuke Ishikawa	Takahiro Kawakami	Yosuke Ishikawa
	(30 MHz -1000 MHz)	(1 GHz -13 GHz)	(13 GHz -26.5 GHz)
Mode	Tx, Hopping Off, 3DH5 2441 MHz		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	52.000	QP	22.30	10.37	6.79	32.19	0.00	7.27	40.00	32.7	100	0	
Hori.	78.000	QP	22.30	6.16	7.45	32.17	0.00	3.74	40.00	36.2	100	0	
Hori.	98.304	QP	22.30	9.75	7.42	32.15	0.00	7.32	43.50	36.1	100	0	
Hori.	196.608	QP	21.90	16.37	7.90	32.07	0.00	14.10	43.50	29.4	100	0	
Hori.	4882.000	PK	50.16	31.37	6.48	42.89	2.30	47.42	73.90	26.4	224	163	
Hori.	7323.000	PK	49.28	37.01	8.13	43.15	2.30	53.57	73.90	20.3	100	0	
Hori.	9764.000	PK	49.16	38.92	9.28	43.01	2.30	56.65	73.90	17.2	100	0	
Hori.	4882.000	AV	39.20	31.37	6.48	42.89	2.30	36.46	53.90	17.4	224	163	VBW: 360 Hz
Hori.	7323.000	AV	36.95	37.01	8.13	43.15	2.30	41.24	53.90	12.6	100	0	VBW: 360 Hz
Hori.	9764.000	AV	36.72	38.92	9.28	43.01	2.30	44.21	53.90	9.6	100	0	VBW: 360 Hz
Vert.	312.000	QP	21.70	13.70	8.85	32.00	0.00	12.25	46.00	33.7	100	0	
Vert.	624.000	QP	21.80	19.24	10.08	31.94	0.00	19.18	46.00	26.8	100	0	
Vert.	936.000	QP	21.10	21.60	11.13	30.77	0.00	23.06	46.00	22.9	100	0	
Vert.	4882.000	PK	50.26	31.37	6.48	42.89	2.30	47.52	73.90	26.3	100	159	
Vert.	7323.000	PK	48.49	37.01	8.13	43.15	2.30	52.78	73.90	21.1	100	0	
Vert.	9764.000	PK	48.26	38.92	9.28	43.01	2.30	55.75	73.90	18.1	100	0	
Vert.	4882.000	AV	38.83	31.37	6.48	42.89	2.30	36.09	53.90	17.8	100	159	VBW: 360 Hz
Vert.	7323.000	AV	35.37	37.01	8.13	43.15	2.30	39.66	53.90	14.2	100	0	VBW: 360 Hz
Vert.	9764.000	AV	36.60	38.92	9.28	43.01	2.30	44.09	53.90	9.8	100	0	VBW: 360 Hz

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz : $20\log(3.91\text{ m} / 3.0\text{ m}) = 2.30\text{ dB}$

13 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

* These results have sufficient margin without taking account Dwell time factor.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Radiated Spurious Emission

Report No.	12920932S-B-R1		
Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	June 18, 2019	June 19, 2019	June 19, 2019
Temperature / Humidity	24 deg. C / 40 % RH	21 deg. C / 56 % RH	23 deg. C / 52 % RH
Engineer	Yosuke Ishikawa	Takahiro Kawakami	Yosuke Ishikawa
	(30 MHz -1000 MHz)	(1 GHz -13 GHz)	(13 GHz -26.5 GHz)
Mode	Tx, Hopping Off, 3DH5 2480 MHz		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	52.000	QP	22.30	10.37	6.79	32.19	0.00	7.27	40.00	32.7	100	0	
Hori.	78.000	QP	22.30	6.16	7.45	32.17	0.00	3.74	40.00	36.2	100	0	
Hori.	98.304	QP	22.20	9.75	7.42	32.15	0.00	7.22	43.50	36.2	100	0	
Hori.	196.608	QP	21.90	16.37	7.90	32.07	0.00	14.10	43.50	29.4	100	0	
Hori.	2483.500	PK	50.97	27.65	14.22	41.62	2.30	53.52	73.90	20.3	100	1	
Hori.	4960.000	PK	49.90	31.54	6.51	42.91	2.30	47.34	73.90	26.5	242	175	
Hori.	7440.000	PK	48.23	37.10	8.12	43.38	2.30	52.37	73.90	21.5	100	0	
Hori.	9920.000	PK	48.25	38.97	9.28	42.84	2.30	55.96	73.90	17.9	100	0	
Hori.	2483.500	AV	36.24	27.65	14.22	41.62	2.30	38.79	53.90	15.1	100	1	VBW: 360 Hz
Hori.	4960.000	AV	38.77	31.54	6.51	42.91	2.30	36.21	53.90	17.6	242	175	VBW: 360 Hz
Hori.	7440.000	AV	37.18	37.10	8.12	43.38	2.30	41.32	53.90	12.5	100	0	VBW: 360 Hz
Hori.	9920.000	AV	36.41	38.97	9.28	42.84	2.30	44.12	53.90	9.7	100	0	VBW: 360 Hz
Vert.	312.000	QP	21.70	13.70	8.85	32.00	0.00	12.25	46.00	33.7	100	0	
Vert.	624.000	QP	21.80	19.24	10.08	31.94	0.00	19.18	46.00	26.8	100	0	
Vert.	936.000	QP	21.10	21.60	11.13	30.77	0.00	23.06	46.00	22.9	100	0	
Vert.	2483.500	PK	48.60	27.67	14.22	41.62	2.30	51.17	73.90	22.7	100	159	
Vert.	4960.000	PK	49.81	31.54	6.51	42.91	2.30	47.25	73.90	26.6	100	1	
Vert.	7440.000	PK	49.58	37.10	8.12	43.38	2.30	53.72	73.90	20.1	100	0	
Vert.	9920.000	PK	49.17	38.97	9.28	42.84	2.30	56.88	73.90	17.0	100	0	
Vert.	2483.500	AV	36.08	27.67	14.22	41.62	2.30	38.65	53.90	15.2	100	159	VBW: 360 Hz
Vert.	4960.000	AV	39.29	31.54	6.51	42.91	2.30	36.73	53.90	17.1	100	1	VBW: 360 Hz
Vert.	7440.000	AV	35.99	37.10	8.12	43.38	2.30	40.13	53.90	13.7	100	0	VBW: 360 Hz
Vert.	9920.000	AV	36.52	38.97	9.28	42.84	2.30	44.23	53.90	9.6	100	0	VBW: 360 Hz

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz : $20\log(3.91\text{ m} / 3.0\text{ m}) = 2.30\text{ dB}$

13 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

* These results have sufficient margin without taking account Dwell time factor.

UL Japan, Inc.

Shonan EMC Lab.



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Radiated Spurious Emission (Reference Plot for band-edge)


Report No. 12920932S-B-R1
Test place Shonan EMC Lab.
Semi Anechoic Chamber No.3
Date June 19, 2019
Temperature / Humidity 21 deg. C / 56 % RH
Engineer Takahiro Kawakami
(1 GHz -13 GHz)
Mode Tx, Hopping Off, 3DH5 2480 MHz

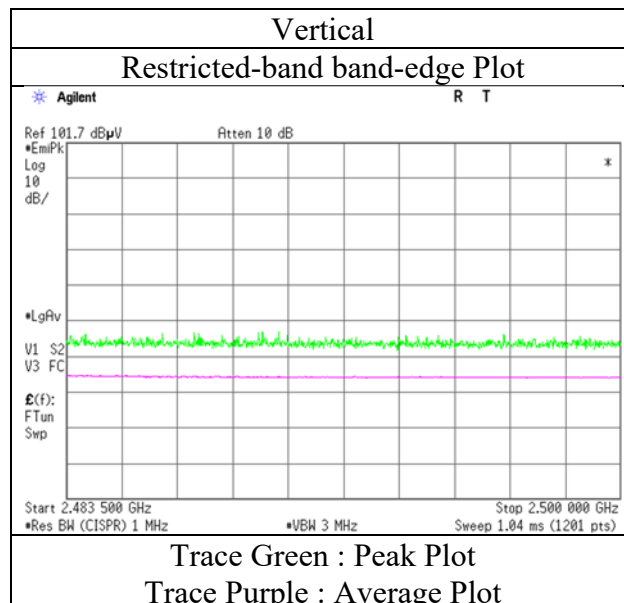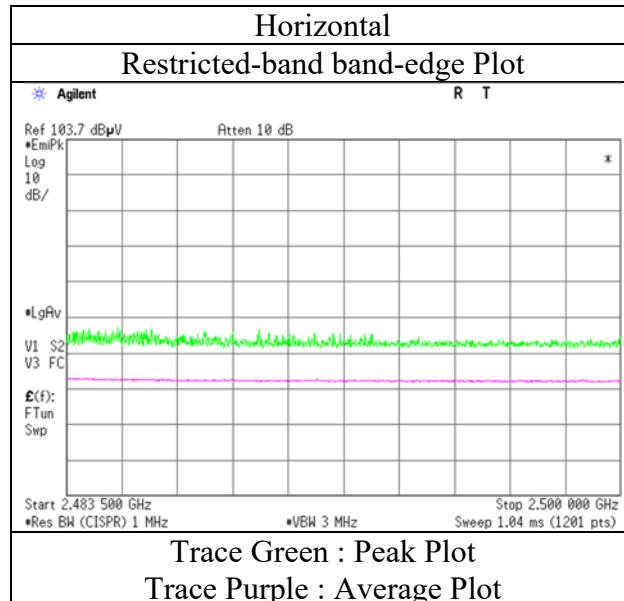

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission
(Plot data, Worst case)

Report No.	12920932S-B-R1		
Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	June 18, 2019	June 19, 2019	June 19, 2019
Temperature / Humidity	24 deg. C / 40 % RH	21 deg. C / 56 % RH	23 deg. C / 52 % RH
Engineer	Yosuke Ishikawa	Takahiro Kawakami	Yosuke Ishikawa
	(30 MHz -1000 MHz)	(1 GHz -13 GHz)	(13 GHz -26.5 GHz)
Mode	Tx, Hopping Off, DH5 2480 MHz		


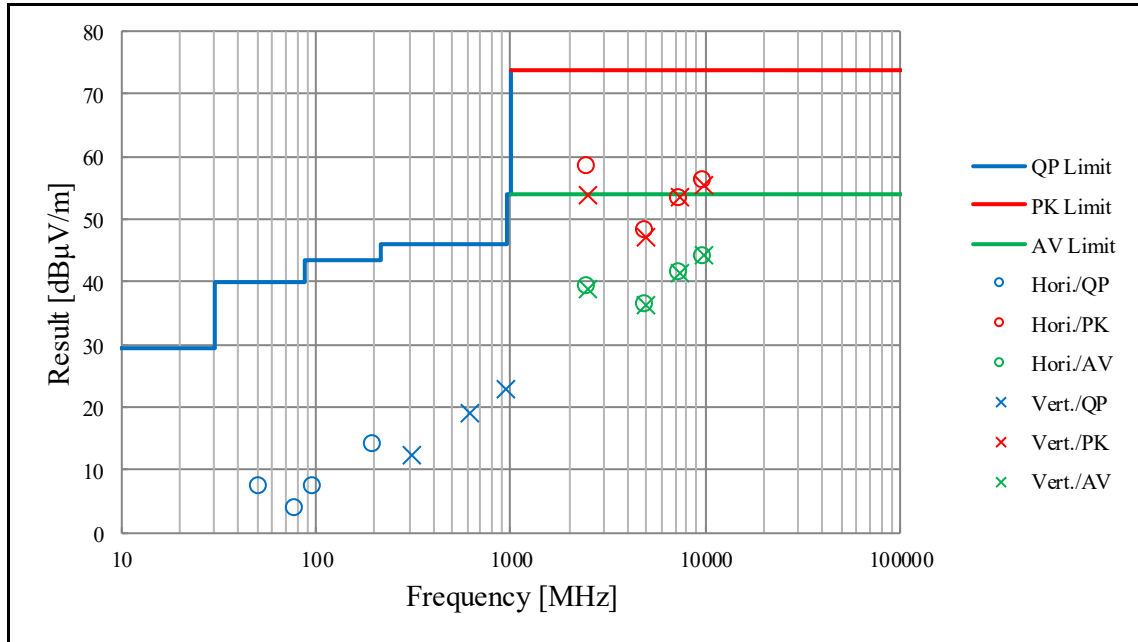


*These plots data contains sufficient number to show the trend of characteristic features for EUT.

Conducted Spurious Emission

Report No. 12920932S-B-R1
Test place Shonan EMC Lab. No.5 Shielded Room
Date June 28, 2019
Temperature / Humidity 26 deg. C / 49 % RH
Engineer Hiromasa Sato
Mode Tx, Hopping Off, DH5



2402 MHz

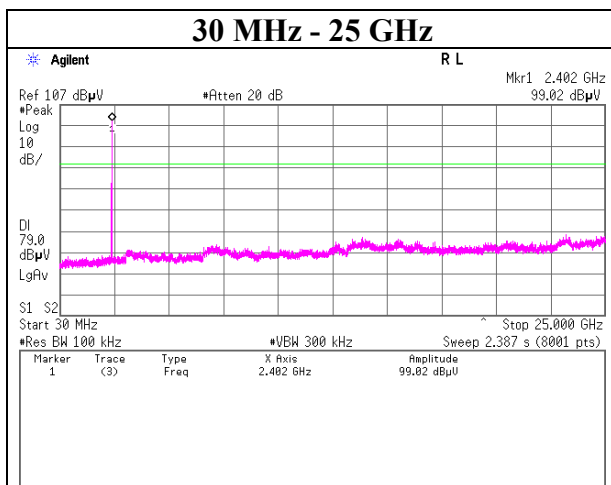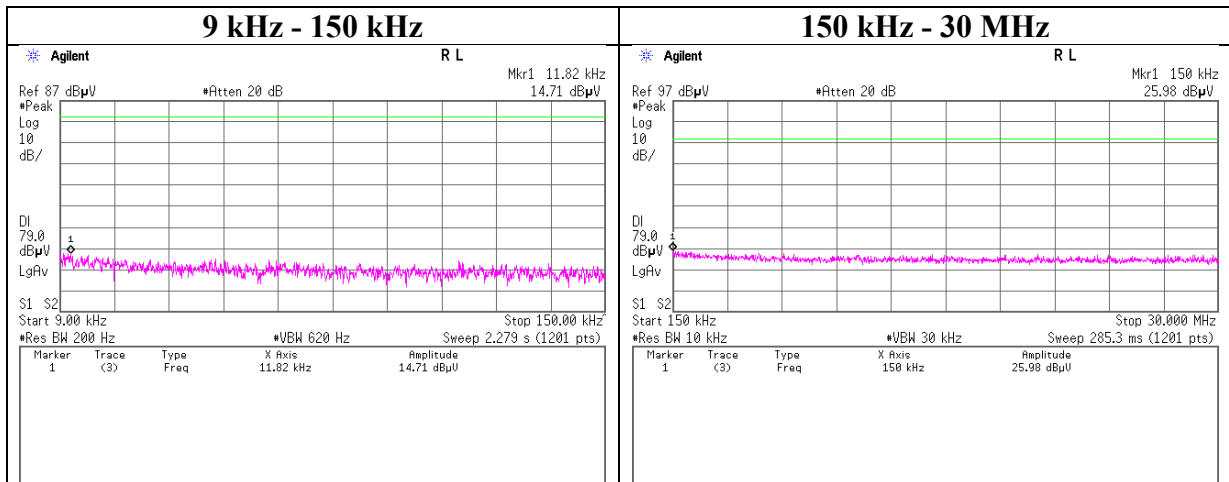

Conducted Spurious Emission

Report No. 12920932S-B-R1
Test place Shonan EMC Lab. No.5 Shielded Room
Date June 28, 2019
Temperature / Humidity 26 deg. C / 49 % RH
Engineer Hiromasa Sato
Mode Tx, Hopping Off, DH5



2441 MHz

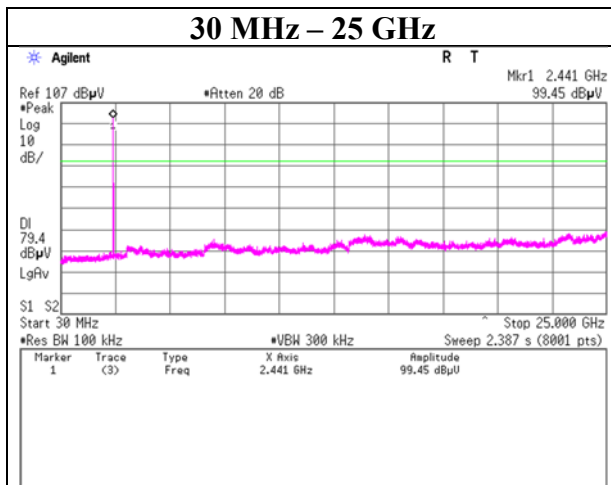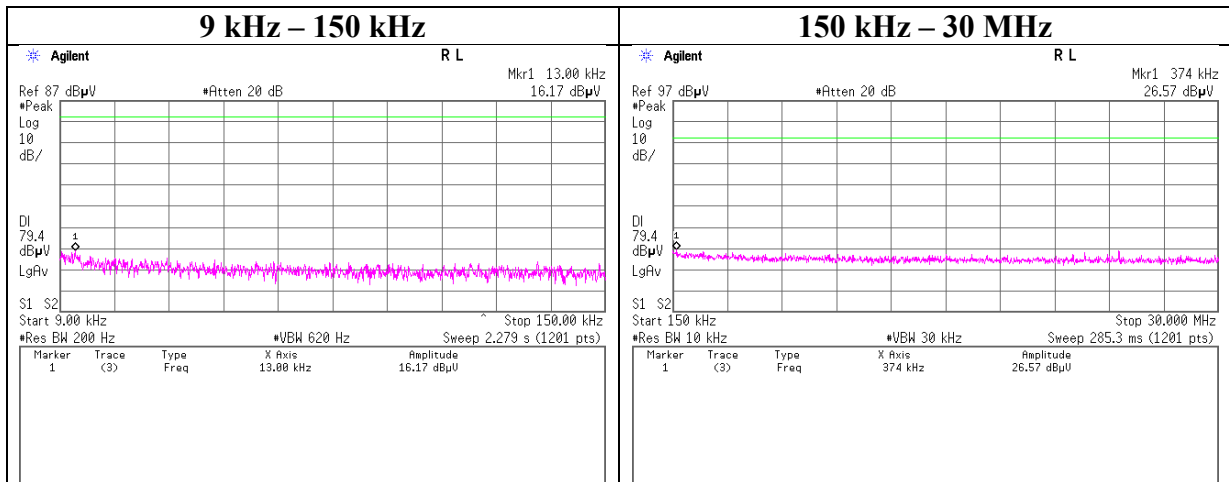

Conducted Spurious Emission

Report No. 12920932S-B-R1
Test place Shonan EMC Lab. No.5 Shielded Room
Date June 28, 2019
Temperature / Humidity 26 deg. C / 49 % RH
Engineer Hiromasa Sato
Mode Tx, Hopping Off, DH5



2480 MHz

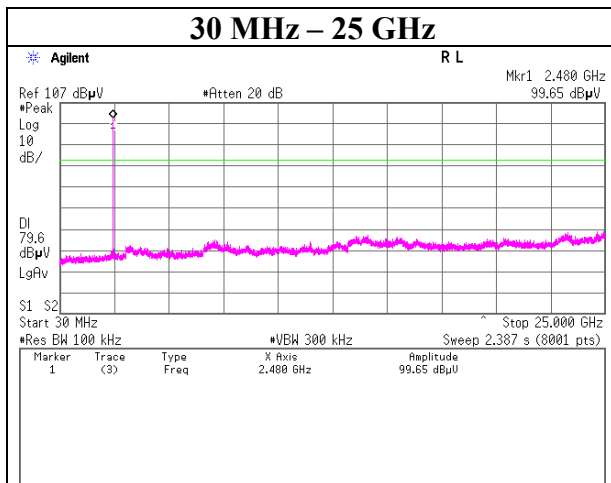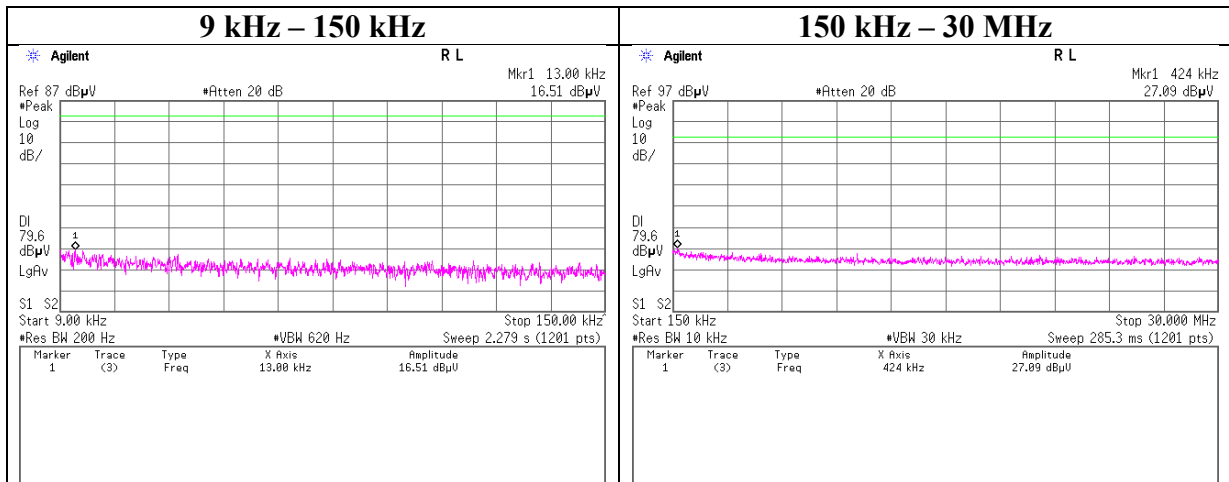

Conducted Spurious Emission

Report No. 12920932S-B-R1
Test place Shonan EMC Lab. No.5 Shielded Room
Date June 28, 2019
Temperature / Humidity 26 deg. C / 49 % RH
Engineer Hiromasa Sato
Mode Tx, Hopping Off, 3DH5



2402 MHz

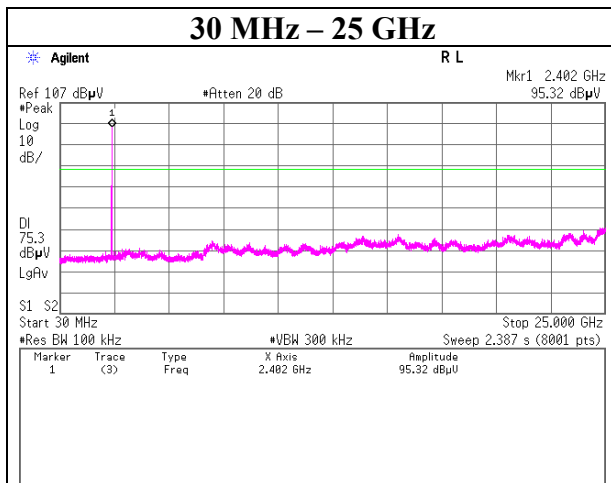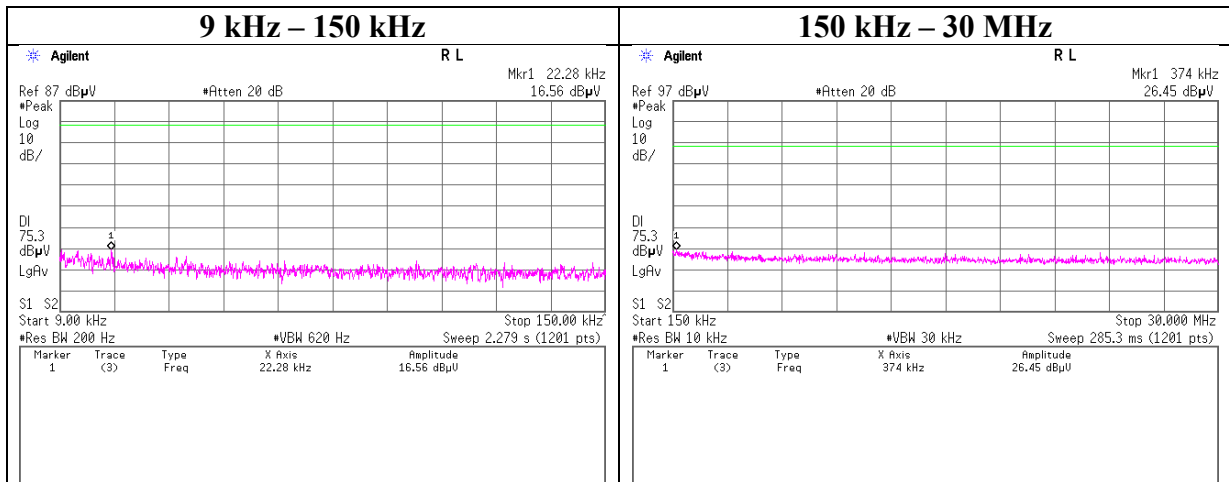

Conducted Spurious Emission

Report No. 12920932S-B-R1
Test place Shonan EMC Lab. No.5 Shielded Room
Date June 28, 2019
Temperature / Humidity 26 deg. C / 49 % RH
Engineer Hiromasa Sato
Mode Tx, Hopping Off, 3DH5



2441 MHz

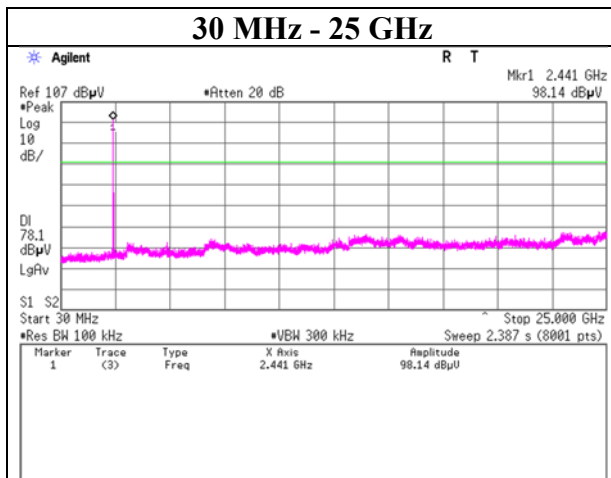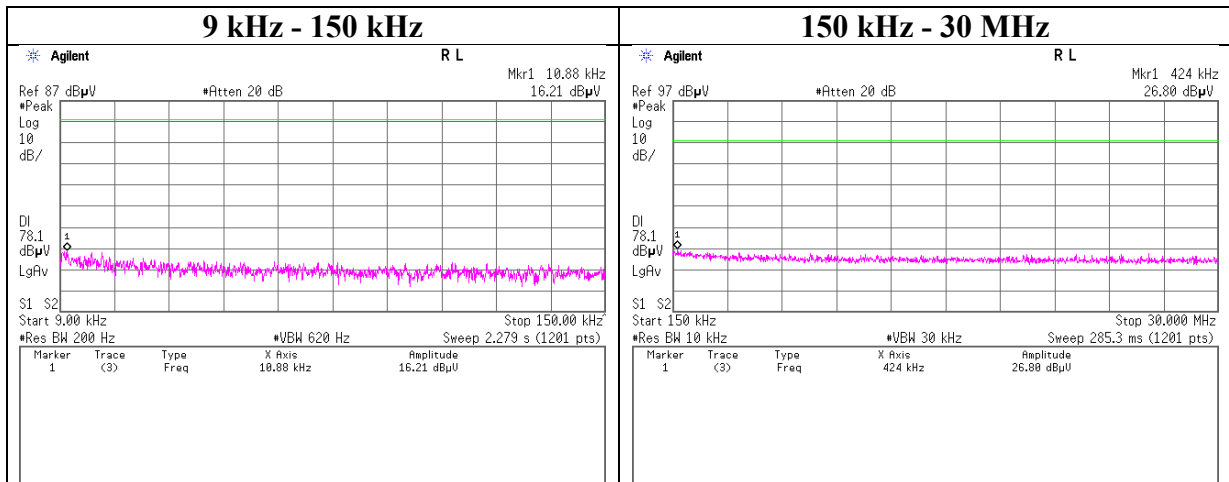

Conducted Spurious Emission

Report No. 12920932S-B-R1
Test place Shonan EMC Lab. No.5 Shielded Room
Date June 28, 2019
Temperature / Humidity 26 deg. C / 49 % RH
Engineer Hiromasa Sato
Mode Tx, Hopping Off, 3DH5


2480 MHz

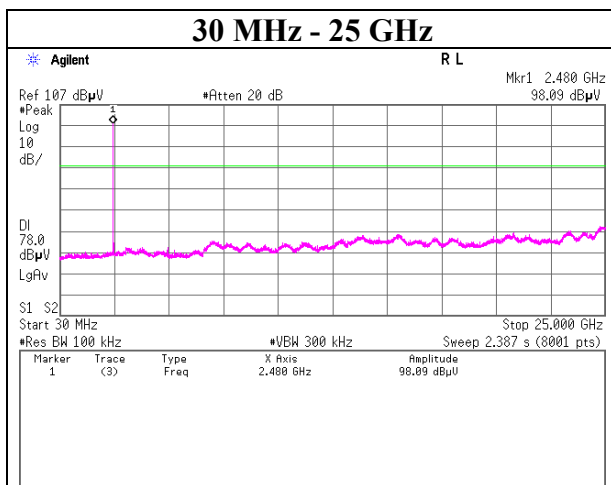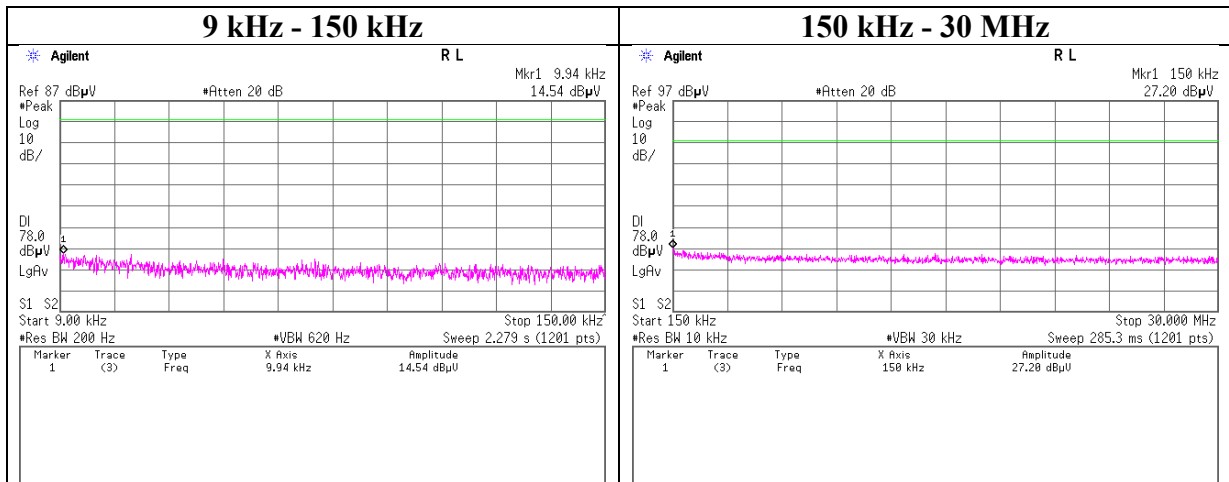


Conducted Emission Band Edge compliance

Report No.	12920932S-B-R1
Test place	Shonan EMC Lab. No.5 Shielded Room
Date	June 28, 2019
Temperature / Humidity	26 deg. C / 49 % RH
Engineer	Hiromasa Sato
Mode	Tx DH5

Hopping On

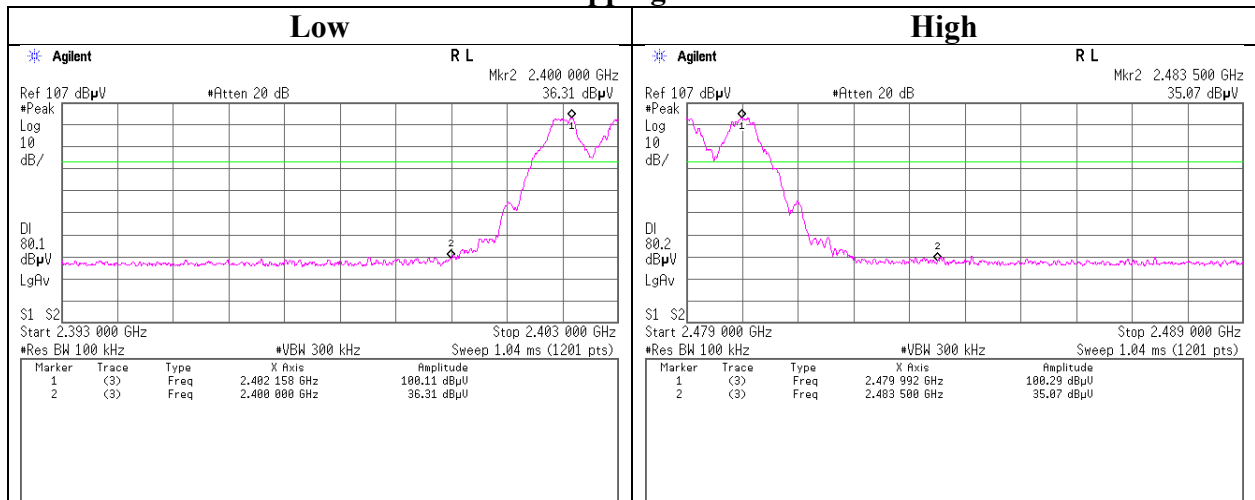


Hopping Off

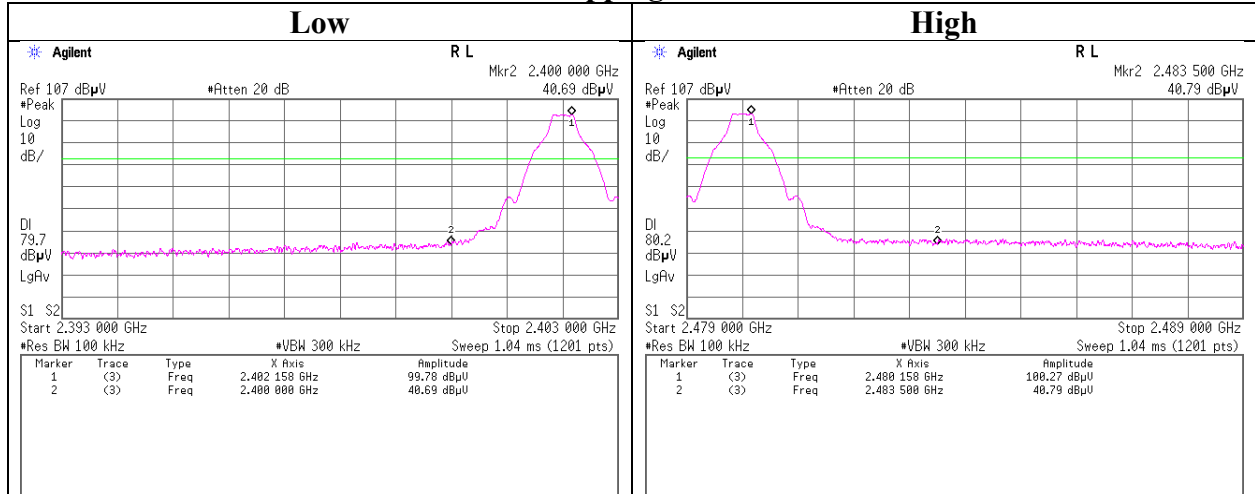


Conducted Emission Band Edge compliance

Report No.	12920932S-B-R1
Test place	Shonan EMC Lab. No.5 Shielded Room
Date	June 28, 2019
Temperature / Humidity	26 deg. C / 49 % RH
Engineer	Hiromasa Sato
Mode	Tx 3DH5

Hopping On

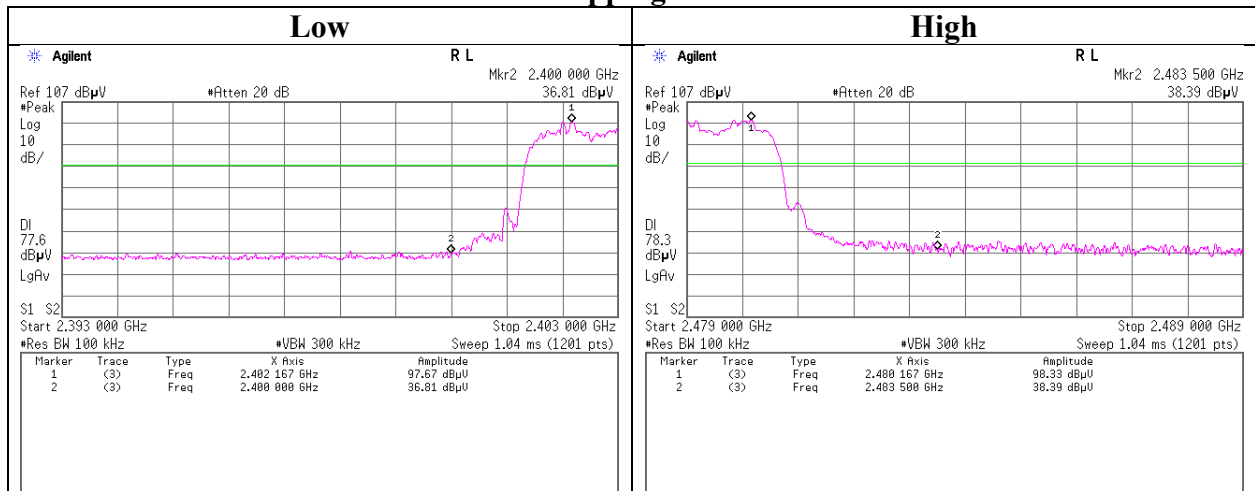

Hopping Off

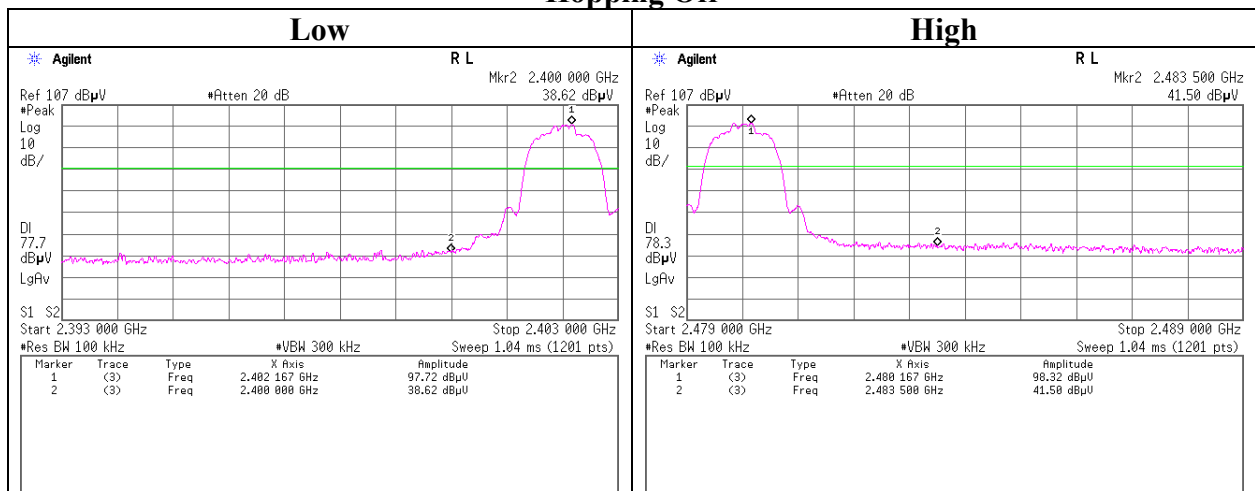

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

APPENDIX 2: Test instruments

Test Instruments (1 / 2)

Local ID	Test Name	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Calibration Due Date	Calibration Interval (Month)
SAT10-16	AT	160494	Attenuator	Weinschel Corp.	54A-10	83406	2018/12/6	2019/12/30	12
SCC-G32	AT	145183	Coaxial Cable	Junkosha	MWX241-02000KMSK MS	OCT-09-13-005	2018/11/25	2019/11/30	12
SOS-09	AT	146318	Humidity Indicator	A&D	AD-5681	4061484	2018/12/5	2019/12/31	12
SPM-13	AT	169910	Power Meter	EMC Instruments Corporation	8990B	MY51000448	2019/3/6	2020/3/31	12
SPSS-06	AT	169911	Power sensor	EMC Instruments Corporation	N1923A	MY57270004	2019/3/6	2020/3/31	12
KSA-08	AT,RE	145089	Spectrum Analyzer	AGILENT	E4446A	MY46180525	2018/10/7	2019/10/31	12

Test Instruments (2 / 2)

Local ID	Test Name	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Calibration Due Date	Calibration Interval (Month)
COTS-SEMI-5	RE	170932	EMI Software	TSJ	TEPTO-DV3(RE,CE,ME,PE)	-	-	-	-
KJM-02	RE	146432	Measure	TAJIMA	GL19-55	-	-	-	-
SAEC-03(NSA)	RE	145565	Semi-Anechoic Chamber	TDK	SAEC-03(NSA)	3	2019/4/8	2020/4/30	12
SAEC-03(SVSWR)	RE	145566	Semi-Anechoic Chamber	TDK	SAEC-03(SVSWR)	3	2019/5/3	2020/5/31	12
SAF-03	RE	145126	Pre Amplifier	SONOMA	310N	290213	2019/2/5	2020/2/29	12
SAF-06	RE	145005	Pre Amplifier	Toyo Corporation	TPA0118-36	1440491	2019/2/8	2020/2/29	12
SAF-08	RE	145007	Pre Amplifier	Toyo Corporation	HAP18-26W	19	2019/3/5	2020/3/31	12
SAT10-05	RE	145136	Attenuator(above 1GHz)	AGILENT	8493C-010	74864	2018/11/25	2019/11/30	12
SAT6-13	RE	167094	Attenuator	JFW	50HF-006N	-	2019/2/5	2020/2/29	12
SBA-03	RE	145023	Biconical Antenna	Schwarzbeck	BBA9106	91032666	2019/5/7	2020/5/31	12
SCC-C1/C2/C3/C4/C5/C10/SRSE-03	RE	145171	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/TOYO	8D2W/12DSF A/141PE/141PE/141PE/141P	-/0901-271(RF Selector)	2019/4/19	2020/4/30	12
SCC-G40	RE	166491	Coaxial Cable	Junkosha	MWX221-01000NFSN MS/B	1612S005	2019/1/25	2020/1/31	12
SCC-G43	RE	156380	Coaxial Cable	HUBER+SUNER	SUCOFLEX_104 E	SN MY 13406/4E	2018/7/10	2019/7/31	12
SCC-G44	RE	168300	Coaxial Cable	HUBER+SUNER	SUCOFLEX 104	800070/4A	2019/3/26	2020/3/31	12
SCC-G45	RE	168301	Coaxial Cable	HUBER+SUNER	SUCOFLEX 102 E	800137/2E A	2019/3/26	2020/3/31	12
SCC-G57	RE	179540	Coaxial Cable	HUBER+SUNER	SUCOFLEX 102	802815/2	2019/5/16	2020/5/31	12
SFL-02	RE	145301	Highpass Filter	MICRO-TRONICS	HPM50111	51	2018/11/16	2019/11/30	12
SHA-03	RE	145501	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-739	2018/7/23	2019/7/31	12
SHA-04	RE	145512	Horn Antenna	ETS LINDGREN	9-60	LM3640	2018/7/23	2019/7/31	12
SLA-07	RE	145529	Logperiodic Antenna	Schwarzbeck	VUSLP9111B	196	2019/5/7	2020/5/31	12
SOS-05	RE	146293	Humidity Indicator	A&D	AD-5681	4062518	2018/10/25	2019/10/31	12
STR-08	RE	150463	Test Receiver	Rohde & Schwarz	ESW44	101581	2018/11/28	2019/11/30	12
STS-03	RE	146210	Digital Hitester	HIOKI	3805-50	80997823	2018/10/16	2019/10/31	12

*Hyphens for Last Calibration Date, Calibration Due Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test item: RE: Radiated Emission test
AT: Antenna Terminal Conducted test

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401