

TEST REPORT

EUT Description	WLAN and BT, 2x2 PCIe M.2 1216 SD adapter card
Brand Name	Intel® Wireless-AC 9560
Model Name	9560D2W
FCC ID	PD99560D2
Date of Test Start/End	2017-10-07 / 2017-11-30
Features	802.11ac, Dual Band, 2x2 Wi-Fi + Bluetooth® 5 (see section 5)

Applicant	Intel Mobile Communications
Address	100 Center Point Circle, Suite 200 Columbia, South Carolina 29210 USA
Contact Person	Steven Hackett
Telephone/Fax/ Email	steven.c.hackett@intel.com

Reference Standards	FCC CFR Title 47 Part 15 E (see section 1)
---------------------	---

Test Report identification	170919-03.TR01
Revision Control	Rev. 00 This test report revision replaces any previous test report revision (see section 8)

The test results relate only to the samples tested.

The test report shall not be reproduced in full, without written approval of the laboratory.

Issued by

Reviewed by

Gregory ROUSTAN
(Test Engineer Lead)

Olivier FARGANT
(Technical Manager)

Intel Mobile Communications France S.A.S – WRF Lab
425 rue de Goa – Le Cargo B6 - 06600, Antibes, France
Tel. +33493001400 / Fax +33493001401

Table of Contents

1. Standards, reference documents and applicable test methods	3
2. General conditions, competences and guarantees	3
3. Environmental Conditions	3
4. Test samples	4
5. EUT Features	4
6. Remarks and comments	4
7. Test Verdicts summary	5
7.1. 802.11 A/N/AC – U-NII-1	5
7.2. 802.11 A/N/AC – U-NII-2A	5
8. Document Revision History	5
Annex A. Test & System Description	6
A.1 MEASUREMENT SYSTEM	6
A.2 TEST EQUIPMENT LIST	8
A.3 MEASUREMENT UNCERTAINTY EVALUATION	9
Annex B. Test Results U-NII-1 & U-NII-2A	10
B.1 TEST CONDITIONS	10
B.2 TEST RESULTS TABLES U-NII-1	11
B.2.1 26dB & 99% Bandwidth	11
B.2.2 Power Limits. Maximum Output power & Peak power spectral density	13
B.2.3 Undesirable emission limits : Band Edge (Conducted)	19
B.2.4 Radiated spurious emission	21
B.3 TEST RESULTS SCREENSHOT U-NII-1	48
B.3.1 26dB Bandwidth	48
B.3.2 99% Bandwidth	53
B.3.3 Power Limits. Maximum Output power & Peak power spectral density	58
B.3.4 Undesirable emission limits : Band Edge (Conducted)	69
B.4 TEST RESULTS TABLES U-NII-2A	97
B.4.1 26dB & 99% Bandwidth	97
B.4.2 Power Limits. Maximum Output power & Peak power spectral density	99
B.4.3 Undesirable emissions limits : Band Edge (Conducted)	103
B.4.4 Radiated spurious emission	105
B.5 TEST RESULTS SCREENSHOT U-NII-2A	129
B.5.1 26dB Bandwidth	129
B.5.2 99% Bandwidth	133
B.5.3 Power Limits. Maximum Output power & Peak power spectral density	137
B.5.4 Undesirable emissions limits : Band Edge (Conducted)	146
Annex C. Photographs	157
C.1 TEST SETUP	157
C.2 TEST SAMPLE	159

1. Standards, reference documents and applicable test methods

1. FCC 47 CFR part 15 – Subpart E – Unlicensed National Information Infrastructure Devices.
2. FCC 47 CFR part 15 - Subpart C – §15.209 Radiated emission limits; general requirements.
3. FCC OET KDB 789033 D02 General U-NII Test Procedures New Rules v01r04 – Guidelines for compliance testing of Unlicensed National Information Infrastructure (U-NII) Devices (Part 15, Subpart E).
4. FCC OET KDB 644545 D03 Guidance for IEEE 802.11ac v01 - GUIDANCE FOR IEEE Std 802.11ac™ DEVICES EMISSION TESTING.
5. ANSI C63.10-2013 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

2. General conditions, competences and guarantees

- ✓ Intel Mobile Communications France SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2005 testing laboratory accredited by the American Association for Laboratory Accreditation (A2LA) with the certificate number 3478.01.
- ✓ Intel Mobile Communications France SAS Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm recognized by the FCC, with Designation Number FR0011.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.

3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	23 °C ±1 °C
Humidity	55 % ± 5 %

4. Test samples

Sample	Control #	Description	Model	Serial #	Date of receipt	Note
#01	170919-03.S29	Module	9560D2W	WFM: 3413E8702821	2017-10-02	Used for conducted tests
	170524-02.S15	Extender Board	PCB00609_01	6092416-442	2017-05-30	
	170000-01.S01	Laptop	Latitude E5470	DPBLMC2	2017-03-28	
	170220-04.S04	Adapter 1216SD to M.2	JfP Adapter M2	N/A	2017-04-10	
#02	170919-03.S22	Module	9560D2W	WFM:3413 E870281C	2017-10-02	Used for radiated tests
	170220-02.S03	Extender Board	PCB00609_01	6092416-446	2017-02-20	
	170000-01.S13	Laptop	Latitude E5470	FT6LMC2	2017-05-30	
	170727-02.S11	Adapter 1216SD to M.2	JfP Adapter M2	N/A	2017-08-09	
#03	170919-03.S21	Module	9560D2W	WFM:3413 E8702826	2017-10-02	Used for radiated tests
	170220-02.S04	Extender Board	PCB00609_01	6092416-493	2017-02-20	
	170801-01.S10	Laptop	Latitude E7470	7KNOXF2	2017-09-13	
	170727-02.S13	Adapter 1216SD to M.2	JfP Adapter M2	N/A	2017-08-09	

5. EUT Features

Brand Name	Intel® Wireless-AC 9560		
Model Name	9560D2W		
FCC ID	PD99560D2		
Software Version	10.1739.0-06012		
Driver Version	99.0.28.6		
Prototype / Production	Production		
Supported Radios	802.11b/g/n	2.4GHz (2400.0 – 2483.5 MHz)	
	802.11a/n/ac	5.2GHz (5150.0 – 5350.0 MHz)	
		5.6GHz (5470.0 – 5725.0 MHz)	
		5.8GHz (5725.0 – 5850.0 MHz)	
	Bluetooth 5	2.4GHz (2400.0 – 2483.5 MHz)	
Antenna Information	CHAIN A: PIFA antenna. WiFi 2.4GHz & 5GHz and BT CHAIN B: PIFA antenna. WiFi 2.4GHz & 5GHz		
Additional Information			

6. Remarks and comments

N/A

7. Test Verdicts summary

7.1. 802.11 a/n/ac – U-NII-1

FCC part	Test name	Verdict
15.407 (a) (1)	Power Limits. Maximum output power	P
15.407 (a) (1)	Peak power spectral density	P
15.407 (b) (1) 15.209	Undesirable emissions limits: Band Edge (conducted)	P
15.407 (b) (1) 15.209	Undesirable emissions limits (radiated)	P

7.2. 802.11 a/n/ac – U-NII-2A

FCC part	Test name	Verdict
15.407 (a) (2)	Power Limits. Maximum output power	P
15.407 (a) (2)	Peak power spectral density	P
15.407 (b) (2) 15.209	Undesirable emissions limits: Band Edge (conducted)	P
15.407 (b) (2) 15.209	Undesirable emissions limits (radiated)	P

P: Pass

F: Fail

NM: Not Measured

NA: Not Applicable

8. Document Revision History

Revision #	Date	Modified by	Revision Details
Rev.00	2017-11-30	A.Sayoud	First Issue


Annex A. Test & System Description

A.1 Measurement System


Measurements were performed using the following setups, made in accordance to the general provisions of FCC KDB 789033 D02 General UNII Test Procedures.

The DUT was installed in a test fixture and this test fixture is connected to a laptop computer and AC/DC power adapter. The laptop computer was used to configure the EUT to continuously transmit at a specified output power using all different modes and modulation schemes, using the Intel proprietary tool DRTU.


Conducted Setup

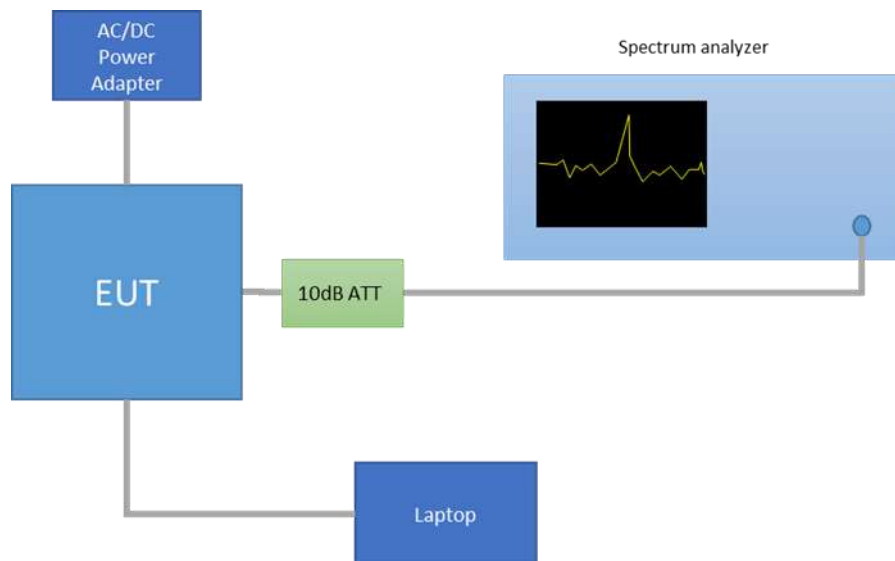


Radiated Setup < 1GHz

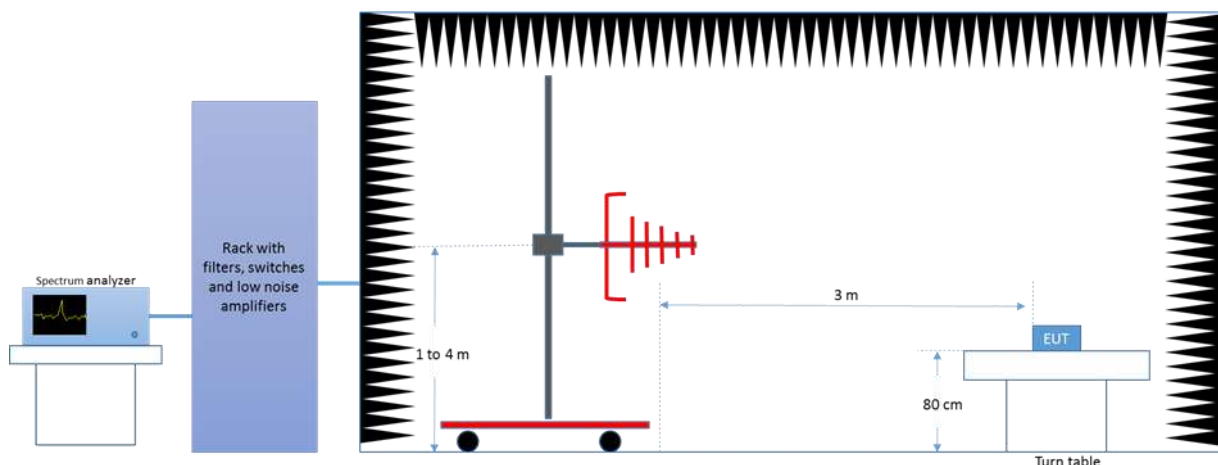

Radiated Setup 1 GHz – 18 GHz

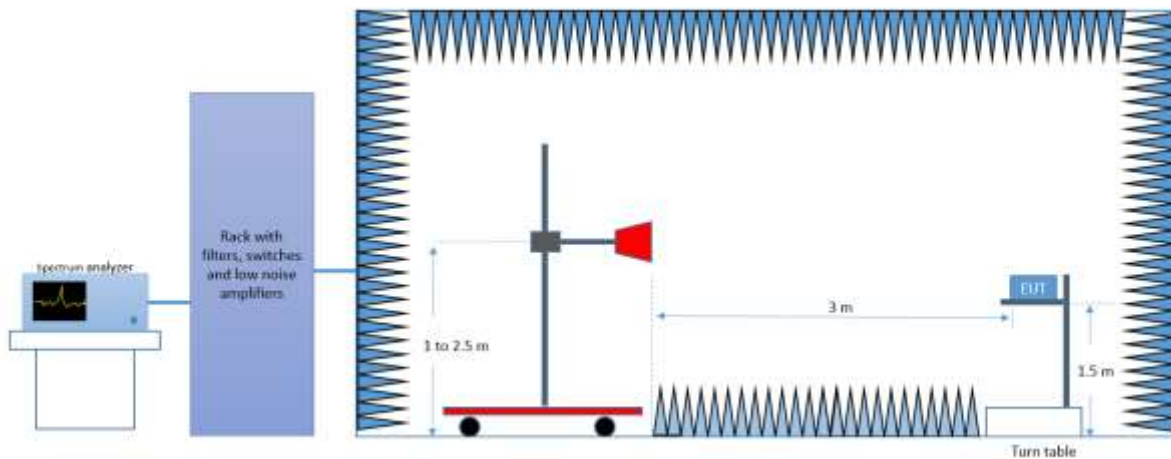

Radiated Setup 18 GHz – 40 GHz

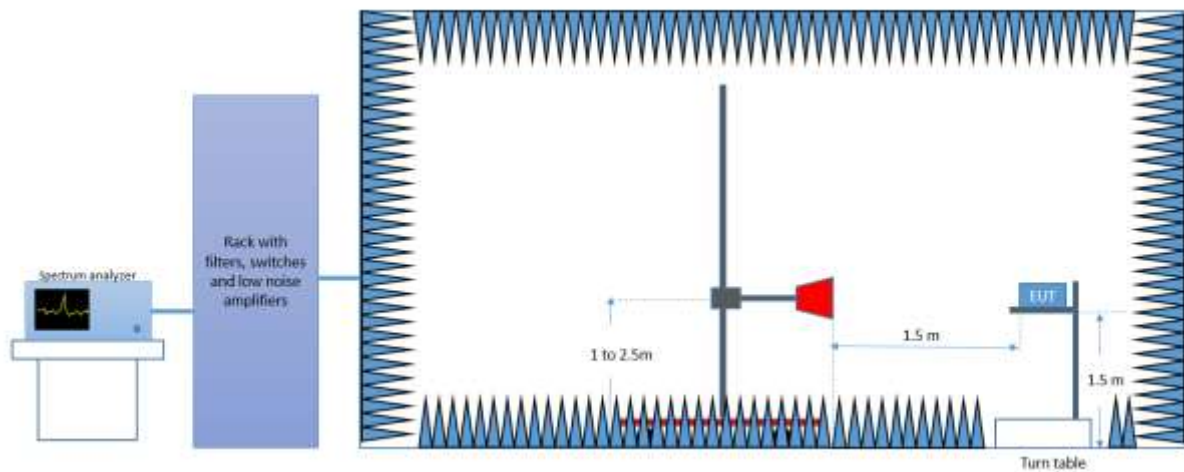

A.2 Test Equipment List

Conducted Setup

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
0316	Spectrum analyzer	FSV30	103309	Rohde & Schwarz	2017-09-22	2019-09-22

Radiated Setup-1

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
0133	Spectrum analyzer	FSV40	101358	Rohde & Schwarz	2016-04-15	2018-04-15
0137	Log antenna 30 MHz – 1 GHz	3142E	00156946	ETS Lindgren	2015-12-11	2017-12-11
0135	Semi Anechoic chamber	FACT 3	5720	ETS Lindgren	2016-04-28	2018-04-28
0530	Measurement Software	EMC32	100623	Rohde & Schwarz	N/A	N/A
0296	Power Supply	6673A	MY41000318	Agilent	N/A	N/A
0346	Multimeter	34401A	US36054685	HP	2016-02-04	2018-02-04

N/A: Not Applicable

Radiated Setup-2

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
0420	Spectrum analyzer	FSV40	101556	Rohde & Schwarz	2016-04-15	2018-04-15
0138	Horn antenna 1 GHz – 6.4 GHz	3117	00152266	ETS Lindgren	2016-03-14	2018-03-14
0141	Double Ridged Horn Antenna 1 GHz – 18 GHz	3117	00157736	ETS Lindgren	2016-04-13	2018-04-13
0409	PreAmplifier	3117-PA	00157993	ETS Lindgren	N/A	N/A
0334	Double Ridged Horn Antenna 18 GHz – 40 GHz	3116C-PA	00196308	ETS Lindgren	2017-08-22	2019-08-22
0337	Full Anechoic chamber	RFD_FA_100	5996	ETS Lindgren	2016-04-28	2018-04-28
0329	Measurement Software	EMC32	100401	Rohde & Schwarz	N/A	N/A

N/A: Not Applicable

Radiated Setup - shared equipments

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
0617	Power Sensor 50MHz-18GHz	NRP-Z81	104386	Rohde & Schwarz	2017-05-24	2019-05-24
0618	Power Sensor 50MHz-18GHz	NRP-Z81	104382	Rohde & Schwarz	2017-05-24	2019-05-24

A.3 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the below table:

Measurement type	Uncertainty [\pm dB]
Conducted Power	± 1.0
Conducted Spurious Emission	± 2.9
Radiated tests <1GHz	± 3.8
Radiated tests 1GHz - 40 GHz	± 4.7

Annex B. Test Results U-NII-1 & U-NII-2A

B.1 Test Conditions

For 802.11a mode the EUT can transmit at both CHAIN A and CHAIN B RF outputs individually, but not simultaneously.

For 802.11n20 (20 MHz channel bandwidth), 802.11n40 (40MHz channel bandwidth), 802.11ac80 (80MHz channel bandwidth) and 802.11ac160 (160MHz channel bandwidth) modes the EUT can transmit at both CHAIN A and CHAIN B RF outputs individually, and also simultaneously.

The conducted RF output power at each chain was adjusted according to the client's supplied Target values (see following table) using the Intel DRTU tool and measuring the power by using a spectrum analyser with the channel integration method according to point II) E) 2) e) (Method SA-2 Alternative) of Guidance 789033 D02.

Measured values for adjustment were within +/- 0.25 dB from the declared Target values.

U-NII-1					Conducted Power, Target Value (dBm)		
Mode	BW (MHz)	Data Rate	CH #	Freq. (MHz)	SISO Chain A	SISO Chain B	MIMO at both ports A and B
802.11a	20	6Mbps	36	5180	18.5	17.5	-
			40	5200	21.5	20.5	-
			48	5240	21.0	20.5	-
802.11n	20	HT0 HT8*	36	5180	18.0	17.0	19.0
			40	5200	21.0	21.0	21.5
			48	5240	21.0	21.0	21.5
	40	HT0 HT8*	38F	5190	17.0	17.5	17.0
			46F	5230	21.5	21.5	21.0
802.11ac	80	VHT0	42ac80	5210	18.0	17.0	13.0
802.11ac	160	VHT0	50ac160	5250	16.0	16.5	17.5

U-NII-2A					Conducted Power, Target Value (dBm)		
Mode	BW (MHz)	Data Rate	CH #	Freq. (MHz)	SISO Chain A	SISO Chain B	MIMO at both ports A and B
802.11a	20	6Mbps	52	5260	21.5	21.5	-
			56	5280	21.5	21.5	-
			64	5320	17.5	17.5	-
802.11n	20	HT0 HT8*	52	5260	21.5	21.5	21.5
			56	5280	21.5	21.5	21.5
			64	5320	17.5	17.5	19.0
	40	HT0 HT8*	54F	5270	21.0	21.0	22.0
			62F	5310	16.0	15.5	17.5
802.11ac	80	VHT0	58ac80	5290	15.0	14.5	15.5

The following data rates were selected based on preliminary testing that identified those rates as the worst cases for output power and spurious levels at the band edges:

802.11a → 6Mbps

802.11n20 and 802.11n40 (SISO) → HT0

802.11n20 and 802.11n40 (MIMO) → HT8

802.11ac80 (SISO) → VHT0

802.11ac80 (MIMO) → VHT0

802.11ac160 (SISO) → VHT0

802.11ac160 (MIMO) → VHT0


Alternative channels to the lowest and highest channels per band have been also tested for Band Edge compliance.

B.2 Test Results Tables U-NII-1

B.2.1 26dB & 99% Bandwidth

Test procedure

The setup below was used to measure the 26dB & 99% Bandwidth. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

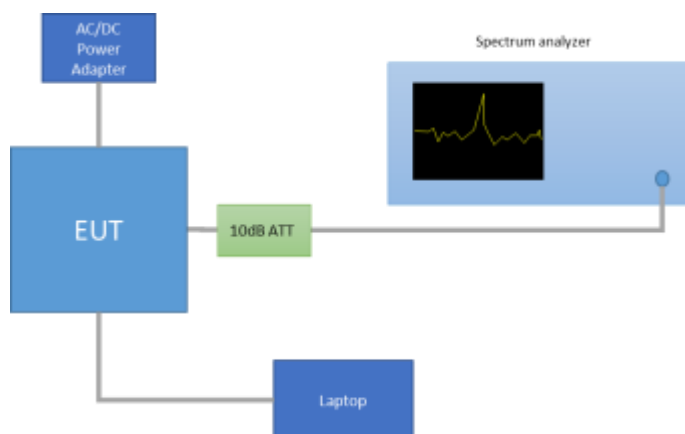

Results tables

Mode	Rate	Antenna	Channel	Frequency [MHz]	26dB BW [MHz]	99% BW [MHz]
802.11a	6Mbps	SISO CHAIN A	36	5180	24.47	16.80
			40	5200	26.28	17.20
			48	5240	25.78	17.04
		SISO CHAIN B	36	5180	24.17	16.80
			40	5200	38.00	20.16
			48	5240	39.94	21.76
802.11n20	HT0	SISO CHAIN A	36	5180	24.12	17.92
			40	5200	25.73	18.00
			48	5240	25.78	18.00
		SISO CHAIN B	36	5180	24.17	17.92
			40	5200	44.80	23.08
			48	5240	48.35	29.04
802.11n20	HT8	MIMO CHAIN A	36	5180	25.38	17.96
			40	5200	26.03	18.00
			48	5240	25.98	18.00
		MIMO CHAIN B	36	5180	24.90	17.92
			40	5200	24.98	17.96
			48	5240	24.98	17.96

Mode	Rate	Antenna	Channel	Frequency [MHz]	26dB BW [MHz]	99% BW [MHz]
802.11n40	HT0	SISO CHAIN A	38F	5190	45.00	36.64
			46F	5230	50.18	36.96
		SISO CHAIN B	38F	5190	44.78	36.56
			46F	5230	62.43	37.36
	HT8	MIMO CHAIN A	38F	5190	45.41	36.72
			46F	5230	49.46	36.88
		MIMO CHAIN B	38F	5190	44.41	36.40
			46F	5230	45.95	36.56
802.11ac80	VHT0	SISO CHAIN A	42ac80	5210	85.02	75.12
		SISO CHAIN B	42ac80	5210	85.21	75.12
	VHT0	MIMO CHAIN A	42ac80	5210	87.30	75.12
		MIMO CHAIN B	42ac80	5210	84.06	75.00
802.11ac160	VHT0	SISO CHAIN A	50ac160	5250	165.17	153.20
		SISO CHAIN B	50ac160	5250	156.17	153.20
	VHT0	MIMO CHAIN A	50ac160	5250	164.51	153.00
		MIMO CHAIN B	50ac160	5250	163.84	153.00

Max Value

See Section B.3.1 and Section B.3.2 for the screenshot results.

B.2.2 Power Limits. Maximum Output power & Peak power spectral density

Test limits

FCC part	Limits
15.407 (a) (1) (iv)	For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

Test procedure

The Maximum Conducted Output Power was measured using the channel integration method according to point E) 2) e) (Method SA-2 Alternative) of KDB 789033 D02.


The maximum power spectral density (PSD) was measured using the method according to point F) (Method SA-2 Alternative) of KDB 789033 D02.

In the measure-and-sum approach for MIMO mode, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically in linear power units to determine the total emission level from the device.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

The setup below was used to measure the maximum conducted output power and power spectral density. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

The declared maximum antenna gain is 5dBi.

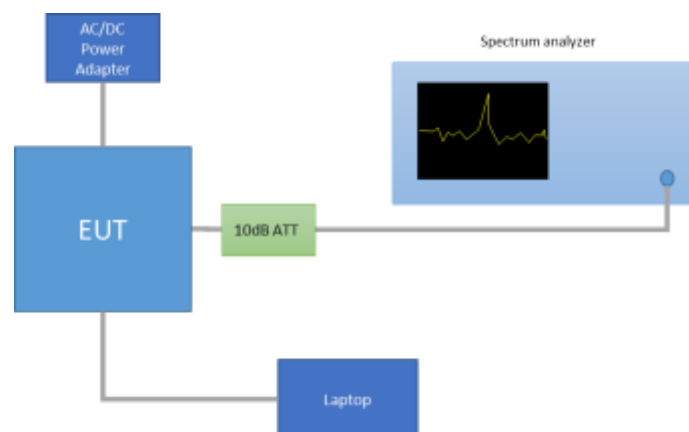

Results tables

Duty cycle

Mode	Rate	Antenna	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
802.11a	6Mbps	SISO-A	2.03	2.07	98.28%
		SISO-B	2.03	2.07	98.28%
802.11n20	HT0	SISO-A	1.89	1.93	98.09%
		SISO-B	1.89	1.93	98.09%
	HT8	MIMO-A	0.97	1.01	95.74%
		MIMO-B	0.97	1.01	95.74%
802.11n40	HT0	SISO-A	0.94	0.97	96.45%
		SISO-B	0.94	0.97	96.45%
	HT8	MIMO-A	0.49	0.53	92.45%
		MIMO-B	0.49	0.53	92.45%
802.11ac80	VHT0	SISO-A	0.46	0.49	92.64%
		SISO-B	0.46	0.49	92.64%
		MIMO-A	0.26	0.29	86.59%
		MIMO-B	0.26	0.29	86.59%
802.11ac160	VHT0	SISO-A	0.25	0.28	88.03%
		SISO-B	0.25	0.28	88.03%
		MIMO-A	0.15	0.19	79.02%
		MIMO-B	0.15	0.19	79.02%

Maximum output power

Mode	Rate	Channel	Freq. [MHz]	Antenna	Average Conducted Output Power [dBm]	Maximum* Conducted Output Power [dBm]	Maximum* Conducted Output Power [mW]	Max of EIRP [dBm]
802.11a	6Mbps	36	5180	SISO CHAIN A	18.44	18.44	69.82	23.44
				SISO CHAIN B	17.57	17.57	57.15	22.57
		40	5200	SISO CHAIN A	21.42	21.42	138.68	26.42
				SISO CHAIN B	20.50	20.50	112.20	25.50
		48	5240	SISO CHAIN A	21.00	21.00	125.89	26.00
				SISO CHAIN B	20.48	20.48	111.69	25.48
802.11n20	HT0	36	5180	SISO CHAIN A	17.95	17.95	62.37	22.95
				SISO CHAIN B	16.78	16.78	47.64	21.78
		40	5200	SISO CHAIN A	21.01	21.01	126.18	26.01
				SISO CHAIN B	20.93	20.93	123.88	25.93
		48	5240	SISO CHAIN A	20.95	20.95	124.45	25.95
				SISO CHAIN B	21.19	21.19	131.52	26.19
	HT8	36	5180	MIMO CHAIN A	15.50	15.69	37.06	20.69
				MIMO CHAIN B	16.41	16.60	45.70	21.60
				Combined A+B	18.99	19.18	82.76	24.18
		40	5200	MIMO CHAIN A	18.28	18.47	70.29	23.47
				MIMO CHAIN B	18.58	18.77	75.32	23.77
				Combined A+B	21.44	21.63	145.61	26.63
		48	5240	MIMO CHAIN A	17.95	18.14	65.15	23.14
				MIMO CHAIN B	18.53	18.72	74.45	23.72
				Combined A+B	21.26	21.45	139.60	26.45

Mode	Rate	Channel	Freq. [MHz]	Antenna	Average Conducted Output Power [dBm]	Maximum* Conducted Output Power [dBm]	Maximum* Conducted Output Power [mW]	Max of EIRP [dBm]
802.11n40	HT0	38F	5190	SISO CHAIN A	19.25	19.41	87.24	24.41
				SISO CHAIN B	19.38	19.54	89.89	24.54
		46F	5230	SISO CHAIN A	21.37	21.53	142.14	26.53
				SISO CHAIN B	21.45	21.61	144.78	26.61
	HT8	38F	5190	MIMO CHAIN A	13.77	14.11	25.77	19.11
				MIMO CHAIN B	13.68	14.02	25.24	19.02
				Combined A+B	16.74	17.08	51.01	22.08
		46F	5230	MIMO CHAIN A	18.08	18.42	69.52	23.42
				MIMO CHAIN B	16.99	17.33	54.09	22.33
				Combined A+B	20.58	20.92	123.61	25.92
802.11ac80	VHT0	42ac80	5210	SISO CHAIN A	17.82	18.15	65.34	23.15
				SISO CHAIN B	16.73	17.06	50.84	22.06
				MIMO CHAIN A	8.75	9.38	8.66	14.38
				MIMO CHAIN B	10.01	10.64	11.58	15.64
				Combined A+B	12.44	13.06	20.24	18.06
802.11ac160	VHT0	50ac160	5250	SISO CHAIN A	15.26	15.81	38.14	20.81
				SISO CHAIN B	15.83	16.38	43.49	21.38
				MIMO CHAIN A	12.34	13.36	21.69	18.36
				MIMO CHAIN B	14.44	15.46	35.18	20.46
				Combined A+B	16.53	17.55	56.87	22.55

* Maximum values are the duty cycle compensated values calculated from the average (measured) values

Max Value

Min Value

Maximum power spectral Density (PSD)

Mode	Rate	Channel	Freq. [MHz]	Antenna	Average conducted PSD [dBm/MHz]	Maximum* conducted PSD [dBm/MHz]
802.11a	6Mbps	36	5180	SISO CHAIN A	6.79	6.79
				SISO CHAIN B	5.93	5.93
		40	5200	SISO CHAIN A	9.74	9.74
				SISO CHAIN B	8.79	8.79
		48	5240	SISO CHAIN A	9.35	9.35
				SISO CHAIN B	8.78	8.78
802.11n20	HT0	36	5180	SISO CHAIN A	6.01	6.01
				SISO CHAIN B	4.84	4.84
		40	5200	SISO CHAIN A	9.05	9.05
				SISO CHAIN B	8.87	8.87
		48	5240	SISO CHAIN A	9.02	9.02
				SISO CHAIN B	9.12	9.12
	HT8	36	5180	MIMO CHAIN A	3.54	3.73
				MIMO CHAIN B	4.46	4.65
				Combined A+B	7.03	7.22
		40	5200	MIMO CHAIN A	6.31	6.50
				MIMO CHAIN B	6.51	6.70
				Combined A+B	9.42	9.61
		48	5240	MIMO CHAIN A	6.02	6.21
				MIMO CHAIN B	6.61	6.80
				Combined A+B	9.34	9.52

Mode	Rate	Channel	Freq. [MHz]	Antenna	Average conducted PSD [dBm/MHz]	Maximum* conducted PSD [dBm/MHz]
802.11n40	HT0	38F	5190	SISO CHAIN A	4.20	4.36
				SISO CHAIN B	4.32	4.48
		46F	5230	SISO CHAIN A	6.29	6.45
				SISO CHAIN B	6.36	6.52
	HT8	38F	5190	MIMO CHAIN A	-1.25	-0.91
				MIMO CHAIN B	-1.33	-0.99
				Combined A+B	2.43	2.77
		46F	5230	MIMO CHAIN A	3.05	3.39
				MIMO CHAIN B	1.98	2.32
				Combined A+B	5.56	5.90
802.11ac80	VHT0	42ac80	5210	SISO CHAIN A	0.39	0.72
				SISO CHAIN B	-0.74	-0.41
				MIMO CHAIN A	-8.65	-8.02
				MIMO CHAIN B	-4.93	-4.30
				Combined A+B	-3.39	-2.77
802.11ac160	VHT0	50ac160	5250	SISO CHAIN A	-4.81	-4.26
				SISO CHAIN B	-4.26	-3.71
				MIMO CHAIN A	-7.66	-6.64
				MIMO CHAIN B	-5.47	-4.45
				Combined A+B	-3.42	-2.40

* Maximum values are the duty cycle compensated values calculated from the measured average values

See Section B.3.3 for the screenshot results.


B.2.3 Undesirable emission limits : Band Edge (Conducted)

Test limits

FCC part	Limits																				
15.407 (b) (1)	For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.																				
15.209	<p>Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):</p> <table><tr><th>Freq Range (MHz)</th><th>Field Strength (μV/m)</th><th>Field Strength (dBμV/m)</th><th>Meas. Distance (m)</th></tr><tr><td>30-88</td><td>100</td><td>40</td><td>3</td></tr><tr><td>88-216</td><td>150</td><td>43.5</td><td>3</td></tr><tr><td>216-960</td><td>200</td><td>46</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>54</td><td>3</td></tr></table> <p>The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p> <p>For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.</p>	Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)																		
30-88	100	40	3																		
88-216	150	43.5	3																		
216-960	200	46	3																		
Above 960	500	54	3																		

Test procedure

The setup below was used to measure undesirable emissions on the Band Edge domain. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss and the declared Antenna Gain.

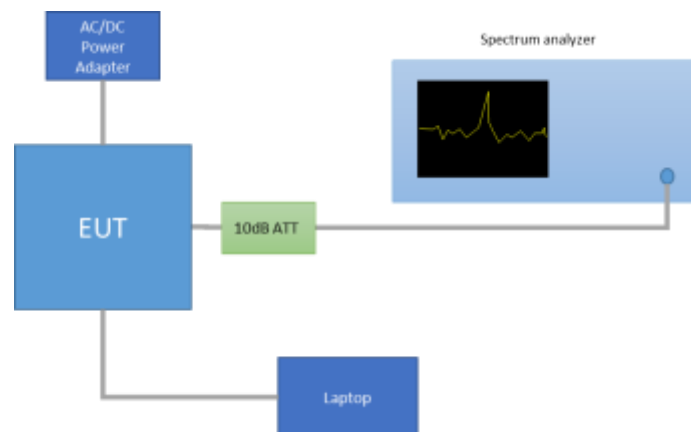

For Band Edge measurements in average mode on the low frequency section, one of the two methods is used according to section G) 6) (KDB 789033 D02):

- 1) Method AD (Average Detection) as per paragraph II.G.6.c.
- 2) Method VB (Averaging using reduced video bandwidth) as per paragraph II.G.6.d.

In case of Band Edge measurements falling in restricted bands, the declared Antenna Gain is also compensated in the graph. The declared maximum antenna gain is 5dBi.

For Band Edge measurements falling in restricted bands, the following limits in dBm were applied for the average detector after the conversion from the limits detailed above in dB μ V/m, according to FCC 47 CFR part 15 - Subpart C – §15.209(a). The limits in dBm for peak detector are 20dB above the indicated values in the table.

§15.209(a)			Converted values	
Freq Range (MHz)	Distance (m)	Field strength (microvolts/meter)	Field strength (dB microvolts/meter)	Power (dBm)
Above 960	3	500	54.0	-41.2

See Section B.3.4 for the screenshot results.

B.2.4 Radiated spurious emission

Standard references

FCC part	Limits																																
15.407 (b) (1)	For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.																																
15.209	Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a): <table><tr><th>Freq Range (MHz)</th><th>Field Strength (μV/m)</th><th>Field Strength (dBμV/m)</th><th>Meas. Distance (m)</th></tr><tr><td>0.009-0.490</td><td>2400/f(kHz)</td><td>-</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/f(kHz)</td><td>-</td><td>300</td></tr><tr><td>1.705-30.0</td><td>30</td><td>-</td><td>30</td></tr><tr><td>30-88</td><td>100</td><td>40</td><td>3</td></tr><tr><td>88-216</td><td>150</td><td>43.5</td><td>3</td></tr><tr><td>216-960</td><td>200</td><td>46</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>54</td><td>3</td></tr></table>	Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)	0.009-0.490	2400/f(kHz)	-	300	0.490-1.705	24000/f(kHz)	-	300	1.705-30.0	30	-	30	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
	Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)																													
	0.009-0.490	2400/f(kHz)	-	300																													
	0.490-1.705	24000/f(kHz)	-	300																													
	1.705-30.0	30	-	30																													
	30-88	100	40	3																													
	88-216	150	43.5	3																													
	216-960	200	46	3																													
	Above 960	500	54	3																													
	The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.																																
For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.																																	

Test procedure

The setup below was used to measure the radiated spurious emissions.


Depending of the frequency range and bands being tested, different antennas and filters were used.

The final measurement is done by varying the antenna height, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.


The radiated spurious emission was measured on the worst case configuration selected from the chapter B.2.2 and using the low, middle and high channel.

For technologies 802.11n20, 802.11n40, 802.11ac80 and 802.11ac160 the worst case in terms of spurious emissions found among the low, mid and high channels when tested on chain A and B separately is used to perform the test in MIMO mode (Chain A+B).


Radiated Setup < 1GHz

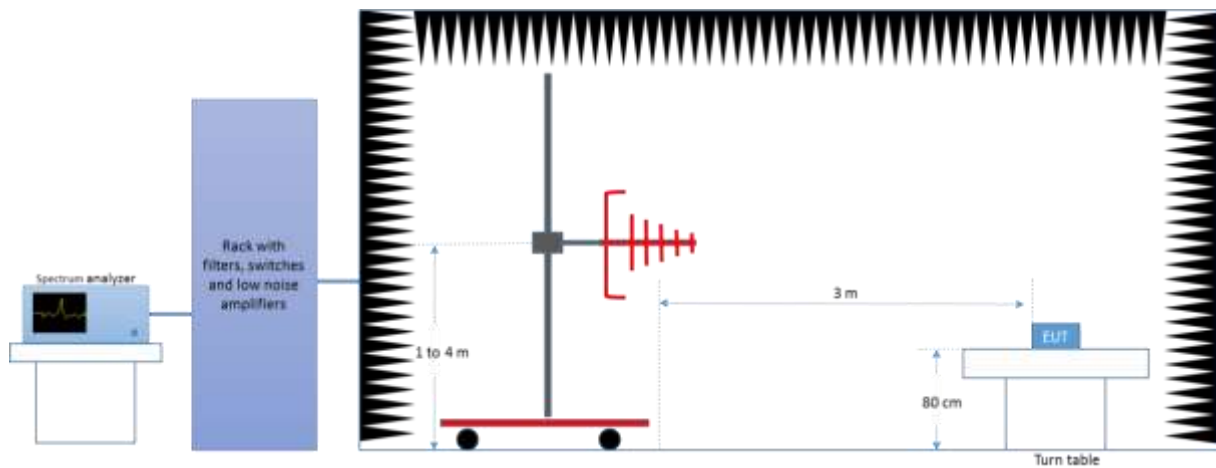

Radiated Setup 1 GHz - 18 GHz

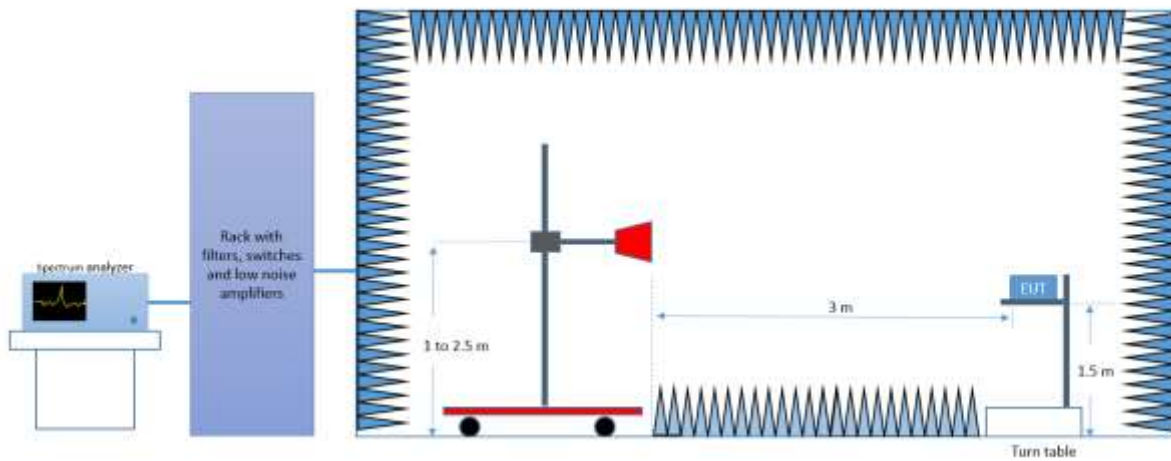

Radiated Setup 18 GHz - 40 GHz

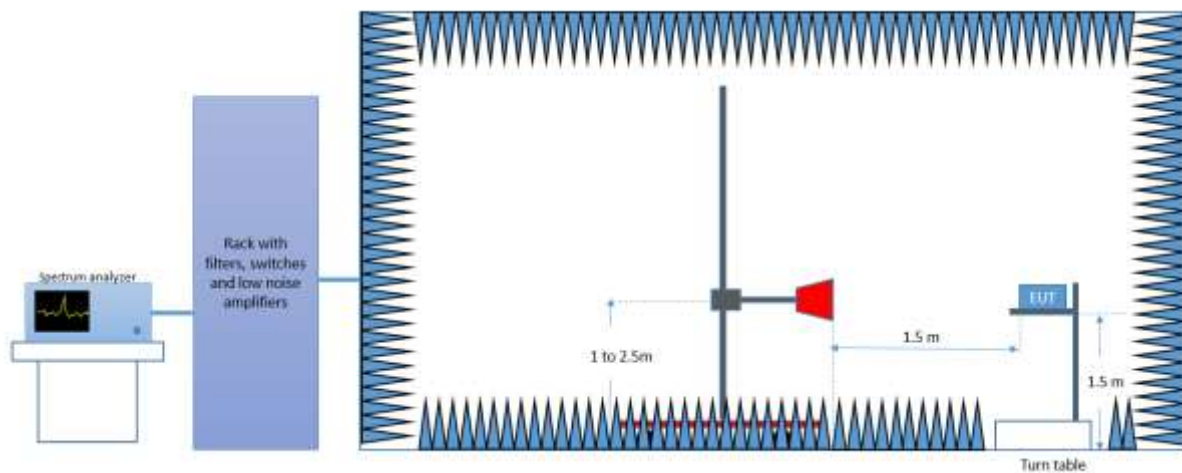

Sample Calculation

The field strength is deduced from the radiated measurement using the following equation:

$$E = 126.8 - 20\log(\lambda) + P - G$$

where

E is the field strength of the emission at the measurement distance, in dBμV/m

P is the power measured at the output of the test antenna, in dBm

λ is the wavelength of the emission under investigation $[300/f_{MHz}]$, in m

G is the gain of the test antenna, in dBi

NOTE – The measured power P includes all applicable instrument correction factors up to the connection to the test Antenna e.g. cable losses, amplifier gains.

For field strength measurements made at other than the distance at which the applicable limit is specified, the field strength of the emission at the distance specified by the limit is deduced as follows:

$$E_{SpecLimit} = E_{Meas} + 20\log(D_{Meas}/D_{SpecLimit})$$

where

E_{SpecLimit} is the field strength of the emission at the distance specified by the limit, in dBμV/m

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

D_{Meas} is the measurement distance, in m

D_{SpecLimit} is the distance specified by the limit, in m

Test Results

30 MHz – 40 GHz, 802.11a, 6Mbps, Chain A

Radiated Spurious – CH36

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
32.6	30.8	---	40.0	9.2
115.2	27.4	---	43.5	16.1
208.0	33.6	---	43.5	9.9
220.5	36.1	---	46.0	9.9
640.0	38.6	---	46.0	7.4
1190.0	---	41.6	54.0	12.4
6072.1	---	49.3	54.0	4.7
6073.1	61.3	---	74.0	12.7
10359.6	---	40.1	54.0	13.9
10360.5	50.5	---	74.0	23.5
25959.4	---	38.8	54.0	15.2
26125.4	49.4	---	74.0	24.6
39661.2	---	49.1	54.0	4.9
39864.2	59.9	---	74.0	14.1

Radiated Spurious – CH40

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
32.6	30.1	---	40.0	9.9
62.5	28.9	---	40.0	11.1
208.0	29.9	---	43.5	13.6
640.0	41.3	---	46.0	4.7
819.7	40.3	---	46.0	5.7
1190.2	---	42.4	54.0	11.6
6053.7	---	49.0	54.0	5.0
6089.7	60.8	---	74.0	13.2
10399.3	50.0	---	74.0	24.0
10400.7	---	40.0	54.0	14.0
25985.3	---	38.3	54.0	15.7
26046.3	48.9	---	74.0	25.1
39657.9	---	48.8	54.0	5.2
39794.5	59.4	---	74.0	14.6

Radiated Spurious – CH48

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
32.6	30.7	---	40.0	9.3
220.5	36.1	---	46.0	9.9
224.6	34.3	---	46.0	11.7
640.0	37.7	---	46.0	8.4
832.8	40.3	---	46.0	5.7
1190.0	---	41.7	54.0	12.3
6065.4	---	49.3	54.0	4.7
6065.4	60.8	---	74.0	13.2
10473.8	49.3	---	74.0	24.7
10477.8	---	38.1	54.0	15.9
20948.7	48.7	---	74.0	25.3
20964.2	---	38.3	54.0	15.7
39448.6	---	49.1	54.0	4.9
39697.9	59.5	---	74.0	14.5

30 MHz – 40 GHz, 802.11a, 6Mbps, Chain B

Radiated Spurious – CH36

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
32.6	29.1	---	40.0	10.9
208.0	34.2	---	43.5	9.3
220.5	36.1	---	46.0	9.9
640.0	35.8	---	46.0	10.2
830.6	40.4	---	46.0	5.7
1190.2	---	42.7	54.0	11.3
6061.5	---	49.4	54.0	4.6
6076.0	61.6	---	74.0	12.4
10360.5	---	37.7	54.0	16.3
10653.2	48.6	---	74.0	25.4
25966.8	---	38.8	54.0	15.2
25994.3	49.4	---	74.0	24.6
39628.8	---	49.2	54.0	4.8
39707.6	60.1	---	74.0	13.9

Radiated Spurious – CH40

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
32.7	31.1	---	40.0	8.9
208.0	34.0	---	43.5	9.5
220.4	35.8	---	46.0	10.2
640.0	35.6	---	46.0	10.4
833.0	40.2	---	46.0	5.8
1190.2	---	42.6	54.0	11.4
6073.8	---	49.1	54.0	4.9
6099.6	61.9	---	74.0	12.1
10399.8	---	36.8	54.0	17.2
10680.8	48.4	---	74.0	25.6
20799.9	---	39.6	54.0	14.4
25993.8	49.0	---	74.0	25.0
39650.7	59.2	---	74.0	14.8
39663.3	---	48.9	54.0	5.1

Radiated Spurious – CH48

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
32.6	30.9	---	40.0	9.2
220.5	32.8	---	46.0	13.2
224.6	32.6	---	46.0	13.5
640.0	38.0	---	46.0	8.1
828.2	40.1	---	46.0	5.9
1190.2	---	42.8	54.0	11.2
6052.2	61.4	---	74.0	12.6
6059.1	---	49.3	54.0	4.7
10485.9	---	37.5	54.0	16.5
10564.0	49.1	---	74.0	24.9
20960.2	---	40.0	54.0	14.0
20965.8	50.6	---	74.0	23.4
39644.8	---	49.3	54.0	4.7
39885.3	60.0	---	74.0	14.0

30 MHz – 40 GHz, 802.11n20, HT0, Chain A

Radiated Spurious – CH36

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
32.7	30.0	---	40.0	10.0
62.5	29.1	---	40.0	10.9
500.1	35.5	---	46.0	10.5
640.0	40.1	---	46.0	5.9
836.7	40.7	---	46.0	5.4
1190.2	---	42.8	54.0	11.2
6037.5	---	49.2	54.0	4.8
6051.5	60.8	---	74.0	13.2
10359.2	---	39.1	54.0	14.9
10361.0	49.9	---	74.0	24.1
20719.8	47.7	---	74.0	26.3
20720.3	---	36.9	54.0	17.1
39864.6	---	49.0	54.0	5.0
39899.2	59.1	---	74.0	15.0

Radiated Spurious – CH40

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
32.6	29.3	---	40.0	10.7
65.2	27.8	---	40.0	12.2
208.0	37.7	---	43.5	5.8
639.4	34.1	---	46.0	11.9
821.5	39.4	---	46.0	6.6
1190.2	---	42.9	54.0	11.1
1190.5	47.6	---	74.0	26.5
6067.9	---	49.5	54.0	4.5
6078.7	60.8	---	74.0	13.2
10398.0	48.4	---	74.0	25.6
10400.2	---	38.8	54.0	15.2
20802.7	47.6	---	74.0	26.4
20807.5	---	37.3	54.0	16.7
39487.8	59.4	---	74.0	14.6
39870.5	---	48.6	54.0	5.4

Radiated Spurious – CH48

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dB μ V/m	dB μ V/m	dB μ V/m	dB
32.6	31.2	---	40.0	8.8
65.7	37.0	---	40.0	3.0
195.5	37.7	---	43.5	5.8
208.0	39.2	---	43.5	4.3
825.0	39.6	---	46.0	6.4
1190.2	48.0	---	74.0	26.0
1190.2	---	42.5	54.0	11.5
6038.4	---	49.3	54.0	4.7
6063.2	62.0	---	74.0	12.0
10477.0	---	37.8	54.0	16.2
10643.4	48.9	---	74.0	25.1
20965.3	---	38.7	54.0	15.3
20977.7	49.1	---	74.0	24.9
39444.0	60.1	---	74.0	13.9
39639.7	---	49.1	54.0	4.9

30 MHz – 40 GHz, 802.11n20, HT0, Chain B

Radiated Spurious – CH36

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
32.6	30.8	---	40.0	9.2
115.2	28.1	---	43.5	15.4
500.1	34.6	---	46.0	11.5
640.0	40.3	---	46.0	5.8
828.1	40.5	---	46.0	5.5
1190.2	47.6	---	74.0	26.4
1190.2	---	42.9	54.0	11.1
6134.4	---	48.9	54.0	5.1
6139.1	60.6	---	74.0	13.4
10357.4	49.2	---	74.0	24.8
10360.1	---	38.8	54.0	15.2
23949.9	49.5	---	74.0	24.5
25953.5	---	38.3	54.0	15.7
39400.5	59.6	---	74.0	14.4
39855.7	---	48.9	54.0	5.1

Radiated Spurious – CH40

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
32.5	29.7	---	40.0	10.3
208.0	32.5	---	43.5	11.0
220.4	34.8	---	46.0	11.3
640.0	38.1	---	46.0	7.9
819.0	40.7	---	46.0	5.4
1190.2	47.8	---	74.0	26.2
1190.5	---	42.8	54.0	11.2
6078.9	61.6	---	74.0	12.4
6079.4	---	49.2	54.0	4.8
10398.4	48.4	---	74.0	25.6
10398.9	---	38.2	54.0	15.8
25929.1	49.0	---	74.0	25.0
25949.6	---	38.3	54.0	15.7
39649.0	59.3	---	74.0	14.7
39659.1	---	48.6	54.0	5.4

Radiated Spurious – CH48

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dB μ V/m	dB μ V/m	dB μ V/m	dB
32.8	29.7	---	40.0	10.3
65.3	32.9	---	40.0	7.1
115.2	26.1	---	43.5	17.4
288.0	31.2	---	46.0	14.9
796.4	39.8	---	46.0	6.2
1190.2	48.2	---	74.0	25.8
1190.2	---	42.7	54.0	11.3
6056.1	60.8	---	74.0	13.2
6081.4	---	49.2	54.0	4.8
10670.6	---	37.1	54.0	16.9
10677.3	48.2	---	74.0	25.8
20963.0	---	39.5	54.0	14.5
20966.1	50.1	---	74.0	23.9
39453.3	59.5	---	74.0	14.5
39475.6	---	48.5	54.0	5.5

30 MHz – 40 GHz, 802.11n20, HT8, Chain A+B

Radiated Spurious – CH48

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
74.9	34.0	---	40.0	6.0
95.6	21.7	---	43.5	21.8
112.3	27.1	---	43.5	16.4
115.1	29.6	---	43.5	13.9
191.3	29.3	---	43.5	14.2
228.8	37.5	---	46.0	8.5
640.0	40.5	---	46.0	5.6
1190.0	47.9	---	74.0	26.1
1190.2	---	41.5	54.0	12.5
6165.6	---	48.8	54.0	5.2
6213.5	60.9	---	74.0	13.1
8814.6	48.4	---	74.0	25.6
10673.7	---	36.7	54.0	17.3
20957.7	---	40.2	54.0	13.8
20973.7	49.7	---	74.0	24.3
39433.4	59.1	---	74.0	14.9
39643.5	---	48.8	54.0	5.2

30 MHz – 40 GHz, 802.11n40, HT0, Chain A

Radiated Spurious – CH38F

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
32.6	30.0	---	40.0	10.0
65.4	29.3	---	40.0	10.7
212.2	34.0	---	43.5	9.5
220.5	35.9	---	46.0	10.1
640.0	35.8	---	46.0	10.2
815.5	39.7	---	46.0	6.3
1151.9	---	38.2	54.0	15.8
1190.2	---	42.6	54.0	11.4
2127.1	54.0	---	74.0	20.0
6301.8	60.7	---	74.0	13.3
6304.0	---	49.1	54.0	4.9
10359.6	49.1	---	74.0	24.9
10378.8	---	37.6	54.0	16.5
25965.3	---	38.3	54.0	15.7
26005.6	48.7	---	74.0	25.3
39473.5	---	48.5	54.0	5.5
39655.3	59.5	---	74.0	14.5

Radiated Spurious – CH46F

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
74.9	29.2	---	40.0	10.8
115.1	25.2	---	43.5	18.3
191.4	29.5	---	43.5	14.0
195.5	29.9	---	43.5	13.6
199.6	29.8	---	43.5	13.7
237.1	34.7	---	46.0	11.3
640.0	35.6	---	46.0	10.4
1190.2	---	42.8	54.0	11.2
2124.7	55.2	---	74.0	18.8
6060.0	---	49.3	54.0	4.8
6079.2	61.0	---	74.0	13.0
10456.0	---	37.2	54.0	16.8
10685.3	48.0	---	74.0	26.0
17978.6	61.1	---	74.0	12.9
17999.1	---	50.1	54.0	3.9
23883.5	48.8	---	74.0	25.3
25979.7	---	38.2	54.0	15.8
39696.7	59.3	---	74.0	14.7
39876.8	---	48.7	54.0	5.3

30 MHz – 40 GHz, 802.11n40, HT0, Chain B

Radiated Spurious – CH38F

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
70.7	25.5	---	40.0	14.5
115.2	26.1	---	43.5	17.4
191.3	31.9	---	43.5	11.6
199.7	31.4	---	43.5	12.1
228.8	36.0	---	46.0	10.1
399.9	36.1	---	46.0	9.9
640.0	35.5	---	46.0	10.5
1190.5	47.4	---	74.0	26.6
1190.5	---	42.4	54.0	11.6
6077.7	---	49.3	54.0	4.7
6082.4	61.5	---	74.0	12.5
10380.6	---	37.1	54.0	16.9
10648.3	48.0	---	74.0	26.0
25971.0	48.1	---	74.0	25.9
25985.3	---	38.3	54.0	15.8
39627.9	58.8	---	74.0	15.2
39631.7	---	48.9	54.0	5.1

Radiated Spurious – CH46F

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
74.9	26.4	---	40.0	13.6
115.1	25.5	---	43.5	18.0
191.3	26.0	---	43.5	17.5
195.5	27.7	---	43.5	15.8
199.7	30.4	---	43.5	13.1
233.0	31.2	---	46.0	14.8
640.0	37.2	---	46.0	8.8
1190.2	---	42.5	54.0	11.5
2128.4	53.7	---	74.0	20.3
6085.8	61.1	---	74.0	12.9
6087.0	---	49.3	54.0	4.7
10550.6	---	36.7	54.0	17.3
10675.5	49.0	---	74.0	25.0
20924.8	---	37.1	54.0	16.9
20926.2	47.6	---	74.0	26.5
39465.1	---	48.6	54.0	5.4
39833.8	59.4	---	74.0	14.6

30 MHz – 40 GHz, 802.11n40, HT8, Chain A+B

Radiated Spurious – CH38F

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
74.9	34.0	---	40.0	6.0
95.6	21.7	---	43.5	21.8
112.3	27.1	---	43.5	16.4
115.1	29.6	---	43.5	13.9
191.3	29.3	---	43.5	14.2
228.8	37.5	---	46.0	8.5
640.0	40.5	---	46.0	5.6
1190.0	47.9	---	74.0	26.1
1190.2	---	41.5	54.0	12.5
6165.6	---	48.8	54.0	5.2
6213.5	60.9	---	74.0	13.1
8814.6	48.4	---	74.0	25.6
10673.7	---	36.7	54.0	17.3
17006.4	---	44.6	54.0	9.4
17021.6	56.7	---	74.0	17.3
20957.7	---	40.2	54.0	13.8
20973.7	49.7	---	74.0	24.3
39433.4	59.1	---	74.0	14.9
39643.5	---	48.8	54.0	5.2

30 MHz – 40 GHz, 802.11ac80, VHT0, Chain A

Radiated Spurious – CH42ac80

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
74.9	31.5	---	40.0	8.5
115.2	24.6	---	43.5	18.9
191.3	30.2	---	43.5	13.3
195.5	31.0	---	43.5	12.5
199.7	29.7	---	43.5	13.8
237.1	35.2	---	46.0	10.8
640.0	37.2	---	46.0	8.8
1113.4	---	42.1	54.0	11.9
1190.2	---	43.0	54.0	11.0
2125.4	54.7	---	74.0	19.3
2661.0	52.8	---	74.0	21.2
10428.8	---	37.2	54.0	16.8
10527.4	48.7	---	74.0	25.3
25958.0	48.9	---	74.0	25.1
25979.7	---	38.1	54.0	15.9
39665.0	---	48.9	54.0	5.1
39985.2	59.3	---	74.0	14.7

30 MHz – 40 GHz, 802.11ac80, VHT0, Chain B

Radiated Spurious – CH42ac80

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
74.9	25.4	---	40.0	14.6
115.2	25.7	---	43.5	17.8
191.4	26.5	---	43.5	17.0
195.5	28.3	---	43.5	15.2
199.7	29.8	---	43.5	13.7
237.2	32.6	---	46.0	13.4
640.0	36.4	---	46.0	9.6
1113.6	---	41.6	54.0	12.4
1190.2	---	43.4	54.0	10.6
2128.8	54.4	---	74.0	19.6
2665.4	53.7	---	74.0	20.3
10488.6	48.1	---	74.0	25.9
10543.0	---	36.9	54.0	17.2
23948.2	48.6	---	74.0	25.4
25977.4	---	38.3	54.0	15.7
39595.8	---	48.9	54.0	5.1
39621.6	58.9	---	74.0	15.1

30 MHz – 40 GHz, 802.11ac80, VHT0, Chain A+B

Radiated Spurious – CH42ac80

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
74.9	33.3	---	40.0	6.7
115.2	25.7	---	43.5	17.8
183.0	32.9	---	43.5	10.6
191.3	29.6	---	43.5	13.9
199.7	31.3	---	43.5	12.2
237.1	36.9	---	46.0	9.1
640.0	35.7	---	46.0	10.3
1190.0	46.9	---	74.0	27.1
1190.2	---	42.5	54.0	11.5
6057.3	61.5	---	74.0	12.5
6077.2	---	49.4	54.0	4.6
10412.7	---	37.7	54.0	16.3
10427.4	48.8	---	74.0	25.2
25862.7	48.9	---	74.0	25.1
25973.5	---	38.3	54.0	15.7
39631.3	59.4	---	74.0	14.6
39639.3	---	48.8	54.0	5.2

30 MHz – 40 GHz, 802.11ac160, VHT0, Chain A

Radiated Spurious – CH50ac160

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
74.9	28.5	---	40.0	11.5
115.1	25.4	---	43.5	18.1
133.1	29.8	---	43.5	13.7
183.0	29.3	---	43.5	14.2
199.6	30.8	---	43.5	12.7
237.1	35.1	---	46.0	10.9
640.0	36.1	---	46.0	9.9
1113.4	---	41.6	54.0	12.4
1190.2	---	42.8	54.0	11.2
2132.0	54.3	---	74.0	19.7
2656.1	52.7	---	74.0	21.3
8833.8	48.0	---	74.0	26.0
10679.1	---	36.8	54.0	17.2
25924.6	48.6	---	74.0	25.4
26001.1	---	38.2	54.0	15.8
39431.7	59.4	---	74.0	14.7
39651.5	---	48.6	54.0	5.4

30 MHz – 40 GHz, 802.11ac160, VHT0, Chain B

Radiated Spurious – CH50ac160

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
74.8	26.1	---	40.0	13.9
115.2	25.0	---	43.5	18.5
133.1	27.8	---	43.5	15.7
183.0	29.3	---	43.5	14.2
199.6	29.8	---	43.5	13.7
237.1	32.5	---	46.0	13.5
640.0	36.6	---	46.0	9.4
1113.6	---	41.5	54.0	12.6
1190.2	---	42.6	54.0	11.4
2129.8	53.5	---	74.0	20.5
2667.1	52.7	---	74.0	21.3
10514.0	---	37.0	54.0	17.0
10677.3	48.6	---	74.0	25.4
25989.0	---	38.1	54.0	15.9
25998.3	48.9	---	74.0	25.1
39487.4	59.1	---	74.0	14.9
39637.2	---	48.6	54.0	5.4

30 MHz – 40 GHz, 802.11ac160, VHT0, Chain A+B

Radiated Spurious – CH50ac160


Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
74.9	30.8	---	40.0	9.2
80.0	33.7	---	40.0	6.4
133.1	32.4	---	43.5	11.1
183.0	32.3	---	43.5	11.2
191.3	31.6	---	43.5	11.9
237.1	35.8	---	46.0	10.2
640.0	37.8	---	46.0	8.2
1187.3	48.0	---	74.0	26.0
1190.2	---	41.3	54.0	12.7
6042.9	---	49.2	54.0	4.8
6074.8	61.3	---	74.0	12.7
10539.4	---	37.0	54.0	17.0
10553.2	48.3	---	74.0	25.7
21058.9	49.1	---	74.0	24.9
21058.9	---	38.2	54.0	15.8
39668.4	59.3	---	74.0	14.7
39703.0	---	48.9	54.0	5.1

B.3 Test Results Screenshot U-NII-1

B.3.1 26dB Bandwidth


SISO-B, 802.11a, 6Mbps

Channel 48

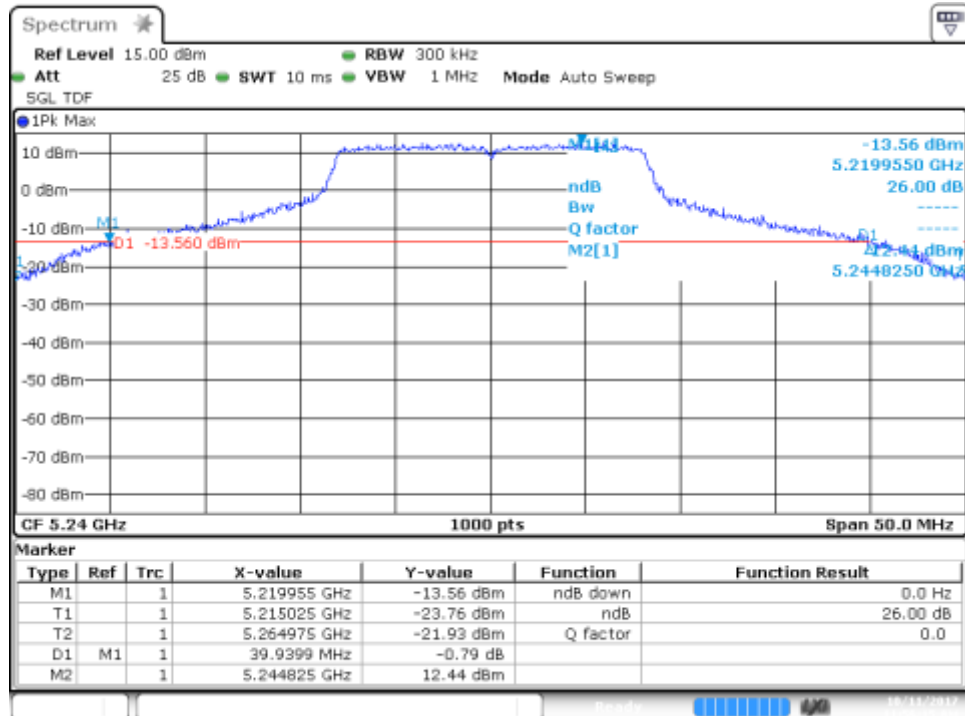


SISO-B, 802.11n20, HT0

Channel 48

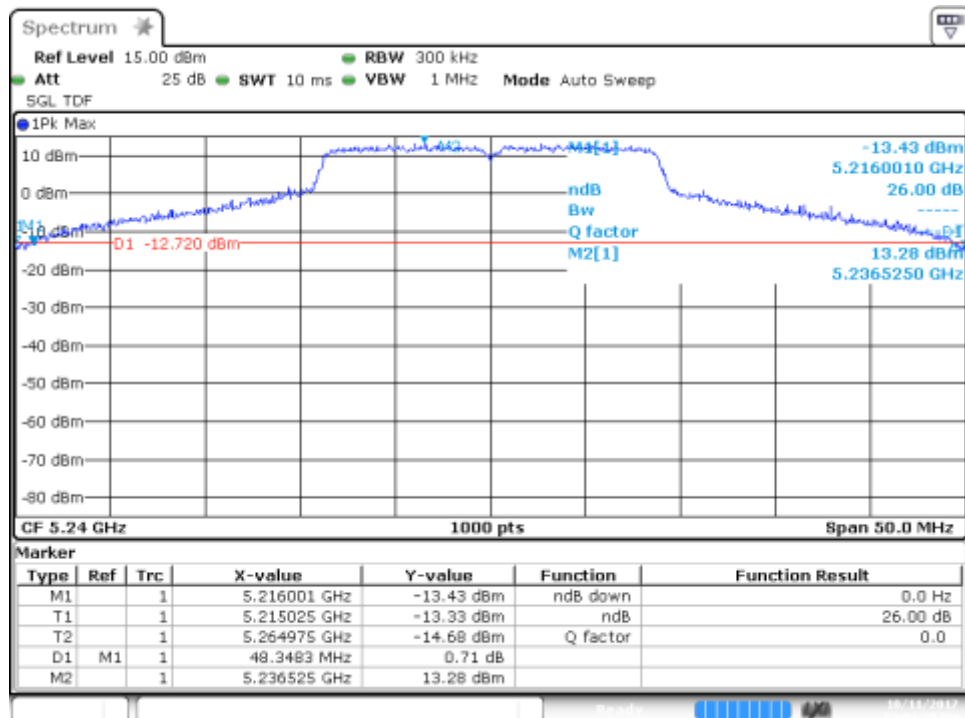


SISO-B, 802.11n40, HT0

Channel 46F

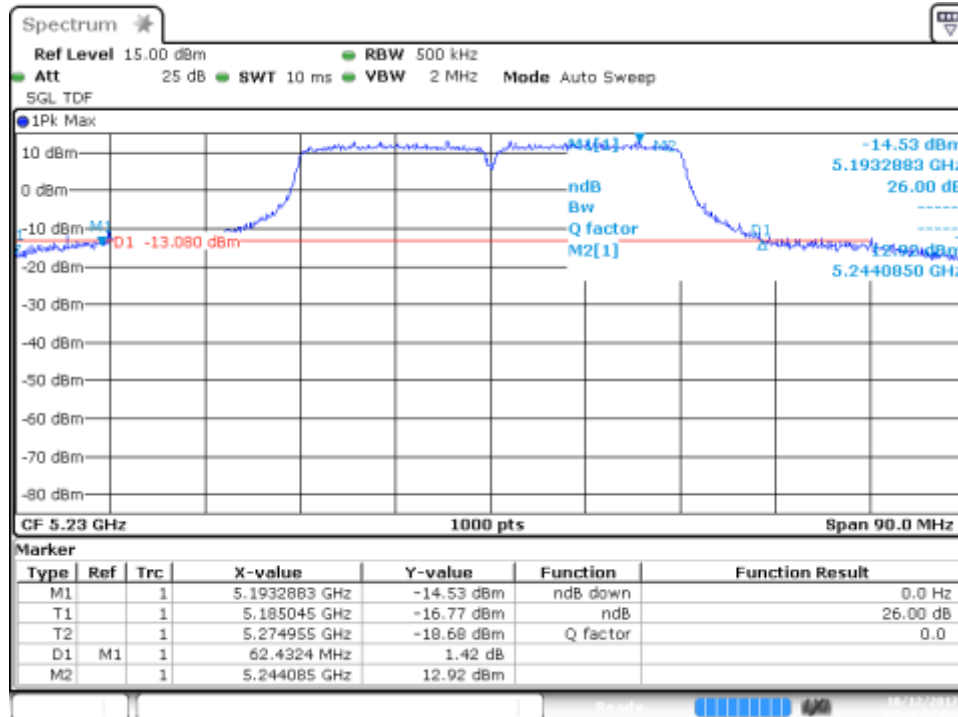


MIMO-A, 802.11n20, HT8

Channel 40

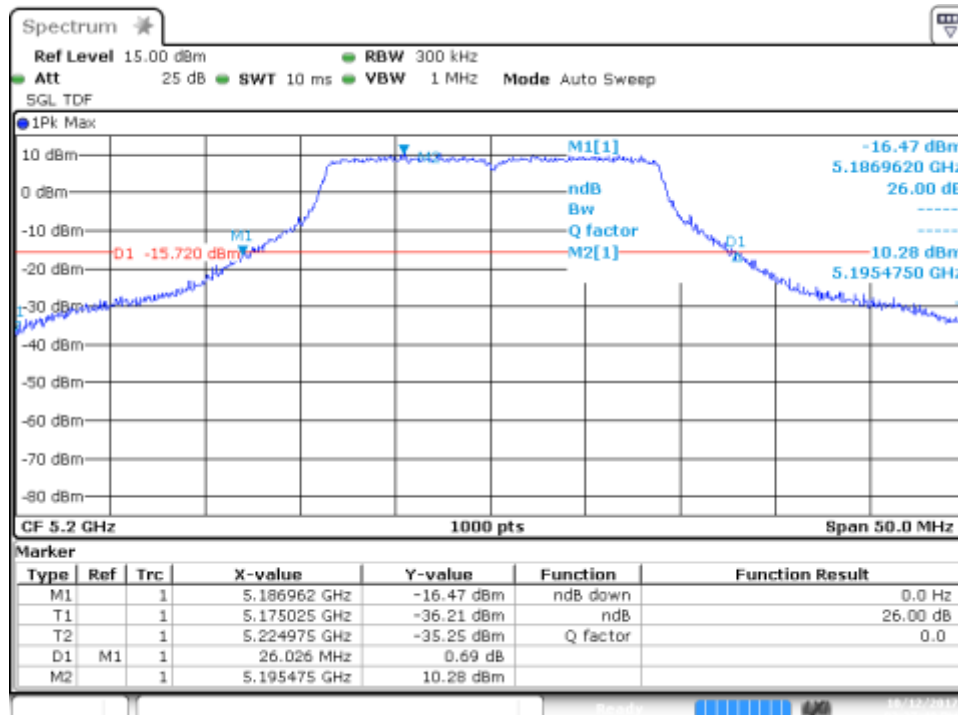


MIMO-A, 802.11n40, HT8

Channel 38F

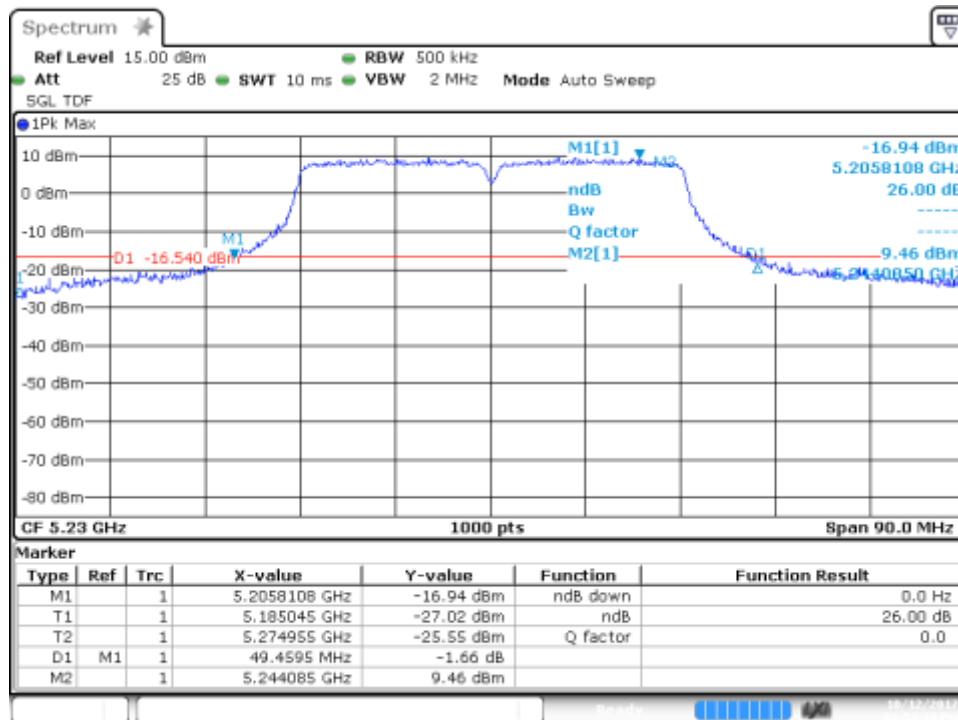


SISO-B, 802.11ac80, VHT0

Channel 42ac80

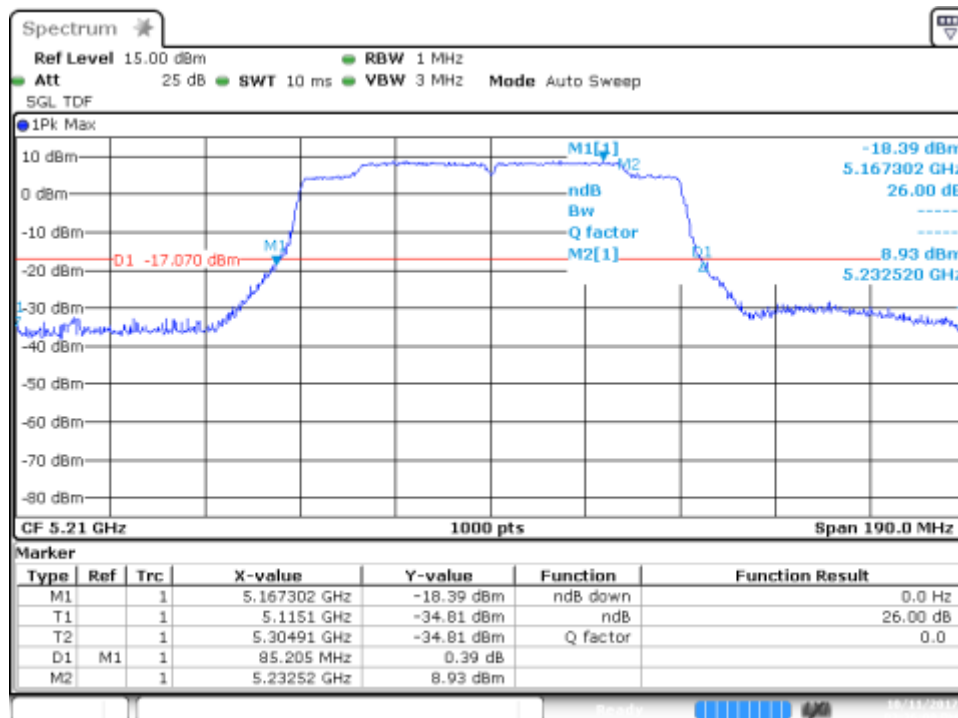


MIMO-A, 802.11ac80, VHT0

Channel 42ac80

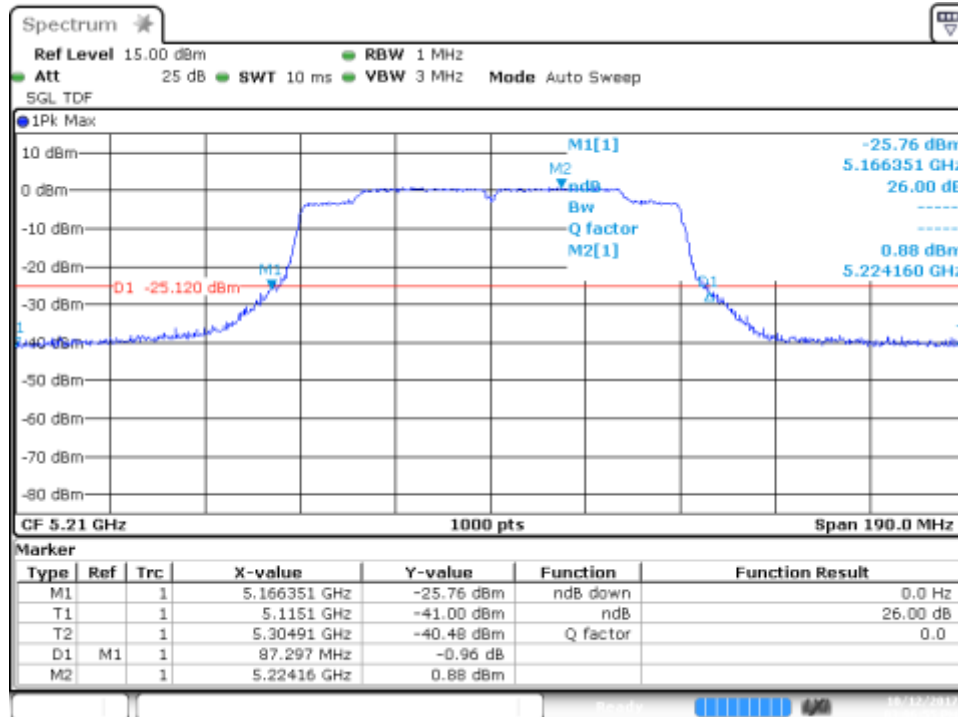


SISO-A, 802.11ac160, VHT0

Channel 50ac160

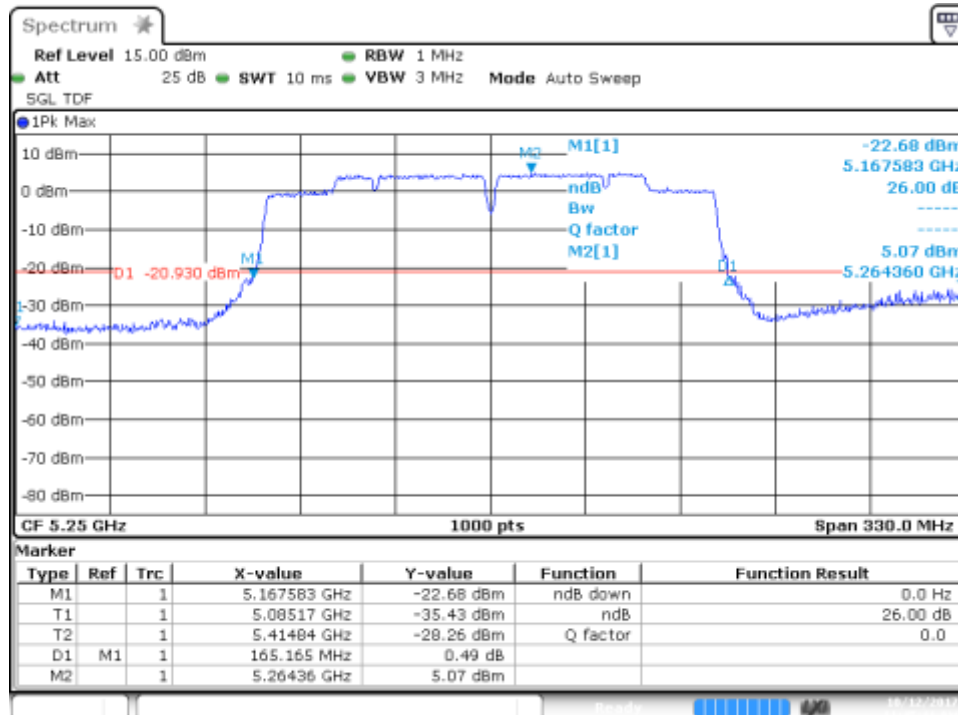

MIMO-A, 802.11ac160, VHT0


Channel 50ac160

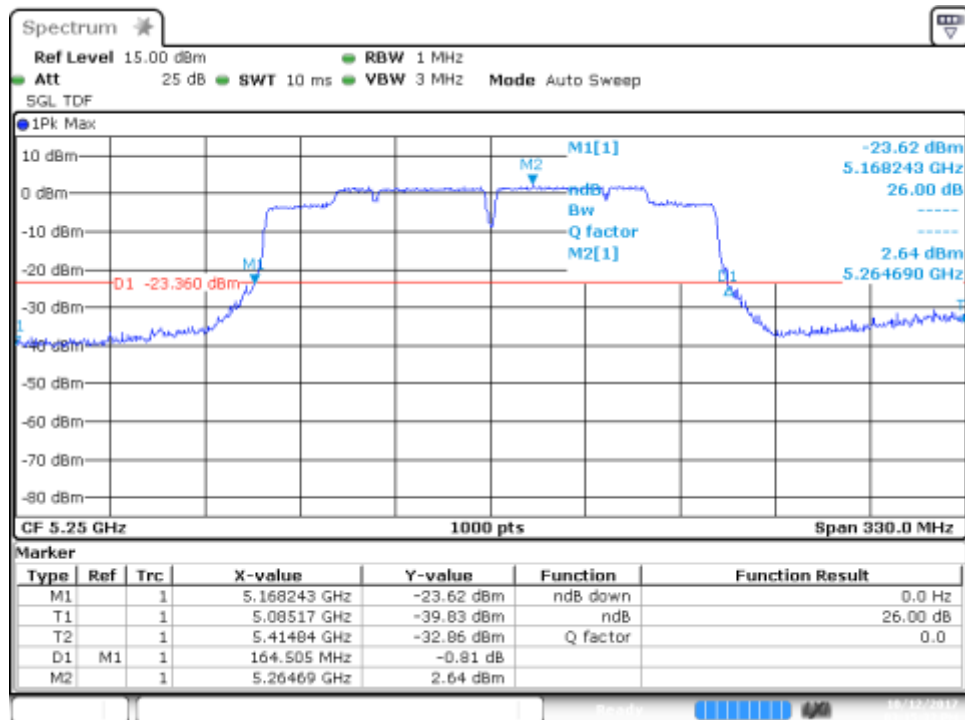

B.3.2 99% Bandwidth


SISO-B, 802.11a, 6Mbps

Channel 48

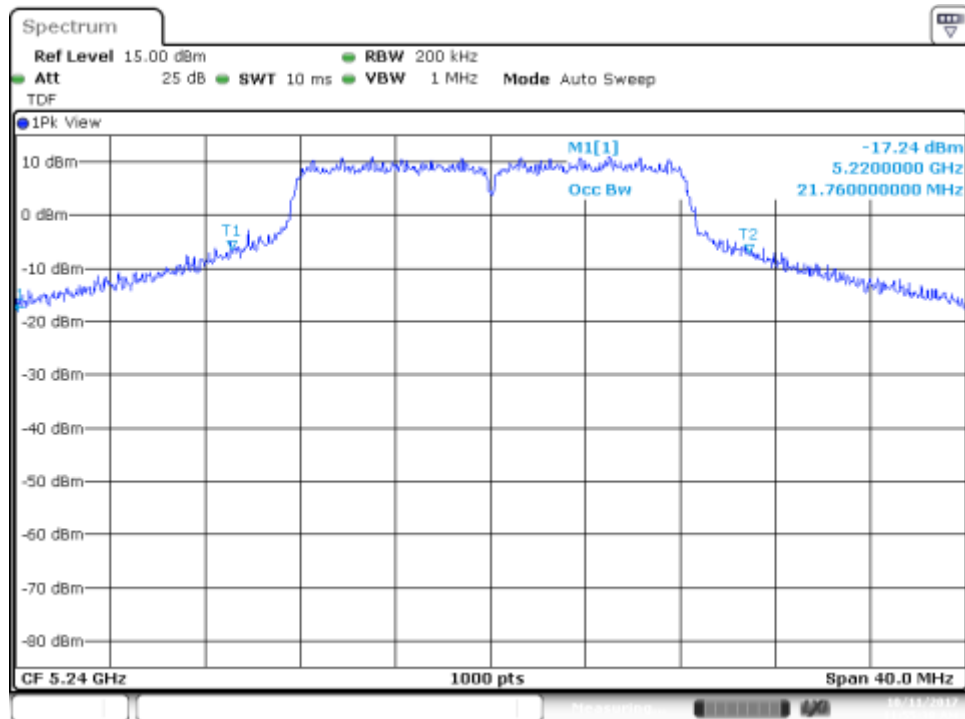


SISO-B, 802.11n20, HT0

Channel 48

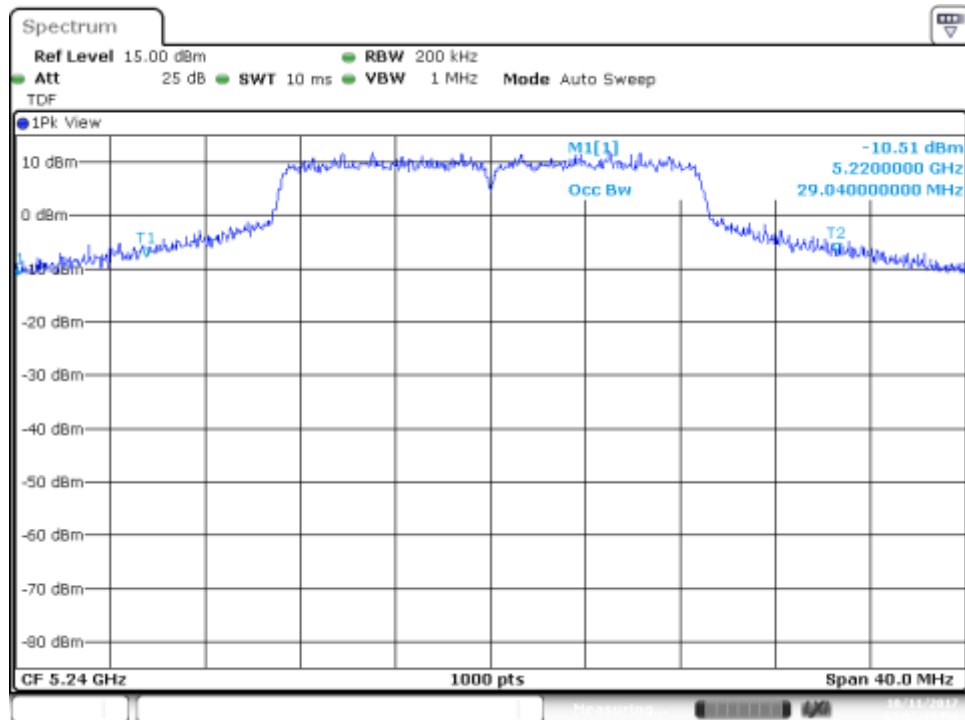


SISO-B, 802.11n40, HT0

Channel 46F

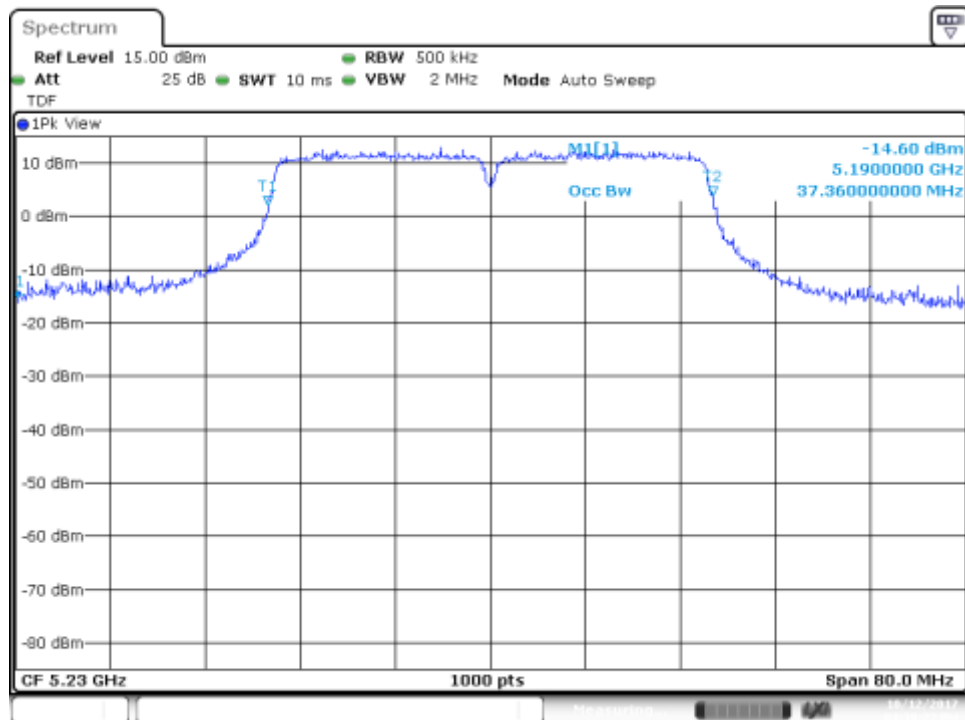


MIMO-A, 802.11n20, HT8

Channel 40

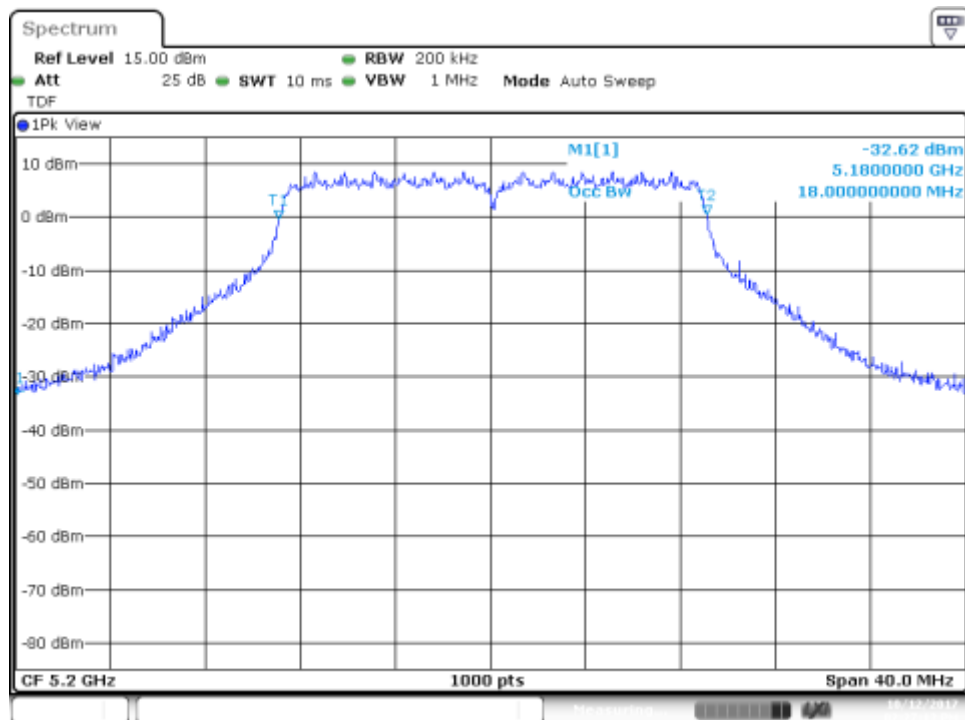


MIMO-A, 802.11n40, HT8

Channel 46F

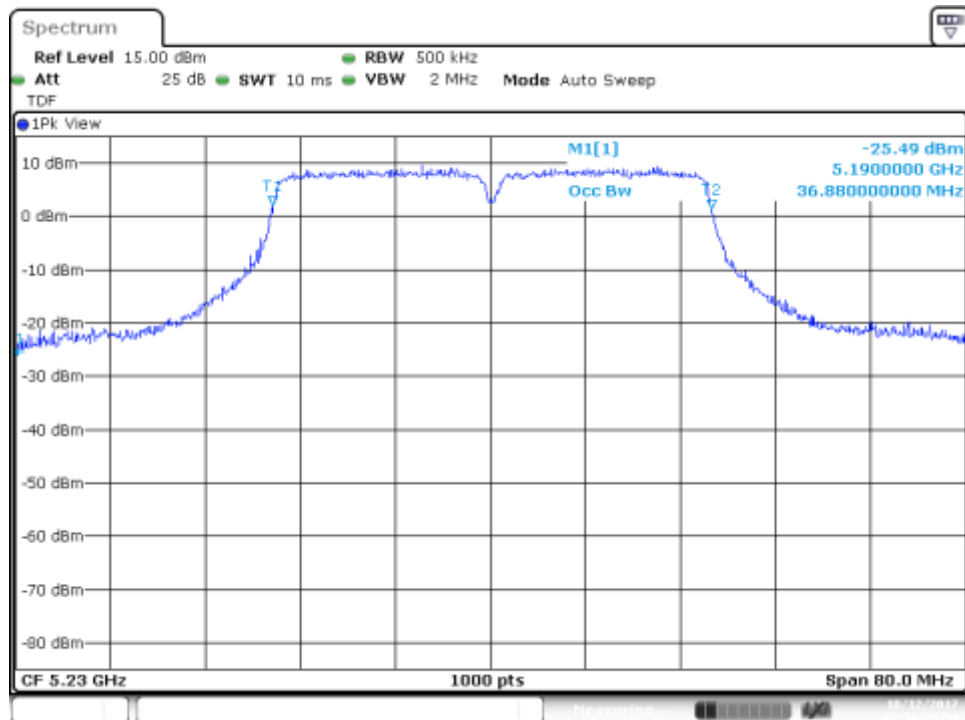


SISO-B, 802.11ac80, VHT0

Channel 42ac80

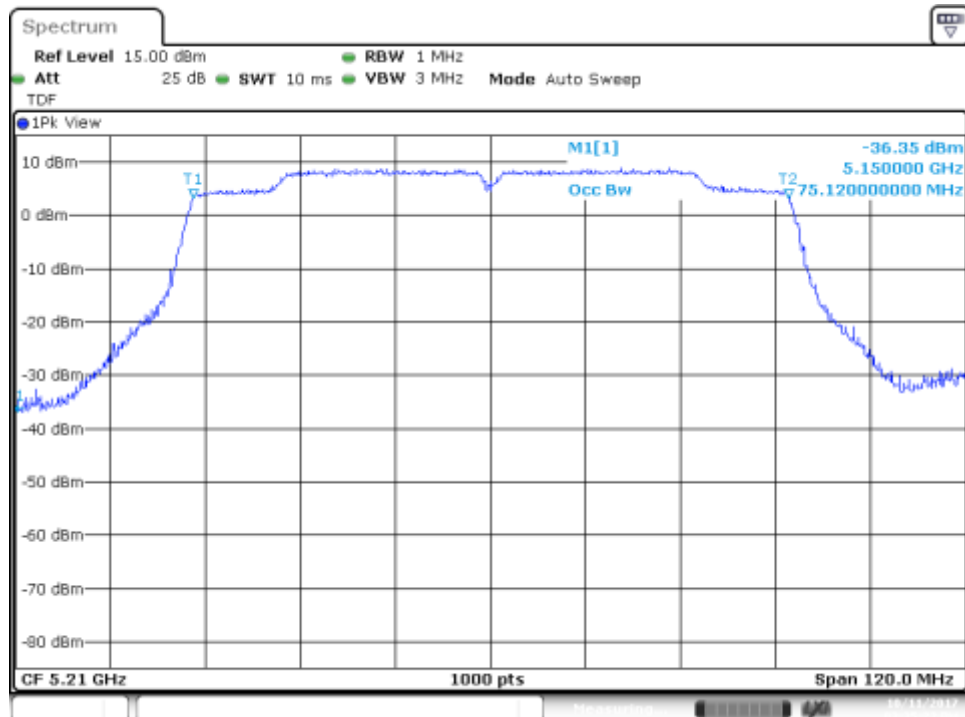


MIMO-A, 802.11ac80, VHT0

Channel 42ac80

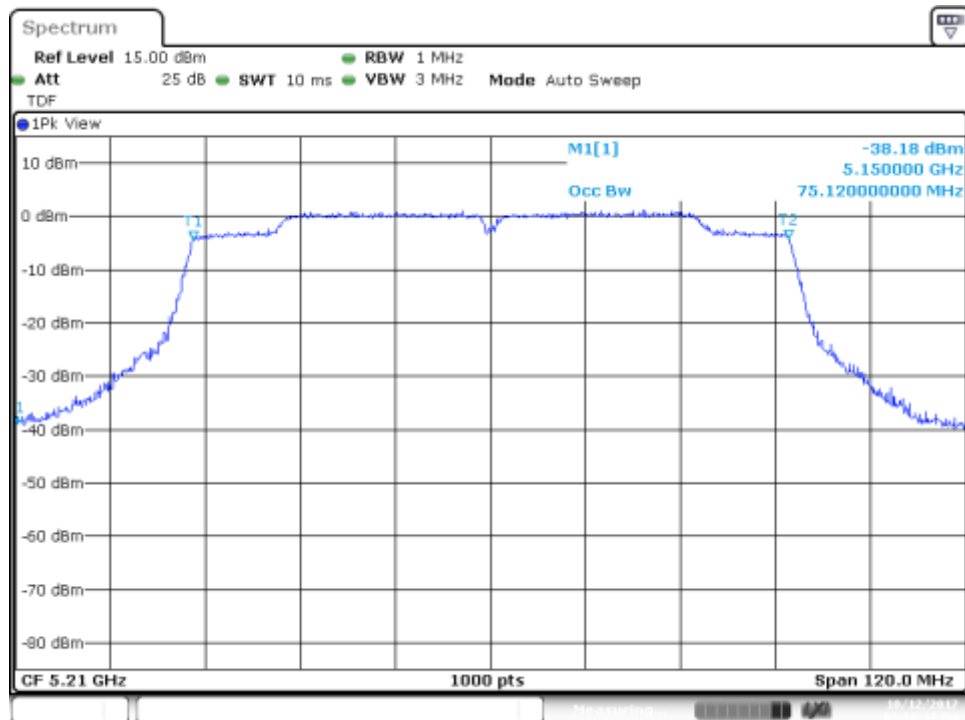


SISO-A, 802.11ac160, VHT0

Channel 50ac160

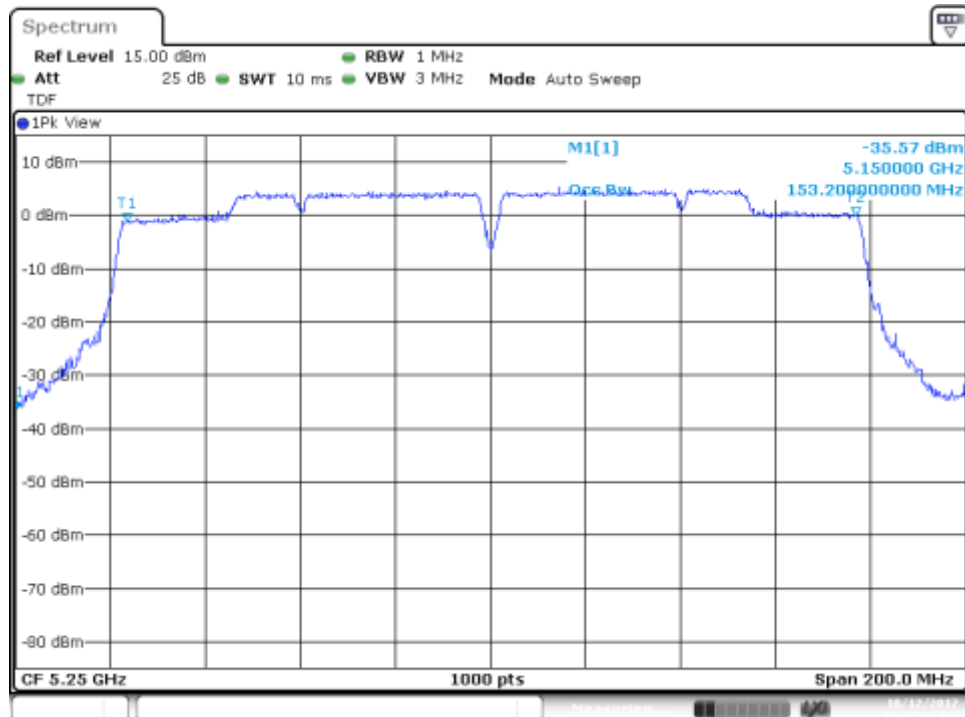

MIMO-A, 802.11ac160, VHT0


Channel 50ac160

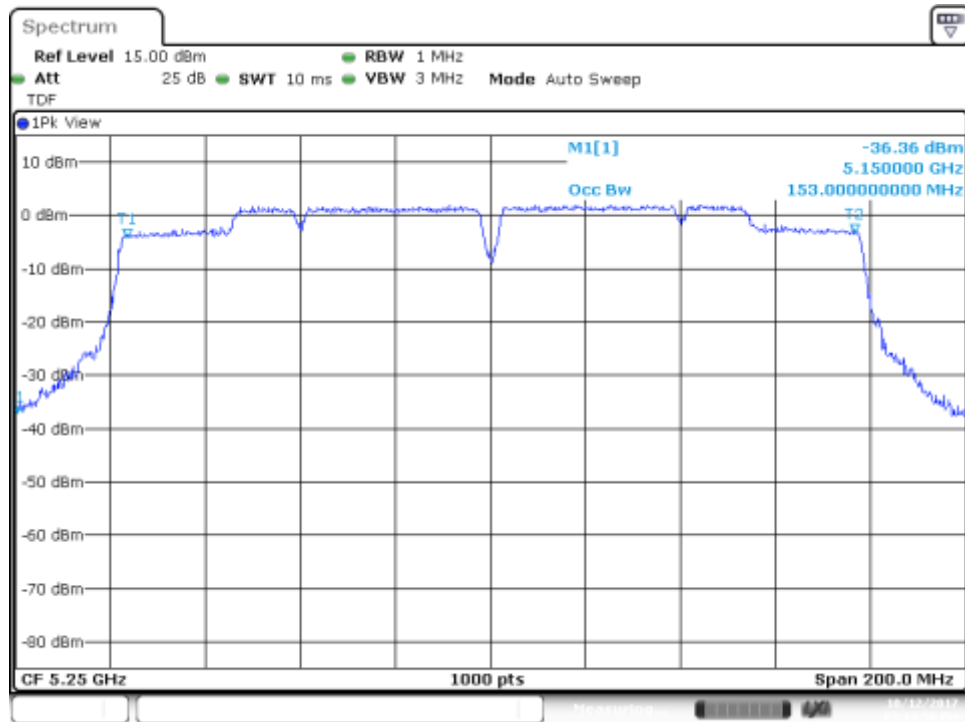

B.3.3 Power Limits. Maximum Output power & Peak power spectral density


SISO-B, 802.11a, 6Mbps

Channel 36

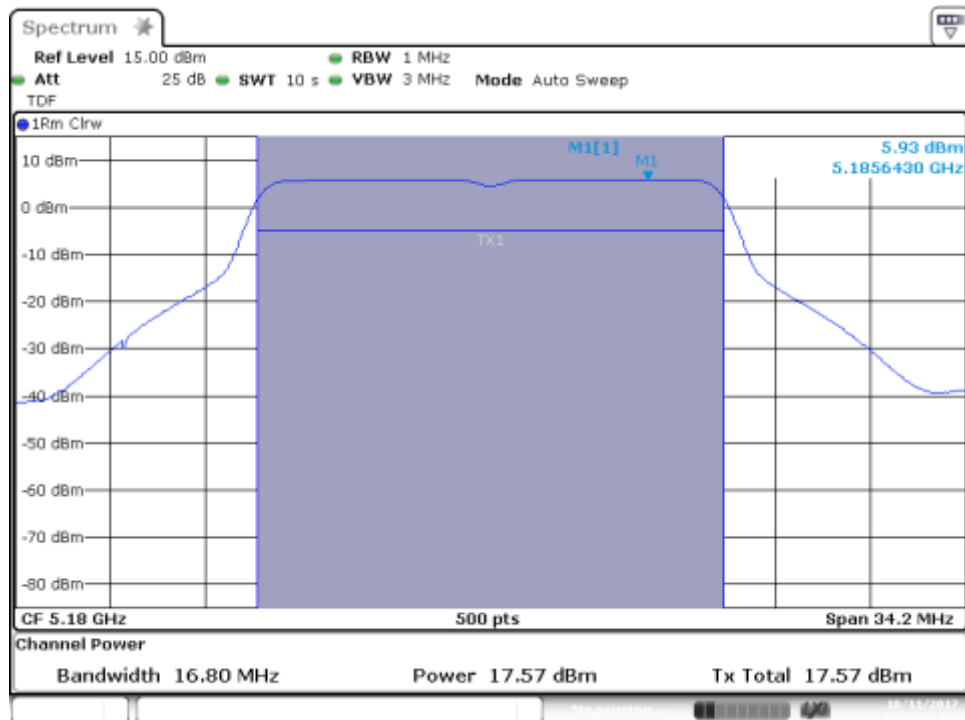


SISO-A, 802.11a, 6Mbps

Channel 40

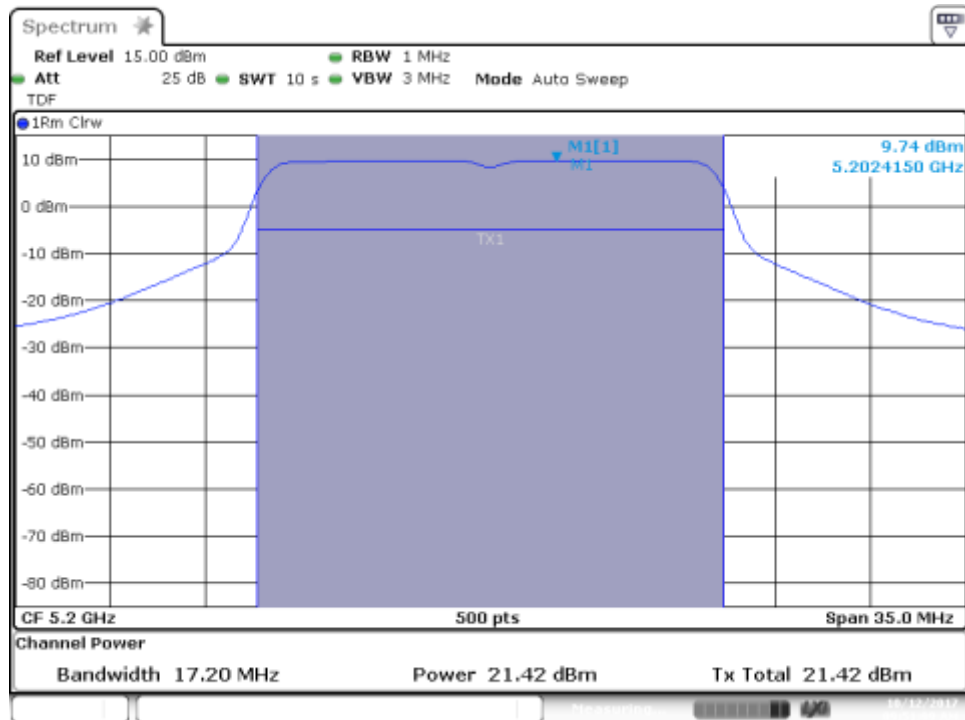


SISO-B, 802.11n20, HT0

Channel 36

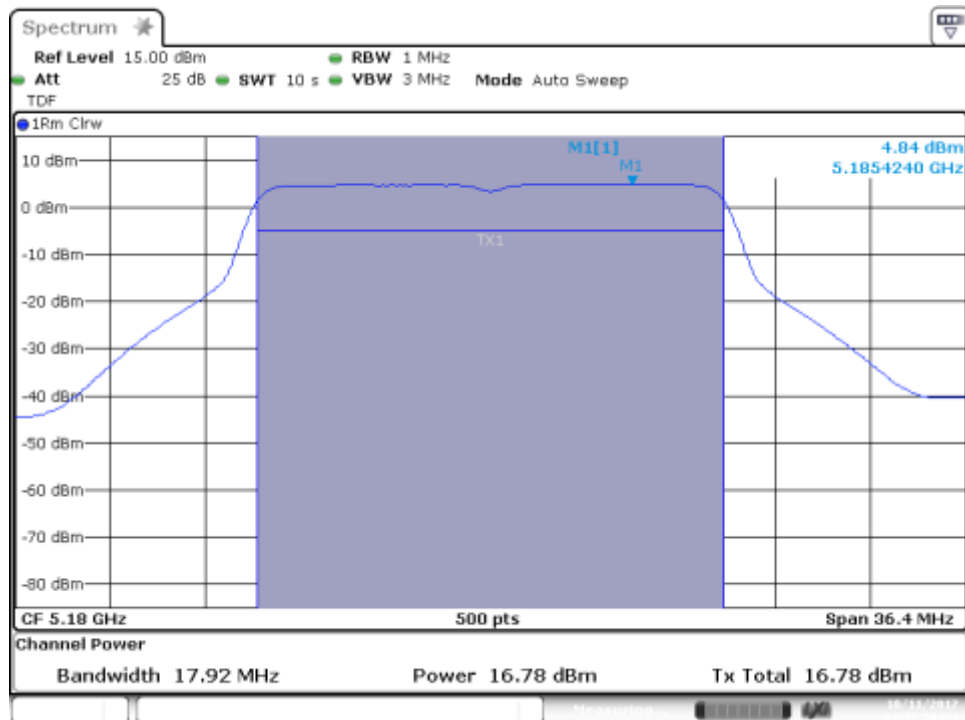


Channel 48

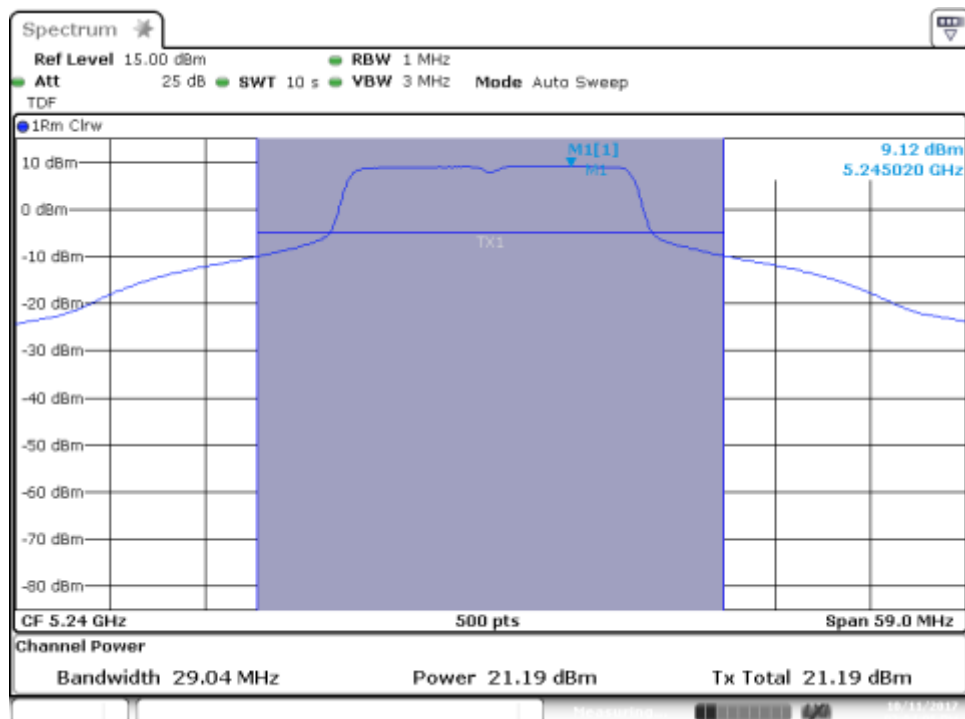


SISO-A, 802.11n40, HT0

Channel 38F

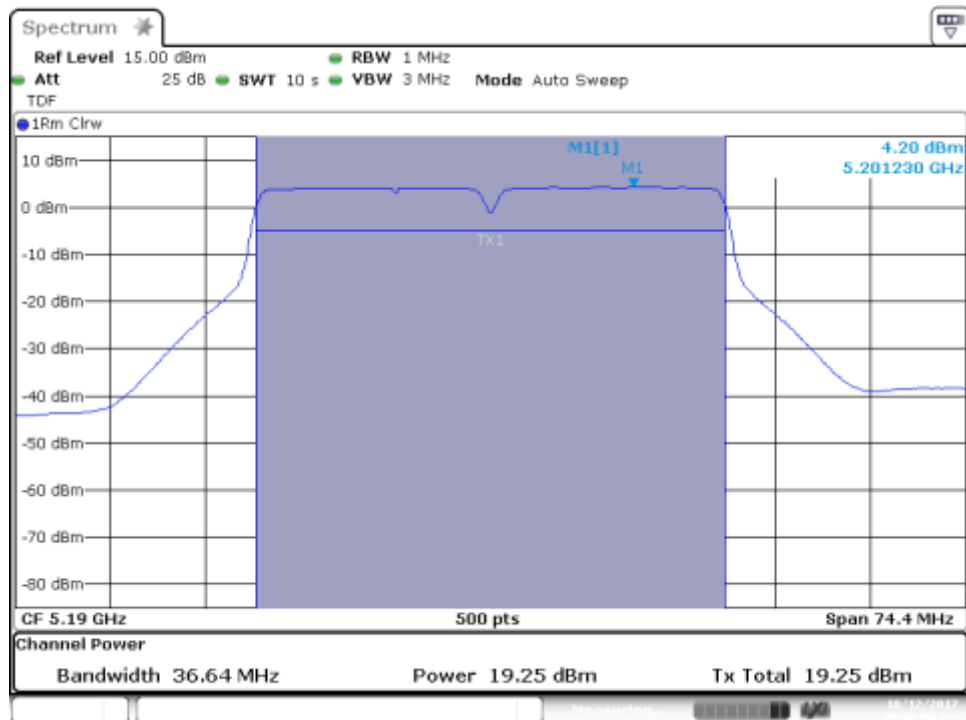


SISO-B, 802.11n40, HT0

Channel 46F

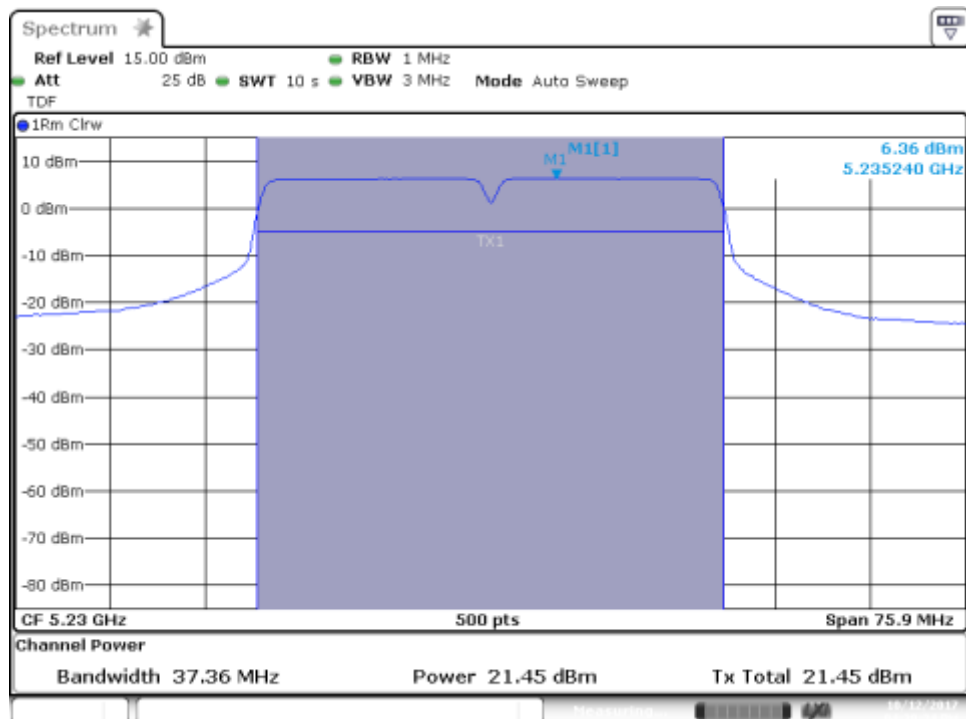


MIMO-A, 802.11n20, HT8

Channel 36

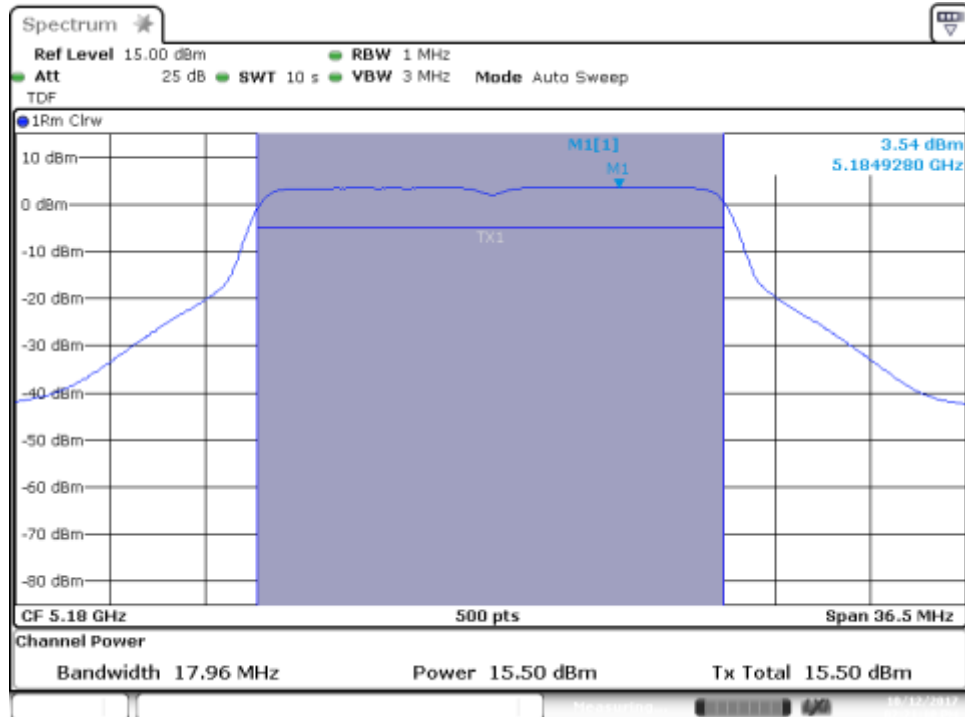


MIMO-B, 802.11n20, HT8

Channel 36

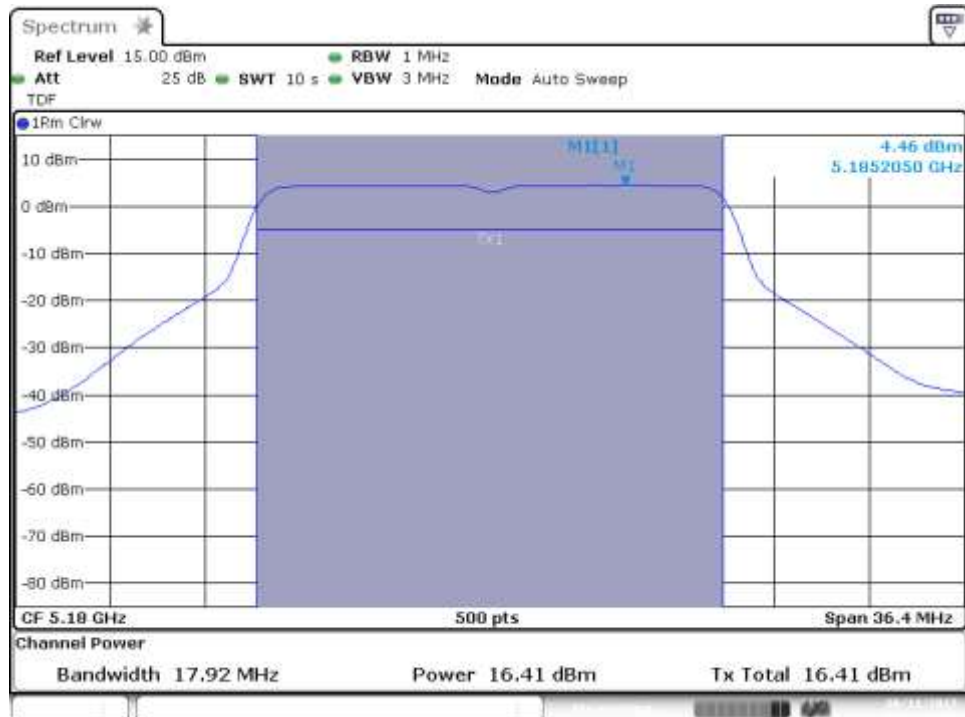


MIMO-A, 802.11n20, HT8

Channel 40

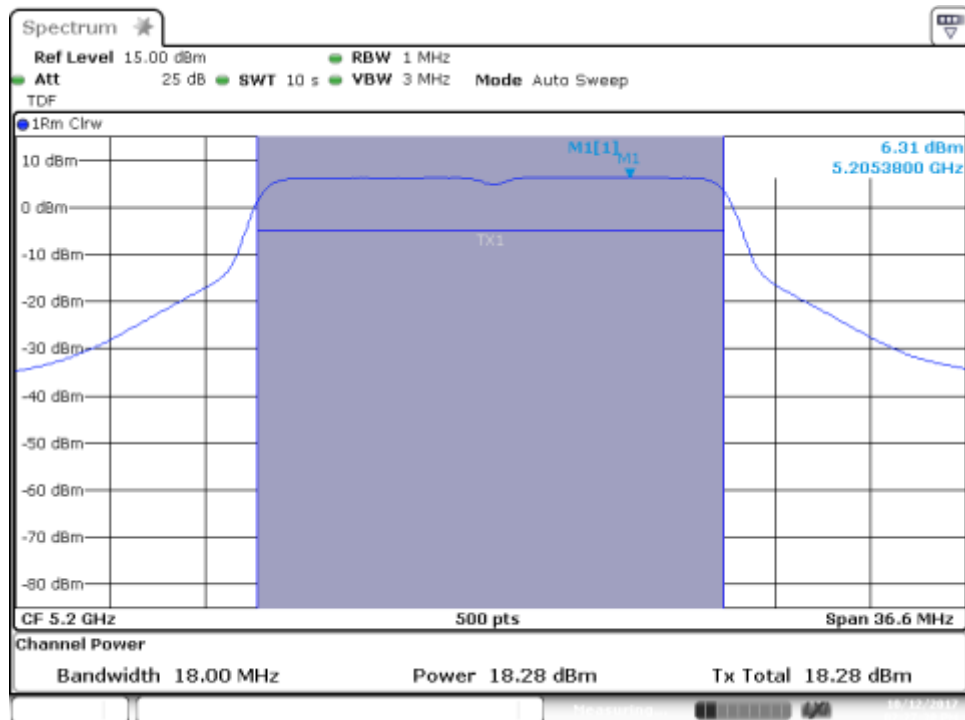


MIMO-B, 802.11n20, HT8

Channel 40

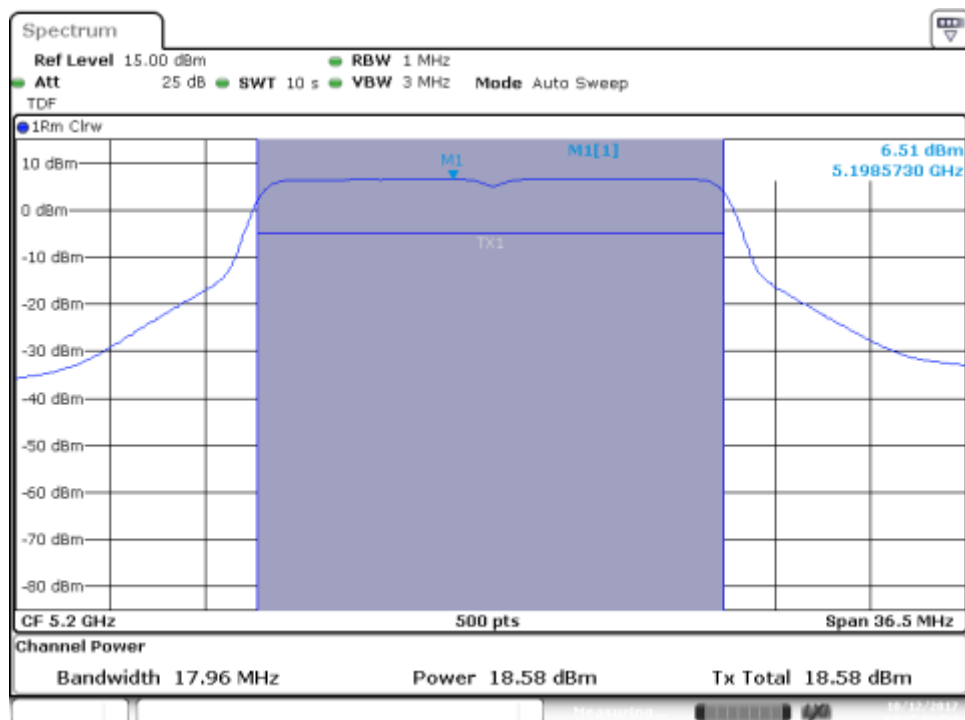


MIMO-A, 802.11n40, HT8

Channel 38F

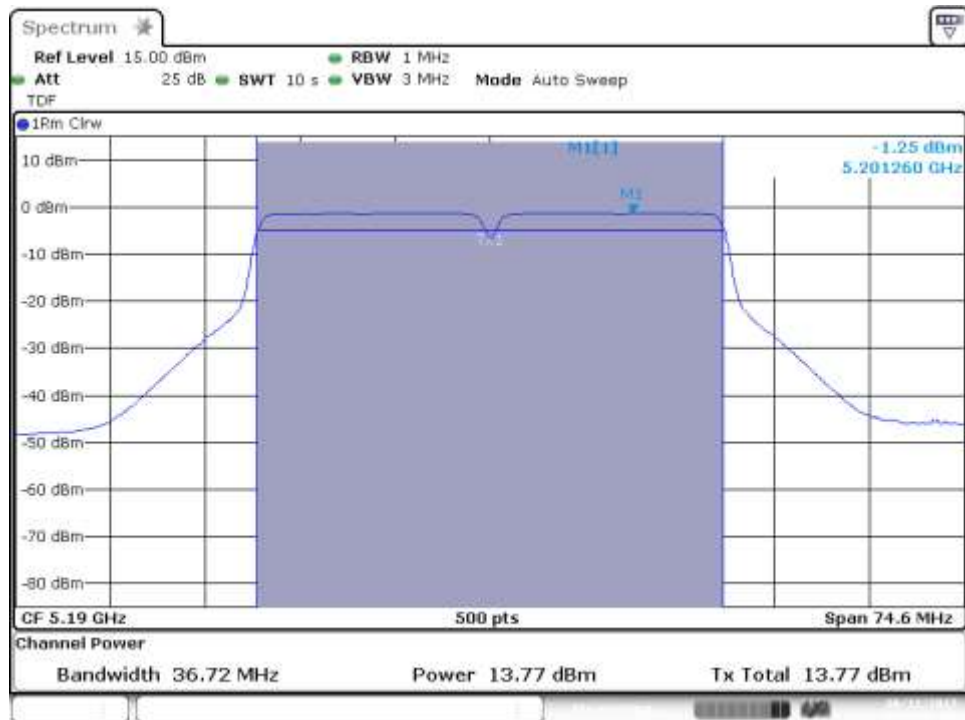


MIMO-B, 802.11n40, HT8

Channel 38F

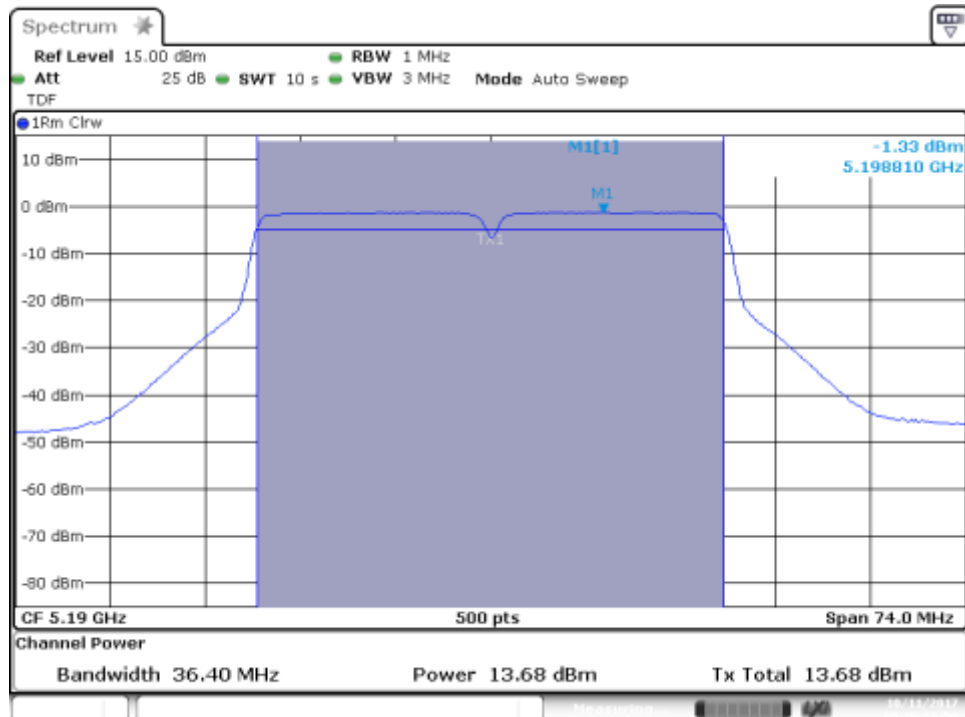


MIMO-A, 802.11n40, HT8

Channel 46F

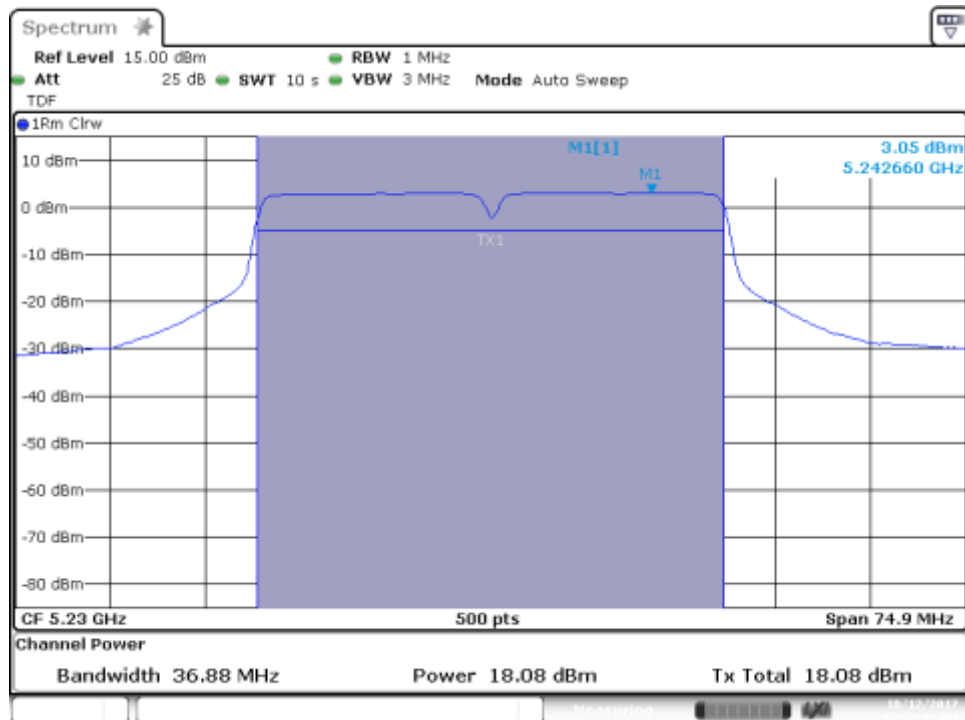


MIMO-B, 802.11n40, HT8

Channel 46F

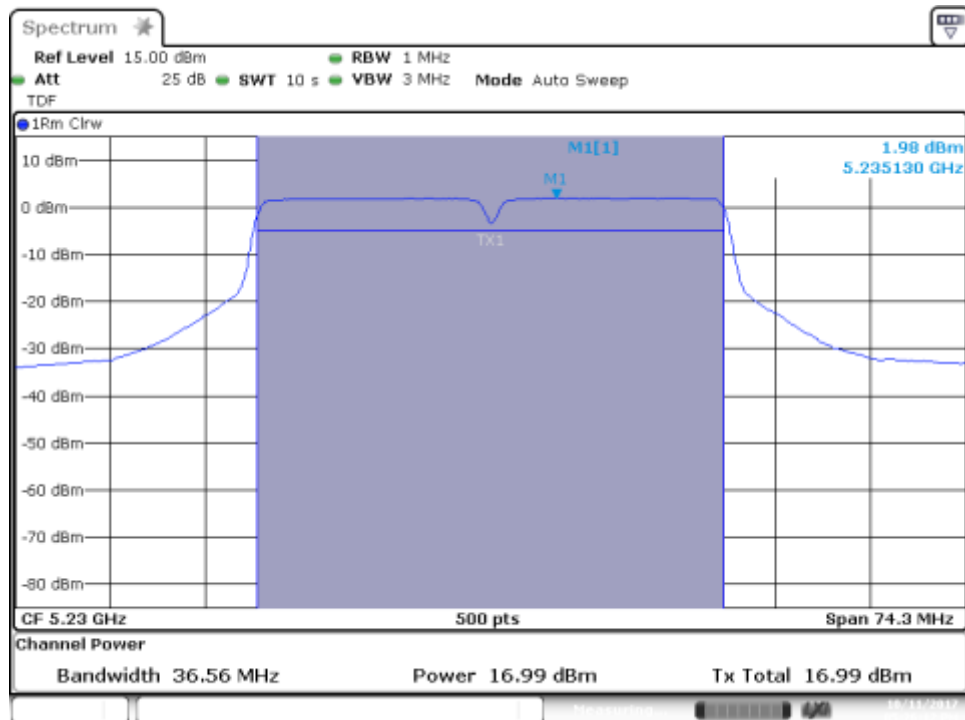


SISO-A, 802.11ac80, VHT0

Channel 42ac80

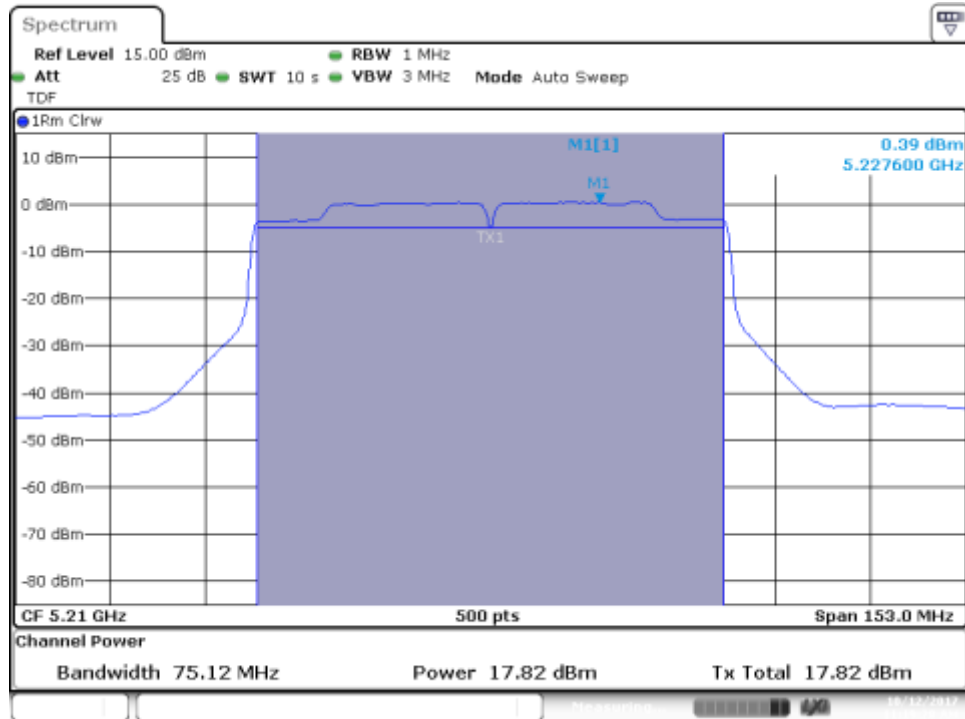


SISO-B, 802.11ac80, VHT0

Channel 42ac80

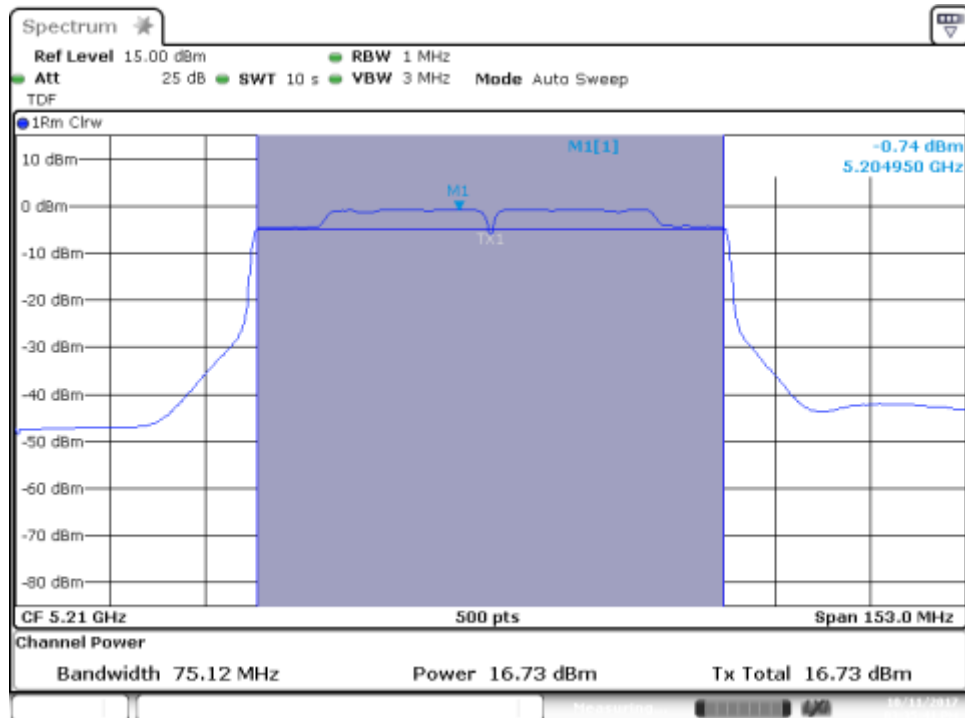


MIMO-A, 802.11ac80, VHT0

Channel 42ac80

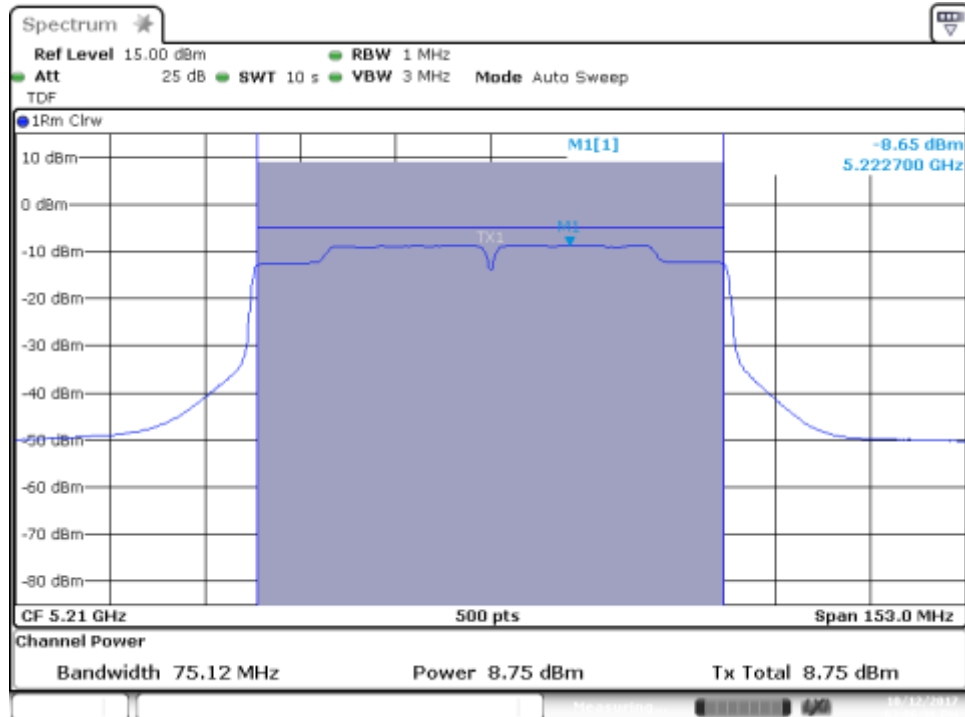


MIMO-B, 802.11ac80, VHT0

Channel 42ac80

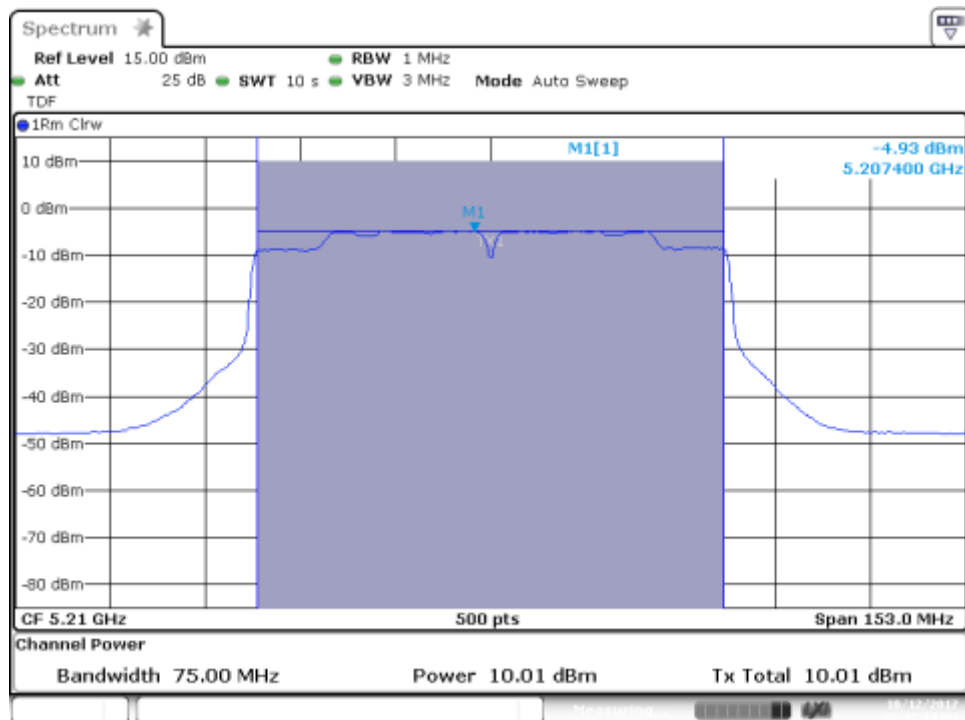


SISO-A, 802.11ac160, VHT0

Channel 50ac160

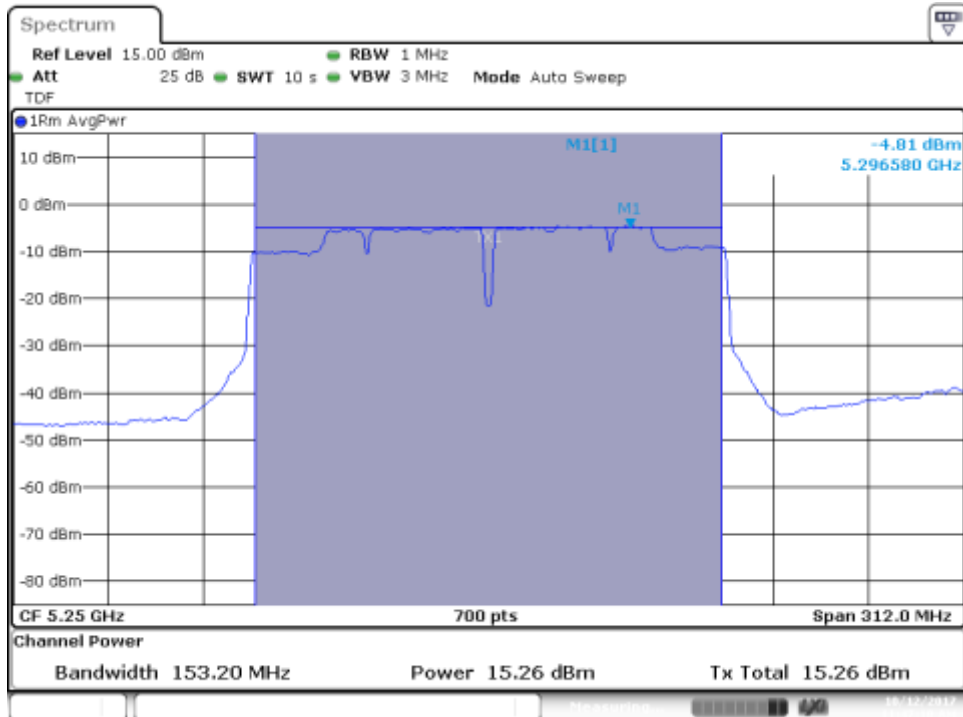


SISO-B, 802.11ac160, VHT0

Channel 50ac160

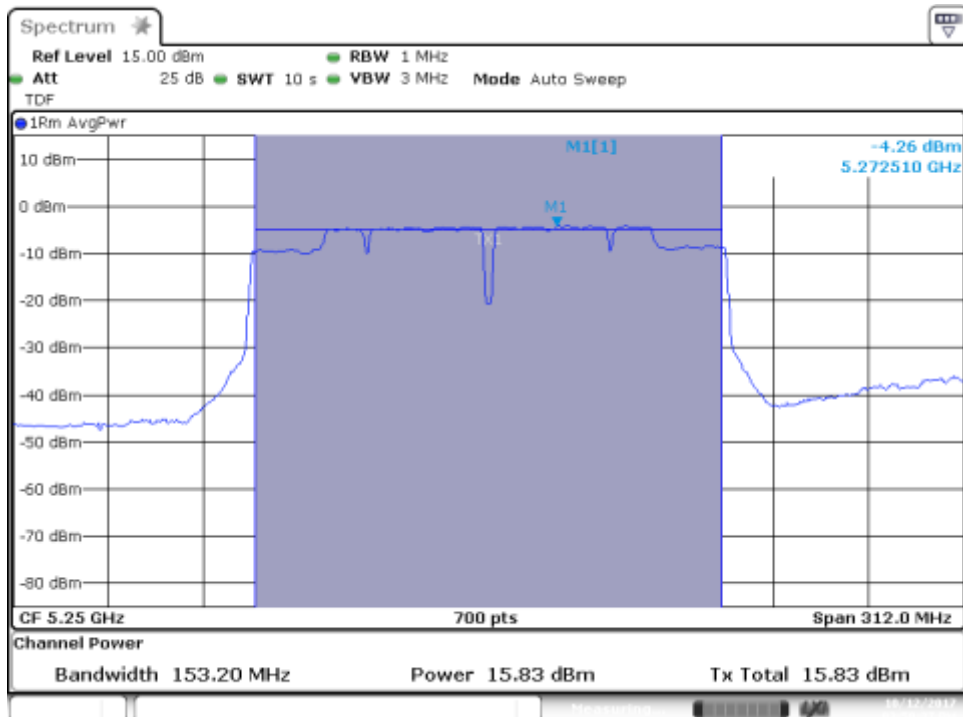


MIMO-A, 802.11ac160, VHT0

Channel 50ac160

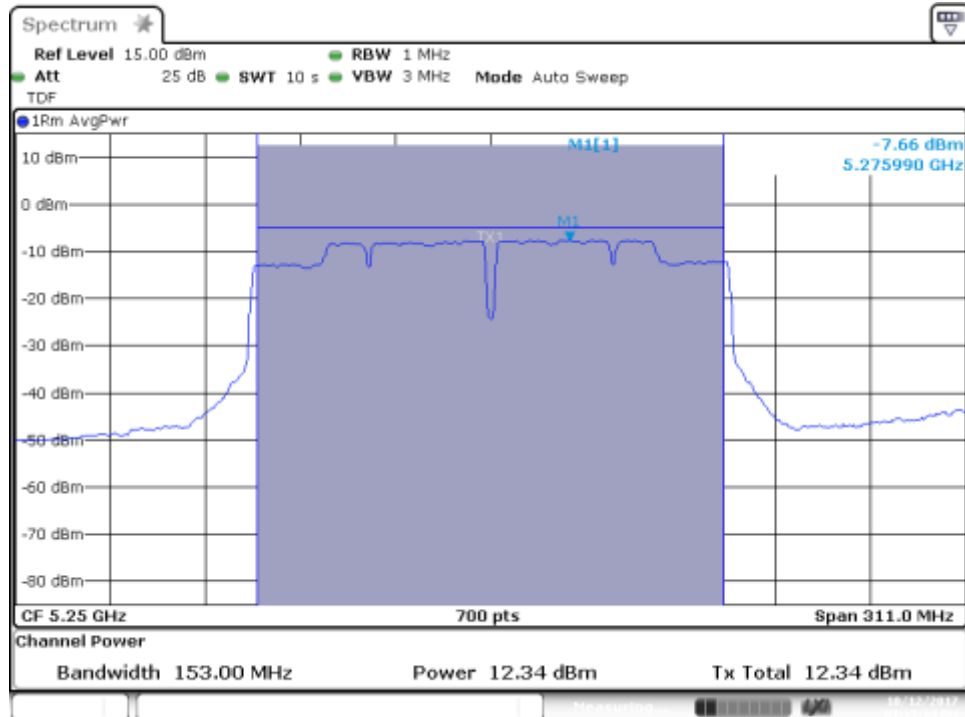

MIMO-B, 802.11ac160, VHT0


Channel 50ac160

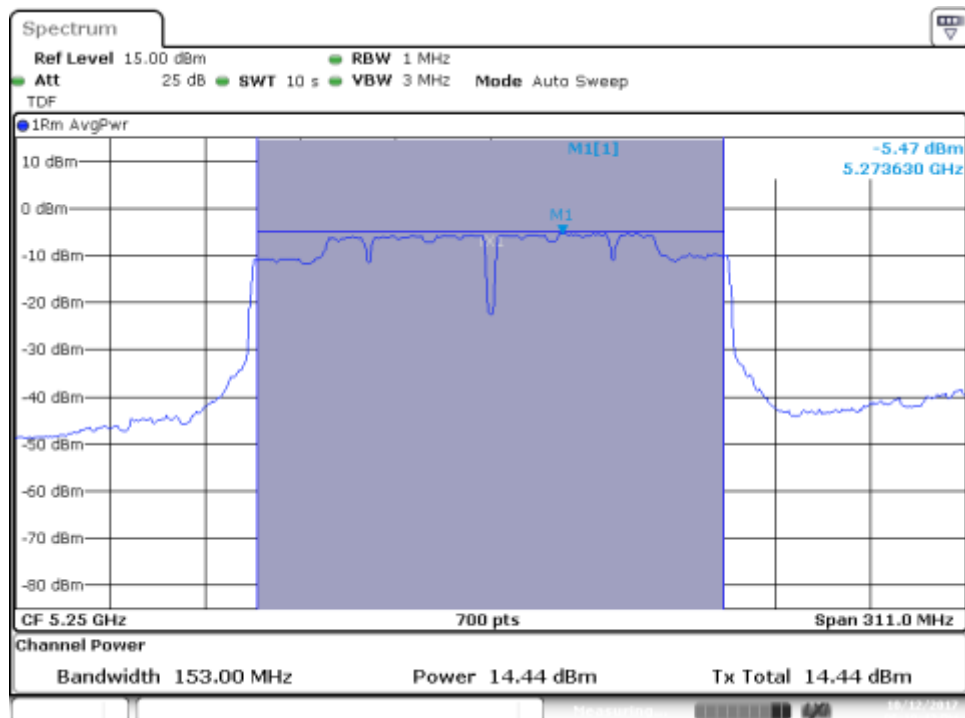

B.3.4 Undesirable emission limits : Band Edge (Conducted)


802.11a, 6Mbps – Chain A

BE Low Freq Section , Peak, RMS – CH36

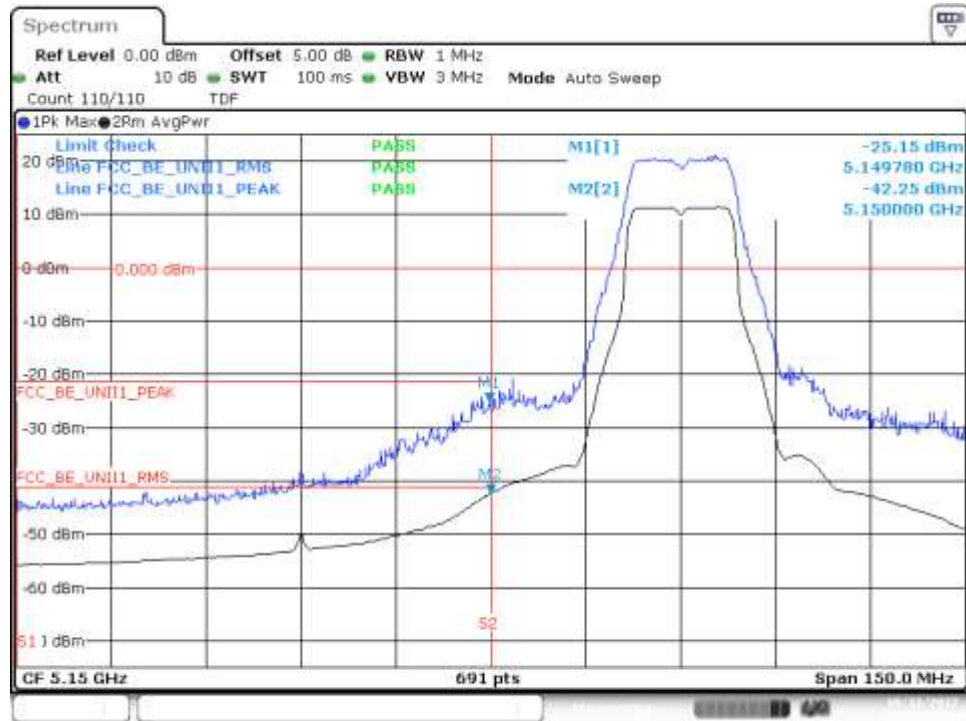

Date: 12 OCT 2017 09:32:51

BE Low Freq Section, Peak – CH40

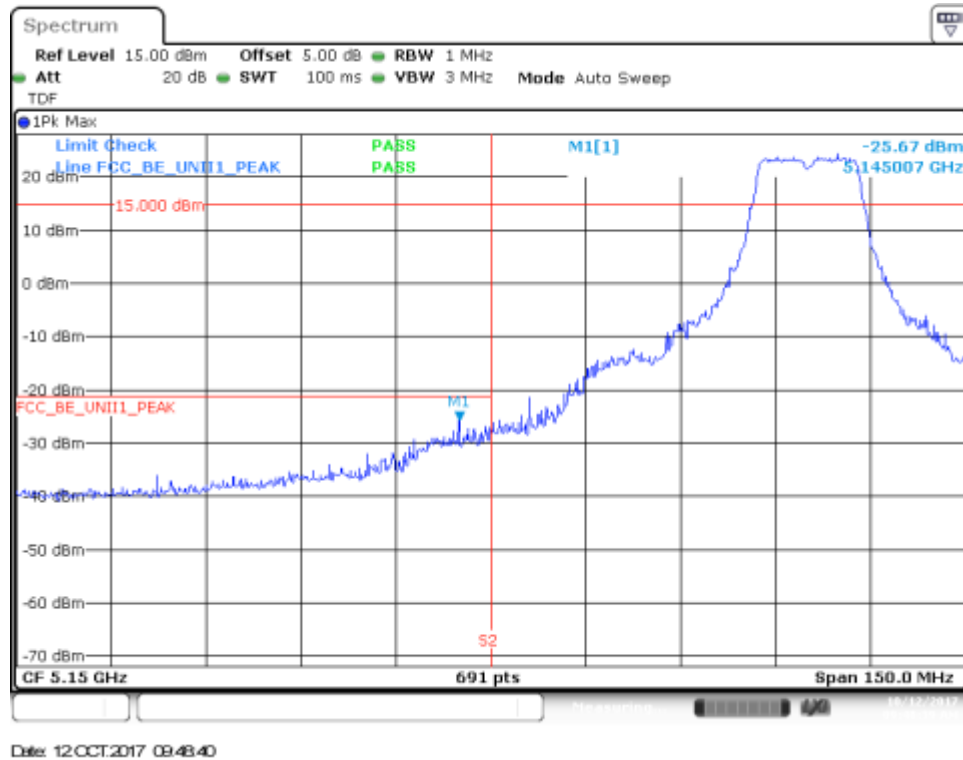


BE Low Freq Section, RMS – CH40




802.11a, 6Mbps – Chain B

BE Low Freq Section , Peak, RMS – CH36

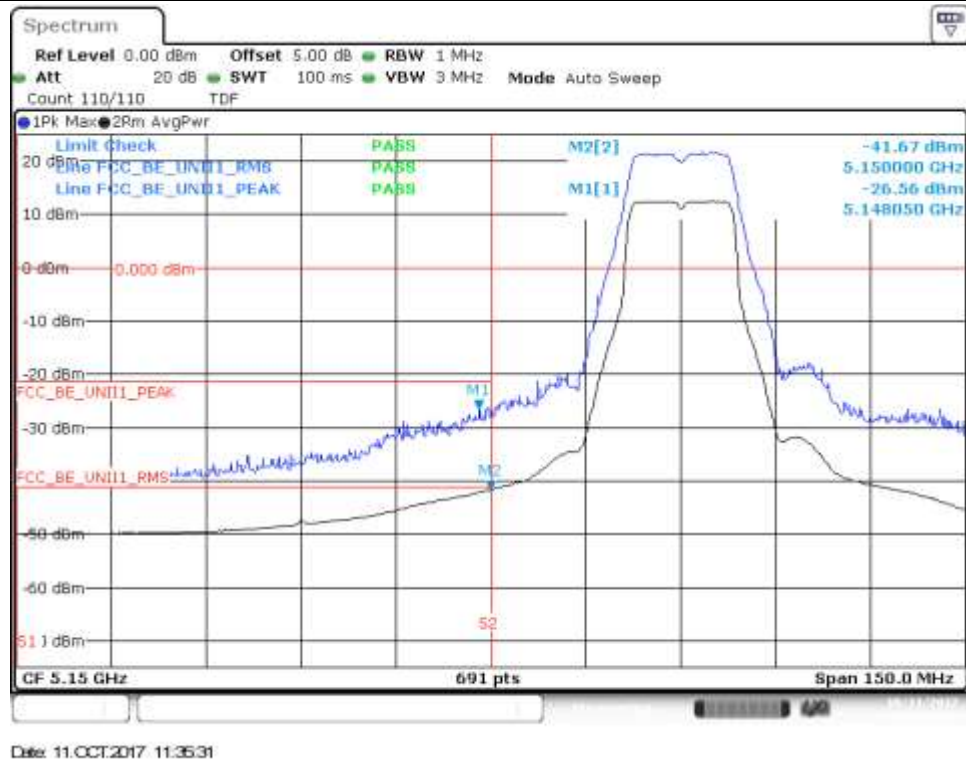


BE Low Freq Section, Peak – CH40

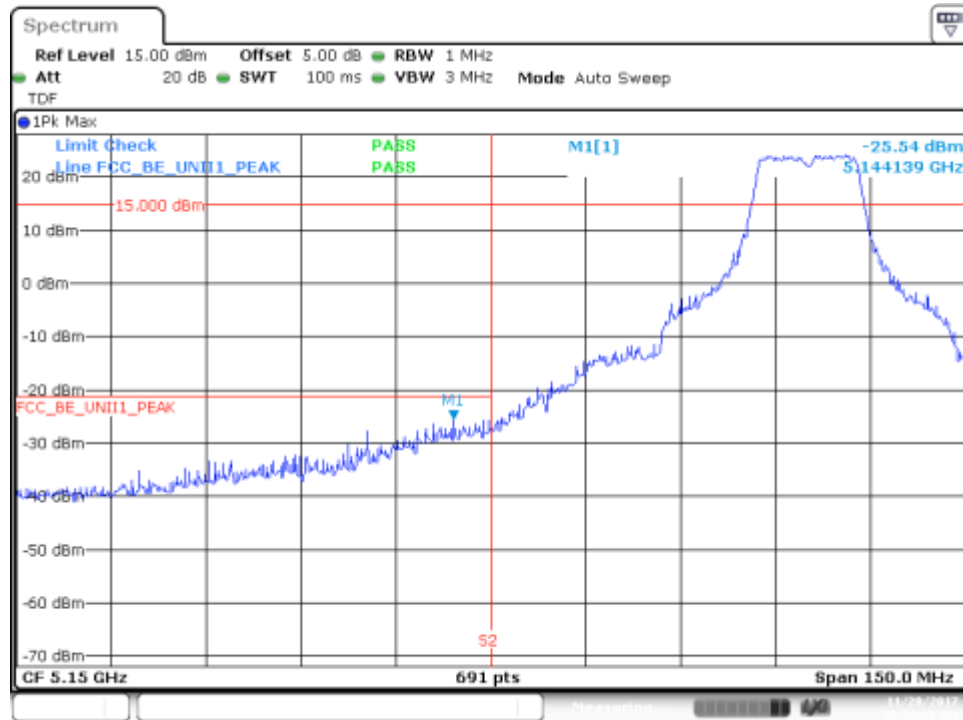

Date: 28 NOV 2017 10:53:15


BE Low Freq Section, RMS – CH40

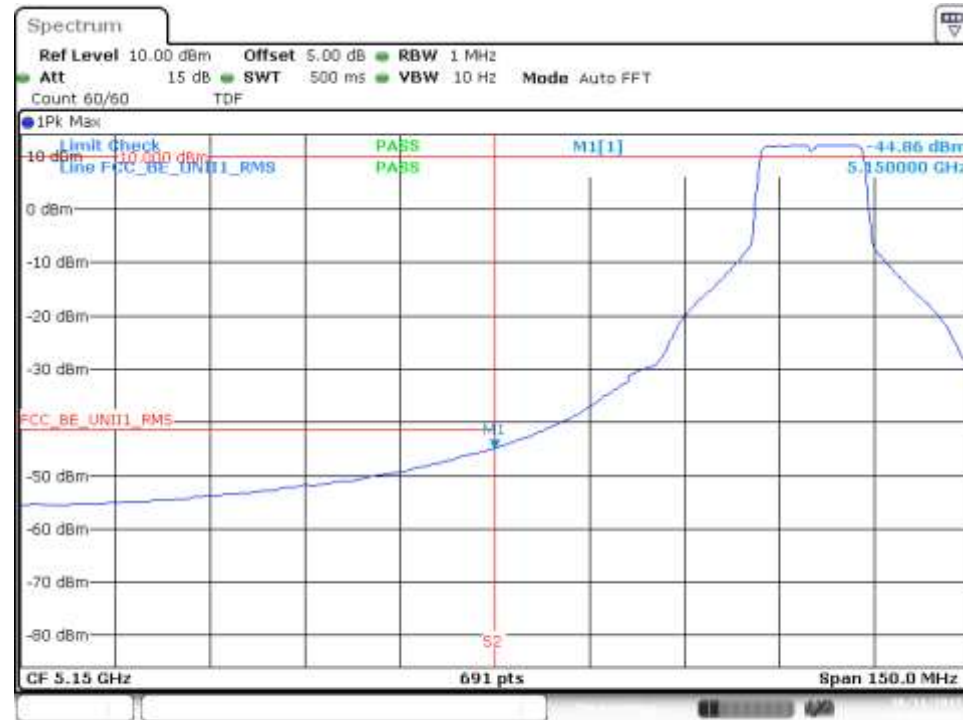

Date: 11 OCT 2017 11:45:29


802.11n20, HT0 (SISO) – Chain A

BE Low Freq Section, Peak, RMS – CH36

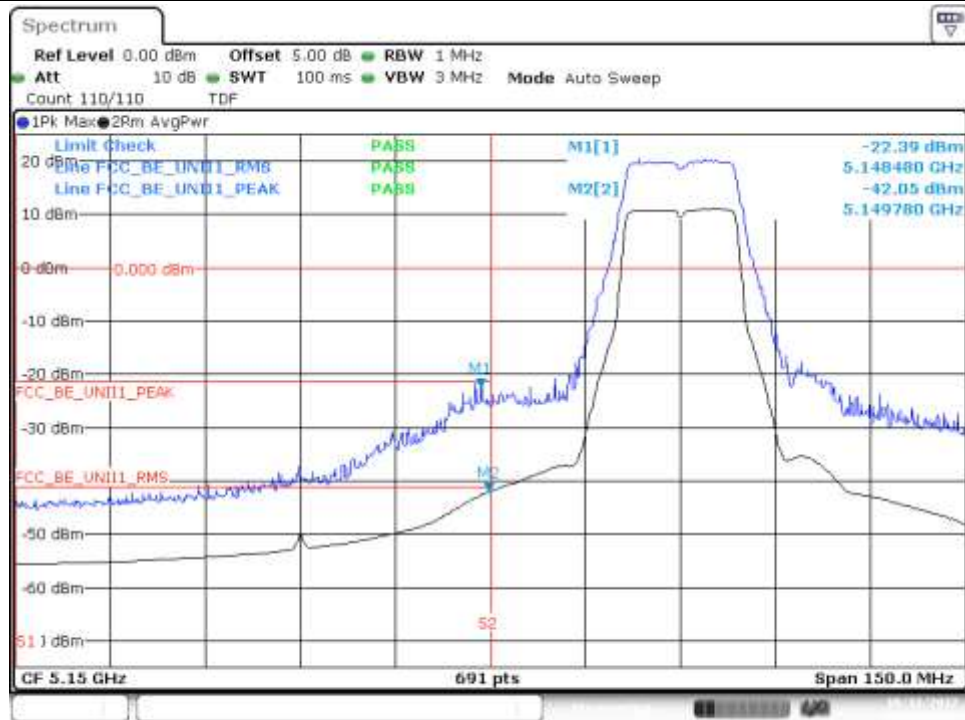

Date: 12 OCT 2017 10:33:28

BE Low Freq Section, Peak – CH40

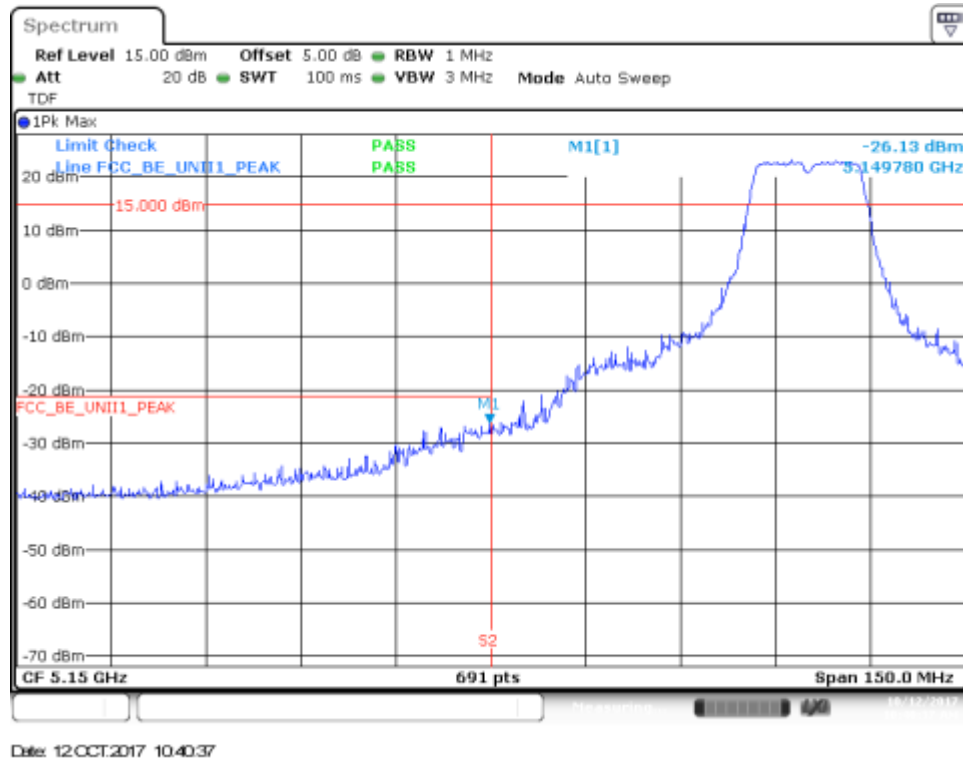


BE Low Freq Section, RMS – CH40




802.11n20, HT0 (SISO) – Chain B

BE Low Freq Section, Peak, RMS – CH36

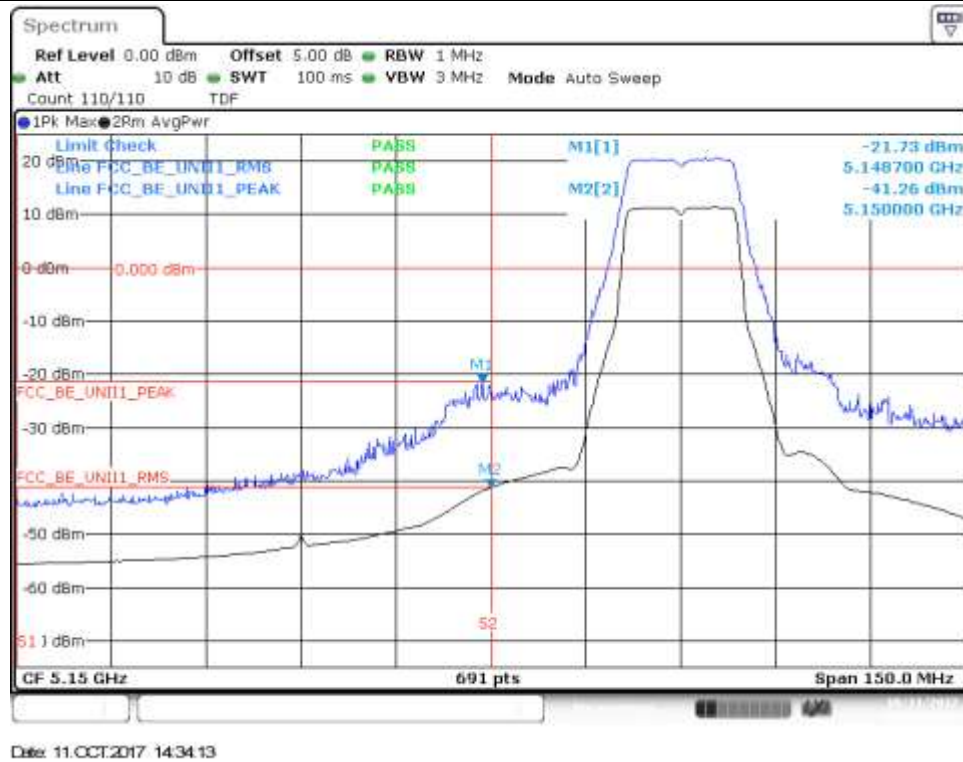

BE Low Freq Section, Peak – CH40

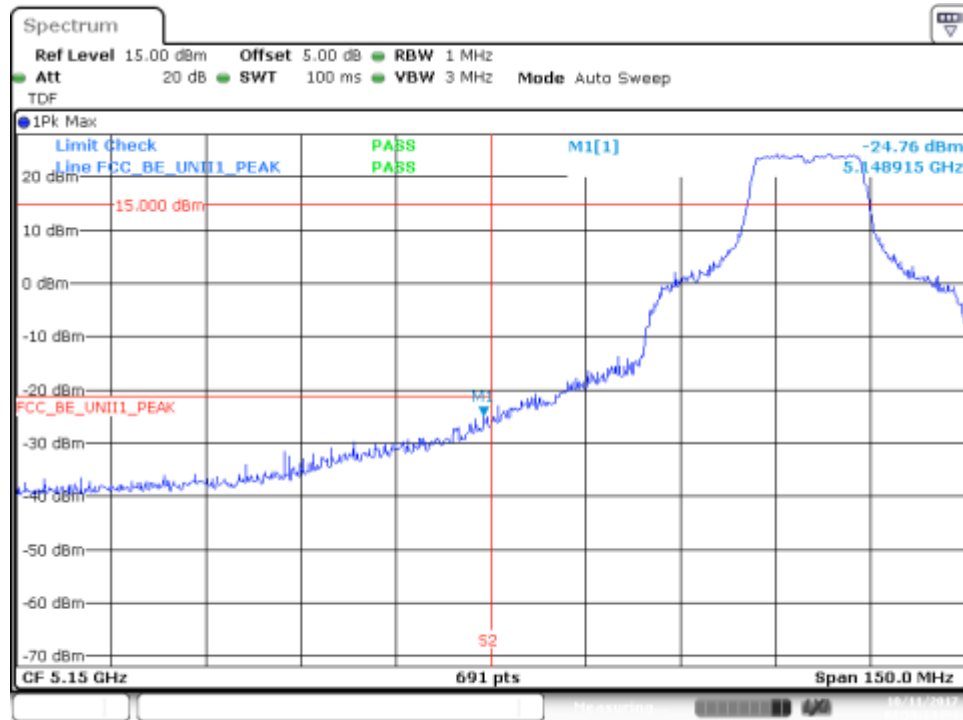

Date: 11.OCT.2017 14:59:15


BE Low Freq Section, RMS – CH40



Date: 11.OCT.2017 14:58:50


802.11n20, HT8 (MIMO) – Chain A

BE Low Freq Section, Peak – CH36

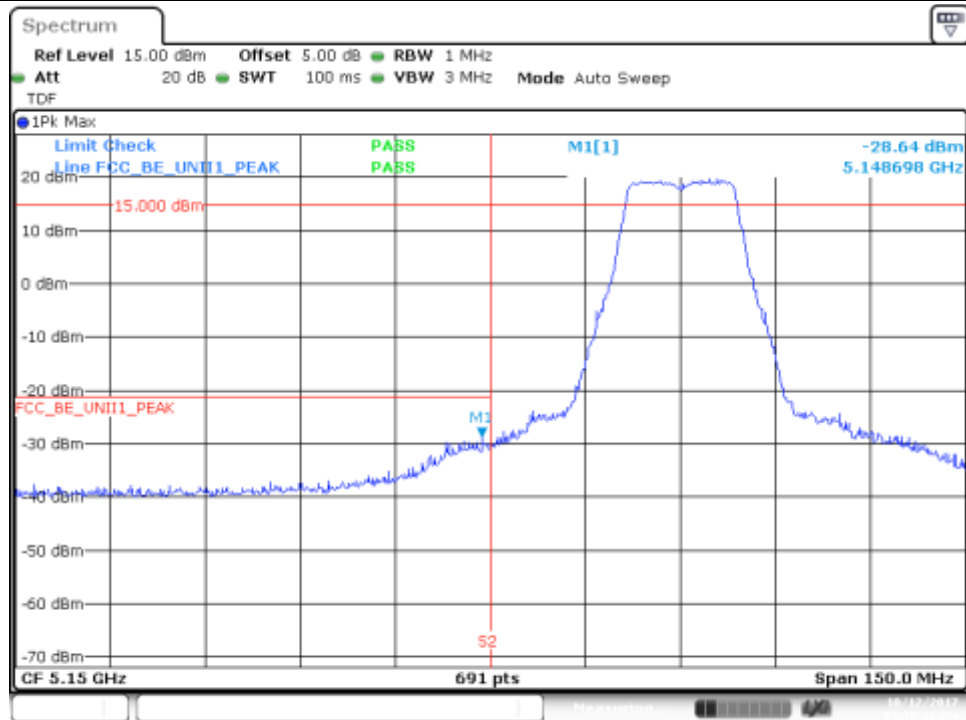


Date: 12 OCT 2017 14:20:16

BE Low Freq Section, RMS – CH36

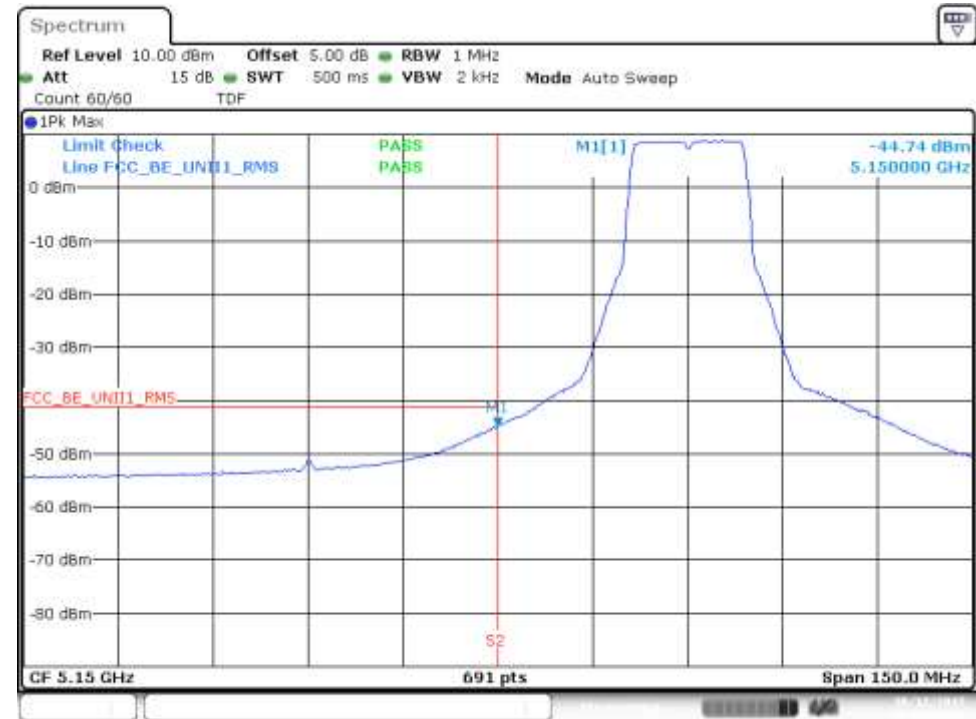

Date: 12 OCT 2017 14:19:32

BE Low Freq Section, Peak – CH40

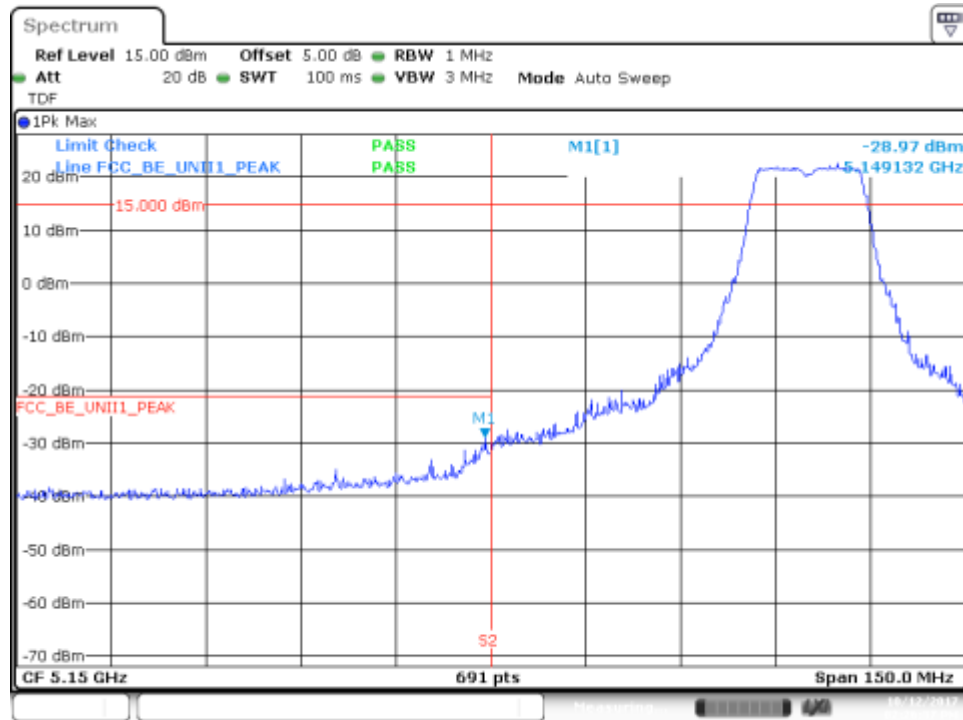

Date: 12 OCT 2017 14:28:38


BE Low Freq Section, RMS – CH40



Date: 12 OCT 2017 14:28:21

802.11n20, HT8 (MIMO) – Chain B

BE Low Freq Section, Peak – CH36

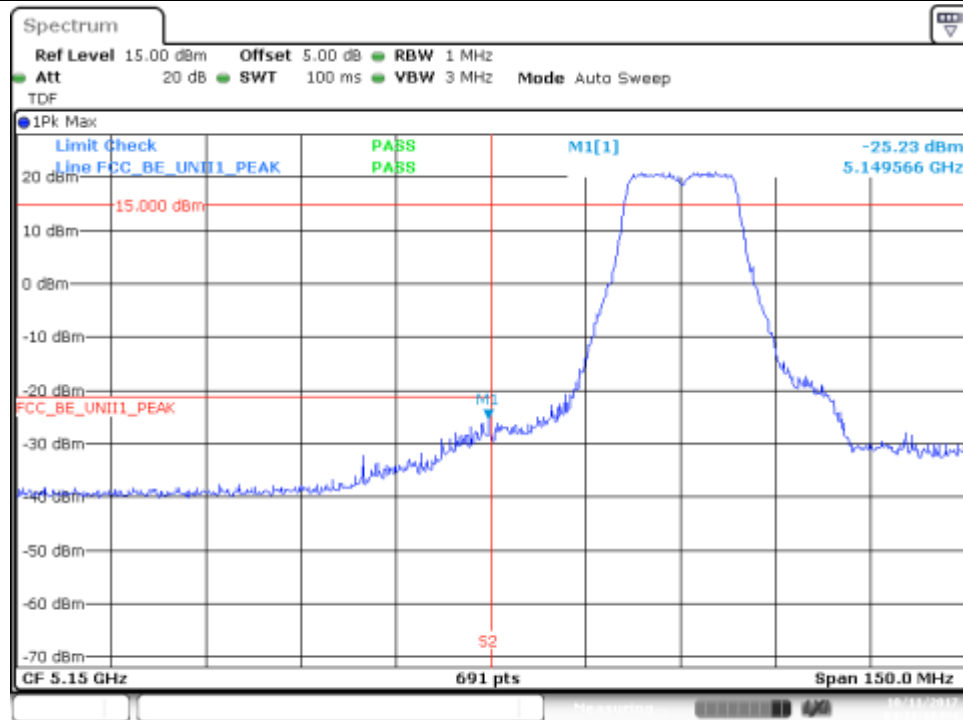


Date: 11.OCT.2017 16:11:19

BE Low Freq Section, RMS – CH36




Date: 11.OCT.2017 16:10:54

BE Low Freq Section, Peak – CH40

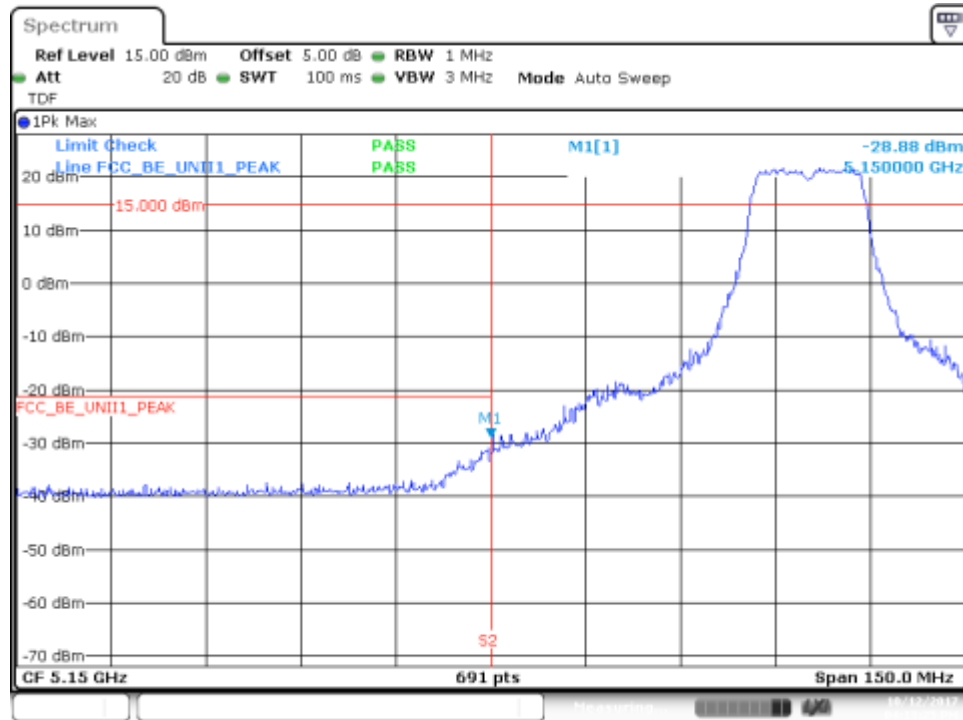


BE Low Freq Section, RMS – CH40

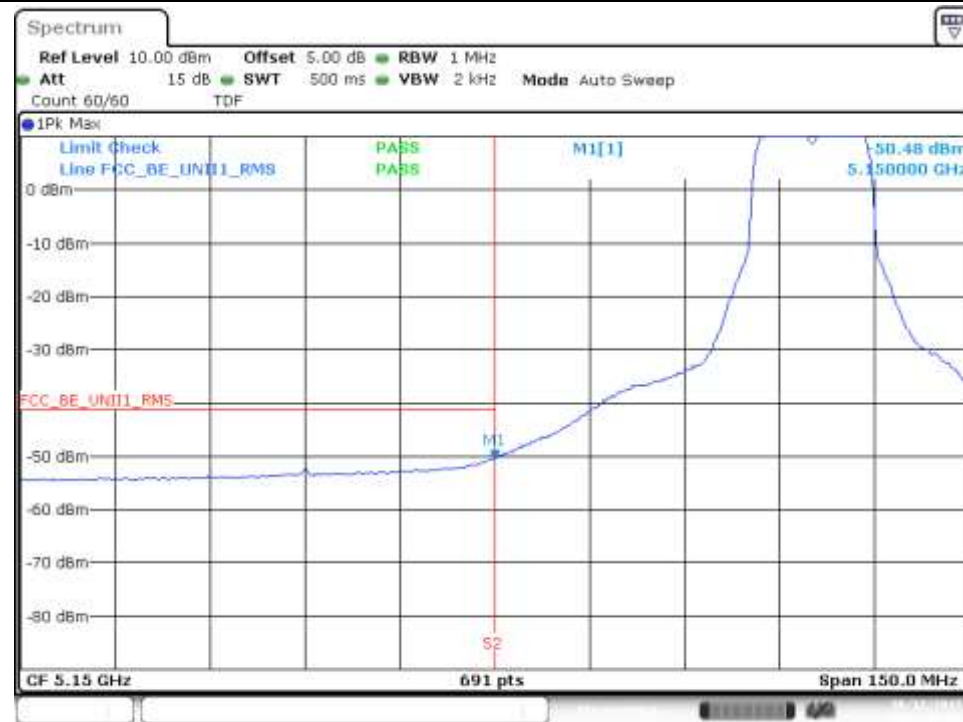


802.11n40, HT0 (SISO) – Chain A

BE Low Freq Section, Peak – CH38F

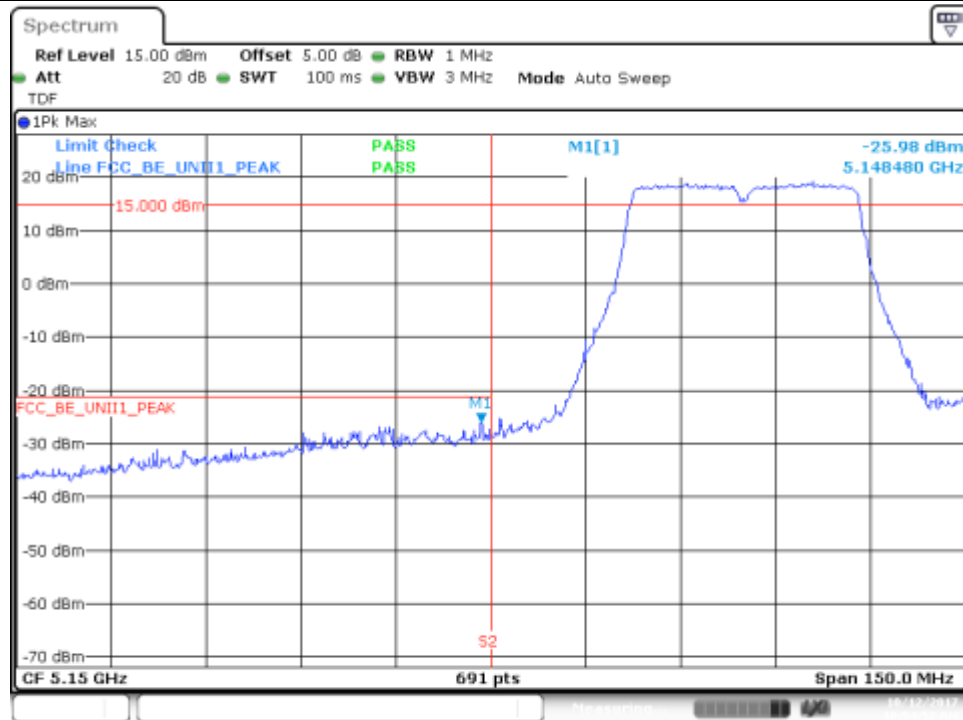


Date: 12 OCT 2017 10:54:52

BE Low Freq Section, RMS – CH38F

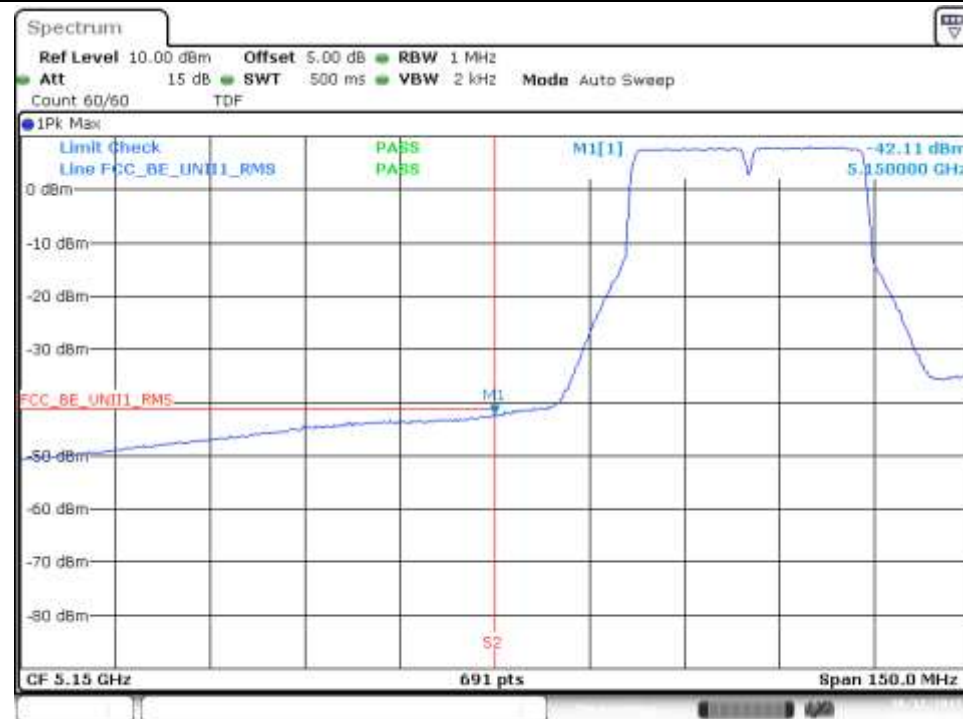

Date: 12 OCT 2017 10:54:09

BE Low Freq Section, Peak – CH46F

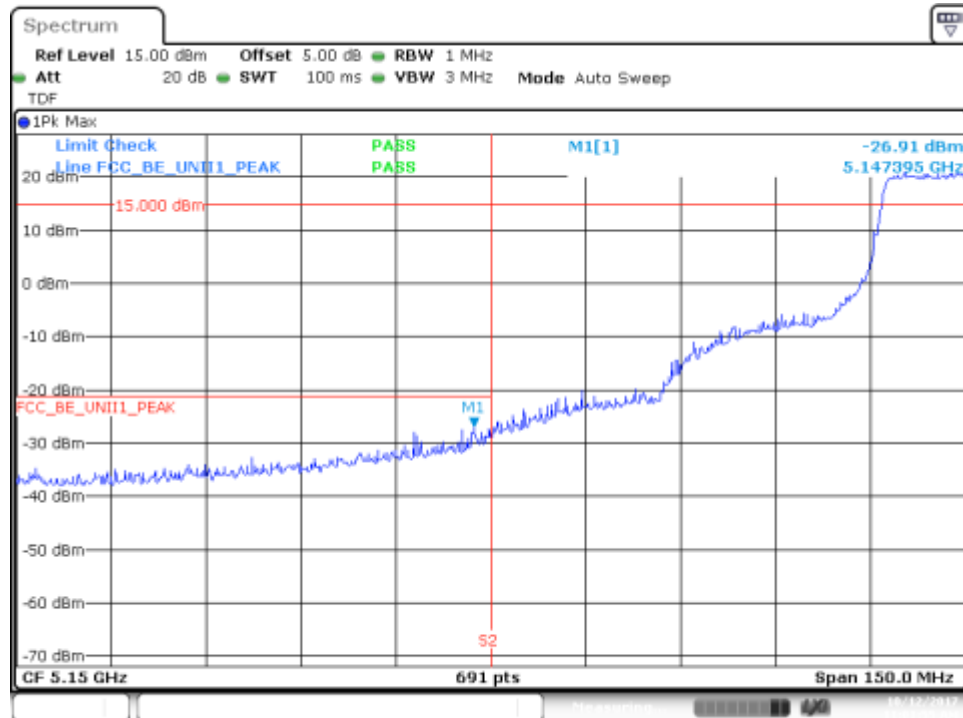

Date: 12 OCT 2017 11:01:55


BE Low Freq Section, RMS – CH46F



Date: 12 OCT 2017 11:01:14


802.11n40, HT0 (SISO) – Chain B

BE Low Freq Section, Peak – CH38F

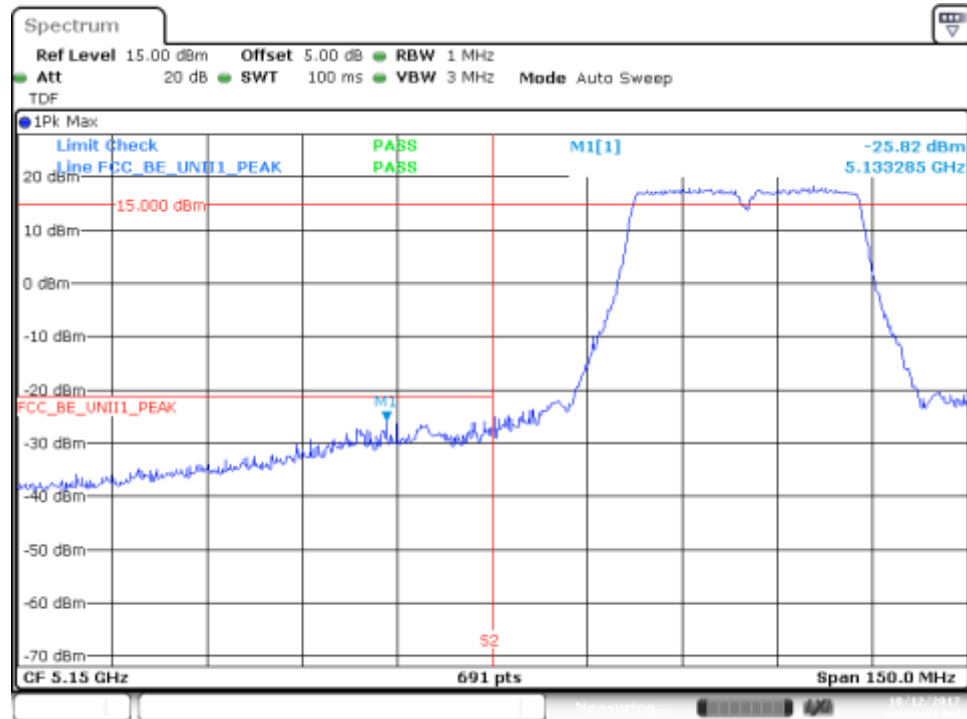


Date: 12.OCT.2017 15:44:28

BE Low Freq Section, RMS – CH38F

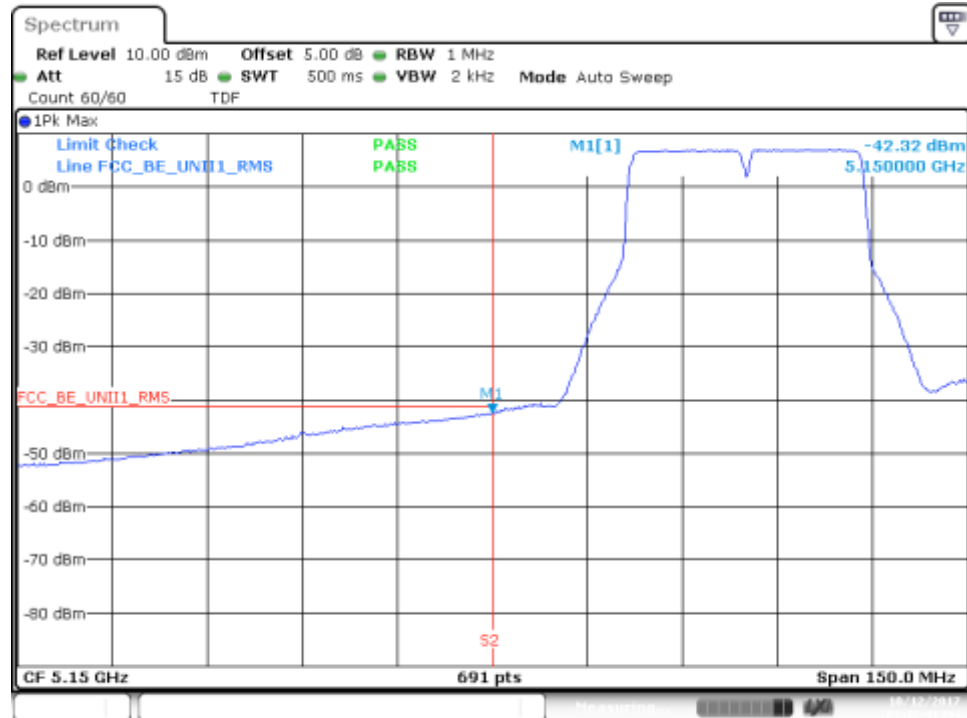


Date: 12.OCT.2017 15:42:42

BE Low Freq Section, Peak – CH46F

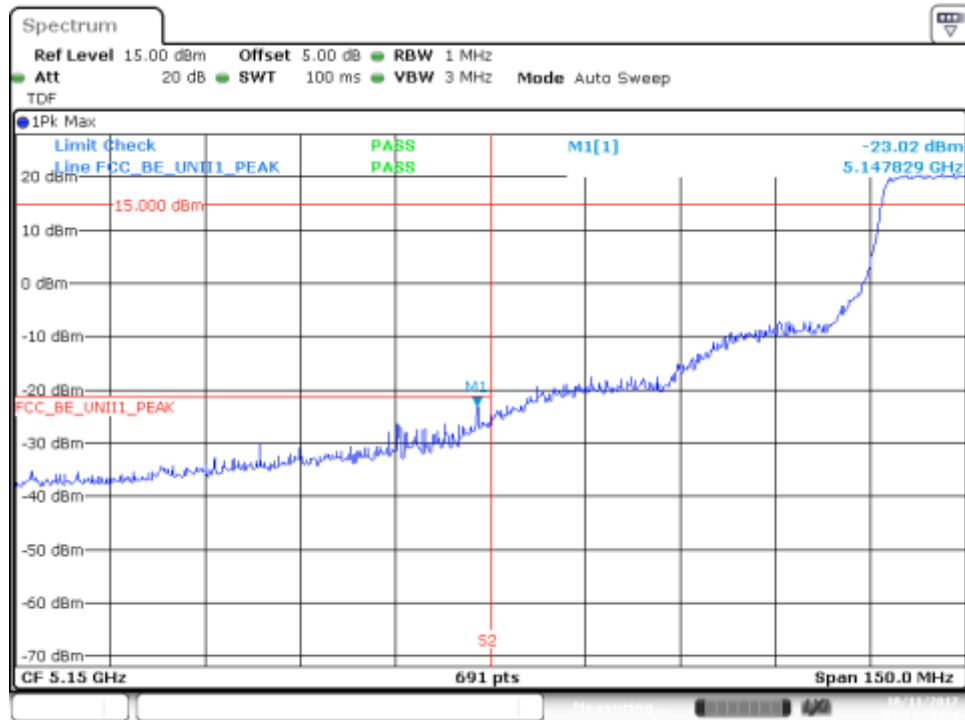

Date: 11.OCT.2017 15:23:51


BE Low Freq Section, RMS – CH46F

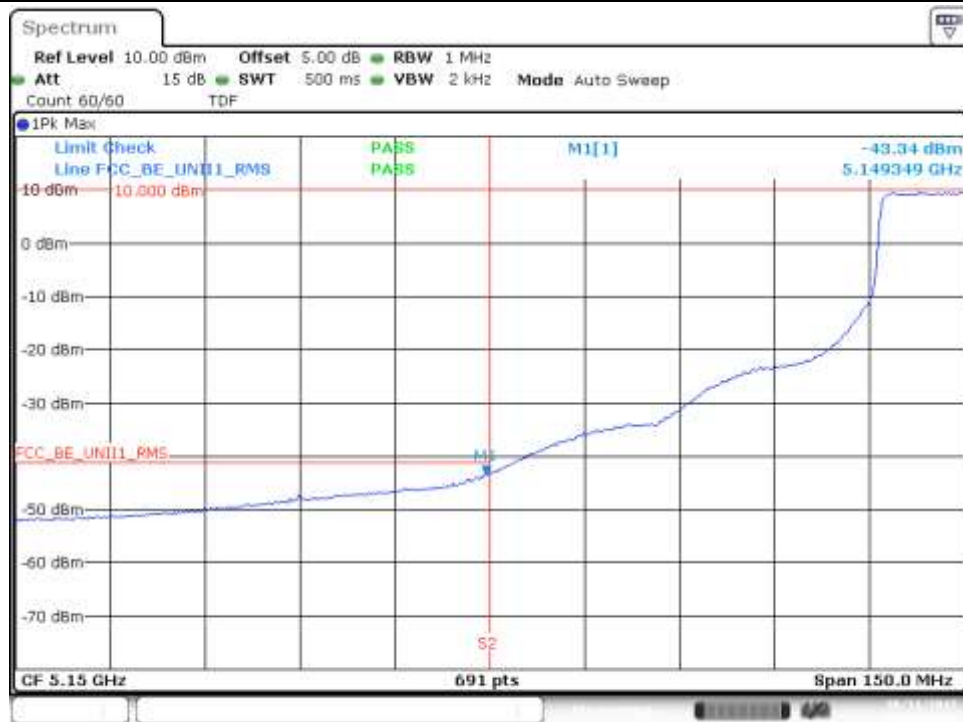


Date: 11.OCT.2017 15:21:55

802.11n40, HT8 (MIMO) – Chain A


BE Low Freq Section, Peak – CH38F

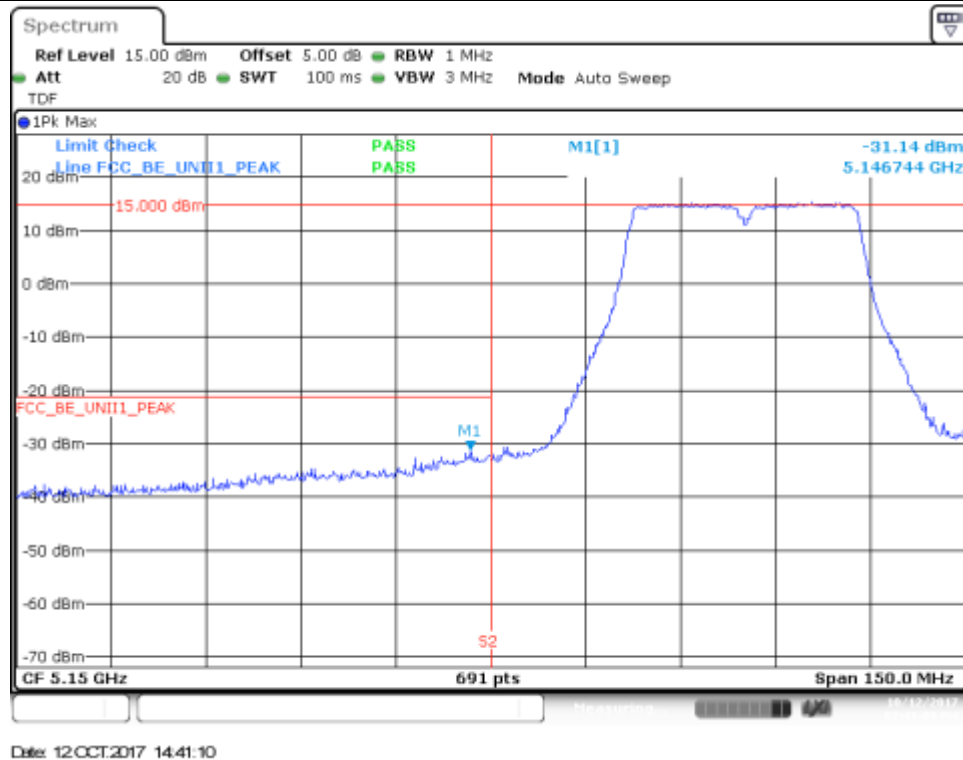


BE Low Freq Section, RMS – CH38F

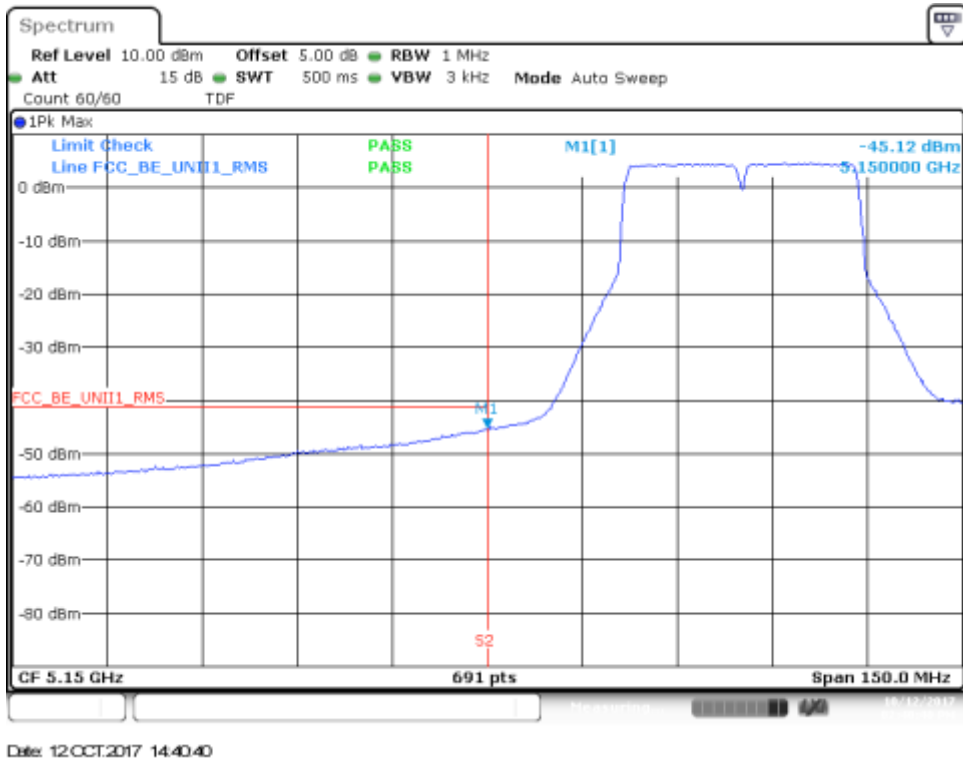

BE Low Freq Section, Peak – CH46F

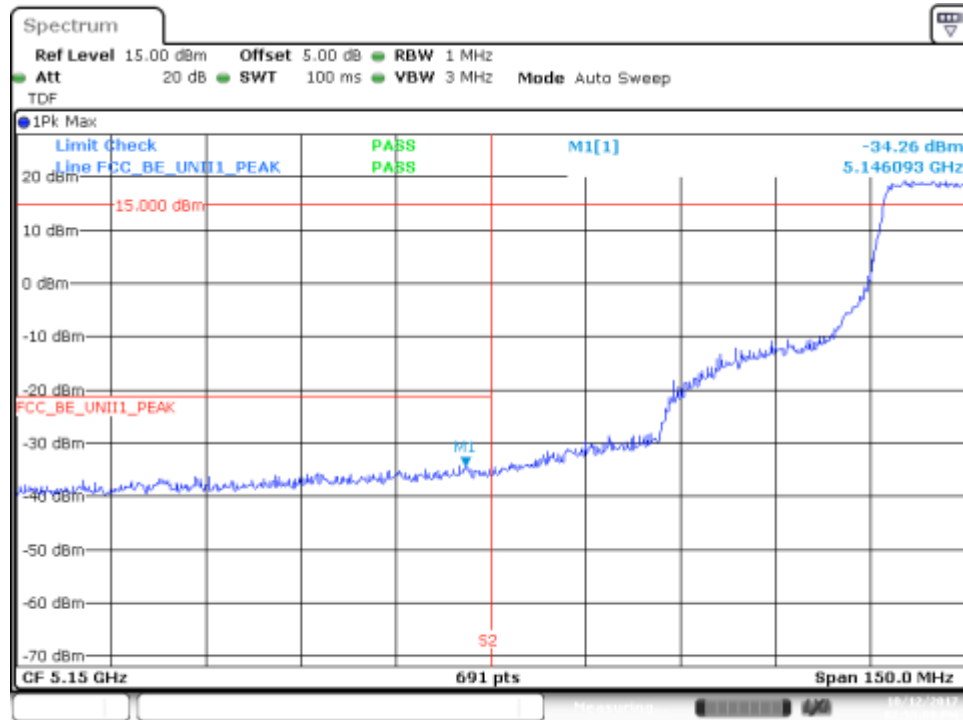


BE Low Freq Section, RMS – CH46F

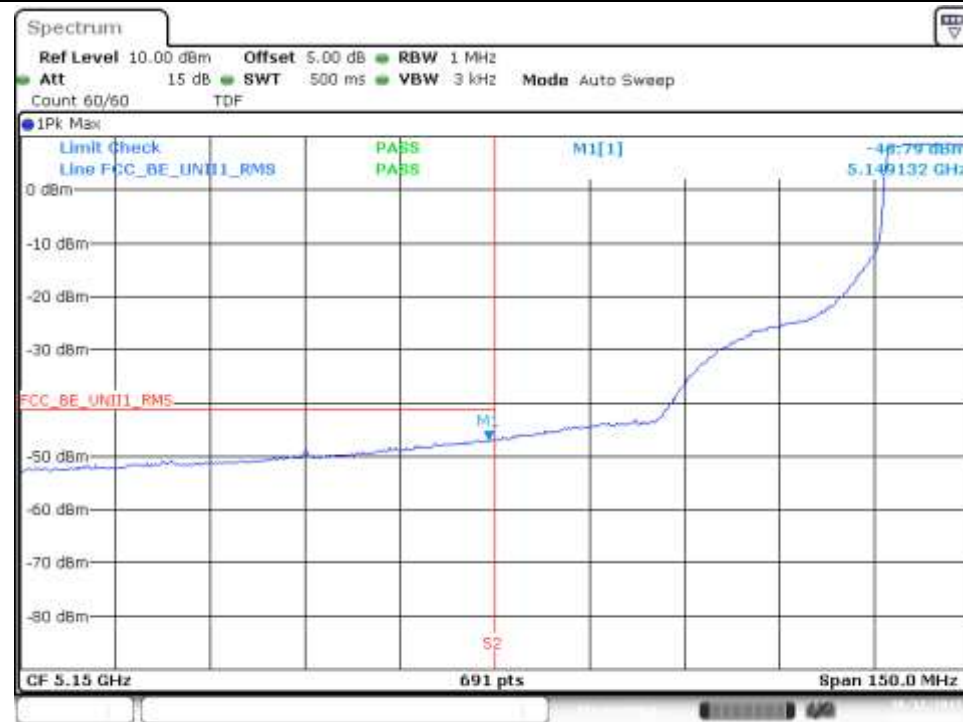


802.11n40, HT8 (MIMO) – Chain B

BE Low Freq Section, Peak – CH38F

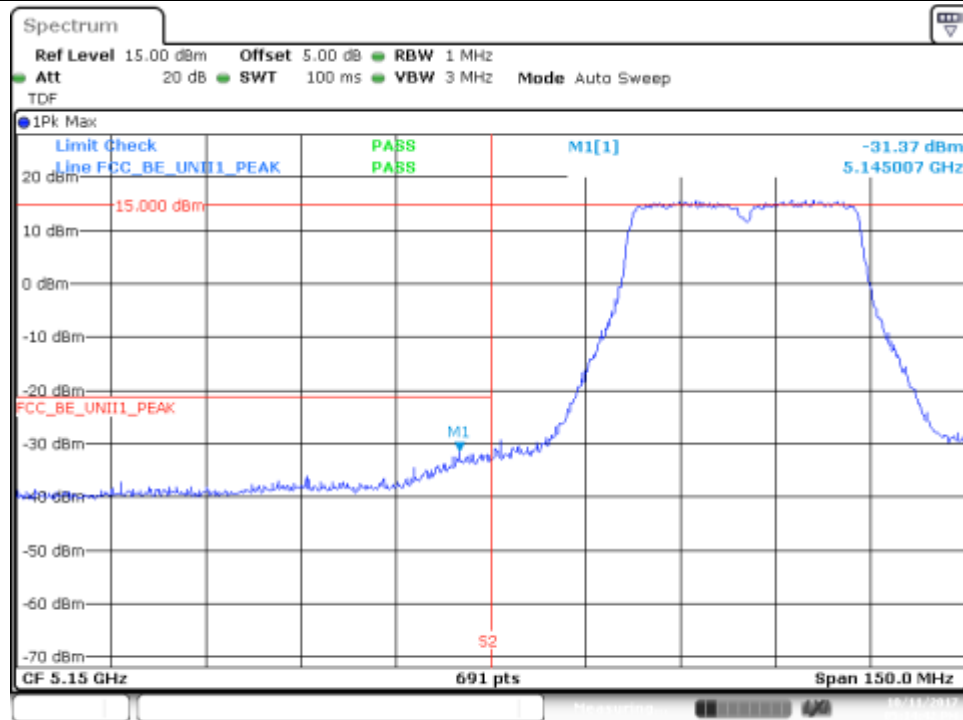


Date: 11.OCT.2017 17:14:42

BE Low Freq Section, RMS – CH38F

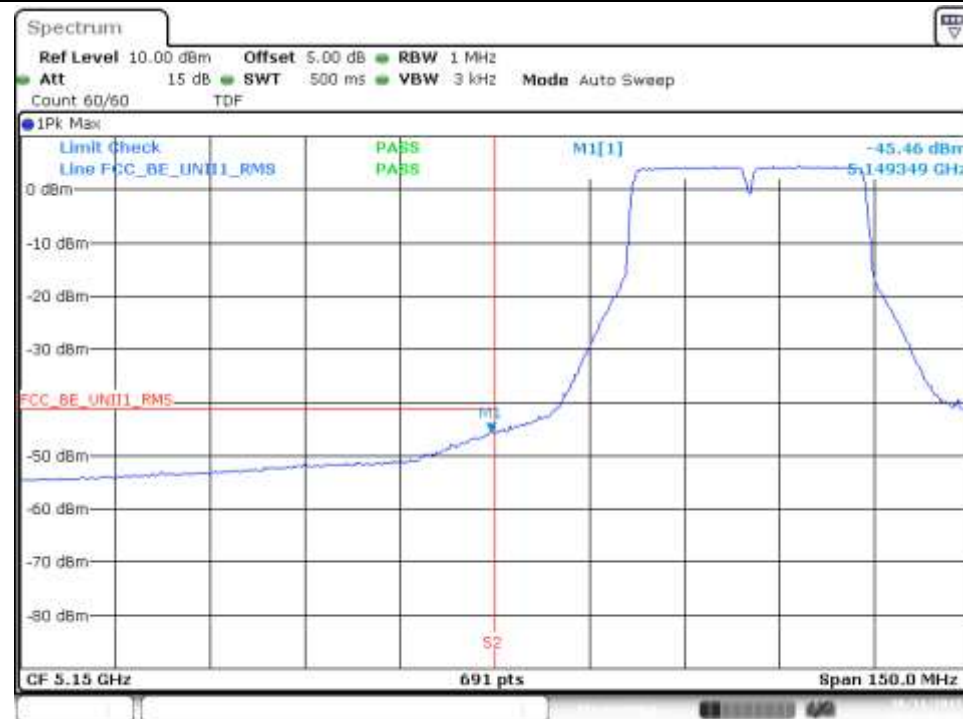

Date: 11.OCT.2017 17:14:12

BE Low Freq Section, Peak – CH46F

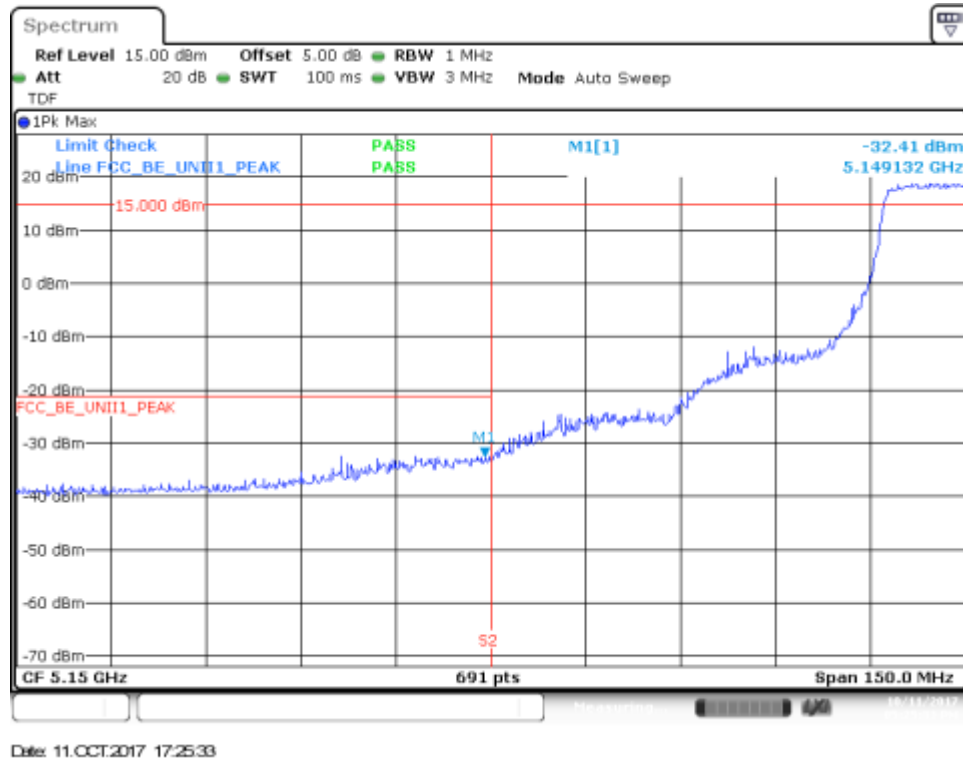


BE Low Freq Section, RMS – CH46F



802.11ac80, VHT0 (SISO) – Chain A

BE Low Freq Section, Peak – CH42ac80

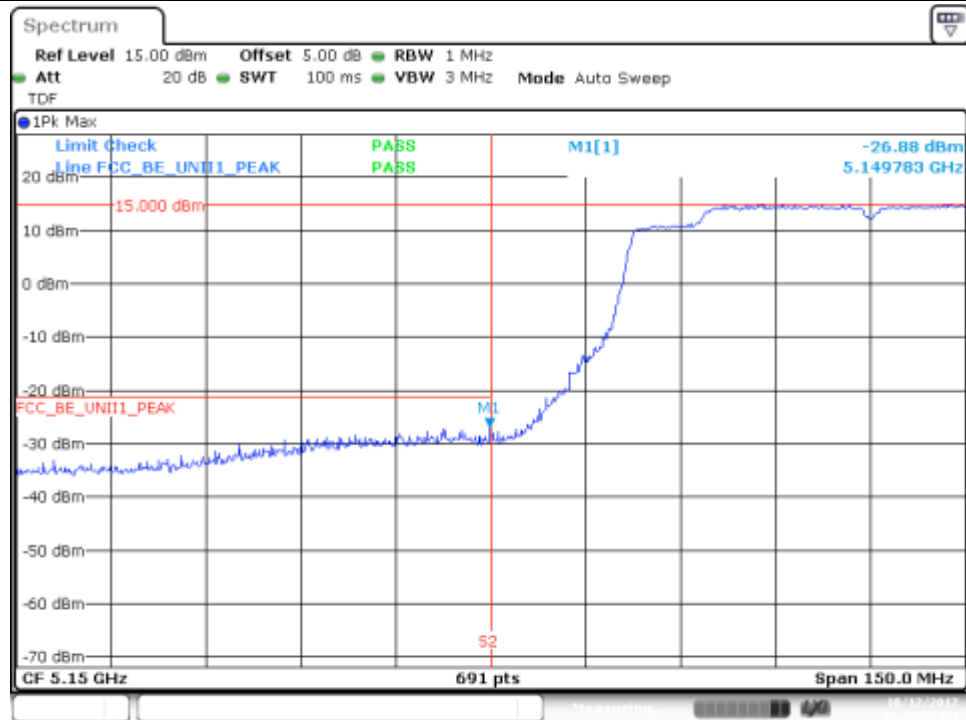

Date: 12 OCT 2017 11:13:59


BE Low Freq Section, RMS – CH42ac80



Date: 12 OCT 2017 11:13:10


802.11ac80, VHT0 (SISO) – Chain B

BE Low Freq Section, Peak – CH42ac80

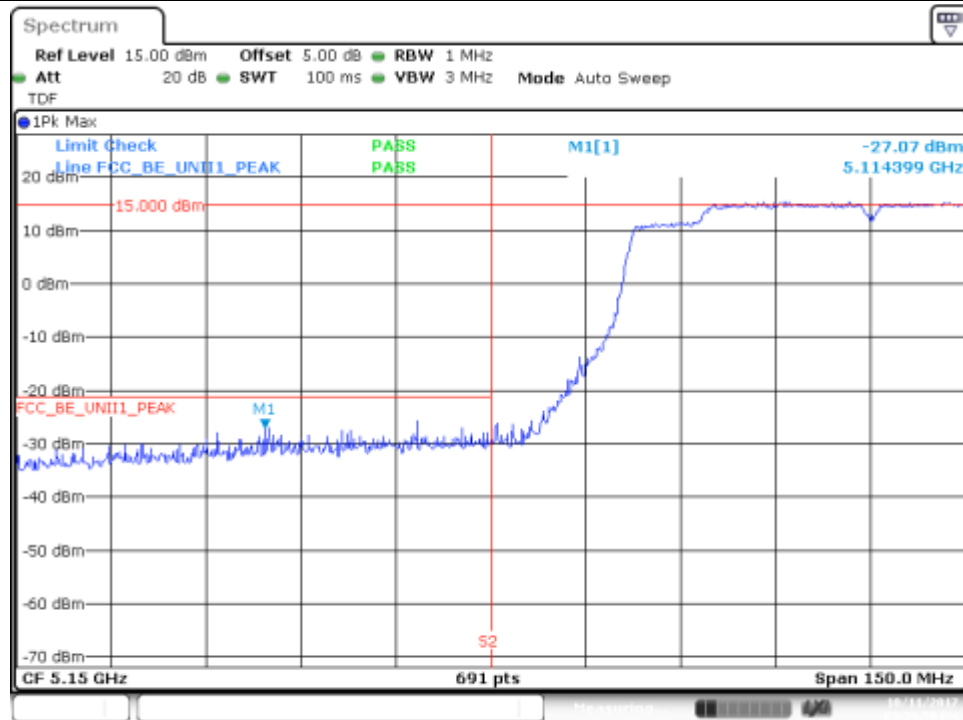

Date: 11.OCT.2017 15:34:50


BE Low Freq Section, RMS – CH42ac80

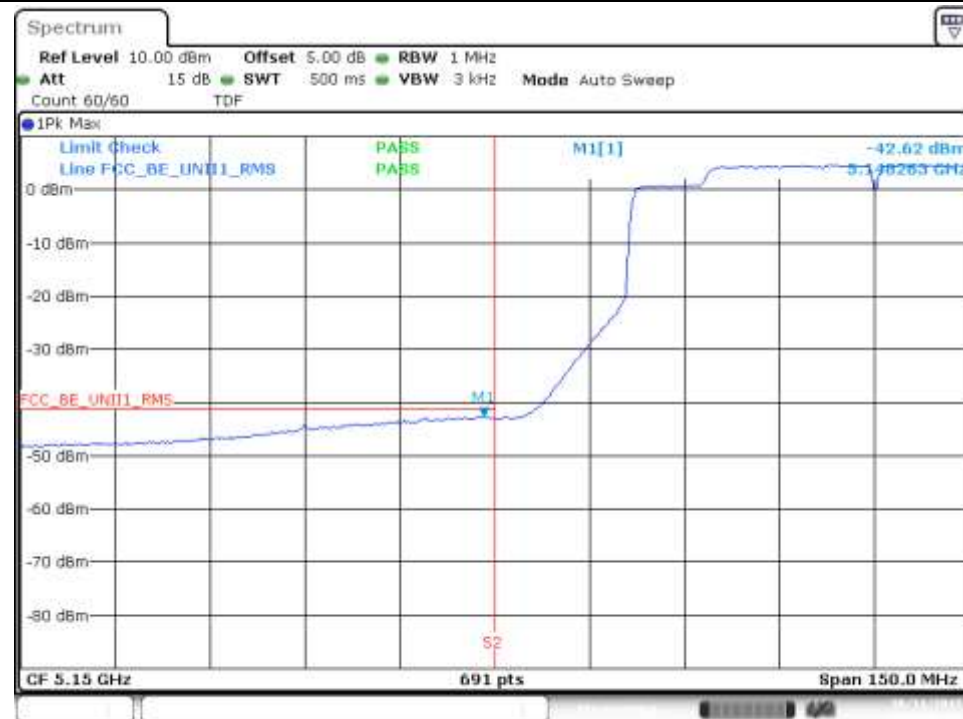

Date: 11.OCT.2017 15:41:18

802.11ac80, VHT0 (MIMO) – Chain A

BE Low Freq Section, Peak – CH42ac80

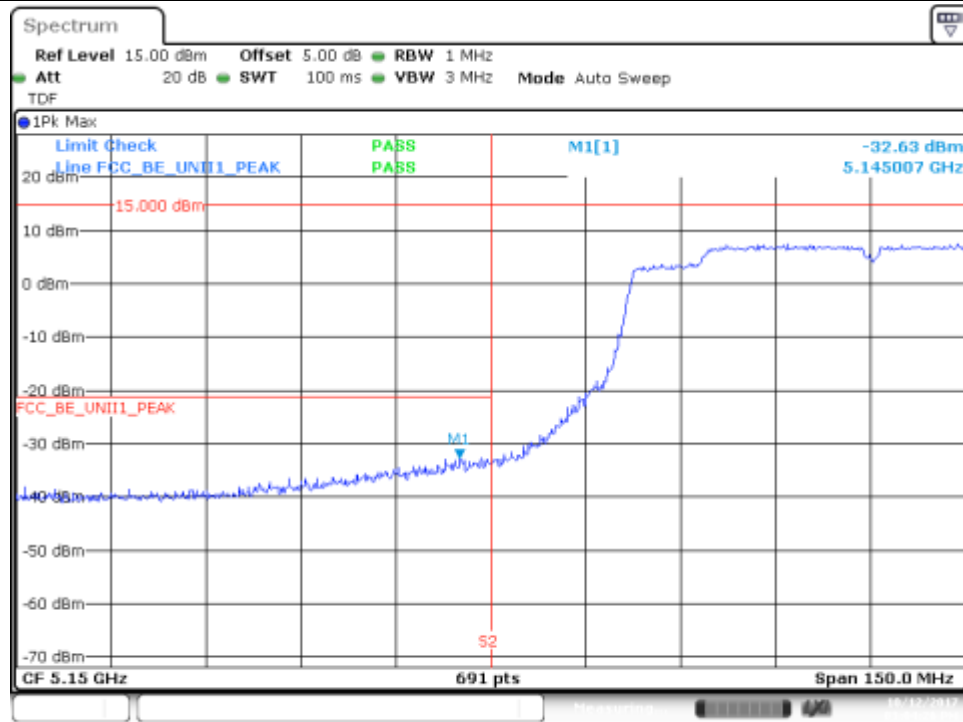


BE Low Freq Section, RMS – CH42ac80




802.11ac80, VHT0 (MIMO) – Chain B

BE Low Freq Section, Peak – CH42ac80

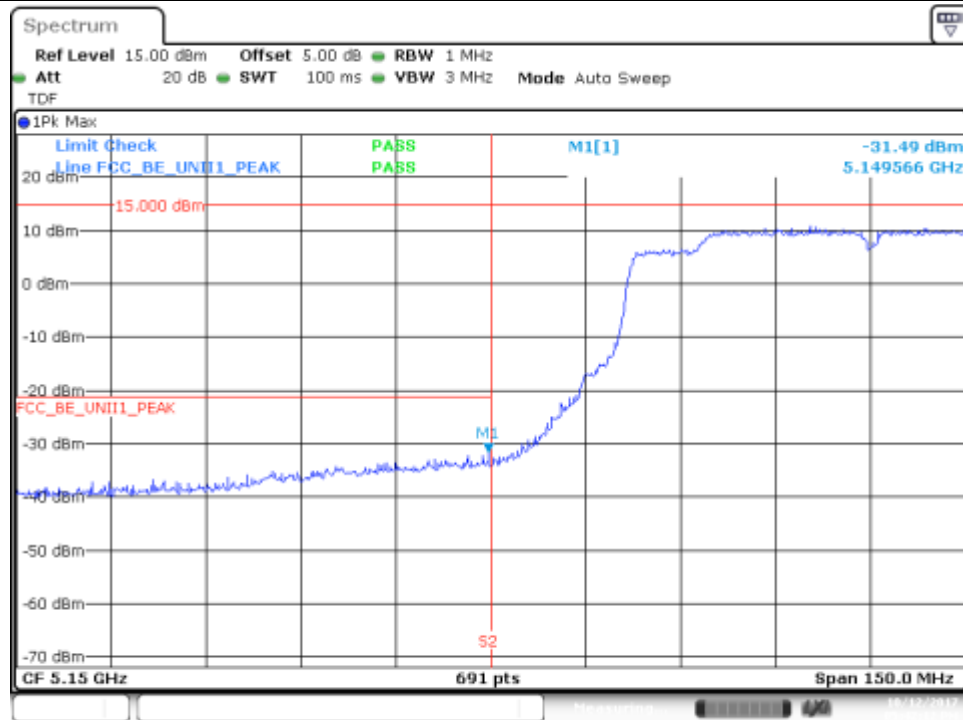

Date: 12 OCT 2017 17:42:13


BE Low Freq Section, RMS – CH42ac80

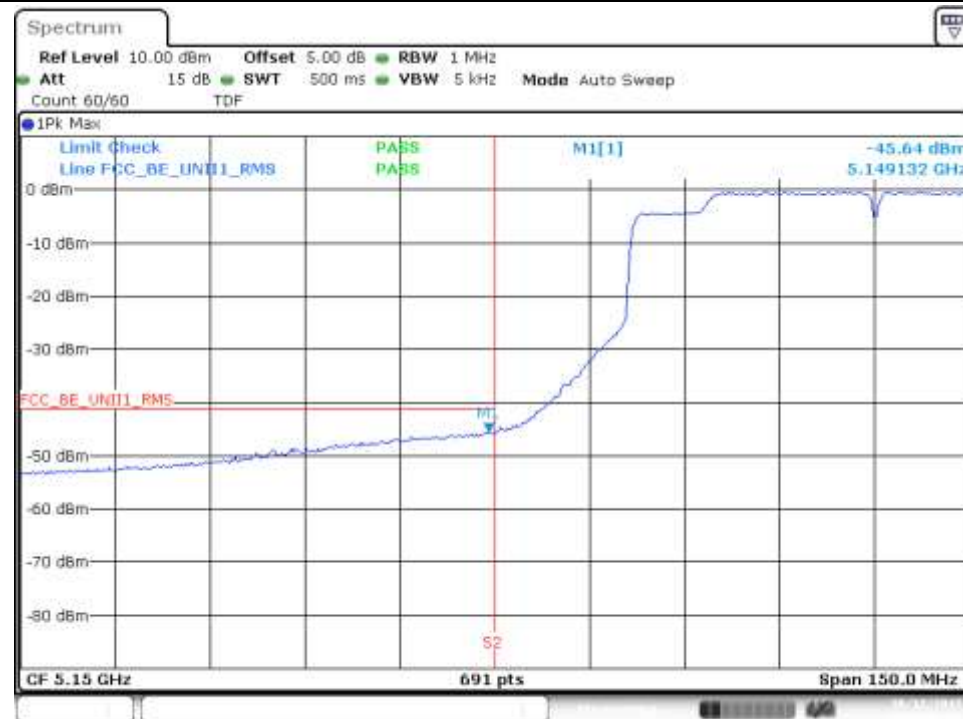

Date: 12 OCT 2017 17:41:16

802.11ac160, VHT0 (SISO) – Chain A

BE Low Freq Section, Peak – CH50ac160

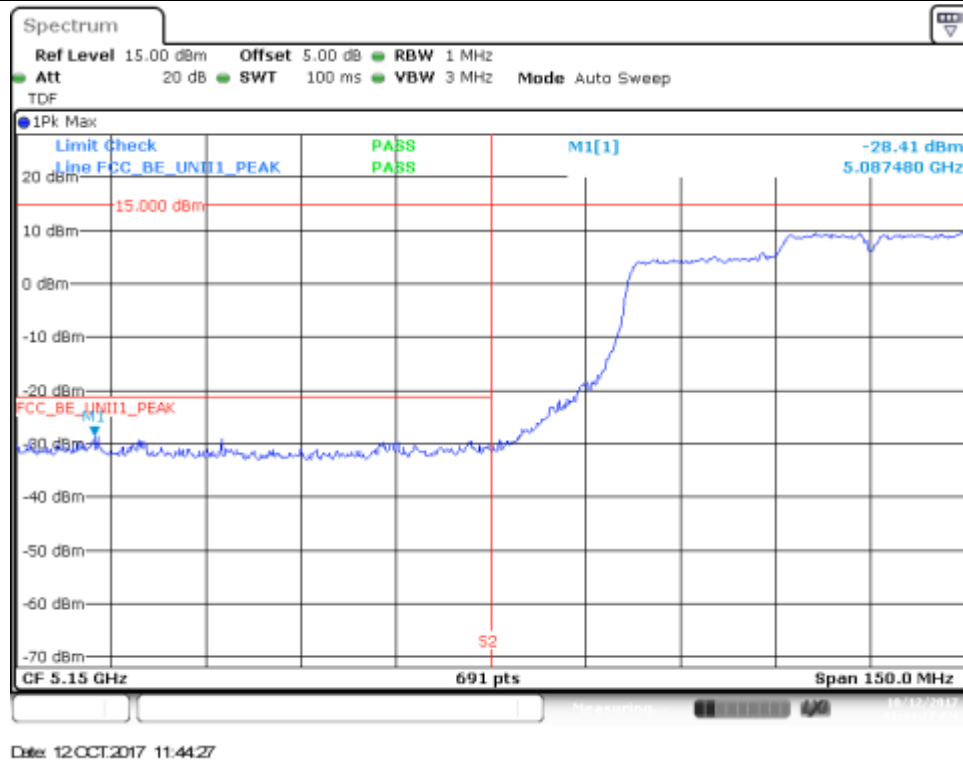


BE Low Freq Section, RMS – CH50ac160




802.11ac160, VHT0 (SISO) – Chain B

BE Low Freq Section, Peak – CH50ac160

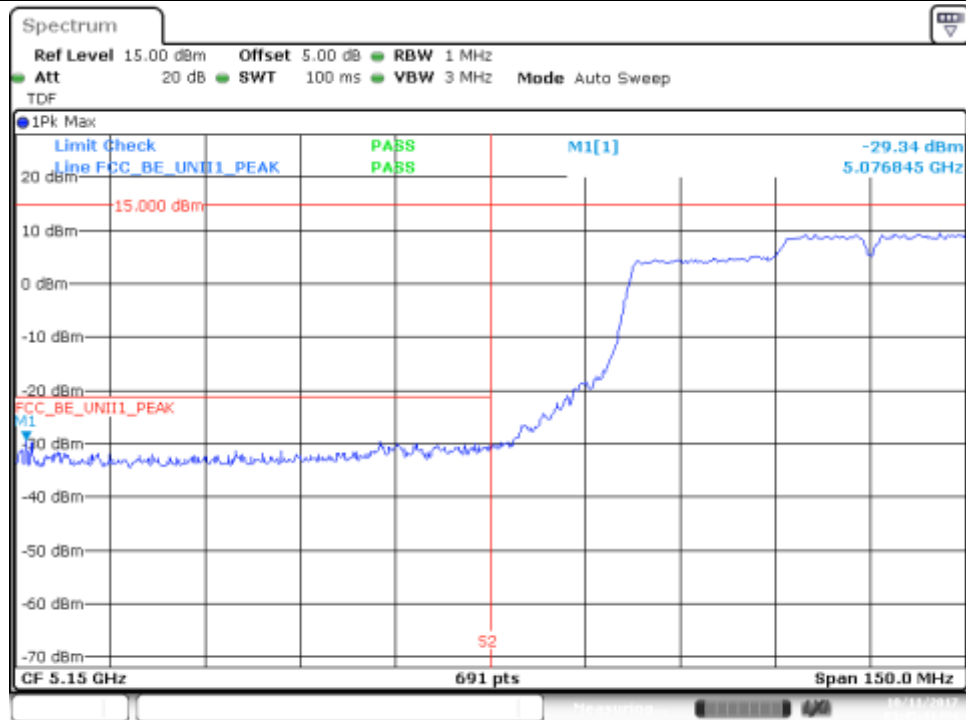

Date: 11.OCT.2017 15:45:41


BE Low Freq Section, RMS – CH50ac160

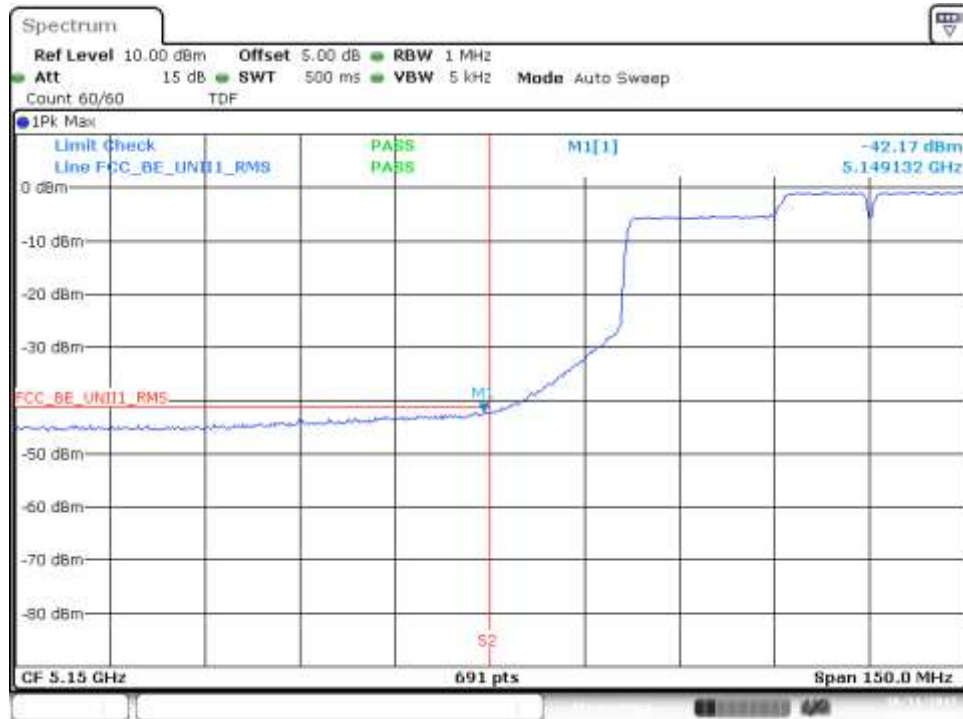

Date: 11.OCT.2017 15:45:20

802.11ac160, VHT0 (MIMO) – Chain A

BE Low Freq Section, Peak – CH50ac160

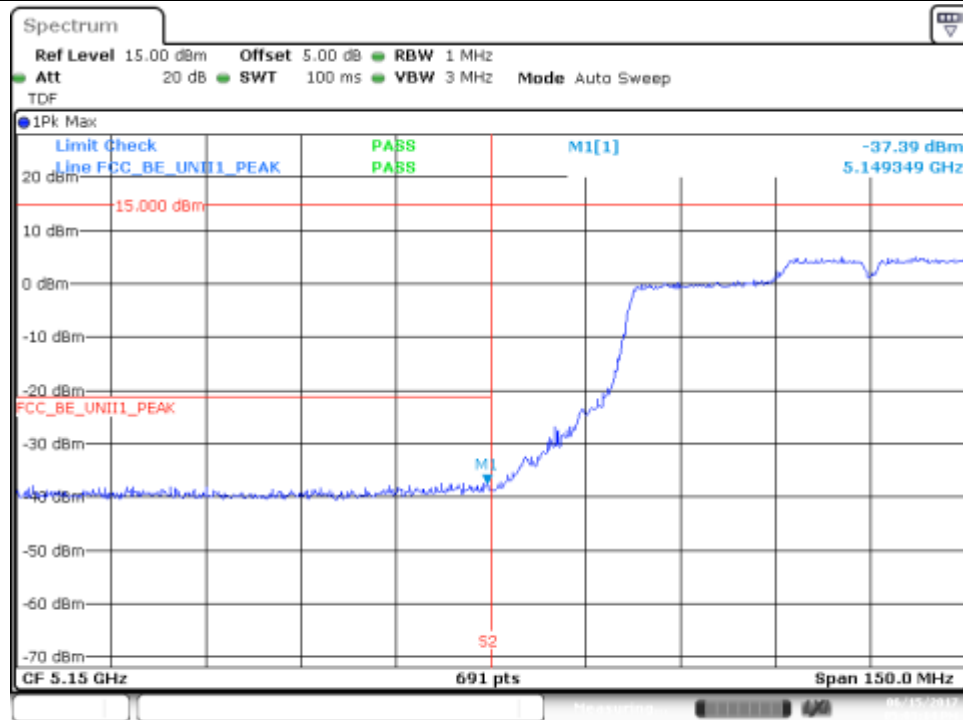

Date: 15 JUN 2017 17:03:15


BE Low Freq Section, RMS – CH50ac160




Date: 12 OCT 2017 15:14:17

802.11ac160, VHT0 (MIMO) – Chain B

BE Low Freq Section, Peak – CH50ac160

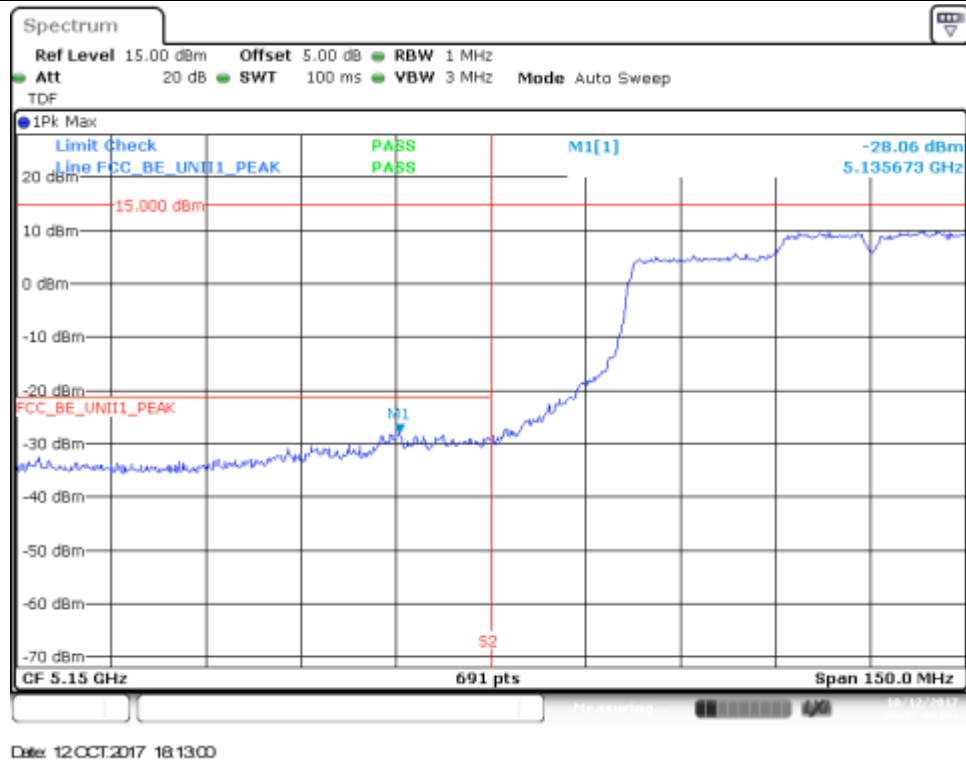

BE Low Freq Section, RMS – CH50ac160

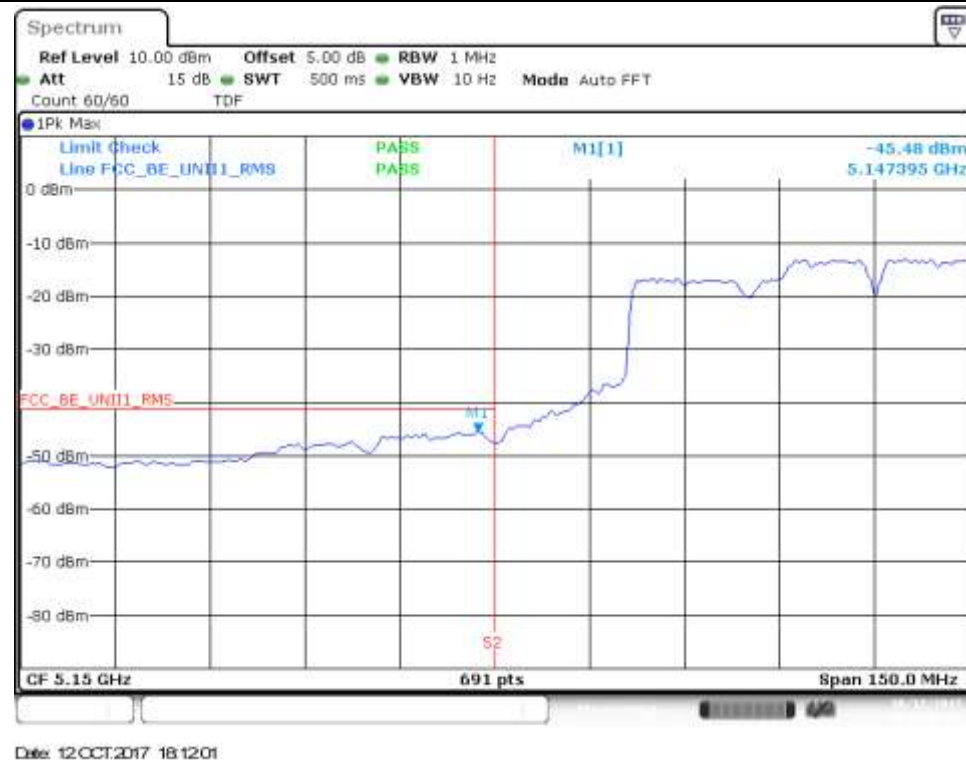


B.4 Test Results Tables U-NII-2A

B.4.1 26dB & 99% Bandwidth

Test procedure

The setup below was used to measure the 26dB & 99% Bandwidth. The antenna terminal of the EUT is connected to the spectrum through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

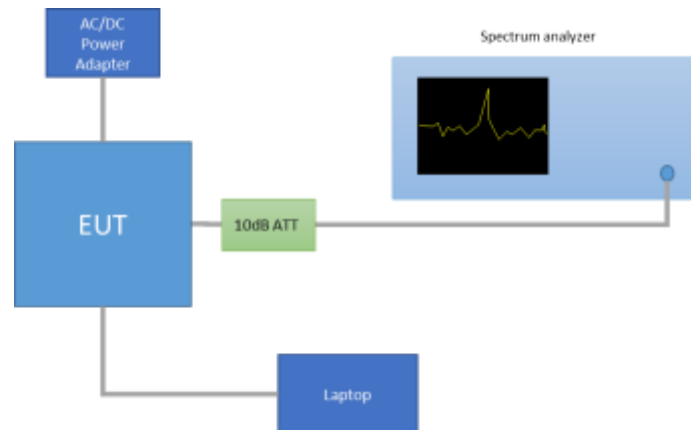

Results tables

Mode	Rate	Antenna	Channel	Frequency [MHz]	26dB BW [MHz]	99% BW [MHz]
802.11a	6Mbps	SISO CHAIN A	52	5260	27.68	17.28
			56	5280	29.53	17.52
			64	5320	24.47	16.84
		SISO CHAIN B	52	5260	31.03	18.12
			56	5280	31.03	18.12
			64	5320	24.57	16.84
802.11n20	HT0	SISO CHAIN A	52	5260	28.23	18.28
			56	5280	28.68	18.28
			64	5320	24.58	17.92
		SISO CHAIN B	52	5260	34.03	19.04
			56	5280	31.33	18.80
			64	5320	24.73	17.92
	HT8	MIMO CHAIN A	52	5260	25.48	17.96
			56	5280	24.78	17.96
			64	5320	25.38	17.96
		MIMO CHAIN B	52	5260	24.53	17.96
			56	5280	25.38	17.96
			64	5320	24.48	17.96
802.11n40	HT0	SISO CHAIN A	54F	5270	46.58	36.72
			62F	5310	43.87	36.48
		SISO CHAIN B	54F	5270	48.65	36.88
			62F	5310	43.69	36.56
	HT8	MIMO CHAIN A	54F	5270	46.50	36.80
			62F	5310	44.51	36.56
		MIMO CHAIN B	54F	5270	45.23	36.40
			62F	5310	42.88	36.32
802.11ac80	VHT0	SISO CHAIN A	58ac80	5290	86.54	75.12
		SISO CHAIN B	58ac80	5290	86.16	75.24
		MIMO CHAIN A	58ac80	5290	86.92	75.24
		MIMO CHAIN B	58ac80	5290	87.11	75.12

Max Value

See Section B.5.1 and Section B.5.2 for the screenshot results.

B.4.2 Power Limits. Maximum Output power & Peak power spectral density

Test limits

FCC part	Limits
15.407 (a) (2)	For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1 megahertz band.

Test procedure

The Maximum Conducted Output Power was measured using the channel integration method according to point E) 2) e) (Method SA-2 Alternative) of KDB 789033 D02.


The maximum power spectral density (PSD) was measured using the method according to point F) (Method SA-2 Alternative) of KDB 789033 D02.

In the measure-and-sum approach for MIMO mode, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically in linear power units to determine the total emission level from the device.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

The setup below was used to measure the maximum conducted output power and power spectral density. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

The declared maximum antenna gain is 5dBi.

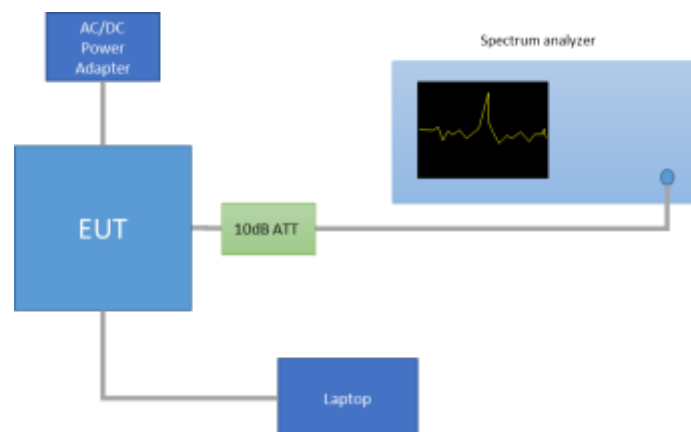

Results tables

Duty cycle

Mode	Rate	Antenna	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
802.11a	6Mbps	SISO-A	2.03	2.07	98.28%
		SISO-B	2.03	2.07	98.28%
802.11n20	HT0	SISO-A	1.89	1.93	98.09%
		SISO-B	1.89	1.93	98.09%
	HT8	MIMO-A	0.97	1.01	95.74%
		MIMO-B	0.97	1.01	95.74%
802.11n40	HT0	SISO-A	0.94	0.97	96.45%
		SISO-B	0.94	0.97	96.45%
	HT8	MIMO-A	0.49	0.53	92.45%
		MIMO-B	0.49	0.53	92.45%
802.11ac80	VHT0	SISO-A	0.46	0.49	92.64%
		SISO-B	0.46	0.49	92.64%
		MIMO-A	0.26	0.29	86.59%
		MIMO-B	0.26	0.29	86.59%
802.11ac160	VHT0	SISO-A	0.25	0.28	88.03%
		SISO-B	0.25	0.28	88.03%
		MIMO-A	0.15	0.19	79.02%
		MIMO-B	0.15	0.19	79.02%

Maximum output power

Mode	Rate	Channel	Freq. [MHz]	Antenna	Average Conducted Output Power [dBm]	Maximum* Conducted Output Power [dBm]	Maximum* Conducted Output Power [mW]	Maximum* EIRP [dBm]
802.11a	6Mbps	52	5260	SISO CHAIN A	21.44	21.44	139.32	26.44
				SISO CHAIN B	21.51	21.51	141.58	26.51
		56	5280	SISO CHAIN A	21.44	21.44	139.32	26.44
				SISO CHAIN B	21.30	21.30	134.90	26.30
		64	5320	SISO CHAIN A	17.73	17.73	59.29	22.73
				SISO CHAIN B	17.53	17.53	56.62	22.53
802.11n20	HT0	52	5260	SISO CHAIN A	21.45	21.45	139.64	26.45
				SISO CHAIN B	21.47	21.47	140.28	26.47
		56	5280	SISO CHAIN A	21.39	21.39	137.72	26.39
				SISO CHAIN B	21.27	21.27	133.97	26.27
		64	5320	SISO CHAIN A	17.70	17.70	58.88	22.70
				SISO CHAIN B	17.29	17.29	53.58	22.29
	HT8	52	5260	MIMO CHAIN A	18.47	18.66	73.43	23.66
				MIMO CHAIN B	18.61	18.80	75.84	23.80
				Combined A+B	21.55	21.74	149.27	26.74
		56	5280	MIMO CHAIN A	18.47	18.66	73.43	23.66
				MIMO CHAIN B	18.39	18.58	72.09	23.58
				Combined A+B	21.44	21.63	145.52	26.63
		64	5320	MIMO CHAIN A	15.89	16.08	40.54	21.08
				MIMO CHAIN B	15.73	15.92	39.07	20.92
				Combined A+B	18.82	19.01	79.61	24.01
802.11n40	HT0	54F	5270	SISO CHAIN A	20.75	20.91	123.23	25.91
				SISO CHAIN B	20.71	20.87	122.10	25.87
		62F	5310	SISO CHAIN A	15.65	15.81	38.08	20.81
				SISO CHAIN B	15.48	15.64	36.62	20.64
	HT8	54F	5270	MIMO CHAIN A	18.34	18.68	73.81	23.68
				MIMO CHAIN B	18.79	19.13	81.87	24.13
				Combined A+B	21.58	21.92	155.67	26.92
		62F	5310	MIMO CHAIN A	13.89	14.23	26.49	19.23
				MIMO CHAIN B	14.79	15.13	32.59	20.13
				Combined A+B	17.37	17.71	59.08	22.71
802.11ac80	VHT0	58ac80	5290	SISO CHAIN A	14.70	15.03	31.86	20.03
				SISO CHAIN B	14.50	14.83	30.42	19.83
				MIMO CHAIN A	11.55	12.18	16.50	17.18
				MIMO CHAIN B	12.01	12.64	18.35	17.64
				Combined A+B	14.80	15.42	34.85	20.42

* Maximum values are the duty cycle compensated values calculated from the average (measured) values

Max Value

Min Value

Maximum Power Spectral Density (PSD)

Mode	Rate	Channel	Freq. [MHz]	Antenna	Average conducted PSD [dBm/MHz]	Maximum* conducted PSD [dBm/MHz]
802.11a	6Mbps	52	5260	SISO CHAIN A	9.77	9.77
				SISO CHAIN B	9.80	9.80
		56	5300	SISO CHAIN A	9.77	9.77
				SISO CHAIN B	9.65	9.65
		64	5320	SISO CHAIN A	6.14	6.14
				SISO CHAIN B	5.95	5.95
802.11n20	HT0	52	5260	SISO CHAIN A	9.48	9.48
				SISO CHAIN B	9.49	9.49
		56	5300	SISO CHAIN A	9.48	9.48
				SISO CHAIN B	9.29	9.29
		64	5320	SISO CHAIN A	5.83	5.83
				SISO CHAIN B	5.41	5.41
	HT8	52	5260	MIMO CHAIN A	3.54	3.73
				MIMO CHAIN B	4.46	4.65
				Combined A+B	7.03	7.22
		56	5300	MIMO CHAIN A	6.31	6.50
				MIMO CHAIN B	6.51	6.70
				Combined A+B	9.42	9.61
		64	5320	MIMO CHAIN A	6.02	6.21
				MIMO CHAIN B	6.61	6.80
				Combined A+B	9.34	9.52
802.11n40	HT0	54F	5270	SISO CHAIN A	5.72	5.88
				SISO CHAIN B	5.65	5.81
		62F	5310	SISO CHAIN A	0.62	0.78
				SISO CHAIN B	0.45	0.61
	HT8	54F	5270	MIMO CHAIN A	-1.25	-0.91
				MIMO CHAIN B	-1.33	-0.99
				Combined A+B	1.72	2.06
		62F	5310	MIMO CHAIN A	3.05	3.39
				MIMO CHAIN B	1.98	2.32
				Combined A+B	5.56	5.90
802.11ac80	VHT0	58ac80	5290	SISO CHAIN A	-2.67	-2.34
				SISO CHAIN B	-2.90	-2.57
				MIMO CHAIN A	-8.65	-8.02
				MIMO CHAIN B	-4.93	-4.30
				Combined A+B	-3.39	-2.77

* Maximum values are the duty cycle compensated values calculated from the measured average values

See Section B.5.3 for the screenshot results.


B.4.3 Undesirable emissions limits : Band Edge (Conducted)

Test limits

FCC part	Limits																				
15.407 (b) (2)	For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz.																				
15.209	<p>Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):</p> <table><tr><th>Freq Range (MHz)</th><th>Field Strength (μV/m)</th><th>Field Strength (dBμV/m)</th><th>Meas. Distance (m)</th></tr><tr><td>30-88</td><td>100</td><td>40</td><td>3</td></tr><tr><td>88-216</td><td>150</td><td>43.5</td><td>3</td></tr><tr><td>216-960</td><td>200</td><td>46</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>54</td><td>3</td></tr></table> <p>The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p> <p>For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.</p>	Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)																		
30-88	100	40	3																		
88-216	150	43.5	3																		
216-960	200	46	3																		
Above 960	500	54	3																		

Test procedure

The setup below was used to measure undesirable emissions on the Band Edge domain. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss and the declared Antenna Gain.

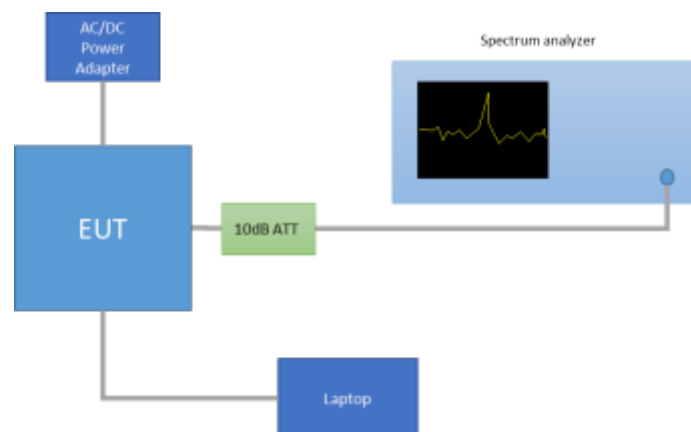

For Band Edge measurements in average mode on the low frequency section, one of the two methods is used according to section G) 6) (KDB 789033 D02):

- 1) Method AD (Average Detection) as per paragraph II.G.6.c.
- 2) Method VB (Averaging using reduced video bandwidth) as per paragraph II.G.6.d.

In case of Band Edge measurements falling in restricted bands, the declared Antenna Gain is also compensated in the graph. The declared maximum antenna gain is 5dBi.

The following limits in dBm were applied for the average detector after the conversion from the limits detailed above in dBμV/m, according to FCC 47 CFR part 15 - Subpart C – §15.209(a). The limits in dBm for peak detector are 20dB above the indicated values in the table.

§15.209(a)			Converted values	
Freq Range (MHz)	Distance (m)	Field strength (microvolts/meter)	Field strength (dB microvolts/meter)	Power (dBm)
960-25000	3	500	53.98	-41.2

See Section B.5.4 for the screenshot results.

B.4.4 Radiated spurious emission

Standard references

FCC part	Limits																				
15.407 (a) (2)	For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1 megahertz band.																				
15.209	<p>Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):</p> <table><tr><th>Freq Range (MHz)</th><th>Field Strength (μV/m)</th><th>Field Strength (dBμV/m)</th><th>Meas. Distance (m)</th></tr><tr><td>30-88</td><td>100</td><td>40</td><td>3</td></tr><tr><td>88-216</td><td>150</td><td>43.5</td><td>3</td></tr><tr><td>216-960</td><td>200</td><td>46</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>54</td><td>3</td></tr></table> <p>The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p> <p>For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.</p>	Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)																		
30-88	100	40	3																		
88-216	150	43.5	3																		
216-960	200	46	3																		
Above 960	500	54	3																		

Test procedure

The below setups were used to measure the radiated spurious emissions.


Depending of the frequency range and bands being tested, different antennas and filters were used.

The final measurement is done by varying the antenna height, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.


The radiated spurious emissions were measured on the worst case configuration selected from the chapter B.4.2 and using the lowest, middle and highest channels.

For technologies 802.11n20, 802.11n40 and 802.11ac80 the worst case in terms of spurious emissions found among the low, mid and high channels when tested on chain A and B separately is used to perform the test in MIMO mode (Chain A+B).


Radiated Setup < 1GHz

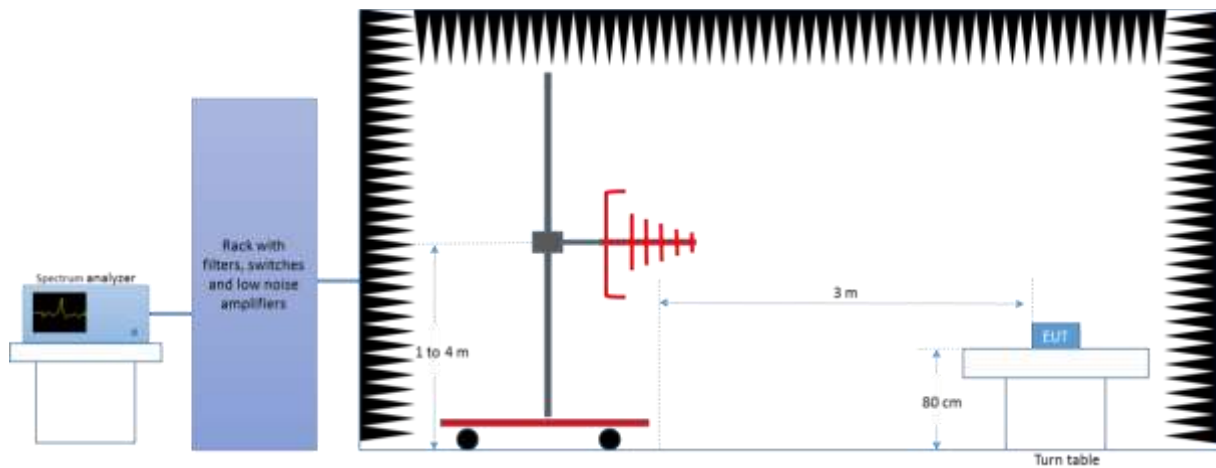

Radiated Setup 1 GHz - 18 GHz

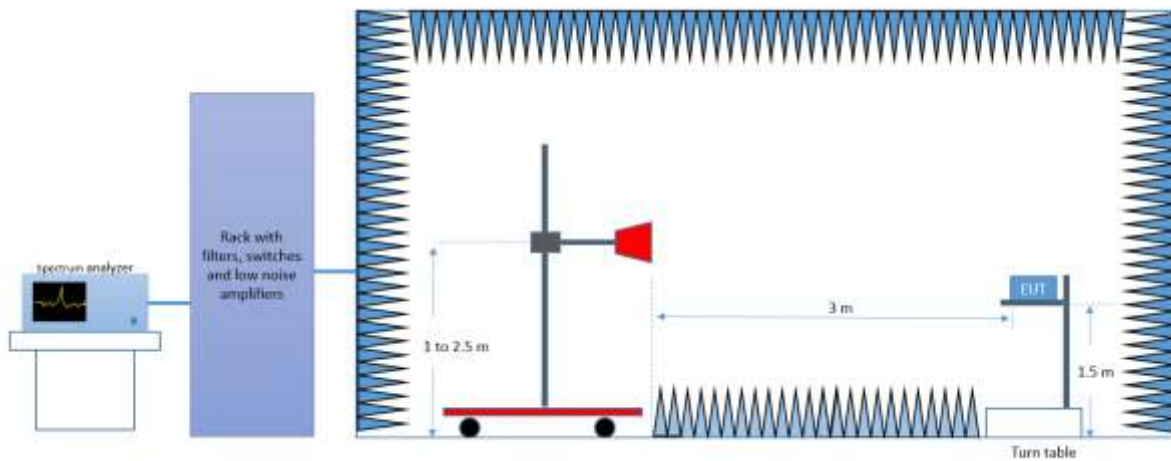

Radiated Setup 18 GHz - 40 GHz

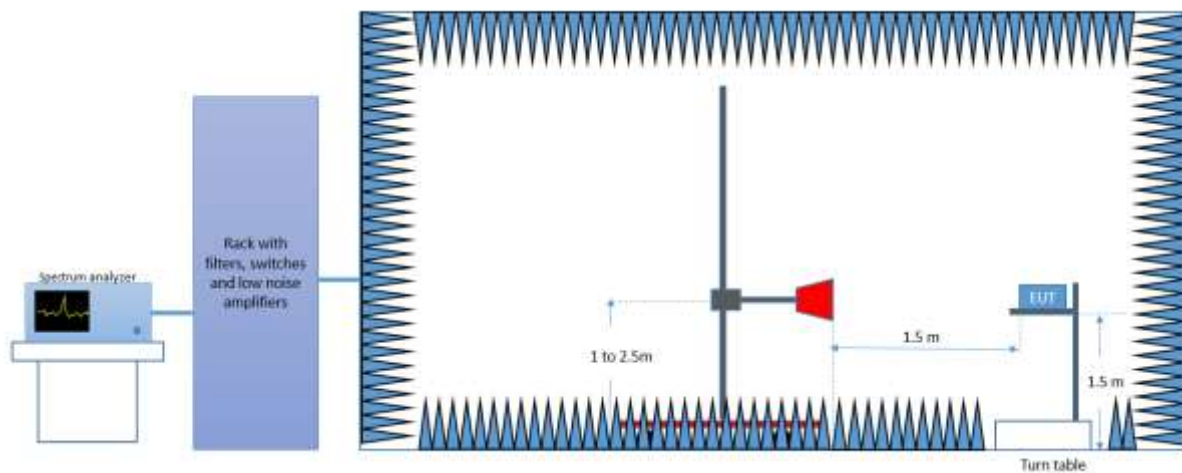

Sample Calculation

The field strength is deduced from the radiated measurement using the following equation:

$$E = 126.8 - 20\log(\lambda) + P - G$$

where

E is the field strength of the emission at the measurement distance, in dBμV/m

P is the power measured at the output of the test antenna, in dBm

λ is the wavelength of the emission under investigation $[300/f_{MHz}]$, in m

G is the gain of the test antenna, in dBi

NOTE – The measured power P includes all applicable instrument correction factors up to the connection to the test Antenna e.g. cable losses, amplifier gains.

For field strength measurements made at other than the distance at which the applicable limit is specified, the field strength of the emission at the distance specified by the limit is deduced as follows:

$$E_{SpecLimit} = E_{Meas} + 20\log(D_{Meas}/D_{SpecLimit})$$

where

E_{SpecLimit} is the field strength of the emission at the distance specified by the limit, in dBμV/m

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

D_{Meas} is the measurement distance, in m

D_{SpecLimit} is the distance specified by the limit, in m

Test Results

30 MHz – 40 GHz, 802.11a, 6Mbps, Chain A

Radiated Spurious – CH52

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
74.9	29.5	---	40.0	10.5
133.1	29.4	---	43.5	14.1
183.0	31.7	---	43.5	11.8
191.3	30.0	---	43.5	13.5
195.5	30.9	---	43.5	12.6
237.1	35.3	---	46.0	10.8
640.0	36.1	---	46.0	9.9
1113.4	---	41.2	54.0	12.8
1190.2	---	42.8	54.0	11.2
1190.5	48.0	---	74.0	26.0
2132.0	53.3	---	74.0	20.7
10522.5	---	37.5	54.0	16.5
10556.8	48.3	---	74.0	25.7
21034.8	---	39.0	54.0	15.0
21040.4	48.3	---	74.0	25.8
39664.6	---	48.5	54.0	5.5
39665.5	59.0	---	74.0	15.1

Radiated Spurious – CH56

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
74.9	29.0	---	40.0	11.0
133.1	28.8	---	43.5	14.7
183.0	31.4	---	43.5	12.1
191.4	29.8	---	43.5	13.7
195.5	31.0	---	43.5	12.5
237.1	35.4	---	46.0	10.6
640.0	35.3	---	46.0	10.7
1113.6	---	41.0	54.0	13.0
1190.2	---	42.7	54.0	11.3
1190.5	47.6	---	74.0	26.4
2129.6	53.4	---	74.0	20.6
10474.7	48.9	---	74.0	25.2
10559.9	---	38.0	54.0	16.0
21120.3	---	37.4	54.0	16.6
21125.3	46.8	---	74.0	27.2
39607.7	59.1	---	74.0	14.9
39850.7	---	48.7	54.0	5.3

Radiated Spurious – CH64

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
74.9	29.1	---	40.0	10.9
133.1	27.0	---	43.5	16.5
183.0	31.8	---	43.5	11.7
195.5	31.3	---	43.5	12.2
199.7	30.7	---	43.5	12.8
237.1	35.3	---	46.0	10.7
640.0	35.3	---	46.0	10.7
1113.6	---	41.2	54.0	12.8
1113.6	48.1	---	74.0	25.9
1190.2	---	43.0	54.0	11.0
2132.8	54.4	---	74.0	19.6
10640.2	---	40.0	54.0	14.0
10641.6	50.6	---	74.0	23.4
25940.3	---	38.1	54.0	15.9
26040.4	48.8	---	74.0	25.2
39652.0	---	48.7	54.0	5.3
39858.7	59.3	---	74.0	14.7

30 MHz – 40 GHz, 802.11a, 6Mbps, Chain B

Radiated Spurious – CH52

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
74.9	27.3	---	40.0	12.7
115.2	24.9	---	43.5	18.6
191.3	27.5	---	43.5	16.0
195.5	27.9	---	43.5	15.6
199.7	29.9	---	43.5	13.6
237.1	31.2	---	46.0	14.8
640.0	36.8	---	46.0	9.2
1113.4	---	40.9	54.0	13.1
1190.2	---	43.1	54.0	11.0
2127.6	51.7	---	74.0	22.3
3045.6	52.4	---	74.0	21.6
10519.8	49.3	---	74.0	24.7
10519.8	---	38.9	54.0	15.1
21034.8	49.9	---	74.0	24.1
21039.5	---	40.9	54.0	13.1
39458.3	---	48.7	54.0	5.3
39828.7	59.1	---	74.0	14.9

Radiated Spurious – CH56

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
74.9	27.1	---	40.0	13.0
115.2	25.1	---	43.5	18.4
195.5	27.2	---	43.5	16.3
199.7	30.3	---	43.5	13.2
237.2	30.6	---	46.0	15.4
288.0	32.0	---	46.0	14.0
640.0	36.7	---	46.0	9.3
1113.4	---	41.0	54.0	13.0
1190.2	---	42.8	54.0	11.2
2124.2	54.5	---	74.0	19.5
2660.0	54.1	---	74.0	19.9
10643.4	47.8	---	74.0	26.2
10686.6	---	36.8	54.0	17.2
21112.7	51.9	---	74.0	22.1
21118.6	---	42.1	54.0	11.9
39649.4	---	48.6	54.0	5.4
39879.3	60.0	---	74.0	14.0

Radiated Spurious – CH64

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
74.9	24.0	---	40.0	16.0
133.1	27.8	---	43.5	15.7
183.0	30.4	---	43.5	13.1
195.5	28.2	---	43.5	15.3
199.7	30.1	---	43.6	13.4
237.1	32.4	---	46.0	13.6
640.0	36.0	---	46.0	10.0
1113.4	---	41.2	54.0	12.8
1113.6	48.2	---	74.0	25.8
1190.2	---	42.7	54.0	11.4
2132.8	54.2	---	74.0	19.8
10640.7	---	39.2	54.0	14.8
10650.5	49.2	---	74.0	24.8
25953.3	---	38.4	54.0	15.6
25972.4	49.1	---	74.0	24.9
39827.0	---	48.7	54.0	5.3
39869.2	59.4	---	74.0	14.6

30 MHz – 40 GHz, 802.11n20, HT0, Chain A

Radiated Spurious – CH52

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
74.9	27.9	---	40.0	12.1
133.1	28.1	---	43.5	15.4
183.0	32.4	---	43.5	11.1
195.5	31.2	---	43.5	12.3
199.6	29.8	---	43.5	13.7
237.1	35.2	---	46.0	10.8
640.0	37.2	---	46.0	8.8
1113.6	---	41.4	54.0	12.6
1190.0	48.1	---	74.0	25.9
1190.2	---	42.8	54.0	11.2
2128.8	54.3	---	74.0	19.7
10522.9	---	37.7	54.0	16.3
10525.6	48.5	---	74.0	25.5
25890.8	48.7	---	74.0	25.3
26039.3	---	38.2	54.0	15.8
39676.0	---	48.8	54.0	5.2
39890.7	59.3	---	74.0	14.7

Radiated Spurious – CH56

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dB μ V/m	dB μ V/m	dB μ V/m	dB
74.8	29.1	---	40.0	10.9
183.0	32.1	---	43.5	11.4
237.1	35.1	---	46.0	10.9
399.9	34.5	---	46.0	11.5
500.1	34.4	---	46.0	11.7
599.8	36.5	---	46.0	9.5
640.0	36.7	---	46.0	9.3
1113.4	---	41.2	54.0	12.8
1190.2	---	42.9	54.0	11.1
2125.4	52.9	---	74.0	21.1
3972.7	55.9	---	74.0	18.1
10560.4	---	37.8	54.0	16.3
10689.8	49.1	---	74.0	24.9
25905.2	49.0	---	74.0	25.0
25979.1	---	38.3	54.0	15.8
39456.6	59.0	---	74.0	15.0
39660.4	---	48.7	54.0	5.3

Radiated Spurious – CH64

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
74.8	26.6	---	40.0	13.4
183.0	30.5	---	43.5	13.0
237.1	33.1	---	46.0	12.9
288.0	31.1	---	46.0	14.9
398.3	33.5	---	46.0	12.5
598.7	36.8	---	46.0	9.2
640.0	37.8	---	46.0	8.2
1113.6	---	41.3	54.0	12.7
1190.2	---	43.1	54.0	10.9
6179.6	62.1	---	74.0	11.9
10638.9	---	39.3	54.0	14.7
10647.8	49.8	---	74.0	24.2
24244.4	48.5	---	74.0	25.5
25980.8	---	38.1	54.0	15.9
39456.6	---	48.5	54.0	5.5
39684.9	59.2	---	74.0	14.8

30 MHz – 40 GHz, 802.11n20, HT0, Chain B

Radiated Spurious – CH52

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
74.9	26.6	---	40.0	13.5
115.2	25.6	---	43.5	17.9
199.7	30.8	---	43.5	12.7
233.0	30.9	---	46.0	15.1
293.3	35.6	---	46.0	10.5
599.9	36.9	---	46.0	9.1
640.0	36.6	---	46.0	9.5
1113.4	---	41.1	54.0	12.9
1190.2	---	43.0	54.0	11.0
10518.0	---	37.7	54.0	16.3
10524.2	48.8	---	74.0	25.2
21022.4	49.7	---	74.0	24.3
21036.7	---	39.6	54.0	14.4
39472.7	59.4	---	74.0	14.6
39485.7	---	47.8	54.0	6.2

Radiated Spurious – CH56

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dB μ V/m	dB μ V/m	dB μ V/m	dB
74.9	26.9	---	40.0	13.2
199.7	29.9	---	43.5	13.6
237.1	32.0	---	46.0	14.0
398.2	32.5	---	46.0	13.5
500.1	34.9	---	46.0	11.1
597.4	36.7	---	46.0	9.3
640.0	36.0	---	46.0	10.0
1113.4	---	41.3	54.0	12.7
1190.2	---	42.7	54.0	11.3
10554.1	---	36.9	54.0	17.1
10664.3	48.1	---	74.0	26.0
21116.0	---	39.5	54.0	14.5
21120.3	49.9	---	74.0	24.1
39661.2	---	48.6	54.0	5.4
39824.5	59.1	---	74.0	14.9

Radiated Spurious – CH64

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
74.9	25.8	---	40.0	14.2
133.1	27.7	---	43.5	15.8
199.7	30.9	---	43.5	12.6
237.2	32.4	---	46.0	13.6
398.3	33.5	---	46.0	12.5
599.9	37.5	---	46.0	8.5
640.0	36.9	---	46.0	9.1
1113.6	---	41.6	54.0	12.4
1190.2	---	43.1	54.0	10.9
10644.3	49.5	---	74.0	24.5
10644.3	---	39.1	54.0	14.9
25927.9	---	38.7	54.0	15.3
25975.2	49.4	---	74.0	24.6
39447.8	59.4	---	74.0	14.7
39652.0	---	48.6	54.0	5.4

30 MHz – 40 GHz, 802.11n20, HT8, Chain A+B

Radiated Spurious – CH52

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
74.9	31.5	---	40.0	8.5
133.1	31.5	---	43.5	12.0
183.0	33.5	---	43.5	10.0
237.1	37.0	---	46.0	9.0
312.0	31.3	---	46.0	14.7
399.8	33.8	---	46.0	12.2
640.0	34.6	---	46.0	11.4
1190.2	---	41.1	54.0	12.9
1190.2	47.5	---	74.0	26.5
6064.0	---	49.2	54.0	4.8
6102.0	62.2	---	74.0	11.9
10522.5	---	41.3	54.0	12.7
10523.4	50.6	---	74.0	23.4
21040.9	---	41.2	54.0	12.8
21041.2	50.9	---	74.0	23.1
39410.6	59.4	---	74.0	14.6
39894.5	---	48.8	54.0	5.2

30 MHz – 40 GHz, 802.11n40, HT0, Chain A

Radiated Spurious – CH54F

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
74.9	26.0	---	40.0	14.0
133.1	28.0	---	43.5	15.5
183.0	30.9	---	43.5	12.6
237.1	34.1	---	46.0	11.9
398.3	33.9	---	46.0	12.1
597.4	36.8	---	46.0	9.2
640.0	36.1	---	46.0	9.9
1190.2	---	42.6	54.0	11.4
3200.0	---	42.0	54.0	12.0
17010.0	56.4	---	74.0	17.6
17024.3	---	44.8	54.0	9.2
24291.1	49.0	---	74.0	25.0
25971.5	---	37.9	54.0	16.1
39406.0	---	48.8	54.0	5.2
39645.6	59.3	---	74.0	14.7

Radiated Spurious – CH62F

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
115.2	29.8	---	43.5	13.7
208.0	36.0	---	43.5	7.5
224.6	36.7	---	46.0	9.3
375.1	33.2	---	46.0	12.8
640.0	37.1	---	46.0	8.9
823.9	39.7	---	46.0	6.3
1113.6	---	41.2	54.0	12.8
1190.2	---	42.8	54.0	11.2
17003.7	---	45.0	54.0	9.0
17012.2	56.8	---	74.0	17.2
17468.2	57.9	---	74.0	16.1
17482.0	---	46.1	54.0	7.9
25941.2	---	38.1	54.0	15.9
26275.8	48.6	---	74.0	25.4
39457.0	---	48.8	54.0	5.2
39846.4	59.6	---	74.0	14.4

30 MHz – 40 GHz, 802.11n40, HT0, Chain B

Radiated Spurious – CH54F

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
74.9	26.9	---	40.0	13.1
115.2	25.6	---	43.5	17.9
199.7	30.3	---	43.5	13.2
398.2	33.5	---	46.0	12.5
500.1	34.7	---	46.0	11.3
599.1	36.4	---	46.0	9.6
640.0	36.2	---	46.0	9.8
1113.4	---	40.9	54.0	13.1
1190.5	---	42.6	54.0	11.4
17019.8	56.3	---	74.0	17.7
17022.9	---	44.8	54.0	9.2
17490.9	57.2	---	74.0	16.8
17496.7	---	46.3	54.0	7.7
25967.9	48.6	---	74.0	25.4
26041.8	---	38.2	54.0	15.8
39625.4	58.7	---	74.0	15.3
39650.3	---	48.7	54.0	5.3

Radiated Spurious – CH62F

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dB μ V/m	dB μ V/m	dB μ V/m	dB
62.5	27.2	---	40.0	12.8
115.2	26.5	---	43.5	17.0
208.0	32.8	---	43.5	10.7
220.5	35.0	---	46.0	11.0
640.0	36.5	---	46.0	9.5
822.7	40.3	---	46.0	5.7
1113.4	---	41.1	54.0	12.9
1190.2	---	43.0	54.0	11.0
17020.2	---	44.8	54.0	9.3
17047.9	56.4	---	74.0	17.6
17466.8	56.9	---	74.0	17.1
17497.2	---	46.3	54.0	7.7
25956.3	49.1	---	74.0	24.9
26007.0	---	38.0	54.0	16.0
39644.4	---	49.0	54.0	5.0
39870.1	59.9	---	74.0	14.1

30 MHz – 40 GHz, 802.11n40, HT8, Chain A+B

Radiated Spurious – CH62F

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
74.9	33.5	---	40.0	6.5
115.2	31.5	---	43.5	12.0
149.8	27.7	---	43.5	15.8
208.0	30.5	---	43.5	13.0
228.8	33.4	---	46.0	12.6
237.1	36.3	---	46.0	9.7
640.0	38.0	---	46.0	8.0
1190.2	---	41.3	54.0	12.7
1190.5	46.4	---	74.0	27.6
6157.0	---	48.9	54.0	5.1
6166.1	60.5	---	74.0	13.5
8846.3	48.2	---	74.0	25.8
10616.2	---	38.0	54.0	16.0
17012.2	55.7	---	74.0	18.3
17013.1	---	44.6	54.0	9.5
25980.8	---	38.0	54.0	16.0
26043.0	49.2	---	74.0	24.8
39443.5	---	48.6	54.0	5.4
39861.6	59.0	---	74.0	15.0

30 MHz – 40 GHz, 802.11ac80, HT0, Chain A

Radiated Spurious – CH58ac80

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
62.4	32.1	---	40.0	7.9
220.5	32.0	---	46.0	14.1
224.6	32.5	---	46.0	13.5
237.1	34.4	---	46.0	11.6
640.0	36.6	---	46.0	9.4
811.7	40.8	---	46.0	5.2
1190.2	---	42.6	54.0	11.4
3200.3	---	41.7	54.0	12.3
4489.9	58.7	---	74.0	15.3
17015.8	56.7	---	74.0	17.3
17028.3	---	44.8	54.0	9.2
17462.8	57.2	---	74.0	16.8
17492.7	---	45.8	54.0	8.2
25982.8	---	38.2	54.0	15.8
26061.5	48.5	---	74.0	25.5
39647.7	59.1	---	74.0	14.9
39844.3	---	48.8	54.0	5.2

30 MHz – 40 GHz, 802.11ac80, HT0, Chain B

Radiated Spurious – CH58ac80

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
62.4	32.7	---	40.0	7.3
115.2	27.1	---	43.5	16.4
208.0	34.9	---	43.5	8.6
220.5	35.5	---	46.0	10.5
640.0	36.8	---	46.0	9.2
817.9	40.6	---	46.0	5.4
1113.4	48.4	---	74.0	25.6
1113.4	---	41.1	54.0	12.9
1190.2	---	42.7	54.0	11.3
2128.1	54.0	---	74.0	20.0
17027.8	---	44.9	54.0	9.1
17036.8	56.1	---	74.0	17.9
17480.2	57.4	---	74.0	16.6
17488.3	---	45.9	54.0	8.1
24965.8	48.3	---	74.0	25.7
26008.7	---	38.3	54.0	15.7
39457.9	---	48.7	54.0	5.3
39696.7	59.4	---	74.0	14.6

30 MHz – 40 GHz, 802.11ac80, HT8, Chain A+B

Radiated Spurious – CH58ac80


Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
62.4	32.7	---	40.0	7.3
115.2	27.1	---	43.5	16.4
208.0	34.9	---	43.5	8.6
220.5	35.5	---	46.0	10.5
640.0	36.8	---	46.0	9.2
817.9	40.6	---	46.0	5.4
1190.2	---	41.7	54.0	12.3
1190.5	48.3	---	74.0	25.7
6065.0	---	49.1	54.0	4.9
6074.8	61.1	---	74.0	12.9
17006.4	55.9	---	74.0	18.1
17023.8	---	44.7	54.0	9.3
17483.8	57.5	---	74.0	16.5
17486.5	---	46.1	54.0	7.9
23953.0	49.1	---	74.0	24.9
25981.9	---	38.1	54.0	15.9
39470.5	---	48.6	54.0	5.4
39665.5	59.2	---	74.0	14.8

B.5 Test Results Screenshot U-NII-2A

B.5.1 26dB Bandwidth


SISO-B, 802.11a, 6Mbps

Channel 56

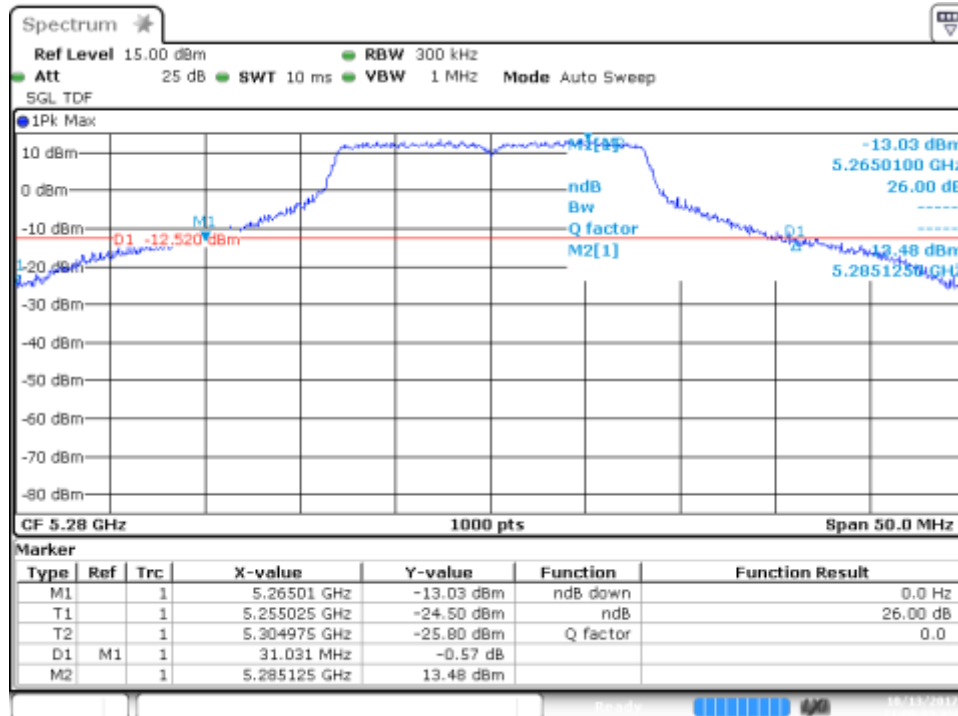


SISO-B, 802.11n20, HT0

Channel 52

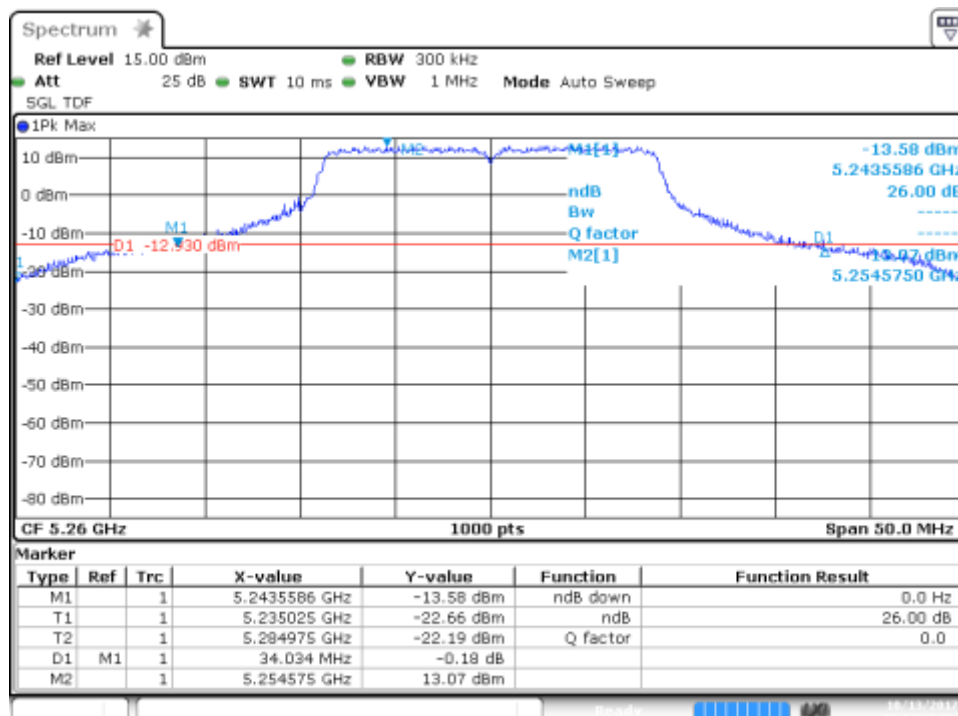


SISO-B, 802.11n40, HT0

Channel 54F

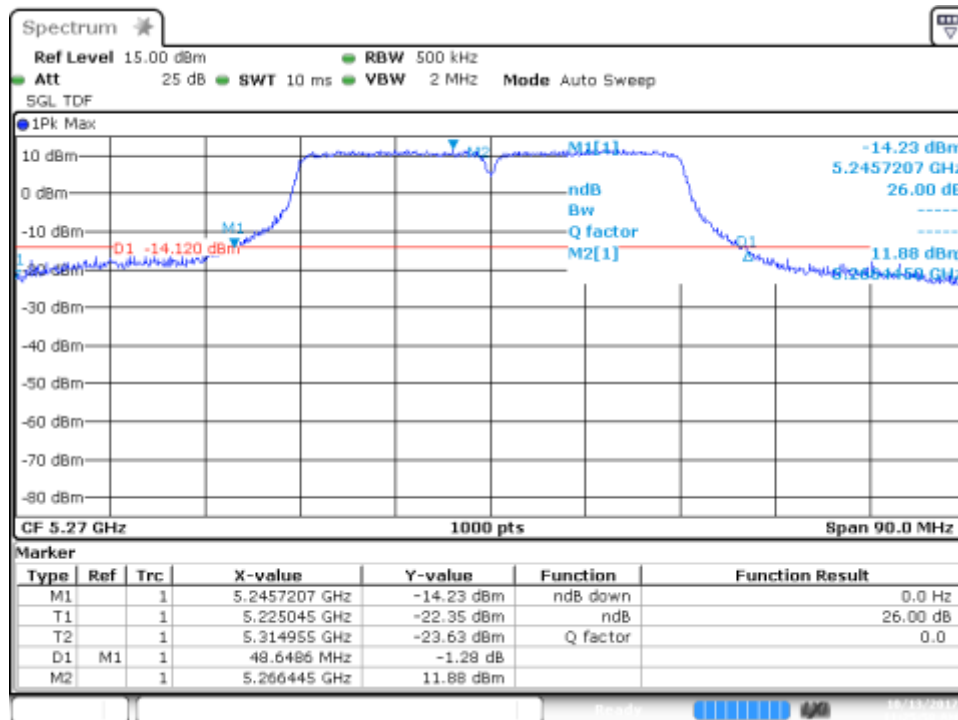


MIMO-A, 802.11n20, HT8

Channel 52

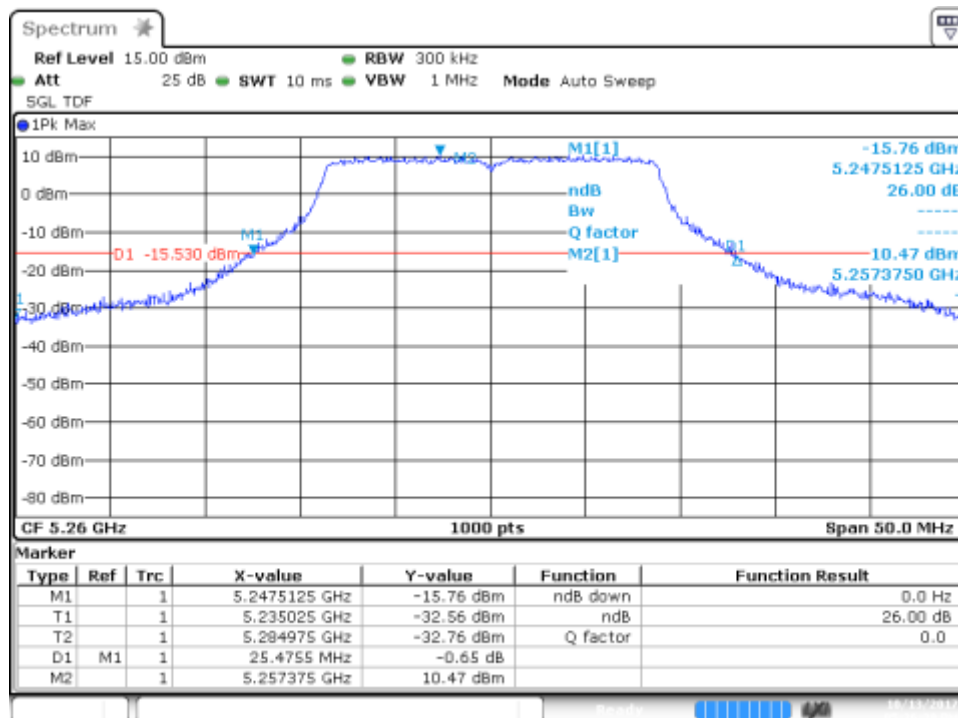


MIMO-A, 802.11n40, HT8

Channel 54F

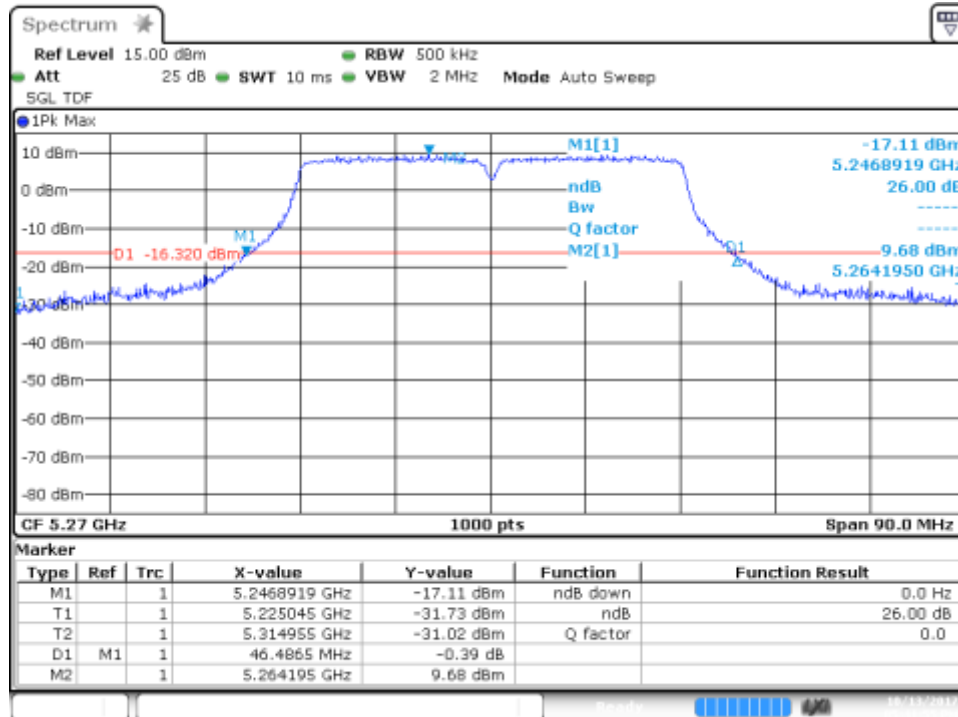


SISO-A, 802.11ac80, VHT0

Channel 58ac80

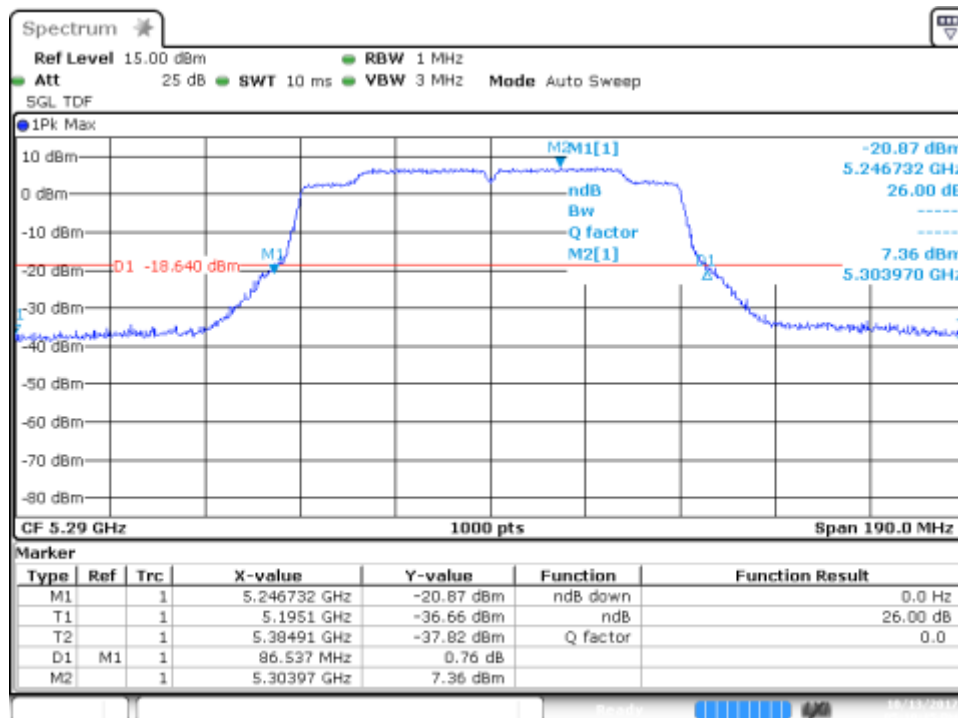

MIMO-A, 802.11ac80, VHT0


Channel 58ac80

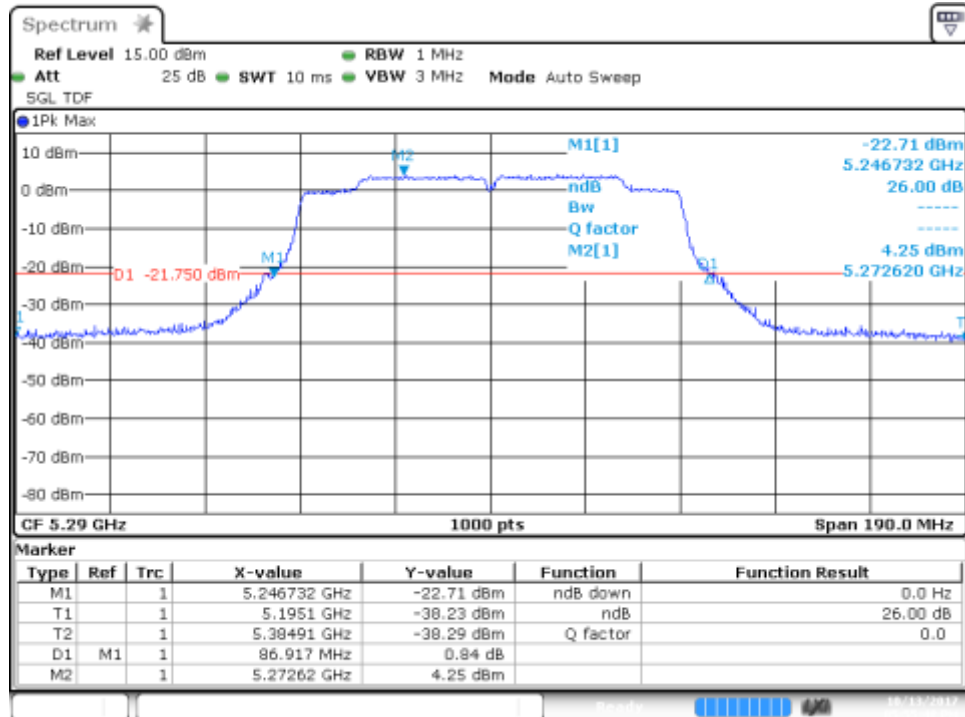

B.5.2 99% Bandwidth


SISO-B, 802.11a, 6Mbps

Channel 56

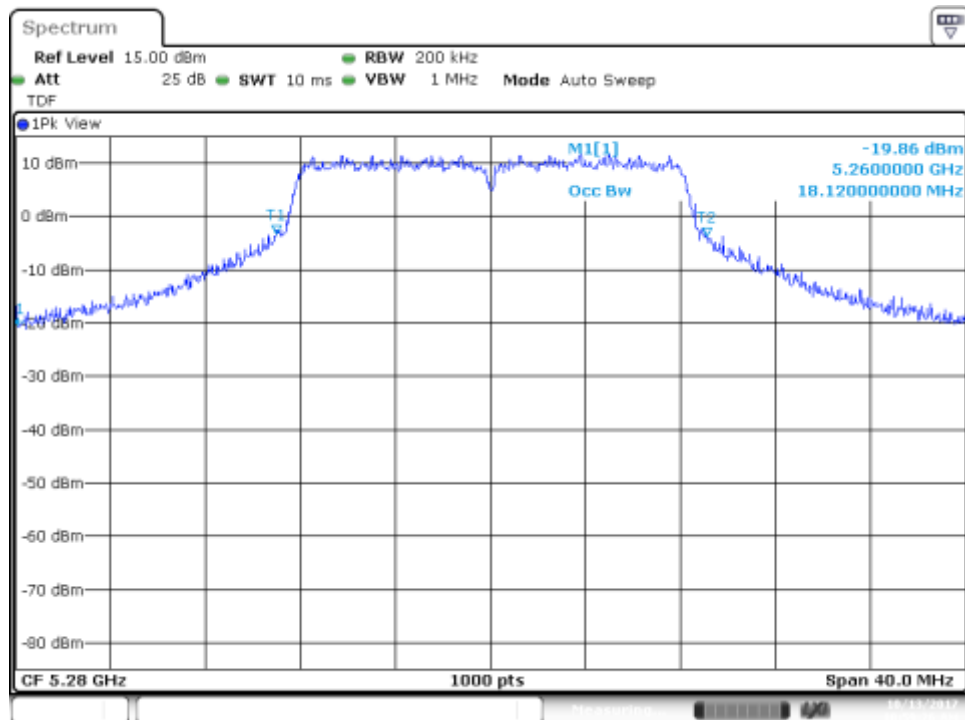


SISO-B, 802.11n20, HT0

Channel 52

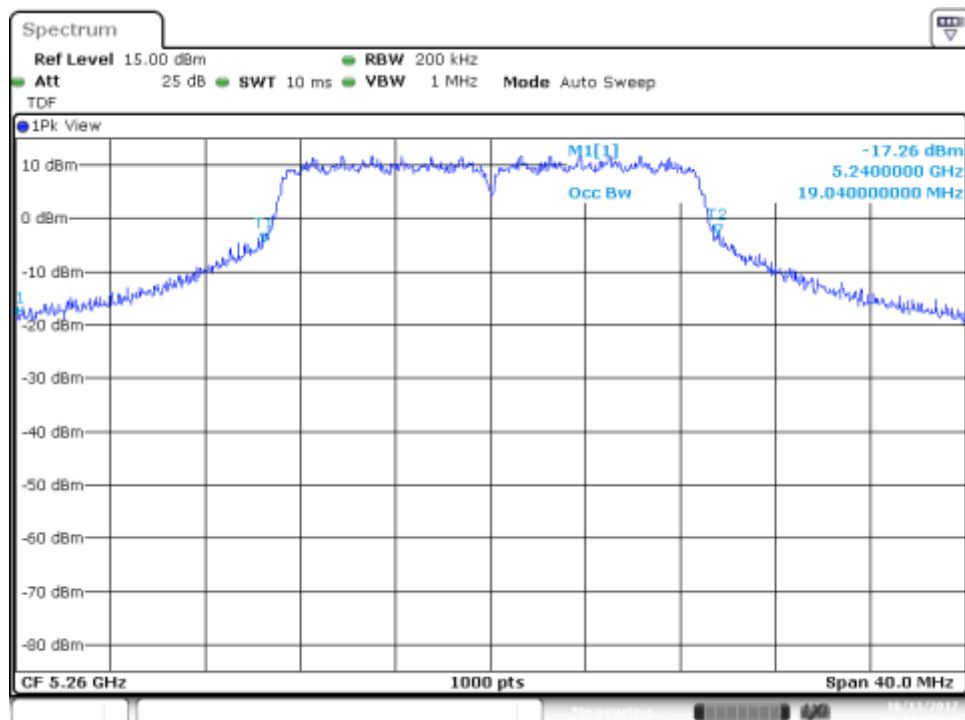


SISO-B, 802.11n40, HT0

Channel 54F

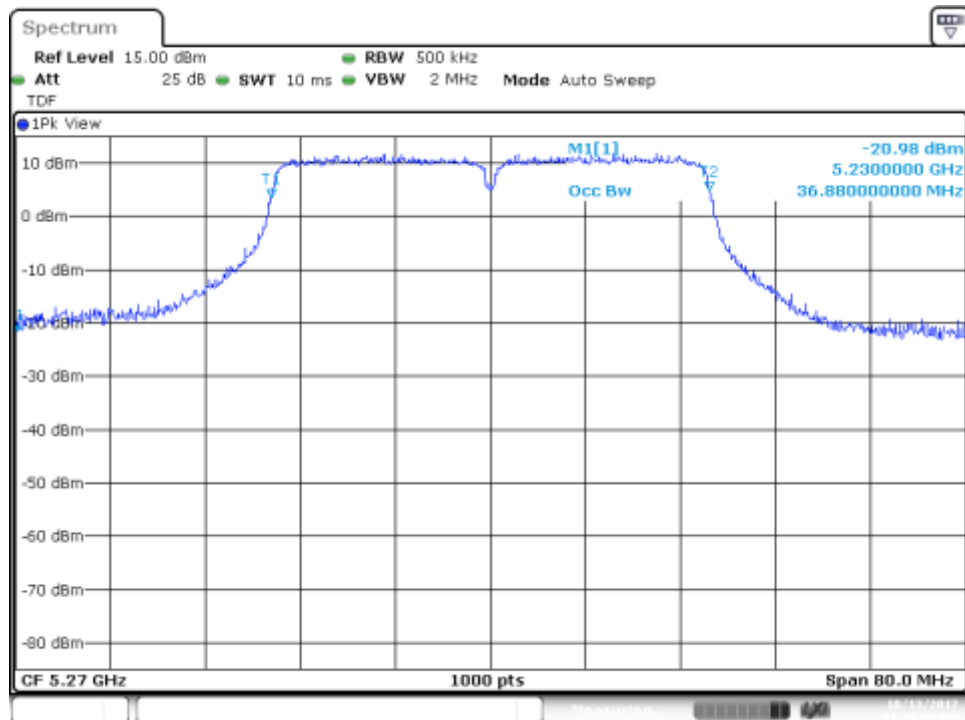


MIMO-A, 802.11n20, HT8

Channel 52

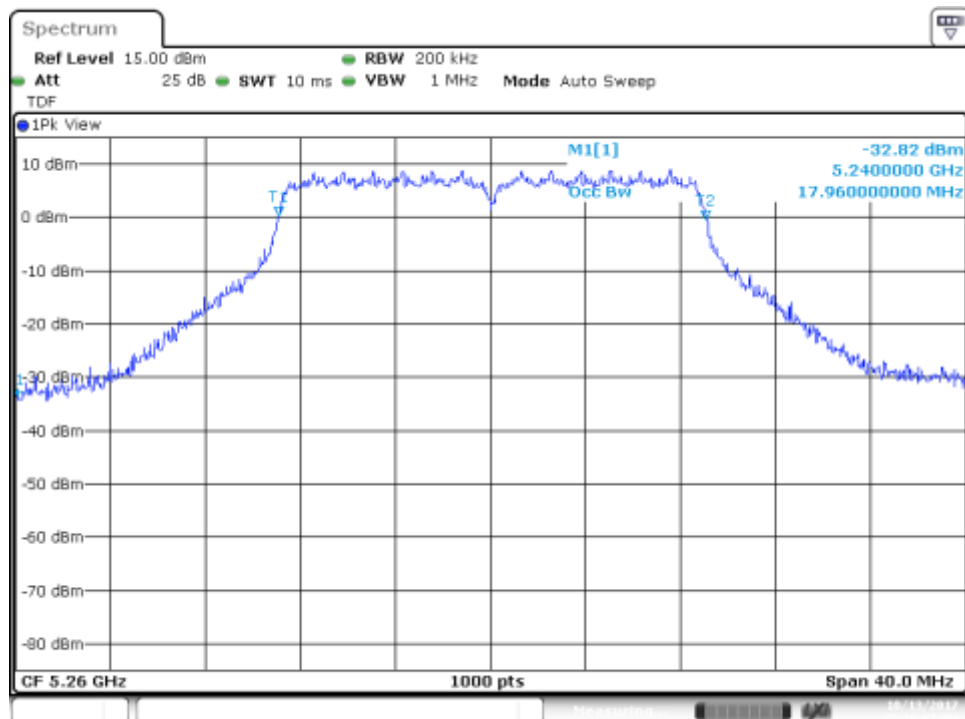


MIMO-A, 802.11n40, HT8

Channel 54F

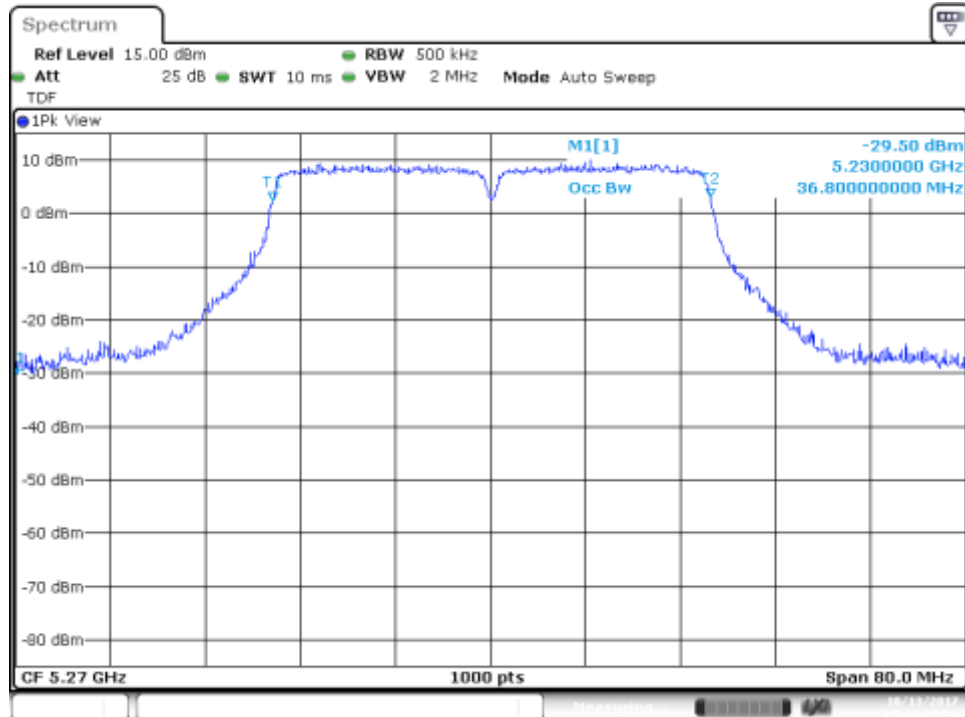

SISO-B, 802.11ac80, VHT0


Channel 58ac80

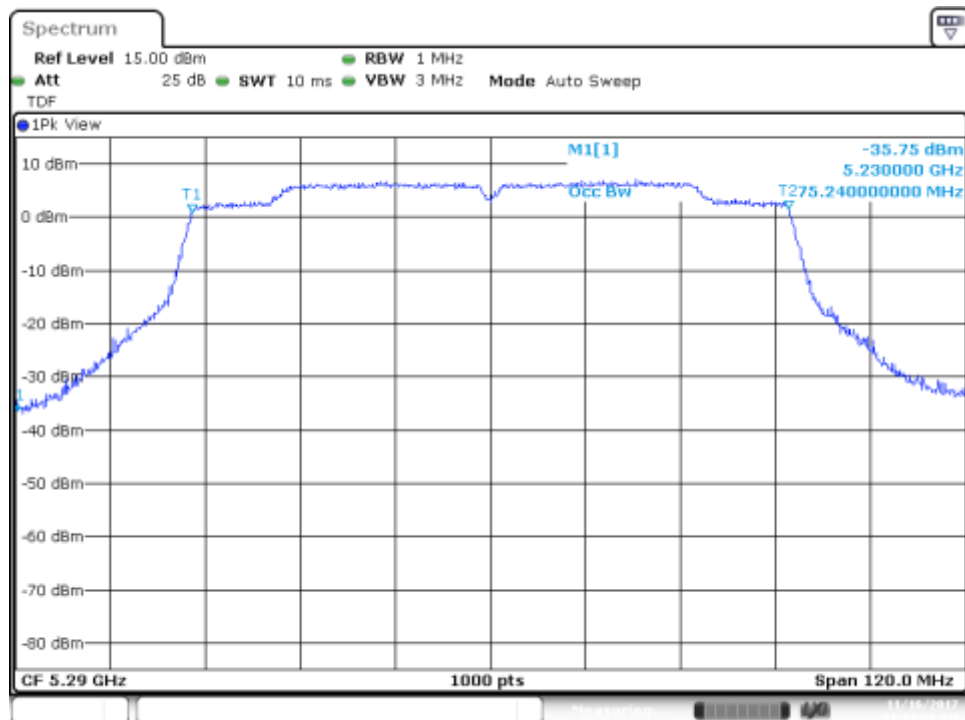

Date: 16 NOV 2017 11:13:28

MIMO-A, 802.11ac80, VHT0


Channel 58ac80

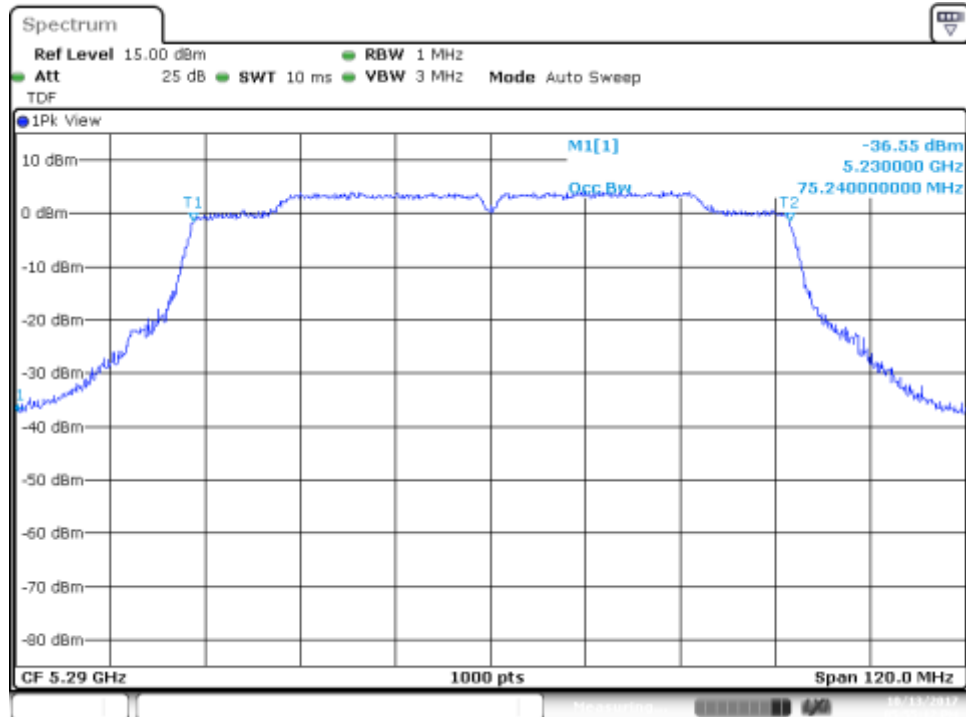


B.5.3 Power Limits. Maximum Output power & Peak power spectral density

SISO-B, 802.11a, 6Mbps

Channel 52

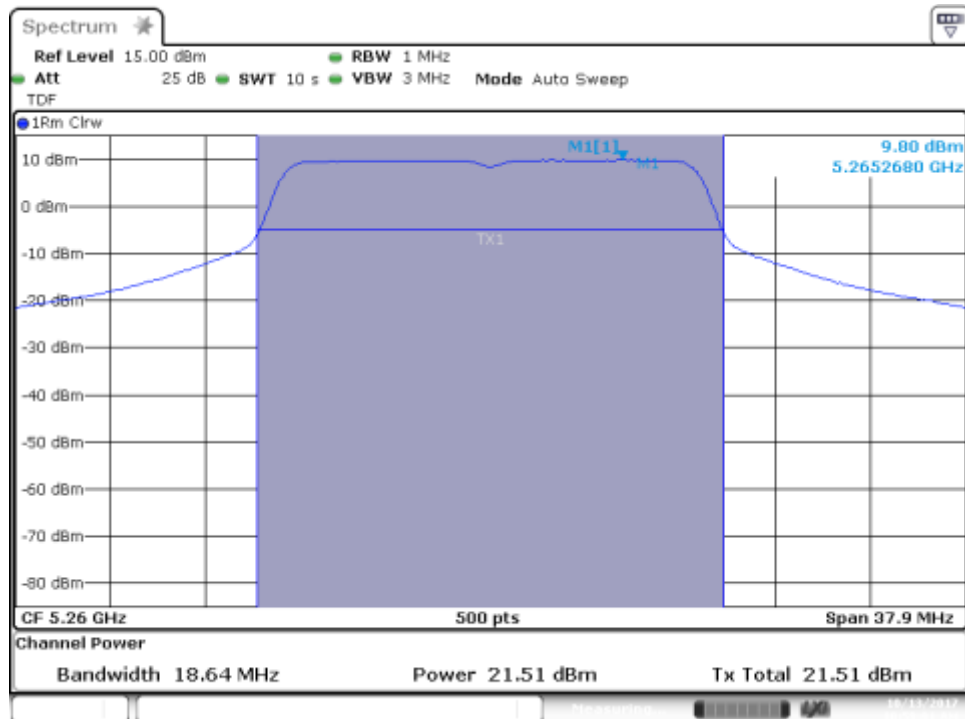


Channel 64

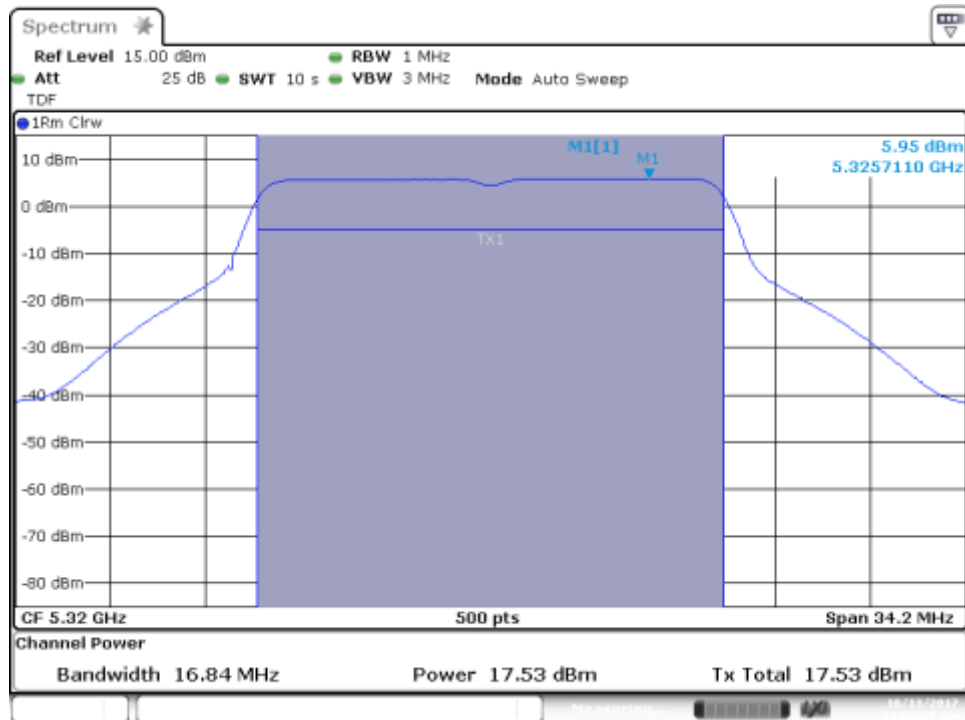


SISO-B, 802.11n20, HT0

Channel 64

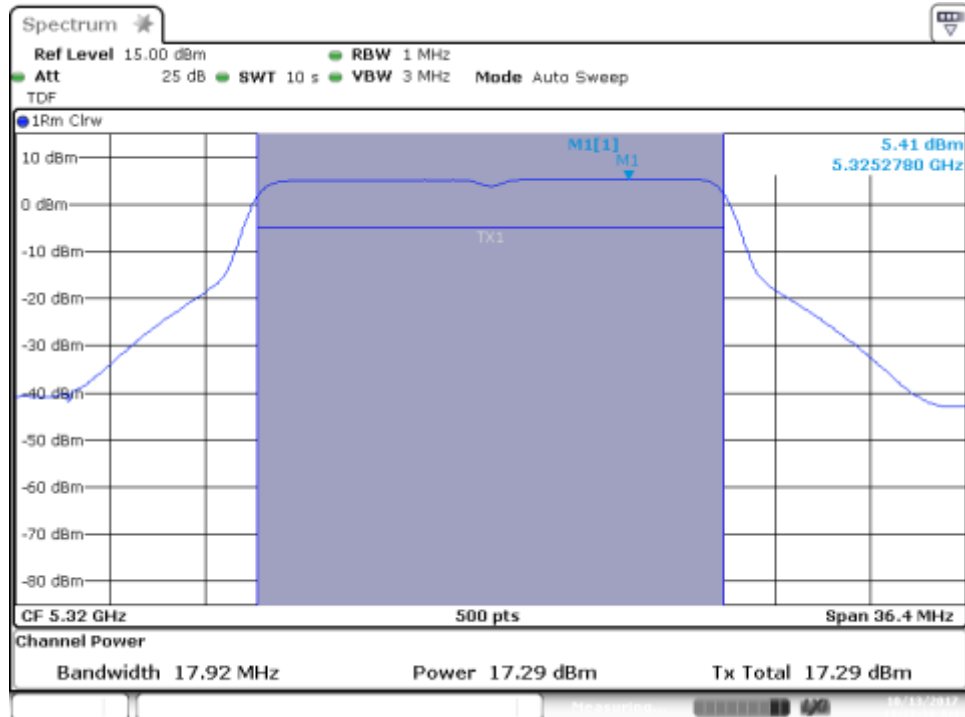


Channel 52

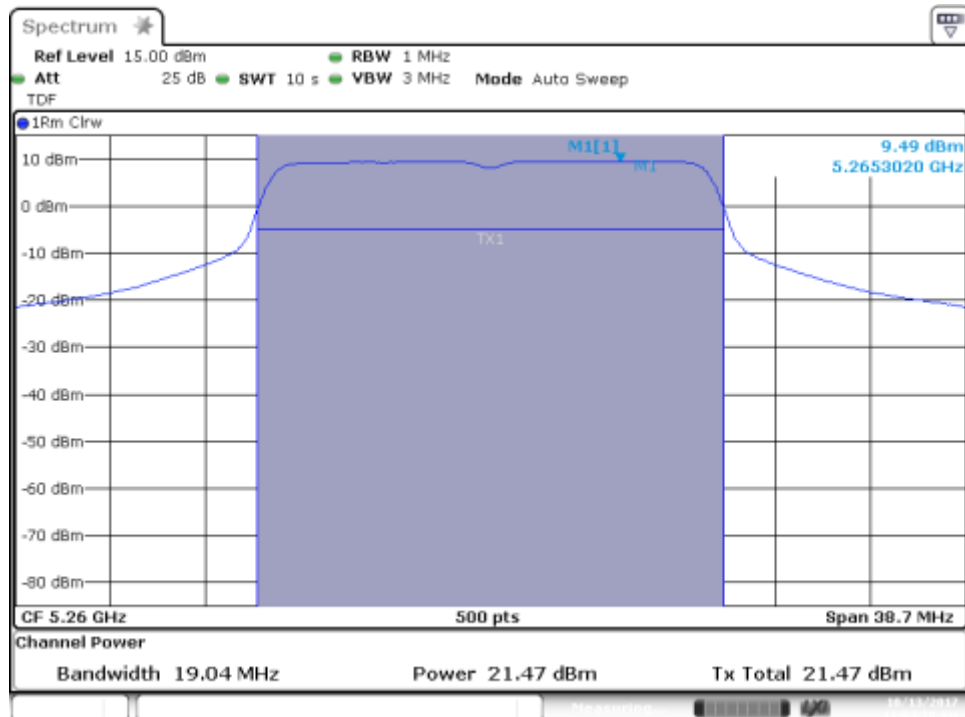


SISO-A, 802.11n40, HT0

Channel 62F

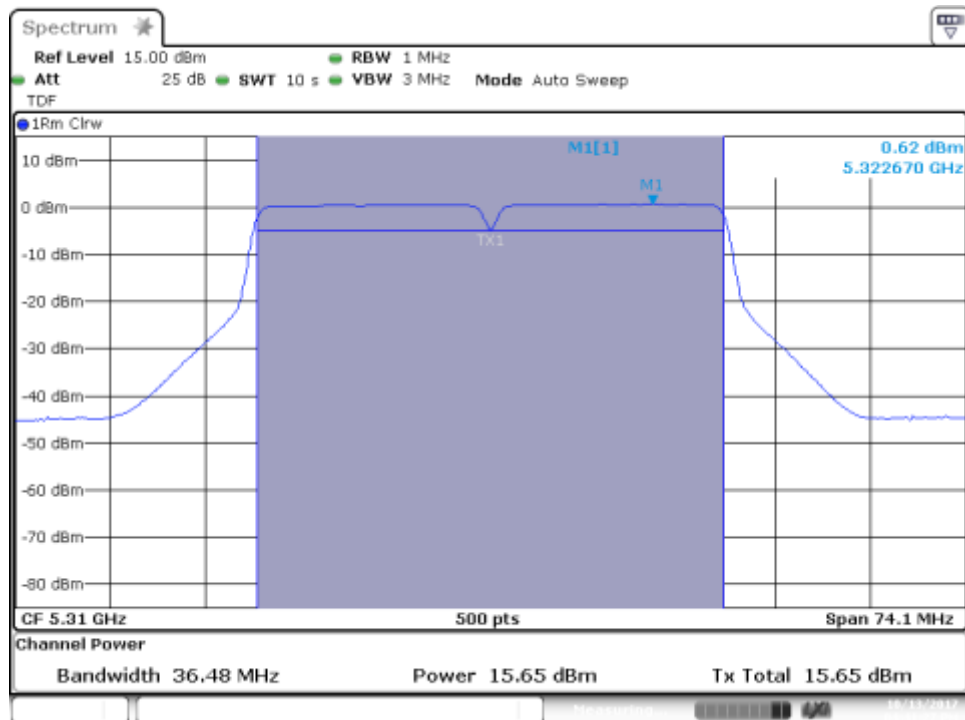


Channel 54F

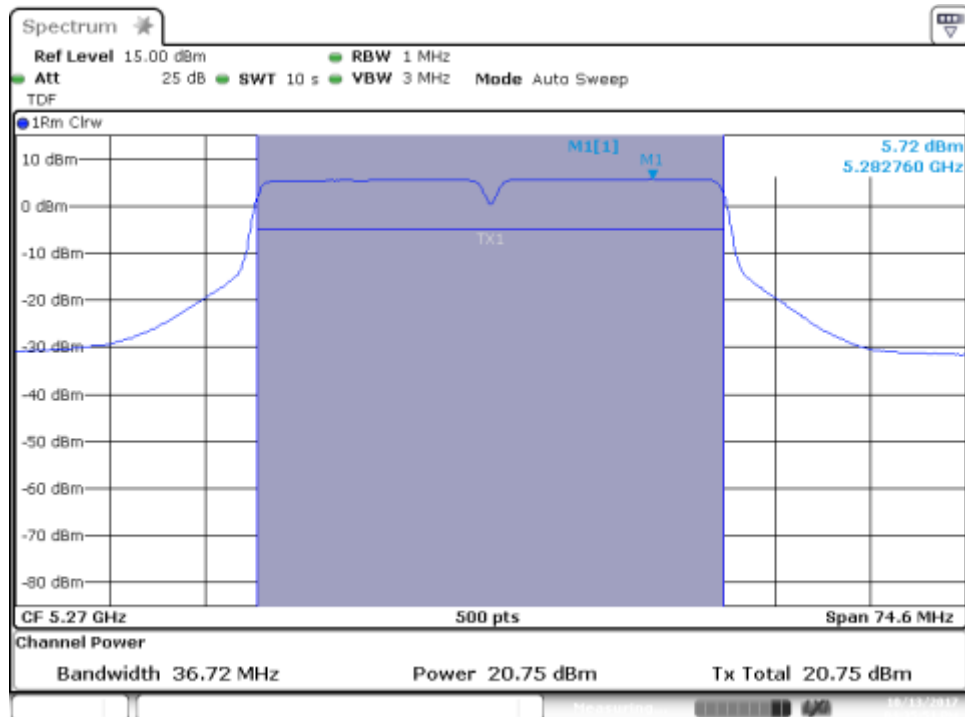


MIMO-A, 802.11n20, HT8

Channel 52

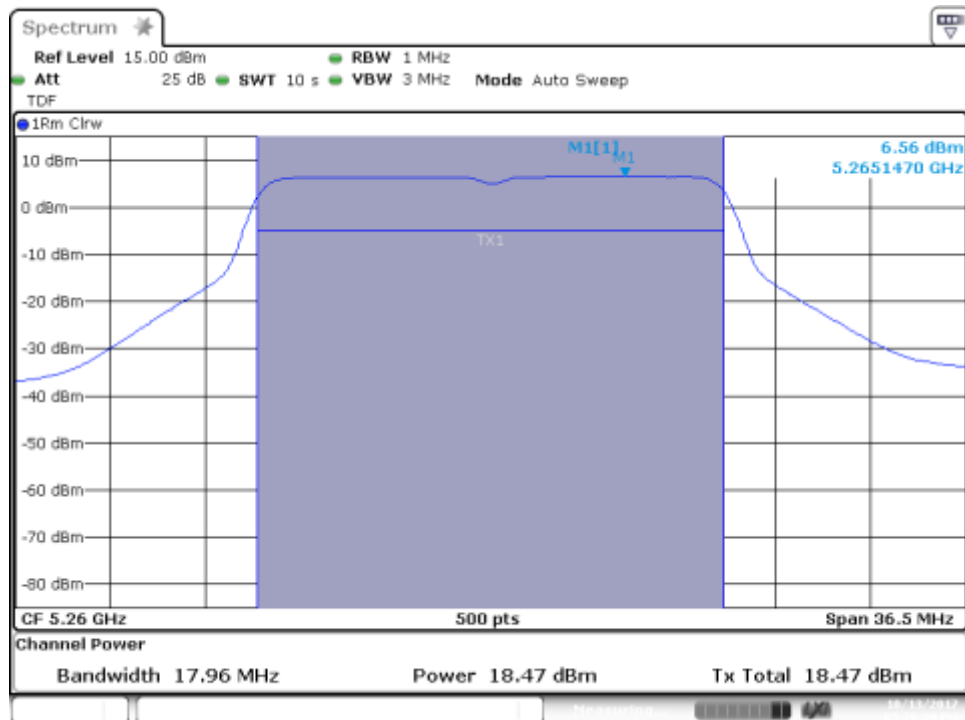


MIMO-B, 802.11n20, HT8

Channel 52

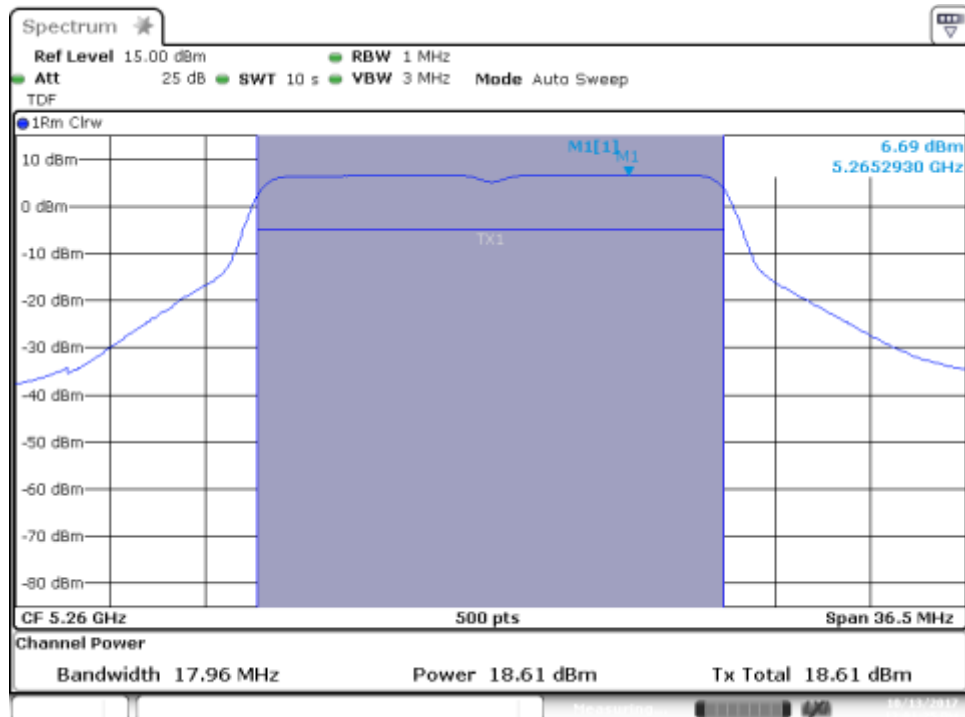


MIMO-A, 802.11n20, HT8

Channel 64

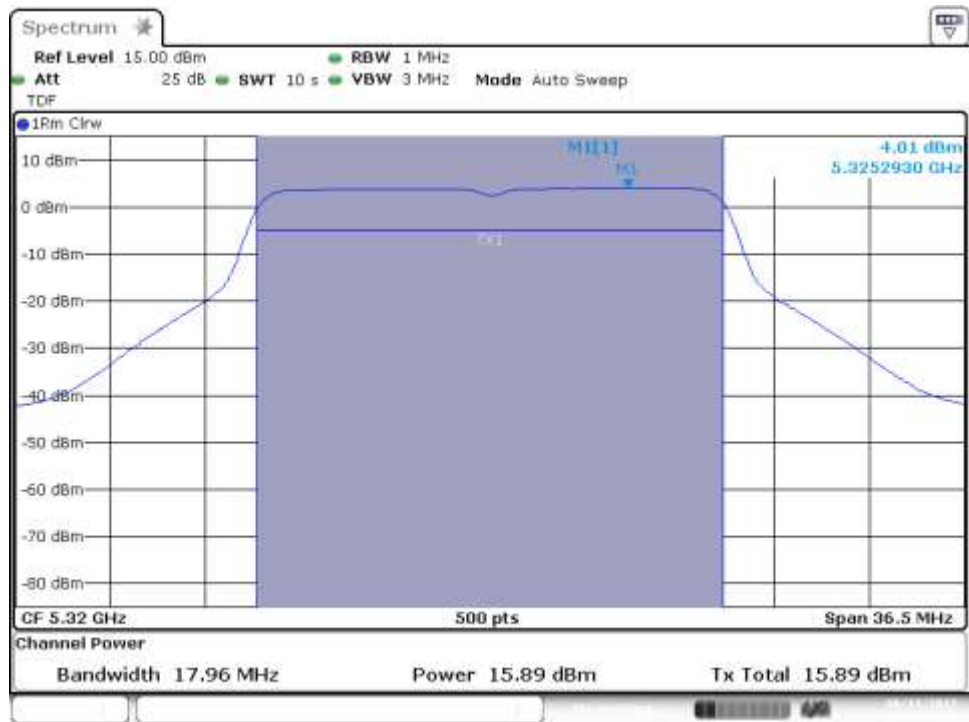


MIMO-B, 802.11n20, HT8

Channel 64

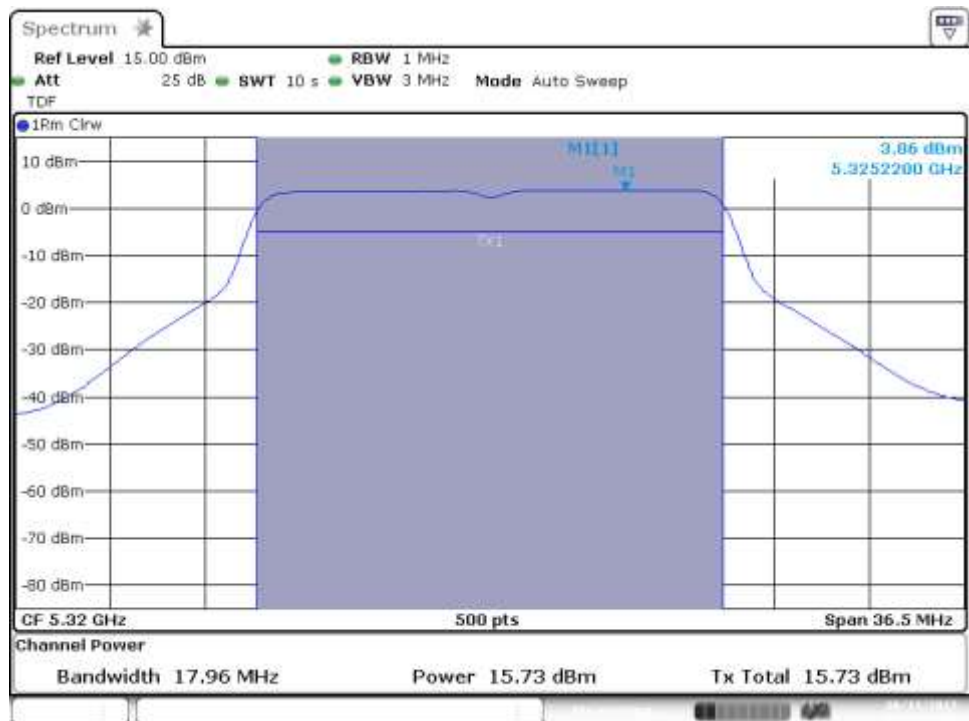


MIMO-A, 802.11n40, HT8

Channel 54F

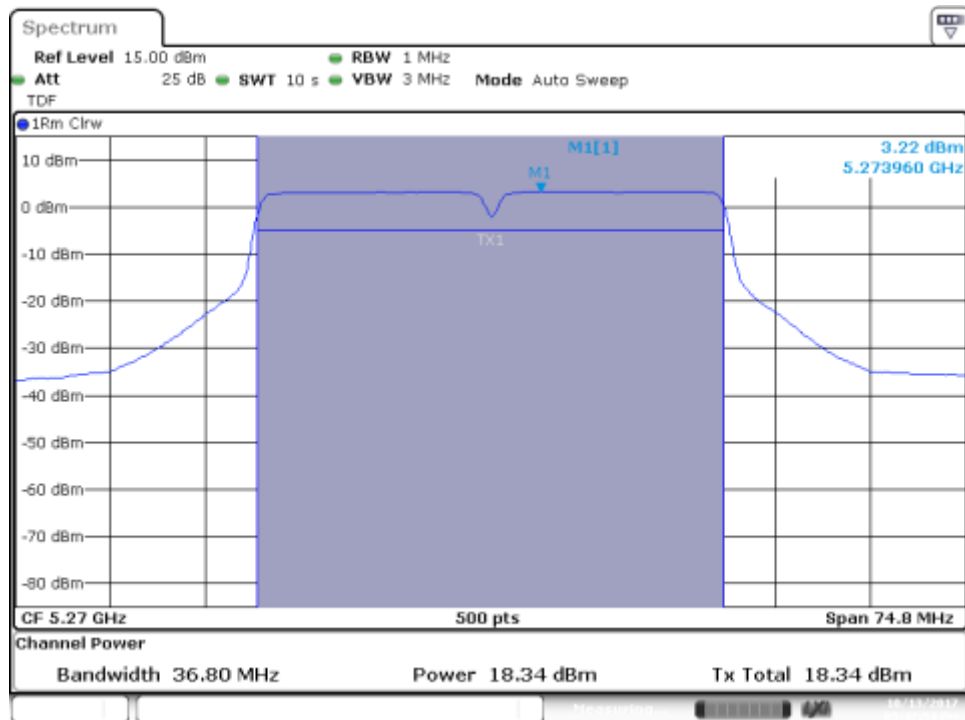


MIMO-B, 802.11n40, HT8

Channel 54F

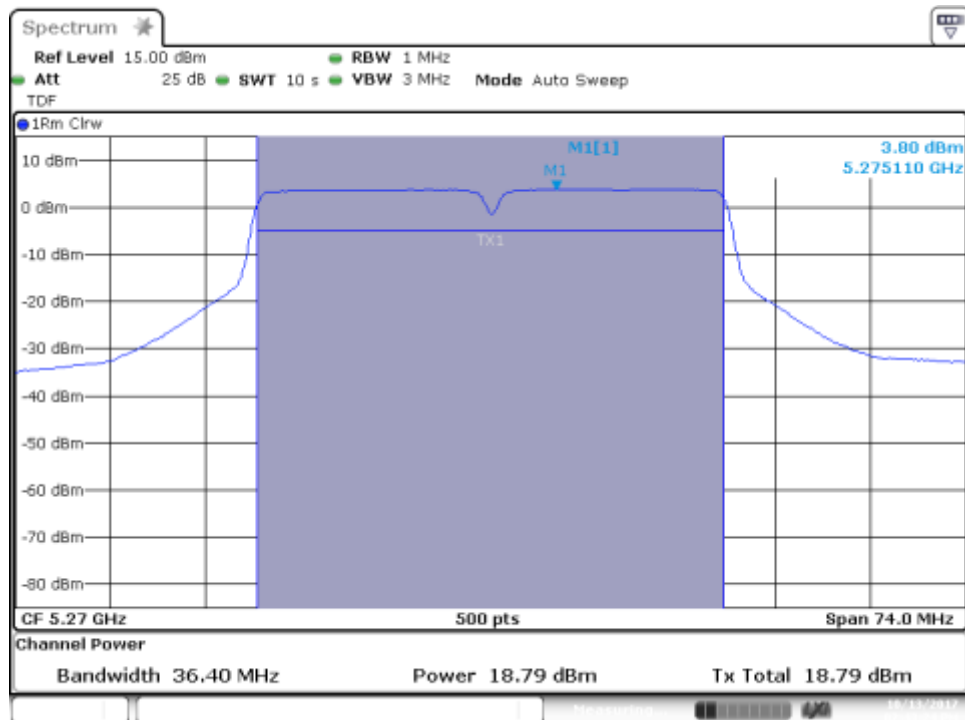


MIMO-A, 802.11n40, HT8

Channel 62F

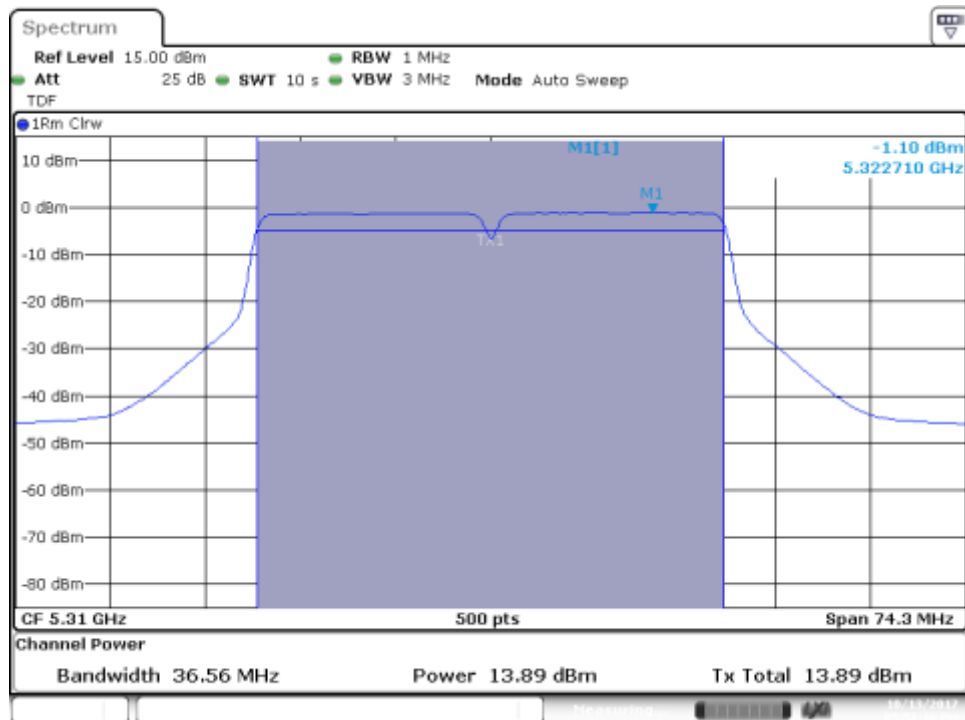


MIMO-B, 802.11n40, HT8

Channel 62F

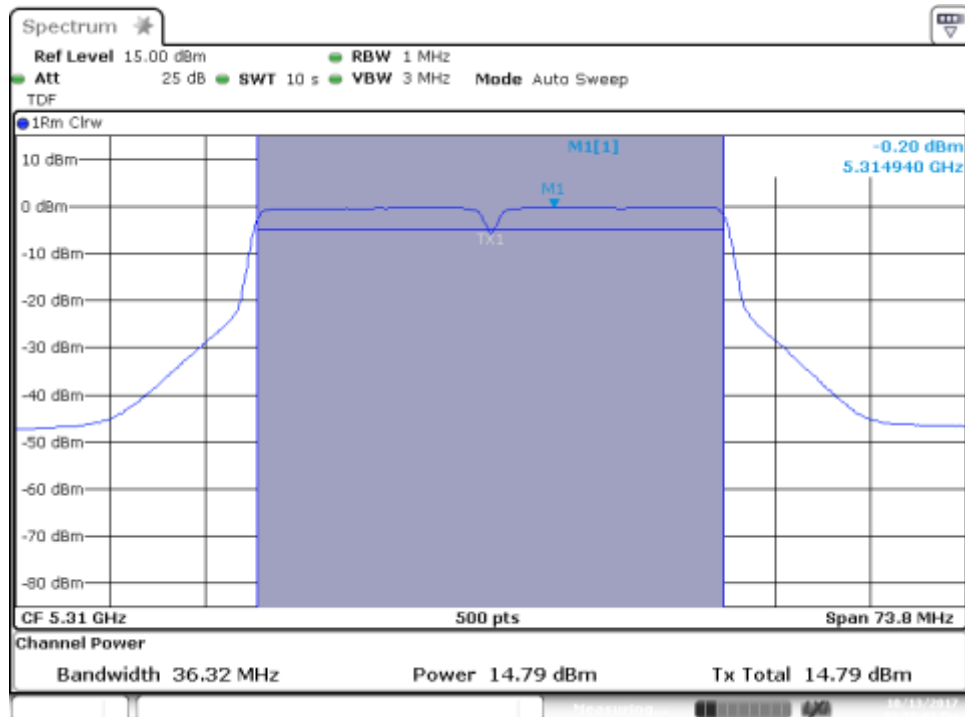

SISO-A, 802.11ac80, VHT0


Channel 58ac80

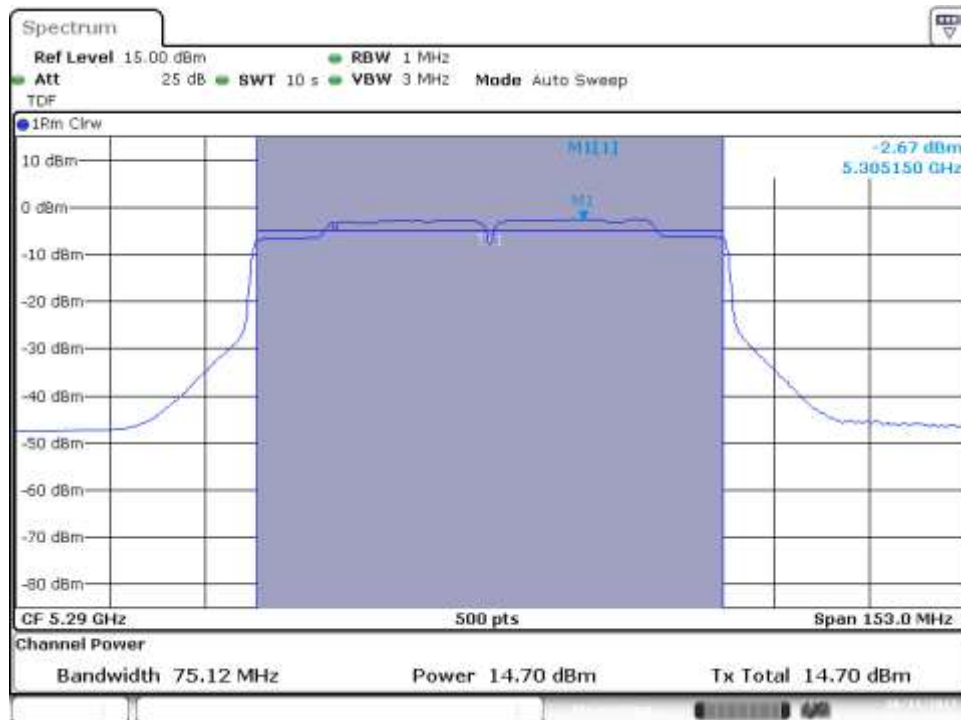

+

SISO-B, 802.11ac80, VHT0


Channel 58ac80

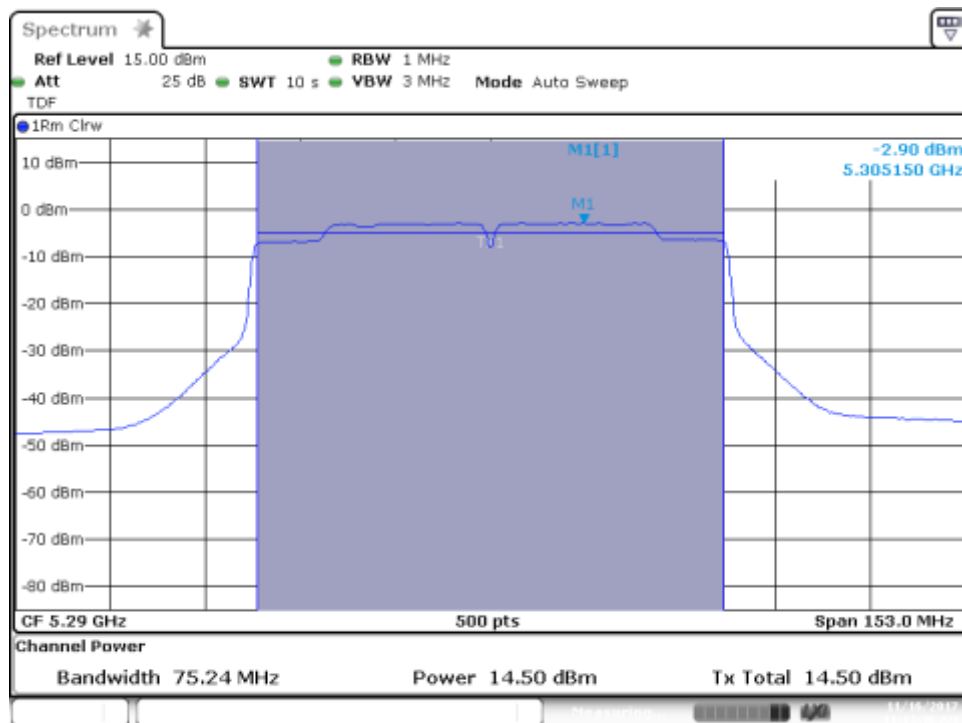

Date: 16 NOV 2017 11:13:47


MIMO-A, 802.11ac80, VHT0

Channel 58ac80

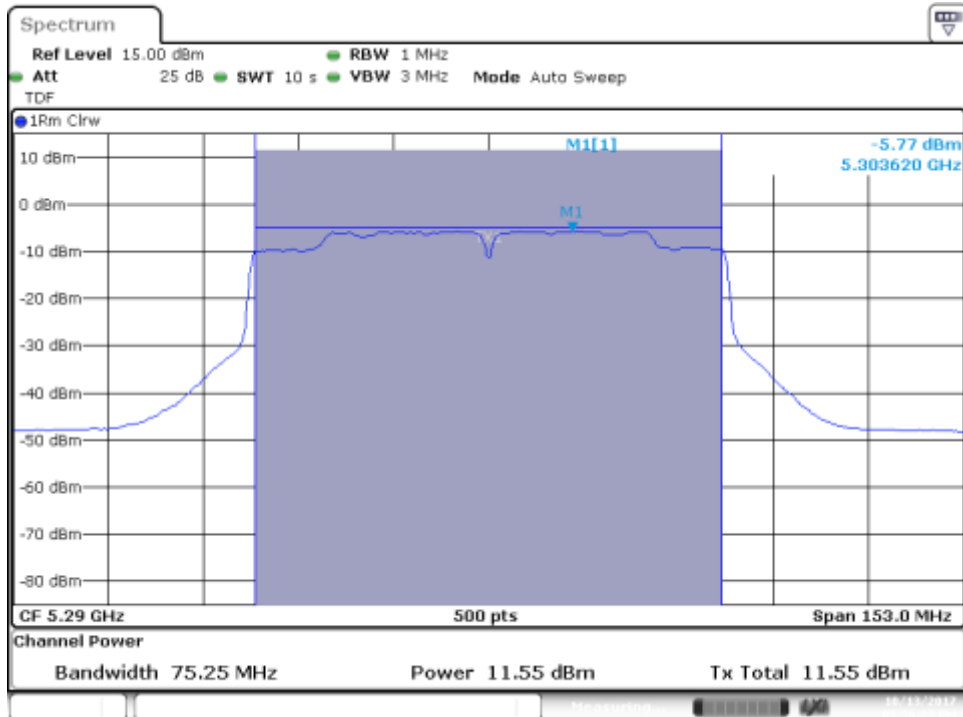

MIMO-B, 802.11ac80, VHT0


Channel 58ac80

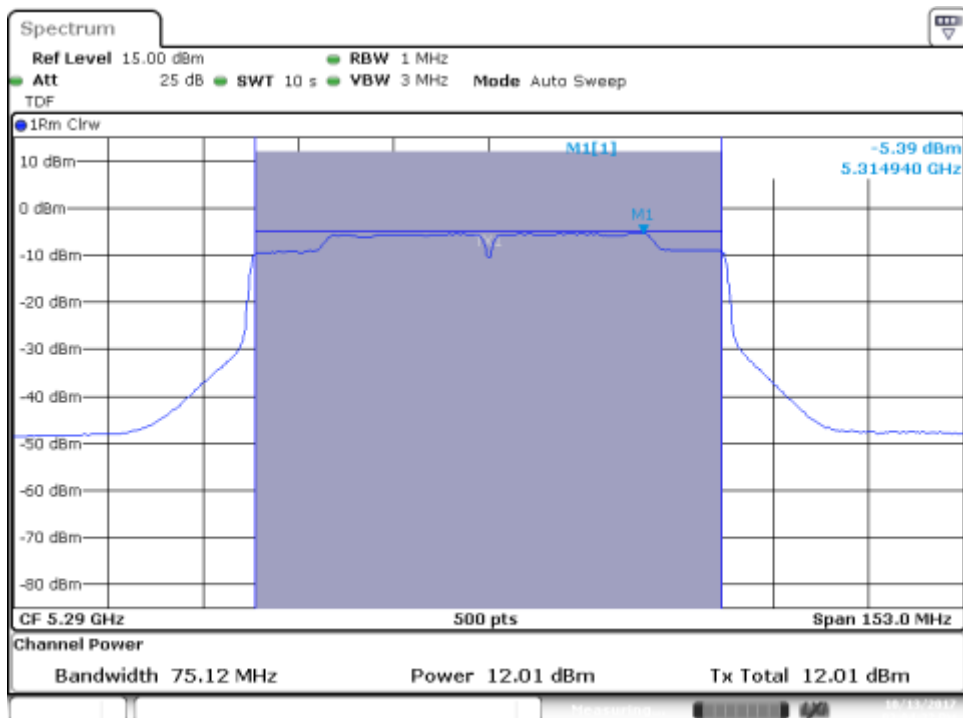

B.5.4 Undesirable emissions limits : Band Edge (Conducted)


802.11a, 6Mbps – Chain A

BE High Freq Section, Peak, RMS – CH52

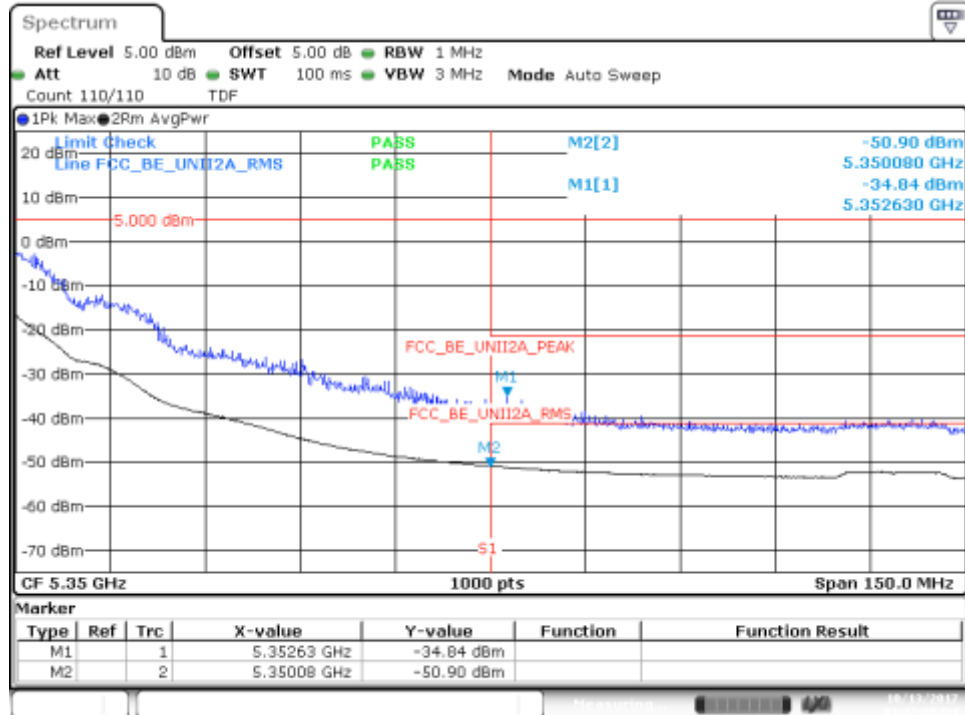

802.11a, 6Mbps – Chain B

BE High Freq Section, Peak, RMS – CH52

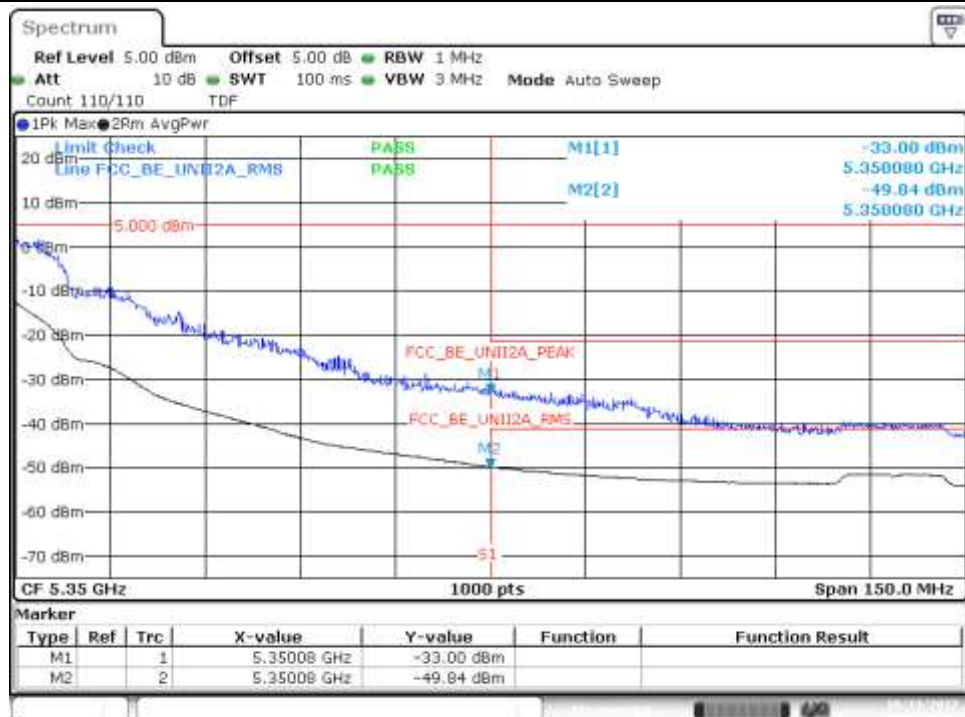


802.11n20, HT0 (SISO) - Chain A

BE High Freq Section, Peak, RMS – CH52




802.11n20, HT0 (SISO) - Chain B

BE High Freq Section, Peak, RMS – CH52

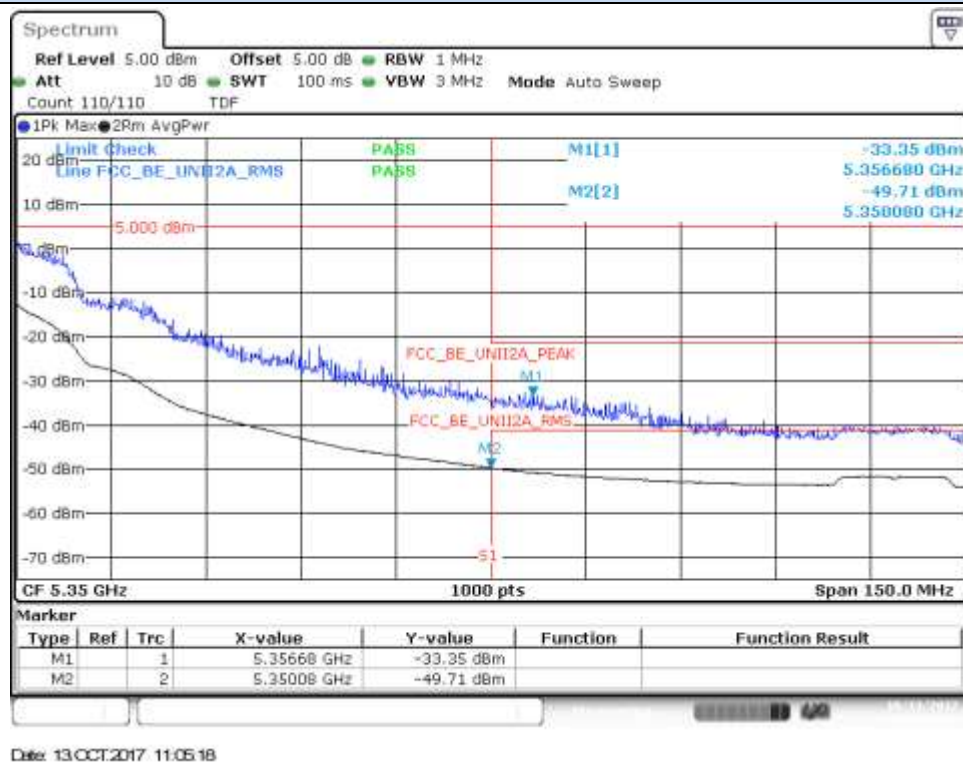


802.11n20, HT8 (MIMO) - Chain A

BE High Freq Section, Peak, RMS – CH52

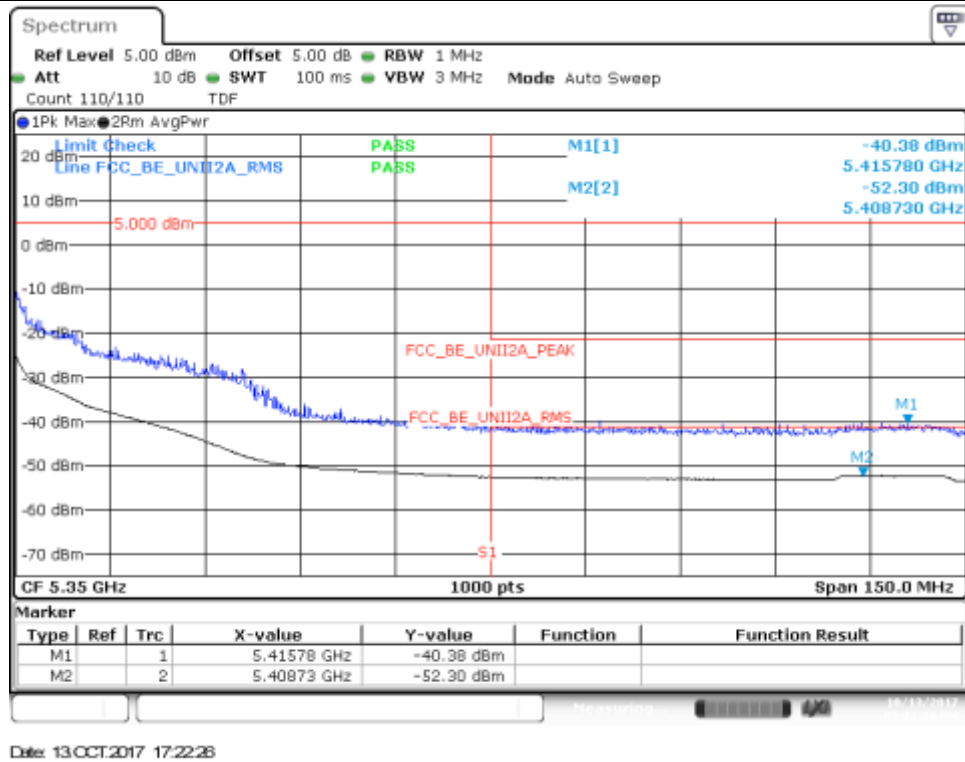


802.11n20, HT8 (MIMO) - Chain B

BE High Freq Section, Peak, RMS – CH52

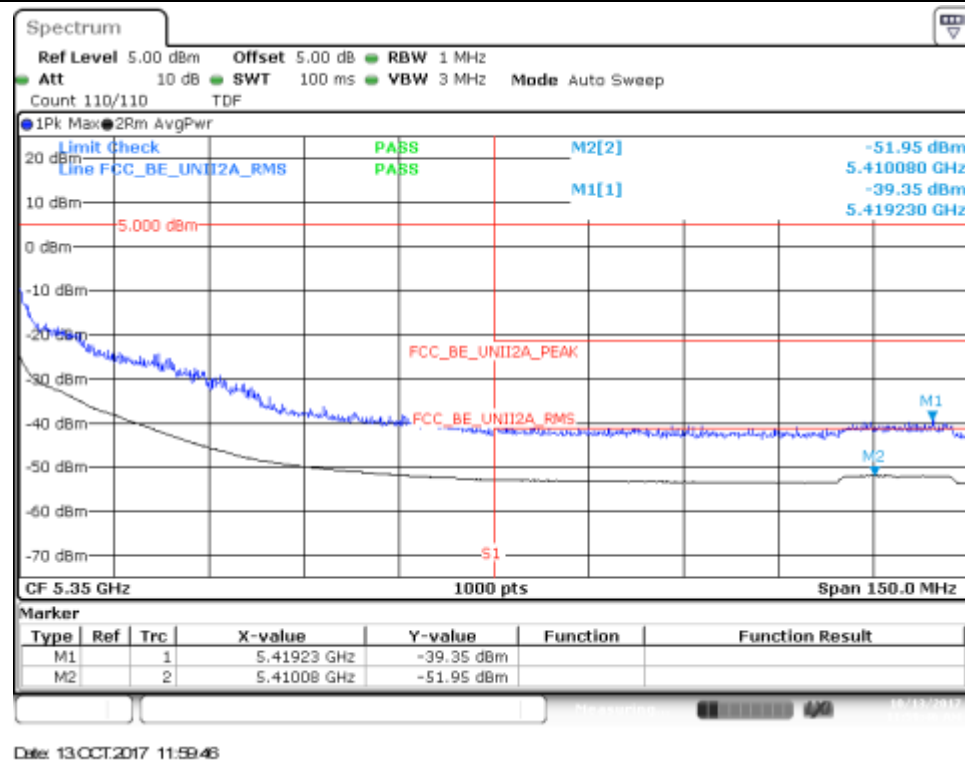


802.11n40, HT0 (SISO) - Chain A

BE High Freq Section, Peak – CH54F

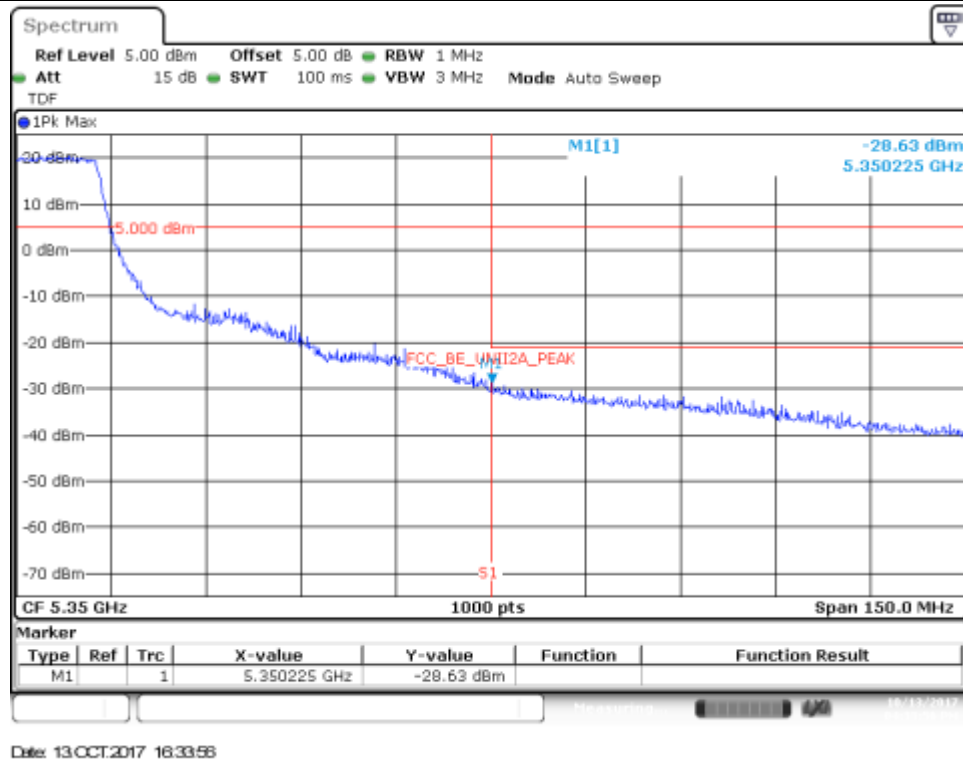


BE High Freq Section, RMS – CH54F

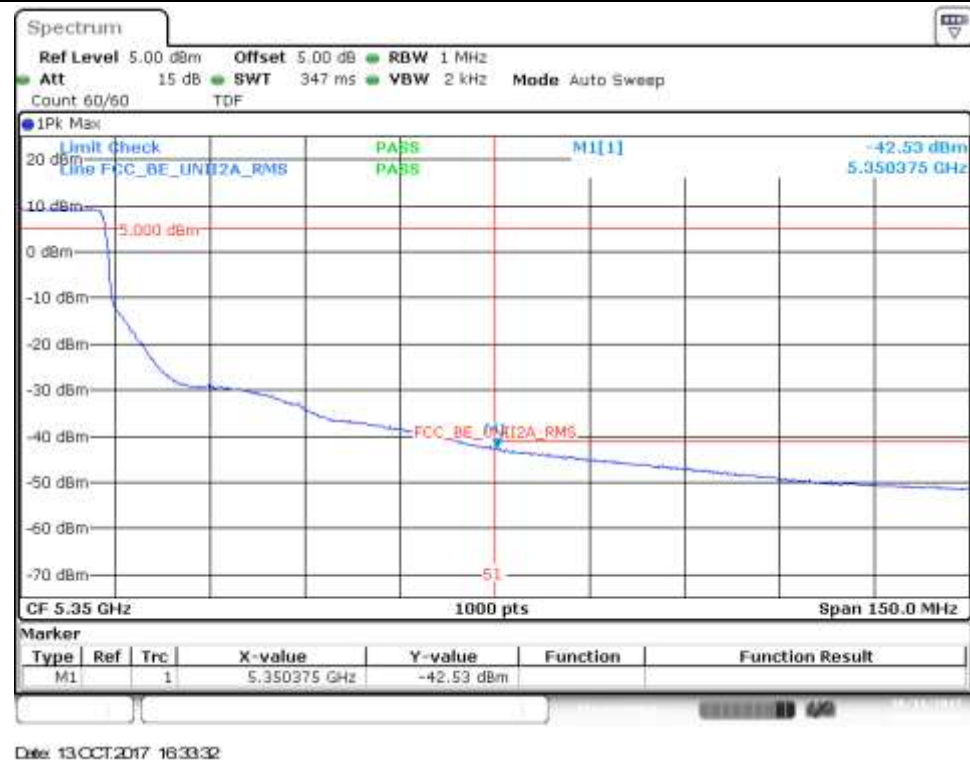

802.11n40, HT0 (SISO) - Chain B

BE High Freq Section, Peak – CH54F

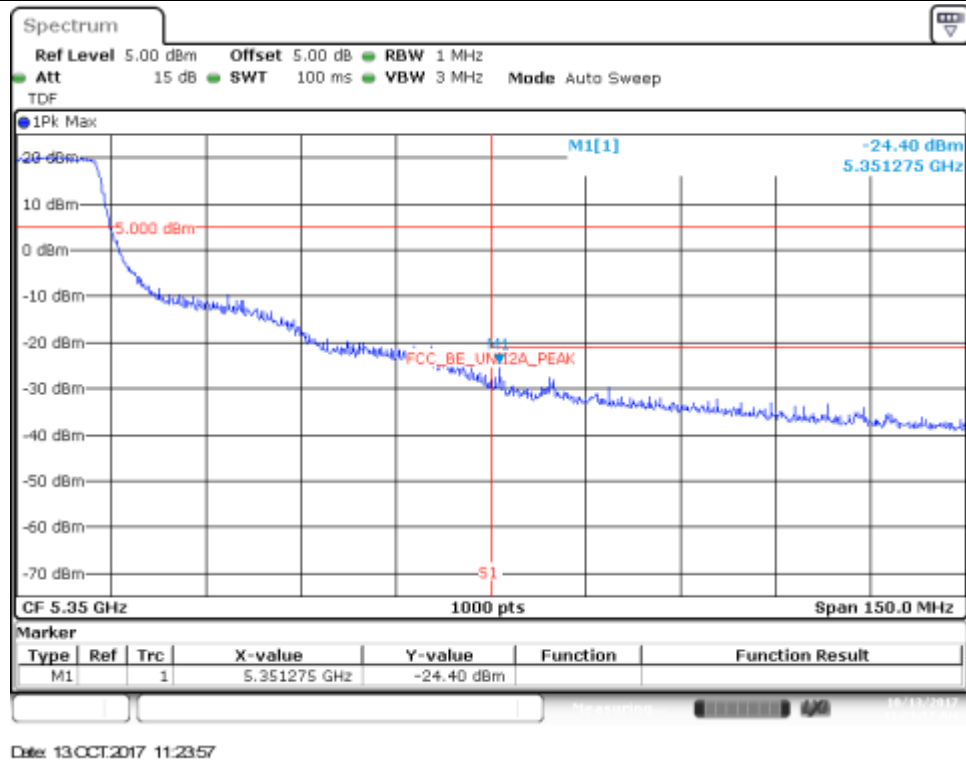


BE High Freq Section, RMS – CH54F




802.11n40, HT8 (MIMO) - Chain A

BE High Freq Section, Peak- CH54F

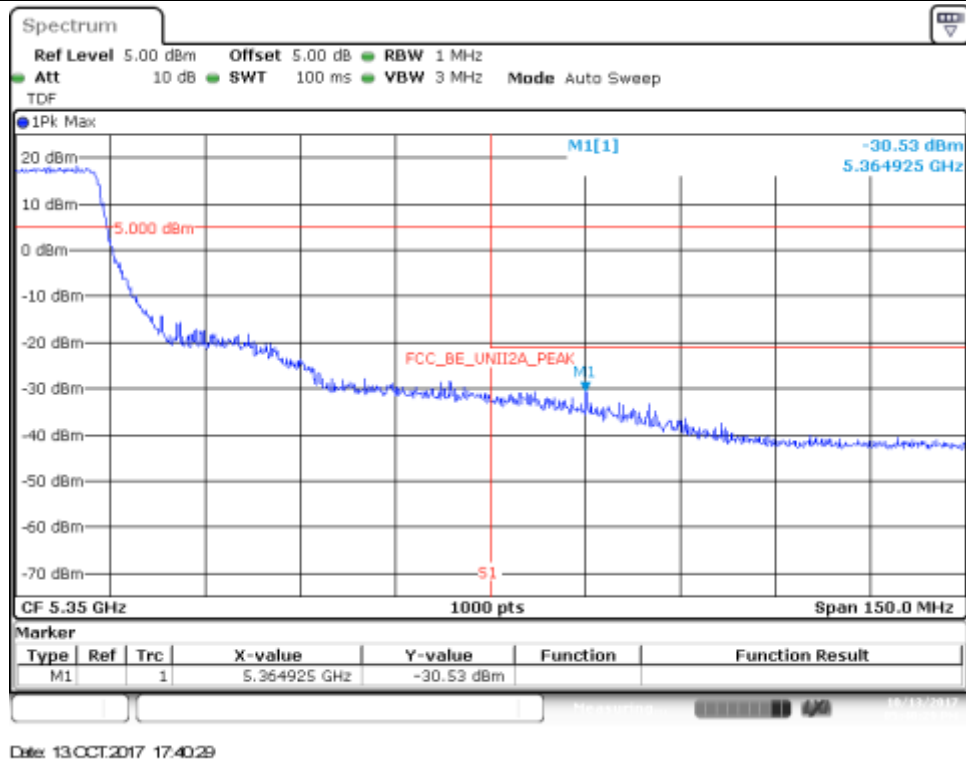


BE High Freq Section, RMS - CH54F

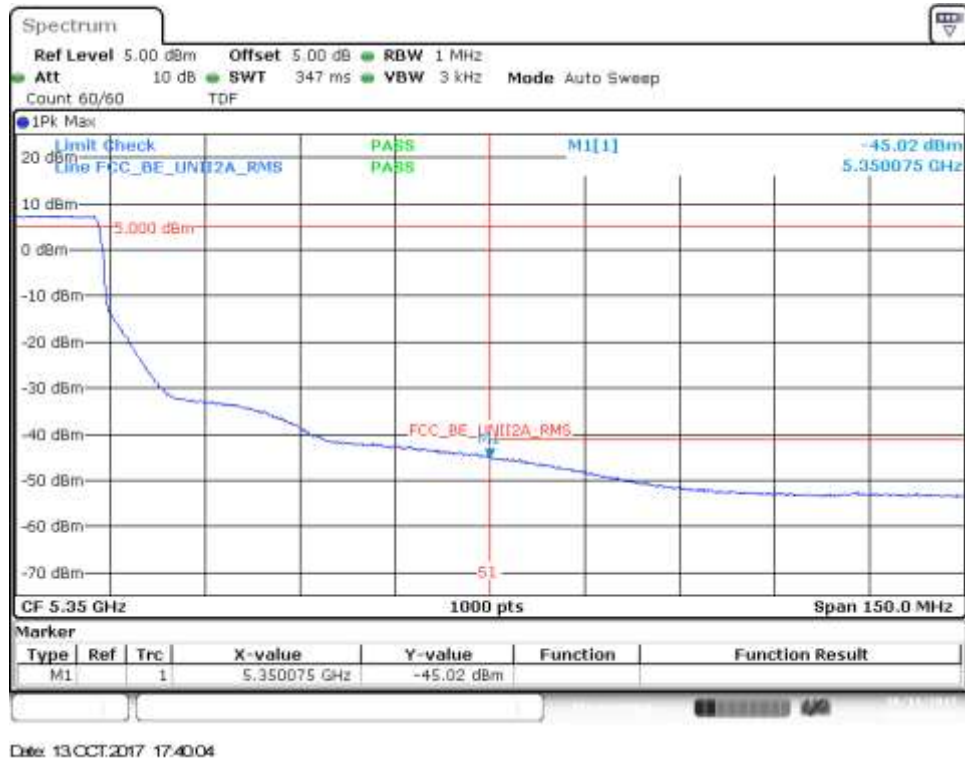


802.11n40, HT8 (MIMO) - Chain B

BE High Freq Section, Peak – CH54F

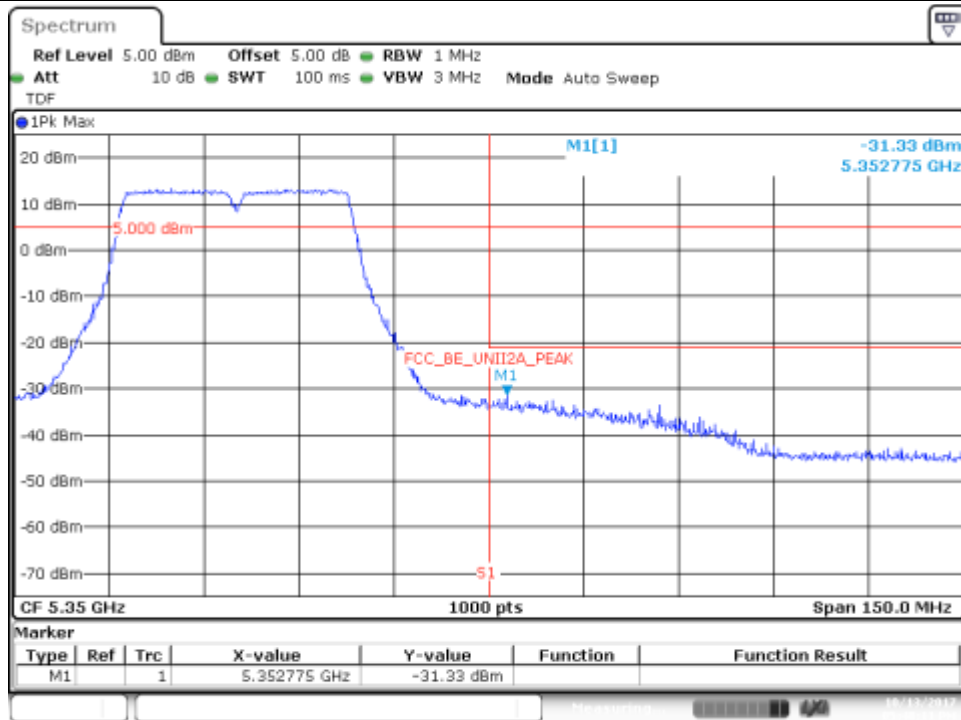


BE High Freq Section, RMS – CH54F

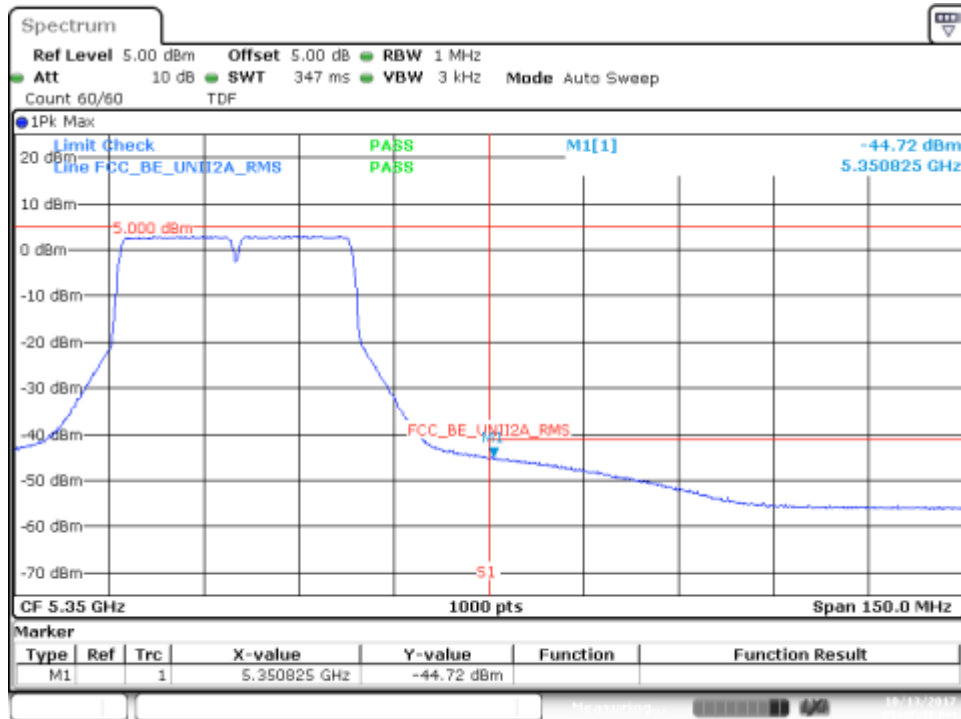

802.11ac80, VHT0 (SISO) - Chain A

BE High Freq Section, Peak – CH58ac80

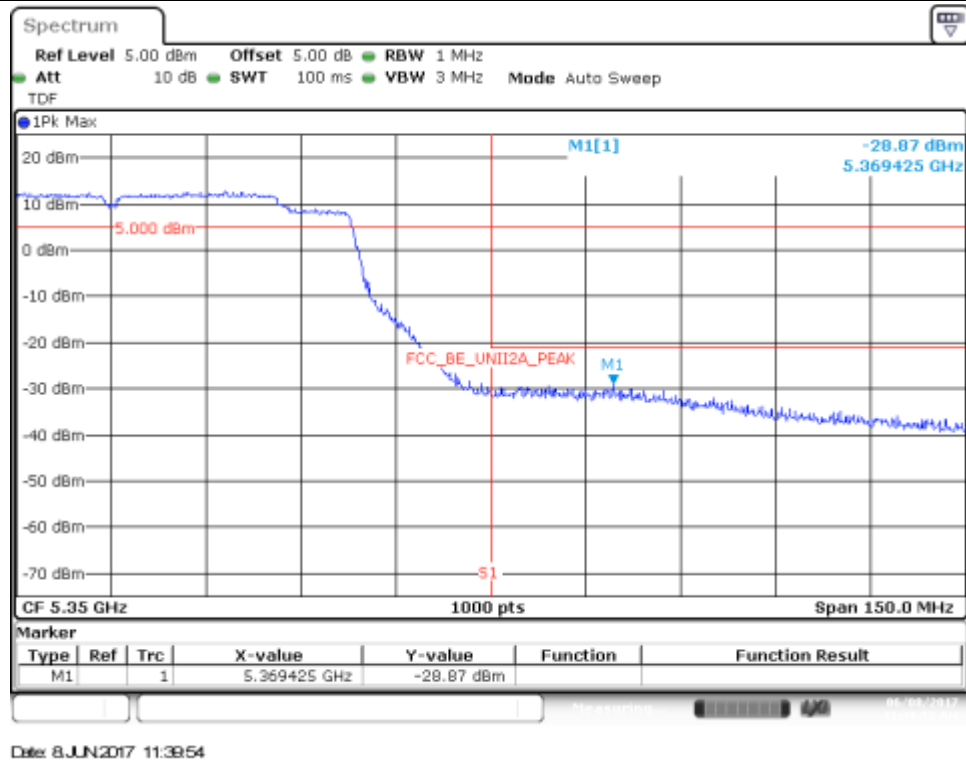


BE High Freq Section, RMS – CH58ac80



802.11ac80, VHT0 (SISO) - Chain B

BE High Freq Section, Peak – CH58ac80

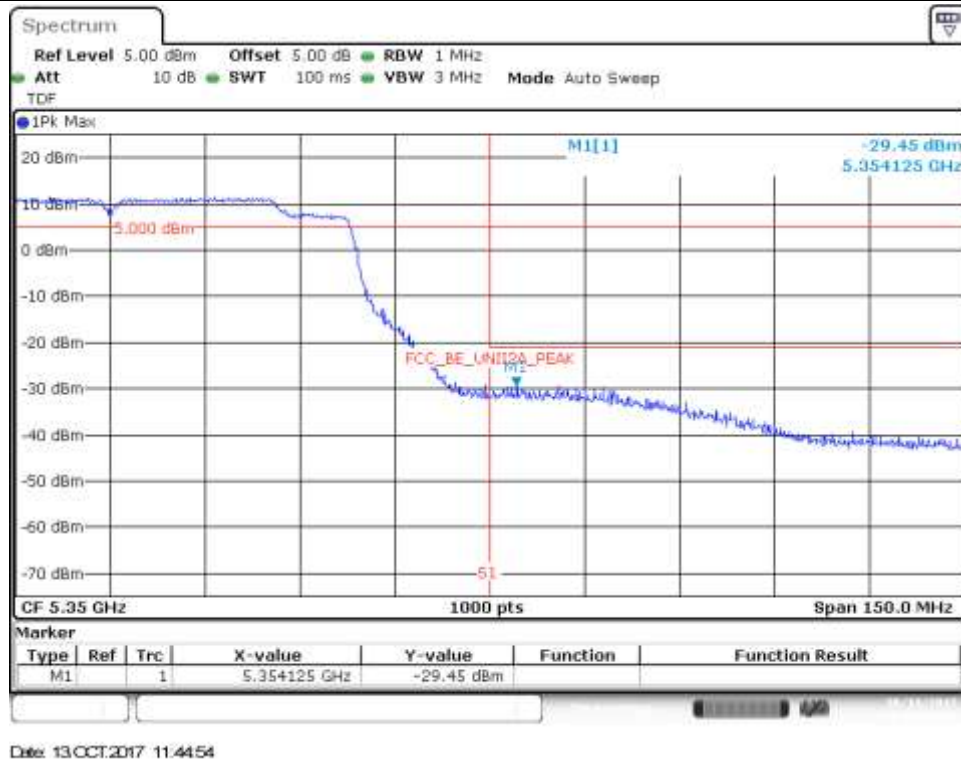


BE High Freq Section, RMS – CH58ac80




802.11ac80, VHT0 (MIMO) - Chain A

BE High Freq Section, Peak – CH58ac80

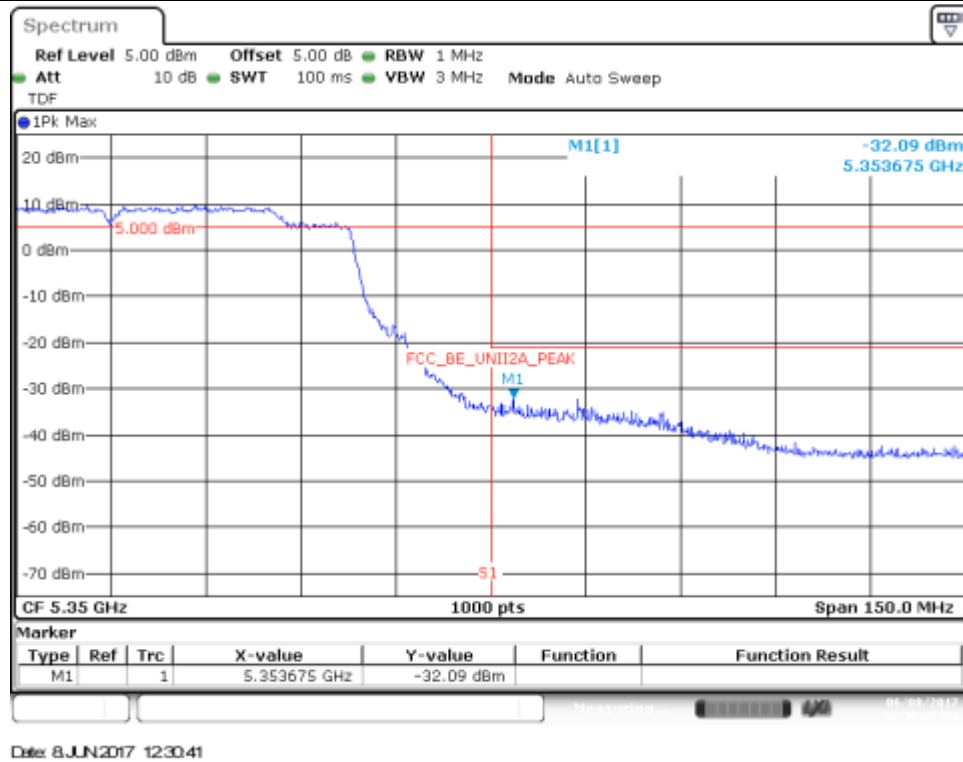


BE High Freq Section, RMS – CH58ac80

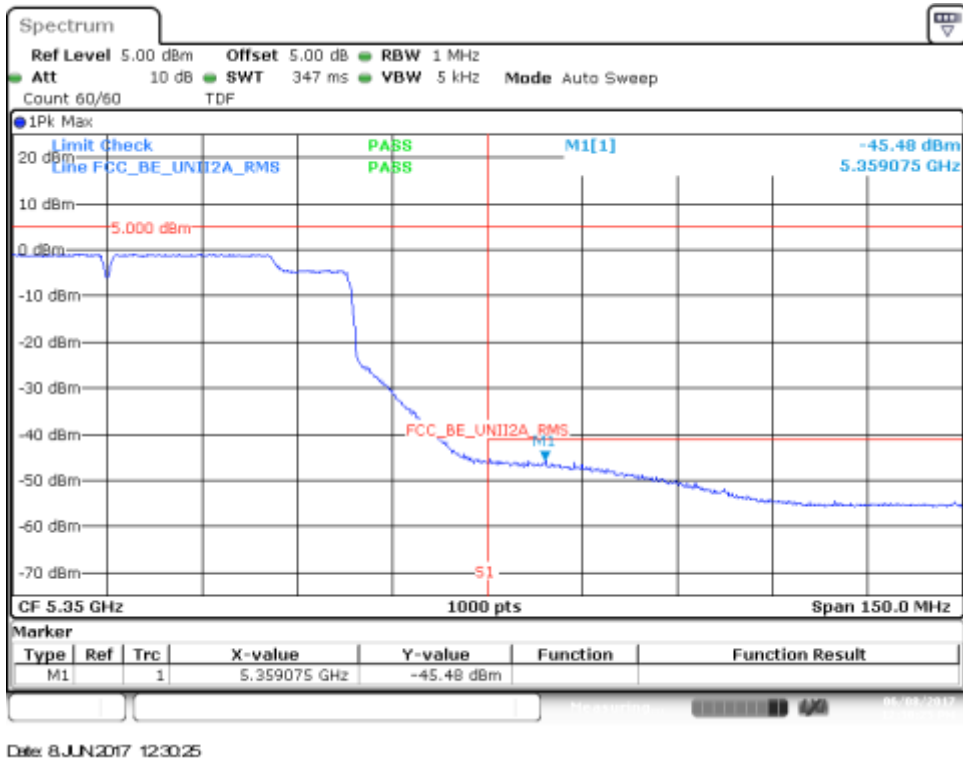

802.11ac80, VHT0 (MIMO) - Chain B

BE High Freq Section, Peak – CH58ac80

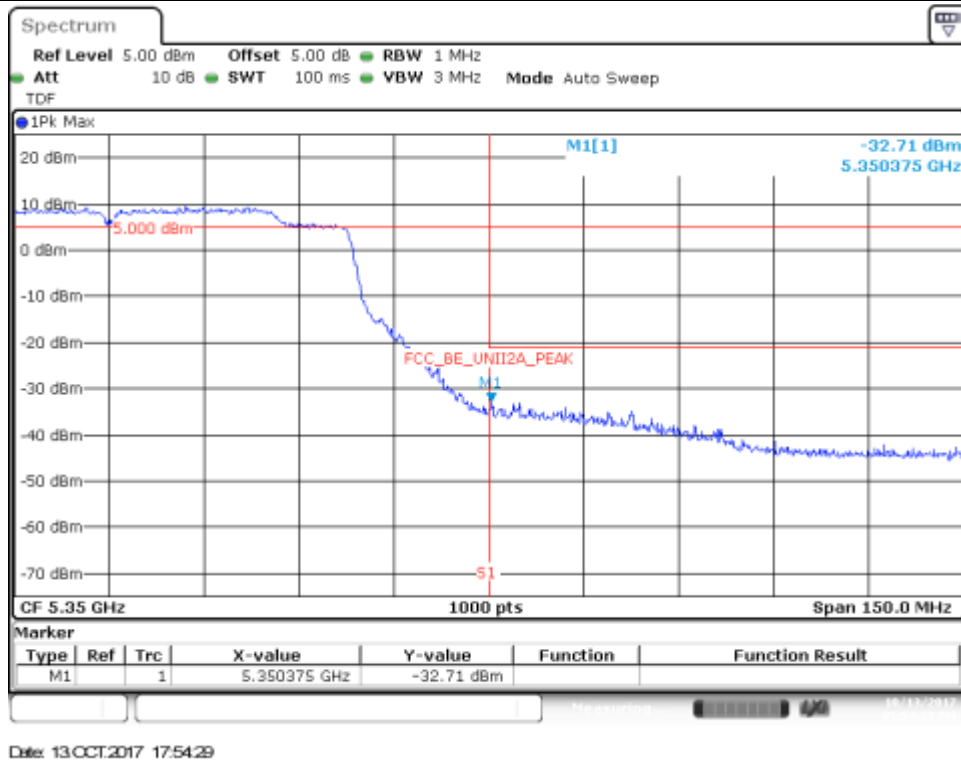

BE High Freq Section, Peak – CH58ac80

