



Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 3 / 5720 MHz (UNII 2C)

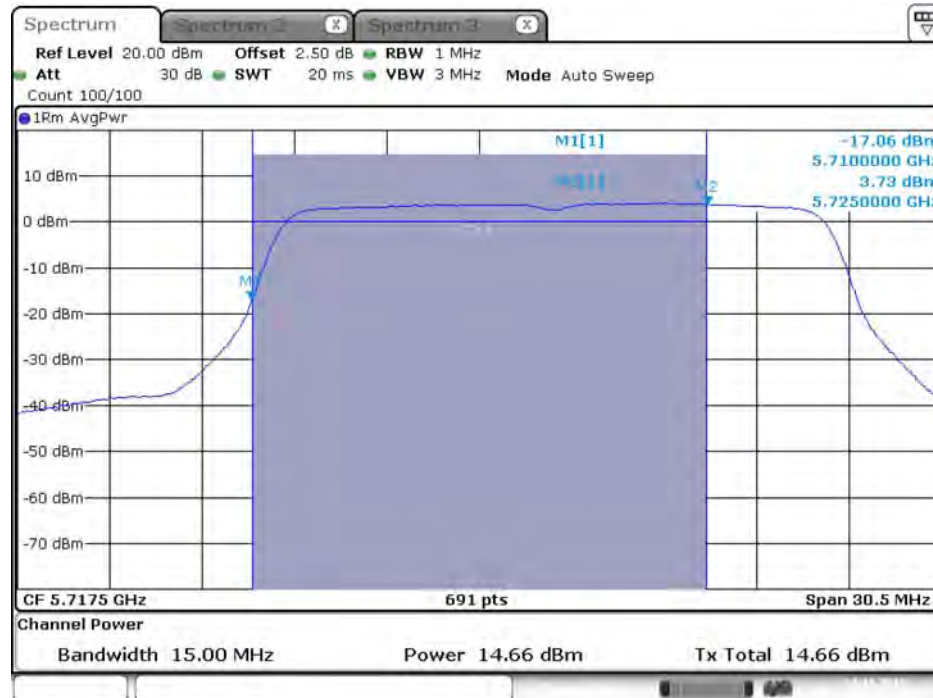


Date: 24.NOV.2015 03:23:32

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 / 5720 MHz (UNII 2C)

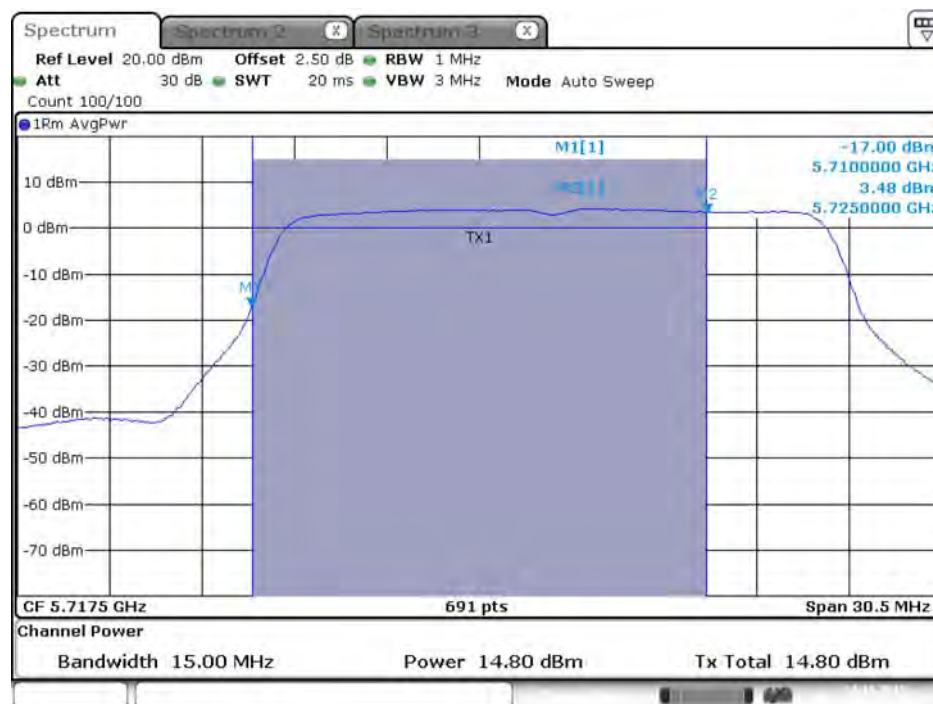

Date: 24.NOV.2015 03:23:40

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz (UNII 3)

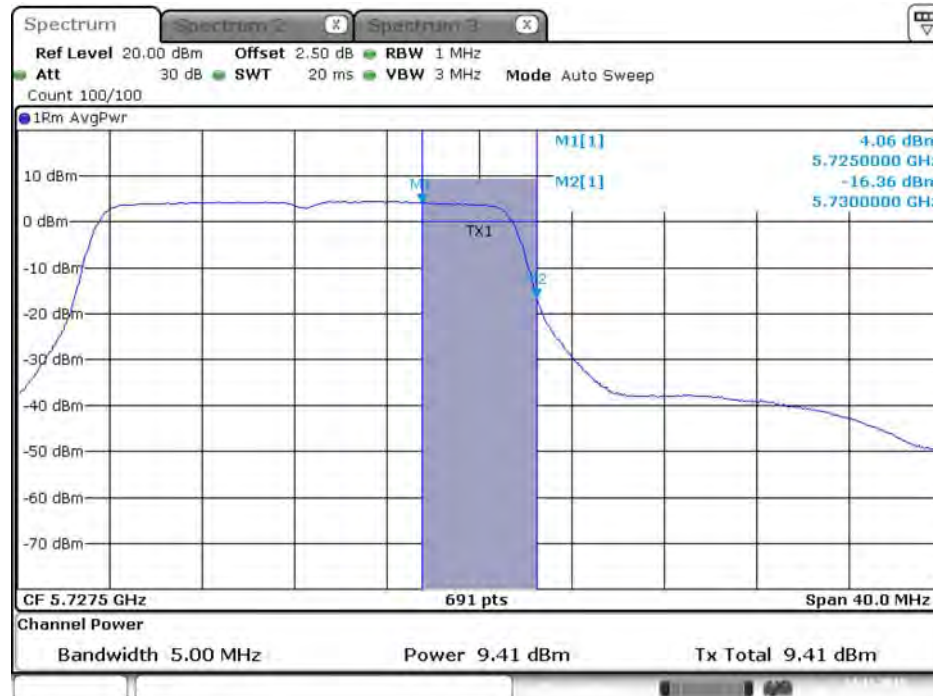


Date: 24.NOV.2015 03:23:28

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 2 / 5720 MHz (UNII 3)



Date: 24.NOV.2015 03:23:36

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 3 / 5720 MHz (UNII 3)

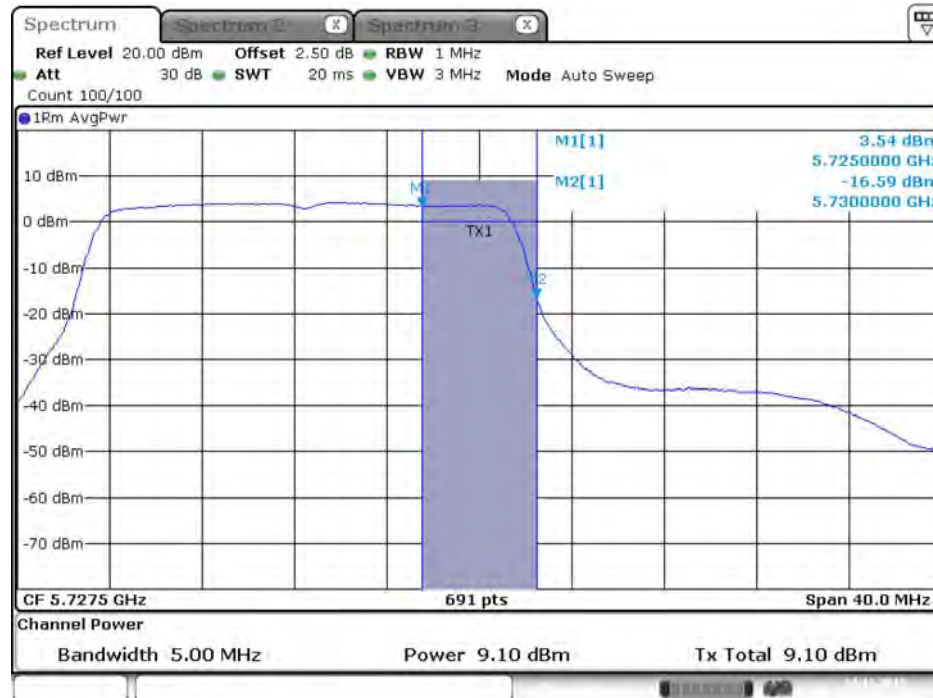


Date: 24.NOV.2015 03:23:43

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 / 5720 MHz (UNII 3)




Date: 24.NOV.2015 03:23:50

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 2C)

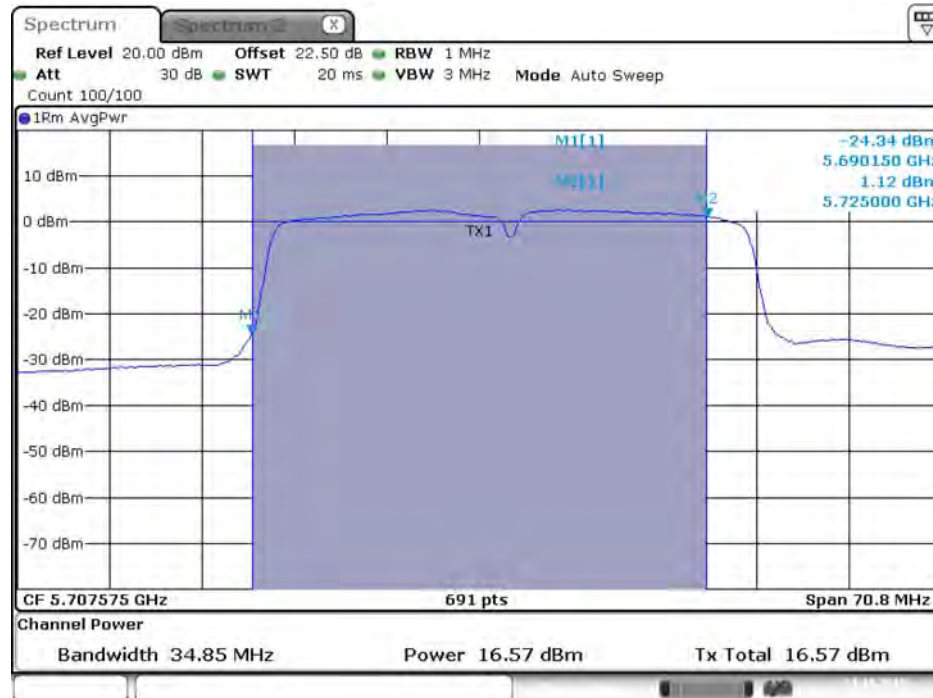


Date: 23.OCT.2015 17:29:20

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 2 / 5710 MHz (UNII 2C)

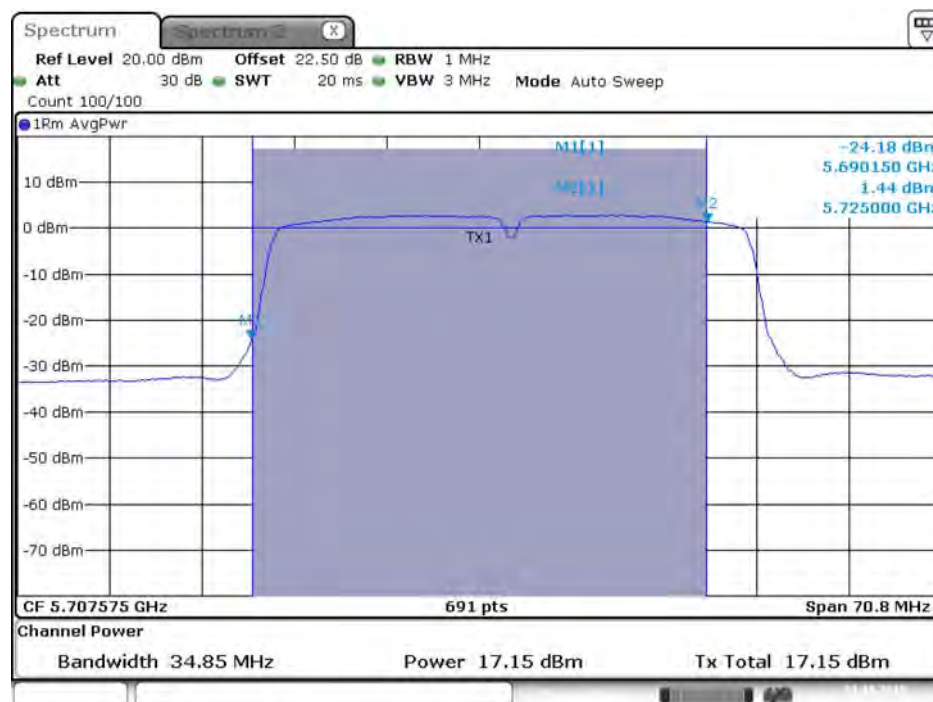


Date: 23.OCT.2015 17:29:27

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 3 / 5710 MHz (UNII 2C)

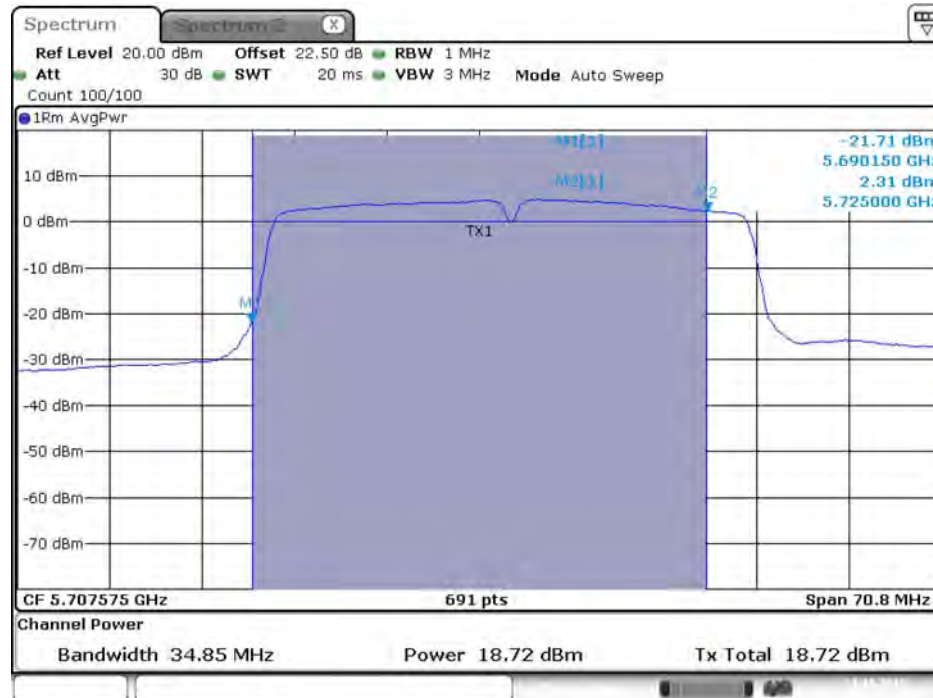

Date: 23.OCT.2015 17:29:35

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 / 5710 MHz (UNII 2C)

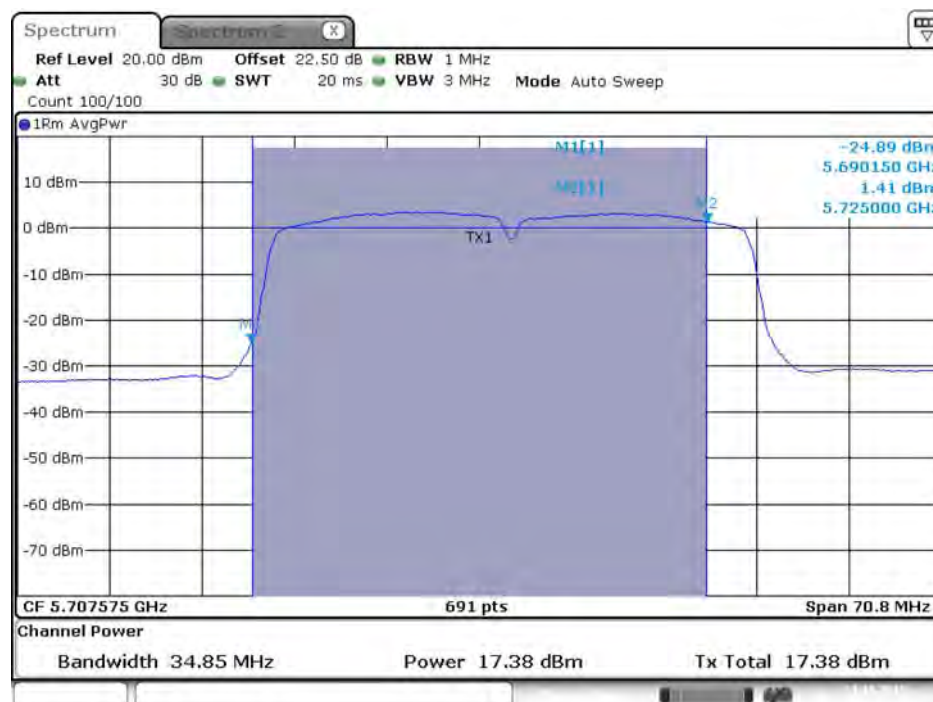

Date: 23.OCT.2015 17:29:42

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 3)



Date: 23.OCT.2015 17:29:24

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 2 / 5710 MHz (UNII 3)



Date: 23.OCT.2015 17:29:31

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 3 / 5710 MHz (UNII 3)




Date: 23.OCT.2015 17:29:38

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 / 5710 MHz (UNII 3)




Date: 23.OCT.2015 17:29:45


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz (UNII 2C)

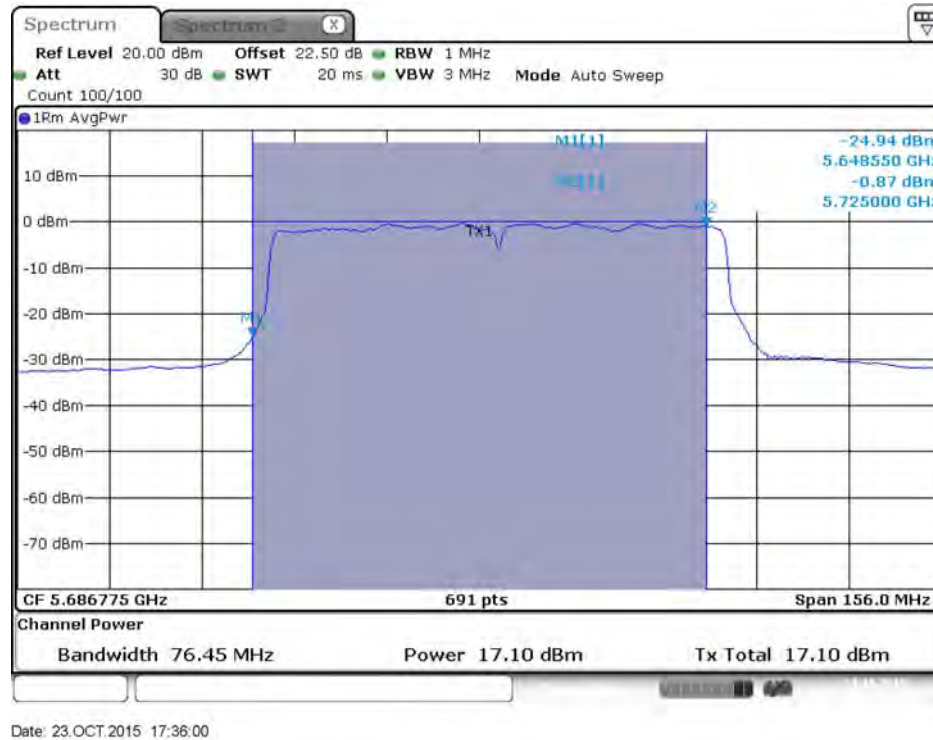

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 2 / 5690 MHz (UNII 2C)

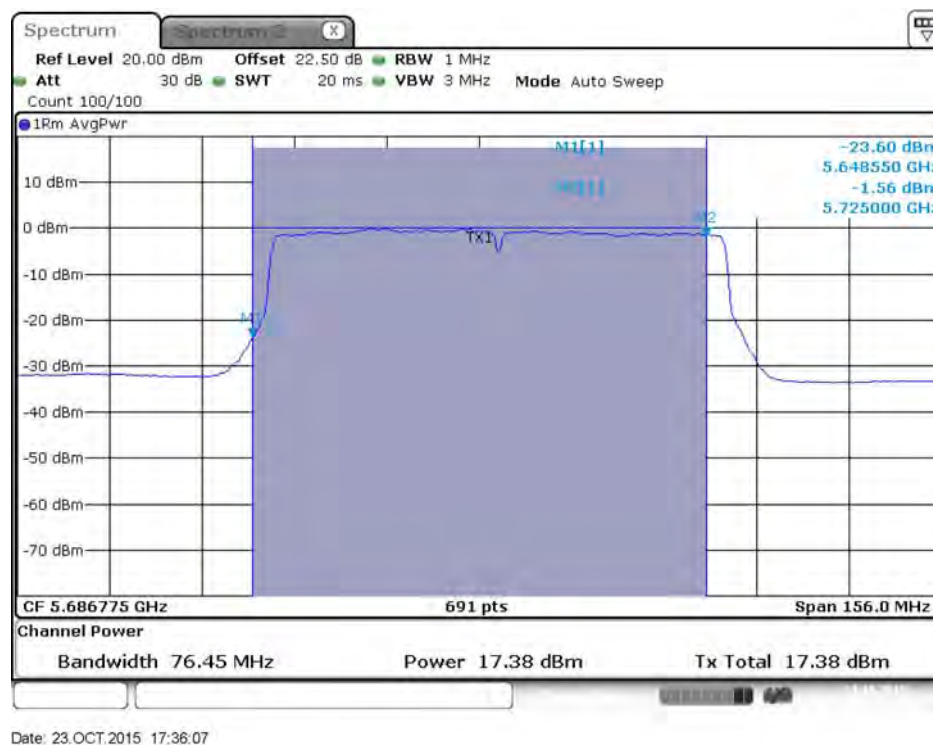


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 3 / 5690 MHz (UNII 2C)

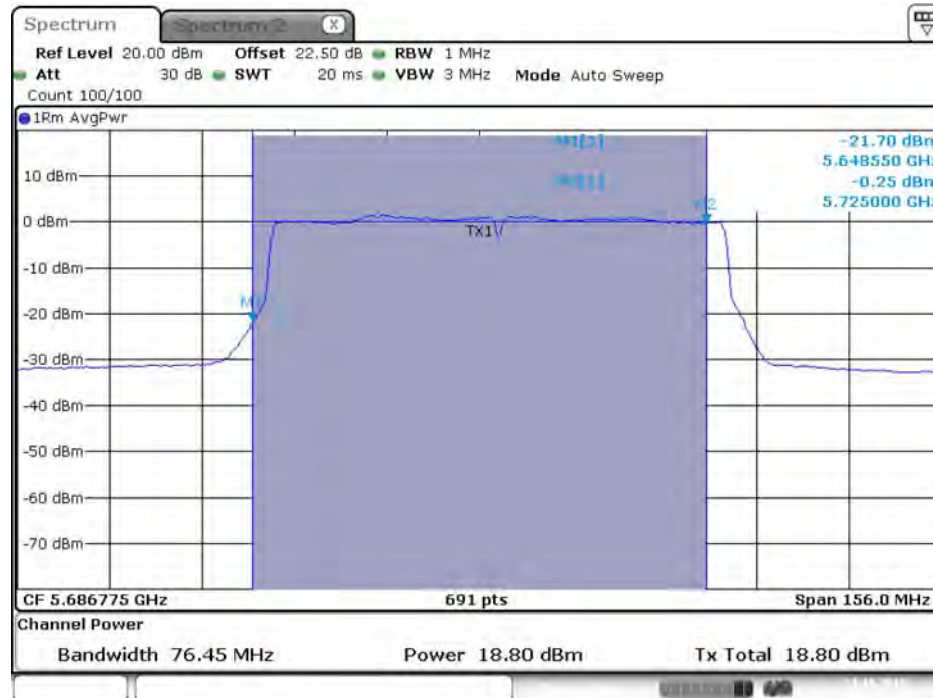


Date: 23.OCT.2015 17:36:14

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 4 / 5690 MHz (UNII 2C)

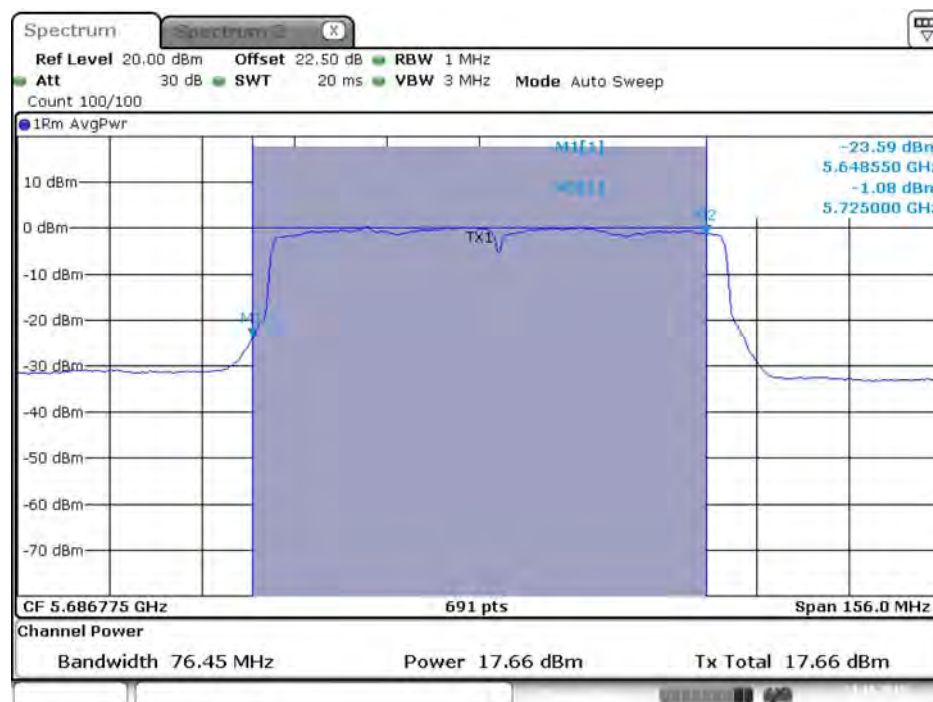


Date: 23.OCT.2015 17:36:21

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz (UNII 3)

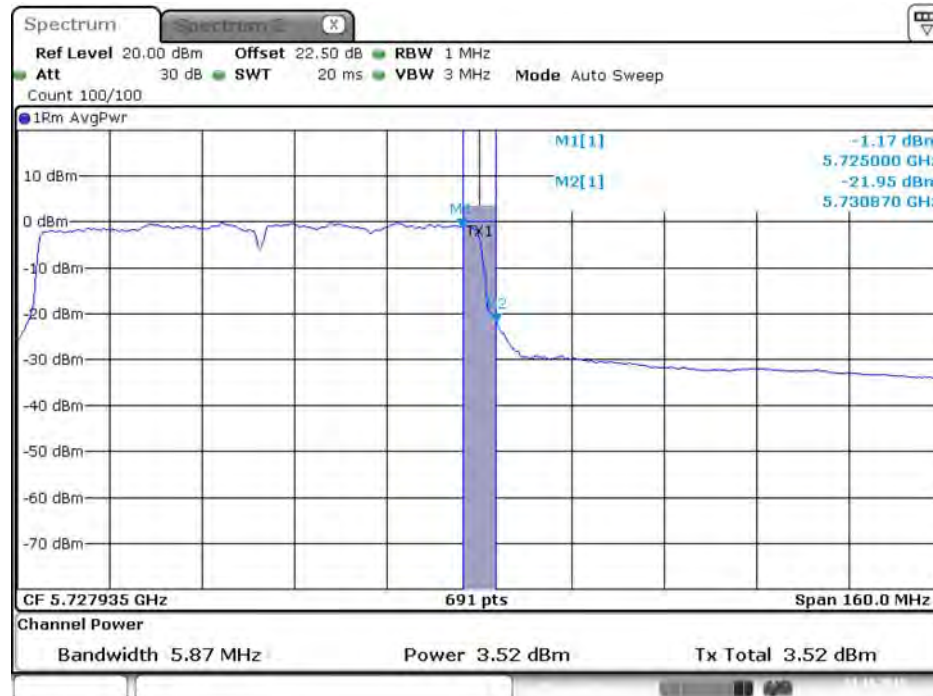


Date: 23.OCT.2015 17:36:03

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 2 / 5690 MHz (UNII 3)

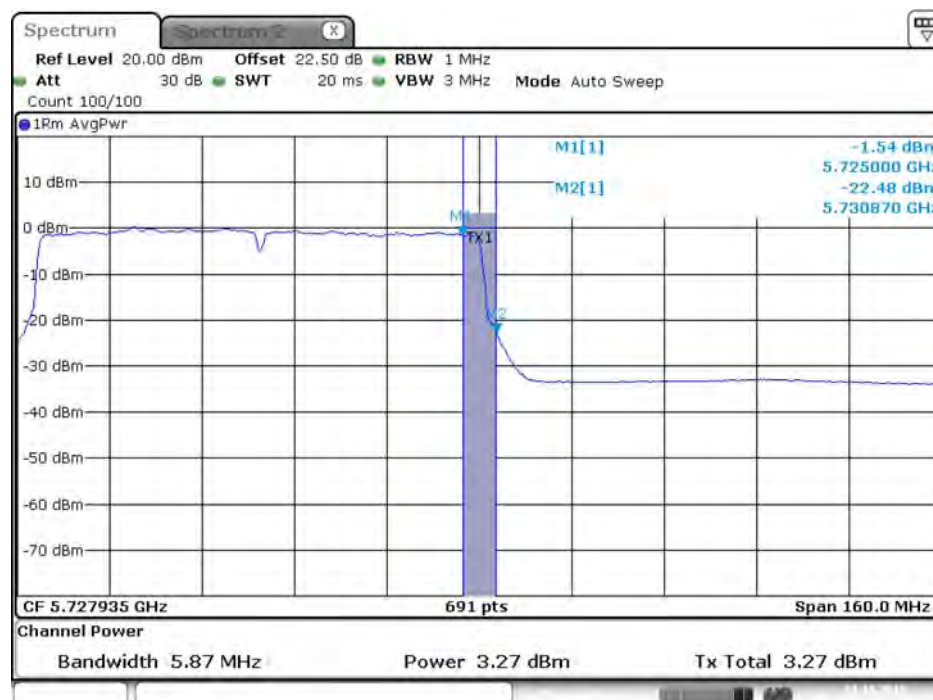


Date: 23.OCT.2015 17:36:10

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 3 / 5690 MHz (UNII 3)

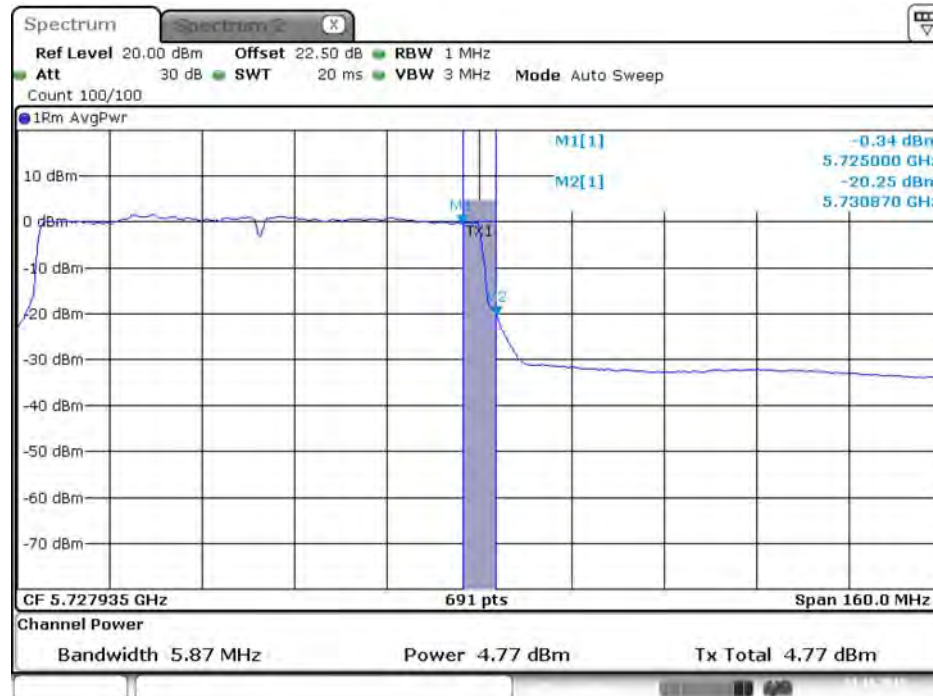

Date: 23.OCT.2015 17:36:17


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 4 / 5690 MHz (UNII 3)

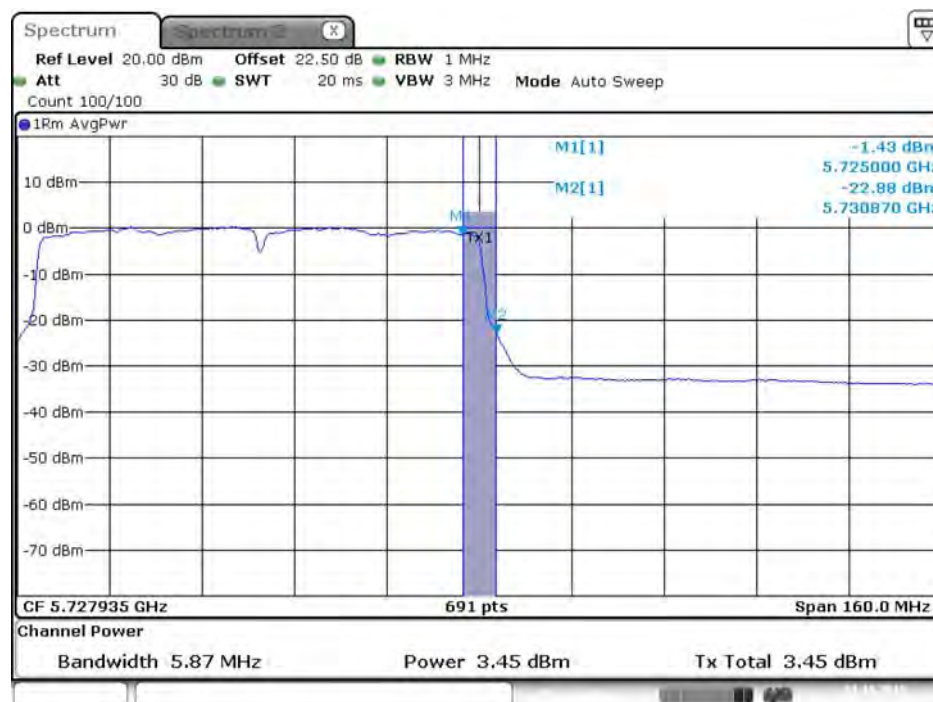

Date: 23.OCT.2015 17:36:24


Mode 6: EUT 1 + Set 6 Sector Antenna / 4 dBi

Conducted Output Power Plot on Configuration IEEE 802.11a / Chain 1 / 5720 MHz (UNII 2C)

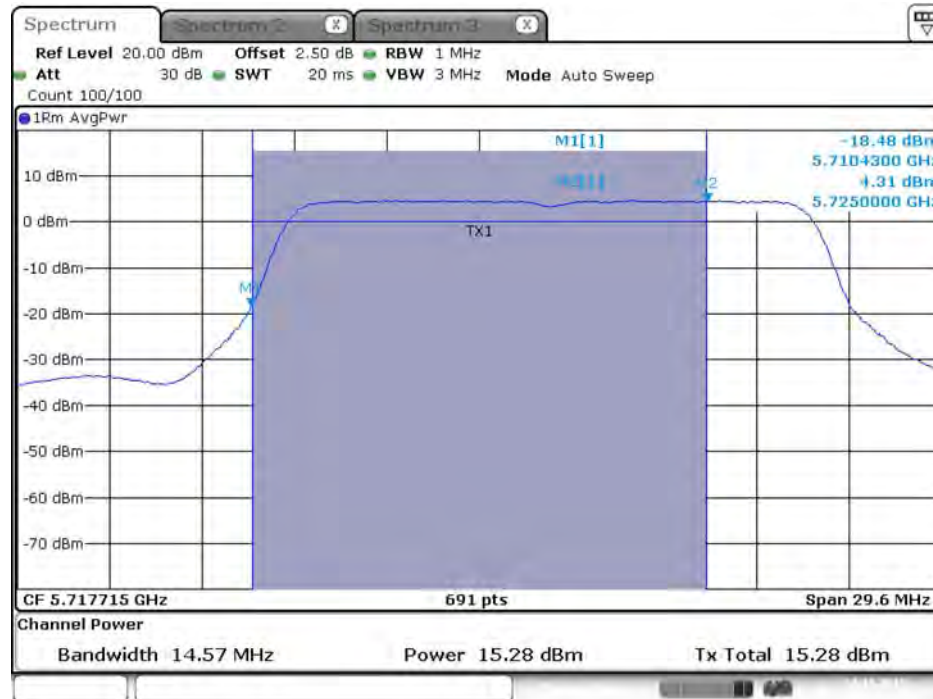


Date: 24.NOV.2015 03:42:07

Conducted Output Power Plot on Configuration IEEE 802.11a / Chain 2 / 5720 MHz (UNII 2C)

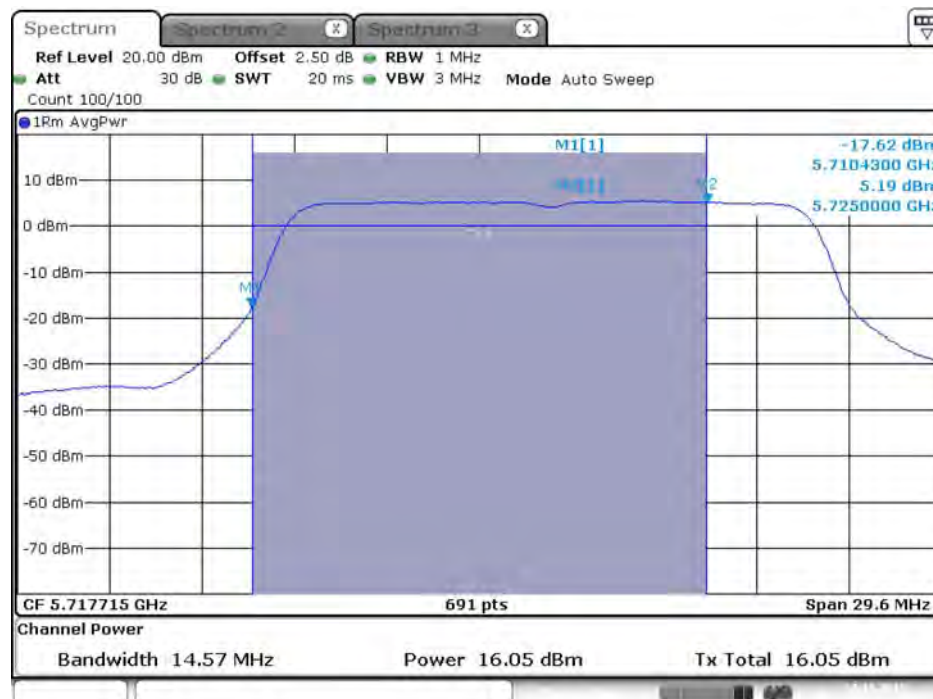


Date: 24.NOV.2015 03:41:45

Conducted Output Power Plot on Configuration IEEE 802.11a / Chain 3 / 5720 MHz (UNII 2C)

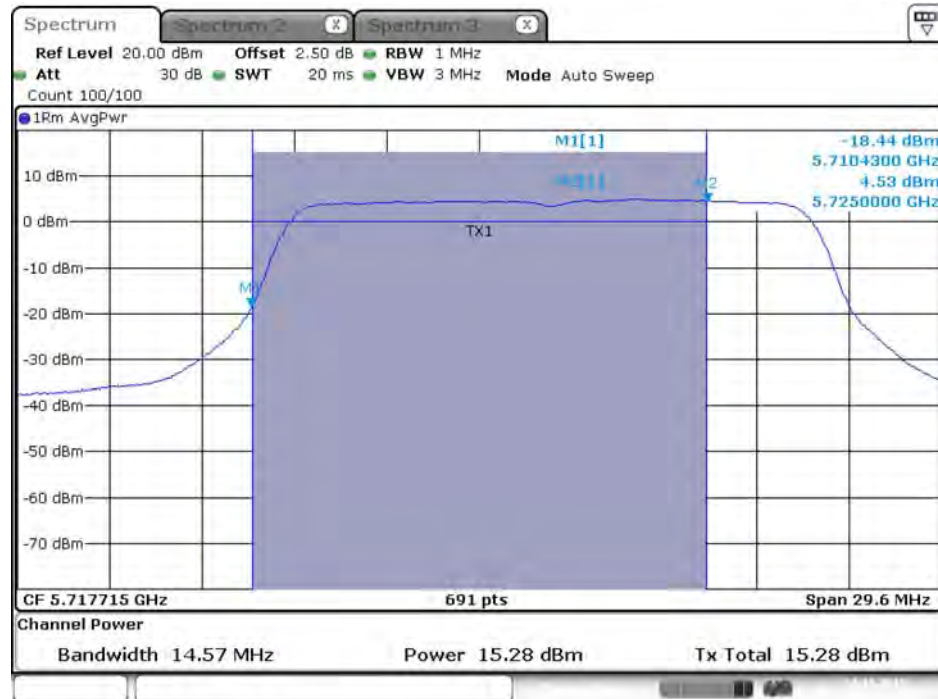

Date: 24.NOV.2015 03:41:53

Conducted Output Power Plot on Configuration IEEE 802.11a / Chain 4 / 5720 MHz (UNII 2C)

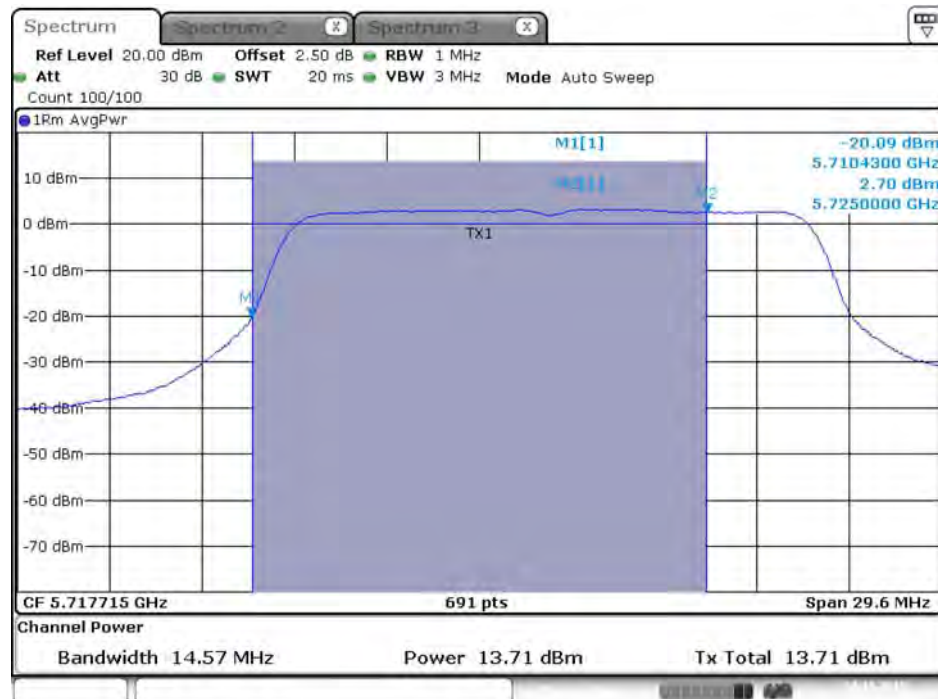

Date: 24.NOV.2015 03:42:00

Conducted Output Power Plot on Configuration IEEE 802. 11a / Chain 1 / 5720 MHz (UNII 3)



Date: 24.NOV.2015 03:41:49

Conducted Output Power Plot on Configuration IEEE 802. 11a / Chain 2 / 5720 MHz (UNII 3)



Date: 24.NOV.2015 03:41:56

Conducted Output Power Plot on Configuration IEEE 802. 11a / Chain 3 / 5720 MHz (UNII 3)




Date: 24.NOV.2015 03:42:03

Conducted Output Power Plot on Configuration IEEE 802. 11a / Chain 4 / 5720 MHz (UNII 3)




Date: 24.NOV.2015 03:42:10

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz (UNII 2C)

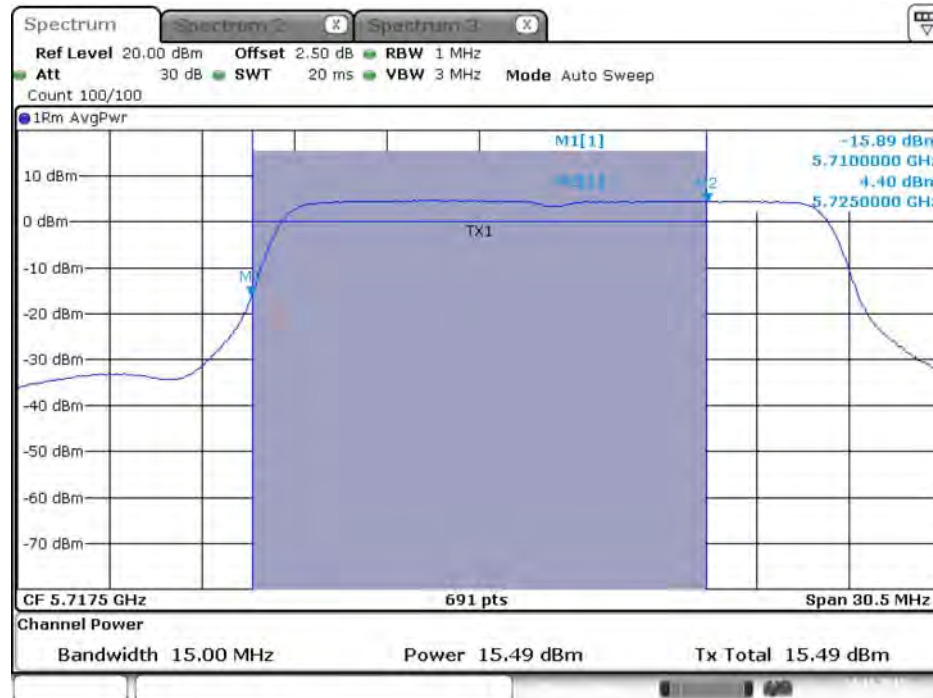

Date: 24.NOV.2015 03:49:01

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 2 / 5720 MHz (UNII 2C)

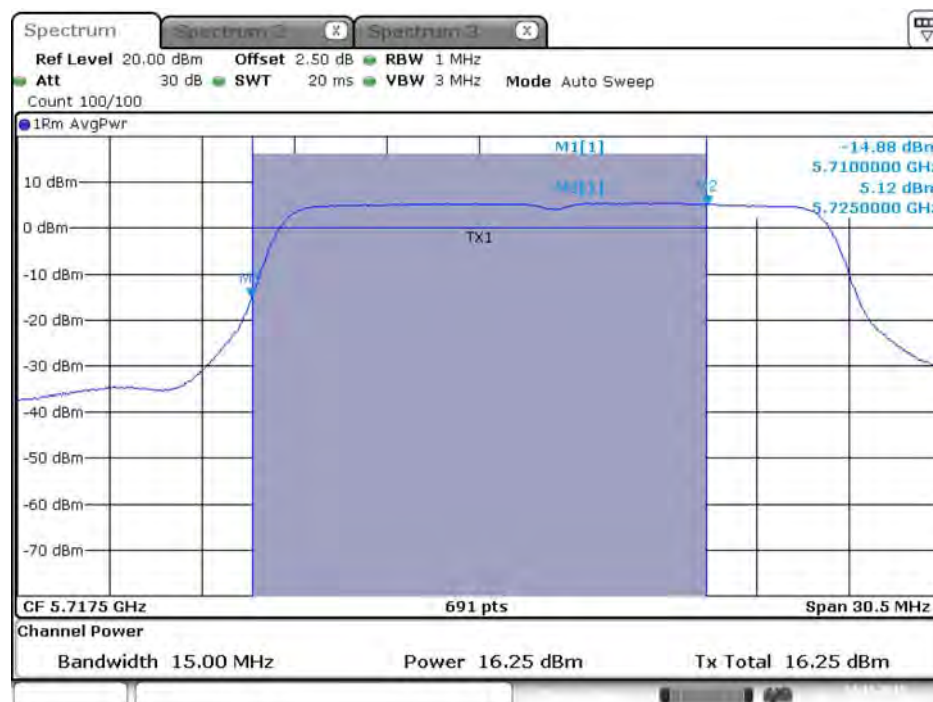

Date: 24.NOV.2015 03:48:40



Spectrum

Ref Level 20.00 dBm Offset 2.50 dB RBW 1 MHz
Att 30 dB SWT 20 ms VBW 3 MHz Mode Auto Sweep
Count 100/100

1Rm AvgPwr

MI[1]
MI[1]
TX1
M1
M2
-15.95 dBm
5.7100000 GHz
4.75 dBm
5.7250000 GHz

CF 5.7175 GHz 691 pts Span 30.5 MHz

Channel Power

Bandwidth 15.00 MHz Power 15.57 dBm Tx Total 15.57 dBm

Spectrum Spectrum 2 Spectrum 3

Ref Level 20.00 dBm Offset 2.50 dB RBW 1 MHz
Att 30 dB SWT 20 ms VBW 3 MHz Mode Auto Sweep
Count 100/100

1Rm AvgPwr

10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm

CF 5.7175 GHz 691 pts Span 30.5 MHz


Channel Power

Bandwidth 15.00 MHz Power 15.47 dBm Tx Total 15.47 dBm

MI[1]
TX1
f/2
-16.06 dBm
5.7100000 GHz
4.24 dBm
5.7250000 GHz

Date: 24.NOV.2015 03:48:54

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz (UNII 3)

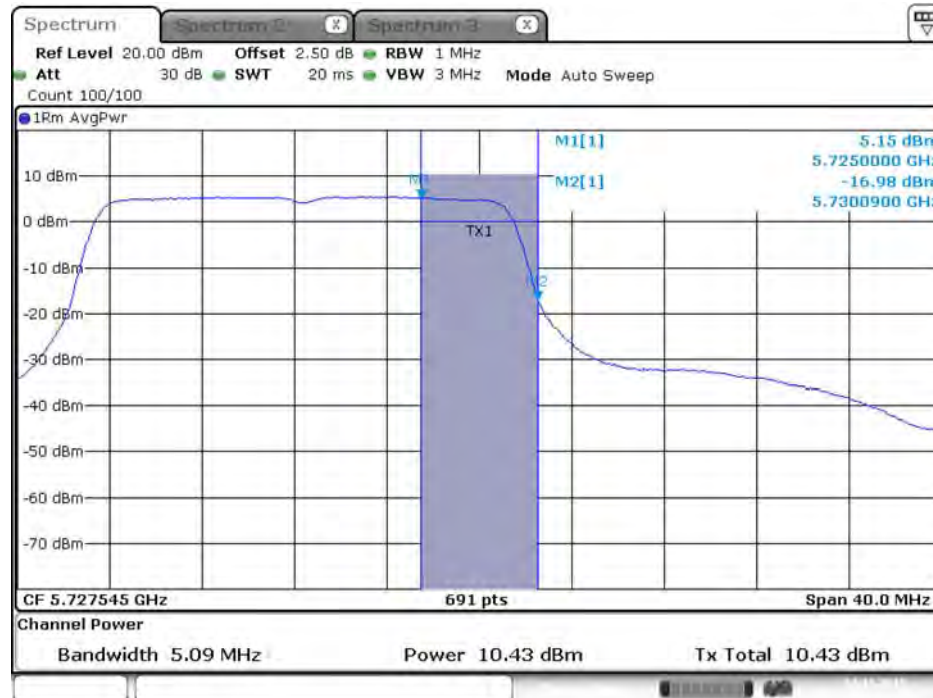


Date: 24.NOV.2015 03:48:43

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 2 / 5720 MHz (UNII 3)



Date: 24.NOV.2015 03:48:50

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 3 / 5720 MHz (UNII 3)

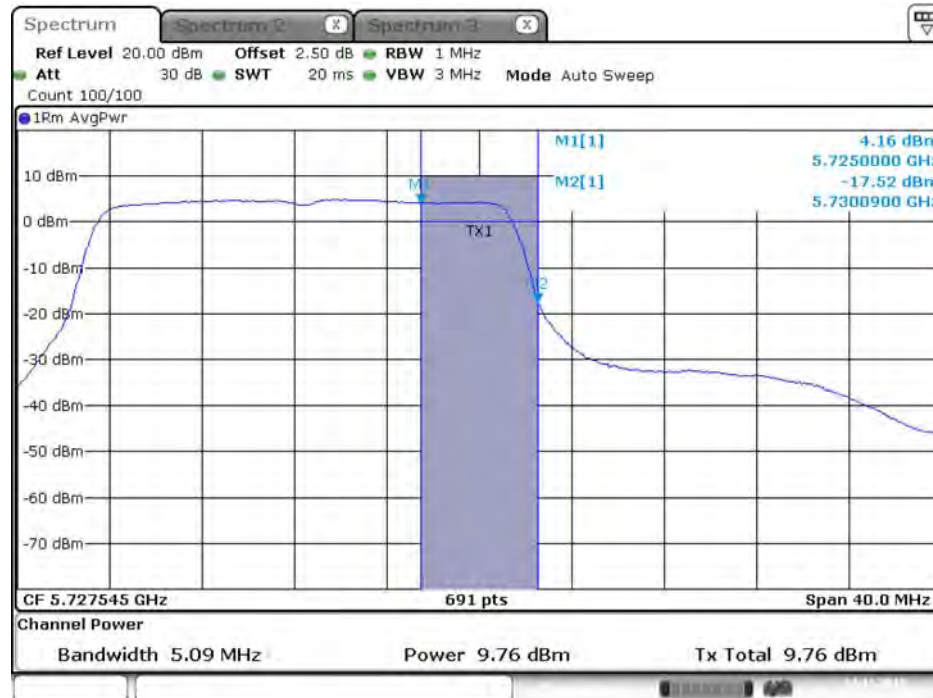


Date: 24.NOV.2015 03:48:57

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 / 5720 MHz (UNII 3)




Date: 24.NOV.2015 03:49:05

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 2C)

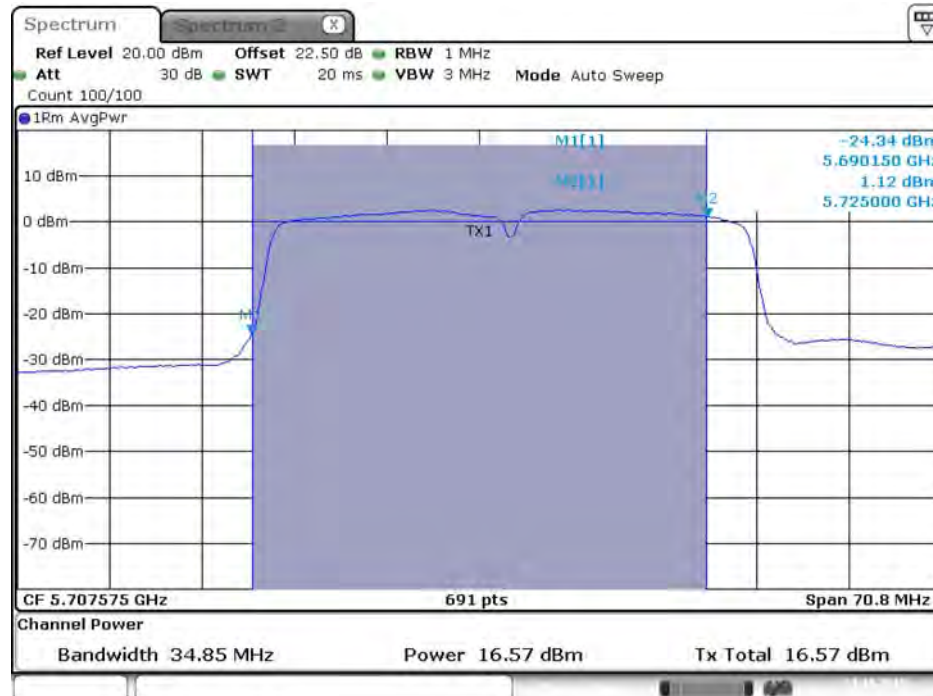


Date: 23.OCT.2015 17:29:20

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 2 / 5710 MHz (UNII 2C)

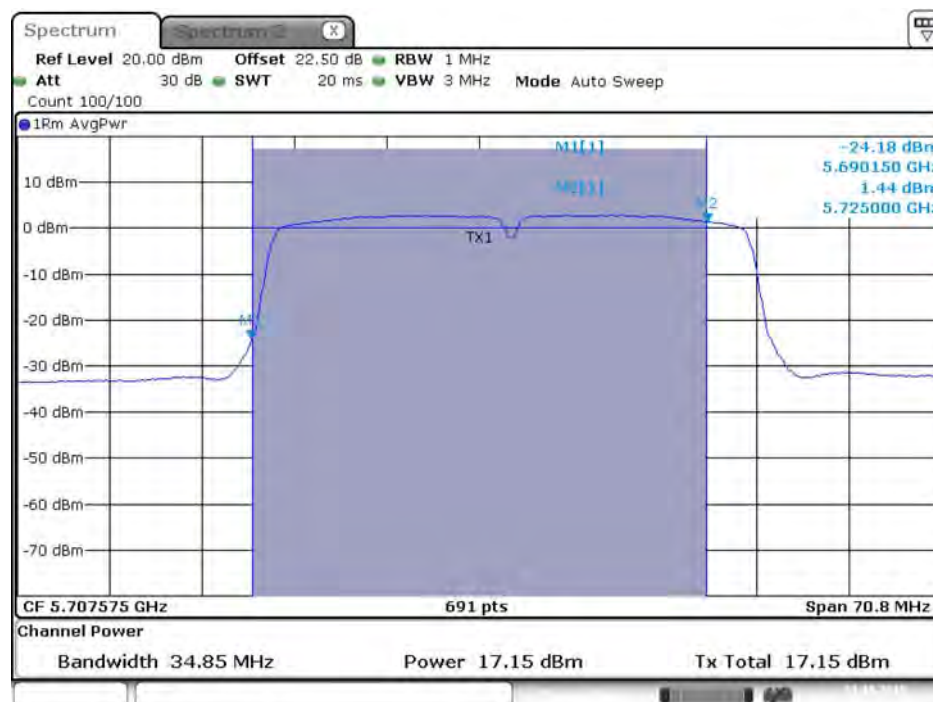


Date: 23.OCT.2015 17:29:27

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 3 / 5710 MHz (UNII 2C)

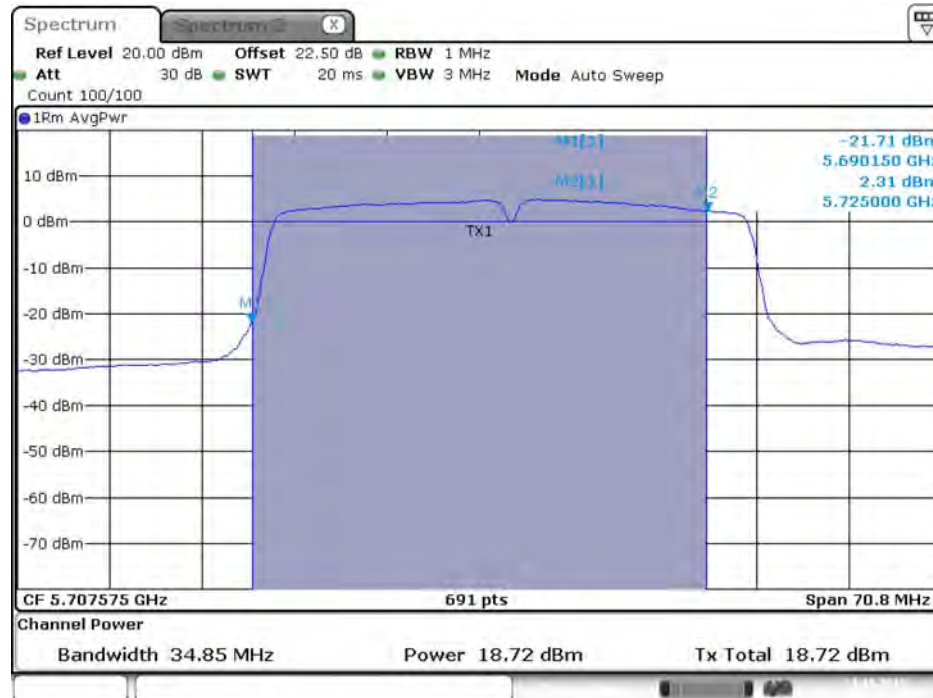

Date: 23.OCT.2015 17:29:35

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 / 5710 MHz (UNII 2C)

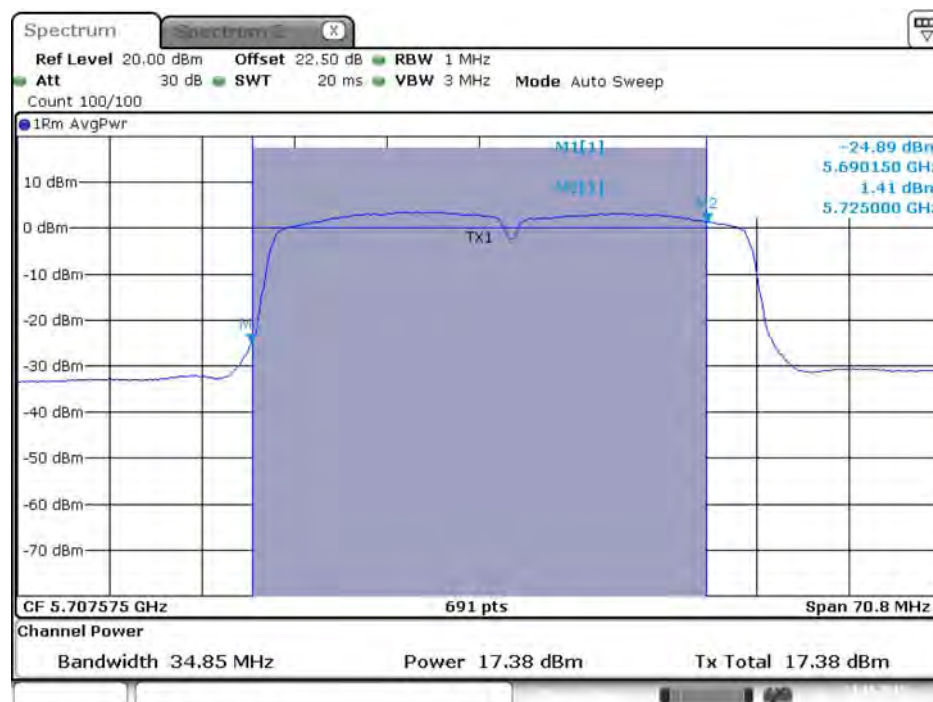

Date: 23.OCT.2015 17:29:42

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 3)



Date: 23.OCT.2015 17:29:24

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 2 / 5710 MHz (UNII 3)



Date: 23.OCT.2015 17:29:31

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 3 / 5710 MHz (UNII 3)




Date: 23.OCT.2015 17:29:38

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 / 5710 MHz (UNII 3)




Date: 23.OCT.2015 17:29:45

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz
(UNII 2C)

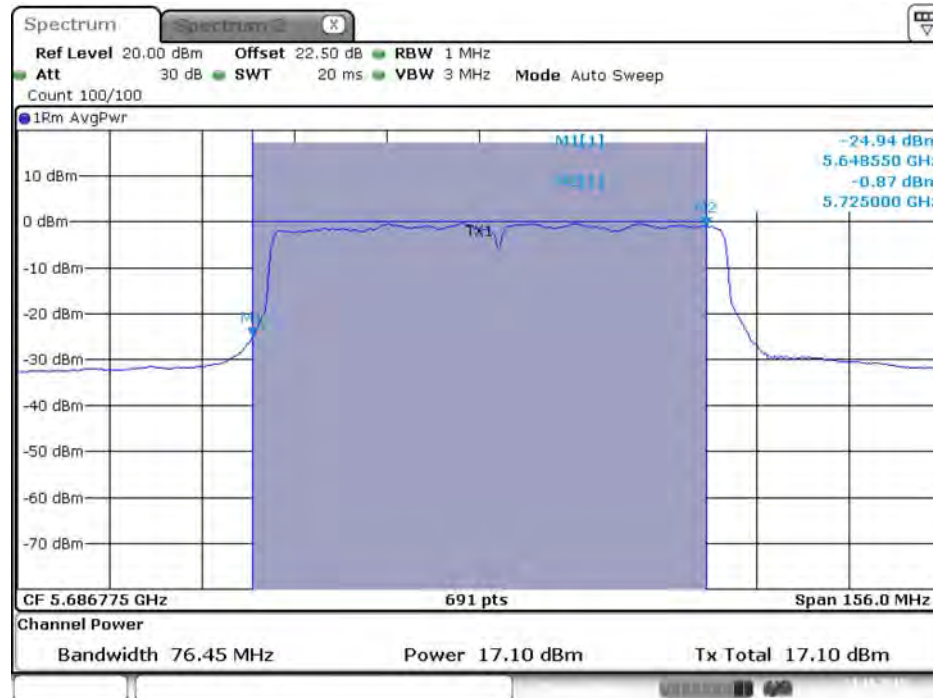

Date: 23.OCT.2015 17:36:00

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 2 / 5690 MHz
(UNII 2C)

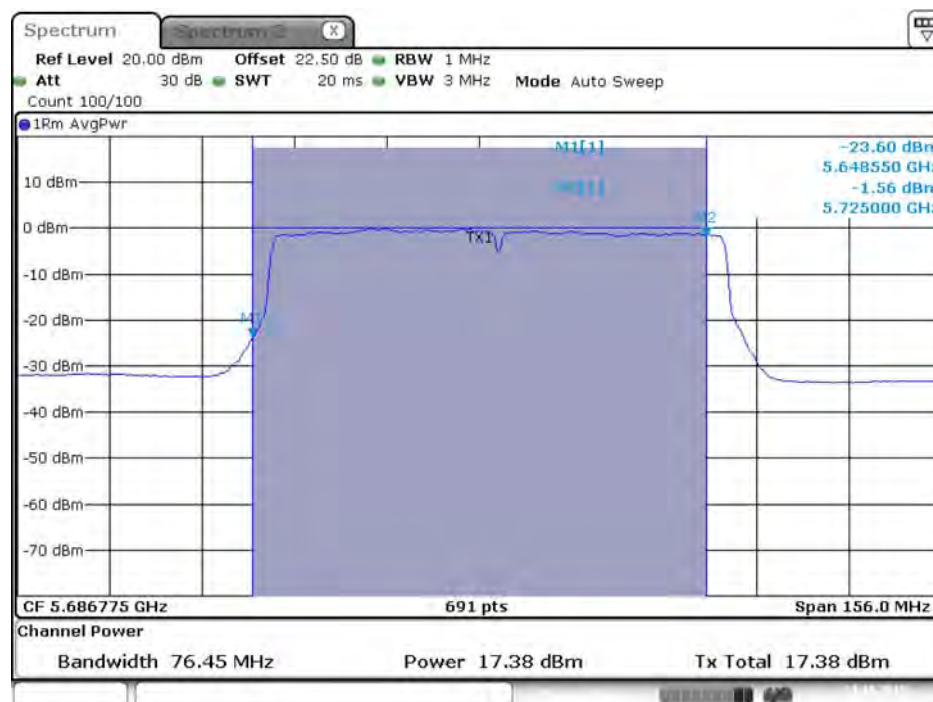

Date: 23.OCT.2015 17:36:07



Spectrum

Ref Level 20.00 dBm **Offset** 22.50 dB **RBW** 1 MHz
Att 30 dB **SWT** 20 ms **VBW** 3 MHz **Mode** Auto Sweep
Count 100/100

1Rm AvgPwr

TX1V

CF 5.686775 GHz **Span** 156.0 MHz

Channel Power

Bandwidth 76.45 MHz **Power** 18.80 dBm **Tx Total** 18.80 dBm

Date: 23.OCT.2015 17:36:14

Spectrum

Ref Level 20.00 dBm Offset 22.50 dB RBW 1 MHz
Att 30 dB SWT 20 ms VBW 3 MHz Mode Auto Sweep
Count 100/100

1Rm AvgPwr

10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm


CF 5.686775 GHz 691 pts Span 156.0 MHz

Channel Power

Bandwidth 76.45 MHz Power 17.66 dBm Tx Total 17.66 dBm


Date: 23.OCT.2015 17:36:21

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz (UNII 3)

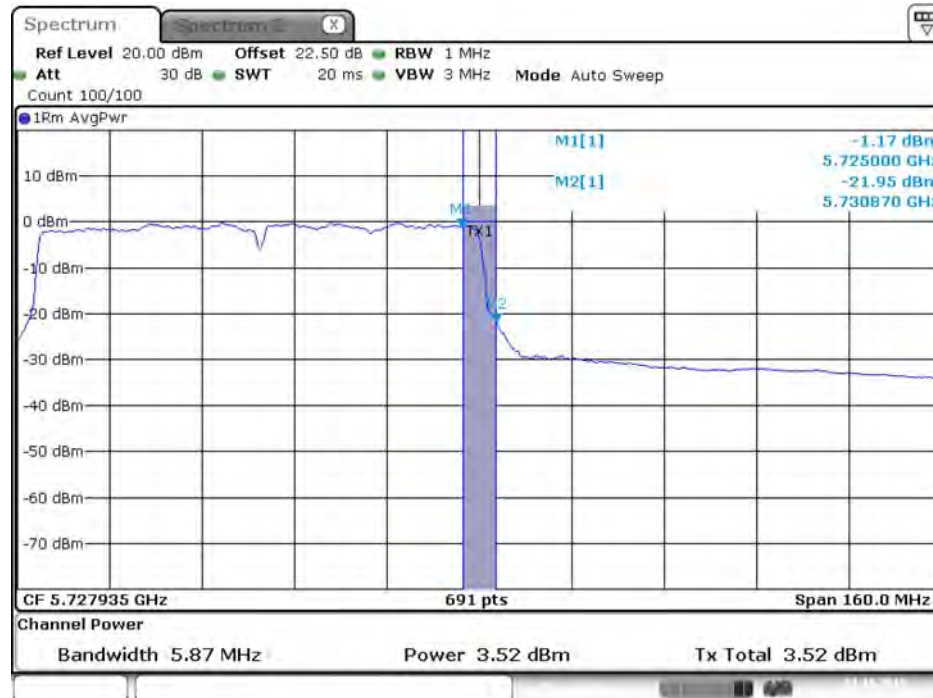


Date: 23.OCT.2015 17:36:03

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 2 / 5690 MHz (UNII 3)

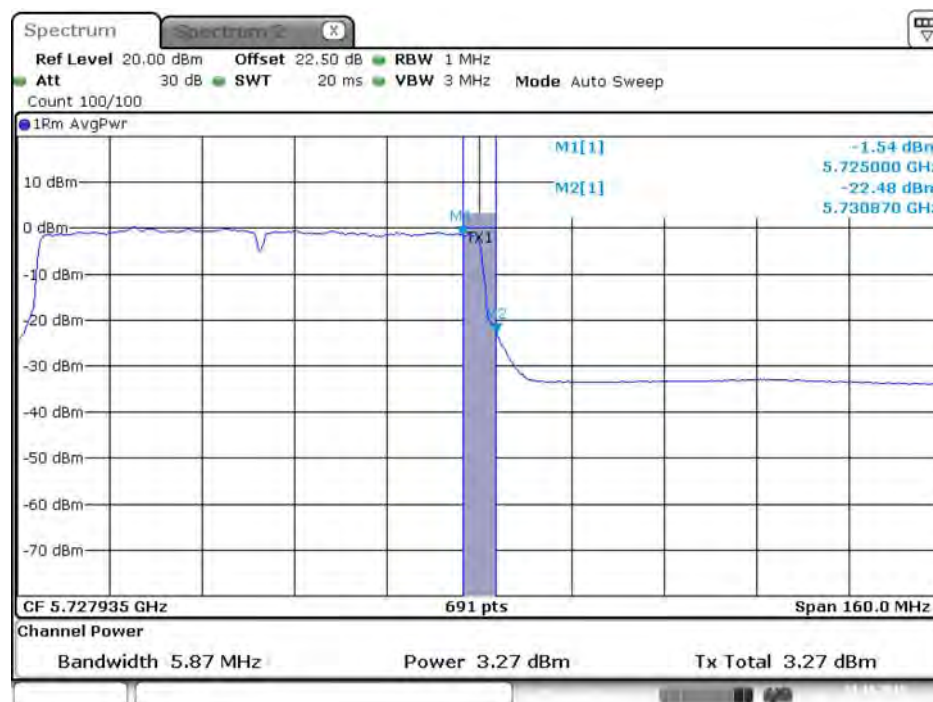


Date: 23.OCT.2015 17:36:10

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 3 / 5690 MHz (UNII 3)

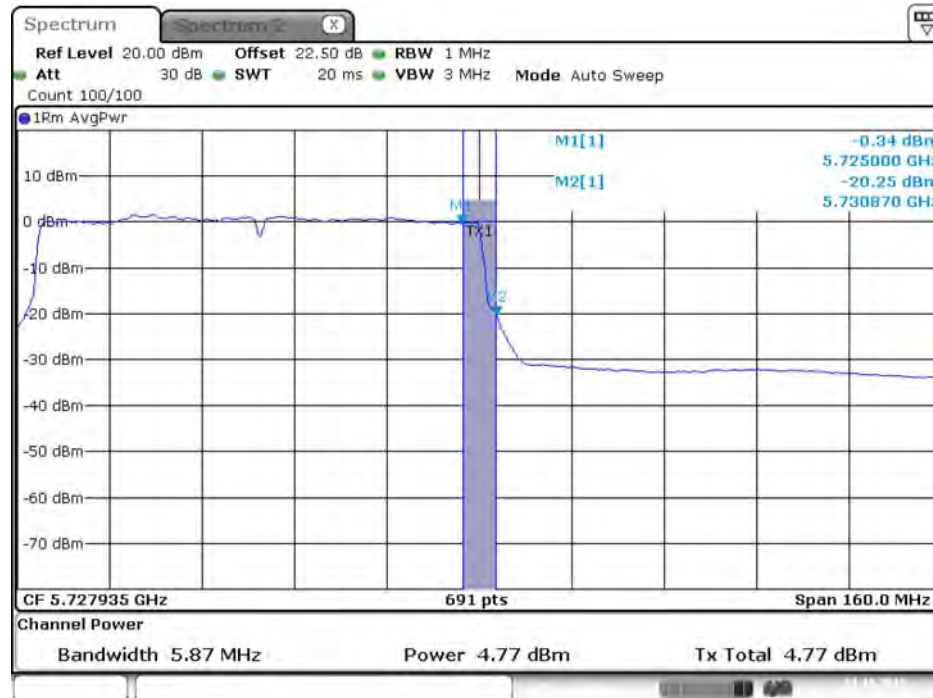

Date: 23.OCT.2015 17:36:17


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 4 / 5690 MHz (UNII 3)

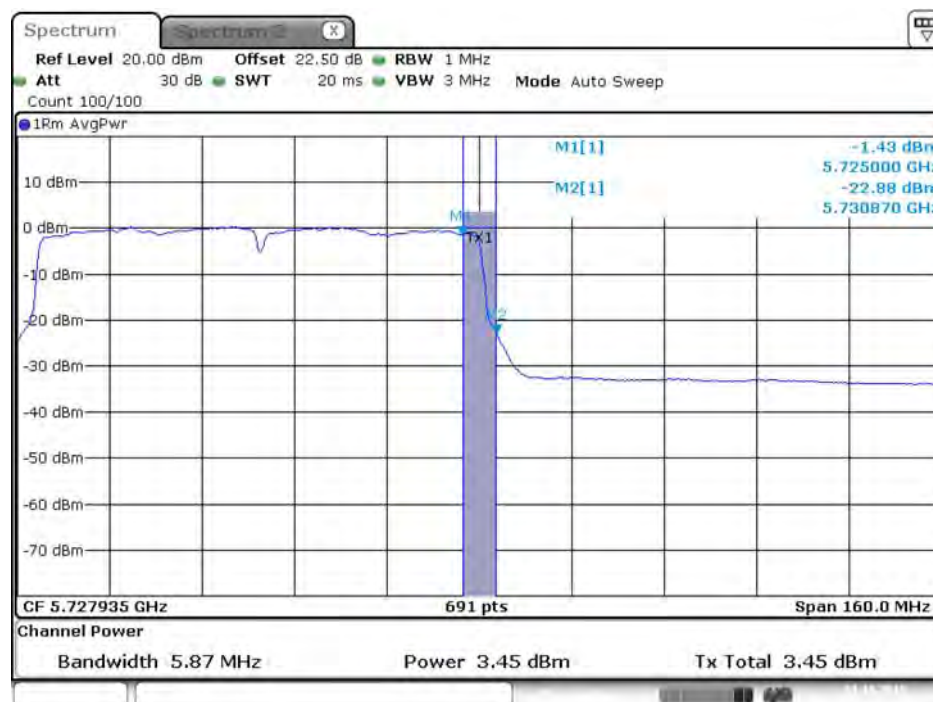

Date: 23.OCT.2015 17:36:24


Mode 7: EUT 1 + Set 9 Dipole Antenna / 4.67 dBi

Conducted Output Power Plot on Configuration IEEE 802.11a / Chain 1 / 5720 MHz (UNII 2C)

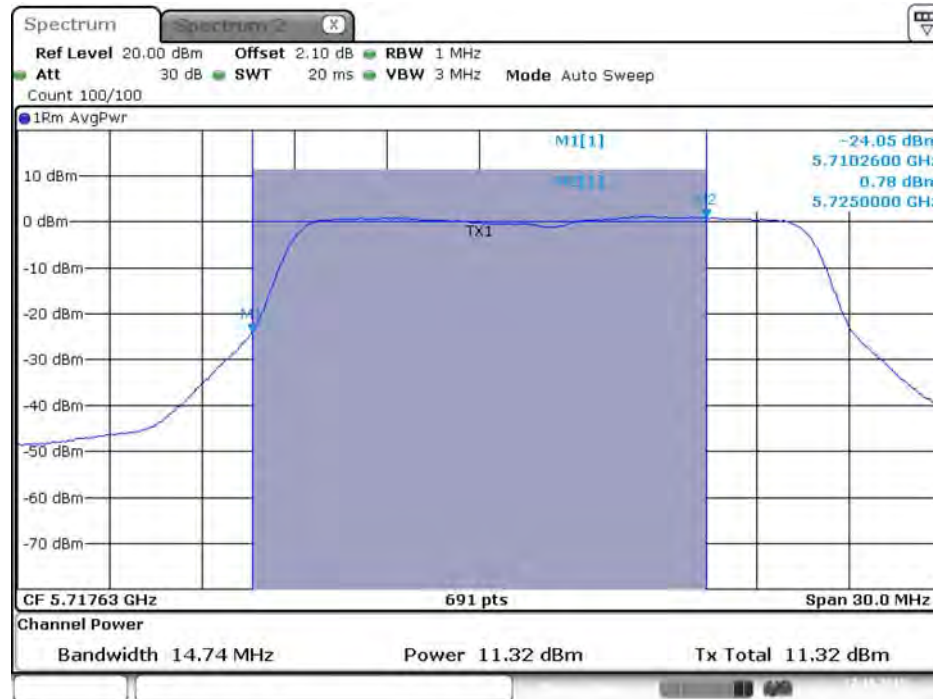

Date: 27.OCT.2015 00:11:52

Conducted Output Power Plot on Configuration IEEE 802.11a / Chain 2 / 5720 MHz (UNII 2C)

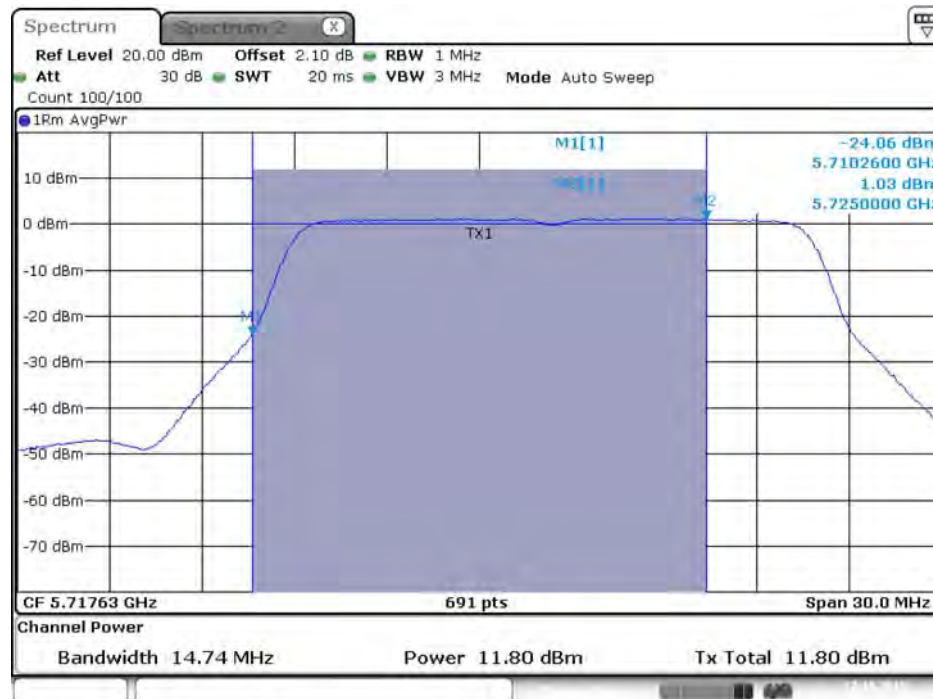

Date: 27.OCT.2015 00:11:59



Spectrum Spectrum2 X

Ref Level 20.00 dBm Offset 2.10 dB RBW 1 MHz
Att 30 dB SWT 20 ms VBW 3 MHz Mode Auto Sweep

Count 100/100

1Rm AvgPwr

CF 5.71763 GHz 691 pts Span 30.0 MHz

Channel Power

Bandwidth 14.74 MHz Power 11.93 dBm Tx Total 11.93 dBm

Spectrum Spectrum 2 X

Ref Level 20.00 dBm Offset 2.10 dB RBW 1 MHz
 Att 30 dB SWT 20 ms VBW 3 MHz Mode Auto Sweep
 Count 100/100

1Rm AvgPwr

10 dBm
 0 dBm
 -10 dBm
 -20 dBm
 -30 dBm
 -40 dBm
 -50 dBm
 -60 dBm
 -70 dBm

MI[1]
 MI[1]
 TX1
 -24.31 dBm
 5.7102600 GHz
 1.16 dBm
 5.7250000 GHz

CF 5.71763 GHz 691 pts Span 30.0 MHz

Channel Power
 Bandwidth 14.74 MHz Power 11.99 dBm Tx Total 11.99 dBm

Issued Date : Dec. 14, 2015



Spectrum Spectrum2 X

Ref Level 20.00 dBm Offset 2.10 dB RBW 1 MHz

Att 30 dB SWT 20 ms VBW 3 MHz Mode Auto Sweep

Count 100/100

1Rm AvgPwr

10 dBm

0 dBm

-10 dBm

-20 dBm

-30 dBm

-40 dBm

-50 dBm

-60 dBm

-70 dBm

CF 5.727285 GHz

691 pts

Span 40.0 MHz

Channel Power

Bandwidth 4.57 MHz Power 5.36 dBm Tx Total 5.36 dBm

M1[1] 0.83 dBm 5.7250000 GHz

M2[1] -21.80 dBm 5.7295700 GHz

TX1

Spectrum Spectrum 2 X

Ref Level 20.00 dBm Offset 2.10 dB RBW 1 MHz
Att 30 dB SWT 20 ms VBW 3 MHz Mode Auto Sweep
Count 100/100

1Rm AvgPwr

1.03 dBm
5.7250000 GHz
-21.74 dBm
5.7295700 GHz

M1
TX1
M2

CF 5.727285 GHz 691 pts Span 40.0 MHz

Channel Power

Bandwidth 4.57 MHz Power 5.60 dBm Tx Total 5.60 dBm

Issued Date : Dec. 14, 2015

Conducted Output Power Plot on Configuration IEEE 802. 11a / Chain 3 / 5720 MHz (UNII 3)




Date: 27.OCT.2015 00:12:09

Conducted Output Power Plot on Configuration IEEE 802. 11a / Chain 4 / 5720 MHz (UNII 3)




Date: 27.OCT.2015 00:12:16

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz (UNII 2C)

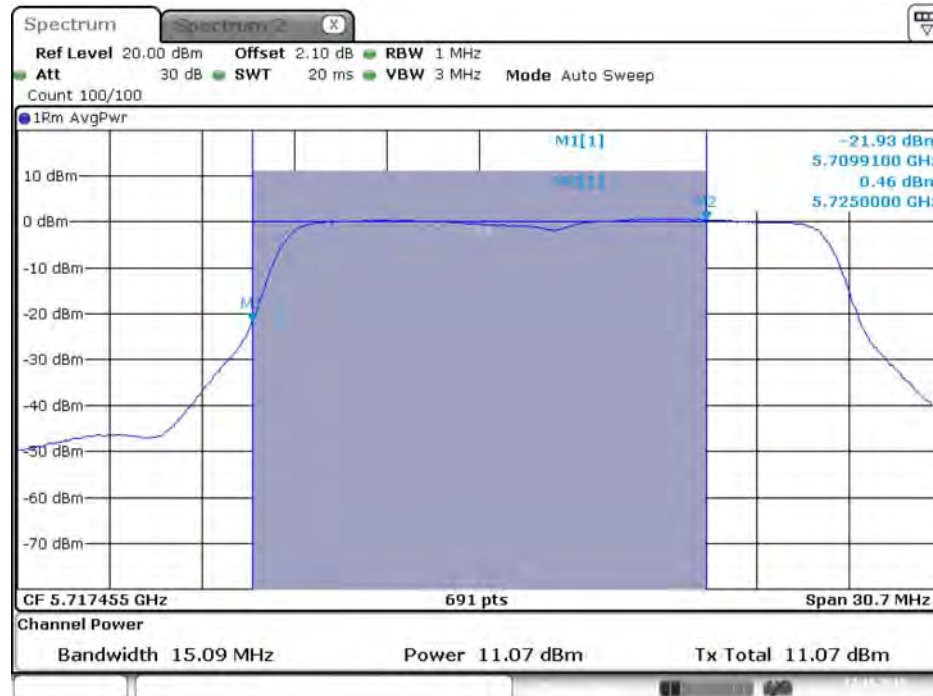


Date: 27.OCT.2015 00:17:08

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 2 / 5720 MHz (UNII 2C)

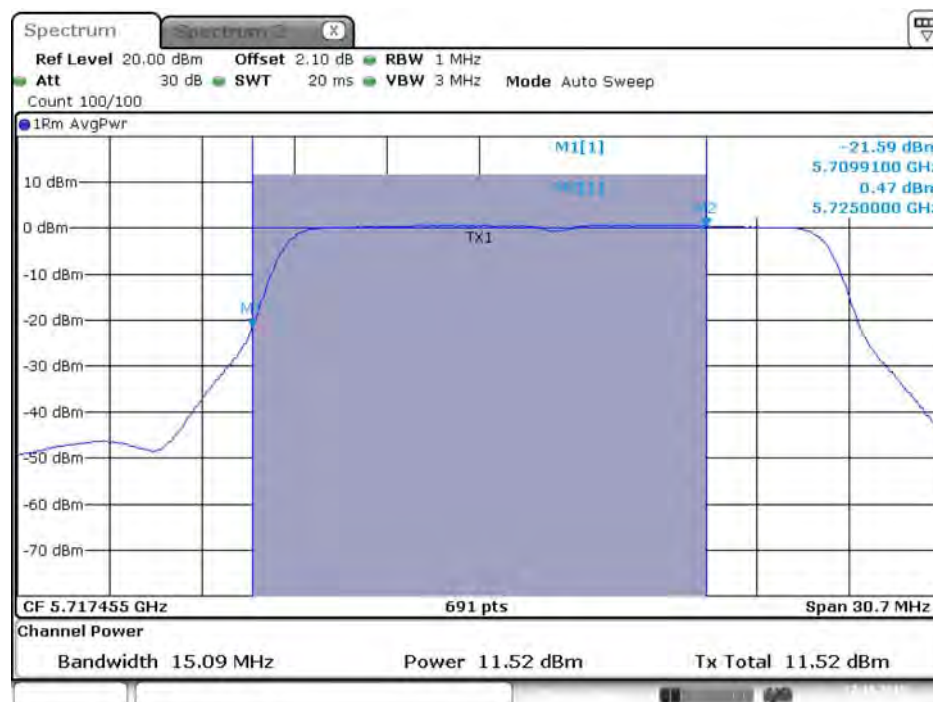


Date: 27.OCT.2015 00:17:15

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 3 / 5720 MHz (UNII 2C)

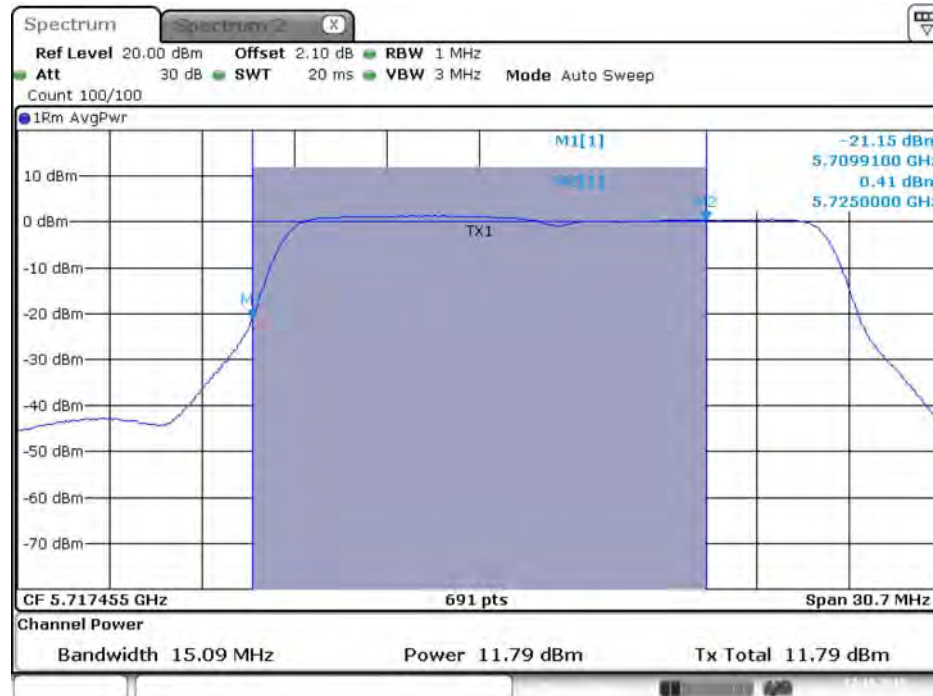

Date: 27.OCT.2015 00:17:22

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 / 5720 MHz (UNII 2C)

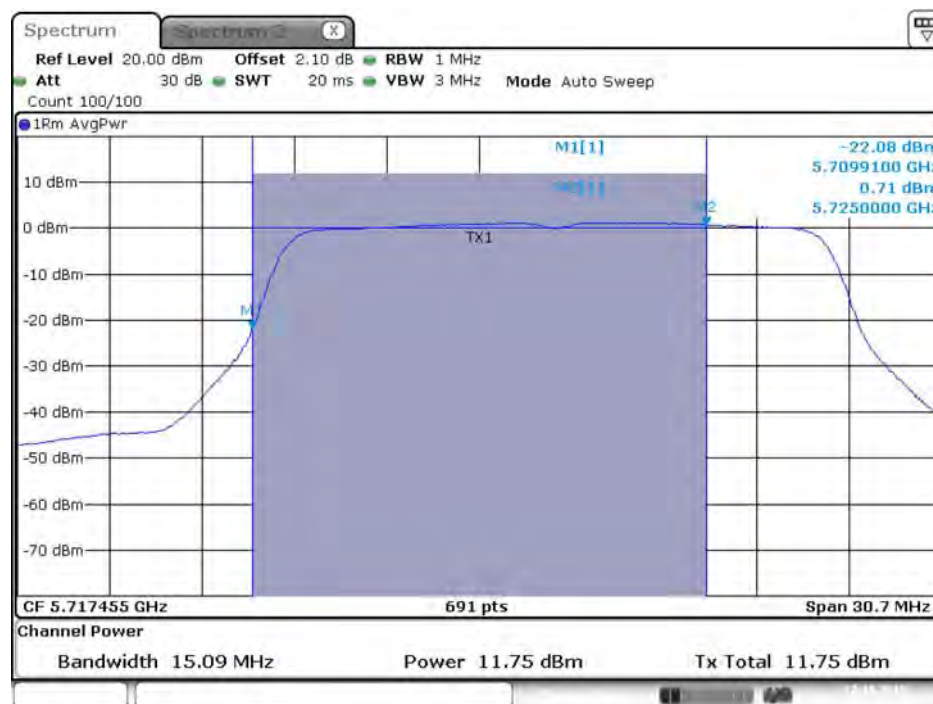

Date: 27.OCT.2015 00:17:29

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz (UNII 3)



Date: 27.OCT.2015 00:17:11

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 2 / 5720 MHz (UNII 3)



Date: 27.OCT.2015 00:17:18

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 3 / 5720 MHz (UNII 3)




Date: 27.OCT.2015 00:17:25

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 / 5720 MHz (UNII 3)




Date: 27.OCT.2015 00:17:32

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 2C)

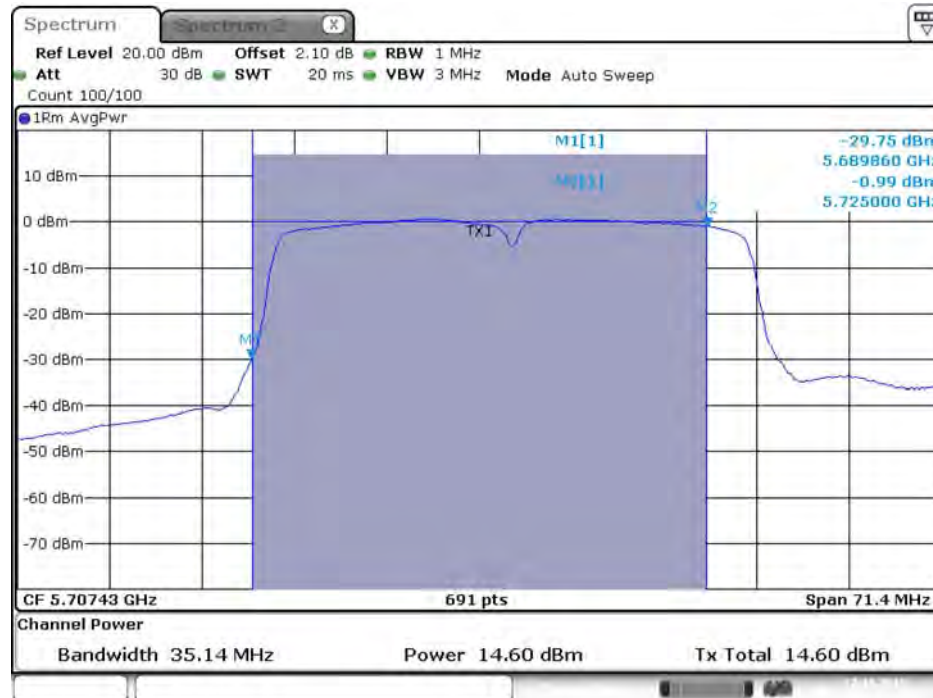


Date: 27.OCT.2015 00:24:35

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 2 / 5710 MHz (UNII 2C)

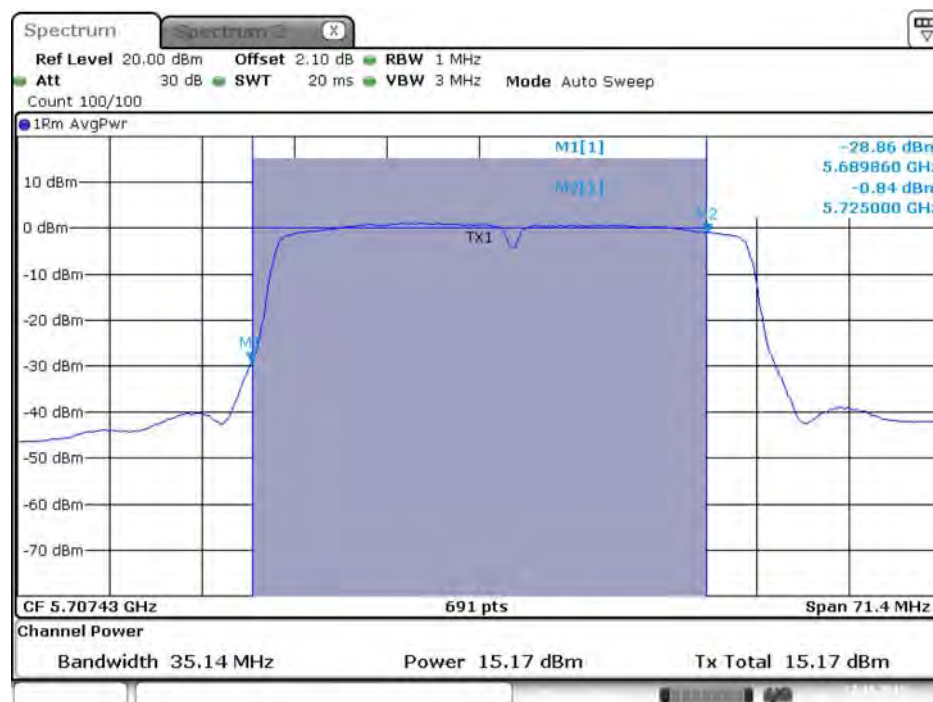


Date: 27.OCT.2015 00:24:43

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 3 / 5710 MHz (UNII 2C)

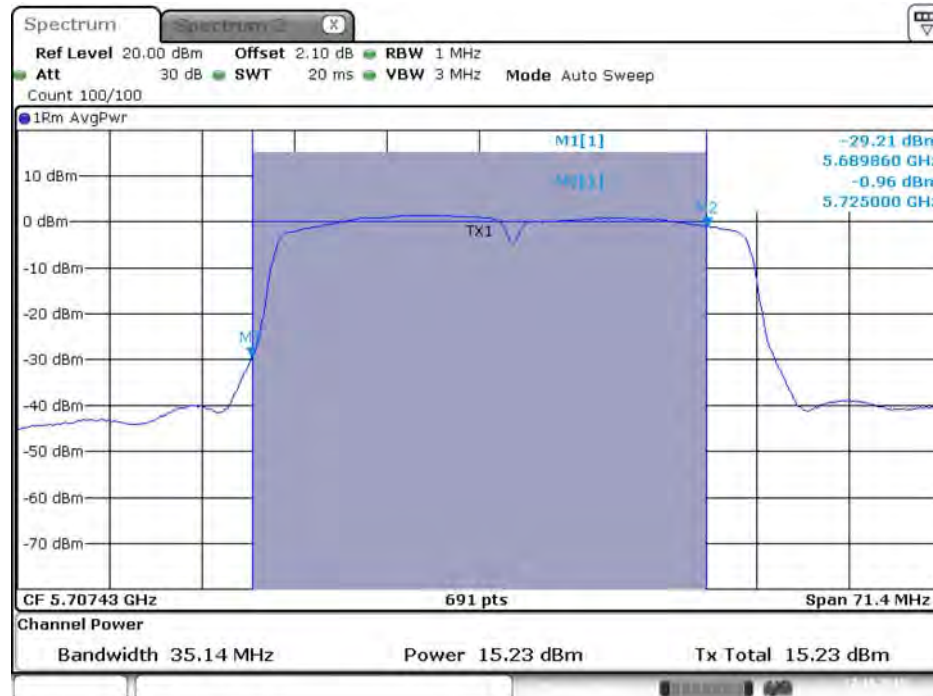

Date: 27.OCT.2015 00:24:50

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 / 5710 MHz (UNII 2C)

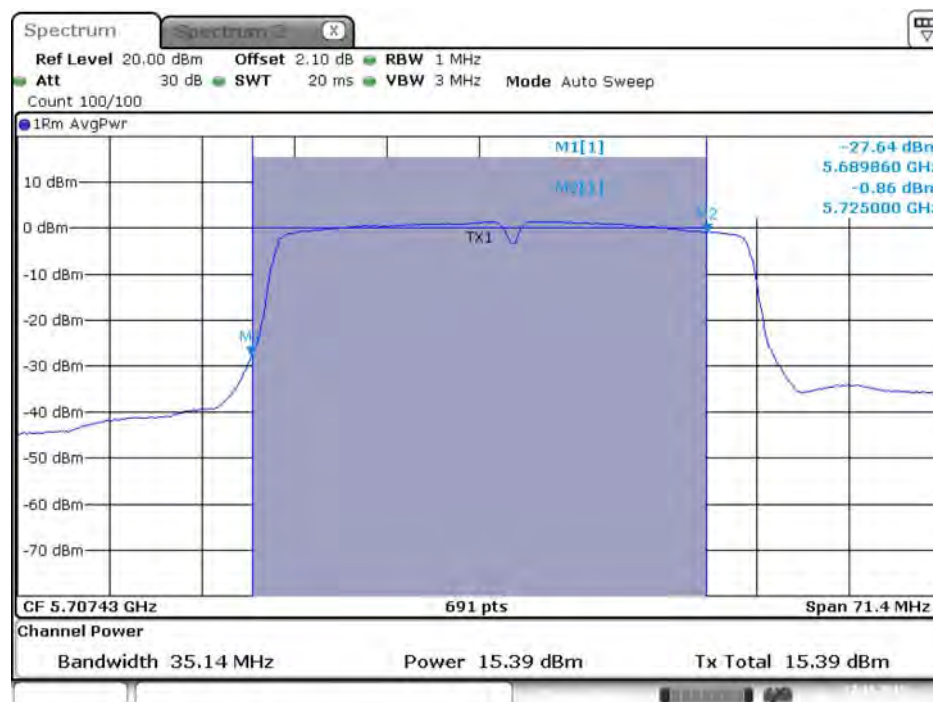

Date: 27.OCT.2015 00:24:57

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 3)



Date: 27.OCT.2015 00:24:39

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 2 / 5710 MHz (UNII 3)



Date: 27.OCT.2015 00:24:46

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 3 / 5710 MHz (UNII 3)




Date: 27.OCT.2015 00:24:53

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 / 5710 MHz (UNII 3)




Date: 27.OCT.2015 00:25:00


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz
(UNII 2C)

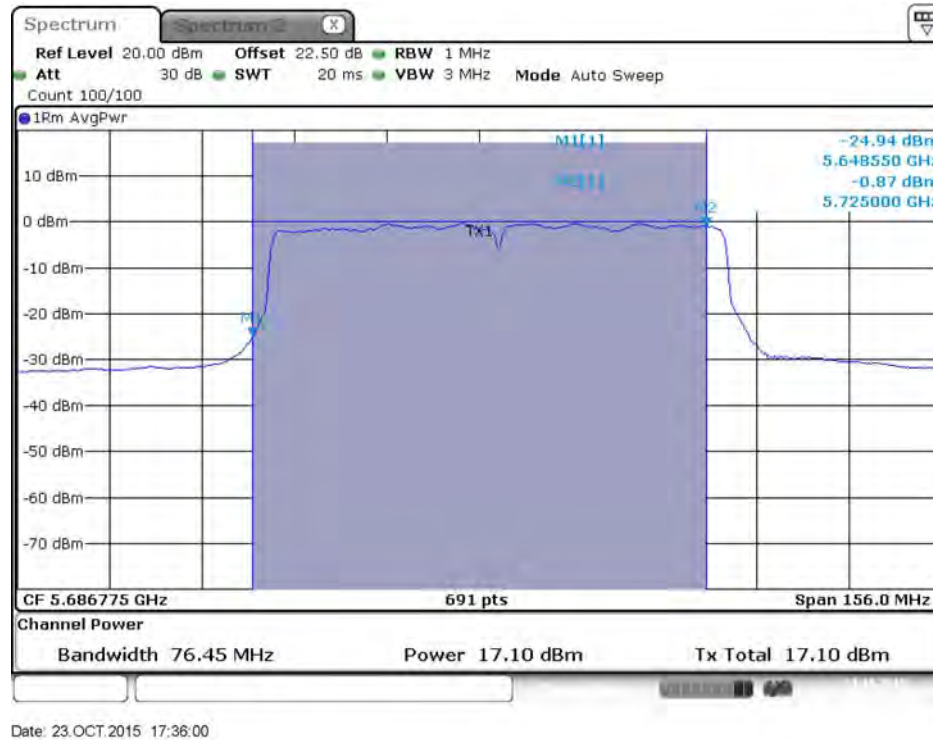

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 2 / 5690 MHz
(UNII 2C)

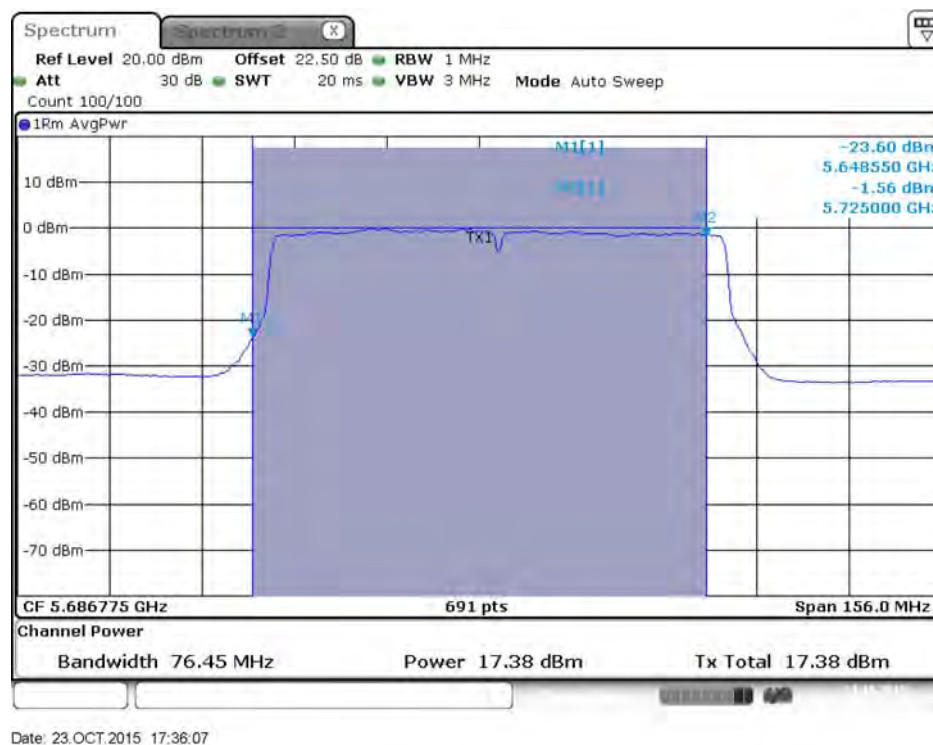


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 3 / 5690 MHz (UNII 2C)

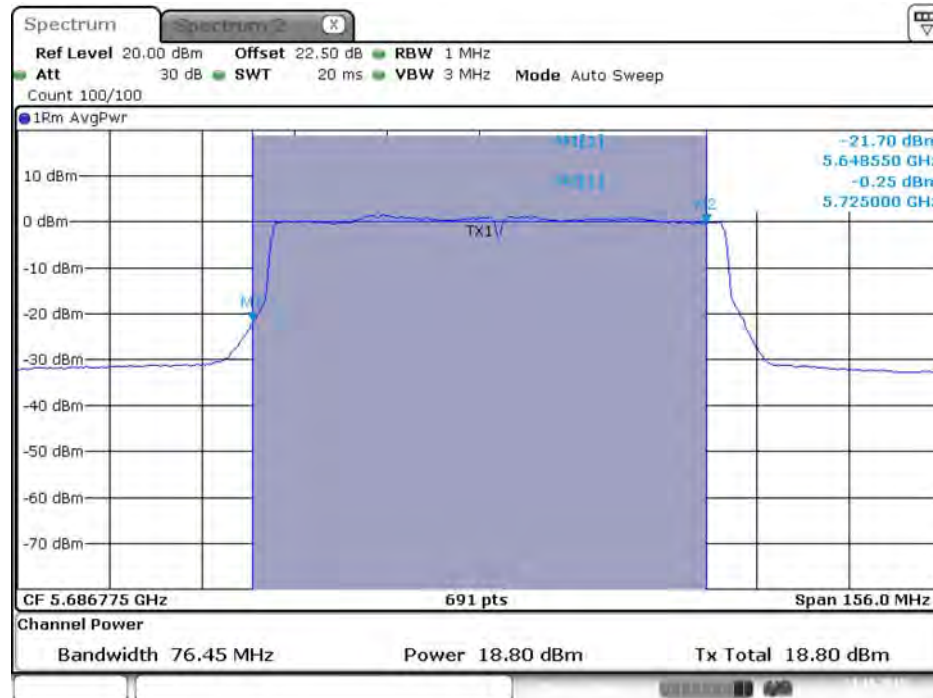


Date: 23.OCT.2015 17:36:14

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 4 / 5690 MHz (UNII 2C)

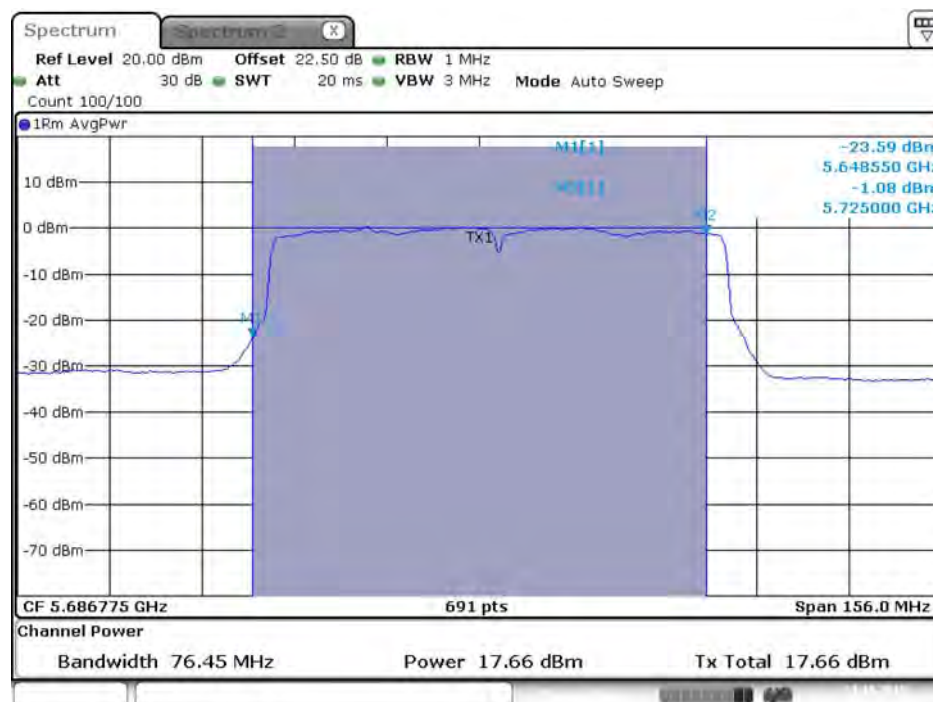


Date: 23.OCT.2015 17:36:21

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz
(UNII 3)

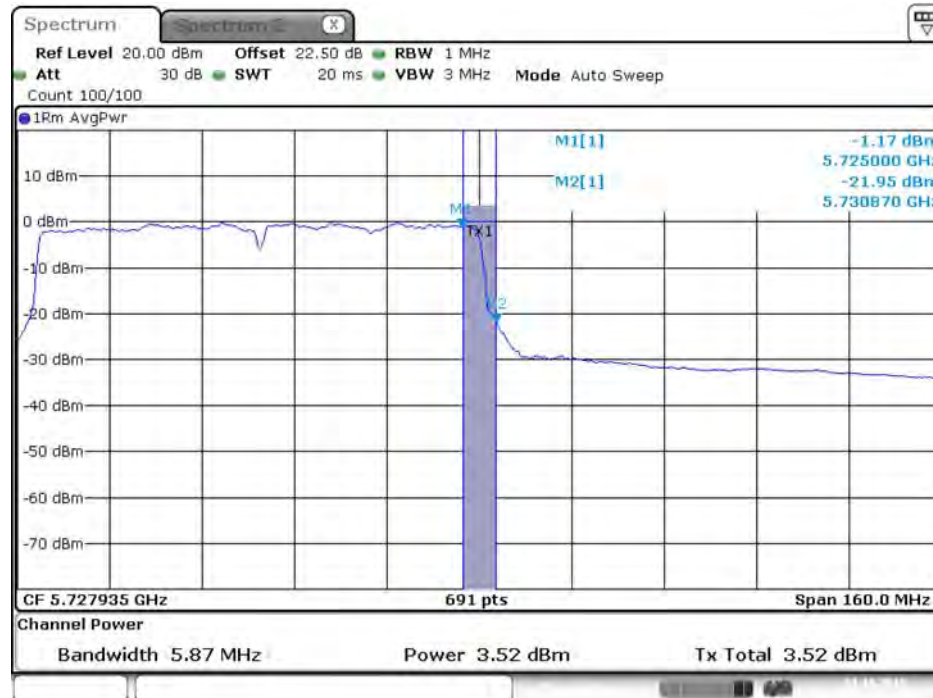


Date: 23.OCT.2015 17:36:03

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 2 / 5690 MHz
(UNII 3)

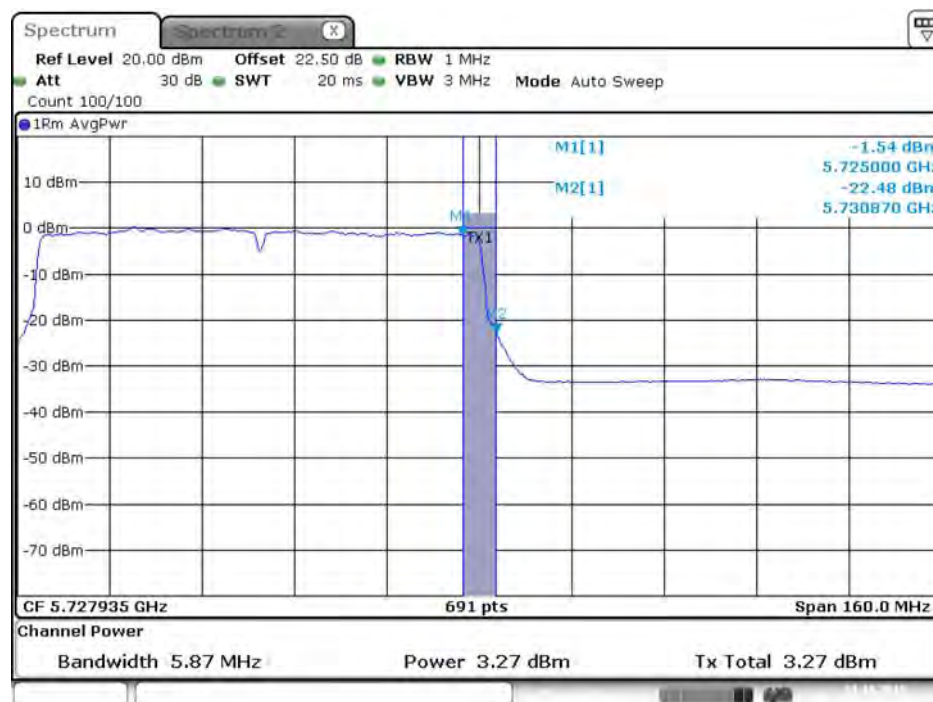


Date: 23.OCT.2015 17:36:10

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 3 / 5690 MHz (UNII 3)

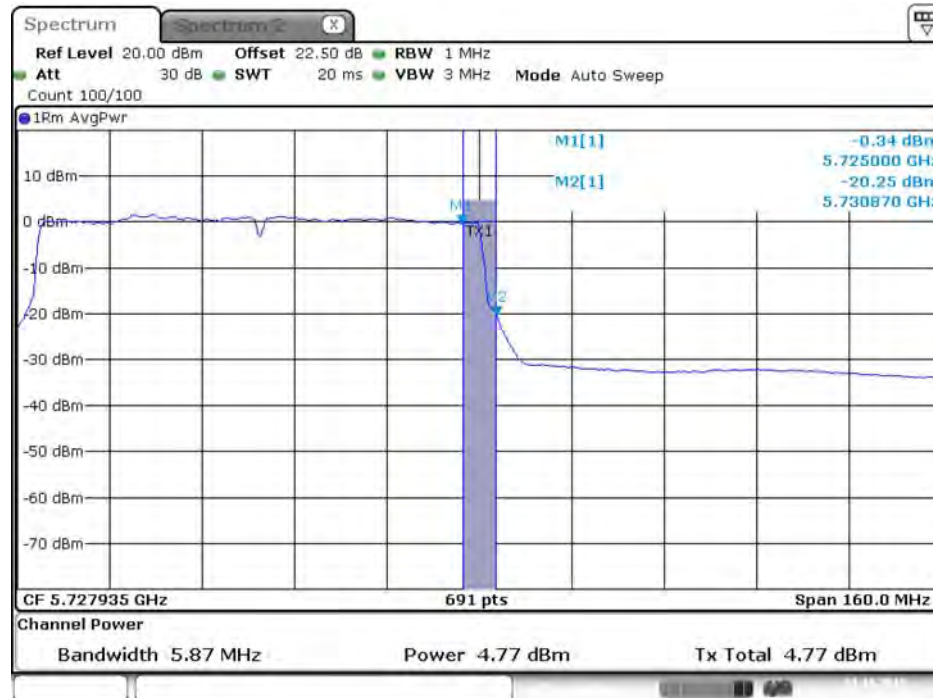

Date: 23.OCT.2015 17:36:17


Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 4 / 5690 MHz (UNII 3)

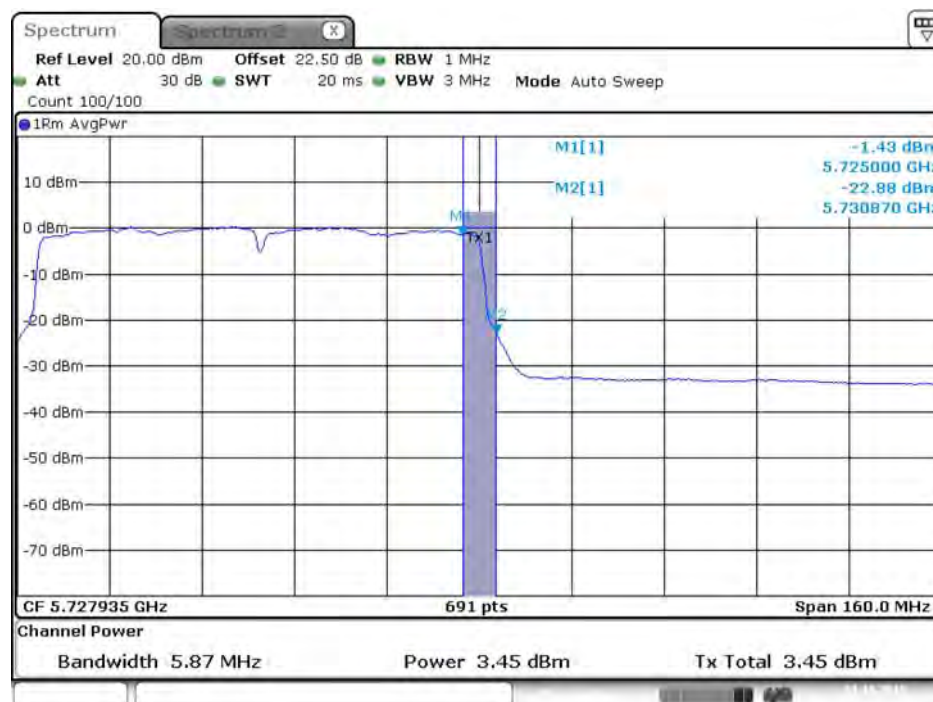

Date: 23.OCT.2015 17:36:24


Mode 8: EUT 2 + Set 10 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi

Conducted Output Power Plot on Configuration IEEE 802.11a / Chain 1 / 5720 MHz (UNII 2C)

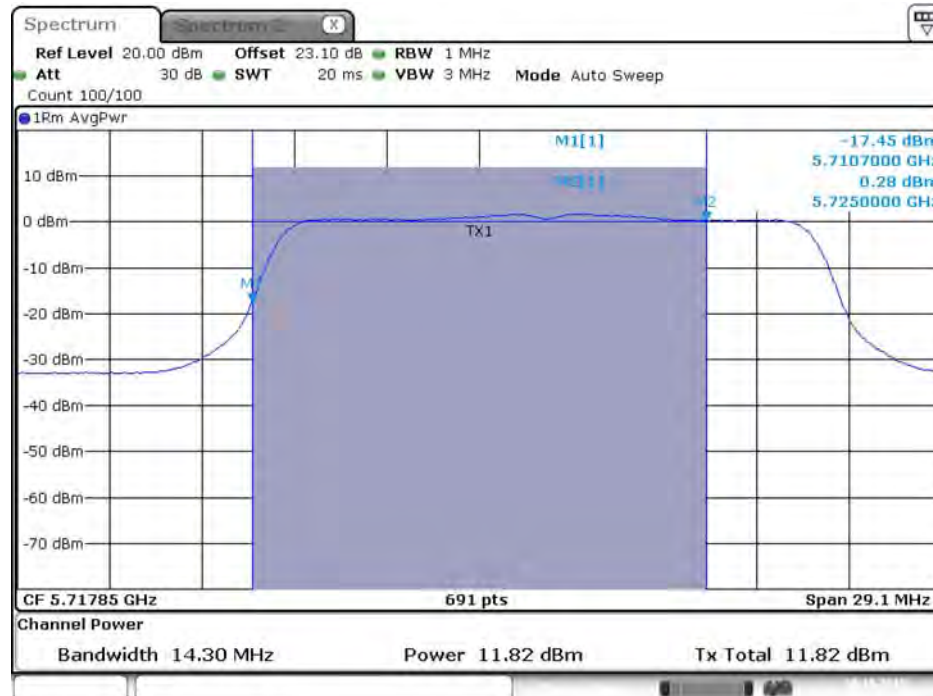


Date: 20.OCT.2015 22:39:19

Conducted Output Power Plot on Configuration IEEE 802.11a / Chain 2 / 5720 MHz (UNII 2C)

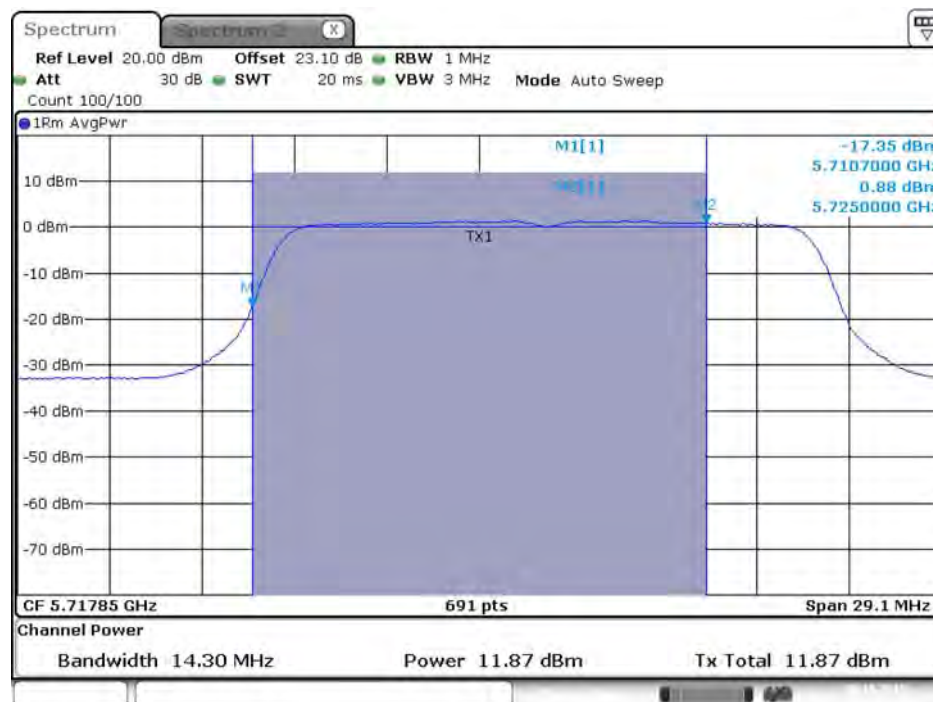


Date: 20.OCT.2015 22:39:26

Conducted Output Power Plot on Configuration IEEE 802.11a / Chain 3 / 5720 MHz (UNII 2C)

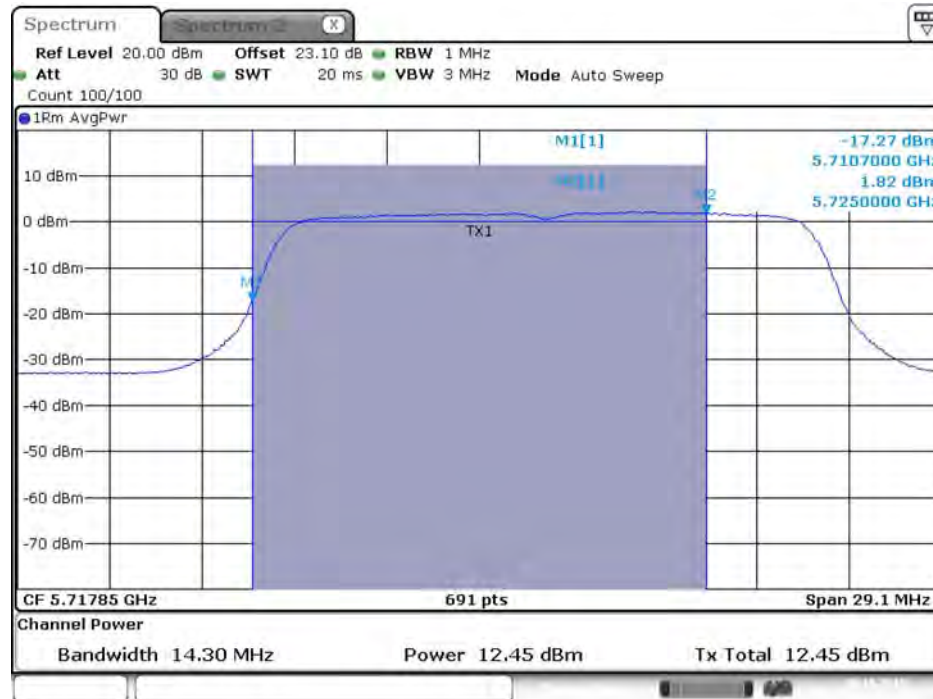


Date: 20.OCT.2015 22:39:33

Conducted Output Power Plot on Configuration IEEE 802.11a / Chain 4 / 5720 MHz (UNII 2C)

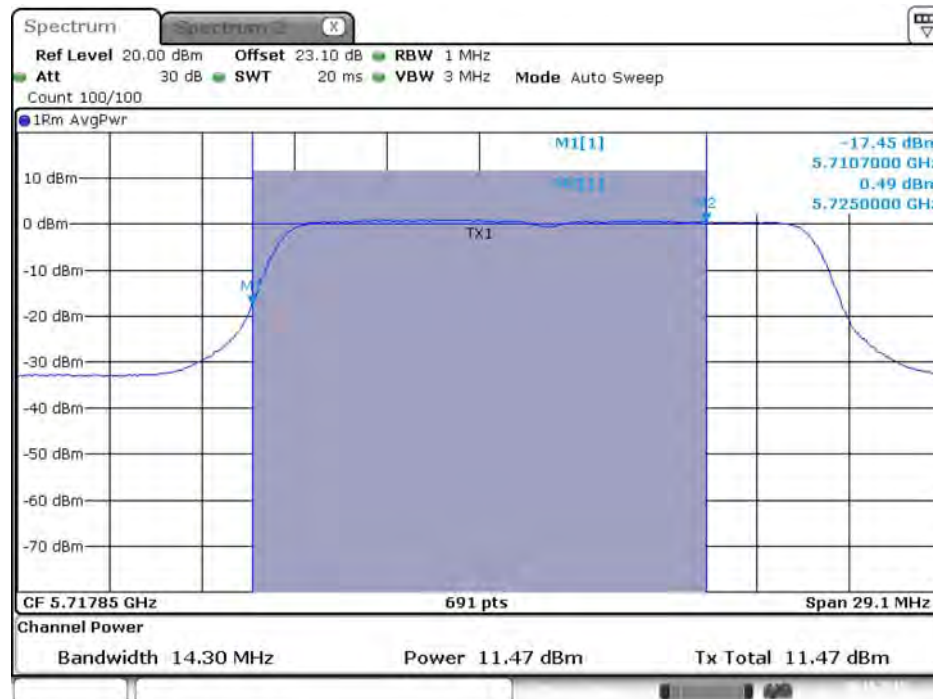


Date: 20.OCT.2015 22:39:40

Conducted Output Power Plot on Configuration IEEE 802. 11a / Chain 1 / 5720 MHz (UNII 3)

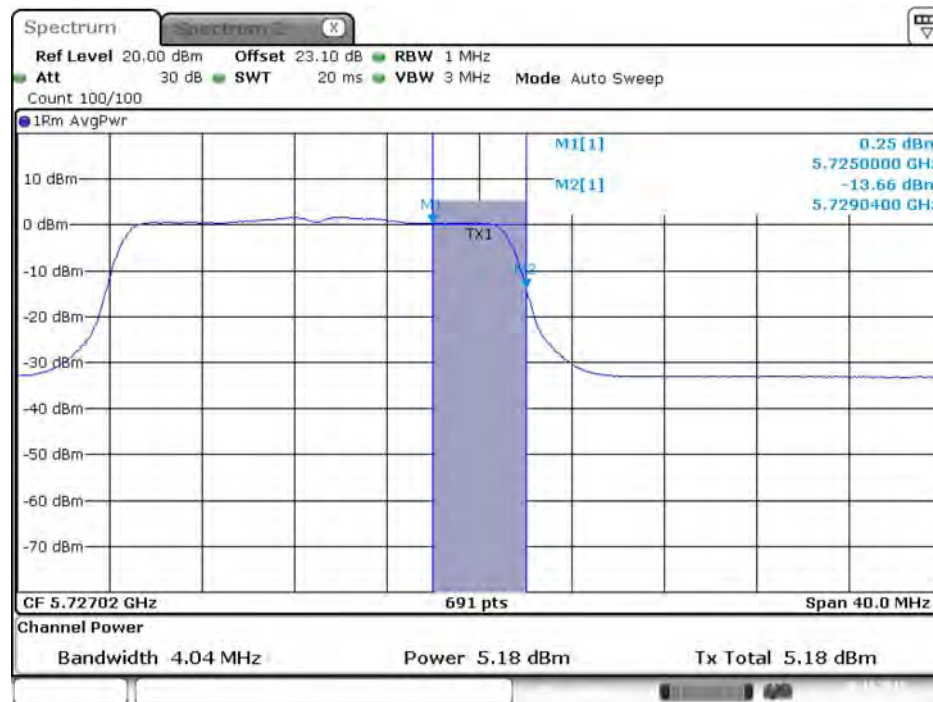

Date: 20.OCT.2015 22:39:23

Conducted Output Power Plot on Configuration IEEE 802. 11a / Chain 2 / 5720 MHz (UNII 3)

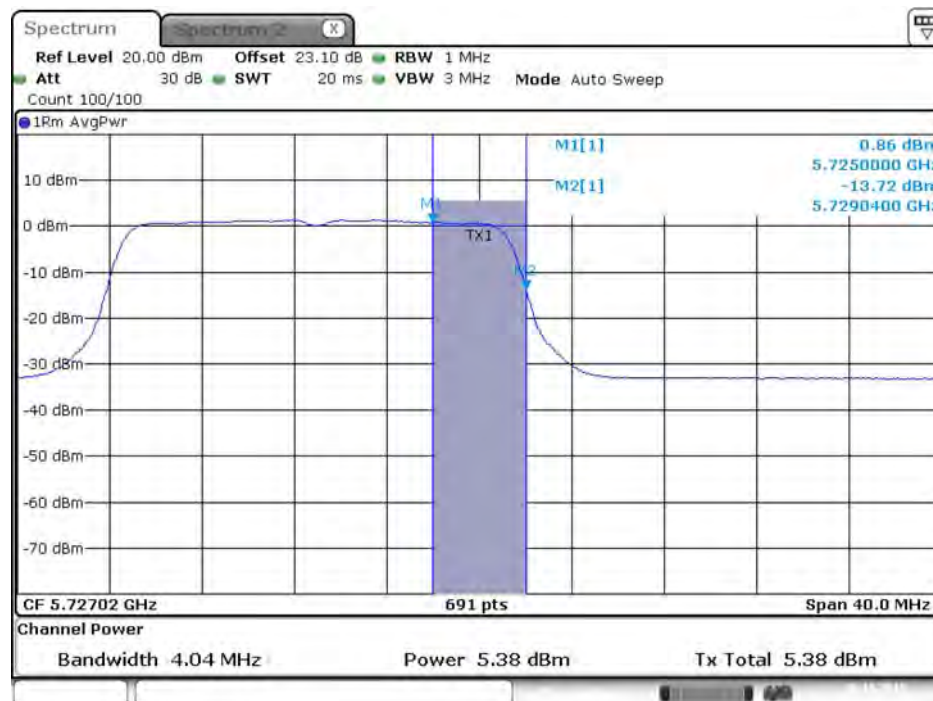

Date: 20.OCT.2015 22:39:30



Spectrum Spectrum2 X

Ref Level 20.00 dBm Offset 23.10 dB RBW 1 MHz
Att 30 dB SWT 20 ms VBW 3 MHz Mode Auto Sweep
Count 100/100

1Rm AvgPwr

1.73 dBm
5.7250000 GHz
-13.02 dBm
5.7290400 GHz

CF 5.72702 GHz 691 pts Span 40.0 MHz

Channel Power

Bandwidth 4.04 MHz Power 6.20 dBm Tx Total 6.20 dBm

Spectrum Spectrum 2 X

Ref Level 20.00 dBm **Offset** 23.10 dB **RBW** 1 MHz
Att 30 dB **SWT** 20 ms **VBW** 3 MHz **Mode** Auto Sweep
Count 100/100

1Rm AvgPwr

0.55 dBm
5.7250000 GHz
-13.71 dBm
5.7290400 GHz


10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm

CF 5.72702 GHz **691 pts** **Span 40.0 MHz**

Channel Power
Bandwidth 4.04 MHz **Power** 5.19 dBm **Tx Total** 5.19 dBm


Issued Date : Dec. 14, 2015

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz (UNII 2C)

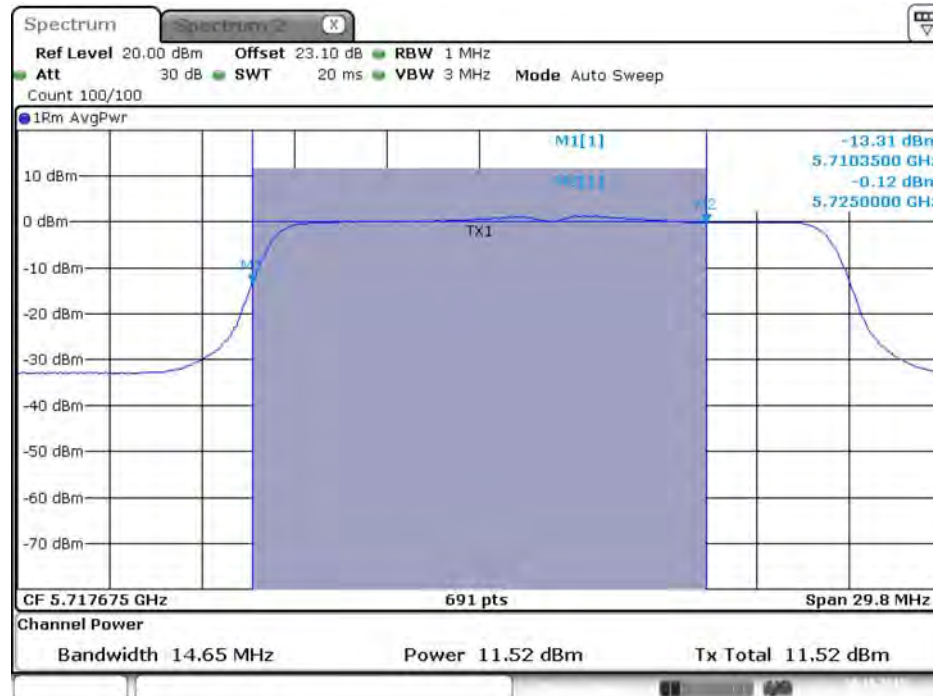


Date: 20.OCT.2015 23:00:44

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 2 / 5720 MHz (UNII 2C)

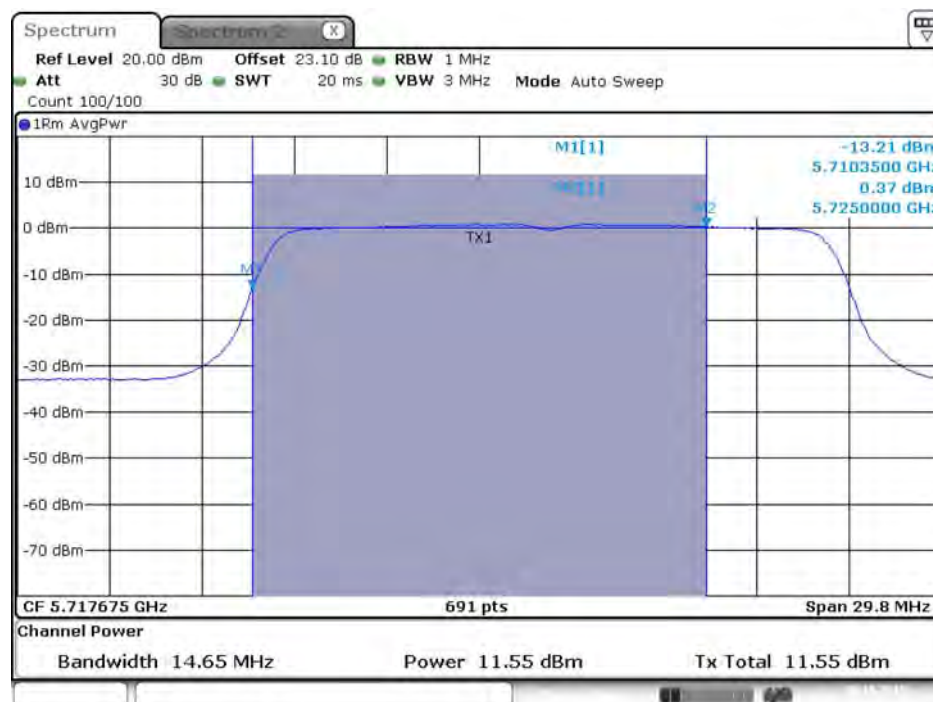


Date: 20.OCT.2015 23:00:51

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 3 / 5720 MHz (UNII 2C)

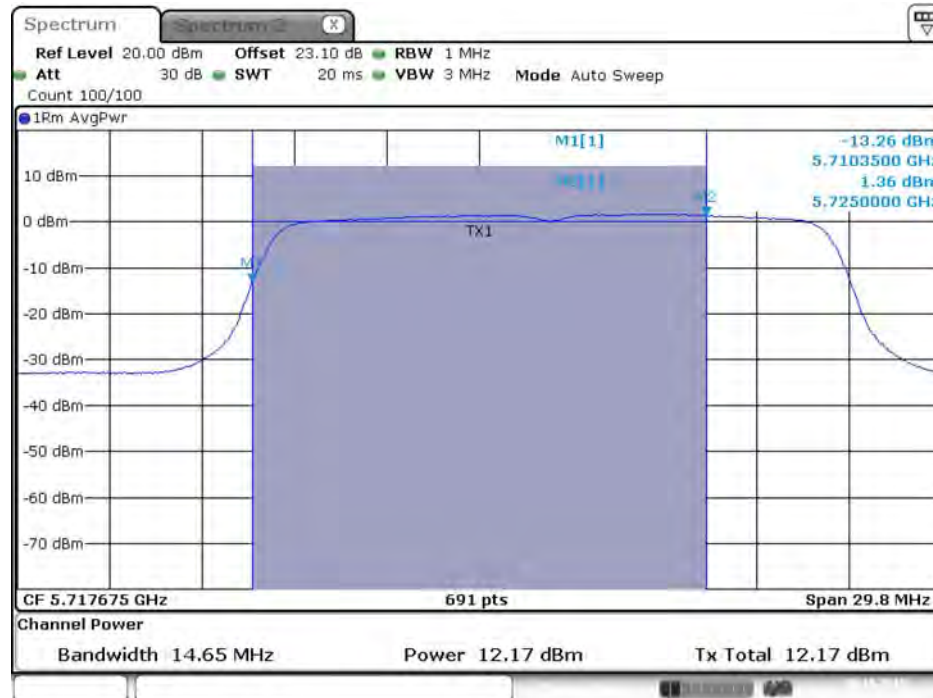


Date: 20.OCT.2015 23:00:58

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 / 5720 MHz (UNII 2C)

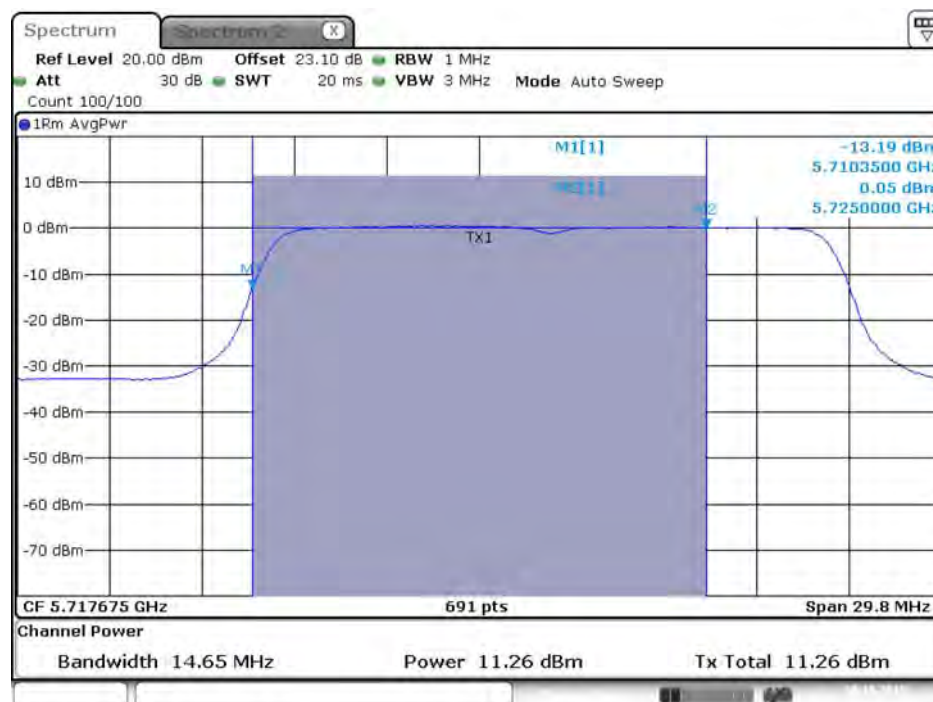


Date: 20.OCT.2015 23:01:06

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 / 5720 MHz (UNII 3)

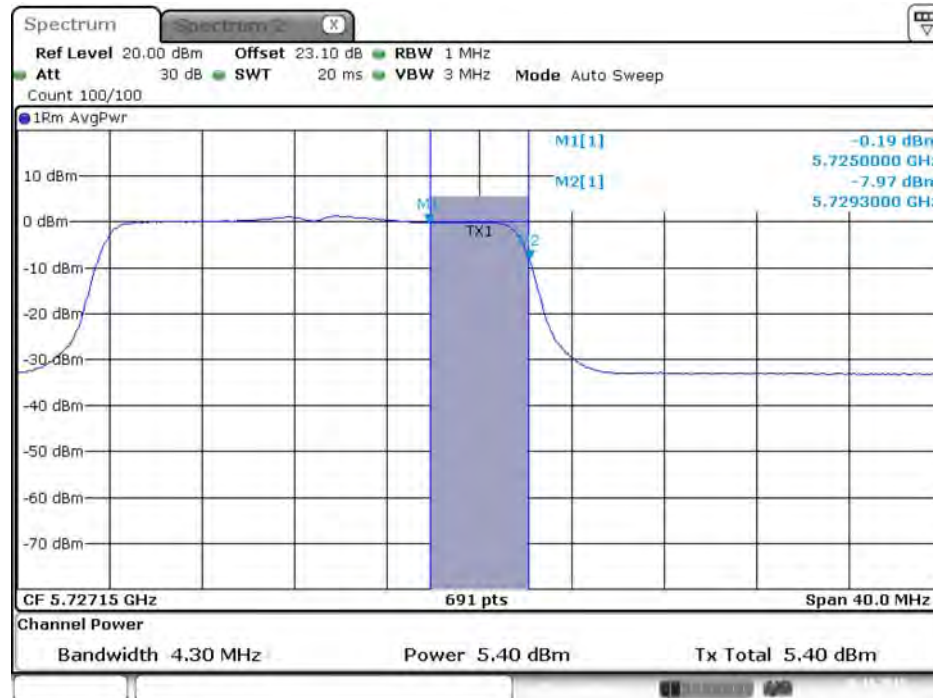

Date: 20.OCT.2015 23:00:48

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 2 / 5720 MHz (UNII 3)

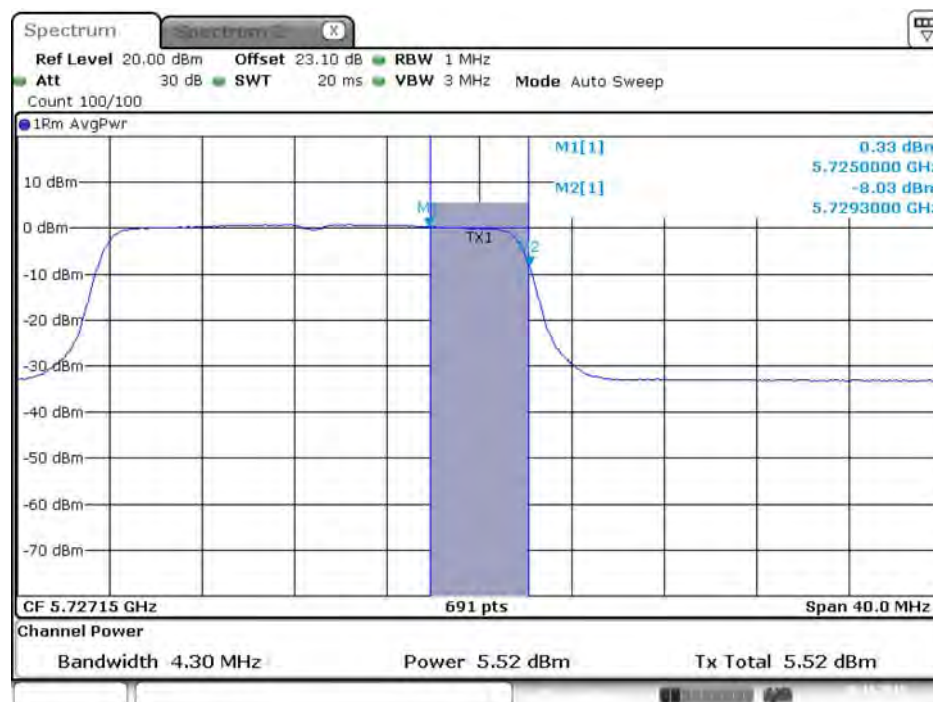


Date: 20.OCT.2015 23:00:55

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 3 / 5720 MHz (UNII 3)




Date: 20.OCT.2015 23:01:02

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 / 5720 MHz (UNII 3)

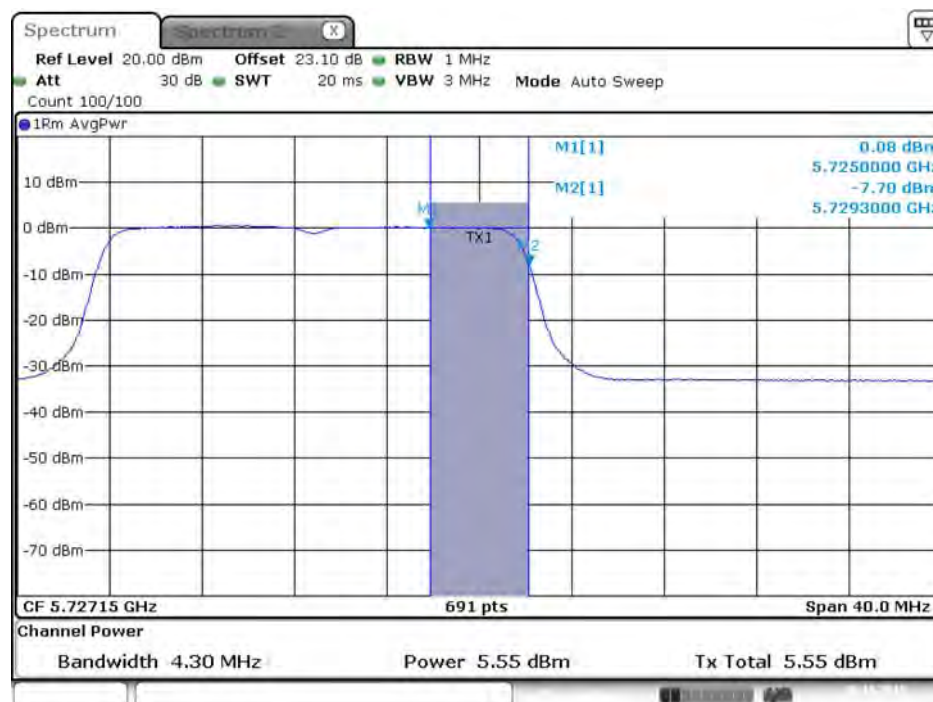


Date: 20.OCT.2015 23:01:09

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 2C)

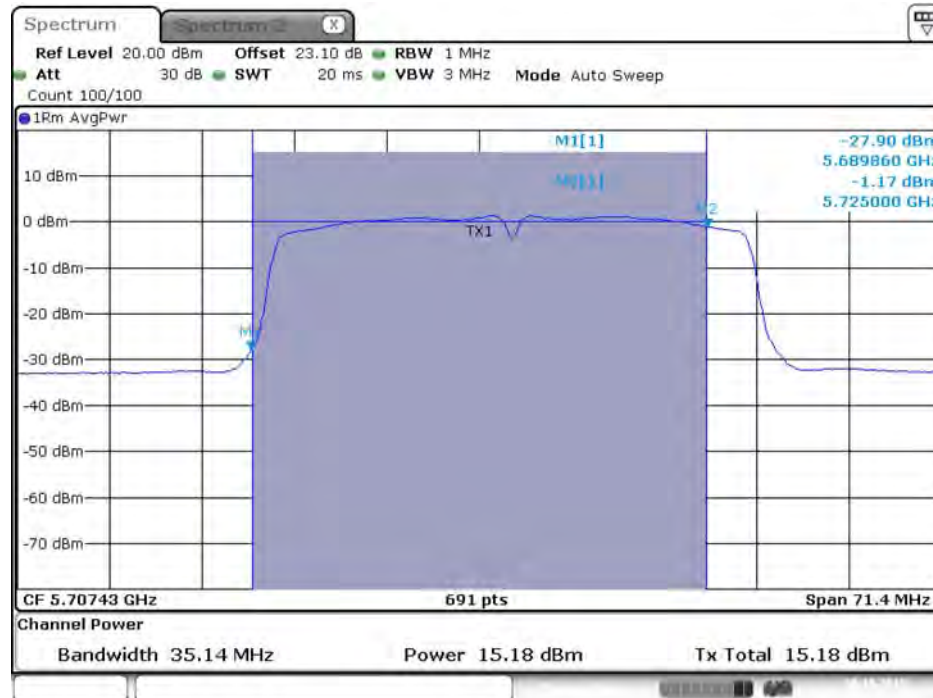


Date: 20.OCT.2015 22:46:40

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 2 / 5710 MHz (UNII 2C)

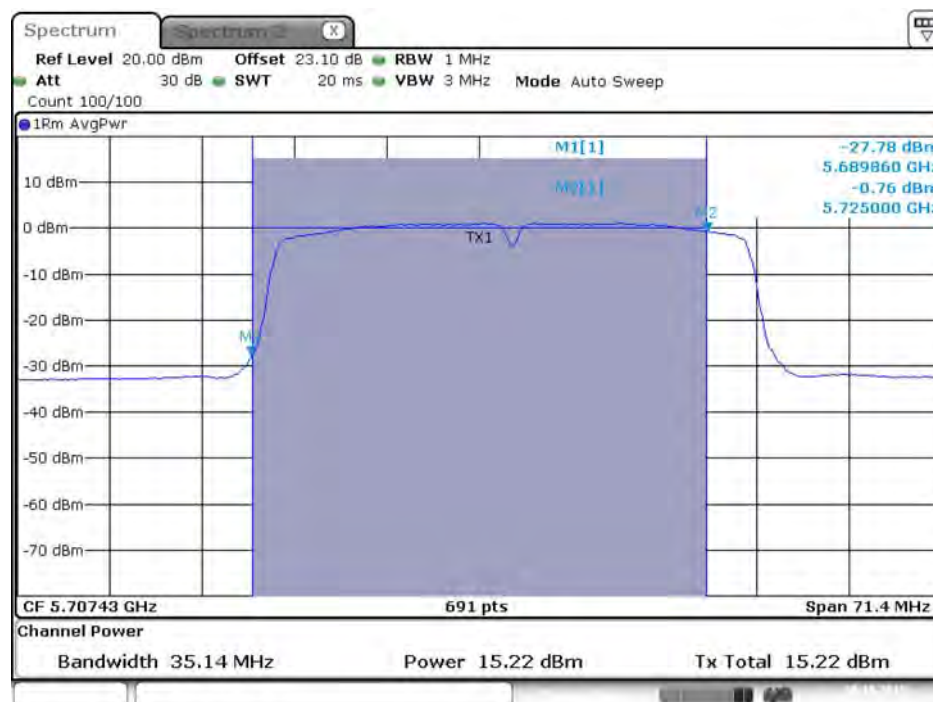


Date: 20.OCT.2015 22:46:47

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 3 / 5710 MHz (UNII 2C)

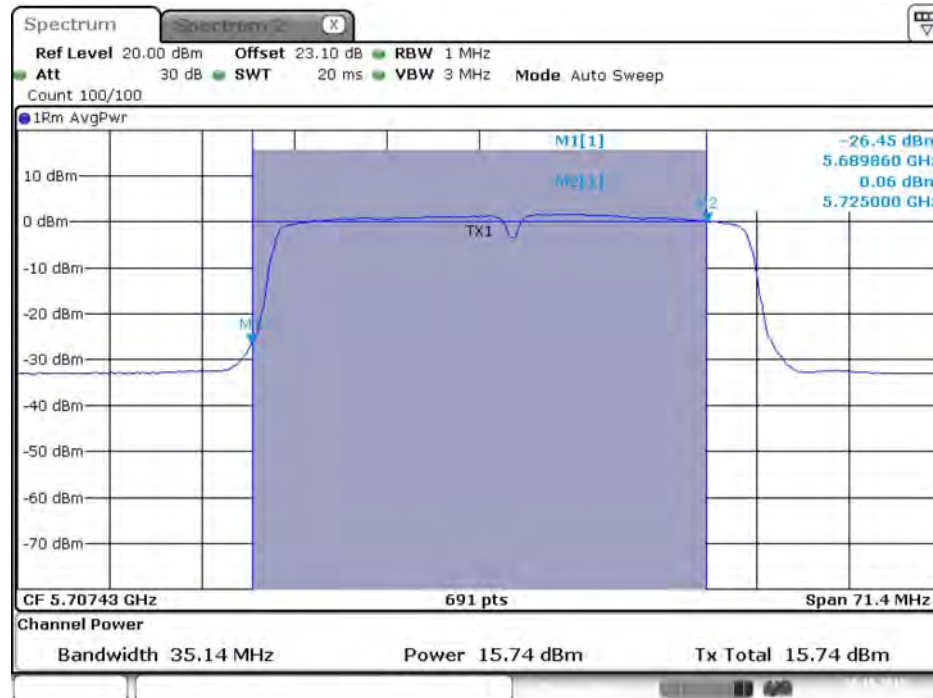


Date: 20.OCT.2015 22:46:54

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 / 5710 MHz (UNII 2C)

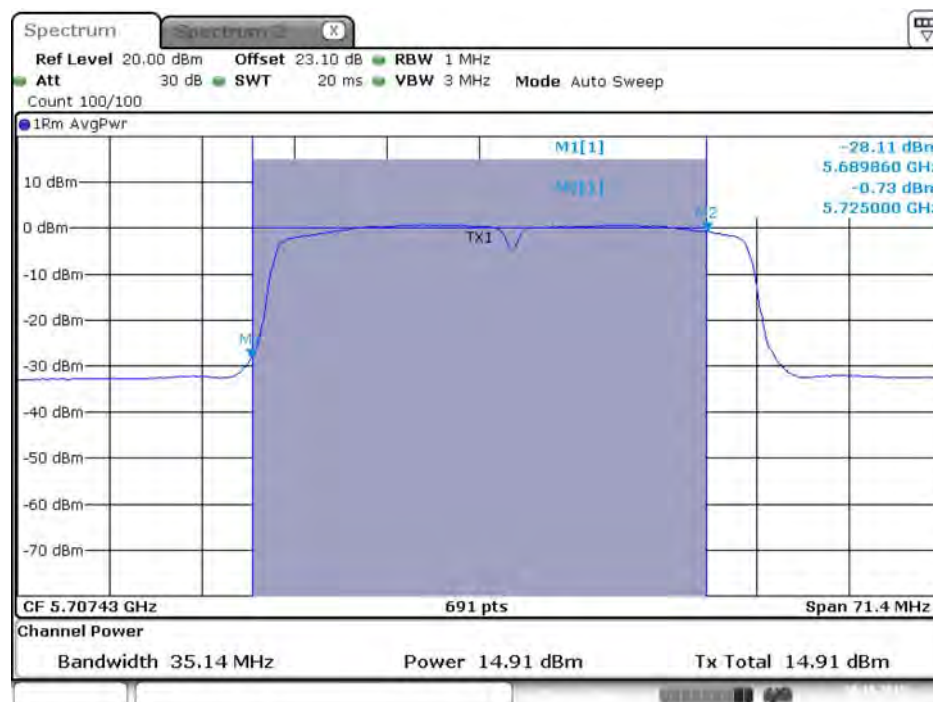


Date: 20.OCT.2015 22:47:01

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 / 5710 MHz (UNII 3)

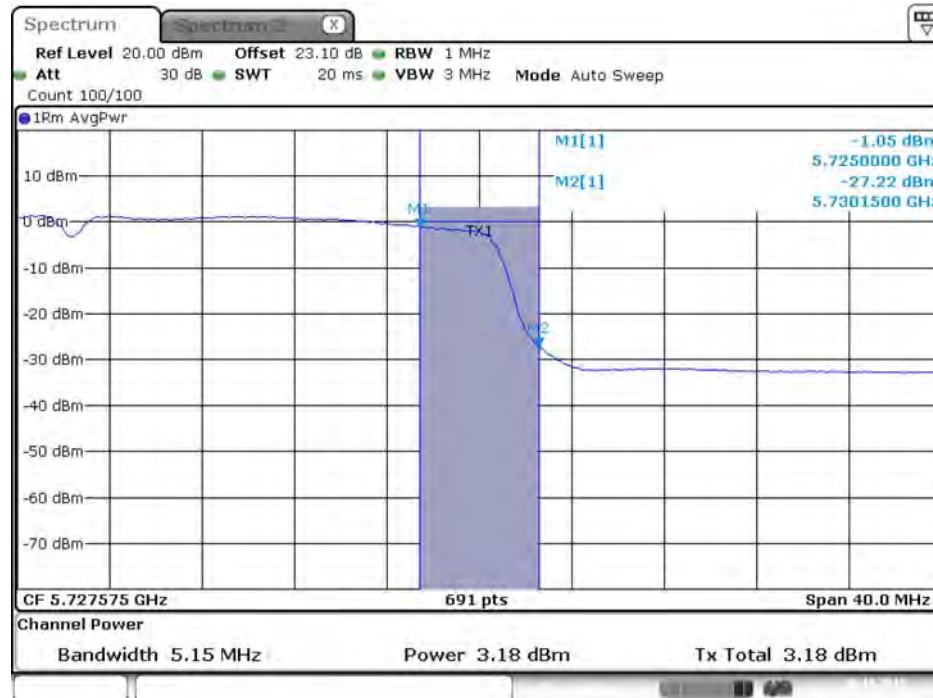


Date: 20.OCT.2015 22:46:44

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 2 / 5710 MHz (UNII 3)

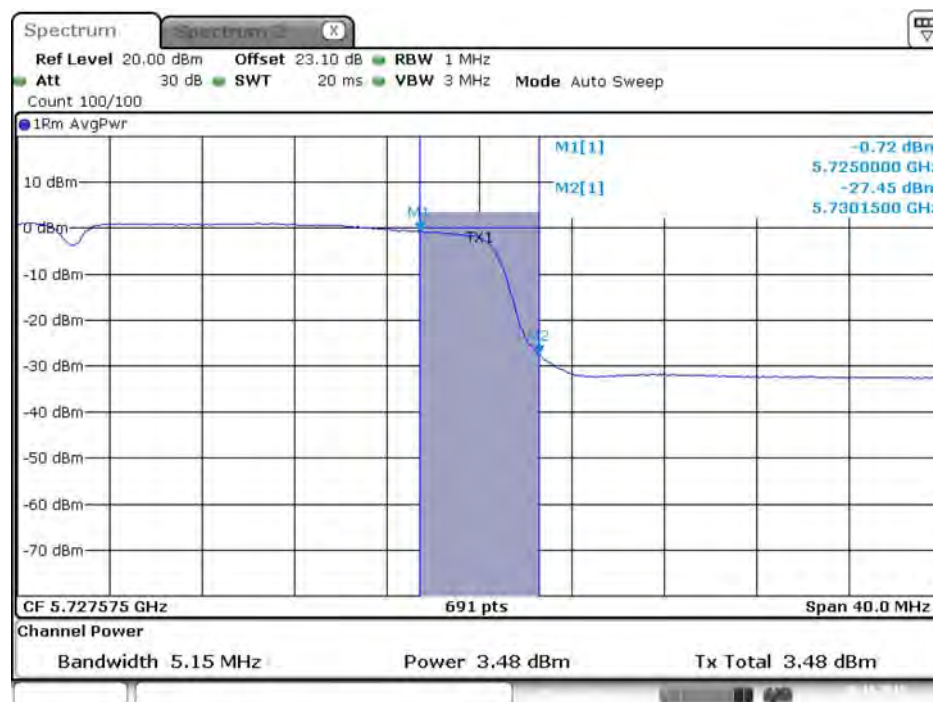


Date: 20.OCT.2015 22:46:51

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 3 / 5710 MHz (UNII 3)

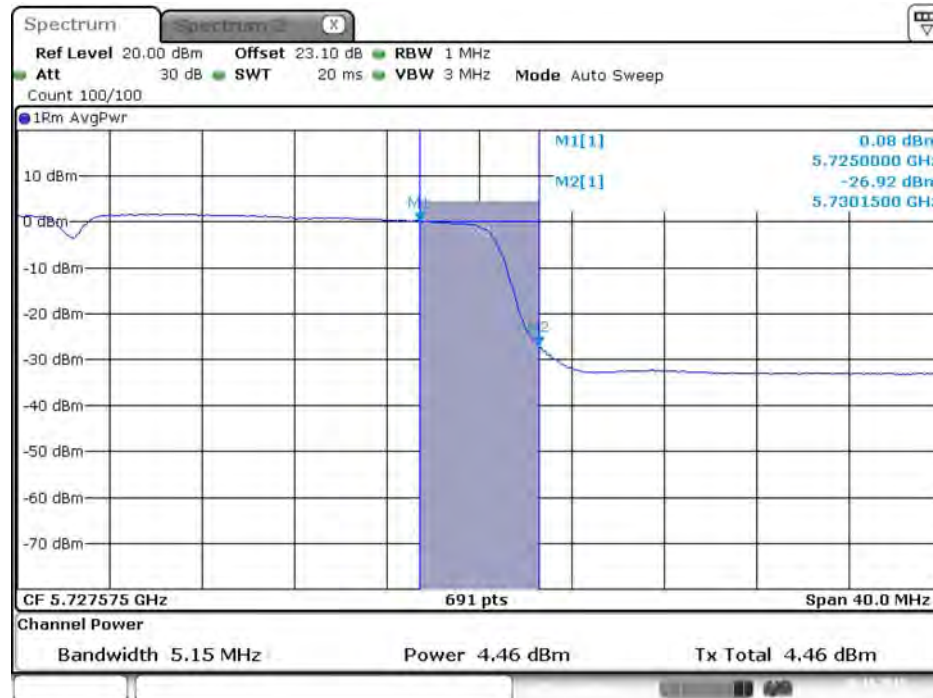


Date: 20.OCT.2015 22:48:58

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 / 5710 MHz (UNII 3)

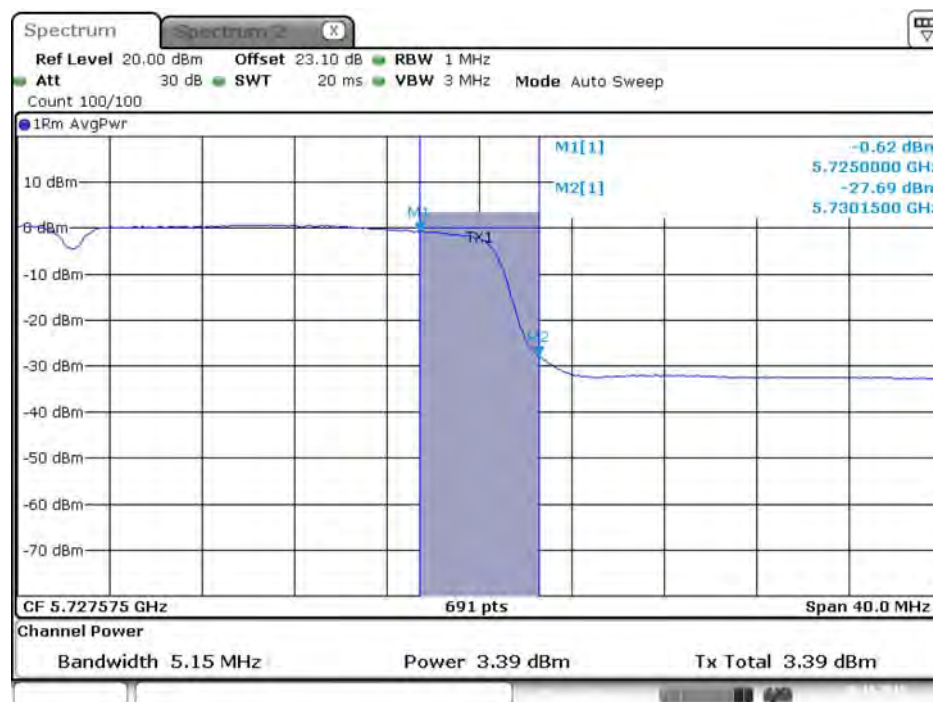


Date: 20.OCT.2015 22:47:05

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz (UNII 2C)

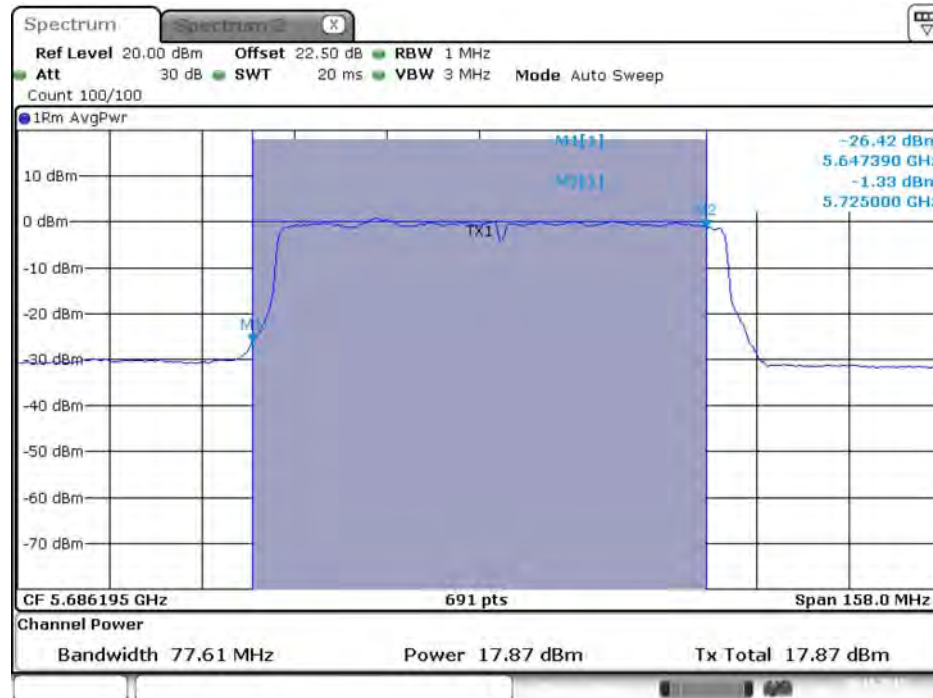


Date: 20.OCT.2015 22:49:49

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 2 / 5690 MHz (UNII 2C)

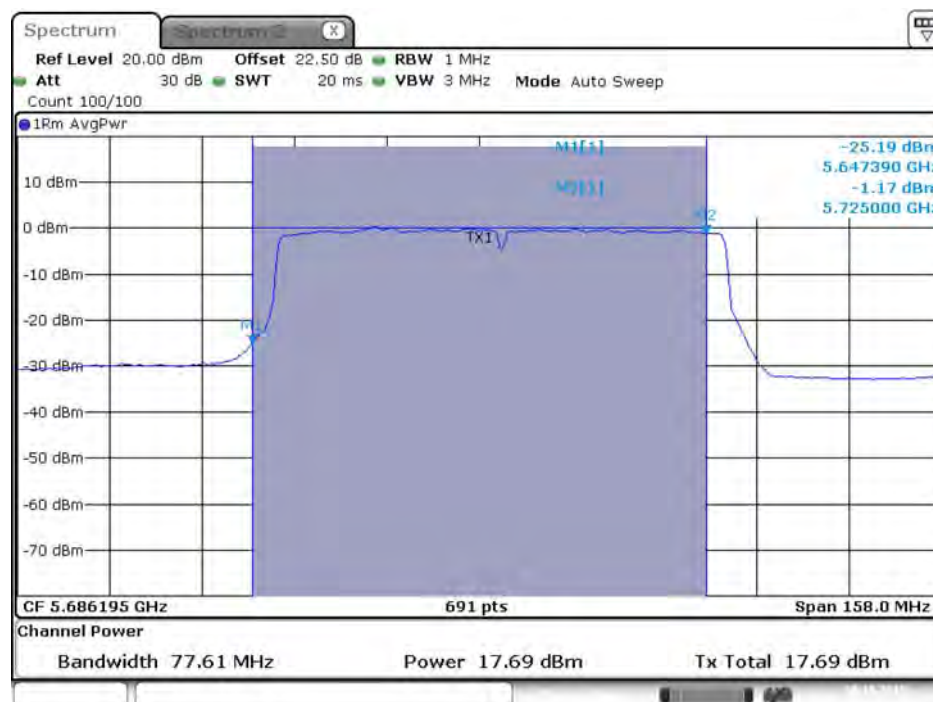


Date: 20.OCT.2015 22:49:56

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 3 / 5690 MHz (UNII 2C)

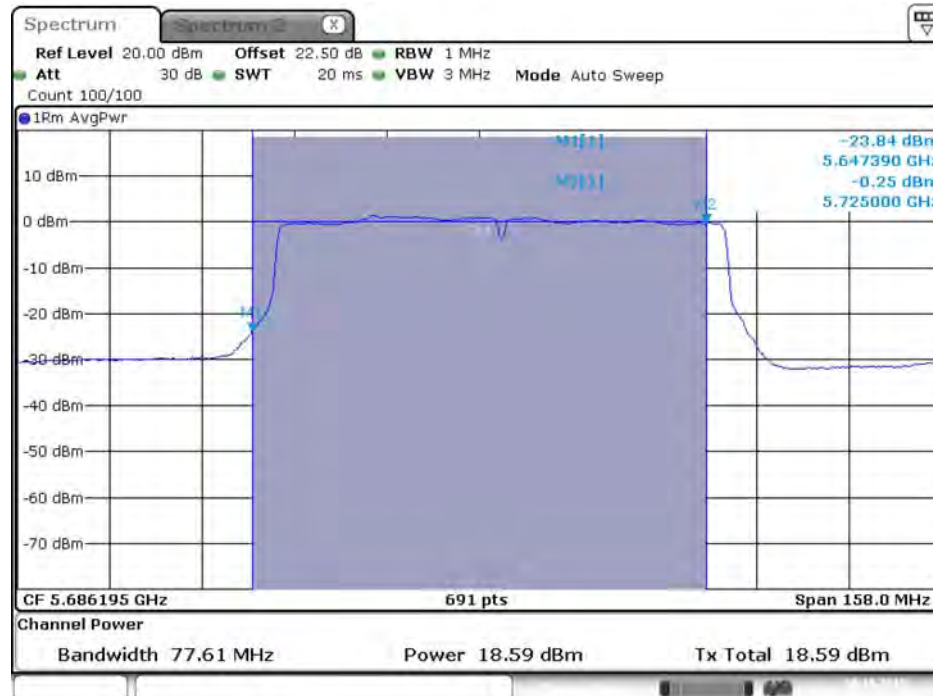


Date: 20.OCT.2015 22:50:03

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 4 / 5690 MHz (UNII 2C)

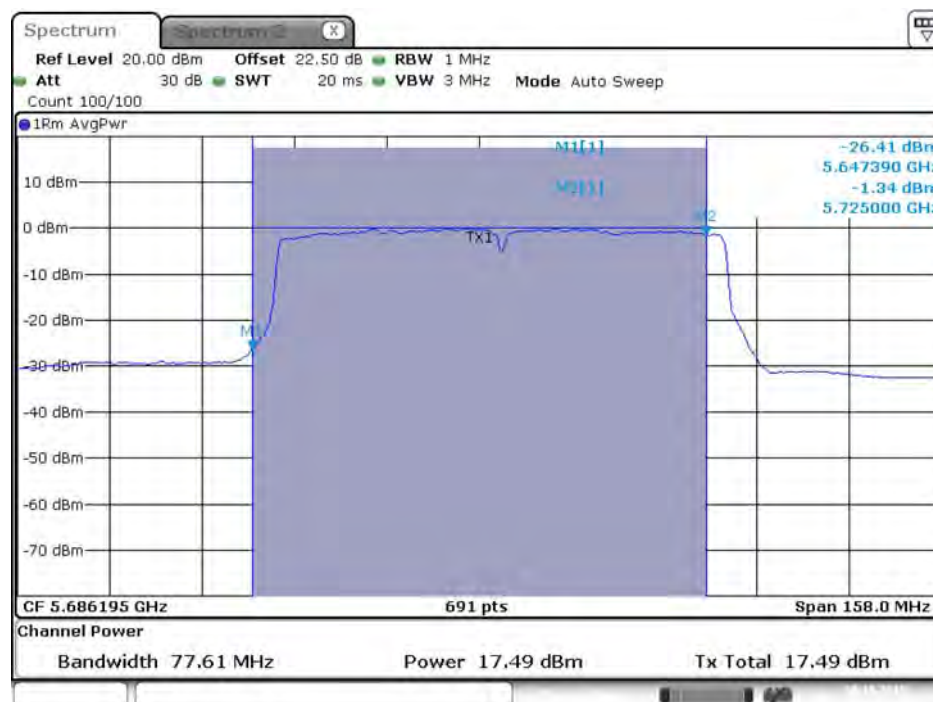


Date: 20.OCT.2015 22:50:10

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 / 5690 MHz (UNII 3)

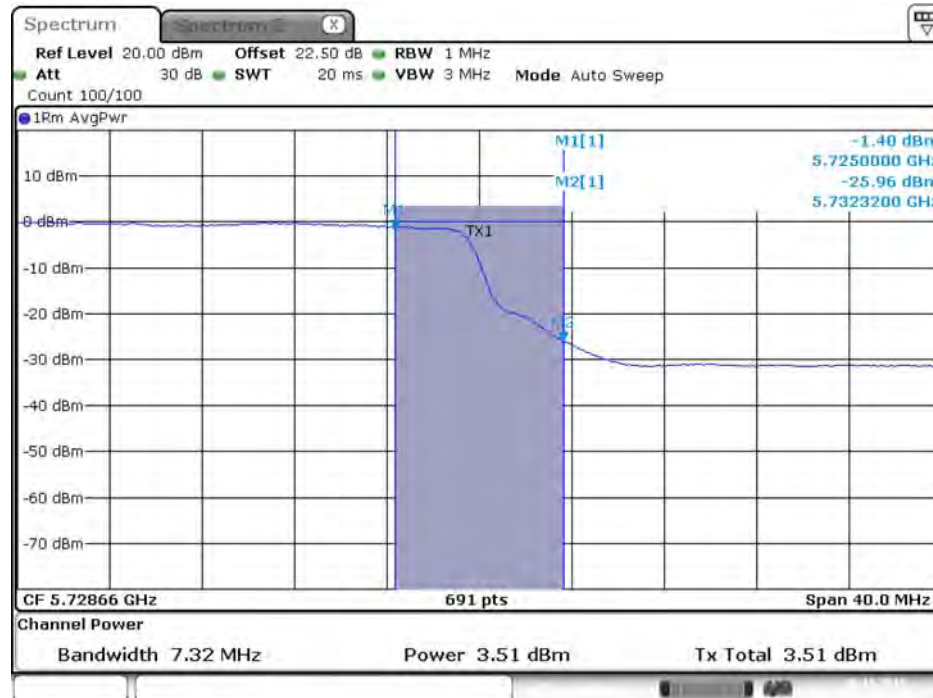


Date: 20.OCT.2015 22:49:52

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 2 / 5690 MHz (UNII 3)

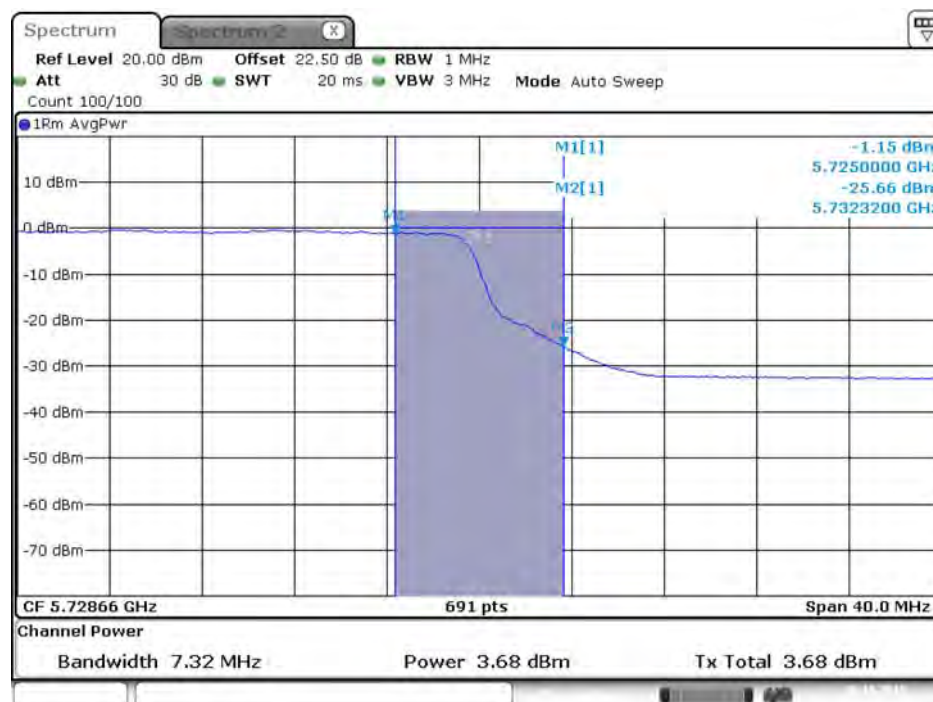


Date: 20.OCT.2015 22:49:59

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 3 / 5690 MHz (UNII 3)

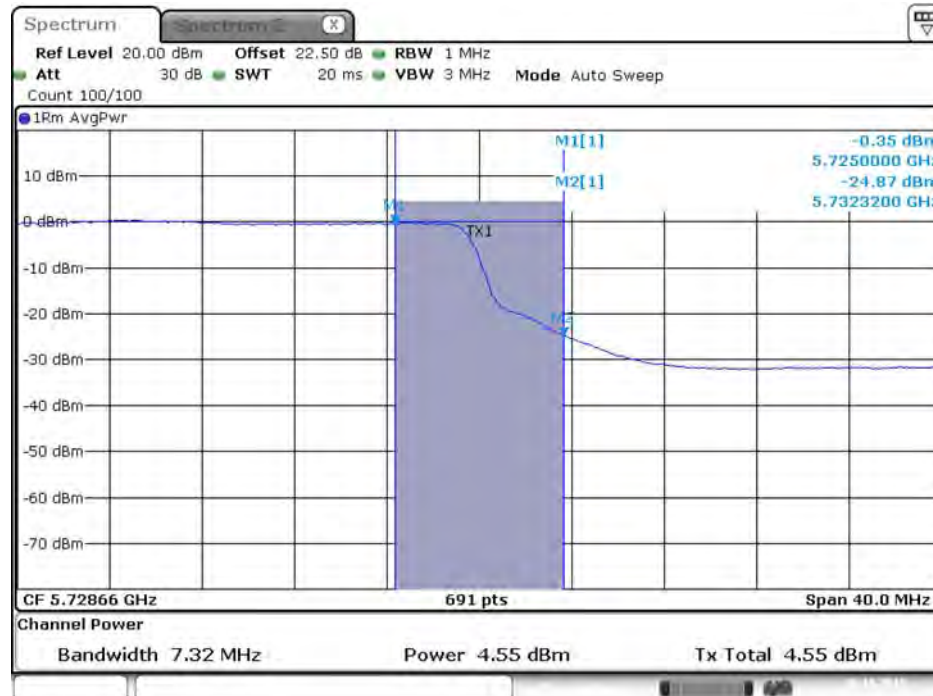

Date: 20.OCT.2015 22:50:06

Conducted Output Power Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 4 / 5690 MHz (UNII 3)

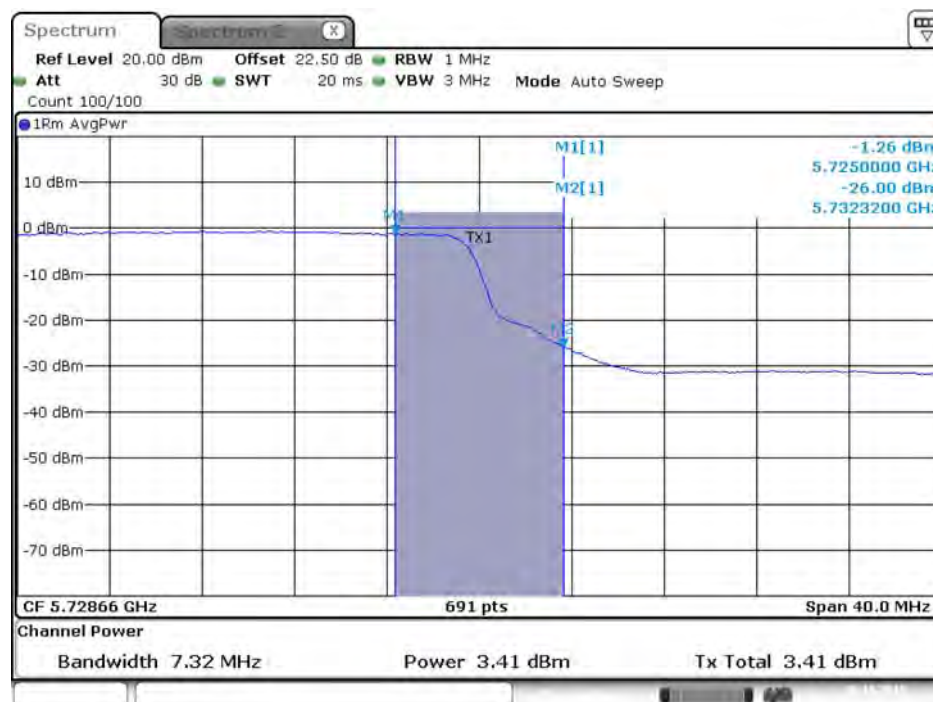

Date: 20.OCT.2015 22:50:13

4.4. Power Spectral Density Measurement

4.4.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Band		Limit
☒	5.25-5.35 GHz	11 dBm/MHz
☒	5.470-5.725 GHz	11 dBm/MHz

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

4.4.4. Test Setup Layout

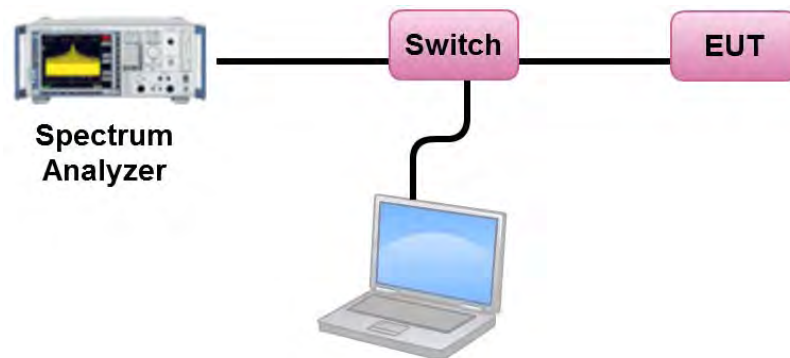

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	6.52	6.99	Complies
	5300 MHz	6.69	6.99	Complies
	5320 MHz	6.57	6.99	Complies
	5500 MHz	6.57	6.99	Complies
	5580 MHz	6.63	6.99	Complies
	5700 MHz	6.52	6.99	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	6.58	6.99	Complies
	5300 MHz	6.63	6.99	Complies
	5320 MHz	6.64	6.99	Complies
	5500 MHz	6.61	6.99	Complies
	5580 MHz	6.72	6.99	Complies
	5700 MHz	6.76	6.99	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	6.51	6.99	Complies
	5310 MHz	2.20	6.99	Complies
	5510 MHz	5.07	6.99	Complies
	5550 MHz	6.50	6.99	Complies
	5670 MHz	6.43	6.99	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-1.22	6.99	Complies
	5530 MHz	-2.58	6.99	Complies
	5610 MHz	3.86	6.99	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.01\text{ dBi} > 6\text{ dBi}, \text{ so the limit } 11 - (10.01 - 6) = 6.99\text{ dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	6.96	6.99	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.01 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 11 - (10.01 - 6) = 6.99 \text{ dBm/MHz}.$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	6.82	-3.01	3.81	25.99	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.01 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 30 - (10.01 - 6) = 25.99 \text{ dBm/500kHz}.$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	6.80	6.99	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.01 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 11 - (10.01 - 6) = 6.99 \text{ dBm/MHz}.$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	6.49	-3.01	3.48	25.99	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.01 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 30 - (10.01 - 6) = 25.99 \text{ dBm/500kHz}.$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	6.86	6.99	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.01 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 11 - (10.01 - 6) = 6.99 \text{ dBm/MHz.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	5.08	-3.01	2.07	25.99	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.01 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 30 - (10.01 - 6) = 25.99 \text{ dBm/500kHz.}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	4.12	6.99	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.01 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 11 - (10.01 - 6) = 6.99 \text{ dBm/MHz.}$$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	3.18	-3.01	0.17	25.99	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.01 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 30 - (10.01 - 6) = 25.99 \text{ dBm/500kHz.}$$

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	7.44	7.49	Complies
	5300 MHz	7.39	7.49	Complies
	5320 MHz	7.35	7.49	Complies
	5500 MHz	7.40	7.49	Complies
	5580 MHz	7.42	7.49	Complies
	5700 MHz	7.45	7.49	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	7.31	7.49	Complies
	5300 MHz	7.30	7.49	Complies
	5320 MHz	7.14	7.49	Complies
	5500 MHz	7.38	7.49	Complies
	5580 MHz	7.09	7.49	Complies
	5700 MHz	7.15	7.49	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	7.31	7.49	Complies
	5310 MHz	2.64	7.49	Complies
	5510 MHz	1.79	7.49	Complies
	5550 MHz	7.07	7.49	Complies
	5670 MHz	7.30	7.49	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-3.06	7.49	Complies
	5530 MHz	-3.32	7.49	Complies
	5610 MHz	3.86	7.49	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.51\text{ dBi} > 6\text{ dBi}, \text{ so the limit } 11 - (9.51 - 6) = 7.49\text{ dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	7.44	7.49	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (9.51 - 6) = 7.49 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	7.12	-3.01	4.11	26.49	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (9.51 - 6) = 26.49 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	7.29	7.49	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (9.51 - 6) = 7.49 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	7.08	-3.01	4.07	26.49	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (9.51 - 6) = 26.49 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	7.43	7.49	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (9.51 - 6) = 7.49 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	5.13	-3.01	2.12	26.49	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (9.51 - 6) = 26.49 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	4.38	7.49	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (9.51 - 6) = 7.49 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	3.21	-3.01	0.20	26.49	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (9.51 - 6) = 26.49 \text{ dBm/500kHz}$.

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	8.28	8.49	Complies
	5300 MHz	8.40	8.49	Complies
	5320 MHz	8.34	8.49	Complies
	5500 MHz	8.12	8.49	Complies
	5580 MHz	8.23	8.49	Complies
	5700 MHz	8.33	8.49	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	8.43	8.49	Complies
	5300 MHz	8.41	8.49	Complies
	5320 MHz	8.38	8.49	Complies
	5500 MHz	8.37	8.49	Complies
	5580 MHz	8.40	8.49	Complies
	5700 MHz	8.44	8.49	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	7.50	8.49	Complies
	5310 MHz	4.59	8.49	Complies
	5510 MHz	5.45	8.49	Complies
	5550 MHz	7.33	8.49	Complies
	5670 MHz	7.51	8.49	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	0.08	8.49	Complies
	5530 MHz	-1.07	8.49	Complies
	5610 MHz	5.25	8.49	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.51\text{ dBi} > 6\text{ dBi}, \text{ so the limit } 11 - (8.51 - 6) = 8.49\text{ dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	8.26	8.49	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (8.51 - 6) = 8.49 \text{ dBm/MHz}$.

$Directional \text{ Gain} = 10 \cdot \log$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	8.22	-3.01	5.21	27.49	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (8.51 - 6) = 27.49 \text{ dBm/500kHz}$.

$Directional \text{ Gain} = 10 \cdot \log$

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	7.90	8.49	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (8.51 - 6) = 8.49 \text{ dBm/MHz}$.

$Directional \text{ Gain} = 10 \cdot \log$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	7.69	-3.01	4.68	27.49	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (8.51 - 6) = 27.49 \text{ dBm/500kHz}$.

$Directional \text{ Gain} = 10 \cdot \log$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	7.83	8.49	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (8.51 - 6) = 8.49 \text{ dBm/MHz}$.

$Directional Gain = 10 \cdot \log$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	6.20	-3.01	3.19	27.49	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (8.51 - 6) = 27.49 \text{ dBm/500kHz}$.

$Directional Gain = 10 \cdot \log$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	4.77	8.49	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (8.51 - 6) = 8.49 \text{ dBm/MHz}$.

$Directional Gain = 10 \cdot \log$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	3.76	-3.01	0.75	27.49	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (8.51 - 6) = 27.49 \text{ dBm/500kHz}$.

$Directional Gain = 10 \cdot \log$

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	6.25	6.49	Complies
	5300 MHz	6.26	6.49	Complies
	5320 MHz	6.13	6.49	Complies
	5500 MHz	6.16	6.49	Complies
	5580 MHz	6.21	6.49	Complies
	5700 MHz	6.25	6.49	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	5.98	6.49	Complies
	5300 MHz	6.00	6.49	Complies
	5320 MHz	6.25	6.49	Complies
	5500 MHz	6.04	6.49	Complies
	5580 MHz	6.06	6.49	Complies
	5700 MHz	6.16	6.49	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	6.05	6.49	Complies
	5310 MHz	1.37	6.49	Complies
	5510 MHz	4.19	6.49	Complies
	5550 MHz	6.41	6.49	Complies
	5670 MHz	6.08	6.49	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-1.80	6.49	Complies
	5530 MHz	-2.14	6.49	Complies
	5610 MHz	3.28	6.49	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.51\text{ dBi} > 6\text{ dBi}, \text{ so the limit } 11 - (10.51 - 6) = 6.49\text{ dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	6.26	6.49	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (10.51 - 6) = 6.49 \text{ dBm/MHz}$.
 $Directional Gain = 10 \cdot \log$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	5.94	-3.01	2.93	25.49	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (10.51 - 6) = 25.49 \text{ dBm/500kHz}$.
 $Directional Gain = 10 \cdot \log$

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	6.22	6.49	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (10.51 - 6) = 6.49 \text{ dBm/MHz}$.
 $Directional Gain = 10 \cdot \log$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	6.10	-3.01	3.09	25.49	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (10.51 - 6) = 25.49 \text{ dBm/500kHz}$.
 $Directional Gain = 10 \cdot \log$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	6.13	6.49	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (10.51 - 6) = 6.49 \text{ dBm/MHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	4.66	-3.01	1.65	25.49	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (10.51 - 6) = 25.49 \text{ dBm/500kHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	3.34	6.49	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (10.51 - 6) = 6.49 \text{ dBm/MHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	1.95	-3.01	-1.06	25.49	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (10.51 - 6) = 25.49 \text{ dBm/500kHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 5: EUT 1 + Set 5 Sector Antenna / 4.5 dBi		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	9.33	9.49	Complies
	5300 MHz	9.29	9.49	Complies
	5320 MHz	9.31	9.49	Complies
	5500 MHz	9.24	9.49	Complies
	5580 MHz	9.14	9.49	Complies
	5700 MHz	9.34	9.49	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	9.35	9.49	Complies
	5300 MHz	9.33	9.49	Complies
	5320 MHz	9.44	9.49	Complies
	5500 MHz	9.11	9.49	Complies
	5580 MHz	9.35	9.49	Complies
	5700 MHz	9.42	9.49	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	7.50	9.49	Complies
	5310 MHz	3.52	9.49	Complies
	5510 MHz	5.45	9.49	Complies
	5550 MHz	7.33	9.49	Complies
	5670 MHz	6.93	9.49	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-1.03	9.49	Complies
	5530 MHz	-0.59	9.49	Complies
	5610 MHz	6.45	9.49	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.51\text{ dBi} > 6\text{ dBi}, \text{ so the limit } 11 - (7.51 - 6) = 9.49\text{ dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	9.19	9.49	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (7.51 - 6) = 9.49 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	9.10	-3.01	6.09	28.49	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (7.51 - 6) = 28.49 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	8.94	9.49	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (7.51 - 6) = 9.49 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	8.62	-3.01	5.61	28.49	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (7.51 - 6) = 28.49 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	7.83	9.49	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (7.51 - 6) = 9.49 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	6.20	-3.01	3.19	28.49	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (7.51 - 6) = 28.49 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	4.77	9.49	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (7.51 - 6) = 9.49 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	3.76	-3.01	0.75	28.49	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.51 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (7.51 - 6) = 28.49 \text{ dBm/500kHz}$.

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 6: EUT 1 + Set 6 Sector Antenna / 4 dBi		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	9.59	9.99	Complies
	5300 MHz	9.29	9.99	Complies
	5320 MHz	9.31	9.99	Complies
	5500 MHz	9.60	9.99	Complies
	5580 MHz	9.53	9.99	Complies
	5700 MHz	8.52	9.99	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	9.85	9.99	Complies
	5300 MHz	9.58	9.99	Complies
	5320 MHz	8.63	9.99	Complies
	5500 MHz	9.51	9.99	Complies
	5580 MHz	9.35	9.99	Complies
	5700 MHz	7.15	9.99	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	7.50	9.99	Complies
	5310 MHz	2.20	9.99	Complies
	5510 MHz	1.92	9.99	Complies
	5550 MHz	7.33	9.99	Complies
	5670 MHz	6.23	9.99	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-2.15	9.99	Complies
	5530 MHz	-5.99	9.99	Complies
	5610 MHz	2.62	9.99	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.01\text{ dBi} > 6\text{ dBi}, \text{ so the limit } 11 - (7.01 - 6) = 9.99\text{ dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	9.74	9.99	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.01 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (7.01 - 6) = 9.99 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	9.60	-3.01	6.59	28.99	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.01 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (7.01 - 6) = 28.99 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	9.49	9.99	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.01 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (7.01 - 6) = 9.99 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	9.21	-3.01	6.20	28.99	Complies

Note: $Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.01 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (7.01 - 6) = 28.99 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	7.83	9.99	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.01 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (7.01 - 6) = 9.99 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	6.20	-3.01	3.19	28.99	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.01 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (7.01 - 6) = 28.99 \text{ dBm/500kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	4.77	9.99	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.01 \text{ dBi} > 6 \text{ dBi}$, so the limit $11 - (7.01 - 6) = 9.99 \text{ dBm/MHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	3.76	-3.01	0.75	28.99	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.01 \text{ dBi} > 6 \text{ dBi}$, so the limit $30 - (7.01 - 6) = 28.99 \text{ dBm/500kHz}$.

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 7: EUT 1 + Set 9 Dipole Antenna / 4.67 dBi		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	6.08	6.31	Complies
	5300 MHz	6.11	6.31	Complies
	5320 MHz	6.10	6.31	Complies
	5500 MHz	6.06	6.31	Complies
	5580 MHz	6.21	6.31	Complies
	5700 MHz	6.11	6.31	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	6.22	6.31	Complies
	5300 MHz	6.23	6.31	Complies
	5320 MHz	6.27	6.31	Complies
	5500 MHz	6.27	6.31	Complies
	5580 MHz	6.04	6.31	Complies
	5700 MHz	6.13	6.31	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	6.17	6.31	Complies
	5310 MHz	3.07	6.31	Complies
	5510 MHz	6.23	6.31	Complies
	5550 MHz	6.24	6.31	Complies
	5670 MHz	6.13	6.31	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-2.15	6.31	Complies
	5530 MHz	-2.50	6.31	Complies
	5610 MHz	4.48	6.31	Complies

Note:

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.69\text{dBi} > 6\text{dBi}, \text{ so the limit } 11 - (10.69 - 6) = 6.31\text{dBm/MHz}.$$

Straddle Channel

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	6.14	6.31	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.69\text{dBi} > 6\text{dBi}$, so the limit $11 - (10.69 - 6) = 6.31\text{ dBm/MHz}$.

$Directional\ Gain = 10 \cdot \log$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	5.95	-3.01	2.94	25.31	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.69\text{dBi} > 6\text{dBi}$, so the limit $30 - (10.69 - 6) = 25.31\text{ dBm/500kHz}$.

$Directional\ Gain = 10 \cdot \log$

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	6.13	6.31	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.69\text{dBi} > 6\text{dBi}$, so the limit $11 - (10.69 - 6) = 6.31\text{ dBm/MHz}$.

$Directional\ Gain = 10 \cdot \log$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	5.88	-3.01	2.87	25.31	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.69\text{dBi} > 6\text{dBi}$, so the limit $30 - (10.69 - 6) = 25.31\text{ dBm/500kHz}$.

$Directional\ Gain = 10 \cdot \log$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	6.28	6.31	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.69\text{dBi} > 6\text{dBi}$, so the limit $11-(10.69-6)=6.31\text{ dBm/MHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	4.36	-3.01	1.35	25.31	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.69\text{dBi} > 6\text{dBi}$, so the limit $30-(10.69-6)=25.31\text{ dBm/500kHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	4.77	6.31	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.69\text{dBi} > 6\text{dBi}$, so the limit $11-(10.69-6)=6.31\text{ dBm/MHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	3.76	-3.01	0.75	25.31	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.69\text{dBi} > 6\text{dBi}$, so the limit $30-(10.69-6)=25.31\text{ dBm/500kHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Temperature	25°C	Humidity	50%
Test Engineer	Eddie Weng & Lucas Huang		
Test Mode	Mode 8: EUT 2 + Set 10 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi		

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5260 MHz	5.03	5.27	Complies
	5300 MHz	5.10	5.27	Complies
	5320 MHz	5.26	5.27	Complies
	5500 MHz	5.20	5.27	Complies
	5580 MHz	5.04	5.27	Complies
	5700 MHz	5.03	5.27	Complies
802.11ac MCS0/Nss1 VHT20	5260 MHz	5.14	5.27	Complies
	5300 MHz	5.11	5.27	Complies
	5320 MHz	5.13	5.27	Complies
	5500 MHz	5.12	5.27	Complies
	5580 MHz	5.15	5.27	Complies
	5700 MHz	5.09	5.27	Complies
802.11ac MCS0/Nss1 VHT40	5270 MHz	5.04	5.27	Complies
	5310 MHz	0.56	5.27	Complies
	5510 MHz	3.89	5.27	Complies
	5550 MHz	5.18	5.27	Complies
	5670 MHz	5.14	5.27	Complies
802.11ac MCS0/Nss1 VHT80	5290 MHz	-2.68	5.27	Complies
	5530 MHz	-3.57	5.27	Complies
	5610 MHz	4.17	5.27	Complies

Note:

$$Directional Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.73 \text{ dBi} > 6 \text{ dBi}, \text{ so the limit } 11 - (11.73 - 6) = 5.27 \text{ dBm/MHz.}$$

Straddle Channel

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	5.15	5.27	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.73\text{dBi} > 6\text{dBi}$, so the limit $11-(11.73-6)=5.27\text{dBm/MHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	4.62	-3.01	1.61	24.27	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.73\text{dBi} > 6\text{dBi}$, so the limit $30-(11.73-6)=24.27\text{dBm/500kHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
144	5720 MHz (UNII 2C)	5.01	5.27	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.73\text{dBi} > 6\text{dBi}$, so the limit $11-(11.73-6)=5.27\text{dBm/MHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
144	5720 MHz (UNII 3)	4.37	-3.01	1.36	24.27	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.73\text{dBi} > 6\text{dBi}$, so the limit $30-(11.73-6)=24.27\text{dBm/500kHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
142	5710 MHz (UNII 2C)	5.02	5.27	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.73\text{dBi} > 6\text{dBi}$, so the limit $11-(11.73-6)=5.27\text{dBm/MHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
142	5710 MHz (UNII 3)	3.39	-3.01	0.38	24.27	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.73\text{dBi} > 6\text{dBi}$, so the limit $30-(11.73-6)=24.27\text{dBm/500kHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
138	5690 MHz (UNII 2C)	5.20	5.27	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.73\text{dBi} > 6\text{dBi}$, so the limit $11-(11.73-6)=5.27\text{dBm/MHz}$.

$\text{Directional Gain} = 10 \cdot \log$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
138	5690 MHz (UNII 3)	3.75	-3.01	0.74	24.27	Complies

Note: $\left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 11.73\text{dBi} > 6\text{dBi}$, so the limit $30-(11.73-6)=24.27\text{dBm/500kHz}$.


$\text{Directional Gain} = 10 \cdot \log$

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5300 MHz

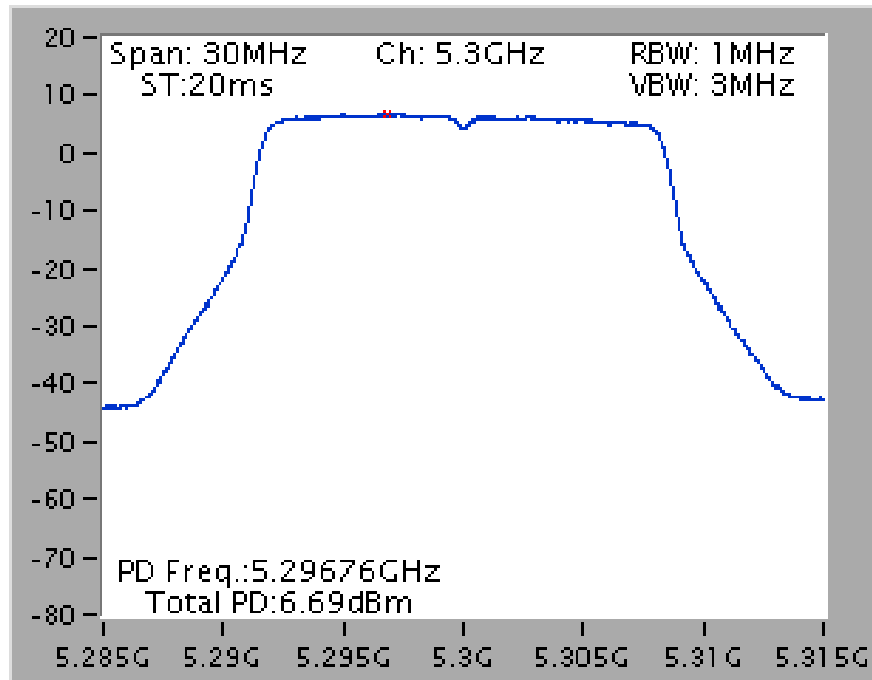


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5580 MHz

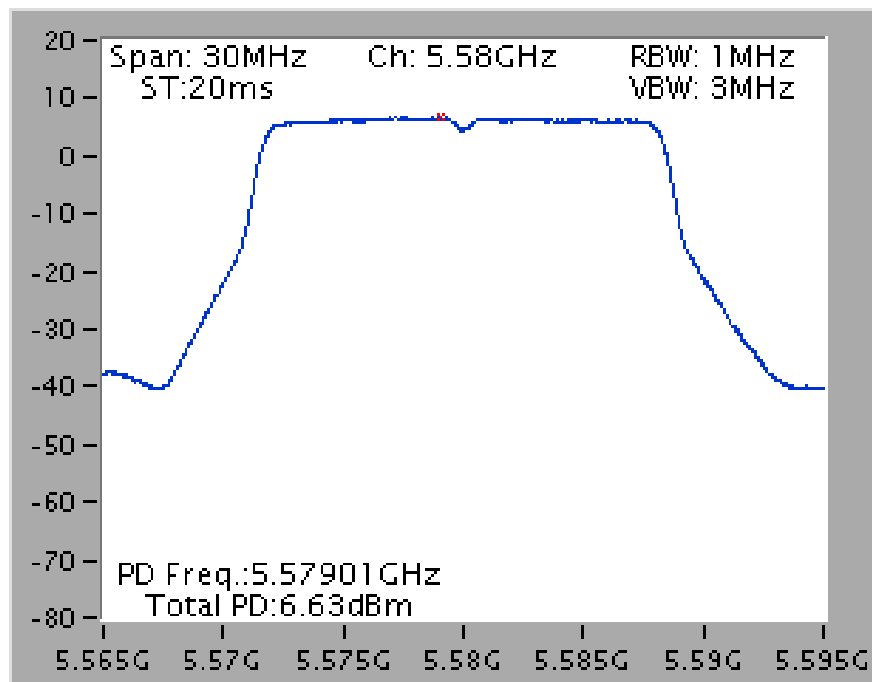


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5320 MHz

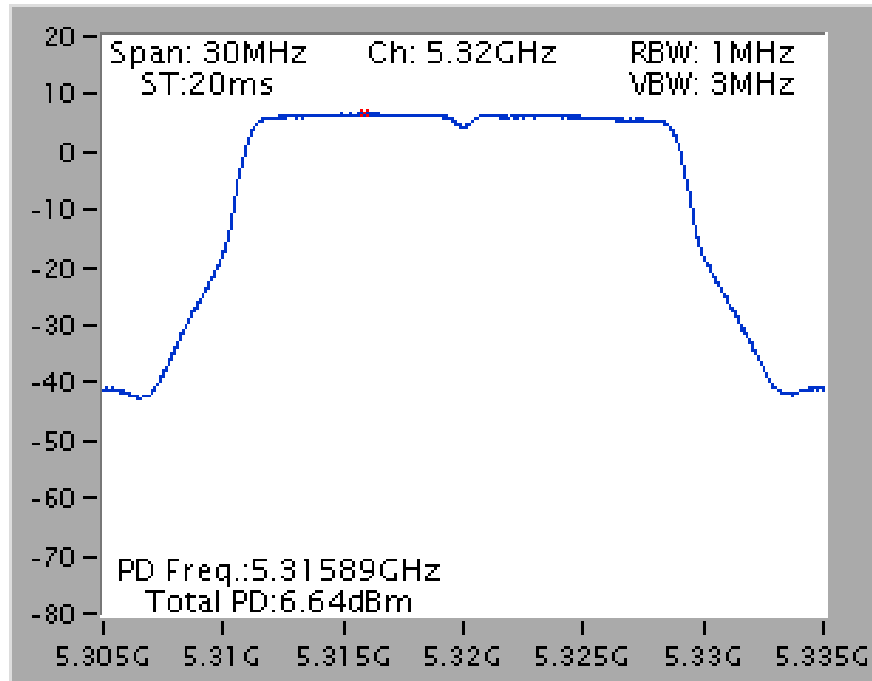


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5700 MHz

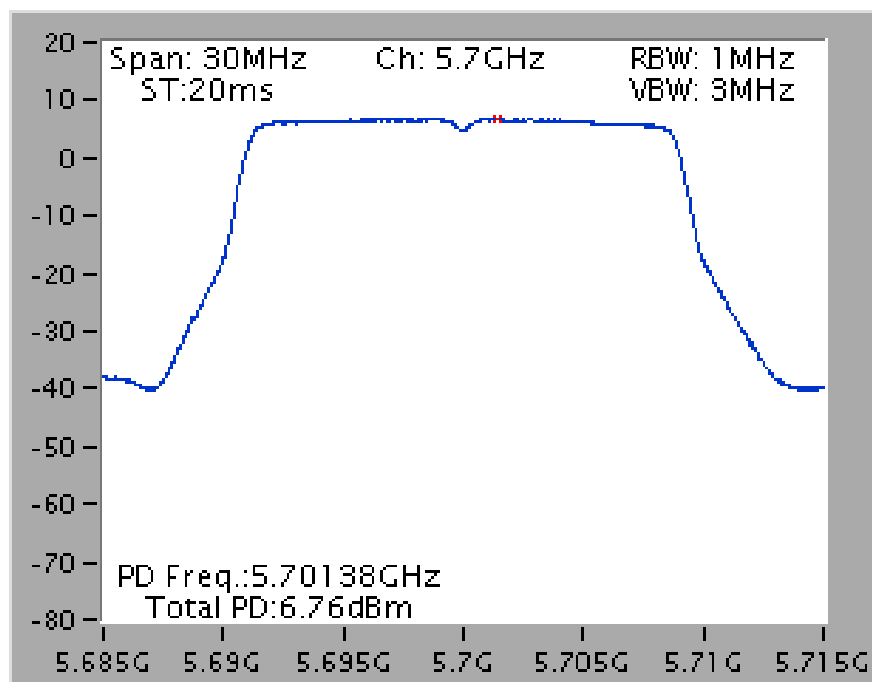


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5270 MHz

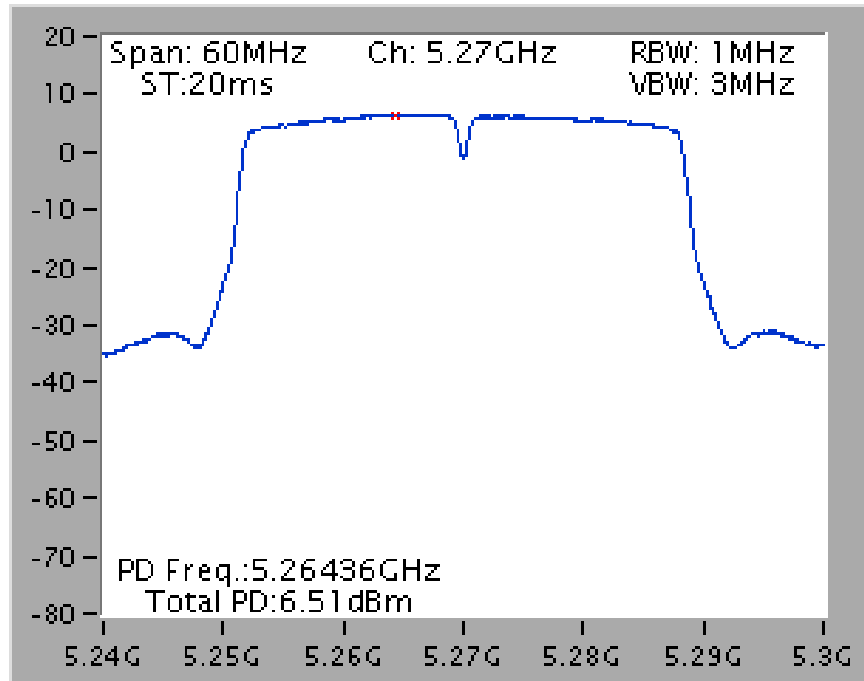


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5550 MHz

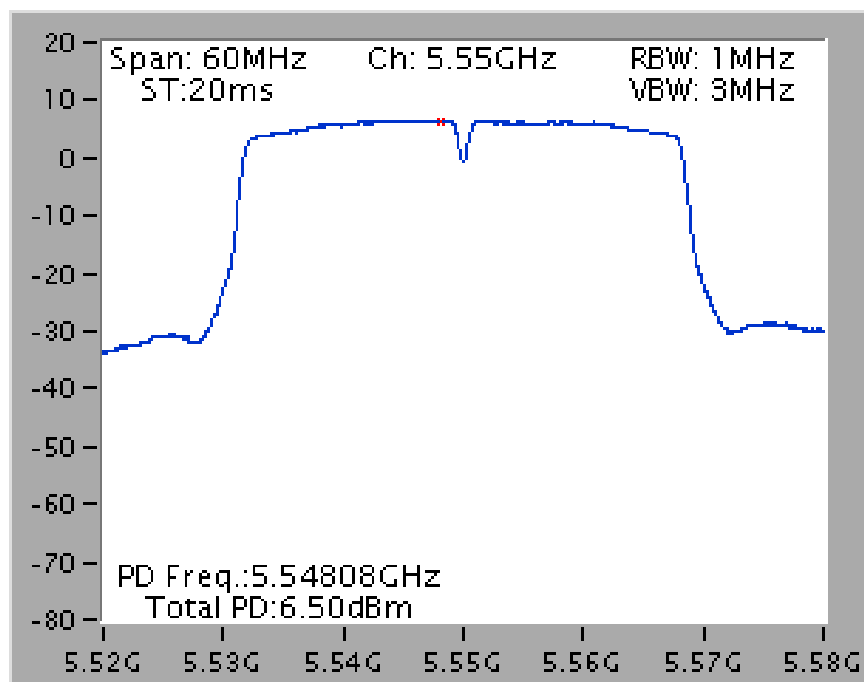

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5290 MHz

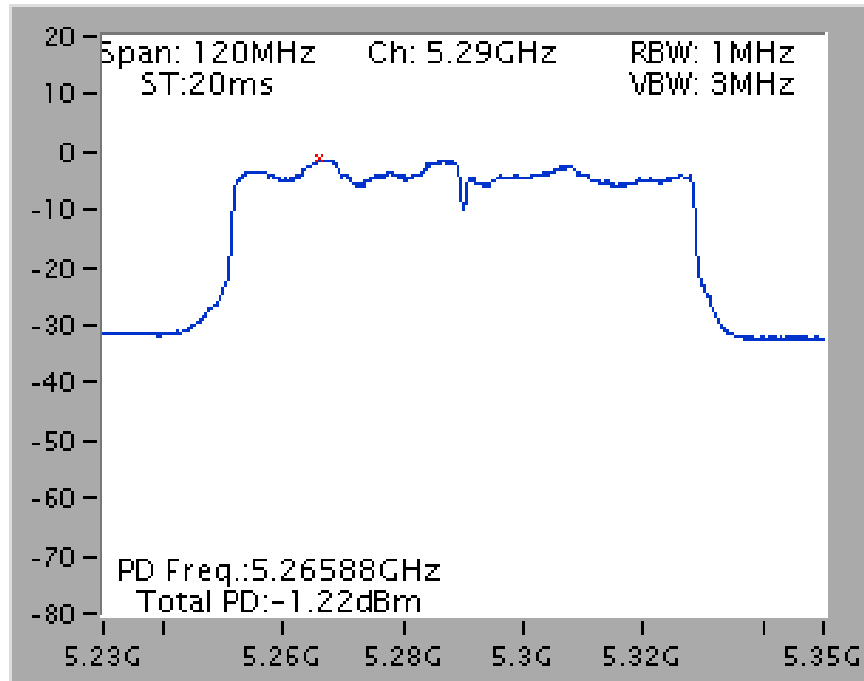


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5610 MHz

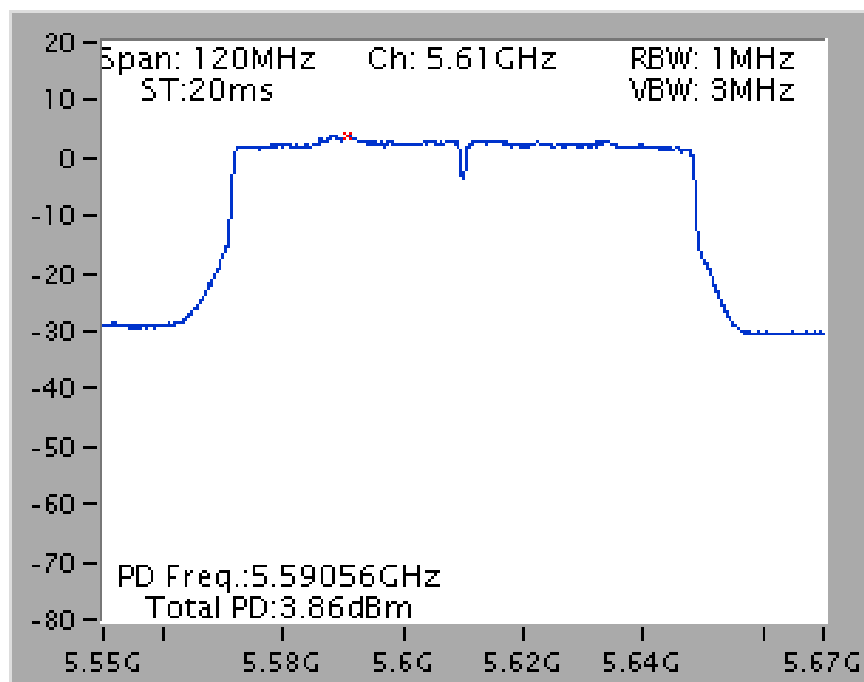


Straddle Channel


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz
(UNII 2C)

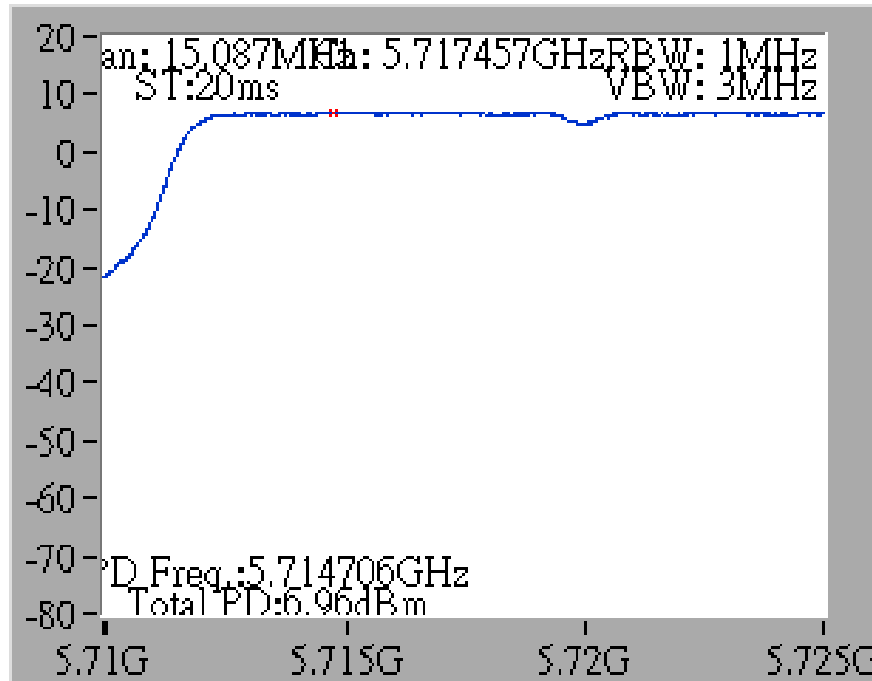


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz
(UNII 3)

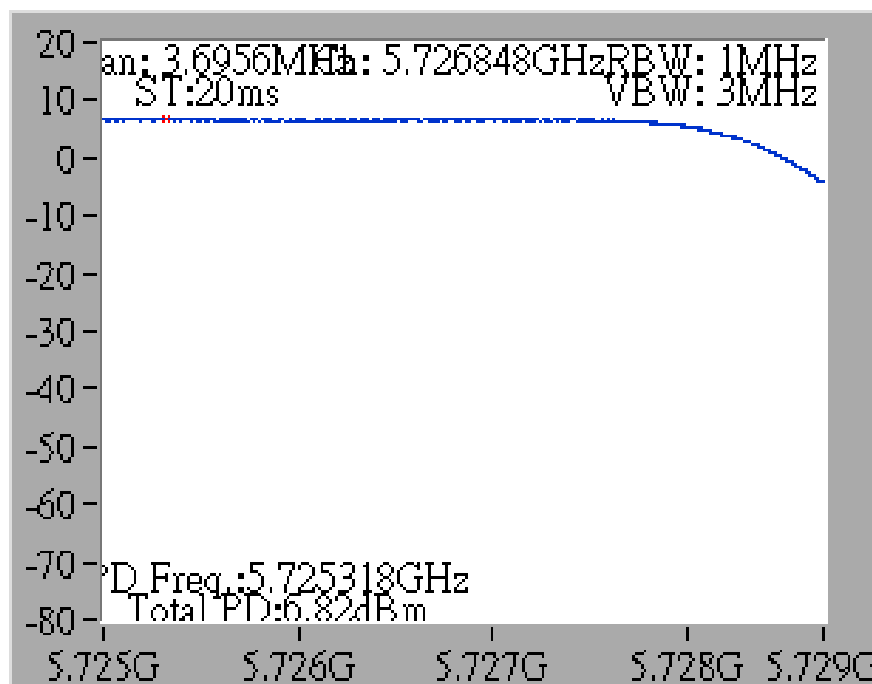


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz (UNII 2C)

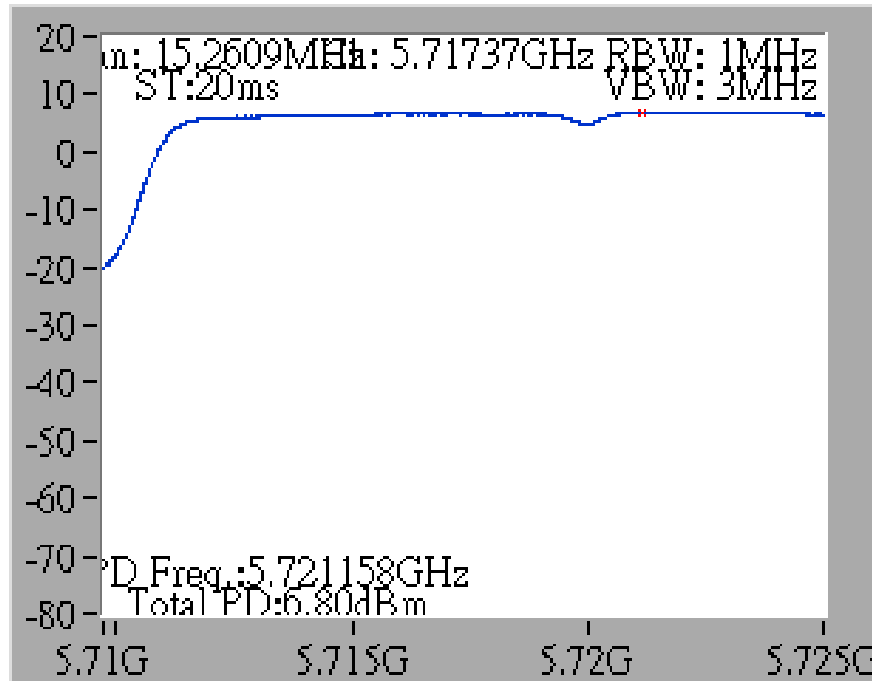


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz (UNII 3)

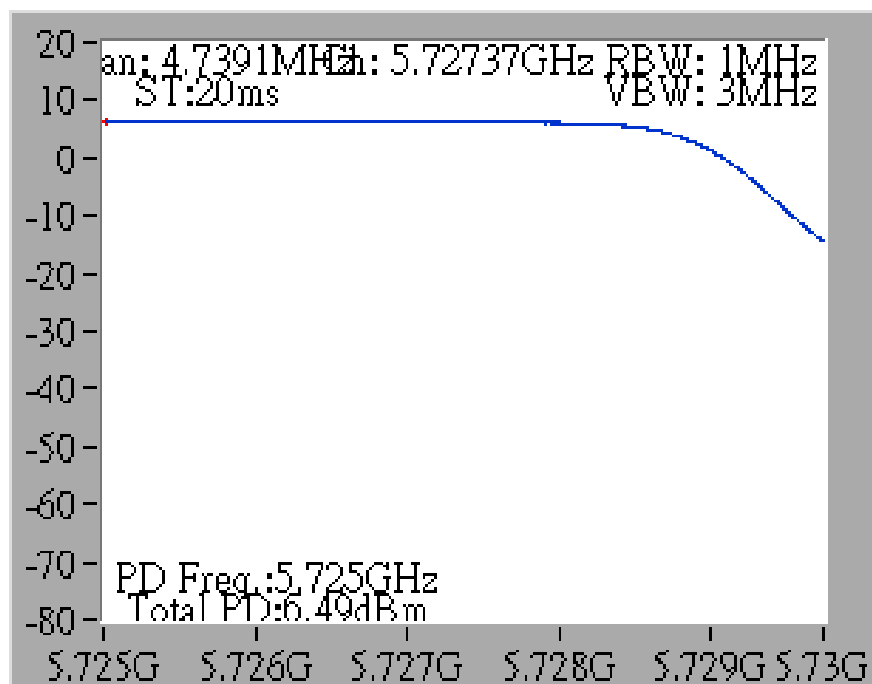


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5710 MHz (UNII 2C)

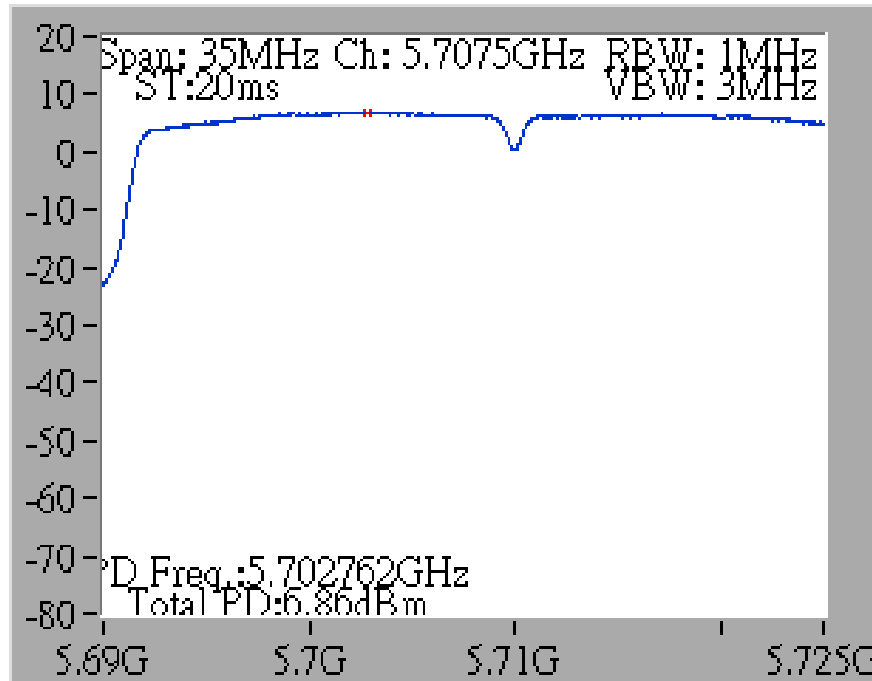


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5710 MHz (UNII 3)

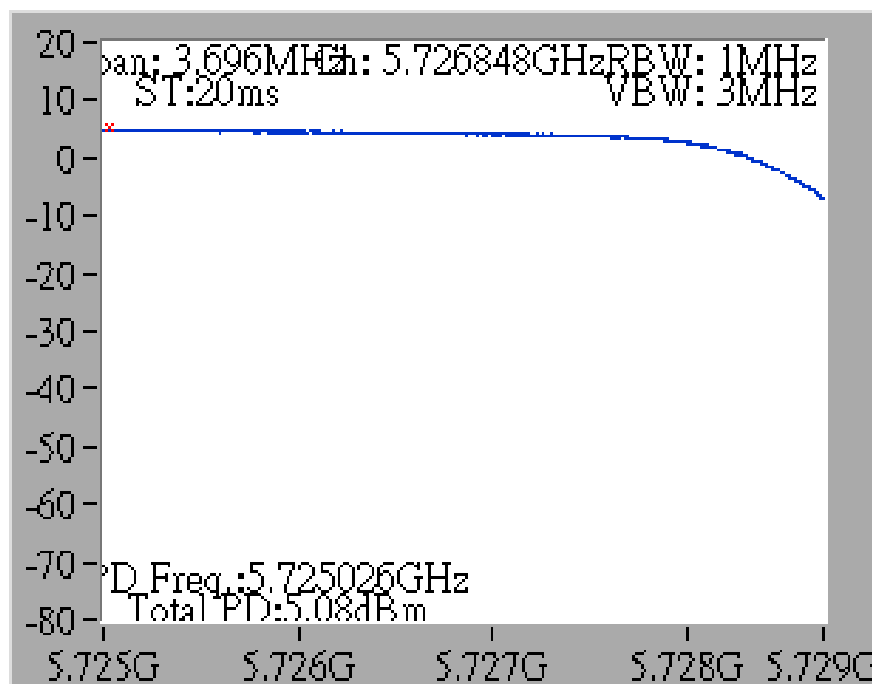

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5690 MHz (UNII 2C)

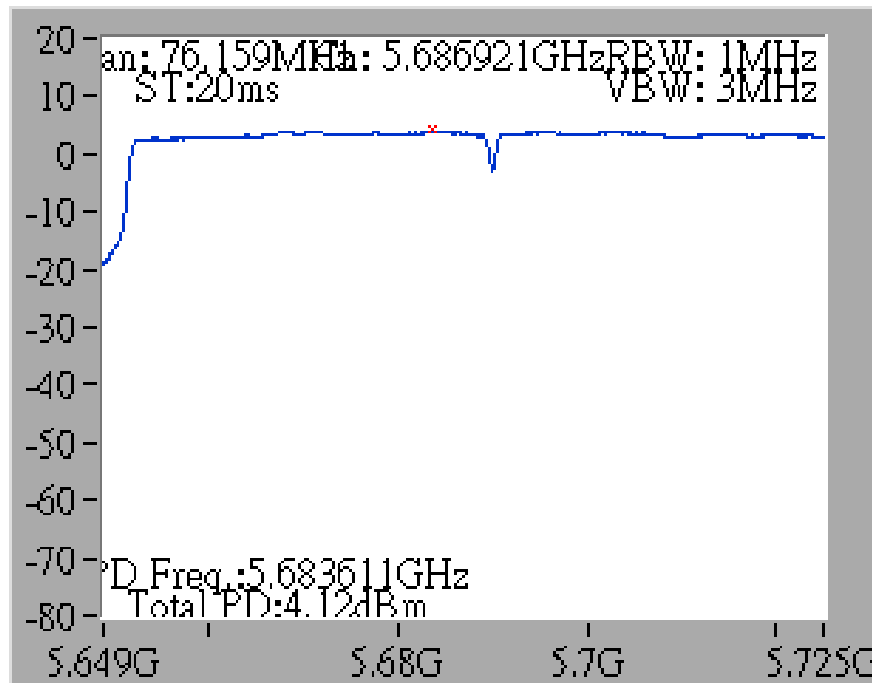


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5690 MHz (UNII 3)

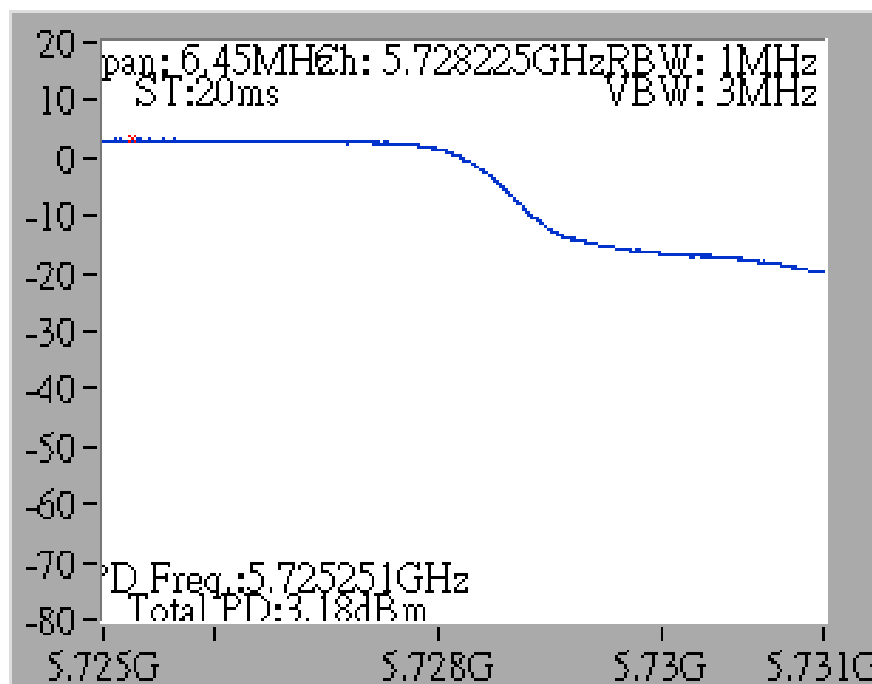


Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5260 MHz

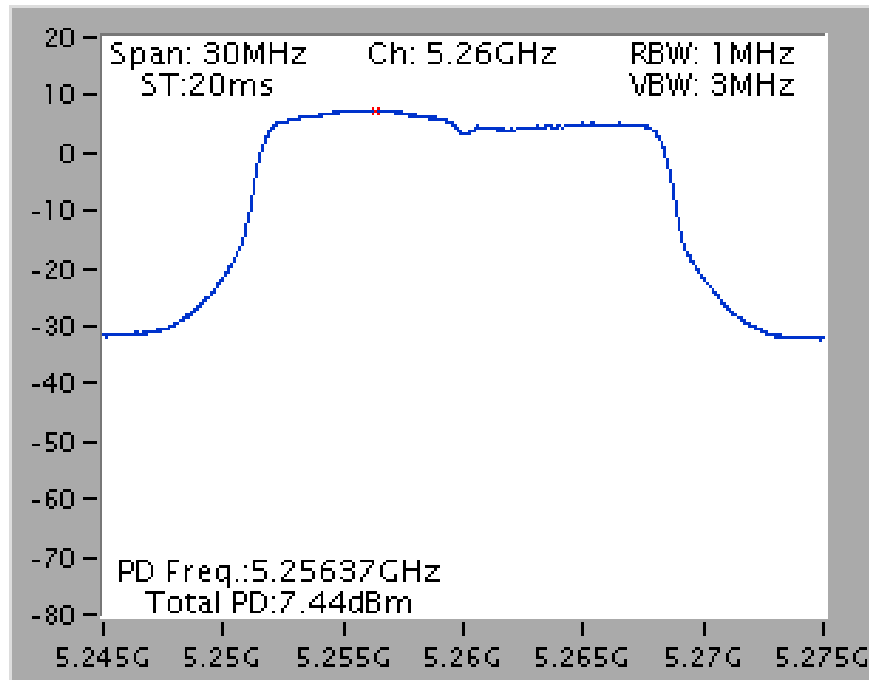


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5700 MHz

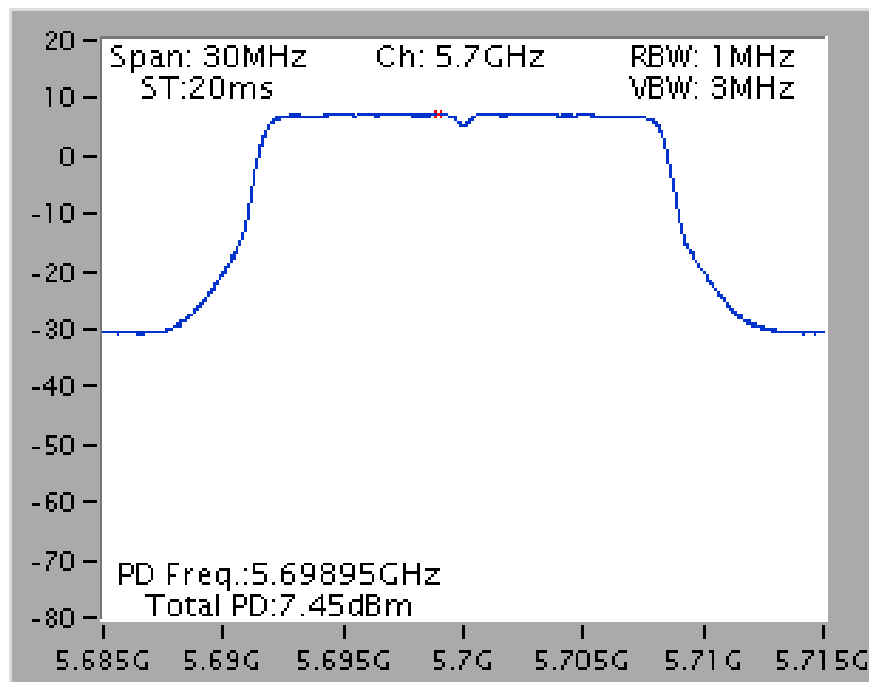


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5260 MHz

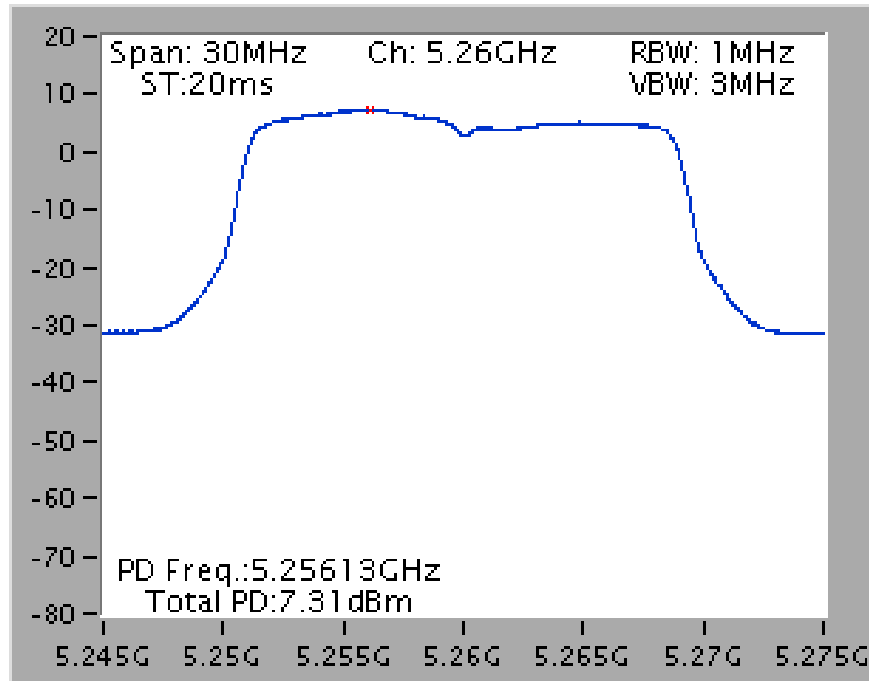


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5500 MHz

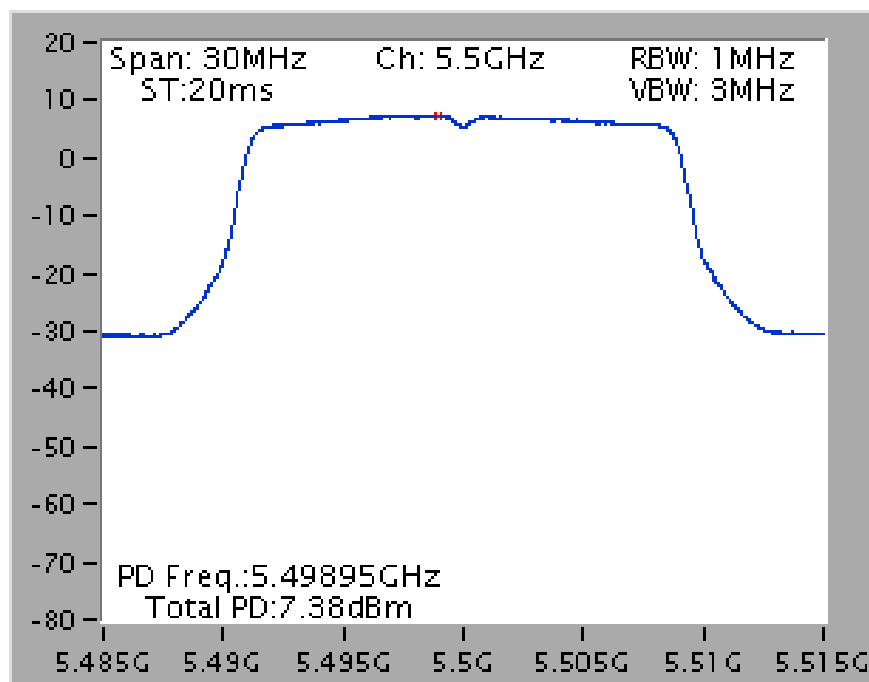


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5270 MHz

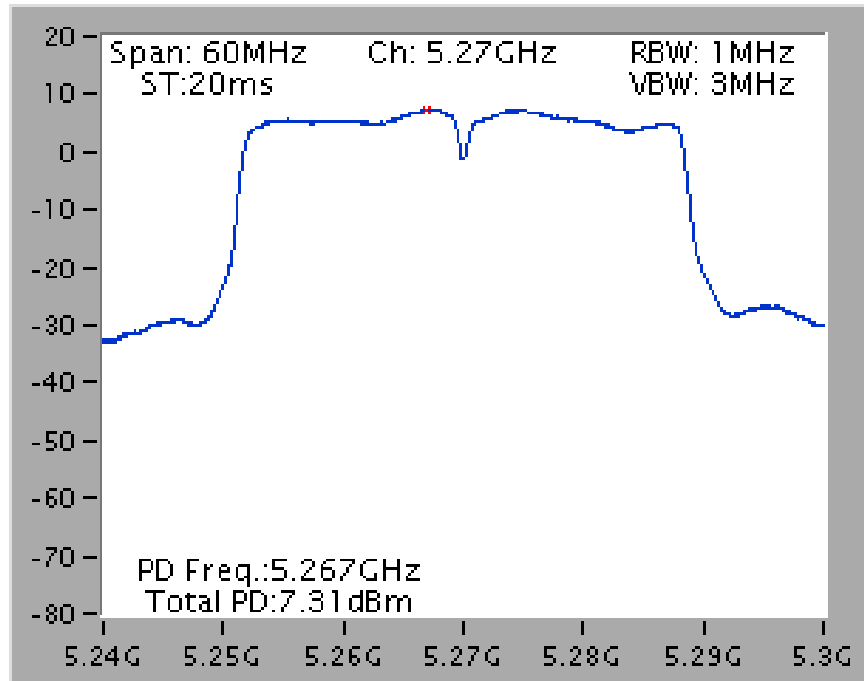


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5670 MHz

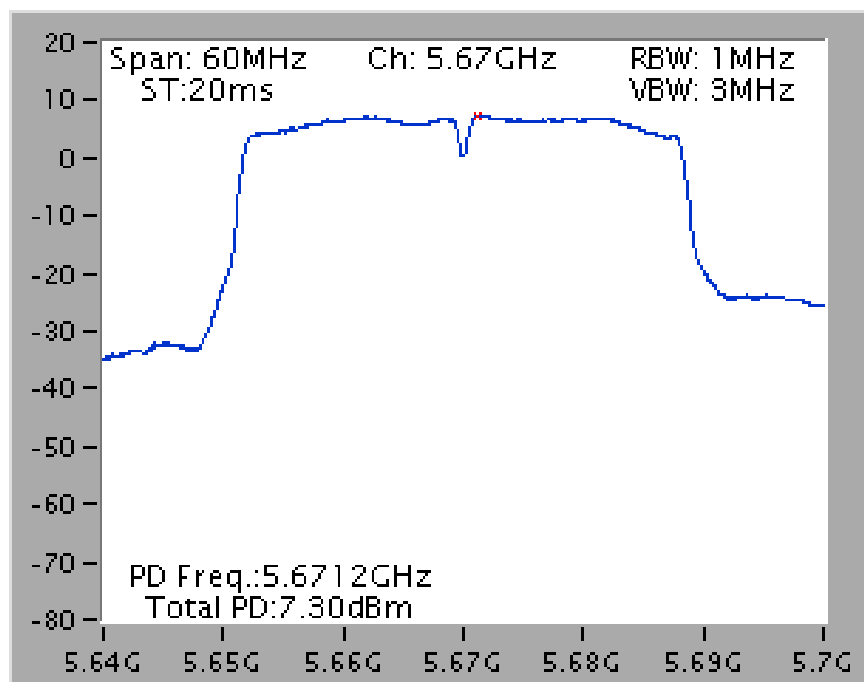

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5290 MHz

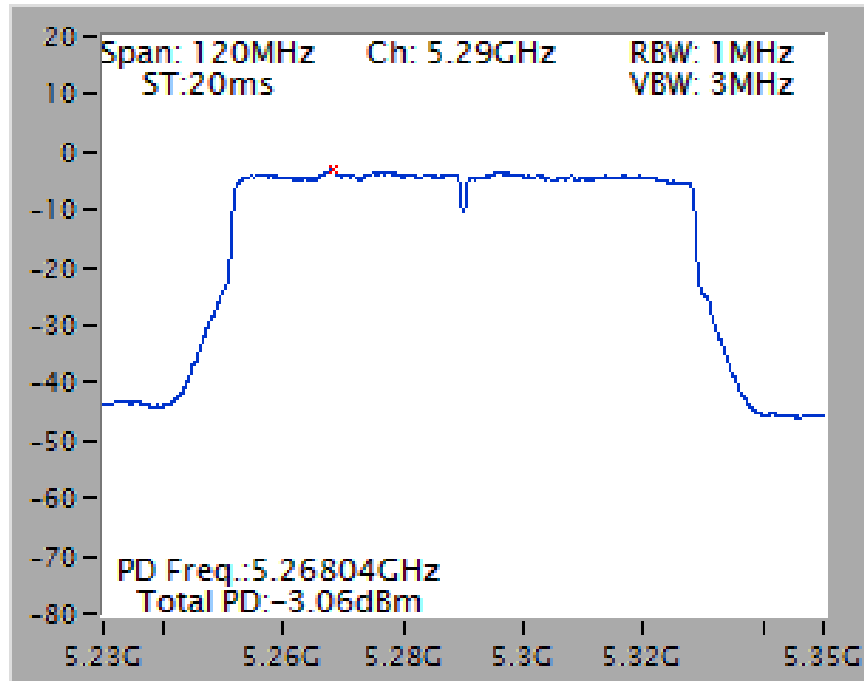


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5610 MHz

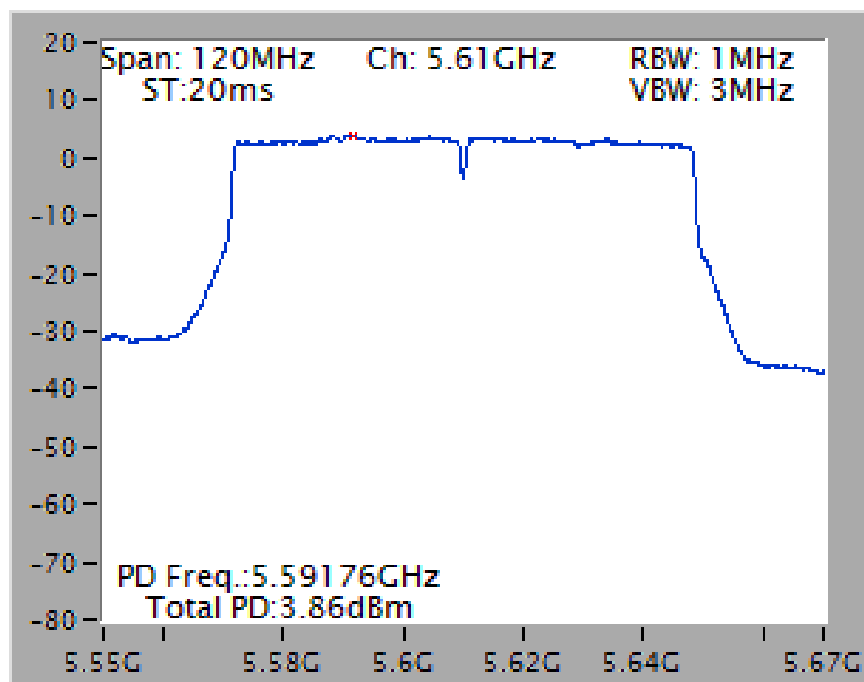


Straddle Channel


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz
(UNII 2C)

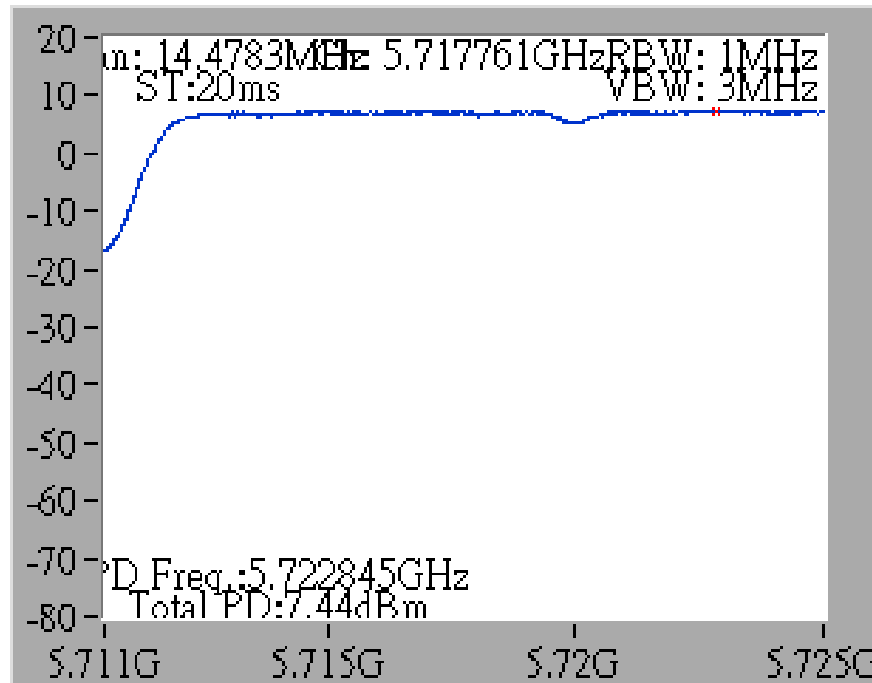


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz
(UNII 3)

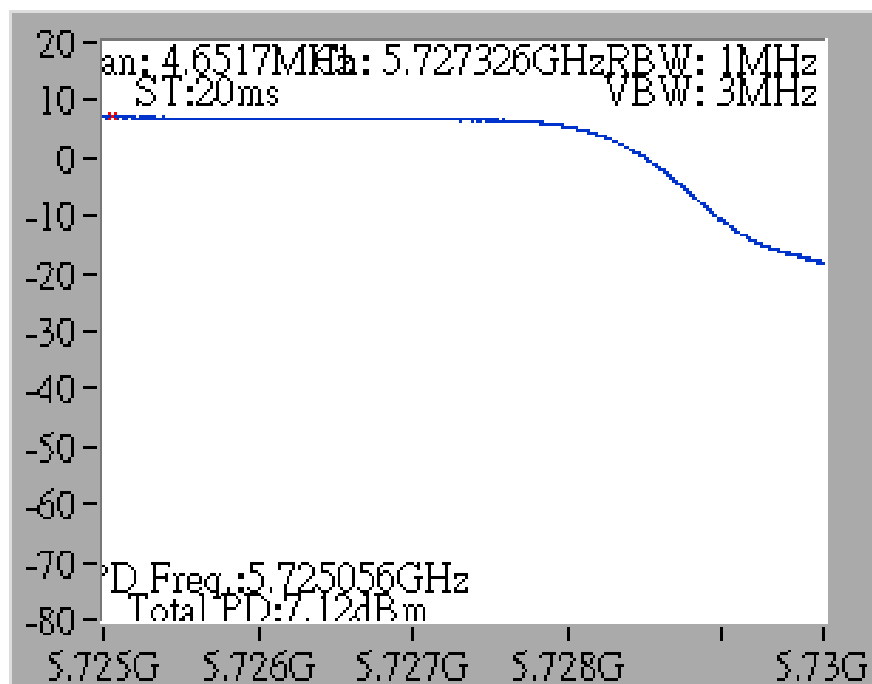


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz (UNII 2C)

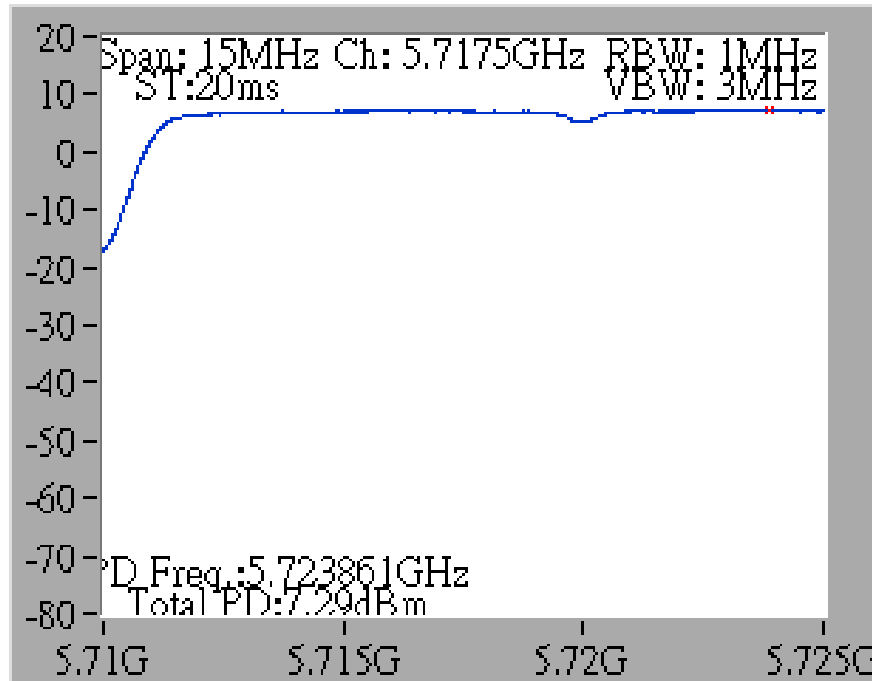


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz (UNII 3)

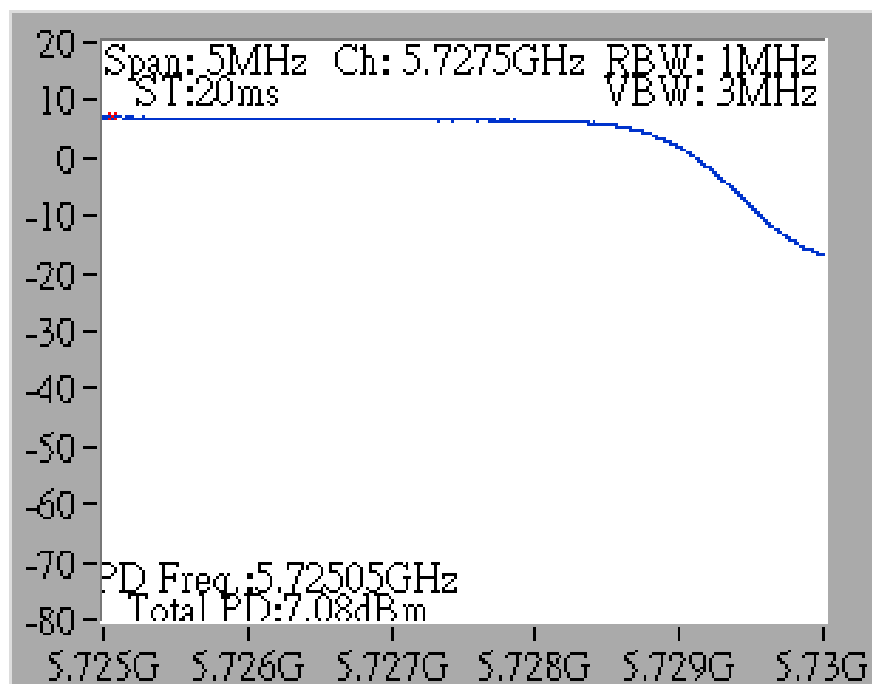


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5710 MHz (UNII 2C)

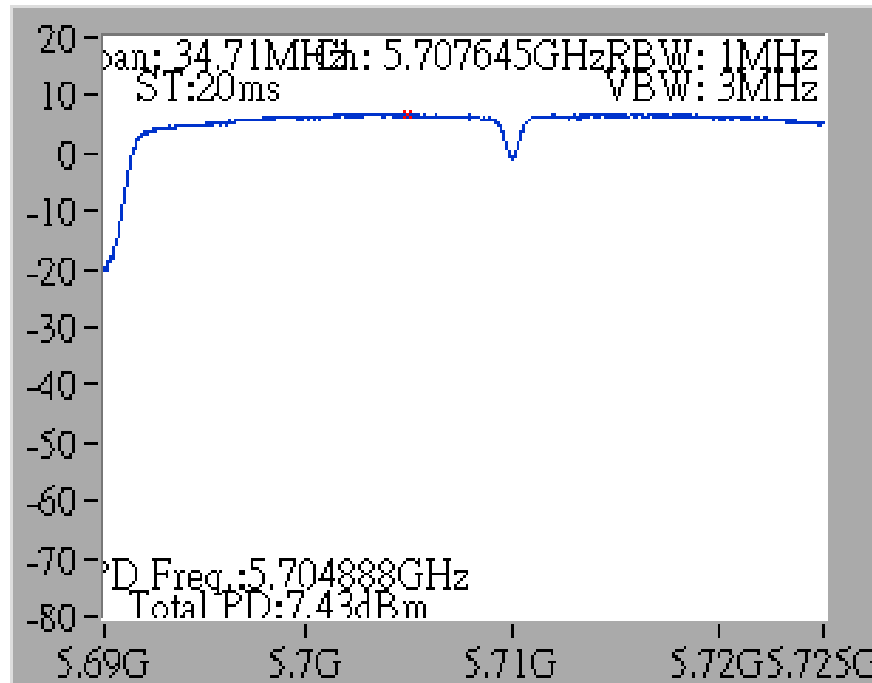


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5710 MHz (UNII 3)

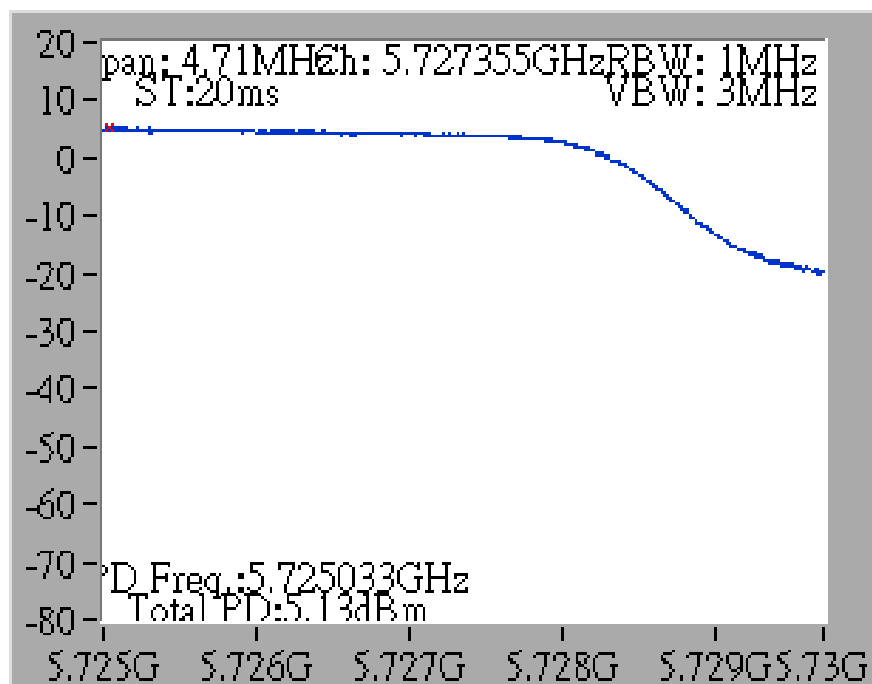

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5690 MHz (UNII 2C)

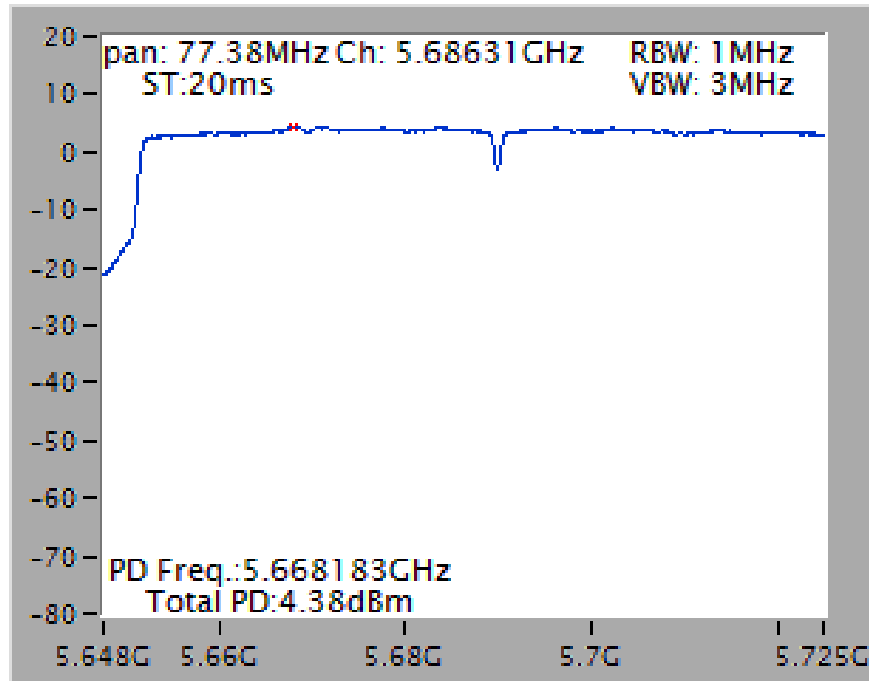


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5690 MHz (UNII 3)

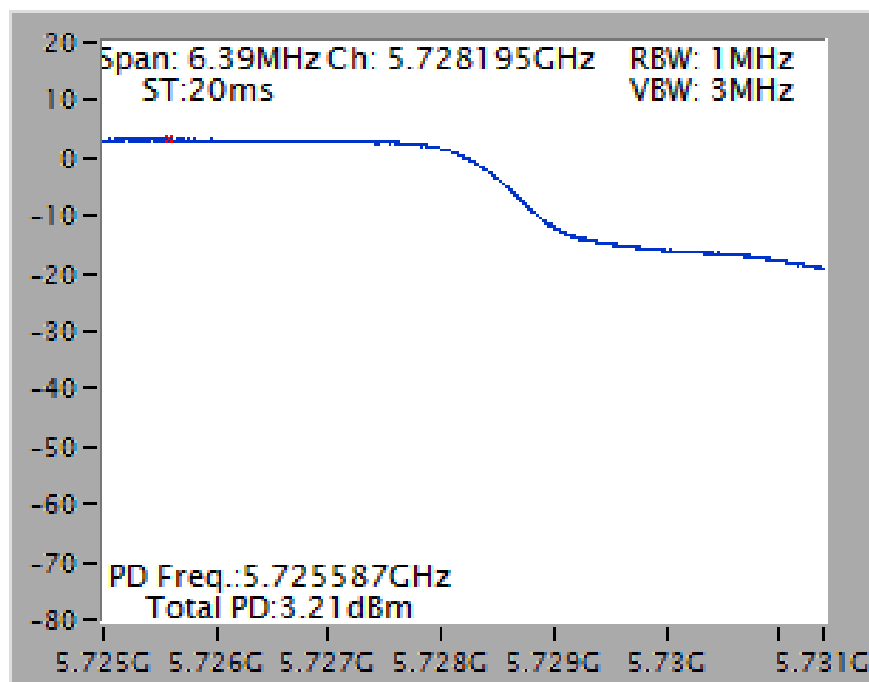


Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5300 MHz

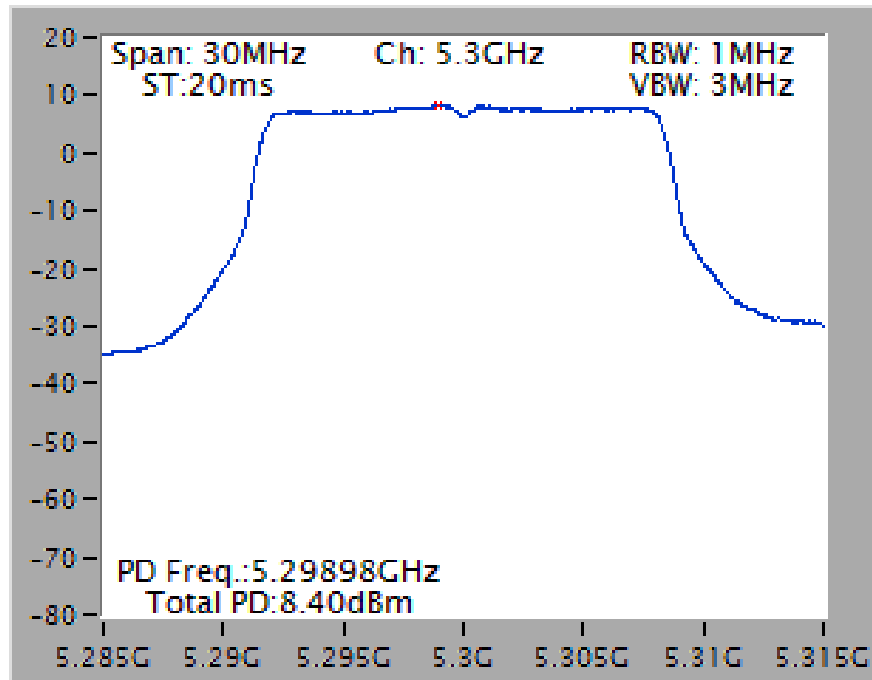


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5700 MHz

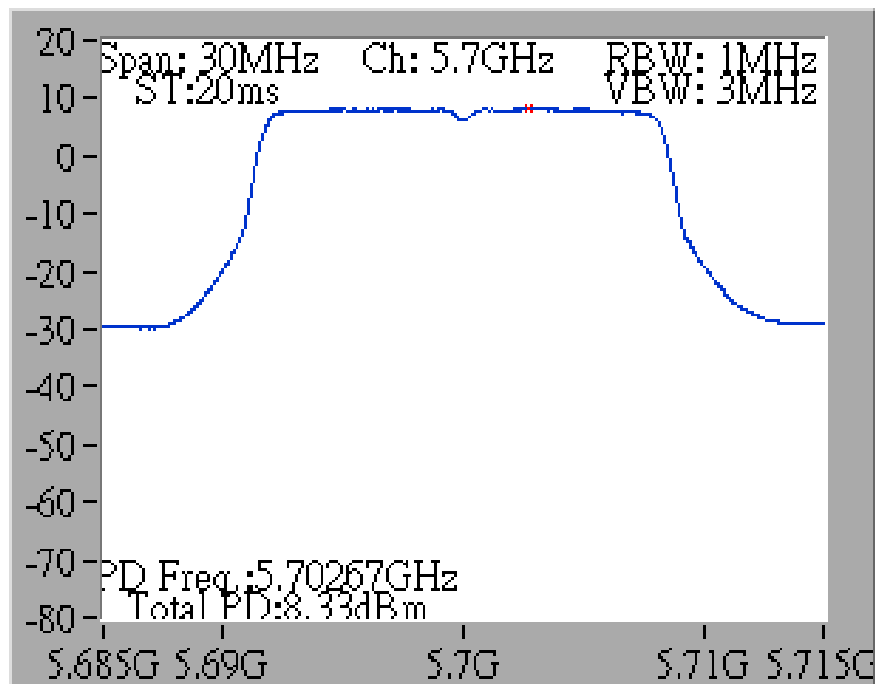


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5260 MHz

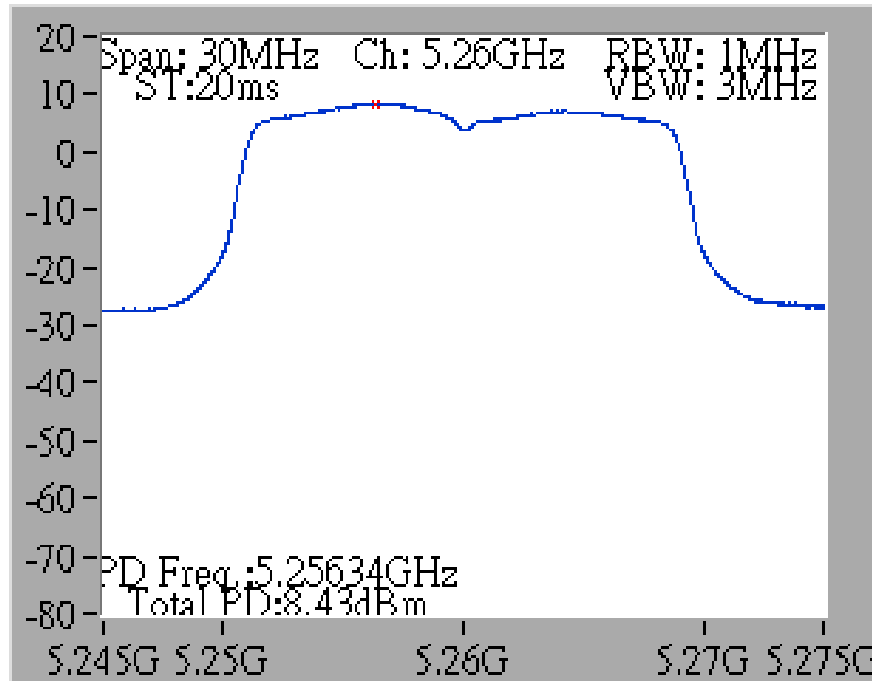


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5700 MHz

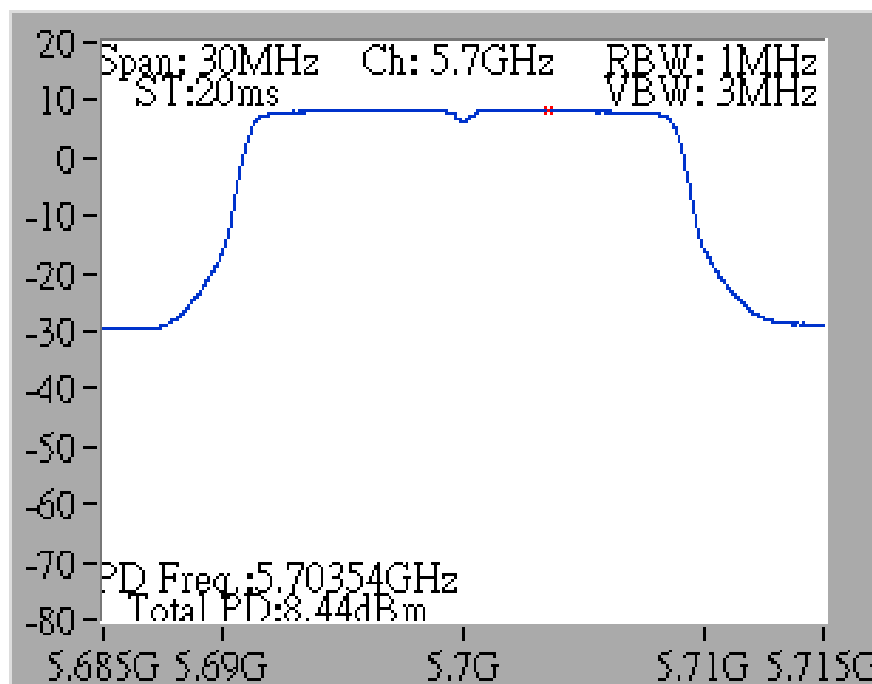


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5270 MHz

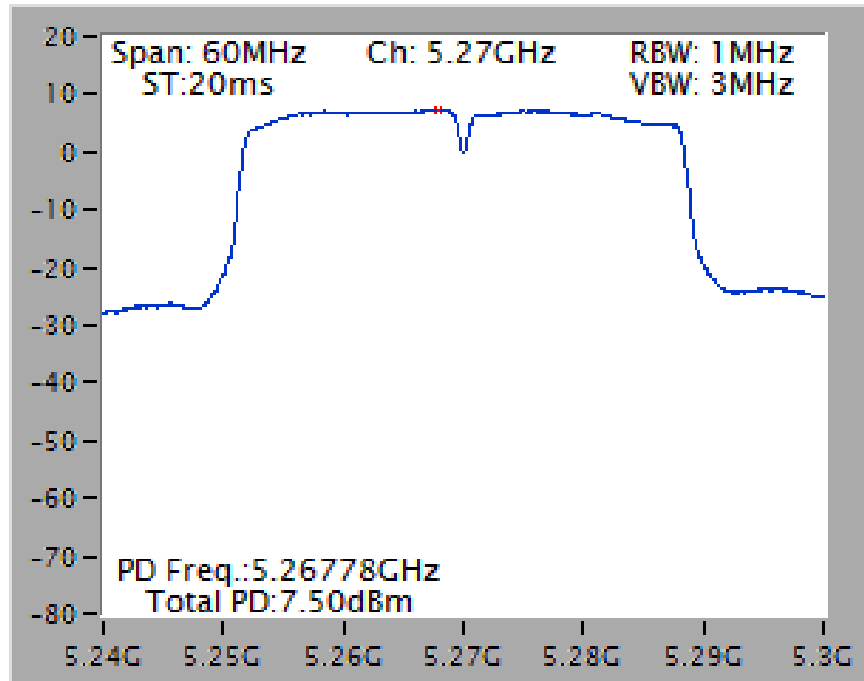


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5670 MHz

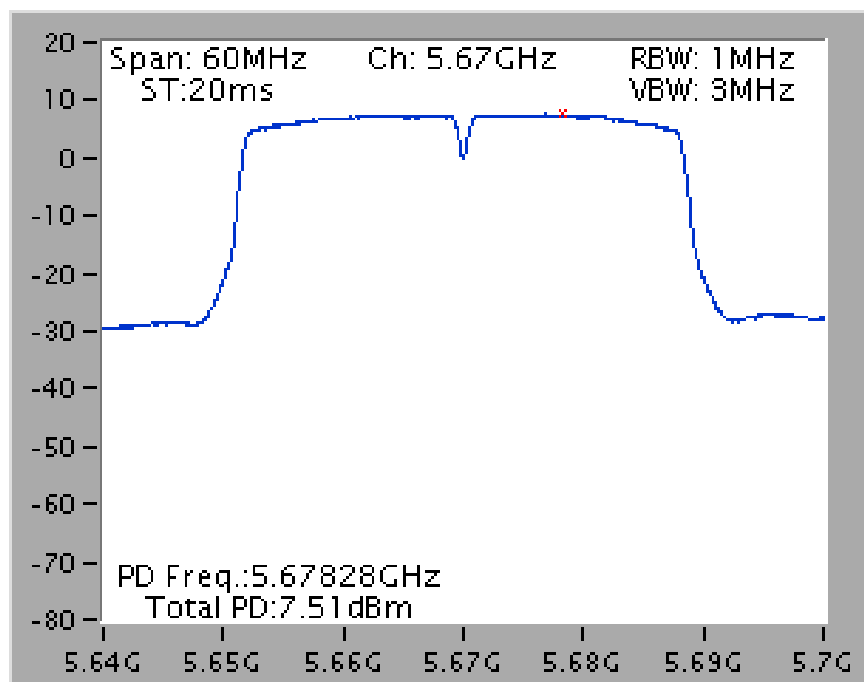

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5290 MHz

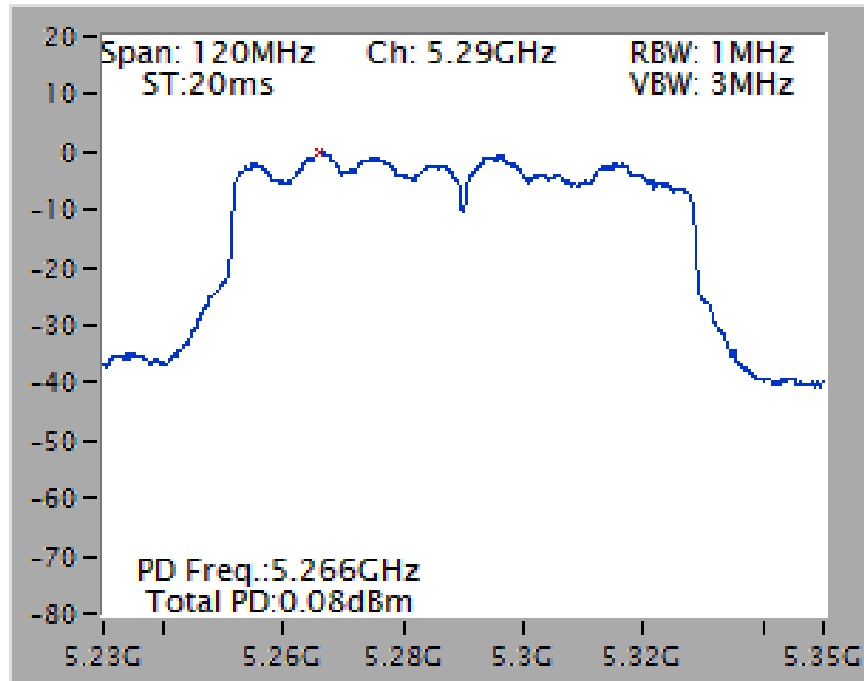


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5610 MHz

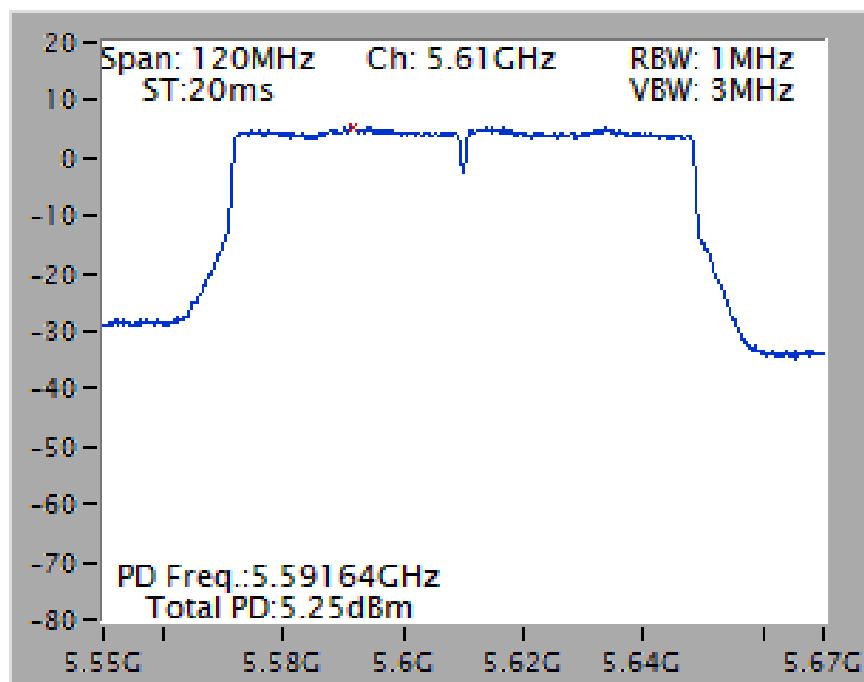


Straddle Channel


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz
(UNII 2C)

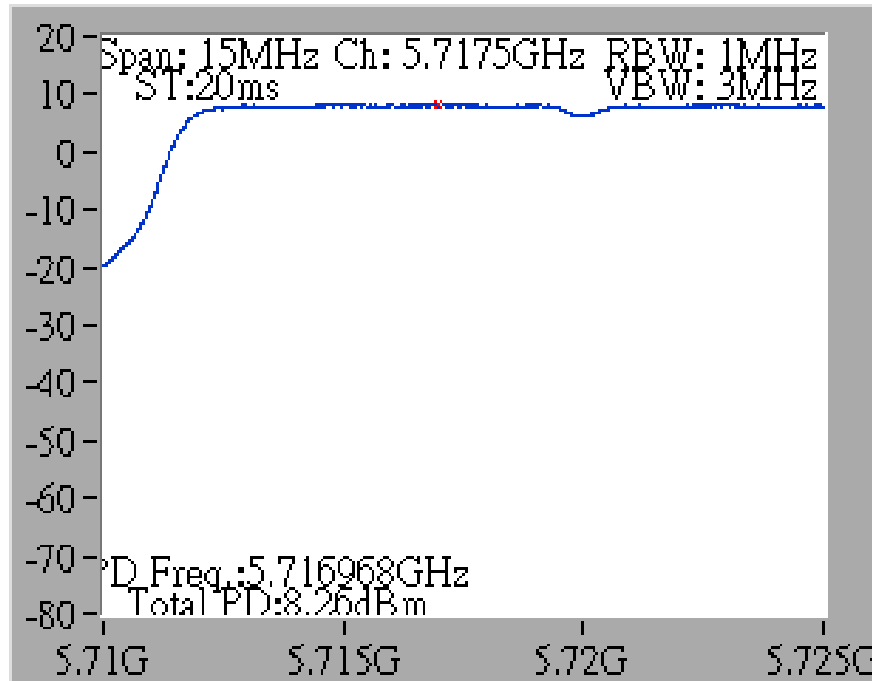


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz
(UNII 3)

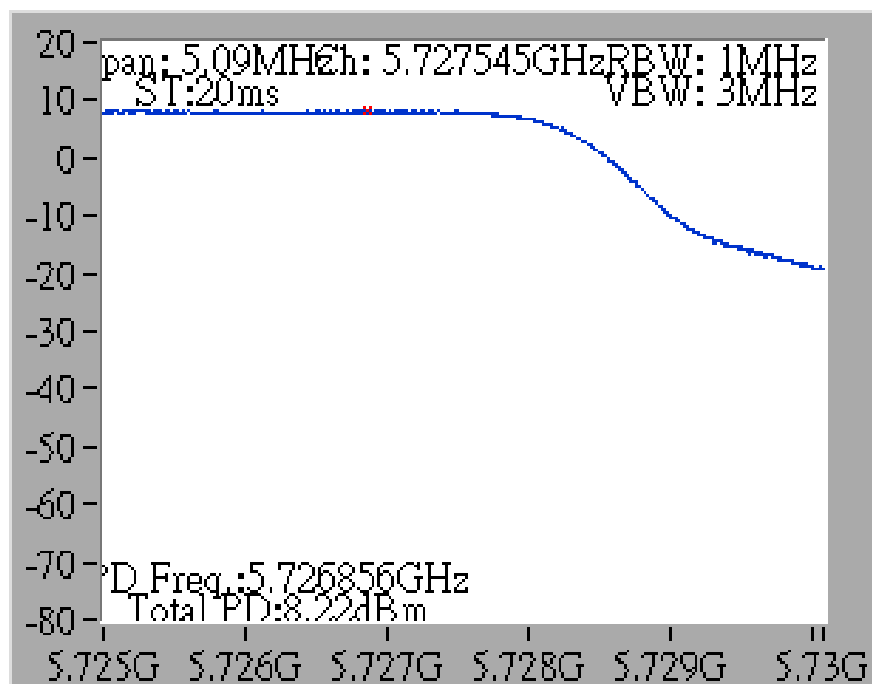


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz (UNII 2C)

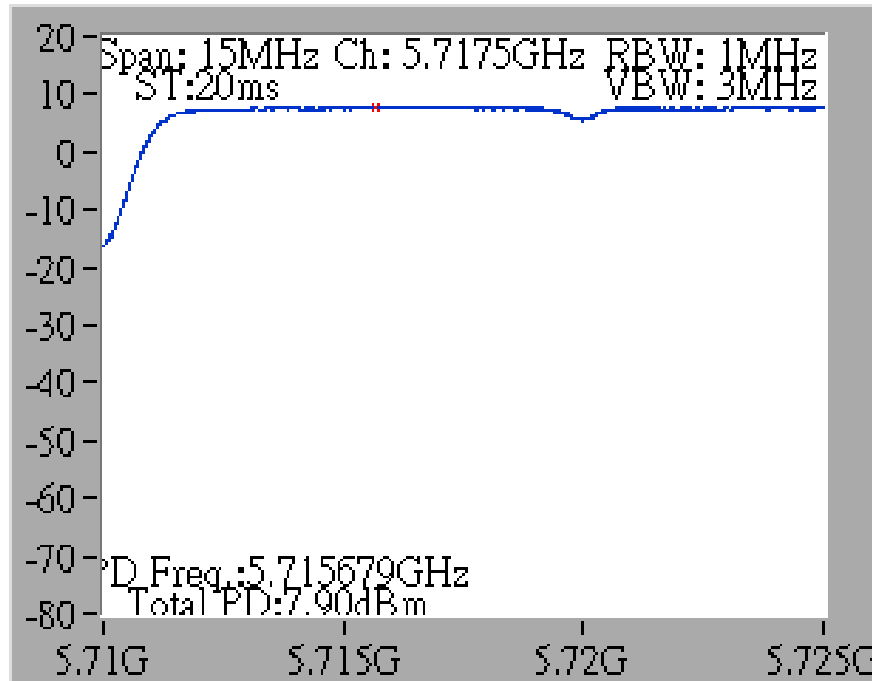


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz (UNII 3)

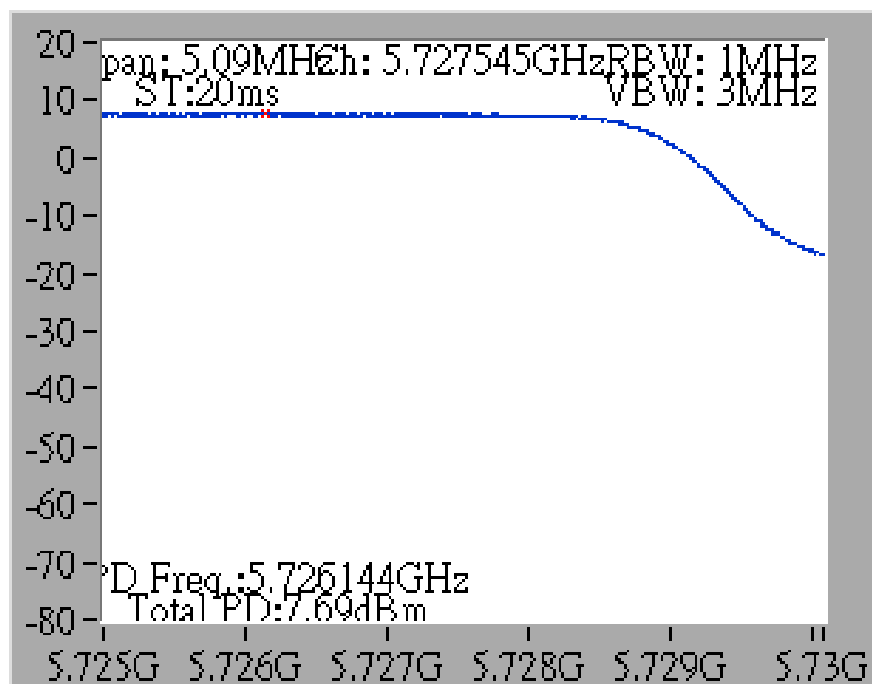


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5710 MHz (UNII 2C)

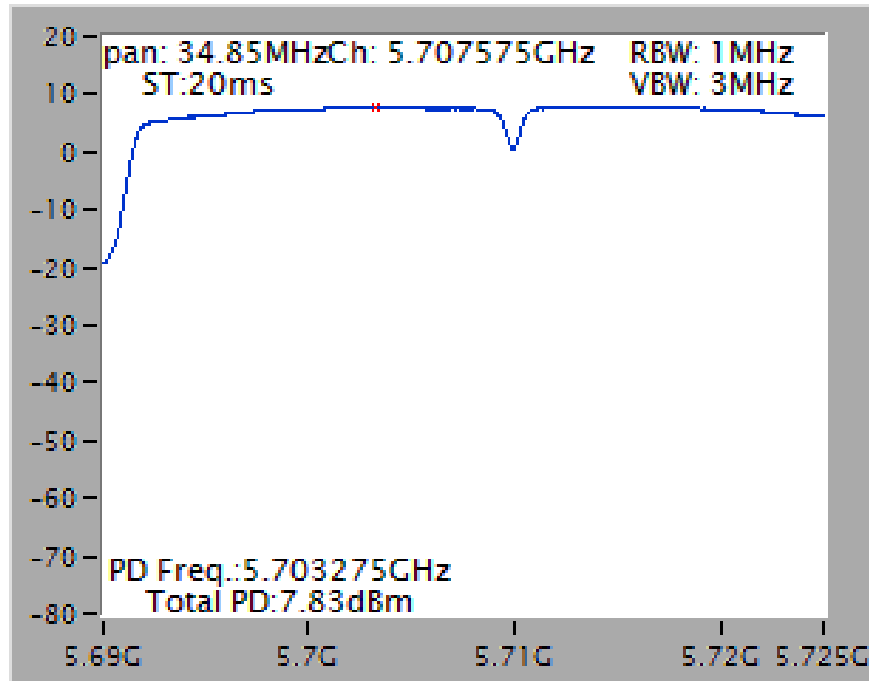


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5710 MHz (UNII 3)

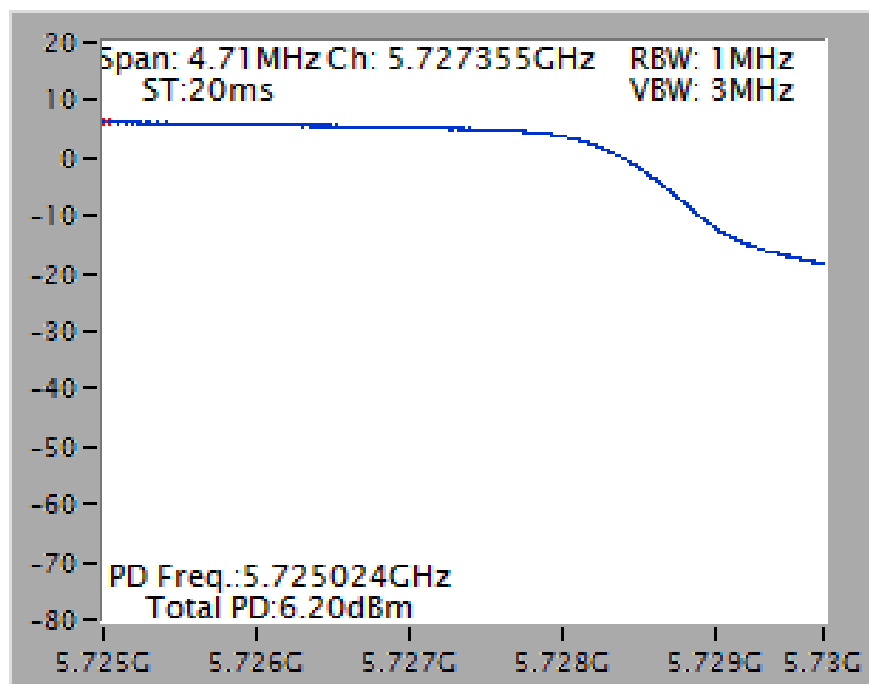

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5690 MHz (UNII 2C)

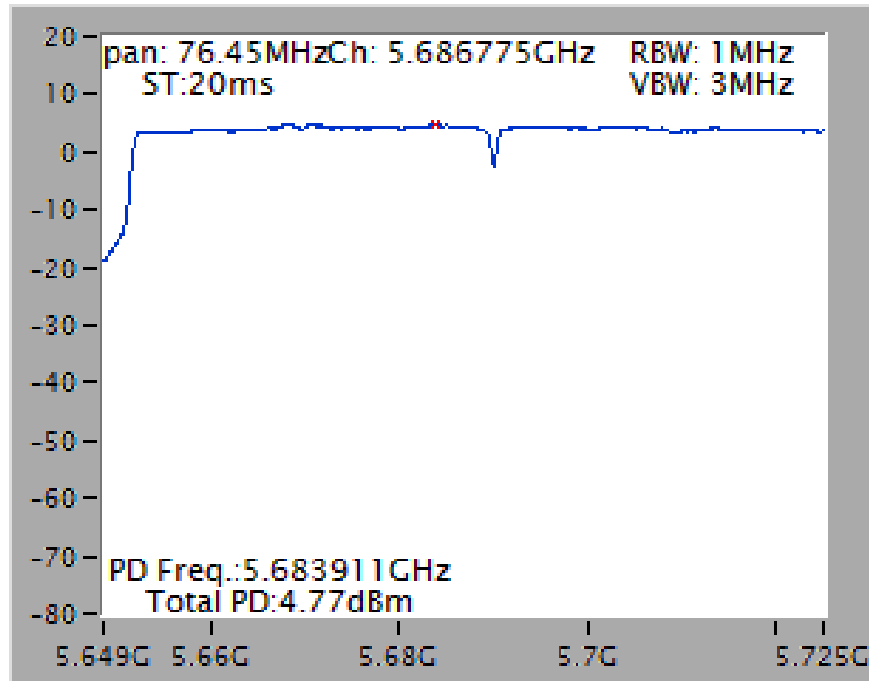


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5690 MHz (UNII 3)

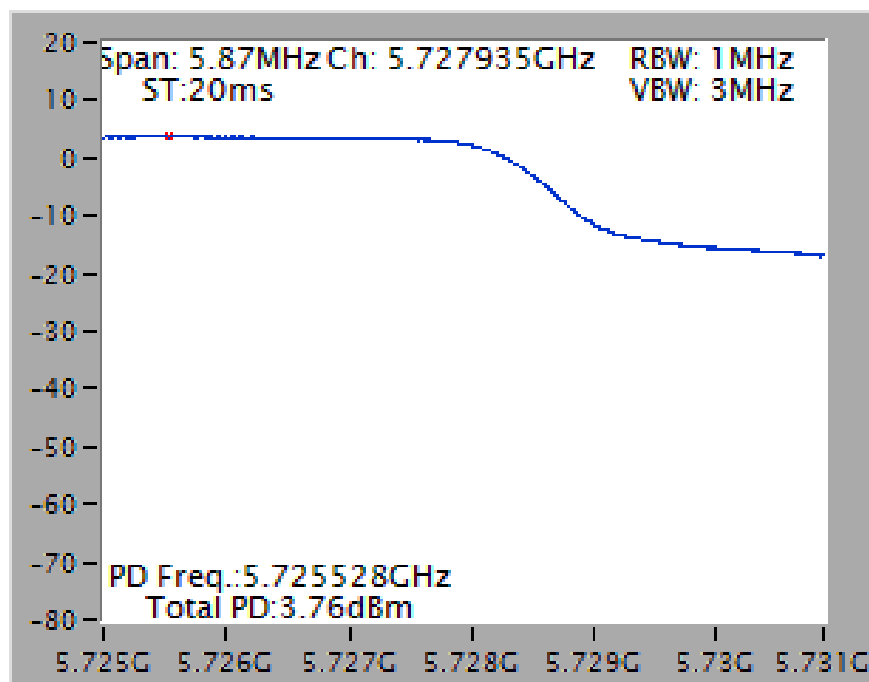


Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5300 MHz

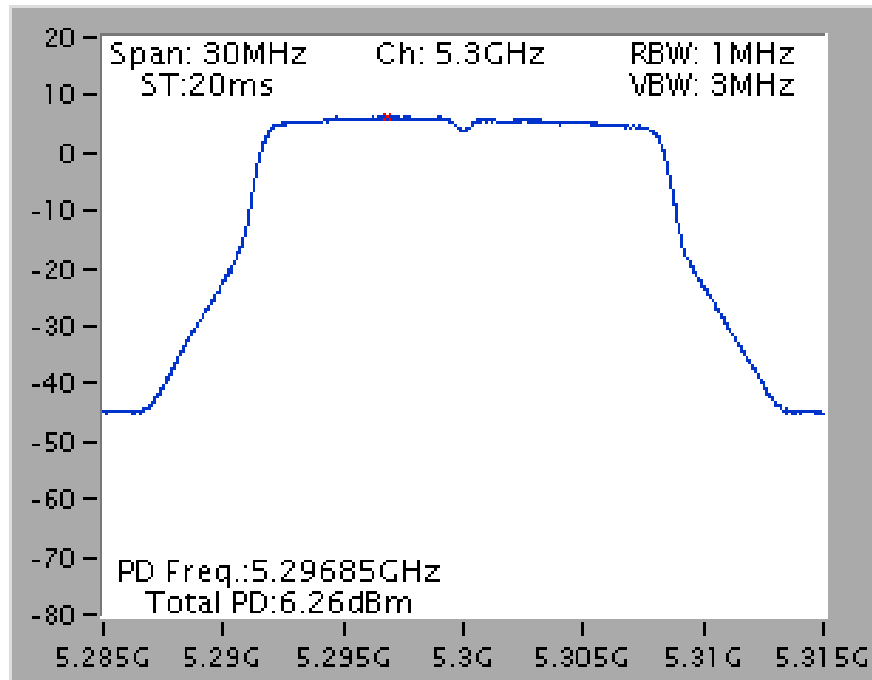


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5700 MHz

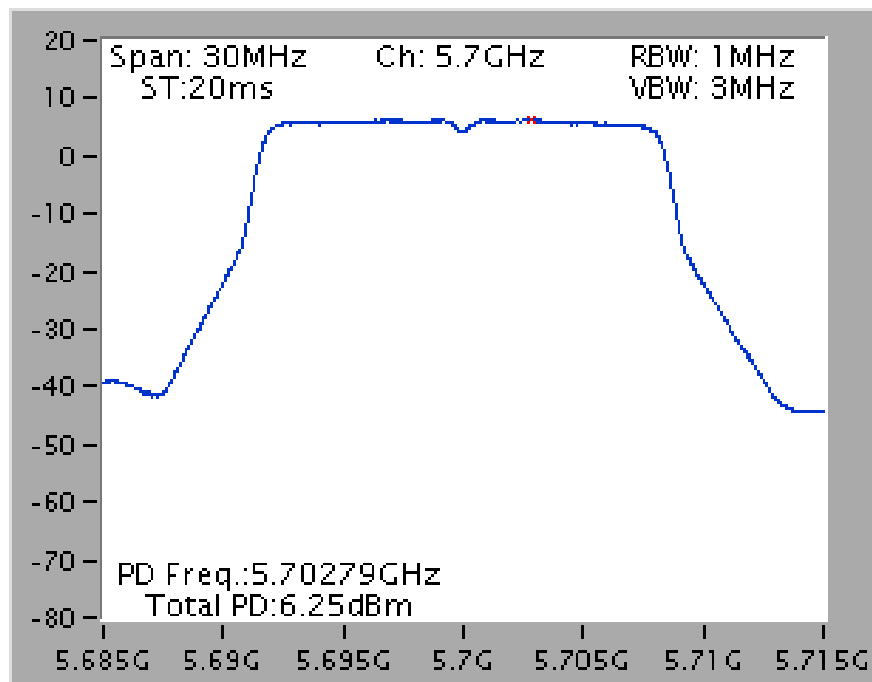


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5320 MHz

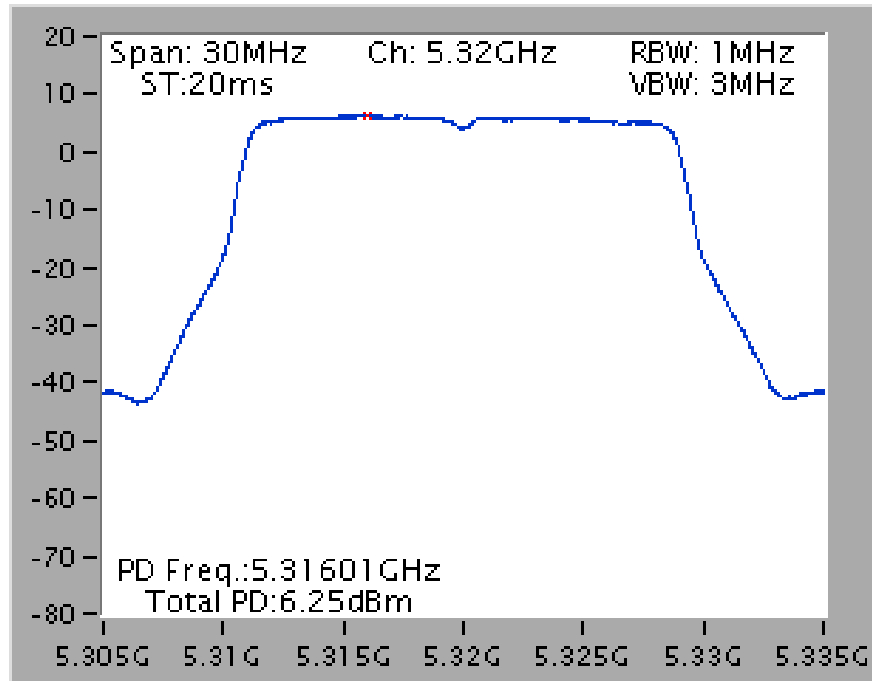


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5700 MHz

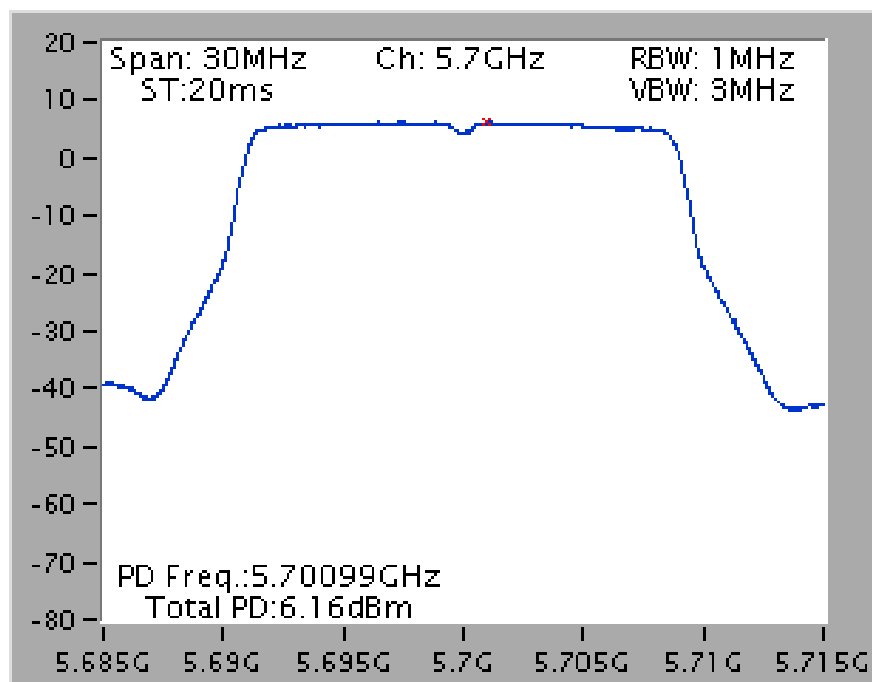


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5270 MHz

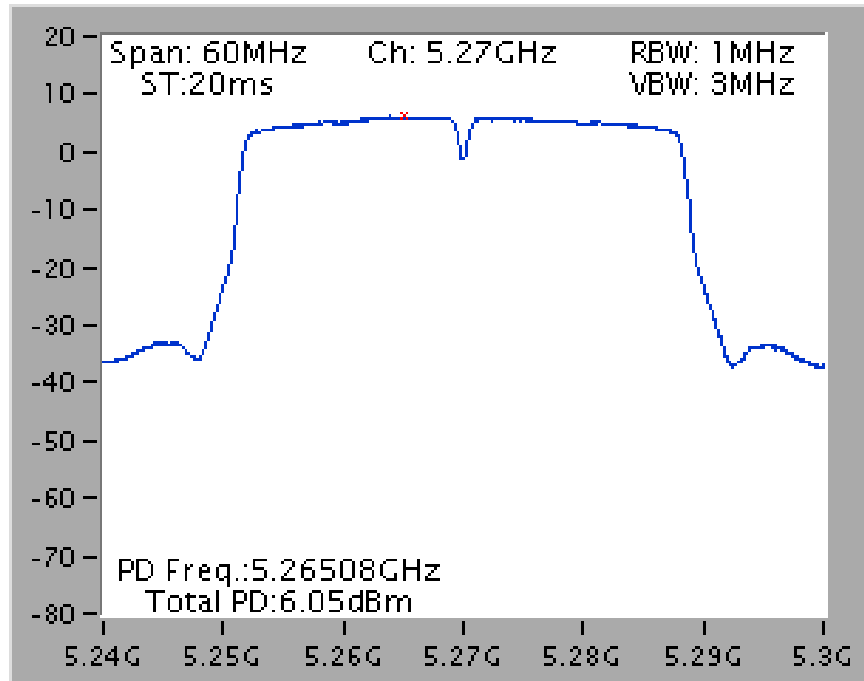


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5550 MHz

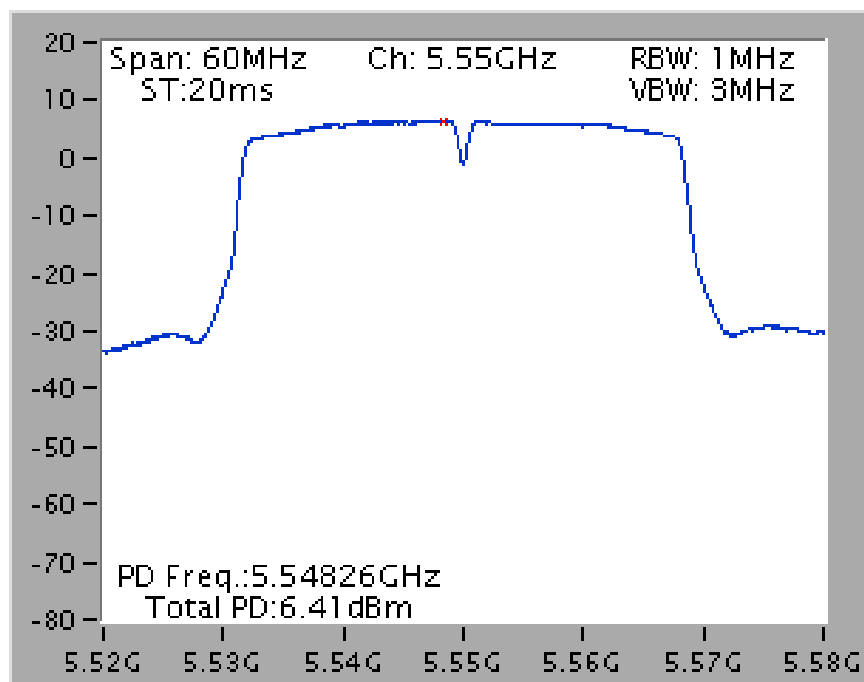

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5290 MHz

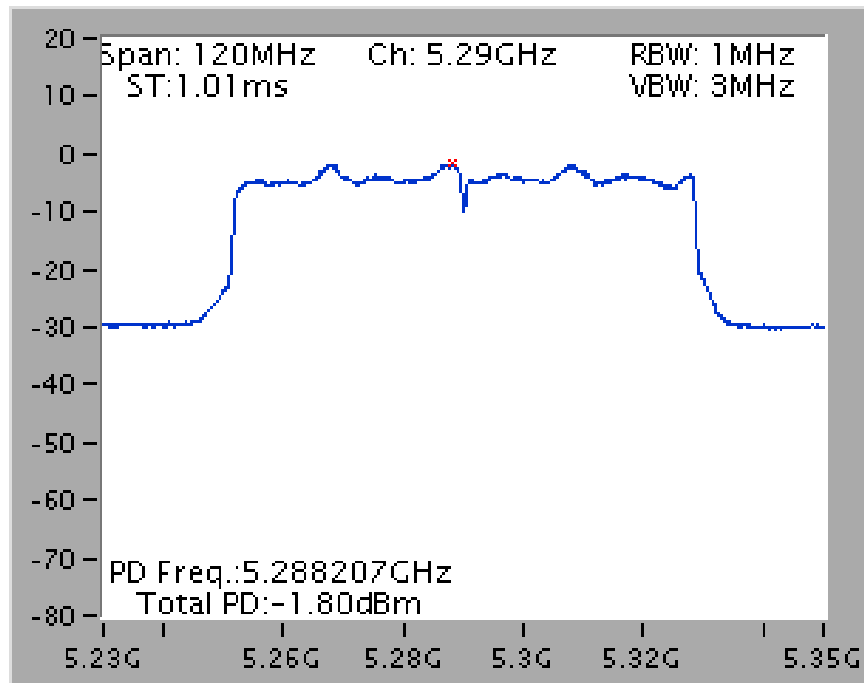


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5610 MHz

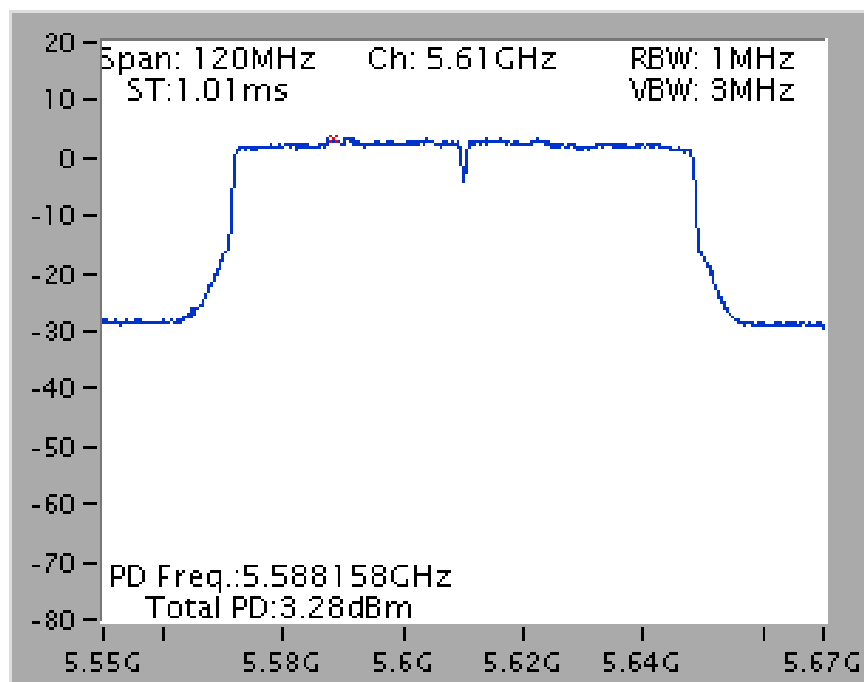


Straddle Channel


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz
(UNII 2C)

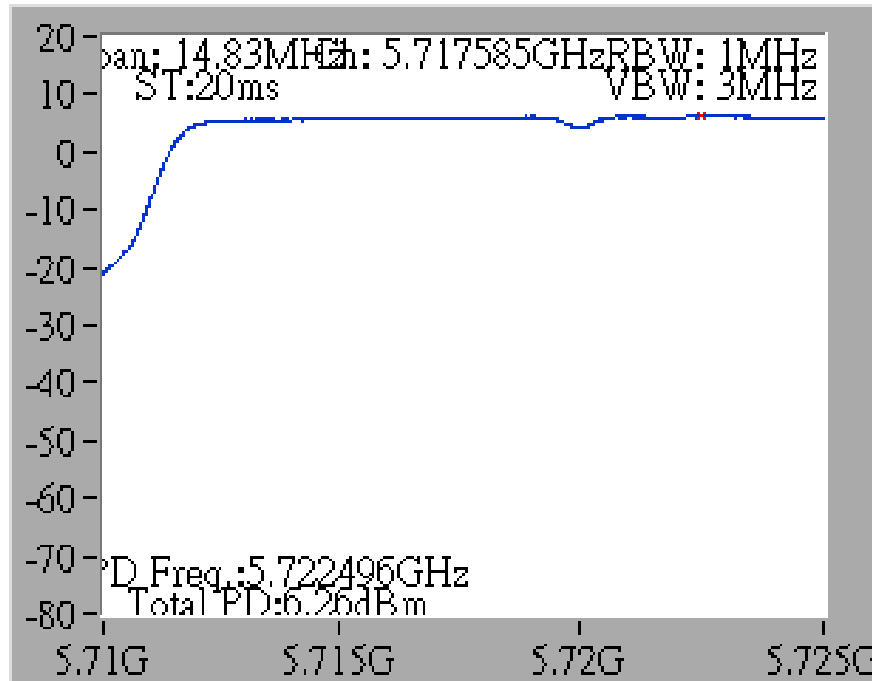


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz
(UNII 3)

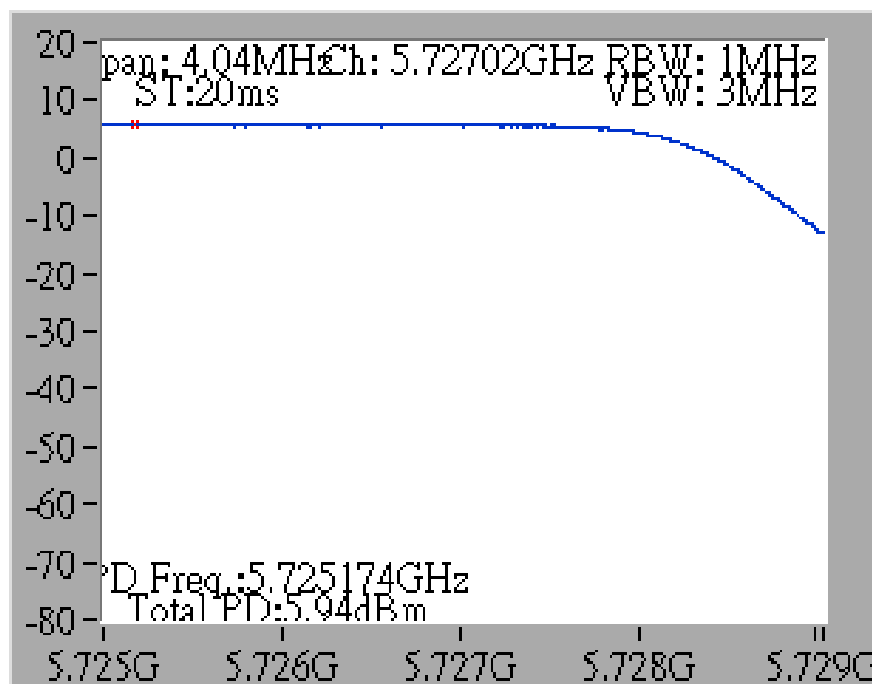


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz (UNII 2C)

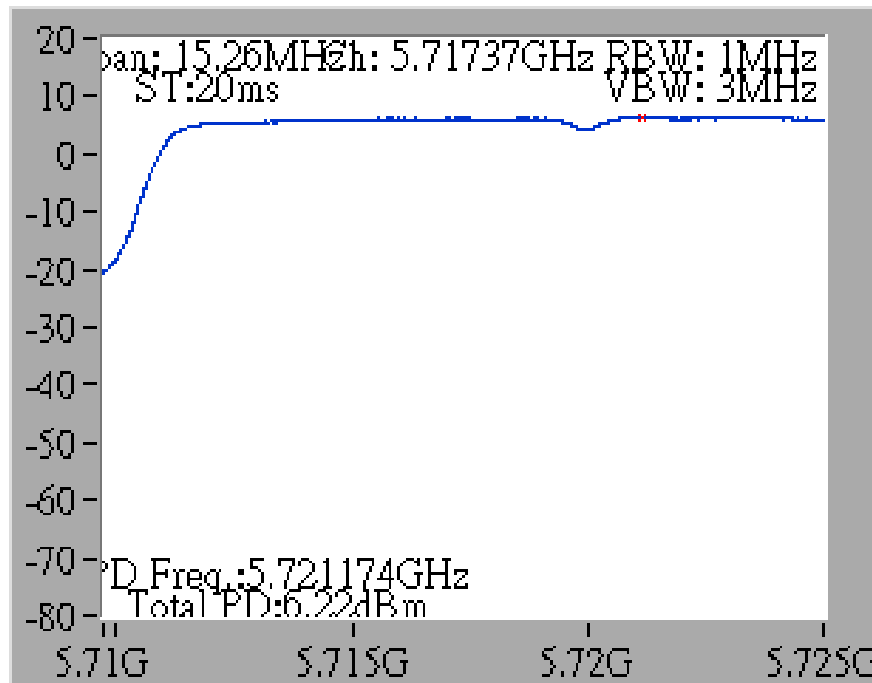


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz (UNII 3)

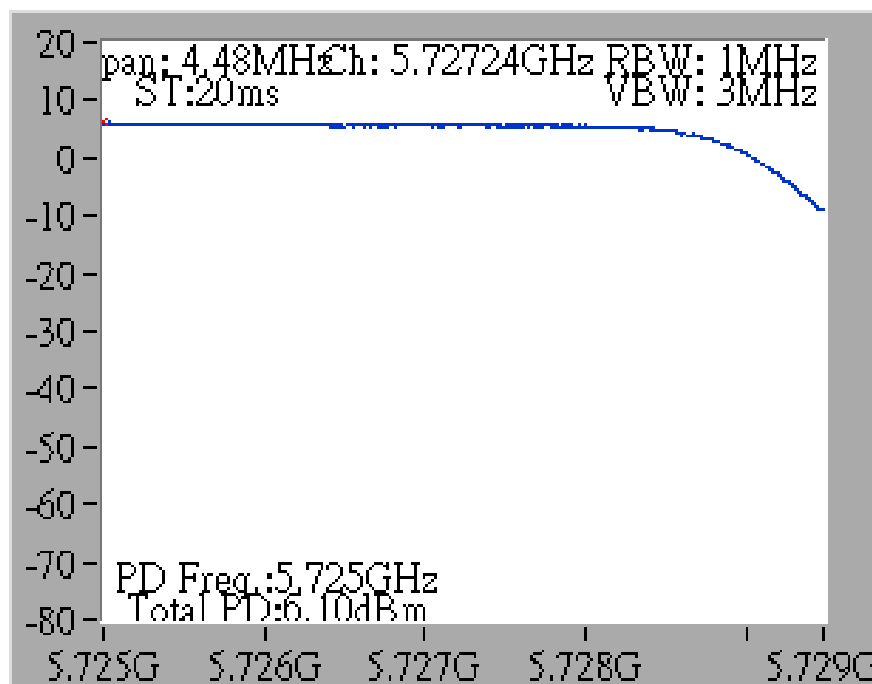


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5710 MHz (UNII 2C)

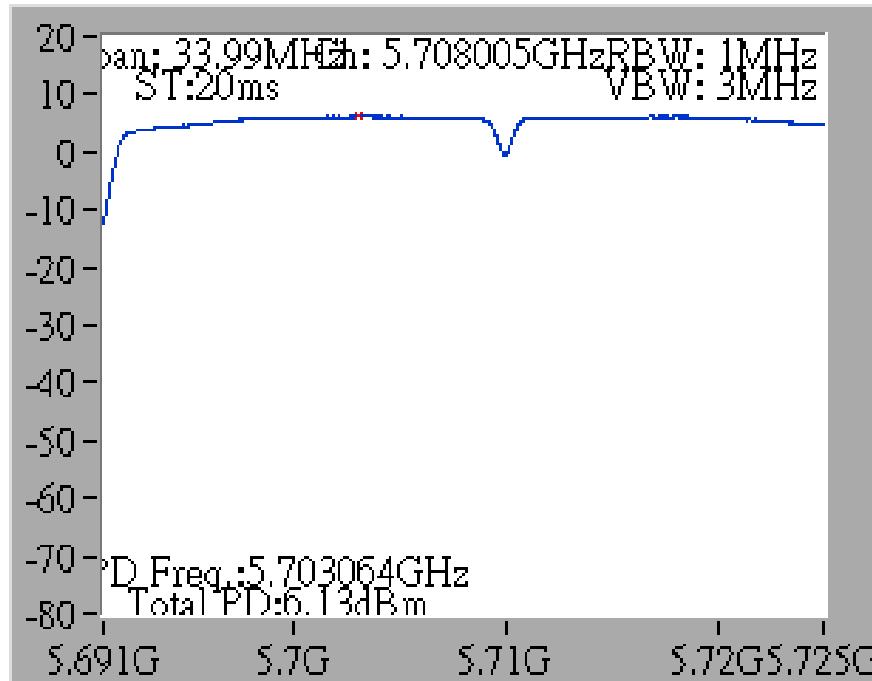


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5710 MHz (UNII 3)

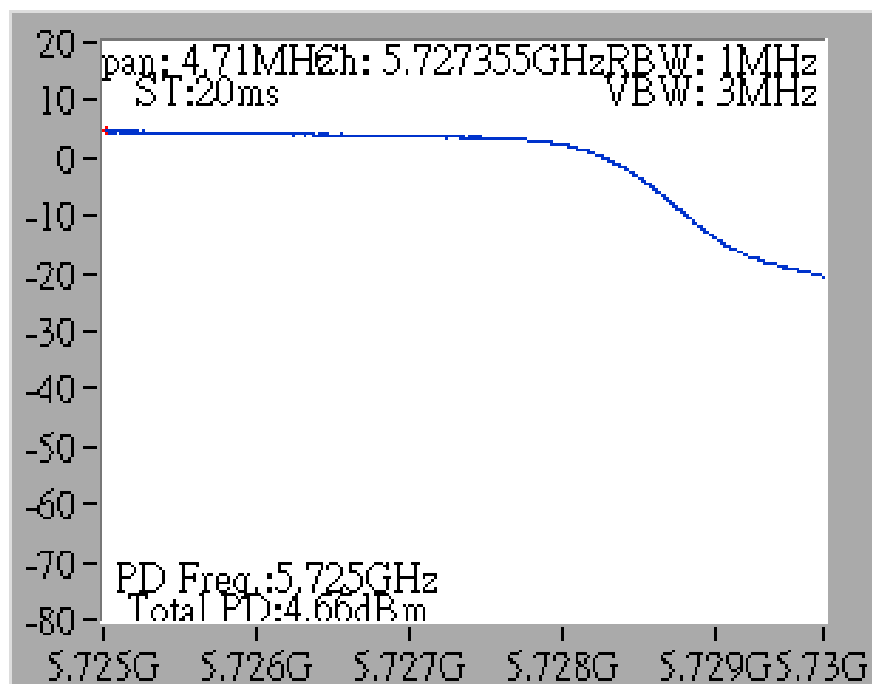

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5690 MHz (UNII 2C)

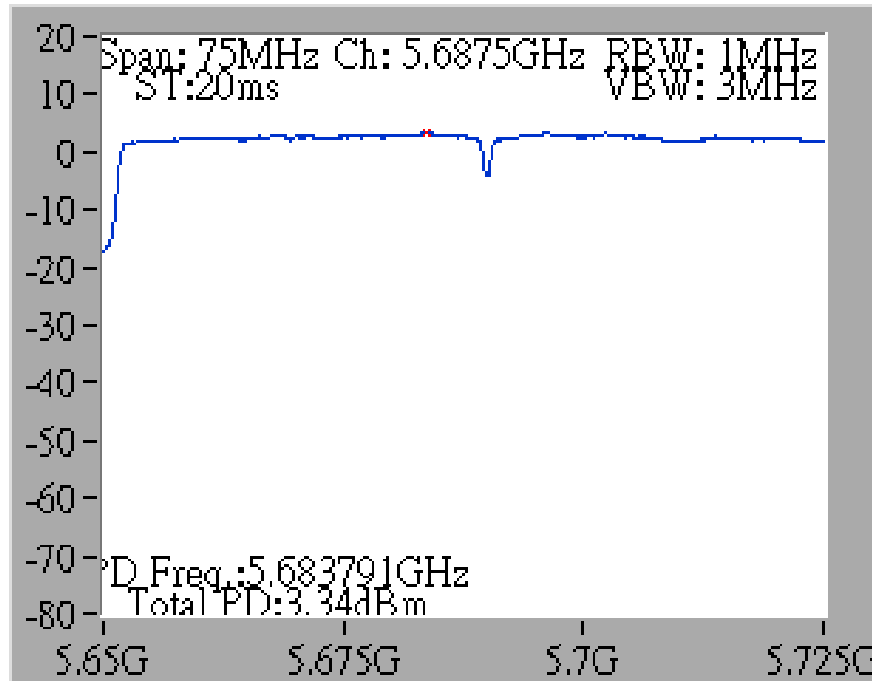


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5690 MHz (UNII 3)

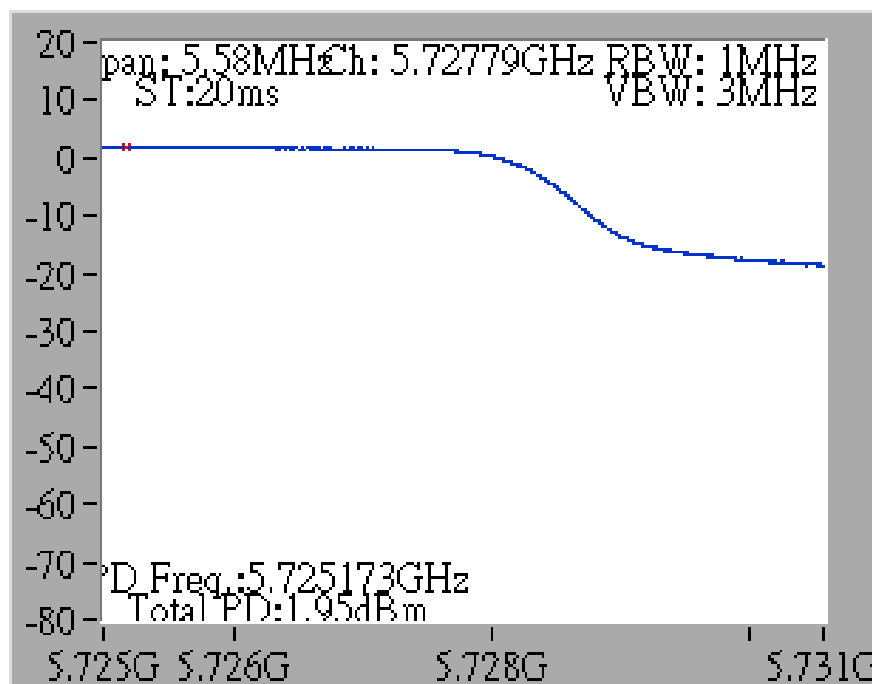


Mode 5: EUT 1 + Set 5 Sector Antenna / 4.5 dBi


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5260 MHz

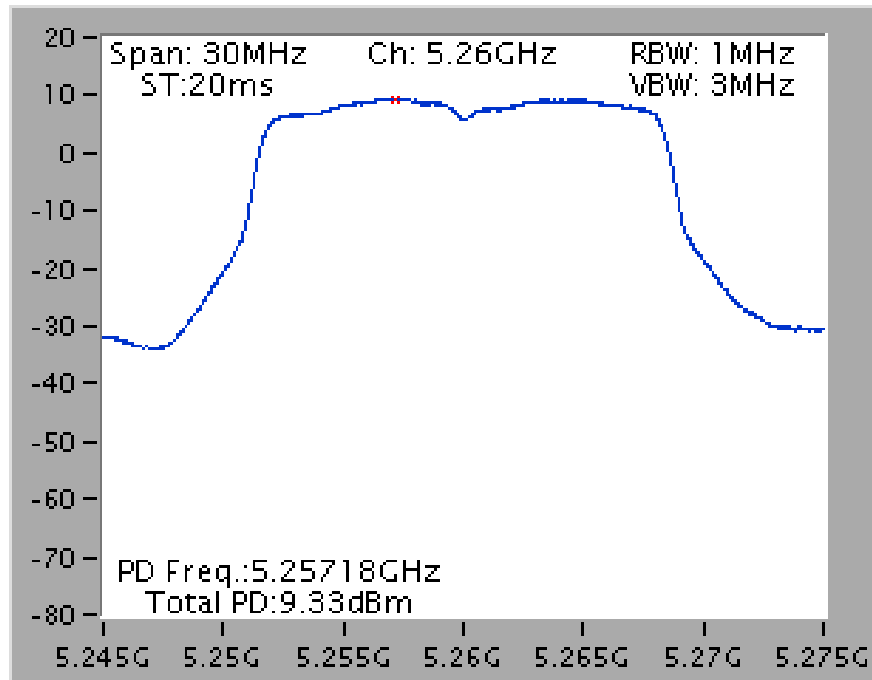


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5700 MHz

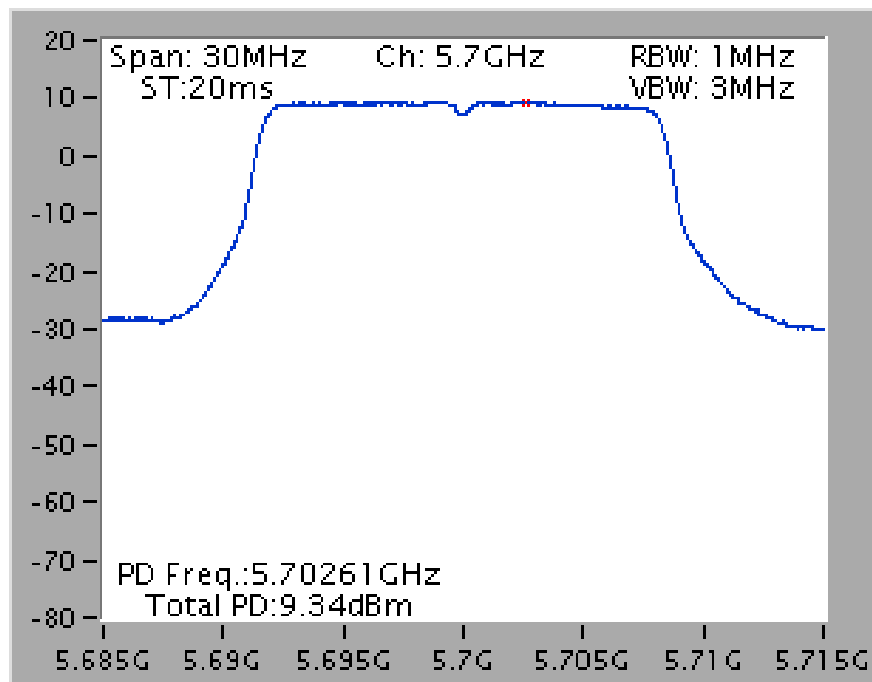


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5320 MHz

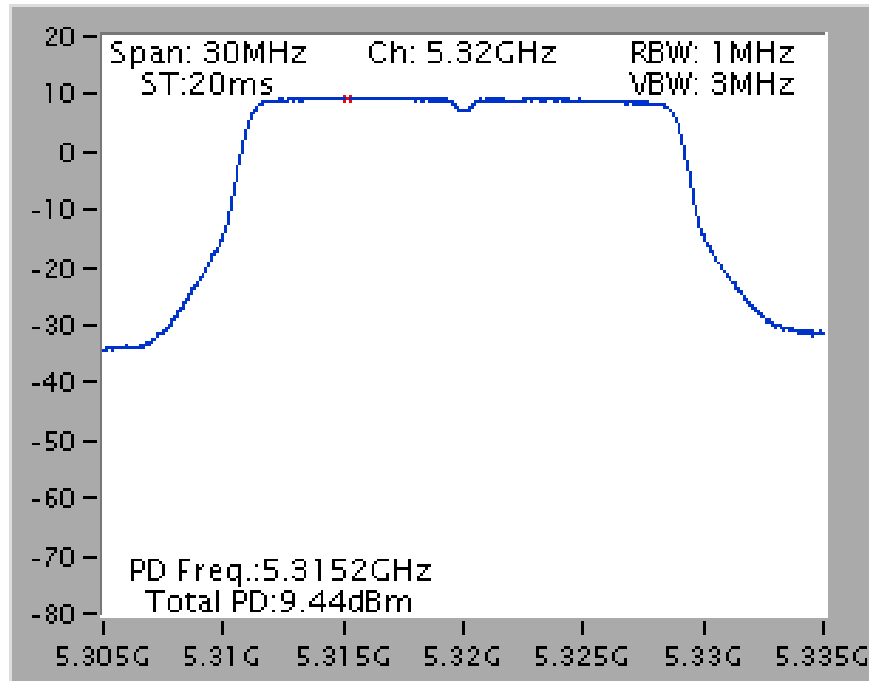


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5700 MHz

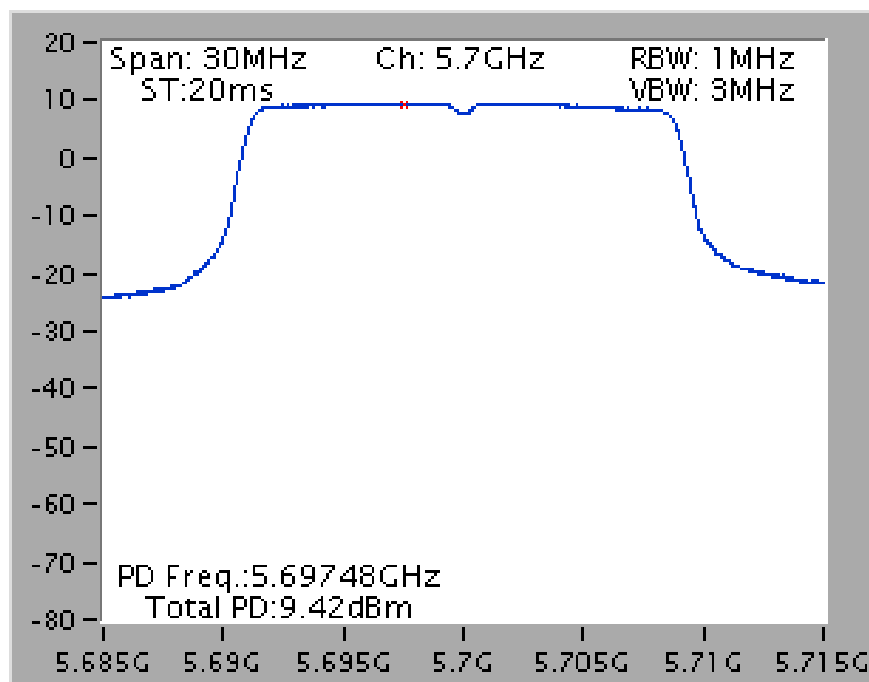


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5270 MHz

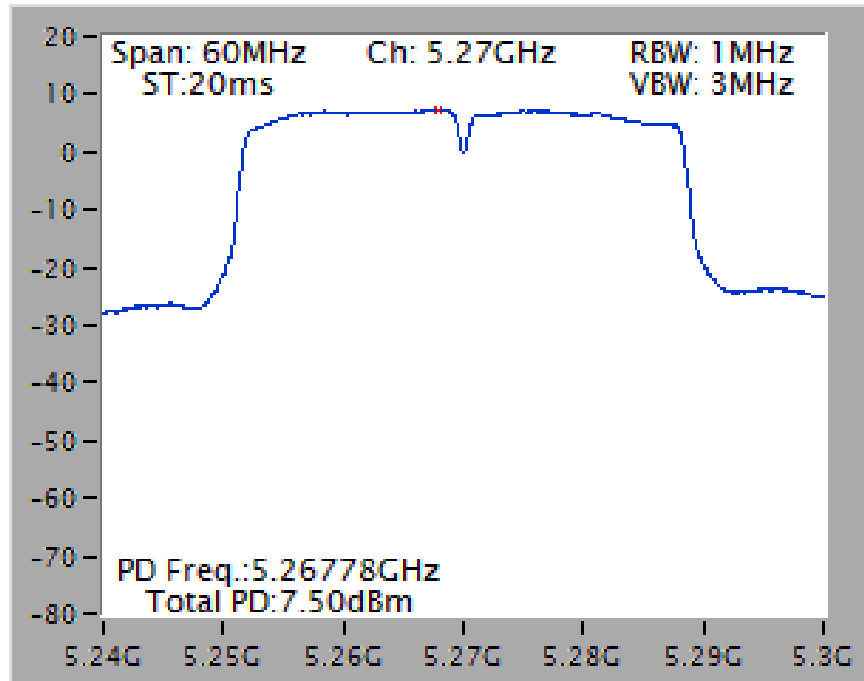


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5550 MHz

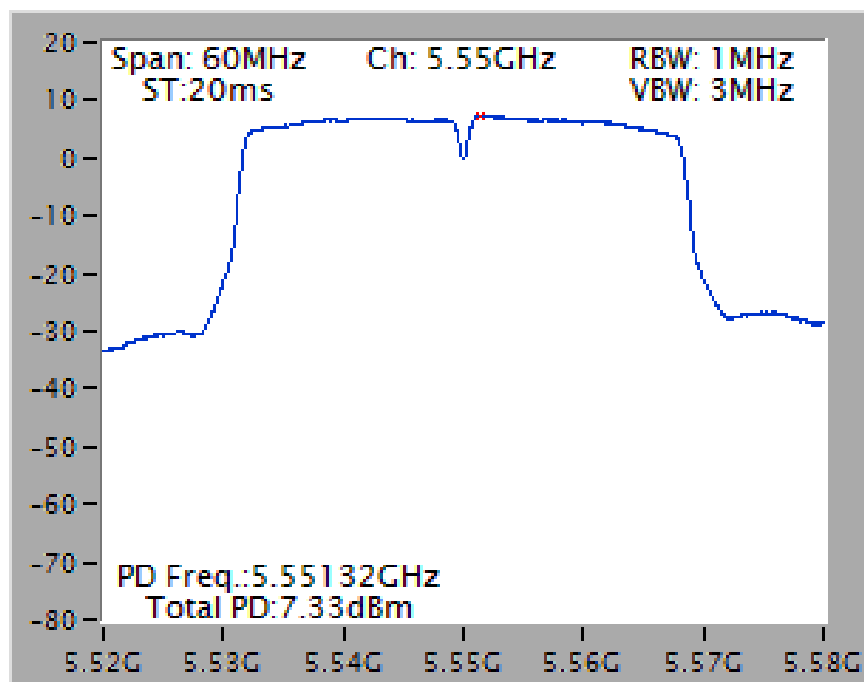

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5290 MHz

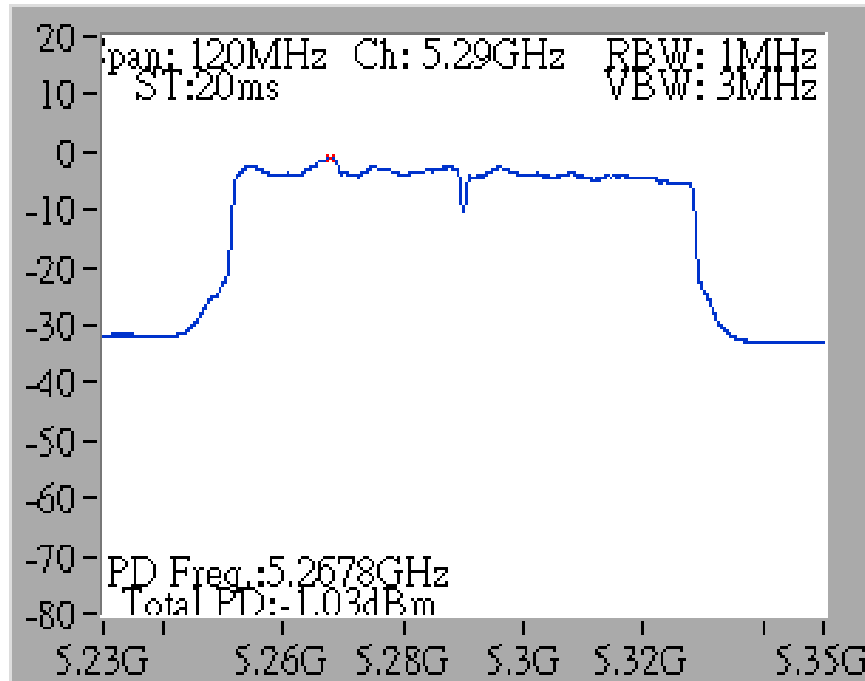


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5610 MHz

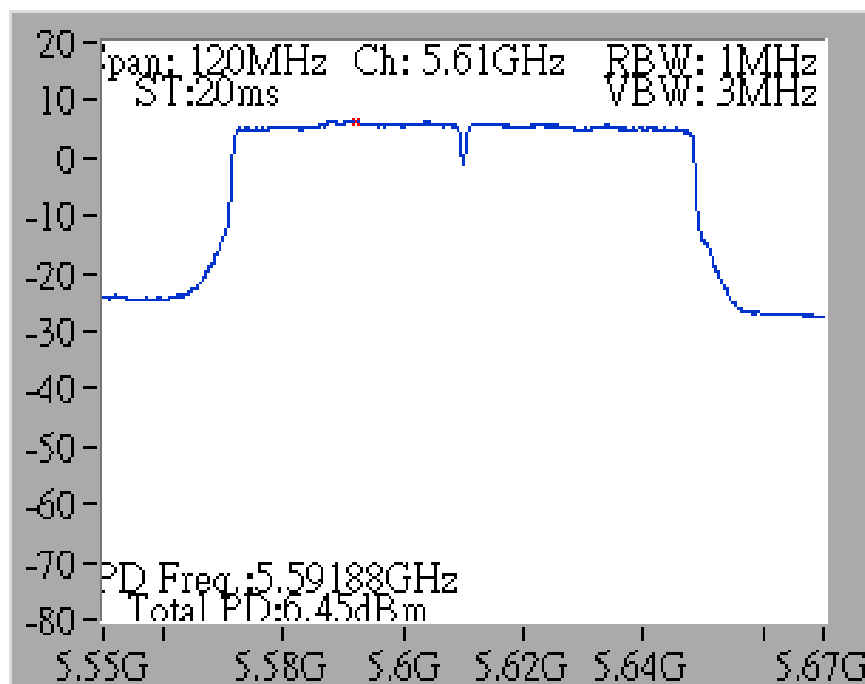


Straddle Channel


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz
(UNII 2C)

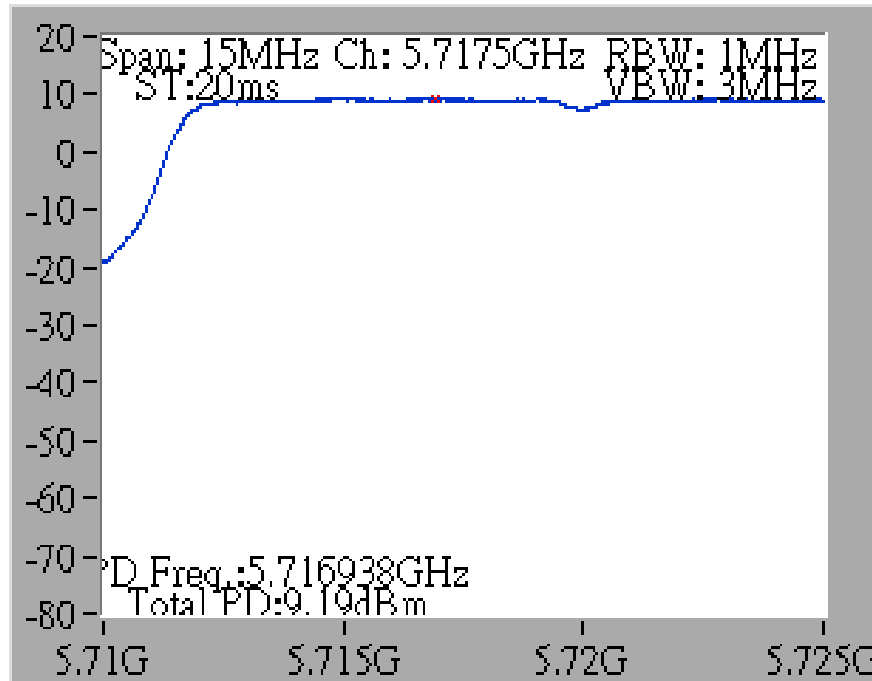


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz
(UNII 3)

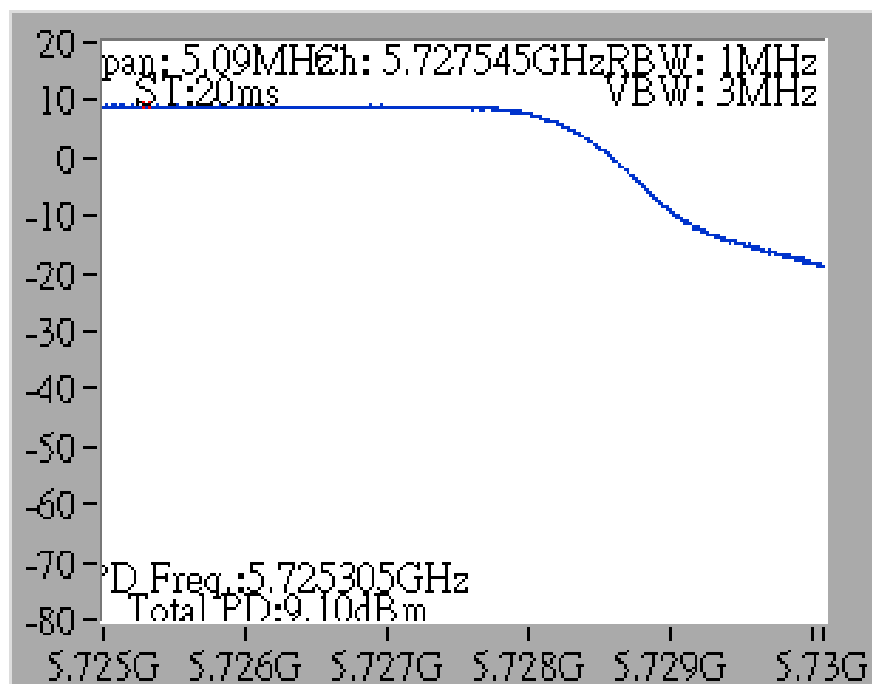


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz (UNII 2C)

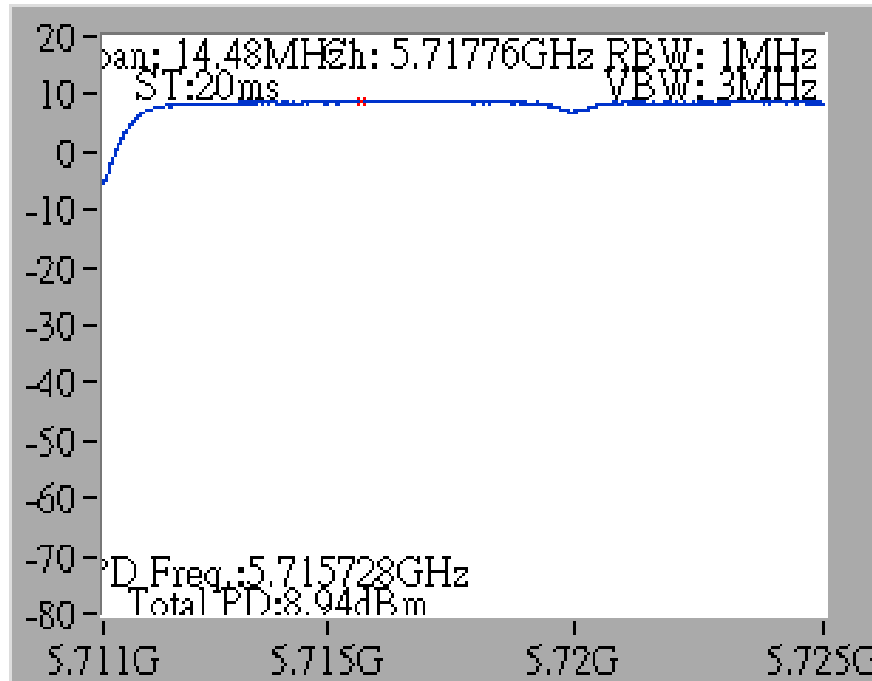


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz (UNII 3)

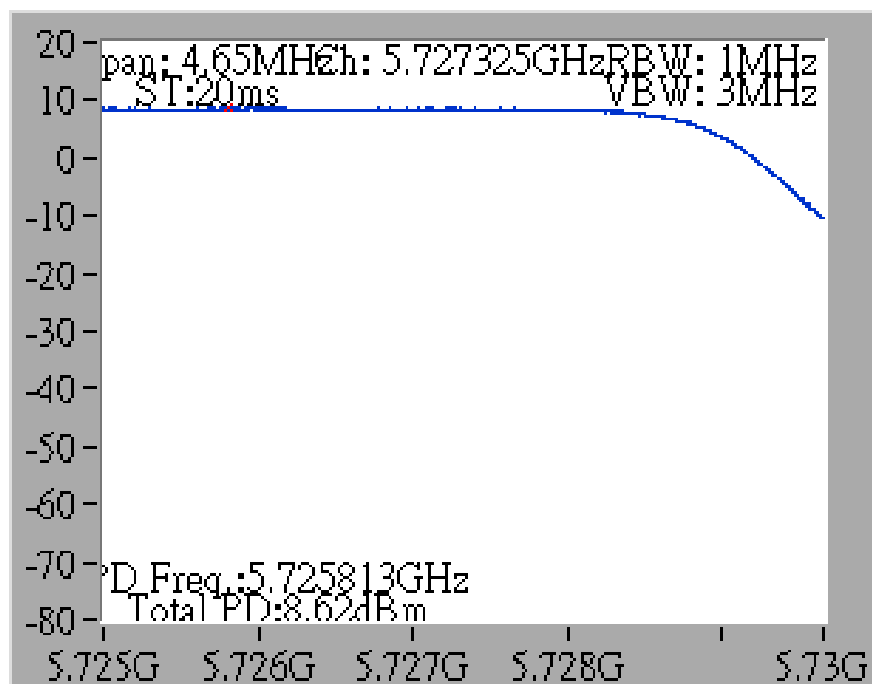


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5710 MHz (UNII 2C)

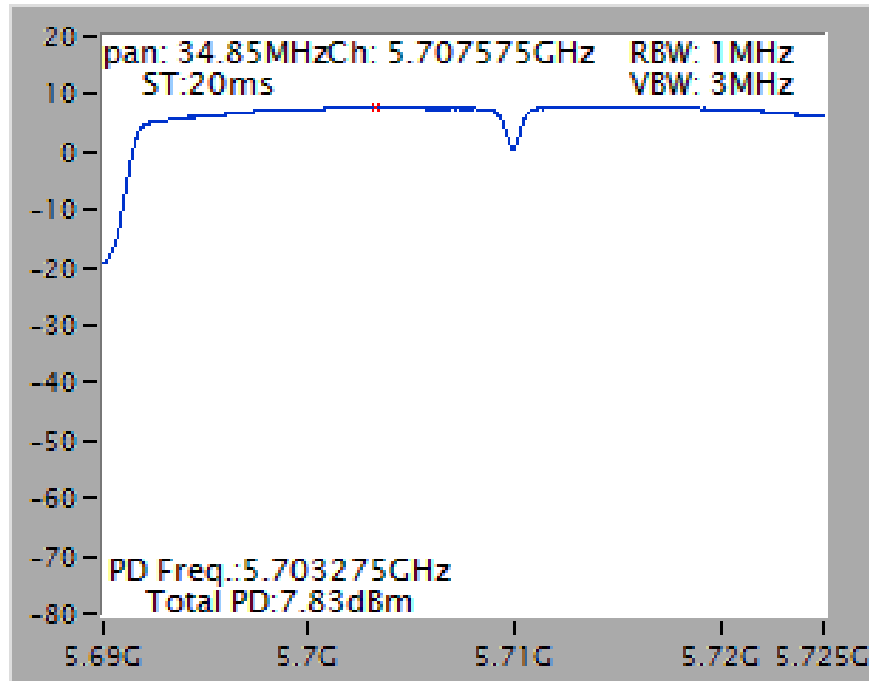


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5710 MHz (UNII 3)

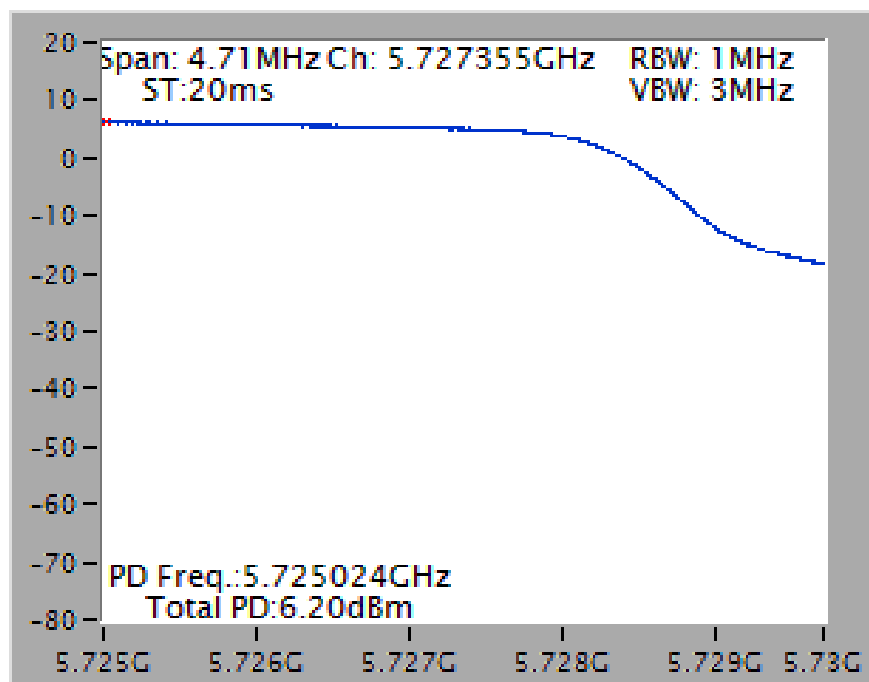

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5690 MHz (UNII 2C)

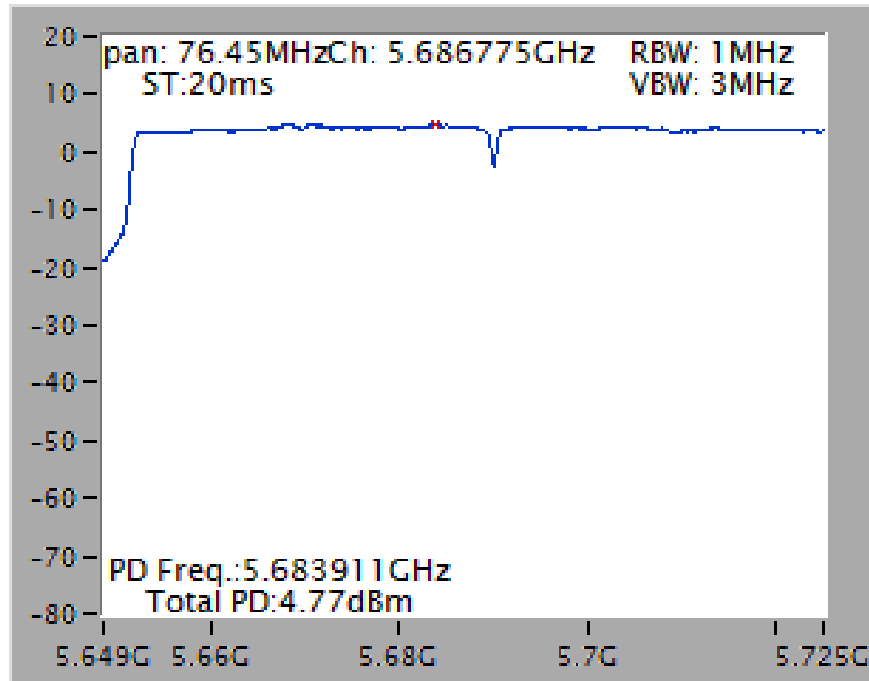


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5690 MHz (UNII 3)

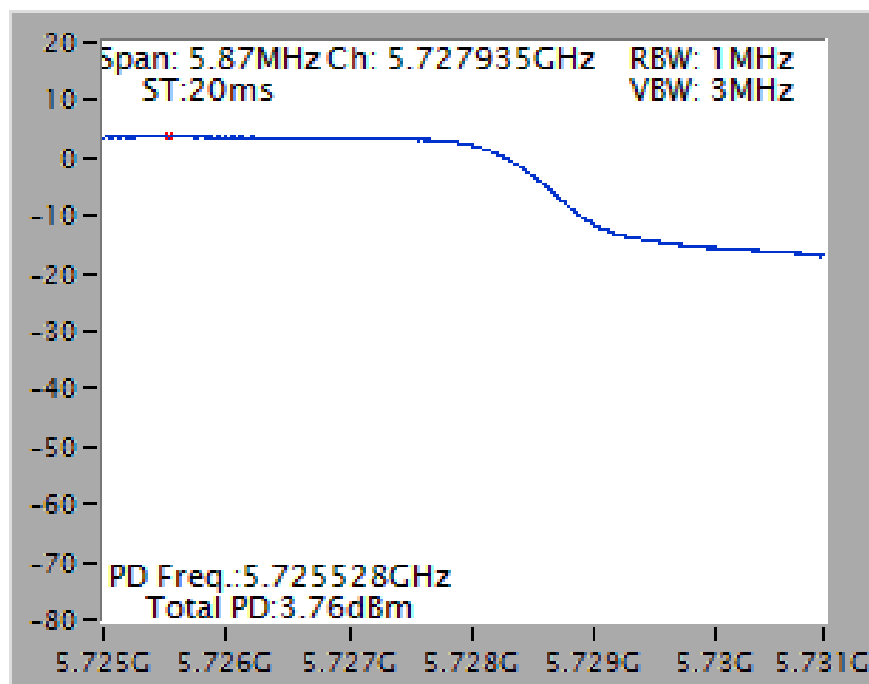


Mode 6: EUT 1 + Set 6 Sector Antenna / 4 dBi


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5260 MHz

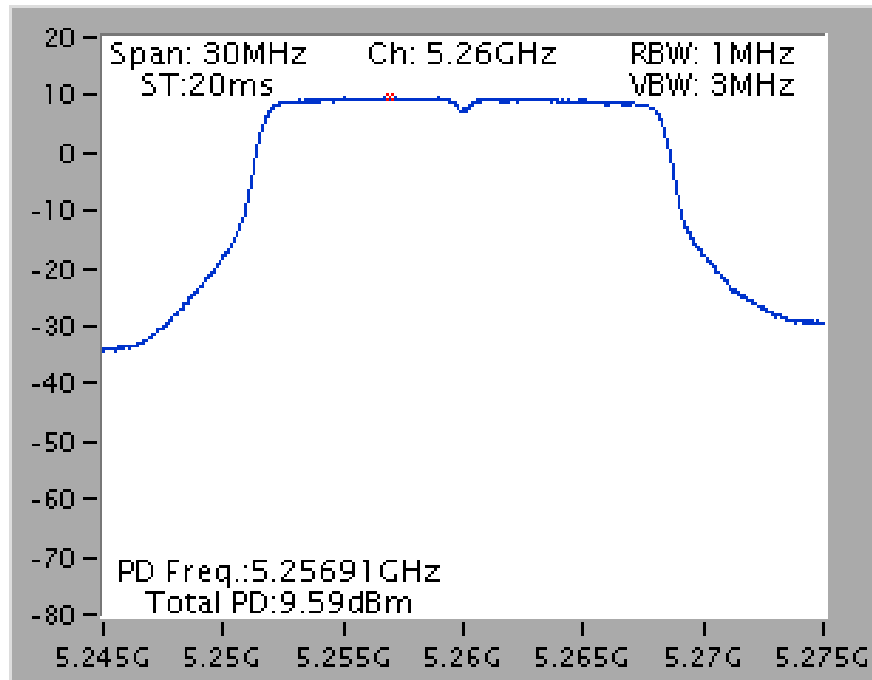


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5500 MHz

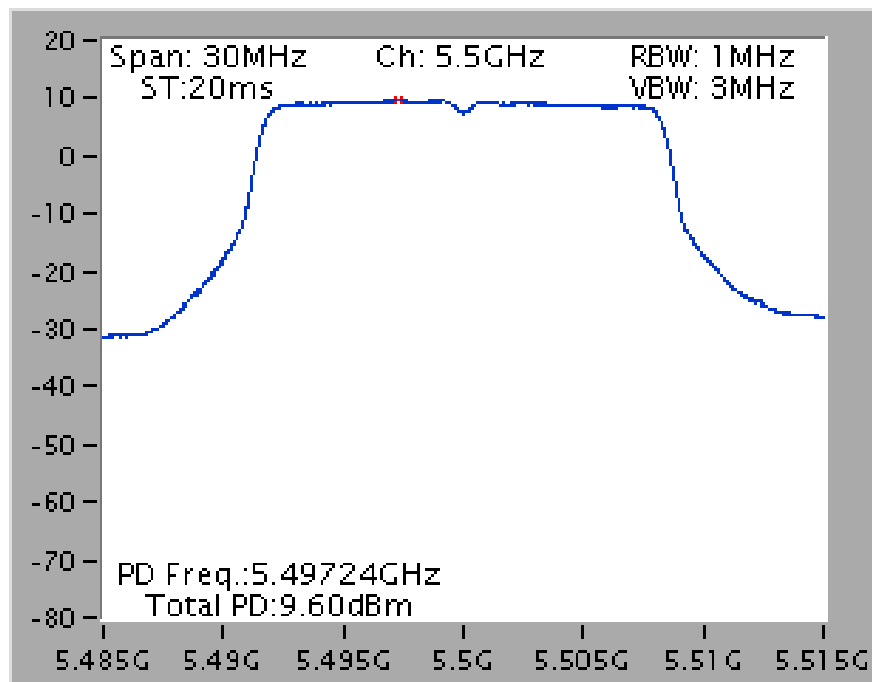


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5260 MHz

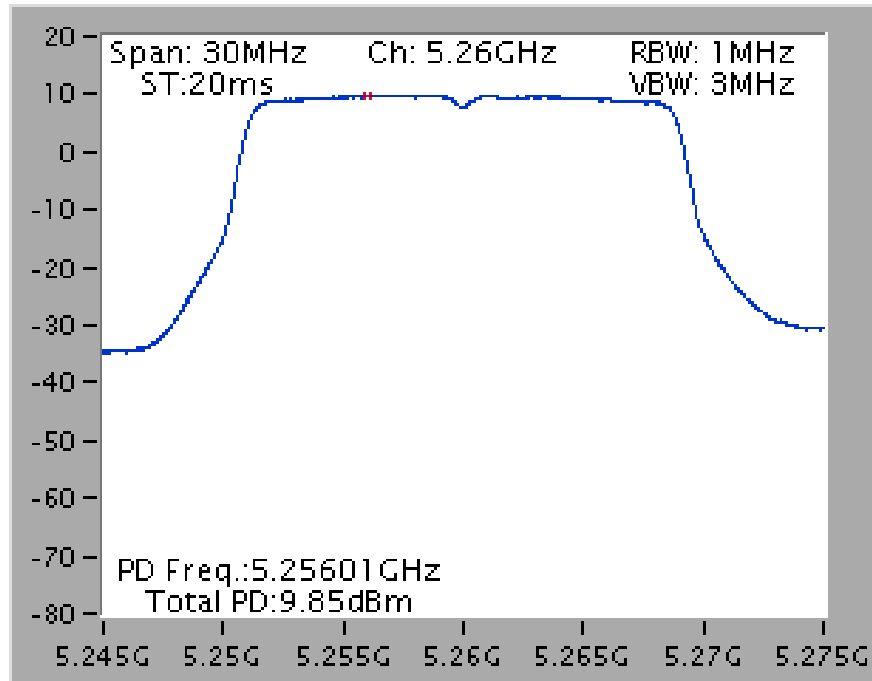


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5500 MHz

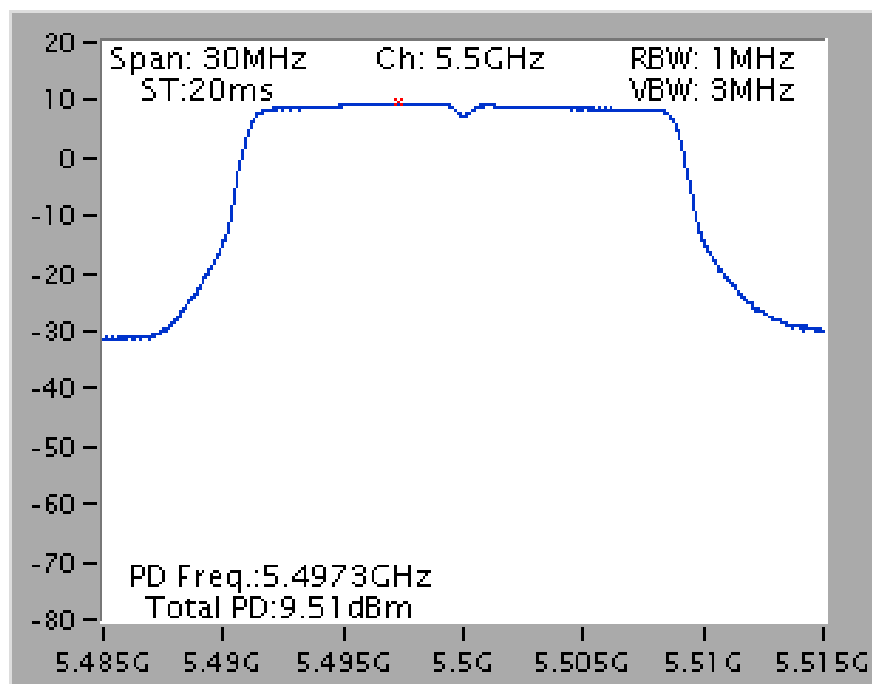


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5270 MHz

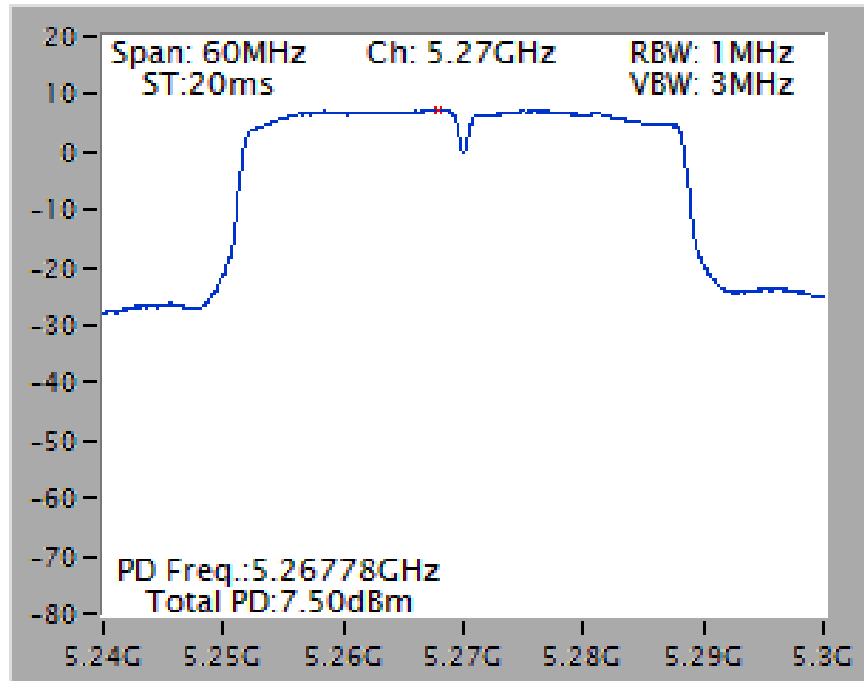


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5550 MHz

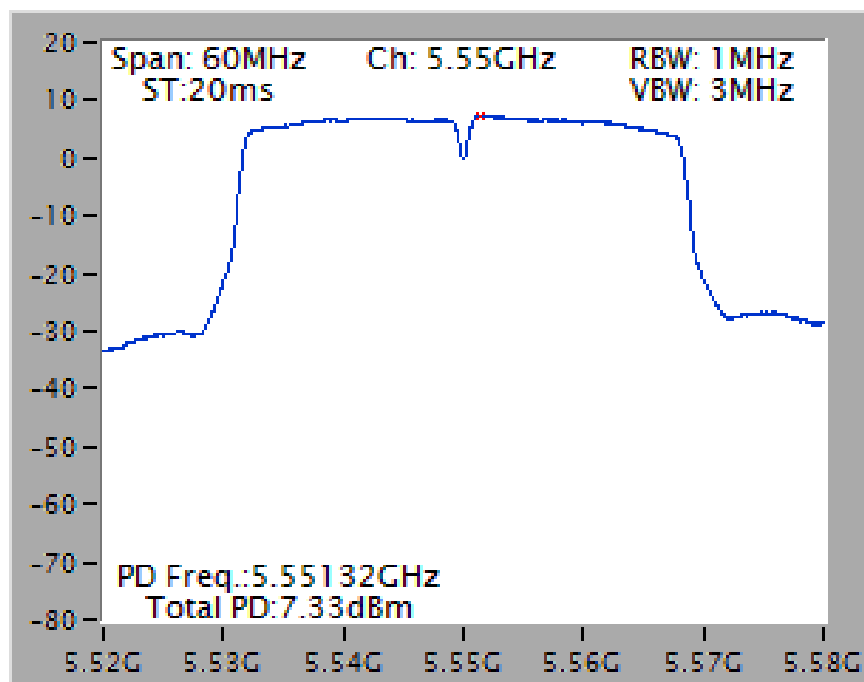

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5290 MHz

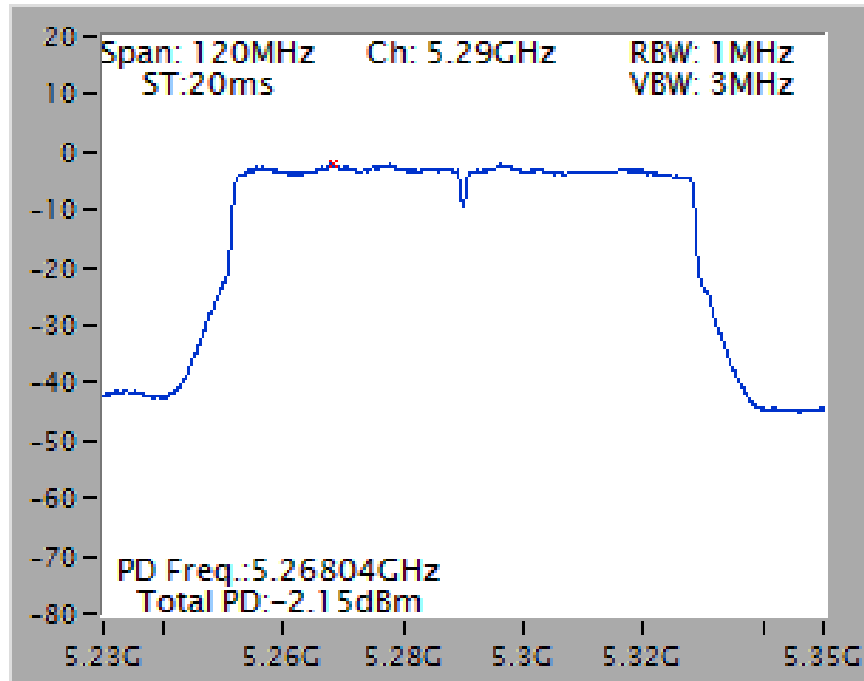


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5610 MHz

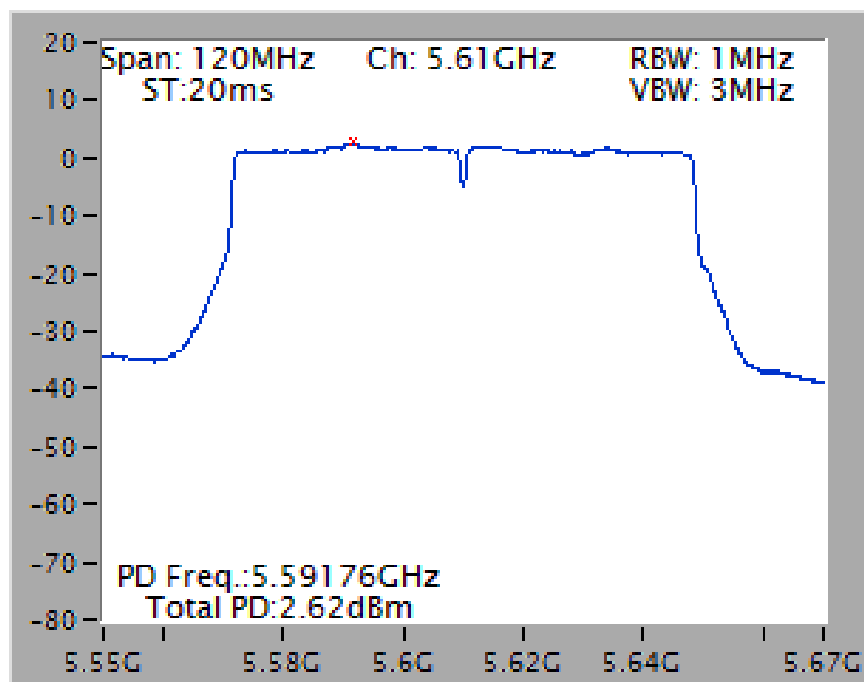


Straddle Channel


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz
(UNII 2C)

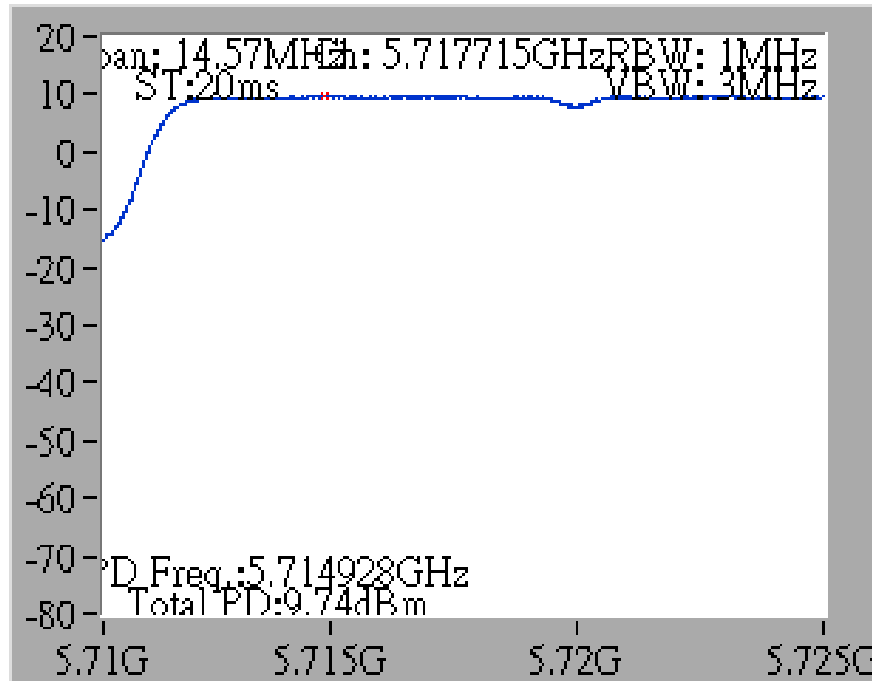


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz
(UNII 3)

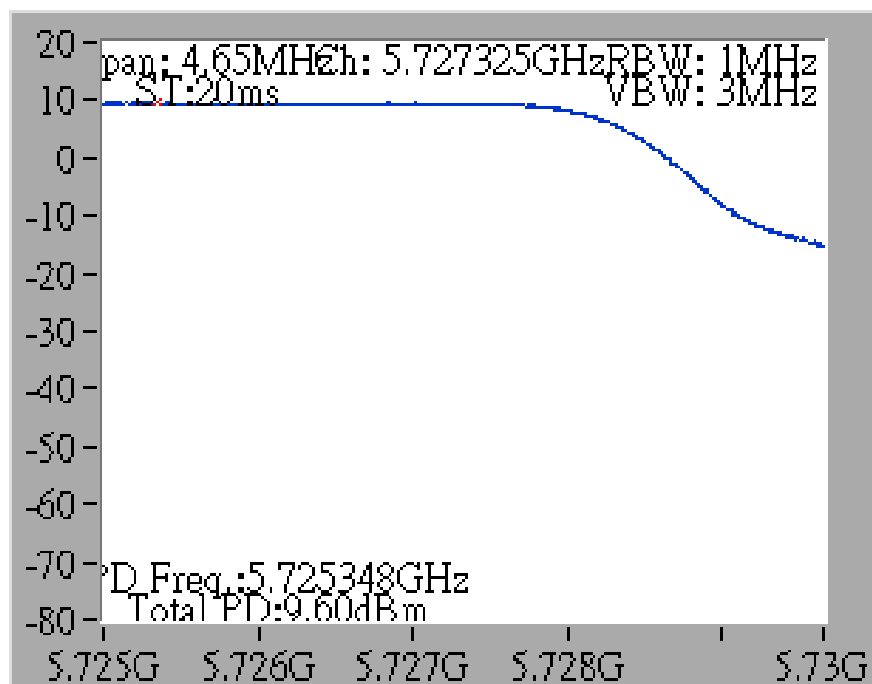


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz (UNII 2C)

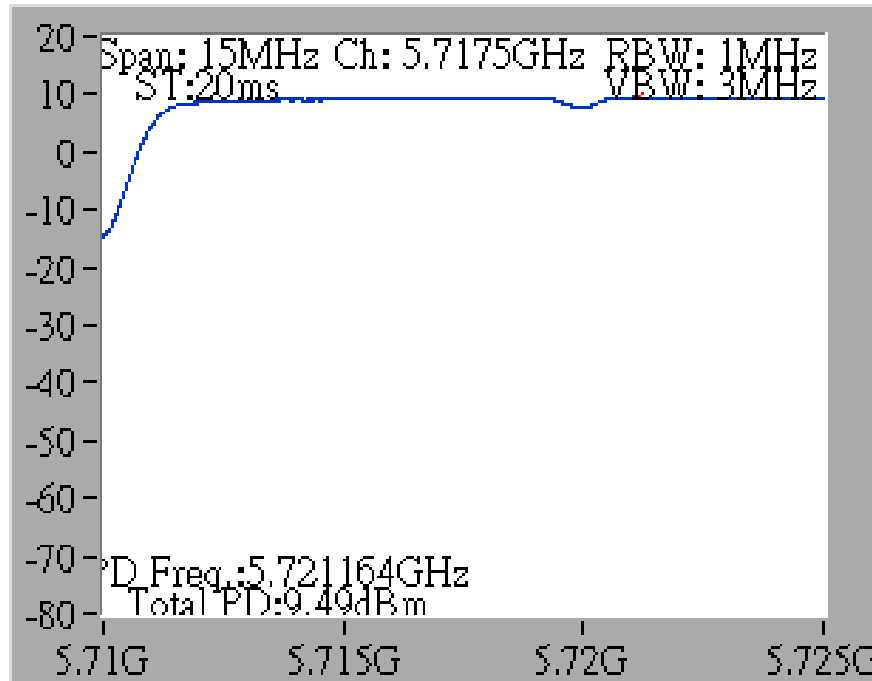


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz (UNII 3)

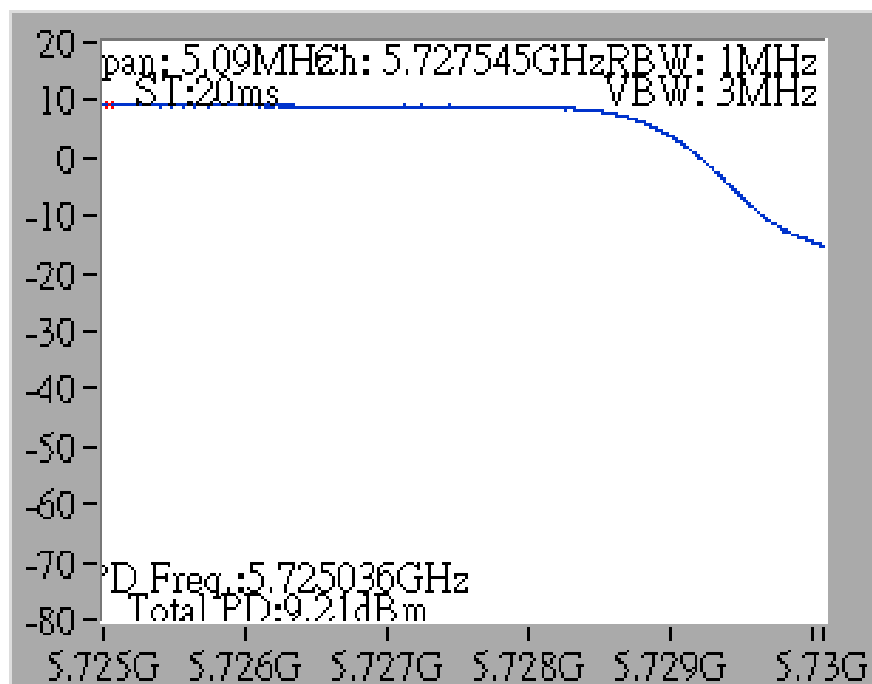


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5710 MHz (UNII 2C)

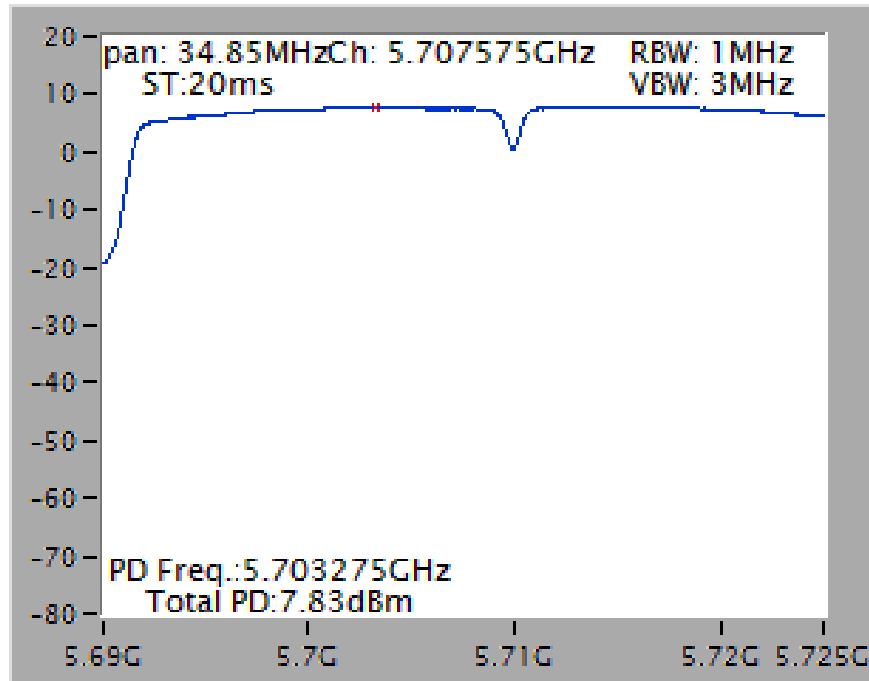


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5710 MHz (UNII 3)

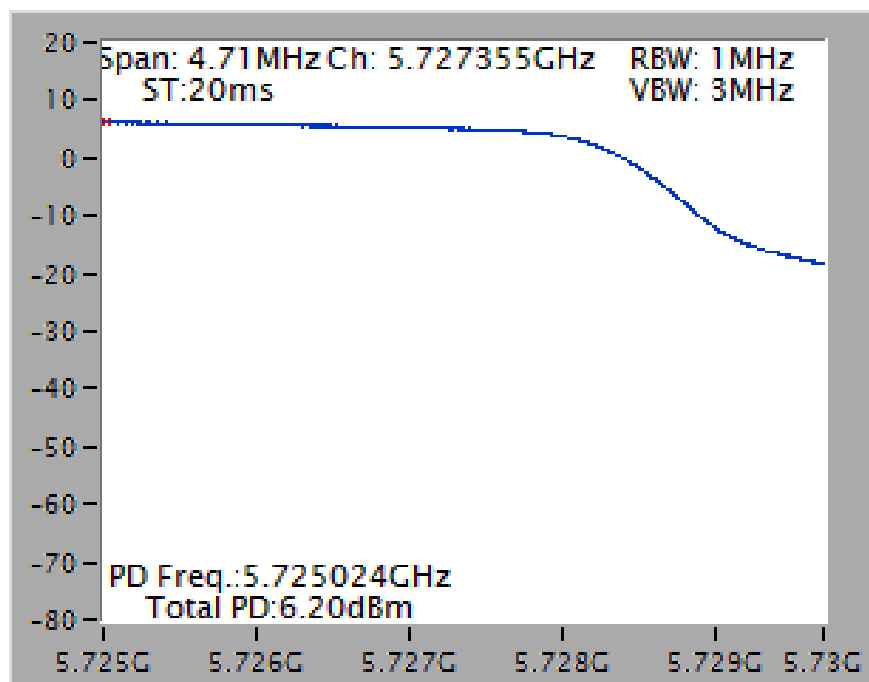

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5690 MHz (UNII 2C)

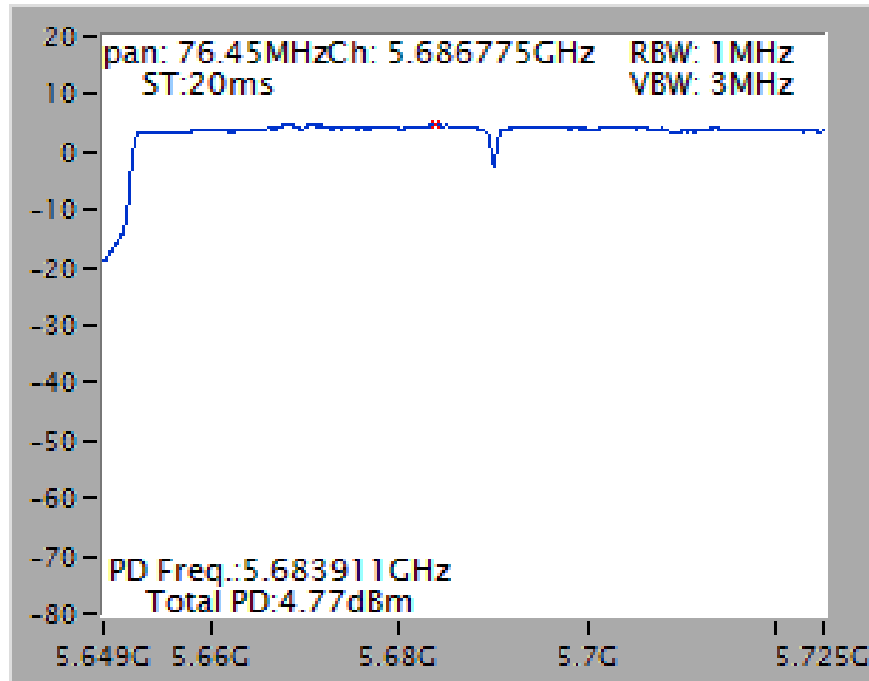


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5690 MHz (UNII 3)

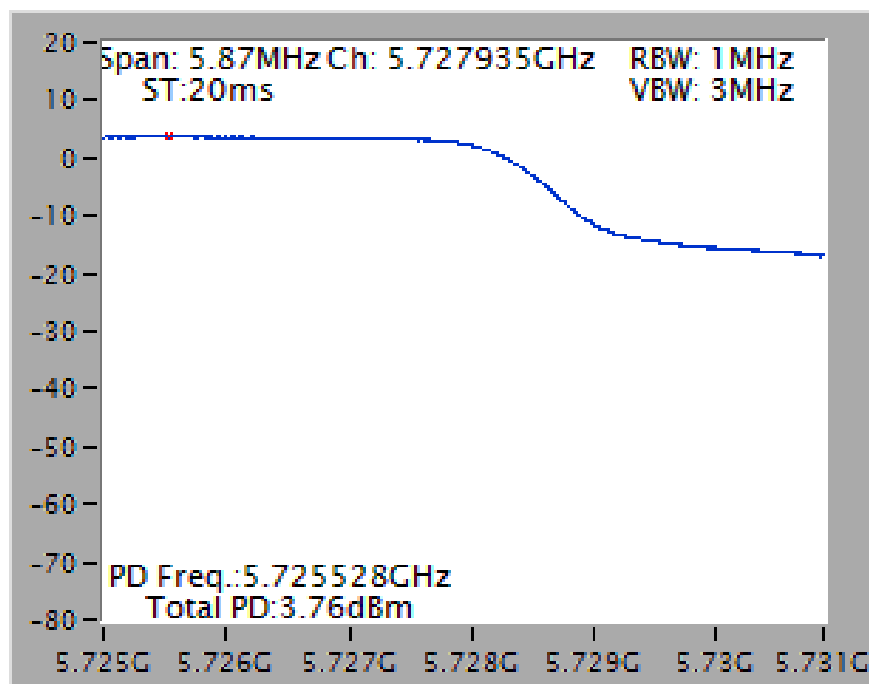


Mode 7: EUT 1 + Set 9 Dipole Antenna / 4.67 dBi


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5300 MHz

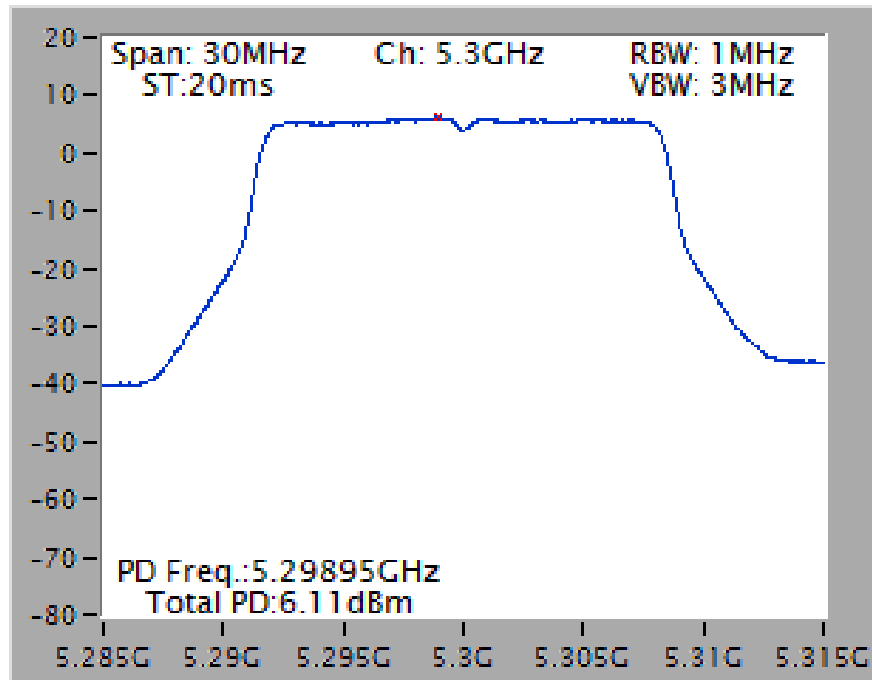


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5580 MHz

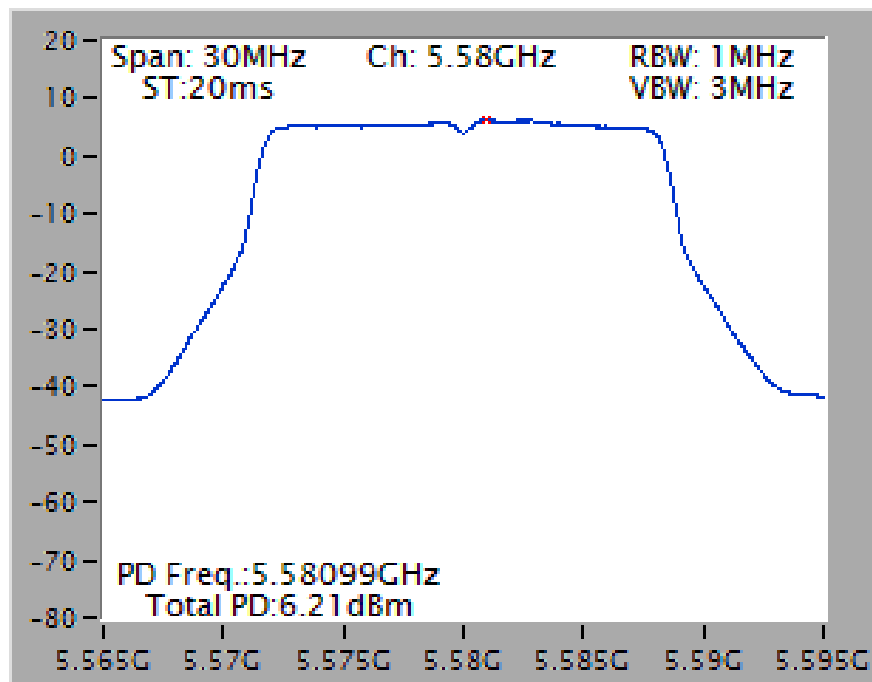


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5320 MHz

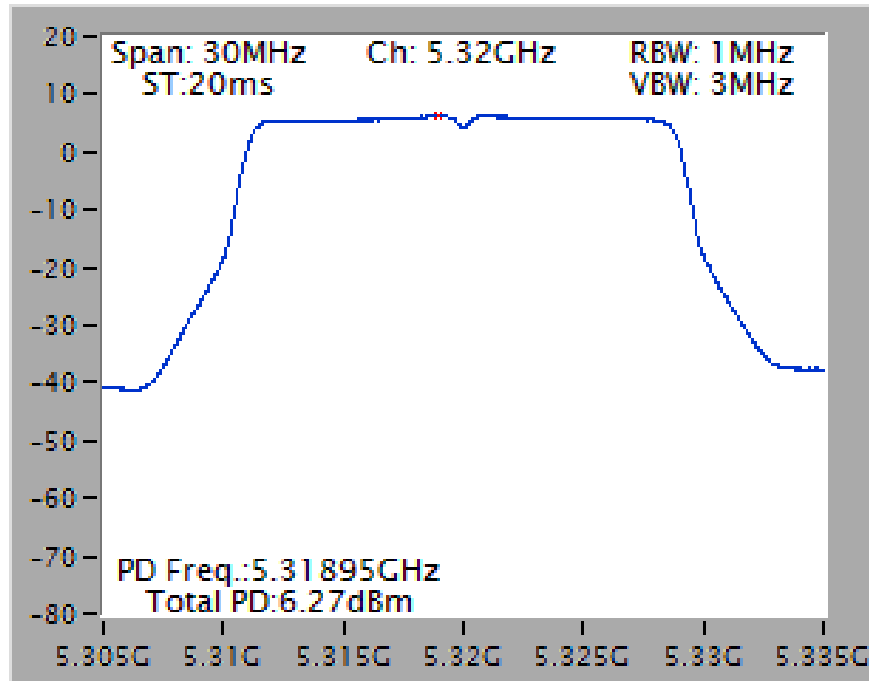


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5500 MHz

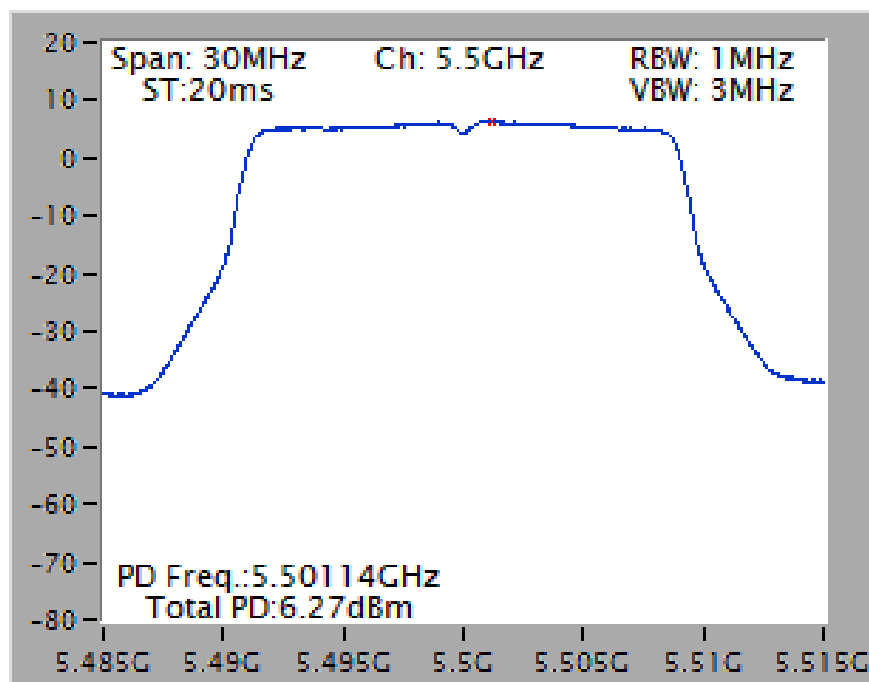


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5270 MHz

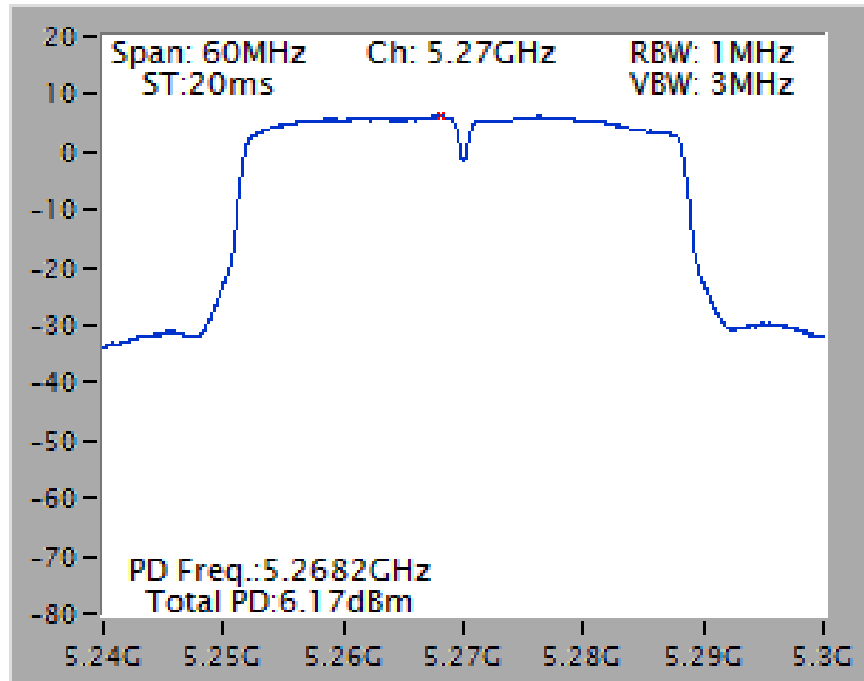


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5550 MHz

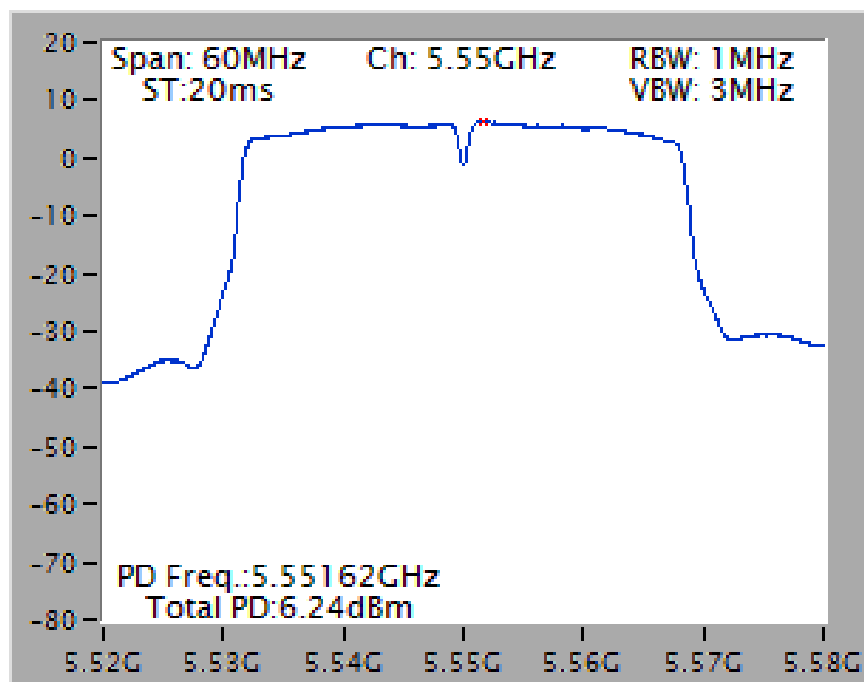

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5290 MHz

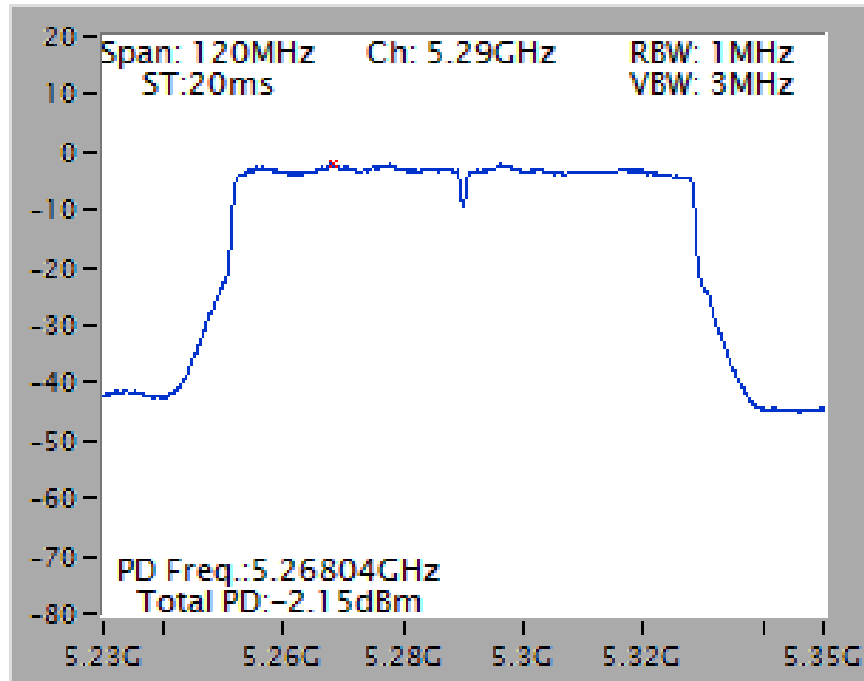


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5610 MHz

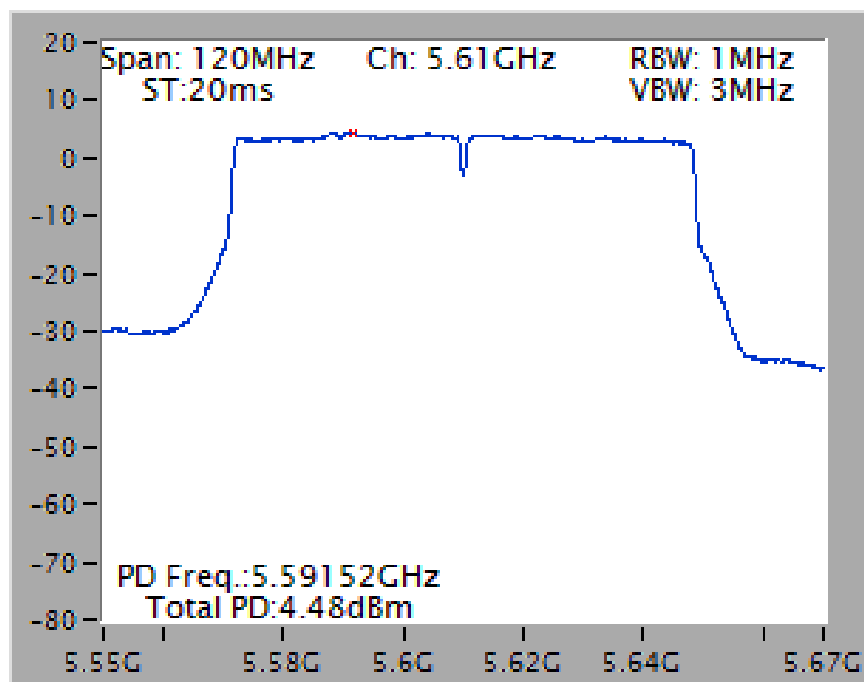


Straddle Channel


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz
(UNII 2C)

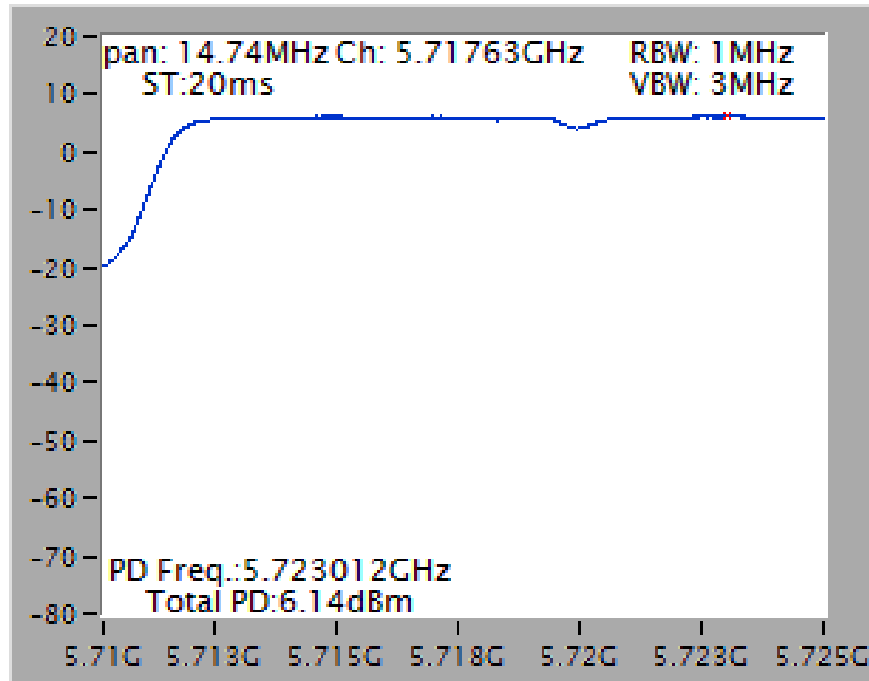


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz
(UNII 3)

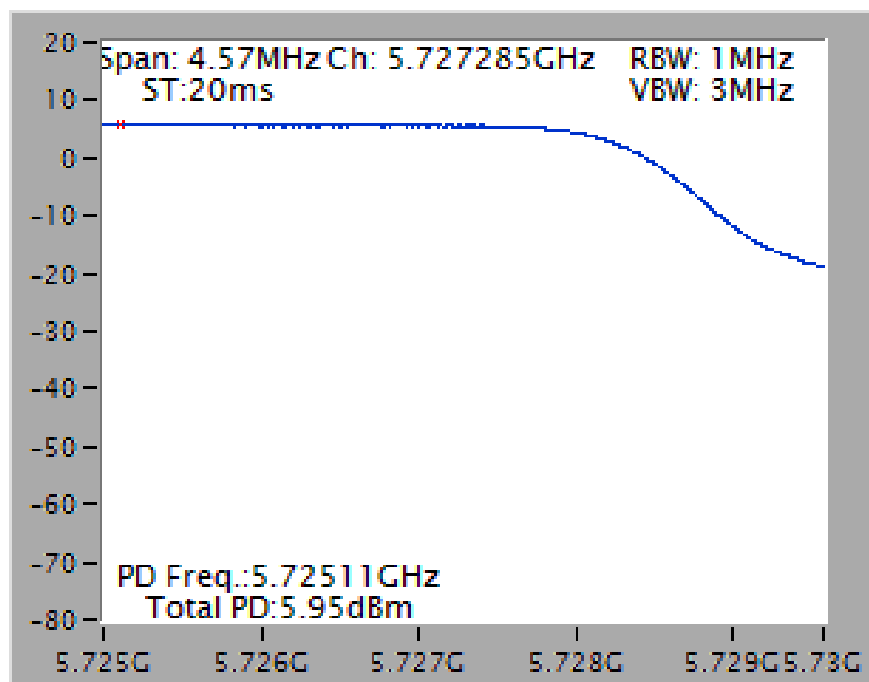


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz (UNII 2C)

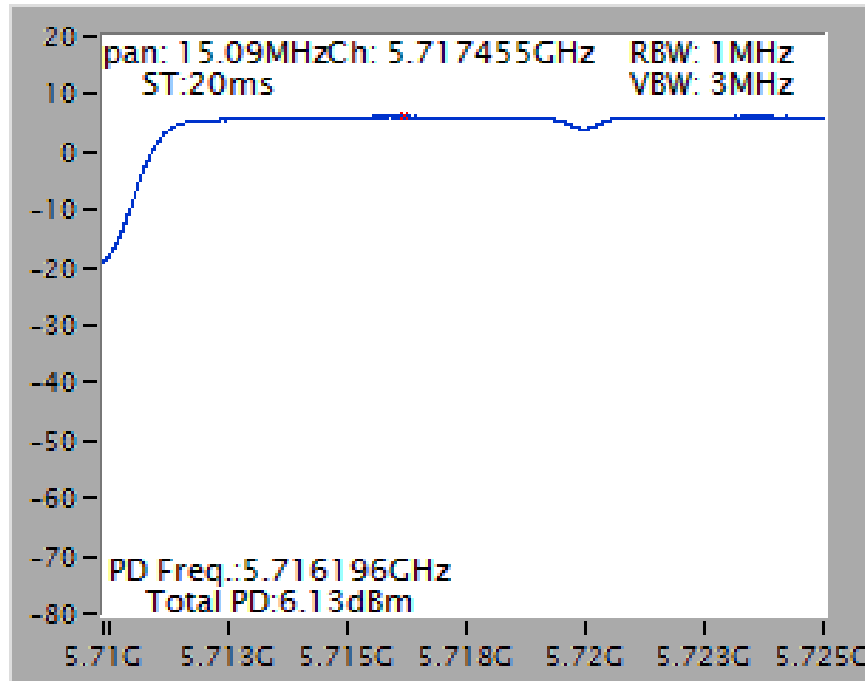


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz (UNII 3)

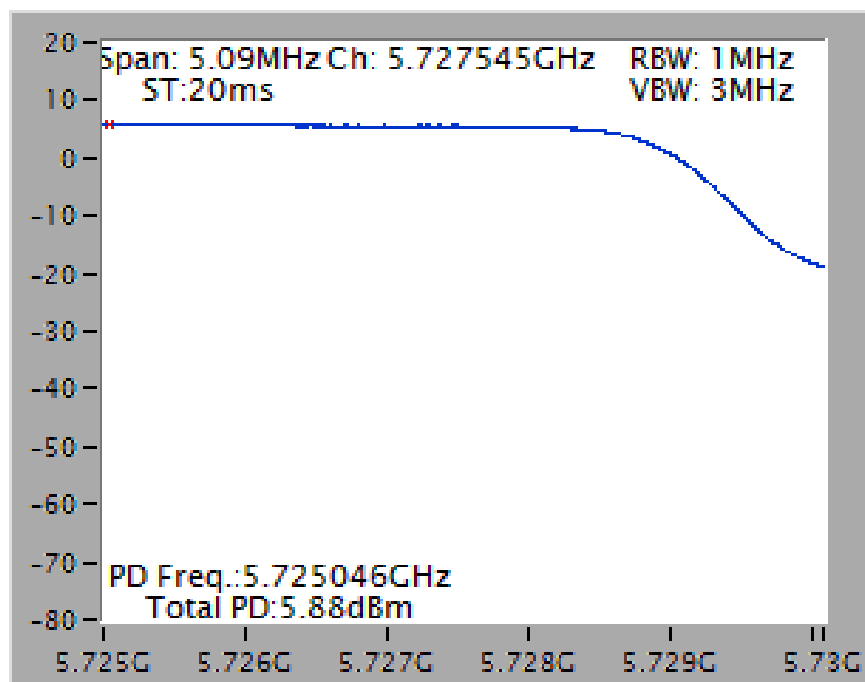


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5710 MHz (UNII 2C)

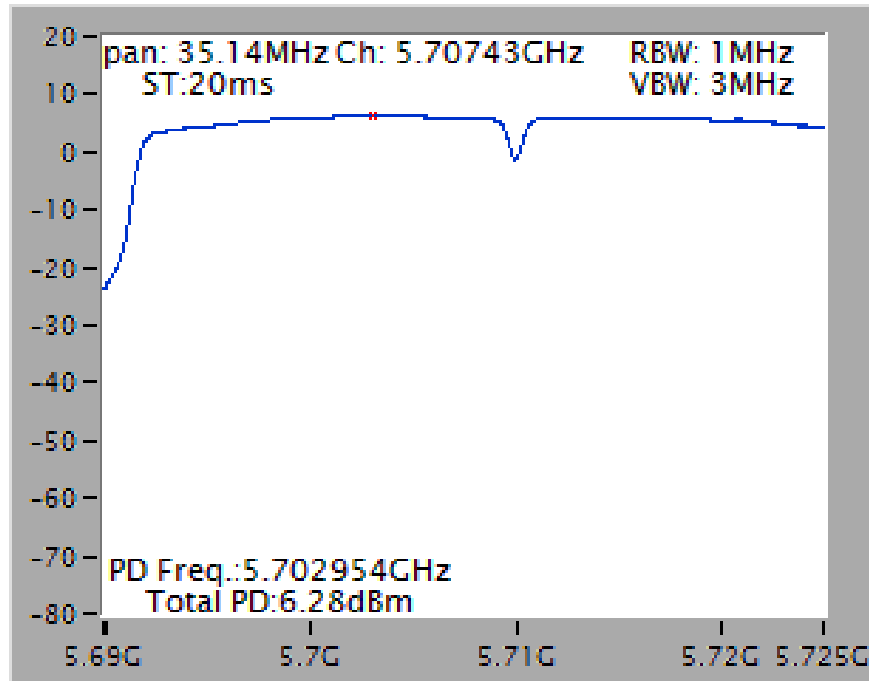


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5710 MHz (UNII 3)

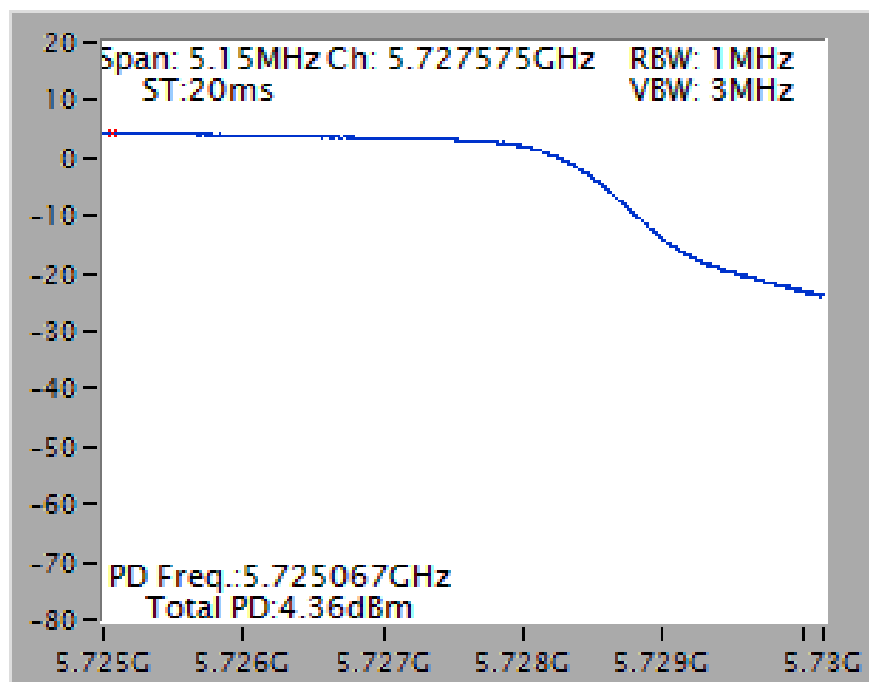

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5690 MHz (UNII 2C)

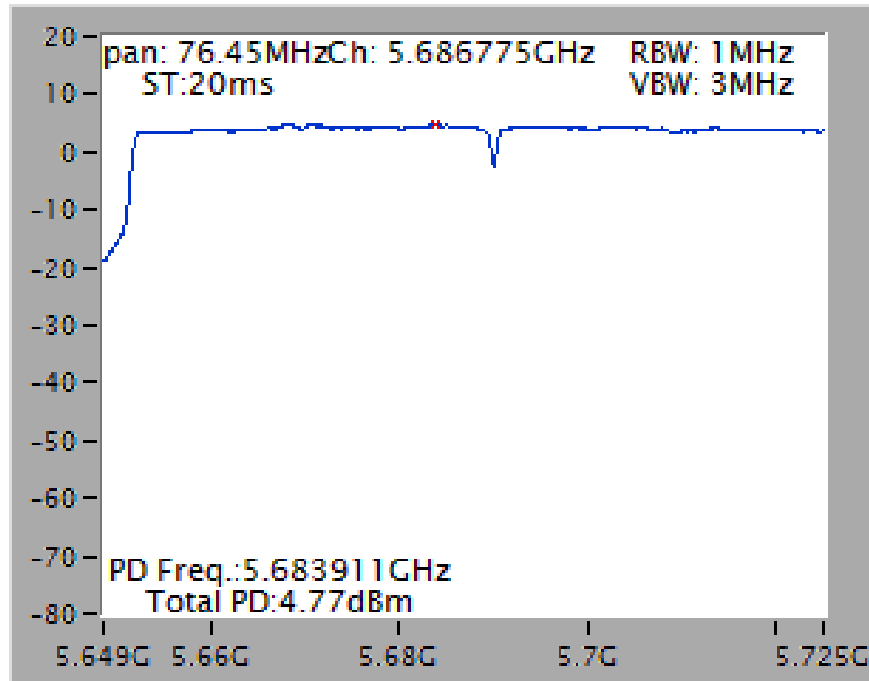


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5690 MHz (UNII 3)

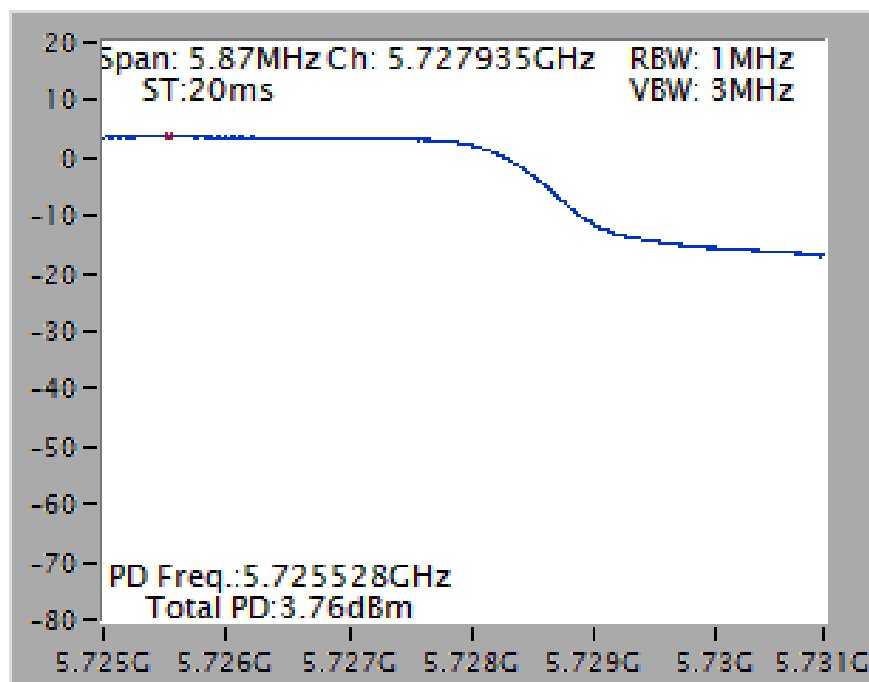


Mode 8: EUT 2 + Set 10 PIFA Antenna / Chain1:5.84 dBi, Chain2:5.50 dBi, Chain3:5.84 dBi, Chain4:5.65 dBi


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5320 MHz

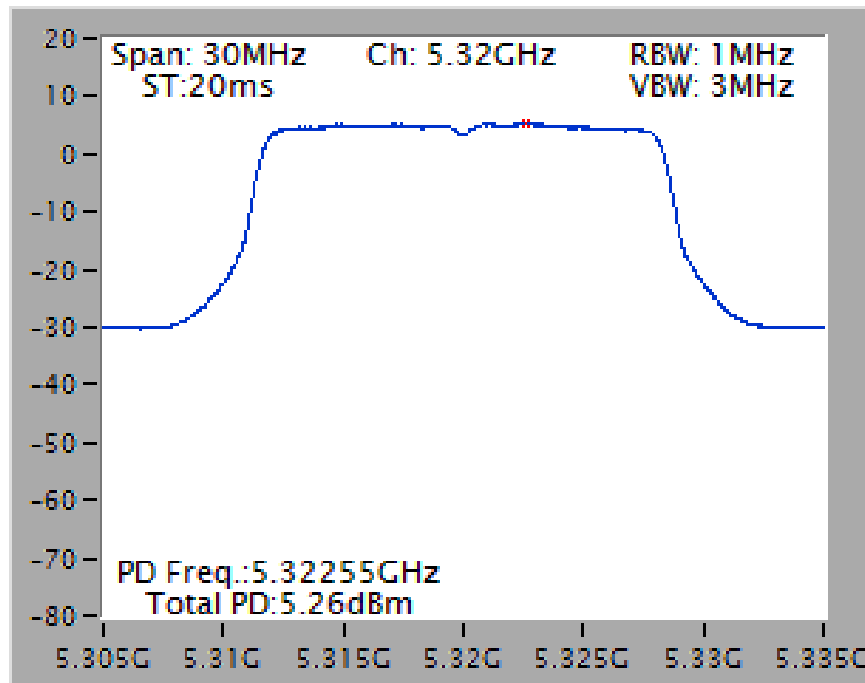


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5500 MHz

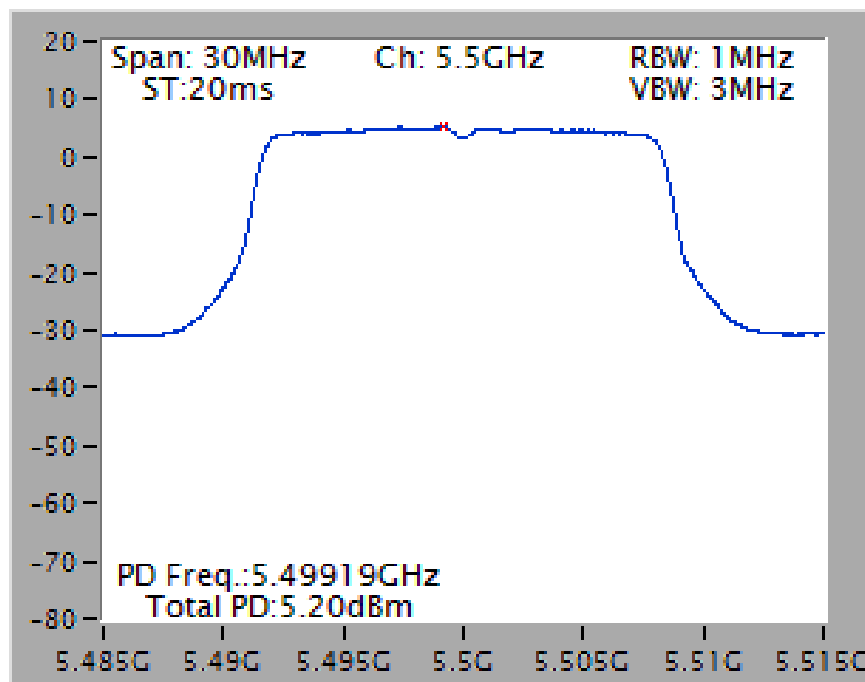


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5260 MHz

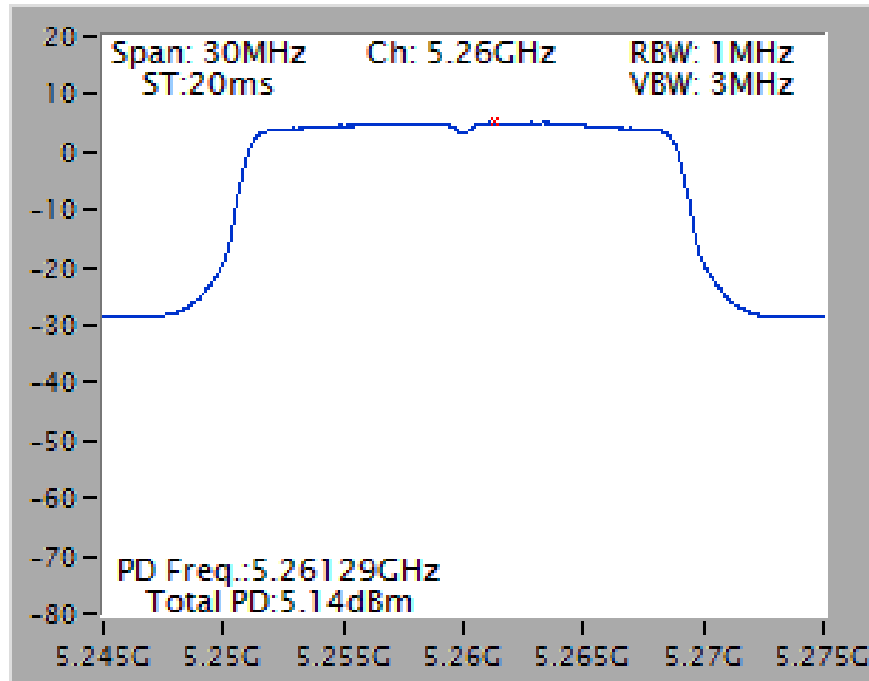


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5580 MHz

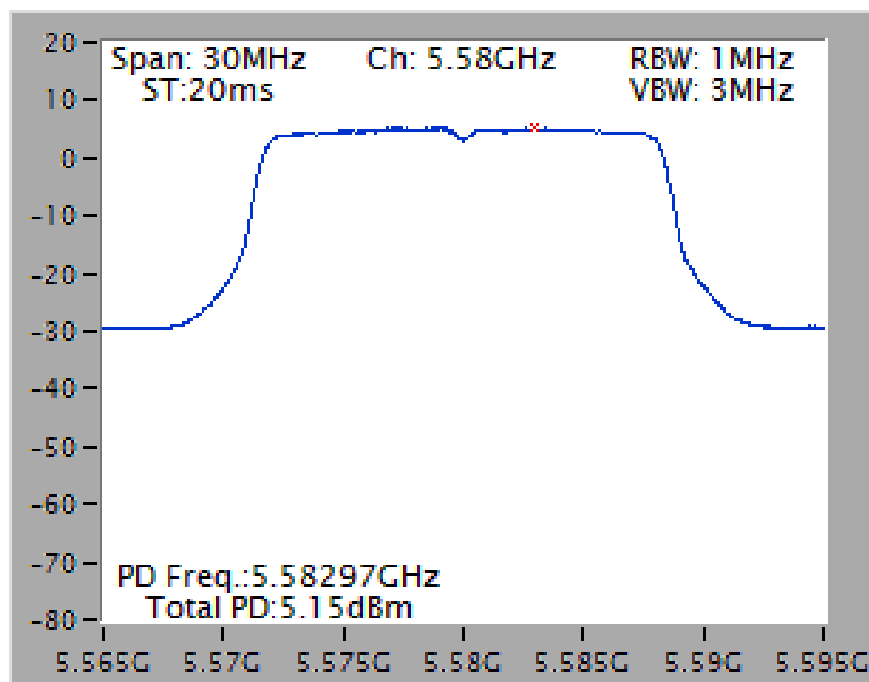


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5270 MHz

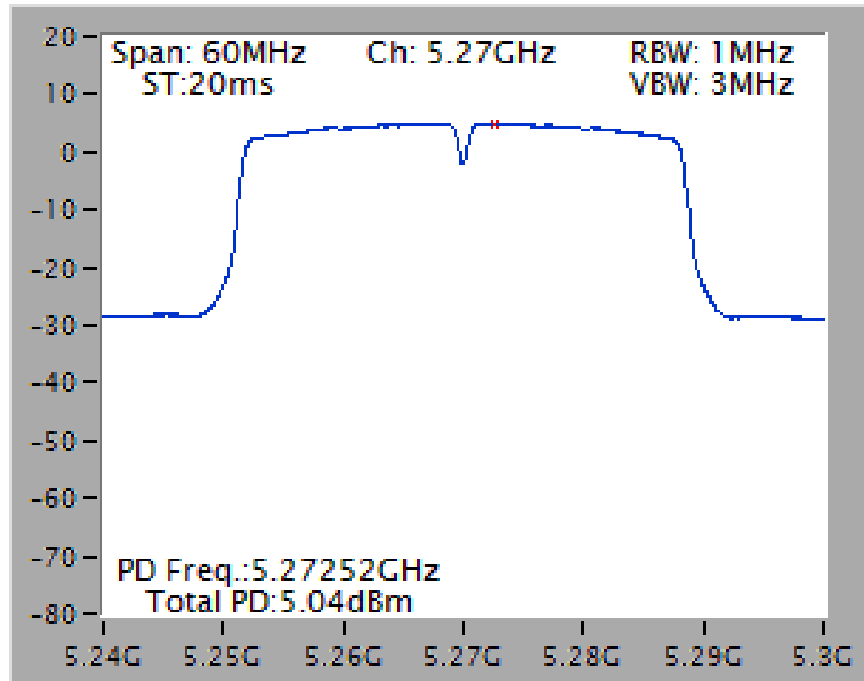


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5550 MHz

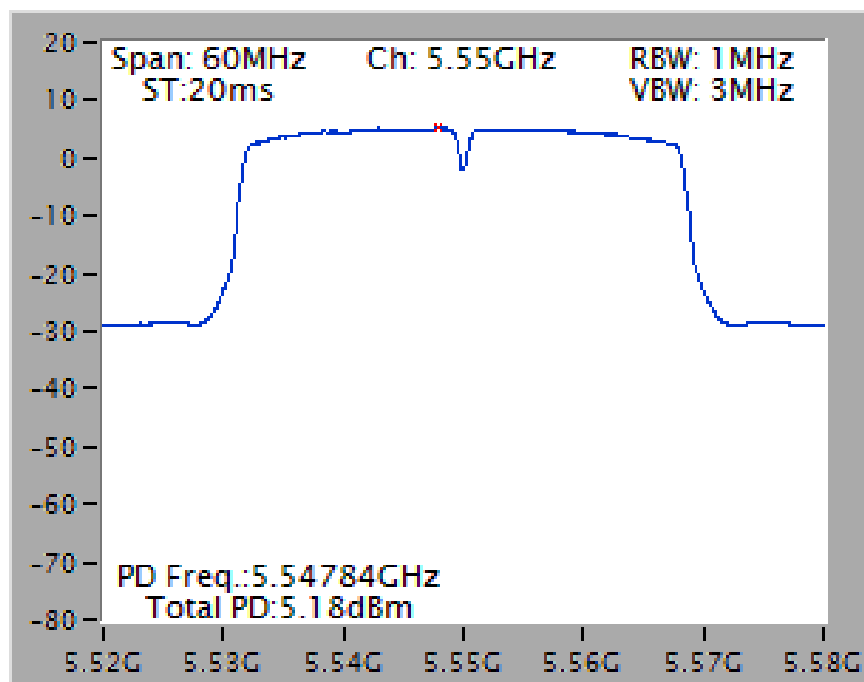

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5290 MHz

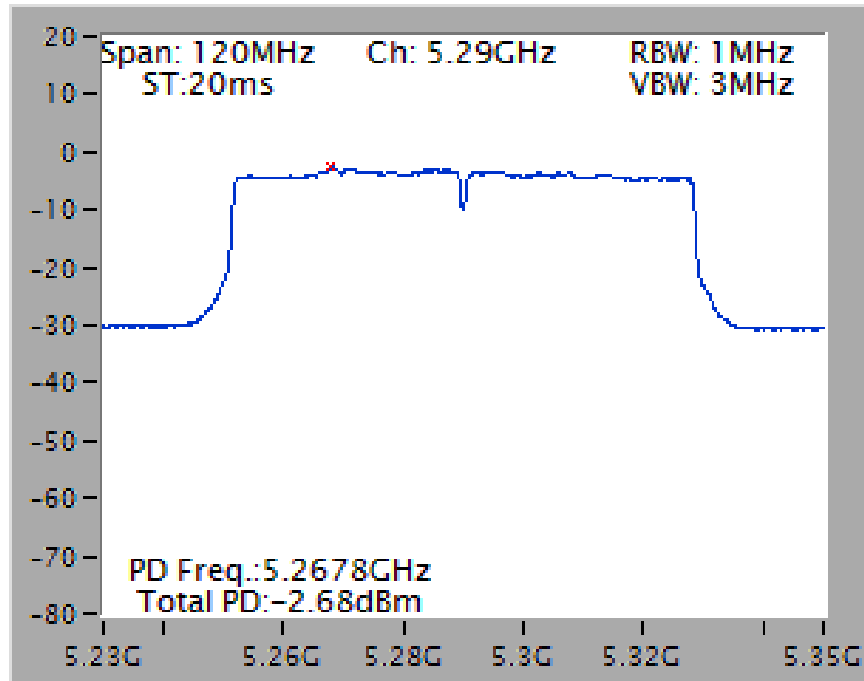


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5610 MHz

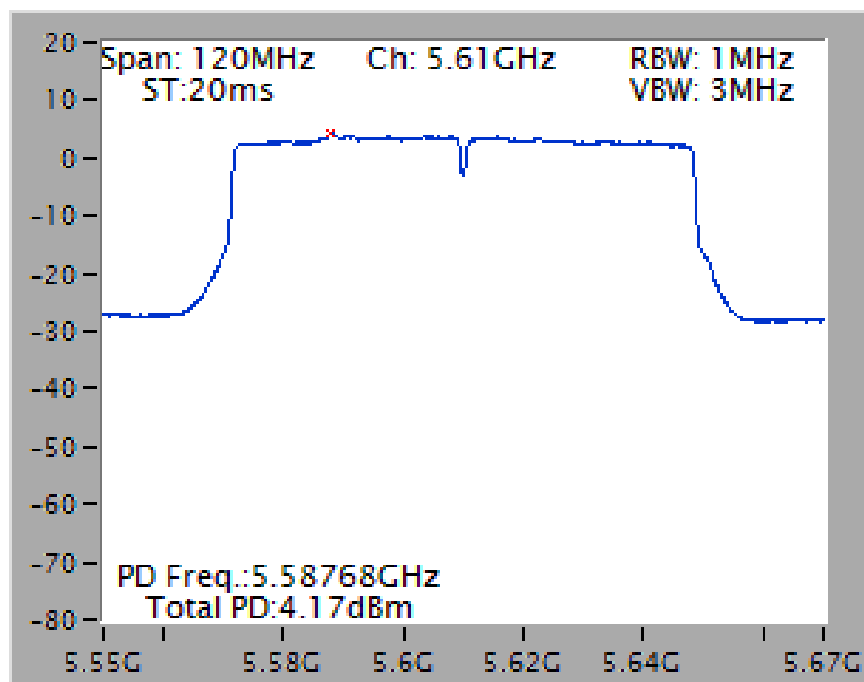


Straddle Channel


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz
(UNII 2C)

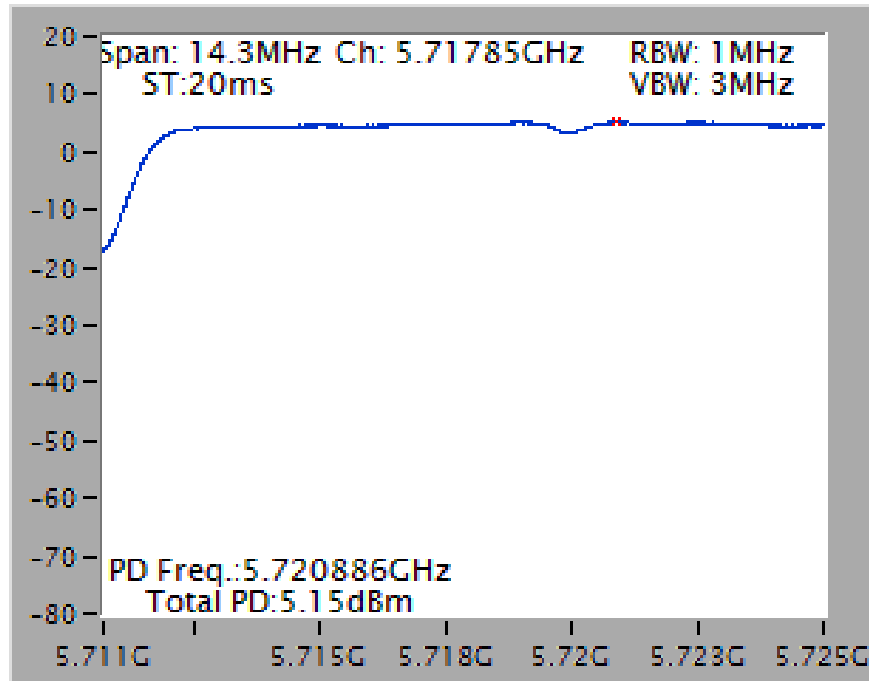


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz
(UNII 3)

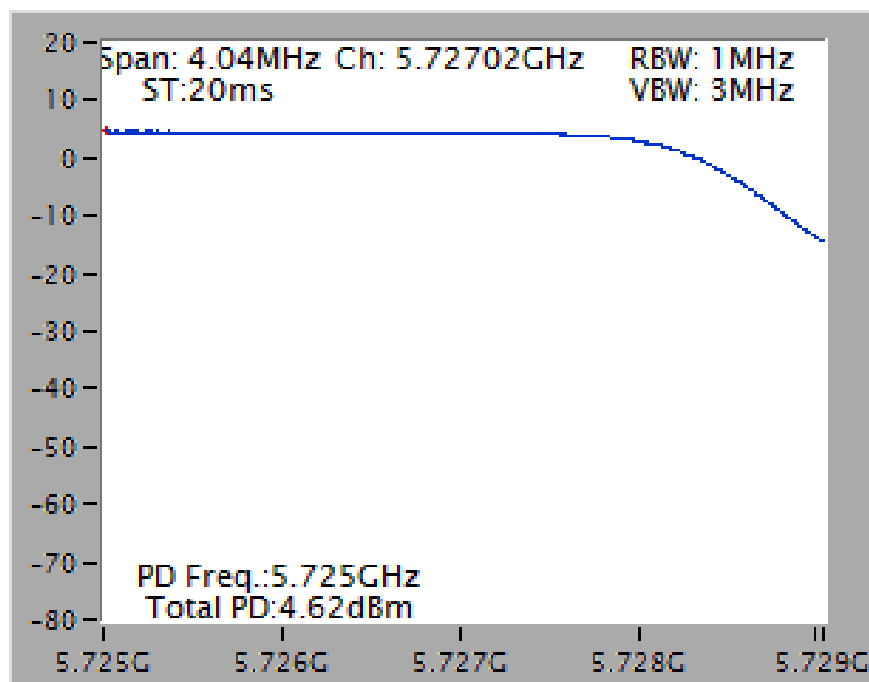


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz (UNII 2C)

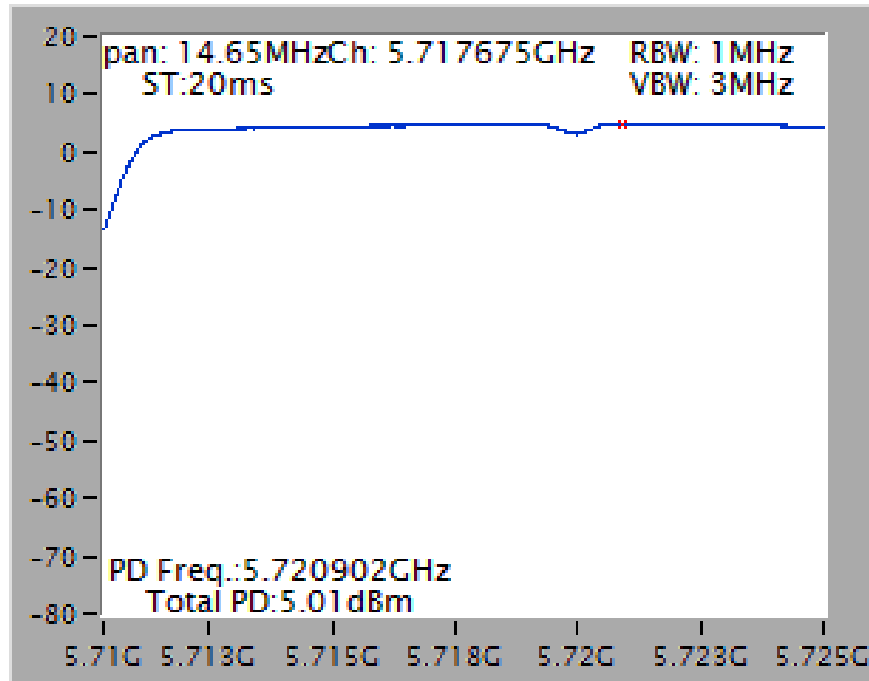


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5720 MHz (UNII 3)

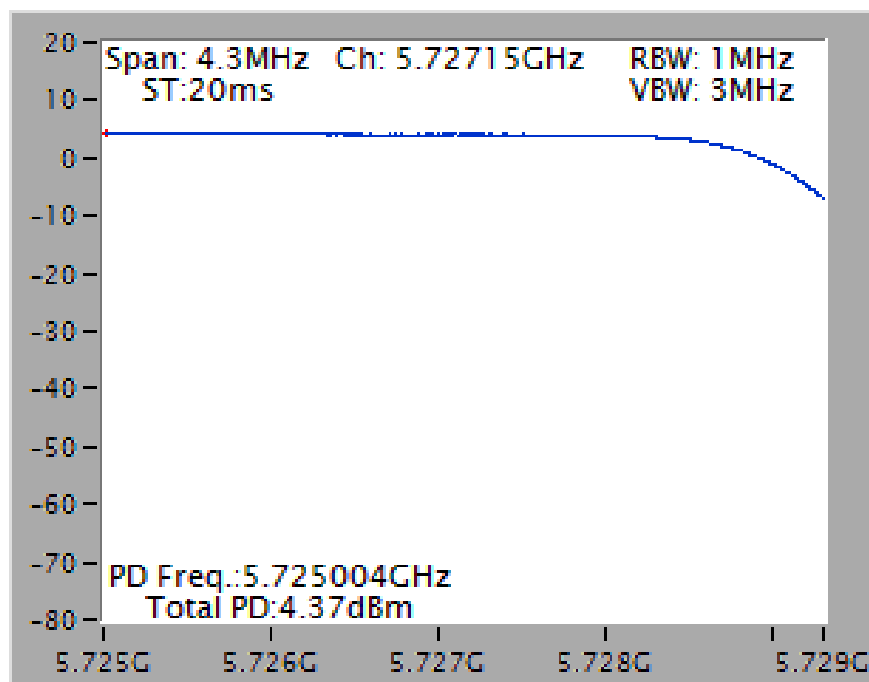


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5710 MHz (UNII 2C)

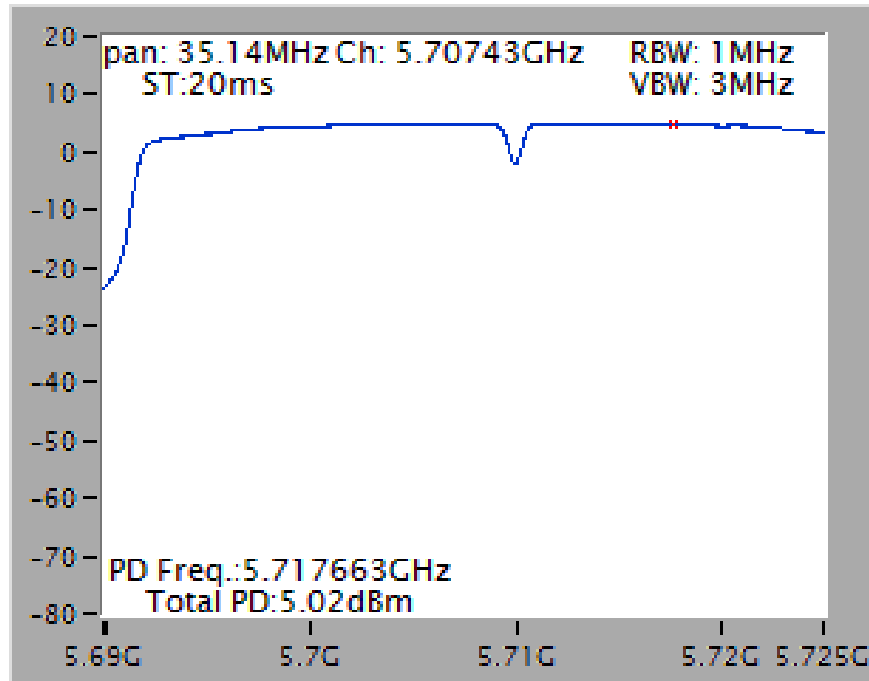


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5710 MHz (UNII 3)

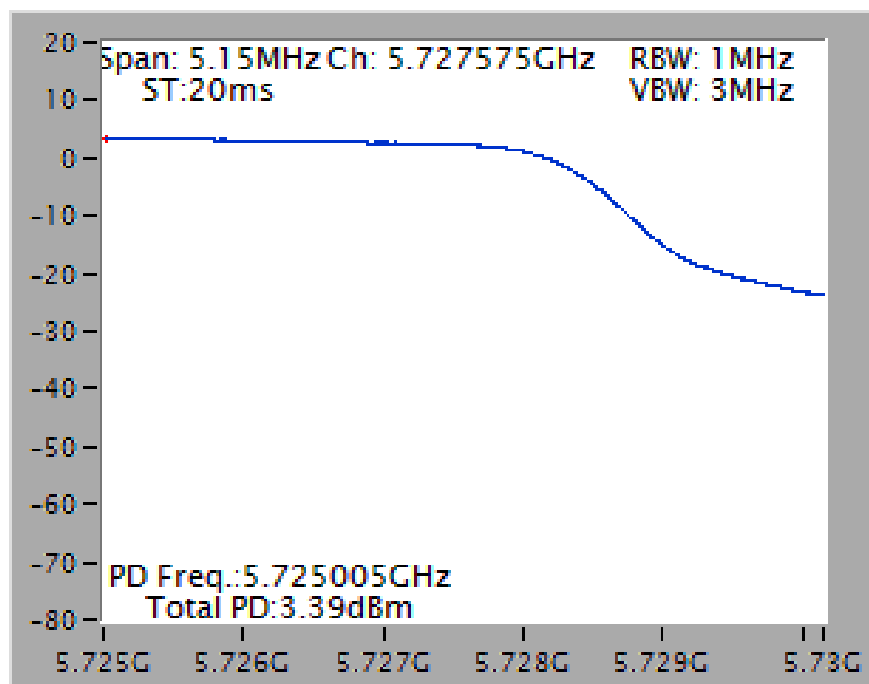

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5690 MHz (UNII 2C)

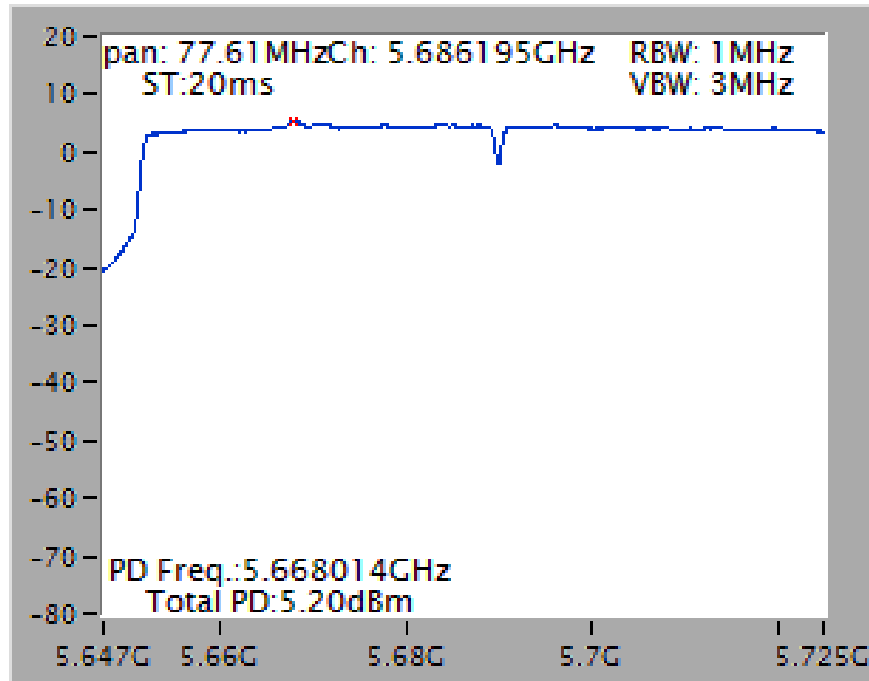

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5690 MHz (UNII 3)

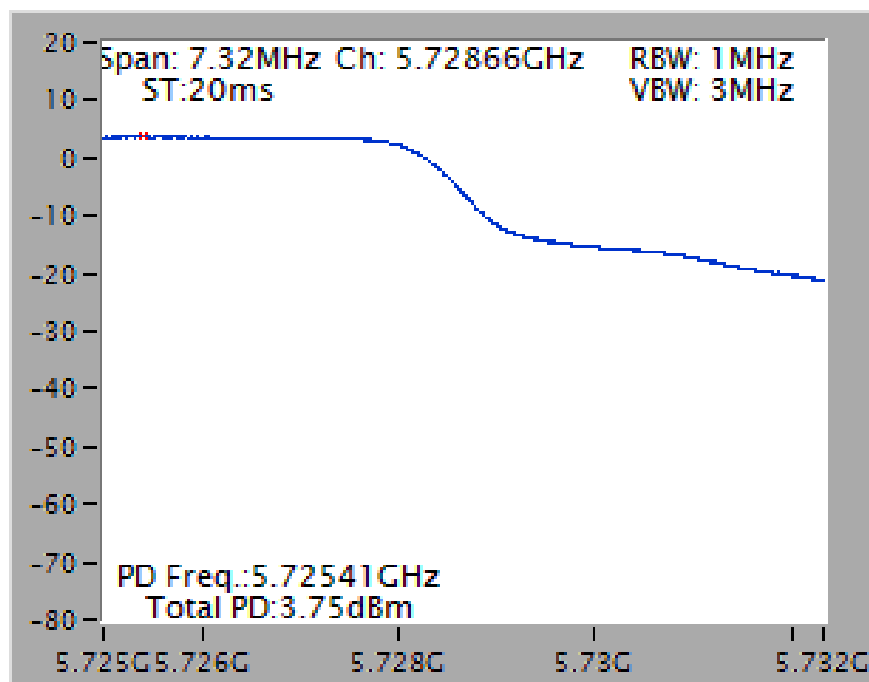

4.5. Radiated Emissions Measurement

4.5.1. Limit

For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout

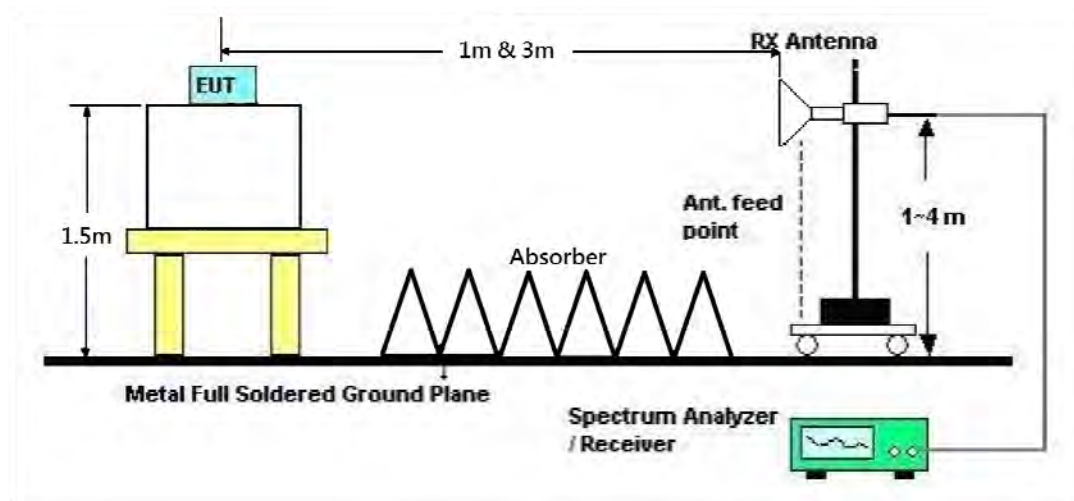

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results for Radiated Emissions (1GHz~40GHz)

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 52 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	15772.50	41.46	54.00	-12.54	28.06	10.80	37.91	35.31	Average	200	93 HORIZONTAL
2	15792.80	55.36	74.00	-18.64	41.99	10.80	37.89	35.32	Peak	200	93 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	15755.70	53.19	74.00	-20.81	39.76	10.80	37.94	35.31	Peak	200	102 VERTICAL
2	15784.00	41.64	54.00	-12.36	28.27	10.80	37.89	35.32	Average	200	102 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 60 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	10595.86	50.55	74.00	-23.45	38.31	8.62	38.58	34.96	Peak	200	74 HORIZONTAL
2	10601.64	39.12	54.00	-14.88	26.85	8.64	38.58	34.95	Average	200	74 HORIZONTAL
3	15895.30	53.95	74.00	-20.05	40.76	10.81	37.74	35.36	Peak	200	192 HORIZONTAL
4	15899.36	41.65	54.00	-12.35	28.46	10.81	37.74	35.36	Average	200	192 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	10583.90	38.95	54.00	-15.05	26.71	8.62	38.58	34.96	Average	200	152 VERTICAL
2	10598.90	51.48	74.00	-22.52	39.22	8.64	38.58	34.96	Peak	200	152 VERTICAL
3	15896.60	53.29	74.00	-20.71	40.10	10.81	37.74	35.36	Peak	200	163 VERTICAL
4	15917.20	42.16	54.00	-11.84	29.01	10.81	37.72	35.38	Average	200	163 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 64 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	10638.94	38.88	54.00	-15.12	26.59	8.66	38.57	34.94	Average	200	83 HORIZONTAL
2	10641.18	51.01	74.00	-22.99	38.72	8.66	38.57	34.94	Peak	200	83 HORIZONTAL
3	15958.90	54.30	74.00	-19.70	41.23	10.82	37.65	35.40	Peak	200	212 HORIZONTAL
4	15963.68	41.78	54.00	-12.22	28.71	10.82	37.65	35.40	Average	200	212 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	10640.00	50.77	74.00	-23.23	38.48	8.66	38.57	34.94	Peak	200	193 VERTICAL
2	10640.54	38.90	54.00	-15.10	26.61	8.66	38.57	34.94	Average	200	193 VERTICAL
3	15960.76	53.56	74.00	-20.44	40.49	10.82	37.65	35.40	Peak	200	82 VERTICAL
4	15964.44	42.48	54.00	-11.52	29.41	10.82	37.65	35.40	Average	200	82 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 100 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	10995.90	51.95	74.00	-22.05	39.31	8.93	38.50	34.79	Peak	200	182	HORIZONTAL
2	10999.42	39.50	54.00	-14.50	26.86	8.93	38.50	34.79	Average	200	182	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11000.76	40.52	54.00	-13.48	27.88	8.93	38.50	34.79	Average	200	61	VERTICAL
2	11000.76	52.11	74.00	-21.89	39.47	8.93	38.50	34.79	Peak	200	61	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 116 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11161.72	39.74	54.00	-14.26	26.79	9.04	38.70	34.79	Average	200	145 HORIZONTAL
2	11162.36	51.88	74.00	-22.12	38.93	9.04	38.70	34.79	Peak	200	145 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11157.74	52.58	74.00	-21.42	39.63	9.04	38.70	34.79	Peak	200	102 VERTICAL
2	11162.22	40.60	54.00	-13.40	27.65	9.04	38.70	34.79	Average	200	102 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 140 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11396.30	52.24	74.00	-21.76	38.87	9.19	38.98	34.80	Peak	200	103 HORIZONTAL
2	11403.28	40.39	54.00	-13.61	27.02	9.19	38.98	34.80	Average	200	103 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11402.18	41.40	54.00	-12.60	28.03	9.19	38.98	34.80	Average	200	192 VERTICAL
2	11404.48	53.58	74.00	-20.42	40.21	9.19	38.98	34.80	Peak	200	192 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15781.22	53.64	74.00	-20.36	40.25	10.80	37.91	35.32	Peak	200	133	HORIZONTAL
2	15781.54	41.09	54.00	-12.91	27.72	10.80	37.89	35.32	Average	200	133	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15777.56	54.29	74.00	-19.71	40.90	10.80	37.91	35.32	Peak	200	152	VERTICAL
2	15784.80	41.64	54.00	-12.36	28.27	10.80	37.89	35.32	Average	200	152	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 60 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	10602.48	51.12	74.00	-22.88	38.85	8.64	38.58	34.95	Peak	200	151 HORIZONTAL
2	10604.96	38.81	54.00	-15.19	26.54	8.64	38.58	34.95	Average	200	151 HORIZONTAL
3	15895.02	53.58	74.00	-20.42	40.39	10.81	37.74	35.36	Peak	200	83 HORIZONTAL
4	15900.02	41.45	54.00	-12.55	28.26	10.81	37.74	35.36	Average	200	83 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	10595.24	38.98	54.00	-15.02	26.74	8.62	38.58	34.96	Average	200	110 VERTICAL
2	10599.66	50.69	74.00	-23.31	38.43	8.64	38.58	34.96	Peak	200	110 VERTICAL
3	15898.76	41.94	54.00	-12.06	28.75	10.81	37.74	35.36	Average	200	201 VERTICAL
4	15904.70	54.46	74.00	-19.54	41.29	10.81	37.72	35.36	Peak	200	201 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 64 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10639.16	50.63	74.00	-23.37	38.34	8.66	38.57	34.94	Peak	200	92	HORIZONTAL
2	10640.68	38.91	54.00	-15.09	26.62	8.66	38.57	34.94	Average	200	92	HORIZONTAL
3	15961.70	53.18	74.00	-20.82	40.11	10.82	37.65	35.40	Peak	200	210	HORIZONTAL
4	15962.12	41.22	54.00	-12.78	28.15	10.82	37.65	35.40	Average	200	210	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10637.74	50.65	74.00	-23.35	38.36	8.66	38.57	34.94	Peak	200	107	VERTICAL
2	10643.06	38.73	54.00	-15.27	26.44	8.66	38.57	34.94	Average	200	107	VERTICAL
3	15961.42	54.51	74.00	-19.49	41.44	10.82	37.65	35.40	Peak	200	53	VERTICAL
4	15963.82	42.56	54.00	-11.44	29.49	10.82	37.65	35.40	Average	200	53	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 100 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			Pol/Phase
1	10996.42	40.09	54.00	-13.91	27.45	8.93	38.50	34.79	Average	200	121 HORIZONTAL
2	10998.84	51.94	74.00	-22.06	39.30	8.93	38.50	34.79	Peak	200	121 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			Pol/Phase
1	10998.58	55.20	74.00	-18.80	42.56	8.93	38.50	34.79	Peak	200	154 VERTICAL
2	10998.66	41.53	54.00	-12.47	28.89	8.93	38.50	34.79	Average	200	154 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 116 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11155.00	52.32	74.00	-21.68	39.40	9.03	38.68	34.79	Peak	200	201 HORIZONTAL
2	11160.92	39.96	54.00	-14.04	27.01	9.04	38.70	34.79	Average	200	201 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11157.16	53.35	74.00	-20.65	40.43	9.03	38.68	34.79	Peak	200	111 VERTICAL
2	11161.52	41.85	54.00	-12.15	28.90	9.04	38.70	34.79	Average	200	111 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 140 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11396.66	41.02	54.00	-12.98	27.65	9.19	38.98	34.80	Average	200	193 HORIZONTAL
2	11398.84	53.02	74.00	-20.98	39.65	9.19	38.98	34.80	Peak	200	193 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11399.10	53.39	74.00	-20.61	40.02	9.19	38.98	34.80	Peak	200	85 VERTICAL
2	11402.14	41.81	54.00	-12.19	28.44	9.19	38.98	34.80	Average	200	85 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	15803.52	42.62	54.00	-11.38	29.28	10.80	37.87	35.33	Average	200	13 HORIZONTAL
2	15806.20	55.37	74.00	-18.63	42.03	10.80	37.87	35.33	Peak	200	13 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	15806.08	42.73	54.00	-11.27	29.39	10.80	37.87	35.33	Average	200	23 VERTICAL
2	15814.44	55.02	74.00	-18.98	41.68	10.80	37.87	35.33	Peak	200	23 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 62 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	10610.08	39.25	54.00	-14.75	26.98	8.64	38.58	34.95	Average	200	331 HORIZONTAL
2	10613.40	51.07	74.00	-22.93	38.80	8.64	38.58	34.95	Peak	200	331 HORIZONTAL
3	15920.96	55.79	74.00	-18.21	42.66	10.81	37.70	35.38	Peak	200	264 HORIZONTAL
4	15927.52	43.23	54.00	-10.77	30.10	10.81	37.70	35.38	Average	200	264 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	10615.80	51.03	74.00	-22.97	38.75	8.65	38.58	34.95	Peak	200	96 VERTICAL
2	10622.60	39.23	54.00	-14.77	26.95	8.65	38.58	34.95	Average	200	96 VERTICAL
3	15926.48	42.16	54.00	-11.84	29.03	10.81	37.70	35.38	Average	200	213 VERTICAL
4	15938.12	55.01	74.00	-18.99	41.92	10.81	37.67	35.39	Peak	200	213 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 102 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11010.64	52.20	74.00	-21.80	39.53	8.94	38.52	34.79	Peak	200	145 HORIZONTAL
2	11021.56	39.98	54.00	-14.02	27.28	8.95	38.54	34.79	Average	200	145 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11017.52	52.46	74.00	-21.54	39.79	8.94	38.52	34.79	Peak	200	189 VERTICAL
2	11019.32	40.81	54.00	-13.19	28.14	8.94	38.52	34.79	Average	200	189 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 110 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11106.28	51.80	74.00	-22.20	38.98	8.99	38.62	34.79	Peak	200	182	HORIZONTAL
2	11109.64	40.06	54.00	-13.94	27.21	9.00	38.64	34.79	Average	200	182	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11090.36	40.90	54.00	-13.10	28.08	8.99	38.62	34.79	Average	200	157	VERTICAL
2	11098.12	52.35	74.00	-21.65	39.53	8.99	38.62	34.79	Peak	200	157	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 134 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11331.56	52.16	74.00	-21.84	38.92	9.14	38.90	34.80	Peak	200	156 HORIZONTAL
2	11348.92	40.46	54.00	-13.54	27.19	9.15	38.92	34.80	Average	200	156 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11334.24	53.39	74.00	-20.61	40.15	9.14	38.90	34.80	Peak	200	154 VERTICAL
2	11340.00	40.72	54.00	-13.28	27.48	9.14	38.90	34.80	Average	200	154 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 58 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	15869.76	42.41	54.00	-11.59	29.18	10.81	37.77	35.35	Average	200	187 HORIZONTAL
2	15870.04	54.12	74.00	-19.88	40.89	10.81	37.77	35.35	Peak	200	187 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	15869.72	54.91	74.00	-19.09	41.68	10.81	37.77	35.35	Peak	200	167 VERTICAL
2	15869.92	42.91	54.00	-11.09	29.68	10.81	37.77	35.35	Average	200	167 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 106 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11059.71	39.97	54.00	-14.03	27.21	8.97	38.58	34.79	Average	200	104 HORIZONTAL
2	11060.22	52.00	74.00	-22.00	39.24	8.97	38.58	34.79	Peak	200	104 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11059.50	39.90	54.00	-14.10	27.14	8.97	38.58	34.79	Average	200	63 VERTICAL
2	11059.92	52.97	74.00	-21.03	40.21	8.97	38.58	34.79	Peak	200	63 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 122 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11219.59	39.72	54.00	-14.28	26.68	9.07	38.76	34.79	Average	200	82	HORIZONTAL
2	11220.09	52.06	74.00	-21.94	39.02	9.07	38.76	34.79	Peak	200	82	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11220.17	39.65	54.00	-14.35	26.61	9.07	38.76	34.79	Average	200	197	VERTICAL
2	11220.17	51.57	74.00	-22.43	38.53	9.07	38.76	34.79	Peak	200	197	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Straddle Channel

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 144 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11435.24	54.50	74.00	-19.50	41.07	9.21	39.02	34.80	Peak	200	301	HORIZONTAL
2	11440.56	40.77	54.00	-13.23	27.34	9.21	39.02	34.80	Average	200	301	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11440.42	58.07	74.00	-15.93	44.64	9.21	39.02	34.80	Peak	200	252	VERTICAL
2	11440.72	44.02	54.00	-9.98	30.59	9.21	39.02	34.80	Average	200	252	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 144 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11440.90	53.01	74.00	-20.99	39.58	9.21	39.02	34.80	Peak	200	173 HORIZONTAL
2	11441.96	41.05	54.00	-12.95	27.62	9.21	39.02	34.80	Average	200	173 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11437.90	53.88	74.00	-20.12	40.45	9.21	39.02	34.80	Peak	200	154 VERTICAL
2	11440.70	42.12	54.00	-11.88	28.69	9.21	39.02	34.80	Average	200	154 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 142 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11421.24	40.90	54.00	-13.10	27.50	9.20	39.00	34.80	Average	200	197 HORIZONTAL
2	11424.60	53.45	74.00	-20.55	40.05	9.20	39.00	34.80	Peak	200	197 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11411.92	53.26	74.00	-20.74	39.89	9.19	38.98	34.80	Peak	200	111 VERTICAL
2	11415.12	41.57	54.00	-12.43	28.17	9.20	39.00	34.80	Average	200	111 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 138 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 1: EUT 1 + Set 1 Ceiling Mount Omni Antenna / 7 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	11379.51	40.51	54.00	-13.49	27.17	9.18	38.96	34.80	Average	200	121 HORIZONTAL
2	11380.34	52.82	74.00	-21.18	39.48	9.18	38.96	34.80	Peak	200	121 HORIZONTAL
3	17069.80	47.39	54.00	-6.61	29.32	12.39	40.36	34.68	Average	200	44 HORIZONTAL
4	17069.91	58.59	74.00	-15.41	40.52	12.39	40.36	34.68	Peak	200	44 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	11379.65	52.21	74.00	-21.79	38.87	9.18	38.96	34.80	Peak	200	152 VERTICAL
2	11379.94	40.67	54.00	-13.33	27.33	9.18	38.96	34.80	Average	200	152 VERTICAL
3	17069.76	59.94	74.00	-14.06	41.87	12.39	40.36	34.68	Peak	200	177 VERTICAL
4	17069.89	46.90	54.00	-7.10	28.83	12.39	40.36	34.68	Average	200	177 VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 52 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15781.85	56.86	74.00	-17.14	43.49	10.80	37.89	35.32	Peak	157	80	HORIZONTAL
2	15782.74	43.52	54.00	-10.48	30.15	10.80	37.89	35.32	Average	157	80	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15776.44	56.17	74.00	-17.83	42.77	10.80	37.91	35.31	Peak	148	197	VERTICAL
2	15783.21	43.50	54.00	-10.50	30.13	10.80	37.89	35.32	Average	148	197	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 60 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10593.92	47.18	54.00	-6.82	34.94	8.62	38.58	34.96 Average	133	313	HORIZONTAL
2	10594.36	59.85	74.00	-14.15	47.61	8.62	38.58	34.96 Peak	133	313	HORIZONTAL
3	15902.82	44.08	54.00	-9.92	30.91	10.81	37.72	35.36 Average	154	233	HORIZONTAL
4	15904.57	57.00	74.00	-17.00	43.83	10.81	37.72	35.36 Peak	154	233	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10601.52	55.71	74.00	-18.29	43.44	8.64	38.58	34.95 Peak	137	316	VERTICAL
2	10601.81	43.24	54.00	-10.76	30.97	8.64	38.58	34.95 Average	137	316	VERTICAL
3	15895.24	43.87	54.00	-10.13	30.68	10.81	37.74	35.36 Average	173	180	VERTICAL
4	15899.70	56.86	74.00	-17.14	43.67	10.81	37.74	35.36 Peak	173	180	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 64 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10644.92	59.75	74.00	-14.25	47.46	8.66	38.57	34.94	169	45	HORIZONTAL
2	10646.15	47.65	54.00	-6.35	35.36	8.66	38.57	34.94	169	45	HORIZONTAL
3	15955.86	43.18	54.00	-10.82	30.11	10.82	37.65	35.40	166	242	HORIZONTAL
4	15961.59	56.48	74.00	-17.52	43.41	10.82	37.65	35.40	166	242	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10637.32	44.26	54.00	-9.74	31.97	8.66	38.57	34.94	144	299	VERTICAL
2	10640.14	55.48	74.00	-18.52	43.19	8.66	38.57	34.94	144	299	VERTICAL
3	15955.60	56.38	74.00	-17.62	43.30	10.82	37.65	35.39	193	117	VERTICAL
4	15957.51	43.40	54.00	-10.60	30.33	10.82	37.65	35.40	193	117	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 100 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	10999.78	45.04	54.00	-8.96	32.40	8.93	38.50	34.79	Average	228	304	HORIZONTAL
2	11001.59	56.93	74.00	-17.07	44.29	8.93	38.50	34.79	Peak	228	304	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	10996.82	53.81	74.00	-20.19	41.17	8.93	38.50	34.79	Peak	224	5	VERTICAL
2	11000.14	41.51	54.00	-12.49	28.87	8.93	38.50	34.79	Average	224	5	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 116 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11162.68	60.67	74.00	-13.33	47.72	9.04	38.70	34.79	Peak	220	304
2	11164.05	47.63	54.00	-6.37	34.68	9.04	38.70	34.79	Average	220	304

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11162.03	45.35	54.00	-8.65	32.40	9.04	38.70	34.79	Average	217	35
2	11162.75	57.29	74.00	-16.71	44.34	9.04	38.70	34.79	Peak	217	35

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 140 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11398.05	46.52	54.00	-7.48	33.15	9.19	38.98	34.80	Average	208	351 HORIZONTAL
2	11400.07	58.77	74.00	-15.23	45.40	9.19	38.98	34.80	Peak	208	351 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11394.43	55.05	74.00	-18.95	41.71	9.18	38.96	34.80	Peak	208	18 VERTICAL
2	11403.18	43.37	54.00	-10.63	30.00	9.19	38.98	34.80	Average	208	18 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15776.15	56.64	74.00	-17.36	43.24	10.80	37.91	35.31	Peak	172	263	HORIZONTAL
2	15781.74	43.42	54.00	-10.58	30.05	10.80	37.89	35.32	Average	172	263	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15780.90	56.78	74.00	-17.22	43.39	10.80	37.91	35.32	Peak	190	311	VERTICAL
2	15783.88	43.49	54.00	-10.51	30.12	10.80	37.89	35.32	Average	190	311	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 60 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
						dB	dB/m	dB			Pol/Phase
1	10602.82	60.76	74.00	-13.24	48.49	8.64	38.58	34.95	Peak	163	46 HORIZONTAL
2	10603.62	48.08	54.00	-5.92	35.81	8.64	38.58	34.95	Average	163	46 HORIZONTAL
3	15901.37	57.62	74.00	-16.38	44.45	10.81	37.72	35.36	Peak	179	220 HORIZONTAL
4	15903.84	43.85	54.00	-10.15	30.68	10.81	37.72	35.36	Average	179	220 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
						dB	dB/m	dB			Pol/Phase
1	10597.03	43.33	54.00	-10.67	31.07	8.64	38.58	34.96	Average	176	45 VERTICAL
2	10599.28	56.04	74.00	-17.96	43.78	8.64	38.58	34.96	Peak	176	45 VERTICAL
3	15900.20	43.91	54.00	-10.09	30.72	10.81	37.74	35.36	Average	156	128 VERTICAL
4	15903.20	57.06	74.00	-16.94	43.89	10.81	37.72	35.36	Peak	156	128 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 64 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10645.86	46.05	54.00	-7.95	33.76	8.66	38.57	34.94	Average	167	45	HORIZONTAL
2	10647.16	59.70	74.00	-14.30	47.41	8.66	38.57	34.94	Peak	167	45	HORIZONTAL
3	15959.14	43.29	54.00	-10.71	30.22	10.82	37.65	35.40	Average	150	197	HORIZONTAL
4	15964.34	56.78	74.00	-17.22	43.71	10.82	37.65	35.40	Peak	150	197	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10635.88	54.63	74.00	-19.37	42.34	8.66	38.57	34.94	Peak	158	313	VERTICAL
2	10638.63	42.46	54.00	-11.54	30.17	8.66	38.57	34.94	Average	158	313	VERTICAL
3	15959.56	56.31	74.00	-17.69	43.24	10.82	37.65	35.40	Peak	188	177	VERTICAL
4	15961.44	43.51	54.00	-10.49	30.44	10.82	37.65	35.40	Average	188	177	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 100 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11002.53	58.41	74.00	-15.59	45.77	8.93	38.50	34.79	Peak	165	46 HORIZONTAL
2	11003.83	47.62	54.00	-6.38	34.98	8.93	38.50	34.79	Average	165	46 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	10998.34	56.40	74.00	-17.60	43.76	8.93	38.50	34.79	Peak	170	133 VERTICAL
2	11002.68	43.72	54.00	-10.28	31.08	8.93	38.50	34.79	Average	170	133 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 116 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11160.68	61.24	74.00	-12.76	48.29	9.04	38.70	34.79	Peak	156	316	HORIZONTAL
2	11162.93	49.46	54.00	-4.54	36.51	9.04	38.70	34.79	Average	156	316	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11159.07	59.25	74.00	-14.75	46.30	9.04	38.70	34.79	Peak	141	40	VERTICAL
2	11163.76	45.36	54.00	-8.64	32.41	9.04	38.70	34.79	Average	141	40	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 140 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11398.70	55.47	74.00	-18.53	42.10	9.19	38.98	34.80	Peak	149	6 HORIZONTAL
2	11400.36	43.44	54.00	-10.56	30.07	9.19	38.98	34.80	Average	149	6 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11398.13	54.53	74.00	-19.47	41.16	9.19	38.98	34.80	Peak	203	227 VERTICAL
2	11399.42	42.31	54.00	-11.69	28.94	9.19	38.98	34.80	Average	203	227 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15807.47	43.57	54.00	-10.43	30.23	10.80	37.87	35.33	Average	157	204 HORIZONTAL
2	15812.10	56.68	74.00	-17.32	43.34	10.80	37.87	35.33	Peak	157	204 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15812.94	43.45	54.00	-10.55	30.11	10.80	37.87	35.33	Average	165	311 VERTICAL
2	15813.17	57.80	74.00	-16.20	44.46	10.80	37.87	35.33	Peak	165	311 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 62 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	10618.18	41.33	54.00	-12.67	29.05	8.65	38.58	34.95	Average	182	70 HORIZONTAL
2	10619.84	53.40	74.00	-20.60	41.12	8.65	38.58	34.95	Peak	182	70 HORIZONTAL
3	15933.23	56.17	74.00	-17.83	43.05	10.81	37.70	35.39	Peak	182	286 HORIZONTAL
4	15934.66	43.38	54.00	-10.62	30.29	10.81	37.67	35.39	Average	182	286 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	10623.50	53.15	74.00	-20.85	40.87	8.65	38.58	34.95	Peak	165	92 VERTICAL
2	10624.82	40.74	54.00	-13.26	28.46	8.65	38.58	34.95	Average	165	92 VERTICAL
3	15925.59	56.82	74.00	-17.18	43.69	10.81	37.70	35.38	Peak	155	165 VERTICAL
4	15932.03	43.34	54.00	-10.66	30.22	10.81	37.70	35.39	Average	155	165 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 102 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11019.45	40.82	54.00	-13.18	28.15	8.94	38.52	34.79	Average	170	290	HORIZONTAL
2	11023.37	54.54	74.00	-19.46	41.84	8.95	38.54	34.79	Peak	170	290	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	
1	11016.06	54.05	74.00	-19.95	41.38	8.94	38.52	34.79	Peak	162	105	VERTICAL
2	11022.23	41.01	54.00	-12.99	28.31	8.95	38.54	34.79	Average	162	105	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 110 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11096.67	57.66	74.00	-16.34	44.84	8.99	38.62	34.79	Peak	182	33	HORIZONTAL
2	11099.78	44.80	54.00	-9.20	31.98	8.99	38.62	34.79	Average	182	33	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11105.93	54.82	74.00	-19.18	42.00	8.99	38.62	34.79	Peak	191	40	VERTICAL
2	11106.22	43.26	54.00	-10.74	30.44	8.99	38.62	34.79	Average	191	40	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 134 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11339.57	44.69	54.00	-9.31	31.45	9.14	38.90	34.80	Average	184	316 HORIZONTAL
2	11350.06	57.60	74.00	-16.40	44.33	9.15	38.92	34.80	Peak	184	316 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11343.83	54.25	74.00	-19.75	41.01	9.14	38.90	34.80	Peak	141	272 VERTICAL
2	11346.01	42.65	54.00	-11.35	29.38	9.15	38.92	34.80	Average	141	272 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 58 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15865.21	44.22	54.00	-9.78	30.97	10.81	37.79	35.35	Average	147	175	HORIZONTAL
2	15871.53	56.99	74.00	-17.01	43.76	10.81	37.77	35.35	Peak	147	175	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15866.77	44.16	54.00	-9.84	30.93	10.81	37.77	35.35	Average	174	259	VERTICAL
2	15874.36	56.73	74.00	-17.27	43.50	10.81	37.77	35.35	Peak	174	259	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 106 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11055.17	53.80	74.00	-20.20	41.07	8.96	38.56	34.79	Peak	220	24	HORIZONTAL
2	11059.22	41.54	54.00	-12.46	28.78	8.97	38.58	34.79	Average	220	24	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11060.67	54.75	74.00	-19.25	41.99	8.97	38.58	34.79	Peak	131	163	VERTICAL
2	11064.37	41.38	54.00	-12.62	28.62	8.97	38.58	34.79	Average	131	163	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 122 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11215.08	55.84	74.00	-18.16	42.80	9.07	38.76	34.79	Peak	169	350	HORIZONTAL
2	11219.64	43.84	54.00	-10.16	30.80	9.07	38.76	34.79	Average	169	350	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11221.25	54.73	74.00	-19.27	41.69	9.07	38.76	34.79	Peak	184	172	VERTICAL
2	11223.26	41.47	54.00	-12.53	28.43	9.07	38.76	34.79	Average	184	172	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Straddle Channel

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 144 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11440.29	51.68	54.00	-2.32	38.25	9.21	39.02	34.80 Average	212	305	HORIZONTAL
2	11440.58	64.75	74.00	-9.25	51.32	9.21	39.02	34.80 Peak	212	305	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11440.00	45.60	54.00	-8.40	32.17	9.21	39.02	34.80 Average	207	35	VERTICAL
2	11440.72	57.10	74.00	-16.90	43.67	9.21	39.02	34.80 Peak	207	35	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 144 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11440.65	63.38	74.00	-10.62	49.95	9.21	39.02	34.80	Peak	176	312 HORIZONTAL
2	11442.24	50.05	54.00	-3.95	36.62	9.21	39.02	34.80	Average	176	312 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11441.95	45.05	54.00	-8.95	31.62	9.21	39.02	34.80	Average	178	316 VERTICAL
2	11444.92	56.67	74.00	-17.33	43.24	9.21	39.02	34.80	Peak	178	316 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 142 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11419.93	47.33	54.00	-6.67	33.93	9.20	39.00	34.80	Average	134	316	HORIZONTAL
2	11420.07	59.13	74.00	-14.87	45.73	9.20	39.00	34.80	Peak	134	316	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11419.93	45.27	54.00	-8.73	31.87	9.20	39.00	34.80	Average	136	41	VERTICAL
2	11420.22	57.59	74.00	-16.41	44.19	9.20	39.00	34.80	Peak	136	41	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 138 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 25, 2015		
Test Mode	Mode 2: EUT 1 + Set 2 Sector Antenna / 6.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11384.27	57.52	74.00	-16.48	44.18	9.18	38.96	34.80	Peak	169	319	HORIZONTAL
2	11384.92	45.40	54.00	-8.60	32.06	9.18	38.96	34.80	Average	169	319	HORIZONTAL
3	17067.21	47.23	54.00	-6.77	29.16	12.39	40.36	34.68	Average	157	191	HORIZONTAL
4	17071.59	61.29	74.00	-12.71	43.22	12.39	40.36	34.68	Peak	157	191	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11372.18	55.60	74.00	-18.40	42.30	9.16	38.94	34.80	Peak	176	41	VERTICAL
2	11379.57	43.11	54.00	-10.89	29.77	9.18	38.96	34.80	Average	176	41	VERTICAL
3	17067.22	60.76	74.00	-13.24	42.69	12.39	40.36	34.68	Peak	140	143	VERTICAL
4	17073.34	47.28	54.00	-6.72	29.21	12.39	40.36	34.68	Average	140	143	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 52 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15779.53	41.79	54.00	-12.21	28.40	10.80	37.91	35.32	Average	150	246 HORIZONTAL
2	15780.36	54.88	74.00	-19.12	41.49	10.80	37.91	35.32	Peak	150	246 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15779.50	42.55	54.00	-11.45	29.16	10.80	37.91	35.32	Average	150	110 VERTICAL
2	15780.17	55.19	74.00	-18.81	41.80	10.80	37.91	35.32	Peak	150	110 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 60 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10600.24	43.02	54.00	-10.98	30.76	8.64	38.58	34.96	153	11	HORIZONTAL
2	10600.48	54.94	74.00	-19.06	42.68	8.64	38.58	34.96	153	11	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10601.68	43.08	54.00	-10.92	30.81	8.64	38.58	34.95	148	347	VERTICAL
2	10601.92	54.45	74.00	-19.55	42.18	8.64	38.58	34.95	148	347	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 64 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	10640.03	42.73	54.00	-11.27	30.44	8.66	38.57	34.94	Average	149	5 HORIZONTAL
2	10640.19	55.61	74.00	-18.39	43.32	8.66	38.57	34.94	Peak	149	5 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	10636.96	56.20	74.00	-17.80	43.91	8.66	38.57	34.94	Peak	148	336 VERTICAL
2	10637.92	43.69	54.00	-10.31	31.40	8.66	38.57	34.94	Average	148	336 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 100 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11004.73	56.69	74.00	-17.31	44.02	8.94	38.52	34.79	Peak	134	61	HORIZONTAL
2	11005.85	44.69	54.00	-9.31	32.02	8.94	38.52	34.79	Average	134	61	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11001.28	57.62	74.00	-16.38	44.98	8.93	38.50	34.79	Peak	141	345	VERTICAL
2	11001.92	44.77	54.00	-9.23	32.13	8.93	38.50	34.79	Average	141	345	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 116 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11158.08	45.72	54.00	-8.28	32.77	9.04	38.70	34.79	Average	248	64 HORIZONTAL
2	11158.56	57.38	74.00	-16.62	44.43	9.04	38.70	34.79	Peak	248	64 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11161.20	59.21	74.00	-14.79	46.26	9.04	38.70	34.79	Peak	176	343 VERTICAL
2	11162.00	45.98	54.00	-8.02	33.03	9.04	38.70	34.79	Average	176	343 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 140 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			Pol/Phase
1	11399.69	55.45	74.00	-18.55	42.08	9.19	38.98	34.80	Peak	154	310 HORIZONTAL
2	11400.02	42.64	54.00	-11.36	29.27	9.19	38.98	34.80	Average	154	310 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			Pol/Phase
1	11399.99	54.30	74.00	-19.70	40.93	9.19	38.98	34.80	Peak	150	297 VERTICAL
2	11400.04	42.35	54.00	-11.65	28.98	9.19	38.98	34.80	Average	150	297 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15779.96	55.81	74.00	-18.19	42.42	10.80	37.91	35.32	Peak	150	109	HORIZONTAL
2	15780.21	41.65	54.00	-12.35	28.26	10.80	37.91	35.32	Average	150	109	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15779.51	42.39	54.00	-11.61	29.00	10.80	37.91	35.32	Average	150	214	VERTICAL
2	15780.10	54.62	74.00	-19.38	41.23	10.80	37.91	35.32	Peak	150	214	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 60 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			Pol/Phase
1	10600.32	42.40	54.00	-11.60	30.14	8.64	38.58	34.96	Average	143	11 HORIZONTAL
2	10600.80	54.39	74.00	-19.61	42.12	8.64	38.58	34.95	Peak	143	11 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			Pol/Phase
1	10600.02	42.99	54.00	-11.01	30.73	8.64	38.58	34.96	Average	140	346 VERTICAL
2	10600.02	55.69	74.00	-18.31	43.43	8.64	38.58	34.96	Peak	140	346 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 64 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	10639.84	41.74	54.00	-12.26	29.45	8.66	38.57	34.94	Average	142	358 HORIZONTAL
2	10640.15	53.90	74.00	-20.10	41.61	8.66	38.57	34.94	Peak	142	358 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	10636.55	55.13	74.00	-18.87	42.84	8.66	38.57	34.94	Peak	149	337 VERTICAL
2	10636.88	42.44	54.00	-11.56	30.15	8.66	38.57	34.94	Average	149	337 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 100 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11003.69	54.78	74.00	-19.22	42.14	8.93	38.50	34.79	Peak	129	61 HORIZONTAL
2	11006.01	43.97	54.00	-10.03	31.30	8.94	38.52	34.79	Average	129	61 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11003.04	44.28	54.00	-9.72	31.64	8.93	38.50	34.79	Average	136	342 VERTICAL
2	11004.89	57.59	74.00	-16.41	44.92	8.94	38.52	34.79	Peak	136	342 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 116 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11157.44	57.28	74.00	-16.72	44.36	9.03	38.68	34.79	Peak	147	64 HORIZONTAL
2	11157.92	44.95	54.00	-9.05	32.00	9.04	38.70	34.79	Average	147	64 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11152.15	56.58	74.00	-17.42	43.66	9.03	38.68	34.79	Peak	144	333 VERTICAL
2	11152.31	44.31	54.00	-9.69	31.39	9.03	38.68	34.79	Average	144	333 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 140 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11400.00	54.05	74.00	-19.95	40.68	9.19	38.98	34.80	Peak	150	163 HORIZONTAL
2	11400.12	41.16	54.00	-12.84	27.79	9.19	38.98	34.80	Average	150	163 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11399.58	54.26	74.00	-19.74	40.89	9.19	38.98	34.80	Peak	152	268 VERTICAL
2	11400.10	41.67	54.00	-12.33	28.30	9.19	38.98	34.80	Average	152	268 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			Pol/Phase
1	15810.27	41.62	54.00	-12.38	28.28	10.80	37.87	35.33	Average	150	163 HORIZONTAL
2	15810.33	54.80	74.00	-19.20	41.46	10.80	37.87	35.33	Peak	150	163 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			Pol/Phase
1	15809.68	41.71	54.00	-12.29	28.37	10.80	37.87	35.33	Average	150	94 VERTICAL
2	15809.94	54.66	74.00	-19.34	41.32	10.80	37.87	35.33	Peak	150	94 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 62 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	10619.95	53.39	74.00	-20.61	41.11	8.65	38.58	34.95	Peak	150	139	HORIZONTAL
2	10620.19	39.85	54.00	-14.15	27.57	8.65	38.58	34.95	Average	150	139	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	10619.64	40.18	54.00	-13.82	27.90	8.65	38.58	34.95	Average	150	215	VERTICAL
2	10620.32	53.30	74.00	-20.70	41.02	8.65	38.58	34.95	Peak	150	215	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 102 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11019.70	40.45	54.00	-13.55	27.78	8.94	38.52	34.79	Average	150	315 HORIZONTAL
2	11020.31	53.51	74.00	-20.49	40.84	8.94	38.52	34.79	Peak	150	315 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11019.89	53.26	74.00	-20.74	40.59	8.94	38.52	34.79	Peak	150	235 VERTICAL
2	11020.06	40.66	54.00	-13.34	27.99	8.94	38.52	34.79	Average	150	235 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 110 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			Pol/Phase
1	11100.17	41.17	54.00	-12.83	28.35	8.99	38.62	34.79	Average	150	244 HORIZONTAL
2	11100.49	53.43	74.00	-20.57	40.61	8.99	38.62	34.79	Peak	150	244 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			Pol/Phase
1	11099.79	41.94	54.00	-12.06	29.12	8.99	38.62	34.79	Average	150	72 VERTICAL
2	11100.04	54.19	74.00	-19.81	41.37	8.99	38.62	34.79	Peak	150	72 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 134 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11339.56	53.25	74.00	-20.75	40.01	9.14	38.90	34.80	Peak	150	199
2	11340.09	41.46	54.00	-12.54	28.22	9.14	38.90	34.80	Average	150	199

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11339.56	54.54	74.00	-19.46	41.30	9.14	38.90	34.80	Peak	150	329
2	11339.87	41.92	54.00	-12.08	28.68	9.14	38.90	34.80	Average	150	329

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 58 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15869.57	41.80	54.00	-12.20	28.57	10.81	37.77	35.35	Average	150	221	HORIZONTAL
2	15869.83	54.47	74.00	-19.53	41.24	10.81	37.77	35.35	Peak	150	221	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	Line	Line	Limit	Level	Loss	Factor	Factor	Remark			Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15869.84	54.40	74.00	-19.60	41.17	10.81	37.77	35.35	Peak	150	324 VERTICAL
2	15870.03	41.92	54.00	-12.08	28.69	10.81	37.77	35.35	Average	150	324 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 106 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11060.03	53.03	74.00	-20.97	40.27	8.97	38.58	34.79	Peak	150	176 HORIZONTAL
2	11060.30	39.89	54.00	-14.11	27.13	8.97	38.58	34.79	Average	150	176 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11059.58	53.00	74.00	-21.00	40.24	8.97	38.58	34.79	Peak	150	75 VERTICAL
2	11060.44	39.97	54.00	-14.03	27.21	8.97	38.58	34.79	Average	150	75 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 122 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11219.56	40.42	54.00	-13.58	27.38	9.07	38.76	34.79	Average	150	198	HORIZONTAL
2	11219.85	54.21	74.00	-19.79	41.17	9.07	38.76	34.79	Peak	150	198	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11220.35	53.93	74.00	-20.07	40.89	9.07	38.76	34.79	Peak	150	288	VERTICAL
2	11220.48	40.60	54.00	-13.40	27.56	9.07	38.76	34.79	Average	150	288	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Straddle Channel

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 144 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11445.53	56.53	74.00	-17.47	43.10	9.21	39.02	34.80	Peak	157	56	HORIZONTAL
2	11445.85	44.65	54.00	-9.35	31.22	9.21	39.02	34.80	Average	157	56	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11441.68	56.90	74.00	-17.10	43.47	9.21	39.02	34.80	Peak	156	324	VERTICAL
2	11442.00	43.89	54.00	-10.11	30.46	9.21	39.02	34.80	Average	156	324	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 144 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11442.40	57.38	74.00	-16.62	43.95	9.21	39.02	34.80	Peak	162	62 HORIZONTAL
2	11443.53	44.66	54.00	-9.34	31.23	9.21	39.02	34.80	Average	162	62 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11440.07	43.66	54.00	-10.34	30.23	9.21	39.02	34.80	Average	154	324 VERTICAL
2	11440.25	56.63	74.00	-17.37	43.20	9.21	39.02	34.80	Peak	154	324 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 142 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11419.72	43.91	54.00	-10.09	30.51	9.20	39.00	34.80	Average	151	56 HORIZONTAL
2	11419.80	55.35	74.00	-18.65	41.95	9.20	39.00	34.80	Peak	151	56 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	11419.51	55.05	74.00	-18.95	41.65	9.20	39.00	34.80	Peak	174	321 VERTICAL
2	11420.07	43.54	54.00	-10.46	30.14	9.20	39.00	34.80	Average	174	321 VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 138 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 28, 2015		
Test Mode	Mode 3: EUT 1 + Set 3 Sector Antenna / 5.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11379.68	54.09	74.00	-19.91	40.75	9.18	38.96	34.80	Peak	150	90	HORIZONTAL
2	11380.33	41.19	54.00	-12.81	27.85	9.18	38.96	34.80	Average	150	90	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	11380.08	53.78	74.00	-20.22	40.44	9.18	38.96	34.80	Peak	150	161	VERTICAL
2	11380.13	41.38	54.00	-12.62	28.04	9.18	38.96	34.80	Average	150	161	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 52 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15775.51	56.82	74.00	-17.18	43.12	9.92	38.60	34.82	214	165	Peak	HORIZONTAL
2	15788.75	43.44	54.00	-10.56	29.72	9.93	38.63	34.84	214	165	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15775.54	56.57	74.00	-17.43	42.87	9.92	38.60	34.82	185	165	Peak	VERTICAL
2	15780.16	44.39	54.00	-9.61	30.71	9.92	38.60	34.84	185	165	Average	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 60 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	10600.00	51.57	54.00	-2.43	39.92	7.82	38.78	34.95	43	181 Average	HORIZONTAL
2	10600.77	65.28	74.00	-8.72	53.61	7.82	38.78	34.93	43	181 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	10600.00	52.93	54.00	-1.07	41.28	7.82	38.78	34.95	338	170 Average	VERTICAL
2	10600.77	66.52	74.00	-7.48	54.85	7.82	38.78	34.93	338	170 Peak	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 64 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	10636.15	64.65	74.00	-9.35	52.98	7.81	38.77	34.91	61	163 Peak	HORIZONTAL
2	10637.82	51.93	54.00	-2.07	40.26	7.81	38.77	34.91	61	163 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	10637.82	51.83	54.00	-2.17	40.16	7.81	38.77	34.91	338	168 Average	VERTICAL
2	10640.64	64.34	74.00	-9.66	52.67	7.81	38.77	34.91	338	168 Peak	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 100 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11001.28	66.94	74.00	-7.06	55.20	7.70	38.70	34.66	296	137	Peak	HORIZONTAL
2	11002.05	52.72	54.00	-1.28	40.98	7.70	38.70	34.66	296	137	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10997.50	51.26	54.00	-2.74	39.52	7.70	38.70	34.66	315	129	Average	VERTICAL
2	10997.56	64.02	74.00	-9.98	52.28	7.70	38.70	34.66	315	129	Peak	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 116 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11162.76	52.81	54.00	-1.19	41.18	7.58	38.70	34.65	297	145 Average	HORIZONTAL
2	11162.82	67.29	74.00	-6.71	55.66	7.58	38.70	34.65	297	145 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11160.13	51.71	54.00	-2.29	40.08	7.58	38.70	34.65	323	200 Average	VERTICAL
2	11160.64	66.37	74.00	-7.63	54.74	7.58	38.70	34.65	323	200 Peak	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 140 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11399.81	47.87	54.00	-6.13	36.40	7.40	38.70	34.63	60	144	Average	HORIZONTAL
2	11400.71	61.11	74.00	-12.89	49.64	7.40	38.70	34.63	60	144	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11396.35	57.77	74.00	-16.23	46.30	7.40	38.70	34.63	359	131	Peak	VERTICAL
2	11397.76	45.96	54.00	-8.04	34.49	7.40	38.70	34.63	359	131	Average	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15773.08	55.98	74.00	-18.02	42.28	9.92	38.60	34.82	174	176	Peak	HORIZONTAL
2	15781.92	43.21	54.00	-10.79	29.49	9.93	38.63	34.84	174	176	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15784.10	43.27	54.00	-10.73	29.55	9.93	38.63	34.84	140	176	Average	VERTICAL
2	15799.55	56.09	74.00	-17.91	42.33	9.94	38.66	34.84	140	176	Peak	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 60 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10597.31	52.88	54.00	-1.12	41.23	7.82	38.78	34.95	63	164	Average	HORIZONTAL
2	10598.08	67.31	74.00	-6.69	55.66	7.82	38.78	34.95	63	164	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10598.08	67.97	74.00	-6.03	56.32	7.82	38.78	34.95	339	169	Peak	VERTICAL
2	10599.74	51.98	54.00	-2.02	40.33	7.82	38.78	34.95	339	169	Average	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 64 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10634.10	63.06	74.00	-10.94	51.39	7.81	38.77	34.91	289	143	Peak	HORIZONTAL
2	10636.15	49.52	54.00	-4.48	37.85	7.81	38.77	34.91	289	143	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	10637.82	64.15	74.00	-9.85	52.48	7.81	38.77	34.91	339	167	Peak	VERTICAL
2	10639.62	50.55	54.00	-3.45	38.88	7.81	38.77	34.91	339	167	Average	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 100 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	11002.50	66.91	74.00	-7.09	55.17	7.70	38.70	295	107	Peak	HORIZONTAL
2	11003.85	52.17	54.00	-1.83	40.43	7.70	38.70	295	107	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	10994.07	50.67	54.00	-3.33	38.93	7.70	38.70	321	126	Average	VERTICAL
2	10994.33	64.55	74.00	-9.45	52.81	7.70	38.70	321	126	Peak	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 116 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	11162.32	66.94	74.00	-7.06	55.31	7.58	38.70	298	145	Peak	HORIZONTAL
2	11163.45	52.76	54.00	-1.24	41.13	7.58	38.70	298	145	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	11160.08	50.76	54.00	-3.24	39.13	7.58	38.70	324	237	Average	VERTICAL
2	11160.72	63.46	74.00	-10.54	51.83	7.58	38.70	324	237	Peak	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 140 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11399.20	44.45	54.00	-9.55	32.98	7.40	38.70	34.63	60	152 Average	HORIZONTAL
2	11399.84	57.28	74.00	-16.72	45.81	7.40	38.70	34.63	60	152 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11396.96	42.87	54.00	-11.13	31.40	7.40	38.70	34.63	360	169 Average	VERTICAL
2	11398.08	56.91	74.00	-17.09	45.44	7.40	38.70	34.63	360	169 Peak	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15795.98	43.07	54.00	-10.93	29.35	9.93	38.63	34.84	187	178 Average	HORIZONTAL
2	15831.31	55.65	74.00	-18.35	41.90	9.95	38.69	34.89	187	178 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15800.87	43.15	54.00	-10.85	29.39	9.94	38.66	34.84	144	157 Average	VERTICAL
2	15805.11	55.66	74.00	-18.34	41.93	9.94	38.66	34.87	144	157 Peak	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 62 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	10613.99	41.24	54.00	-12.76	29.58	7.81	38.78	34.93	303	166 Average	HORIZONTAL
2	10642.44	53.65	74.00	-20.35	41.98	7.81	38.77	34.91	303	166 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	10611.35	41.08	54.00	-12.92	29.41	7.82	38.78	34.93	258	181 Average	VERTICAL
2	10636.27	53.78	74.00	-20.22	42.11	7.81	38.77	34.91	258	181 Peak	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 102 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	10611.11	40.79	54.00	-13.21	29.12	7.82	38.78	34.93	46	150 Average	HORIZONTAL
2	10614.71	53.19	74.00	-20.81	41.53	7.81	38.78	34.93	46	150 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	10595.40	53.40	74.00	-20.60	41.75	7.82	38.78	34.95	104	150 Peak	VERTICAL
2	10634.50	40.64	54.00	-13.36	28.97	7.81	38.77	34.91	104	150 Average	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 110 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11081.25	53.71	74.00	-20.29	42.02	7.64	38.70	34.65	153	150	Peak	HORIZONTAL
2	11093.43	40.47	54.00	-13.53	28.79	7.63	38.70	34.65	153	150	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11102.72	40.35	54.00	-13.65	28.67	7.63	38.70	34.65	88	150	Average	VERTICAL
2	11114.50	52.96	74.00	-21.04	41.30	7.61	38.70	34.65	88	150	Peak	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 134 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11351.94	53.20	74.00	-20.80	41.69	7.44	38.70	34.63	142	150 Peak	HORIZONTAL
2	11364.92	40.47	54.00	-13.53	28.97	7.43	38.70	34.63	142	150 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11321.57	53.10	74.00	-20.90	41.56	7.47	38.70	34.63	195	150 Peak	VERTICAL
2	11358.19	40.28	54.00	-13.72	28.77	7.44	38.70	34.63	195	150 Average	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 58 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15867.04	56.10	74.00	-17.90	42.25	9.98	38.78	34.91	226	150	Peak	HORIZONTAL
2	15892.44	43.29	54.00	-10.71	29.42	9.99	38.81	34.93	226	150	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15888.11	56.83	74.00	-17.17	42.96	9.99	38.81	34.93	195	150	Peak	VERTICAL
2	15894.76	43.22	54.00	-10.78	29.35	9.99	38.81	34.93	195	150	Average	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 106 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11047.58	53.12	74.00	-20.88	41.42	7.66	38.70	34.66	230	150	Peak	HORIZONTAL
2	11073.78	40.20	54.00	-13.80	28.51	7.64	38.70	34.65	230	150	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11070.18	40.29	54.00	-13.71	28.59	7.65	38.70	34.65	201	150	Average	VERTICAL
2	11083.00	53.25	74.00	-20.75	41.56	7.64	38.70	34.65	201	150	Peak	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 122 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11232.82	40.06	54.00	-13.94	28.47	7.53	38.70	34.64	238	150	Average	HORIZONTAL
2	11235.79	52.87	74.00	-21.13	41.28	7.53	38.70	34.64	238	150	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11202.77	40.15	54.00	-13.85	28.54	7.55	38.70	34.64	273	150	Average	VERTICAL
2	11220.64	53.22	74.00	-20.78	41.62	7.54	38.70	34.64	273	150	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Straddle Channel

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 144 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11431.73	46.84	54.00	-7.16	35.39	7.38	38.70	34.63	291	179	Average	HORIZONTAL
2	11432.69	59.68	74.00	-14.32	48.23	7.38	38.70	34.63	291	179	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11436.28	47.93	54.00	-6.07	36.48	7.38	38.70	34.63	359	179	Average	VERTICAL
2	11436.41	60.28	74.00	-13.72	48.83	7.38	38.70	34.63	359	179	Peak	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 144 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11439.12	61.04	74.00	-12.96	49.59	7.38	38.70	34.63	60	146	Peak	HORIZONTAL
2	11439.20	48.06	54.00	-5.94	36.61	7.38	38.70	34.63	60	146	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11438.80	60.57	74.00	-13.43	49.12	7.38	38.70	34.63	60	149	Peak	VERTICAL
2	11439.68	47.80	54.00	-6.20	36.35	7.38	38.70	34.63	60	149	Average	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 142 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11419.28	61.39	74.00	-12.61	49.93	7.39	38.70	34.63	61	148 Peak	HORIZONTAL
2	11419.68	49.34	54.00	-4.66	37.88	7.39	38.70	34.63	61	148 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	11416.15	46.81	54.00	-7.19	35.35	7.39	38.70	34.63	360	184 Average	VERTICAL
2	11416.47	59.89	74.00	-14.11	48.43	7.39	38.70	34.63	360	184 Peak	VERTICAL

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 138 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 30, 2015		
Test Mode	Mode 4: EUT 1 + Set 4 Sector Antenna / 7.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11378.96	58.79	74.00	-15.21	47.30	7.42	38.70	34.63	62	150	Peak	HORIZONTAL
2	11379.84	46.35	54.00	-7.65	34.86	7.42	38.70	34.63	62	150	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11363.33	40.39	54.00	-13.61	28.89	7.43	38.70	34.63	79	156	Average	VERTICAL
2	11391.38	54.14	74.00	-19.86	42.65	7.42	38.70	34.63	79	156	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 52 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 31, 2015		
Test Mode	Mode 5: EUT 1 + Set 5 Sector Antenna / 4.5 dBi		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	15779.82	57.26	74.00	-16.74	43.87	10.80	37.91	35.32	Peak	161	102
2	15780.04	44.13	54.00	-9.87	30.74	10.80	37.91	35.32	Average	161	102

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	15780.02	44.09	54.00	-9.91	30.70	10.80	37.91	35.32	Average	154	123
2	15780.80	56.56	74.00	-17.44	43.17	10.80	37.91	35.32	Peak	154	123

Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	IEEE 802.11a CH 60 / Chain 1 + Chain 2 + Chain 3+ Chain 4
Test Date	Oct. 31, 2015		
Test Mode	Mode 5: EUT 1 + Set 5 Sector Antenna / 4.5 dBi		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10599.90	44.03	54.00	-9.97	31.77	8.64	38.58	34.96	Average	141	231	HORIZONTAL
2	10599.94	54.69	74.00	-19.31	42.43	8.64	38.58	34.96	Peak	141	231	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10600.31	42.46	54.00	-11.54	30.20	8.64	38.58	34.96	Average	141	166	VERTICAL
2	10600.44	55.37	74.00	-18.63	43.11	8.64	38.58	34.96	Peak	141	166	VERTICAL