



深圳市英佳创电子科技有限公司

Shenzhen Yingjia Chuang electronic technology Co., LTD

<http://www.szsyjc.com>

APPROVAL SHEET

承认书

CUSTOMER NAME 客户名称	九洲电器	
CUSTOMER P/N 客户料号		
PART NAME 品 名	5G 黑色 PCB 内置天线, 1.37黑色线 L=115MM 5G black PCB built-in antenna, 1.37black. line L=115MM	
P/ N 料 号	YJC-6N115-B30	
APPROVAL REV. 版 次	A0	
DELIVERY DATE 送样日期	May 25, 2024	
PREPARED BY 承 办	殷飞杰 Yin Feijie	
CHECKED BY 审 核	方文锋 Fang Wenfeng	
APPROVED BY 核 准	肖 汉 Chauhan	
Customer Approved 客 户 承 认		
Prepared By 承 办	Checked By 审 核	Approved By 核 准

总部地址: 深圳市光明区马田街道油麻岗路 11 号宏域光明谷 C 栋

Headquarters Address: Building C, Hongyu Guangming Valley, No. 11, Youma Gang Road, Matan Street, Guangming District, Shenzhen City

东莞分厂: 东莞市桥头镇石水口银河三路 2 号英佳创产业园

Dongguan Branch: Yingjiachuang Industrial Park, No. 2 Yinhe 3rd Road, Shishuikou, Qiaotou Town, Dongguan City

杭州办事处: 杭州市滨江区物联网街 369 号大华江虹国际创新园 B 栋 212

Hangzhou Office: 212, Building B, Dahua Jianghong International Innovation Park, No. 369 Internet of Things Street, Binjiang District, Hangzhou


绵阳办事处: 四川省绵阳市高新区绵兴东路 35 号万向高新国际 4F-34 号

Mianyang Office: No. 4F-34 Wanxiang High-tech International, No. 35 Mianxing East Road, Gaoxin District, Mianyang City, Sichuan Province

电话: 0755-27810060

传真: 0755-27810057

网址: <http://www.szsyjc.com>



Shenzhen Yingjia Chuang electronic technology Co., LTD

<http://www.szsyjc.com>

目录 catalogue

1、	封面 cover。	1
2、	目录 catalogue。	2
3、	履历表 resume。	3
4、	天线平面图 Antenna plan。	4
5、	天线技术参数 Antenna technical parameter。	5
6、	环境性能测试 Environmental performance test。	6
7、	天线实物图 Antenna diagram。	7
8、	天线贴附位置图 Antenna attached location map。	7
9、	天线性能测试图 Antenna performance test diagram。	7
10、	2D.3D（5G）测试数据 2D.3D (5G) test data。	8-9
11、	ROHS 物料控制报告 ROHS Material control report。	10



深圳市英佳创电子科技有限公司

Shenzhen Yingjia Chuang electronic technology Co., LTD

<http://www.szsyjc.com>

履历表 resume:

版本 edition	变更内容及更改原因 Content of change and reasons for change	日期 date	发行 release
A0	初版发行 Initial release	2024 年 05 月 25 日 May 25, 2024	



深圳市英佳创电子科技有限公司

Shenzhen Yingjia Chuang electronic technology Co., LTD

http://www.szsyjc.com

天线平面图 Antenna plan:

A	B	C	D	E	F	G
1	1.37 黑色 双锡线 1.37 black double tin wire *11.5^{+0.5} 注意端子开口方向 1 generation line and Note the terminal opening direction 1代线端 手撕位 Tear position PCB板背面贴附17.0*9.0*0.2mm 3M双面胶(带3mm 撕边) PGB board foam 17.0*9.0*0.2mm 3M double-sided tape (with 3mm tear)					6
2						5
3						4
4						3
5						2
6						1

要求:

1. 成品须100%测试导通OK
2. 成品须100%全检OK.
3. 采用环保制程. 成品
4. 符合ROHS要求.
5. 未注公差请以一般公差为准.
6. *为重点标注尺寸.

频率范围(Frequency Range)	5150~5850MHz
增益 (Gain)	5.0dBi±1
电压驻波比(VSWR)	<1.92
极化 (Polarization)	Linear, Vertical
最大功率(Max power rating)	50W
特性阻抗 (Impedance)	50Ω

Requirements:

1. The finished product must be 100% test conduction OK
2. The finished product must be 100% inspected OK.
3. Environmentally friendly process. Finished product
4. Meet ROHS requirements.
5. No tolerance is specified. Please refer to general tolerance.
6. * Dimensioning for emphasis.

物料名称 (PART NAME)	产品规格 (PRODUCT SPEC.)	单位 (UNIT)	比例 (SCALE)	版本 (REV)	数量 (QTY)
1.37 黑色 双锡线	1.37 黑色 双锡线 (总长约115MM)	mm	1:1	A0	1000
17.0*9.0*0.2mm 3M双面胶	17.0*9.0*0.2mm 3M双面胶 (总长约115MM)	mm	1:1	A0	1000

深圳市英佳创电子科技有限公司
SHENZHEN YINGJIA CHUANG ELECTRONIC CO., LTD



深圳市英佳创电子科技有限公司

Shenzhen Yingjia Chuang electronic technology Co., LTD

<http://www.szsyjc.com>

天线技术参数及环境测试 Antenna technical parameters and environmental testing:

电气技术参数 Electrical technical parameter			
电 性 能 指 标		Electrical Specifications	
频率范围	5150-5850MHz	Frequency Range	5150-5850MHz
电压驻波比	<1.92	VSWR	<1.92
输入阻抗	50 Ω	Input Impedance	50 Ω
方向	全向	Direction	All
增益	5.0±1dBi	Gain	5.0±1dBi
机 械 指 标		Mechanical Specifications	
线材颜色	黑色	Wire Color	black.
接口形式	XD	Input connector	XD
线材长度	115MM	Wire Length	115MM
工作温度	-20℃~+70℃	Working Temperature	-20℃~+70℃
工作湿度	20%~80%	Working Humidity	20%~80%



深圳市英佳创电子科技有限公司

Shenzhen Yingjia Chuang electronic technology Co., LTD

<http://www.szsyjc.com>

环境性能测试Environmental performance test:

项目 (Project)	测试条件 (Test condition)	规格 (Specification)
储存环境 Storage Conditions	In the absence of specified test temperature, humidity, air pressure is as follows: 在没有指定的情况下测试温度、湿度、气压如下: 1. Temperature is $-45^{\circ}\text{C} \sim +85^{\circ}\text{C}$ 1. 温度为 $-45^{\circ}\text{C} \sim +85^{\circ}\text{C}$ 2. Relative humidity of 20~80% 2. 相对湿度为20~80% 3. Air pressure is 86 kpa to 106 kpa 3. 气压为86kpa-106kpa	Electrical and mechanical properties is normal 电气机械性能正常
高低温试验 high and low temperature test	Between 85°C and -45°C for 5 loops, then 1-2 h under normal conditions, check the appearance quality. 在 85°C 与 -45°C 之间进行5次循环, 然后在正常条件下1-2H, 检查外观质量。	Size should meet the requirements and should satisfy the content with the electrical and mechanical properties 尺寸应满足规定并应满足于机械、电气性能
耐恒定 湿热试验 Constant damp and hot resistance test	$80 \pm 3\%$ relative humidity, temperature test: 40°C . Lasts 2 h after, try to take out the determination of electrical properties, within 5 min after try 1-2 h under article normal thing, check the appearance quality 相对湿度 $80 \pm 3\%$, 试验温度: 40°C . 持续2H作用后, 试品取出后5min之内测定电气性能, 试品在正常条件下1-2H, 检查外观质量	Size should meet the requirements and should satisfy the content with the electrical and mechanical properties 尺寸应满足规定并应满足于机械、电气性能
振动试验 vibration test	10-55 hz, vibration frequency range of displacement amplitude: 0.35 MM, acceleration amplitude: 50.0 M/S, sweep cycles: 30 times 振频范围10-55HZ, 位移幅值: 0.35MM, 加速度幅值: 50.0M/S, 扫频循环次数: 30次	Electrical and mechanical properties is normal 电气机械性能正常
跌落试验 fall down test	1 m high altitude in accordance with the perpendicular axis free drop 3 times 1M高空按照互相垂直的轴方向自由跌落3次	Electrical and mechanical properties is normal 电气机械性能正常




深圳市英佳创电子科技有限公司

Shenzhen Yingjia Chuang electronic technology Co., LTD

<http://www.szsyjc.com>

天线实物图与天线贴附位置图 Antenna physical diagram and antenna attached location diagram:

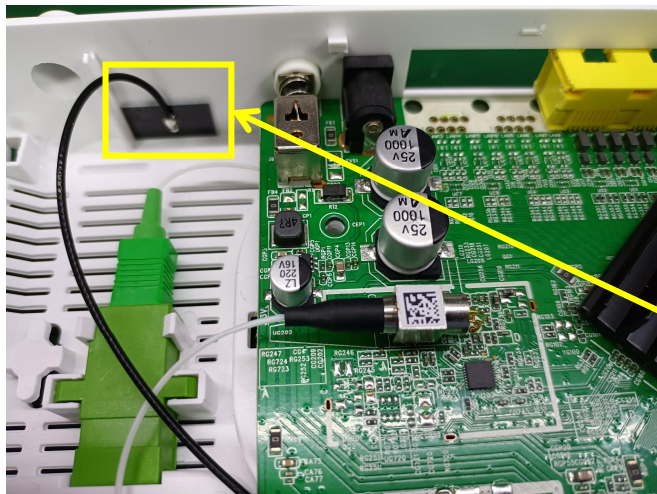

天线贴附位置图
Antenna attached location map

天线性能测试图 Antenna performance test diagram:





深圳市英佳创电子科技有限公司


Shenzhen Yingjia Chuang electronic technology Co., LTD

<http://www.szsyjc.com>


2D、3D 测试数据(5G)2D and 3D test data (5G):

Frequency	Efficiency (%)	Gain. (dBi)
5150MHz	54.92	5.39
5250MHz	55.22	4.96
5350MHz	56.74	4.96
5450MHz	57.25	4.50
5550MHz	58.52	5.02
5650MHz	52.99	5.03
5750MHz	57.16	5.31
5850MHz	56.95	5.18


Phi 0 2D 图:

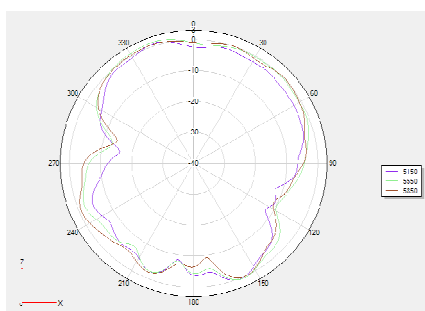




Phi 90 2D 图

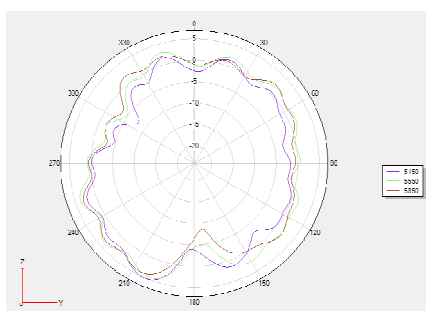

Theta 90 2D 图

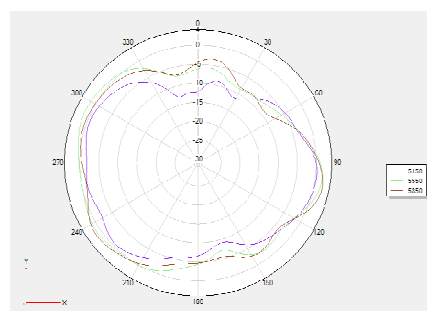

3D 5150:

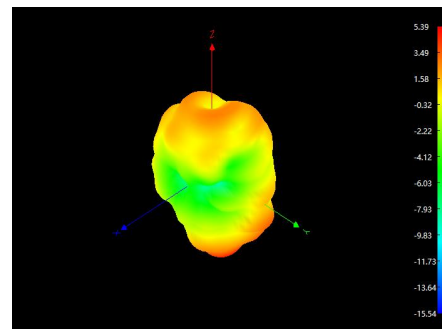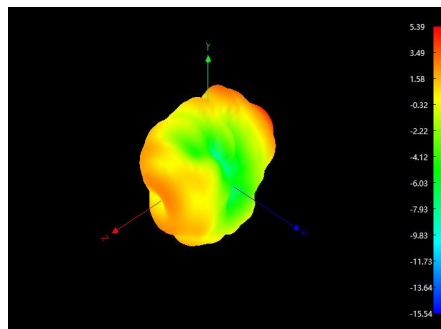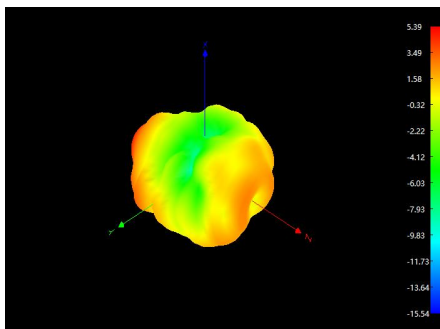






深圳市英佳创电子科技有限公司




Shenzhen Yingjia Chuang electronic technology Co., LTD

<http://www.szsyjc.com>

3D 5550:

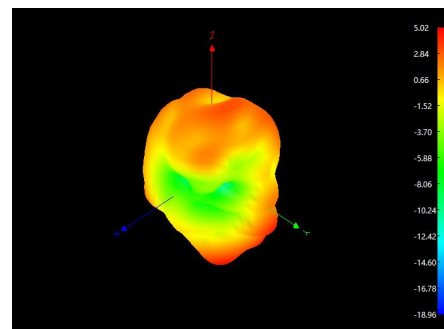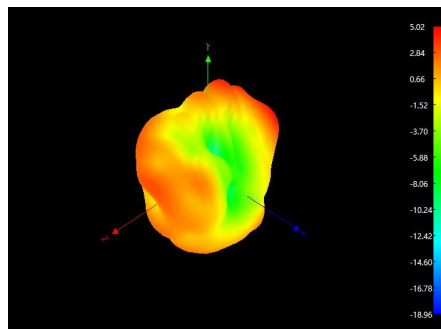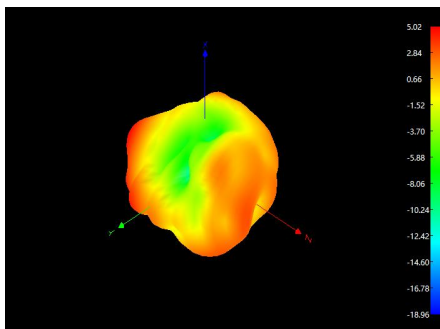

3D 5850:

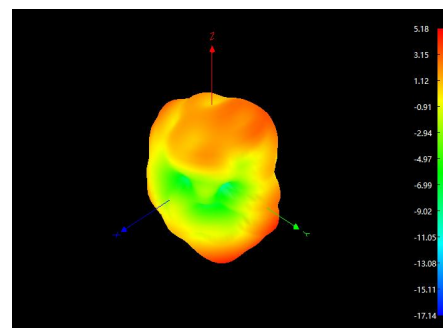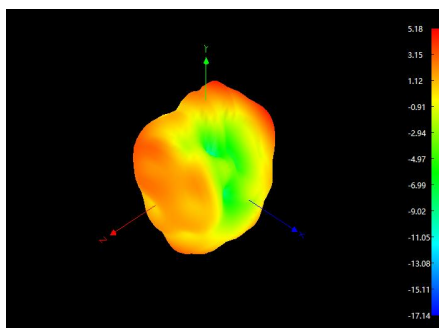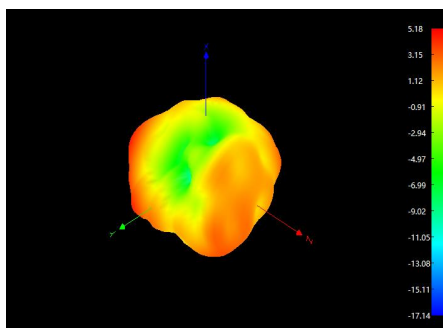



深圳市英佳创电子科技有限公司

<http://www.szsyjc.com>

ROHS 物料控制报告 (ROHS Material control report)

兹证明向贵司交货的零组件、辅助材料所使用的原材料、以及生产工程中的添加剂等均符合 RoHS 限制使用有害物质指令的环保要求 (RoHS 指令 2011/65/EC)
This is to certify that the components delivered to your company, the raw materials used for auxiliary materials, and the additives used in the production project all meet the environmental requirements of the RoHS directive on limiting the use of hazardous substances. (RoHS 指令 2011/65/EC)

关于零组件、辅助材料所使用的原材料、包装材料以及和产过程中使用的添加剂等的构成成份报告如下:

The report on the composition of raw materials, packaging materials, and additives used in the manufacturing process for component auxiliary materials is as follows

组成物料名称 Component /Part Name	组成材料 Material Composition	ICP 报告编号 ICP report #	测试机构 Test Org.	测试时间 Test Date	有害物质含量(ppm)						是否合格? PASS?
					Cd	Pb	Hg	Cr ⁶⁺	PBB	PBDE	PASS
线材(wire rod)	铁氟龙同轴 线缆 Teflon coaxial	CANEC24002746206	SGS	24/02/23	ND	ND	ND	ND	ND	ND	PASS
锡条 (tin rod)	环保锡丝 Green solder	SZXEC23001647204	SGS	23/07/28	ND	63	ND	ND	ND	ND	PASS
端子	铜 cuprum	CANEC24000977302	SGS	24/01/22	ND	6	ND	ND	ND	ND	PASS
	金镀层 gold plate	A2230400553101001E	CTI	23/08/12	ND	ND	ND	ND	ND	ND	PASS
	胶芯 rubber core	ETR23705931	SGS	23/08/04	ND	ND	ND	ND	ND	ND	PASS
EVA	EVA	ETR23705931	SGS	23/08/04	ND	ND	ND	ND	ND	ND	PASS
PCB	PCB	SHAEC23017333402	SGS	23/10/31	ND	12	ND	ND	ND	ND	PASS