

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : OT-212-RWD-018

Reception No. : 2101000274

Applicant : LG Electronics USA

Address : 111 Sylvan Avenue, North Building, Englewood Cliffs, New Jersey, 07632, United States

Manufacturer : LG Electronics Inc

Address : 10, Magokjungang 10-ro, Gangseo-gu, Seoul, Republic of Korea

Type of Equipment : NAVIGATION RADIO

FCC ID. : BEJLANR21

Model Name : LANR21

Multiple Model Name : N/A

EUT Part Number : NSRNCNAG1A1

Serial Part Number : Refer to the clause 3.2

Total page of Report : 103 pages (including this page)

Date of Incoming : January 28, 2021

Date of issue : February 08, 2021

SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART E Section 15.407**

This test report only contains the result of a single test of the sample supplied for the examination.


It is not a generally valid assessment of the features of the respective products of the mass-production.



Tested by
Hyung-Kwon, Oh / Manager
ONETECH Corp.



Reviewed by
Tae-Ho, Kim / Senior Manager
ONETECH Corp.



Approved by
Ki-Hong, Nam / General Manager
ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	6
2. TEST SUMMARY	7
2.1 TEST ITEMS AND RESULTS	7
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	7
2.3 RELATED SUBMITTAL(S) / GRANT(S)	7
2.4 PURPOSE OF THE TEST	7
2.5 TEST METHODOLOGY.....	7
2.6 TEST FACILITY.....	7
3. GENERAL INFORMATION.....	8
3.1 PRODUCT DESCRIPTION.....	8
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	10
4. EUT MODIFICATIONS.....	10
5. SYSTEM TEST CONFIGURATION	11
5.1 JUSTIFICATION.....	11
5.2 PERIPHERAL EQUIPMENT	11
5.3 MODE OF OPERATION DURING THE TEST	12
5.4 CONFIGURATION OF TEST SYSTEM.....	22
5.5 ANTENNA REQUIREMENT	22
6. PRELIMINARY TEST	22
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	22
6.2 GENERAL RADIATED EMISSIONS TESTS	22
7. MINIMUM 26 DB BANDWIDTH	23
7.1 OPERATING ENVIRONMENT	23
7.2 TEST SET-UP	23
7.3 TEST DATE	23
7.4 TEST DATA FOR 802.11A RLAN MODE.....	24
7.5 TEST DATA FOR 802.11N_HT20 RLAN MODE.....	28
7.6 TEST DATA FOR 802.11N_HT40 RLAN MODE.....	32
7.7 Test data for 802.11ac_VHT80 RLAN Mode.....	35
8. 6 DB BANDWIDTH	37
8.1 OPERATING ENVIRONMENT	37
8.2 TEST SET-UP	37
8.3 TEST DATE	37

8.4 TEST DATA FOR 802.11A RLAN MODE.....	38
8.5 TEST DATA FOR 802.11n_HT20 RLAN MODE.....	40
8.6 Test data for 802.11n_HT40 RLAN Mode.....	42
8.7 TEST DATA FOR 802.11AC_VHT80 RLAN MODE.....	44
9. MAXIMUM CONDUCTED OUTPUT POWER.....	45
9.1 OPERATING ENVIRONMENT	45
9.2 TEST SET-UP	45
9.3 TEST DATE	45
9.4 TEST DATA FOR 802.11A RLAN MODE.....	46
9.5 TEST DATA FOR 802.11n_HT20 RLAN MODE.....	50
9.6 TEST DATA FOR 802.11n_HT40 RLAN MODE.....	54
9.7 TEST DATA FOR 802.11AC_HT80 RLAN MODE.....	57
10. PEAK POWER SPECTRUL DENSITY	59
10.1 OPERATING ENVIRONMENT	59
10.2 TEST SET-UP	59
10.3 TEST DATE	59
10.4 TEST DATA FOR 802.11A RLAN MODE.....	60
10.5 Test data for 802.11n_HT20 RLAN Mode.....	64
10.6 Test data for 802.11n_HT40 RLAN Mode.....	68
10.7 Test data for 802.11ac_HT80 RLAN Mode	71
11. FREQUENCY STABILITY WITH TEMPERATURE VARIATION.....	73
11.1 OPERATING ENVIRONMENT	73
11.2 TEST SET-UP	73
11.3 TEST DATE	73
11.4 TEST DATA FOR U-NII-1	74
11.5 TEST DATA FOR U-NII-3	76
12.1 OPERATING ENVIRONMENT	78
12.2 TEST SET-UP	78
12.3 TEST DATE	78
12.4 TEST DATA FOR U-NII-1	79
12.5 TEST DATA FOR U-NII-3	79
13. RADIATED SPURIOUS EMISSIONS.....	80
13.1 OPERATING ENVIRONMENT	80
13.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	80
13.3 TEST DATE	81
13.4 TEST DATA FOR BELOW 30 MHz	82
13.5 TEST DATA FOR 30 MHz ~ 1 000 MHz	83
13.5.1 Test data for WLAN 5 GHz	83

13.5.2 Test data for Intermodulation Mode(Bluetooth LE + WLAN 5 GHz)	84
13.5.3 Test data for Intermodulation Mode(Bluetooth + WLAN 5 GHz)	85
13.6 Test data for Above 1 GHz.....	86
13.6.1 Test data for Frequency UNII I	86
13.6.2 Test data for Frequency UNII 3.....	90
14. RADIATED RESTRICTED BAND EDGE MEASUREMENTS	94
14.1 OPERATING ENVIRONMENT	94
14.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	94
14.3 TEST DATE	95
14.4 TEST DATA FOR FREQUENCY UNII I.....	96
14.4.1 Test data for 802.11a RLAN Mode	96
14.4.2 Test data for 802.11n_HT20 RLAN Mode.....	96
14.4.3 Test data for 802.11n_HT40 RLAN Mode.....	97
14.4.4 Test data for 802.11ac_HT80 RLAN Mode	97
14.5 TEST DATA FOR FREQUENCY U-NII-3.....	98
14.5.1 Test data for 802.11a RLAN Mode	98
14.5.2 Test data for 802.11n_HT20 RLAN Mode.....	99
14.5.3 Test data for 802.11n_HT40 RLAN Mode.....	100
14.5.4 Test data for 802.11ac_HT80 RLAN Mode	101
14.6.5 U-NII-3 Emission Limits	102
15. LIST OF TEST EQUIPMENT	103

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-212-RWD-018	February 08, 2021	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : LG Electronics USA

Address : 111 Sylvan Avenue, North Building, Englewood Cliffs, New Jersey, 07632, United States

Contact Person : Dae Woong Kim / Director, Regulatory and Environmental Affairs

Telephone No. : 201-266-2215

FCC ID : BEJLANR21

Model Name : LANR21

Brand Name : Alliance-RNM

Serial Number : N/A

Date : February 08, 2021

EQUIPMENT CLASS	Unlicensed National Information infrastructure(UNII)
E.U.T. DESCRIPTION	NAVIGATION RADIO
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART E Section 15.407 789033 D02 General UNII Test Procedures New Rules v02r01
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.407(a)	26 dB Bandwidth	PASS
15.407(a)	Maximum Conducted Output Power	Met the Limit / PASS
15.407(a)	Peak Power Spectral Density	Met the Limit / PASS
15.407(e)	6 dB Bandwidth	Met the Limit / PASS
15.407(g)	Frequency Stability	Met the Limit / PASS
15.407(b)	Undesirable Emissions	Met the Limit / PASS
15.205, 15.407(b)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Met the Limit / PASS
15.207	Conducted Limits	N/A (See Note)

Note: This test is not performed because the EUT is operated by DC Power.

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART E Section 15.407

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The LG Electronics USA, Model LANR21 (referred to as the EUT in this report) is a NAVIGATION RADIO. The product specification described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	NAVIGATION RADIO	
Temperature Range	-40 °C ~ 80 °C	
OPERATING FREQUENCY	Bluetooth LE	2 402 MHz ~ 2 480 MHz
	Bluetooth	2 402 MHz ~ 2 480 MHz
	WLAN 2.4 GHz	2 412 MHz ~ 2 462 MHz (802.11b/g/n(HT20))
	5 150 MHz ~ 5 250 MHz Band	5 180 MHz ~ 5 240 MHz (802.11a/n(HT20)/ac(VHT20))
		5 190 MHz ~ 5 230 MHz (802.11n(HT40)/ac(VHT40))
		5 210 MHz (802.11ac(VHT80))
	5 725 MHz ~ 5 850 MHz Band	5 745 MHz ~ 5 805 MHz (802.11a/n(HT20)/ac(VHT20))
		5 755 MHz ~ 5 795 MHz (802.11n(HT40)/ac(VHT40))
		5 775 MHz (802.11ac(VHT80))
MODULATION TYPE	Bluetooth LE	GFSK for 1 Mbps / 2 Mbps
	Bluetooth	GFSK for 1 Mbps, $\pi/4$ -DQPSK for 2 Mbps, 8-DPSK for 3 Mbps
	WLAN 2.4 GHz	802.11b: DSSS Modulation(DBPSK/DQPSK/CCK)
		802.11g/n(HT20): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)
	WLAN 5 GHz	802.11a/n(HT20)/n(HT40)/ac(VHT80): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)

RF OUTPUT POWER	Bluetooth LE	1 Mbps	-3.31 dBm
		2 Mbps	-3.65 dBm
	Bluetooth	1 Mbps	-2.69 dBm
		2 Mbps	-4.40 dBm
		3 Mbps	-4.06 dBm
	WLAN 2.4 GHz	16.23 dBm(802.11b) 16.45 dBm(802.11g) 15.46 dBm(802.11n_HT20)	
	5 150 MHz ~ 5 250 MHz Band	12.83 dBm(802.11a) 8.73 dBm(802.11n_HT20) 8.01 dBm(802.11n_HT40) 6.00 dBm(802.11ac_VHT80)	
	5 725 MHz ~ 5 850 MHz Band	11.26 dBm(802.11a) 11.12 dBm(802.11n_HT20) 11.98 dBm(802.11n_HT40) 8.99 dBm(802.11ac_VHT80)	
ANTENNA TYPE	Bluetooth LE	Chip Antenna	
	Bluetooth	Chip Antenna	
	WLAN 2.4 GHz	PCB Antenna	
	WLAN 5 GHz	Chip Antenna	
ANTENNA GAIN	Bluetooth LE	2.86 dBi	
	Bluetooth	2.86 dBi	
	WLAN 2.4 GHz	-2.91 dBi	
	5 150 MHz ~ 5 250 MHz Band	2.75 dBi	
	5 725 MHz ~ 5 850 MHz Band	2.13 dBi	
	List of each Osc. or crystal Freq.(Freq. >= 1 MHz)		32.768 kHz, 20 MHz, 25 MHz, 28.636 36 MHz, 38.4 MHz, 55.466 67 MHz

3.2 Alternative type(s)/model(s); also covered by this test report.

-. The following lists consist of the added model and their differences.

Model Name : LANR21

Tested sample P/N : NSRNCNAG1A1

Variant P/N :	N	S	#	#	C	N	A	G	1	#	#
	A1	A2	B1	B2	C1	C2	C3	C4	D1	E1	F1

The # in P/N can be 0 to 9 or A to Z
according to below Character or Number table.

A1/A2 (Platform)	
NS	AVN Silver Box

B1/B2 (Customer Code)	
RN	Renault
NS	Nissan
RS	Infinity

C1/C2/C3/C4 (Product spec.)	
CNAG	Ext. Display/Radio/RVC/Bluetooth/Wi-fi

D1 (Generation)	
1	Generation 1

E1 (Production Year)	
A	2021
B	2022
C	2023
D	2024
E	2025
F	2026

F1 (Country Information)	
1	EU/Canada
2	Mexico
3	USA
4	EU
5	Else
6	Japan
7	Korea

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	LG Electronics Inc	N/A	N/A
Audio Board	LG Electronics Inc	N/A	N/A
Antenna Board	LG Electronics Inc	N/A	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
LANR21	LG Electronics Inc	NAVIGATION RADIO (EUT)	
PWS-3003D	Protek	DC Power Supply (DC 30 V 3 A)	

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting mode is programmed.

UNII 1

Modulation	DATA RATE	OUTPUT POWER[dBm]
802.11 a (Middle Channel)	6 Mbps	12.83
	9 Mbps	12.05
	12 Mbps	11.64
	18 Mbps	10.89
	24 Mbps	10.36
	36 Mbps	9.86
	48 Mbps	9.25
	54 Mbps	8.76
HT 20 (Middle Channel)	6.5 Mbps	8.73
	13 Mbps	8.01
	19.5 Mbps	7.54
	26 Mbps	6.48
	39 Mbps	5.60
	52 Mbps	4.82
	58.5 Mbps	3.71
	65 Mbps	2.38
HT 40 (Low Channel)	13.5 Mbps	7.74
	27 Mbps	7.10
	40.5 Mbps	6.46
	54 Mbps	5.69
	81 Mbps	4.48
	108 Mbps	3.68
	121.5 Mbps	2.47
	135 Mbps	1.75

VHT80 (Middle Channel)	29.3 Mbps	6.00
	58.5 Mbps	5.44
	87.8 Mbps	4.62
	117 Mbps	3.89
	175.5 Mbps	3.18
	234 Mbps	2.31
	263.3 Mbps	1.52
	292.5 Mbps	0.38
	351 Mbps	-1.54
	390 Mbps	-2.14

- . The worse case data rate for each modulation is determined 6 Mbps for IEEE 802.11a, 6.5 Mbps for HT20, 13.5 Mbps for HT40, 29.3 Mbps for VHT80.
- . To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis.

UNII 3

Modulation	DATA RATE	OUTPUT POWER[dBm]
802.11 a (Middle Channel)	6 Mbps	10.64
	9 Mbps	10.43
	12 Mbps	10.12
	18 Mbps	9.76
	24 Mbps	9.11
	36 Mbps	8.53
	48 Mbps	8.05
	54 Mbps	7.76
HT 20 (Middle Channel)	6.5 Mbps	10.54
	13 Mbps	10.26
	19.5 Mbps	9.84
	26 Mbps	9.13
	39 Mbps	8.96
	52 Mbps	8.54
	58.5 Mbps	8.01
	65 Mbps	7.63
HT 40 (Low Channel)	13.5 Mbps	11.98
	27 Mbps	11.45
	40.5 Mbps	11.10
	54 Mbps	10.76
	81 Mbps	10.21
	108 Mbps	9.86
	121.5 Mbps	9.18
	135 Mbps	8.54


VHT80 (Middle Channel)	29.3 Mbps	8.99
	58.5 Mbps	8.17
	87.8 Mbps	7.65
	117 Mbps	7.28
	175.5 Mbps	6.40
	234 Mbps	5.70
	263.3 Mbps	5.04
	292.5 Mbps	4.28
	351 Mbps	3.56
	390 Mbps	2.78


- . The worse case data rate for each modulation is determined 6 Mbps for IEEE 802.11a, 6.5 Mbps for HT20, 13.5 Mbps for HT40, 29.3 Mbps for VHT80.
- . To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis.

-. Duty Cycle


Band	Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
UNII 1	802.11 a	1.430	0.100	93.46	0.29
	802.11 HT 20	1.320	0.115	91.99	0.36
	802.11 HT 40	0.645	0.120	84.31	0.74
	802.11 VHT 80	0.332	0.102	76.50	1.16
UNII 3	802.11 a	1.425	0.105	93.14	0.31
	802.11 HT 20	1.335	0.100	93.03	0.31
	802.11 HT 40	0.665	0.100	86.93	0.61
	802.11 VHT 80	0.332	0.102	76.50	1.16

-. Test Plot

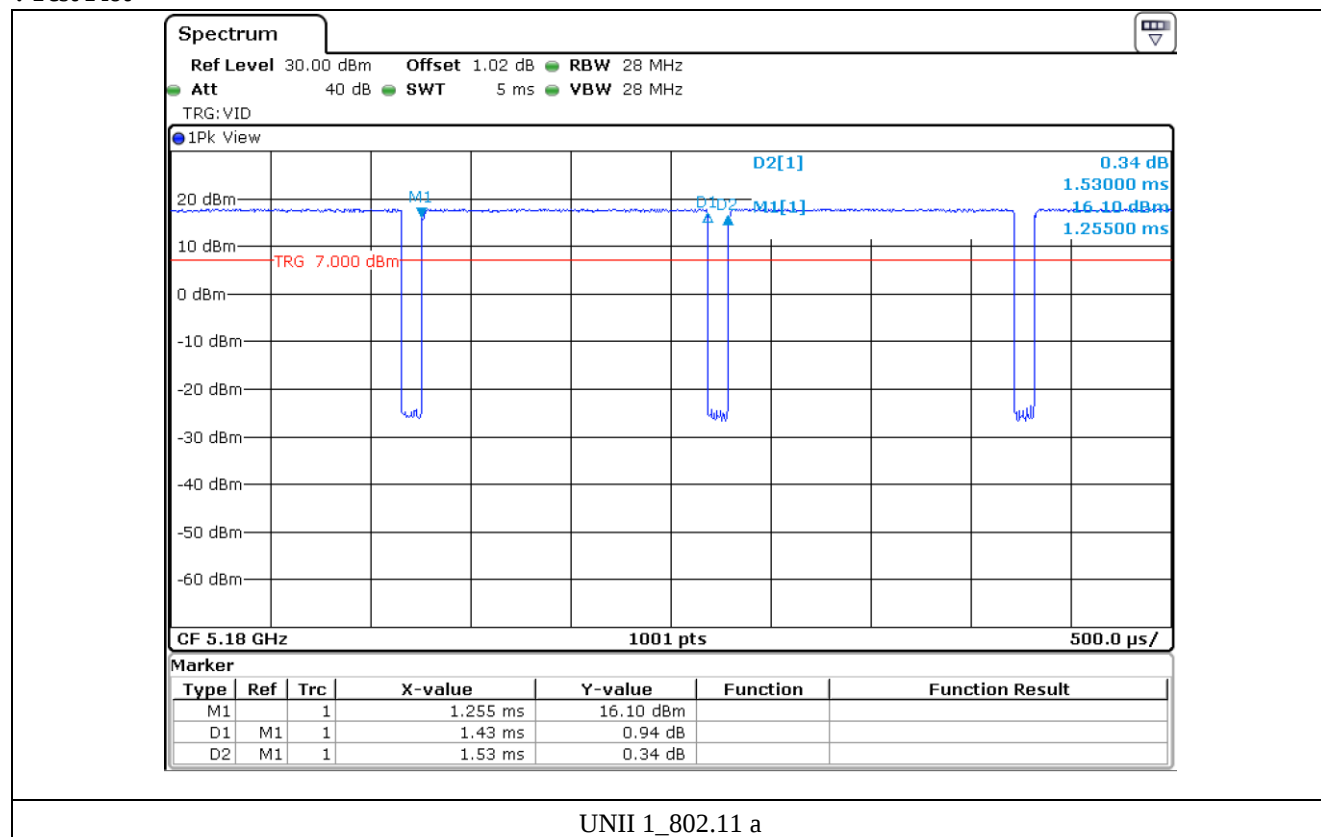


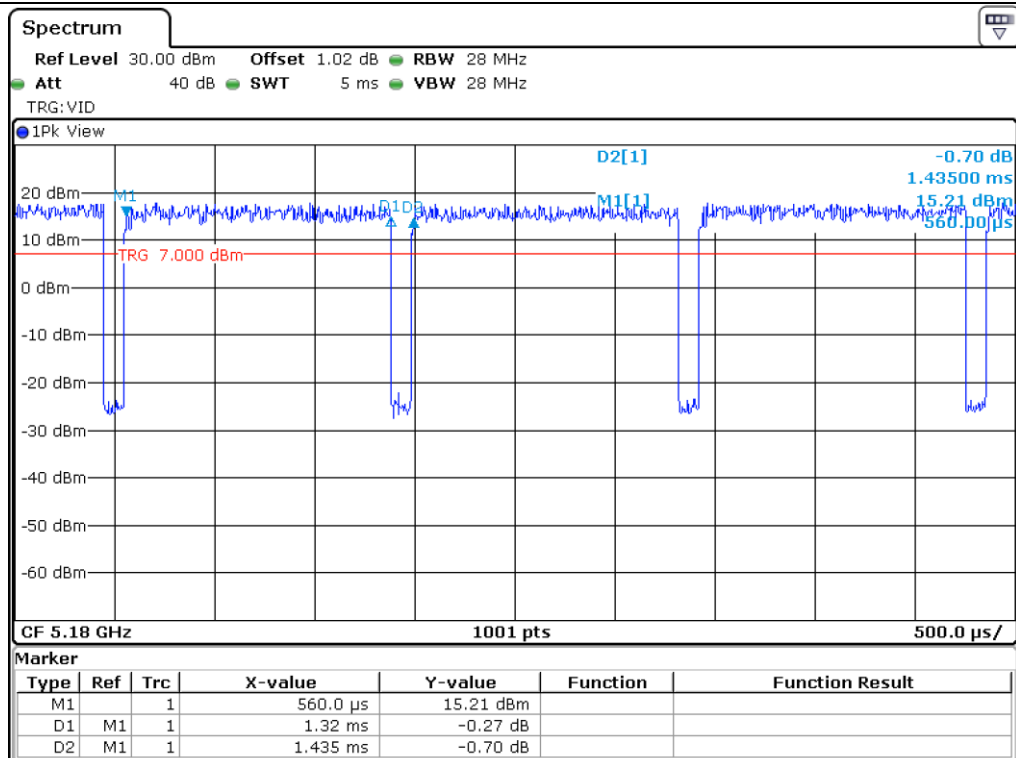


UNII 1_802.11 HT 20

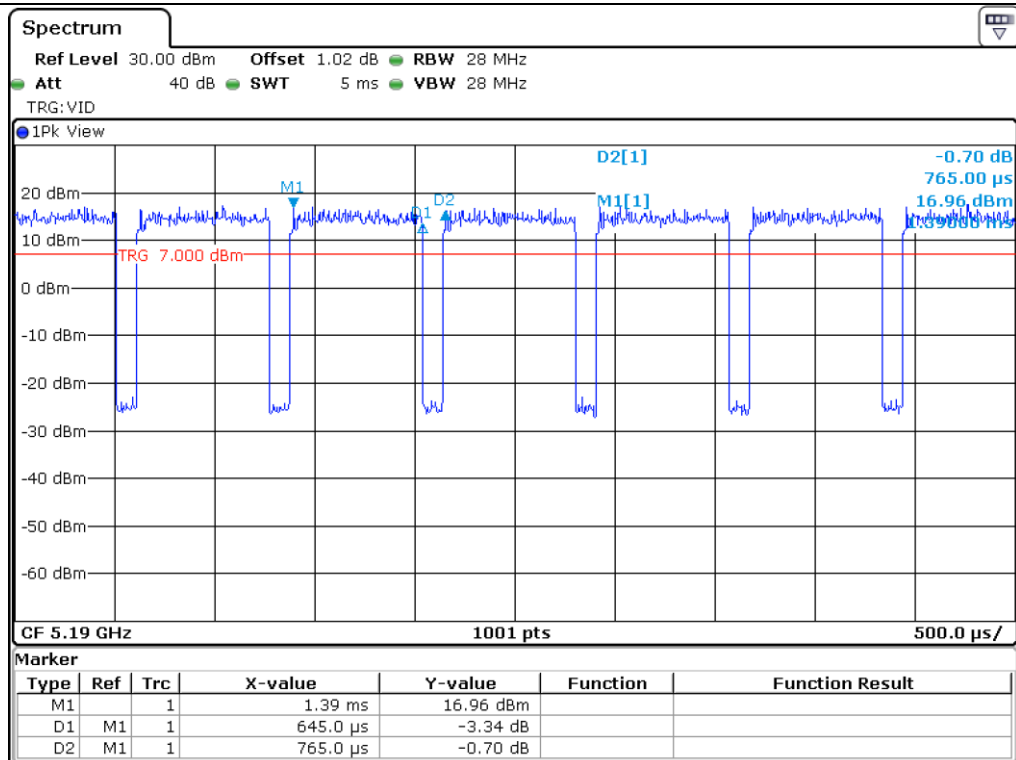


UNII 1_802.11 HT40

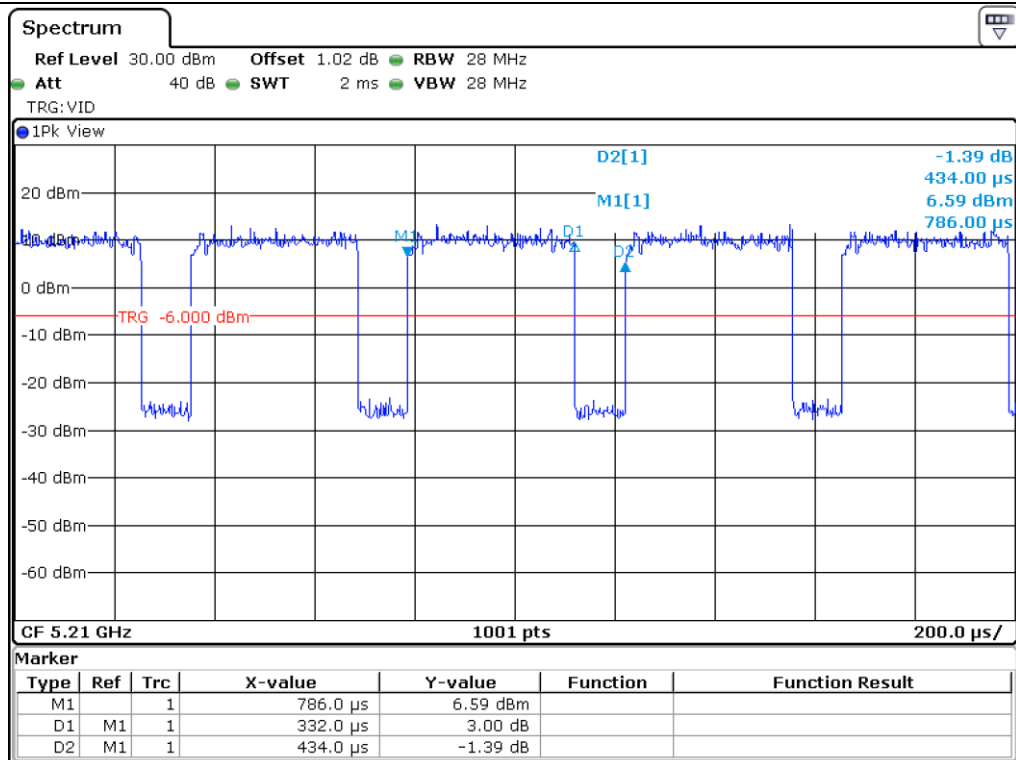


UNII 1_802.11 VHT 80

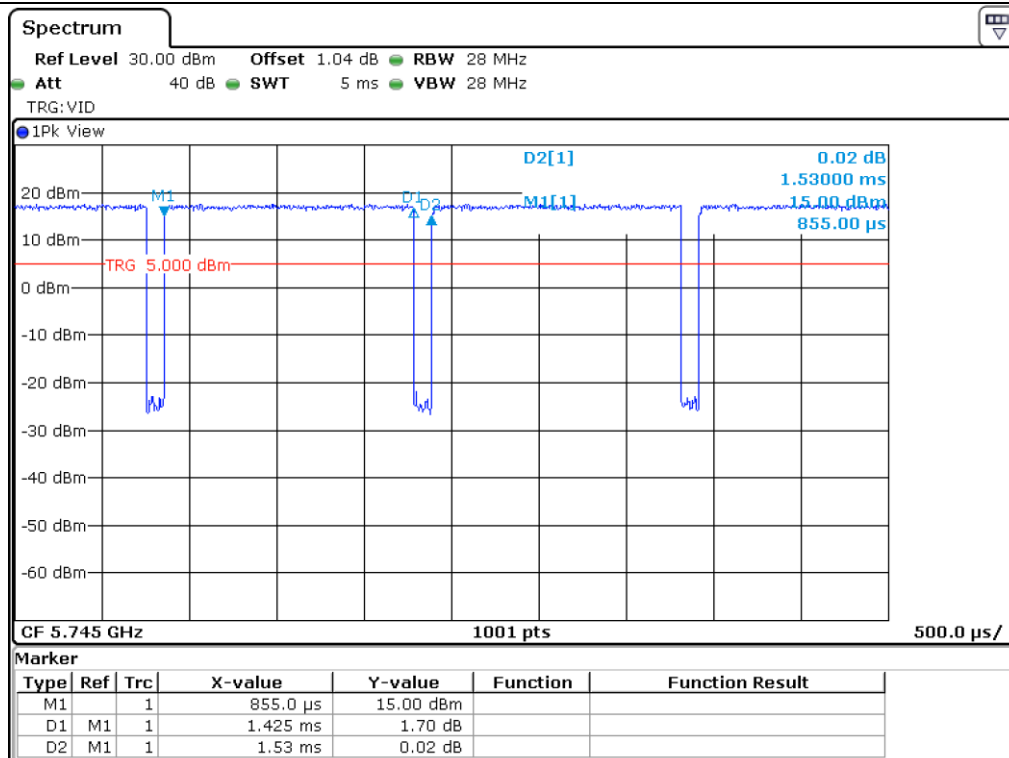


UNII 3_802.11 a

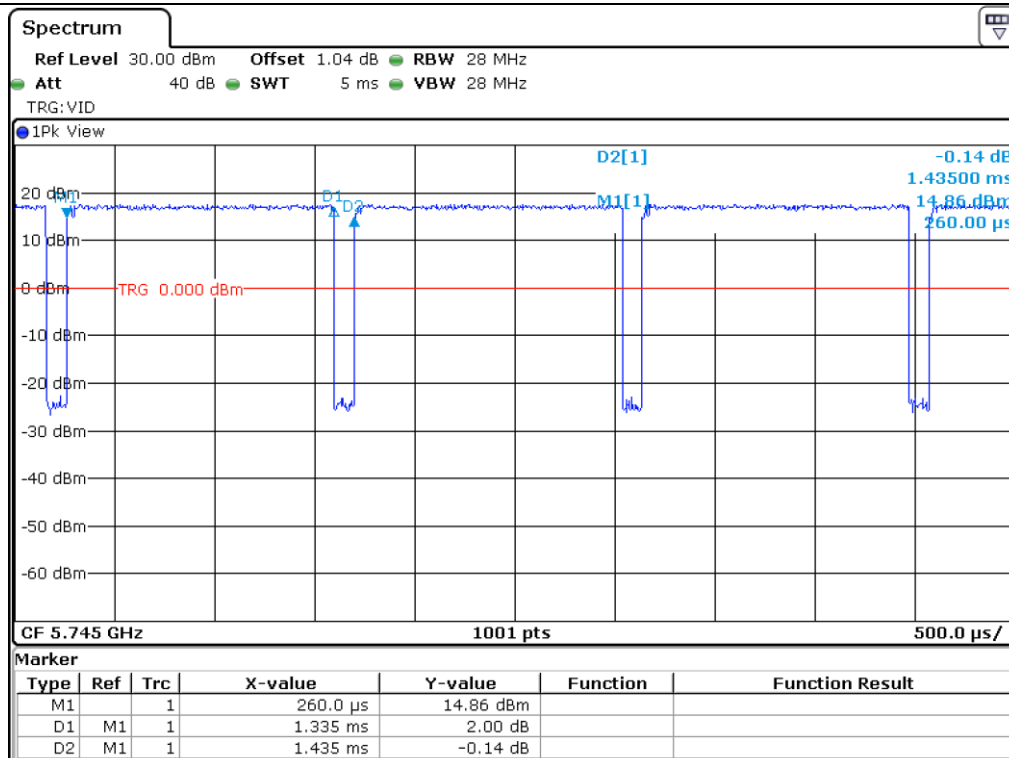

UNII 3_802.11 HT 20

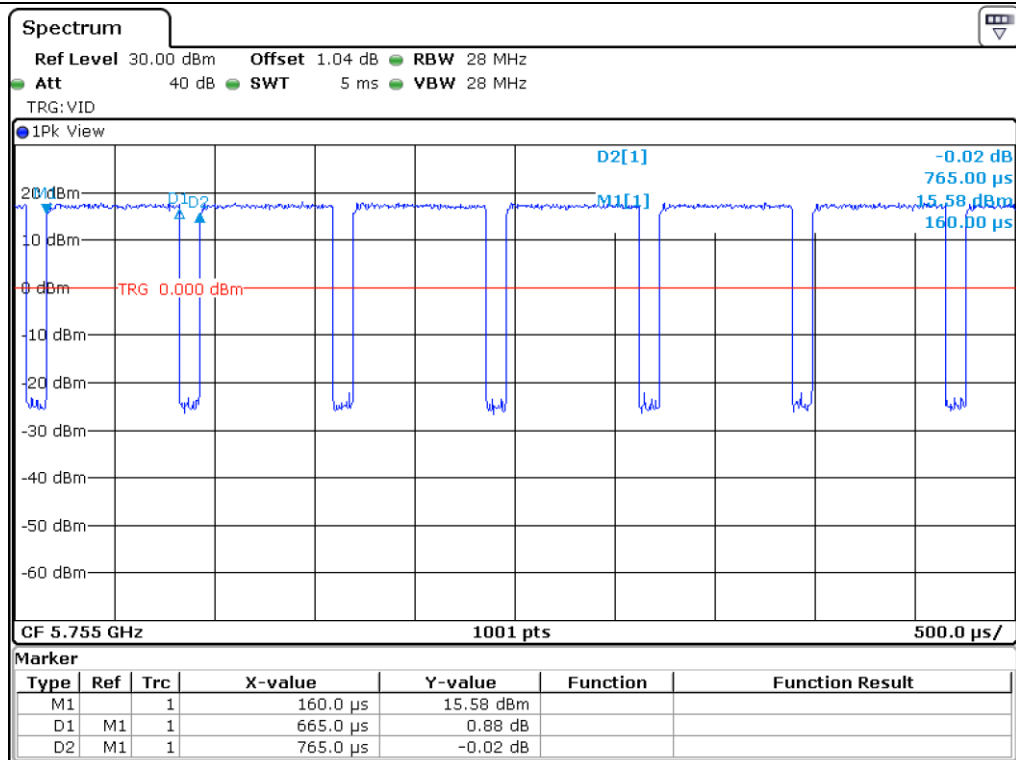

UNII 3_802.11 HT40

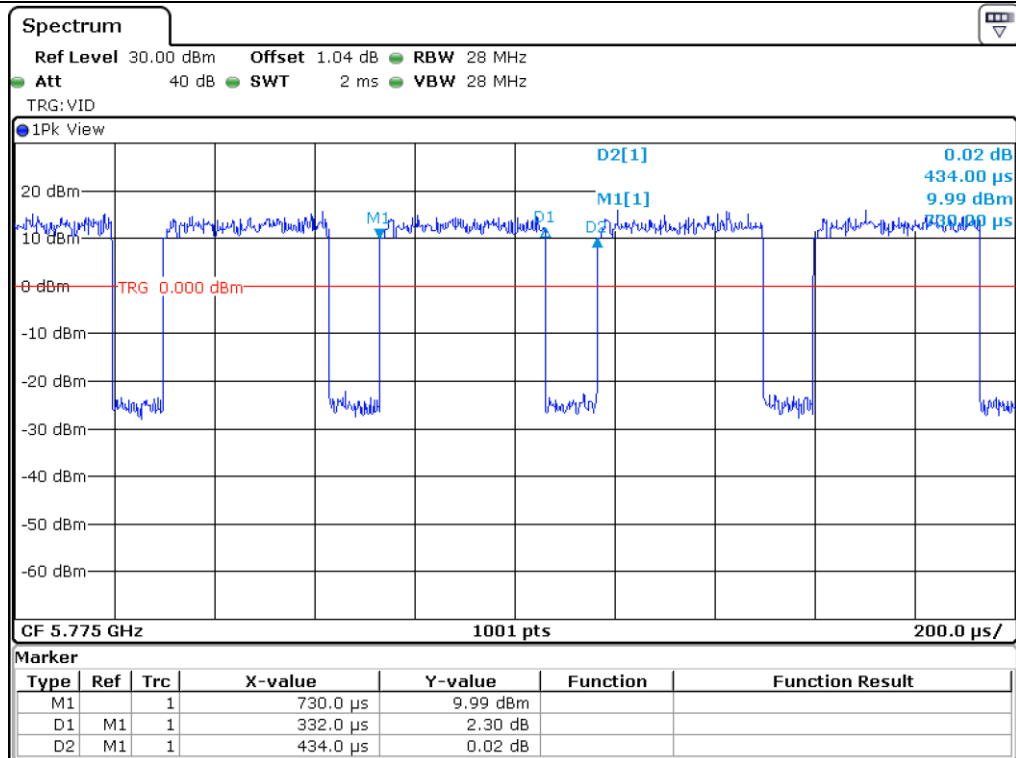

UNII 3_802.11 VHT 80

-. Channel List (5 150 MHz ~ 5 250 MHz Band)

802.11a / n_HT20 / ac_VHT20		802.11n_HT40 / ac_VHT40		802.11ac_VHT80	
Channel	Frequency[MHz]	Channel	Frequency[MHz]	Channel	Frequency[MHz]
36	5 180.00	38	5 190.00	42	5 210.00
40	5 200.00	46	5 230.00		
44	5 220.00				
48	5 240.00				

-. Channel List (5 725 MHz ~ 5 850 MHz Band)

802.11a / n_HT20 / ac_VHT20		802.11n_HT40 / ac_VHT40		802.11ac_VHT80	
Channel	Frequency[MHz]	Channel	Frequency[MHz]	Channel	Frequency[MHz]
149	5 745.00	151	5 755.00	155	5 775.00
153	5 765.00	159	5 795.00		
157	5 785.00				
161	5 805.00				

5.4 Configuration of Test System

Line Conducted Test: It is not need to test this requirement, because the EUT shall be operated by DC Power.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a Chip Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
It is not need to test this requirement, because the power of the EUT is supplied by DC Power.	

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

7. MINIMUM 26 dB BANDWIDTH

7.1 Operating environment

Temperature : 23 °C
Relative humidity : 45 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to approximately 1% of the emission bandwidth, and peak detection was used. The 26 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 26 dB.




7.3 Test Date


January 28, 2021 ~ February 04, 2021

7.4 Test data for 802.11a RLAN Mode


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	22.13
	Middle	5 220.00	22.13
	High	5 240.00	22.03
5 725 ~ 5 850	Low	5 745.00	21.78
	Middle	5 785.00	22.03
	High	5 805.00	21.33

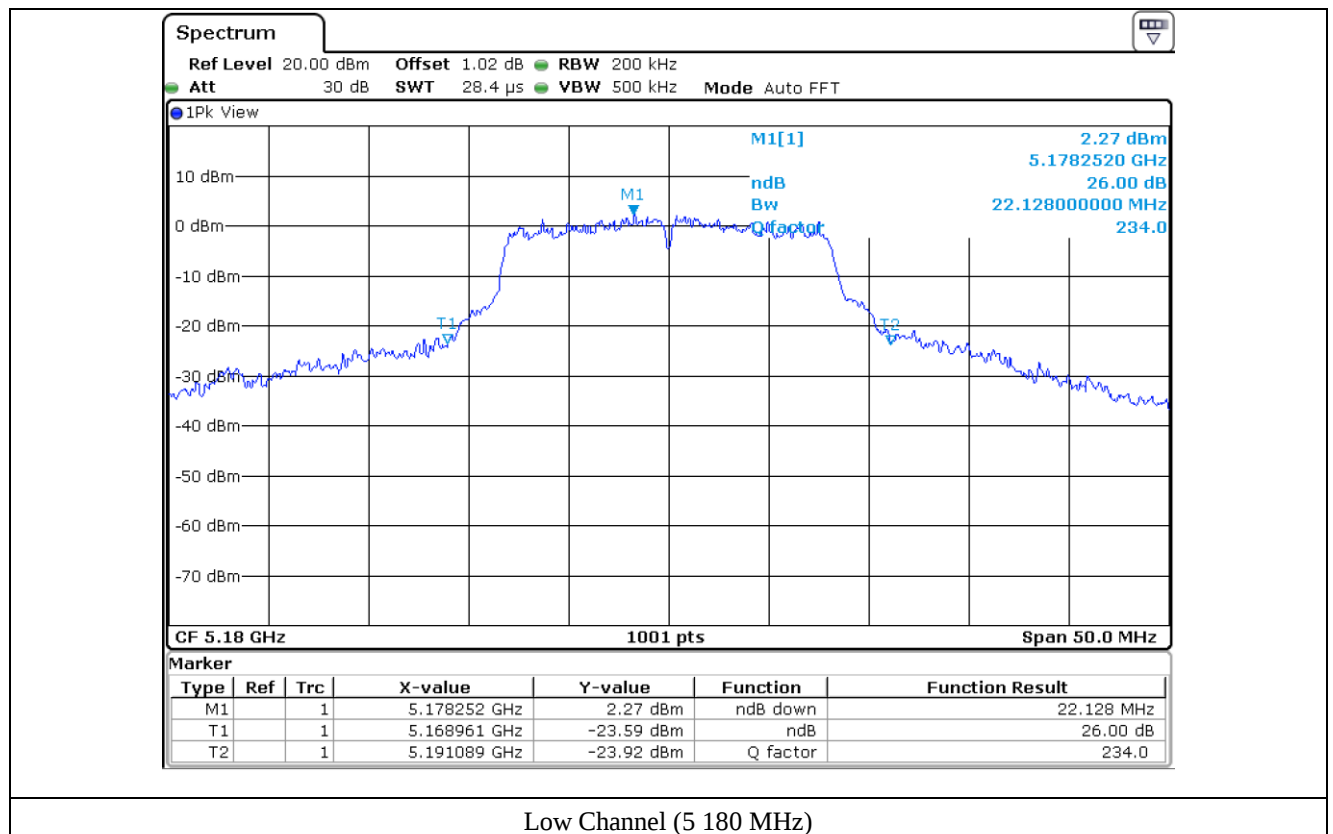


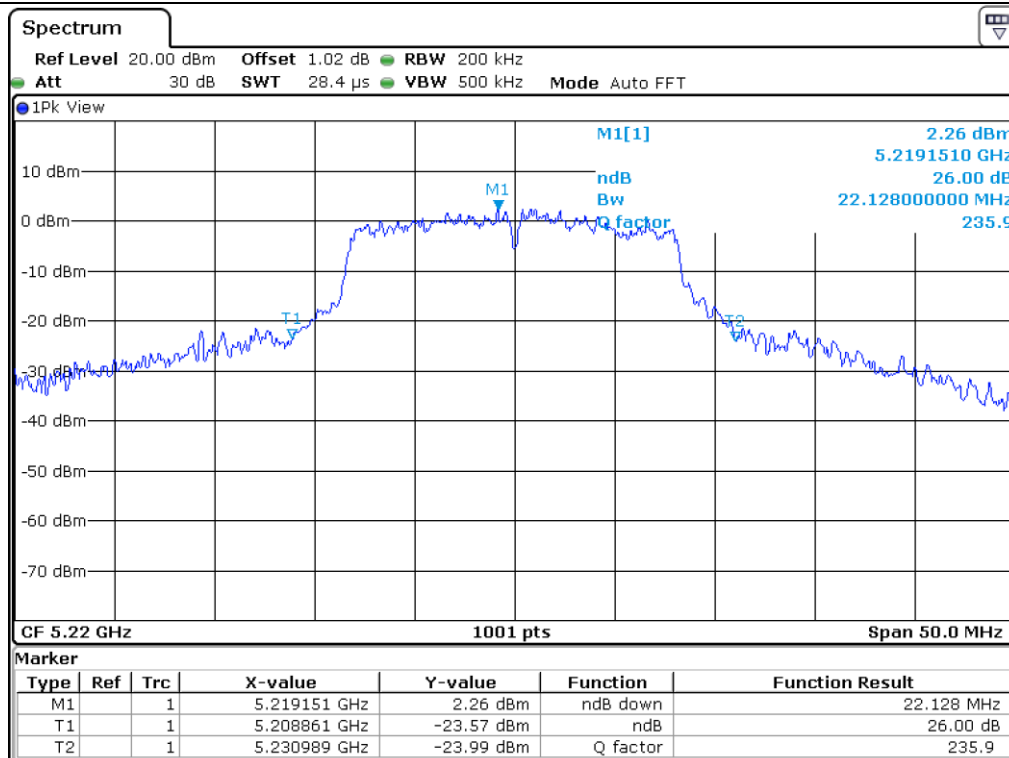


Middle Channel (5 220 MHz)

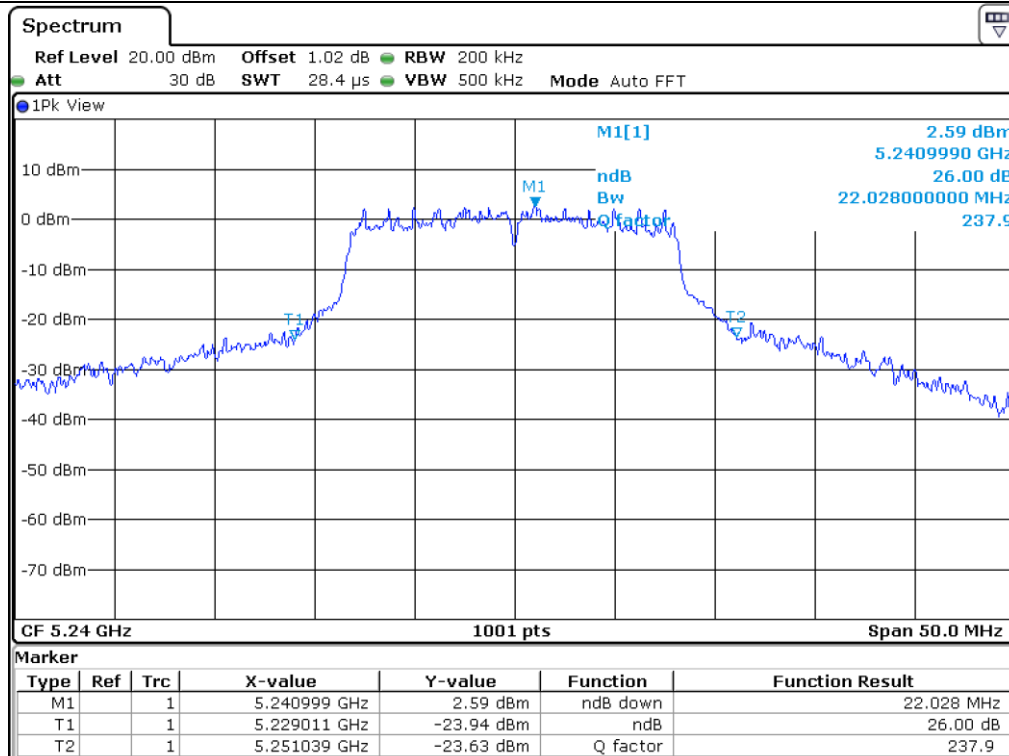


High Channel (5 240 MHz)

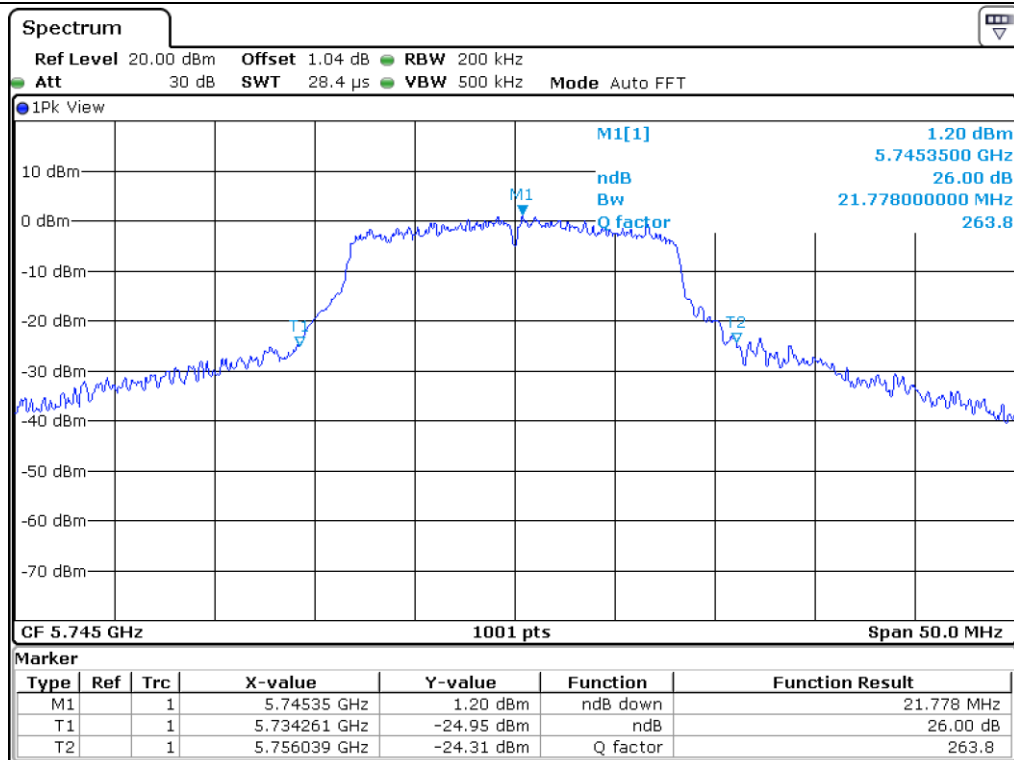

Low Channel (5 745 MHz)

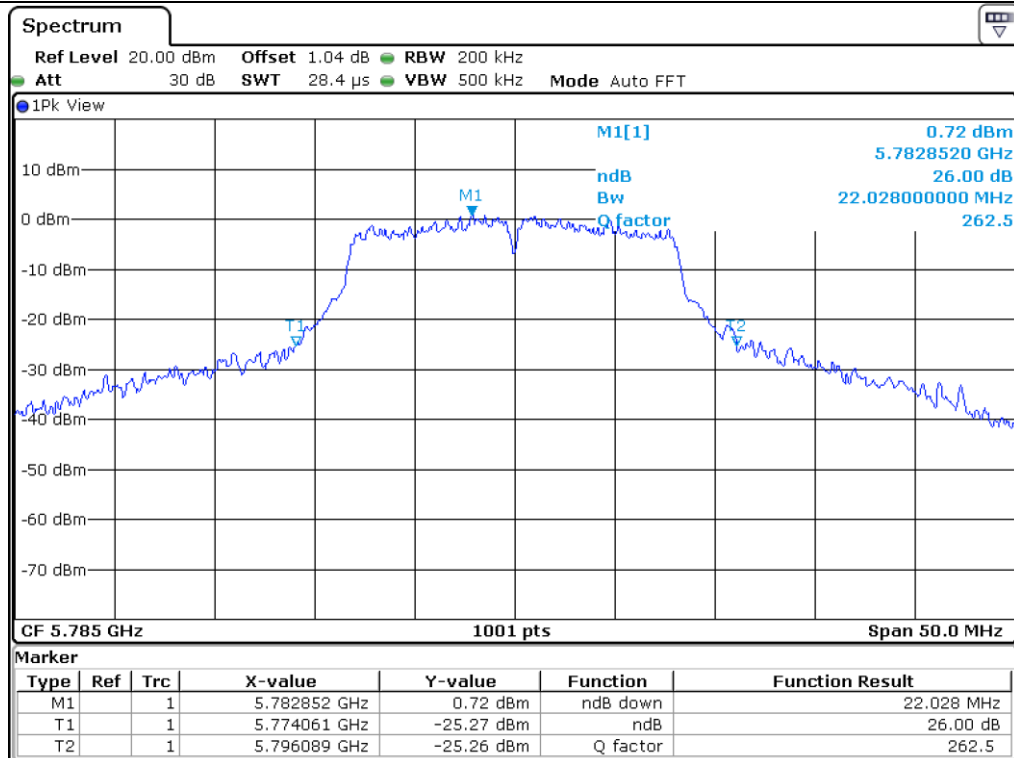

Middle Channel (5 785 MHz)

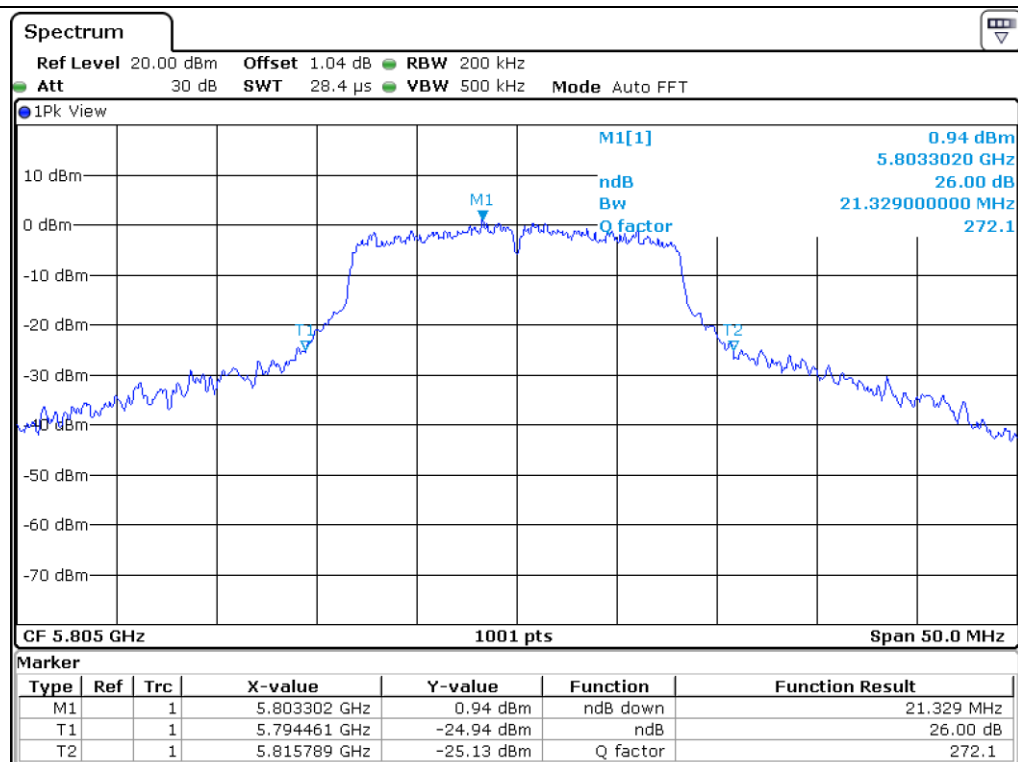



High Channel (5 805 MHz)

7.5 Test data for 802.11n_HT20 RLAN Mode


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	21.13
	Middle	5 220.00	21.53
	High	5 240.00	21.53
5 725 ~ 5 850	Low	5 745.00	22.48
	Middle	5 785.00	21.53
	High	5 805.00	21.93

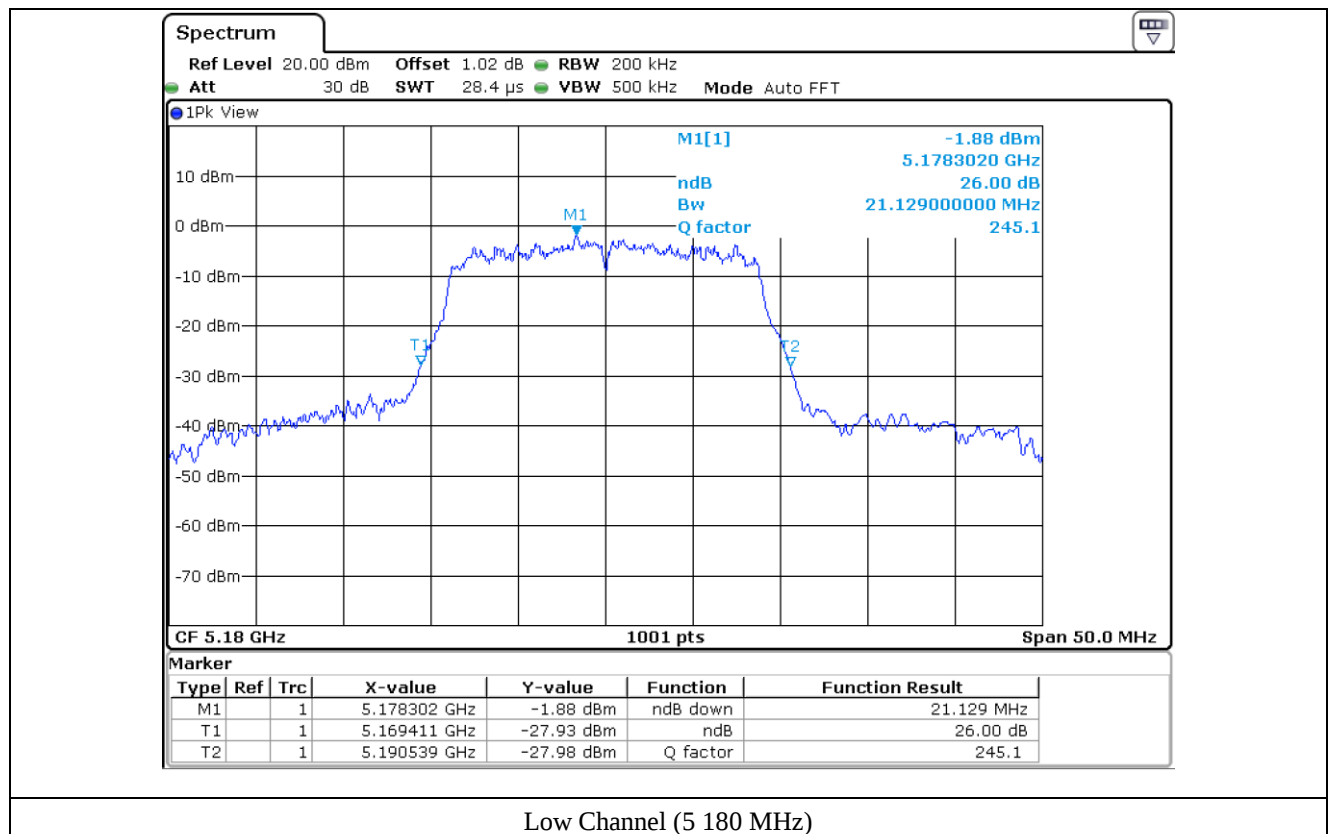


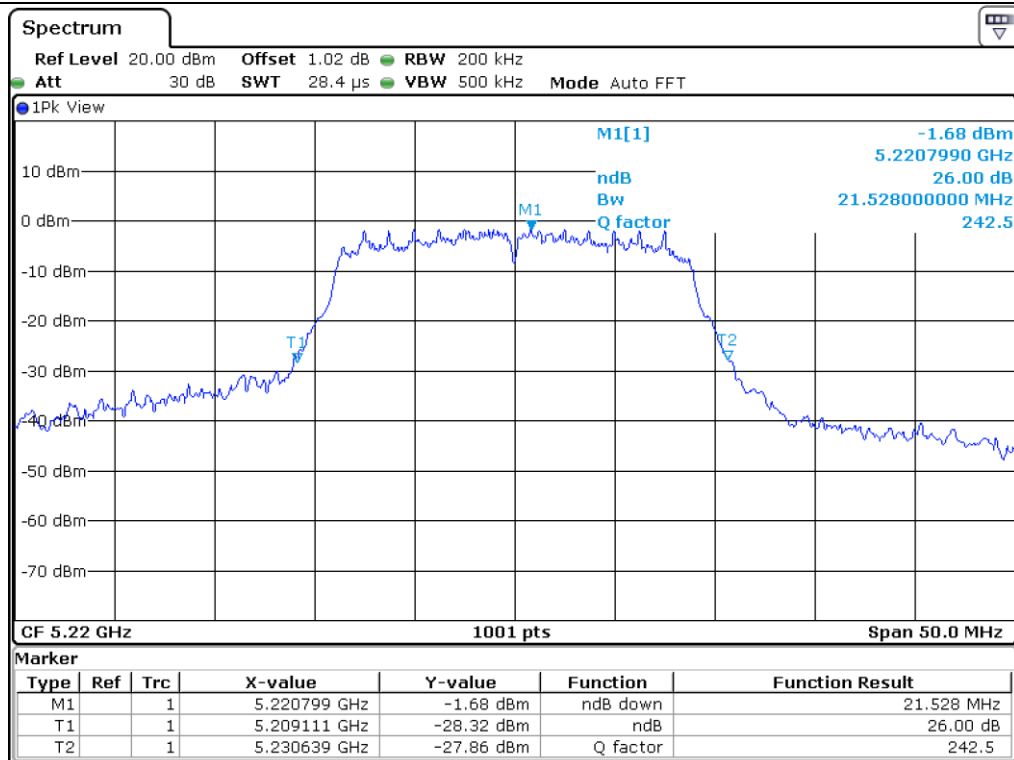


Middle Channel (5 220 MHz)

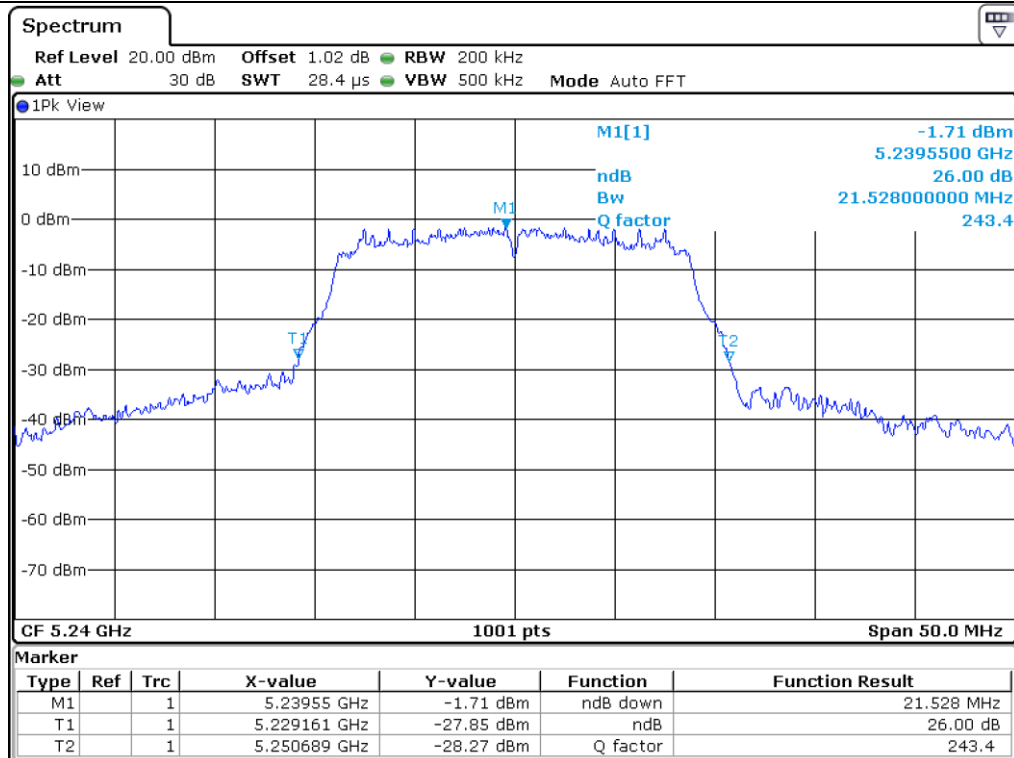


High Channel (5 240 MHz)

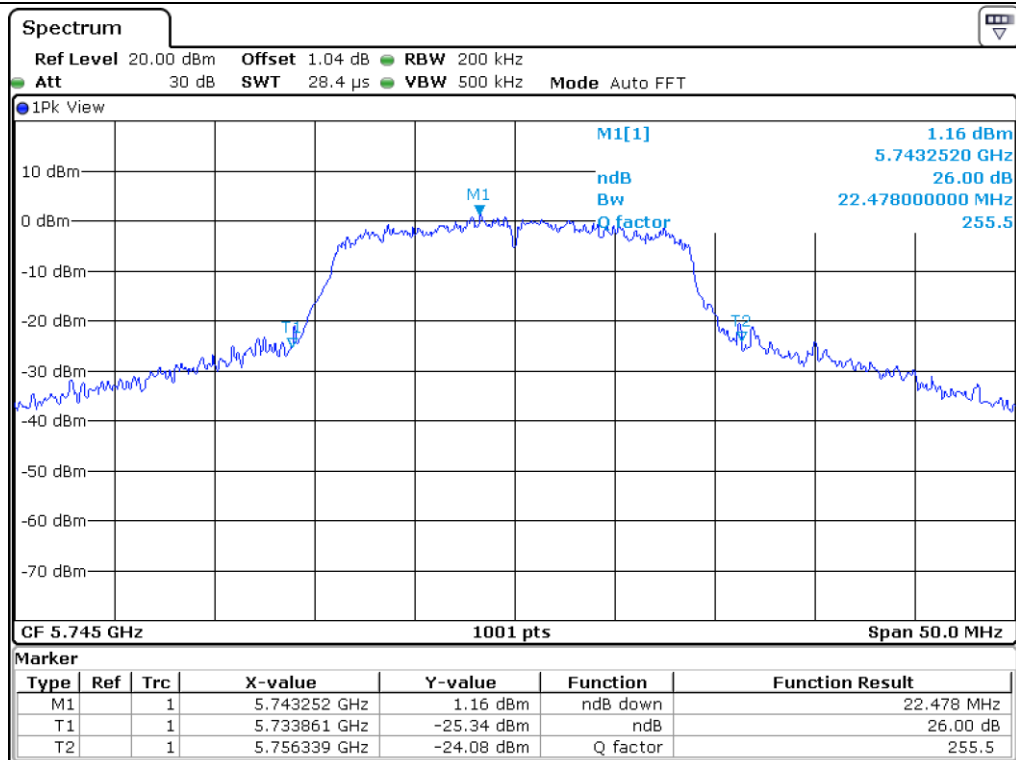

Low Channel (5 745 MHz)

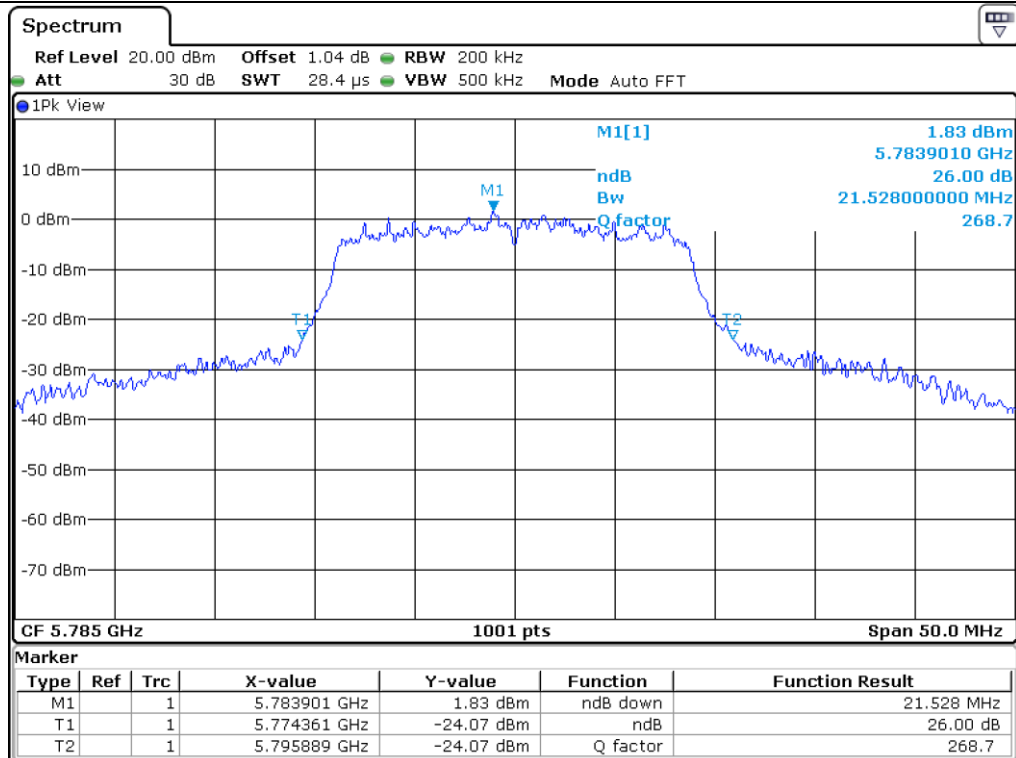

Middle Channel (5 785 MHz)

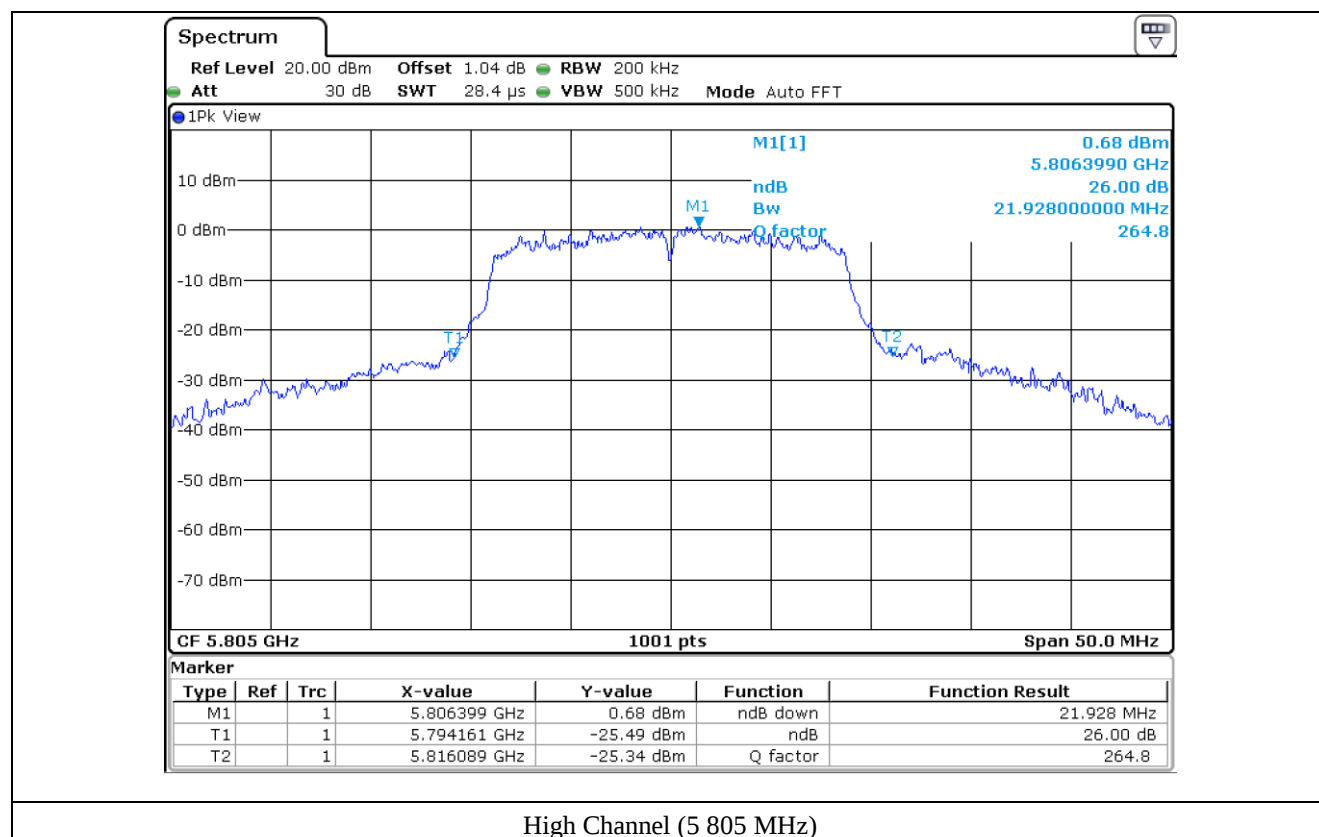


7.6 Test data for 802.11n_HT40 RLAN Mode


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 190.00	39.56
	High	5 230.00	39.76
5 725 ~ 5 850	Low	5 755.00	42.36
	High	5 795.00	41.86


Remark: See next page for measurement data.

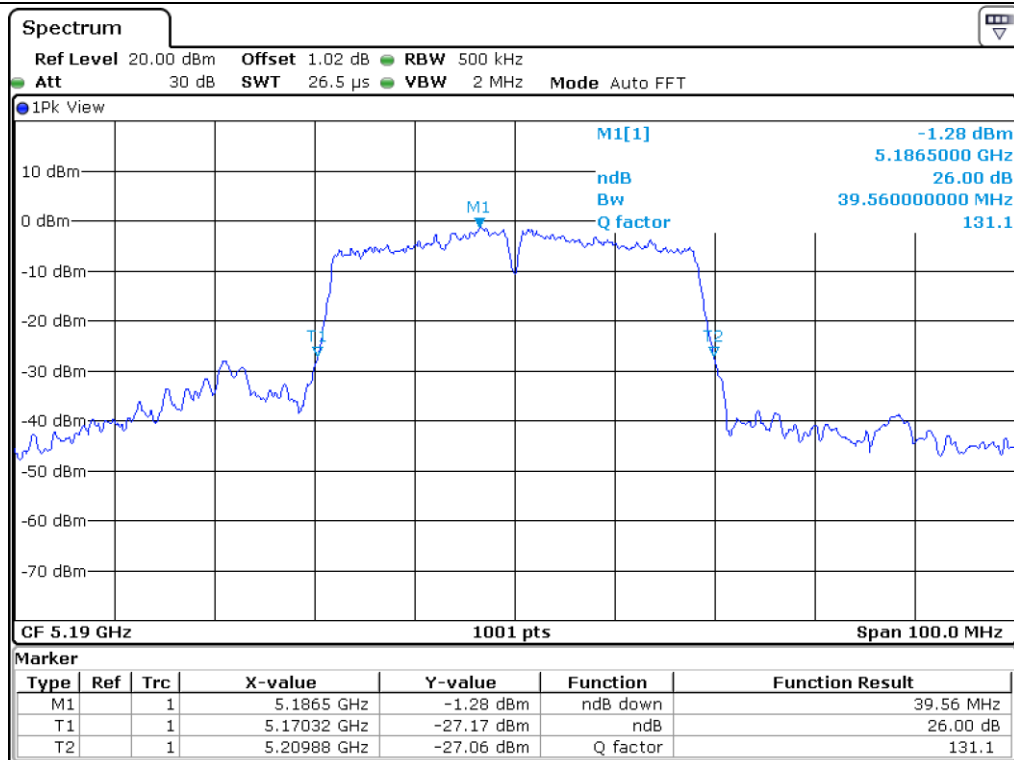


Low Channel (5 190 MHz)

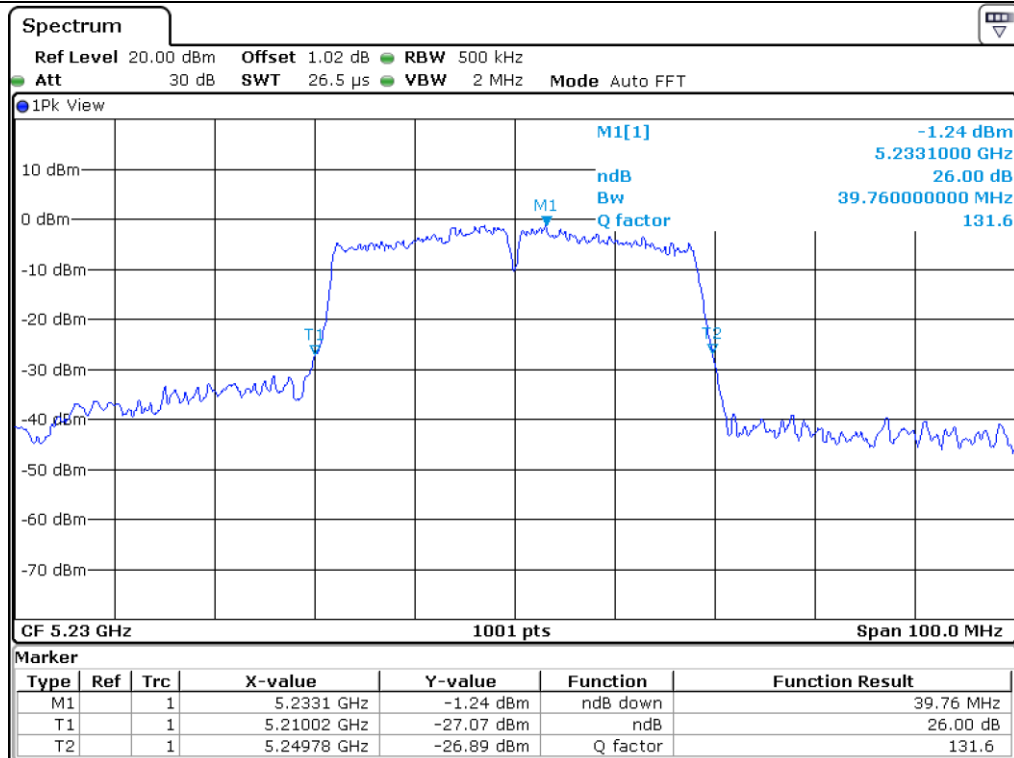

High Channel (5 230 MHz)

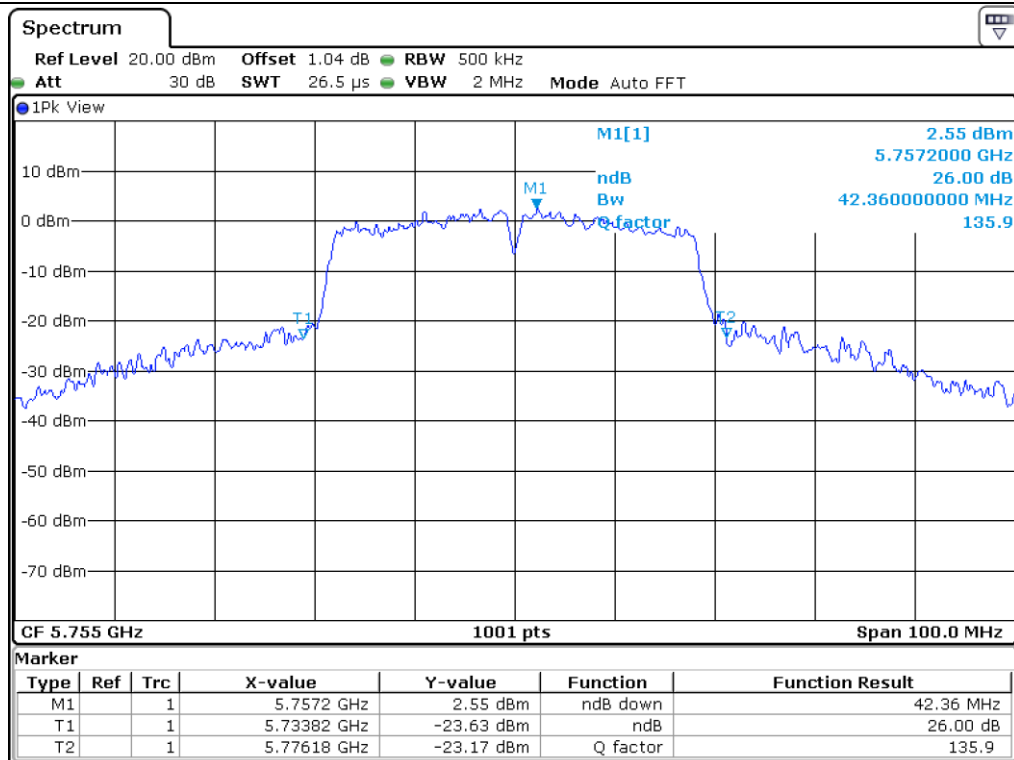

Low Channel (5 755 MHz)

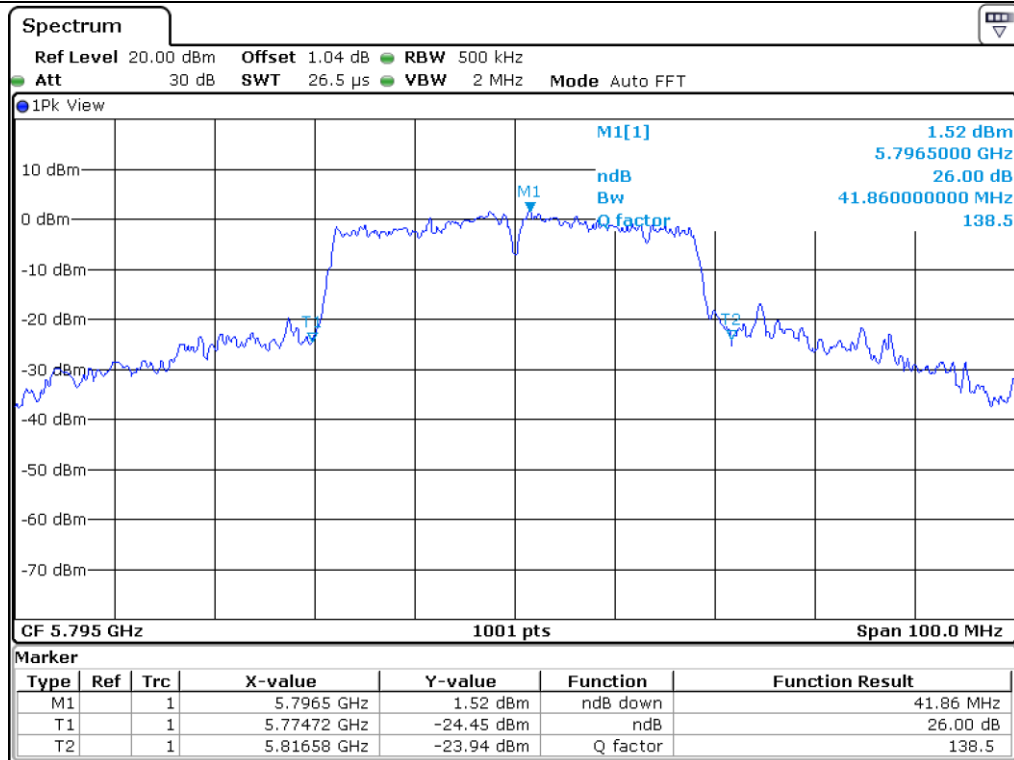


High Channel (5 795 MHz)

7.7 Test data for 802.11ac_VHT80 RLAN Mode


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Middle	5 210.00	80.52
5 725 ~ 5 850	Middle	5 775.00	81.32

Remark: See next page for measurement data.

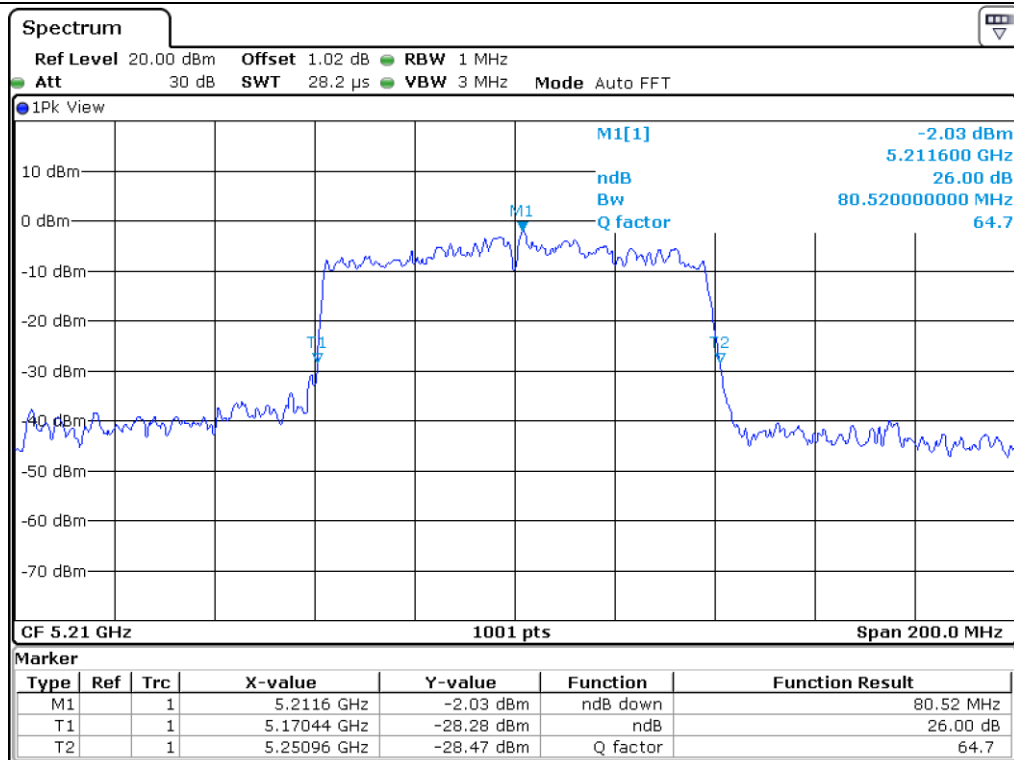

Middle Channel (5 210 MHz)

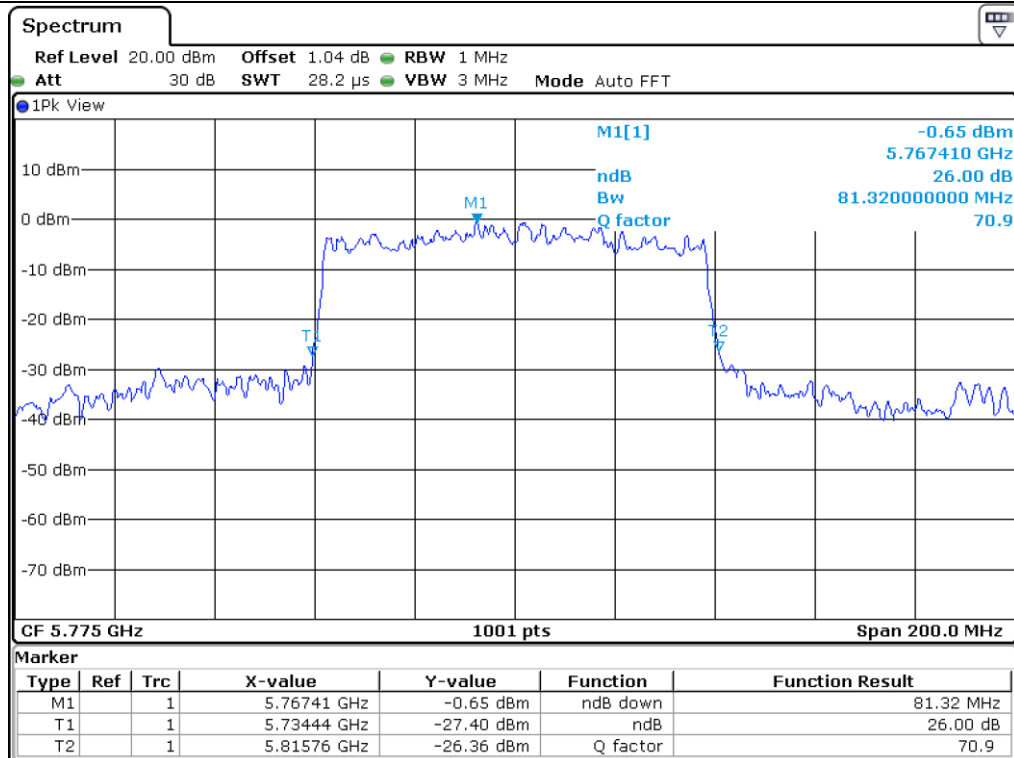

Middle Channel (5 775 MHz)


8. 6 dB BANDWIDTH

8.1 Operating environment

Temperature : 23 °C
Relative humidity : 45 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

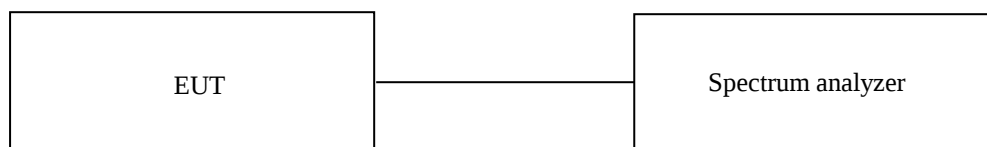


8.3 Test Date


January 28, 2021 ~ February 04, 2021

8.4 Test data for 802.11a RLAN Mode


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745.00	16.28
	Middle	5 785.00	16.28
	High	5 805.00	16.28

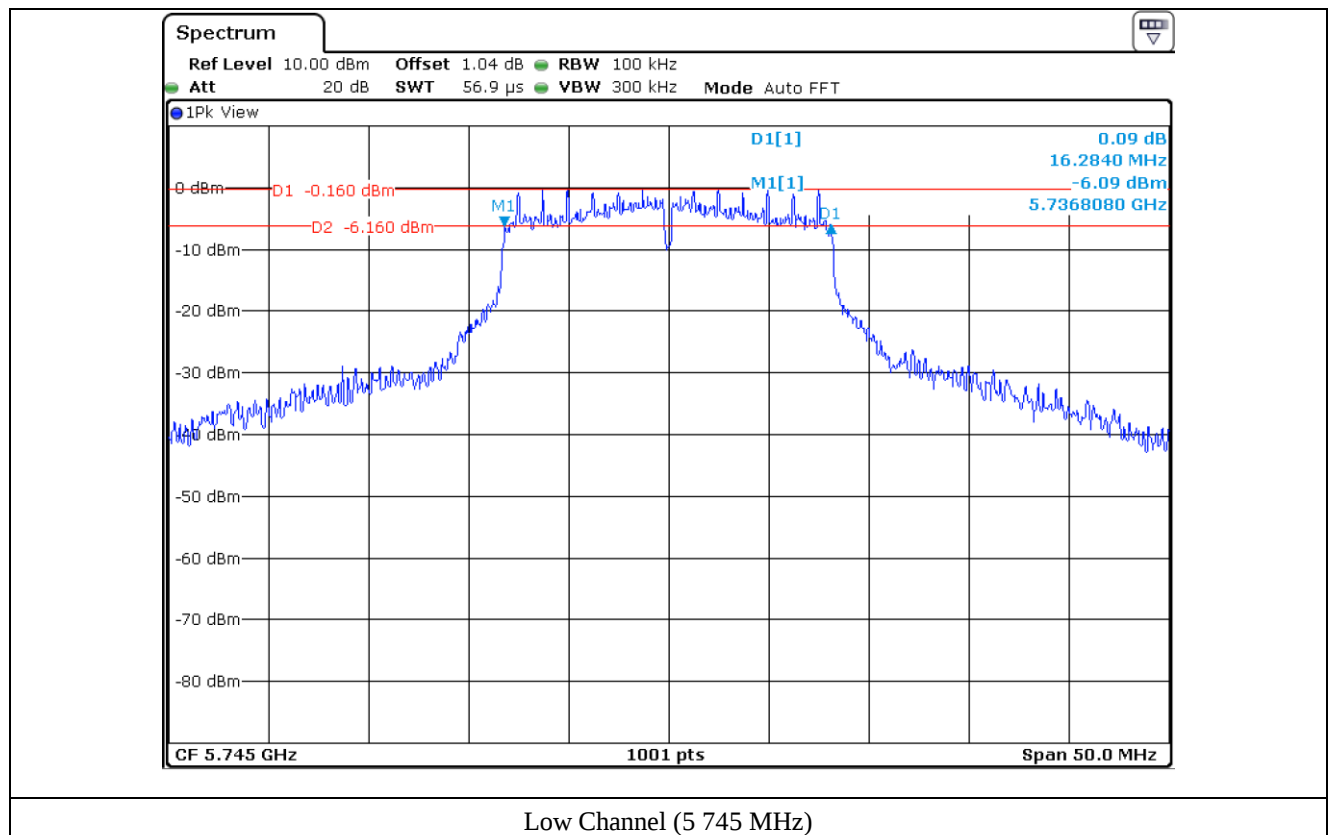

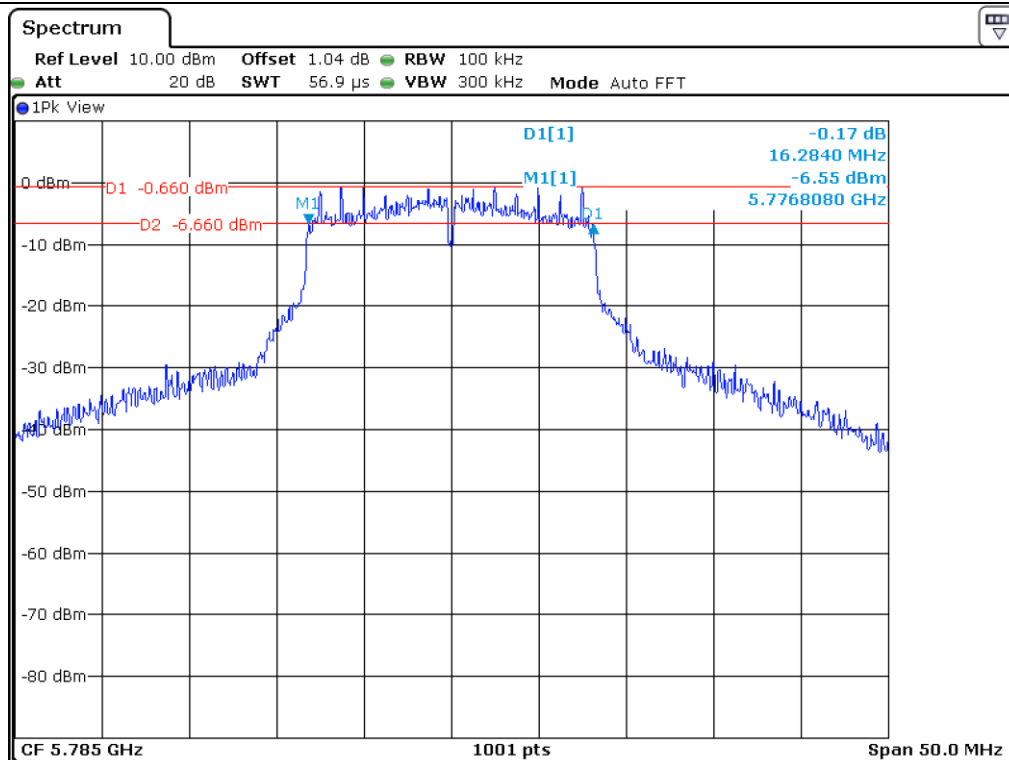

Middle Channel (5 785 MHz)

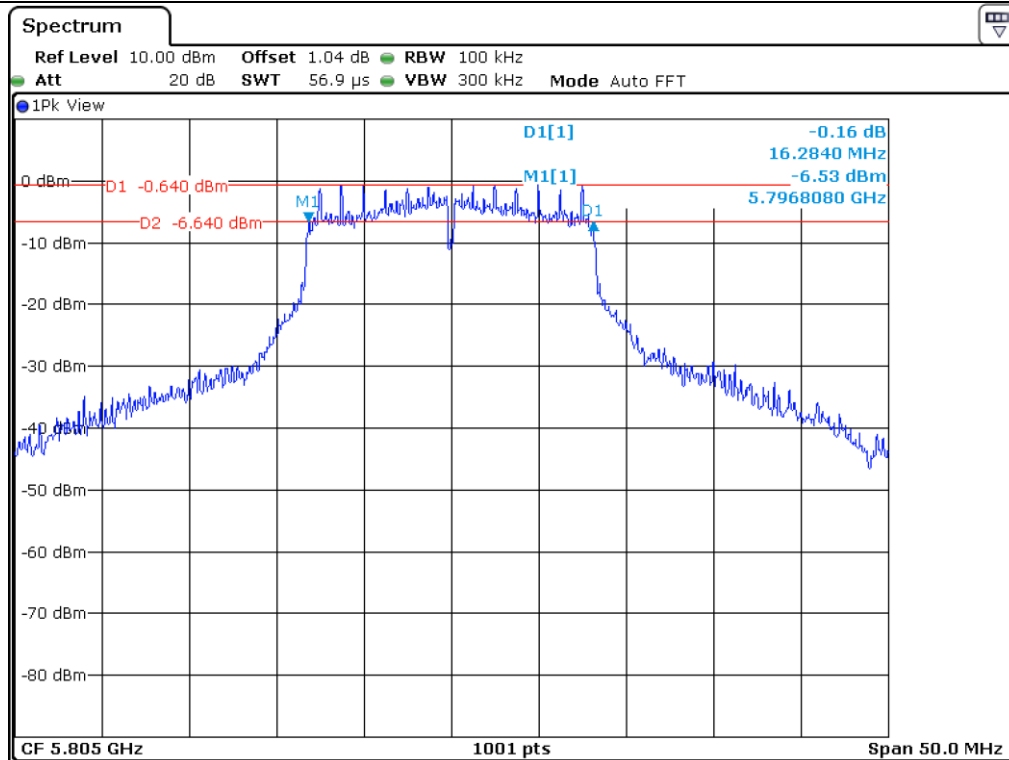



High Channel (5 805 MHz)

8.5 Test data for 802.11n_HT20 RLAN Mode


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745.00	17.53
	Middle	5 785.00	17.58
	High	5 805.00	17.58

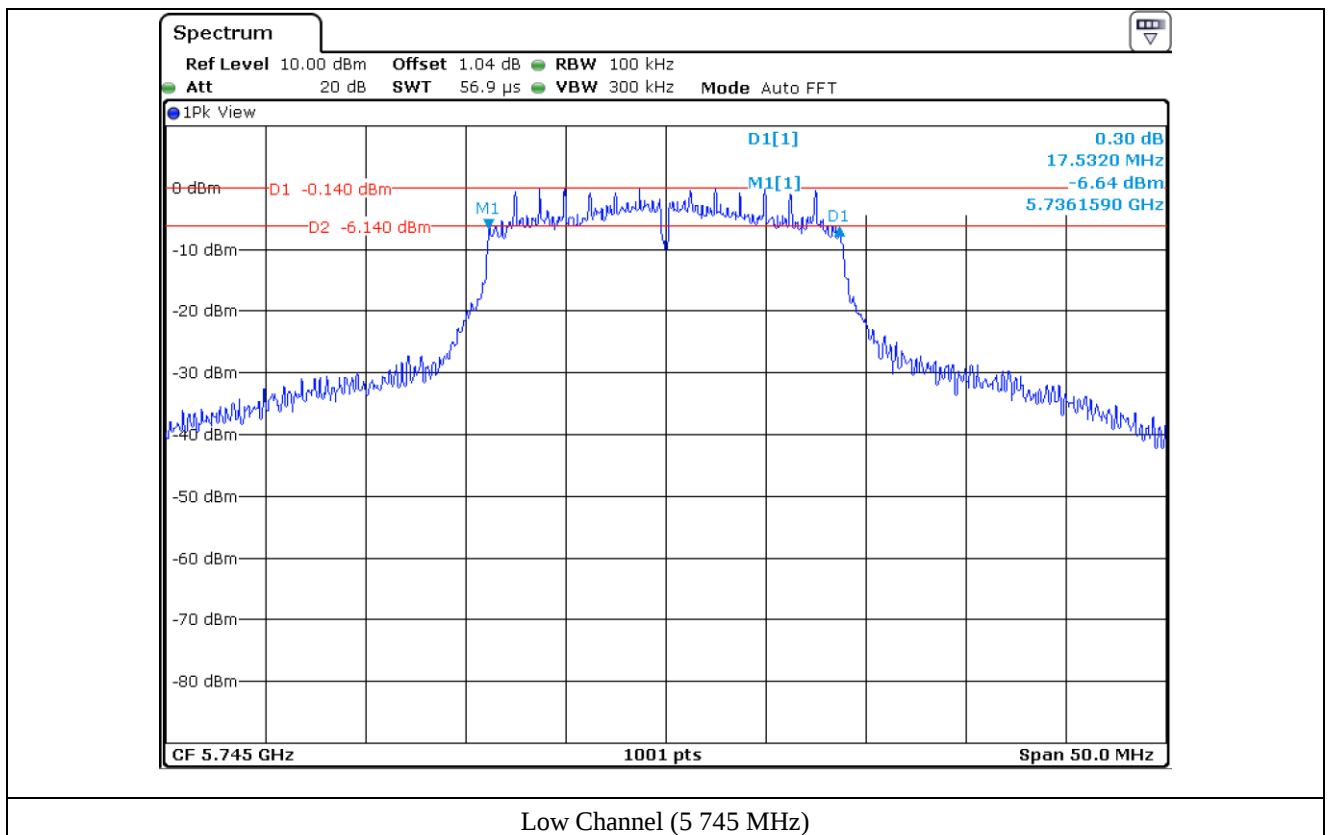

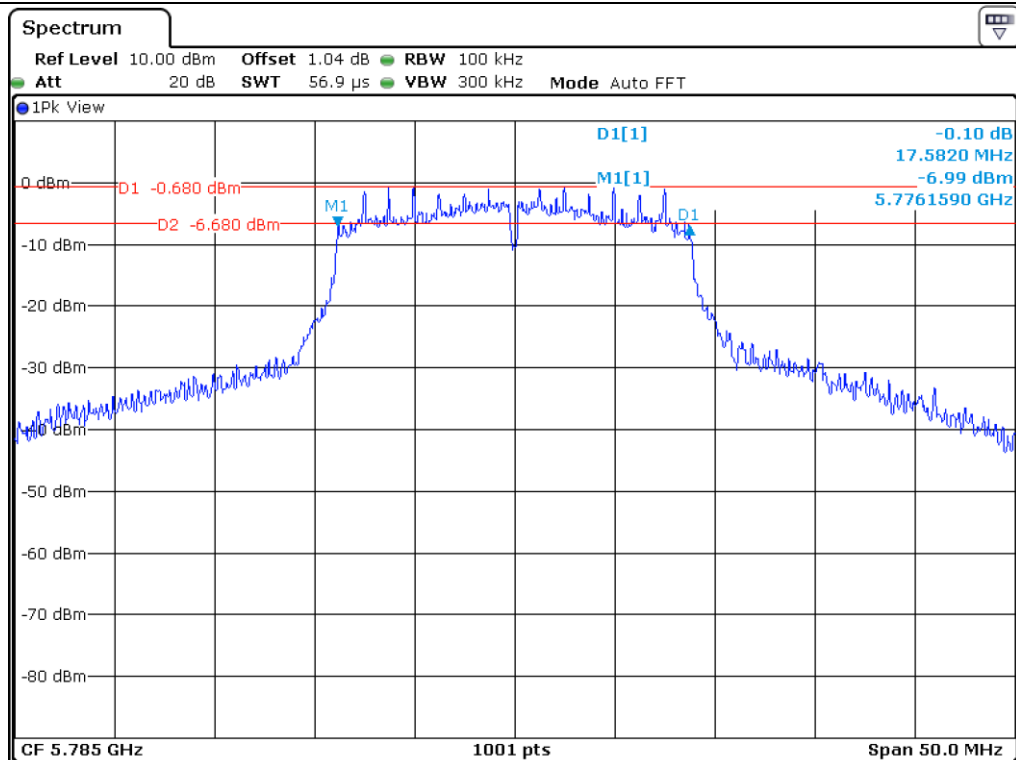

Middle Channel (5 785 MHz)

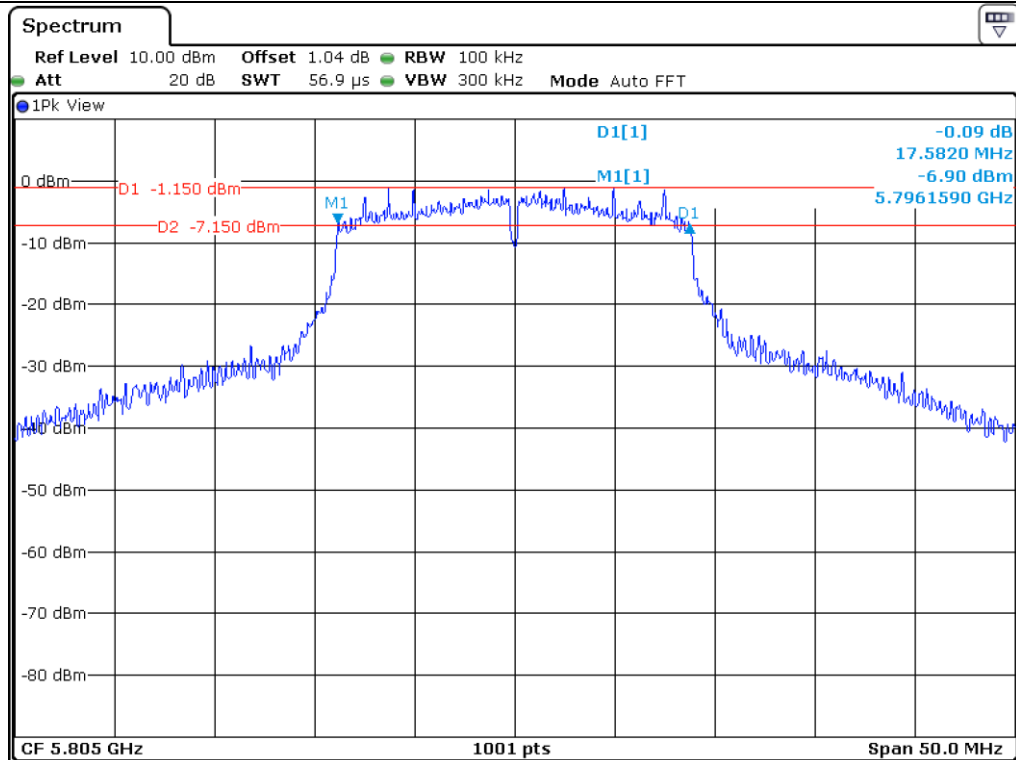



High Channel (5 805 MHz)

8.6 Test data for 802.11n_HT40 RLAN Mode

-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 755.00	36.26
	High	5 795.00	36.26

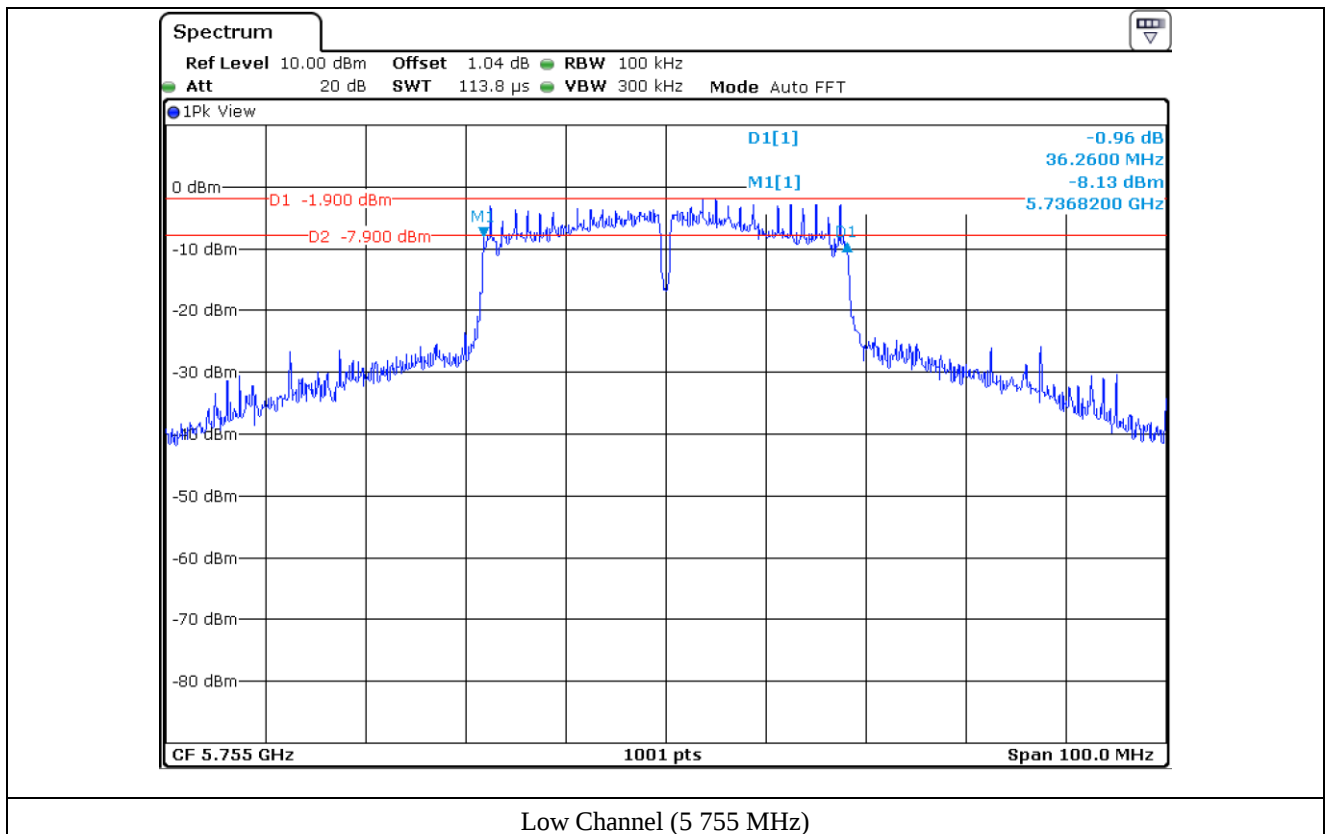

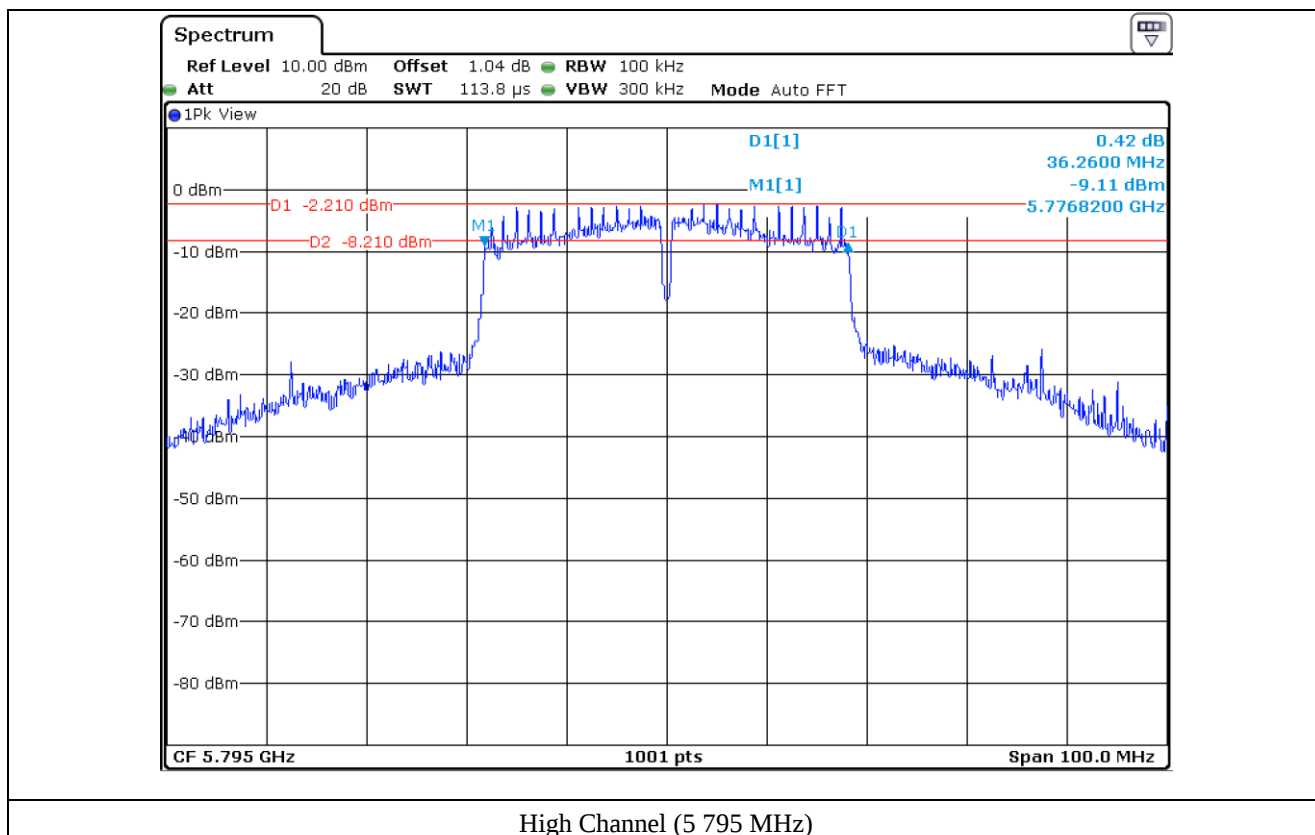


8.7 Test data for 802.11ac_VHT80 RLAN Mode

-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Middle	5 775.00	75.72

Remark: See next page for measurement data.

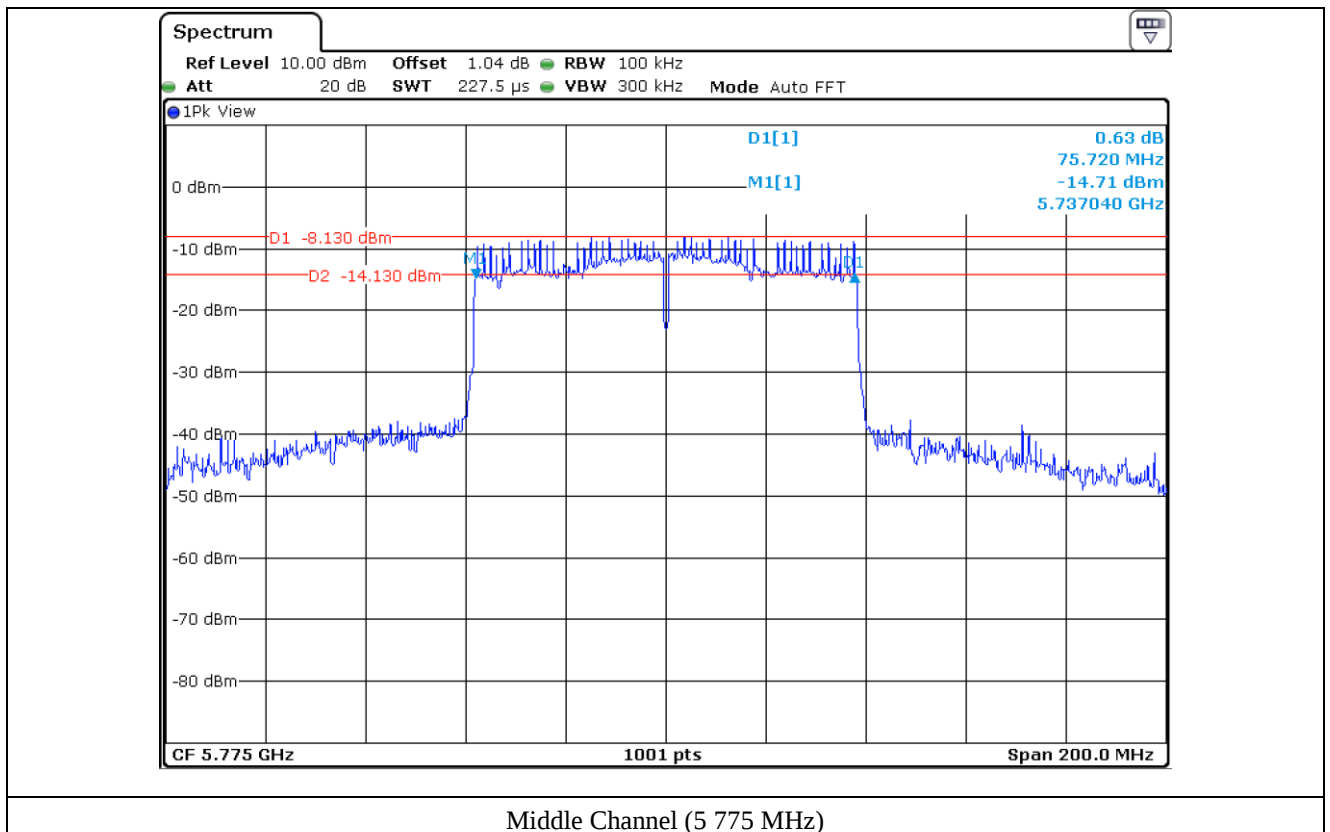


9. MAXIMUM CONDUCTED OUTPUT POWER

9.1 Operating environment

Temperature : 23 °C
Relative humidity : 45 % R.H.

9.2 Test set-up

The maximum peak output power was measured with the spectrum analyzer connected to the antenna output of the EUT. The spectrum analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 26 dB & 6 dB bandwidth. The EUT was operating in transmit mode at the appropriate center frequency.

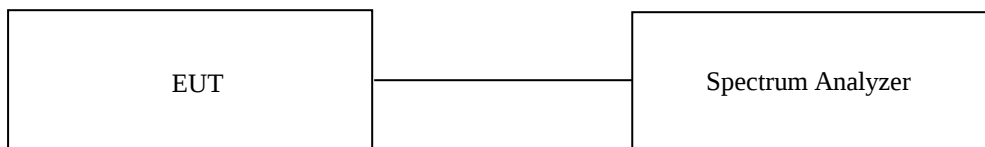

9.3 Test Date

January 28, 2021 ~ February 04, 2021


9.4 Test data for 802.11a RLAN Mode


-. Test Result : Pass

-. Duty Cycle : 93.46 %(UNII 1), 93.14 %(UNII 3)


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	C.F. (dB)	RESULT (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	5 180.00	12.22	0.29	12.51	24.00	11.49
	Middle	5 220.00	12.54	0.29	12.83	24.00	11.17
	High	5 240.00	12.43	0.29	12.72	24.00	11.28
5 725 ~ 5 850	Low	5 745.00	10.95	0.31	11.26	30.00	18.74
	Middle	5 785.00	10.33	0.31	10.64	30.00	19.36
	High	5 805.00	10.45	0.31	10.76	30.00	19.24

Remark. Margin = Limit – Result (=Measured Value + C.F.)

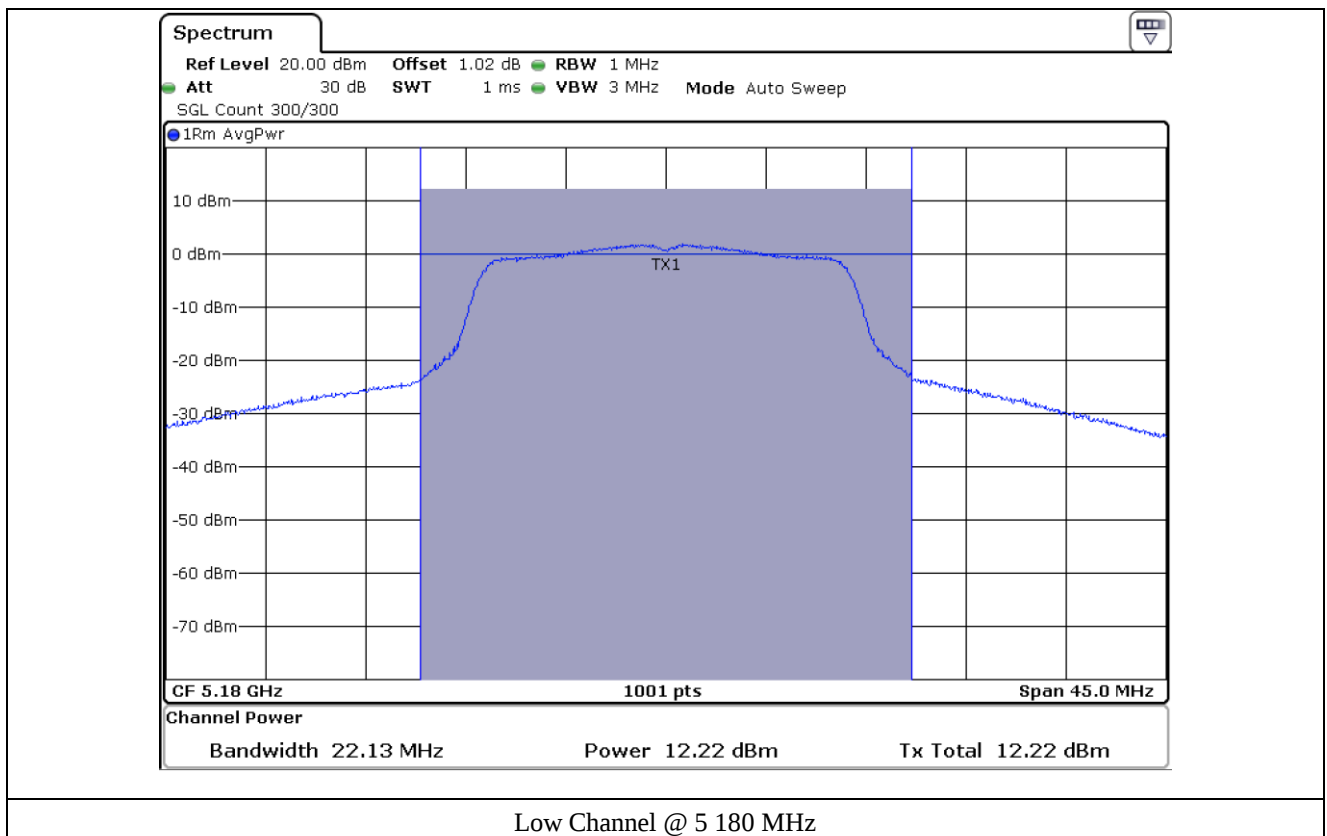


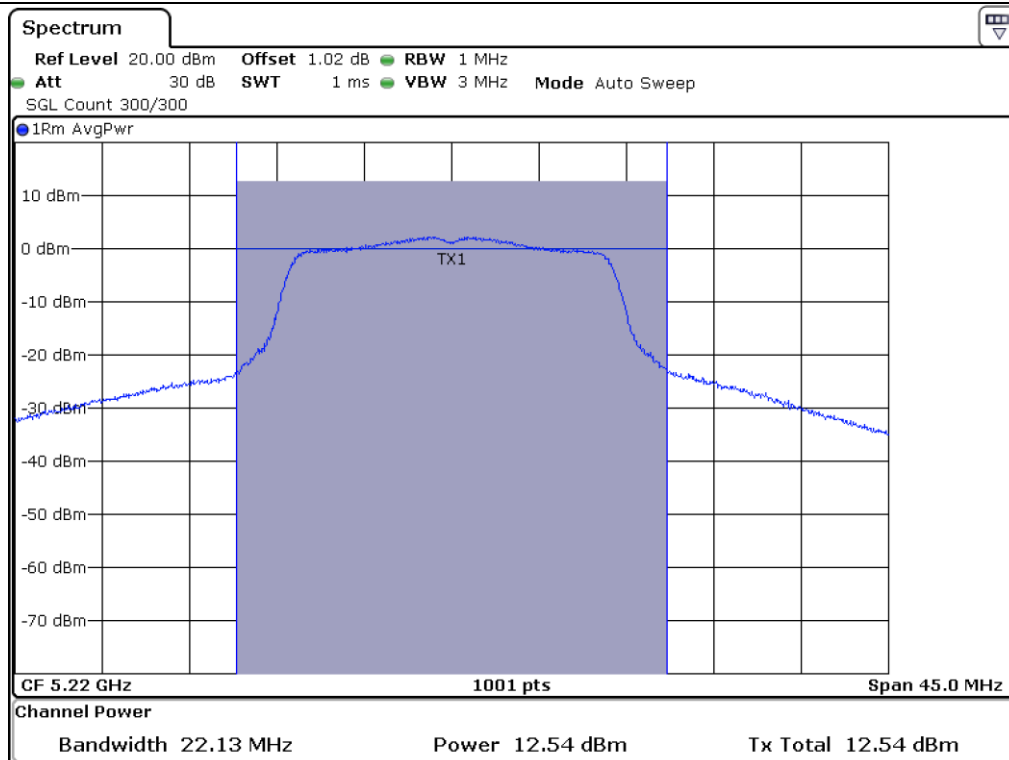


Middle Channel @ 5 220 MHz

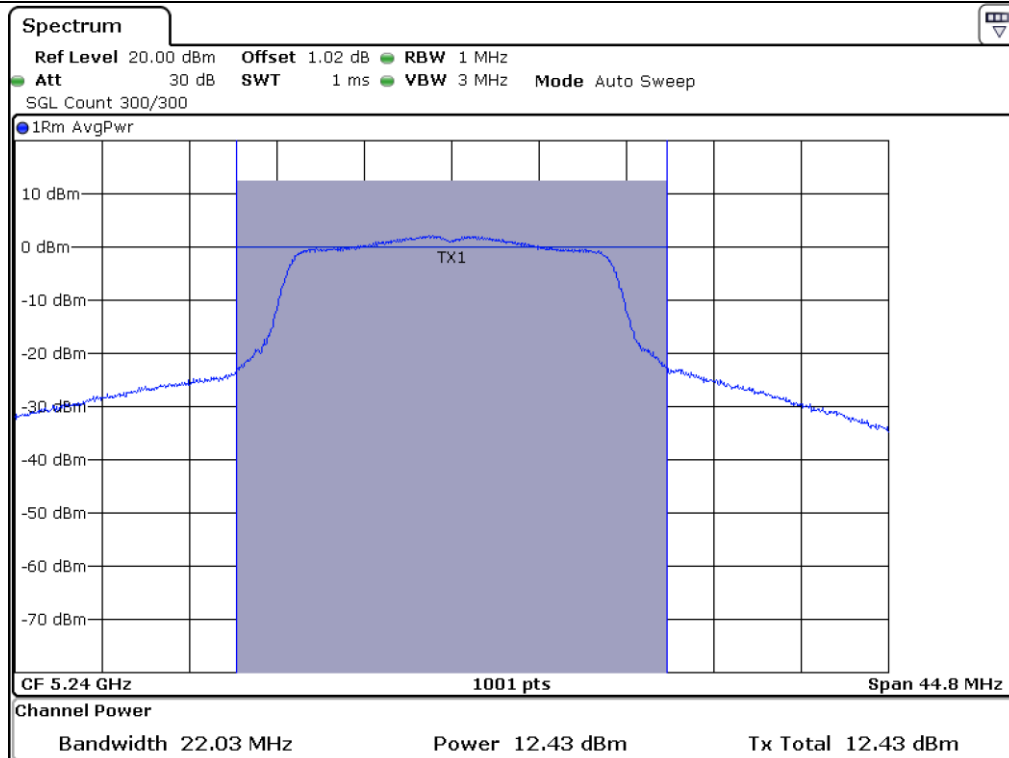


High Channel @ 5 240 MHz

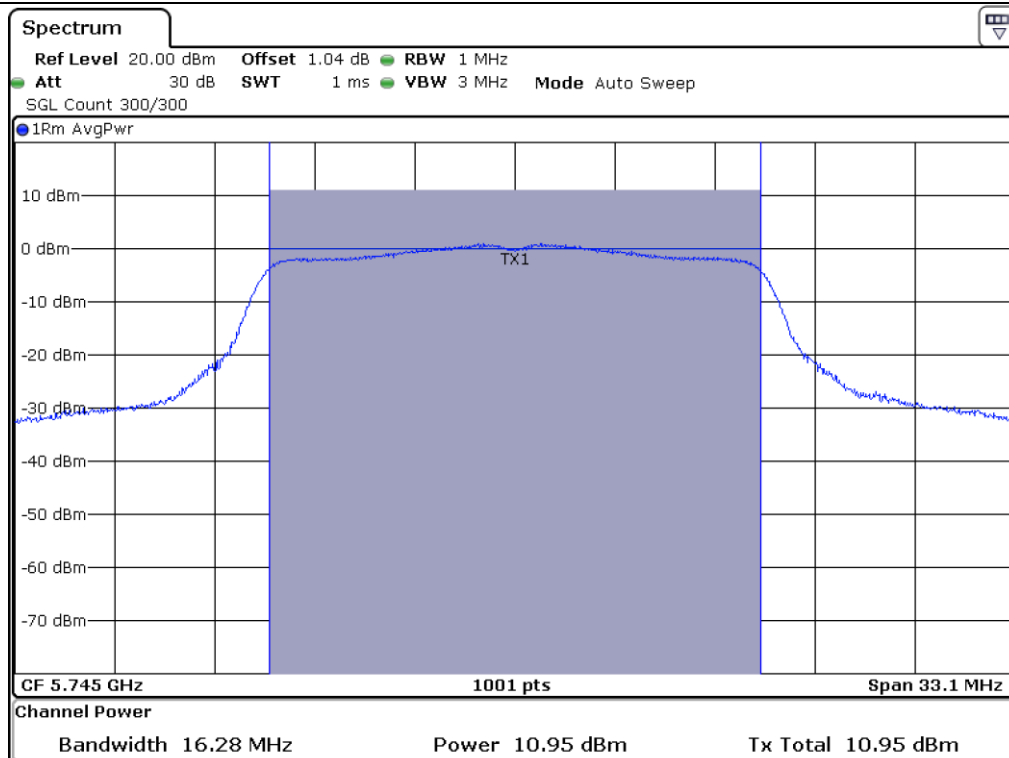

Low Channel @ 5 745 MHz

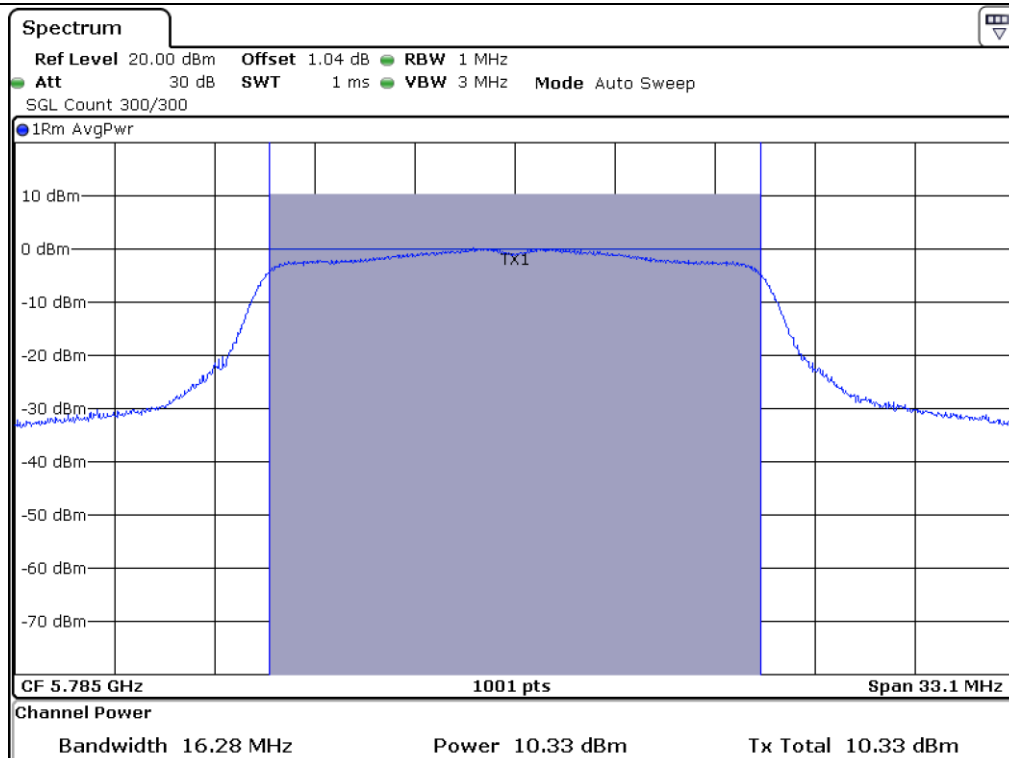

Middle Channel @ 5 785 MHz

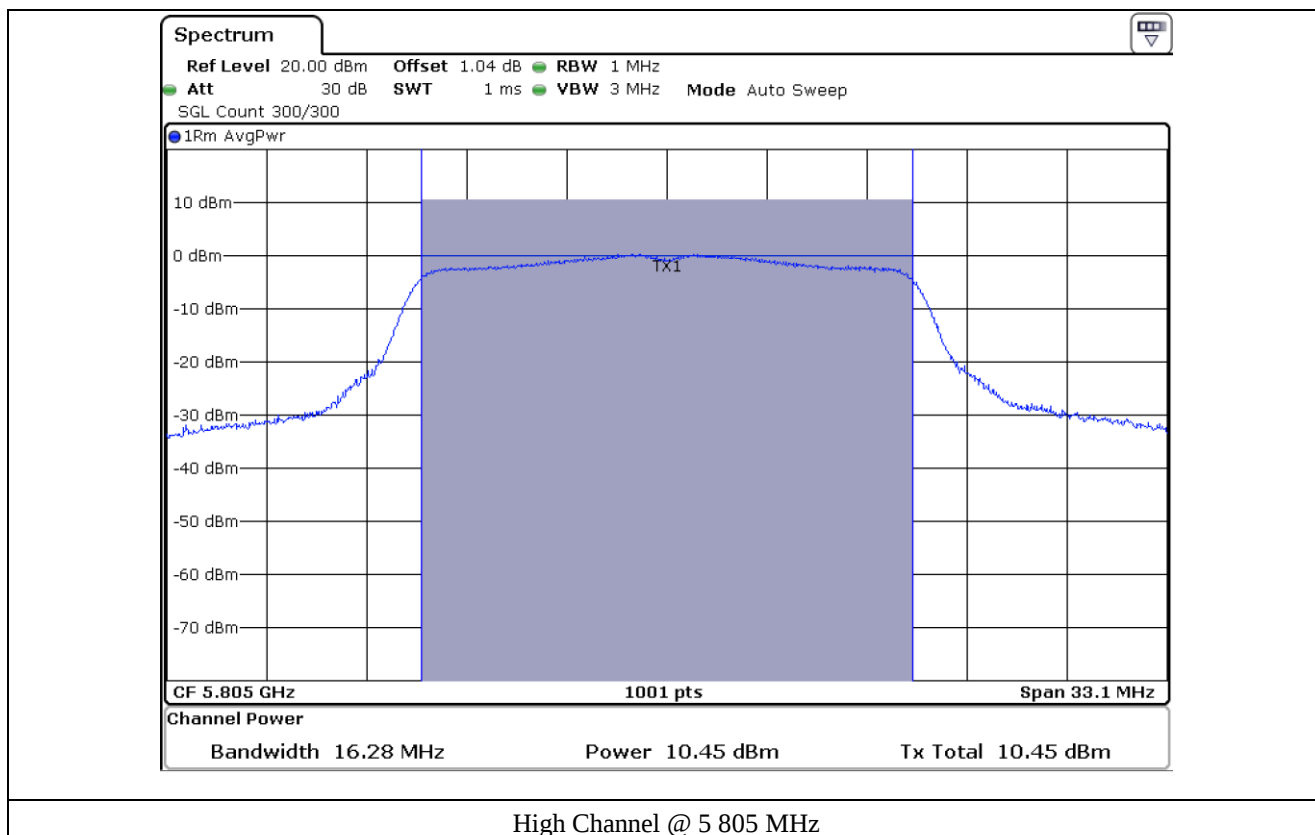


9.5 Test data for 802.11n_HT20 RLAN Mode


-. Test Result : Pass

-. Duty Cycle : 91.99 %(UNII 1), 93.03 %(UNII 3)


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	C.F (dB)	RESULT (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	5 180.00	8.08	0.36	8.44	24.00	15.56
	Middle	5 220.00	8.37	0.36	8.73	24.00	15.27
	High	5 240.00	8.36	0.36	8.72	24.00	15.28
5 725 ~ 5 850	Low	5 745.00	10.81	0.31	11.12	30.00	18.88
	Middle	5 785.00	10.23	0.31	10.54	30.00	19.46
	High	5 805.00	10.46	0.31	10.77	30.00	19.23

Remark. Margin = Limit – Result (=Measured Value + C.F.)

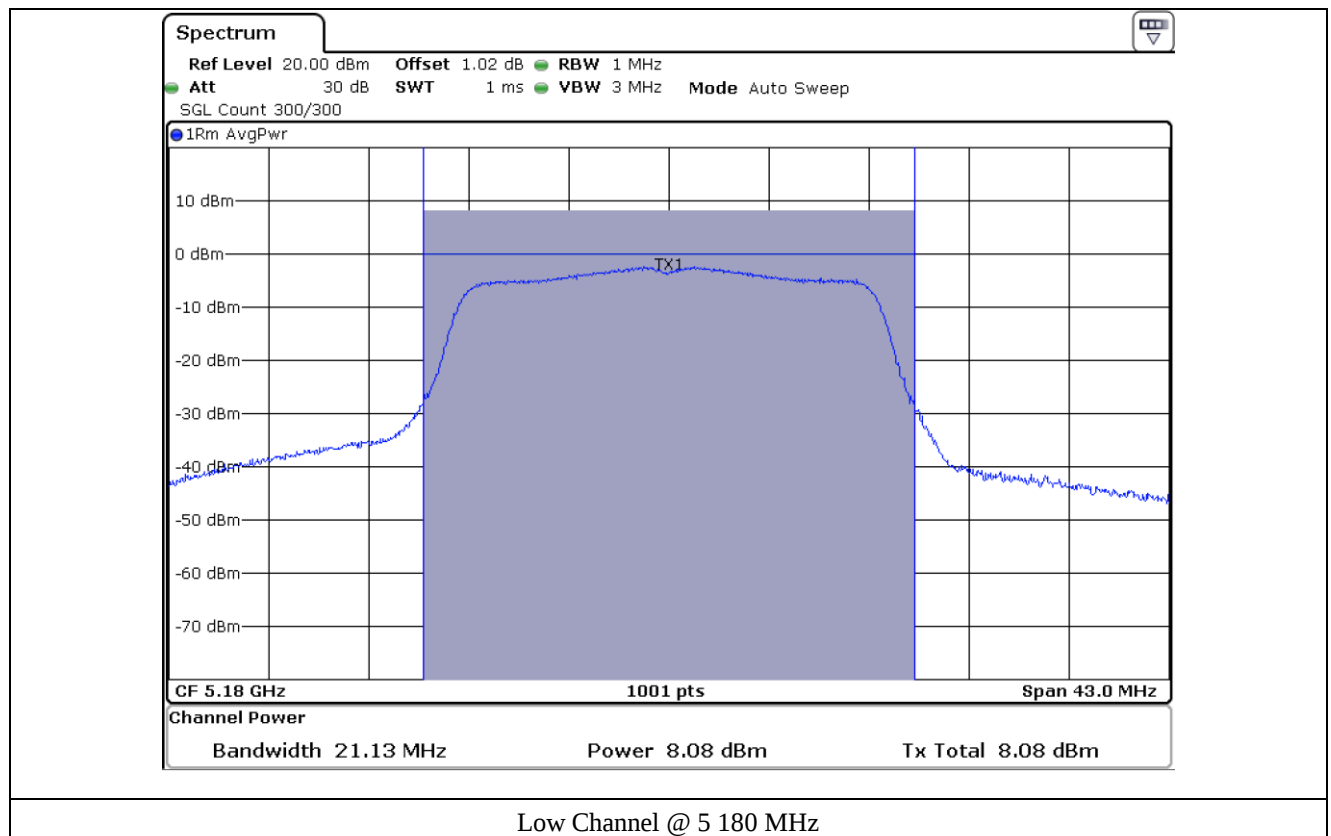


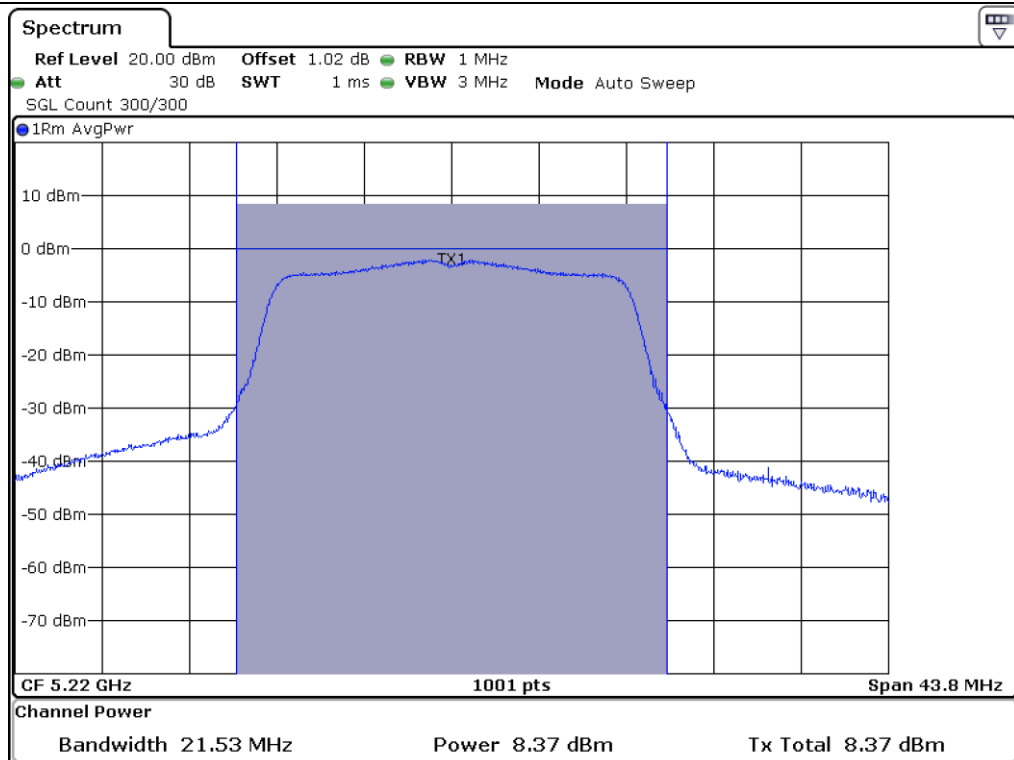


Middle Channel @ 5 220 MHz

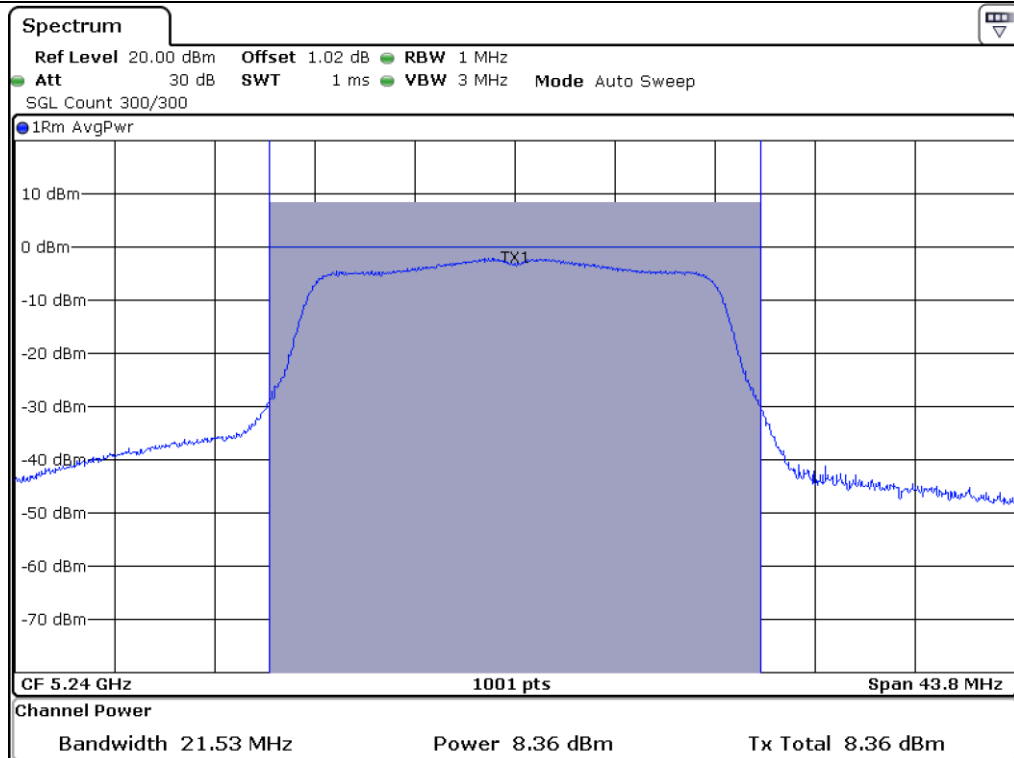


High Channel @ 5 240 MHz

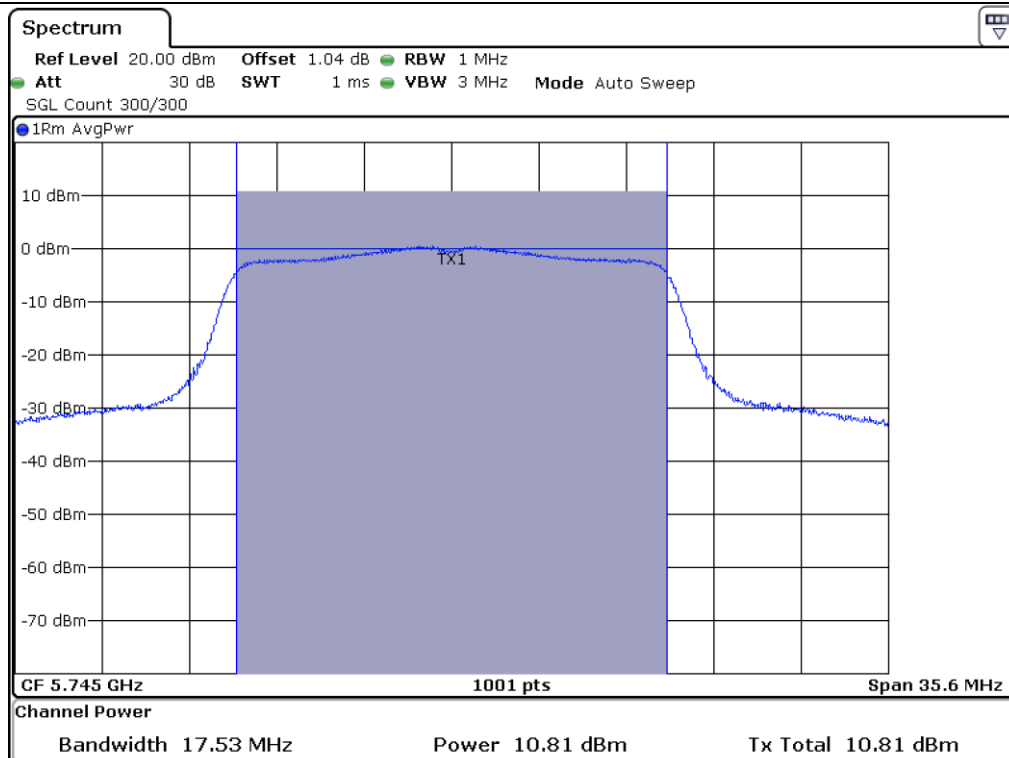

Low Channel @ 5 745 MHz

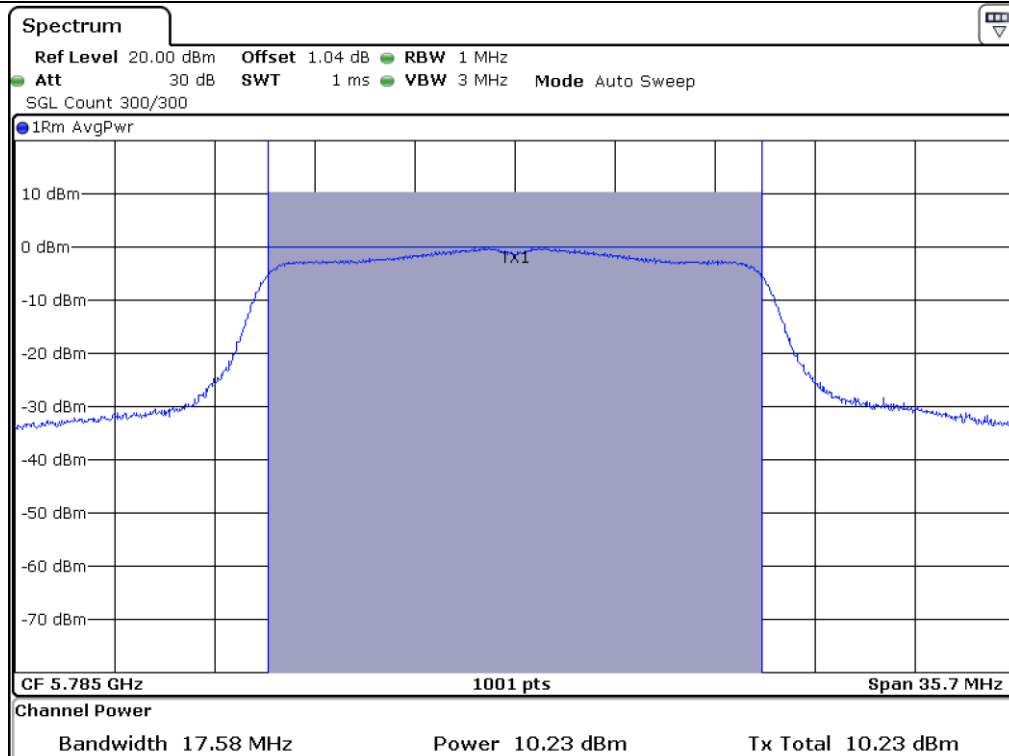

Middle Channel @ 5 785 MHz

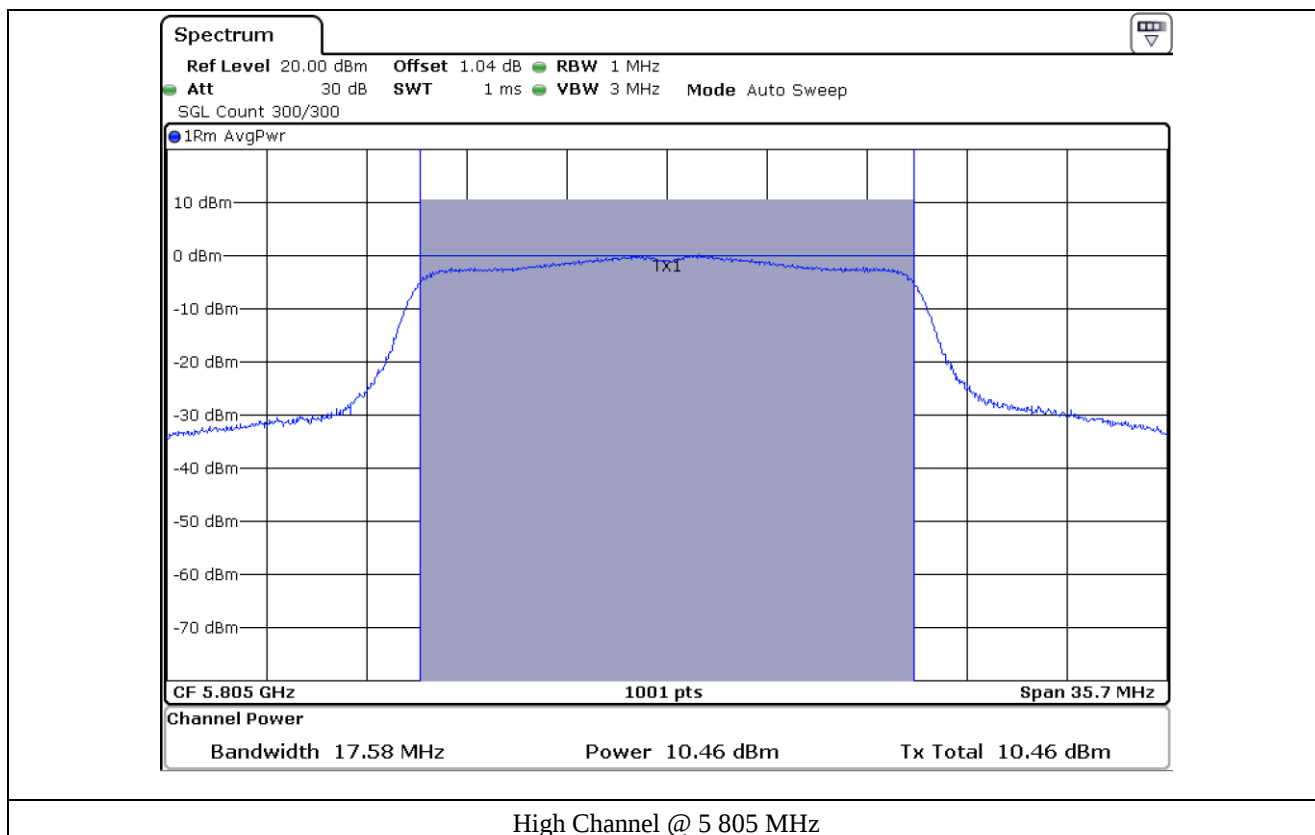

9.6 Test data for 802.11n_HT40 RLAN Mode


-. Test Result : Pass

-. Duty Cycle : 84.31 %(UNII 1), 86.93 %(UNII 3)


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	C.F. (dB)	RESULT (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	5 190.00	7.00	0.74	7.74	24.00	16.26
	High	5 230.00	7.27	0.74	8.01	24.00	15.99
5 725 ~ 5 850	Low	5 755.00	11.37	0.61	11.98	30.00	18.02
	High	5 795.00	11.08	0.61	11.69	30.00	18.31

Remark. Margin = Limit – Result (=Measured Value + C.F.)


Remark: See next page for measurement data.

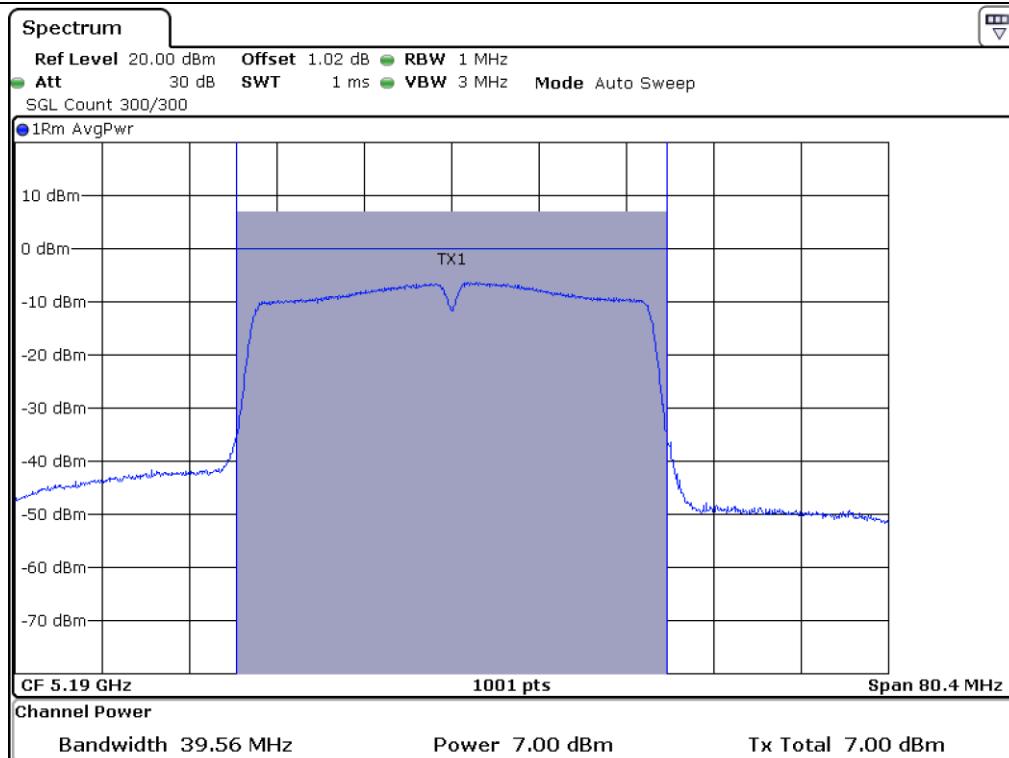


Low Channel @ 5 190 MHz

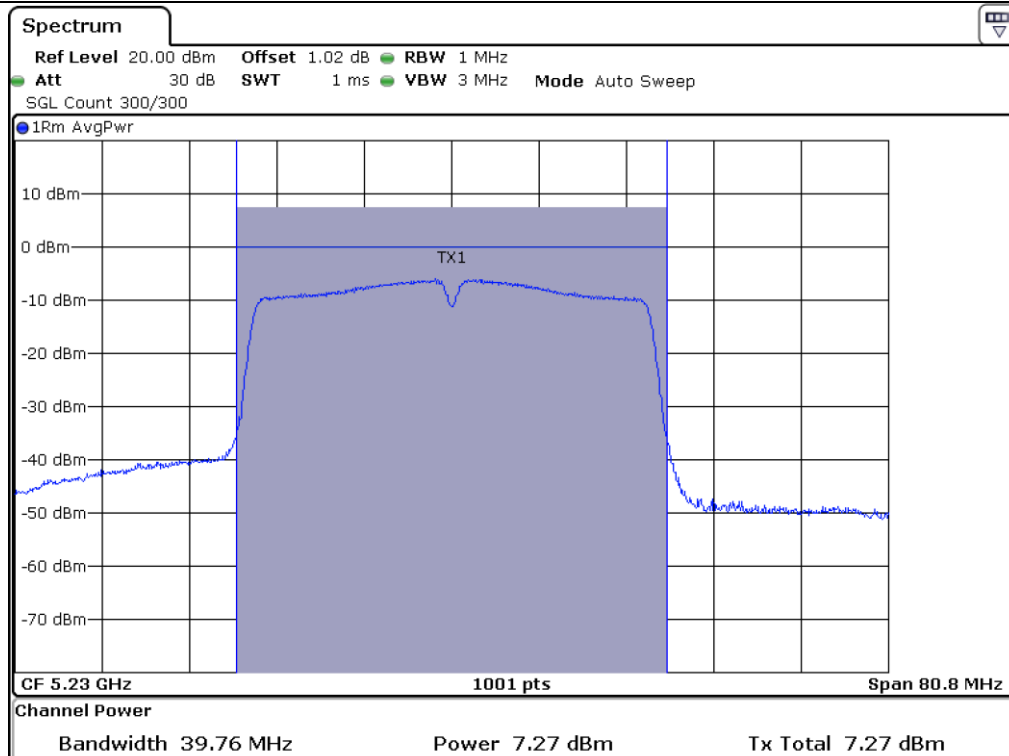

High Channel @ 5 230 MHz

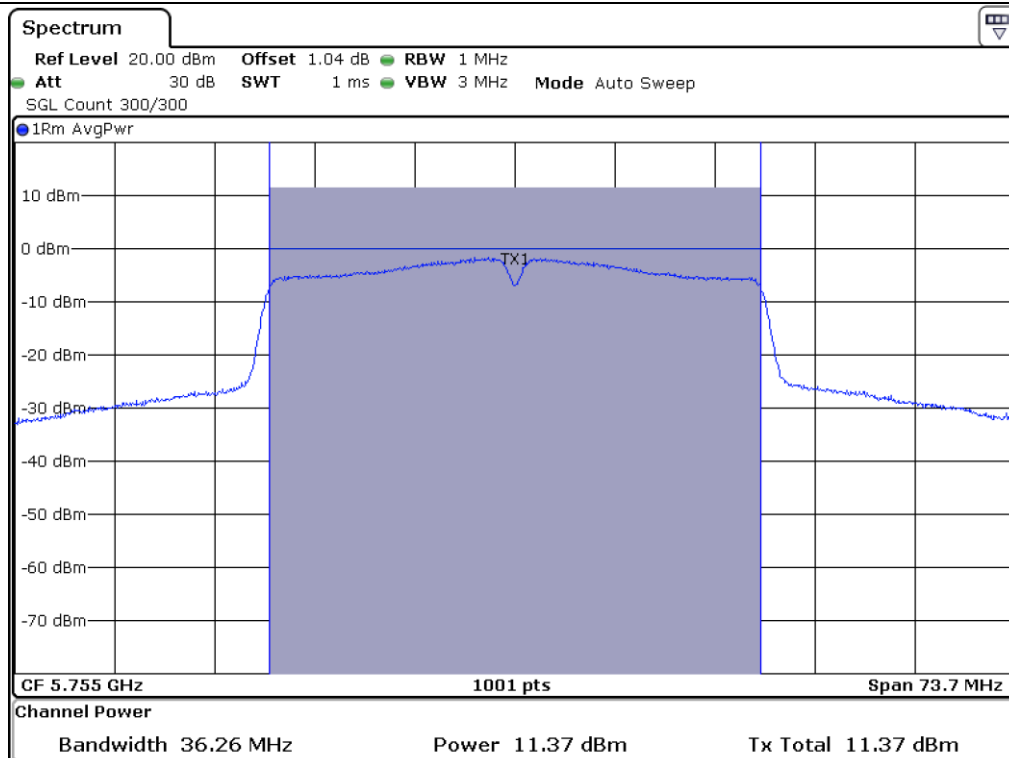

Low Channel @ 5 755 MHz

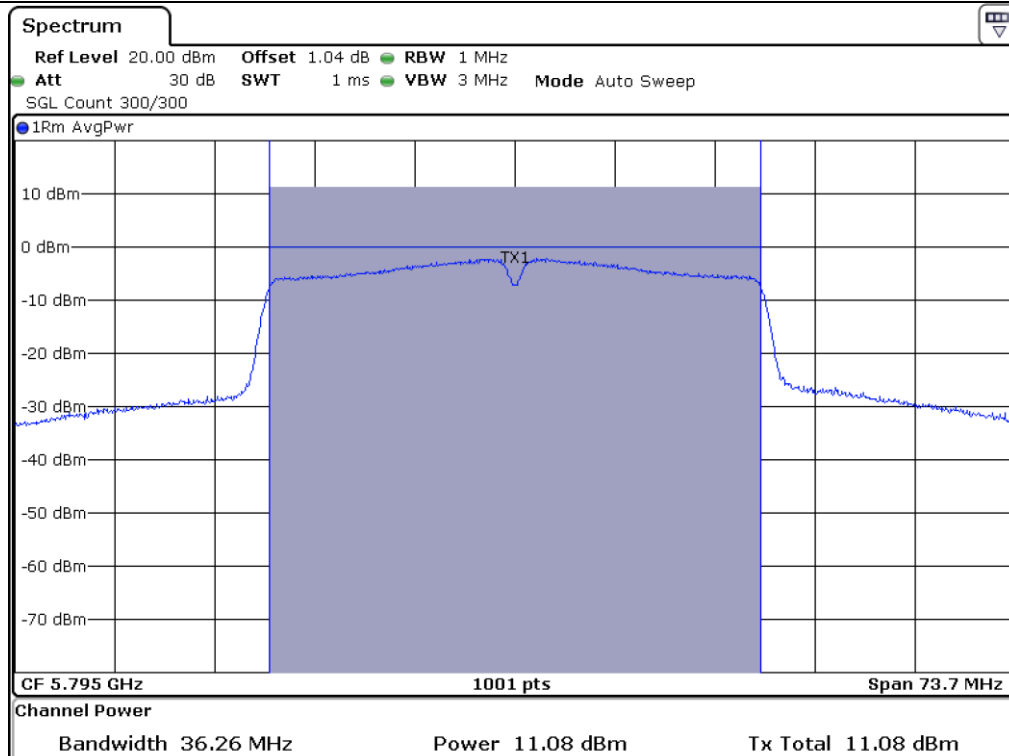

High Channel @ 5 795 MHz

9.7 Test data for 802.11ac_HT80 RLAN Mode


-. Test Result : Pass

-. Duty Cycle : 76.50 %(UNII 1), 76.50 %(UNII 3)


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	C.F (dB)	RESULT (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Middle	5 210.00	4.84	1.16	6.00	24.00	18.00
5 725 ~ 5 850	Middle	5 775.00	7.83	1.16	8.99	30.00	21.01

Remark. Margin = Limit – Result (=Measured Value + C.F.)

Remark: See next page for measurement data.

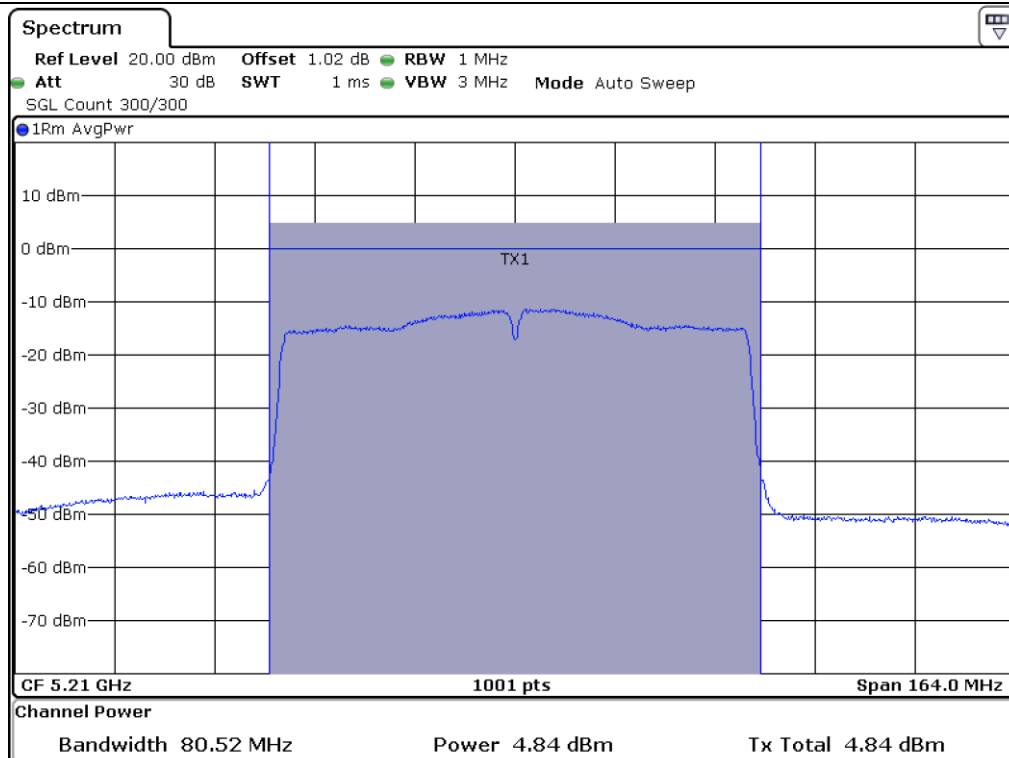

Middle Channel @ 5 210 MHz

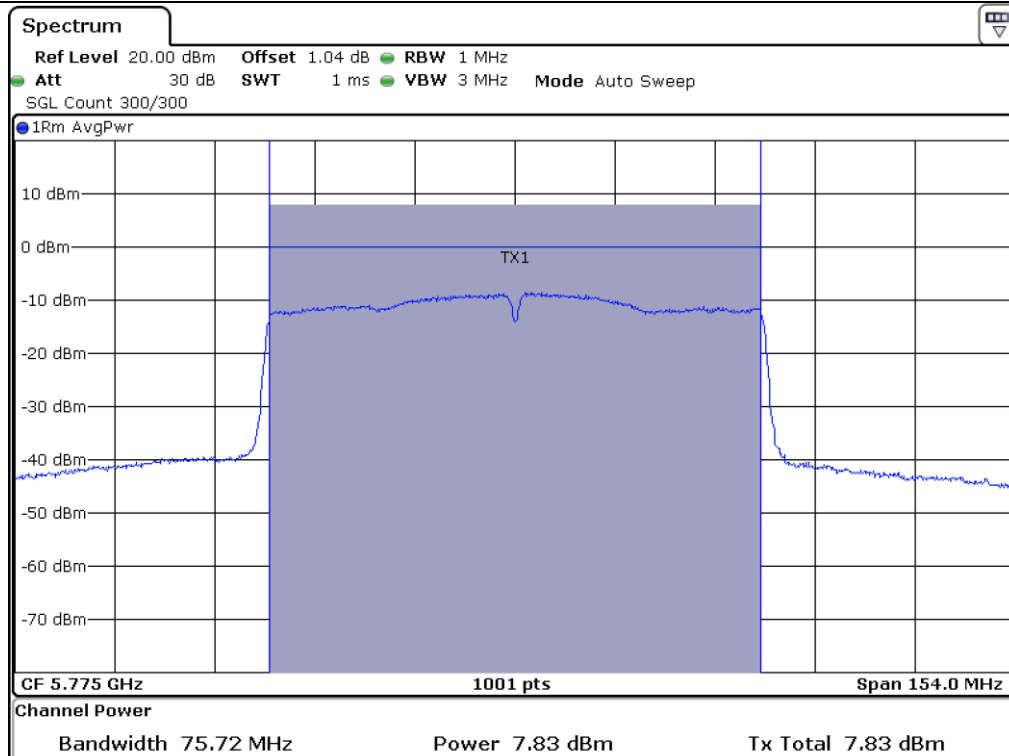

Middle Channel @ 5 775 MHz


10. PEAK POWER SPECTRUL DENSITY

10.1 Operating environment

Temperature : 23 °C
Relative humidity : 45 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz(500 kHz for frequency range 5 725 MHz ~ 5 850 MHz), the video bandwidth is set to 3 times the resolution bandwidth. The maximum level form the EUT in 1 MHz bandwidth was measured with above condition.

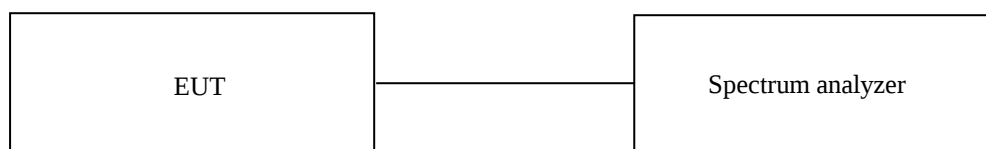

10.3 Test Date


January 28, 2021 ~ February 04, 2021


10.4 Test data for 802.11a RLAN Mode

- . Operating condition : Highest Output Power Transmitting Mode
- . Duty Cycle : 93.46 %(UNII 1), 93.14 %(UNII 3)
- . Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	MEASURED VALUE (dBm)	C.F. (dB)	RESULT (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	2.16	0.29	2.45	11.00	8.55
	Middle	1.95	0.29	2.24	11.00	8.76
	High	2.21	0.29	2.50	11.00	8.50
5 725 ~ 5 850	Low	-1.74	0.31	-1.43	30.00	31.43
	Middle	-2.87	0.31	-2.56	30.00	32.56
	High	-2.71	0.31	-2.40	30.00	32.40

Remark. Margin = Limit – Result (=Measured Value + C.F.)

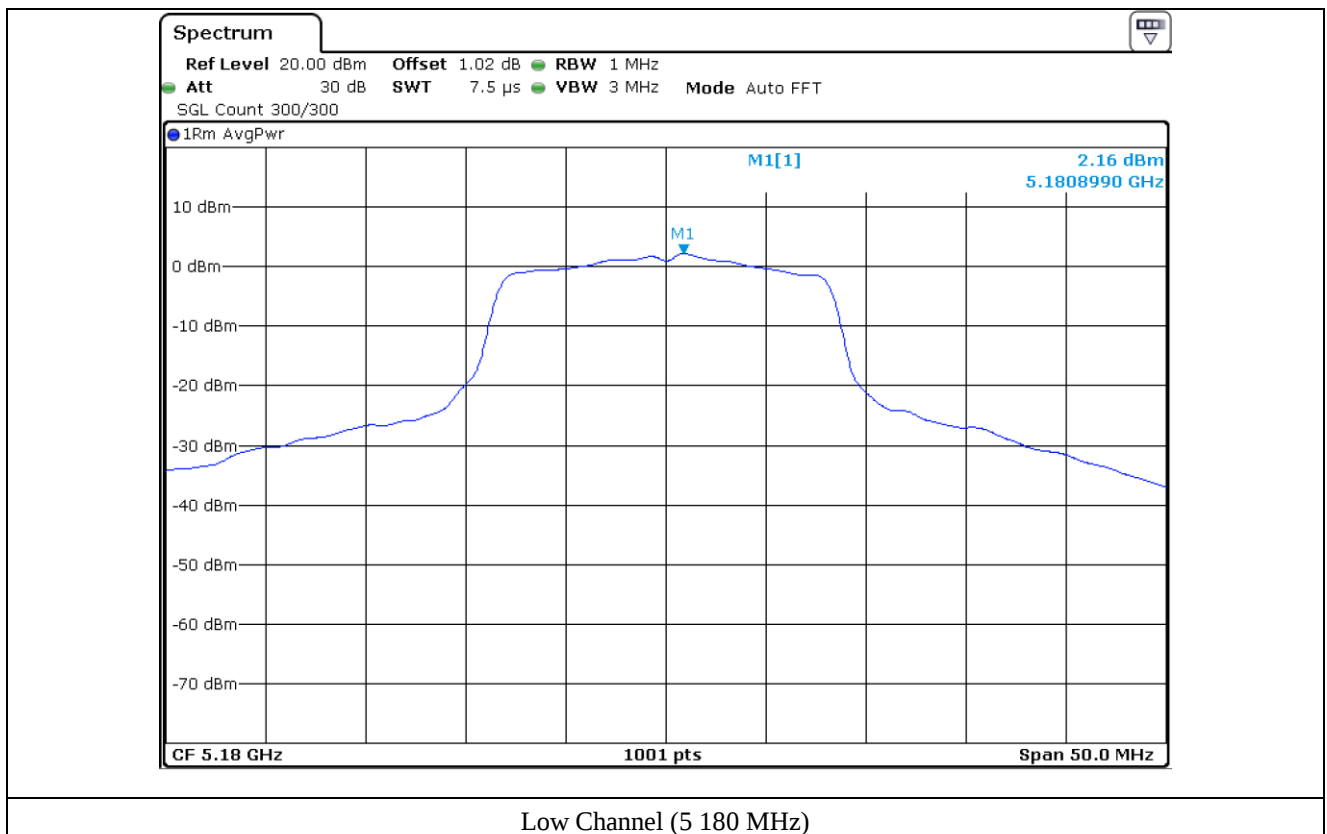


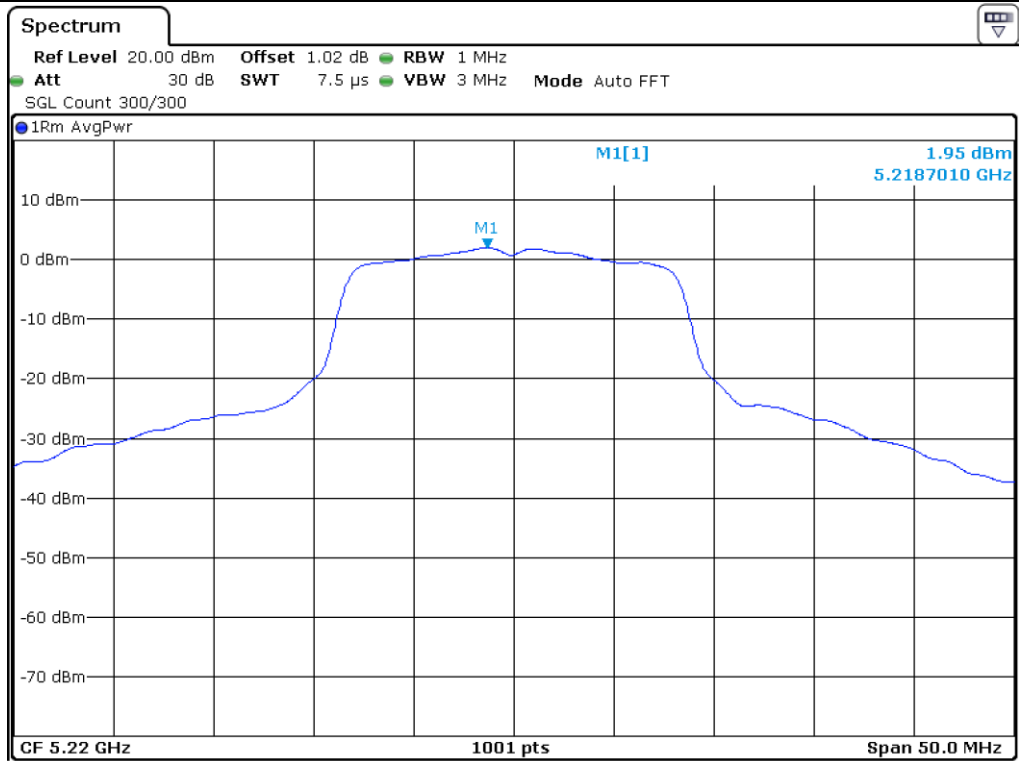


Middle Channel (5 220 MHz)

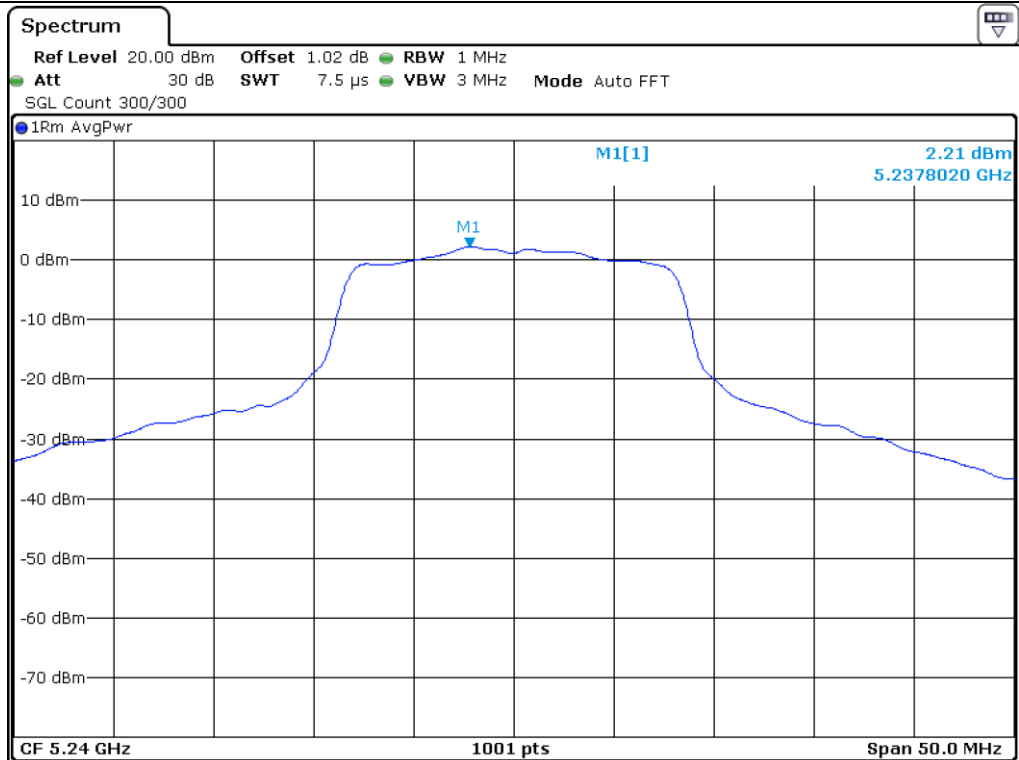


High Channel (5 240 MHz)

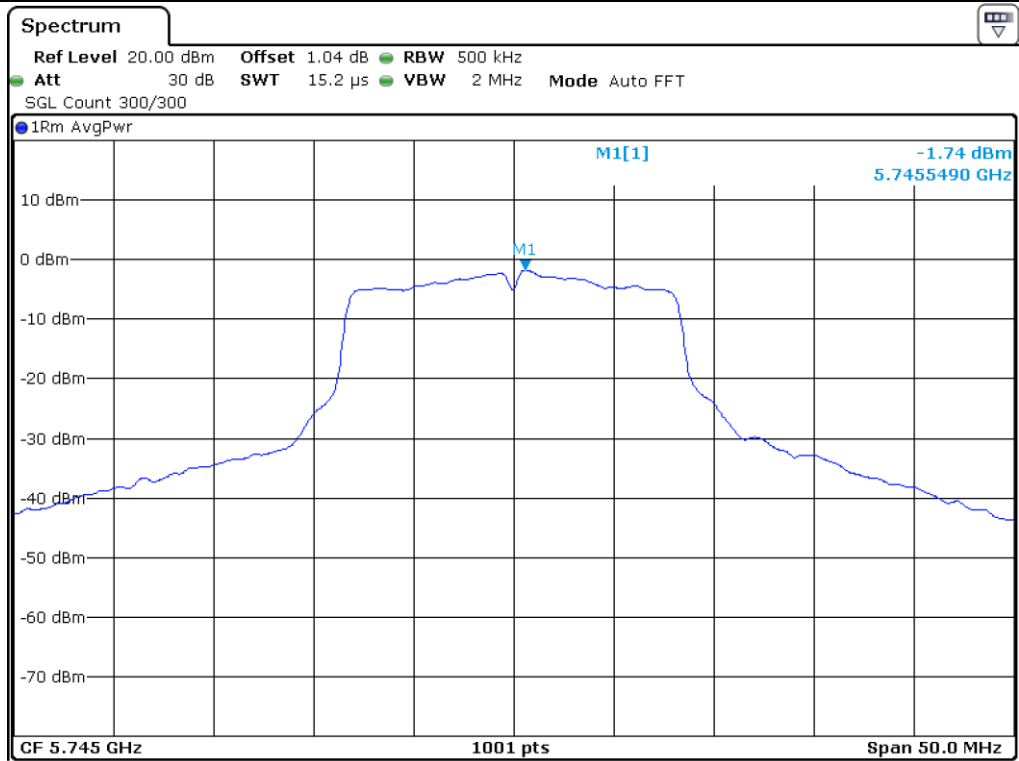

Low Channel (5 745 MHz)

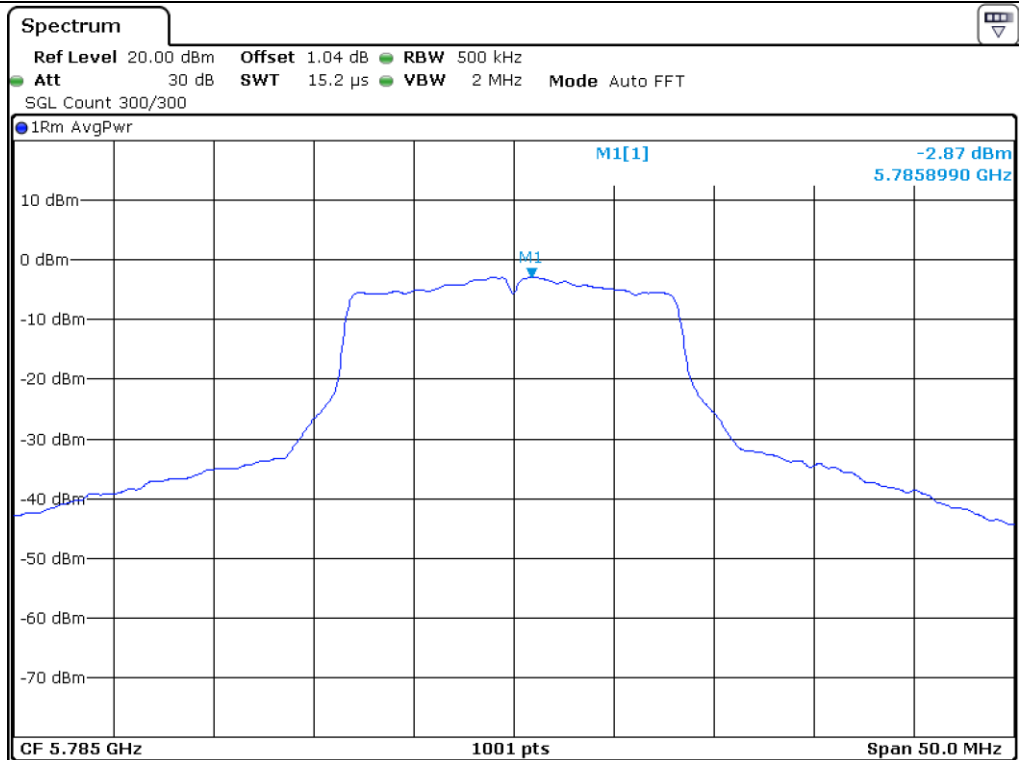

Middle Channel (5 785 MHz)

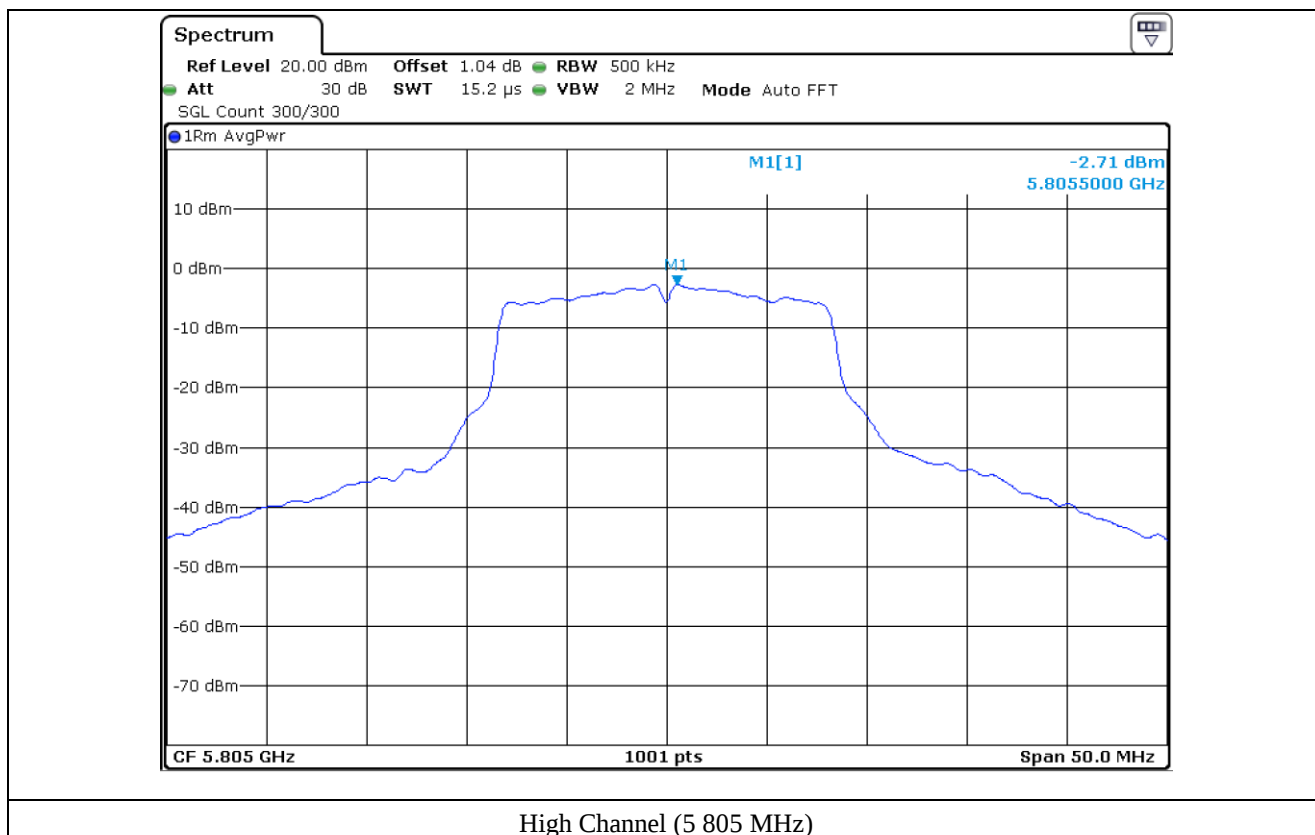

10.5 Test data for 802.11n_HT20 RLAN Mode


-. Operating condition : Highest Output Power Transmitting Mode

-. Duty Cycle : 91.99 %(UNII 1), 93.03 %(UNII 3)

-. Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	MEASURED VALUE (dBm)	C.F (dB)	RESULT (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	-2.34	0.36	-1.98	11.00	12.98
	Middle	-2.46	0.36	-2.10	11.00	13.10
	High	-2.32	0.36	-1.96	11.00	12.96
5 725 ~ 5 850	Low	-2.28	0.31	-1.97	30.00	31.97
	Middle	-2.80	0.31	-2.49	30.00	32.49
	High	-2.85	0.31	-2.54	30.00	32.54

Remark. Margin = Limit – Result (=Measured Value + C.F.)

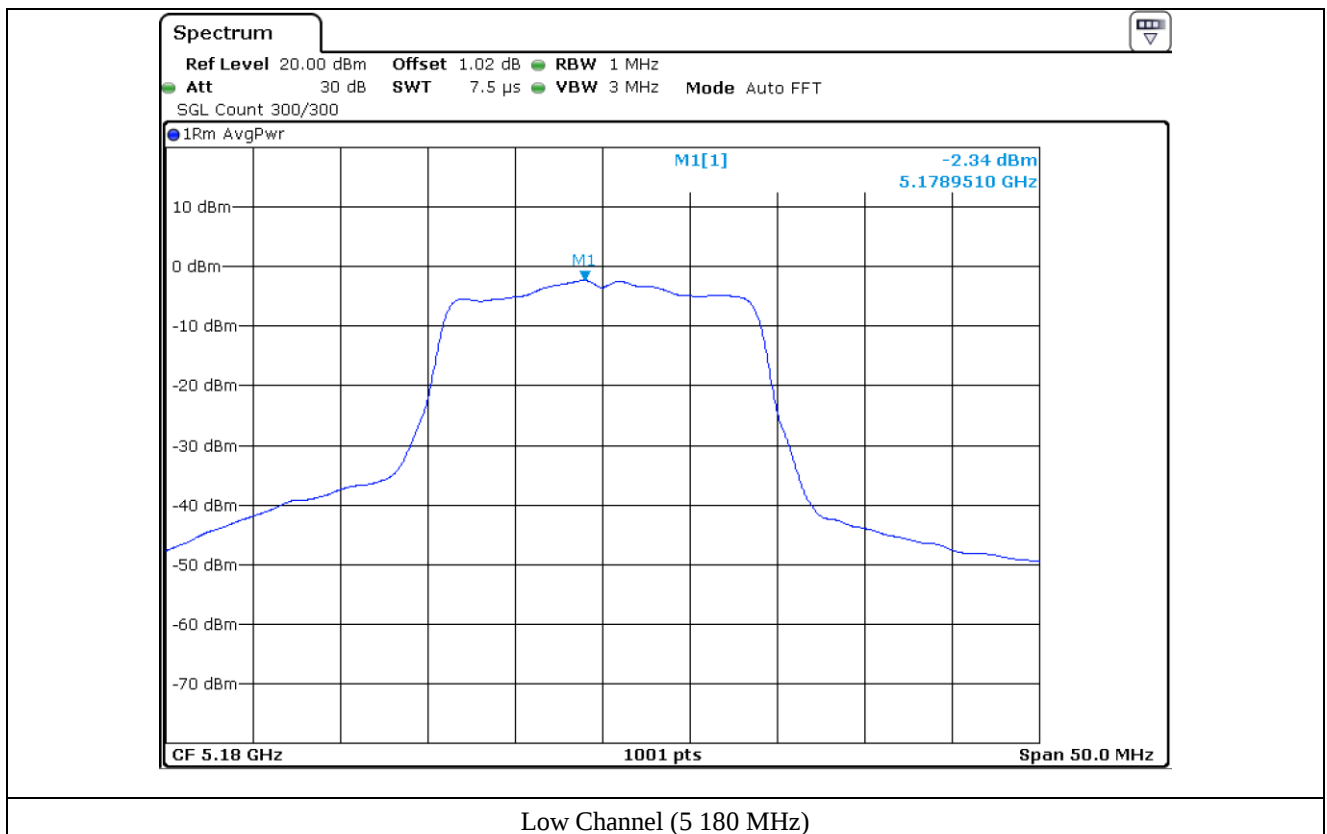





Middle Channel (5 220 MHz)

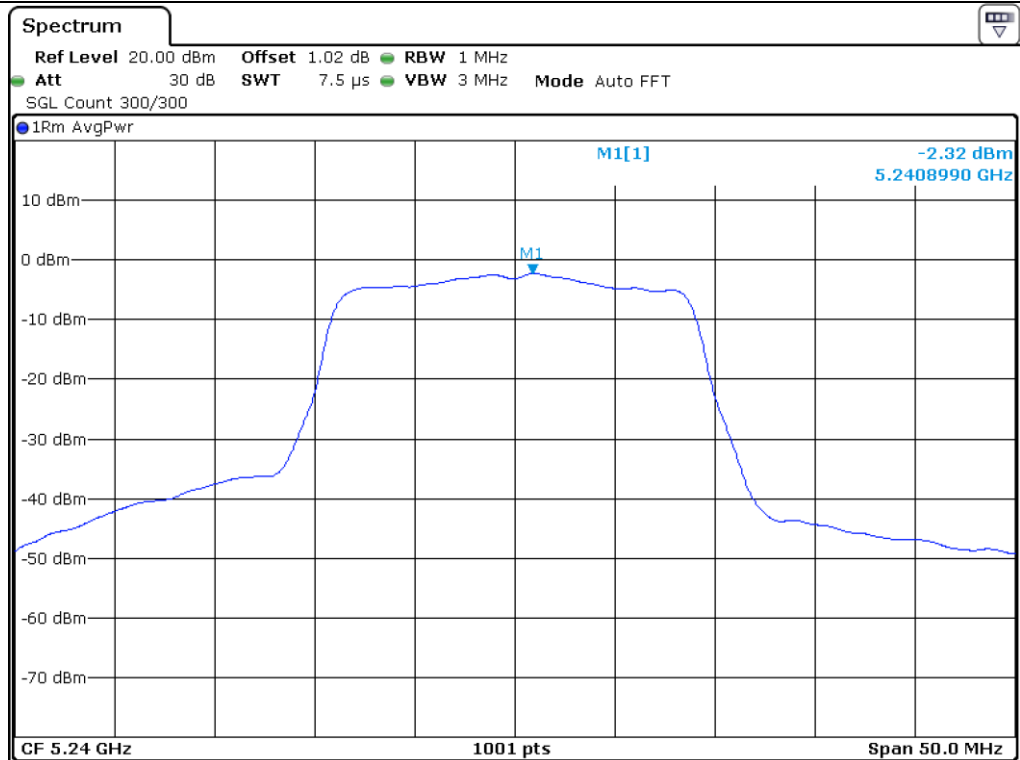


High Channel (5 240 MHz)

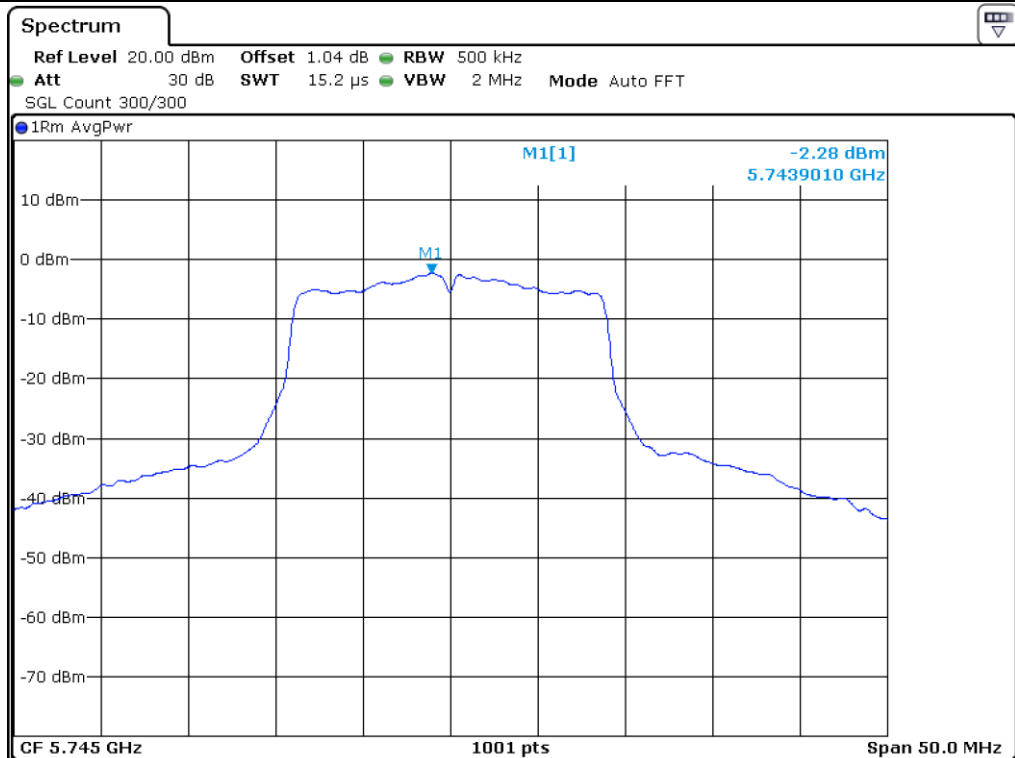

Low Channel (5 745 MHz)

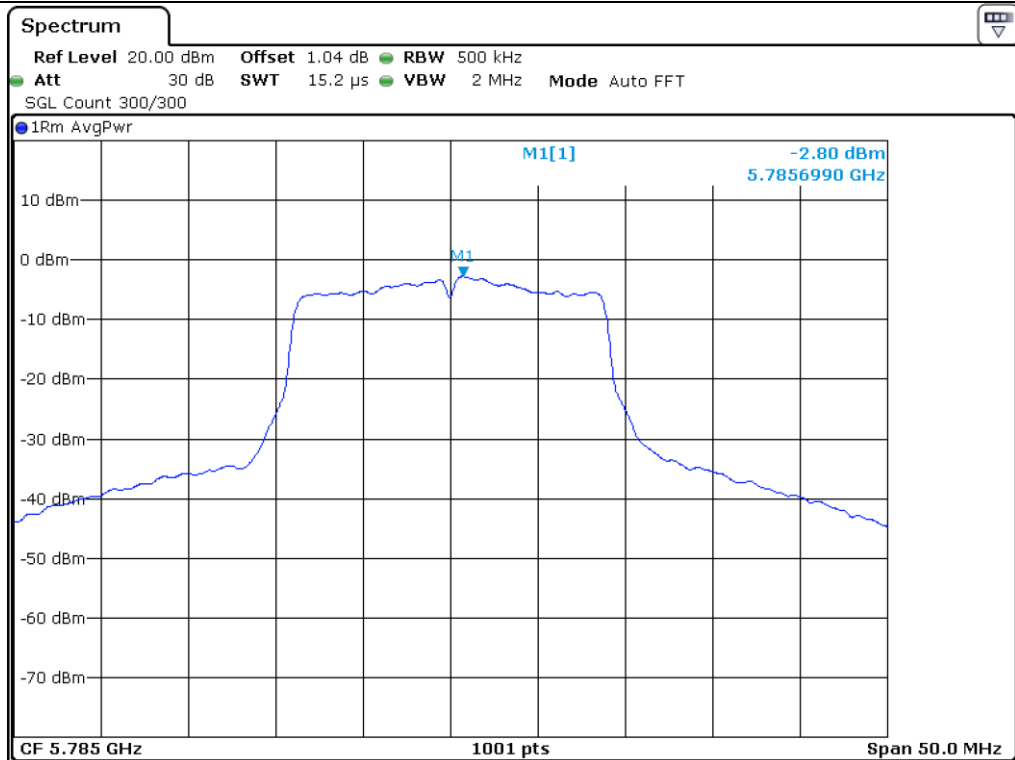

Middle Channel (5 785 MHz)

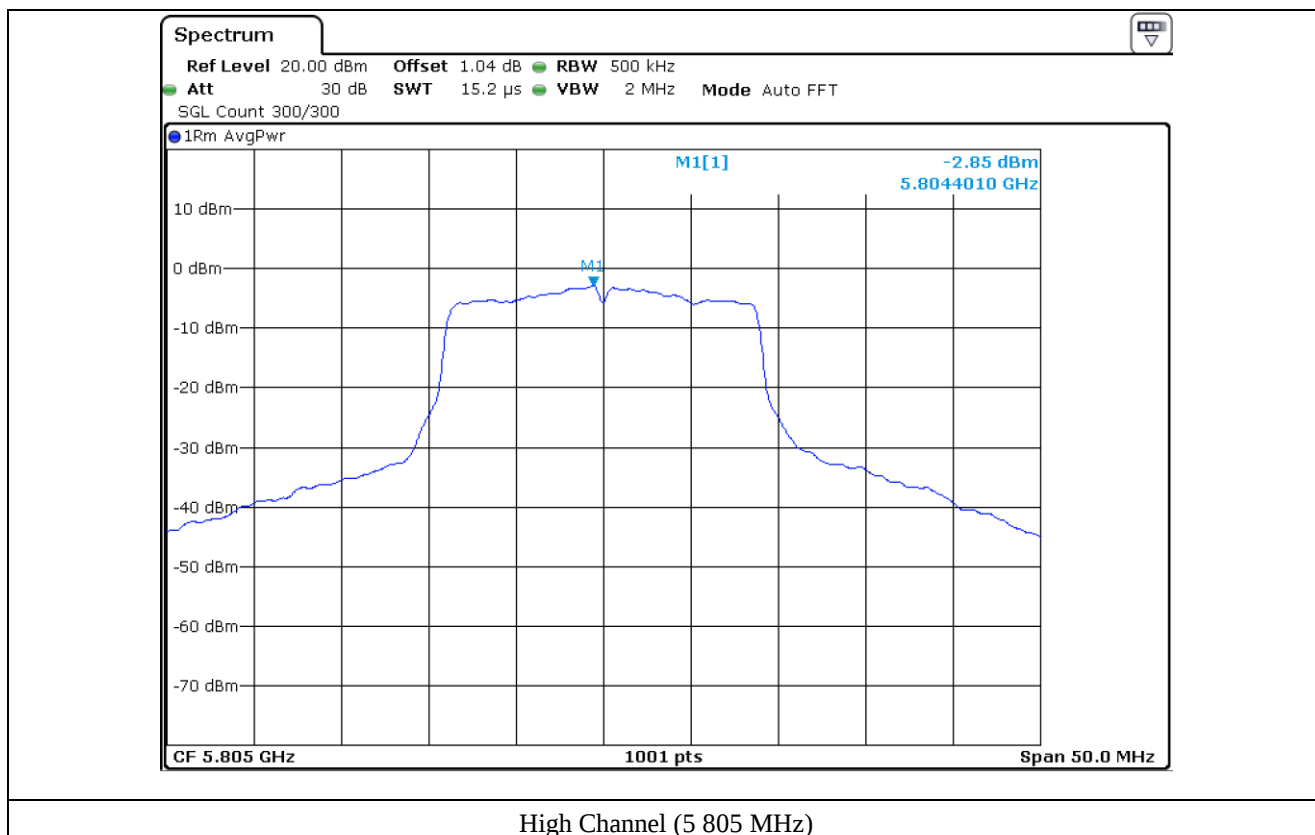


10.6 Test data for 802.11n_HT40 RLAN Mode

- . Operating condition : Highest Output Power Transmitting Mode
- . Duty Cycle : 84.31 %(UNII 1), 86.93 %(UNII 3)
- . Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	MEASURED VALUE (dBm)	C.F (dB)	RESULT (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	-6.29	0.74	-5.55	11.00	16.55
	High	-5.93	0.74	-5.19	11.00	16.19
5 725 ~ 5 850	Low	-4.07	0.61	-3.46	30.00	33.46
	High	-5.09	0.61	-4.48	30.00	34.48

Remark. Margin = Limit – Result (=Measured Value + C.F.)


Remark: See next page for measurement data.

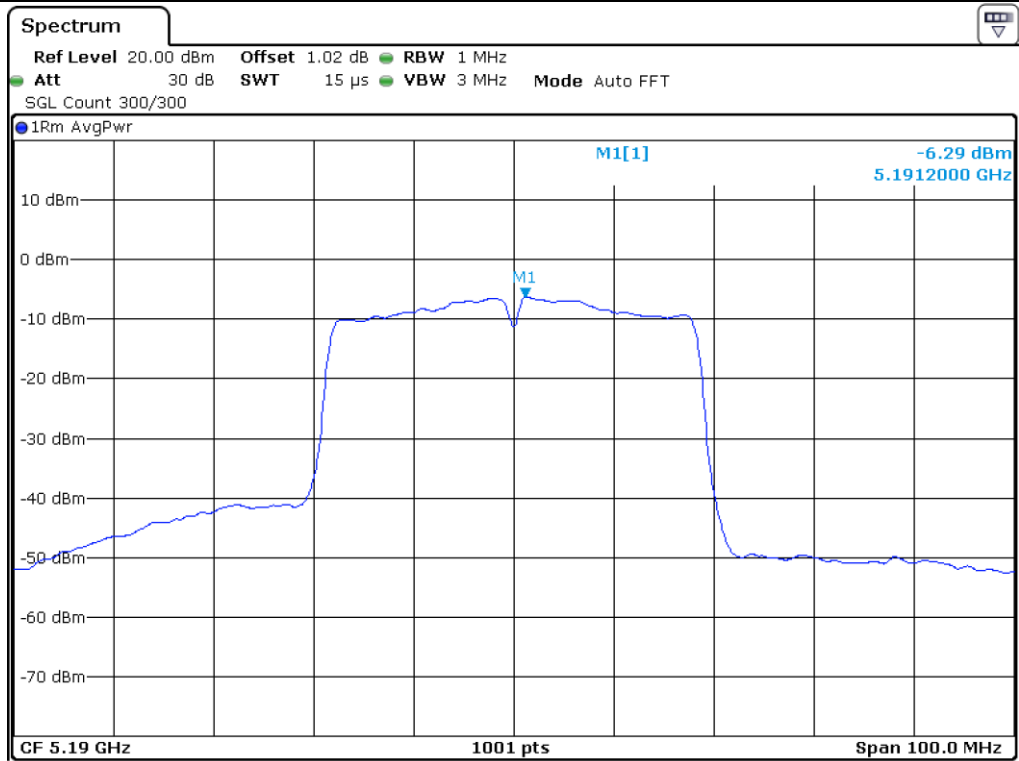


Low Channel (5 190 MHz)

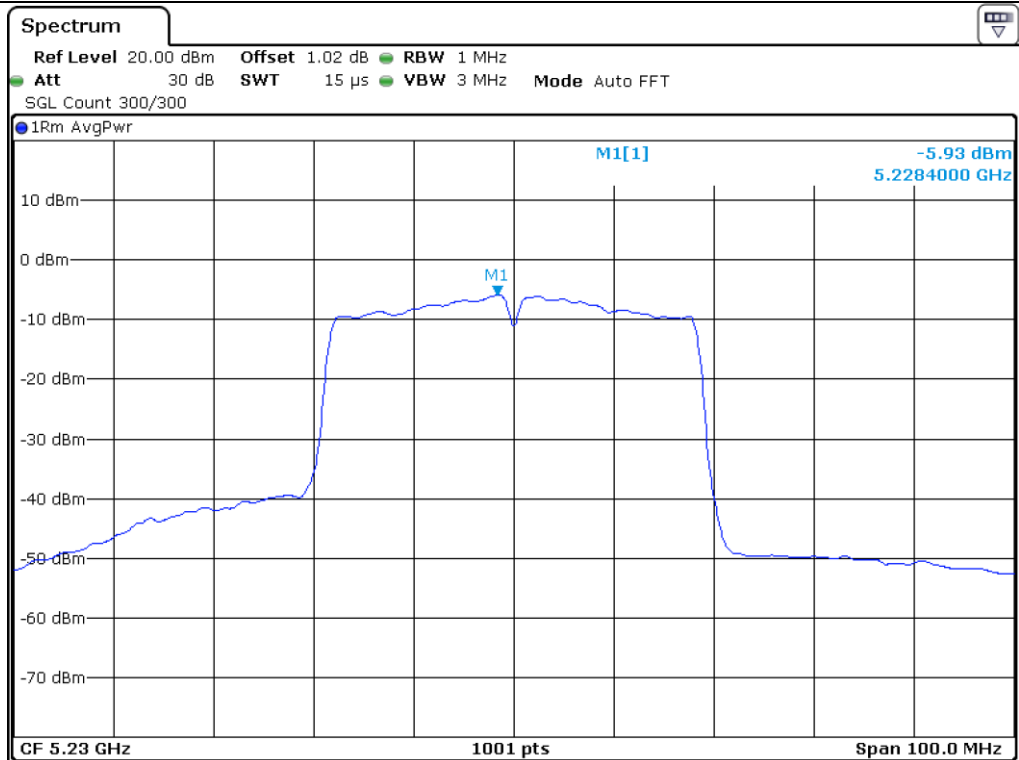

High Channel (5 230 MHz)

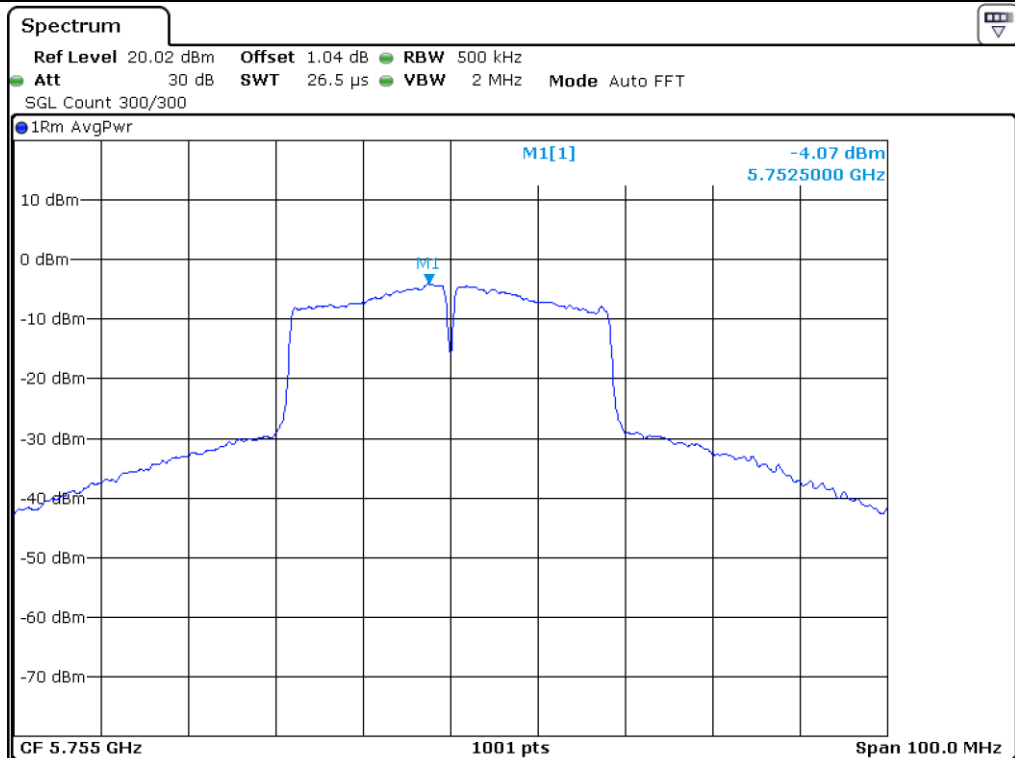

Low Channel (5 755 MHz)

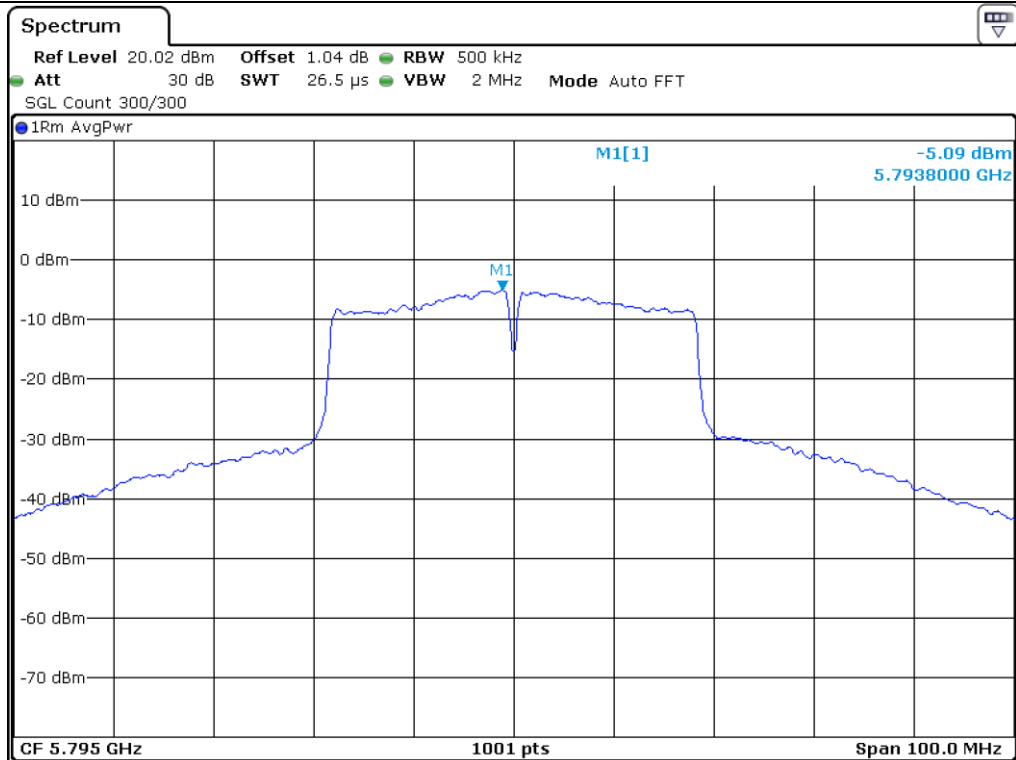

High Channel (5 795 MHz)

10.7 Test data for 802.11ac_HT80 RLAN Mode

-. Operating condition : Highest Output Power Transmitting Mode


-. Duty Cycle : 76.50 %(UNII 1), 76.50 %(UNII 3)

-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	MEASURED VALUE (dBm)	C.F (dB)	RESULT (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	-11.25	1.16	-10.09	11.00	21.09
5 725 ~ 5 850	Low	-11.32	1.16	-10.16	30.00	40.16

Remark. Margin = Limit – Result (=Measured Value + C.F.)

Remark: See next page for measurement data.

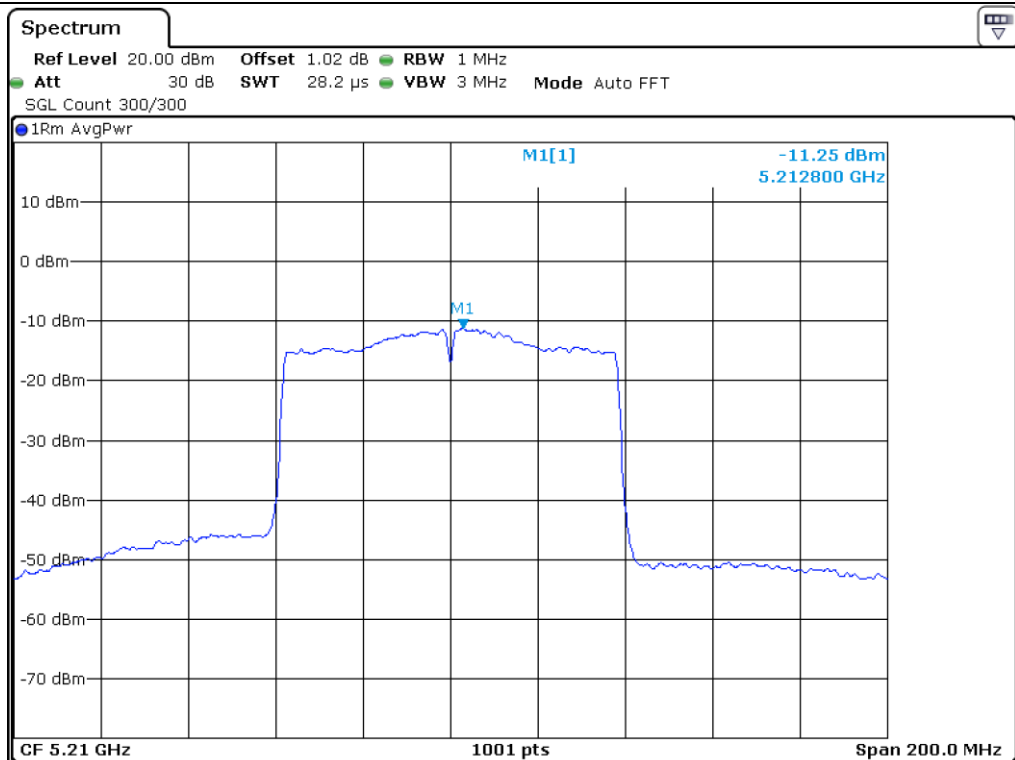

Middle Channel (5 210 MHz)



Middle Channel (5 775 MHz)


11. FREQUENCY STABILITY WITH TEMPERATURE VARIATION

11.1 Operating environment

Temperature : 23 °C
Relative humidity : 45 % R.H.

11.2 Test set-up

Turn EUT off and set chamber temperature to -40 °C and then allow sufficient time (approximately 20 min to 30 min after chamber reach the assigned temperature) for EUT to stabilize. Turn on the EUT and measure the EUT operating frequency and then turn off the EUT after the measurement. The temperature in the chamber was raised 10 °C step from -40 °C to +80 °C. Repeat above method for frequency measurements every 10 °C step and then record all measured frequencies on each temperature step.

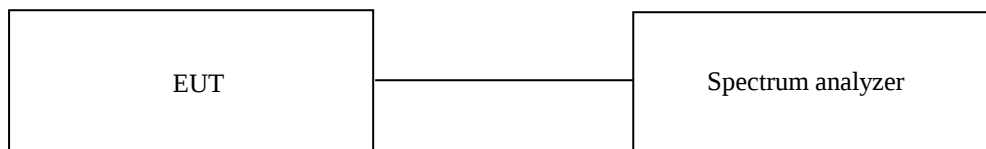

11.3 Test Date

January 28, 2021 ~ February 04, 2021

11.4 Test Data for U-NII-1

-. Result : Pass

Temperature (°C)	Carrier Freq. (Hz)	Measured Freq. (Hz)	Frequency Error (Hz)
-40	5 180 000 000	5 179 986 326	-13 674
-30		5 179 986 395	-13 605
-20		5 179 986 457	-13 543
-10		5 179 986 515	-13 485
0		5 179 986 575	-13 425
10		5 179 986 625	-13 375
20		5 179 986 690	-13 310
30		5 179 986 755	-13 245
40		5 179 986 842	-13 158
50		5 179 986 966	-13 034
60		5 179 986 969	-13 031
70		5 179 986 970	-13 030
80		5 179 986 971	-13 029
-40	5 220 000 000	5 219 979 647	-20 353
-30		5 219 979 753	-20 247
-20		5 219 979 815	-20 185
-10		5 219 979 896	-20 104
0		5 219 979 913	-20 087
10		5 219 980 014	-19 986
20		5 219 980 148	-19 852
30		5 219 980 176	-19 824
40		5 219 980 245	-19 755
50		5 219 980 325	-19 675
60		5 219 980 375	-19 625
70		5 219 980 453	-19 547
80		5 219 980 513	-19 487

-40	5 240 000 000	5 239 979 874	-20 126
-30		5 239 979 916	-20 084
-20		5 239 980 074	-19 926
-10		5 239 980 133	-19 867
0		5 239 980 187	-19 813
10		5 239 980 235	-19 765
20		5 239 980 369	-19 631
30		5 239 980 397	-19 603
40		5 239 980 452	-19 548
50		5 239 980 544	-19 456
60		5 239 980 644	-19 356
70		5 239 980 755	-19 245
80		5 239 980 849	-19 151

11.5 Test Data for U-NII-3

-. Result : Pass

Temperature (°C)	Carrier Freq. (Hz)	Measured Freq. (Hz)	Frequency Error (Hz)
-40	5 745 000 000	5 744 976 766	-23 234
-30		5 744 976 842	-23 158
-20		5 744 976 914	-23 086
-10		5 744 976 958	-23 042
0		5 744 976 137	-23 863
10		5 744 976 241	-23 759
20		5 744 977 350	-22 650
30		5 744 977 397	-22 603
40		5 744 977 463	-22 537
50		5 744 977 585	-22 415
60		5 744 977 675	-22 325
70		5 744 977 753	-22 247
80		5 744 977 843	-22 157
-40	5 785 000 000	5 784 978 302	-21 698
-30		5 784 978 376	-21 624
-20		5 784 978 437	-21 563
-10		5 784 978 588	-21 412
0		5 784 978 665	-21 335
10		5 784 978 753	-21 247
20		5 784 978 869	-21 131
30		5 784 978 897	-21 103
40		5 784 978 935	-21 065
50		5 784 978 035	-21 965
60		5 784 978 099	-21 901
70		5 784 978 165	-21 835
80		5 784 979 260	-20 740

-40	5 805 000 000	5 804 976 269	-23 731
-30		5 804 976 336	-23 664
-20		5 804 976 473	-23 527
-10		5 804 976 575	-23 425
0		5 804 976 655	-23 345
10		5 804 976 767	-23 233
20		5 804 976 885	-23 115
30		5 804 976 939	-23 061
40		5 804 977 006	-22 994
50		5 804 977 035	-22 965
60		5 804 977 174	-22 826
70		5 804 977 252	-22 748
80		5 804 977 375	-22 625

12. FREQUENCY STABILITY WITH VOLTAGE VARIATION


12.1 Operating environment

Temperature : 23 °C

Relative humidity : 45 % R.H.

12.2 Test set-up

An external DC power supply was connected to the input of the EUT. The voltage of EUT set to 110 % of the nominal value and then was reduced to 90 % of nominal voltage. The output frequency was recorded at each step.

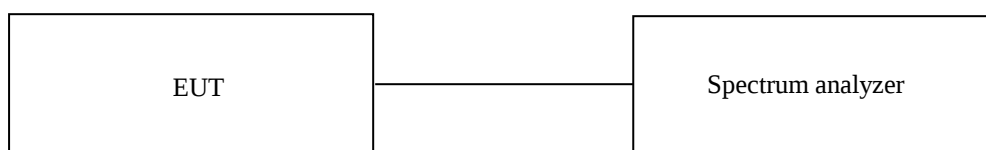

12.3 Test Date

January 28, 2021 ~ February 04, 2021

12.4 Test Data for U-NII-1

-. Result : Pass

Voltage (VDC)	Carrier Freq. (Hz)	Measured Freq. (Hz)	Frequency Error (Hz)
12.0	5 180 000 000	5 179 986 648	-13 352
10.8		5 179 986 635	-13 365
13.2		5 179 986 615	-13 385
12.0	5 220 000 000	5 219 980 173	-19 827
10.8		5 219 980 116	-19 884
13.2		5 219 980 065	-19 935
12.0	5 240 000 000	5 239 980 350	-19 650
10.8		5 239 980 316	-19 684
13.2		5 239 980 296	-19 704

12.5 Test Data for U-NII-3

-. Result : Pass

Voltage (VDC)	Carrier Freq. (Hz)	Measured Freq. (Hz)	Frequency Error (Hz)
12.0	5 745 000 000	5 744 977 366	-22 634
10.8		5 744 977 322	-22 678
13.2		5 744 977 305	-22 695
12.0	5 785 000 000	5 784 978 876	-21 124
10.8		5 784 978 850	-21 150
13.2		5 784 978 821	-21 179
12.0	5 805 000 000	5 804 976 893	-23 107
10.8		5 804 976 855	-23 145
13.2		5 804 976 830	-23 170

13. RADIATED SPURIOUS EMISSIONS

13.1 Operating environment

Temperature : 23 °C
Relative humidity : 45 % R.H.


13.2 Test set-up for conducted measurement

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.


The frequency spectrum from 30 MHz to 40 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

- Test Configuration


1. Below 30 MHz

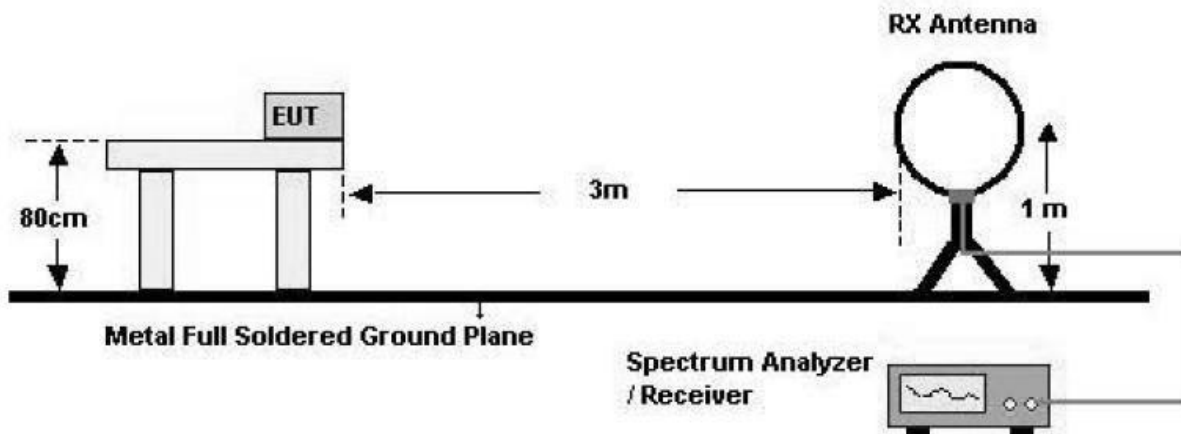

2. 30 MHz - 1 GHz

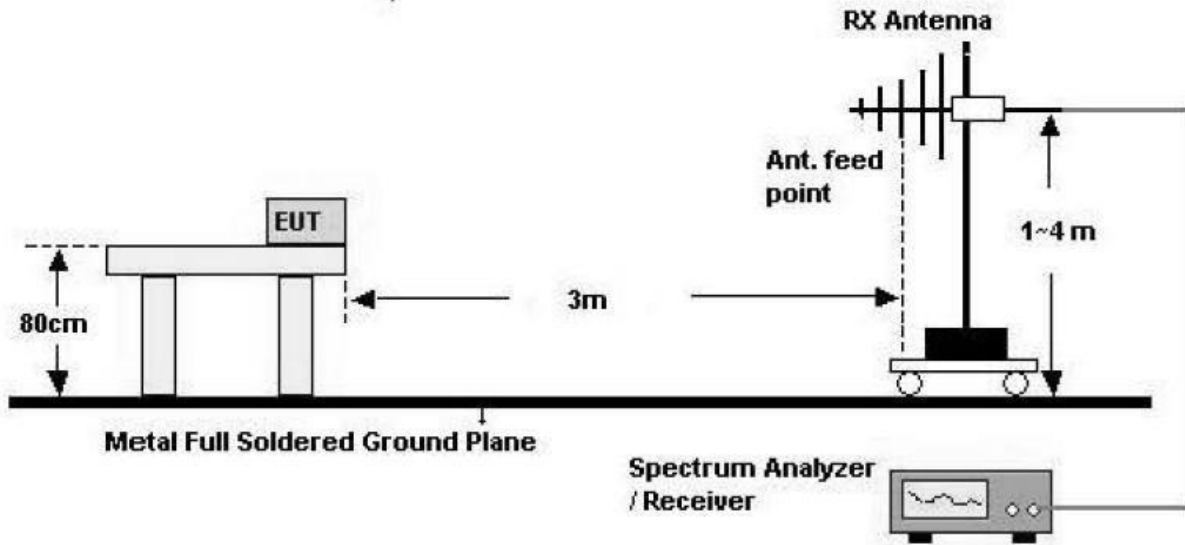

3. Above 1 GHz

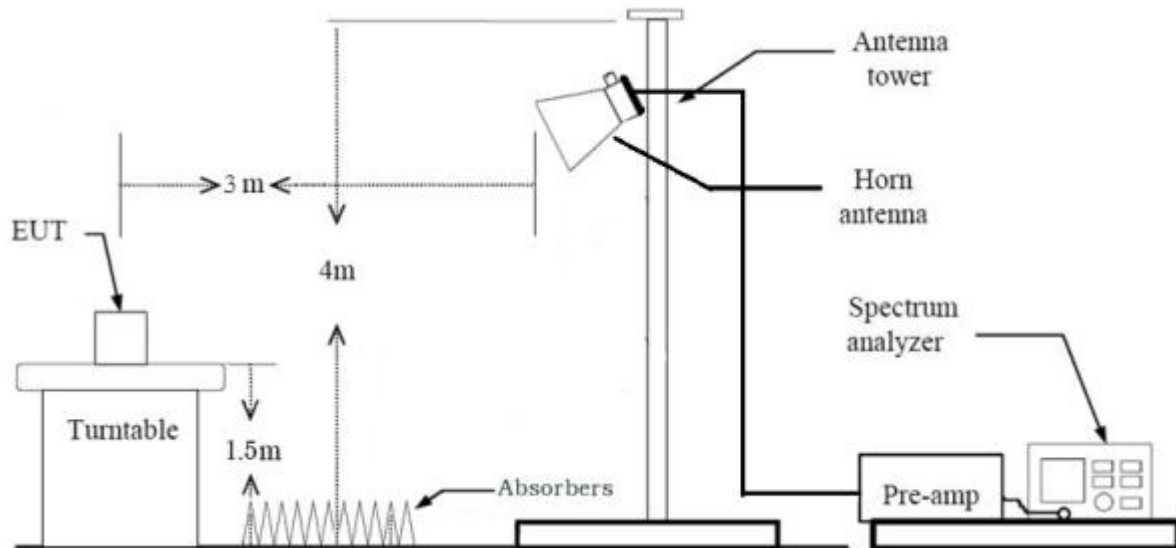

13.3 Test Date

January 28, 2021 ~ February 04, 2021

13.4 Test data for Below 30 MHz

- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

13.5 Test data for 30 MHz ~ 1 000 MHz


13.5.1 Test data for WLAN 5 GHz

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : NAVIGATION RADIO

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

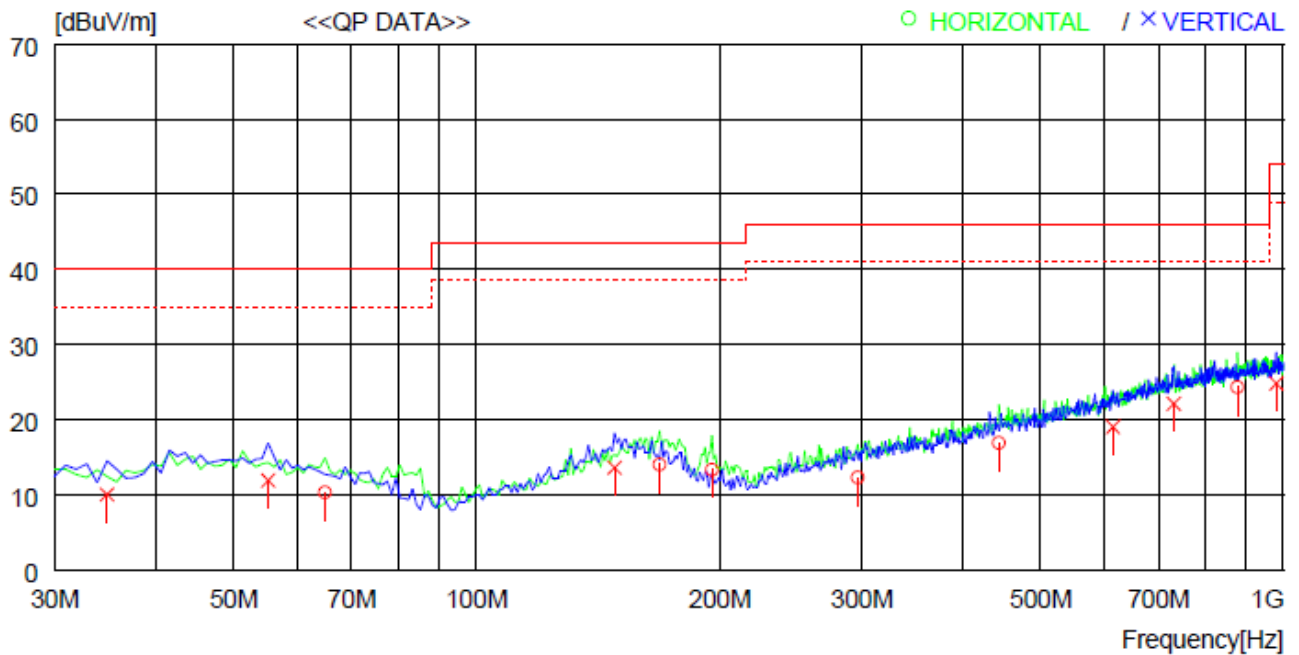

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	[dBuV]	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	64.920	33.2	9.1	0.7	32.7	10.3	40.0	29.7	100	205
2	168.710	32.6	12.8	1.2	32.6	14.0	43.5	29.5	100	97
3	195.870	31.9	12.7	1.3	32.6	13.3	43.5	30.2	100	352
4	296.750	29.9	13.4	1.7	32.7	12.3	46.0	33.7	100	352
5	444.191	30.7	17.0	2.0	32.8	16.9	46.0	29.1	100	352
6	876.800	30.7	23.0	2.7	32.1	24.3	46.0	21.7	100	105
----- Vertical -----										
7	34.850	31.0	11.1	0.5	32.6	10.0	40.0	30.0	100	42
8	55.220	34.3	9.6	0.7	32.7	11.9	40.0	28.1	100	146
9	148.340	33.6	11.5	1.2	32.7	13.6	43.5	29.9	100	351
10	614.908	29.6	20.0	2.4	33.0	19.0	46.0	27.0	100	13
11	731.304	31.2	21.3	2.4	32.8	22.1	46.0	23.9	100	13
12	979.617	29.8	23.6	3.0	31.6	24.8	54.0	29.2	100	194


13.5.2 Test data for Intermodulation Mode(Bluetooth LE + WLAN 5 GHz)

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : NAVIGATION RADIO

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

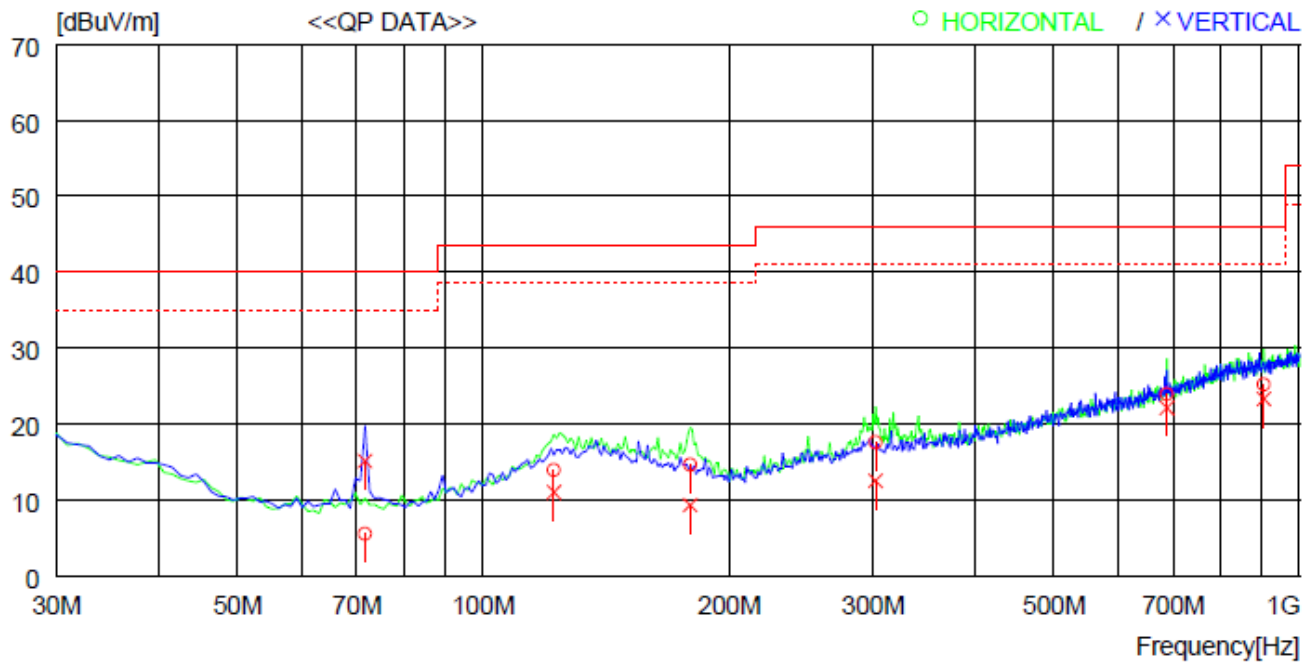

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	[dBuV]	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	71.710	28.7	8.7	0.8	32.7	5.5	40.0	34.5	100	346
2	122.150	34.8	10.8	1.0	32.7	13.9	43.5	29.6	300	358
3	179.380	32.8	13.1	1.3	32.6	14.6	43.5	28.9	200	322
4	302.570	34.9	13.7	1.7	32.7	17.6	46.0	28.4	100	151
5	687.655	33.5	20.8	2.5	32.9	23.9	46.0	22.1	300	359
6	903.959	31.0	23.3	2.9	32.0	25.2	46.0	20.8	200	2
----- Vertical -----										
7	71.710	38.3	8.7	0.8	32.7	15.1	40.0	24.9	300	0
8	122.150	31.9	10.8	1.0	32.7	11.0	43.5	32.5	200	144
9	179.380	27.5	13.1	1.3	32.6	9.3	43.5	34.2	200	121
10	302.570	29.8	13.7	1.7	32.7	12.5	46.0	33.5	200	359
11	687.655	31.7	20.8	2.5	32.9	22.1	46.0	23.9	300	1
12	903.959	29.1	23.3	2.9	32.0	23.3	46.0	22.7	200	359


13.5.3 Test data for Intermodulation Mode(Bluetooth + WLAN 5 GHz)

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : NAVIGATION RADIO

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

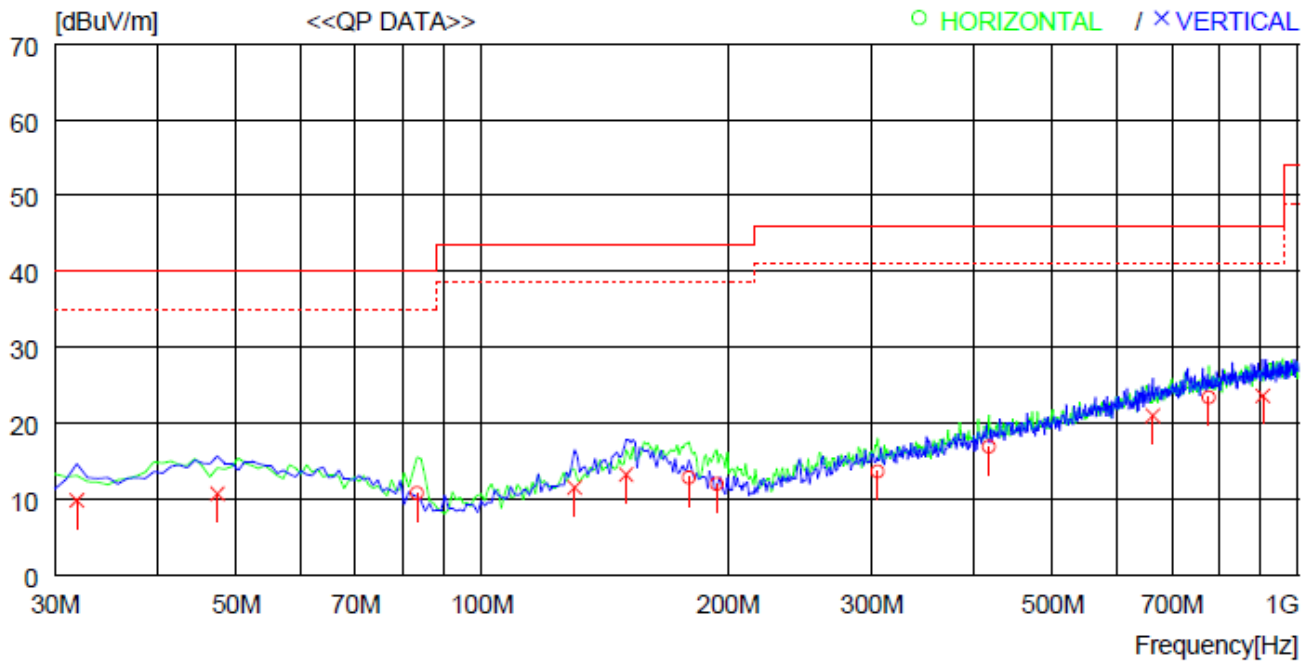

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	[dBuV]	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	83.350	34.9	7.8	0.8	32.7	10.8	40.0	29.2	100	357
2	179.380	31.0	13.1	1.3	32.6	12.8	43.5	30.7	100	263
3	193.930	30.6	12.7	1.3	32.6	12.0	43.5	31.5	100	74
4	305.480	30.9	13.7	1.7	32.7	13.6	46.0	32.4	100	56
5	418.001	30.9	16.7	2.0	32.7	16.9	46.0	29.1	100	90
6	776.893	32.3	21.7	2.1	32.7	23.4	46.0	22.6	100	357
----- Vertical -----										
7	31.940	31.0	10.9	0.5	32.6	9.8	40.0	30.2	100	8
8	47.460	32.7	10.1	0.6	32.7	10.7	40.0	29.3	100	229
9	129.910	32.3	10.8	1.1	32.7	11.5	43.5	32.0	100	8
10	150.280	32.9	11.7	1.2	32.6	13.2	43.5	30.3	100	8
11	663.406	30.9	20.5	2.5	32.9	21.0	46.0	25.0	100	212
12	904.929	29.4	23.3	2.9	32.0	23.6	46.0	22.4	100	271

13.6 Test data for Above 1 GHz

13.6.1 Test data for Frequency UNII I

13.6.1.1 Test data for 802.11a RLAN Mode

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 40 GHz
- Measurement distance : 3 m
- Duty Cycle : 93.46 %
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Factor	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Low Channel									
10 360.00	43.91	Peak	H	39.20	18.07	46.00	55.18	68.20	13.02
10 360.00	43.08	Peak	V	39.20	18.07	46.00	54.35	68.20	13.85
Middle Channel									
10 440.00	43.94	Peak	H	39.30	18.07	46.10	55.21	68.20	12.99
10 440.00	42.78	Peak	V	39.30	18.07	46.10	54.05	68.20	14.15
High Channel									
10 480.00	43.97	Peak	H	39.40	18.07	46.20	55.24	68.20	12.96
10 480.00	42.84	Peak	V	39.40	18.07	46.20	54.11	68.20	14.09

Remark - "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total (dBμV/m)

13.6.1.2 Test data for 802.11n_HT20 RLAN Mode

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 40 GHz
- Measurement distance : 3 m
- Duty Cycle : 91.99 %
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Factor	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Low Channel									
10 360.00	43.48	Peak	H	39.20	18.07	46.00	54.75	68.20	13.45
10 360.00	43.64	Peak	V	39.20	18.07	46.00	54.91	68.20	13.29
Middle Channel									
10 440.00	43.93	Peak	H	39.30	18.07	46.10	55.20	68.20	13.00
10 440.00	43.28	Peak	V	39.30	18.07	46.10	54.55	68.20	13.65
High Channel									
10 480.00	43.93	Peak	H	39.40	18.07	46.20	55.20	68.20	13.00
10 480.00	43.48	Peak	V	39.40	18.07	46.20	54.75	68.20	13.45

Remark - "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total (dBμV/m)

13.6.1.3 Test data for 802.11n_HT40 RLAN Mode

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 40 GHz
- Measurement distance : 3 m
- Duty Cycle : 84.31 %
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Factor	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Low Channel									
10 380.00	43.57	Peak	H	39.20	18.07	46.00	54.84	68.20	13.36
10 380.00	43.00	Peak	V	39.20	18.07	46.00	54.27	68.20	13.93
High Channel									
10 460.00	43.45	Peak	H	39.30	18.07	46.20	54.62	68.20	13.58
10 460.00	43.29	Peak	V	39.30	18.07	46.20	54.46	68.20	13.74

Remark - "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total (dBμV/m)

13.6.1.4 Test data for 802.11ac_HT80 RLAN Mode

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 40 GHz
- Measurement distance : 3 m
- Duty Cycle : 76.50 %
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Factor	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Middle Channel									
10420.00	43.76	Peak	H	39.30	18.07	46.10	55.03	68.20	13.17
10420.00	43.44	Peak	V	39.30	18.07	46.10	54.71	68.20	13.49

Remark - "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total (dBμV/m)

13.6.2 Test data for Frequency UNII 3

13.6.2.1 Test data for 802.11a RLAN Mode

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 40 GHz
- Measurement distance : 3 m
- Duty Cycle : 93.14 %
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Factor	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Low Channel										
11 490.00	43.72	Peak	H	39.30	18.65	46.50	-	55.17	74.00	18.83
11 490.00	37.06	Average	H	39.30	18.65	46.50	0.31	48.82	54.00	5.18
11 490.00	44.11	Peak	V	39.30	18.65	46.50	-	55.56	74.00	18.44
11 490.00	37.35	Average	V	39.30	18.65	46.50	0.31	49.11	54.00	4.89
Middle Channel										
11 570.00	43.56	Peak	H	39.40	18.67	46.40	-	55.23	74.00	18.77
11 570.00	37.62	Average	H	39.40	18.67	46.40	0.31	49.60	54.00	4.40
11 570.00	43.14	Peak	V	39.40	18.67	46.40	-	54.81	74.00	19.19
11 570.00	37.50	Average	V	39.40	18.67	46.40	0.31	49.48	54.00	4.52
High Channel										
11 610.00	43.17	Peak	H	39.70	18.71	46.30	-	55.28	74.00	18.72
11 610.00	36.53	Average	H	39.70	18.71	46.30	0.31	48.95	54.00	5.05
11 610.00	43.87	Peak	V	39.70	18.71	46.30	-	55.98	74.00	18.02
11 610.00	37.24	Average	V	39.70	18.71	46.30	0.31	49.66	54.00	4.34

Remark - "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total (dBμV/m)

13.6.2.2 Test data for 802.11n_HT20 RLAN Mode

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 40 GHz
- Measurement distance : 3 m
- Duty Cycle : 93.03 %
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Factor	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Low Channel										
11 490.00	43.78	Peak	H	39.30	18.65	46.50	-	55.23	74.00	18.77
11 490.00	37.11	Average	H	39.30	18.65	46.50	0.31	48.87	54.00	5.13
11 490.00	43.69	Peak	V	39.30	18.65	46.50	-	55.14	74.00	18.86
11 490.00	37.46	Average	V	39.30	18.65	46.50	0.31	49.22	54.00	4.78
Middle Channel										
11 570.00	44.03	Peak	H	39.40	18.67	46.40	-	55.70	74.00	18.30
11 570.00	37.15	Average	H	39.40	18.67	46.40	0.31	49.13	54.00	4.87
11 570.00	43.51	Peak	V	39.40	18.67	46.40	-	55.18	74.00	18.82
11 570.00	37.69	Average	V	39.40	18.67	46.40	0.31	49.67	54.00	4.33
High Channel										
11 610.00	43.32	Peak	H	39.70	18.71	46.30	-	55.43	74.00	18.57
11 610.00	37.32	Average	H	39.70	18.71	46.30	0.31	49.74	54.00	4.26
11 610.00	43.78	Peak	V	39.70	18.71	46.30	-	55.89	74.00	18.11
11 610.00	37.37	Average	V	39.70	18.71	46.30	0.31	49.79	54.00	4.21

Remark - "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total (dBμV/m)

13.6.2.3 Test data for 802.11n_HT40 RLAN Mode

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 40 GHz
- Measurement distance : 3 m
- Duty Cycle : 86.93 %
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Factor	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Low Channel										
11 510.00	44.06	Peak	H	39.30	18.65	46.50	-	55.51	74.00	18.49
11 510.00	37.23	Average	H	39.30	18.65	46.50	0.61	49.29	54.00	4.71
11 510.00	43.95	Peak	V	39.30	18.65	46.50	-	55.40	74.00	18.60
11 510.00	36.95	Average	V	39.30	18.65	46.50	0.61	49.01	54.00	4.99
High Channel										
11 590.00	43.74	Peak	H	39.40	18.67	46.30	-	55.51	74.00	18.49
11 590.00	37.74	Average	H	39.40	18.67	46.30	0.61	50.12	54.00	3.88
11 590.00	42.94	Peak	V	39.40	18.67	46.30	-	54.71	74.00	19.29
11 590.00	37.43	Average	V	39.40	18.67	46.30	0.61	49.81	54.00	4.19

Remark - "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total (dBμV/m)

13.6.2.4 Test data for 802.11ac_HT80 RLAN Mode

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 40 GHz
- Measurement distance : 3 m
- Duty Cycle : 76.50 %
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Factor	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Middle Channel										
11 550.00	43.59	Peak	H	39.40	18.67	46.40	-	55.26	68.20	12.94
11 550.00	43.62	Peak	V	39.40	18.67	46.40	-	55.29	68.20	12.91

Remark - "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total (dBμV/m)

14. RADIATED RESTRICTED BAND EDGE MEASUREMENTS

14.1 Operating environment

Temperature : 23 °C
Relative humidity : 45 % R.H.


14.2 Test set-up for conducted measurement

The radiated emissions measurements were performed on the 3 m, open-field test site. The EUT was placed on a non-conductive turntable above the ground plane.


The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

- Test Configuration


1. Below 30 MHz

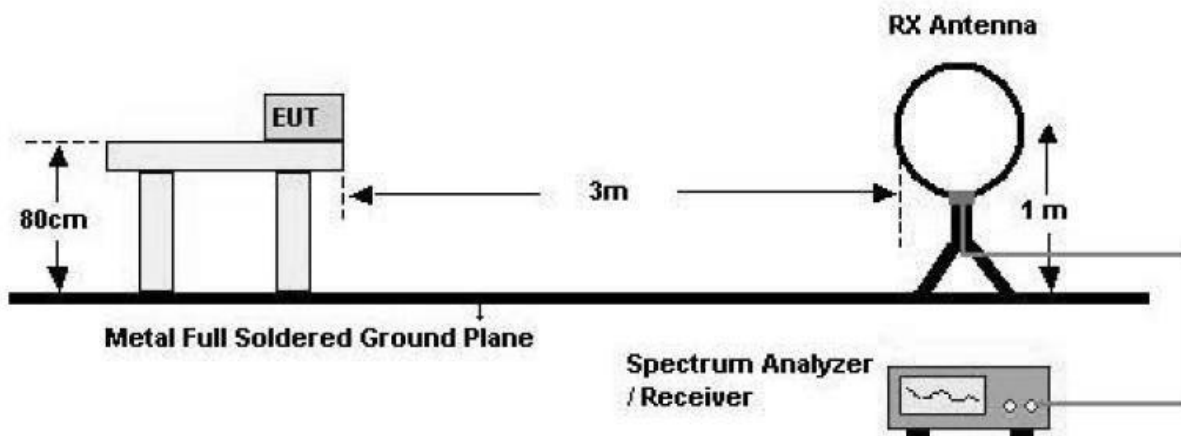

2. 30 MHz - 1 GHz

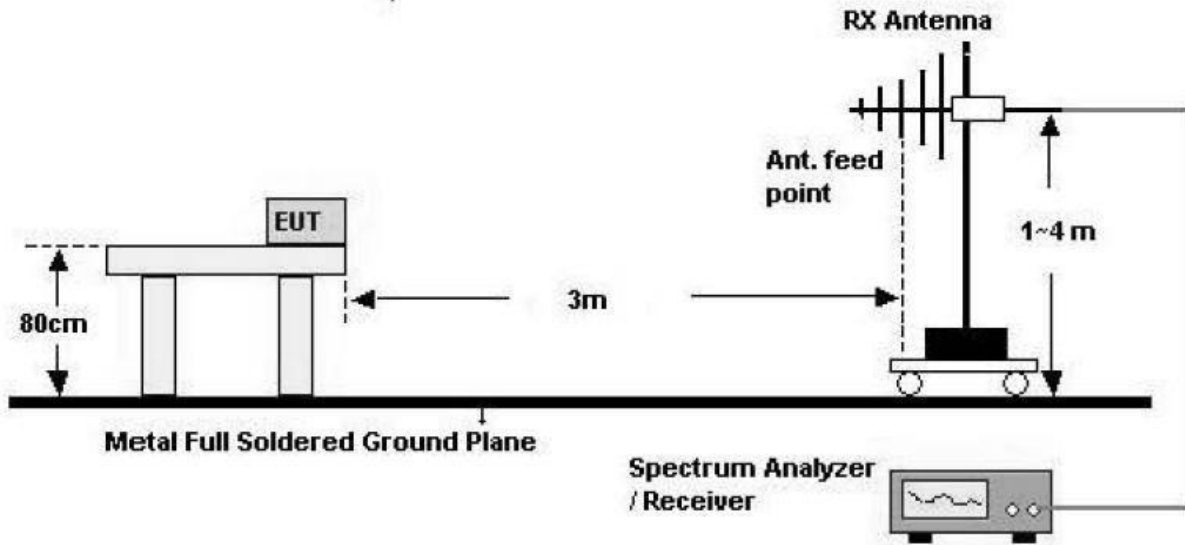

3. Above 1 GHz

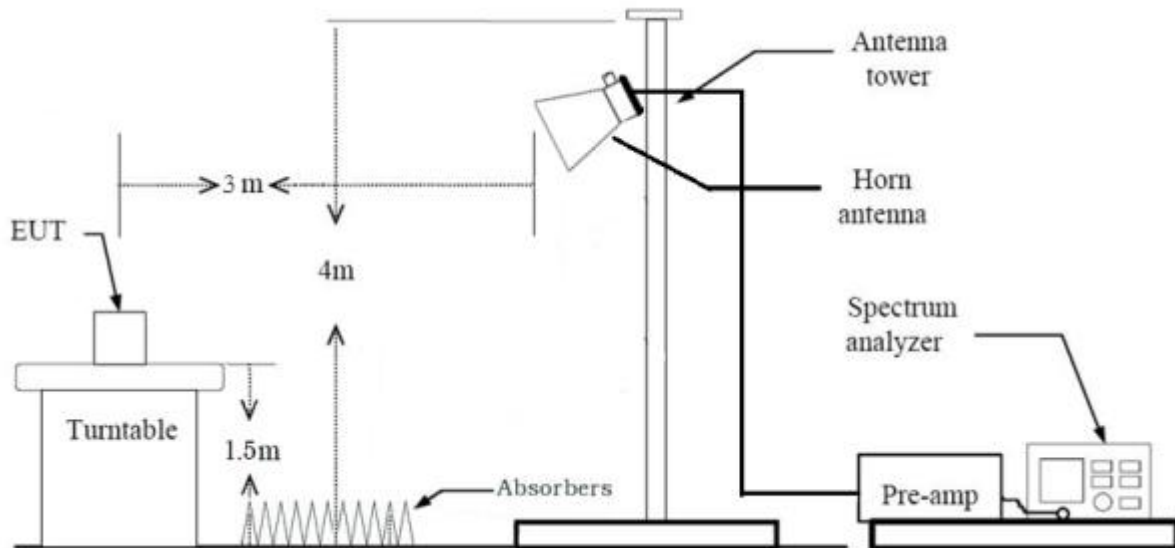

14.3 Test Date

January 28, 2021 ~ February 04, 2021

14.4 Test data for Frequency UNII I

14.4.1 Test data for 802.11a RLAN Mode

- . Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Measurement distance : 3 m
- . Duty Cycle : 93.46 %
- . Result : Pass

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP FACTOR	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
5 149.680	54.81	Peak	H	34.20	12.50	46.30	-	55.21	74.00	18.79
5 148.380	46.65	Average	H	34.20	12.50	46.30	0.29	47.34	54.00	6.66
5 141.230	60.05	Peak	V	34.20	12.50	46.30	-	60.45	74.00	13.55
5 148.380	50.50	Average	V	34.20	12.50	46.30	0.29	51.19	54.00	2.81

Tabulated test data for Restricted Band

Remark - “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dBμV/m)} - \text{Total (dBμV/m)}$$

14.4.2 Test data for 802.11n_HT20 RLAN Mode

- . Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Measurement distance : 3 m
- . Duty Cycle : 91.99 %
- . Result : Pass

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP FACTOR	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
5 147.080	60.94	Peak	H	34.20	12.50	46.30	-	61.34	74.00	12.66
5 149.680	51.50	Average	H	34.20	12.50	46.30	0.36	52.26	54.00	1.74
5 145.780	59.09	Peak	V	34.20	12.50	46.30	-	59.49	74.00	14.51
5 148.380	47.74	Average	V	34.20	12.50	46.30	0.36	48.50	54.00	5.50

Tabulated test data for Restricted Band

Remark - “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dBμV/m)} - \text{Total (dBμV/m)}$$

14.4.3 Test data for 802.11n_HT40 RLAN Mode

- . Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Measurement distance : 3 m
- . Duty Cycle : 84.31 %
- . Result : Pass

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP FACTOR	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
5 146.430	62.06	Peak	H	34.20	12.50	46.30	-	62.46	74.00	11.54
5 414.080	51.05	Average	H	34.20	12.50	46.30	0.74	52.19	54.00	1.81
5 148.380	57.37	Peak	V	34.20	12.50	46.30	-	57.77	74.00	16.23
5 149.030	49.06	Average	V	34.20	12.50	46.30	0.74	50.20	54.00	3.80

Tabulated test data for Restricted Band

Remark - “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dBμV/m)} - \text{Total (dBμV/m)}$$

14.4.4 Test data for 802.11ac_HT80 RLAN Mode

- . Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Measurement distance : 3 m
- . Duty Cycle : 76.50 %
- . Result : Pass

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP FACTOR	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
5 149.680	58.12	Peak	H	34.20	12.50	46.30	-	58.52	74.00	15.48
5 149.030	50.11	Average	H	34.20	12.50	46.30	1.16	51.67	54.00	2.33
5 149.030	55.58	Peak	V	34.20	12.50	46.30	-	55.98	74.00	18.02
5 140.580	47.88	Average	V	34.20	12.50	46.30	1.16	49.44	54.00	4.56

Tabulated test data for Restricted Band

Remark - “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dBμV/m)} - \text{Total (dBμV/m)}$$

14.5 Test data for Frequency U-NII-3

14.5.1 Test data for 802.11a RLAN Mode

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 93.14 %
- Result : Pass

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP FACTOR	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Low Channel									
5 650.000	50.74	Peak	H	34.10	15.39	46.30	53.93	68.20	14.27
5 700.000	56.14	Peak	H	34.10	15.39	46.30	59.33	105.20	45.87
5 720.000	64.04	Peak	H	34.10	15.39	46.30	67.23	110.80	43.57
5 725.000	70.60	Peak	H	34.10	15.39	46.30	73.79	122.20	48.41
5 650.000	50.31	Peak	V	34.10	15.39	46.30	53.50	68.20	14.70
5 700.000	54.24	Peak	V	34.10	15.39	46.30	57.43	105.20	47.77
5 720.000	63.09	Peak	V	34.10	15.39	46.30	66.28	110.80	44.52
5 725.000	68.29	Peak	V	34.10	15.39	46.30	71.48	122.20	50.72
High Channel									
5 850.000	55.93	Peak	H	34.80	15.55	46.10	60.18	122.20	62.02
5 855.000	53.97	Peak	H	34.80	15.55	46.10	58.22	110.80	52.58
5 875.000	51.38	Peak	H	34.80	15.55	46.10	55.63	105.20	49.57
5 925.000	48.91	Peak	H	34.80	15.55	46.10	53.16	68.20	15.04
5 850.000	52.82	Peak	V	34.80	15.55	46.10	57.07	122.20	65.13
5 855.000	53.81	Peak	V	34.80	15.55	46.10	58.06	110.80	52.74
5 875.000	49.51	Peak	V	34.80	15.55	46.10	53.76	105.20	51.44
5 925.000	48.81	Peak	V	34.80	15.55	46.10	53.06	68.20	15.14

Tabulated test data for Restricted Band

Remark - “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total (dB}\mu\text{V/m)}$$

14.5.2 Test data for 802.11n_HT20 RLAN Mode

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 93.03 %
- Result : Pass

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP FACTOR	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Low Channel									
5 650.000	49.27	Peak	H	34.10	15.39	46.30	52.46	68.20	15.74
5 700.000	58.16	Peak	H	34.10	15.39	46.30	61.35	105.20	43.85
5 720.000	66.76	Peak	H	34.10	15.39	46.30	69.95	110.80	40.85
5 725.000	72.95	Peak	H	34.10	15.39	46.30	76.14	122.20	46.06
5 650.000	49.42	Peak	V	34.10	15.39	46.30	52.61	68.20	15.59
5 700.000	55.33	Peak	V	34.10	15.39	46.30	58.52	105.20	46.68
5 720.000	65.49	Peak	V	34.10	15.39	46.30	68.68	110.80	42.12
5 725.000	69.73	Peak	V	34.10	15.39	46.30	72.92	122.20	49.28
High Channel									
5 850.000	56.23	Peak	H	34.80	15.55	46.10	60.48	122.20	61.72
5 855.000	54.17	Peak	H	34.80	15.55	46.10	58.42	110.80	52.38
5 875.000	51.52	Peak	H	34.80	15.55	46.10	55.77	105.20	49.43
5 925.000	48.63	Peak	H	34.80	15.55	46.10	52.88	68.20	15.32
5 850.000	52.63	Peak	V	34.80	15.55	46.10	56.88	122.20	65.32
5 855.000	52.40	Peak	V	34.80	15.55	46.10	56.65	110.80	54.15
5 875.000	49.56	Peak	V	34.80	15.55	46.10	53.81	105.20	51.39
5 925.000	49.04	Peak	V	34.80	15.55	46.10	53.29	68.20	14.91

Tabulated test data for Restricted Band

Remark - “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dBμV/m)} - \text{Total (dBμV/m)}$$

14.5.3 Test data for 802.11n_HT40 RLAN Mode

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 86.93 %
- Result : Pass

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP FACTOR	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Low Channel									
5 650.000	54.29	Peak	H	34.10	15.39	46.30	57.48	68.20	10.72
5 700.000	64.93	Peak	H	34.10	15.39	46.30	68.12	105.20	37.08
5 720.000	73.48	Peak	H	34.10	15.39	46.30	76.67	110.80	34.13
5 725.000	76.86	Peak	H	34.10	15.39	46.30	80.05	122.20	42.15
5 650.000	53.91	Peak	V	34.10	15.39	46.30	57.10	68.20	11.10
5 700.000	63.74	Peak	V	34.10	15.39	46.30	66.93	105.20	38.27
5 720.000	70.83	Peak	V	34.10	15.39	46.30	74.02	110.80	36.78
5 725.000	74.29	Peak	V	34.10	15.39	46.30	77.48	122.20	44.72
High Channel									
5 850.000	63.33	Peak	H	34.80	15.55	46.10	67.58	122.20	54.62
5 855.000	62.29	Peak	H	34.80	15.55	46.10	66.54	110.80	44.26
5 875.000	57.46	Peak	H	34.80	15.55	46.10	61.71	105.20	43.49
5 925.000	49.46	Peak	H	34.80	15.55	46.10	53.71	68.20	14.49
5 850.000	59.69	Peak	V	34.80	15.55	46.10	63.94	122.20	58.26
5 855.000	58.68	Peak	V	34.80	15.55	46.10	62.93	110.80	47.87
5 875.000	54.06	Peak	V	34.80	15.55	46.10	58.31	105.20	46.89
5 925.000	49.02	Peak	V	34.80	15.55	46.10	53.27	68.20	14.93

Tabulated test data for Restricted Band

Remark - “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total (dB}\mu\text{V/m)}$$

14.5.4 Test data for 802.11ac_HT80 RLAN Mode

- . Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Measurement distance : 3 m
- . Duty Cycle : 76.50 %
- . Result : Pass

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP FACTOR	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Middle Channel									
5 650.000	56.19	Peak	H	34.10	15.39	46.30	59.38	68.20	8.82
5 700.000	66.20	Peak	H	34.10	15.39	46.30	69.39	105.20	35.81
5 720.000	66.21	Peak	H	34.10	15.39	46.30	69.40	110.80	41.40
5 725.000	67.63	Peak	H	34.10	15.39	46.30	70.82	122.20	51.38
5 650.000	55.01	Peak	V	34.10	15.39	46.30	58.20	68.20	10.00
5 700.000	63.95	Peak	V	34.10	15.39	46.30	67.14	105.20	38.06
5 720.000	64.49	Peak	V	34.10	15.39	46.30	67.68	110.80	43.12
5 725.000	64.06	Peak	V	34.10	15.39	46.30	67.25	122.20	54.95
Middle Channel									
5 850.000	61.64	Peak	H	34.80	15.55	46.10	65.89	122.20	56.31
5 855.000	60.90	Peak	H	34.80	15.55	46.10	65.15	110.80	45.65
5 875.000	62.78	Peak	H	34.80	15.55	46.10	67.03	105.20	38.17
5 925.000	51.43	Peak	H	34.80	15.55	46.10	55.68	68.20	12.52
5 850.000	58.48	Peak	V	34.80	15.55	46.10	62.73	122.20	59.47
5 855.000	58.45	Peak	V	34.80	15.55	46.10	62.70	110.80	48.10
5 875.000	59.37	Peak	V	34.80	15.55	46.10	63.62	105.20	41.58
5 925.000	49.81	Peak	V	34.80	15.55	46.10	54.06	68.20	14.14


Tabulated test data for Restricted Band

Remark - "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total (dB}\mu\text{V/m)}$$

14.6.5 U-NII-3 Emission Limits

14.6.5.1 Emission Mask Plots

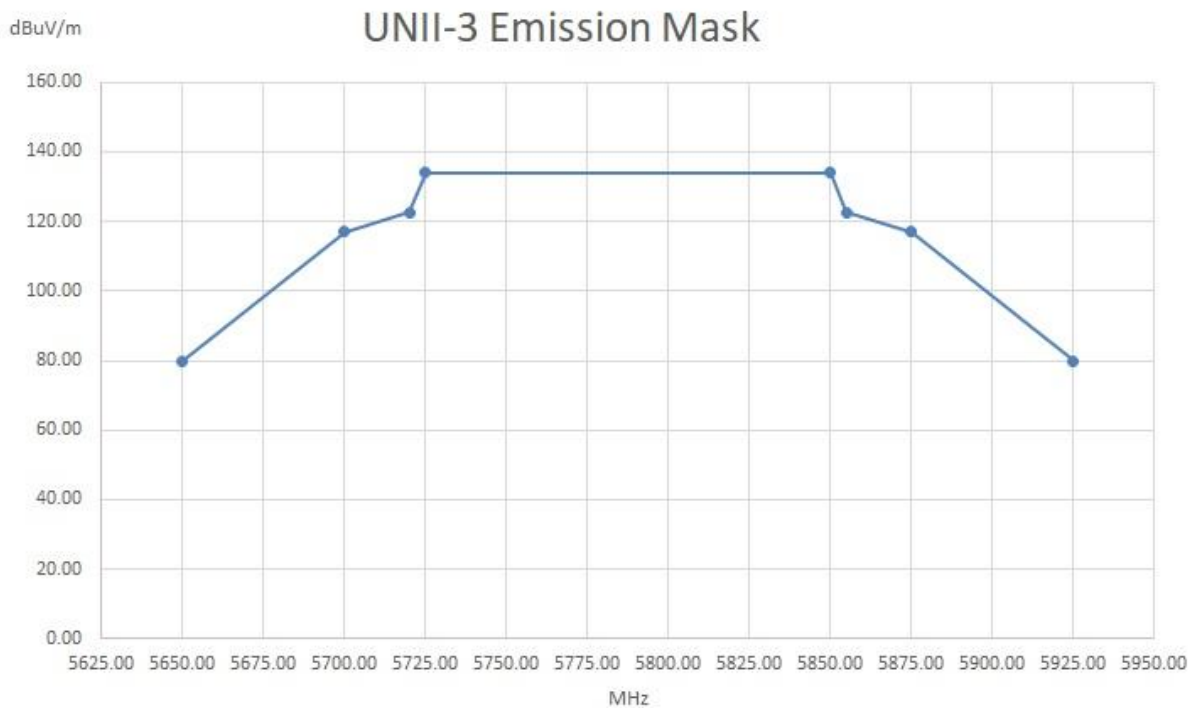

Remark.

-. Title 47 → Part 15 → Subpart E—UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE DEVICES

§ 15.407 General technical requirements.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

15. LIST OF TEST EQUIPMENT

Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
FSV40-N	Rohde & Schwarz	Signal Analyzer	102177	Apr. 20, 2020 (1Y)
FSW43	Rohde & Schwarz	Signal Analyzer	104544	Jul. 15, 2020 (1Y)
ESW	Rohde & Schwarz	EMI Test Receiver	101851	Mar. 27, 2020 (1Y)
SSE-43CI-A	Samkun Tech	Humidity Chamber	60712	Feb. 21, 2020 (1Y)
310N	Sonoma Instrument	Pre-Amplifier	392756	Oct. 16, 2020 (1Y)
PAM-118A	Com-Power	Pre-Amplifier	18040081	Oct. 12, 2020 (1Y)
PAM-840A	Com-Power	Pre-Amplifier	461339	Oct. 16, 2020 (1Y)
DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
FMZB 1513	Schwarzbeck	Loop Antenna	1513-235	Mar. 24, 2020 (2Y)
HLP-2008	TDK	Hybrid Antenna	131316	Feb. 27, 2020 (2Y)
AH-118	Com-Power	Horn Antenna	10050061	Oct. 15, 2020 (1Y)
BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jan. 07, 2020(1Y)
ESR	Rohde & Schwarz	EMI TEST RECEIVER	102602	Mar. 17, 2020 (1Y)