

样品承认书

Version: V1.0

Supplier sample production confirmation: (stamp required)

Formulate	Confirm	Approve	Quality	Stamp
代庆蓉	龙超群	傅梁成	曹光平	

Customer approval:

Project confirmation	Project approval	Quality confirmation	Quality approval	Confirmation date



1. Graphic for reference



Figure 2 0.8*20mmBT

Name	ANTENNA
Model	LT13
Frequency	2.4Ghz
Input impedance	50Ω
Allowed power	5mW
Working temp.	-25 ~ +65 °C
Storage temp.	-40 ~ +85 °C
Weight	0.25g
Antenna gain天线增益	-1dBi


2. OTA(Free Space)

Channel	TRP (dBm)	TIS (dBm)
0	6.3	-91.1
39	6.5	-91.3
78	6.6	-91.2




3.Field


Bluetooth 0 TRP

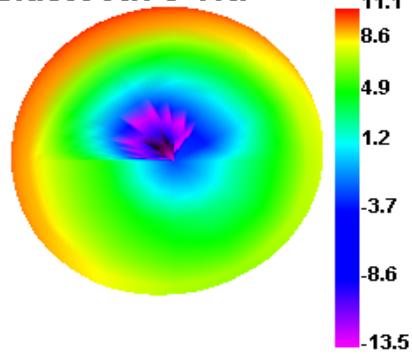


Bluetooth 0 TRP H

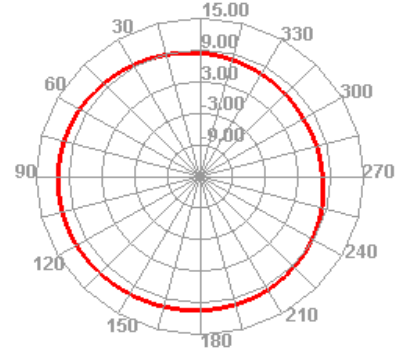


Bluetooth 39 TRP

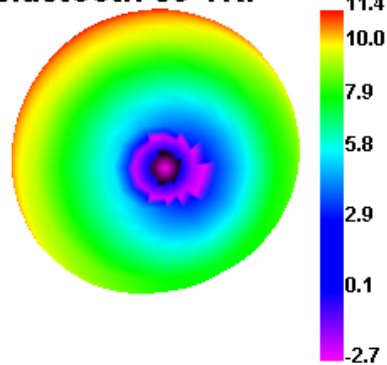


Bluetooth 39 TRP H

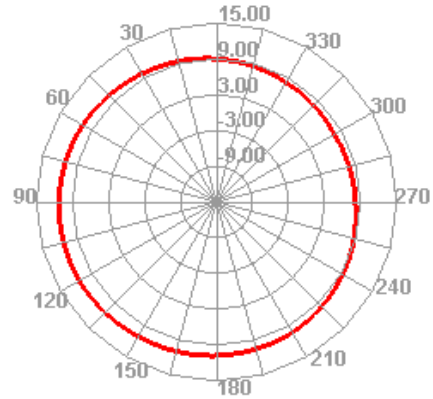

Bluetooth 78 TRP

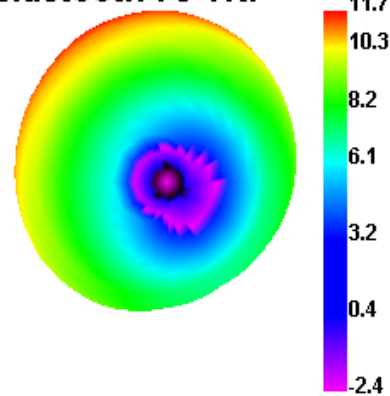

Bluetooth 78 TRP H

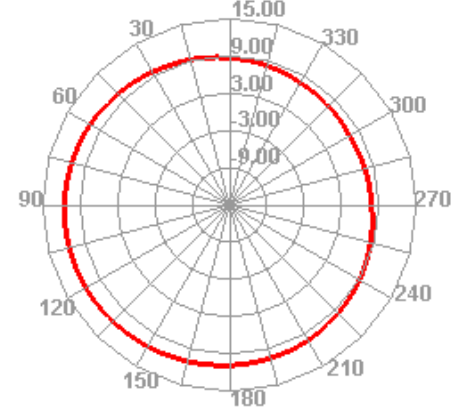

4. BT Test

Test term	Environment	Max pairing distance	BT Call distance	
BT	Office	16-18m	10-12m	



5.Blueprint

