

Antenna Testing Report

Customer : Shenzhen sangge'er Polytron Technologies Inc

Project Name : ML1

Antenna Manufacturer: Sunnyway Technology(CHINA)

Address: The 6th floor, Building 5, Nantaiyun Innovation Valley Center,
Guangming District, Shenzhen City

Report version: 2024/4/17 A0
Research staff: Xu Jun

Version	Report date	Remark
A0	2024.4.17	Antenna test report
A1		
A2		
A3		
A4		
A5		
A6		
A7		
A8		
A9		

1.Record·····

2.Project Overview ·····

3.Equipment List·····

4. Antenna mounting position·····

5.Passive parameters ·····


6.Passive efficiency and gain ·····

7.OTA test data ·····

8.Directiona pattern ·····

9.Summary·····

Prototype status	Debugging machine	
Device type		
Number of antennas	Main antenna; diversity antenna; three-in-one antenna NFCantenna	
Frequency band	GSM :850/900/1800/1900	
	WCDMA: B1/2/5/8	
	FDD: B1/2/3/4/5/7/8/12/14/17//25/26/66 TDD: 38/40/41	
Structural style	LDS+FPC	
Environment adjustment	Change made	
Matching modification	Change made	

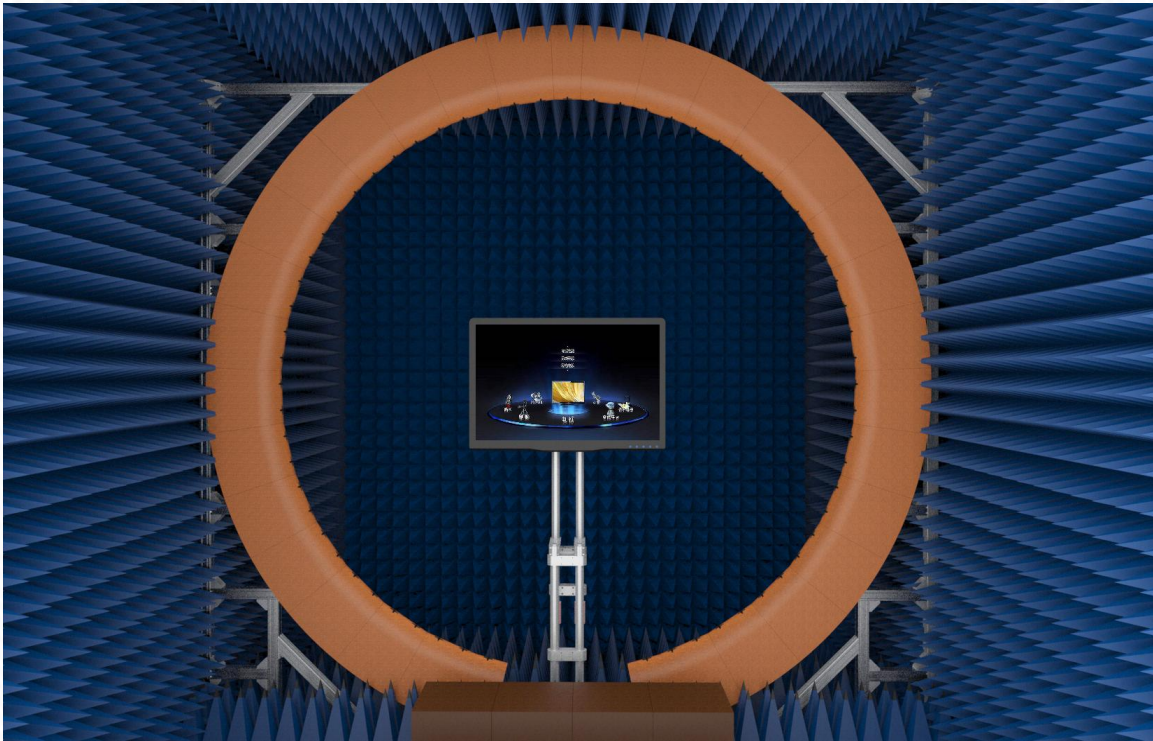

The industry's top 64 sensors OTA chamber



Frequency range: 400MHz-11GHz

Device Llimitation: 2M

Load-bearing limitation:100KG


Equipments Items	Total Quantity	Quantity for Shanghai R&D	Quantity for Shenzhen R&D	Quantity for ChongQing R&D
OTA chamber	10	4	5	1
5G Tester (SP9500-CTS)	3	1	1	1
R&S Tester (high configuration CMW500)	6	3	2	1
Japan Anritsu Tester (Dual Channel 8820)	4	2	2	--
NB-IoT Tester (SP8315)	3	1	1	1
Agilent Tester (8960)	9	4	4	--
Agilent Network Analyzer (E5062A)	7	3	3	1
Agilent Network Analyzer (E5071C 8.5GHZ)	11	5	5	1
Agilent Network Analyzer (E5071B 8.5GHZ)	7	3	3	1
R&S Network Analyzer (ZND)	9	4	4	1
R&S Network Analyzer (ZVB)	3	1	1	1
OTA head hand / ear hand / arm hand	5	2	2	1
GPS/WIFI active test equipment	5	2	2	1

Antenna

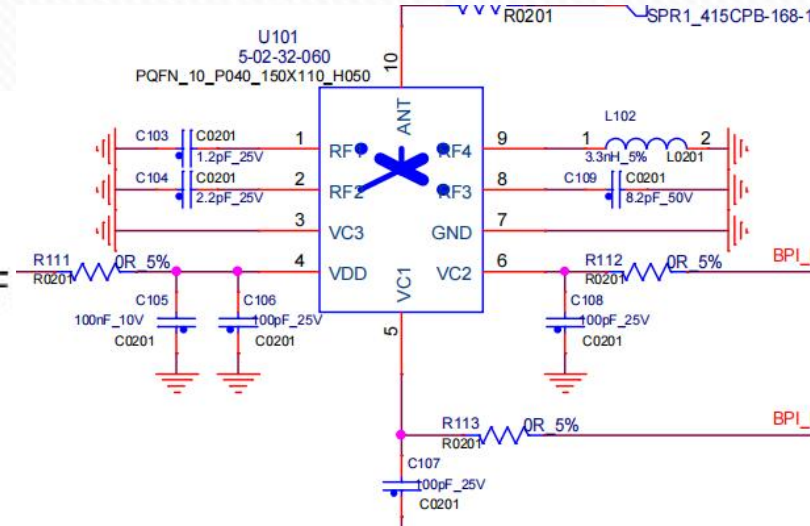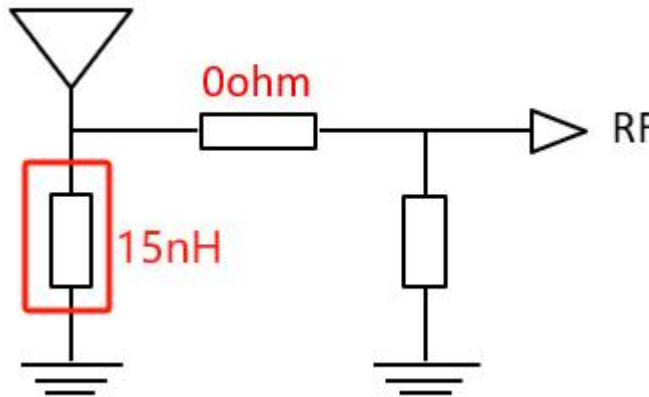



RF1 C103:0R
RF2 C104:4.7nH
RF3 C109:NC
RF4 L102:22nH

Antenna

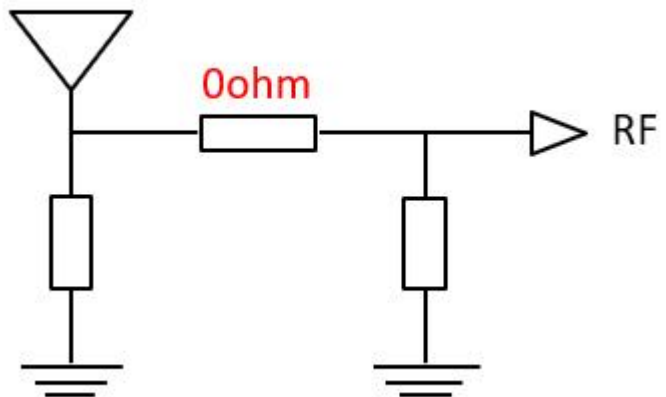


Antenna

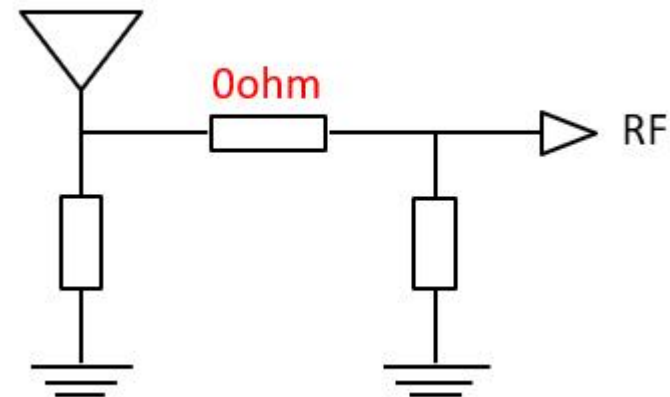

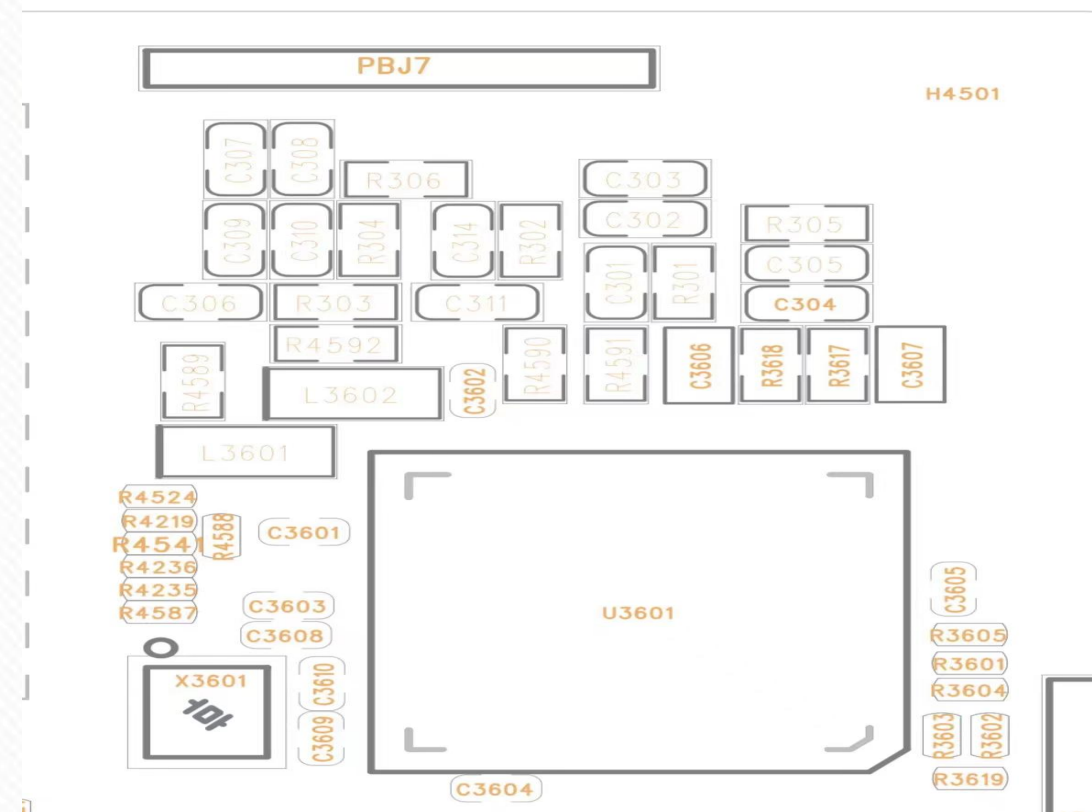C

Complete machine antenna data:

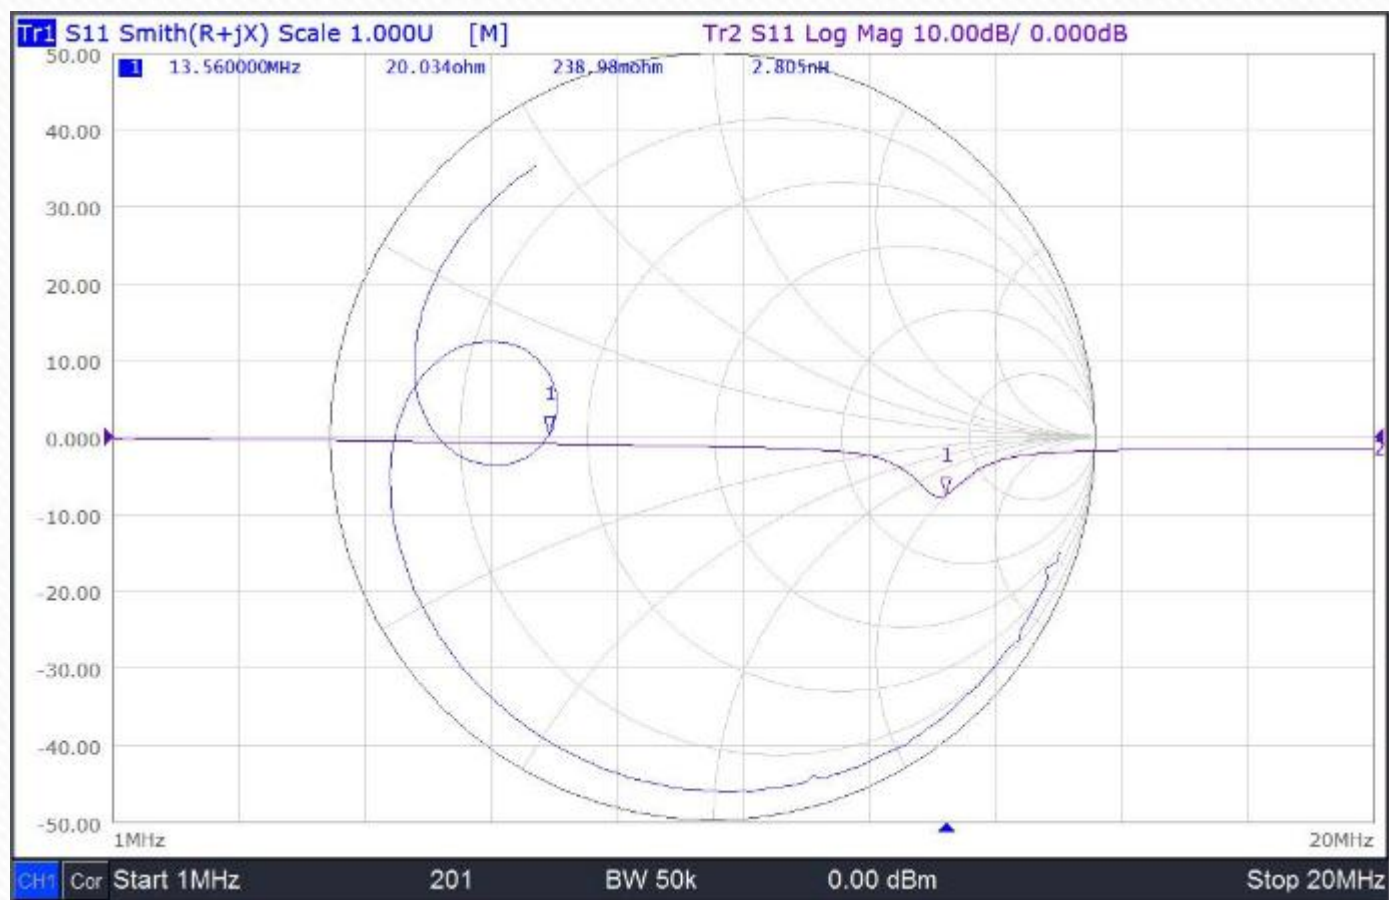

S11-VSWR



Main antenna efficiency and gain

Frequency/MHz	MaxGain/dBi	Efficiency / %
700	-2.7	13.55
710	-3.22	13.3
720	-4.07	13.39
730	-4.39	13.97
740	-3.68	15.23
750	-3.21	15.64
760	-3.07	15.79
770	-3.05	16.3
780	-3.06	15.96
790	-2.63	16.22
800	-4.78	14.77
810	-4.82	14.85
820	-0.82	18.75
830	-1.33	19.72
840	-1.56	18.92
850	-1.68	18.32
860	-1.68	16.75
870	-1.78	15.67
880	-1.56	25.83
890	-2.27	24.42
900	-1.78	24.41
910	-0.63	28.07
920	0.09	30.12
930	-0.16	28.17
940	-1.36	22.46
950	-2.91	24.61

Frequency/MHz	MaxGain/dBi	Efficiency / %
1710	-1.76	20.05
1720	-1.17	20.27
1730	-0.8	20.07
1740	-1.31	21.33
1750	-1.81	25.35
1760	-1.21	30.2
1770	-0.84	33.19
1780	-0.89	33.5
1790	-1.21	31.41
1800	-1.17	30.69
1810	-0.78	31.62
1820	-0.9	30.55
1830	-0.89	29.31
1840	-0.79	29.51
1850	-0.77	29.92
1860	-1.06	28.12
1870	-1.22	26.98
1880	-1.19	27.29
1890	-1.21	27.61
1900	-1.19	27.1
1910	-1.15	27.35
1920	-1.23	27.61
1930	-1.31	27.23
1940	-1.05	27.86
1950	-0.88	27.99
1960	-0.83	27.93

Frequency/MHz	MaxGain/dBi	Efficiency / %
1980	-0.73	26.36
1990	-0.83	23.93
2000	-0.46	23.99
2010	-0.2	23.33
2020	-0.1	22.39
2030	0	21.58
2040	0.27	22.13
2050	0.27	21.38
2060	0.14	19.86
2070	0.25	20
2080	0.45	20.84
2090	0.41	20.61
2100	0.01	18.58
2110	0.04	18.62
2120	-0.09	18.07
2130	-0.44	17.46
2140	-0.92	16.67
2150	-1.53	15.81
2160	-1.92	15.17
2170	-2.02	15
2300	-3.43	22.33
2310	-3.65	22.19
2320	-3.6	22.88
2330	-3.71	23.09
2340	-3.72	22.65
2350	-3	23.87

Frequency/MHz	MaxGain/dBi	Efficiency / %
2370	-2.25	25.03
2380	-2.35	24.39
2390	-1.99	25.07
2400	-1.98	24.96
2410	-1.93	24.83
2420	-1.84	25
2430	-1.47	25.92
2440	-1.26	26.75
2450	-0.82	28.03
2460	-0.66	28.2
2470	-0.12	29.82
2480	0.26	31.58
2490	0.56	32.54
2500	0.73	33.12
2510	1.22	34.95
2520	1.38	35.64
2530	1.53	35.53
2540	1.92	36.67
2550	2.29	36.8
2560	2.47	35.18
2570	2.42	36.23
2580	2.51	36.61
2590	2.44	36.67
2600	2.24	36.85
2610	1.8	34.6
2620	1.55	33.39

Frequency/MHz	MaxGain/dBi	Efficiency / %
2640	1.35	31.48
2650	1.17	29.63
2660	0.97	27.99
2670	1.03	27.38
2680	0.99	26.48
2690	0.8	15.21

Bright screen

Band	Channel	TRP	TIS
GSM850	128	24.72	
	190	25.73	
	251	25.3	-94.36
GSM900	1	24.98	
	62	23.68	
	124	23.58	-94.68
DCS1800	512	23.55	
	699	23.53	
	885	23.42	-99.73
PCS1900	512	24.16	
	661	24.7	
	810	26.06	-98.25
WCDMA_B1	9612	16.71	
	9750	16.59	
	9888	16.16	-99.74
WCDMA_B2	9262	16.98	
	9400	18.09	
	9538	18.33	-100.55
WCDMA_B5	4132	15.8	
	4183	15.09	
	4233	15.2	-96.93
WCDMA_B8	2712	15.46	
	2787	14.58	
	2863	14.32	-93.31

Band	Channel	TRP	TIS
FDD_B1(10MHz)	18050	18.77	
	18300	17.77	
	18550	17.49	-90.58
FDD_B2(10MHz)	18650	17.49	
	18900	18.62	
	19150	18.66	-91.61
FDD_B3(10MHz)	19250	14.48	
	19575	15.14	
	19900	14.97	-96.09
FDD_B4(10MHz)	20000	14.55	
	20175	14.02	
	20350	14.37	-93.44
FDD_B5(10MHz)	20450	15.93	
	20525	15.23	
	20600	14.23	-88.18
FDD_B7(10MHz)	20800	17.33	
	21100	17.85	
	21400	18	-90.01
FDD_B8(10MHz)	21500	15.54	
	21625	14.76	
	21750	14.85	-89.65
FDD_B12(10MHz)	23060	15.96	
	23095	15.95	
	23130	15.33	-83.59

Band	Channel	TRP	TIS
FDD_B14(10MHz)	23330	13.61	-84.23
FDD_B17(10MHz)	23780	15.07	
	23790	15.76	
	23800	15.34	-83.57
FDD_B25(10MHz)	26090	17.45	
	26365	18.61	
	26640	19.04	-90.34
FDD_B26(10MHz)	26740	14.56	
	26865	15.03	
	26990	15.17	-90.64
FDD_B66(10MHz)	132022	15.77	
	132322	15.69	
	132622	15.79	-90.58
TDD_B38(20MHz)	37850	18.69	
	38000	18.57	
	38150	18.78	-89.3
TDD_B40(20MHz)	38750	16.72	
	39150	16.87	
	39550	16.56	-91.05
TDD_B41(20MHz)	40340	18.84	
	40620	18.14	
	41140	17.97	-88.64




Screen extinction

Band	Channel	TRP	TIS
GSM850	128	24.65	
	190	25.76	
	251	25.37	-94.7
GSM900	1	24.97	
	62	24.66	
	124	23.53	-95.27
DCS1800	512	23.49	
	699	23.43	
	885	23.36	-100.41
PCS1900	512	23.88	
	661	24.78	
	810	26.18	-98.84
WCDMA_B1	9612	16.86	
	9750	16.01	
	9888	16.23	-99.94
WCDMA_B2	9262	16.96	
	9400	18.08	
	9538	18.43	-100.57
WCDMA_B5	4132	15.87	
	4183	15.17	
	4233	14.77	-97.43
WCDMA_B8	2712	15.53	
	2787	14.66	
	2863	14.57	-93.68

Band	Channel	TRP	TIS
FDD_B1(10MHz)	18050	18.9	
	18300	17.9	
	18550	17.55	-90.83
FDD_B2(10MHz)	18650	17.44	
	18900	18.64	
	19150	18.71	-90.94
FDD_B3(10MHz)	19250	14.56	
	19575	15.16	
	19900	15.05	-97.12
FDD_B4(10MHz)	20000	14.63	
	20175	14.55	
	20350	14.41	-93.85
FDD_B5(10MHz)	20450	16.02	
	20525	15.31	
	20600	14.28	-88.82
FDD_B7(10MHz)	20800	17.36	
	21100	17.9	
	21400	19.08	-91.12
FDD_B8(10MHz)	21500	15.63	
	21625	14.83	
	21750	14.53	-90.07
FDD_B12(10MHz)	23060	16.02	
	23095	16.02	
	23130	15.38	-85.52




Band	Channel	TRP	TIS
FDD_B14(10MHz)	23330	13.63	-86.25
FDD_B17(10MHz)	23780	15.15	
	23790	15.8	
	23800	15.38	-84.44
FDD_B25(10MHz)	26090	17.4	
	26365	18.64	
	26640	19.15	-90.38
FDD_B26(10MHz)	26740	15.57	
	26865	15.96	
	26990	14.76	-90.77
FDD_B66(10MHz)	132022	15.83	
	132322	15.72	
	132622	15.81	-91.25
TDD_B38(20MHz)	37850	19.77	
	38000	19.73	
	38150	18.94	-89.79
TDD_B40(20MHz)	38750	16.72	
	39150	16.98	
	39550	16.47	-92.15
TDD_B41(20MHz)	40340	18.92	
	40620	18.29	
	41140	18.04	-88.76

Main antenna Directional pattern

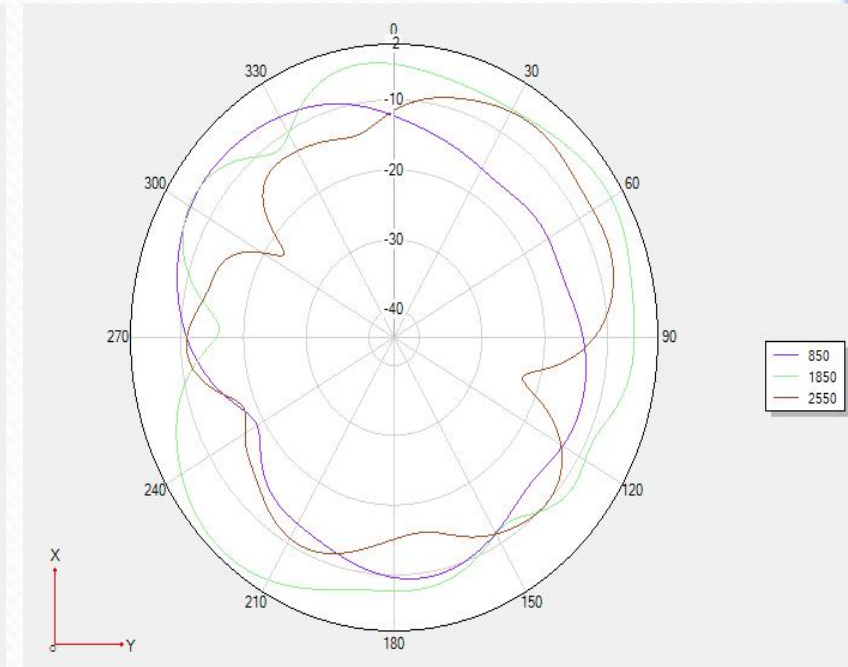
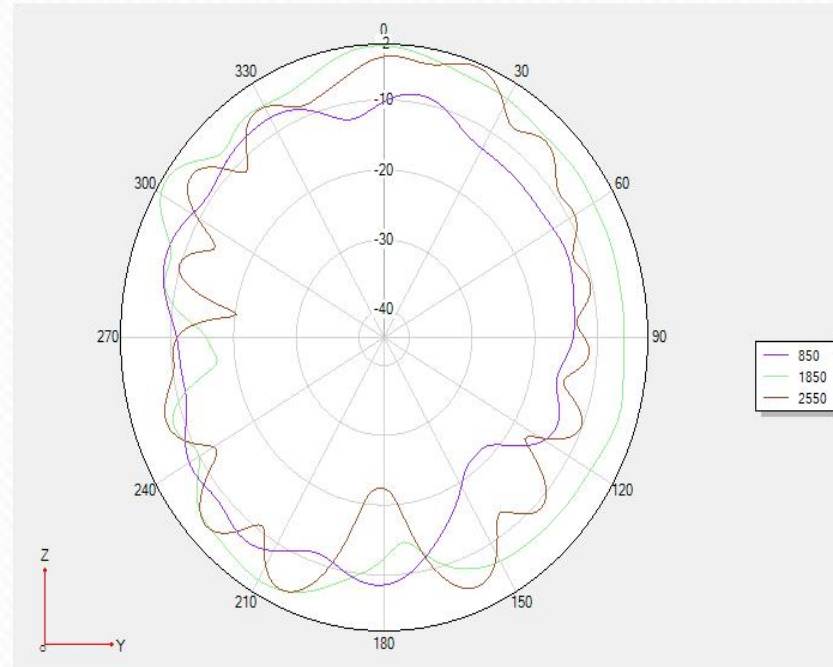
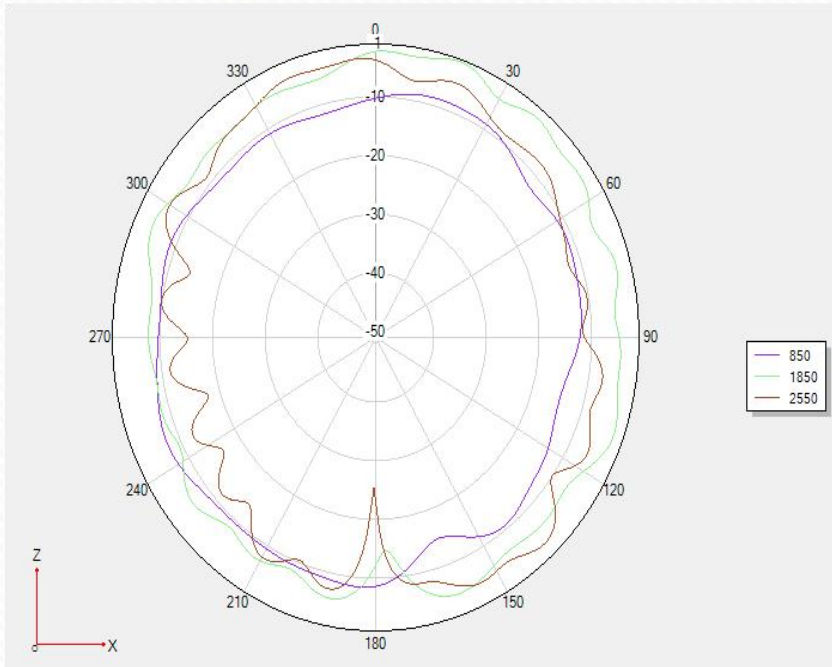


Main antenna Directional pattern




850Mhz

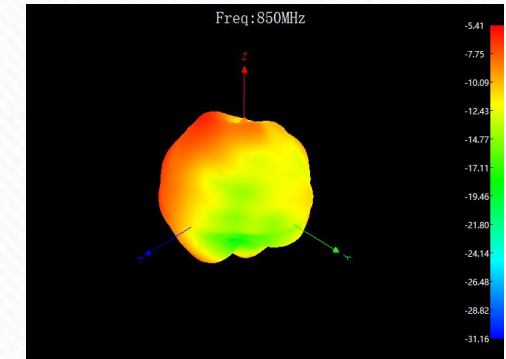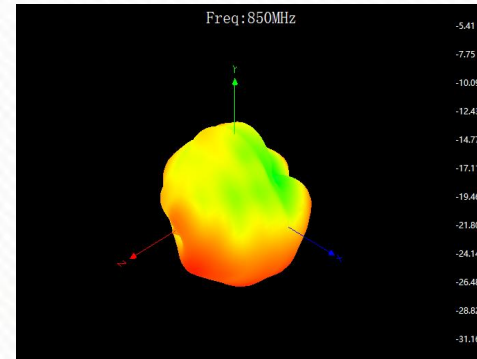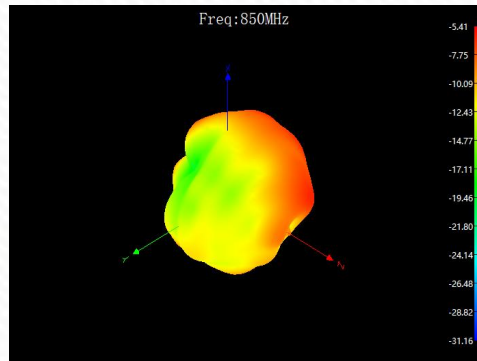


1850Mhz

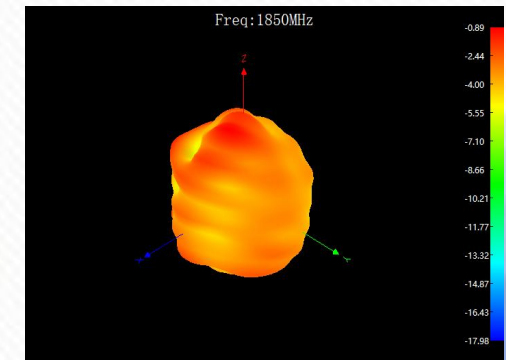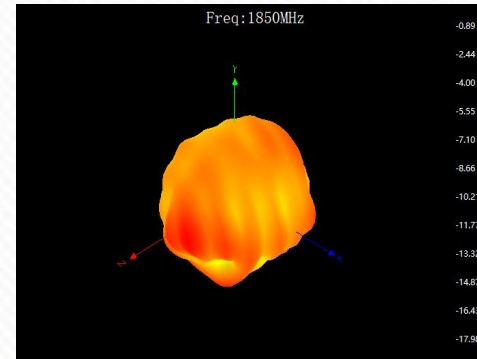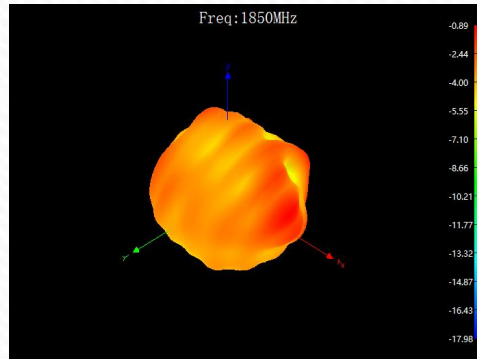

2550Mhz

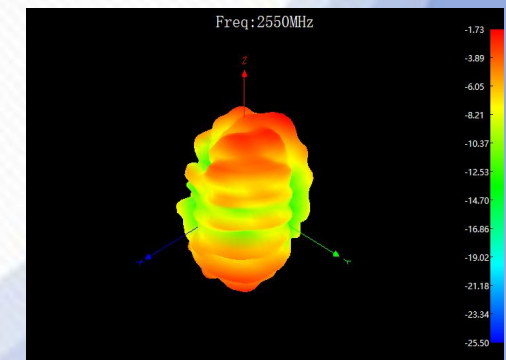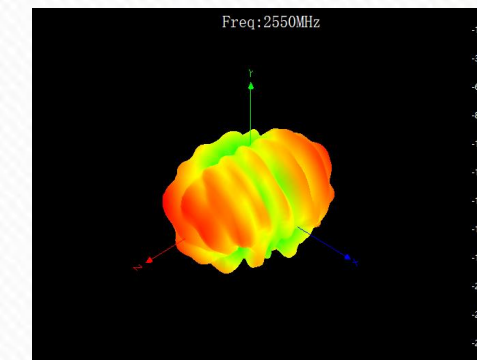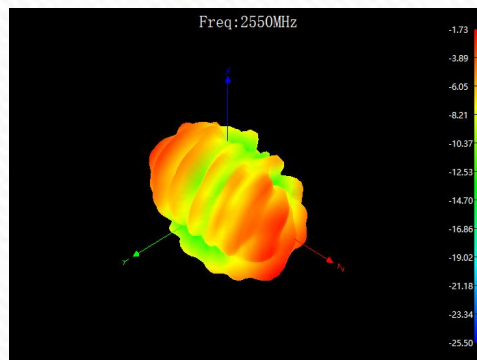

S11-VSWR

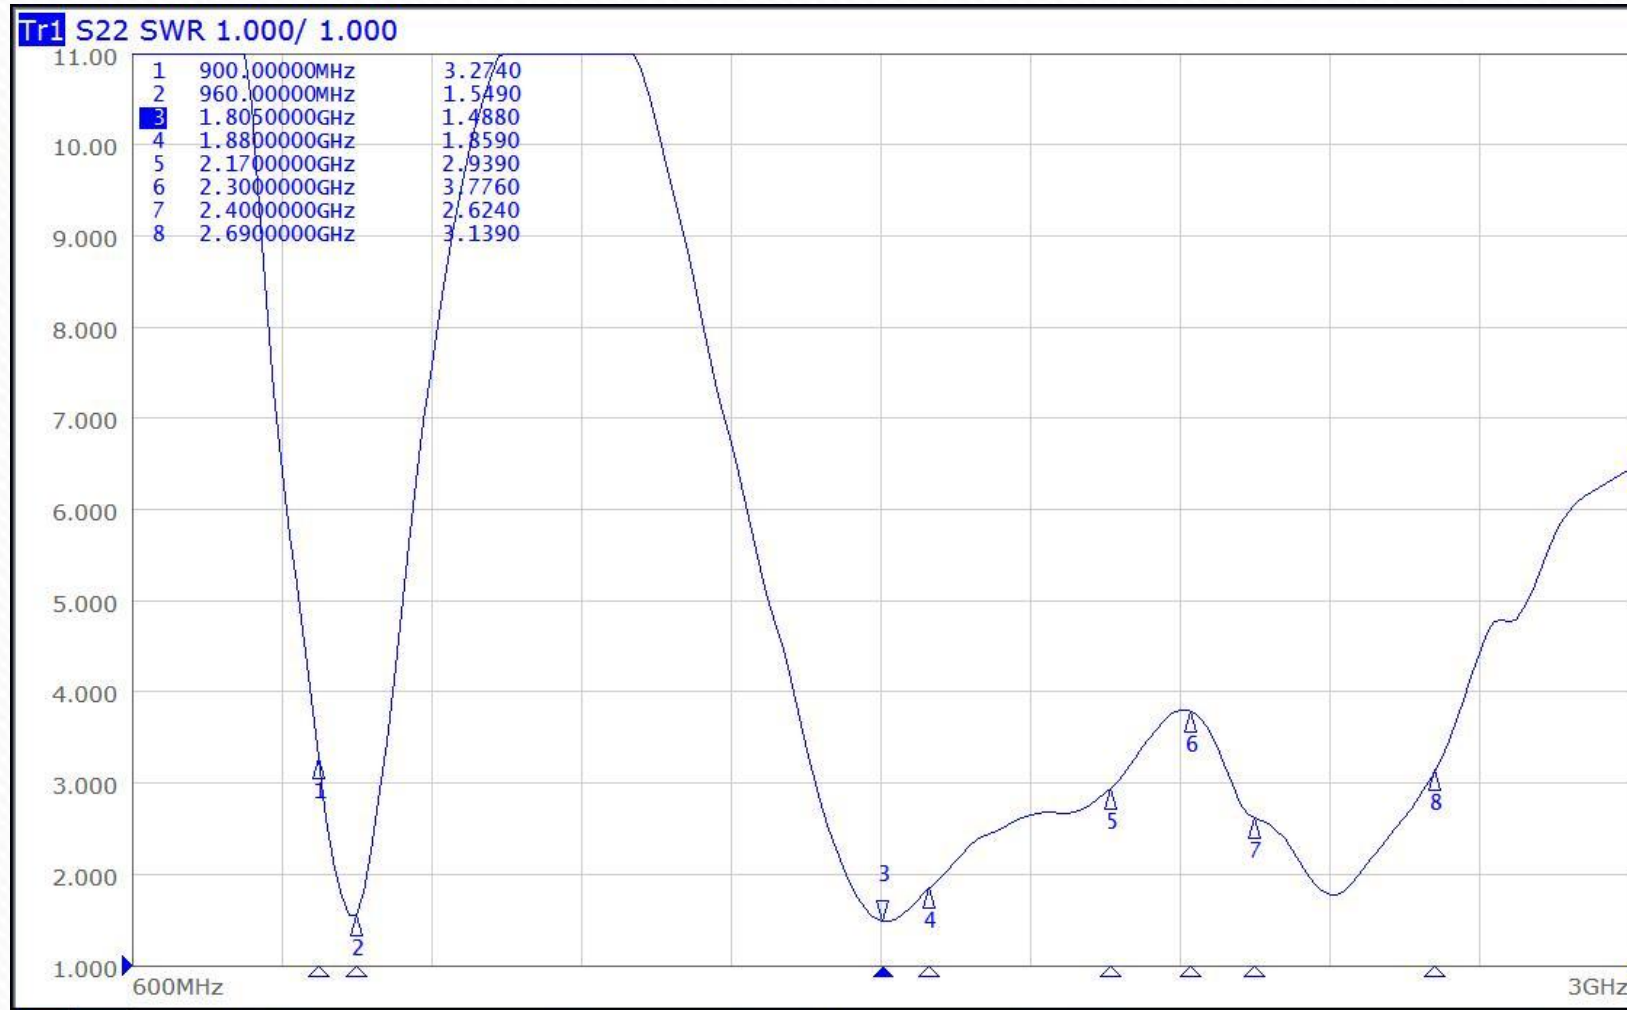




Diversity antenna efficiency and gain

Frequenc y/Mhz	MaxGa in/dBi	Efficienc y / %
800	-14.64	0.88
810	-13.98	1
820	-13.65	1.1
830	-12.58	1.37
840	-11.61	1.71
850	-10.41	2.15
860	-9.37	2.66
870	-8.24	3.33
880	-7.4	4.19
890	-6.6	5.04
900	-5.71	6.85
910	-4.78	8.67
920	-4.2	10.23
930	-4.17	9.73
940	-3.88	9.98
950	-4.19	9.08
960	-4.86	7.87
1710	-6.38	5.46
1720	-5.53	6.81
1730	-5.14	7.55
1740	-4.52	8.75
1750	-3.82	10.09
1760	-2.84	12.13
1770	-2.23	13.68
1780	-1.74	14.96
1790	-1.53	15.28
1800	-0.98	16.41
1810	-0.22	18.45

Frequenc y/Mhz	MaxGa in/dBi	Efficienc y / %
1820	0.19	19.1
1830	0.21	19.28
1840	0.23	20.14
1850	0.29	21.43
1860	0.19	21.09
1870	0.19	21.23
1880	0.39	21.63
1890	0.63	22.8
1900	0.28	22.03
1910	-0.32	21.83
1920	-0.88	21.83
1930	-0.92	21.68
1940	-0.77	21.73
1950	-0.54	22.28
1960	-0.4	22.23
1970	-0.43	22.13
1980	-0.38	22.44
1990	-0.65	21.13
2000	-0.28	22.18
2010	-0.23	22.34
2020	-0.27	22.03
2030	-0.36	21.98
2040	-0.12	23.07
2050	-0.15	23.07
2060	-0.3	21.88
2070	-0.45	22.34
2080	-0.17	22.96
2090	-0.06	23.17




Frequenc y/Mhz	MaxGa in/dBi	Efficienc y / %
2100	0.11	22.18
2110	0.31	22.13
2120	0.76	22.59
2130	0.56	23.55
2140	0.12	22.86
2150	-0.08	23.28
2160	0.18	24.1
2170	0.26	24.43
2310	2.23	31.26
2320	2.26	32.28
2330	2.02	31.7
2340	1.66	29.99
2350	1.77	30.83
2360	1.89	31.55
2370	1.98	31.41
2380	1.75	29.31
2390	1.89	29.85
2400	1.79	29.17
2410	1.51	28.18
2420	1.05	26.06
2430	0.91	26.12
2440	0.6	25.18
2450	0.46	25.18
2460	0	23.12
2470	-0.04	23.33
2480	-0.31	23.23
2490	-0.56	22.59
2500	-1.01	21.63

Frequenc y/Mhz	MaxGa in/dBi	Efficienc y / %
2510	-0.95	22.44
2520	-1.34	21.68
2530	-1.62	20.37
2540	-1.71	20.75
2550	-1.26	21.43
2560	-1.16	21.73
2570	-1.24	21.43
2580	-1.2	22.7
2590	-1.42	23.17
2600	-1.48	24.21
2610	-1.82	23.55
2620	-1.9	23.71
2630	-1.52	25.76
2640	-1.51	26.55
2650	-1.64	25.7
2660	-1.57	25.82
2670	-1.42	26.98
2680	-1.23	26.67
2690	-1.55	25.64

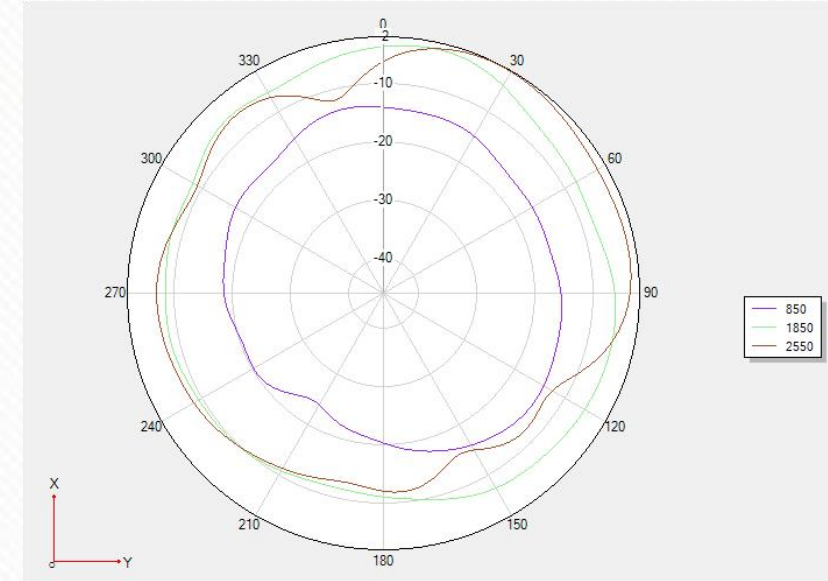
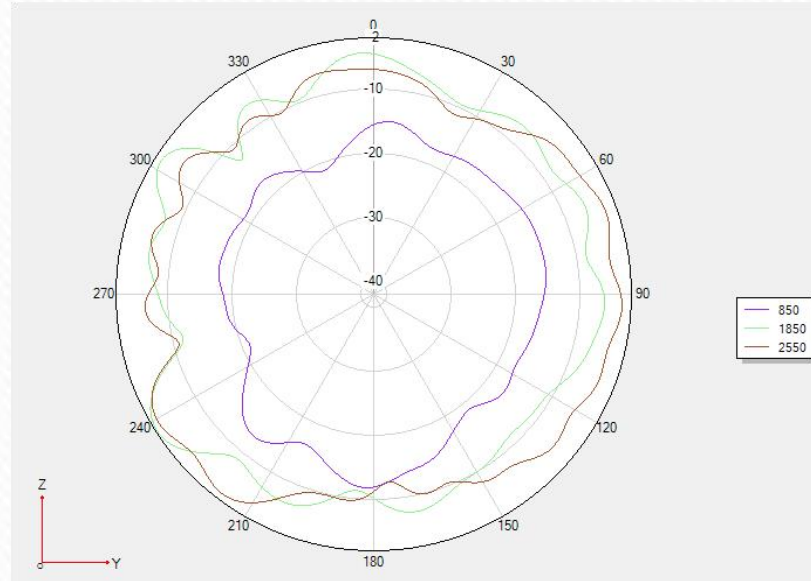
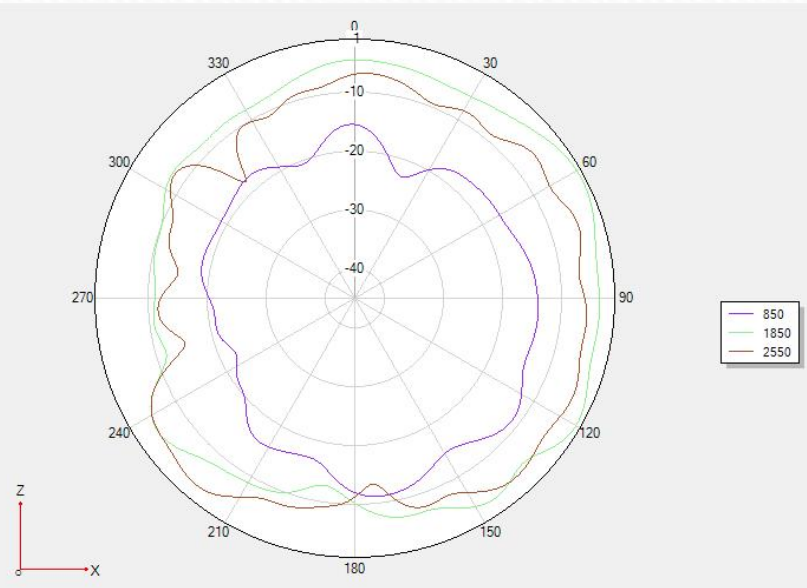


Directional pattern Directional pattern




850Mhz

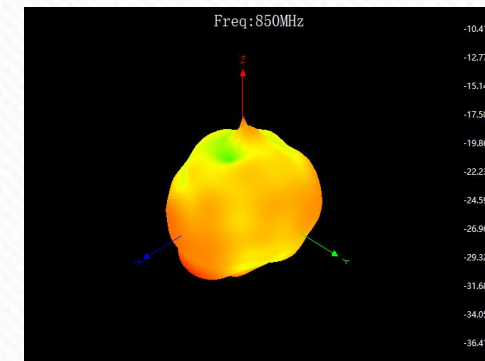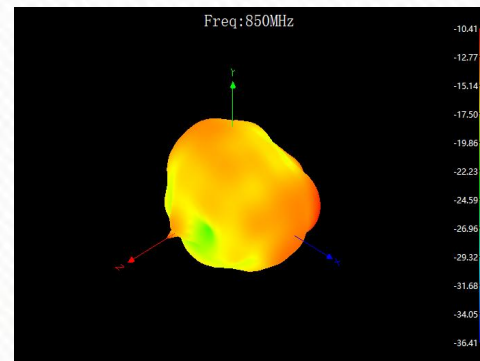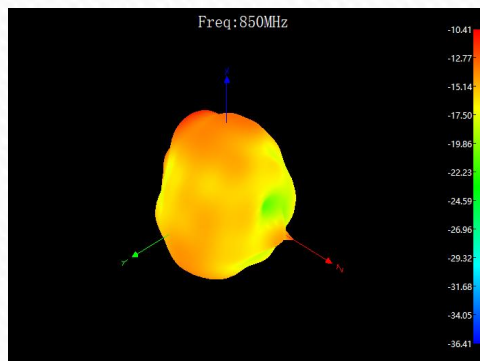

1850MHz

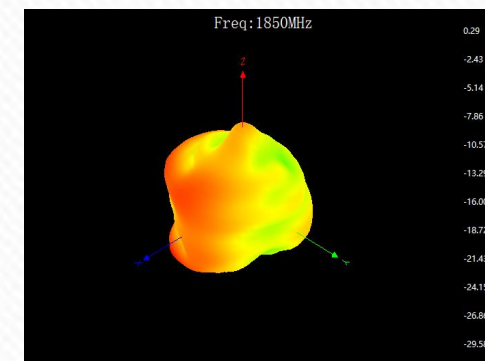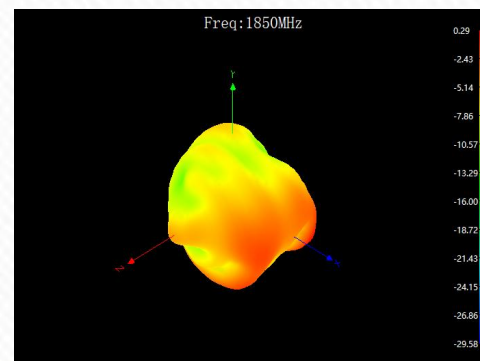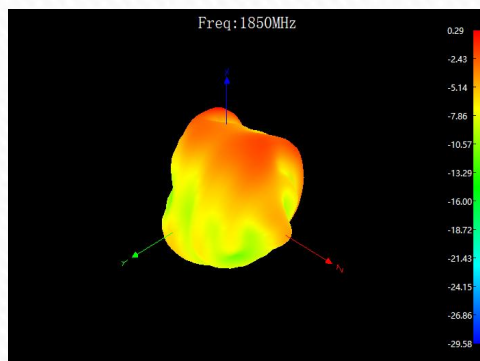

2550Mhz

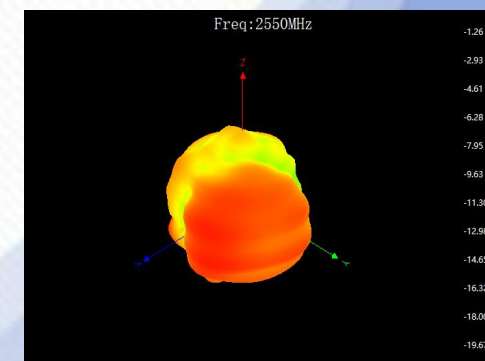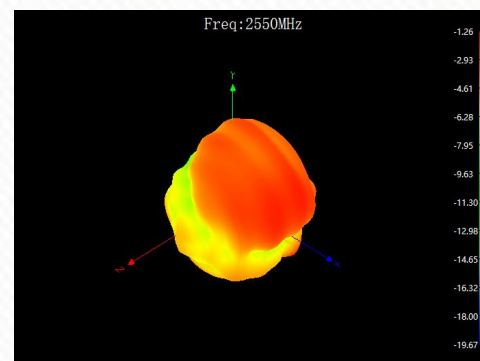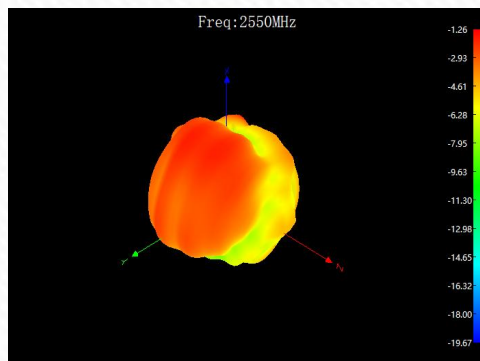

S11-VSWR



Three-in-one antenna efficiency and gain

Frequency/MHz	Efficiency / dB	Efficiency / %	MaxGain/dBi	Frequency/MHz	Efficiency / dB	Efficiency / %	MaxGain/dBi
1570	-4.6	34.67	-2.15	2400	-4.87	32.58	-0.79
1571	-4.89	32.43	-2.05	2410	-4.2	38.02	0.16
1572	-4.86	32.66	-1.73	2420	-5.16	30.48	-0.91
1573	-4.53	35.24	-1.28	2430	-5.14	30.62	-0.58
1574	-4.35	36.73	-0.8	2440	-4.86	32.66	-0.29
1575	-4.26	37.5	-0.49	2450	-4.21	37.93	1.54
1576	-4.72	33.73	-0.23	2460	-4.45	35.89	2.00
1577	-4.67	34.12	-0.04	2470	-4.58	34.83	1.21
1578	-4.52	35.32	0	2480	-4.33	36.9	1.39
1579	-4.32	36.98	0.01	2490	-3.98	39.99	1.58
1580	-4.03	39.54	-0.15	2500	-4.08	39.08	1.24
1570	-4.6	34.67	-2.15	2400	-4.87	32.58	1.79
				5150	-2.78	52.72	1.25
				5200	-2.78	52.72	1.03
				5250	-3.07	49.32	1.78
				5300	-2.9	51.29	1.48
				5350	-3.19	47.97	1.28
				5400	-3.63	43.35	1.98
				5450	-2.59	55.08	1.75
				5500	-3.37	46.03	1.1
				5550	-3.37	46.03	2.00
				5600	-3.02	49.89	1.51
				5650	-3.2	47.86	1.56
				5700	-3.31	46.67	1.42
				5750	-3.66	43.05	1.11
				5800	-2.93	50.93	1.14
				5850	-3.83	41.4	1.91

WIFI antenna OTA data

Bright screen			
Measurement	Band	Channel	Total
TRP	WIFI_B (1M)	1	11.84
TRP	WIFI_B (1M)	6	12.15
TRP	WIFI_B (1M)	11	12.95
TIS(EIRP)	WIFI_B (11M)	11	-82.46
TRP	WIFI_G (6M)	1	10.43
TRP	WIFI_G (6M)	6	11.29
TRP	WIFI_G (6M)	11	11.4
TIS(EIRP)	WIFI_G (54M)	11	-69.61
TRP	WIFI_N_ISM (6.5M)	1	9.38
TRP	WIFI_N_ISM (6.5M)	6	10.29
TRP	WIFI_N_ISM (6.5M)	11	10.33
TIS(EIRP)	WIFI_N_ISM (65M)	11	-67.23
TRP	WIFI_A (6M)	36	8.93
TRP	WIFI_A (6M)	149	8.81
TRP	WIFI_A (6M)	165	9.52
TIS(EIRP)	WIFI_A (54M)	165	-68.05

Screen extinction			
Measurement	Band	Channel	Total
TRP	WIFI_B (1M)	1	11.85
TRP	WIFI_B (1M)	6	12.13
TRP	WIFI_B (1M)	11	12.32
TIS(EIRP)	WIFI_B (11M)	11	-82.91
TRP	WIFI_G (6M)	1	10.39
TRP	WIFI_G (6M)	6	11.23
TRP	WIFI_G (6M)	11	11.39
TIS(EIRP)	WIFI_G (54M)	11	-69.46
TRP	WIFI_N_ISM (6.5M)	1	9.33
TRP	WIFI_N_ISM (6.5M)	6	10.24
TRP	WIFI_N_ISM (6.5M)	11	10.31
TIS(EIRP)	WIFI_N_ISM (65M)	11	-66.42
TRP	WIFI_A (6M)	36	8.86
TRP	WIFI_A (6M)	149	8.75
TRP	WIFI_A (6M)	165	9.46
TIS(EIRP)	WIFI_A (54M)	165	-68.36

GPS RQUN 55055AL1005 L11510RNSS 559AS

Average CNR

Show in single page

SVID	Fg	CNR	Elevation	Azimuth
2 L1	30.1	64.00	148.00	
3 L1	26.1	2.00	167.00	
4 L1	37.9	12.00	188.00	
7 L1	34.4	59.00	313.00	
8 L1	41.5	45.00	23.00	
9 L1	30.7	23.00	228.00	
14 L1	42.8	11.00	301.00	
16 L1	32.4	14.00	85.00	
17 L1	23.1	14.00	243.00	
21 L1	28.3	6.00	103.00	
27 L1	36.0	14.00	44.00	
30 L1	44.0	27.00	318.00	
71 L1	18.5	3.00	270.00	
73 L1	20.7	38.00	347.00	
74 L1	32.4	3.00	322.00	
79 L1	28.5	12.00	117.00	
80 L1	43.6	50.00	72.00	
82 L1	43.7	28.00	27.00	
83 L1	0.0	74.00	35.00	

GPS RQUN 55055AL1005 L11510RNSS 559AS

GPS RQUN 55055AL1005 L11510RNSS 559AS




Average CNR

GPS RQUN 55055AL1005 L11510RNSS 559AS

Show in single page




SVID	Fg	CNR	Elevation	Azimuth
2 L1	35.4	47.00	148.00	
3 L1	0.0	1.00	167.00	
4 L1	38.3	12.00	188.00	
7 L1	40.3	50.00	313.00	
8 L1	41.0	50.00	23.00	
9 L1	35.4	14.00	228.00	
14 L1	40.3	11.00	301.00	
16 L1	34.4	15.00	85.00	
17 L1	37.7	13.00	243.00	
21 L1	38.1	65.00	103.00	
27 L1	38.4	18.00	44.00	
30 L1	40.7	25.00	318.00	
70 L1	0.0	1.00	223.00	
71 L1	20.7	4.00	273.00	
73 L1	38.5	34.00	347.00	
74 L1	32.4	3.00	322.00	
79 L1	28.5	12.00	117.00	
80 L1	43.6	50.00	72.00	
82 L1	43.7	28.00	27.00	
83 L1	0.0	74.00	35.00	

Three-in-one antenna directional pattern

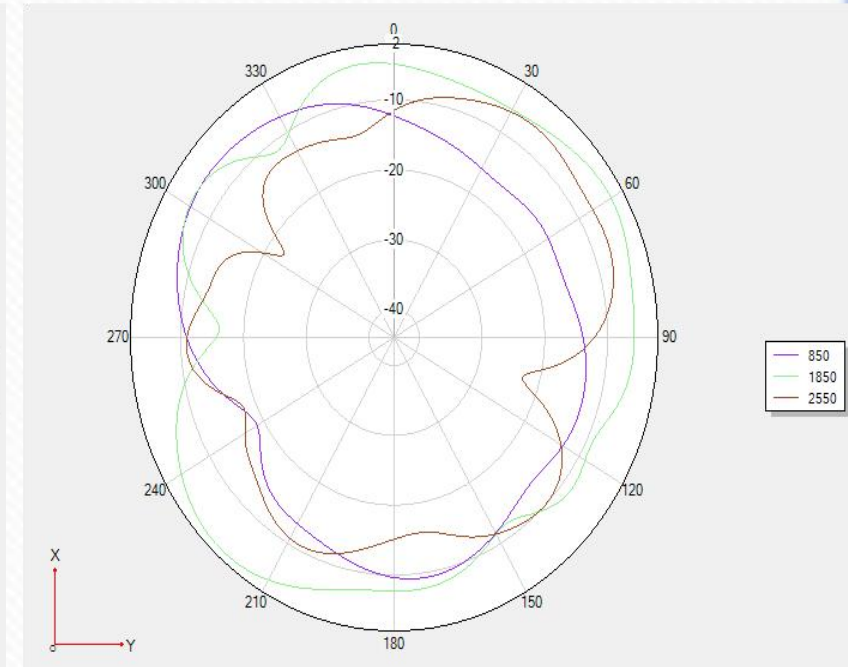
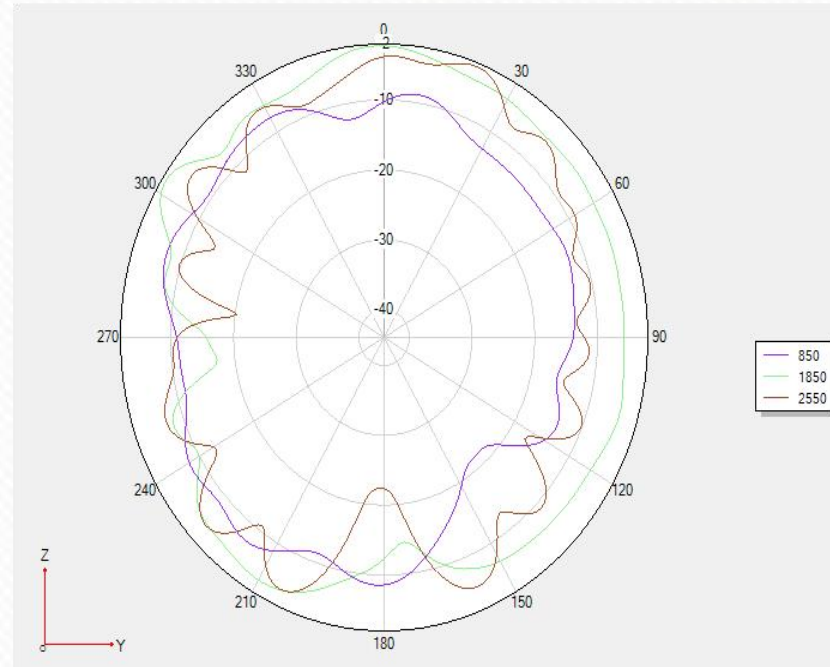
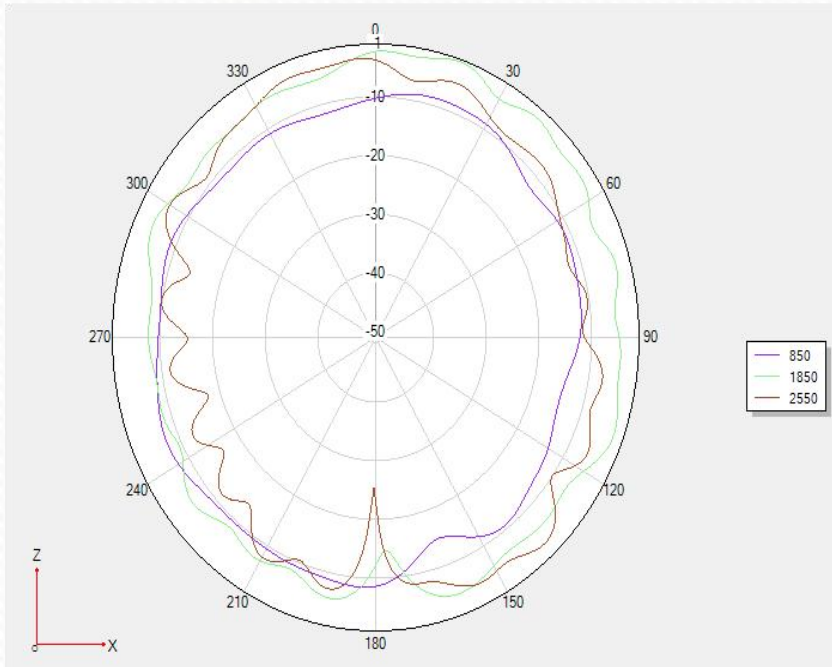


Three-in-one antenna directional pattern




1575Mhz

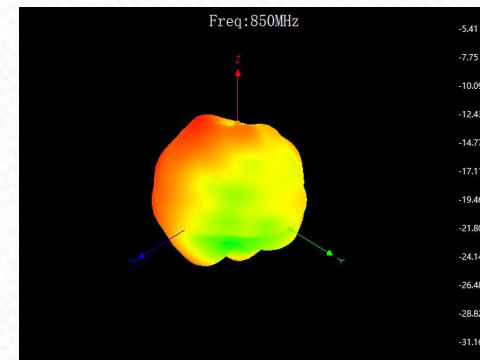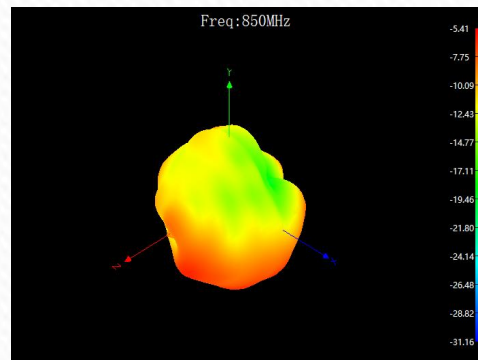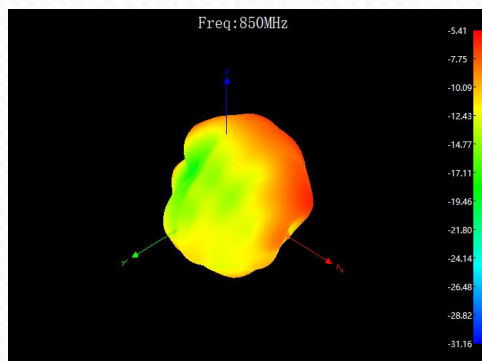


2450MHz

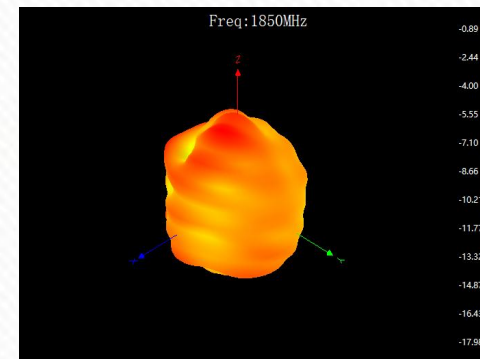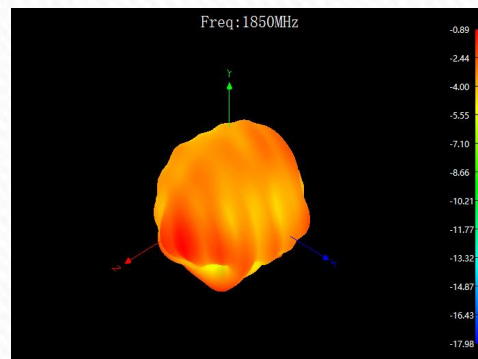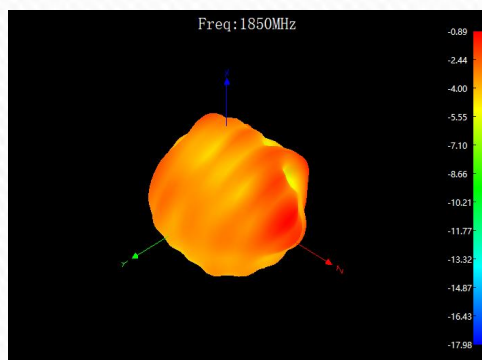


5550Mhz

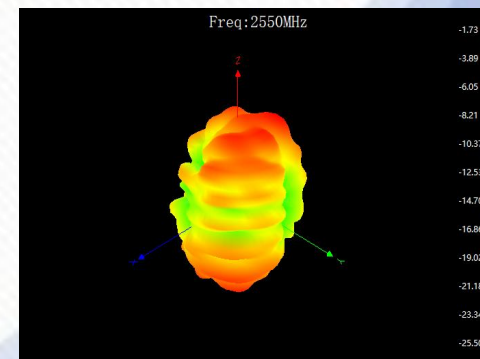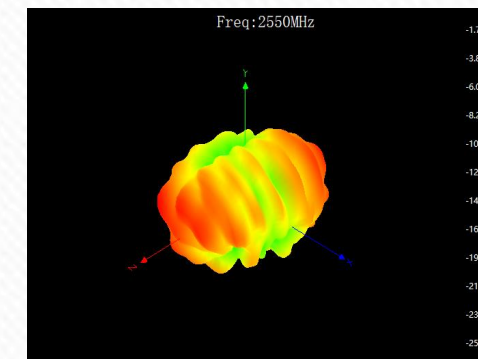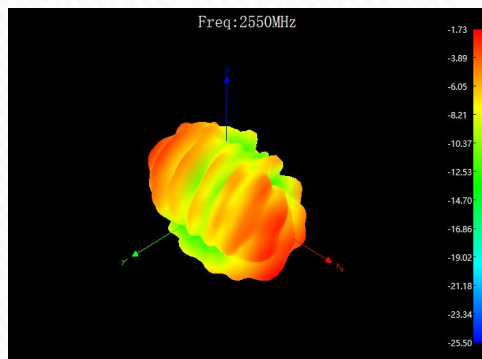

4G main ANT

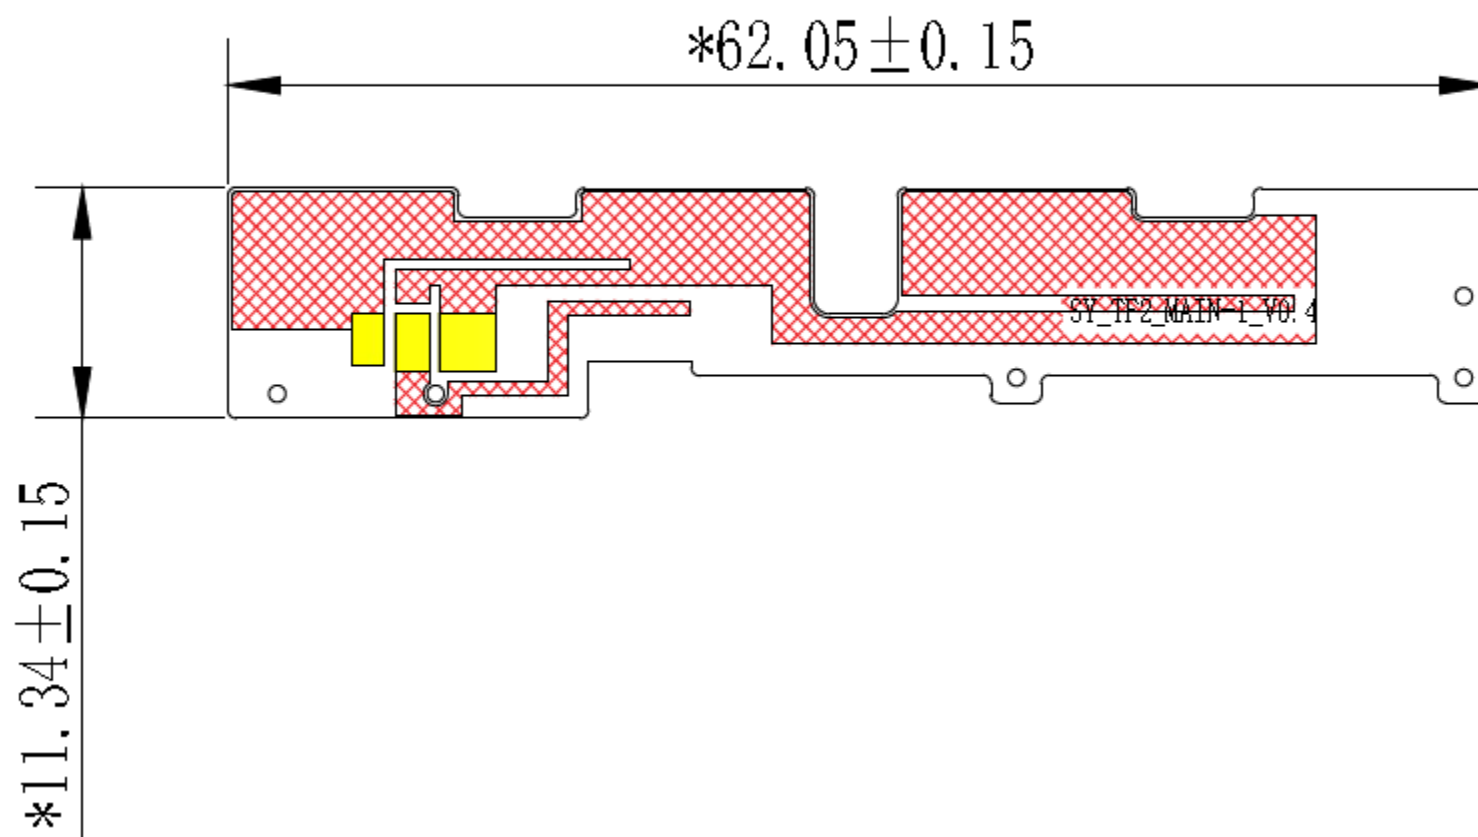


NFC ANT

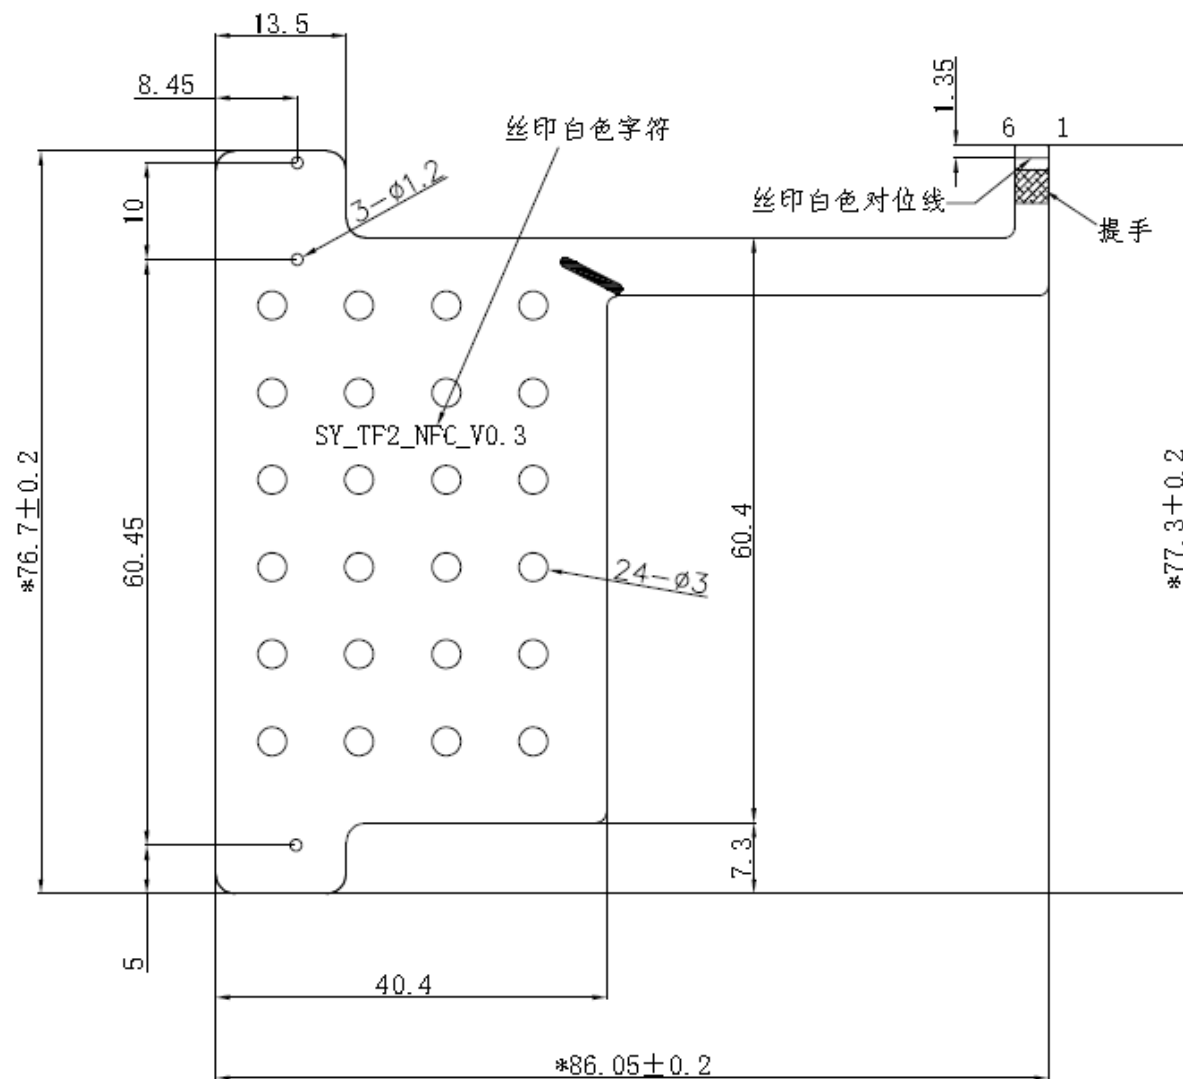


We statement that All measurements were performed radiated and therefore additional antenna gain documentation is not required.

BT&WLAN&GPS ANT

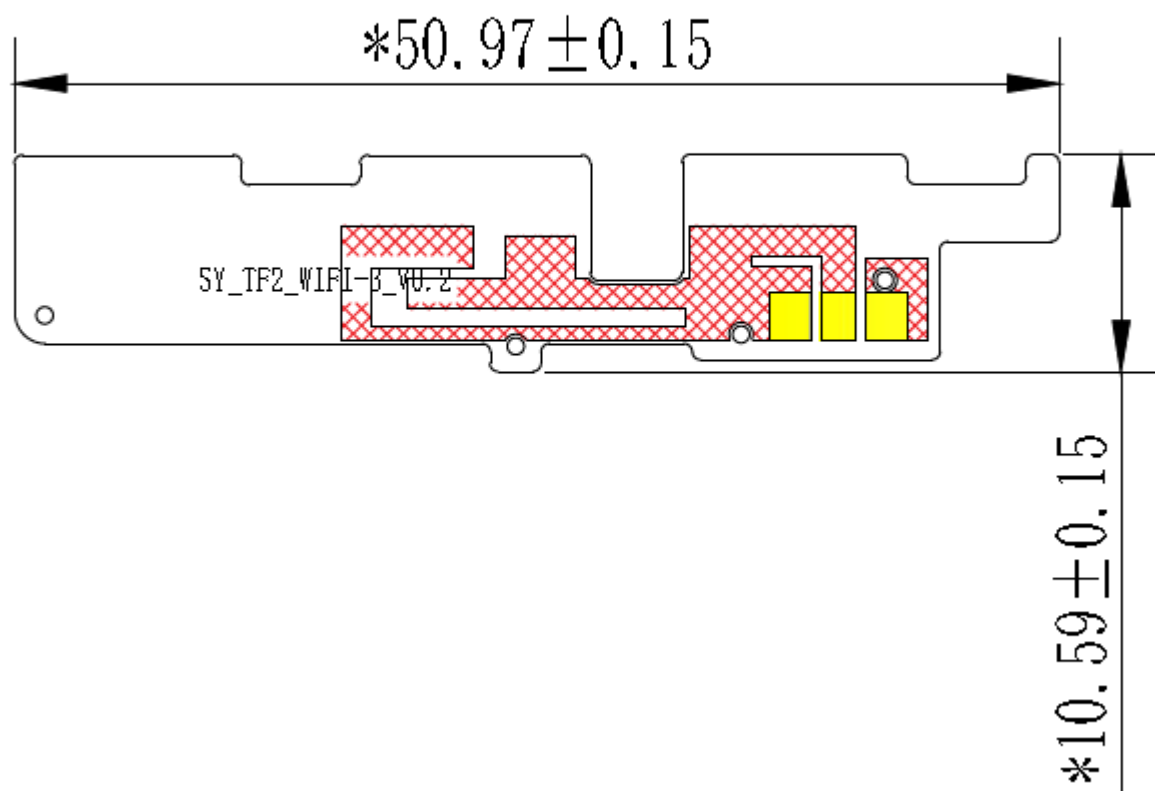

4G DIV ANT

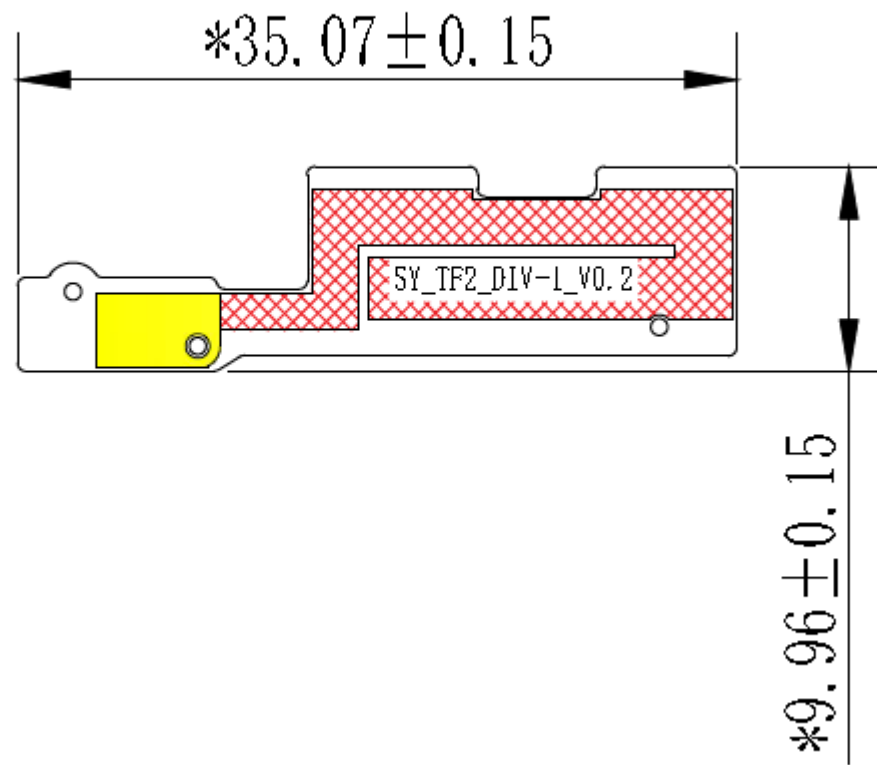

Thank You

Shanghai R&D Center: 1F, Building 4, No.99, Lane 215, Gaoguang Road, Qingpu District, Shanghai, 201799, PRC

Shenzhen R&D Center: The 6th floor, Building 5, Nantaiyun Innovation Valley Center, Guangming District, Shenzhen City

ChongQing R&D Center: 1F, ARM Ecological Industrial Park, 19 East Datugu Road, Xiantao, Yubei District, Chongqing, 401120, PRC

Huizhou Factory: 4-5F, No.1, Central Village Road, Longhu Industrial Zone, Shuikou Town, Huicheng District, Huizhou, 516255, PRC

TEL: 021-60835368 E-mail: sales@sunnyway-iot.com

www.sunnyway-iot.com

