

Shenzhen Zhenduan Electroic Technology Co,.Ltd

SPECIFICATION FOR APPROVAL

CUSTOMER

Product Name ofCustomer 303030-00020

product Mame ofOurs(Maternal) A11 D43*0.5MM
3MMGummed paper L45MM


APPROVED

APPROVED 邓湘 **DRAWN** 赖伟 **DATE** 2022.3.23



REVISED RECORD

PEVISON NO	DATE	REVISE DESCRIPTION		Change person
REV:01				
REV:02				
ESCRINED		CHECKED	APPROVED	PACE
赖伟		邓湘	陈展良	

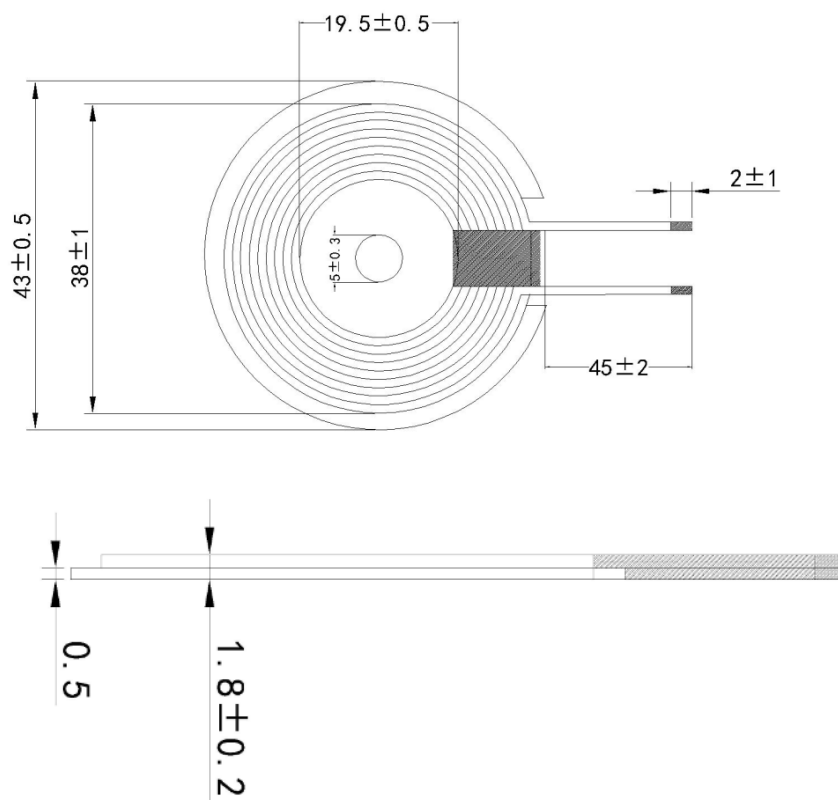


UNIT: mm

* Dimension without tolerance is approx.

3. Coils Specification

3-1. Connection (Bottom View)

“●” START



Note:

Spec. No.

Specifcation					CUSTOMERP/N:			
					PARTNUMBER:			
5.WINDING DETAILS:								
Wdy.NO.	Start	Finish	Turns	Wire Dia	Wdg.TyepeSprad/lose	Wdg.Direction	Turns/Layer	
	S	F	10TS	0.08*48P	Single-layeer	Anticlockwise	1 /10TS	
6.ELECTRICAL CHARACTERISTICS:								
PARAMETERS				UNIN		LIMTI		
Inductance Is@100KHz/1v				uh		6.5 ±5%		
Q @100KHz/1v						38MIN		
DCR @100KHz/1v				m Ω		90MAX		
APPROVED BY		CHECKED BY		PREPARED BY		DATE		PAGE
				赖伟		2022.3.23		

MATERIAL LIST			CUSTOMER P/N:		
			PARTNUMBER:		
NO.	Material name	Description	Manufacturer	Material	
1	Silk-covered wire	0.08*48P			
2	Lead free tin	High temperatuye			
3	Alloy sheet	43*0.5			
4	High temperature adhesive tape	5mm			
5	Sponge	42*0.5mm			
6	3MGummed paper	43mm			
APPROVED BY		CHECKED BY	PREPARED BY	DATE	PAGE
			赖伟	2022.3.23	