

# **FCC C2PC Test Report**

FCC ID : QTG-ZKSA

Equipment : ZAGG Folio Case with Keyboard-Ellipsis 8"

**Tablet 2016-Hinged Folio-Black Case-Black** 

Back-lit KB

Model No. : Folio-I-E86ZFK-BB0

Brand Name : ZAGG

Applicant : ZAGG Inc.

Address : 910 West Legacy Center Drive, Suite 500,

Midvale, UT 84047

Standard : 47 CFR FCC Part 15.247

Received Date : Sep. 08, 2016
Tested Date : Sep. 12, 2016

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: Approved by:

long Chen/ Assistant Manager Gary Chang / Manager

2732

Report No.: FR5D2201-02 Page: 1 of 17



# **Table of Contents**

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	
1.3	Test Setup Chart	7
1.4	The Equipment List	
1.5	Test Standards	8
1.6	Measurement Uncertainty	8
2	TEST CONFIGURATION	9
2.1	Testing Condition	g
2.2	The Worst Test Modes and Channel Details	g
3	TRANSMITTER TEST RESULTS	10
3.1	Unwanted Emissions into Restricted Frequency Bands	10
4	TEST LABORATORY INFORMATION	17



# **Release Record**

Report No.	Version	Description	Issued Date
FR5D2201-02	Rev. 01	Initial issue	Sep. 20, 2016

Report No.: FR5D2201-02 Page: 3 of 17



# **Summary of Test Results**

FCC Rules	Test Items	Measured	Result
15.247(d)	Radiated Emissions	[dBuV/m at 3m]:233.65MHz	Door
15.209	Radiated Emissions	40.77 (Margin -5.23dB) - PK	Pass

Report No.: FR5D2201-02 Page: 4 of 17



# 1 General Description

### 1.1 Information

This report is prepared for FCC class II permissive change.

This report is issued as a supplementary report to original ICC report no.FR5D2201-01. The modification is concerned with following:

- ♦ Change model name and product name
- Outer appearance size is difference

Therefore, only radiated emission tests had been re-tested and presented in following sections.

### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information						
Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number	Data Rate		
2400-2483.5	BR V3.0	2402-2480	0-78 [79]	1 Mbps		

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.

Note 2: Bluetooth BR uses a GFSK.

Note 3: Packet type is only DH1

#### 1.1.2 Antenna Details

Ant. No.	Туре	Gain (dBi)	Connector	Remark
1	PCB	2	N/A	

### 1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	3.7Vdc from battery 5Vdc from host
-------------------	---------------------------------------

#### 1.1.4 Accessories

	Accessories						
No. Equipment Description							
1	Li-Polymer Battery	Power Rating: 3.7Vdc, 1.67Wh					
2 USB cable 0.5m shielded without ferrite core. (For charging only)							

Report No.: FR5D2201-02 Page : 5 of 17



### 1.1.5 Channel List

	Frequency band (MHz)				2400~	2483.5	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		


Report No.: FR5D2201-02 Page: 6 of 17



# 1.2 Local Support Equipment List

	Support Equipment List						
No. Equipment Brand Model FCC ID Signal cable / Length (m							
1	Notebook	DELL	Latitude E6430	DoC			

# 1.3 Test Setup Chart

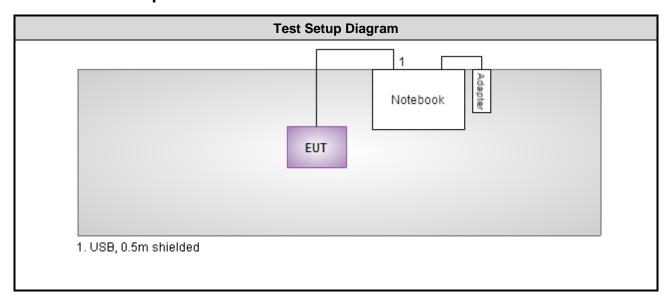

Report No.: FR5D2201-02 Page: 7 of 17



## 1.4 The Equipment List

Test Item	Radiated Emission					
Test Site	966 chamber 3 / (03CH03-WS)					
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until	
Spectrum Analyzer	Agilent	N9010A	MY53400091	Sep. 14, 2015	Sep. 13, 2016	
Receiver	Agilent	N9038A	MY53290044	Oct. 14, 2015	Oct. 13, 2016	
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Apr. 26, 2016	Apr. 25, 2017	
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Feb. 24, 2016	Feb. 23, 2017	
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 04, 2015	Nov. 03, 2016	
Preamplifier	EMC	EMC02325	980187	Sep. 21, 2015	Sep. 20, 2016	
Preamplifier	Agilent	83017A	MY53270014	Aug. 22, 2016	Aug. 21, 2017	
Preamplifier	EMC	EMC184045B	980192	Aug. 24, 2016	Aug. 23, 2017	
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Feb. 05, 2016	Feb. 04, 2017	
RF cable-8M	HUBER+SUHNER	SUCOFLEX104	MY22600/4	Feb. 05, 2016	Feb. 04, 2017	
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Feb. 05, 2016	Feb. 04, 2017	
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Feb. 05, 2016	Feb. 04, 2017	
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Feb. 05, 2016	Feb. 04, 2017	
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Feb. 05, 2016	Feb. 04, 2017	
Measurement Software	AUDIX	e3	6.120210g	NA	NA	
Note: Calibration Inte	erval of instruments lis	sted above is one year.				

## 1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247 ANSI C63.10-2013

### 1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty				
Parameters Uncertain				
Radiated emission ≤ 1GHz	±3.66 dB			
Radiated emission > 1GHz	±5.37 dB			

Report No.: FR5D2201-02 Page: 8 of 17



# 2 Test Configuration

# 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
Radiated Emissions	03CH03-WS	23°C / 66%	Aska Huang

➤ FCC site registration No.: 207696➤ IC site registration No.: 10807C-1

### 2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate (Mbps)	Test Configuration
Radiated Emissions ≤ 1GHz	GFSK	2480	1Mbps	
Radiated Emissions > 1GHz	GFSK	2480	1Mbps	

Report No.: FR5D2201-02 Page: 9 of 17



### 3 Transmitter Test Results

### 3.1 Unwanted Emissions into Restricted Frequency Bands

### 3.1.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit						
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)			
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300			
0.490~1.705	24000/F(kHz)	33.8 - 23	30			
1.705~30.0	30	29	30			
30~88	100	40	3			
88~216	150	43.5	3			
216~960	200	46	3			
Above 960	500	54	3			

#### Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2:** 

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Report No.: FR5D2201-02 Page: 10 of 17



#### 3.1.2 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

#### Note:

3.

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. Radiated emission above 1GHz / Peak value RBW=1MHz, VBW=3MHz and Peak detector

Radiated emission above 1GHz / Average value for harmonics
The average value is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula for DH1 packet type which has worst duty factor:


20log (Duty cycle) = 20log 
$$\frac{1s / 1600 * 2}{100 \text{ ms}}$$
 = -38.06dB

4. Radiated emission above 1GHz / Average value for other emissions RBW=1MHz, VBW=1/T and Peak detector

Report No.: FR5D2201-02 Page: 11 of 17




### 3.1.3 Test Setup

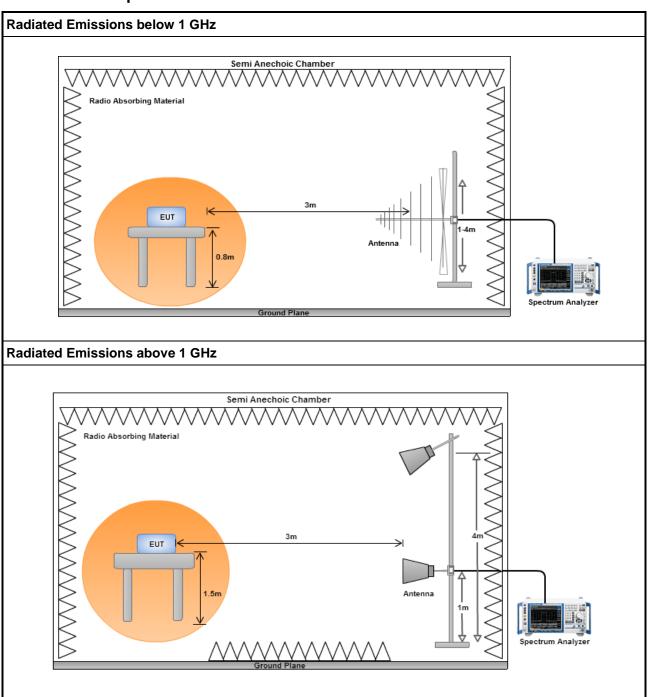

Report No.: FR5D2201-02 Page: 12 of 17



### 3.1.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

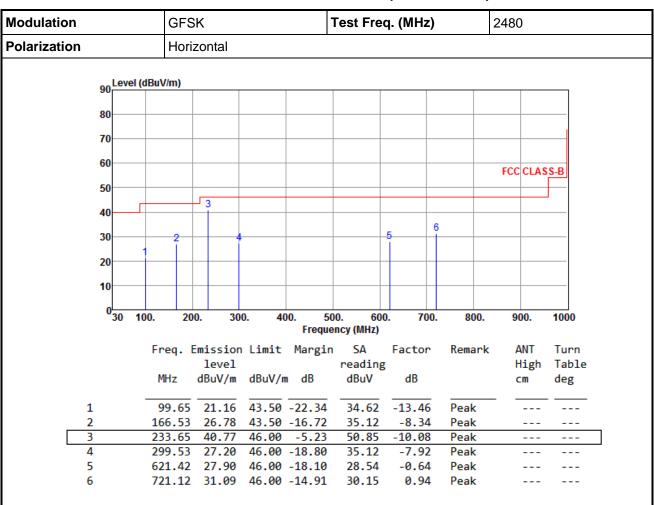

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR5D2201-02 Page: 13 of 17



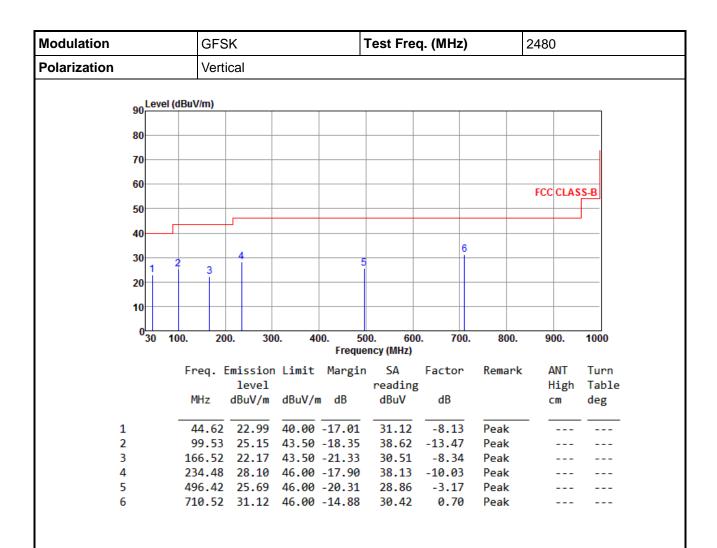

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR5D2201-02 Page: 14 of 17



### 3.1.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)

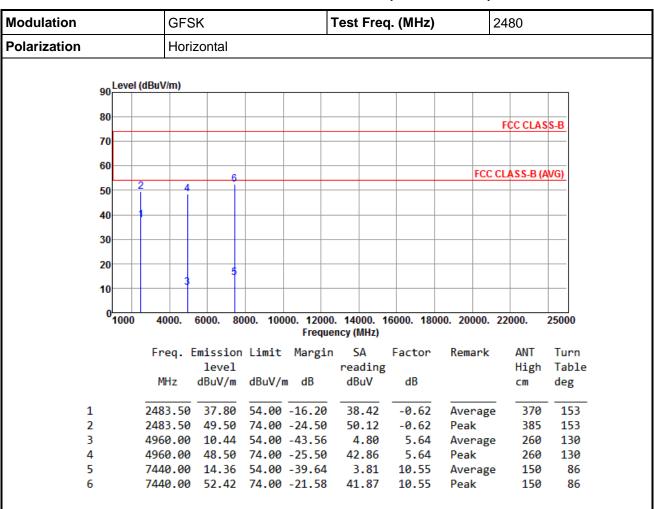

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR5D2201-02 Page: 15 of 17



Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical		

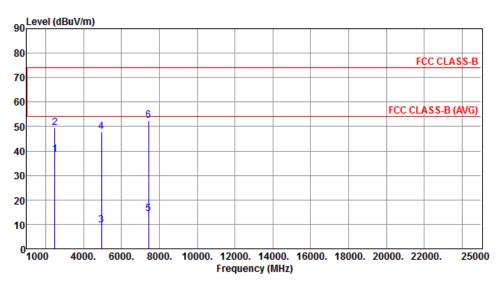

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ü	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
	11112	ubuv/III	ubuv/III	ub	ubuv	ub		CIII	ueg
1	2483.50	38.49	54.00	-15.51	39.11	-0.62	Average	386	239
2	2483.50	49.40	74.00	-24.60	50.02	-0.62	Peak	386	239
3	4960.00	9.74	54.00	-44.26	4.10	5.64	Average	350	47
4	4960.00	47.80	74.00	-26.20	42.16	5.64	Peak	350	47
5	7440.00	14.36	54.00	-39.64	3.81	10.55	Average	150	212
6	7440.00	52.42	74.00	-21.58	41.87	10.55	Peak	150	212

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR5D2201-02 Page: 16 of 17



### 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <a href="http://www.icertifi.com.tw">http://www.icertifi.com.tw</a>.

#### Linkou

Tel: 886-2-2601-1640 No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City,

Taiwan, R.O.C.

#### Kwei Shan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

#### Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==

Report No.: FR5D2201-02 Page: 17 of 17