



TEST REPORT

No. I17D00008-SAR

For

Client: Hisense International Co., Ltd.

Production: Smartphone

Model Name: Hisense T963

FCC ID: 2ADOBT963

Hardware Version: V1.00

Software Version: L1348.6.01.01.MX06

Issued date: 2017-2-7

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of ECIT Shanghai.

Test Laboratory:

ECIT Shanghai, East China Institute of Telecommunications

Add: 7-8F, G Area, No.668, Beijing East Road, Huangpu District, Shanghai, P. R. China

Tel: (+86)-021-63843300, E-Mail: welcome@ecit.org.cn

Revision Version

| Report Number | Revision | Date | Memo |
|---------------|----------|----------|---------------------------------|
| I17D00008-SAR | 00 | 2017-2-7 | Initial creation of test report |

CONTENTS

| | | |
|------|--|----|
| 1. | TEST LABORATORY | 6 |
| 1.1. | TESTING LOCATION..... | 6 |
| 1.2. | TESTING ENVIRONMENT | 6 |
| 1.3. | PROJECT DATA | 6 |
| 1.4. | SIGNATURE | 6 |
| 2. | STATEMENT OF COMPLIANCE..... | 7 |
| 3. | CLIENT INFORMATION..... | 10 |
| 3.1. | APPLICANT INFORMATION..... | 10 |
| 3.2. | MANUFACTURER INFORMATION..... | 10 |
| 4. | EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)..... | 11 |
| 4.1. | ABOUT EUT | 11 |
| 4.2. | MAIN SUPPLY..... | 12 |
| 4.3. | SECONDARY SUPPLY | 12 |
| 4.4. | INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST | 12 |
| 4.5. | INTERNAL IDENTIFICATION OF AE USED DURING THE TEST..... | 12 |
| 5. | TEST METHODOLOGY | 13 |
| 5.1. | APPLICABLE LIMIT REGULATIONS | 13 |
| 5.2. | APPLICABLE MEASUREMENT STANDARDS..... | 13 |
| 6. | SPECIFIC ABSORPTION RATE (SAR) | 14 |
| 6.1. | INTRODUCTION | 14 |
| 6.2. | SAR DEFINITION..... | 14 |
| 7. | TISSUE SIMULATING LIQUIDS..... | 15 |
| 7.1. | TARGETS FOR TISSUE SIMULATING LIQUID | 15 |
| 7.2. | DIELECTRIC PERFORMANCE..... | 15 |
| 8. | SYSTEM VERIFICATION..... | 19 |

| | | |
|----------|--|----|
| 8.1. | SYSTEM SETUP | 19 |
| 8.2. | SYSTEM VERIFICATION..... | 20 |
| 9. | MEASUREMENT PROCEDURES..... | 22 |
| 9.1. | TESTS TO BE PERFORMED | 22 |
| 9.2. | GENERAL MEASUREMENT PROCEDURE..... | 23 |
| 9.3. | WCDMA MEASUREMENT PROCEDURES FOR SAR | 25 |
| 9.4. | BLUETOOTH & WI-FI MEASUREMENT PROCEDURES FOR SAR | 26 |
| 9.5. | POWER DRIFT..... | 26 |
| 10. | AREA SCAN BASED 1-G SAR | 27 |
| 11. | CONDUCTED OUTPUT POWER | 28 |
| 11.1. | MANUFACTURING TOLERANCE | 28 |
| 11.2. | GSM MEASUREMENT RESULT | 33 |
| 11.3. | WCDMA MEASUREMENT RESULT | 35 |
| 11.4. | WI-FI AND BT MEASUREMENT RESULT..... | 36 |
| 12. | SIMULTANEOUS TX SAR CONSIDERATIONS | 39 |
| 12.1. | INTRODUCTION | 39 |
| 12.2. | TRANSMIT ANTENNA SEPARATION DISTANCES..... | 39 |
| 12.3. | STANDALONE SAR TEST EXCLUSION CONSIDERATIONS | 40 |
| 12.4. | SAR MEASUREMENT POSITIONS | 40 |
| 13. | EVALUATION OF SIMULTANEOUS | 41 |
| 14. | SAR TEST RESULT | 44 |
| 15. | SAR MEASUREMENT VARIABILITY | 50 |
| 16. | MEASUREMENT UNCERTAINTY | 51 |
| 17. | MAIN TEST INSTRUMENT..... | 52 |
| ANNEX A. | GRAPH RESULTS | 53 |
| ANNEX B. | SYSTEM VALIDATION RESULTS | 76 |

| | | |
|-----------------|--|------------|
| ANNEX C. | SAR MEASUREMENT SETUP | 89 |
| ANNEX D. | POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM..... | 98 |
| ANNEX E. | EQUIVALENT MEDIA RECIPES | 102 |
| ANNEX F. | SYSTEM VALIDATION | 103 |
| ANNEX G. | PROBE AND DAE CALIBRATION CERTIFICATE..... | 104 |
| ANNEX H. | ACCREDITATION CERTIFICATE | 168 |

1. Test Laboratory

1.1. Testing Location

| | |
|---------------|---|
| Company Name: | ECIT Shanghai, East China Institute of Telecommunications |
| Address: | 7-8F, G Area, No. 668, Beijing East Road, Huangpu District, Shanghai, P. R. China |
| Postal Code: | 200001 |
| Telephone: | (+86)-021-63843300 |
| Fax: | (+86)-021-63843301 |

1.2. Testing Environment

| | |
|-----------------------------|--------------|
| Normal Temperature: | 18-25°C |
| Relative Humidity: | 10-90% |
| Ambient noise & Reflection: | < 0.012 W/kg |

1.3. Project Data

| | |
|---------------------|--------------|
| Project Leader: | Wang Yaqiong |
| Testing Start Date: | 2017-1-10 |
| Testing End Date: | 2017-1-18 |


1.4. Signature



Yan Hang
(Prepared this test report)



Song Kaihua
(Reviewed this test report)



Zheng Zhongbin
Director of the laboratory
(Approved this test report)

2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Hisense T963** are as follows (with expanded uncertainty 22.4%)

Table 2.1: Max. Reported SAR Main Supply (1g)

| Band | Position/Distance | SAR 1g (W/Kg) |
|-------------|-------------------|------------------|
| GSM 850 | Head | 0.331 |
| | Body worn/10mm | 0.659 |
| | Hotspot/10mm | 0.659 |
| GSM 1900 | Head | 0.256 |
| | Body worn/10mm | 0.993 |
| | Hotspot/10mm | 0.993 |
| WCDMA Band2 | Head | 0.279 |
| | Body worn/10mm | 1.059 |
| | Hotspot/10mm | 1.15 |
| WCDMA Band4 | Head | 0.229 |
| | Body worn/10mm | 0.742 |
| | Hotspot/10mm | 0.836 |
| WCDMA Band5 | Head | 0.408 |
| | Body worn/10mm | 0.481 |
| | Hotspot/10mm | 0.481 |
| Wi-Fi | Head | 0.574 |
| | Body worn/10mm | 0.231 |
| | Hotspot/10mm | 0.231 |

Table 2.1: Max. Reported SAR Secondary supply (1g)

| Band | Position/Distance | SAR 1g (W/Kg) |
|-------------|-------------------|---------------|
| GSM 850 | Body worn/10mm | 0.444 |
| | Hotspot/10mm | 0.444 |
| GSM 1900 | Body worn/10mm | 1.035 |
| | Hotspot/10mm | 1.035 |
| WCDMA Band2 | Body worn/10mm | 0.686 |
| | Hotspot/10mm | 0.686 |
| WCDMA Band4 | Body worn/10mm | 0.787 |
| | Hotspot/10mm | 0.787 |
| WCDMA Band5 | Body worn/10mm | 0.113 |
| | Hotspot/10mm | 0.113 |
| Wi-Fi | Head | 0.621 |
| | Body worn/10mm | 0.210 |
| | Hotspot/10mm | 0.210 |

Table 2.3: The maximum of SAR values

| | Maximum SAR value for Head | Maximum SAR value for Body worn | Maximum SAR value for Hotspot |
|--------------|----------------------------|---------------------------------|-------------------------------|
| GSM | 0.331 | 1.035 | 1.035 |
| WCDMA | 0.408 | 1.059 | 1.15 |
| WIFI | 0.621 | 0.231 | 0.231 |

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the ANSI C95.1-1999.

For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The measurement together with the test system set-up is described in chapter 7 of this test report. A detailed description of the equipment under test can be found in chapter 3 of this test report.

The sample has three antennas. One is main antenna for GSM/WCDMA, and the other is for WiFi/BT and GPS. So simultaneous transmission is GSM/WCDMA and WiFi/BT.

Table 2.3: Simultaneous SAR (1g)

| Transmission SAR(W/Kg) | | | | | | | |
|------------------------|--------------|----------|-------|-------|-------|-------|-------|
| Test Position | | | 2G | 3G | WIFI | BT | SUM |
| Head | Left | Cheek | 0.274 | 0.387 | 0.621 | 0.210 | 1.008 |
| | | Tilt 15° | 0.176 | 0.327 | 0.387 | 0.210 | 0.714 |
| | Right | Cheek | 0.331 | 0.408 | 0.256 | 0.210 | 0.664 |
| | | Tilt 15° | 0.215 | 0.303 | 0.242 | 0.210 | 0.545 |
| Body worn 10mm | Phantom Side | | 0.561 | 0.573 | 0.059 | 0.105 | 0.678 |
| | Ground Side | | 1.035 | 1.059 | 0.231 | 0.105 | 1.290 |
| Hotspot 10mm | Phantom Side | | 0.561 | 0.573 | 0.059 | 0.105 | 0.678 |
| | Ground Side | | 1.035 | 1.059 | 0.231 | 0.105 | 1.290 |
| | Left Side | | 0.317 | 0.338 | 0.020 | 0.105 | 0.443 |
| | Right Side | | 0.408 | 0.276 | 0.049 | 0.105 | 0.513 |
| | Bottom Side | | 0.744 | 1.15 | 0.013 | 0.105 | 1.255 |
| | Top Side | | -- | -- | 0.152 | 0.105 | 0.152 |

According to the above table, the maximum sum of reported SAR values for GSM/WCDMA/LTE and WiFi is **1.29 W/kg** (1g). The detail for simultaneous transmission consideration is described in chapter 12.

The **Hisense T963**, supporting UMTS/GSM, manufactured by **Hisense Communications Co., Ltd.** is a variant product for testing. According to the Product Change Description, SAR test is only required in worse case. Test data are reflected from test report **I16D00265-SAR** which is the test report for the initial product.

3. Client Information

3.1. Applicant Information

Company Name: Hisense International Co., Ltd.
Address: Floor 22, Hisense Tower, 17 Donghai Xi Road, Qingdao, 266071, China
Email: zhangkelin@hisense.com
Contact: Zhang Kelin

3.2. Manufacturer Information

Company Name: Hisense Communications Co., Ltd.
Address: 218 Qianwangang Road, Economic & Technological Development Zone, Qingdao, Shandong Province, P.R. China
Email: zhangmingyd@hisense.com
Contact: Zhang Ming

4. Equipment Under Test (EUT) and Ancillary Equipment (AE)

4.1. About EUT

| | |
|---------------------------------------|---|
| Description: | Smartphone |
| Model name: | Hisense T963 |
| Operation Model(s): | GSM850/1900,WCDMA Band II/IV/V WIFI2450 |
| Tx Frequency: | 824.2-848.8MHz(GSM850) 1850.2-1909.8MHz (GSM1900) 1852.4-1907.6 MHz (WCDMA Band II) 1712.4-1752.6 MHz (WCDMA Band IV) 826.4-846.6MHz (WCDMA Band V) 2412- 2472 MHz (Wi-Fi) 2400-2483.5 MHz (BT) |
| Test device Production information: | Production unit |
| GPRS/EGPRS Class Mode: | B |
| GPRS/ EGPRS Multislot Class: | 12 |
| Device type: | Portable device |
| UE category: | 3 |
| Antenna type: | Inner antenna |
| Accessories/Body-worn configurations: | Headset Battery |
| Dimensions: | 14.2cm×7.2 cm×0.8cm |
| Hotspot Mode: | Support simultaneous transmission of hotspot and voice (or data) |
| FCC ID: | 2ADOBT963 |

4.2. Main Supply

| Part Name | Model Name | supplier |
|-----------|------------------|------------|
| LCD | TXDY500DFWPC-174 | TONGXINGDA |
| Flash | KMFNX0012M-B214 | Samsung |

4.3. Secondary Supply

| Part Name | Model Name | supplier |
|-----------|--------------------|----------|
| LCD | KBF8630-5.0 | HOLITECH |
| Flash | H9TQ64A8GTCCUR-KUM | SK Hynix |

4.4. Internal Identification of EUT used during the test

| EUT ID* | SN or IMEI | HW Version | SW Version | Receive Date |
|---------|-----------------|------------|--------------------|--------------|
| N5 | 863933030000242 | V1.00 | L1348.6.01.01.MX06 | 2017-1-16 |
| N8 | 863933030000275 | V1.00 | L1348.6.01.01.MX06 | 2017-1-16 |

*EUT ID: is used to identify the test sample in the lab internally.

N5 is main supply sample;

N8 is Secondary supply sample;

4.5. Internal Identification of AE used during the test

| AE ID* | Description | Model | SN | Manufacturer |
|--------|-------------|-------|-----|--------------|
| A04 | N/A | N/A | N/A | N/A |

*AE ID: is used to identify the test sample in the lab internally.

5. TEST METHODOLOGY

5.1. Applicable Limit Regulations

ANSI C95.1–1999:IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.2. Applicable Measurement Standards

IEEE 1528–2013: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.

KDB648474 D04 Handset SAR v01r03:SAR Evaluation Considerations for Wireless Handsets.

KDB248227 D01 802.11 Wi-Fi SAR v02r02: SAR measurement procedures for 802.112abg transmitters.

KDB447498 D01 General RF Exposure Guidance v06:Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04:SAR Measurement Requirements for 100 MHz to 6 GHz

KDB865664 D02 RF Exposure Reporting v01r02:provides general reporting requirements as well as certain specific information required to support MPE and SAR compliance.

KDB941225 D01 3G SAR Procedures v03r01: 3G SAR Measurement Procedures.

KDB941225 D05 SAR for LTE Devices v02r04: SAR Evaluation Considerations for LTE Devices.

KDB941225 D06 hotspot SAR v02r01:SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities.

6. Specific Absorption Rate (SAR)

6.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7. Tissue Simulating Liquids

7.1. Targets for tissue simulating liquid

Table 7.1: Targets for tissue simulating liquid


| Frequency (MHz) | Liquid Type | Conductivity(σ) | $\pm 5\%$ Range | Permittivity(ϵ) | $\pm 5\%$ Range |
|-----------------|-------------|--------------------------|-----------------|----------------------------|-----------------|
| 835 | Head | 0.90 | 0.86~0.95 | 41.5 | 39.4~43.6 |
| 835 | Body | 0.97 | 0.92~1.02 | 55.2 | 52.4~58.0 |
| 1800 | Head | 1.40 | 1.33~1.47 | 40.0 | 38.0~42.0 |
| 1800 | Body | 1.52 | 1.44~1.60 | 53.3 | 50.6~56.0 |
| 1900 | Head | 1.40 | 1.33~1.47 | 40.0 | 38.0~42.0 |
| 1900 | Body | 1.52 | 1.44~1.60 | 53.3 | 50.6~56.0 |
| 2450 | Head | 1.80 | 1.71~1.89 | 39.2 | 37.2~41.2 |
| 2450 | Body | 1.95 | 1.85~2.05 | 52.7 | 50.1~55.3 |

7.2. Dielectric Performance


Table 7.2: Dielectric Performance of Tissue Simulating Liquid

| Measurement Value | | | | | | |
|-----------------------------|-----------|-------------------------|-----------|-----------------------|-----------|------------|
| Liquid Temperature: 22.5 °C | | | | | | |
| Type | Frequency | Permittivity ϵ | Drift (%) | Conductivity σ | Drift (%) | Test Date |
| Head | 835 MHz | 40.96 | -1.30% | 0.921 | 2.33% | 2017-01-11 |
| Head | 1800 MHz | 39.68 | -0.08% | 1.425 | 1.78% | 2017-01-10 |
| Head | 1900 MHz | 39.61 | -0.98% | 1.389 | -0.79% | 2017-01-17 |
| Head | 2450 MHz | 40.09 | 2.27% | 1.803 | 0.17% | 2017-01-10 |
| Body | 835 MHz | 55.11 | -0.16% | 1.001 | 3.20% | 2017-01-11 |
| Body | 1800 MHz | 51.89 | -2.64% | 1.498 | -1.44% | 2017-01-10 |
| Body | 1900 MHz | 53.29 | -0.02% | 1.525 | 0.33% | 2017-01-17 |
| Body | 2450 MHz | 53.91 | 2.30% | 1.922 | -1.44% | 2017-01-10 |
| Head | 835 MHz | 40.358 | -2.75% | 0.927 | 3.00% | 2017-01-18 |
| Body | 835 MHz | 54.05 | -2.08% | 0.978 | 0.82% | 2017-01-18 |
| Body | 1800 MHz | 53.32 | 0.04% | 1.476 | -2.89% | 2017-01-18 |
| Head | 2450 MHz | 39.117 | -0.21% | 1.801 | 0.06% | 2017-01-19 |

| | | | | | | |
|------|----------|--------|-------|-------|--------|------------|
| Body | 2450 MHz | 53.846 | 2.17% | 1.908 | -2.15% | 2017-01-19 |
|------|----------|--------|-------|-------|--------|------------|

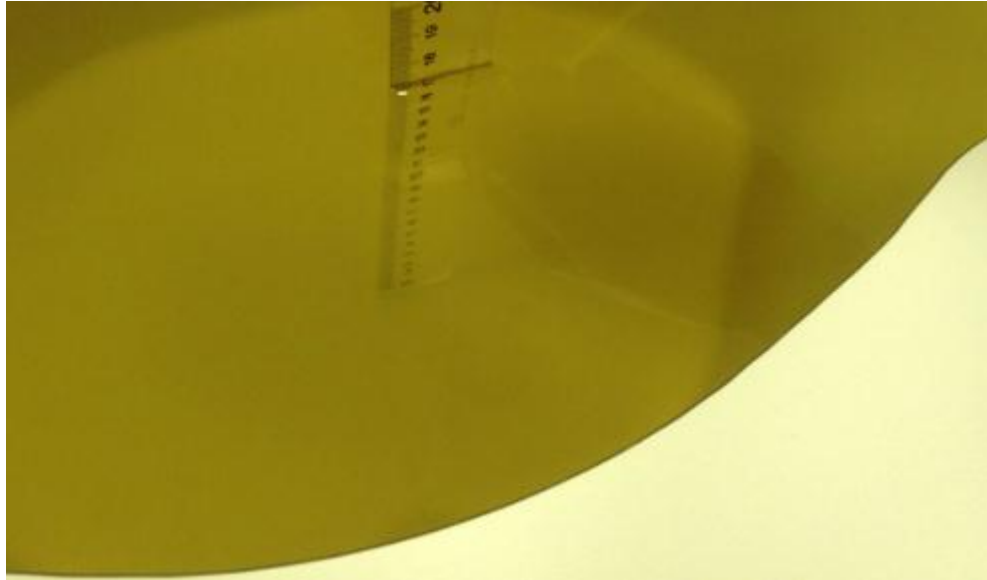


Picture 7-1: Liquid depth in the Flat Phantom (835 MHz Head)

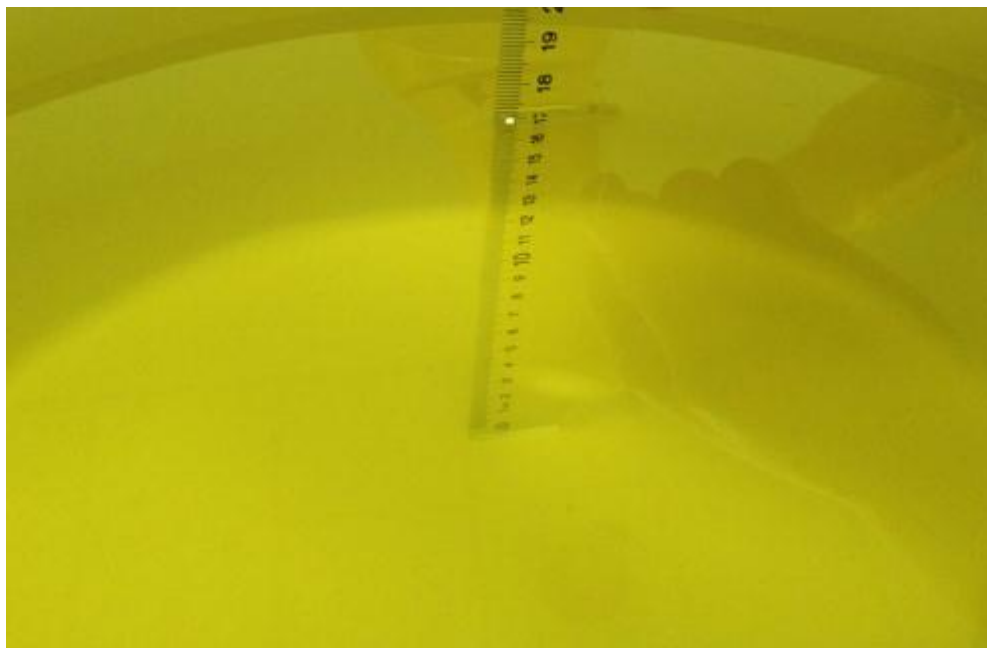


Picture 7-2: Liquid depth in the Flat Phantom (1900 MHz Head)




Picture 7-3: Liquid depth in the Flat Phantom (835 MHz Body)

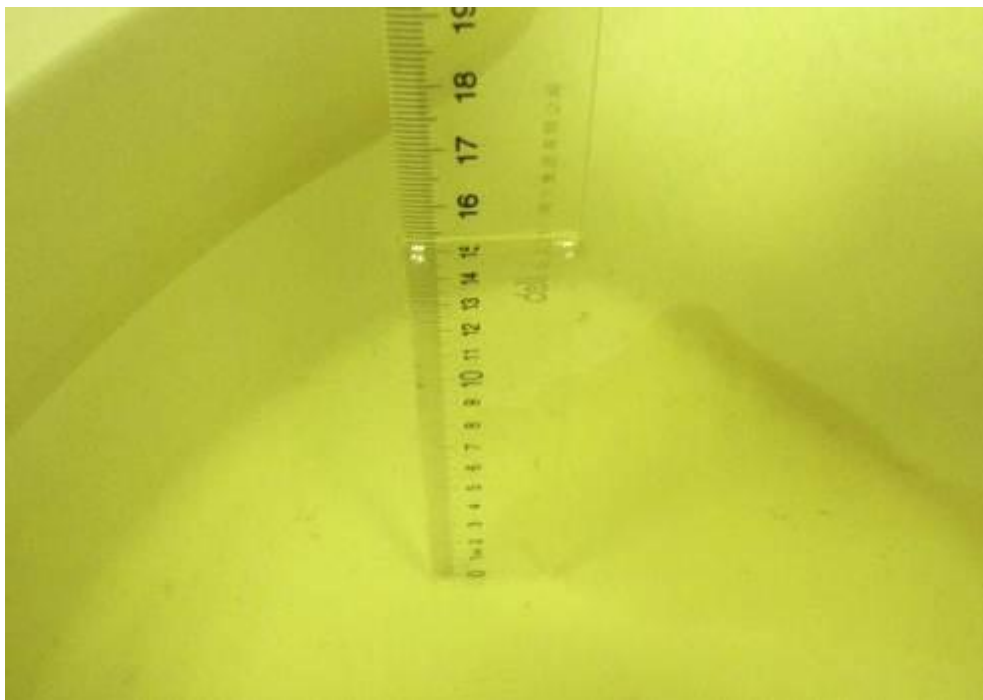

Picture 7-4: Liquid depth in the Flat Phantom (1900 MHz Body)

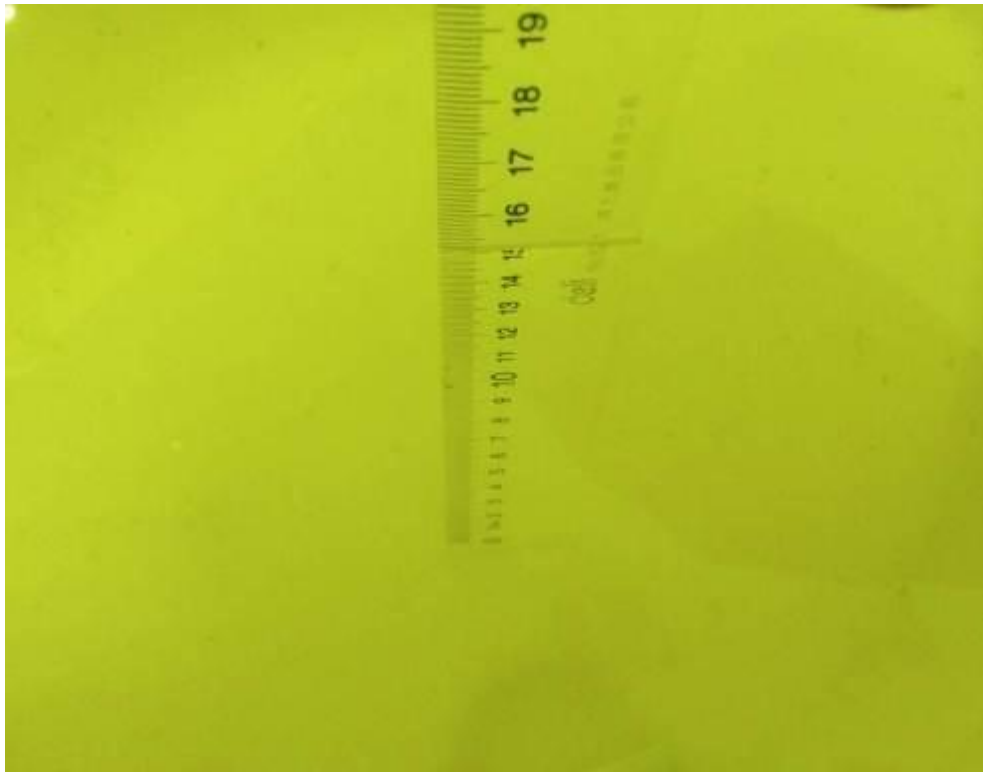

Picture 7-5: Liquid depth in the Flat Phantom (2450 MHz Head)

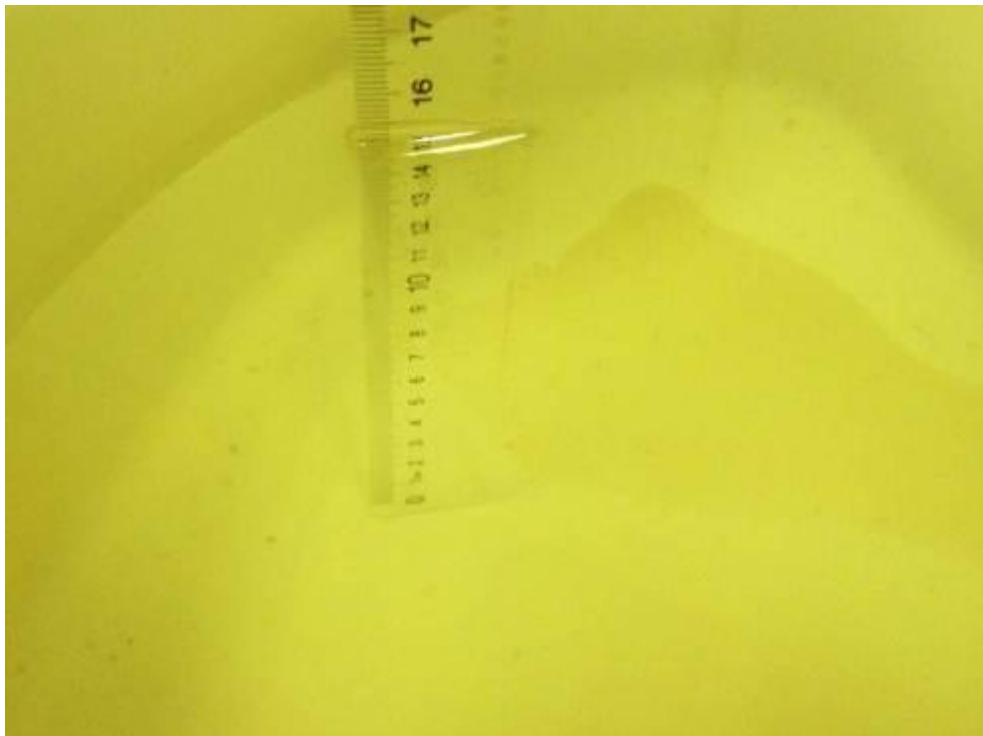


Picture 7-6: Liquid depth in the Flat Phantom (2450 MHz Body)

8. System verification

8.1. System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

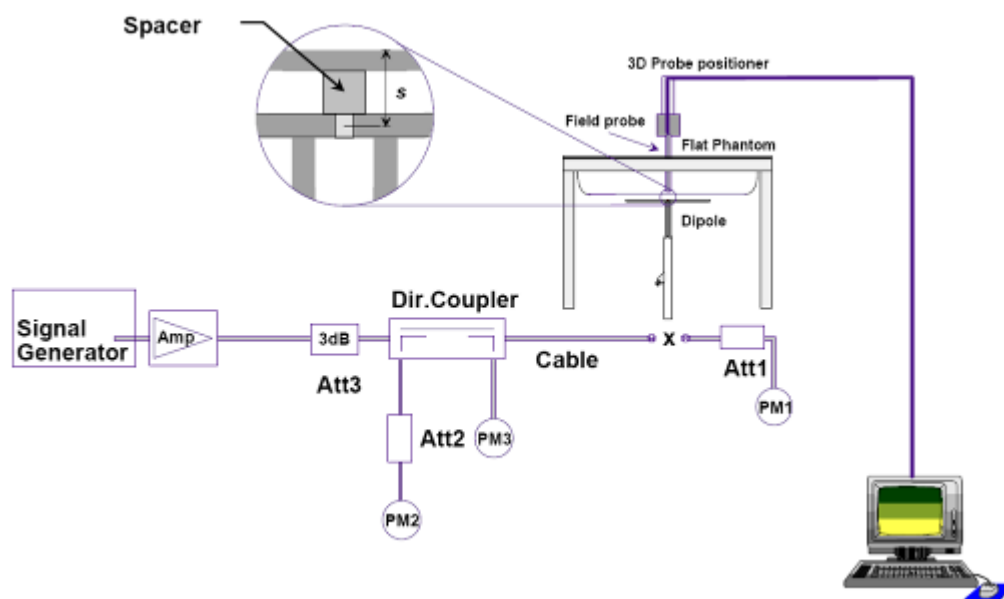

Picture 8.1 System Setup for System Evaluation



Picture 8.2 Photo of Dipole Setup

8.2. System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

Table 8.1: System Verification of Head

| Verification Results | | | | | | | |
|--------------------------|---------------------|----------------|-----------------------|----------------|-----------------|----------------|------------|
| Input power level: 250mW | | | | | | | |
| Frequency | Target value (W/kg) | | Measured value (W/kg) | | Deviation | | Test date |
| | 10 g Average | 1 g Average | 10 g Average | 1 g Average | 10 g Average | 1 g Average | |
| 835 MHz | 1.51 | 2.31 | 1.52 | 2.33 | 0.66% | 0.87% | 2017-01-11 |
| 1750 MHz | 5.09 | 9.48 | 5.12 | 9.53 | 0.59% | 0.53% | 2017-01-10 |
| 1900 MHz | 5.22 | 10.1 | 5.13 | 9.85 | -1.72% | -2.48% | 2017-01-17 |
| 2450 MHz | 6.06 | 13.2 | 6.21 | 13.5 | 2.48% | 2.27% | 2017-01-10 |
| 835 MHz | 1.51 | 2.31 | 1.45 | 2.2 | -3.97% | -4.76% | 2017-01-18 |
| 2450 MHz | 6.06 | 13.2 | 6.17 | 13.4 | 1.82% | 1.52% | 2017-01-19 |

Table 8.2: System Verification of Body

| Verification Results | | | | | | | |
|--------------------------|---------------------|----------------|-----------------------|----------------|-----------------|----------------|------------|
| Input power level: 250mW | | | | | | | |
| Frequency | Target value (W/kg) | | Measured value (W/kg) | | Deviation | | Test date |
| | 10 g Average | 1 g Average | 10 g Average | 1 g Average | 10 g Average | 1 g Average | |
| 835 MHz | 1.56 | 2.37 | 1.58 | 2.39 | 1.28% | 0.84% | 2017-01-11 |
| 1750 MHz | 5.02 | 9.3 | 5.16 | 9.41 | 2.79% | 1.18% | 2017-01-10 |
| 1900 MHz | 5.33 | 10.3 | 5.24 | 10.2 | -1.69% | -0.97% | 2017-01-17 |
| 2450 MHz | 6.16 | 13.2 | 6.18 | 13.3 | 0.32% | 0.76% | 2017-01-10 |
| 835 MHz | 1.56 | 2.37 | 1.57 | 2.42 | 0.64% | 2.11% | 2017-01-18 |
| 1750 MHz | 5.02 | 9.3 | 5.15 | 9.15 | 2.59% | -1.61% | 2017-01-18 |
| 2450 MHz | 6.16 | 13.2 | 6.27 | 13.3 | 1.79% | 0.76% | 2017-01-19 |

9. Measurement Procedures

9.1. Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in Picture 11.1.


Step 1: The tests described in 11.2 shall be performed at the channel that is closest to the centre of the transmit frequency band (f_c) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in Chapter 8),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e., $N_c > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 11.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

Step 3: Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

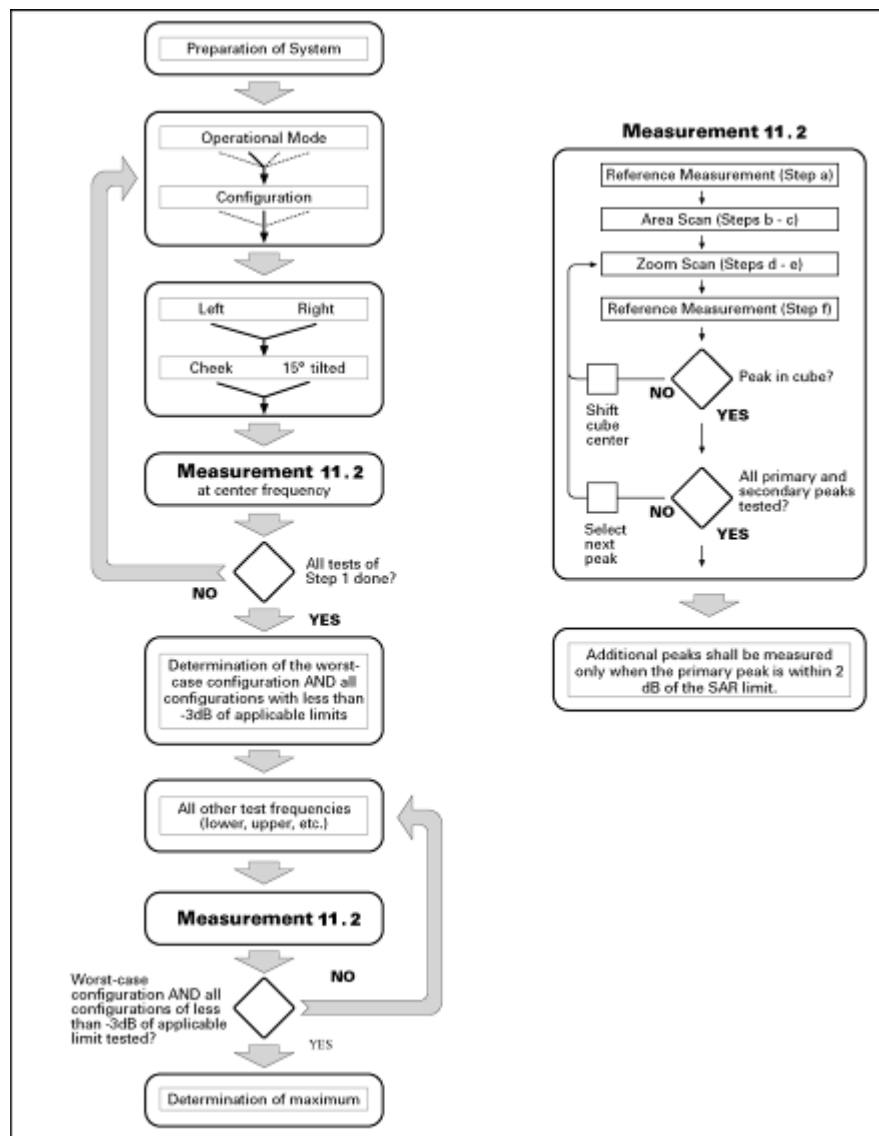

Picture 9.1 Block diagram of the tests to be performed

9.2. General Measurement Procedure

The following procedure shall be performed for each of the test conditions (see Picture 11.1) described in 11.1:

- Measure the local SAR at a test point within 8 mm or less in the normal direction from the inner surface of the phantom.
- Measure the two-dimensional SAR distribution within the phantom (area scan procedure). The boundary of the measurement area shall not be closer than 20 mm from the phantom side walls. The distance between the measurement points should enable the detection of the location of local maximum with an accuracy of better than half the linear dimension of the tissue cube after

interpolation. A maximum grid spacing of 20 mm for frequencies below 3 GHz and $(60/f \text{ [GHz]})$ mm for frequencies of 3 GHz and greater is recommended. The maximum distance between the geometrical centre of the probe detectors and the inner surface of the phantom shall be 5 mm for frequencies below 3 GHz and $\delta \ln(2)/2$ mm for frequencies of 3 GHz and greater, where δ is the plane wave skin depth and $\ln(x)$ is the natural logarithm. The maximum variation of the sensor-phantom surface shall be ± 1 mm for frequencies below 3 GHz and ± 0.5 mm for frequencies of 3 GHz and greater. At all measurement points the angle of the probe with respect to the line normal to the surface should be less than 5° . If this cannot be achieved for a measurement distance to the phantom inner surface shorter than the probe diameter, additional uncertainty evaluation is needed.

c) From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that are not within the zoom-scan volume; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR limit. This is consistent with the 2 dB threshold already stated;

d) Measure the three-dimensional SAR distribution at the local maxima locations identified in step c). The horizontal grid step shall be $(24/f \text{ [GHz]})$ mm or less but not more than 8 mm. The minimum zoom size of 30 mm by 30 mm and 30 mm for frequencies below 3 GHz. For higher frequencies, the minimum zoom size of 22 mm by 22 mm and 22 mm. The grid step in the vertical direction shall be $(8/f \text{ [GHz]})$ mm or less but not more than 5 mm, if uniform spacing is used. If variable spacing is used in the vertical direction, the maximum spacing between the two closest measured points to the phantom shell shall be $(12 / f \text{ [GHz]})$ mm or less but not more than 4 mm, and the spacing between further points shall increase by an incremental factor not exceeding 1.5. When variable spacing is used, extrapolation routines shall be tested with the same spacing as used in measurements. The maximum distance between the geometrical centre of the probe detectors and the inner surface of the phantom shall be 5 mm for frequencies below 3 GHz and $\delta \ln(2)/2$ mm for frequencies of 3 GHz and greater, where δ is the plane wave skin depth and $\ln(x)$ is the natural logarithm. Separate grids shall be centered on each of the local SAR maxima found in step c). Uncertainties due to field distortion between the media boundary and the dielectric enclosure of the probe should also be minimized, which is achieved if the distance between the phantom surface and physical tip of the probe is larger than probe tip diameter. Other methods may utilize correction procedures for these boundary effects that enable high precision measurements closer than half the probe diameter. For all measurement points, the angle of the probe with respect to the flat phantom surface shall be less than 5° . If this cannot be achieved an additional uncertainty evaluation is needed.

e) Use post processing(e.g. interpolation and extrapolation) procedures to determine the local SAR values at the spatial resolution needed for mass averaging.

9.3. WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH_n), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

For Release 5 HSDPA Data Devices:

| Sub-test | β_c | β_d | β_d (SF) | β_c / β_d | β_{hs} | CM/dB | MPR (dB) |
|----------|-----------|-----------|----------------|---------------------|--------------|-------|----------|
| 1 | 2/15 | 15/15 | 64 | 2/15 | 4/15 | 2.0 | 1 |
| 2 | 12/15 | 15/15 | 64 | 12/15 | 24/25 | 2.0 | 1 |
| 3 | 15/15 | 8/15 | 64 | 15/8 | 30/15 | 2.0 | 1 |
| 4 | 15/15 | 4/15 | 64 | 15/4 | 30/15 | 2.0 | 1 |

For Release 6 HSUPA Data Devices

| Sub-test | β_c | β_d | β_d (SF) | β_c / β_d | β_{hs} | β_{ec} | β_{ed} | β_{ed} (SF) | β_{ed} (codes) | CM (dB) | MPR (dB) | AG Index | E-TFCI |
|----------|-----------|-----------|----------------|---------------------|--------------|--------------|--|-------------------|----------------------|---------|----------|----------|--------|
| 1 | 11/15 | 15/15 | 64 | 11/15 | 22/15 | 209/225 | 1039/225 | 4 | 1 | 2.0 | 1.0 | 20 | 75 |
| 2 | 6/15 | 15/15 | 64 | 6/15 | 12/15 | 12/15 | 12/15 | 4 | 1 | 3.0 | 2.0 | 12 | 67 |
| 3 | 15/15 | 9/15 | 64 | 15/9 | 30/15 | 30/15 | $\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$ | 4 | 2 | 3.0 | 2.0 | 15 | 92 |
| 4 | 2/15 | 15/15 | 64 | 2/15 | 4/15 | 4/15 | 56/75 | 4 | 1 | 2.0 | 1.0 | 17 | 71 |

| | | | | | | | | | | | | | |
|---|-------|-------|----|-------|-------|-------|--------|---|---|-----|-----|----|----|
| 5 | 15/15 | 15/15 | 64 | 15/15 | 24/15 | 30/15 | 134/15 | 4 | 1 | 2.0 | 1.0 | 21 | 81 |
|---|-------|-------|----|-------|-------|-------|--------|---|---|-----|-----|----|----|

9.4. Bluetooth & Wi-Fi Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

9.5. Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Section 14 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

10. Area Scan Based 1-g SAR

10.1 Requirement of KDB

According to the KDB447498 D01 v06, when the implementation is based the specific polynomial fit algorithm as presented at the 29th Bioelectromagnetics Society meeting (2007) and the estimated 1-g SAR is ≤ 1.2 W/kg, a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must also demonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR (See Annex B). When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

10.2 Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASY software.

11. Conducted Output Power

11.1. Manufacturing tolerance

Table 11.1: GSM Speech

| GSM 850 | | | |
|----------------------------|-------------|-------------|-------------|
| Channel | Channel 128 | Channel 190 | Channel 251 |
| Maximum Target Value (dBm) | 31.5 | 31.5 | 31.5 |
| GSM1900 | | | |
| Channel | Channel 512 | Channel 661 | Channel 810 |
| Maximum Target Value (dBm) | 28 | 28 | 28 |

Table 11.2: GPRS (GMSK Modulation)

| GSM 850 GPRS | | | | |
|---------------|----------------------------|------|------|------|
| Channel | | 128 | 190 | 251 |
| 1 Txslots | Maximum Target Value (dBm) | 31.5 | 31.5 | 31.5 |
| 2 Txslots | Maximum Target Value (dBm) | 29 | 29 | 29 |
| 3 Txslots | Maximum Target Value (dBm) | 27 | 27 | 27 |
| 4 Txslots | Maximum Target Value (dBm) | 25 | 25 | 25 |
| GSM 1900 GPRS | | | | |
| Channel | | 512 | 661 | 810 |
| 1 Txslots | Maximum Target Value (dBm) | 28 | 28 | 28 |
| 2 Txslots | Maximum Target Value (dBm) | 25.5 | 25.5 | 25.5 |
| 3 Txslots | Maximum Target Value (dBm) | 24 | 24 | 24 |
| 4 Txslots | Maximum Target Value (dBm) | 21.5 | 21.5 | 21.5 |

Table 11.3: GPRS (GMSK Modulation)

| GSM 850 GPRS | | | | |
|---------------|----------------------------|------|------|------|
| Channel | | 128 | 190 | 251 |
| 1 Txslots | Maximum Target Value (dBm) | 31.5 | 31.5 | 31.5 |
| 2 Txslots | Maximum Target Value (dBm) | 29 | 29 | 29 |
| 3 Txslots | Maximum Target Value (dBm) | 27 | 27 | 27 |
| 4 Txslots | Maximum Target Value (dBm) | 25 | 25 | 25 |
| GSM 1900 GPRS | | | | |
| Channel | | 512 | 661 | 810 |
| 1 Txslots | Maximum Target Value (dBm) | 28 | 28 | 28 |
| 2 Txslots | Maximum Target Value (dBm) | 25.5 | 25.5 | 25.5 |
| 3 Txslots | Maximum Target Value (dBm) | 24 | 24 | 24 |
| 4 Txslots | Maximum Target Value (dBm) | 21.5 | 21.5 | 21.5 |

Table 11.4: EGPRS (8-PSK Modulation)

| GSM 850 EGPRS | | | | |
|----------------|----------------------------|------|------|------|
| Channel | | 975 | 38 | 124 |
| 1 Txslots | Maximum Target Value (dBm) | 26 | 26 | 26 |
| 2 Txslots | Maximum Target Value (dBm) | 25.5 | 25.5 | 25.5 |
| 3 Txslots | Maximum Target Value (dBm) | 24.5 | 24.5 | 24.5 |
| 4 Txslots | Maximum Target Value (dBm) | 22.5 | 22.5 | 22.5 |
| GSM 1900 EGPRS | | | | |
| Channel | | 512 | 661 | 810 |
| 1 Txslots | Maximum Target Value (dBm) | 25.5 | 25.5 | 25.5 |
| 2 Txslots | Maximum Target Value (dBm) | 25 | 25 | 25 |
| 3 Txslots | Maximum Target Value (dBm) | 23 | 23 | 23 |
| 4 Txslots | Maximum Target Value (dBm) | 21 | 21 | 21 |

Table 11.5: WCDMA

| WCDMA Band II | | | |
|----------------------------|--------------|--------------|--------------|
| Channel | Channel 9262 | Channel 9400 | Channel 9538 |
| Maximum Target Value (dBm) | 19 | 19 | 19 |

Table 11.6: HSDPA

| WCDMA Band II | | | | | |
|---------------|----------------------------|------|------|------|-----|
| Channel | | 9262 | 9400 | 9538 | MPR |
| 1 | Maximum Target Value (dBm) | 19 | 19 | 19 | 1 |
| 2 | Maximum Target Value (dBm) | 19 | 19 | 19 | 1 |
| 3 | Maximum Target Value (dBm) | 19 | 19 | 19 | 1 |
| 4 | Maximum Target Value (dBm) | 19 | 19 | 19 | 1 |

Table 11.7: HSUPA

| WCDMA Band II | | | | | |
|---------------|----------------------------|------|------|------|-----|
| Channel | | 9262 | 9400 | 9538 | MPR |
| 1 | Maximum Target Value (dBm) | 18 | 18 | 18 | 1 |
| 2 | Maximum Target Value (dBm) | 18 | 18 | 18 | 2 |
| 3 | Maximum Target Value (dBm) | 18.5 | 18.5 | 18.5 | 2 |
| 4 | Maximum Target Value (dBm) | 18 | 18 | 18 | 1 |
| 5 | Maximum Target Value (dBm) | 18 | 18 | 18 | 1 |

Table 11.8: WCDMA

| WCDMA Band V | | | |
|----------------------------|------|------|------|
| Channel | 4233 | 4182 | 4132 |
| Maximum Target Value (dBm) | 19.5 | 19.5 | 19.5 |

Table 11.9: HSDPA

| WCDMA Band V | | | | | |
|--------------|----------------------------|------|------|------|-----|
| Channel | | 4233 | 4182 | 4132 | MPR |
| 1 | Maximum Target Value (dBm) | 19 | 19 | 19 | 1 |
| 2 | Maximum Target Value (dBm) | 19 | 19 | 19 | 1 |
| 3 | Maximum Target Value (dBm) | 18 | 18 | 18 | 1 |
| 4 | Maximum Target Value (dBm) | 18.5 | 18.5 | 18.5 | 1 |

Table 11.10: HSUPA

| WCDMA Band V | | | | | |
|--------------|----------------------------|------|------|------|-----|
| Channel | | 4233 | 4182 | 4132 | MPR |
| 1 | Maximum Target Value (dBm) | 19 | 19 | 19 | 1 |
| 2 | Maximum Target Value (dBm) | 19 | 19 | 19 | 2 |
| 3 | Maximum Target Value (dBm) | 19 | 19 | 19 | 2 |
| 4 | Maximum Target | 19 | 19 | 19 | 1 |

| | Value (dBm) | | | | |
|---|----------------------------|----|----|----|---|
| 5 | Maximum Target Value (dBm) | 19 | 19 | 19 | 1 |

Table 11.11: WCDMA

| WCDMA Band IV | | | |
|----------------------------|------|------|------|
| Channel | 1312 | 1413 | 1512 |
| Maximum Target Value (dBm) | 20 | 20 | 20 |

Table 11.12: HSDPA

| WCDMA Band IV | | | | | |
|---------------|----------------------------|------|------|------|-----|
| | Channel | 1312 | 1413 | 1512 | MPR |
| 1 | Maximum Target Value (dBm) | 20 | 20 | 20 | 1 |
| 2 | Maximum Target Value (dBm) | 20 | 20 | 20 | 1 |
| 3 | Maximum Target Value (dBm) | 19.5 | 19.5 | 19.5 | 1 |
| 4 | Maximum Target Value (dBm) | 19.5 | 19.5 | 19.5 | 1 |

Table 11.13: HSUPA

| WCDMA Band IV | | | | | |
|---------------|----------------------------|------|------|------|-----|
| | Channel | 1312 | 1413 | 1512 | MPR |
| 1 | Maximum Target Value (dBm) | 20 | 20 | 20 | 1 |
| 2 | Maximum Target Value (dBm) | 20 | 20 | 20 | 2 |
| 3 | Maximum Target Value (dBm) | 20 | 20 | 20 | 2 |
| 4 | Maximum Target Value (dBm) | 19.5 | 19.5 | 19.5 | 1 |
| 5 | Maximum Target Value (dBm) | 19.5 | 19.5 | 19.5 | 1 |

Table 11.14: WiFi

| WiFi 802.11b | | | | | |
|----------------------------|-----------|-----------|------------|------------|------------|
| Channel | Channel 1 | Channel 6 | Channel 11 | Channel 12 | Channel 13 |
| Maximum Target Value (dBm) | 14 | 14.5 | 14.5 | 8 | 8 |
| WiFi 802.11g | | | | | |
| Channel | Channel 1 | Channel 6 | Channel 11 | Channel 12 | Channel 13 |
| Maximum Target Value (dBm) | 13 | 13 | 14 | 13 | 13 |
| WiFi 802.11n 20M | | | | | |
| Channel | Channel 1 | Channel 6 | Channel 11 | Channel 12 | Channel 13 |
| Maximum Target Value (dBm) | 5 | 5 | 5 | 5 | 5 |

Table 11.15: Bluetooth

| Bluetooth 2.1 | | | |
|----------------------------|-----------|------------|------------|
| Channel | Channel 0 | Channel 39 | Channel 78 |
| Maximum Target Value (dBm) | 5 | 6 | 7 |

11.2. GSM Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

Table 11.16: The conducted power measurement results for GSM

| GSM 850MHZ | Conducted Power (dBm) | | |
|-------------|------------------------|-----------------------|------------------------|
| | Channel 128(824.2MHz) | Channel 190(836.6MHz) | Channel 251(848.6MHz) |
| | 31.33 | 31.27 | 31.24 |
| GSM 1900MHZ | Conducted Power (dBm) | | |
| | Channel 512(1850.2MHz) | Channel 661(1880MHz) | Channel 810(1909.8MHz) |
| | 27.89 | 27.87 | 27.83 |

Table 11.17: The conducted power measurement results for GPRS

| GSM 850 GPRS | Measured Power (dBm) | | | calculation | Averaged Power (dBm) | | |
|---------------|----------------------|-------|-------|-------------|----------------------|-------|-------|
| | 128 | 190 | 251 | | 128 | 190 | 251 |
| 1 Txslot | 31.35 | 31.29 | 31.25 | -9.03dB | 22.32 | 22.26 | 22.22 |
| 2 Txslots | 28.70 | 28.64 | 28.62 | -6.02dB | 22.68 | 22.62 | 22.6 |
| 3 Txslots | 26.65 | 26.61 | 26.59 | -4.26dB | 22.39 | 22.35 | 22.33 |
| 4 Txslots | 24.80 | 24.77 | 24.78 | -3.01dB | 21.79 | 21.76 | 21.77 |
| GSM 1900 GPRS | Measured Power (dBm) | | | calculation | Averaged Power (dBm) | | |
| | 512 | 661 | 810 | | 512 | 661 | 810 |

| | | | | | | | |
|-----------|-------|-------|-------|---------|-------|-------|-------|
| 1 Txslot | 27.88 | 27.89 | 27.85 | -9.03dB | 18.85 | 18.86 | 18.82 |
| 2 Txslots | 25.12 | 25.06 | 25.10 | -6.02dB | 19.1 | 19.04 | 19.08 |
| 3 Txslots | 23.42 | 23.46 | 23.52 | -4.26dB | 19.16 | 19.2 | 19.26 |
| 4 Txslots | 21.27 | 21.29 | 21.27 | -3.01dB | 18.26 | 18.28 | 18.26 |

Table 11.18: The conducted power measurement results for E-GPRS (GMSK)

| GSM 850 GPRS | Measured Power (dBm) | | | calculation | Averaged Power (dBm) | | |
|------------------|----------------------|-------|-------|-------------|----------------------|-------|-------|
| | 128 | 190 | 251 | | 128 | 190 | 251 |
| 1 Txslot | 31.34 | 31.27 | 31.21 | -9.03dB | 22.31 | 22.24 | 22.18 |
| 2 Txslots | 28.67 | 28.63 | 28.61 | -6.02dB | 22.65 | 22.61 | 22.59 |
| 3 Txslots | 26.66 | 26.60 | 26.57 | -4.26dB | 22.4 | 22.34 | 22.31 |
| 4 Txslots | 24.78 | 24.72 | 24.73 | -3.01dB | 21.77 | 21.71 | 21.72 |
| GSM 1900 GPRS | Measured Power (dBm) | | | calculation | Averaged Power (dBm) | | |
| | 512 | 661 | 810 | | 512 | 661 | 810 |
| 1 Txslot | 27.88 | 27.88 | 27.83 | -9.03dB | 18.85 | 18.85 | 18.8 |
| 2 Txslots | 25.11 | 25.06 | 25.10 | -6.02dB | 19.09 | 19.04 | 19.08 |
| 3 Txslots | 23.41 | 23.42 | 23.51 | -4.26dB | 19.15 | 19.16 | 19.25 |
| 4 Txslots | 21.23 | 21.24 | 21.22 | -3.01dB | 18.22 | 18.23 | 18.21 |

Table 11.19: The conducted power measurement results for E-GPRS(8-PSK)

| GSM 850 E-GPRS | Measured Power (dBm) | | | calculation | Averaged Power (dBm) | | |
|--------------------|----------------------|-------|-------|-------------|----------------------|-------|-------|
| | 128 | 190 | 251 | | 128 | 190 | 251 |
| 1 Txslot | 25.47 | 25.69 | 25.77 | -9.03dB | 16.44 | 16.66 | 16.74 |
| 2 Txslots | 25.22 | 25.23 | 25.37 | -6.02dB | 19.2 | 19.21 | 19.35 |
| 3 Txslots | 24.27 | 24.12 | 24.02 | -4.26dB | 20.01 | 19.86 | 19.76 |
| 4 Txslots | 22 | 21.89 | 22.09 | -3.01dB | 18.99 | 18.88 | 19.08 |
| GSM 1900 E-GPRS | Measured Power (dBm) | | | calculation | Averaged Power (dBm) | | |
| | 512 | 661 | 810 | | 512 | 661 | 810 |
| 1 Txslot | 25.09 | 25.08 | 25.09 | -9.03dB | 16.06 | 16.05 | 16.06 |
| 2 Txslots | 24.62 | 24.66 | 24.57 | -6.02dB | 18.6 | 18.64 | 18.55 |
| 3 Txslots | 22.53 | 22.5 | 22.42 | -4.26dB | 18.27 | 18.24 | 18.16 |
| 4 Txslots | 20.78 | 20.8 | 20.69 | -3.01dB | 17.77 | 17.79 | 17.68 |

NOTES:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 2Txslots for 850MHz ; 3Txslots for1900MHz;

11.3. WCDMA Measurement result

Table 11.20: The conducted Power for WCDMA

| Item | band | WCDMA BAND II result(dBm) | | |
|-------|-------|---------------------------|---------------------|---------------------|
| | ARFCN | 9262 (1852.4MHz) | 9400 (1880.0MHz) | 9538 (1907.6MHz) |
| WCDMA | \ | 18.21 | 18.32 | 18.24 |
| HSDPA | 1 | 17.98 | 17.98 | 17.82 |
| | 2 | 17.78 | 17.94 | 17.99 |
| | 3 | 17.44 | 17.49 | 17.43 |
| | 4 | 17.56 | 17.59 | 17.5 |
| HSUPA | 1 | 16.34 | 16.59 | 16.59 |
| | 2 | 15.89 | 15.93 | 15.93 |
| | 3 | 15.88 | 15.97 | 15.86 |
| | 4 | 16.69 | 16.77 | 16.77 |
| | 5 | 16.49 | 16.67 | 16.66 |
| Item | band | WCDMA BAND IV result(dBm) | | |
| | ARFCN | 1312 (1712.4MHz) | 1413 (1732.6MHz) | 1512 (1752.6MHz) |
| WCDMA | \ | 19.87 | 19.77 | 19.71 |
| HSDPA | 1 | 18.62 | 18.53 | 18.39 |
| | 2 | 18.42 | 18.45 | 18.45 |
| | 3 | 18.15 | 18.04 | 18 |
| | 4 | 18.25 | 18.07 | 18 |
| HSUPA | 1 | 18.05 | 18.04 | 18.03 |
| | 2 | 17.52 | 17.45 | 17.34 |
| | 3 | 17.52 | 17.5 | 17.38 |
| | 4 | 18.45 | 18.27 | 18.26 |
| | 5 | 18.16 | 18.1 | 18.09 |
| Item | band | WCDMA BAND V result(dBm) | | |
| | ARFCN | 4132 (862.4MHz) | 4182 (862.4MHz) | 4233 (846.6MHz) |
| WCDMA | \ | 18.97 | 18.71 | 19.21 |
| HSDPA | 1 | 17.72 | 17.47 | 17.89 |
| | 2 | 17.52 | 17.39 | 17.95 |
| | 3 | 17.25 | 16.98 | 17.5 |
| | 4 | 17.35 | 17.01 | 17.5 |
| HSUPA | 1 | 17.15 | 16.98 | 17.53 |
| | 2 | 16.62 | 16.39 | 16.84 |
| | 3 | 16.62 | 16.44 | 16.88 |
| | 4 | 17.55 | 17.21 | 17.76 |

| | | | | |
|--|---|-------|-------|-------|
| | 5 | 17.26 | 17.04 | 17.59 |
|--|---|-------|-------|-------|

11.4. Wi-Fi and BT Measurement result

Table 11.21: The conducted power for Bluetooth

| GFSK | | | |
|------------------------------|----------------|----------------|----------------|
| Channel | Ch0 (2402 MHz) | Ch39 (2441MHz) | CH78 (2480MHz) |
| Conducted Output Power (dBm) | 4.43 | 5.78 | 6.58 |
| $\pi/4$ DQPSK | | | |
| Channel | Ch0 (2402 MHz) | Ch39 (2441MHz) | CH78 (2480MHz) |
| Conducted Output Power (dBm) | 4.42 | 5.73 | 6.51 |
| 8DPSK | | | |
| Channel | Ch0 (2402 MHz) | Ch39 (2441MHz) | CH78 (2480MHz) |
| Conducted Output Power (dBm) | 4.38 | 5.74 | 6.54 |

NOTE: According to KDB447498 D01 BT standalone SAR are not required, because maximum average output power is less than 10mW.

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] • [$\sqrt{f(\text{GHz})/x}$] W/kg for test separation distances ≤ 50 mm;
where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.

SAR head value of BT is 0.210 W/Kg. SAR body value of BT is 0.105 W/Kg.

The default power measurement procedures are:

a) Power must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band.

b) Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.

1) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.

2) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.

c) For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured.

During WLAN SAR testing EUT is configured with the WLAN continuous TX tool, and the transmission duty factor was monitored on the spectrum analyzer with zero-span setting, the duty cycle is 100%.

Table 11.22: The average conducted power for WiFi

| Mode | Channel | Frequency | Average power(dBm) |
|-----------------|---------|-----------|--------------------|
| 802.11 b | 1 | 2412 MHZ | 13.55 |
| | 6 | 2437 MHZ | 14.34 |
| | 11 | 2462 MHZ | 14.39 |
| | 12 | 2467 MHZ | 7.26 |
| | 13 | 2472 MHZ | 7.19 |
| 802.11 g | 1 | 2412 MHZ | 12.17 |
| | 6 | 2437 MHZ | 12.83 |
| | 11 | 2462 MHZ | 13.77 |
| | 12 | 2467 MHZ | 12.95 |
| | 13 | 2472 MHZ | 12.86 |
| 802.11 n 20M | 1 | 2412 MHZ | 3.67 |
| | 6 | 2437 MHZ | 3.67 |
| | 11 | 2462 MHZ | 4.21 |
| | 12 | 2467 MHZ | 3.52 |
| | 13 | 2472 MHZ | 3.49 |

2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the

following 2.4 GHz OFDM conditions.

- a) When KDB Publication 447498 D01 SAR test exclusion applies to the OFDM configuration.
- b) When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.


12. Simultaneous TX SAR Considerations

12.1. Introduction

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

For this device, the BT and Wi-Fi can transmit simultaneously with other transmitters.

12.2. Transmit Antenna Separation Distances

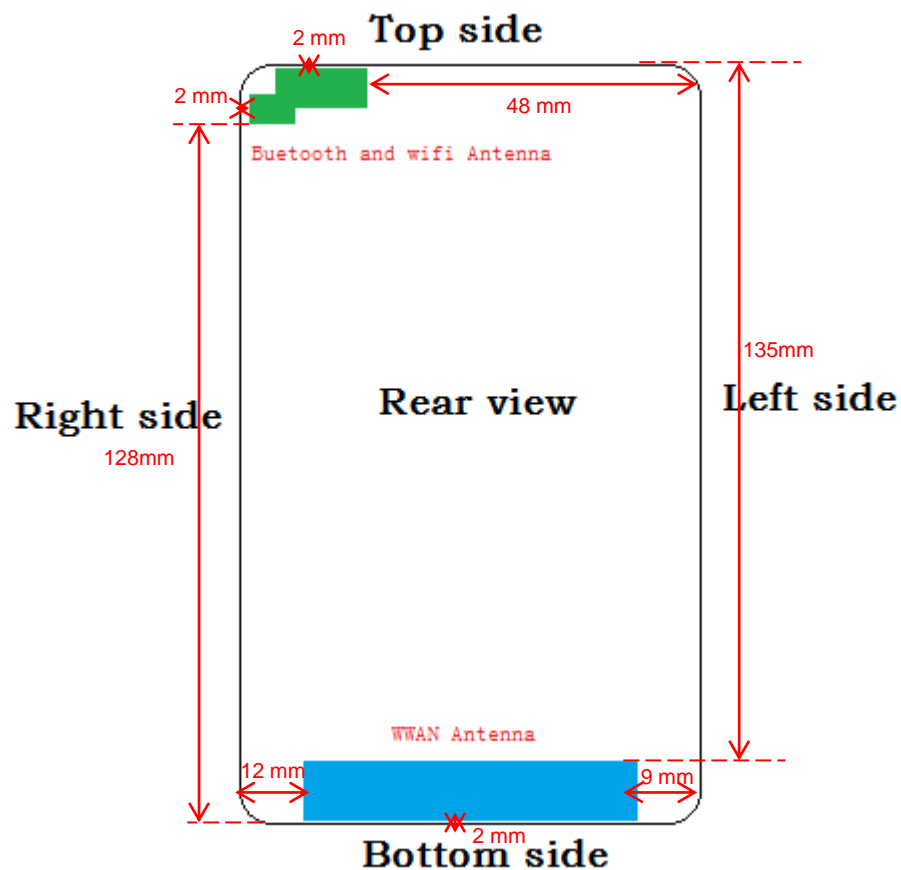

Picture 12.1 Antenna Locations

Note:

WWAN Antenna meaning is 2G/3G TX Antenna

12.3. Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$\left[\frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} \right] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

According to the KDB447498 appendix A, the SAR test exclusion threshold for 2450MHz at 5mm test separation distances is 10mW.

$$\frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} * \sqrt{\text{Frequency (GHz)}} \leq 3.0$$

Based on the above equation, Bluetooth SAR was not required:

Evaluation=2.23<3.0

Based on the above equation, WiFi SAR was required:

Evaluation=4.96>3.0

12.4. SAR Measurement Positions

According to the KDB941225 D06 Hot Spot SAR v01, the edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

| SAR Measurement Positions | | | | | | |
|---------------------------|---------|--------|------|-------|-----|--------|
| Antenna Mode | Phantom | Ground | Left | Right | Top | Bottom |
| WWAN | Yes | Yes | Yes | Yes | No | Yes |
| WLAN | Yes | Yes | No | Yes | Yes | No |

13. Evaluation of Simultaneous

Table 13.1: Summary of Transmitters

| Band/Mode | Frequency (GHz) | SAR test exclusion threshold(mW) | RF output power (mW) |
|--------------------------|-----------------|----------------------------------|----------------------|
| Bluetooth | 2.41 | 10 | 5.01 |
| 2.4GHz WLAN 802.11 b/g/n | 2.45 | 10 | 56.23 |

Table13.2 Simultaneous transmission SAR

| Standalone SAR for 2G(W/Kg) | | | | | |
|-----------------------------|--------------|----------|-------|-------|---------|
| Test Position | | | GSM | GSM | Highest |
| | | | 850 | 1900 | SAR |
| Head | Left | Cheek | 0.274 | 0.236 | 0.274 |
| | | Tilt 15° | 0.176 | 0.089 | 0.176 |
| | Right | Cheek | 0.331 | 0.256 | 0.331 |
| | | Tilt 15° | 0.215 | 0.008 | 0.215 |
| Body worn 10mm | Phantom Side | | 0.389 | 0.561 | 0.561 |
| | Ground Side | | 0.659 | 1.035 | 1.035 |
| Hotspot 10mm | Phantom Side | | 0.389 | 0.561 | 0.561 |
| | Ground Side | | 0.659 | 1.035 | 1.035 |
| | Left Side | | 0.317 | 0.161 | 0.317 |
| | Right Side | | 0.408 | 0.129 | 0.408 |
| | Bottom Side | | 0.154 | 0.744 | 0.744 |
| | Top Side | | -- | -- | -- |

| Standalone SAR for 3G (W/Kg) | | | | | | |
|------------------------------|--------------|----------|------------------|------------------|-----------------|----------------|
| Test Position | | | WCDMA Band II | WCDMA Band IV | WCDMA Band V | Highest SAR |
| Head | Left | Cheek | 0.279 | 0.159 | 0.387 | 0.387 |
| | | Tilt 15° | 0.096 | 0.060 | 0.327 | 0.327 |
| | Right | Cheek | 0.251 | 0.229 | 0.408 | 0.408 |
| | | Tilt 15° | 0.069 | 0.055 | 0.303 | 0.303 |
| Body worn 10mm | Phantom Side | | 0.548 | 0.573 | 0.481 | 0.573 |
| | Ground Side | | 1.059 | 0.742 | 0.756 | 1.059 |
| Hotspot 10mm | Phantom Side | | 0.548 | 0.573 | 0.481 | 0.573 |
| | Ground Side | | 1.059 | 0.704 | 0.217 | 1.059 |
| | Left Side | | 0.079 | 0.115 | 0.338 | 0.338 |
| | Right Side | | 0.090 | 0.079 | 0.276 | 0.276 |
| | Bottom Side | | 1.15 | 0.836 | 0.197 | 1.15 |
| | Top Side | | -- | -- | -- | -- |

| Transmission SAR(W/Kg) | | | | | | | |
|------------------------|--------------|----------|-------|-------|-------|-------|-------|
| Test Position | | | 2G | 3G | WIFI | BT | SUM |
| Head | Left | Cheek | 0.274 | 0.387 | 0.621 | 0.210 | 1.008 |
| | | Tilt 15° | 0.176 | 0.327 | 0.387 | 0.210 | 0.714 |
| | Right | Cheek | 0.331 | 0.408 | 0.256 | 0.210 | 0.664 |
| | | Tilt 15° | 0.215 | 0.303 | 0.242 | 0.210 | 0.545 |
| Body worn 10mm | Phantom Side | | 0.561 | 0.573 | 0.059 | 0.105 | 0.678 |
| | Ground Side | | 1.035 | 1.059 | 0.231 | 0.105 | 1.290 |
| Hotspot 10mm | Phantom Side | | 0.561 | 0.573 | 0.059 | 0.105 | 0.678 |
| | Ground Side | | 1.035 | 1.059 | 0.231 | 0.105 | 1.290 |
| | Left Side | | 0.317 | 0.338 | 0.020 | 0.105 | 0.443 |
| | Right Side | | 0.408 | 0.276 | 0.049 | 0.105 | 0.513 |
| | Bottom Side | | 0.744 | 1.15 | 0.013 | 0.105 | 1.255 |
| | Top Side | | -- | -- | 0.152 | 0.105 | 0.152 |

According to the conducted power measurement result, we can draw the conclusion that: stand-alone SAR for WiFi should be performed. Then, simultaneous transmission SAR for WiFi/BT is considered with measurement results of GSM/WCDMA and WiFi/BT. According to the above table, the sum of reported SAR values for GSM/WCDMA and WiFi<1.6W/kg. So the simultaneous transmission SAR is not required for WiFi/BT transmitter.

14. SAR Test Result

14.1. SAR results for Fast SAR

Table 14.1: Duty Cycle

| Duty Cycle | |
|---------------------------------------|-------|
| Speech for GSM900/1800 | 1:8.3 |
| GPRS for GSM900/1800 | 1:2 |
| WCDMA Band I/ Band IV/Band V/and WiFi | 1:1 |

Table 14.2: SAR Values (GSM 850 MHz Band - Head)

| Frequency | | Side | Test Position | Figure No. | Measured average power(dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|-----------|-----|-------|---------------|------------|-----------------------------|-----------------------------|----------------|-------------------------|-------------------------|------------------|
| MHz | Ch. | | | | | | | | | |
| 836.6 | 190 | Left | Touch | / | 31.27 | 31.5 | 1.054 | 0.260 | 0.274 | 0.08 |
| 836.6 | 190 | Left | Tilt | / | 31.27 | 31.5 | 1.054 | 0.167 | 0.176 | -0.12 |
| 836.6 | 190 | Right | Touch | / | 31.27 | 31.5 | 1.054 | 0.244 | 0.257 | 0.02 |
| 836.6 | 190 | Right | Tilt | / | 31.27 | 31.5 | 1.054 | 0.204 | 0.215 | 0.06 |
| 824.2 | 128 | Left | Touch | / | 31.33 | 31.5 | 1.040 | 0.203 | 0.211 | -0.10 |
| 848.8 | 251 | Left | Touch | Fig.1 | 31.24 | 31.5 | 1.062 | 0.312 | 0.331 | 0.04 |

Table 14.3: SAR Values (GSM 1900 MHz Band - Head)

| Frequency | | Side | Test Position | Figure No. | Measured average power(dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|-----------|-----|-------|---------------|------------|-----------------------------|-----------------------------|----------------|-------------------------|-------------------------|------------------|
| MHz | Ch. | | | | | | | | | |
| 1880 | 661 | Left | Touch | / | 27.87 | 28 | 1.030 | 0.229 | 0.236 | 0.08 |
| 1880 | 661 | Left | Tilt | / | 27.87 | 28 | 1.030 | 0.0862 | 0.089 | -0.03 |
| 1880 | 661 | Right | Touch | Fig.2 | 27.87 | 28 | 1.030 | 0.248 | 0.256 | -0.11 |
| 1880 | 661 | Right | Tilt | / | 27.87 | 28 | 1.030 | 0.00783 | 0.008 | -0.11 |
| 1850.2 | 512 | Right | Touch | / | 27.89 | 28 | 1.026 | 0.217 | 0.223 | 0.18 |
| 1909.8 | 810 | Right | Touch | | 27.83 | 28 | 1.040 | 0.217 | 0.226 | -0.04 |

Table 14.4: SAR Values (WCDMA Band II- Head)

| Frequency | | Side | Test Position | Figure No. | Measured average power(dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|-----------|------|-------|---------------|------------|-----------------------------|-----------------------------|----------------|-------------------------|-------------------------|------------------|
| MHz | Ch. | | | | | | | | | |
| 1880 | 9800 | Left | Touch | / | 18.32 | 19 | 1.169 | 0.221 | 0.258 | -0.12 |
| 1880 | 9800 | Left | Tilt | / | 18.32 | 19 | 1.169 | 0.0823 | 0.096 | 0.16 |
| 1880 | 9800 | Right | Touch | / | 18.32 | 19 | 1.169 | 0.215 | 0.251 | -0.07 |
| 1880 | 9800 | Right | Tilt | / | 18.32 | 19 | 1.169 | 0.0593 | 0.069 | 0.14 |
| 1852.4 | 9662 | Left | Touch | Fig.3 | 18.21 | 19 | 1.199 | 0.233 | 0.279 | -0.19 |
| 1907.6 | 9938 | Left | Touch | / | 18.24 | 19 | 1.191 | 0.227 | 0.270 | 0.18 |

Table 14.5: SAR Values (WCDMA Band IV- Head)

| Frequency | | Side | Test Position | Figure No. | Measured average power(dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|-----------|------|-------|---------------|------------|-----------------------------|-----------------------------|----------------|-------------------------|-------------------------|------------------|
| MHz | Ch. | | | | | | | | | |
| 1732.6 | 1413 | Left | Touch | / | 19.77 | 20 | 1.054 | 0.151 | 0.159 | -0.08 |
| 1732.6 | 1413 | Left | Tilt | / | 19.77 | 20 | 1.054 | 0.0573 | 0.060 | 0.16 |
| 1732.6 | 1413 | Right | Touch | / | 19.77 | 20 | 1.054 | 0.200 | 0.211 | -0.07 |
| 1732.6 | 1413 | Right | Tilt | / | 19.77 | 20 | 1.054 | 0.0517 | 0.055 | 0.14 |
| 1712.4 | 1312 | Right | Touch | / | 19.87 | 20 | 1.054 | 0.193 | 0.203 | 0.08 |
| 1752.6 | 1512 | Right | Touch | Fig.4 | 19.71 | 20 | 1.030 | 0.222 | 0.229 | 0.11 |

Table 14.6: SAR Values (WCDMA Band V- Head)

| Frequency | | Side | Test Position | Figure No. | Measured average power(dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|-----------|------|-------|---------------|------------|-----------------------------|-----------------------------|----------------|-------------------------|-------------------------|------------------|
| MHz | Ch. | | | | | | | | | |
| 836.6 | 4182 | Left | Touch | / | 18.71 | 19.5 | 1.199 | 0.323 | 0.387 | -0.08 |
| 836.6 | 4182 | Left | Tilt | / | 18.71 | 19.5 | 1.199 | 0.273 | 0.327 | 0.16 |
| 836.6 | 4182 | Right | Touch | / | 18.71 | 19.5 | 1.199 | 0.329 | 0.395 | -0.07 |
| 836.6 | 4182 | Right | Tilt | / | 18.71 | 19.5 | 1.199 | 0.253 | 0.303 | 0.14 |
| 826.4 | 4132 | Right | Touch | / | 18.97 | 19.5 | 1.130 | 0.361 | 0.408 | 0.08 |
| 846.6 | 4232 | Right | Touch | Fig.5 | 19.21 | 19.5 | 1.069 | 0.112 | 0.120 | -0.12 |

Table 14.7: SAR Values (WiFi2450- Head)

| Frequency | | Side | Test Position | Figure No. | Measured average power(dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|------------------|-----|-------|---------------|------------|-----------------------------|-----------------------------|----------------|-------------------------|-------------------------|------------------|
| MHz | Ch. | | | | | | | | | |
| 2462 | 11 | Left | Touch | Fig.6 | 14.39 | 14.5 | 1.026 | 0.56 | 0.574 | -0.02 |
| 2462 | 11 | Left | Tilt | / | 14.39 | 14.5 | 1.026 | 0.377 | 0.387 | 0.16 |
| 2462 | 11 | Right | Touch | / | 14.39 | 14.5 | 1.026 | 0.250 | 0.256 | 0.18 |
| 2462 | 11 | Right | Tilt | / | 14.39 | 14.5 | 1.026 | 0.236 | 0.242 | 0.14 |
| Secondary supply | | | | | | | | | | |
| 2462 | 11 | Left | Touch | Fig.7 | 14.39 | 14.5 | 1.026 | 0.605 | 0.621 | 0.11 |

Table 14.8: SAR Values (GSM 850 MHz Band–Hotspot)

| Frequency | | Mode (number of timeslots) | Test Position | Figure No. | Measured average power(dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|-----------|-----|----------------------------|---------------|------------|-----------------------------|-----------------------------|----------------|-------------------------|-------------------------|------------------|
| MHz | Ch. | | | | | | | | | |
| 836.6 | 190 | GPRS (2) | Phantom | / | 28.64 | 29 | 1.086 | 0.358 | 0.389 | 0.02 |
| 836.6 | 190 | GPRS (2) | Ground | / | 28.64 | 29 | 1.086 | 0.461 | 0.501 | 0.06 |
| 836.6 | 190 | GPRS (2) | Left | / | 28.64 | 29 | 1.086 | 0.292 | 0.317 | -0.10 |
| 836.6 | 190 | GPRS (2) | Right | / | 28.64 | 29 | 1.086 | 0.376 | 0.408 | -0.02 |

| | | | | | | | | | | |
|------------------|-----|----------|--------|-------|-------|----|-------|-------|-------|-------|
| 836.6 | 190 | GPRS (2) | Bottom | / | 28.64 | 29 | 1.086 | 0.142 | 0.154 | 0.05 |
| 824.2 | 128 | GPRS (2) | Ground | / | 28.70 | 29 | 1.072 | 0.393 | 0.421 | -0.08 |
| 848.8 | 251 | GPRS (2) | Ground | Fig.8 | 28.62 | 29 | 1.091 | 0.604 | 0.659 | -0.04 |
| Secondary supply | | | | | | | | | | |
| 848.8 | 251 | GPRS (2) | Ground | Fig.9 | 28.62 | 29 | 1.091 | 0.407 | 0.444 | 0.08 |

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.9: SAR Values (GSM 1900 MHz Band–Hotspot)

| Frequency | | Mode (number of timeslots) | Test Position | Figure No. | Measured average power(dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|---------------------------|-----|----------------------------------|------------------|---------------|-----------------------------------|-----------------------------------|-------------------|-------------------------------|-------------------------------|------------------------|
| MHz | Ch. | | | | | | | | | |
| 1880 | 661 | GPRS (3) | Phantom | / | 23.46 | 24 | 1.132 | 0.495 | 0.561 | -0.10 |
| 1880 | 661 | GPRS (3) | Ground | / | 23.46 | 24 | 1.132 | 0.713 | 0.807 | 0.12 |
| 1880 | 661 | GPRS (3) | Left | / | 23.46 | 24 | 1.132 | 0.142 | 0.161 | 0.13 |
| 1880 | 661 | GPRS (3) | Right | / | 23.46 | 24 | 1.132 | 0.114 | 0.129 | -0.14 |
| 1880 | 661 | GPRS (3) | Bottom | / | 23.46 | 24 | 1.132 | 0.657 | 0.744 | -0.03 |
| 1850.2 | 512 | GPRS (3) | Ground | / | 23.42 | 24 | 1.143 | 0.789 | 0.902 | 0.25 |
| 1909.8 | 810 | GPRS (3) | Ground | Fig.10 | 23.52 | 24 | 1.117 | 0.889 | 0.993 | 0.04 |
| Repeated Main supply | | | | | | | | | | |
| 1909.8 | 810 | GPRS (3) | Ground | Fig.11 | 23.52 | 24 | 1.117 | 0.871 | 0.973 | -0.14 |
| Secondary supply | | | | | | | | | | |
| 1909.8 | 810 | GPRS (3) | Ground | Fig.12 | 23.52 | 24 | 1.117 | 0.917 | 1.024 | 0.17 |
| 1850.2 | 512 | GPRS (3) | Ground | / | 23.42 | 24 | 1.143 | 0.643 | 0.735 | 0.09 |
| 1880 | 661 | GPRS (3) | Ground | / | 23.46 | 24 | 1.132 | 0.763 | 0.864 | 0.13 |
| Repeated Secondary supply | | | | | | | | | | |
| 1909.8 | 810 | GPRS (3) | Ground | Fig.13 | 23.52 | 24 | 1.117 | 0.927 | 1.035 | -0.03 |

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.10: SAR Values (WCDMA Band II –Hotspot)

| Frequency | | Mode (number of timeslots) | Test Position | Figure No. | Measured average power(dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|-----------|------|----------------------------------|------------------|---------------|-----------------------------------|-----------------------------------|-------------------|-------------------------------|-------------------------------|------------------------|
| MHz | Ch. | | | | | | | | | |
| 1880 | 9400 | 12.2K RMC | Phantom | / | 18.32 | 19 | 1.169 | 0.469 | 0.548 | 0.06 |
| 1880 | 9400 | 12.2K RMC | Ground | / | 18.32 | 19 | 1.169 | 0.795 | 0.930 | 0.12 |
| 1880 | 9400 | 12.2K RMC | Left | / | 18.32 | 19 | 1.169 | 0.0678 | 0.079 | -0.04 |
| 1880 | 9400 | 12.2K RMC | Right | / | 18.32 | 19 | 1.169 | 0.0773 | 0.090 | 0.12 |

| | | | | | | | | | | |
|----------------------|------|-----------|--------|--------|-------|----|-------|-------|-------|-------|
| 1880 | 9400 | 12.2K RMC | Bottom | Fig.16 | 18.32 | 19 | 1.169 | 0.985 | 1.15 | 0.19 |
| 1852.4 | 9262 | 12.2K RMC | Ground | / | 18.21 | 19 | 1.199 | 0.671 | 0.805 | 0.09 |
| 1907.6 | 9538 | 12.2K RMC | Ground | Fig.14 | 18.24 | 19 | 1.191 | 0.886 | 1.055 | 0.03 |
| 1852.4 | 9262 | 12.2K RMC | Bottom | / | 18.97 | 19 | 1.007 | 0.877 | 0.883 | 0.12 |
| 1907.6 | 9538 | 12.2K RMC | Bottom | / | 18.21 | 19 | 1.199 | 0.934 | 1.120 | 0.13 |
| Repeated Main supply | | | | | | | | | | |
| 1907.6 | 9538 | 12.2K RMC | Ground | Fig.15 | 18.24 | 19 | 1.191 | 0.889 | 1.059 | -0.17 |
| Secondary supply | | | | | | | | | | |
| 1907.6 | 9538 | 12.2K RMC | Ground | Fig.17 | 18.24 | 19 | 1.191 | 0.576 | 0.686 | 0.09 |

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.11: SAR Values (WCDMA Band IV –Hotspot)

| Frequency | | Mode (number of timeslots) | Test Position | Figure No. | Measured average power(dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|------------------|------|-------------------------------|---------------|------------|-----------------------------|-----------------------------|----------------|-------------------------|-------------------------|------------------|
| MHz | Ch. | | | | | | | | | |
| 1732.6 | 1413 | 12.2K RMC | Phantom | / | 19.77 | 20 | 1.054 | 0.543 | 0.573 | 0.01 |
| 1732.6 | 1413 | 12.2K RMC | Ground | / | 19.77 | 20 | 1.054 | 0.704 | 0.742 | 0.06 |
| 1732.6 | 1413 | 12.2K RMC | Left | / | 19.77 | 20 | 1.054 | 0.109 | 0.115 | 0.13 |
| 1732.6 | 1413 | 12.2K RMC | Right | / | 19.77 | 20 | 1.054 | 0.0752 | 0.079 | 0.16 |
| 1732.6 | 1413 | 12.2K RMC | Bottom | / | 19.77 | 20 | 1.054 | 0.613 | 0.646 | 0.03 |
| 1712.4 | 1312 | 12.2K RMC | Bottom | / | 19.87 | 20 | 1.030 | 0.661 | 0.681 | 0.08 |
| 1752.6 | 1512 | 12.2K RMC | Bottom | Fig.19 | 19.71 | 20 | 1.069 | 0.782 | 0.836 | 0.09 |
| Secondary supply | | | | | | | | | | |
| 1752.6 | 1512 | 12.2K RMC | Bottom | Fig.21 | 19.71 | 20 | 1.069 | 0.746 | 0.787 | 0.19 |

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.12: SAR Values (WCDMA Band V –Hotspot)

| Frequency | | Mode (number of timeslots) | Test Position | Figure No. | Measured average power(dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|------------------|------|----------------------------------|------------------|---------------|-----------------------------------|-----------------------------------|-------------------|-------------------------------|-------------------------------|------------------------|
| MHz | Ch. | | | | | | | | | |
| 836.6 | 4182 | 12.2K RMC | Phantom | / | 18.71 | 19.5 | 1.199 | 0.401 | 0.481 | 0.01 |
| 836.6 | 4182 | 12.2K RMC | Ground | Fig.22 | 18.71 | 19.5 | 1.199 | 0.181 | 0.217 | 0.16 |
| 836.6 | 4182 | 12.2K RMC | Left | / | 18.71 | 19.5 | 1.199 | 0.282 | 0.338 | 0.13 |
| 836.6 | 4182 | 12.2K RMC | Right | / | 18.71 | 19.5 | 1.199 | 0.230 | 0.276 | 0.16 |
| 836.6 | 4182 | 12.2K RMC | Bottom | / | 18.71 | 19.5 | 1.199 | 0.164 | 0.197 | 0.18 |
| 826.4 | 4132 | 12.2K RMC | Ground | / | 18.97 | 19.5 | 1.130 | 0.492 | 0.556 | 0.13 |
| 846.6 | 4233 | 12.2K RMC | Ground | / | 19.21 | 19.5 | 1.069 | 0.602 | 0.644 | 0.06 |
| Secondary supply | | | | | | | | | | |
| 836.6 | 4182 | 12.2K RMC | Ground | Fig.23 | 18.71 | 19.5 | 1.199 | 0.094 | 0.113 | 0.06 |

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.13: SAR Values (Wi-Fi2450 –Hotspot)

| Frequency | | Mode (number of timeslots) | Test Position | Figure No. | Measured average power(dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|------------------|-----|----------------------------------|------------------|---------------|-----------------------------------|-----------------------------------|-------------------|-------------------------------|-------------------------------|------------------------|
| MHz | Ch. | | | | | | | | | |
| 2462 | 11 | 802.11 b | Phantom | / | 14.39 | 14.5 | 1.026 | 0.0571 | 0.059 | 0.01 |
| 2462 | 11 | 802.11 b | Ground | Fig.24 | 14.39 | 14.5 | 1.026 | 0.225 | 0.231 | 0.09 |
| 2462 | 11 | 802.11 b | Left | / | 14.39 | 14.5 | 1.026 | 0.0193 | 0.020 | 0.13 |
| 2462 | 11 | 802.11 b | Right | / | 14.39 | 14.5 | 1.026 | 0.0473 | 0.049 | 0.16 |
| 2462 | 11 | 802.11 b | Bottom | / | 14.39 | 14.5 | 1.026 | 0.013 | 0.013 | 0.18 |
| 2462 | 11 | 802.11 b | Top | / | 14.39 | 14.5 | 1.026 | 0.148 | 0.152 | 0.13 |
| Secondary supply | | | | | | | | | | |
| 2462 | 11 | 802.11 b | Ground | Fig.25 | 14.39 | 14.5 | 1.026 | 0.205 | 0.210 | 0.12 |

Note: The distance between the EUT and the phantom bottom is 10mm.

Note: SAR is not required for OFDM because the 802.11b adjusted SAR ≤ 1.2 W/kg.

Note: The distance between the EUT and the phantom bottom is 10mm.

SAR results for Standard procedure

There is zoom scan measurement to be added for the highest measured SAR in each exposure configuration/band.

Table 14.32: SAR Values for Head

| Frequency | | Side | Test Position | Figure No. | Measured average power(dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|-----------|------|-------|---------------|------------|-----------------------------|-----------------------------|----------------|-------------------------|-------------------------|------------------|
| MHz | Ch. | | | | | | | | | |
| 848.8 | 251 | Right | Touch | Fig.1 | 31.24 | 31.5 | 1.062 | 0.312 | 0.331 | 0.04 |
| 1880 | 661 | Right | Touch | Fig.2 | 27.87 | 28 | 1.030 | 0.248 | 0.256 | -0.11 |
| 1852.4 | 9662 | Left | Touch | Fig.3 | 18.21 | 19 | 1.199 | 0.233 | 0.279 | -0.19 |
| 1752.6 | 1512 | Right | Touch | Fig.4 | 19.71 | 20 | 1.030 | 0.222 | 0.229 | 0.11 |
| 846.6 | 4232 | Right | Touch | Fig.5 | 19.21 | 19.5 | 1.069 | 0.391 | 0.418 | 0.18 |
| 2462 | 11 | Left | Touch | Fig.6 | 14.39 | 14.5 | 1.026 | 0.56 | 0.574 | -0.02 |
| 2462 | 11 | Left | Touch | Fig.7 | 14.39 | 14.5 | 1.026 | 0.605 | 0.621 | 0.11 |

Table 14.32: SAR Values for Hotspot/Body worn

| Frequency | | Mode (number of timeslots) | Test Position | Figure No. | Measured average power(dBm) | Maximum allowed Power (dBm) | Scaling factor | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift (dB) |
|-----------|------|----------------------------|---------------|------------|-----------------------------|-----------------------------|----------------|-------------------------|-------------------------|------------------|
| MHz | Ch. | | | | | | | | | |
| 848.8 | 251 | GPRS (2) | Ground | Fig.8 | 28.62 | 29 | 1.091 | 0.604 | 0.659 | -0.04 |
| 848.8 | 251 | GPRS (2) | Ground | Fig.9 | 28.62 | 29 | 1.091 | 0.407 | 0.444 | 0.08 |
| 1909.8 | 810 | GPRS (3) | Ground | Fig.10 | 23.52 | 24 | 1.117 | 0.889 | 0.993 | 0.04 |
| 1909.8 | 810 | GPRS (3) | Ground | Fig.11 | 23.52 | 24 | 1.117 | 0.871 | 0.973 | -0.14 |
| 1909.8 | 810 | GPRS (3) | Ground | Fig.12 | 23.52 | 24 | 1.117 | 0.917 | 1.024 | 0.17 |
| 1909.8 | 810 | GPRS (3) | Ground | Fig.13 | 23.52 | 24 | 1.117 | 0.927 | 1.035 | -0.03 |
| 1880 | 9400 | 12.2K RMC | Bottom | Fig.16 | 18.32 | 19 | 1.169 | 0.985 | 1.15 | 0.19 |
| 1907.6 | 9538 | 12.2K RMC | Ground | Fig.14 | 18.24 | 19 | 1.191 | 0.886 | 1.055 | 0.03 |
| 1907.6 | 9538 | 12.2K RMC | Ground | Fig.15 | 18.24 | 19 | 1.191 | 0.889 | 1.059 | -0.17 |
| 1907.6 | 9538 | 12.2K RMC | Ground | Fig.17 | 18.24 | 19 | 1.191 | 0.576 | 0.686 | 0.09 |
| 1752.6 | 1512 | 12.2K RMC | Bottom | Fig.19 | 19.71 | 20 | 1.069 | 0.782 | 0.836 | 0.09 |
| 1752.6 | 1512 | 12.2K RMC | Bottom | Fig.21 | 19.71 | 20 | 1.069 | 0.746 | 0.787 | 0.19 |
| 836.6 | 4182 | 12.2K RMC | Ground | Fig.23 | 18.71 | 19.5 | 1.199 | 0.094 | 0.113 | 0.06 |
| 2462 | 11 | 802.11 b | Ground | Fig.24 | 14.39 | 14.5 | 1.026 | 0.225 | 0.231 | 0.09 |
| 2462 | 11 | 802.11 b | Ground | Fig.25 | 14.39 | 14.5 | 1.026 | 0.205 | 0.210 | 0.12 |

15. SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Table 15.1: SAR Measurement Variability for Body Value (1g)

| Frequency | | Test Position | Original SAR (W/kg) | First Repeated SAR (W/kg) | The Ratio |
|-----------|------|------------------|------------------------|------------------------------|-----------|
| MHz | Ch. | | | | |
| 1909.8 | 810 | Ground | 0.889 | 0.871 | 1.021 |
| 1909.8 | 810 | Ground | 0.917 | 0.927 | 1.011 |
| 1907.6 | 9538 | Ground | 0.886 | 0.889 | 1.003 |

Note: According to the KDB 865664 D01 repeated measurement is not required when the original highest measured SAR is < 0.8 W/kg.

16. Measurement Uncertainty

| Error Description | Unc. value, ±% | Prob. Dist. | Div. | c _i 1g | c _i 10g | Std.Unc ±%,1g | Std.Unc ±%,10g | V _i V _{eff} |
|---------------------------------|----------------------|----------------|------------|----------------------|-----------------------|------------------|-------------------|------------------------------------|
| Measurement System | | | | | | | | |
| Probe Calibration | 6.0 | N | 1 | 1 | 1 | 6.0 | 6.0 | ∞ |
| Axial Isotropy | 0.5 | R | $\sqrt{3}$ | 0.7 | 0.7 | 0.2 | 0.2 | ∞ |
| Hemispherical Isotropy | 2.6 | R | $\sqrt{3}$ | 0.7 | 0.7 | 1.1 | 1.1 | ∞ |
| Boundary Effects | 0.8 | R | $\sqrt{3}$ | 1 | 1 | 0.5 | 0.5 | ∞ |
| Linearity | 0.6 | R | $\sqrt{3}$ | 1 | 1 | 0.3 | 0.3 | ∞ |
| System Detection Limits | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 | ∞ |
| Readout Electronics | 0.7 | N | 1 | 1 | 1 | 0.7 | 0.7 | ∞ |
| Response Time | 0 | R | $\sqrt{3}$ | 1 | 1 | 0 | 0 | ∞ |
| Integration Time | 2.6 | R | $\sqrt{3}$ | 1 | 1 | 1.5 | 1.5 | ∞ |
| RF Ambient Noise | 3.0 | R | $\sqrt{3}$ | 1 | 1 | 1.7 | 1.7 | ∞ |
| RF Ambient Reflections | 3.0 | R | $\sqrt{3}$ | 1 | 1 | 1.7 | 1.7 | ∞ |
| Probe Positioner | 1.5 | R | $\sqrt{3}$ | 1 | 1 | 0.9 | 0.9 | ∞ |
| Probe Positioning | 2.9 | R | $\sqrt{3}$ | 1 | 1 | 1.7 | 1.7 | ∞ |
| Max. SAR Eval. | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 | ∞ |
| Test Sample Related | | | | | | | | |
| Device Positioning | 2.9 | N | 1 | 1 | 1 | 2.9 | 2.9 | 145 |
| Device Holder | 3.6 | N | 1 | 1 | 1 | 3.6 | 3.6 | 5 |
| Dipole | | | | | | | | |
| Power Drift | 5.0 | R | $\sqrt{3}$ | 1 | 1 | 2.9 | 2.9 | ∞ |
| Dipole Positioning | 2.0 | N | 1 | 1 | 1 | 2.0 | 2.0 | ∞ |
| Dipole Input Power | 5.0 | N | 1 | 1 | 1 | 5.0 | 5.0 | ∞ |
| Phantom and Setup | | | | | | | | |
| Phantom Uncertainty | 4.0 | R | $\sqrt{3}$ | 1 | 1 | 2.3 | 2.3 | ∞ |
| Liquid Conductivity (target) | 5.0 | R | $\sqrt{3}$ | 0.64 | 0.43 | 1.8 | 1.2 | ∞ |
| Liquid Conductivity (meas.) | 2.5 | N | 1 | 0.64 | 0.43 | 1.6 | 1.1 | ∞ |
| Liquid Permittivity (target) | 5.0 | R | $\sqrt{3}$ | 0.6 | 0.49 | 1.7 | 1.4 | ∞ |
| Liquid Permittivity (meas.) | 2.5 | N | 1 | 0.6 | 0.49 | 1.5 | 1.2 | ∞ |
| Combined Std Uncertainty | | | | | | | | |
| | | | | | | ±11.2% | ±10.9% | 387 |
| Expanded Std Uncertainty | | | | | | | | |
| | | | | | | ±22.4% | ±21.8% | |

17. Main Test Instrument

Table 17.1: List of Main Instruments

| No. | Name | Type | Serial Number | Calibration Date | Valid Period |
|-----|-----------------------|----------------|---------------|--------------------------|--------------|
| 01 | Network analyzer | N5242A | MY51221755 | Jan 18, 2016 | 1 year |
| 02 | Power meter | NRVD | 102257 | May 12, 2016 | 1 year |
| 03 | Power sensor | NRV-Z5 | 100241 | | |
| | | | 100644 | | |
| 04 | Signal Generator | E4438C | MY49072044 | Jan 22, 2016 | 1 Year |
| 05 | Amplifier | NTWPA-0086010F | 12023024 | No Calibration Requested | |
| 06 | Coupler | 778D | MY4825551 | May 12, 2016 | 1 year |
| 07 | BTS | E5515C | MY50266468 | Jan 18, 2016 | 1 year |
| 08 | E-field Probe | EX3DV4 | 7375 | Dec 8, 2016 | 1 year |
| 09 | DAE | SPEAG DAE4 | 360 | Nov 8, 2016 | 1 year |
| 10 | Dipole Validation Kit | SPEAG D835V2 | 4d112 | Oct 22, 2015 | 2 year |
| | | SPEAG D1750V2 | 1044 | Nov 3,2015 | 2 year |
| | | SPEAG D1900V2 | 5d134 | Nov 4,2015 | 2 year |
| | | SPEAG D2450V2 | 858 | Oct 30,2015 | 2 year |

ANNEX A. GRAPH RESULTS

GSM 850MHz Right Cheek High

Date/Time: 2017/1/11

Electronics: DAE3 Sn360

Medium: Head 835MHz

Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 0.929 \text{ S/m}$; $\epsilon_r = 40.788$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: GSM Professional 835MHz; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Probe: EX3DV4 - SN7375ConvF(9.73, 9.73, 9.73); Calibrated: 12/8/2016

GSM 850MHz Right Cheek High/Area Scan (121x71x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 0.328 W/kg

GSM 850MHz Right Cheek High/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.795 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.385 W/kg

SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.239 W/kg

Maximum value of SAR (measured) = 0.327 W/kg

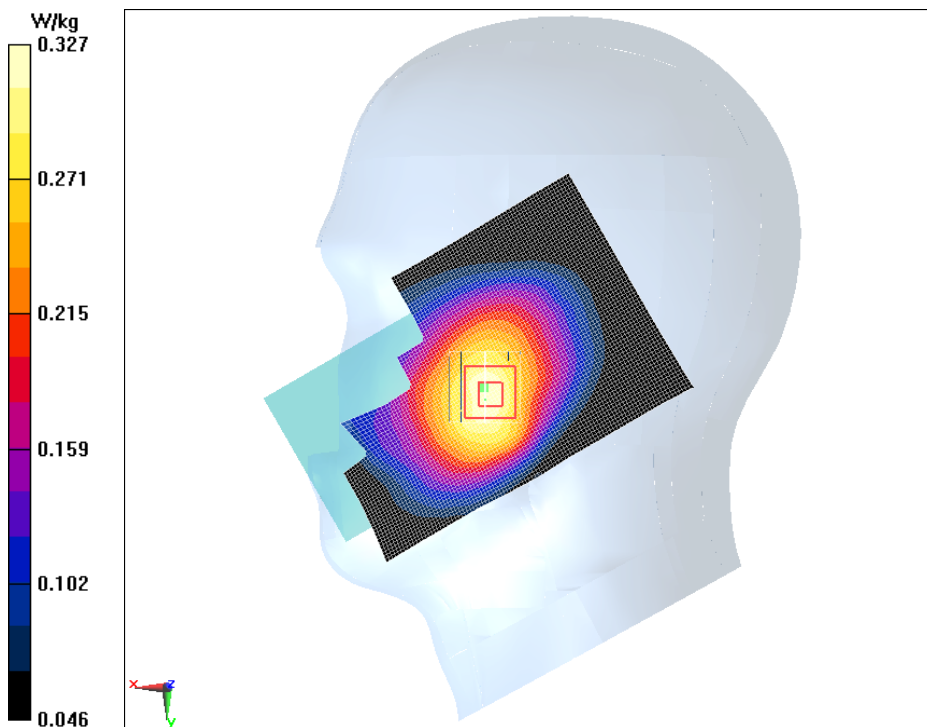


Fig.1

GSM 1900MHz Right Cheek Middle

Date/Time: 2017/1/17

Electronics: DAE3 Sn360

Medium: Head 1900MHz

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.379 \text{ S/m}$; $\epsilon_r = 39.867$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature: 22°C Liquid Temperature: 22°C

Communication System: GSM Professional 1900MHz; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Probe: EX3DV4 - SN7375ConvF(7.92, 7.92, 7.92); Calibrated: 12/8/2016

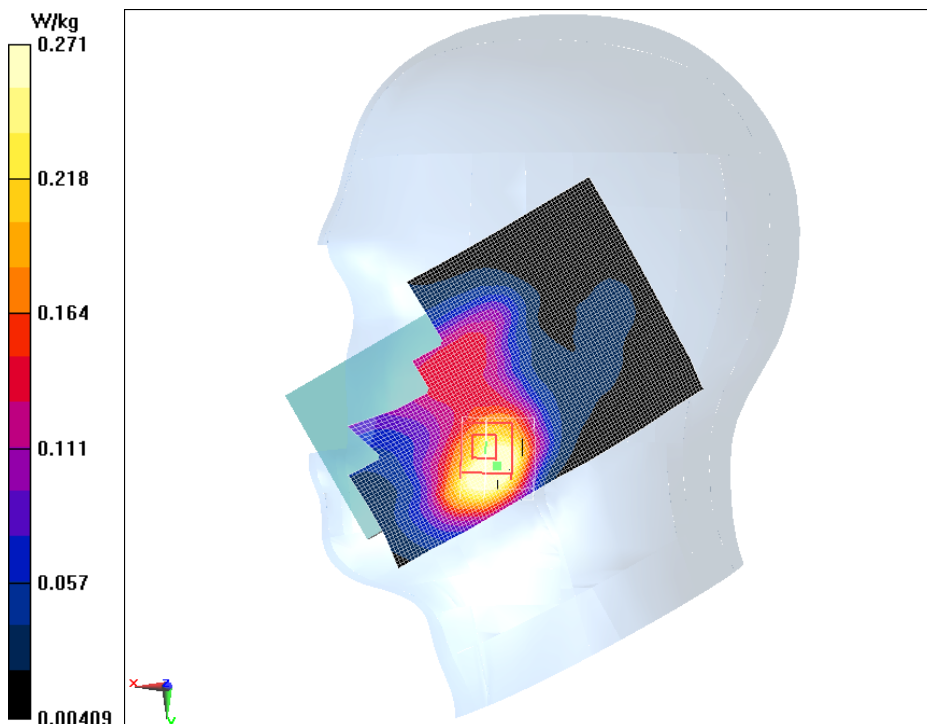
GSM 1900MHz Right Cheek Middle/Area Scan (121x71x1):Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$ Maximum value of SAR (Measurement) = 0.317 W/kg **GSM 1900MHz Right Cheek Middle/Zoom Scan (7x7x7)/Cube 0:**Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 5.150 V/m ; Power Drift = -0.11 dB Peak SAR (extrapolated) = 0.382 W/kg SAR(1 g) = 0.248 W/kg ; SAR(10 g) = 0.148 W/kg Maximum of SAR (measured) = 0.271 W/kg 

Fig.2

WCDMA Band 2 Left Cheek Low

Date/Time: 2017/1/17

Electronics: DAE3 Sn360

Medium: Head 1900MHz

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 40.159$; $\rho = 1000$ kg/m³

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: WCDMA Professional Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(7.92, 7.92, 7.92); Calibrated: 12/8/2016

WCDMA Band 2 Left Cheek Low/Area Scan (121x71x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (Measurement) = 0.264 W/kg

WCDMA Band 2 Left Cheek Low/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.603 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.387 W/kg

SAR(1 g) = 0.233 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.252 W/kg

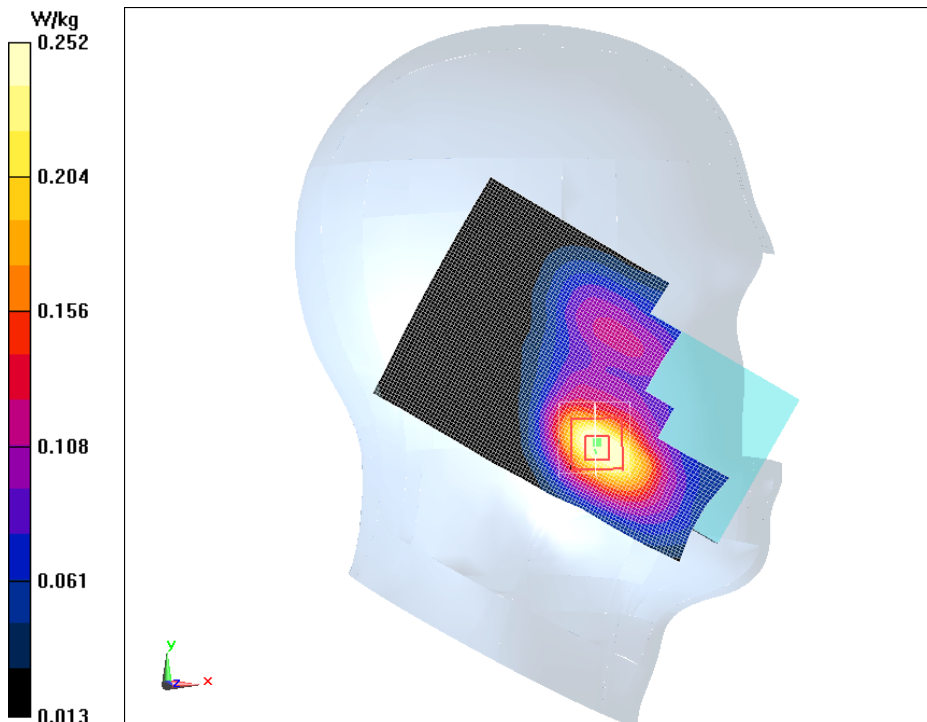


Fig.3

WCDMA Band 4 Right Cheek High

Date/Time: 2017/1/10

Electronics: DAE3 Sn360

Medium: Head 1800MHz

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 40.853$; $\rho = 1000$ kg/m³

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: WCDMA Professional 1800MHz; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(8.31, 8.31, 8.31); Calibrated: 12/8/2016

WCDMA Band 4 Right Cheek High/Area Scan (121x71x1):Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (Measurement) = 0.246 W/kg

WCDMA Band 4 Right Cheek High/Zoom Scan (7x7x7)/Cube 0:Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.459 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.330 W/kg

SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.141 W/kg

Maximum value of SAR (measured) = 0.238 W/kg

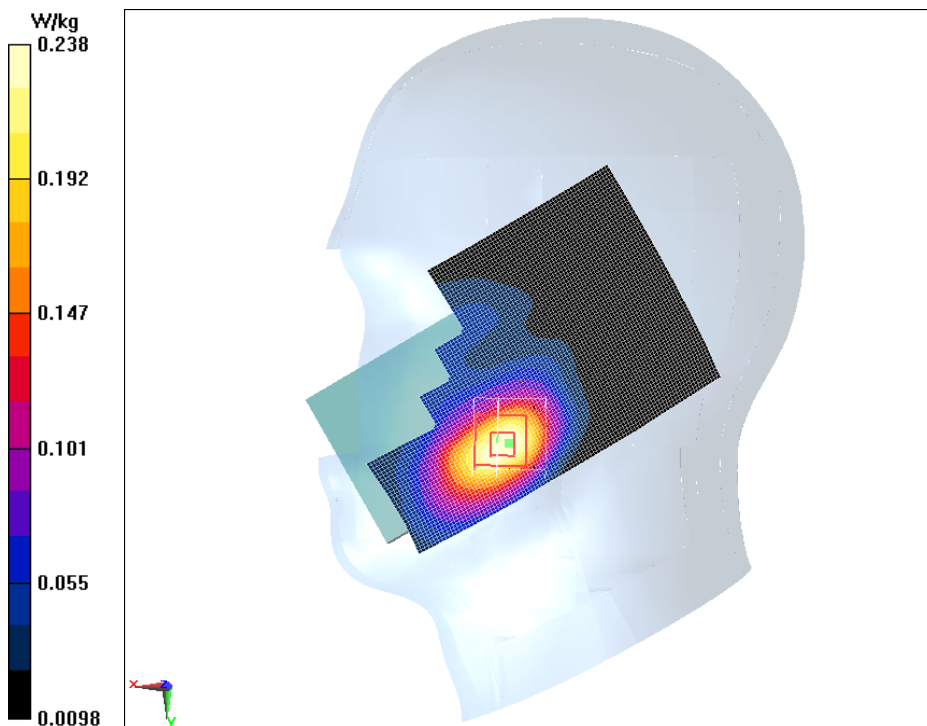


Fig.4

WCDMA Band5 Right Cheek High

Date/Time: 2017/1/18

Electronics: DAE3 Sn360

Medium: Head 835MHz

Medium parameters used: $f = 847 \text{ MHz}$; $\sigma = 0.933 \text{ S/m}$; $\epsilon_r = 40.305$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: WCDMA Professional 835MHz; Frequency: 846.6 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(9.73, 9.73, 9.73); Calibrated: 12/8/2016

WCDMA Band5 Right Cheek High/Area Scan (121x71x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 0.132 W/kg

WCDMA Band5 Right Cheek High/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.092 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.144 W/kg

SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.083 W/kg

Maximum of SAR (measured) = 0.117 W/kg

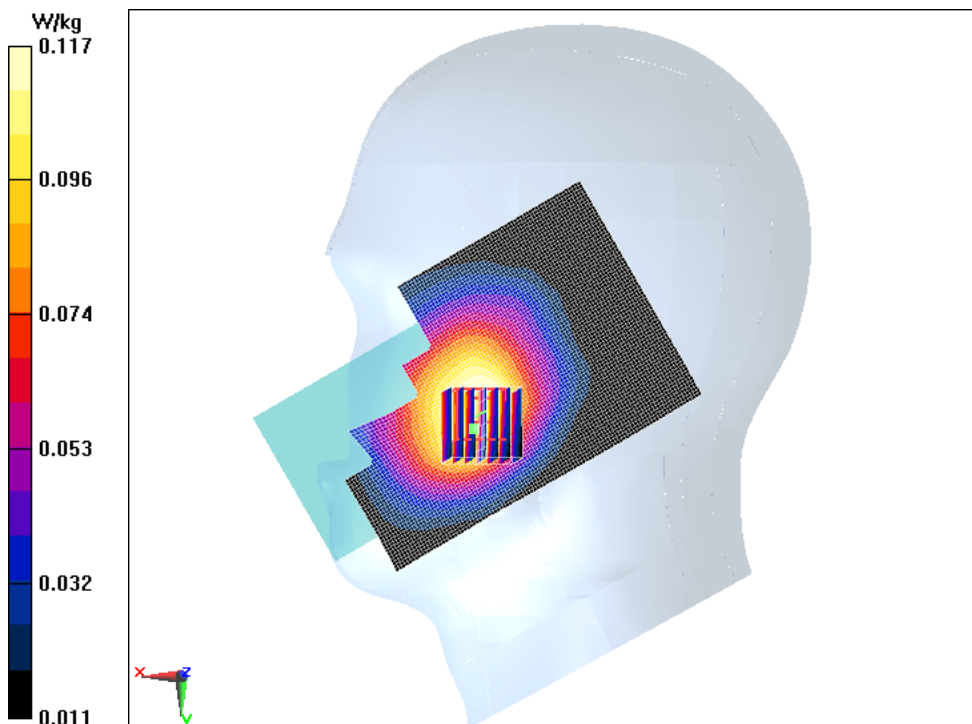


Fig.5

WiFi 802.11b Left Cheek High-N05

Date/Time: 2017/1/19

Electronics: DAE3 Sn360

Medium: Head 2450MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.811$ S/m; $\epsilon_r = 38.972$; $\rho = 1000$ kg/m³

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: Wifi 2450 2450MHz; Frequency: 2462 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(7.27, 7.27, 7.27); Calibrated: 12/8/2016

WiFi 802.11b Left Cheek High-N05/Area Scan (141x81x1):Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (Measurement) = 0.657 W/kg


WiFi 802.11b Left Cheek High-N05/Zoom Scan (7x7x7)/Cube 0:Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.592 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.560 W/kg; SAR(10 g) = 0.231 W/kg

Maximum value of SAR (measured) = 0.636 W/kg

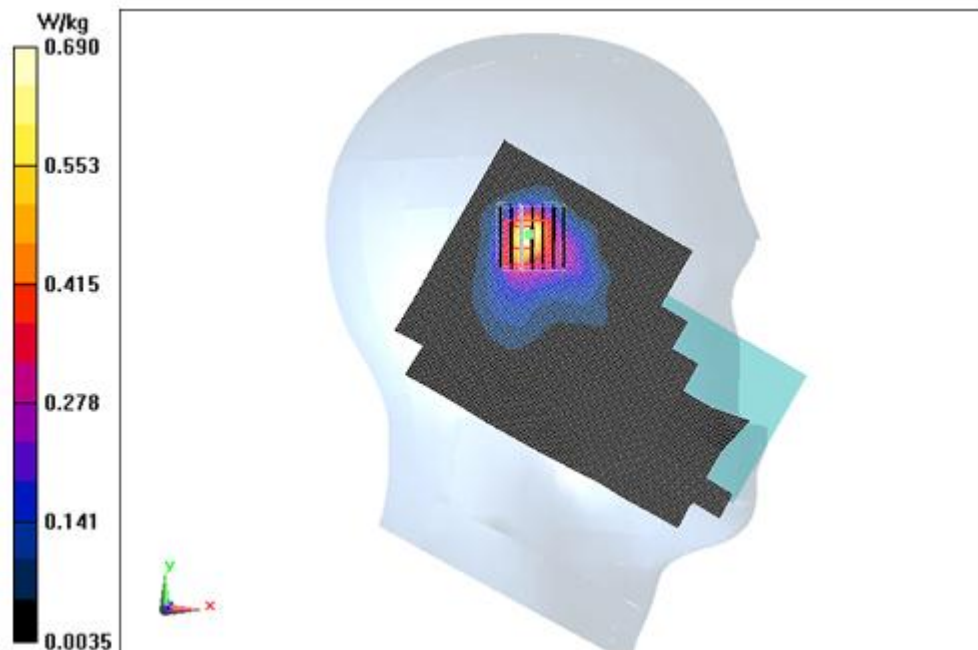**Fig.6**

WiFi 802.11b Left Cheek High-N08

Date/Time: 2017/1/19

Electronics: DAE3 Sn360

Medium: Head 2450MHz

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.811 \text{ S/m}$; $\epsilon_r = 38.972$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: Wifi 2450 2450MHz; Frequency: 2462 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(7.27, 7.27, 7.27); Calibrated: 12/8/2016

WiFi 802.11b Left Cheek High-N08/Area Scan (141x81x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 0.724 W/kg

WiFi 802.11b Left Cheek High-N08/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.40 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 0.605 W/kg; SAR(10 g) = 0.252 W/kg

Maximum value of SAR (measured) = 0.690 W/kg

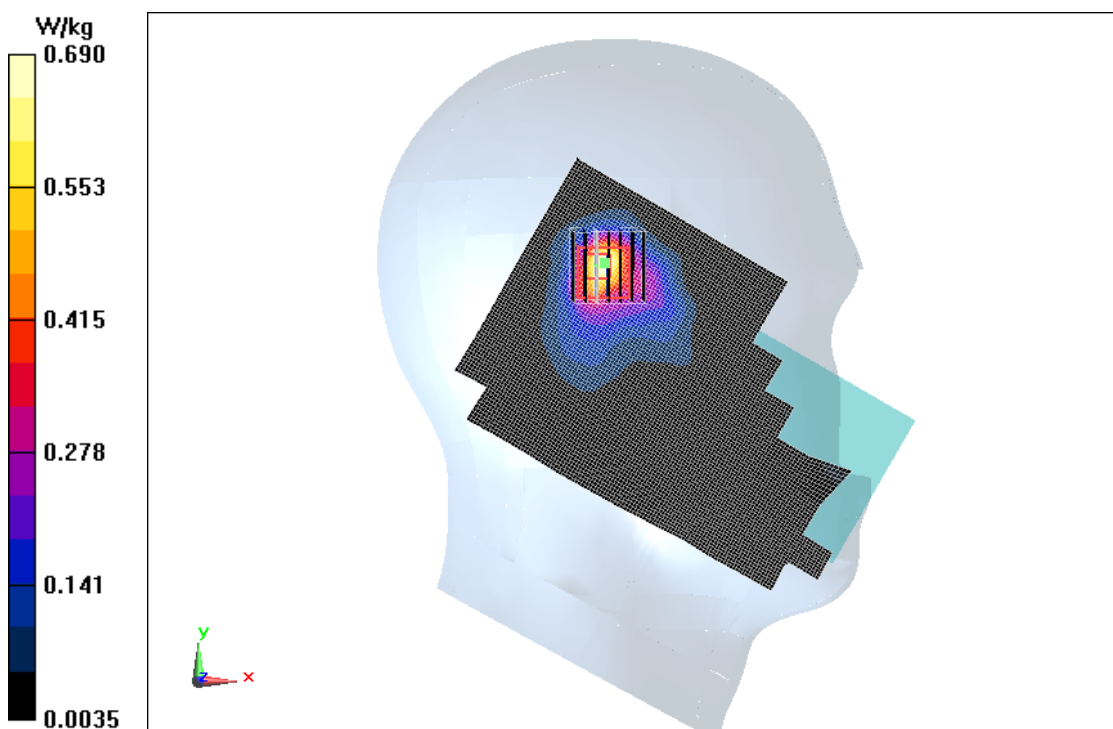


Fig.7

GPRS 850MHz 2TS Ground Mode High N05

Date/Time: 2017/1/18

Electronics: DAE3 Sn360

Medium: Body 835MHz

Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 0.995 \text{ S/m}$; $\epsilon_r = 54.105$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: GSM 850MHz GPRS 2TS (0); Frequency: 848.8 MHz; Duty Cycle: 1:4

Probe: EX3DV4 - SN7375ConvF(9.94, 9.94, 9.94); Calibrated: 12/8/2016

GPRS 850MHz 2TS Ground Mode High N05/Area Scan (61x111x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 0.640 W/kg

GPRS 850MHz 2TS Ground Mode High N05/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.02 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.770 W/kg

SAR(1 g) = 0.604 W/kg; SAR(10 g) = 0.460 W/kg

Maximum value of SAR (measured) = 0.631 W/kg

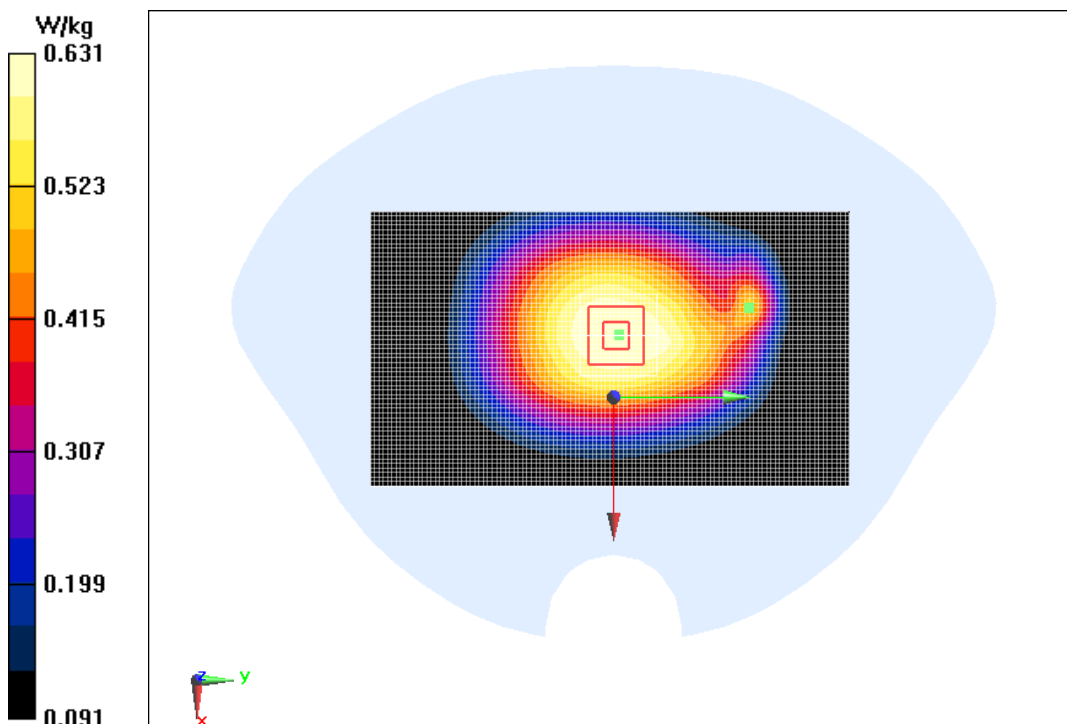


Fig.8

GPRS 850MHz 2TS Ground Mode High N08

Date/Time: 2017/1/18

Electronics: DAE3 Sn360

Medium: Body 835MHz

Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 0.995 \text{ S/m}$; $\epsilon_r = 54.105$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: GSM 850MHz GPRS 2TS (0); Frequency: 848.8 MHz; Duty Cycle: 1:4

Probe: EX3DV4 - SN7375ConvF(9.94, 9.94, 9.94); Calibrated: 12/8/2016

GPRS 850MHz 2TS Ground Mode High N08/Area Scan (61x111x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 0.426 W/kg

GPRS 850MHz 2TS Ground Mode High N08/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.52 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.519 W/kg

SAR(1 g) = 0.407 W/kg; SAR(10 g) = 0.307 W/kg

Maximum value of SAR (measured) = 0.427 W/kg

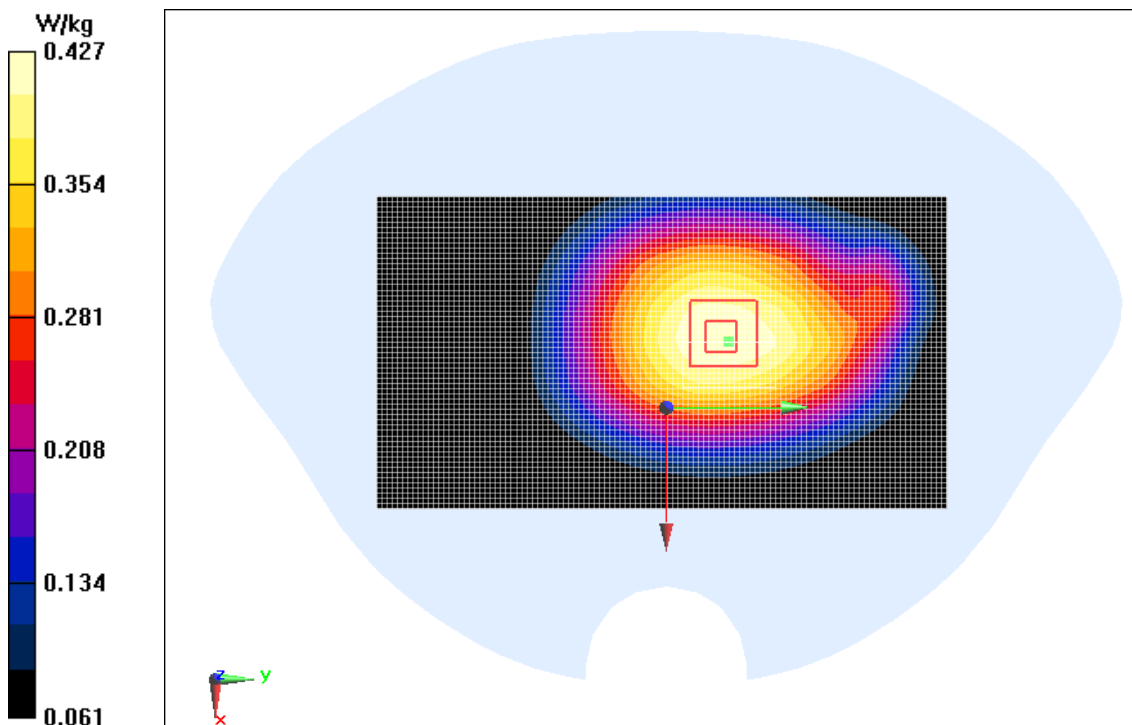


Fig.9

GPRS 1900MHz 3TS Ground Mode High N05

Date/Time: 2017/1/17

Electronics: DAE3 Sn360

Medium: Body 1900MHz

Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.534 \text{ S/m}$; $\epsilon_r = 53.187$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: GSM 1900MHz GPRS 3TS (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2

Probe: EX3DV4 - SN7375ConvF(7.62, 7.62, 7.62); Calibrated: 12/8/2016

GPRS 1900MHz 3TS Ground Mode High N05/Area Scan (71x141x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 0.982 W/kg

GPRS 1900MHz 3TS Ground Mode High N05/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.195 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.889 W/kg; SAR(10 g) = 0.458 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

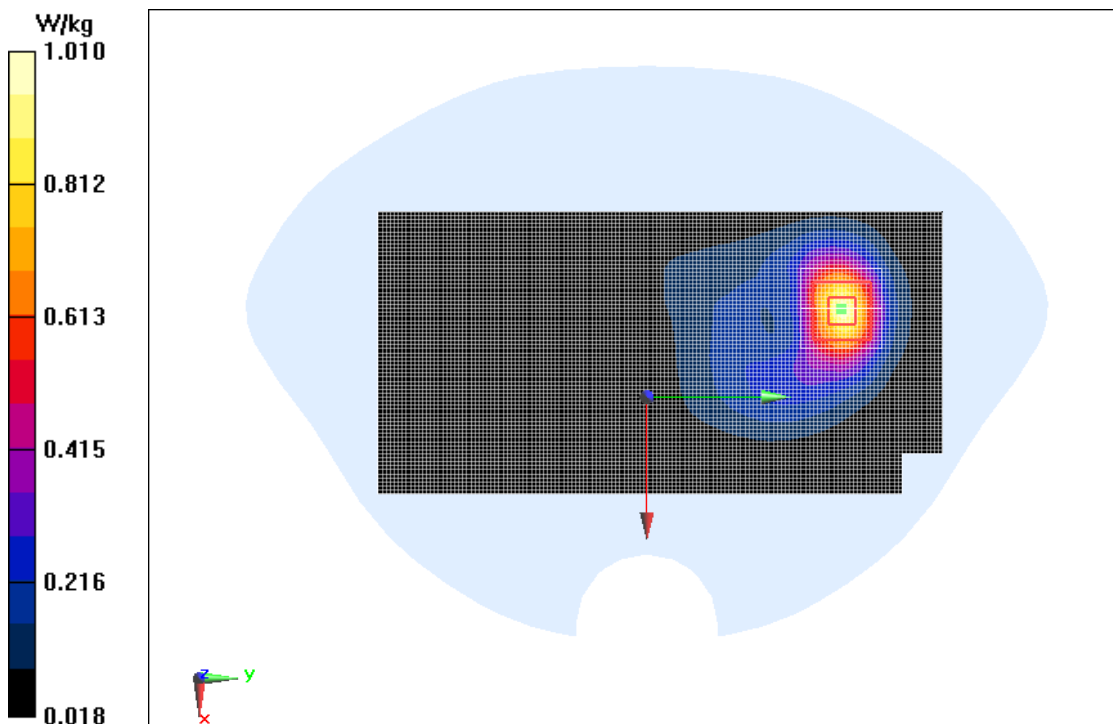


Fig.10

GPRS 1900MHz 3TS Ground Mode High N05 repeated

Date/Time: 2017/1/17

Electronics: DAE3 Sn360

Medium: Body 1900MHz

Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.534 \text{ S/m}$; $\epsilon_r = 53.187$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: GSM 1900MHz GPRS 3TS (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2

Probe: EX3DV4 - SN7375ConvF(7.62, 7.62, 7.62); Calibrated: 12/8/2016

GPRS 1900MHz 3TS Ground Mode High N05 repeated/Area Scan (71x141x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 0.964 W/kg

GPRS 1900MHz 3TS Ground Mode High N05 repeated/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.328 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.871 W/kg; SAR(10 g) = 0.451 W/kg

Maximum value of SAR (measured) = 0.987 W/kg

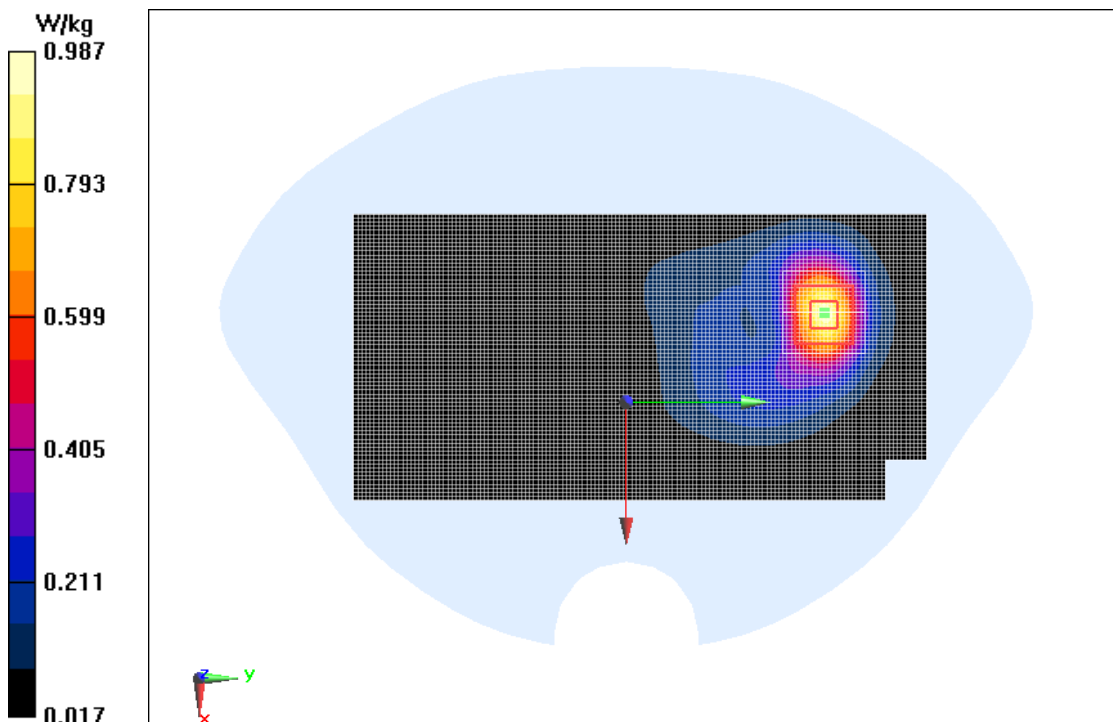


Fig.11

GPRS 1900MHz 3TS Ground Mode High N08

Date/Time: 2017/1/17

Electronics: DAE3 Sn360

Medium: Body 1900MHz

Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.534 \text{ S/m}$; $\epsilon_r = 53.187$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: GSM 1900MHz GPRS 3TS (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2

Probe: EX3DV4 - SN7375ConvF(7.62, 7.62, 7.62); Calibrated: 12/8/2016

GPRS 1900MHz 3TS Ground Mode High N08/Area Scan (71x141x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 0.985 W/kg

GPRS 1900MHz 3TS Ground Mode High N08/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.199 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 0.917 W/kg; SAR(10 g) = 0.473 W/kg

Maximum value of SAR (measured) = 1.03 W/kg

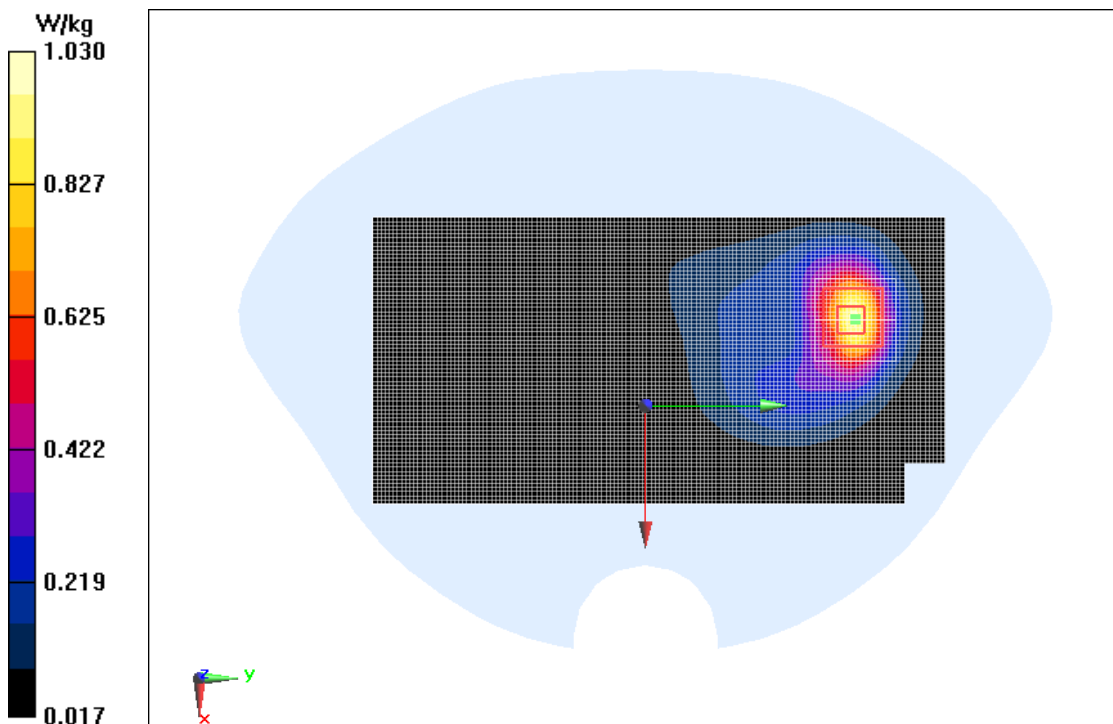


Fig.12

GPRS 1900MHz 3TS Ground Mode High N08 repeated

Date/Time: 2017/1/17

Electronics: DAE3 Sn360

Medium: Body 1900MHz

Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.534 \text{ S/m}$; $\epsilon_r = 53.187$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: GSM 1900MHz GPRS 3TS (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2

Probe: EX3DV4 - SN7375ConvF(7.62, 7.62, 7.62); Calibrated: 12/8/2016

GPRS 1900MHz 3TS Ground Mode High N08 repeated/Area Scan (71x141x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 0.997 W/kg

GPRS 1900MHz 3TS Ground Mode High N08 repeated/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.287 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.70 W/kg

SAR(1 g) = 0.927 W/kg; SAR(10 g) = 0.477 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

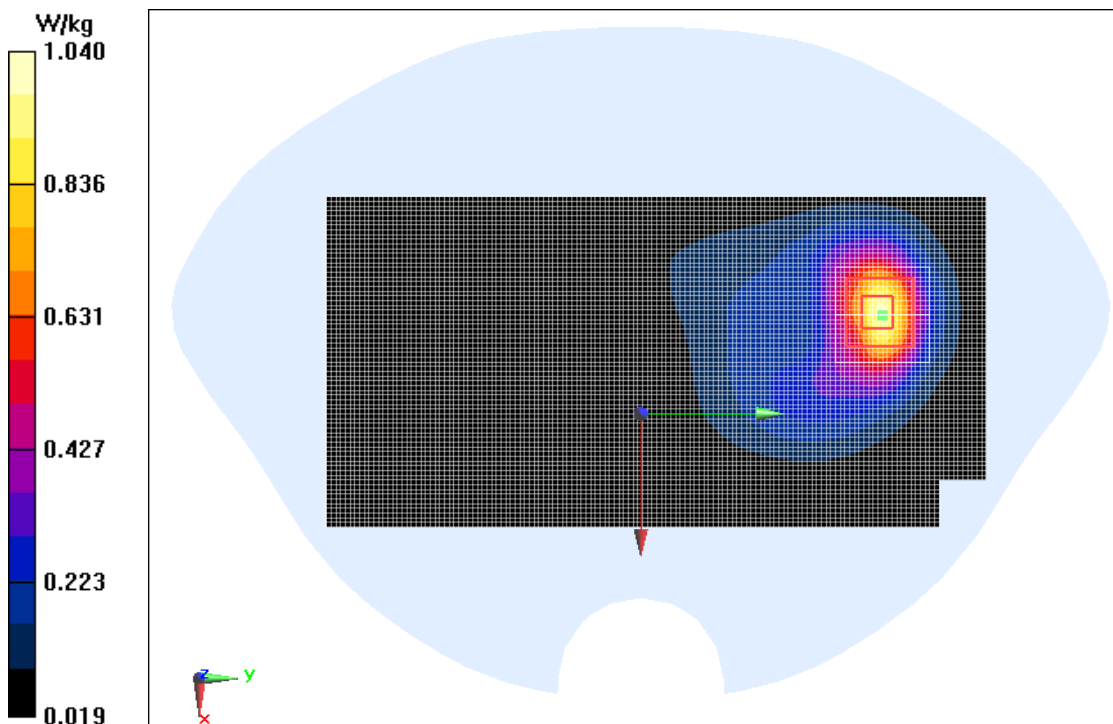


Fig.13

WCDMA Band 2 Ground Mode High N05

Date/Time: 2017/1/17

Electronics: DAE3 Sn360

Medium: Body 1900MHz

Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.532 \text{ S/m}$; $\epsilon_r = 53.199$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: WCDMA Professional Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(7.62, 7.62, 7.62); Calibrated: 12/8/2016

WCDMA Band 2 Ground Mode High N05/Area Scan (71x111x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 0.873 W/kg

WCDMA Band 2 Ground Mode High N05/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.605 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 0.886 W/kg; SAR(10 g) = 0.443 W/kg

Maximum value of SAR (measured) = 1.00 W/kg

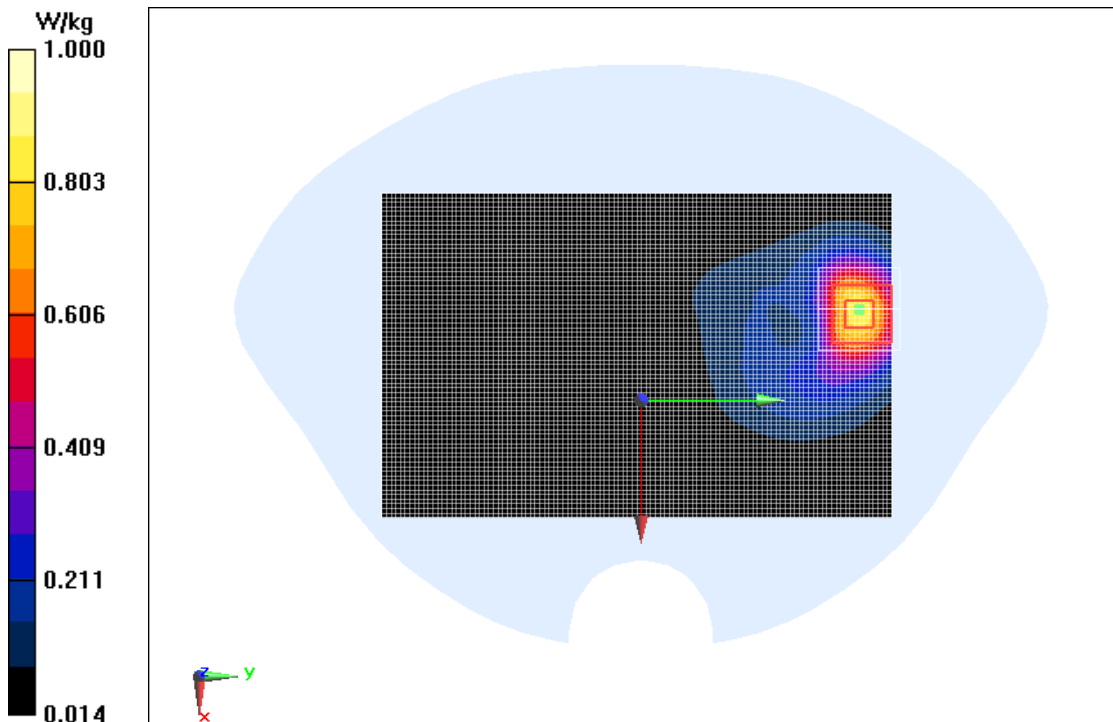


Fig.14

WCDMA Band 2 Ground Mode High N05 Repeated

Date/Time: 2017/1/17

Electronics: DAE3 Sn360

Medium: Body 1900MHz

Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.532 \text{ S/m}$; $\epsilon_r = 53.199$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: WCDMA Professional Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(7.62, 7.62, 7.62); Calibrated: 12/8/2016

WCDMA Band 2 Ground Mode High N05 Repeated/Area Scan (71x111x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 0.878 W/kg

WCDMA Band 2 Ground Mode High N05 Repeated/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.115 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 0.889 W/kg; SAR(10 g) = 0.445 W/kg

Maximum value of SAR (measured) = 1.00 W/kg

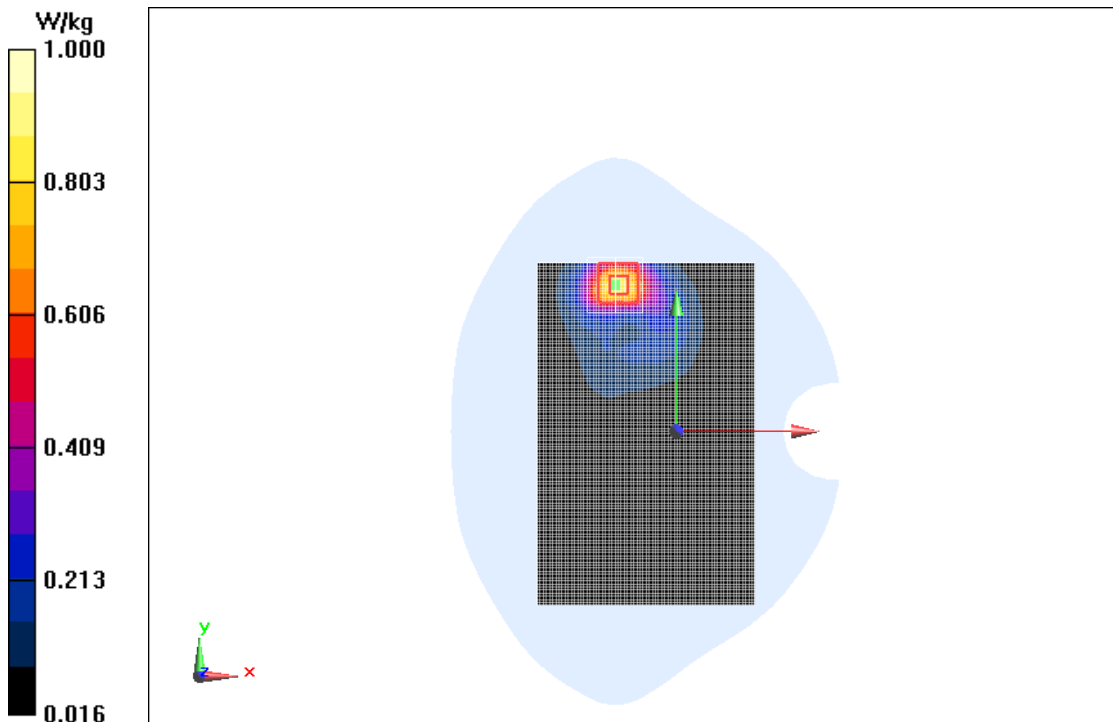


Fig.15

WCDMA Band 2 Bottom Mode Middle

Date/Time: 2017/1/17

Electronics: DAE3 Sn360

Medium: Body 1900MHz

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.504 \text{ S/m}$; $\epsilon_r = 53.319$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: WCDMA Professional Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(7.62, 7.62, 7.62); Calibrated: 12/8/2016

WCDMA Band 2 Bottom Mode Middle/Area Scan (31x71x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 1.19 W/kg

WCDMA Band 2 Bottom Mode Middle/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.66 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 0.985 W/kg; SAR(10 g) = 0.509 W/kg

Maximum value of SAR (measured) = 1.11 W/kg

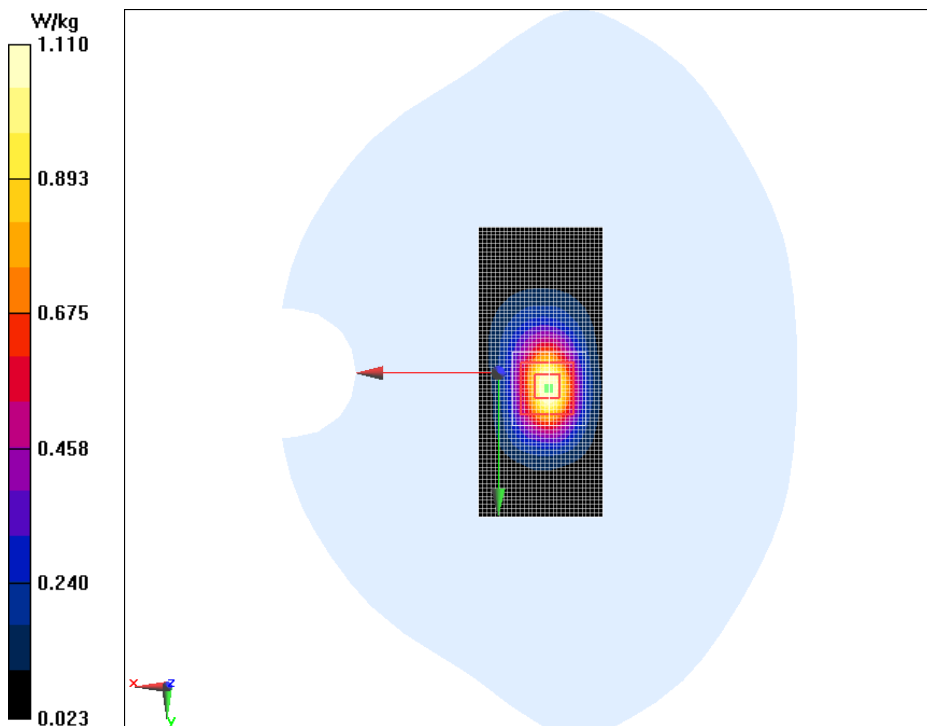


Fig.16

WCDMA Band 2 Ground Mode High N08

Date/Time: 2017/1/17

Electronics: DAE3 Sn360

Medium: Body 1900MHz

Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.532 \text{ S/m}$; $\epsilon_r = 53.199$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: WCDMA Professional Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(7.62, 7.62, 7.62); Calibrated: 12/8/2016

WCDMA Band 2 Ground Mode High N08/Area Scan (71x121x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 0.609 W/kg

WCDMA Band 2 Ground Mode High N08/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.669 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.995 W/kg

SAR(1 g) = 0.576 W/kg; SAR(10 g) = 0.302 W/kg

Maximum value of SAR (measured) = 0.646 W/kg

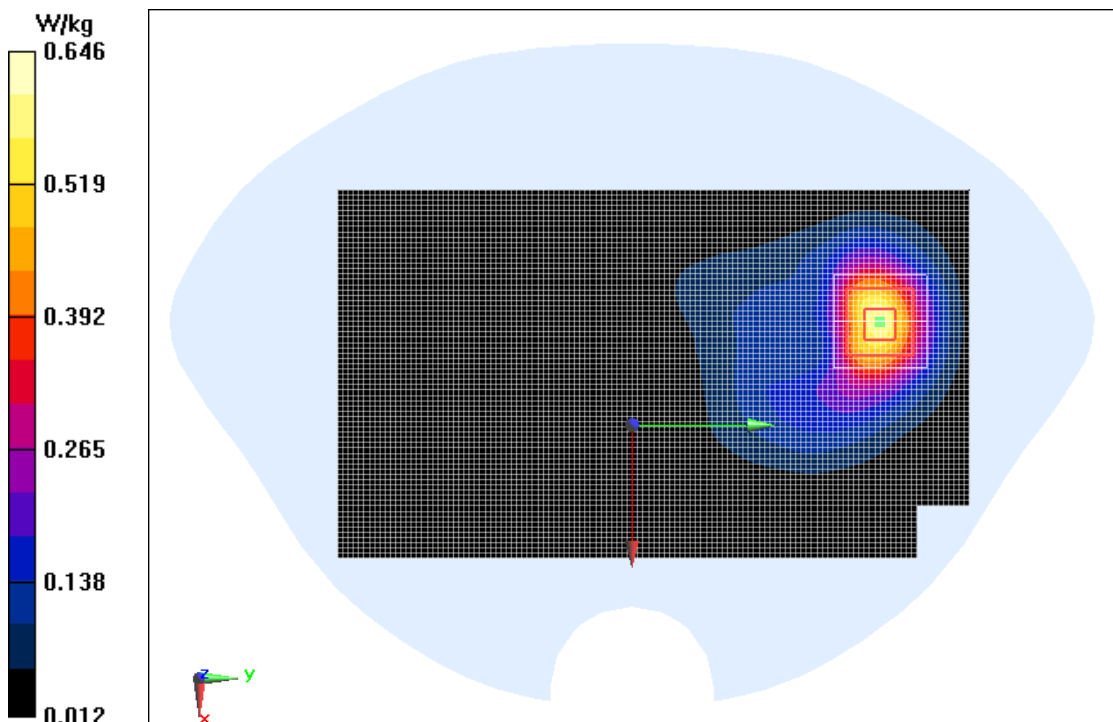


Fig.17

WCDMA Band 4 Bottom Mode High-N05

Date/Time: 2017/1/18

Electronics: DAE3 Sn360

Medium: Body 1800MHz

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.423$ S/m; $\epsilon_r = 52.596$; $\rho = 1000$ kg/m³

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: WCDMA Professional 1800MHz; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(8.22, 8.22, 8.22); Calibrated: 12/8/2016

WCDMA Band 4 Bottom Mode High-N05/Area Scan (31x71x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (Measurement) = 0.912 W/kg

WCDMA Band 4 Bottom Mode High-N05/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.76 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.782 W/kg; SAR(10 g) = 0.423 W/kg

Maximum value of SAR (measured) = 0.886 W/kg

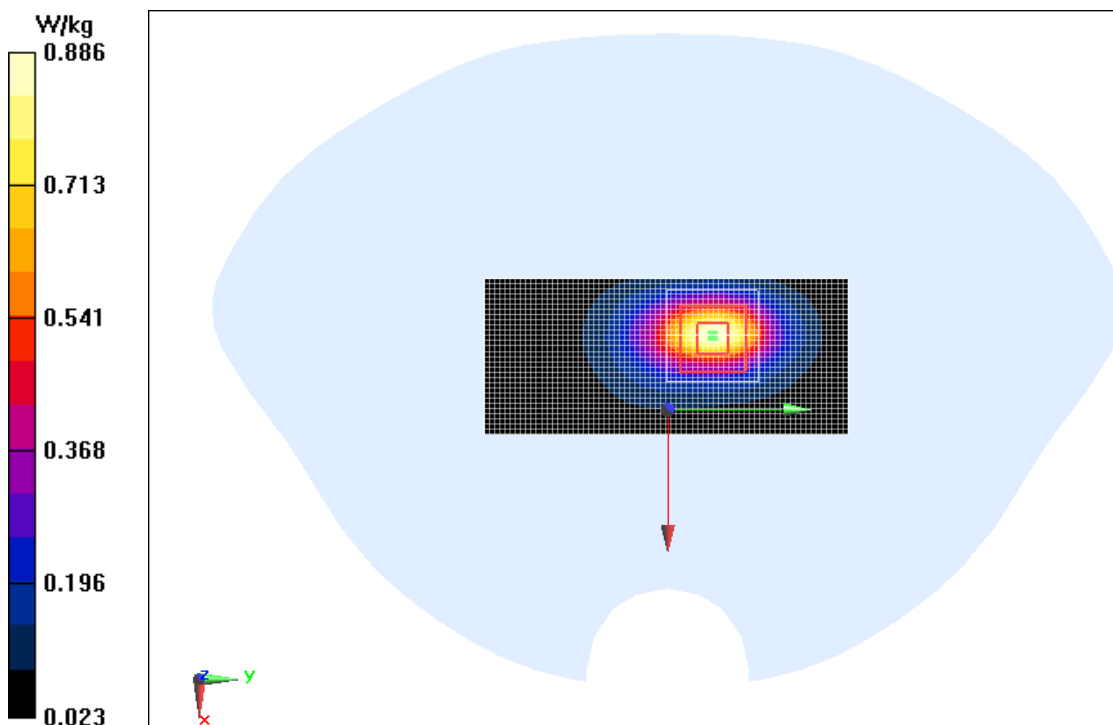


Fig.19

WCDMA Band 4 Bottom Mode High-N08

Date/Time: 2017/1/18

Electronics: DAE3 Sn360

Medium: Body 1800MHz

Medium parameters used: $f = 1753 \text{ MHz}$; $\sigma = 1.423 \text{ S/m}$; $\epsilon_r = 52.596$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: WCDMA Professional 1800MHz; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(8.22, 8.22, 8.22); Calibrated: 12/8/2016

WCDMA Band 4 Bottom Mode High-N08/Area Scan (31x71x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 0.860 W/kg

WCDMA Band 4 Bottom Mode High-N08/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.32 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.746 W/kg; SAR(10 g) = 0.390 W/kg

Maximum value of SAR (measured) = 0.852 W/kg

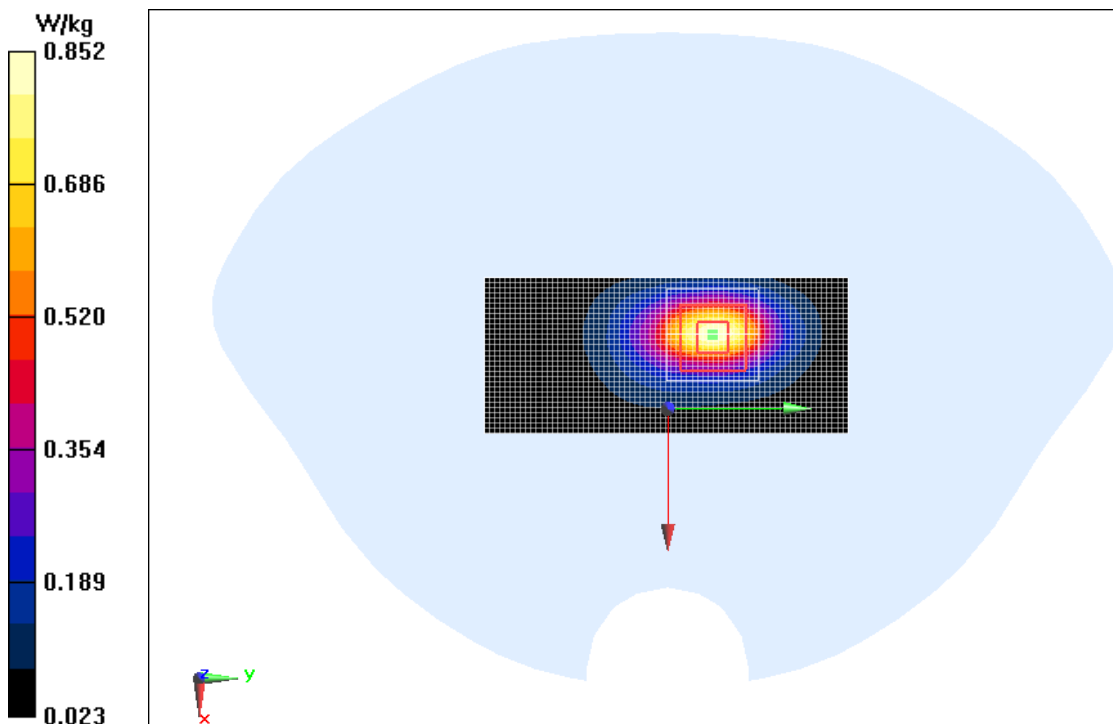


Fig.21

WCDMA Band5 Ground Mode Middle N05

Date/Time: 2017/1/18

Electronics: DAE3 Sn360

Medium: Body 835MHz

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.981 \text{ S/m}$; $\epsilon_r = 54.052$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: WCDMA Professional Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(9.94, 9.94, 9.94); Calibrated: 12/8/2016

WCDMA Band5 Ground Mode Middle N05/Area Scan (71x121x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 0.185 W/kg

WCDMA Band5 Ground Mode Middle N05/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.21 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.232 W/kg

SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.137 W/kg

Maximum of SAR (measured) = 0.190 W/kg

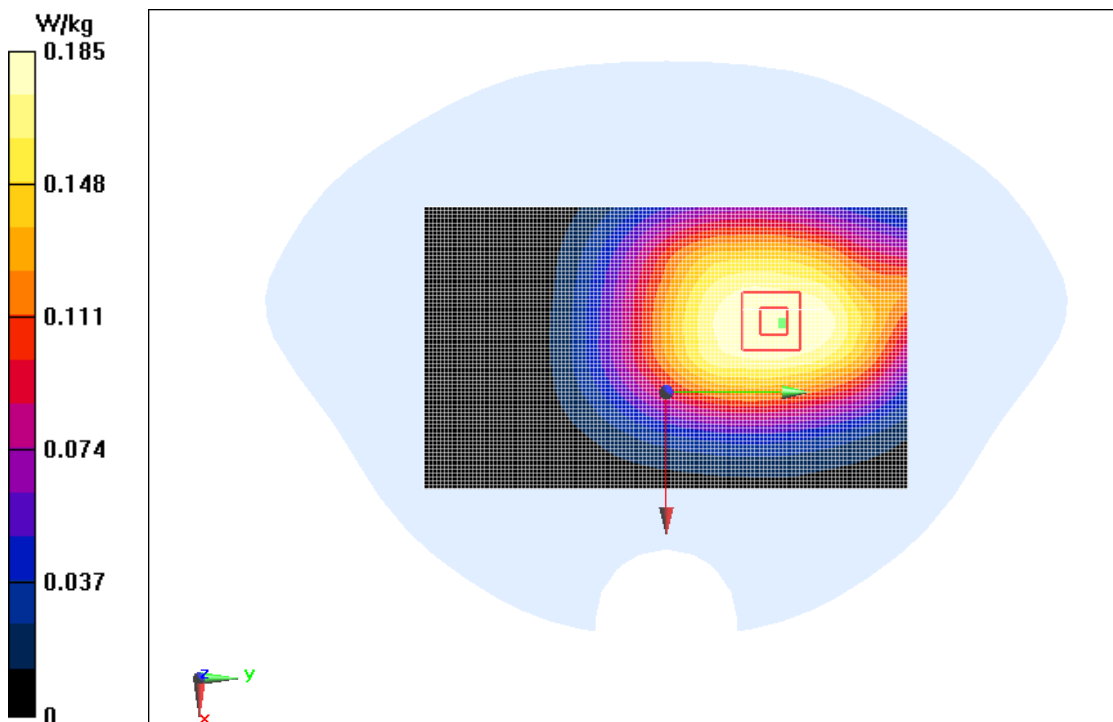


Fig.22

WCDMA Band5 Ground Mode Middle N08

Date/Time: 2017/1/18

Electronics: DAE3 Sn360

Medium: Body 835MHz

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.981 \text{ S/m}$; $\epsilon_r = 54.052$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: WCDMA Professional Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(9.94, 9.94, 9.94); Calibrated: 12/8/2016

WCDMA Band5 Ground Mode Middle N08/Area Scan (71x121x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 0.100 W/kg

WCDMA Band5 Ground Mode Middle N08/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.499 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.118 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.072 W/kg

Maximum value of SAR (measured) = 0.0990 W/kg

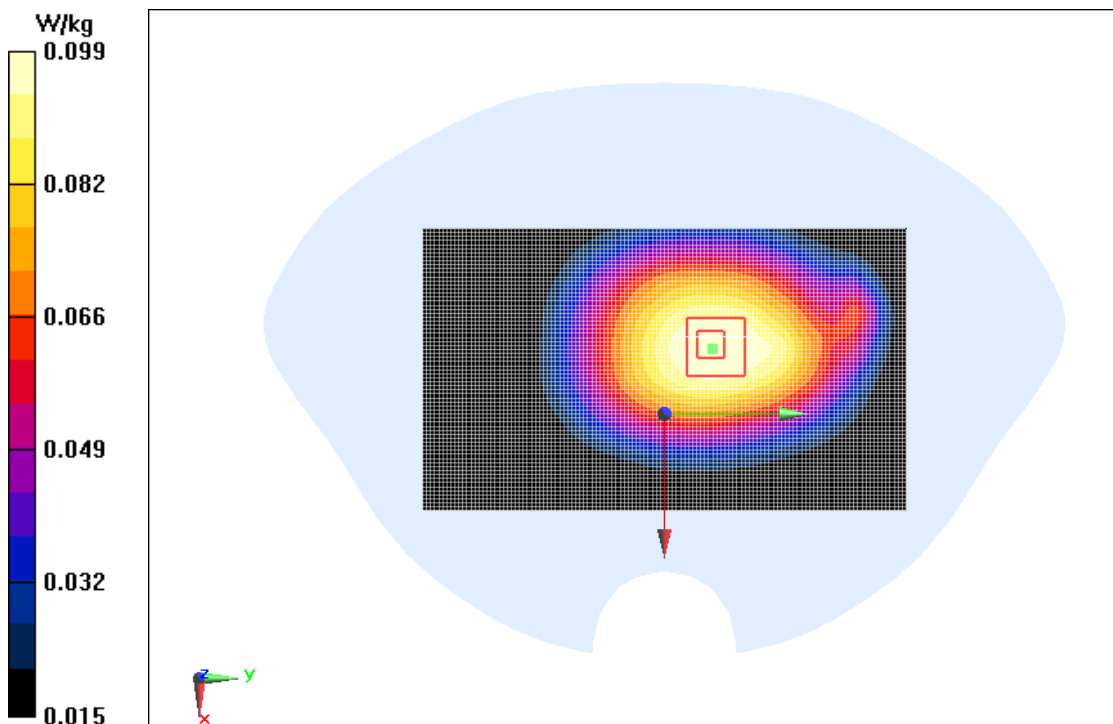


Fig.23

WiFi 802.11b Ground Mode High N05

Date/Time: 2017/1/19

Electronics: DAE3 Sn360

Medium: Body 2450MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 53.827$; $\rho = 1000$ kg/m³

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: Wifi 2450 2450MHz; Frequency: 2462 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(7.33, 7.33, 7.33); Calibrated: 12/8/2016

WiFi 802.11b Ground Mode High N05/Area Scan (71x111x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (Measurement) = 0.254 W/kg

WiFi 802.11b Ground Mode High N05/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.555 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.526 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.098 W/kg

Maximum value of SAR (measured) = 0.249 W/kg

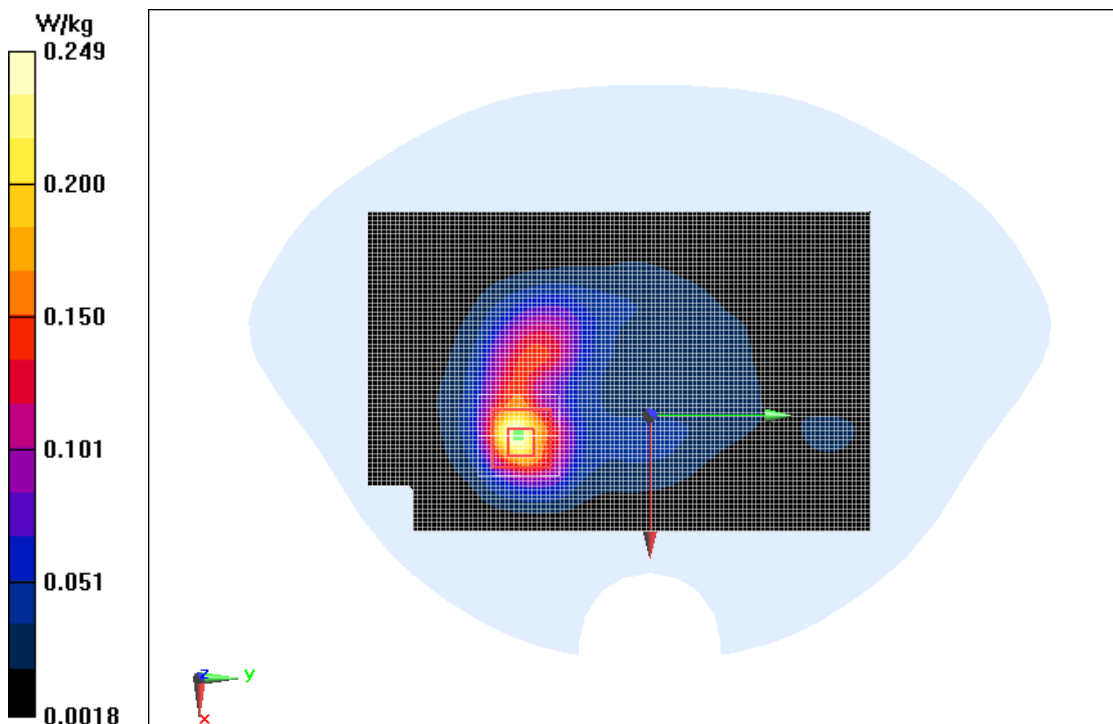


Fig.24

WiFi 802.11b Ground Mode High N08

Date/Time: 2017/1/19

Electronics: DAE3 Sn360

Medium: Body 2450MHz

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.921 \text{ S/m}$; $\epsilon_r = 53.827$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22 °C Liquid Temperature: 22 °C

Communication System: Wifi 2450 2450MHz; Frequency: 2462 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(7.33, 7.33, 7.33); Calibrated: 12/8/2016

WiFi 802.11b Ground Mode High N08/Area Scan (71x111x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 0.223 W/kg

WiFi 802.11b Ground Mode High N08/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.571 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.495 W/kg

SAR(1 g) = 0.205 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.228 W/kg

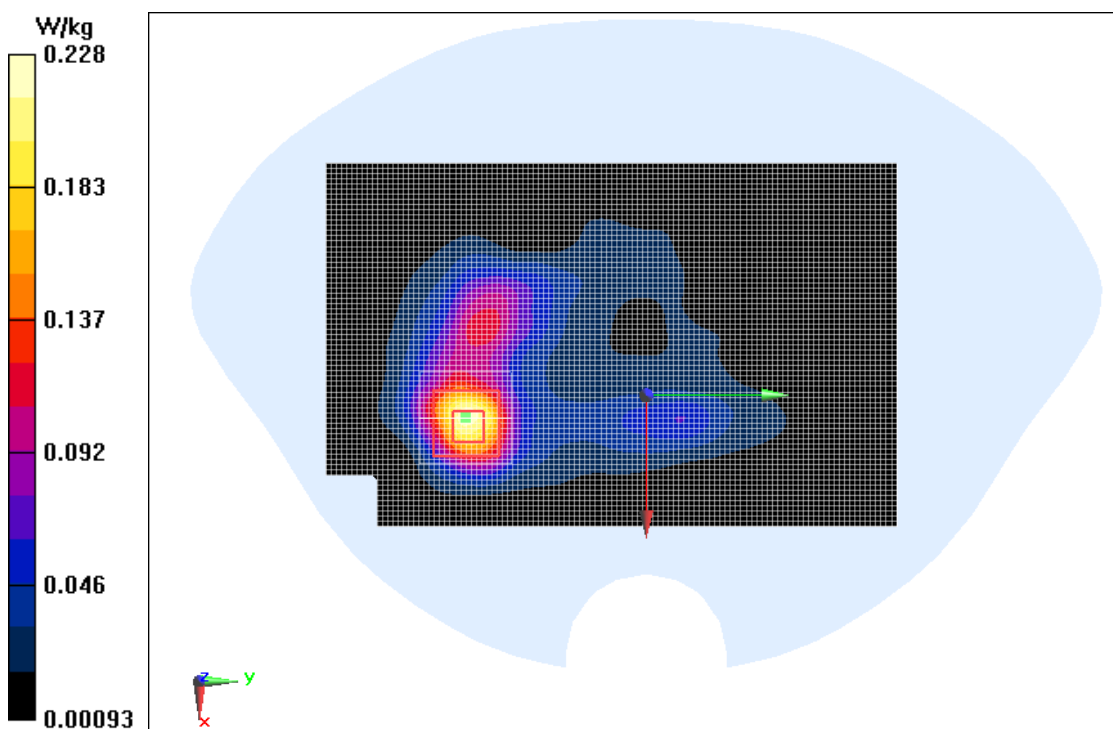


Fig.25

ANNEX B. SYSTEM VALIDATION RESULTS

Date/Time: 2017/1/11

Electronics: DAE3 Sn360

Medium: Head 835MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.921 \text{ S/m}$; $\epsilon_r = 40.962$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: CW (0); Frequency: 835 MHz ; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(9.73, 9.73, 9.73);

System Validation/Area Scan (40x130x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 2.74 W/kg

System Validation/Zoom Scan(7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.85 V/m ; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 3.52 W/kg

SAR(1 g) = 2.33 W/kg ; SAR(10 g) = 1.52 W/kg

Maximum value of SAR (measured) = 2.78 W/kg

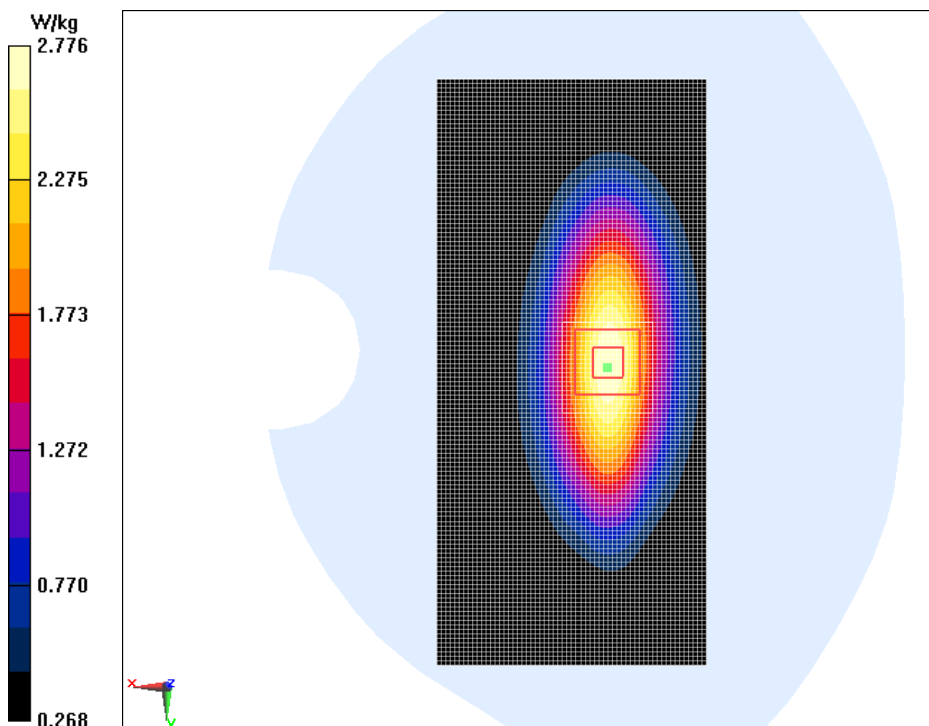

835MHz Body

Date/Time: 2017/1/11

Electronics: DAE3 Sn360

Medium: Body 835MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 1.001 \text{ S/m}$; $\epsilon_r = 55.11$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: CW 850MHz; Frequency: 835 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (9.94, 9.94, 9.94);

System Validation/Area Scan (60x120x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 2.75 W/kg

System Validation/Zoom Scan(7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 54.11 V/m ; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.53 W/kg

SAR(1 g) = 2.39 W/kg ; SAR(10 g) = 1.58 W/kg

Maximum value of SAR (measured) = 2.80 W/kg

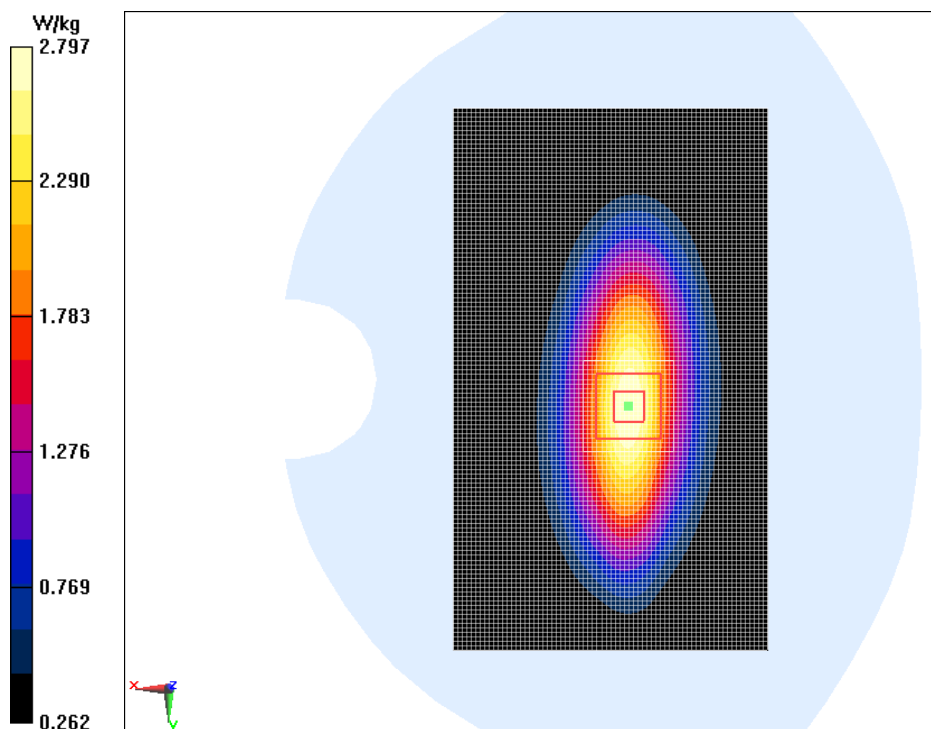

1750MHz Head

Date/Time: 2017/1/10

Electronics: DAE3 Sn360

Medium: Head 1800MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 38.848$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(8.31, 8.31, 8.31);

System Validation/Area Scan (41x91x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 12.3 W/kg

System Validation/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.55 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 16.3 W/kg

SAR(1 g) = 9.53 W/kg; SAR(10 g) = 5.12 W/kg

Maximum value of SAR (measured) = 11.9 W/kg

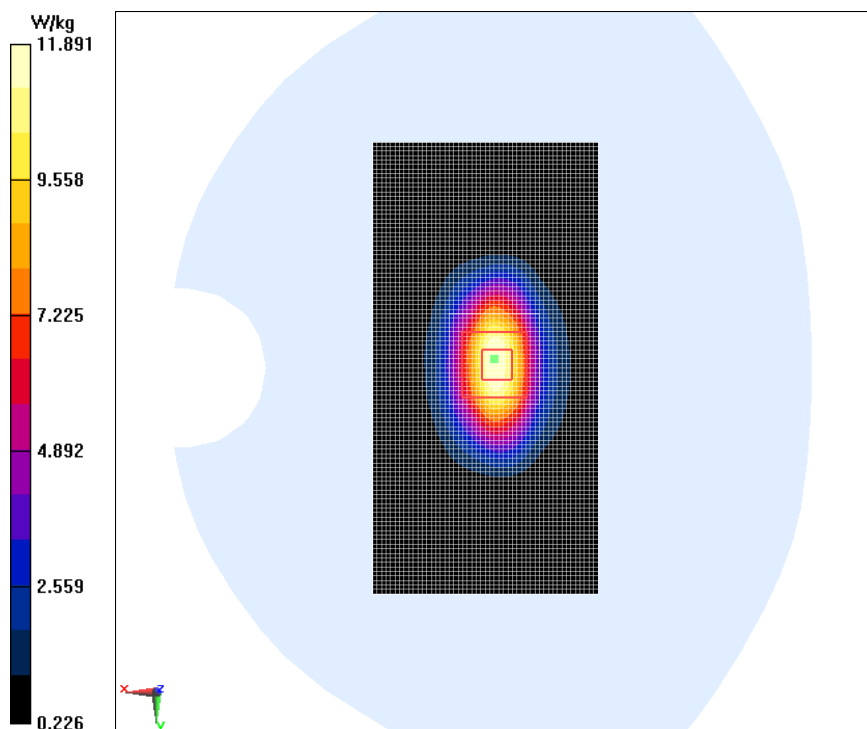

1750MHz Body

Date/Time: 2017/1/10

Electronics: DAE3 Sn360

Medium: Body 1800MHz

Medium parameters used: $f = 1750 \text{ MHz}$; $\sigma = 1.446 \text{ S/m}$; $\epsilon_r = 52.188$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: CW (0); Frequency: 1750 MHz ; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (8.22, 8.22, 8.22);

System Validation/Area Scan (40x100x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 12.6 W/kg

System Validation/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 92.19 V/m ; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 16.6 W/kg

SAR(1 g) = 9.41 W/kg ; SAR(10 g) = 5.16 W/kg

Maximum value of SAR (measured) = 12.9 W/kg

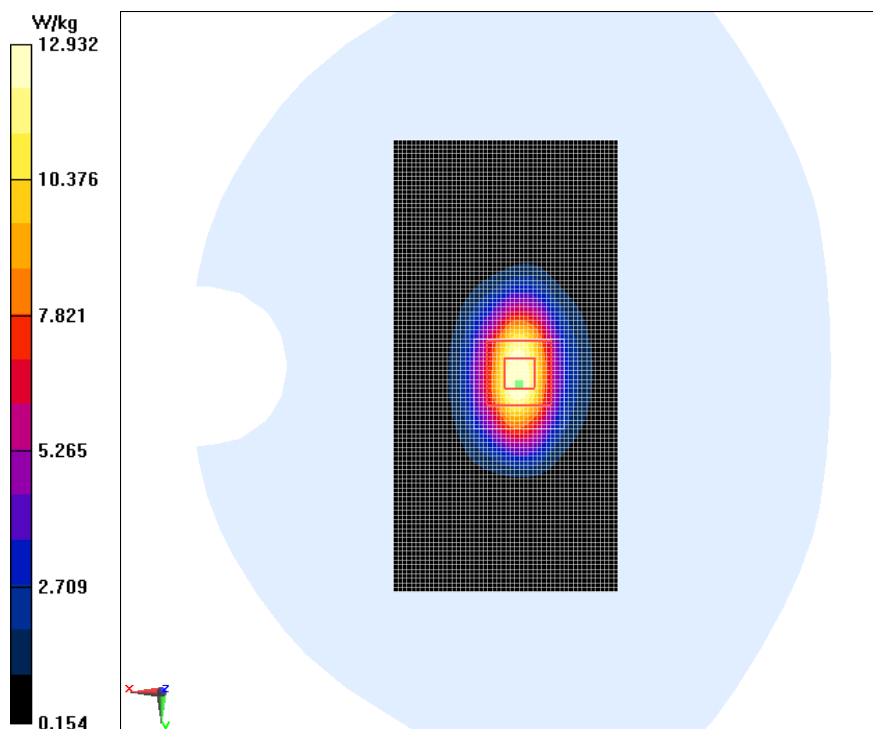

1900MHz Head

Date/Time: 2017/1/17

Electronics: DAE3 Sn360

Medium: Head 1900MHz

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.389 \text{ S/m}$; $\epsilon_r = 39.61$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (7.92, 7.92, 7.92);

System Validation/Area Scan (40x100x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 14.9 W/kg

System Validation/Zoom Scan(7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 102.9 V/m ; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 18.9 W/kg

SAR(1 g) = 9.85 W/kg ; SAR(10 g) = 5.13 W/kg

Maximum value of SAR (measured) = 14.4 W/kg

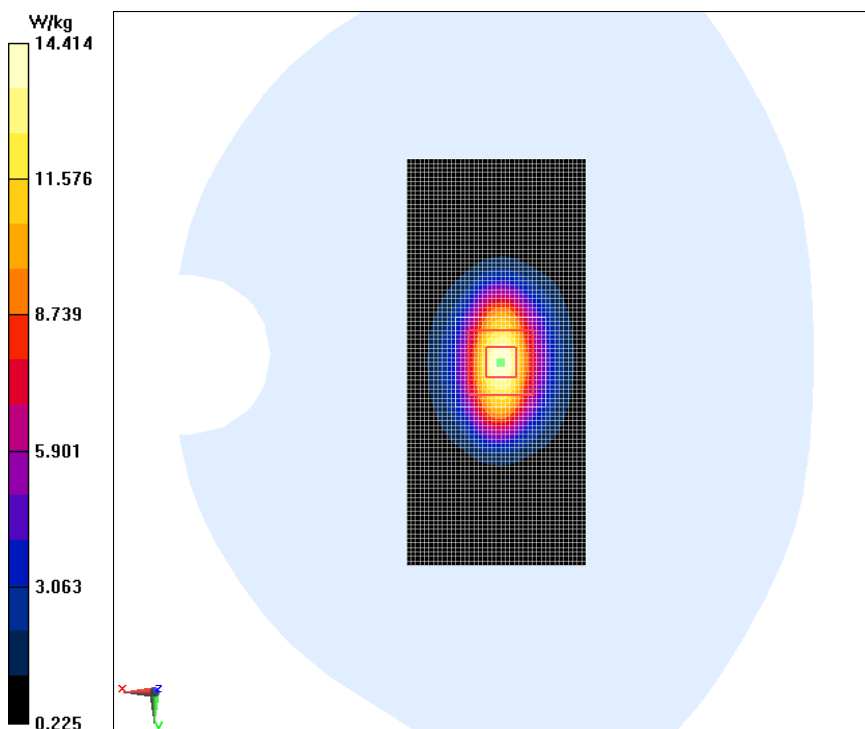

1900MHz Body

Date/Time: 2017/1/17

Electronics: DAE3 Sn360

Medium: Body 1900MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.525$ S/m; $\epsilon_r = 53.29$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5 °C Liquid Temperature: 22.5 °C

Communication System: CW 1900MHz; Frequency: 1900 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (7.62, 7.62, 7.62);

System Validation/Area Scan (60x90x1):

Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (Measurement) = 13.8 W/kg

System Validation/Zoom Scan(7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.85 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 18.6 W/kg

SAR(1 g) = 10.2 W/kg; SAR(10 g) = 5.24 W/kg

Maximum value of SAR (measured) = 13.9 W/kg

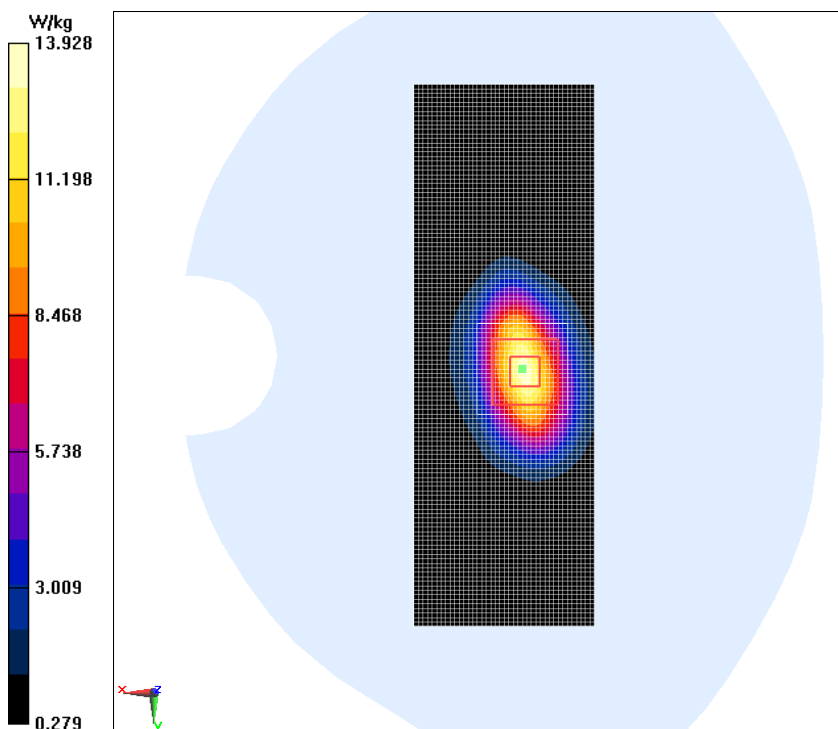

2450MHz Head

Date/Time: 2017/1/10

Electronics: DAE3 Sn360

Medium: Head 2450MHz

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.803 \text{ S/m}$; $\epsilon_r = 40.09$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: CW (0); Frequency: 2450 MHz ; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(7.27, 7.27, 7.27);

System Validation/Area Scan (60x70x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 19.9 W/kg

System Validation/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 100.2 V/m ; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 19.6 W/kg

SAR(1 g) = 13.5 W/kg ; SAR(10 g) = 6.21 W/kg

Maximum value of SAR (measured) = 19.5 W/kg

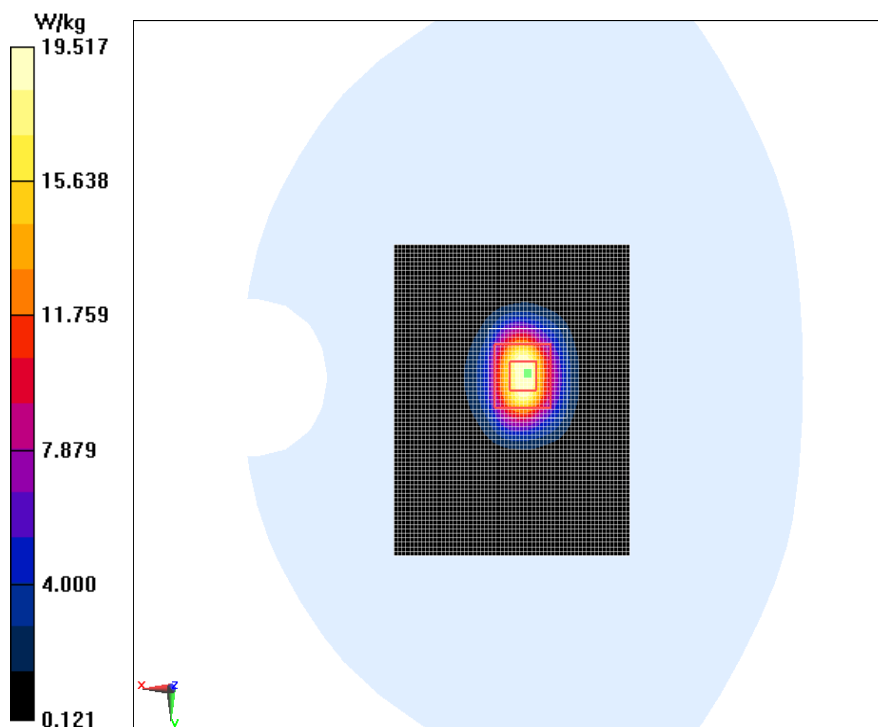

2450MHz Body

Date/Time: 2017/1/10

Electronics: DAE3 Sn360

Medium: Body 2450 MHz

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.922 \text{ S/m}$; $\epsilon_r = 53.91$; $\rho = 1000 \text{ kg/m}^3$

Ambien Temperature: 22.5° C Liquid Temperature: 22.5° C

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (7.33, 7.33, 7.33);

System Validation/ Area Scan (100x100x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 20.1 mW/g

System Validation/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 105.48 V/m ; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 28.39 mW/g

SAR(1 g) = 13.3 mW/g ; SAR(10 g) = 6.18 mW/g

Maximum value of SAR (measured) = 19.8 W/kg

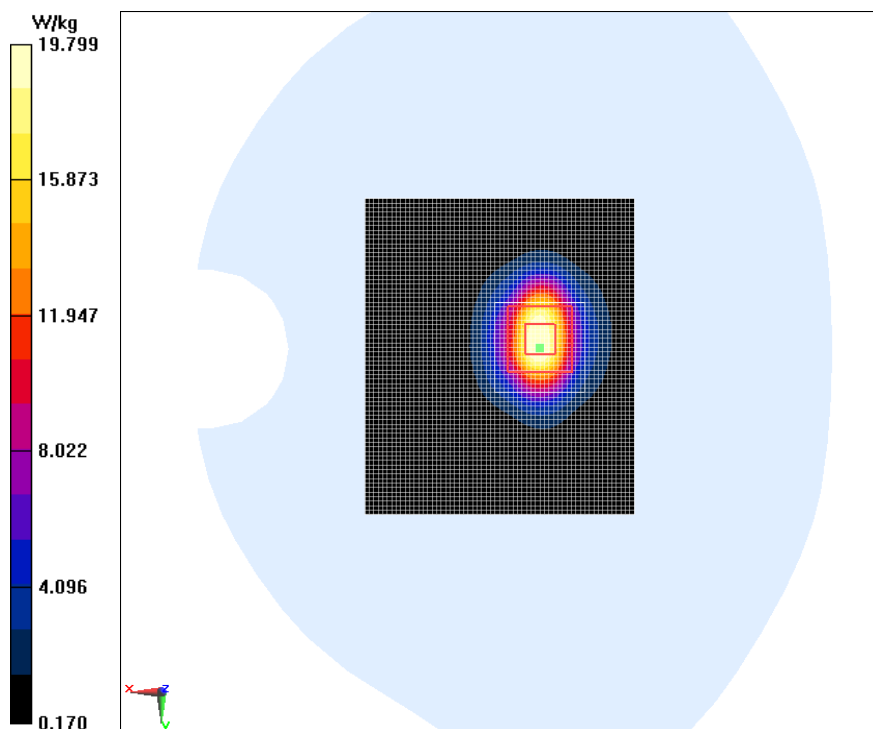

835MHz Head

Date/Time: 2017/1/18


Electronics: DAE3 Sn360

Medium: Head 835MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.927 \text{ S/m}$; $\epsilon_r = 40.358$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature: $22.5 \text{ }^\circ\text{C}$ Liquid Temperature: $22.5 \text{ }^\circ\text{C}$

Communication System: CW 900MHz; Frequency: 835 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(9.73, 9.73, 9.73);

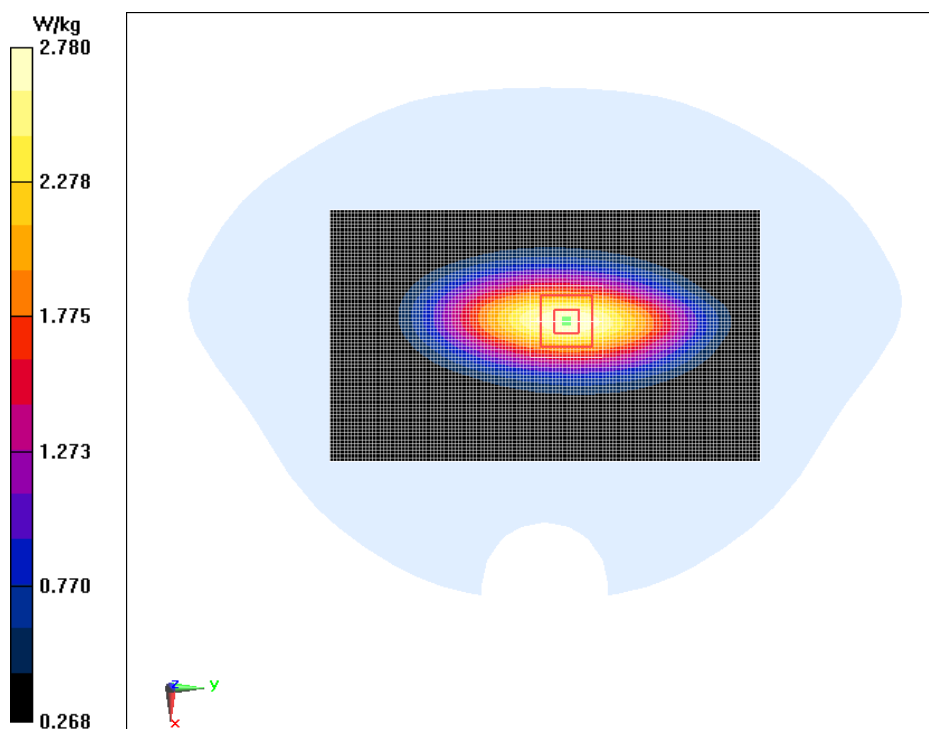System Validation /Area Scan (71x121x1):Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$ Maximum value of SAR (Measurement) = 2.77 W/kg **System Validation /Zoom Scan (7x7x7) (7x7x7)/Cube 0:**Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 51.73 V/m ; Power Drift = 0.06 dB Peak SAR (extrapolated) = 3.27 W/kg SAR(1 g) = 2.20 W/kg ; SAR(10 g) = 1.45 W/kg Maximum value of SAR (measured) = 2.78 W/kg 

835MHz Body

Date/Time: 2017/1/18


Electronics: DAE3 Sn360

Medium: Body 835MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.978 \text{ S/m}$; $\epsilon_r = 54.05$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: CW 850MHz; Frequency: 835 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (9.94, 9.94, 9.94);

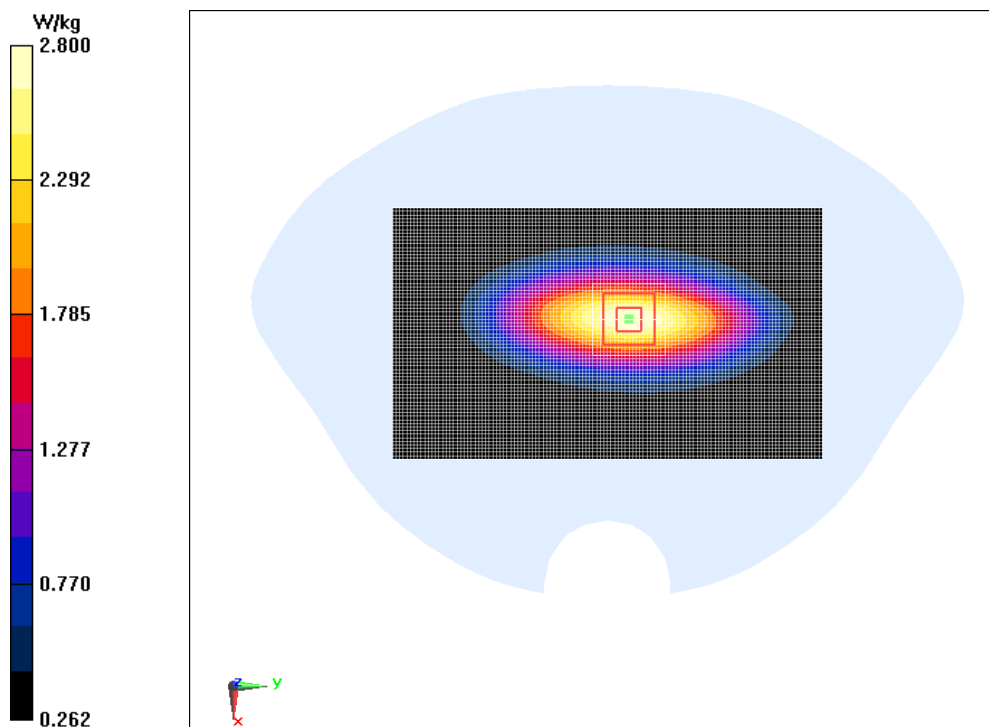System Validation /Area Scan (71x121x1):Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$ Maximum value of SAR (Measurement) = 2.81 W/kg **System Validation /Zoom Scan (7x7x7) /Cube 0:**Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 49.73 V/m ; Power Drift = 0.06 dB Peak SAR (extrapolated) = 3.29 W/kg SAR(1 g) = 2.42 W/kg ; SAR(10 g) = 1.47 W/kg Maximum value of SAR (measured) = 2.80 W/kg 

1750MHz Body

Date/Time: 2017/1/18

Electronics: DAE3 Sn360

Medium: Body 1800MHz

Medium parameters used: $f = 1750 \text{ MHz}$; $\sigma = 1.41 \text{ S/m}$; $\epsilon_r = 52.604$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.5°C

Communication System: CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (8.22, 8.22, 8.22);

System validation /Area Scan (51x81x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 12.8 W/kg

System validation /Zoom Scan (7x7x7) /Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 86.03 V/m ; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 15.7 W/kg

SAR(1 g) = 9.15 W/kg ; SAR(10 g) = 5.15 W/kg

Maximum value of SAR (measured) = 12.7 W/kg

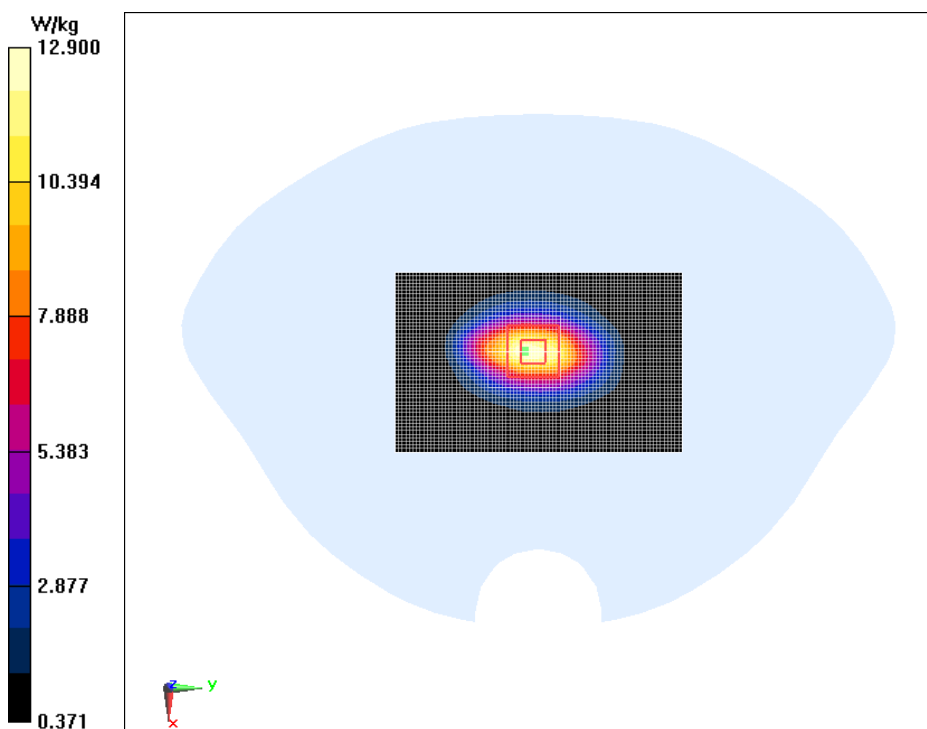

2450MHz Head

Date/Time: 2017/1/19

Electronics: DAE3 Sn360

Medium: Head 2450MHz

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.801 \text{ S/m}$; $\epsilon_r = 39.117$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: $22.5 \text{ }^{\circ}\text{C}$ Liquid Temperature: $22.5 \text{ }^{\circ}\text{C}$

Communication System: CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF(7.27, 7.27, 7.27);

System Validation /Area Scan (61x61x1):

Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (Measurement) = 20.3 W/kg

System Validation /Zoom Scan (7x7x7) /Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 91.36 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 26.9 W/kg

SAR(1 g) = 13.4 W/kg ; SAR(10 g) = 6.17 W/kg

Maximum value of SAR (measured) = 20.0 W/kg

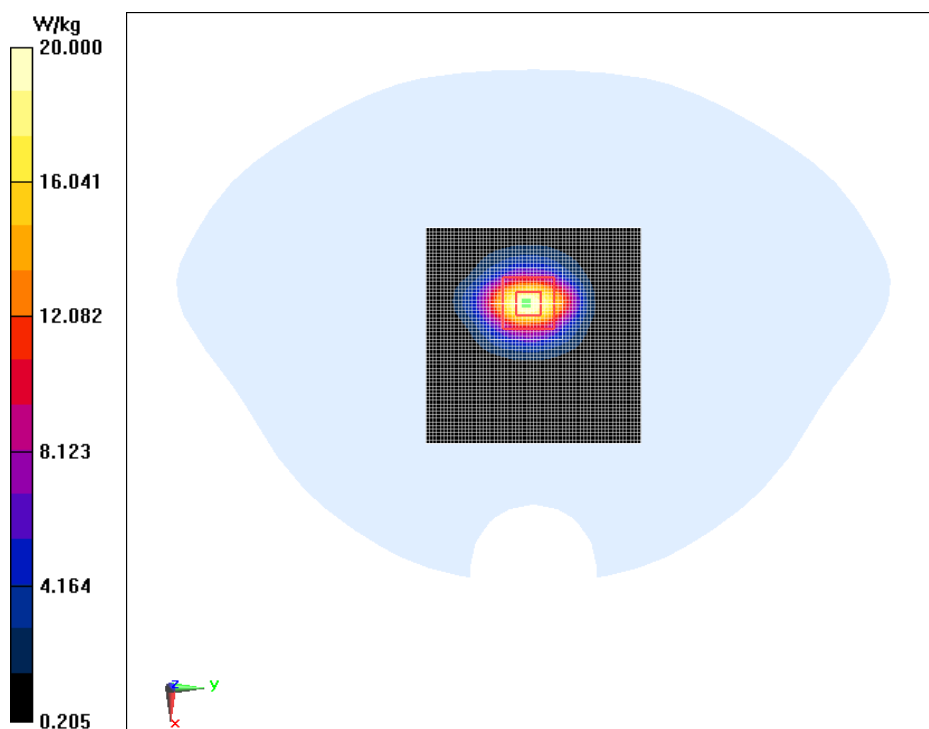

2450MHz Body

Date/Time: 2017/1/19

Electronics: DAE3 Sn360

Medium: Body 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.908$ S/m; $\epsilon_r = 53.846$; $\rho = 1000$ kg/m³

Ambien Temperature: 22.5° C Liquid Temperature: 22.5° C

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7375ConvF (7.33, 7.33, 7.33);

System Validation /Area Scan (51x51x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (Measurement) = 20.4 W/kg

System Validation /Zoom Scan (7x7x7) /Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 89.35 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 26.9 W/kg

SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.27 W/kg


Maximum value of SAR (measured) = 19.9 W/kg

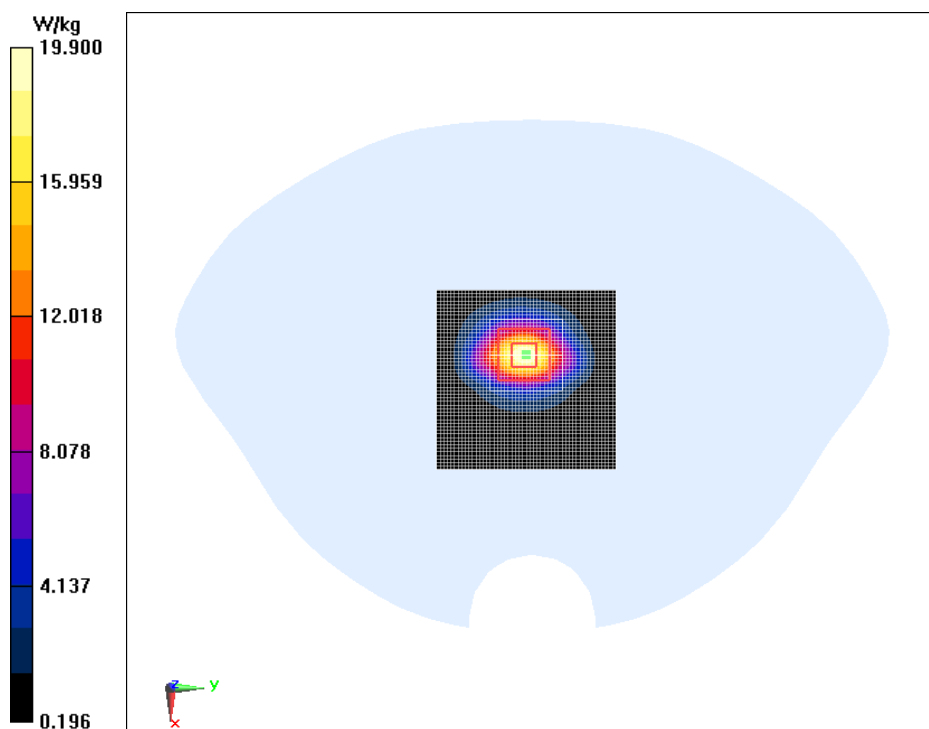

ANNEX C. SAR Measurement Setup

C.1. Measurement Set-up

The DASY5 system for performing compliance tests is illustrated above graphically. This system consists of the following items:

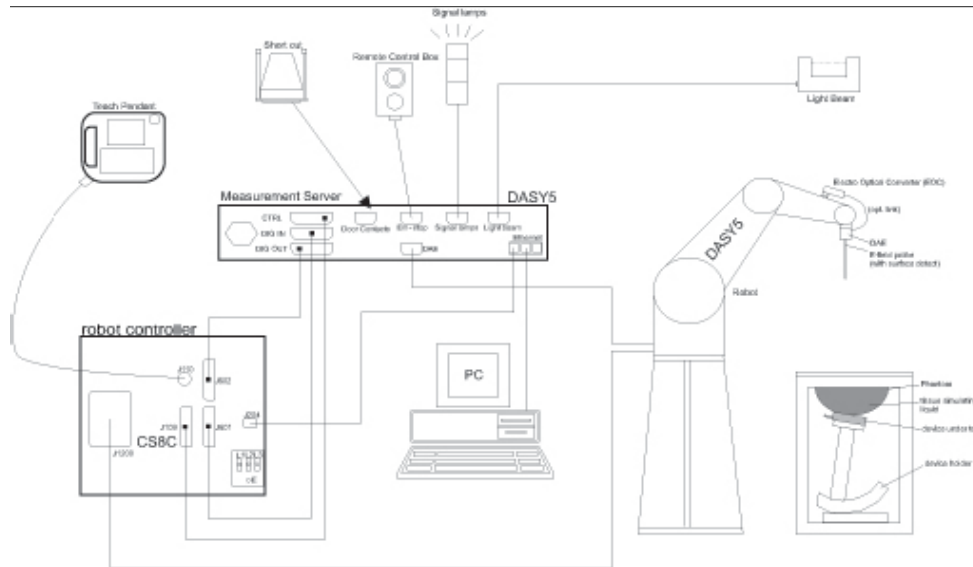

Picture C.1 SAR Lab Test Measurement Set-up

- A standard high precision 6-axis robot (Stäubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as
- warning lamps, etc.

- The phantom, the device holder and other accessories according to the targeted measurement.

C.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY5 software reads the reflection during a software approach and looks for the maximum using 2nd order curve fitting. The approach is stopped at reaching the maximum.

Probe Specifications:

Model: ES3DV3, EX3DV4

Frequency

Range: 700MHz — 2.6GHz(ES3DV3)

Calibration: In head and body simulating tissue at
Frequencies from 835 up to 2450MHz

Linearity:
 $\pm 0.2 \text{ dB}(700\text{MHz} — 2.0\text{GHz})$ for ES3DV3

Dynamic Range: 10 mW/kg — 100W/kg

Probe Length: 330 mm

Probe Tip

Length: 20 mm

Body Diameter: 12 mm

Tip Diameter: 2.5 mm (3.9 mm for ES3DV3)

Tip-Center: 1 mm (2.0mm for ES3DV3)

Application:SAR Dosimetry Testing

Compliance tests of mobile phones

Dosimetry in strong gradient fields



Picture C.2 Near-field Probe



Picture C.3 E-field Probe

C.3. E-field Probe Calibration

Each E-Probe/Probe Amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an RF Signal generator, TEM cell, and RF Power Meter.

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density readings equate to 1 mW/cm².

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where:

Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

ΔT = Temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m³).

C.4. Other Test Equipment

C.4.1. Data Acquisition Electronics(DAE)

The data acquisition electronics consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for

commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



PictureC.4: DAE

C.4.2. Robot

The SPEAG DASY system uses the high precision robots (DASY5: RX90L) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchron motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)



Picture C.5 DASY 5

C.4.3. Measurement Server

The Measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128MB), RAM (DASY5: 128MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.



Picture C.6 Server for DASY 5

C.4.4. Device Holder for Phantom

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5mm distance, a positioning uncertainty of $\pm 0.5\text{mm}$ would produce a SAR uncertainty of $\pm 20\%$. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.


<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with

the Twin-SAM and ELI phantoms.



Picture C.7: Device Holder

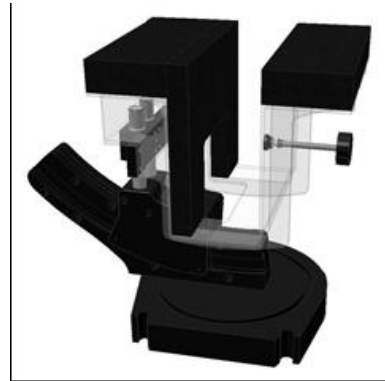

Picture C.8: Laptop Extension Kit

C.4.5. Phantom

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a table. The shape of the shell is based on data from an anatomical study designed to represent the 90th percentile of the population. The phantom enables the dissymmetric evaluation of SAR for both left and right handed handset usage, as well as body-worn usage using the flat phantom region. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. The shell phantom has a 2mm shell thickness (except the ear region where shell thickness increases to 6 mm).

Shell Thickness: 2 ± 0.2 mm

Filling Volume: Approx. 25 liters

Dimensions: 810 x 1000 x 500 mm (H x L x W)

Available: Special




Picture C.9: SAM Twin Phantom

ANNEX D. Position of the wireless device in relation to the phantom


D.1. General considerations

This standard specifies two handset test positions against the head phantom – the “cheek” position and the “tilt” position.

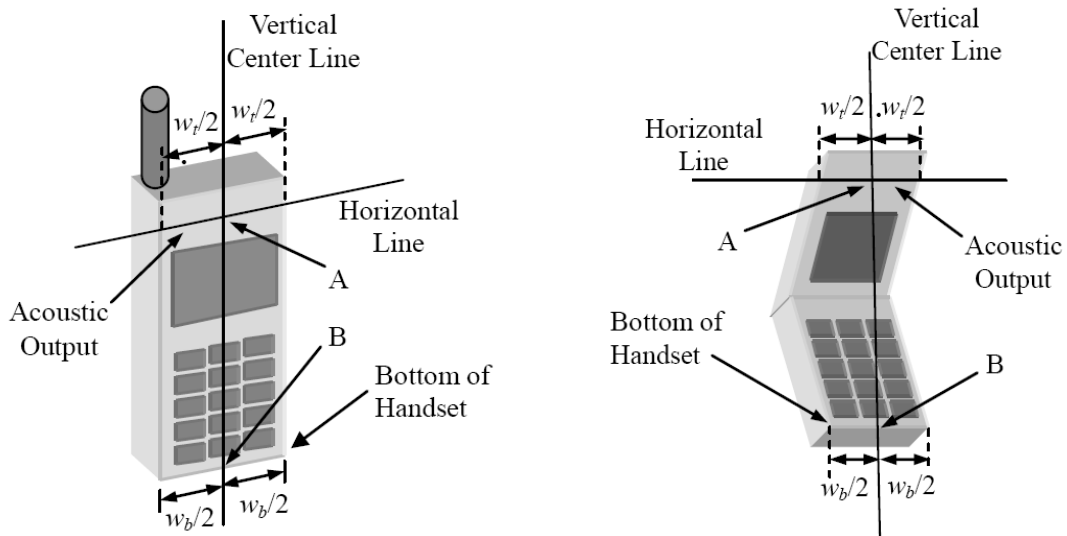


- w_t Width of the handset at the level of the acoustic
- w_b Width of the bottom of the handset
- A Midpoint of the width w_t of the handset at the level of the acoustic output
- B Midpoint of the width w_b of the bottom of the handset

Picture D.1-a Typical “fixed” case handset Picture D.1-b Typical “clam-shell” case handset

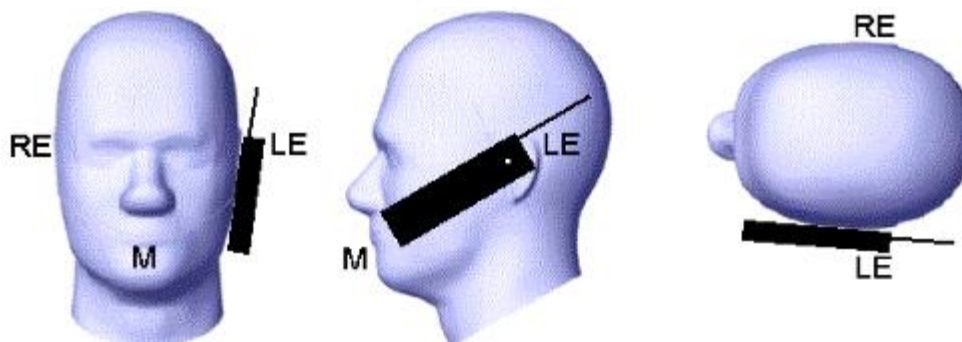


Picture D.2 Cheek position of the wireless device on the left side of SAM

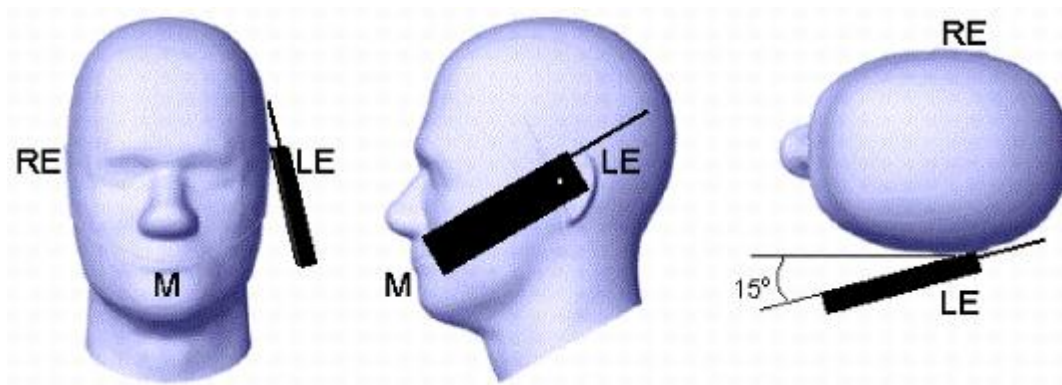

Picture D.3 Tilt position of the wireless device on the left side of SAM

D.2. Body-worn device

A typical example of a body-worn device is a mobile phone, wireless enabled PDA or other battery operated wireless device with the ability to transmit while mounted on a person's body using a carry accessory approved by the wireless device manufacturer.

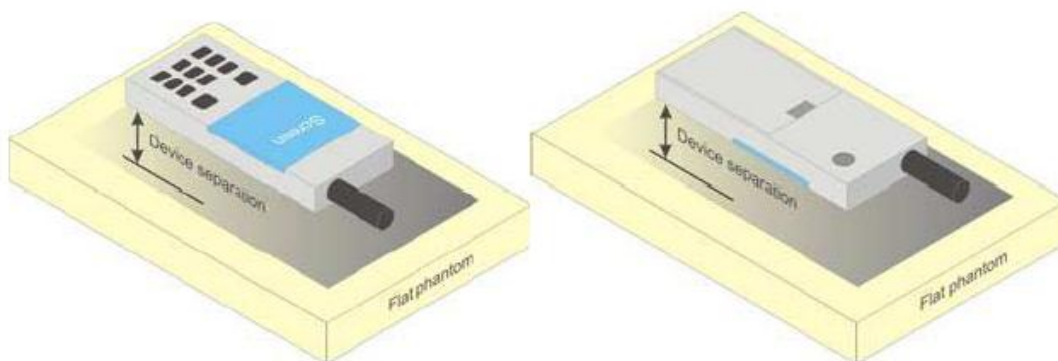


Picture D.4 Test positions for body-worn devices

D.3. Desktop device

A typical example of a desktop device is a wireless enabled desktop computer placed on a table or desk when used.

The DUT shall be positioned at the distance and in the orientation to the phantom that corresponds to the intended use as specified by the manufacturer in the user instructions. For devices that employ an external antenna with variable positions, tests shall be performed for all antenna positions specified. Picture 8.5 show positions for desktop device SAR tests. If the intended use is not specified, the device shall be tested directly against the flat phantom.

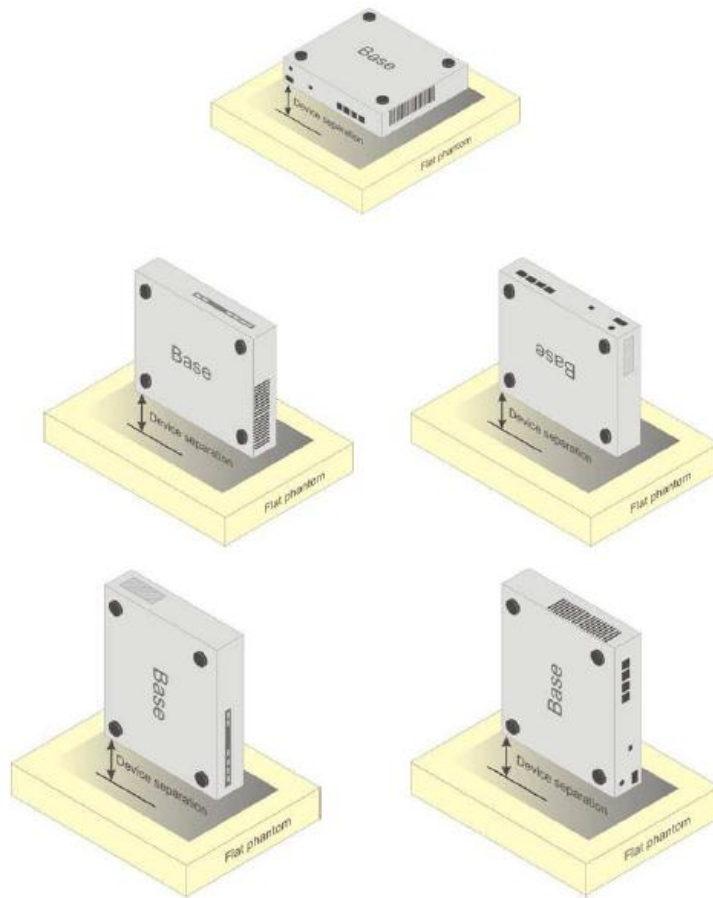

Picture D.5 Test positions for desktop devices

D.4. DUT Setup Photos

Picture D.6 DSY5 system Set-up

Note:

The photos of test sample and test positions show in additional document.

ANNEX E. Equivalent Media Recipes

The liquid used for the frequency range of 800-3000 MHz consisted of water, sugar, salt, preventol, glycol monobutyl and Cellulose. The liquid has been previously proven to be suited for worst-case. The Table E.1 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528 and IEC 62209.

Table E.1: Composition of the Tissue Equivalent Matter

| Frequency (MHz) | 835 Head | 835 Body | 1900 Head | 1900 Body | 2450 Head | 2450 Body |
|--|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| Ingredients (% by weight) | | | | | | |
| Water | 41.45 | 52.5 | 55.242 | 69.91 | 58.79 | 72.60 |
| Sugar | 56.0 | 45.0 | \ | \ | \ | \ |
| Salt | 1.45 | 1.4 | 0.306 | 0.13 | 0.06 | 0.18 |
| Preventol | 0.1 | 0.1 | \ | \ | \ | \ |
| Cellulose | 1.0 | 1.0 | \ | \ | \ | \ |
| Glycol Monobutyl | \ | \ | 44.452 | 29.96 | 41.15 | 27.22 |
| Dielectric Parameters Target Value | $\epsilon=41.5$ $\sigma=0.90$ | $\epsilon=55.2$ $\sigma=0.97$ | $\epsilon=40.0$ $\sigma=1.40$ | $\epsilon=53.3$ $\sigma=1.52$ | $\epsilon=39.2$ $\sigma=1.80$ | $\epsilon=52.7$ $\sigma=1.95$ |

ANNEX F. System Validation

The SAR system must be validated against its performance specifications before it is deployed.

When SAR probes, system components or software are changed, upgraded or recalibrated, these must be validated with the SAR system(s) that operates with such components.












Table F.1: System Validation Part 1

| System No. | Probe SN. | Liquid name | Validation date | Frequency point | Permittivity ϵ | Conductivity σ (S/m) |
|------------|-----------|--------------|-----------------|-----------------|-------------------------|-----------------------------|
| 1 | 7375 | Head 835MHz | Jan 11, 2017 | 835MHz | 40.96 | 0.921 |
| 2 | 7375 | Head 1750MHz | Jan 10, 2017 | 1750MHz | 38.83 | 1.386 |
| 3 | 7375 | Head 1900MHz | Jan 17, 2017 | 1900MHz | 39.61 | 1.389 |
| 4 | 7375 | Head 2450MHz | Jan 10, 2017 | 2450MHz | 40.09 | 1.803 |
| 5 | 7375 | Body 835MHz | Jan 11, 2017 | 835MHz | 55.11 | 1.001 |
| 6 | 7375 | Body 1750MHz | Jan 10, 2017 | 1750MHz | 53.22 | 1.514 |
| 7 | 7375 | Body 1900MHz | Jan 17, 2017 | 1900MHz | 53.29 | 1.525 |
| 8 | 7375 | Body 2450MHz | Jan 10, 2017 | 2450MHz | 53.91 | 1.922 |
| 9 | 7375 | Head 835MHz | Jan 18, 2017 | 835MHz | 40.358 | 0.927 |
| 10 | 7375 | Body 835MHz | Jan 18, 2017 | 835 MHz | 54.05 | 0.978 |
| 11 | 7375 | Body 1750MHz | Jan 18, 2017 | 1750MHz | 52.604 | 1.41 |
| 12 | 7375 | Head 2450MHz | Jan 19, 2017 | 2450MHz | 39.117 | 1.801 |
| 13 | 7375 | Body 2450MHz | Jan 19, 2017 | 2450MHz | 53.846 | 1.908 |

Table F.2: System Validation Part 2

| | | | |
|----------------|-----------------|------|------|
| CW Validation | Sensitivity | PASS | PASS |
| | Probe linearity | PASS | PASS |
| | Probe Isotropy | PASS | PASS |
| Mod Validation | MOD.type | GMSK | GMSK |
| | MOD.type | OFDM | OFDM |
| | Duty factor | PASS | PASS |
| | PAR | PASS | PASS |

ANNEX G. Probe and DAE Calibration Certificate

|  | | In Collaboration with s p e a g CALIBRATION LABORATORY | |  | 中国认可 国际互认 校准 CALIBRATION CNAS L0570 | | | | | | | | | | | | | | | | |
|--|--|---|---|--|---|--|------|----------|-----------|----------------|-------------|-------------------|---|--------------|-------------|--------------------|---|--------------|-------------|-----------------------------------|---|
| Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209 E-mail: cttl@chinattl.com Http://www.chinattl.cn | | | | | | | | | | | | | | | | | | | | | |
| Client : Auden | | | Certificate No: Z16-97204 | | | | | | | | | | | | | | | | | | |
| CALIBRATION CERTIFICATE | | | | | | | | | | | | | | | | | | | | | |
| Object | DAE3 - SN: 360 | | | | | | | | | | | | | | | | | | | | |
| Calibration Procedure(s) | FD-Z11-002-01 Calibration Procedure for the Data Acquisition Electronics (DAEx) | | | | | | | | | | | | | | | | | | | | |
| Calibration date: | November 08, 2016 | | | | | | | | | | | | | | | | | | | | |
| This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. | | | | | | | | | | | | | | | | | | | | | |
| All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%. | | | | | | | | | | | | | | | | | | | | | |
| Calibration Equipment used (M&TE critical for calibration) | | | | | | | | | | | | | | | | | | | | | |
| Primary Standards | ID # | Cal Date(Calibrated by, Certificate No.) | | Scheduled Calibration | | | | | | | | | | | | | | | | | |
| Process Calibrator 753 | 1971018 | 27-June-16 (CTTL, No:J16X04778) | | June-17 | | | | | | | | | | | | | | | | | |
| <table border="1"> <thead> <tr> <th></th> <th>Name</th> <th>Function</th> <th>Signature</th> </tr> </thead> <tbody> <tr> <td>Calibrated by:</td> <td>Yu Zongying</td> <td>SAR Test Engineer</td> <td></td> </tr> <tr> <td>Reviewed by:</td> <td>Qi Dianyuan</td> <td>SAR Project Leader</td> <td></td> </tr> <tr> <td>Approved by:</td> <td>Lu Bingsong</td> <td>Deputy Director of the laboratory</td> <td></td> </tr> </tbody> </table> | | | | | | | Name | Function | Signature | Calibrated by: | Yu Zongying | SAR Test Engineer |  | Reviewed by: | Qi Dianyuan | SAR Project Leader |  | Approved by: | Lu Bingsong | Deputy Director of the laboratory |  |
| | Name | Function | Signature | | | | | | | | | | | | | | | | | | |
| Calibrated by: | Yu Zongying | SAR Test Engineer |  | | | | | | | | | | | | | | | | | | |
| Reviewed by: | Qi Dianyuan | SAR Project Leader |  | | | | | | | | | | | | | | | | | | |
| Approved by: | Lu Bingsong | Deputy Director of the laboratory |  | | | | | | | | | | | | | | | | | | |
| Issued: November 09, 2016 This calibration certificate shall not be reproduced except in full without written approval of the laboratory. | | | | | | | | | | | | | | | | | | | | | |
| Certificate No: Z16-97204 | | | Page 1 of 3 | | | | | | | | | | | | | | | | | | |