

FCC Test Report

Report No.: AGC02931220401FE10

FCC ID : 2AS4FEPCOTX-680AU

PRODUCT DESIGNATION: Digital DMR Transceiver

BRAND NAME : tXPRO

MODEL NAME : TX-680AU

APPLICANT: EL PASO COMMUNICATION SYSTEMS, INC

DATE OF ISSUE : Jun. 30, 2022

STANDARD(S) : FCC Part 90 Rules

REPORT VERSION: V 1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd







Page 2 of 70

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jun. 30, 2022	Valid	Initial Release







TABLE OF CONTENTS

1. GENERAL INFORMATION	5
2. PRODUCT INFORMATION	6
2.1 PRODUCT TECHNICAL DESCRIPTION	6
2.2 TEST FREQUENCY LIST	7
2.3 RELATED SUBMITTAL(S) / GRANT (S)	8
2.4 TEST METHODOLOGY	8
2.5 CALCULATION OF EMISSION INDICATORS	8
2.6 SPECIAL ACCESSORIES	8
2.7 EQUIPMENT MODIFICATIONS	8
3. TEST ENVIRONMENT	9
3.1 ADDRESS OF THE TEST LABORATORY	9
3.2 TEST FACILITY	9
3.3 ENVIRONMENTAL CONDITIONS	9
3.4 MEASUREMENT UNCERTAINTY	10
3.5 LIST OF EQUIPMENTS USED	11
4.SYSTEM TEST CONFIGURATION	12
4.1 EUT CONFIGURATION	12
4.2 EUT EXERCISE	12
4.3 CONFIGURATION OF TESTED SYSTEM	12
4.4 EQUIPMENT USED IN TESTED SYSTEM	12
4.5 SUMMARY OF TEST RESULTS	13
5.DESCRIPTION OF TEST MODES	14
6.FREQUENCY TOLERANCE	15
6.1 PROVISIONS APPLICABLE	15
6.2 MEASUREMENT PROCEDURE	15
6.3 MEASUREMENT SETUP	15
6.4 MEASUREMENT RESULTS	16
7. EMISSION BANDWIDTH	18
7.1 PROVISIONS APPLICABLE	18
7.2 MEASUREMENT PROCEDURE	18
7.3 MEASUREMENT SETUP	18
7.4 MEASUREMENT RESULTS	19
8. SPURIOUS RATIATED EMISSION	25
8.1 PROVISIONS APPLICABLE	25
8.2 MEASUREMENT PROCEDURE	25





8.3 MEASUREMENT SETUP	26
8.4 MEASUREMENT RESULTS	27
8.5 EMISSION MASK PLOT	38
9.MODULATION CHARACTERISTICS	43
9.1 PROVISIONS APPLICABLE	43
9.2 MEASUREMENT METHOD	43
9.3 MEASUREMENT SETUP	43
9.4 MEASUREMENT RESULTS	44
10. MAXIMUMN TRANSMITTER POWER	48
10.1 PROVISIONS APPLICABLE	48
10.2 MEASUREMENT METHOD	48
10.3 MEASUREMENT METHOD	48
10.4 MEASUREMENT RESULTS	50
11. SPURIOUS EMISSION ON ANTENNA PORT	54
11.1 PROVISIONS APPLICABLE	54
11.2 MEASUREMENT METHOD	54
11.3 MEASUREMENT SETUP	54
11.4 MEASUREMENT RESULTS	55
12.TRANSMITTER FREQUENCY BEHAVIOR	62
12.1 PROVISIONS APPLICABLE	62
13.2 MEASUREMENT SETUP	62
12.3 MEASUREMENT METHOD	63
12.4 MEASURET RESULTS	65
13. AUDIO LOW PASS FILTER RESPONSE	66
13.1 PROVISIONS APPLICABLE	66
13.2 MEASUREMENT METHOD	67
13.3 MEASUREMENT SETUP	67
13.4 MEASURET RESULTS	68
APPENDIX I: PHOTOGRAPHS OF TEST SETUP	70
APPENDIX II: PHOTOGRAPHS OF TEST FUT	70



Page 5 of 70

1. GENERAL INFORMATION

Applicant	EL PASO COMMUNICATION SYSTEMS, INC
Address	1630 E PAISANO DR. EL PASO, TX 79901 United States
Manufacturer	TYT ELECTRONICS CO., LTD
Address	Block 39-1, Optoelectronics-information industry base, Nan'an, Quanzhou, Fujian, China.
Factory	TYT ELECTRONICS CO., LTD
Address	Block 39-1, Optoelectronics-information industry base, Nan'an, Quanzhou, Fujian, China.
Product Designation	Digital DMR Transceiver
Brand Name	tXPRO
Test Model	TX-680AU
Deviation from Standard	None
Date of Receipt	Apr. 14, 2022
Date of Test	Apr. 14, 2022~Jun. 30, 2022
Test Result	Pass

WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA-603-E-2016. The sample tested as described in this report is in compliance with the FCC Rules Part 90. The test results of this report relate only to the tested sample identified in this report.

4.

Prepared By	Bibo Mang		
_	Bibo Zhang (Project Engineer)	Jun. 30, 2022	
Reviewed By	Cali	n Liu	
	Calvin Liu (Reviewer)	Jun. 30, 2022	
Approved By	Max Z	rang	
_	Max Zhang Authorized Officer	Jun. 30, 2022	



Page 6 of 70

2. PRODUCT INFORMATION

2.1 PRODUCT TECHNICAL DESCRIPTION

Hardware Version	D211804-35810U-V1.2		
Software Version	V2.00		
Power Supply	DC 7.4V,2200mAh by battery	y, charging for DC8.4V	
Adapter Information	Input: AC 110V, 50Hz, 0.2A Output: DC 12.5V 500mA		
Communication Type	Voice / Data		
Operation Frequency Range	From 400MHz to 512MHz		
Modulation Type	Analog Voice:	FM	
Modulation Type	Digital Voice/Digital Data:	4FSK	
Digital Type	DMR		
Channal Caparation	Analog Voice:	12.5 kHz	
Channel Separation	Digital Voice/Digital Data:	12.5 kHz	
	Analog Voice:	11K0F3E	
Emission Designator	Digital Voice/Digital Data:	☑ UHF:7K81F1D-5W-12.5kHz☑ UHF:7K81F1W-5W-12.5kHz	
Rated Output Power	5W/1W (It was fixed by the manufacturer, any individual can't arbitrarily change it.)		
Maximum Transmitter Power	UHF:36.96dBm(5W-12.5kHz)-Analog UHF:29.96dBm(1W-12.5kHz)-Analog		
Maximum Hansmiller Power	UHF: 36.67dBm(5W-12.5kHz)-Digital UHF: 29.92dBm(1W-12.5kHz)-Digital		
Antenna Designation	Detachable		
Antenna Gain	1.5dBi		

Note:

- 1. The product has the same digital working characters when operating in both two digitized voice/data mode. So only one set of test results for digital modulation modes are provided in this test report.
- 2. This equipment is capable of supporting a minimum data rate of 4800 bits per second per 6.25 kHz of channel bandwidth. DMR interphone's bandwidth is 12.5 kHz, and it has a double time slot, one is the speech time slot, one is the data time slot, just language sequence is satisfied with 4800 bps/6.25 kHz BW.
- 3. The actual working frequency band of the device is UHF: 400-512MHz. According to the frequency division requirements of KDB634817 and the federal frequency allocation requirements, the working frequency band that the device needs to meet is UHF: 406.1-512MHz



Page 7 of 70

2.2 TEST FREQUENCY LIST

Operation mode	Channel Separation	Operation Frequency Range	· · · · · · · · · · · · · · · · · · ·	
	12.5 kHz	400-512MHz	Bottom	406.125 MHz
Analog/Digital	12.5 kHz	400-512MHz	Middle	453.2125 MHz
	12.5 kHz	400-512MHz	Middle	458.2125 MHz
	12.5 kHz	400-512MHz	Middle	480.025 MHz
	12.5 kHz	400-512MHz	Тор	511.975 MHz

Note:

In section KDB 634817 D01 Sections II) (f) (1) and (2):

Test at least one frequency in each band for each rule part applied under and ensure the device is capable of operating on the frequency under each rule part. This requirement may result in testing on multiple frequencies. Testing on one frequency may be acceptable if multiple listed bands for a rule part with a continuous frequency range are split to remove a conflict with other rules and the technical requirements in the split bands are the same. Additional requirements for RF exposure may apply.



Page 8 of 70

2.3 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: **2AS4FEPCOTX-680AU**, filing to comply with Part 2, Part 90 of the Federal Communication Commission rules.

2.4 TEST METHODOLOGY

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 90	Private Land Mobile Radio Services
2	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
3	ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
4	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
5	KDB 971168 D01	KDB 971168 D01 Power Meas License Digital Systems v03r01
6	KDB 579009 D03	KDB 579009 D03 Applications Part 90 Refarming Bands v01
7	KDB 634817 D01	KDB 634817 D01 Freq Range Listing for Grants v04r01

2.5 CALCULATION OF EMISSION INDICATORS

FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth

For FM Mode (ChannelSpacing: 12.5kHz)

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

BW = 2(M+D) = 2*(3.0 kHz + 2.5 kHz) = 11 kHz = 11K0

F3E portion of the designator represents an FM voice transmission.

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

2.6 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

2.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.



Page 9 of 70

3. TEST ENVIRONMENT

3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 10 of 70

3.3 ENVIRONMENTAL CONDITIONS

	NORMAL CONDITIONS	EXTREME CONDITIONS		
Temperature range (°C)	15 - 35	-20 - 50		
Relative humidty range	20 % - 75 %	20 % - 75 %		
Pressure range (kPa)	86 - 106	86 - 106		
Power supply	DC 7.4V LV:DC 6.29V/HV: DC 8			
Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer				

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Test Items	Measurement Uncertainty
Frequency stability	±0.5%
Transmitter power conducted	±0.8dB
Transmitter power Radiated	±1.3dB
Conducted spurious emission 9kHz-40 GHz	±2.7dB
Conducted Emission	±3.2 dB
Radiated Emission below 1GHz	±3.9 dB
Radiated Emission above 1GHz	±4.8 dB
Occupied Channel Bandwidth	±2 %
FM deviation	±2 %
Audio level	±0.98dB
Low Pass Filter Response	±0.65dB
Modulation Limiting	0.42 %
Transient Frequency Behavior	6.8 %



Page 11 of 70

3.5 LIST OF EQUIPMENTS USED

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
EXA Signal Analyzer	Aglient	N9020A	W1312-60196	Aug. 18, 2021	Aug. 17, 2022
EXA Signal Analyzer	Aglient	N9020A	MY52090123	Sep. 06, 2021	Sep. 05, 2022
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
preamplifier	ChengYi	EMC184045SE	980508	Oct. 29, 2021	Oct. 28, 2023
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun. 07, 2021	Jun. 06, 2022
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun. 05, 2022	Jun. 04, 2023
HORN ANTENNA	EM	EM-AH-10180	/	Feb.24, 2022	Feb.23, 2023
SIGNAL GENERATOR	AGILENT	E4421B	MY43351603	Mar. 04, 2022	Mar. 03, 2023
SIGNAL GENERATOR	R&S	SMT03	A0304261	Jun. 07, 2021	Jun. 06, 2022
SIGNAL GENERATOR	R&S	SMT03	A0304261	Jun. 05, 2022	Jun. 04, 2023
ANTENNA	SCHWARZBECK	VULB9168	VULB9168-494	Jan. 08, 2021	Jan. 07, 2023
ANTENNA	SCHWARZBECK	VULB9168	D69250	Apr. 28, 2021	Apr. 27, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2021	Mar. 11, 2024
Modulation Domain Analyzer	HP	53310A	3121A02467	Jul. 03, 2020	Jul. 02, 2022
Small environmental tester	ESPEC	SH-242		Sep. 03, 2020	Sep. 02, 2022
RF Communication Test Set	HP	8920B	US35010161	Sep. 06, 2020	Sep. 05, 2022
Attenuator	Weinachel Corp	58-30-33	ML030	Oct. 24, 2021	Oct. 23, 2022
RF Cable	R&S	1#		Each time	N/A
RF Cable	R&S	2#		Each time	N/A
Fliter-UHF	Microwave	N25155M2	498705	May 07, 2022	May 06, 2023



Page 12 of 70

4.SYSTEM TEST CONFIGURATION

4.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT EXERCISE

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 CONFIGURATION OF TESTED SYSTEM

Fig. 2-1 Configuration of Tested System

EUT

Table 2-1 Equipment Used in Tested System

4.4 EQUIPMENT USED IN TESTED SYSTEM

The Following Peripheral Devices And Interface Cables Were Connected During The Measurement:

☐ Test Accessories Come From The Laboratory

Test Accessories Come From The Manufacturer

Item	Equipment	Model No.	Identifier	Note
1	Digital DMR Transceiver	TX-680AU	FCC ID: 2AS4FEPCOTX-680AU	EUT
2	Battery	LB-85L	DC 7.4V 2200mAh	Accessories
3	Back clip	N/A	N/A	Accessories
4	Adapter	T-1206	Input: 110V, 50Hz, 0.2A Output: DC 12.5V 0.5A	Accessories
5	Charger	CD-02	Input: DC 12.5V 0.5A Output: 8.4V,0.5A	Accessories
6	Lanyard	N/A	N/A	Accessories



Page 13 of 70

4.5 SUMMARY OF TEST RESULTS

Item	FCC Rules	Description Of Test	Result
1	FCC PART 90	Antenna Equipment	Pass
2	§90.205& 2.1046	Maximum Transmitter Power	Pass
3	§90.207& 2.1047	Modulation Characteristic	Pass
4	§2.1047	Audio Low Pass Filter Response	Pass
5	§90.209& 2.1049	Occupied Bandwidth	Pass
6	§90.210& 2.1049	Emission Mask	Pass
7	§90.213& 2.1055	Frequency Tolerance	Pass
8	§90.214	Transmitter Frequency Behavior	Pass
9	§90.210& 2.1051	Spurious Emission on Antenna Port	Pass
10	§90.210& 2.1053	Spurious Ratiated Emission	Pass



Page 14 of 70

5.DESCRIPTION OF TEST MODES

The EUT (**Digital DMR Transceiver**) has been tested under normal operating condition. (The top channel, the middle channel and the bottom channel) are chosen for testing at each channel separation.

NO.	TEST MODE DESCRIPTION	CHANNEL SEPARATION
1	TX Bottom channel-UHF	12.5 kHz
2	TX Middle channel-UHF	12.5 kHz
3	TX Middle channel-UHF	12.5 kHz
4	TX Middle channel-UHF	12.5 kHz
5	TX Top channel-UHF	12.5 kHz

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- 5. Manufacturers use computer PC programming software to switch and operate frequency points, refer to the instructions for details



Page 15 of 70

6.FREQUENCY TOLERANCE

6.1 PROVISIONS APPLICABLE

- a). According to FCC §2.1055,§90.213, the frequency stability shall be measured with variation of ambient temperature from -30° C to $+50^{\circ}$ C centigrade.
- b). According to FCC Part 2 Section 2.1055(d)(2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacturer.
- c). According to FCC Part 90 Section 90.213, the frequency tolerance must be maintained within 0.00025% for 12.5 kHz channel separation and 0.0001% for 6.25 kHz channel separation.

6.2 MEASUREMENT PROCEDURE


6.2.1 Frequency stability versus environmental temperature

- 1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
- 2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1kHz and Video Resolution Bandwidth to 1kHz and Frequency Span to 50kHz.Record this frequency as reference frequency.
- 3. Set the temperature of chamber to 50 °C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
- 4. Repeat step 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured, record all measured frequencies on each temperature step.

6.2.2 Frequency stability versus input voltage

- Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15℃ to 25℃. Otherwise, an environment chamber set for a temperature of 20°C shall be used. The EUT shall be powered by DC 7.4V.
- 2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 kHz and Video Resolution Bandwidth to 1kHz. Record this frequency as reference frequency.
- 3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

6.3 MEASUREMENT SETUP

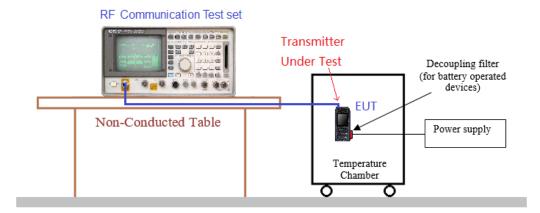



Report No.: AGC02931220401FE10 Page 16 of 70


6.4 MEASUREMENT RESULTS

	12.5 kHz Channel Separation, Analog modulation, Assigned Frequency For UHF-5W										
Test conditions Frequency error (ppm)											
Voltage	Temp		Test	Frequency (N	MHz)		Limit (ppm)	Result			
(V)	(℃)	406.125	453.2125	458.2125	480.025	511.975	(PP)				
	-30	0.904	0.653	1.019	0.951	0.601					
	-20	0.634	1.034	0.556	0.460	0.917					
	-10	0.633	0.737	0.937	0.663	0.837					
	0	0.556	0.833	0.605	0.788	0.400					
7.40	10	0.873	0.507	1.093	0.967	0.973					
	20	0.618	0.638	0.807	0.453	0.395	2.5	Pass			
	30	0.568	0.698	1.063	0.351	0.869					
	40	1.008	0.779	0.926	0.313	0.585					
	50	0.966	0.562	0.867	0.742	0.669					
8.51	20	1.037	0.747	0.986	0.361	0.415					
6.29	20	0.651	0.800	0.951	0.914	0.830					

	12.5 kHz Channel Separation, Analog modulation, Assigned Frequency For UHF-1W									
Test c	Test conditions Frequency error (ppm)									
Voltage	Temp		Test	Frequency (N	ЛHz)		Limit (ppm)	Result		
(V)	(℃)	406.125	453.2125	458.2125	480.025	511.975	(PP)			
	-30	0.998	0.771	0.838	0.684	0.445				
	-20	0.634	0.877	0.853	0.385	0.389				
	-10	0.972	0.521	0.744	0.852	0.609				
	0	0.955	0.584	0.936	0.876	0.308				
7.40	10	0.840	0.903	0.694	0.854	0.949				
	20	1.094	0.632	1.028	0.413	0.370	2.5	Pass		
	30	1.055	1.017	0.631	0.718	0.360				
	40	0.779	0.658	0.531	0.809	0.342				
	50	0.941	0.699	0.553	0.500	0.733				
8.51	20	0.998	0.771	0.838	0.684	0.445				
6.29	20	0.634	0.877	0.853	0.385	0.389				

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





	12.5 kHz Channel Separation, Digital modulation, Assigned Frequency For UHF-5W										
Test conditions Frequency error (ppm)											
Voltage	Temp		Test	Frequency (I	ЛHz)		Limit (ppm)	Result			
(V)	(℃)	406.125	453.2125	458.2125	480.025	511.975	(PP)				
	-30	0.550	0.821	0.555	0.366	0.767					
	-20	0.972	0.868	0.565	0.577	0.755					
	-10	0.959	0.785	0.722	0.557	0.663					
	0	0.602	1.003	1.059	0.388	0.425					
7.40	10	0.774	0.978	0.691	0.305	0.416					
	20	0.820	0.796	0.894	0.618	0.564	2.5	Pass			
	30	1.070	0.889	0.783	0.729	0.806					
	40	0.805	0.538	0.926	0.449	0.527					
	50	0.584	1.064	0.692	0.981	0.651					
8.51	20	0.550	0.821	0.555	0.366	0.767					
6.29	20	0.972	0.868	0.565	0.577	0.755					

	12.5 kHz Channel Separation, Digital modulation, Assigned Frequency For UHF-1W										
Test conditions Frequency error (ppm)											
Voltage	Temp		Test	Frequency (N	ЛHz)		Limit (ppm)	Result			
(V)	(℃)	406.125	453.2125	458.2125	480.025	511.975	(PP)				
	-30	0.858	0.726	0.624	0.794	0.932					
	-20	0.661	0.899	0.613	0.785	0.887					
	-10	1.088	0.950	0.811	0.979	0.561					
	0	0.847	0.707	0.906	0.643	0.965					
7.40	10	0.859	0.677	0.862	0.827	0.886					
	20	0.681	1.053	0.764	0.677	0.418	2.5	Pass			
	30	0.902	0.877	0.654	0.904	0.496					
	40	0.983	1.013	0.542	0.978	0.308	7				
	50	0.846	0.966	1.085	0.711	0.625					
8.51	20	0.858	0.726	0.624	0.794	0.932					
6.29	20	0.661	0.899	0.613	0.785	0.887					



Page 18 of 70

7. EMISSION BANDWIDTH

7.1 PROVISIONS APPLICABLE

FCC Part 90.209 & FCC Part 2.1049:

The authorized bandwidth shall be 11.25 kHz for 12.5 kHz channel separation and 6 kHz for 6.25 kHz channel separation.

7.2 MEASUREMENT PROCEDURE

1.The EUT was modulated by 2.5kHz sine wave audio signal; the level of the audio signal employed is 16dB greater than that necessary to produce 50% of rated system deviation.

Rated system deviation is 2.5 kHz for 12.5kHz channel spacing).


2.Spectrum set as follow:

Centre frequency = fundamental frequency, span=50kHz for 12.5kHz channel spacing, RBW=100Hz, VBW=300Hz, Sweep = auto,

Detector function = peak, Trace = max hold

- 3.Set 99% Occupied Bandwidth and 26dB Occupied Bandwidth.
- 4. Measure and record the results in the test report.

7.3 MEASUREMENT SETUP

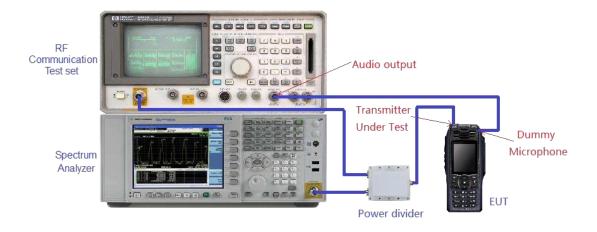



Page 19 of 70

7.4 MEASUREMENT RESULTS

Measurement Result of UHF-Analog Modulation-5W									
Operating Frequency		12.5 kHz Channel Sepa	aration						
Operating Frequency	Occupied Bandwidth	Emission Bandwidth	Limits	Result					
406.125MHz	9.960 kHz	10.17 kHz	11.25 kHz	Pass					
453.2125MHz	10.006 kHz	10.19 kHz	11.25 kHz	Pass					
458.2125MHz	10.004 kHz	10.18 kHz	11.25 kHz	Pass					
480.025MHz	9.988 kHz	10.18 kHz	11.25 kHz	Pass					
511.975MHz	9.992 kHz	10.19 kHz	11.25 kHz	Pass					


Measurement Result of UHF-Analog Modulation-1W									
Operating Frequency		12.5 kHz Channel Sepa	aration						
Operating Frequency	Occupied Bandwidth	Emission Bandwidth	Limits	Result					
406.125MHz	9.958 kHz	10.17 kHz	11.25 kHz	Pass					
453.2125MHz	10.005 kHz	10.18 kHz	11.25 kHz	Pass					
458.2125MHz	10.004 kHz	10.18 kHz	11.25 kHz	Pass					
480.025MHz	9.991 kHz	10.18 kHz	11.25 kHz	Pass					
511.975MHz	9.992kHz	10.18 kHz	11.25 kHz	Pass					



Report No.: AGC02931220401FE10 Page 20 of 70


Measurement Result of UHF-Digital Modulation-5W									
Operating Frequency		12.5 kHz Channel Sepa	aration						
Operating Frequency	Occupied Bandwidth	Emission Bandwidth	Limits	Result					
406.125MHz	7.681 kHz	9.656 kHz	11.25 kHz	Pass					
453.2125MHz	7.621 kHz	9.517 kHz	11.25 kHz	Pass					
458.2125MHz	7.471 kHz	9.486 kHz	11.25 kHz	Pass					
480.025MHz	7.727 kHz	9.386 kHz	11.25 kHz	Pass					
511.975MHz	7.637 kHz	9.598 kHz	11.25 kHz	Pass					


Measurement Result of UHF-Digital Modulation-1W									
Operating Frequency		12.5 kHz Channel Sepa	aration						
Operating Frequency	Occupied Bandwidth	Emission Bandwidth	Limits	Result					
406.125MHz	7.667 kHz	9.357 kHz	11.25 kHz	Pass					
453.2125MHz	7.634 kHz	9.917 kHz	11.25 kHz	Pass					
458.2125MHz	7.481 kHz	9.940 kHz	11.25 kHz	Pass					
480.025MHz	7.809 kHz	9.195 kHz	11.25 kHz	Pass					
511.975MHz	7.699 kHz	9.658 kHz	11.25 kHz	Pass					







Test plot as follows:

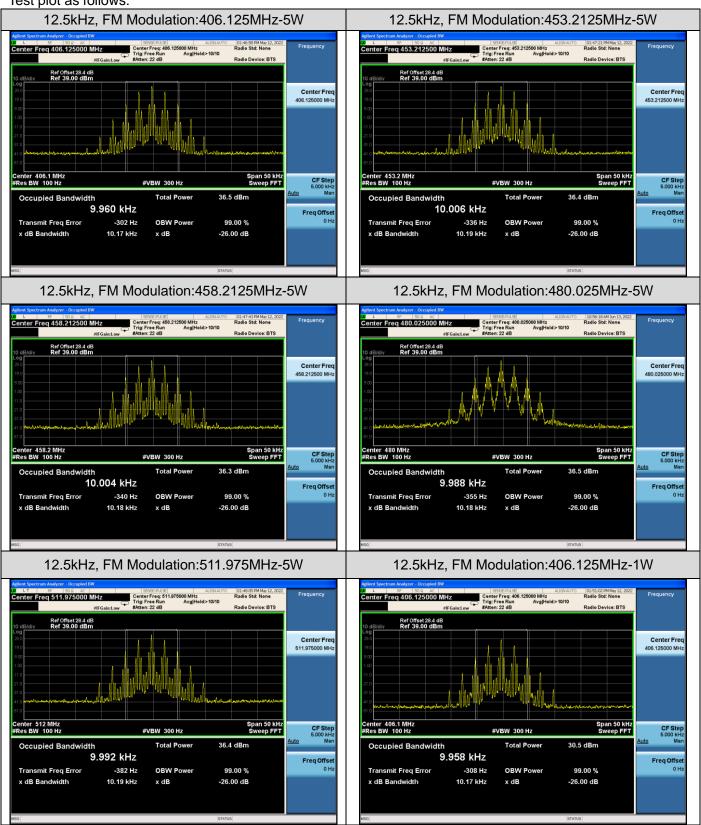







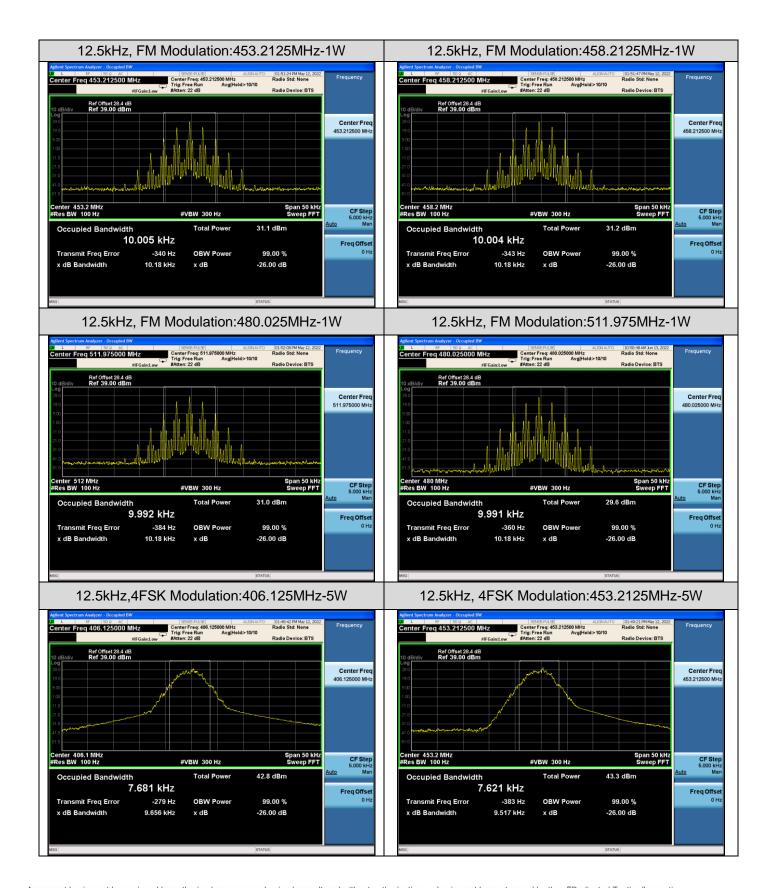






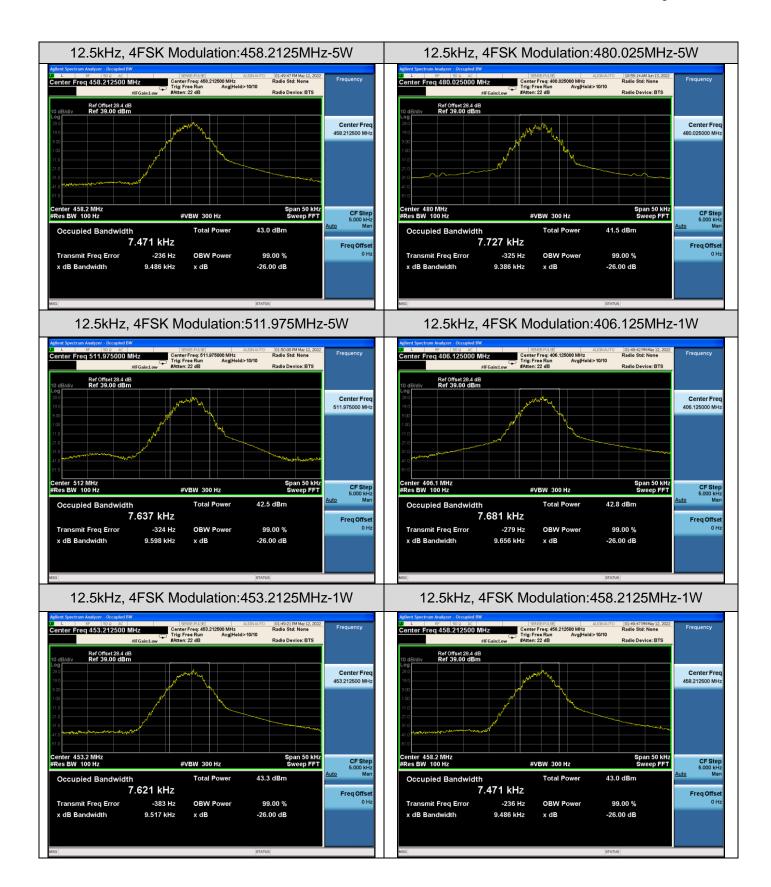





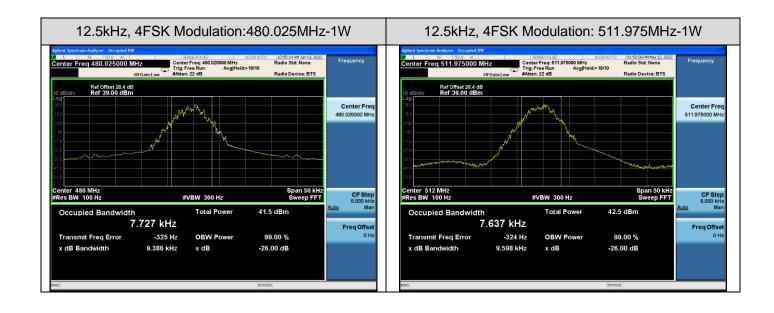



Page 25 of 70

8. SPURIOUS RATIATED EMISSION

8.1 PROVISIONS APPLICABLE

According to FCC §2.1053 and §90.210, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters designed to operate with each channel separation.

Emission Mask D -for 12.5 kHz Channel Separation:

- (1) On any frequency removed from the center of the authorized bandwidth fo to 5.625 kHz removed from fo: Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (fd in kHz) fo of more than 5.625 kHz but no more than 12.5 kHz: At least 7.27(fd-2.88 kHz) dB
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (fd in kHz)fo of more than 12.5 kHz: At least 50+10 log(P) dB or 70 dB, whichever is lesser attenuation.


8.2 MEASUREMENT PROCEDURE


- (1) On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- (2) The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3) The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4) The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5) The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6) The transmitter shall than be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7) The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- (8) The maximum signal level detected by the measuring receiver shall be noted.
- (9) The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10) Replace the antenna with a proper Antenna (substitution antenna).
- (11) The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12) The substitution antenna shall be connected to a calibrated signal generator.
- (13) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14) The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- (15) The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- (16) The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- (17) The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.




8.3 MEASUREMENT SETUP


RADIATED BELOW 1GHZ

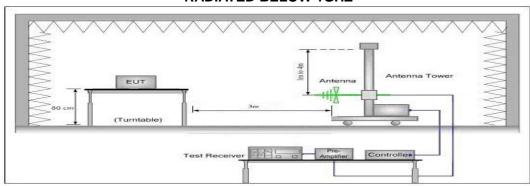

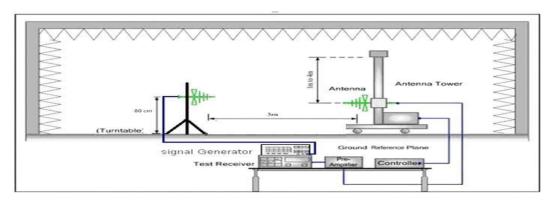

RADIATED ABOVE 1 GHZ

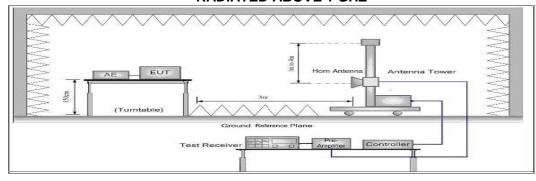

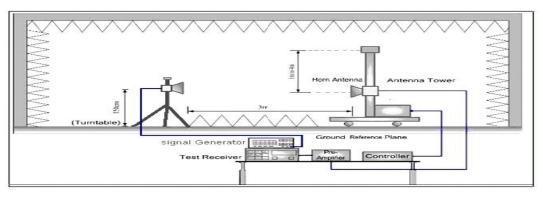



Page 27 of 70

8.4 MEASUREMENT RESULTS

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for below 1GHz, and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10 harmonic.

In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The "Read Value" is the spectrum reading of maximum power value.


The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.

EIRP = "Read Value" + Measured substitution value + 2.15.


Test limit calculation:

Preliminary calculation	Final Result
At least 50+10 log (P) =50+10log (5) =56.99 (dB)	Limit=P- Preliminary calculation=36.99-56.99=-20 dBm
At least 50+10 log (P) =50+10log (1) =50.00 (dB)	Limit=P- Preliminary calculation=30.00-50.00=-20 dBm


Note: The report only reflects high-power test data as the worst.






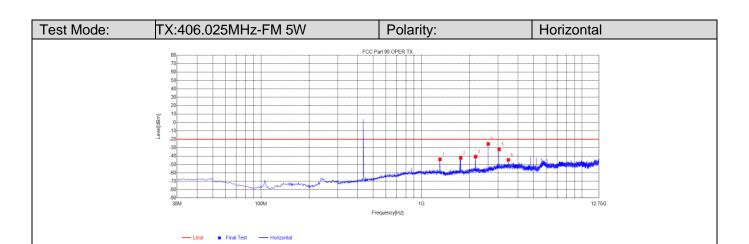


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	1305.5306	-40.18	-43.80	-20.00	23.80	-3.62	359	Horizontal
2	1757.9508	-40.76	-42.04	-20.00	22.04	-1.28	359	Horizontal
3	2175.1175	-40.47	-40.63	-20.00	20.63	-0.16	359	Horizontal
4	2609.911	-25.07	-25.47	-20.00	5.47	-0.40	359	Horizontal
5	3045.8796	-35.25	-31.88	-20.00	11.88	3.37	359	Horizontal
6	3480.6731	-48.68	-44.53	-20.00	24.53	4.15	359	Horizontal

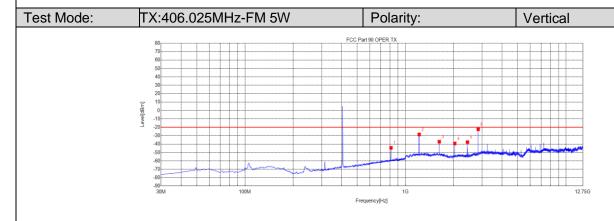


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	812.79	-86.88	-44.39	-20.00	24.39	42.49	17	Vertical
2	1218.5719	-28.84	-28.55	-20.00	8.55	0.29	178	Vertical
3	1625.1625	-38.84	-37.12	-20.00	17.12	1.72	186	Vertical
4	2030.5781	-39.52	-39.20	-20.00	19.20	0.32	305	Vertical
5	2437.1687	-36.72	-37.62	-20.00	17.62	-0.90	186	Vertical
6	2842.5843	-24.19	-22.33	-20.00	2.33	1.86	161	Vertical






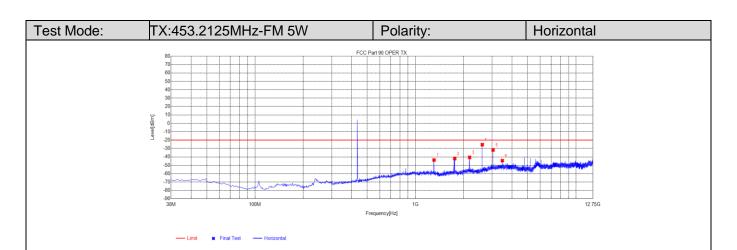


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	1305.5306	-40.18	-43.80	-20.00	23.80	-3.62	359	Horizontal
2	1757.9508	-40.76	-42.04	-20.00	22.04	-1.28	359	Horizontal
3	2175.1175	-40.47	-40.63	-20.00	20.63	-0.16	359	Horizontal
4	2609.911	-25.07	-25.47	-20.00	5.47	-0.40	359	Horizontal
5	3045.8796	-35.25	-31.88	-20.00	11.88	3.37	359	Horizontal
6	3480.6731	-48.68	-44.53	-20.00	24.53	4.15	359	Horizontal

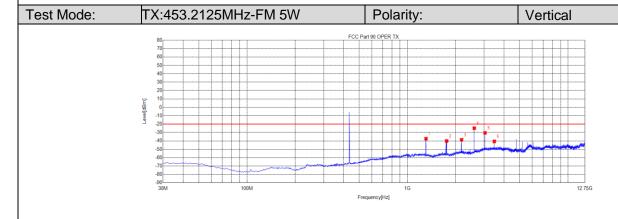


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	1305.5306	-33.84	-37.46	-20.00	17.46	-3.62	292	Vertical
2	1754.4254	-38.84	-40.15	-20.00	20.15	-1.31	317	Vertical
3	2175.1175	-38.59	-38.75	-20.00	18.75	-0.16	309	Vertical
4	2609.911	-24.47	-24.87	-20.00	4.87	-0.40	334	Vertical
5	3045.8796	-33.90	-30.53	-20.00	10.53	3.37	300	Vertical
6	3480.6731	-44.82	-40.67	-20.00	20.67	4.15	29	Vertical






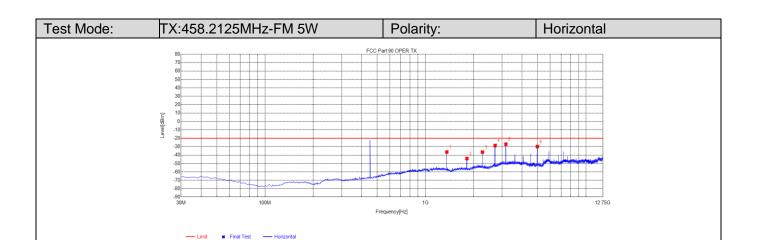


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	1359.586	-32.80	-36.30	-20.00	16.30	-3.50	164	Horizontal
2	1813.1813	-43.24	-44.11	-20.00	24.11	-0.87	0	Horizontal
3	2266.7767	-35.91	-36.43	-20.00	16.43	-0.52	130	Horizontal
4	2719.1969	-29.24	-28.61	-20.00	8.61	0.63	147	Horizontal
5	3172.7923	-30.59	-26.99	-20.00	6.99	3.60	138	Horizontal
6	4985.9986	-33.56	-29.83	-20.00	9.83	3.73	190	Horizontal

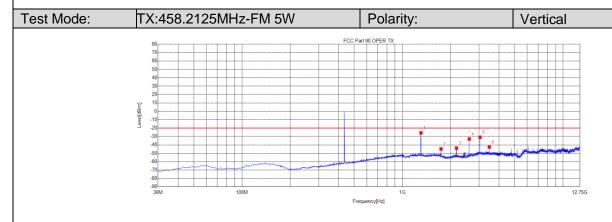


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	1305.5306	-26.57	-25.70	-20.00	5.70	0.87	357	Vertical
2	1740.324	-46.22	-44.90	-20.00	24.90	1.32	77	Vertical
3	2175.1175	-43.77	-43.89	-20.00	23.89	-0.12	213	Vertical
4	2609.911	-32.84	-32.98	-20.00	12.98	-0.14	340	Vertical
5	3045.8796	-34.18	-30.98	-20.00	10.98	3.20	331	Vertical
6	3480.6731	-45.72	-42.65	-20.00	22.65	3.07	340	Vertical






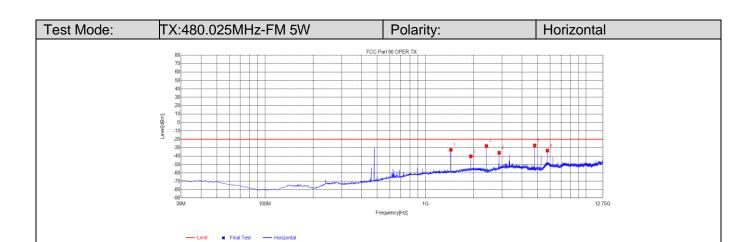


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	1440.6691	-26.16	-32.49	-20.00	12.49	-6.33	53	Horizontal
2	1920.117	-37.14	-40.21	-20.00	20.21	-3.07	18	Horizontal
3	2400.7401	-23.84	-27.89	-20.00	7.89	-4.05	180	Horizontal
4	2881.3631	-35.22	-36.05	-20.00	16.05	-0.83	198	Horizontal
5	4800.33	-27.87	-27.23	-20.00	7.23	0.64	105	Horizontal
6	5760.401	-40.35	-33.45	-20.00	13.45	6.90	310	Horizontal

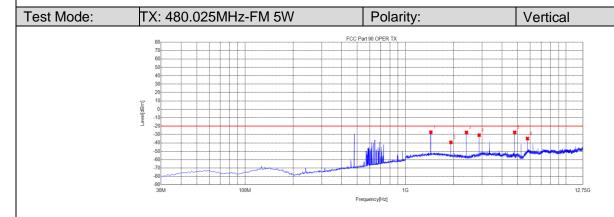


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	1440.6691	-26.09	-27.32	-20.00	7.32	-1.23	108	Vertical
2	1920.117	-37.08	-39.39	-20.00	19.39	-2.31	0	Vertical
3	2400.7401	-23.82	-27.61	-20.00	7.61	-3.79	176	Vertical
4	2880.188	-29.96	-30.78	-20.00	10.78	-0.82	184	Vertical
5	4800.33	-28.09	-27.53	-20.00	7.53	0.56	99	Vertical
6	5760.401	-40.51	-34.90	-20.00	14.90	5.61	99	Vertical






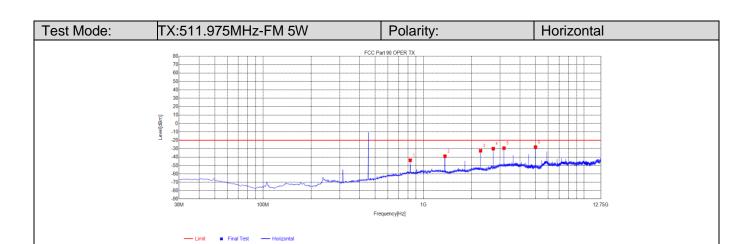


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	827.34	-87.02	-43.73	-20.00	23.73	43.29	281	Horizontal
2	1361.9362	-35.41	-38.91	-20.00	18.91	-3.50	11	Horizontal
3	2270.302	-31.94	-32.47	-20.00	12.47	-0.53	146	Horizontal
4	2723.8974	-30.63	-29.95	-20.00	9.95	0.68	154	Horizontal
5	3178.6679	-32.92	-29.31	-20.00	9.31	3.61	112	Horizontal
6	4994.2244	-31.94	-28.20	-20.00	8.20	3.74	95	Horizontal

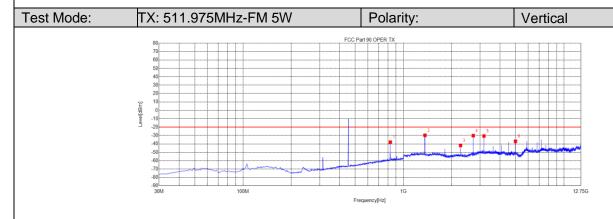


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	828.31	-80.65	-38.01	-20.00	18.01	42.64	1	Vertical
2	1361.9362	-31.00	-29.76	-20.00	9.76	1.24	161	Vertical
3	2270.302	-41.53	-41.93	-20.00	21.93	-0.40	52	Vertical
4	2723.8974	-31.02	-30.18	-20.00	10.18	0.84	170	Vertical
5	3178.6679	-33.79	-30.63	-20.00	10.63	3.16	145	Vertical
6	4994.2244	-40.85	-36.96	-20.00	16.96	3.89	145	Vertical






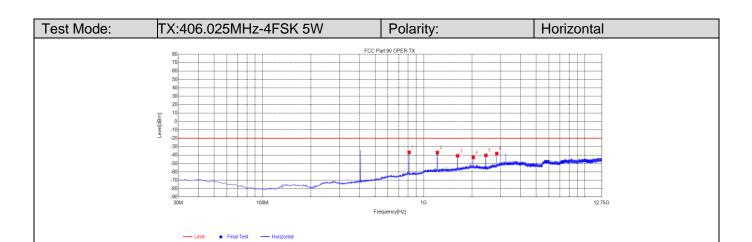


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	812.79	-77.09	-36.73	-20.00	16.73	40.36	20	Horizontal
2	1217.3967	-30.22	-37.02	-20.00	17.02	-6.80	310	Horizontal
3	1626.3376	-35.61	-40.87	-20.00	20.87	-5.26	90	Horizontal
4	2032.9283	-40.07	-42.67	-20.00	22.67	-2.60	190	Horizontal
5	2435.9936	-36.09	-40.28	-20.00	20.28	-4.19	30	Horizontal
6	2844.9345	-36.95	-38.13	-20.00	18.13	-1.18	160	Horizontal

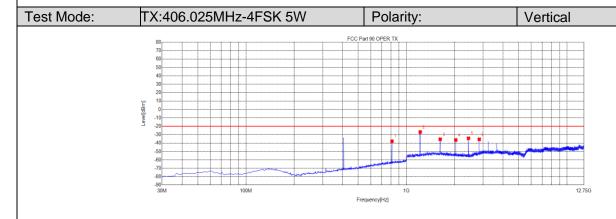


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	812.79	-77.20	-37.71	-20.00	17.71	39.49	340	Vertical
2	1218.5719	-24.09	-26.80	-20.00	6.80	-2.71	20	Vertical
3	1623.9874	-34.15	-35.42	-20.00	15.42	-1.27	140	Vertical
4	2029.4029	-33.60	-36.28	-20.00	16.28	-2.68	270	Vertical
5	2435.9936	-30.38	-34.28	-20.00	14.28	-3.90	160	Vertical
6	2843.7594	-34.40	-35.53	-20.00	15.53	-1.13	40	Vertical






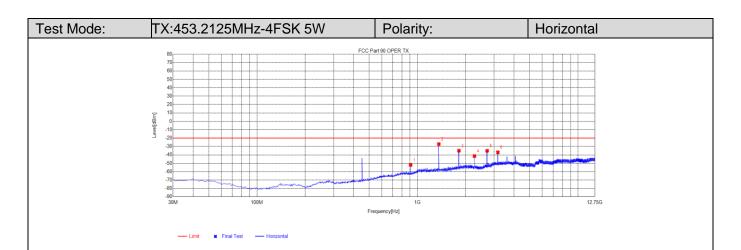


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	906.88	-92.18	-52.09	-20.00	32.09	40.09	80	Horizontal
2	1359.586	-20.67	-27.17	-20.00	7.17	-6.50	80	Horizontal
3	1814.3564	-31.23	-35.09	-20.00	15.09	-3.86	190	Horizontal
4	2266.7767	-37.93	-41.45	-20.00	21.45	-3.52	340	Horizontal
5	2719.1969	-32.84	-35.21	-20.00	15.21	-2.37	150	Horizontal
6	3171.6172	-37.59	-36.99	-20.00	16.99	0.60	340	Horizontal

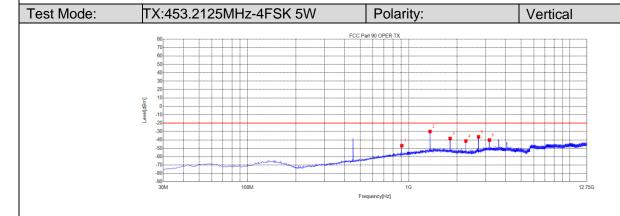


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	906.88	-87.30	-46.92	-20.00	26.92	40.38	340	Vertical
2	1358.4108	-28.25	-30.03	-20.00	10.03	-1.78	310	Vertical
3	1810.8311	-36.51	-38.44	-20.00	18.44	-1.93	60	Vertical
4	2266.7767	-37.98	-41.37	-20.00	21.37	-3.39	10	Vertical
5	2718.0218	-34.13	-36.35	-20.00	16.35	-2.22	60	Vertical
6	3173.9674	-40.39	-40.23	-20.00	20.23	0.16	220	Vertical






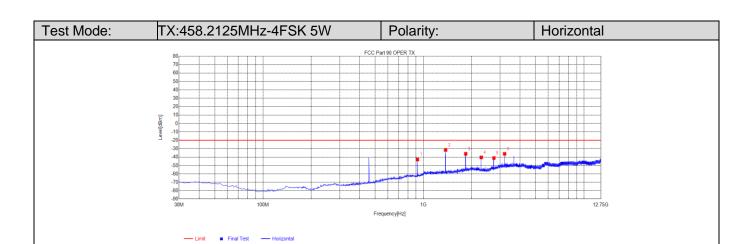


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	917.55	-83.16	-42.84	-20.00	22.84	40.32	180	Horizontal
2	1374.8625	-25.06	-31.53	-20.00	11.53	-6.47	160	Horizontal
3	1834.3334	-32.33	-36.04	-20.00	16.04	-3.71	290	Horizontal
4	2292.6293	-36.74	-40.36	-20.00	20.36	-3.62	340	Horizontal
5	2750.9251	-39.01	-41.08	-20.00	21.08	-2.07	20	Horizontal
6	3206.8707	-36.75	-36.09	-20.00	16.09	0.66	130	Horizontal

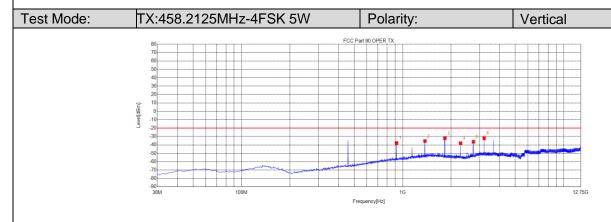


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	917.55	-78.30	-37.81	-20.00	17.81	40.49	50	Vertical
2	1376.0376	-33.86	-35.52	-20.00	15.52	-1.66	140	Vertical
3	1830.8081	-30.11	-32.11	-20.00	12.11	-2.00	120	Vertical
4	2290.279	-34.54	-38.00	-20.00	18.00	-3.46	300	Vertical
5	2750.9251	-34.40	-36.33	-20.00	16.33	-1.93	30	Vertical
6	3208.0458	-32.21	-32.06	-20.00	12.06	0.15	90	Vertical






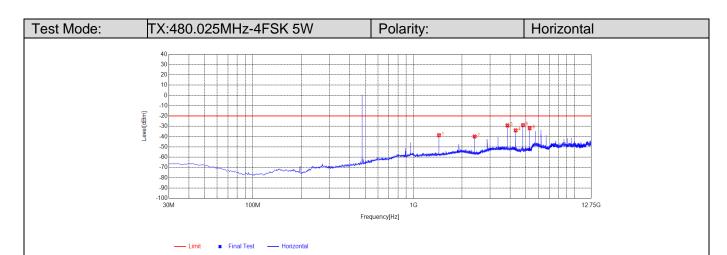


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	1440.0749	-35.36	-38.69	-20.00	18.69	-3.33	163	Horizontal
2	2400.1256	-38.91	-39.95	-20.00	19.95	-1.04	50	Horizontal
3	3840.6422	-33.73	-29.16	-20.00	9.16	4.57	32	Horizontal
4	4319.7070	-37.92	-33.98	-20.00	13.98	3.94	22	Horizontal
5	4800.5600	-32.52	-28.88	-20.00	8.88	3.64	0	Horizontal
6	5280.1125	-38.52	-31.88	-20.00	11.88	6.64	88	Horizontal

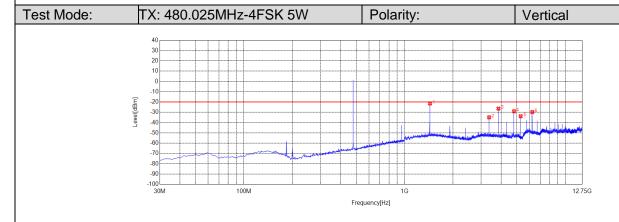


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	1440.0751	-23.21	-21.44	-20.00	1.44	1.77	169	Vertical
2	3360.1752	-37.99	-34.89	-20.00	14.89	3.10	56	Vertical
3	3840.6512	-29.63	-26.41	-20.00	6.41	3.22	46	Vertical
4	4800.6215	-32.54	-28.98	-20.00	8.98	3.56	9	Vertical
5	5279.9979	-38.94	-33.82	-20.00	13.82	5.12	355	Vertical
6	6240.1121	-41.07	-29.79	-20.00	9.79	11.28	159	Vertical





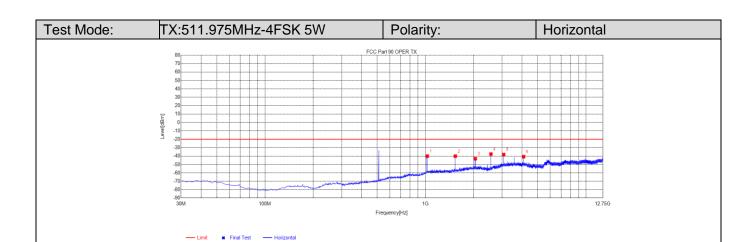

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	1025.8526	-32.80	-40.01	-20.00	20.01	-7.21	70	Horizontal
2	1534.6785	-34.07	-40.02	-20.00	20.02	-5.95	90	Horizontal
3	2045.8546	-40.42	-43.07	-20.00	23.07	-2.65	170	Horizontal
4	2560.5561	-33.70	-37.57	-20.00	17.57	-3.87	300	Horizontal
5	3074.0824	-38.60	-38.18	-20.00	18.18	0.42	320	Horizontal
6	4094.0844	-42.15	-40.64	-20.00	20.64	1.51	220	Horizontal

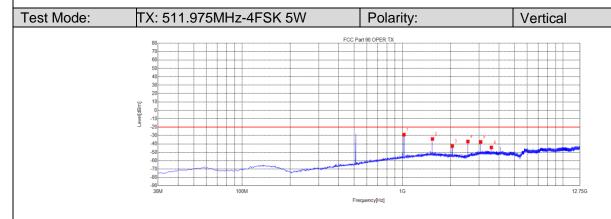

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	1022.3272	-25.04	-29.05	-20.00	9.05	-4.01	330	Vertical
2	1538.2038	-33.17	-34.14	-20.00	14.14	-0.97	300	Vertical
3	2045.8546	-39.87	-42.60	-20.00	22.60	-2.73	110	Vertical
4	2558.2058	-33.59	-37.18	-20.00	17.18	-3.59	290	Vertical
5	3074.0824	-37.85	-37.66	-20.00	17.66	0.19	240	Vertical
6	3582.9083	-44.37	-44.27	-20.00	24.27	0.10	140	Vertical





Page 38 of 70

8.5 EMISSION MASK PLOT

The detailed procedure employed for Emission Mask measurements are specified as following:


- -Connect the equipment as illustrated.
- -Spectrum set as follow:
- Centre frequency = fundamental frequency, Span=50kHz for 12.5kHz and 25kHz channel spacing, RBW=100Hz, VBW=300Hz for 12.5kHz, RBW=300Hz, VBW=1000Hz for 25kHz, Sweep = auto, Detector function = peak, Trace = max hold
- 2. Key the transmitter, and set the level of the unmodulated carrier to a fullscale reference line. This is the 0dB reference for the measurement.
- 3. Modulate the transmitter with a 2500 Hz sine wave at an input level 16 dB greater than that necessary to produce 50% of rated system deviation (Rated system deviation is 2.5 kHz for 12.5kHz channel spacing).
 The input level shall be established at the frequency of maximum response of the audio modulating circuit.
- 4. Transmitters employing digital modulation techniques that bypass the limiter and the audio low-pass filter shall be modulated as specified by the manufacturer.
- 5. Measure and record the results in the test report.

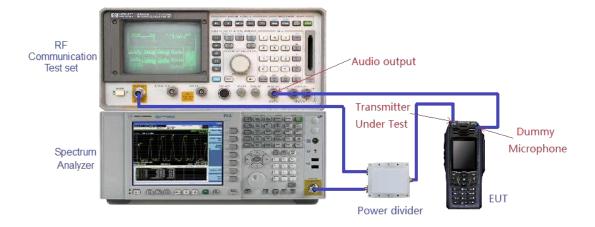





Test plot as follows:

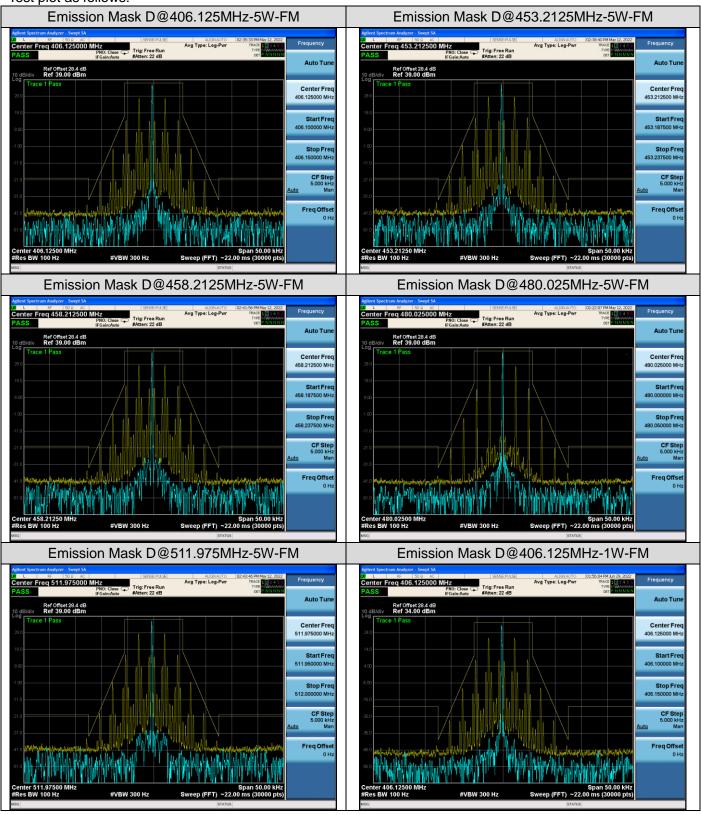

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/