



FCC RADIO TEST REPORT

Applicant : Ubiquiti Inc.
Address : 685 Third Avenue, New York, New York 10017, USA
Equipment : G3 Touch Wall
Model No. : UTP-G3-Touch-Wall
Trade Name : UBIQUITI
FCC ID : SWX-UG3W

I HEREBY CERTIFY THAT :

The sample was received on Feb. 20, 2023 and the testing was completed on Mar. 10, 2023 at Cerpass Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of Cerpass Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

Cerpass Technology Corporation Test Laboratory





CONTENTS

1. Summary of Test Procedure and Test Results	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test	6
2.1 Feature of Equipment under Test.....	6
2.2 Carrier Frequency of Channels.....	7
2.3 Test Mode and Test Software.....	8
2.4 Description of Test System.....	9
2.5 General Information of Test.....	11
2.6 Measurement Uncertainty	12
3. Test Equipment and Ancillaries Used for Tests	13
4. Antenna Requirements.....	15
4.1 Standard Applicable	15
4.2 Antenna Construction and Directional Gain.....	15
5. Test of AC Power Line Conducted Emission	16
5.1 Test Limit	16
5.2 Test Procedures	16
5.3 Typical Test Setup	17
5.4 Test Result and Data.....	18
5.5 Test Photographs	22
6. Test of Spurious Emission (Radiated)	26
6.1 Test Limit	26
6.2 Test Procedures	27
6.3 Typical Test Setup	28
6.4 Test Result and Data (9kHz ~ 30MHz).....	30
6.5 Test Result and Data (30MHz ~ 1GHz)	30
6.6 Test Result and Data (1GHz ~ 25GHz).....	34
6.7 Restricted Bands of Operation	46
6.8 Test Photographs (30MHz ~ 1GHz)	47
6.9 Test Photographs (1GHz ~ 25GHz)	49
7. Test of Spurious Emission (Conducted).....	53
7.1 Test Limit	53
7.2 Test Procedure	53
7.3 Test Setup Layout	53
7.4 Test Result and Data.....	53
8. On Time, Duty Cycle and Measurement methods	58
8.1 Test Limit	58
8.2 Test Procedure	58
8.3 Test Setup Layout	58
8.4 Test Result and Data.....	58
9. 6dB Bandwidth Measurement Data.....	60
9.1 Test Limit	60



9.2	Test Procedures	60
9.3	Test Setup Layout	60
9.4	Test Result and Data.....	60
10.	Maximum Average Output Power	62
10.1	Test Limit	62
10.2	Test Procedures	62
10.3	Test Setup Layout	62
10.4	Test Result and Data.....	63
11.	Power Spectral Density	64
11.1	Test Limit	64
11.2	Test Procedures	64
11.3	Test Setup Layout	64
11.4	Test Result and Data.....	64
12.	Radio Frequency Exposure	66
12.1	Applicable Standards	66
12.1	EUT Specification.....	67
12.2	Result	67



History of this test report

Report No.	Issued Date	Description
23020207-TRFCC03	Mar. 25, 2023	Original
23020207-TRFCC03-A	Dec. 13, 2023	Device category Mobile (>20cm separation)



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	PASS
15.207	AC Power Line Conducted Emission	PASS
15.209 15.205	Radiated Spurious Emission	PASS
15.247(d)	Conducted Spurious Emission	PASS
15.247(a)(2)	6dB Bandwidth	PASS
15.247(b)	Maximum Output Power	PASS
15.247(e)	Power Spectral Density	PASS
2.1091	Radio Frequency Exposure	PASS

*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement.



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Operation Frequency Range	BT / BLE: 2400-2483.5MHz
Center Frequency Range	BT / BLE: 2402-2480MHz
Modulation Type	BT: GFSK, $\pi/4$ -DQPSK, 8DPSK BLE: GFSK
Modulation Technology	FHSS, DTS
Data Rate	BT: GFSK: 1Mbps, $\pi/4$ -DQPSK: 2Mbps, 8DPSK: 3Mbps BLE: GFSK: 1Mbps
Antenna Type	ANT B :PIFA Antenna ANT C :Chip Antenna
Antenna Gain	2400MHz~2483.5MHz: ANT B :4.9dBi, For BLE 2400MHz~2483.5MHz: ANT C :2.7dBi .For BT / BLE

Note:For more details, please refer to the User's manual of the EUT.

For Chip:Nordic Only Support BLE, use ANT B

For Chip:WCN3680 Support BT and BLE, use ANT C



2.2 Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
*00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	*19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	*39	2480
12	2426	26	2454	--	--
13	2428	27	2456	--	--

Note: Channels remarked * are selected to perform test.



2.3 Test Mode and Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- The complete test system included Notebook and EUT for RF test.
- An executive program, "Direct Test Mode ver. 2.0.3" under Windows OS system was executed to transmit and receive data via Bluetooth.- For Chip:Nordic
- An executive program, "QRCT ver. 4.0.00201.0" under Windows OS system was executed to transmit and receive data via Bluetooth.- For Chip:WCN3680
- The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	GFSK (1Mbps), Power from Adapter, For Chip:Nordic
2	GFSK (1Mbps), Power from PoE, For Chip:Nordic
3	GFSK (1Mbps), Power from Adapter, For Chip:WCN3680
4	GFSK (1Mbps), Power from PoE, For Chip:WCN3680
caused "Test Mode 2,4" generated the worst case, it was reported as the final data.	
Radiation Emissions (BELOW 1G)	
Test Mode	Operating Description
1	GFSK (1Mbps), Power from Adapter, For Chip:Nordic
2	GFSK (1Mbps), Power from PoE, For Chip:Nordic
3	GFSK (1Mbps), Power from Adapter, For Chip:WCN3680
4	GFSK (1Mbps), Power from PoE, For Chip:WCN3680
caused "Test Mode 1,3" generated the worst case, it was reported as the final data.	
Radiation Emissions (1GHz ~ 25GHz)	
Test Mode	Operating Description
1	GFSK (1Mbps), Power from Adapter, For Chip:Nordic
2	GFSK (1Mbps), Power from PoE, For Chip:Nordic
3	GFSK (1Mbps), Power from Adapter, For Chip:WCN3680
4	GFSK (1Mbps), Power from PoE, For Chip:WCN3680
caused "Test Mode 1,3" generated the worst case, they were reported as the final data.	

1. There are two kinds of test voltage: AC 120V / 60Hz and AC 240V / 60Hz.

AC Power Line Conducted Emission &Radiated Spurious Emission(BELOW 1G)

AC 120V / 60Hz is worst case.

Modulation Type	TX CONFIGURATION
GFSK (1Mbps)	1TX



2.4 Description of Test System

For Chip:Nordic

RF Conducted

Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	Lenovo	S1GL2W	N/A	Adapter / 1.8m / NS
Type-C USB Cable (Blue)*2	kolin	KEX-DLCP08	1m / NS	N/A
Testfixture	UBIQUITI	113-02820	N/A	N/A

Radiated Emissions

Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
POE	UBIQUITI	GP-H480-050G	N/A	0.6m / NS
RJ45 Cable	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A
Adapter	hoda	TC-03	N/A	N/A
Type-C USB Cable (Blue)*2	kolin	KEX-DLCP08	1m / NS	N/A
Testfixture	UBIQUITI	113-02820	N/A	N/A
Adapter	Noratec	NT-K240	N/A	N/A

AC Power Line Conducted Emission

Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
POE	UBIQUITI	GP-H480-050G	N/A	0.6m / NS
RJ45 Cable	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A
Adapter	hoda	TC-03	N/A	N/A
Type-C USB Cable (Blue)*2	kolin	KEX-DLCP08	1m / NS	N/A
Testfixture	UBIQUITI	113-02820	N/A	N/A



For Chip:WCN3680

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Adapter	hoda	TC-03	N/A	N/A
Type-C USB Cable (Blue)	kolin	KEX-DLCP08	1m / NS	N/A
Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
POE	UBIQUITI	GP-H480-050G	N/A	0.6m / NS
RJ45 Cable	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A
Adapter	hoda	TC-03	N/A	N/A
Type-C USB Cable (Blue)	kolin	KEX-DLCP08	1m / NS	N/A
AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
POE	UBIQUITI	GP-H480-050G	N/A	0.6m / NS
RJ45 Cable	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A
Adapter	hoda	TC-03	N/A	N/A
Type-C USB Cable (Blue)	kolin	KEX-DLCP08	1m / NS	N/A



2.5 General Information of Test

Test Site	Cerpass Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881	
	FCC	TW1439, TW1079
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication test C-4663 for Conducted emission test R-4218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25,000MHz	
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.	

Test Item	Test Site	Test period	Environmental Conditions	Tested By
RF Conducted	RFCON02-NK	2023/03/03	22.6°C / 53%	Leon Huang
Radiated Emissions	3M03-NK	2023/3/9~2023/03/10	22~22°C / 58~61%	Leon Huang
AC Power Line Conducted Emission	CON02-NK	2023/03/10	22°C / 55%	Leon Huang



2.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±3.28dB
Radiated Spurious Emission(9KHz~30MHz)	±3.4dB
Radiated Spurious Emission(30MHz~1GHz)	±5.7dB
Radiated Spurious Emission(1GHz~25GHz)	±6.8dB
Conducted Spurious Emission	±1.8dB
6dB Bandwidth	±4.4%
20dB Bandwidth	±4.4%
Occupied Bandwidth	±4.4%
Peak Output Power(Conducted Power Meter)	±1.1dB
Dwell Time / Deactivation Time	±1.2%
Power Spectral Density	±1.8dB
Duty Cycle	±1.2%



3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room (3M03-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Sunol	JB1	A051717	2022/07/22	2023/07/21
Active Loop Antenna	EMCO	6507	40855	2022/05/25	2023/05/24
Horn Antenna	EMCO	3116	31974	2022/10/06	2023/10/05
Double Ridged Guide Horn Antenna	RF SPAN	DRH18-E	210309A18-ES	2022/08/24	2023/08/23
Spectrum Analyzer	ROHDE & SCHWARZ	FSP 40	100219	2022/08/16	2023/08/15
EMI Receiver	ROHDE & SCHWARZ	ESR 7	101906	2022/05/17	2023/05/16
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	101329	2022/07/20	2023/07/19
Preamplifier	EM Electronics corp.	EM01G18G	60700	2022/09/05	2023/09/04
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2022/11/11	2023/11/10
Preamplifier	EM Electronics corp.	EM330	60644	2022/09/05	2023/09/04
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130605	2022/09/06	2023/09/05
Cable-10m(30M-1G)	HARBOUR INDUSTRIES	RG-214	01126M	2022/04/22	2023/04/21
Cable-1m(30M-1G)	HARBOUR INDUSTRIES	RG-214	01099M	2022/04/22	2023/04/21
Cable-1.5m(30M-1G)	HARBOUR INDUSTRIES	RG-214	00420M	2022/06/21	2023/06/20
Cable-0.5m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	28420/2	2022/4/9	2023/04/08
Cable-3m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	MY2608/2	2022/4/9	2023/04/08
Cable-0.5m(1G-40G)	Rapidtek	40GHZ 50CM	38MS-38MS50314	2022/4/9	2023/04/08
Cable-3m(1G-40G)	Rapidtek	40GHZ 300CM	38MS-38MS300314	2022/4/9	2023/04/08
Cable-0.5m(1G-18G)	EMEC	EM104-SMSM-0.5M	CCE1354	2022/5/26	2023/05/25
Cable-3m(1G-18G)	EMEC	EM104-SMSM-3M	CCE1355	2022/5/26	2023/05/25
Cable-8m(10M-26.5G)	HUBER SUHNER	SF126E	587396/126E	2022/10/7	2023/10/06
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA

Test Item	RF Conducted				
Test Site	RFCON02-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
CAX Signal Analyzer	KEYSIGHT	N9000B	MY57100339	2022/11/29	2023/11/28
Attenuator	KEYSIGHT	8491B	MY39250705	2022/10/06	2023/10/05
Power Meter	Anritsu	ML2495A	2034001	2022/10/06	2023/10/05
Power Sensor	Anritsu	MA2411B	1911175	2022/10/06	2023/10/05



Test Item	AC Power Line Conducted Emission				
Test Site	CON02-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESCI	101423	2022/07/05	2023/07/04
TWO-LINE V-NETWORK	ROHDE & SCHWARZ	ENV216	102185	2022/08/24	2023/08/23
Cable-4m(9k-3G)	EMEC	RG-223	18274M	2022/07/27	2023/07/26
E3	AUDIX	v8.2014-8-6	RK-000536	NA	NA



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

Antenna Type	ANT B :PIFA Antenna ANT C :Chip Antenna
Antenna Gain	2400MHz~2483.5MHz: ANT B :4.9dBi, For BLE: 2400MHz~2483.5MHz: ANT C :2.7dBi .For BT / BLE:



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



5.3 Typical Test Setup

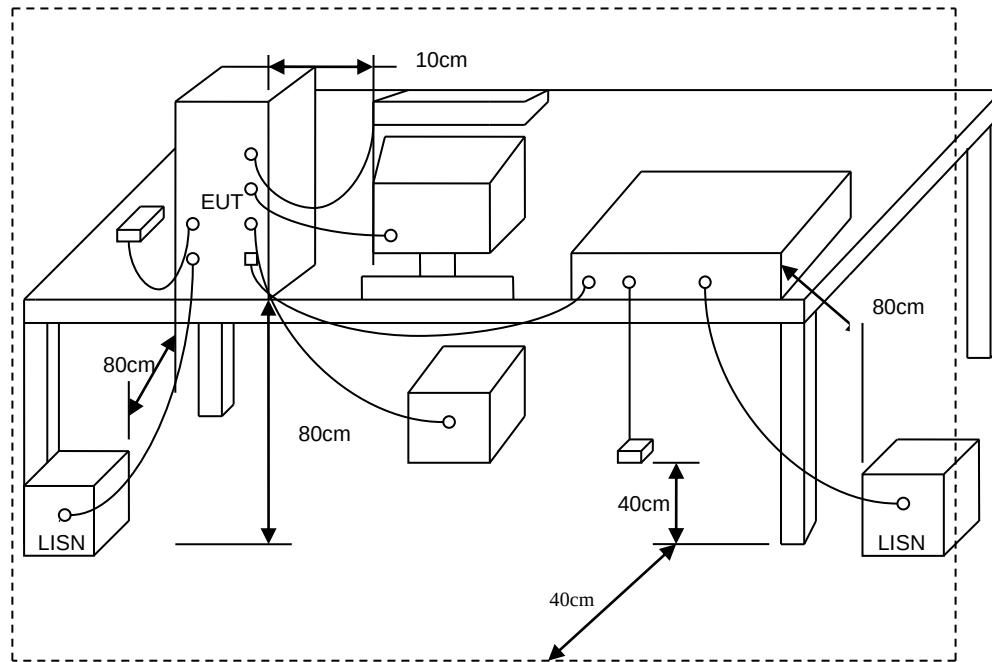




5.4 Test Result and Data

For Chip:Nordic

Power	: AC 120V / 60Hz	Pol/Phase	: LINE
Test Mode	: Mode 2		

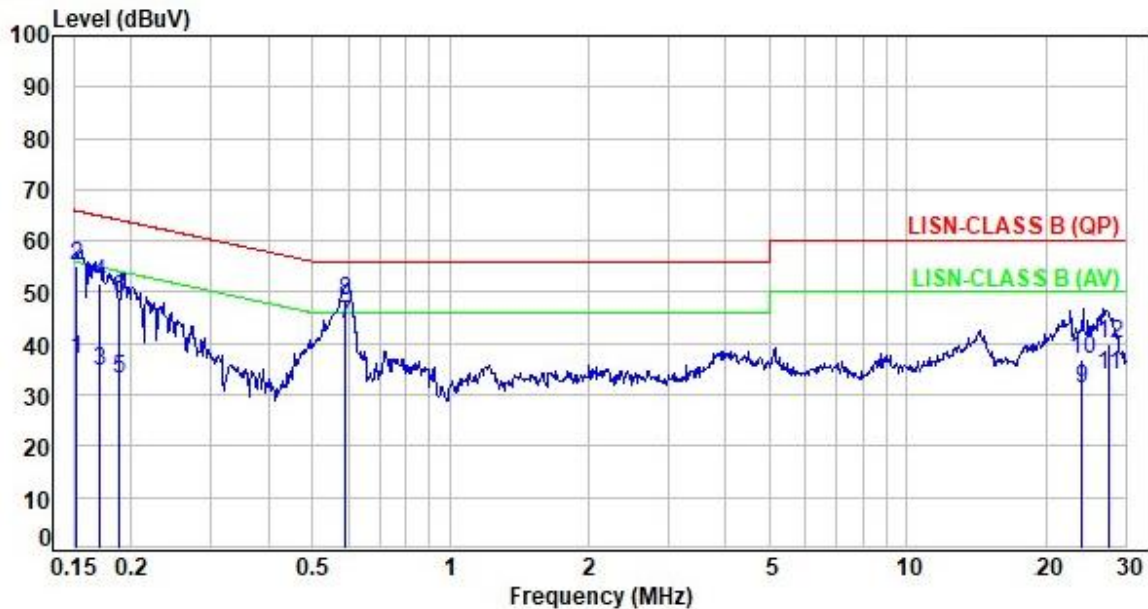

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.15	9.62	27.12	36.74	55.94	-19.20	Average	P
2	0.15	9.62	45.45	55.07	65.94	-10.87	QP	P
3	0.17	9.62	24.99	34.61	54.95	-20.34	Average	P
4	0.17	9.62	42.17	51.79	64.95	-13.16	QP	P
5	0.19	9.61	23.52	33.13	54.11	-20.98	Average	P
6	0.19	9.61	39.22	48.83	64.11	-15.28	QP	P
7	0.59	9.63	34.20	43.83	46.00	-2.17	Average	P
8	0.59	9.63	38.72	48.35	56.00	-7.65	QP	P
9	23.98	9.92	21.27	31.19	50.00	-18.81	Average	P
10	23.98	9.92	26.96	36.88	60.00	-23.12	QP	P
11	27.40	9.92	23.74	33.66	50.00	-16.34	Average	P
12	27.40	9.92	29.98	39.90	60.00	-20.10	QP	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



For Chip:Nordic

Power	: AC 120V / 60Hz	Pol/Phase	: NEUTRAL
Test Mode	: Mode 2		:

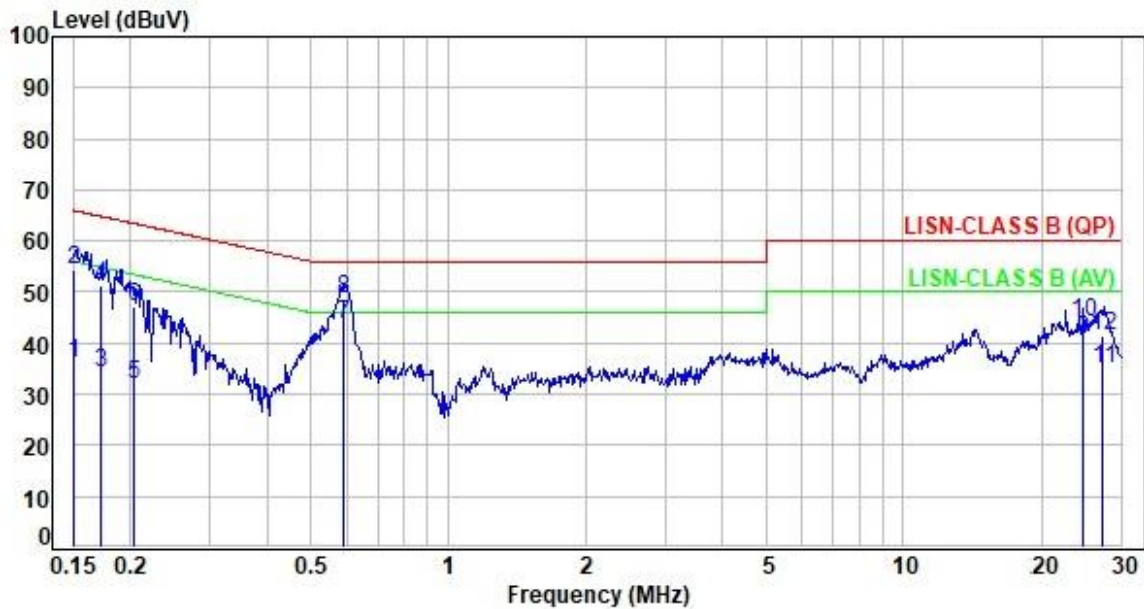

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV)	Limit (dBUV)	Margin (dB)	Detector	P/F
1	0.15	9.63	26.63	36.26	55.97	-19.71	Average	P
2	0.15	9.63	44.74	54.37	65.97	-11.60	QP	P
3	0.17	9.63	24.46	34.09	54.83	-20.74	Average	P
4	0.17	9.63	41.66	51.29	64.83	-13.54	QP	P
5	0.20	9.62	22.31	31.93	53.43	-21.50	Average	P
6	0.20	9.62	37.51	47.13	63.43	-16.30	QP	P
7	0.59	9.63	33.94	43.57	46.00	-2.43	Average	P
8	0.59	9.63	39.03	48.66	56.00	-7.34	QP	P
9	24.58	9.96	30.79	40.75	50.00	-9.25	Average	P
10	24.58	9.96	34.16	44.12	60.00	-15.88	QP	P
11	27.22	9.97	24.90	34.87	50.00	-15.13	Average	P
12	27.22	9.97	31.56	41.53	60.00	-18.47	QP	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



For Chip: WCN3680

Power	: AC 120V / 60Hz	Pol/Phase	: LINE
Test Mode	: Mode 4		:

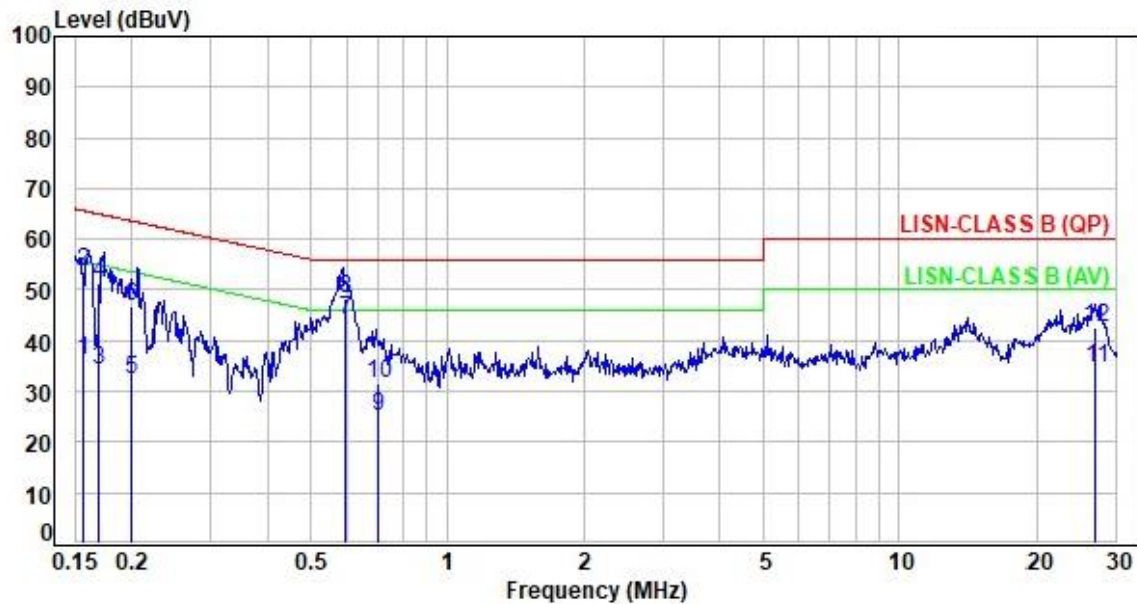

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.16	9.62	26.54	36.16	55.65	-19.49	Average	P
2	0.16	9.62	43.81	53.43	65.65	-12.22	QP	P
3	0.17	9.62	24.67	34.29	55.00	-20.71	Average	P
4	0.17	9.62	41.53	51.15	65.00	-13.85	QP	P
5	0.20	9.61	22.71	32.32	53.61	-21.29	Average	P
6	0.20	9.61	37.27	46.88	63.61	-16.73	QP	P
7	0.59	9.63	34.48	44.11	46.00	-1.89	Average	P
8	0.59	9.63	38.67	48.30	56.00	-7.70	QP	P
9	0.70	9.64	15.44	25.08	46.00	-20.92	Average	P
10	0.70	9.64	21.86	31.50	56.00	-24.50	QP	P
11	26.97	9.93	24.71	34.64	50.00	-15.36	Average	P
12	26.97	9.93	32.51	42.44	60.00	-17.56	QP	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



For Chip: WCN3680

Power	: AC 120V / 60Hz	Pol/Phase	: NEUTRAL
Test Mode	: Mode 4		:

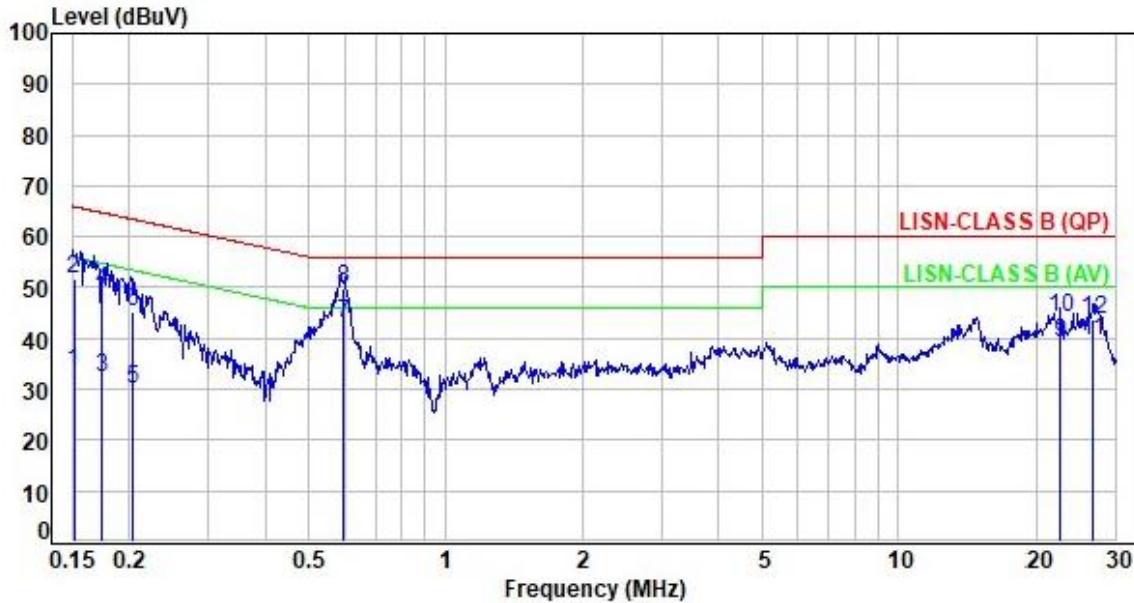

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.15	9.63	23.73	33.36	55.94	-22.58	Average	P
2	0.15	9.63	41.98	51.61	65.94	-14.33	QP	P
3	0.17	9.62	22.62	32.24	54.73	-22.49	Average	P
4	0.17	9.62	39.75	49.37	64.73	-15.36	QP	P
5	0.20	9.62	20.57	30.19	53.48	-23.29	Average	P
6	0.20	9.62	35.79	45.41	63.48	-18.07	QP	P
7	0.59	9.63	33.32	42.95	46.00	-3.05	Average	P
8	0.59	9.63	40.27	49.90	56.00	-6.10	QP	P
9	22.53	9.95	29.38	39.33	50.00	-10.67	Average	P
10	22.53	9.95	34.03	43.98	60.00	-16.02	QP	P
11	26.62	9.97	29.45	39.42	50.00	-10.58	Average	P
12	26.62	9.97	33.85	43.82	60.00	-16.18	QP	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



6. Test of Spurious Emission (Radiated)

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3



6.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.


Note:

- 1.The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.
- 2.Due to the test software function limit the operation band setting(200dBuV/m).
There's no corresponding limitation in the actual test item.




6.3 Typical Test Setup

Below 30MHz test setup

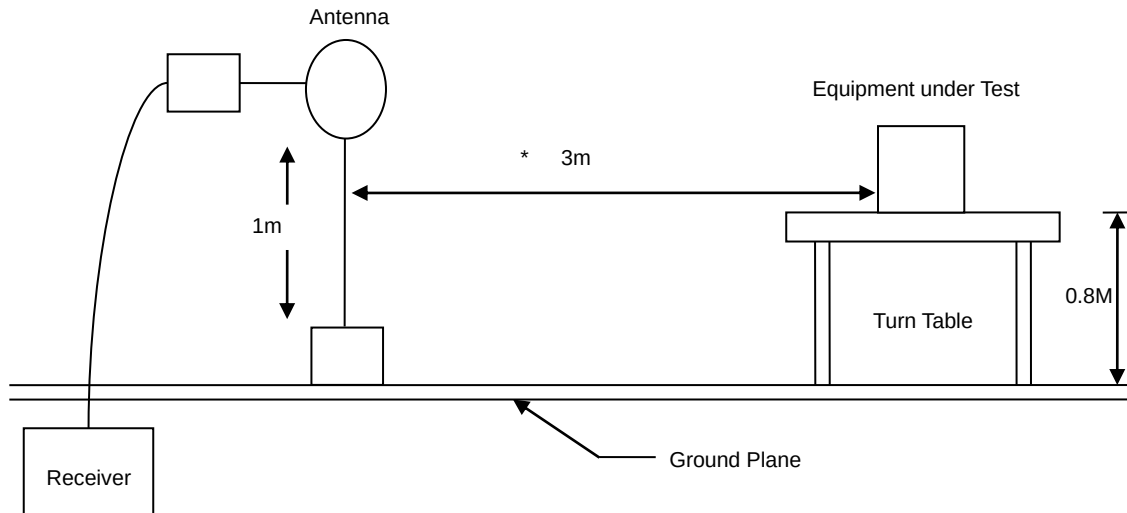


30MHz- 1GHz Test Setup

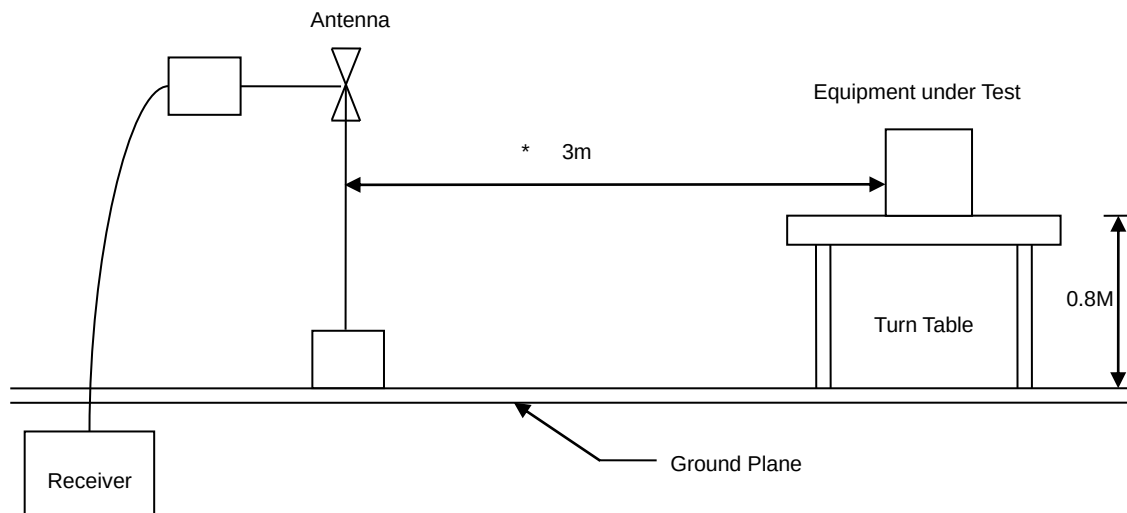



Above 1GHz Test Setup

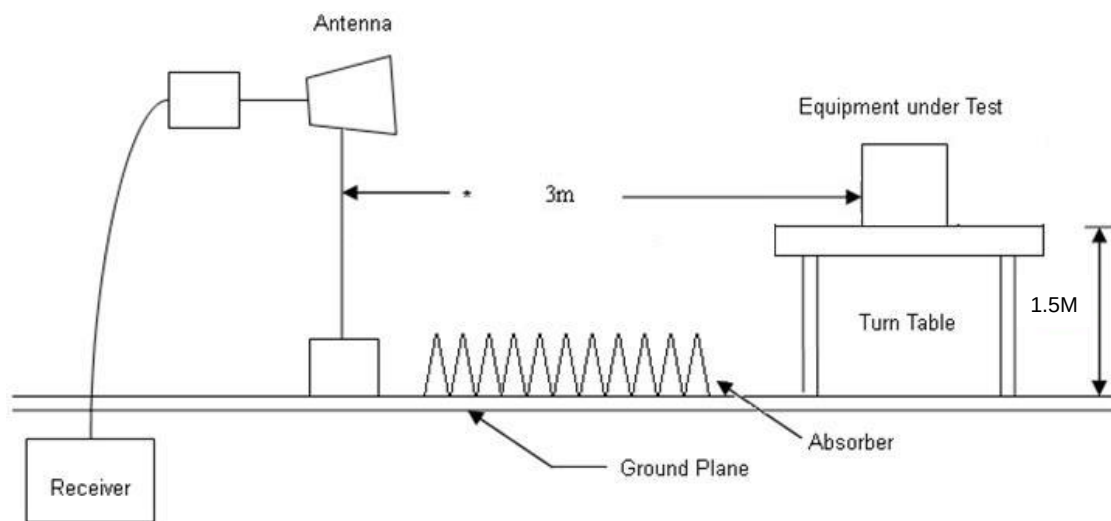




6.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

6.5 Test Result and Data (30MHz ~ 1GHz)

For Chip:Nordic

Power	:	AC 120V / 60Hz	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1		:	

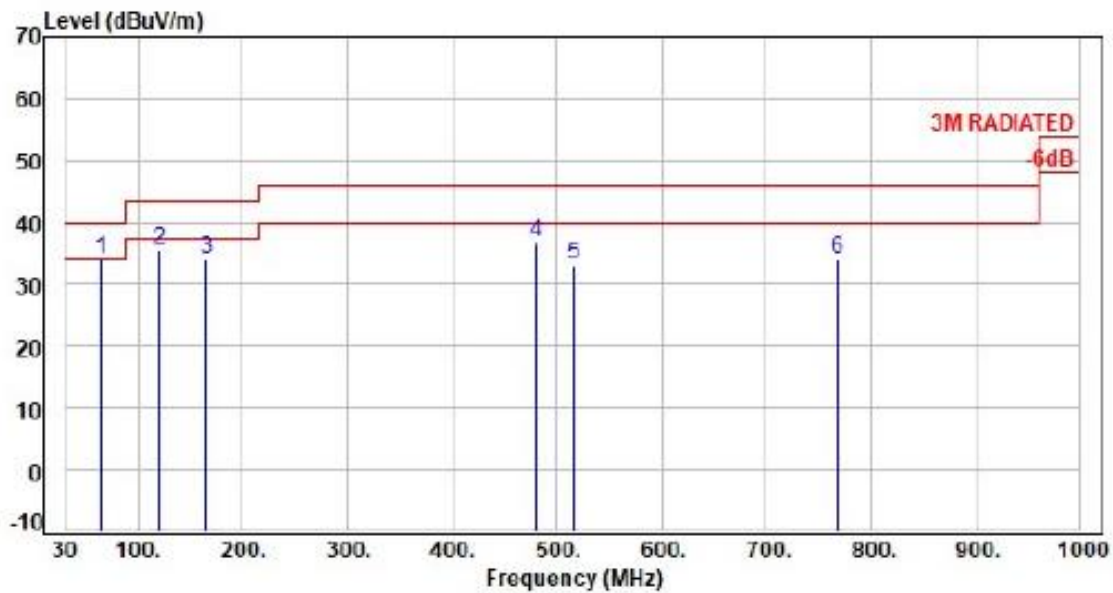

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	63.95	-16.13	50.09	33.96	40.00	-6.04	Peak	100	0	P
2	120.21	-9.86	45.36	35.50	43.50	-8.00	Peak	100	0	P
3	164.83	-11.19	45.15	33.96	43.50	-9.54	Peak	100	0	P
4	480.08	-4.12	41.03	36.91	46.00	-9.09	Peak	100	0	P
5	515.97	-3.88	37.18	33.30	46.00	-12.70	Peak	100	0	P
6	768.17	0.91	33.25	34.16	46.00	-11.84	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For Chip:Nordic

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1		:

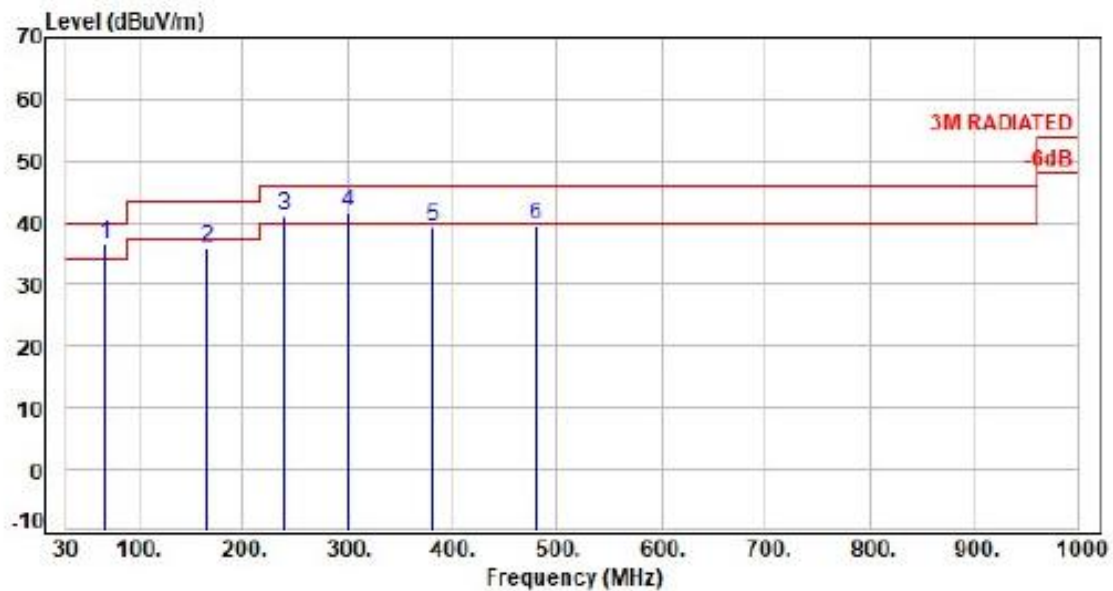

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	67.83	-15.82	52.29	36.47	40.00	-3.53	QP	274	152	P
2	164.83	-11.19	47.20	36.01	43.50	-7.49	Peak	100	360	P
3	239.52	-11.04	52.10	41.06	46.00	-4.94	Peak	100	360	P
4	299.66	-9.13	50.95	41.82	46.00	-4.18	Peak	100	360	P
5	381.14	-7.01	46.29	39.28	46.00	-6.72	Peak	100	360	P
6	480.08	-4.12	43.56	39.44	46.00	-6.56	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For Chip: WCN3680

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 3		:

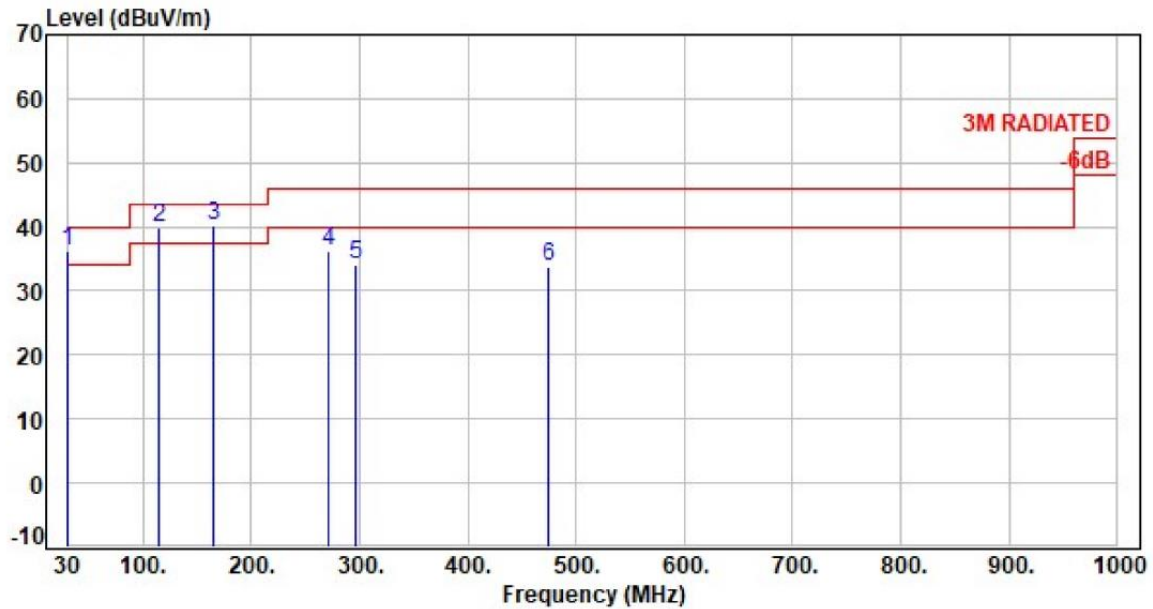

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	30.97	-3.17	39.29	36.12	40.00	-3.88	Peak	100	360	P
2	115.36	-10.39	50.26	39.87	43.50	-3.63	Peak	100	360	P
3	164.83	-11.19	51.50	40.31	43.50	-3.19	Peak	100	360	P
4	270.56	-9.58	45.96	36.38	46.00	-9.62	Peak	100	360	P
5	295.78	-9.16	43.33	34.17	46.00	-11.83	Peak	100	360	P
6	474.26	-4.48	38.23	33.75	46.00	-12.25	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For Chip: WCN3680

Power	:	AC 120V / 60Hz	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 3		:	

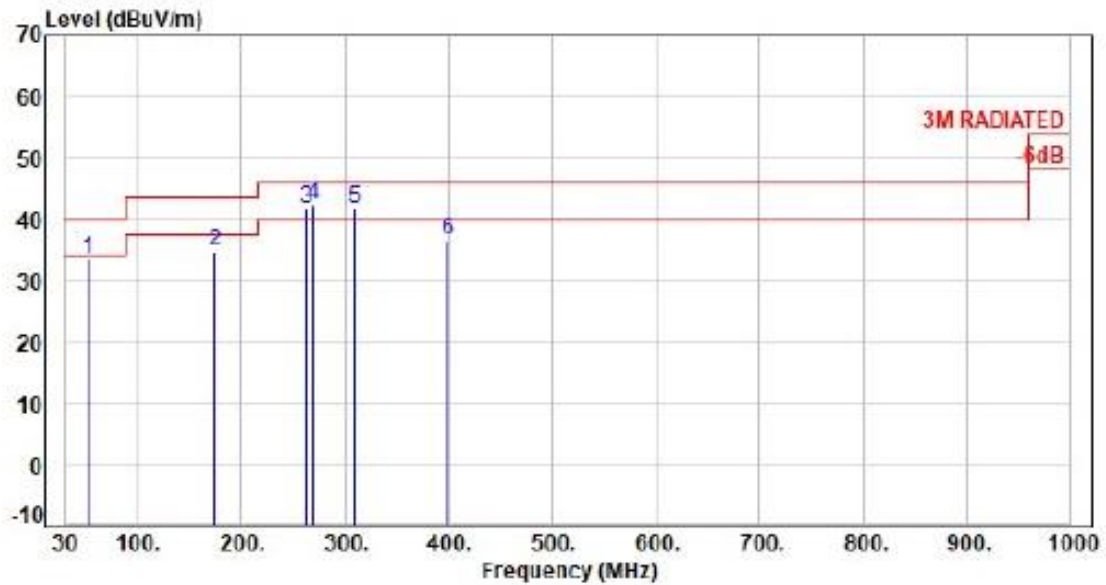

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	52.31	-16.52	50.08	33.56	40.00	-6.44	Peak	100	360	P
2	173.56	-11.77	46.50	34.73	43.50	-8.77	Peak	100	360	P
3	261.83	-9.97	51.80	41.83	46.00	-4.17	Peak	100	360	P
4	269.59	-9.60	52.01	42.41	46.00	-3.59	Peak	100	360	P
5	309.36	-8.73	50.40	41.67	46.00	-4.33	Peak	100	360	P
6	399.57	-6.46	43.01	36.55	46.00	-9.45	Peak	100	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



6.6 Test Result and Data (1GHz ~ 25GHz)

For Chip:Nordic

Power	:	AC 120V / 60Hz	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH00		:	

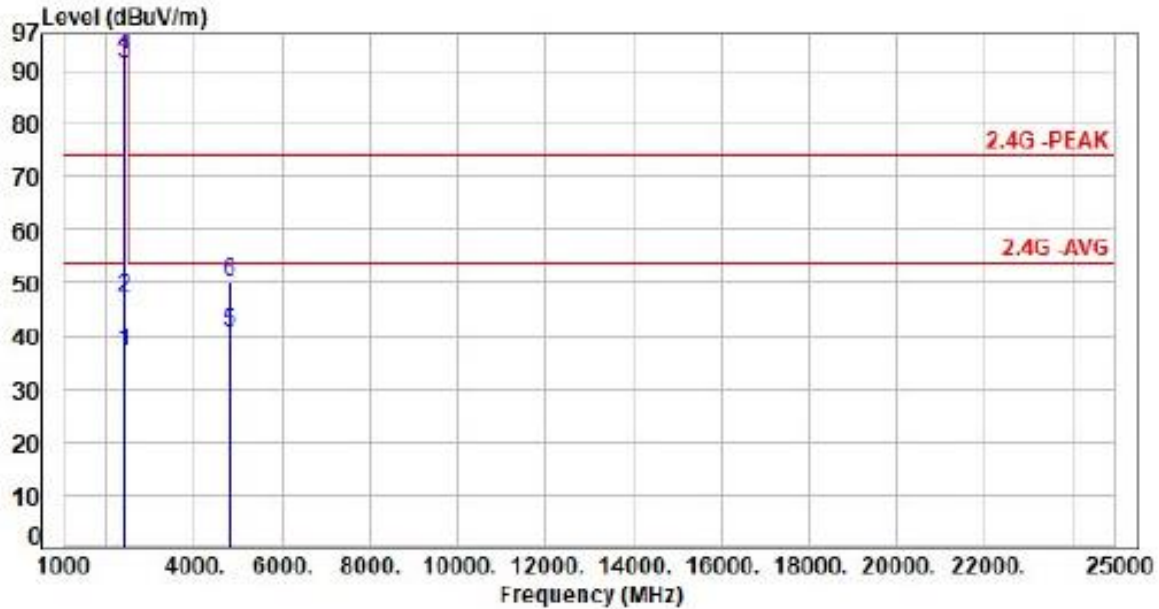

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-31.37	68.07	36.70	54.00	-17.30	Average	107	360	P
2	2390.00	-31.37	78.53	47.16	74.00	-26.84	Peak	107	360	P
3	2402.00	-31.40	122.92	91.52	200.00	-108.48	Average	107	360	P
4	2402.00	-31.40	124.27	92.87	200.00	-107.13	Peak	107	360	P
5	4804.00	-24.19	64.94	40.75	54.00	-13.25	Average	100	139	P
6	4804.00	-24.19	74.39	50.20	74.00	-23.80	Peak	100	139	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For Chip:Nordic

Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH00		:

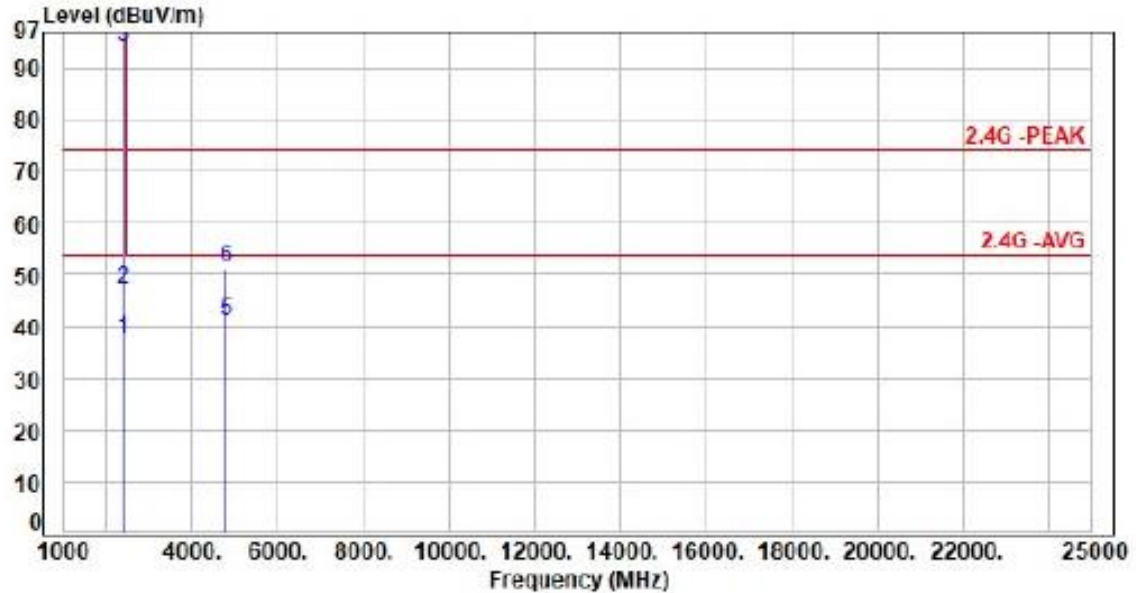

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-31.37	68.92	37.55	54.00	-16.45	Average	175	56	P
2	2390.00	-31.37	78.65	47.28	74.00	-26.72	Peak	175	56	P
3	2402.00	-31.40	125.57	94.17	200.00	-105.83	Average	175	56	P
4	2402.00	-31.40	126.90	95.50	200.00	-104.50	Peak	175	56	P
5	4804.00	-24.19	65.04	40.85	54.00	-13.15	Average	222	22	P
6	4804.00	-24.19	75.48	51.29	74.00	-22.71	Peak	222	22	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For Chip:Nordic

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH19		:

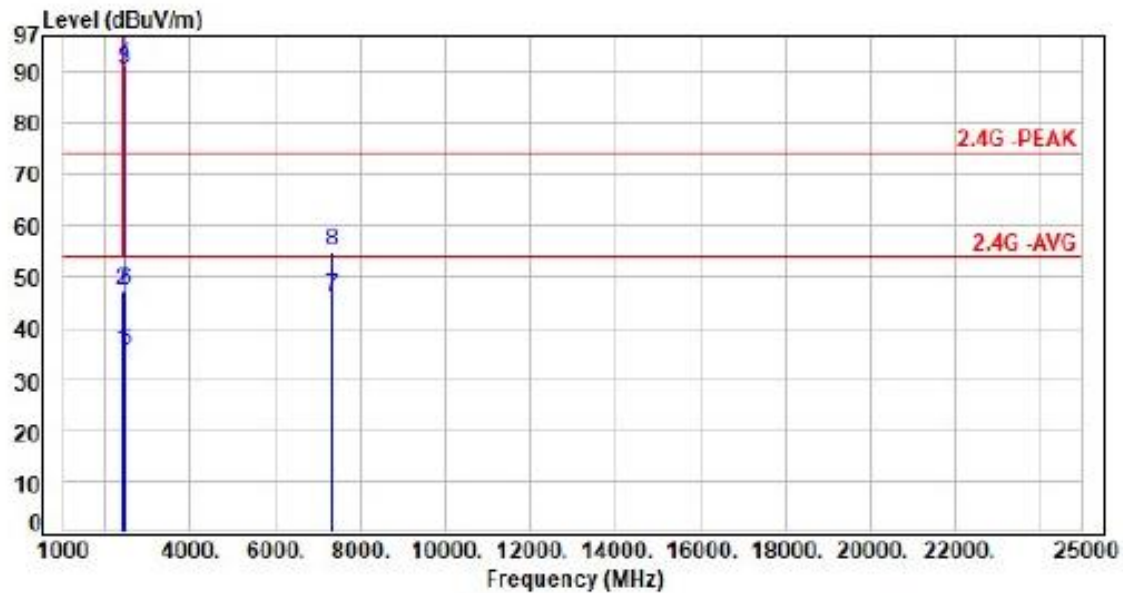

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-31.37	66.77	35.40	54.00	-18.60	Average	100	360	P
2	2390.00	-31.37	78.46	47.09	74.00	-26.91	Peak	100	360	P
3	2440.00	-31.45	121.71	90.26	200.00	-109.74	Average	100	360	P
4	2440.00	-31.45	123.04	91.59	200.00	-108.41	Peak	100	360	P
5	2483.50	-31.51	66.75	35.24	54.00	-18.76	Average	100	360	P
6	2483.50	-31.51	78.89	47.38	74.00	-26.62	Peak	100	360	P
7	7320.00	-18.77	64.76	45.99	54.00	-8.01	Average	100	206	P
8	7320.00	-18.77	73.58	54.81	74.00	-19.19	Peak	100	206	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For Chip:Nordic

Power	:	AC 120V / 60Hz	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1, CH19		:	

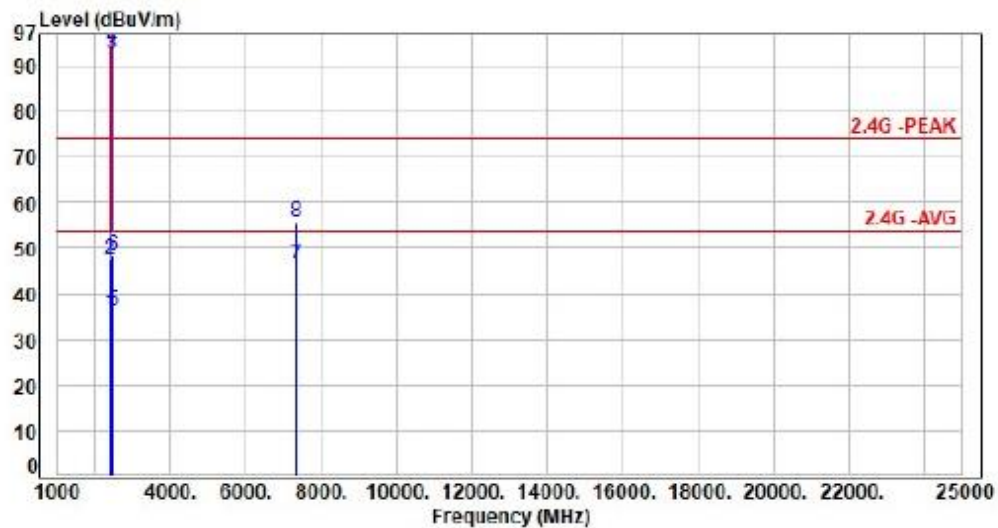

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-31.37	67.19	35.82	54.00	-18.18	Average	195	63	P
2	2390.00	-31.37	78.87	47.50	74.00	-26.50	Peak	195	63	P
3	2440.00	-31.45	124.00	92.64	200.00	-107.36	Average	195	63	P
4	2440.00	-31.45	125.50	94.05	200.00	-105.95	Peak	195	63	P
5	2483.50	-31.51	67.66	36.15	54.00	-17.85	Average	195	63	P
6	2483.50	-31.51	79.98	48.47	74.00	-25.53	Peak	195	63	P
7	7320.00	-18.77	65.40	46.63	54.00	-7.37	Average	100	131	P
8	7320.00	-18.77	74.51	55.74	74.00	-18.26	Peak	100	131	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For Chip:Nordic

Power	:	AC 120V / 60Hz	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH39		:	

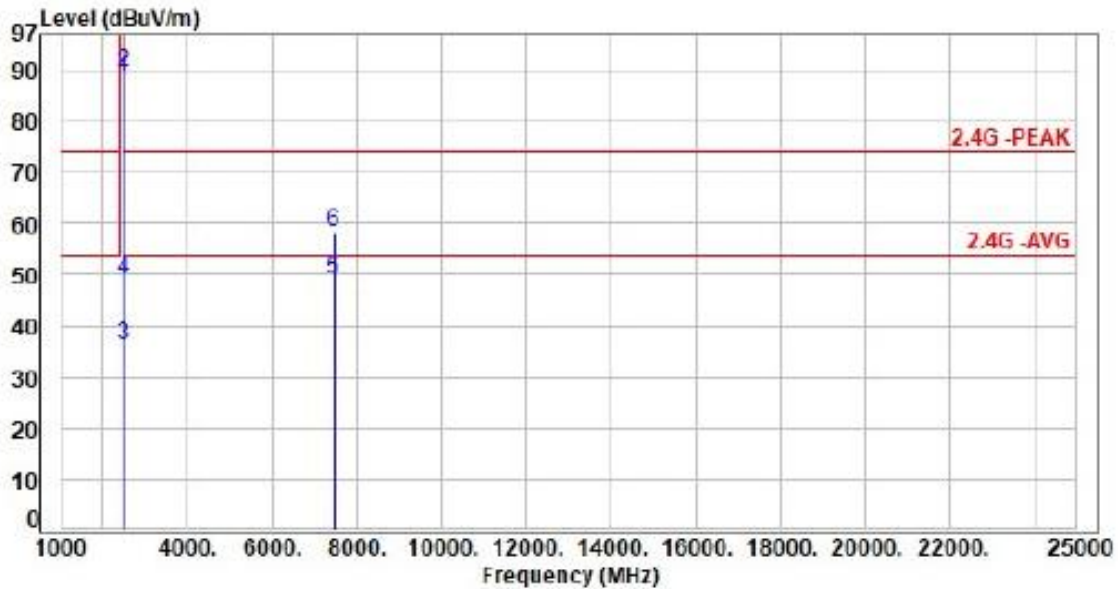

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2480.00	-31.50	119.87	88.37	200.00	-111.63	Average	100	359	P
2	2480.00	-31.50	121.03	89.53	200.00	-110.47	Peak	100	359	P
3	2483.50	-31.51	67.56	36.05	54.00	-17.95	Average	100	359	P
4	2483.50	-31.51	80.51	49.00	74.00	-25.00	Peak	100	359	P
5	7440.00	-18.84	67.72	48.88	54.00	-5.12	Average	100	203	P
6	7440.00	-18.84	77.20	58.36	74.00	-15.64	Peak	100	203	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For Chip:Nordic

Power	:	AC 120V / 60Hz	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1, CH39		:	

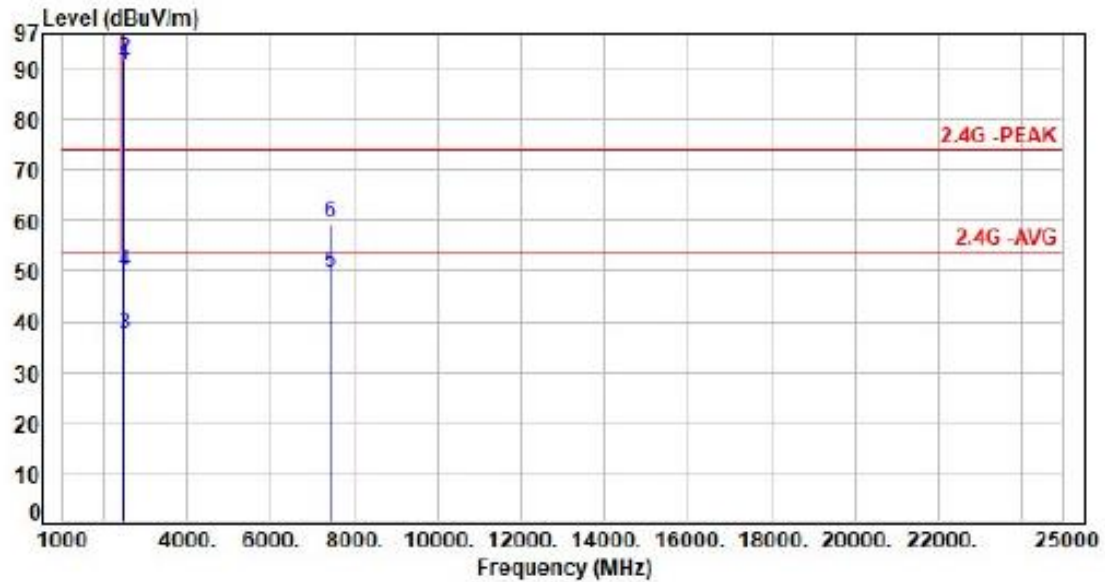

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2480.00	-31.50	122.23	90.73	200.00	-109.27	Average	144	60	P
2	2480.00	-31.50	123.51	92.01	200.00	-107.99	Peak	144	60	P
3	2483.50	-31.51	68.60	37.09	54.00	-16.91	Average	144	60	P
4	2483.50	-31.51	81.24	49.73	74.00	-24.27	Peak	144	60	P
5	7440.00	-18.84	68.39	49.55	54.00	-4.45	Average	100	153	P
6	7440.00	-18.84	78.30	59.46	74.00	-14.54	Peak	100	153	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For Chip: WCN3680

Power	:	AC 120V / 60Hz	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 3, CH00		:	

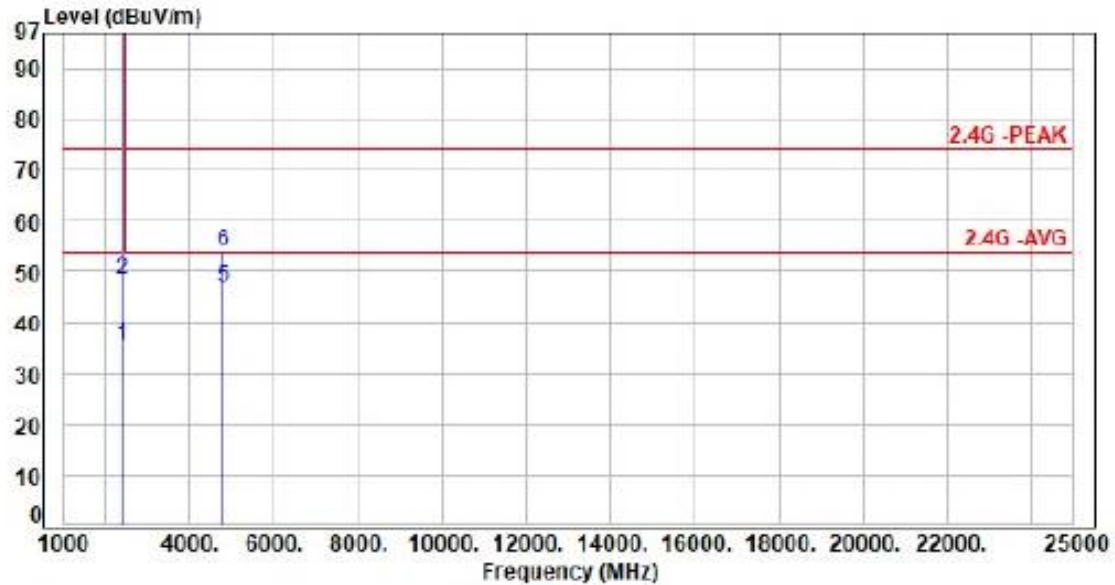

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2398.00	-31.37	66.85	35.48	54.00	-18.52	Average	100	350	P
2	2398.00	-31.37	79.63	48.26	74.00	-25.74	Peak	100	350	P
3	2402.00	-31.40	129.47	98.07	200.00	-101.93	Average	100	350	P
4	2402.00	-31.40	130.95	99.55	200.00	-100.45	Peak	100	350	P
5	4804.00	-24.19	71.03	46.84	54.00	-7.16	Average	362	209	P
6	4804.00	-24.19	77.94	53.75	74.00	-20.25	Peak	362	209	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For Chip: WCN3680

Power	:	AC 120V / 60Hz	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 3, CH00		:	

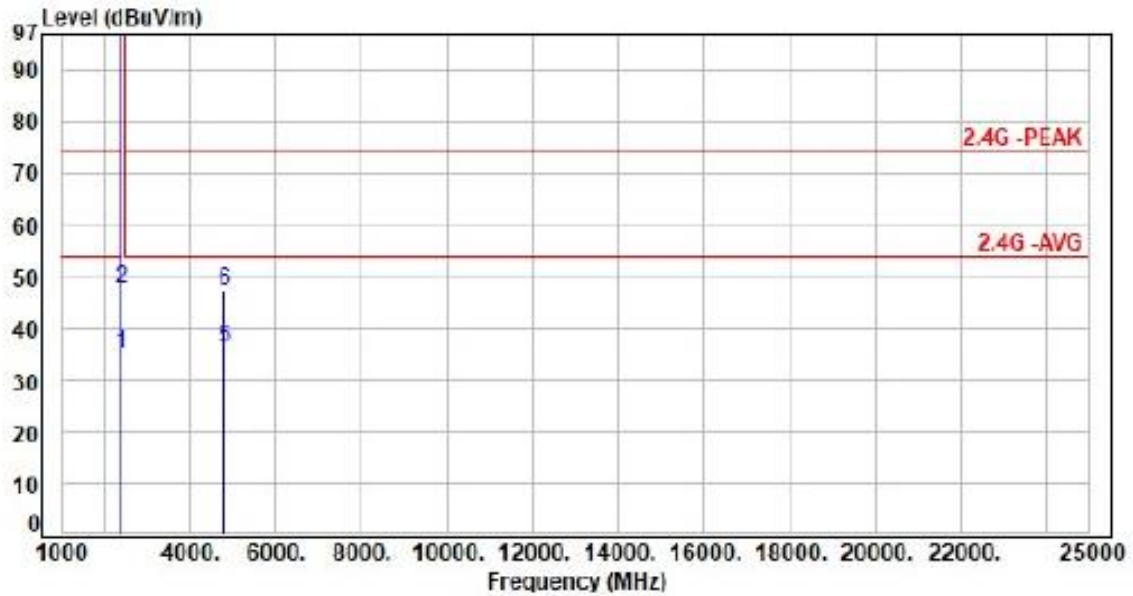

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-31.37	65.35	34.98	54.00	-19.02	Average	276	206	P
2	2390.00	-31.37	78.92	47.55	74.00	-26.45	Peak	276	206	P
3	2402.00	-31.40	129.22	97.82	200.00	-102.18	Average	276	206	P
4	2402.00	-31.40	130.64	99.24	200.00	-100.76	Peak	276	206	P
5	4804.00	-24.19	60.15	35.96	54.00	-18.04	Average	100	123	P
6	4804.00	-24.19	71.50	47.31	74.00	-26.69	Peak	100	123	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For Chip: WCN3680

Power	:	AC 120V / 60Hz	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 3, CH19		:	

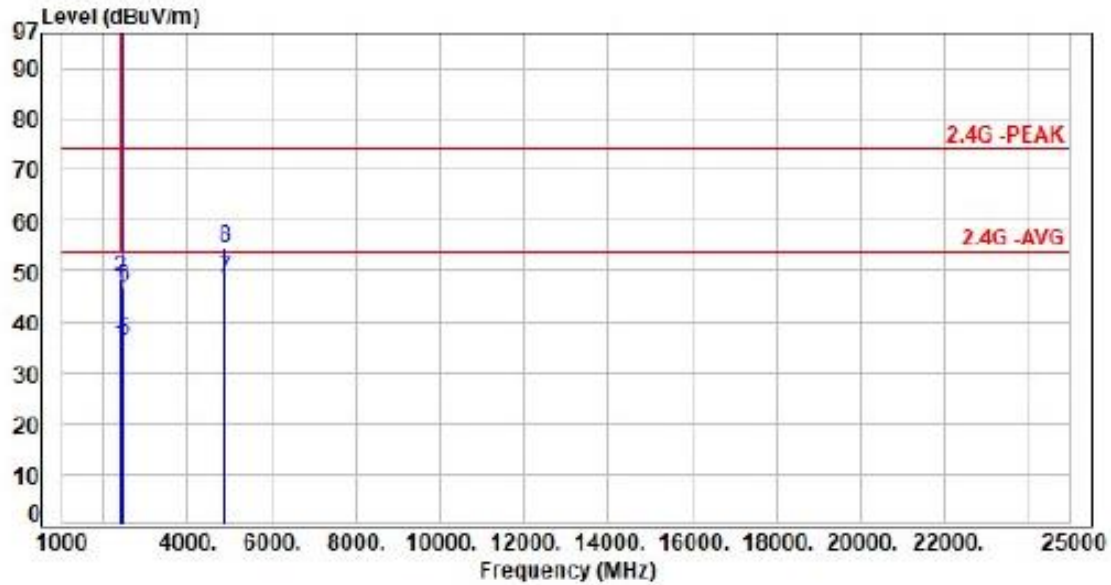

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-31.37	66.81	35.44	54.00	-18.56	Average	100	358	P
2	2390.00	-31.37	79.94	48.57	74.00	-25.43	Peak	100	358	P
3	2440.00	-31.45	129.50	98.05	200.00	-101.95	Average	100	358	P
4	2440.00	-31.45	130.99	99.54	200.00	-100.46	Peak	100	358	P
5	2483.50	-31.51	67.54	36.03	54.00	-17.97	Average	100	358	P
6	2483.50	-31.51	78.36	46.85	74.00	-27.15	Peak	100	358	P
7	4880.00	-23.85	72.10	48.25	54.00	-5.75	Average	371	208	P
8	4880.00	-23.85	78.50	54.65	74.00	-19.35	Peak	371	208	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For Chip: WCN3680

Power	:	AC 120V / 60Hz	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 3, CH19		:	

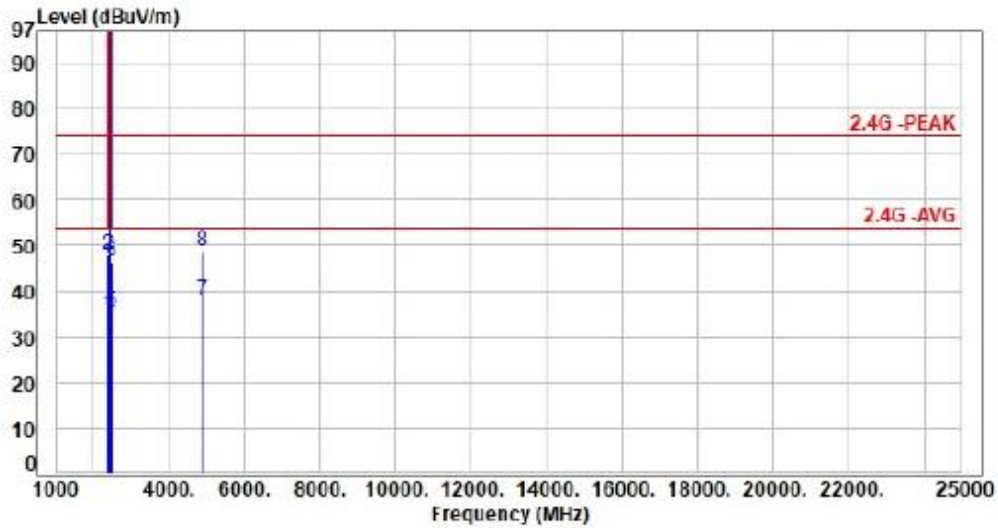

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-31.37	66.52	35.15	54.00	-18.85	Average	213	163	P
2	2390.00	-31.37	79.19	47.82	74.00	-26.18	Peak	213	163	P
3	2440.00	-31.45	128.85	97.40	200.00	-102.60	Average	213	163	P
4	2440.00	-31.45	130.26	98.81	200.00	-101.19	Peak	213	163	P
5	2483.50	-31.51	66.75	35.24	54.00	-18.76	Average	213	163	P
6	2483.50	-31.51	77.85	46.34	74.00	-27.66	Peak	213	163	P
7	4880.00	-23.85	62.02	38.17	54.00	-15.83	Average	100	122	P
8	4880.00	-23.85	72.52	48.67	74.00	-25.33	Peak	100	122	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For Chip: WCN3680

Power	:	AC 120V / 60Hz	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 3, CH39		:	

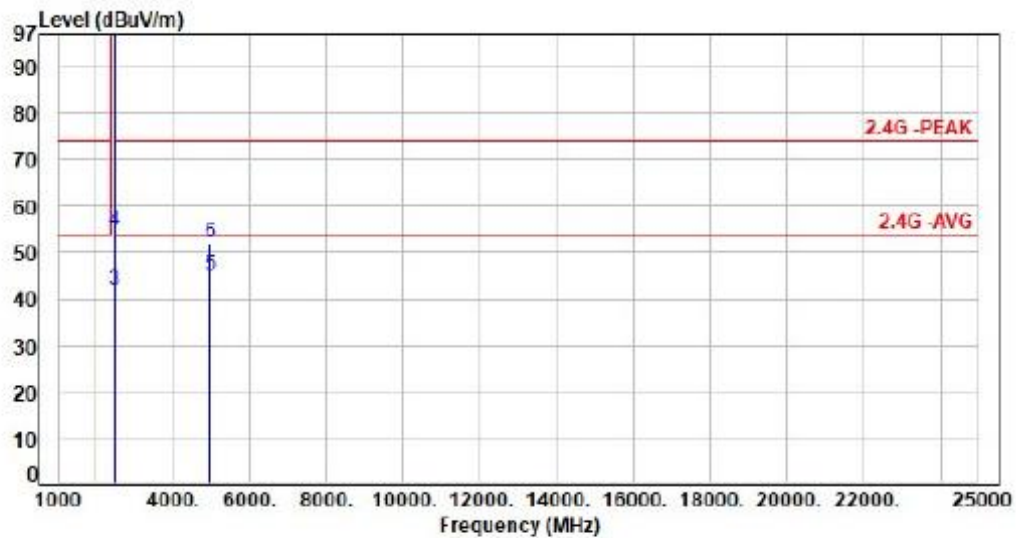

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2480.00	-31.50	129.49	97.99	200.00	-102.01	Average	100	351	P
2	2480.00	-31.50	130.94	99.44	200.00	-100.56	Peak	100	351	P
3	2483.50	-31.51	73.11	41.60	54.00	-12.40	Average	100	351	P
4	2483.50	-31.51	86.10	54.59	74.00	-19.41	Peak	100	351	P
5	4960.00	-23.60	68.73	45.13	54.00	-8.87	Average	384	212	P
6	4960.00	-23.60	75.50	51.90	74.00	-22.10	Peak	384	212	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For Chip: WCN3680

Power	:	AC 120V / 60Hz	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 3, CH39		:	

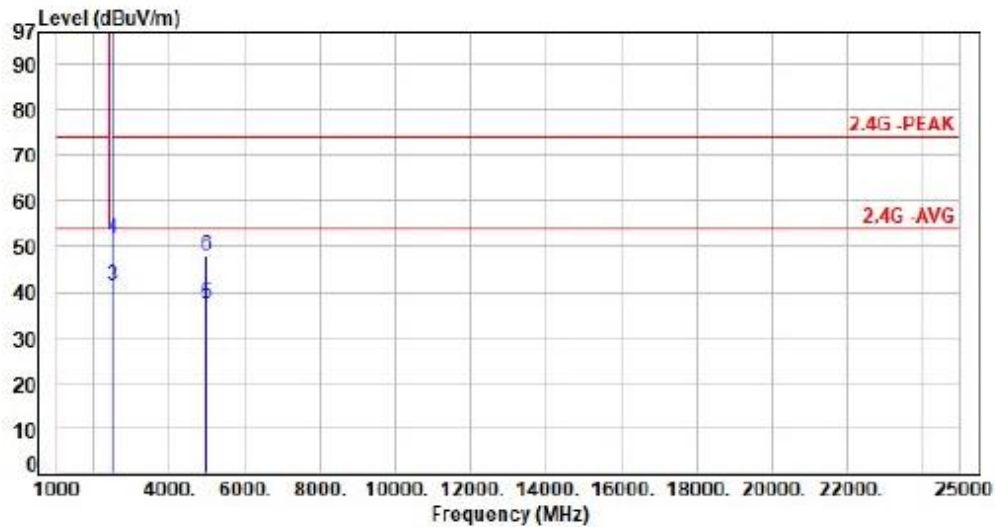

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2480.00	-31.50	129.04	97.54	200.00	-102.46	Average	204	163	P
2	2480.00	-31.50	130.43	98.93	200.00	-101.07	Peak	204	163	P
3	2483.50	-31.51	72.65	41.14	54.00	-12.86	Average	204	163	P
4	2483.50	-31.51	83.08	51.57	74.00	-22.43	Peak	204	163	P
5	4960.00	-23.60	60.71	37.11	54.00	-16.89	Average	100	129	P
6	4960.00	-23.60	71.44	47.84	74.00	-26.16	Peak	100	129	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. Test of Spurious Emission (Conducted)

7.1 Test Limit

According to the methods defined in ANSI C63.10-2013 Section 11.11.1


Below –30dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

7.2 Test Procedure

According to the methods defined in ANSI C63.10-2013 Section 11.11.2 & 11.11.3

- The transmitter output was connected to the spectrum analyzer via a low loss cable.
- Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 30dB relative to the maximum measured in-band peak PSD level.
- The band edges was measured and recorded.

7.3 Test Setup Layout




7.4 Test Result and Data



Note: Test plots refer to the following pages.



For Chip:Nordic
Modulation Type: GFSK(1Mbps)
CH00



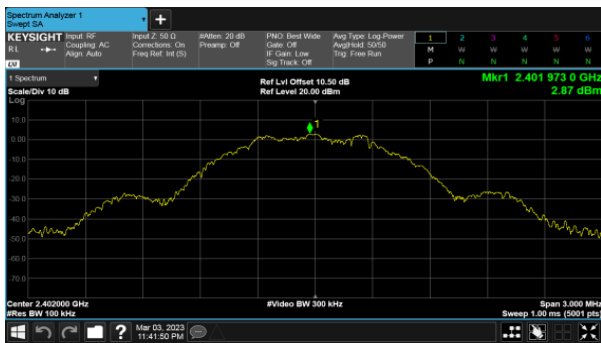


Modulation Type: GFSK(1Mbps)
CH19

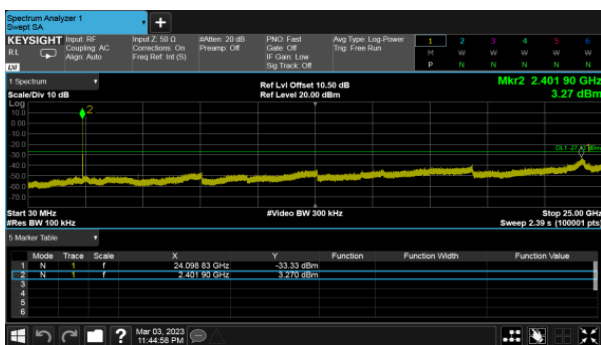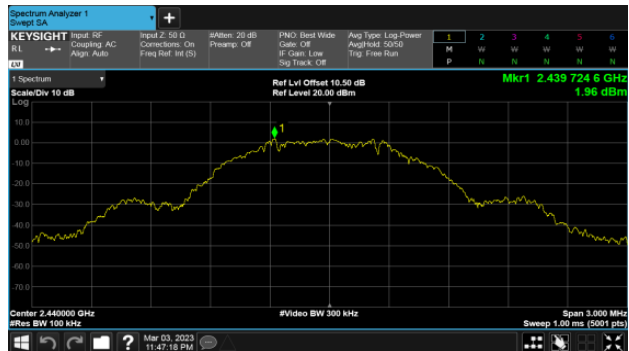




For Chip:Nordic
Modulation Type: GFSK(1Mbps)
CH39

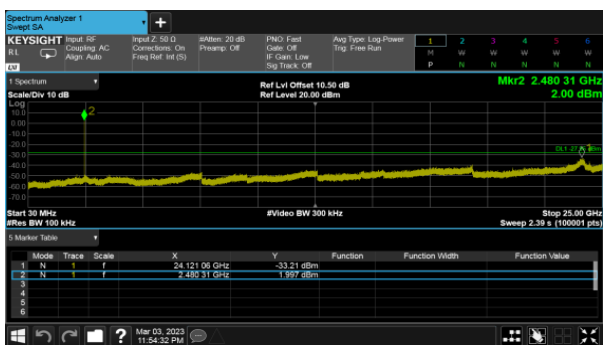
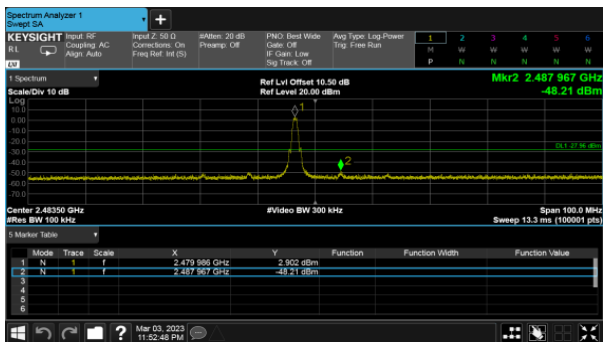
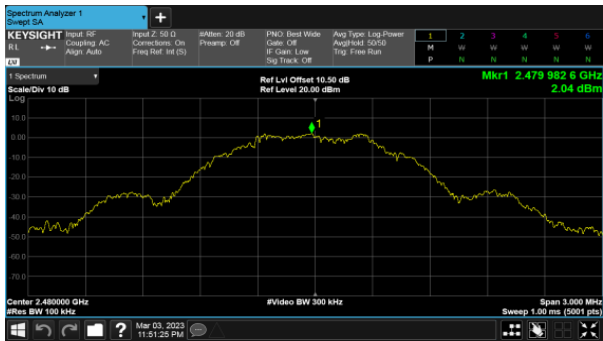




For Chip: WCN3680
Modulation Type: GFSK(1Mbps)
CH00


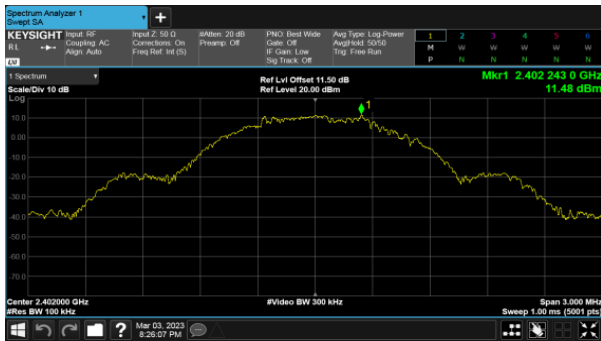


Modulation Type: GFSK(1Mbps)
CH19

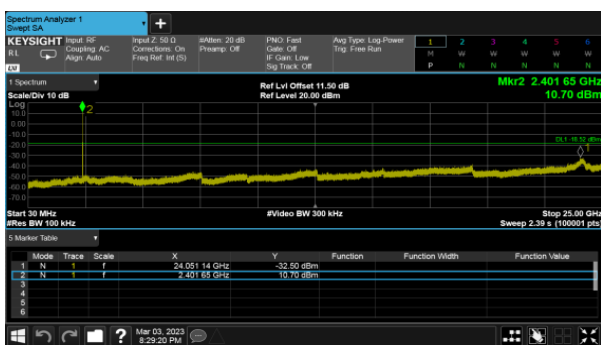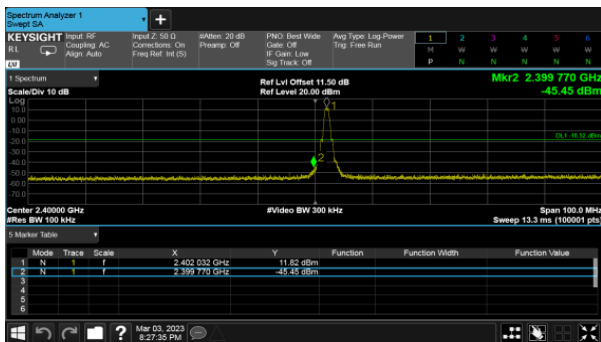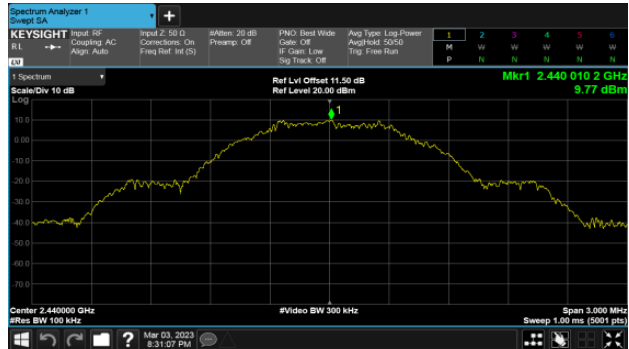



For Chip: WCN3680
Modulation Type: GFSK(1Mbps)
CH39

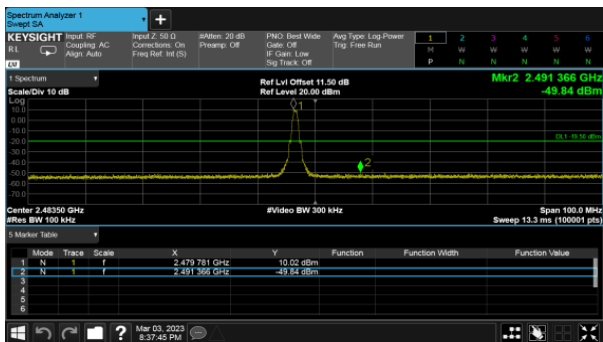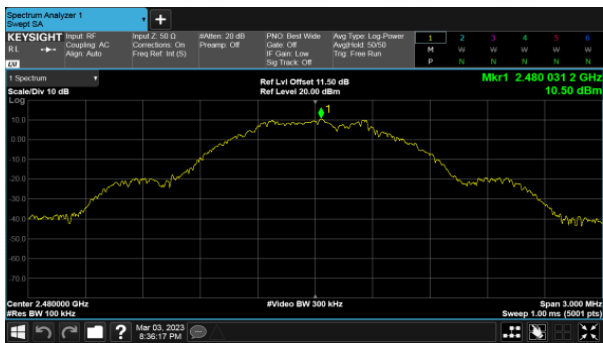



8. On Time, Duty Cycle and Measurement methods


8.1 Test Limit

None; for reporting purposes only.

8.2 Test Procedure

According to the methods defined in ANSI C63.10-2013 Section 11.6
Zero-Span Spectrum Analyzer Method.

8.3 Test Setup Layout



8.4 Test Result and Data

For Chip:Nordic


Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
GFSK(1MBps)	0.40	0.63	63.63%

For Chip: WCN3680


Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
GFSK(1MBps)	0.41	0.63	65.54%



For Chip:Nordic
Modulation Type: GFSK(1Mbps)

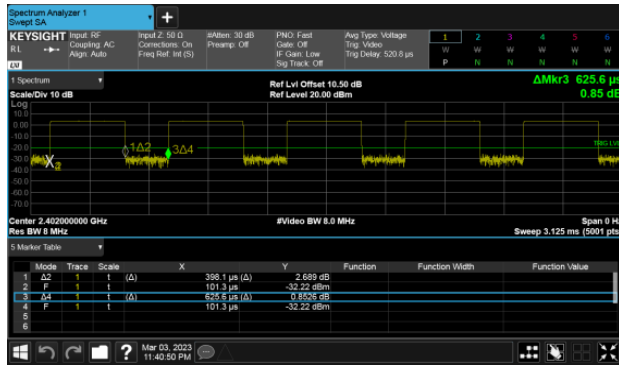

For Chip: WCN3680
Modulation Type: GFSK(1Mbps)

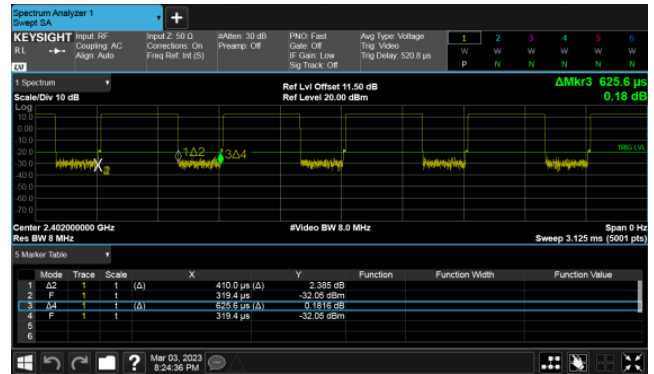



9. 6dB Bandwidth Measurement Data

9.1 Test Limit


The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

9.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.8

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
- The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- The 6dB Bandwidth was measured and recorded.

9.3 Test Setup Layout



9.4 Test Result and Data

For Chip:Nordic


Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (KHz)	Limit (KHz)
GFSK(1Mbps)	0	2402	689.50	500
	19	2440	693.70	500
	39	2480	682.00	500

For Chip:
WCN3680






Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (KHz)	Limit (KHz)
GFSK(1Mbps)	0	2402	681.60	500
	19	2440	691.70	500
	39	2480	688.80	500



For Chip:Nordic

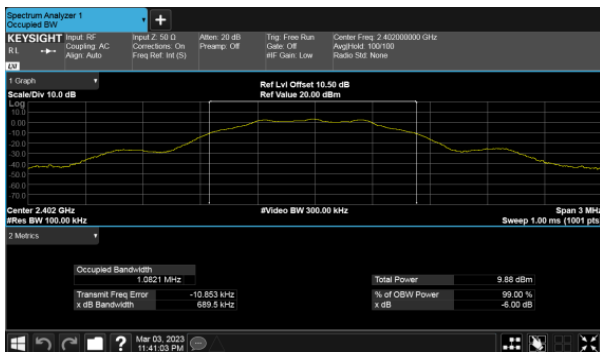Modulation Type: GFSK(1Mbps)
CH00

For Chip: WCN3680

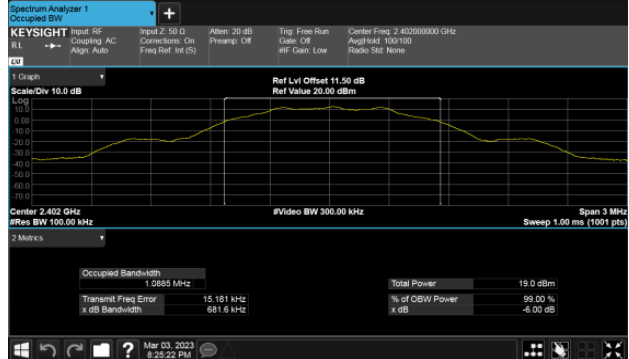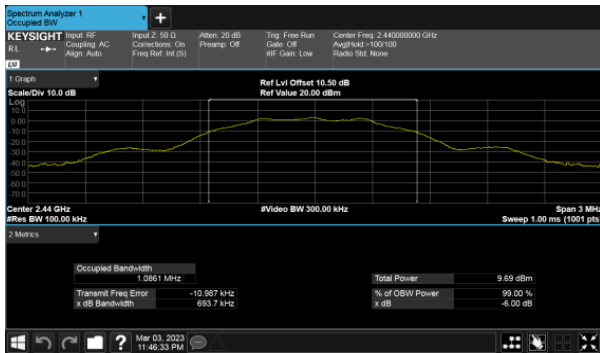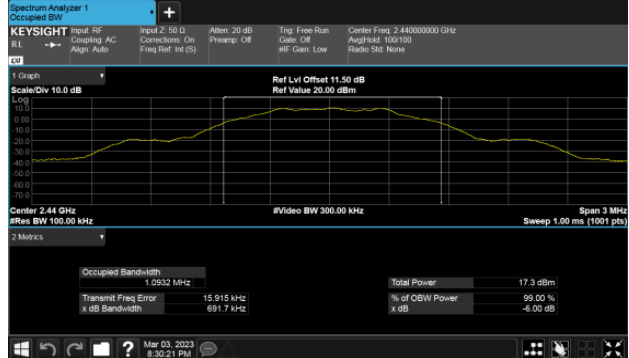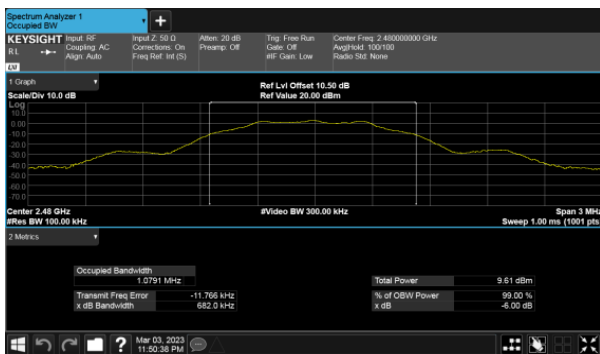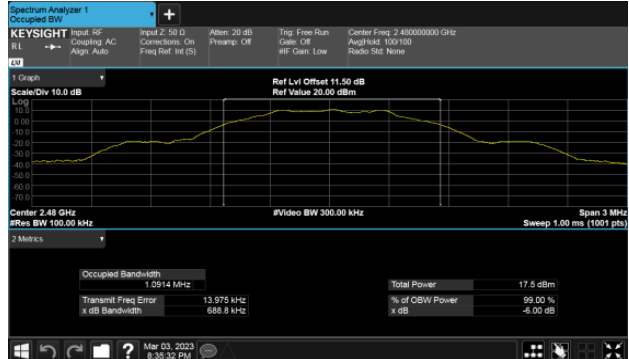Modulation Type: GFSK(1Mbps)
CH00Modulation Type: GFSK(1Mbps)
CH19Modulation Type: GFSK(1Mbps)
CH19Modulation Type: GFSK(1Mbps)
CH39Modulation Type: GFSK(1Mbps)
CH39



10. Maximum Average Output Power

10.1 Test Limit


The Maximum Output Power Measurement is 30dBm.

10.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.9.2.3.2

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

10.3 Test Setup Layout



**10.4 Test Result and Data**

For Chip:Nordic

(1M bps)

Power Set	Modulation Type	Channel	Frequency (MHz)	Power Output (dBm)	Power Output (mW)
				Average	Average
Default	GFSK	0	2402	3.68	2.33
Default		19	2440	3.50	2.24
Default		39	2480	3.27	2.12

For Chip: WCN3680

(1M bps)

Power Set	Modulation Type	Channel	Frequency (MHz)	Power Output (dBm)	Power Output (mW)
				Average	Average
Default	GFSK	0	2402	12.95	19.724
Default		19	2440	11.14	13.002
Default		39	2480	11.25	13.335



11. Power Spectral Density

11.1 Test Limit


The Maximum of Power Spectral Density Measurement is 8dBm.

If transmitting antennas of directional gain greater than 6 dBi are used, the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

11.2 Test Procedures

According to the methods defined in ANSI C63.10-2013 Section 11.10.1

11.3 Test Setup Layout



11.4 Test Result and Data

For Chip:Nordic


Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 10KHz Bandwidth(dBm)	Limit
GFSK(1Mbps)	0	2402	-13.814	8.00
	19	2440	-13.978	8.00
	39	2480	-14.119	8.00

For Chip: WCN3680





Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 10KHz Bandwidth(dBm)	Limit
GFSK(1Mbps)	0	2402	-4.36	8.00
	19	2440	-6.002	8.00
	39	2480	-5.722	8.00



For Chip: Nordic

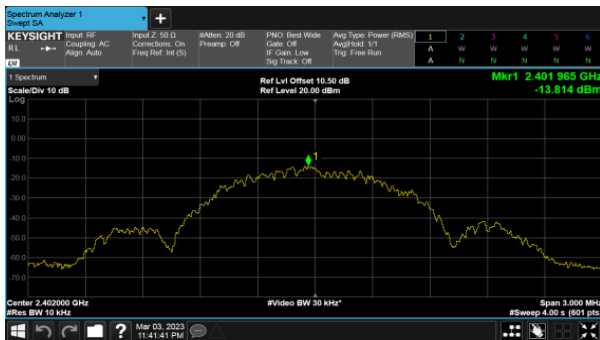Modulation Type: GFSK(1Mbps)
CH00

For Chip: WCN3680

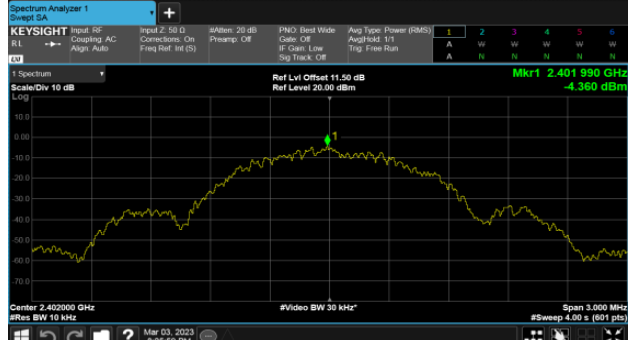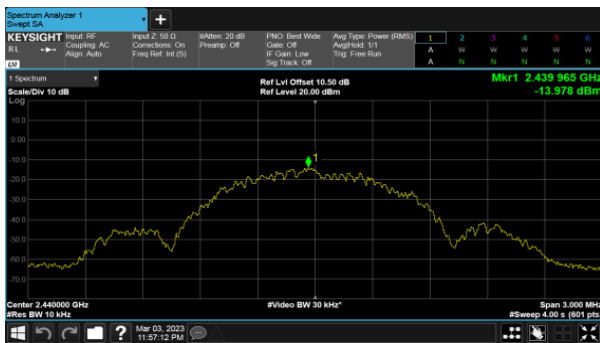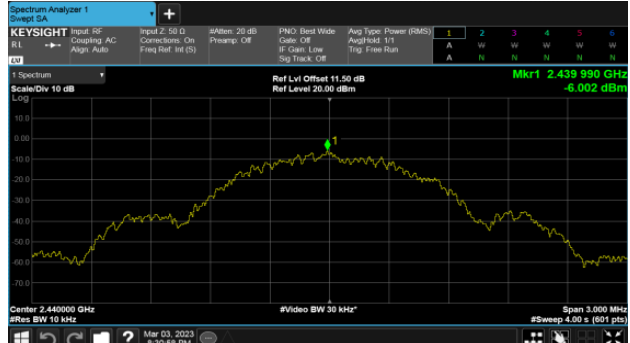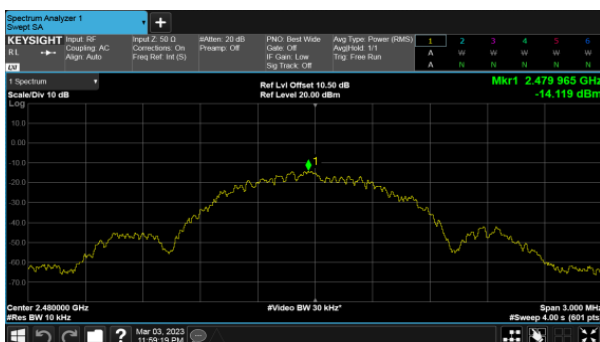Modulation Type: GFSK(1Mbps)
CH00Modulation Type: GFSK(1Mbps)
CH19Modulation Type: GFSK(1Mbps)
CH19Modulation Type: GFSK(1Mbps)
CH39Modulation Type: GFSK(1Mbps)
CH39