

# RF Test Report

## For

### Globe Electric Company Inc.

|                       |                                                      |
|-----------------------|------------------------------------------------------|
| Test Standards:       | Part 15C Subpart C §15.247<br><u>RSS 247 Issue 2</u> |
| Product Description:  | <u>Wifi LED lamp</u>                                 |
| Tested Model:         | <u>34225</u>                                         |
| Additional Model No.: | <u>34224</u>                                         |
| Brand Name:           | <u>Globe</u>                                         |
| FCC ID:               | <u>2AQUQGB34225</u>                                  |
| IC:                   | <u>8290A-GB34225</u>                                 |
| Classification        | <u>Digital Spread Spectrum (DSS)</u>                 |
| Report No.:           | <u>EC2011051RF03</u>                                 |
| Tested Date:          | <u>2020-11-25 to 2020-12-18</u>                      |
| Issued Date:          | <u>2020-12-18</u>                                    |
| Prepared By:          | <u>Jack Liu.</u><br>Jack Liu / Engineer              |
| Approved By:          | <u>Tiny-yang</u><br>Tiny Yang / RF Manager           |

**Hunan Ecloud Testing Technology Co., Ltd.**  
Building A1, Changsha E Center, No. 18 Xiangtai Avenue, Liuyang Economic and  
Technological Development Zone, Hunan, P.R.C  
Tel.: +86-731-89634887 Fax.: +86-731-89634887  
[www.hn-ecloud.com](http://www.hn-ecloud.com)

Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Hunan Ecloud Testing Technology Co., Ltd., the test report shall not be reproduced except in full.

## Report Revise Record

| Report Version | Revise Time | Issued Date | Valid Version | Notes           |
|----------------|-------------|-------------|---------------|-----------------|
| V1.0           | /           | 2020.12.18  | Valid         | Original Report |

## TABLE OF CONTENTS

|          |                                                             |            |
|----------|-------------------------------------------------------------|------------|
| <b>1</b> | <b>TEST LABORATORY .....</b>                                | <b>5</b>   |
| 1.1      | Test facility .....                                         | 5          |
| <b>2</b> | <b>GENERAL DESCRIPTION.....</b>                             | <b>6</b>   |
| 2.1      | Applicant .....                                             | 6          |
| 2.2      | Manufacturer .....                                          | 6          |
| 2.3      | General Description Of EUT .....                            | 6          |
| 2.4      | Modification of EUT .....                                   | 7          |
| 2.5      | Applicable Standards .....                                  | 7          |
| <b>3</b> | <b>TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b>      | <b>8</b>   |
| 3.1      | Descriptions of Test Mode .....                             | 8          |
| 3.2      | Test Mode .....                                             | 8          |
| 3.3      | Support Equipment .....                                     | 10         |
| 3.4      | Test Setup .....                                            | 10         |
| 3.5      | Measurement Results Explanation Example .....               | 13         |
| <b>4</b> | <b>TEST RESULT .....</b>                                    | <b>14</b>  |
| 4.1      | 20dB and 99% Bandwidth Measurement .....                    | 14         |
| 4.2      | Peak Output Power Measurement .....                         | 15         |
| 4.3      | Carrier Frequency Separation Measurement .....              | 16         |
| 4.4      | Time of Occupancy Measurement.....                          | 17         |
| 4.5      | Number of Hopping Channels Measurement .....                | 18         |
| 4.6      | Conducted Band Edges Measurement.....                       | 19         |
| 4.7      | Conducted Spurious Emission Measurement .....               | 20         |
| 4.8      | Radiated Band Edges and Spurious Emission Measurement ..... | 21         |
| 4.9      | AC Conducted Emission Measurement.....                      | 46         |
| 4.10     | Antenna Requirements .....                                  | 49         |
| <b>5</b> | <b>LIST OF MEASURING EQUIPMENT.....</b>                     | <b>50</b>  |
| <b>6</b> | <b>UNCERTAINTY OF EVALUATION.....</b>                       | <b>52</b>  |
|          | <b>Appendix A: 20dB Emission Bandwidth .....</b>            | <b>53</b>  |
|          | <b>Appendix B: Occupied Channel Bandwidth .....</b>         | <b>59</b>  |
|          | <b>Appendix C: Maximum conducted output power .....</b>     | <b>65</b>  |
|          | <b>Appendix D: Carrier frequency separation .....</b>       | <b>71</b>  |
|          | <b>Appendix E: Time of occupancy .....</b>                  | <b>74</b>  |
|          | <b>Appendix F: Number of hopping channels .....</b>         | <b>82</b>  |
|          | <b>Appendix G: Band edge measurements .....</b>             | <b>85</b>  |
|          | <b>Appendix H: Conducted Spurious Emission.....</b>         | <b>92</b>  |
|          | <b>Appendix I. Setup Photographs .....</b>                  | <b>107</b> |

## Summary of Test Result

| FCC Rule              | IC Rule           | Description                                              | Limit                                                                   | Result | Remark                                  |
|-----------------------|-------------------|----------------------------------------------------------|-------------------------------------------------------------------------|--------|-----------------------------------------|
| 15.247(a)(1)          | RSS-247<br>5.1(a) | 20dB Bandwidth                                           | NA                                                                      | Pass   | -                                       |
| -                     | RSS-Gen<br>6.7    | 99% Bandwidth                                            | -                                                                       | Pass   | -                                       |
| 15.247(a)(1)          | RSS-247<br>5.1(b) | Hopping Channel<br>Separation                            | $\geq 2/3$ of 20dB BW                                                   | Pass   | -                                       |
| 15.247(a)(1)          | RSS-247<br>5.1(d) | Number of Channels                                       | $\geq 15$ Chs                                                           | Pass   | -                                       |
| 15.247(a)(1)          | RSS-247<br>5.1(d) | Average Time of<br>Occupancy                             | $\leq 0.4$ sec in 31.6sec<br>period                                     | Pass   | -                                       |
| 15.247(b)(1)          | RSS-247<br>5.4(b) | Peak Output Power                                        | $\leq 125$ mW                                                           | Pass   | -                                       |
| 15.247(d)             | RSS-247<br>5.5    | Conducted Band Edges                                     | $\leq 20$ dBc                                                           | Pass   | -                                       |
| 15.247(d)             | RSS-247<br>5.5    | Conducted Spurious<br>Emission                           | $\leq 20$ dBc                                                           | Pass   | -                                       |
| 15.247(d)             | RSS-247<br>5.5    | Radiated Band Edges<br>and Radiated Spurious<br>Emission | 15.209(a) & 15.247(d)<br>& RSS-247 5.5 &<br>RSS-Gen Table 5,<br>Table 6 | Pass   | Under limit<br>4.63 dB at<br>9920 MHz   |
| 15.207                | RSS-Gen<br>8.8    | AC Conducted Emission                                    | 15.207(a) &<br>RSS-Gen 8.8 Table 4                                      | Pass   | Under limit<br>11.91 dB at<br>0.186 MHz |
| 15.203 &<br>15.247(b) | RSS-Gen<br>6.8    | Antenna Requirement                                      | RSS-Gen<br>6.8                                                          | Pass   | -                                       |

## **1 Test Laboratory**

### **1.1 Test facility**

#### **CNAS ( accreditation number:L11138 )**

Hunan Ecloud Testing Technology Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

#### **FCC (Designation number:CN1244 , Test Firm Registration**

#### **Number:793308 )**

Hunan Ecloud Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

#### **ISED(CAB identifier: CN0012, ISED# :24347)**

Hunan Ecloud Testing Technology Co., Ltd. has been listed on the Wireless Device Testing Laboratories list of innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements.

#### **A2LA (Certificate Number:4895.01)**

Hunan Ecloud Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

## 2 General Description

### 2.1 Applicant

Globe Electric Company Inc.  
150 Oneida, Montreal, Quebec, Canada, H9R 1A8

### 2.2 Manufacturer

Globe Electric Company Inc.  
150 Oneida, Montreal, Quebec, Canada, H9R 1A8

### 2.3 General Description Of EUT

|                        |                                                                                                                                                                                                                                                 |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product                | Wifi LED lamp                                                                                                                                                                                                                                   |
| Model No.              | 34225                                                                                                                                                                                                                                           |
| Brand Name             | Globe                                                                                                                                                                                                                                           |
| Additional NO.         | 34224                                                                                                                                                                                                                                           |
| Difference Description | 34225 and 34224 circuit design scheme, intelligent module, distribution network mode and APP are the same. The intelligent module firmware, the light source schematic and the dimmer chip are different.<br>Does not affect any RF parameters. |
| FCC ID                 | 2AQUQGB34225                                                                                                                                                                                                                                    |
| IC                     | 8290A-GB34225                                                                                                                                                                                                                                   |
| Power Supply           | 120Vac                                                                                                                                                                                                                                          |
| Modulation Technology  | FHSS                                                                                                                                                                                                                                            |
| Modulation Type        | GFSK, 8DPSK, $\pi/4$ DQPSK                                                                                                                                                                                                                      |
| Operating Frequency    | 2402MHz~2480MHz                                                                                                                                                                                                                                 |
| Number Of Channel      | 79                                                                                                                                                                                                                                              |
| Max. Output Power      | Bluetooth BR(1Mbps) : 9.63 dBm (0.0092W)<br>Bluetooth BR(2Mbps) : 11.62 dBm (0.0145W)<br>Bluetooth BR(3Mbps) : 11.88 dBm (0.0154W)                                                                                                              |
| Max. e.i.r.p.          | 13.08 dBm (0.0203W)                                                                                                                                                                                                                             |
| Antenna Type           | Monopole Antenna type with 1.2dBi gain                                                                                                                                                                                                          |
| HW Version             | V2.0                                                                                                                                                                                                                                            |
| SW Version             | ESP32_RFTTest_169_20200803                                                                                                                                                                                                                      |
| I/O Ports              | Refer to user's manual                                                                                                                                                                                                                          |
| Cable Supplied         | N/A                                                                                                                                                                                                                                             |

**NOTE:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

## 2.4 Modification of EUT

No modifications are made to the EUT during all test items.

## 2.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2013
- ♦ IC RSS-247 Issue 2
- ♦ IC RSS-Gen Issue 5
- ♦ KDB 558074 D01 15.247 Meas Guidance v05r02

**Remark:**

1. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B&ICES-005, recorded in a separate test report.

### 3 Test Configuration of Equipment Under Test

#### 3.1 Descriptions of Test Mode

The transmitter has a maximum peak conducted output power as follows:

| Mode           | Channel | Frequency | Bluetooth RF Output Power |
|----------------|---------|-----------|---------------------------|
| GFSK           | Ch00    | 2402MHz   | 8.29                      |
|                | Ch39    | 2441MHz   | 9.26                      |
|                | Ch78    | 2480MHz   | 9.63                      |
| 4 $\pi$ -DQPSK | Ch00    | 2402MHz   | 10.48                     |
|                | Ch39    | 2441MHz   | 11.29                     |
|                | Ch78    | 2480MHz   | 11.62                     |
| 8DPSK          | Ch00    | 2402MHz   | 10.83                     |
|                | Ch39    | 2441MHz   | 11.66                     |
|                | Ch78    | 2480MHz   | 11.88                     |

**Remark:**

1. All the test data for each data rate were verified, but only the worst case was reported.
2. The data rate was set in 3Mbps for all the test items due to the highest RF output power.

#### 3.2 Test Mode

##### 3.2.1 Antenna Port Conducted Measurement

| Summary table of Test Cases |                            |                                       |                               |
|-----------------------------|----------------------------|---------------------------------------|-------------------------------|
| Test Item                   | Data Rate / Modulation     |                                       |                               |
|                             | Bluetooth BR 1Mbps<br>GFSK | Bluetooth EDR 2Mbps<br>$\pi/4$ -DQPSK | Bluetooth EDR 3Mbps<br>8-DPSK |
| <b>Conducted Test Cases</b> | Mode 1: CH00_2402 MHz      | Mode 4: CH00_2402 MHz                 | Mode 7: CH00_2402 MHz         |
|                             | Mode 2: CH39_2441 MHz      | Mode 5: CH39_2441 MHz                 | Mode 8: CH39_2441 MHz         |
|                             | Mode 3: CH78_2480 MHz      | Mode 6: CH78_2480 MHz                 | Mode 9: CH78_2480 MHz         |



### 3.2.2 Radiated Emission Test (Below 1GHz)

| Radiated<br>Test Cases | Bluetooth BR 3Mbps<br>GFSK |
|------------------------|----------------------------|
|                        | Mode 1: CH00_2402MHz       |

- Note : 1. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type. Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.
2. Following channel(s) was (were) selected for the final test as listed above

### 3.2.3 Radiated Emission Test (Above 1GHz)

| Radiated<br>Test Cases | Bluetooth EDR 3Mbps 8-DPSK |
|------------------------|----------------------------|
|                        | Mode 1: CH00_2402 MHz      |
|                        | Mode 2: CH39_2441 MHz      |
|                        | Mode 3: CH78_2480 MHz      |

- Note : 1. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.
2. Following channel(s) was (were) selected for the final test as listed above
3. For frequency above 18GHz, the measured value is much lower than the limit, therefore, it is not reflected in the report.

### 3.2.4 Power Line Conducted Emission Test:

| AC<br>Conducted<br>Emission | Mode 1 : Bluetooth Link + Lighting |
|-----------------------------|------------------------------------|
|-----------------------------|------------------------------------|


### 3.3 Support Equipment

| Item | Equipment | Trade Name | Model Name | FCC ID      | Data Cable | Power Cord                                                         |
|------|-----------|------------|------------|-------------|------------|--------------------------------------------------------------------|
| 1.   | WLAN AP   | NETGEAR    | R7800      | PY315100319 | N/A        | shielded, 1.8 m                                                    |
| 2.   | Notebook  | Lenovo     | E470C      | FCC sDoC    | N/A        | shielded cable<br>DC O/P 1.8 m<br>unshielded AC<br>I/P cable 1.2 m |


### 3.4 Test Setup

The EUT is continuously communicating to the Bluetooth tester during the tests.


EUT was set in the Hidden menu mode to enable BT communications.

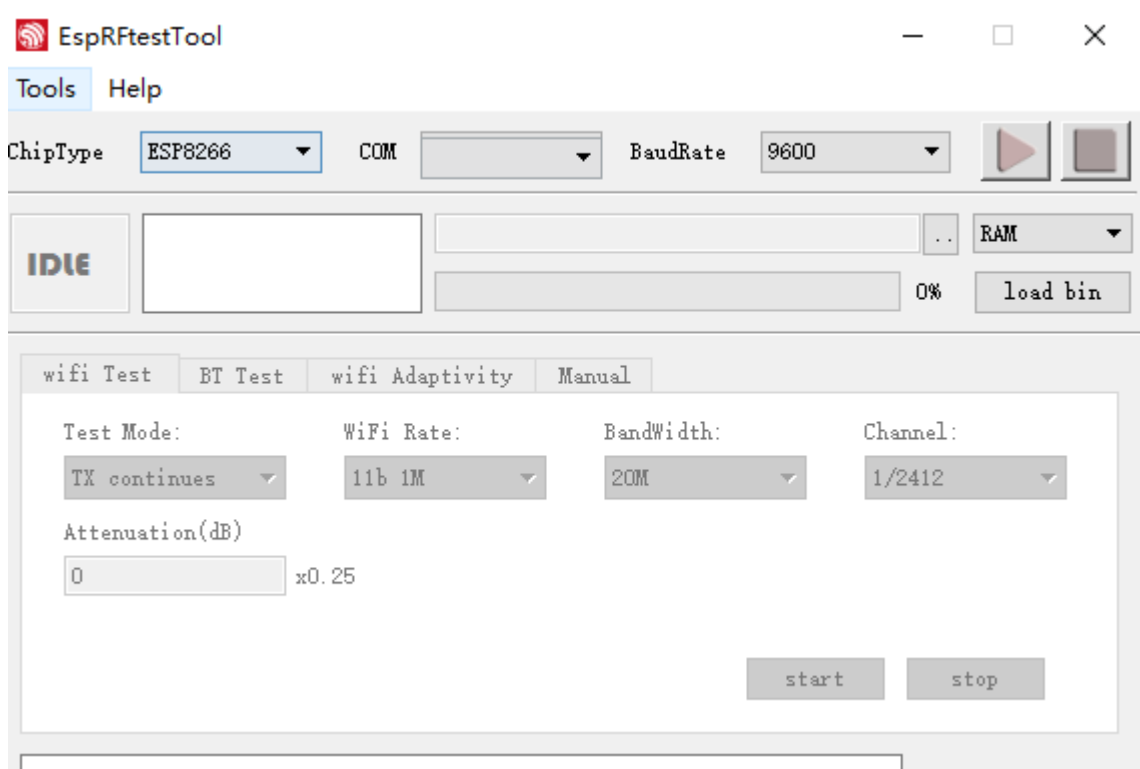


Setup diagram for Conducted Test

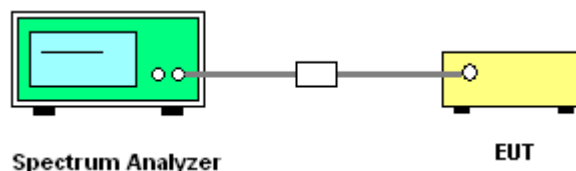


### Setup diagram for Raidation(9KHz~30MHz) Test

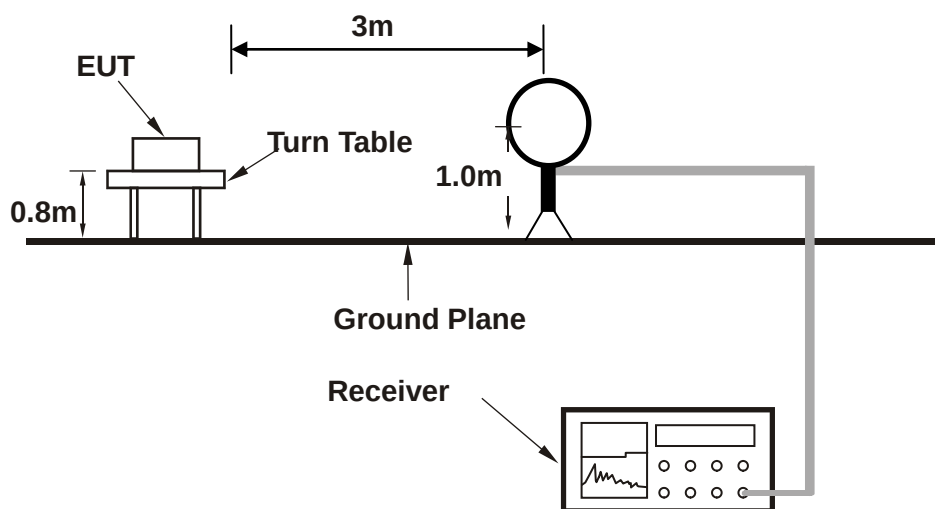


### Setup diagram for Raidation(Below 1G) Test

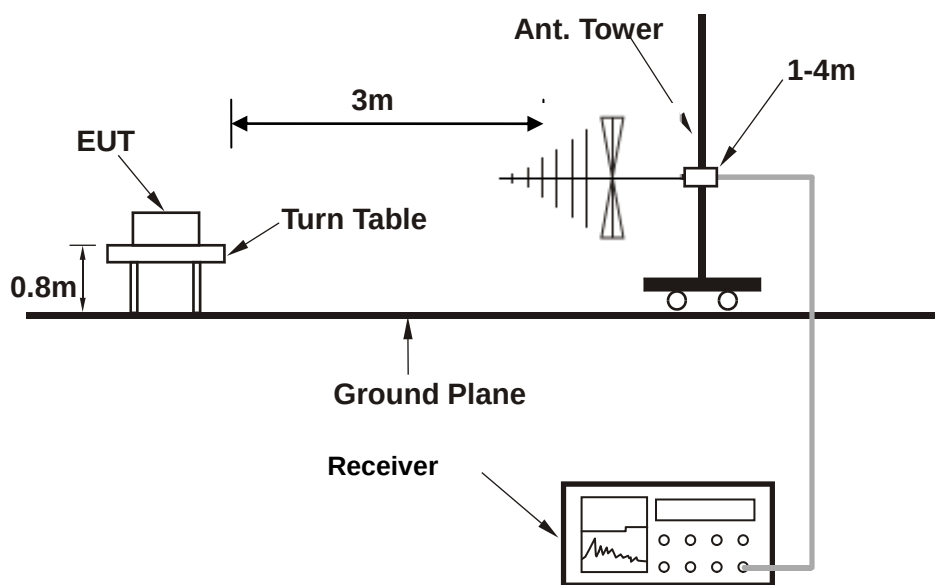

### Setup diagram for Raidation(Above1G) Test

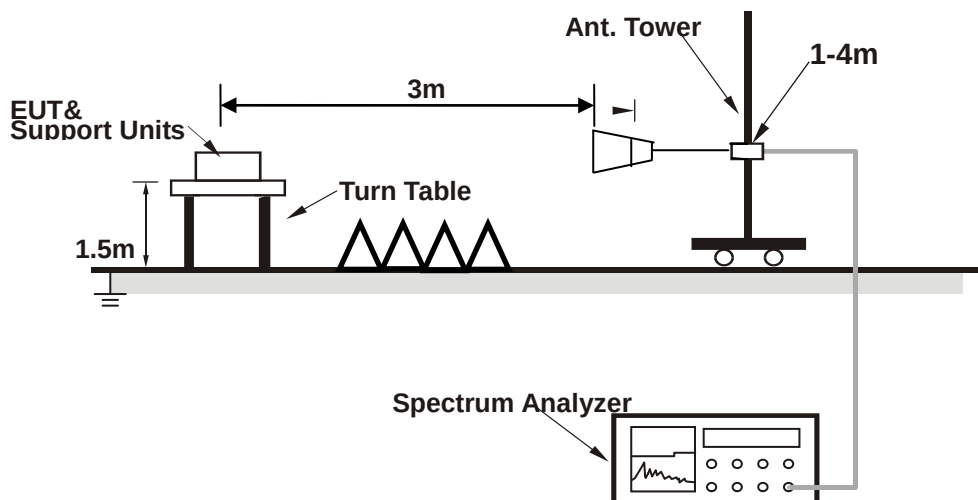

### Setup diagram for AC Conducted Emission Test

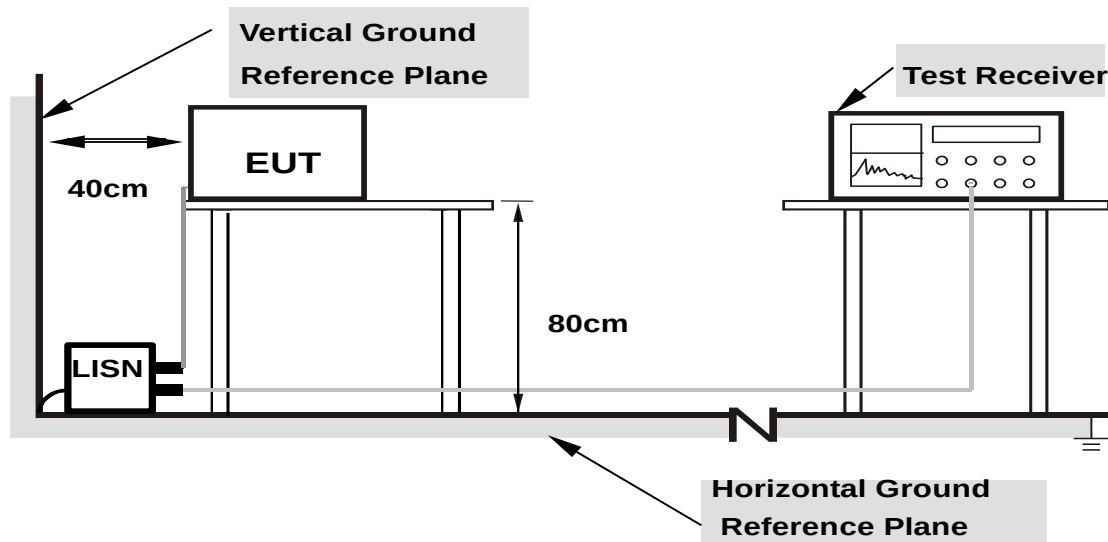

**Note: 1.Support units were connected to second LISN.**

**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

### 3.5 Measurement Results Explanation Example

#### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

#### Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 5 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5 + 10 = 15 \text{ (dB)}\end{aligned}$$

#### For all radiated test items:

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Over Limit (dB  $\mu$  V/m) = Level(dB  $\mu$  V/m) - Limit Level (dB  $\mu$  V/m)

## 4 Test Result

### 4.1 20dB and 99% Bandwidth Measurement

#### 4.1.1 Limit of 20dB and 99% Bandwidth

None; for reporting purposes only.

#### 4.1.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.  
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
4. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.  
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 99% bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = sample;  
Trace = max hold.

#### 4.1.3 Test Result of 20dB Bandwidth

Refer to Appendix A of this test report.

#### 4.1.4 Test Result of 99% Bandwidth

Refer to Appendix B of this test report.

## 4.2 Peak Output Power Measurement

### 4.2.1 Limit of Peak Output Power

Section 15.247 (b)

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.

RSS-247 5.4(b)

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W

### 4.2.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

### 4.2.3 Test Result of Peak Output Power

Refer to Appendix C of this test report.

## 4.3 Carrier Frequency Separation Measurement

### 4.3.1 Limit of Hopping Channel Separation

FCC §15.247 (a) (1)

RSS-247 5.1(b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 4.3.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

### 4.3.3 Test Result of Hopping Channel Separation

Refer to Appendix D of this test report.



## 4.4 Time of Occupancy Measurement

### 4.4.1 Limit of Average Time of Occupancy

FCC §15.247 (a) (1) (iii)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

RSS-247 5.1(d)

FHSs operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

### 4.4.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.
4. The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements.

The test period:  $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test channel: 2441MHz as below:

DH1 time slot = Burst Width (ms) \* (1600 / (2 \* 79)) \* 31.6

DH3 time slot = Burst Width (ms) \* (1600 / (4 \* 79)) \* 31.6

DH5 time slot = Burst Width (ms) \* (1600 / (6 \* 79)) \* 31.6

### 4.4.3 Test Result of Dwell Time

Refer to Appendix E of this test report.

## **4.5 Number of Hopping Channels Measurement**

### **4.5.1 Limits of Number of Hopping Channels**

FCC § 15.247(a)(1)(iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

RSS-247 5.1(d)

FHSs operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

### **4.5.2 Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to 100KHz. The analyzer is set to Max Hold.

### **4.5.3 Test Result of Number of Hopping Channels**

Refer to Appendix F of this test report.

## 4.6 Conducted Band Edges Measurement

### 4.6.1 Limit of Band Edges

FCC §15.247(d)

IC RSS-247 5.5

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### 4.6.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 1~3.

### 4.6.3 Test Result of Conducted Band Edges

Refer to Appendix G of this test report.

## 4.7 Conducted Spurious Emission Measurement

### 4.7.1 Limit of Spurious Emission Measurement

FCC §15.247(d)

IC RSS-247 5.5

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### 4.7.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 4.7.3 Test Result of Conducted Spurious Emission

Refer to Appendix H of this test report.

## 4.8 Radiated Band Edges and Spurious Emission Measurement

### 4.8.1 Limit of Radiated Band Edges and Spurious Emission

FCC §15.247 (d)

IC RSS-247 5.5


In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

| Frequency<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|--------------------|--------------------------------------|----------------------------------|
| 0.009 – 0.490      | 2400/F(kHz)                          | 300                              |
| 0.490 – 1.705      | 24000/F(kHz)                         | 30                               |
| 1.705 – 30.0       | 30                                   | 30                               |
| 30 – 88            | 100                                  | 3                                |
| 88 – 216           | 150                                  | 3                                |
| 216 - 960          | 200                                  | 3                                |
| Above 960          | 500                                  | 3                                |

Note: The frequency range from 9KHz to 10th harmonic (25GHz) are checked, and no any emissions were found from 18GHz to 25GHz, So the radiated emissions from 18GHz to 25GHz were not record.

#### 4.8.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz, RBW=1MHz for  $f > 1$ GHz ; VBW=3RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement:  
VBW = 10 Hz, when duty cycle is no less than 98 percent.  
VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
5. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP.
6. Convert the resultant EIRP to an equivalent electric field strength using the following relationship:
$$E = \text{EIRP} - 20 \log d + 104.8$$
Where:
  - E is the electric field strength in dB $\mu$ V/m
  - EIRP is the equivalent isotropically radiated power in dBm
  - d is the specified measurement distance in m
  - $E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2$ , for  $d = 3$  m.
7. Compare the resultant electric field strength level with the applicable regulatory limit.

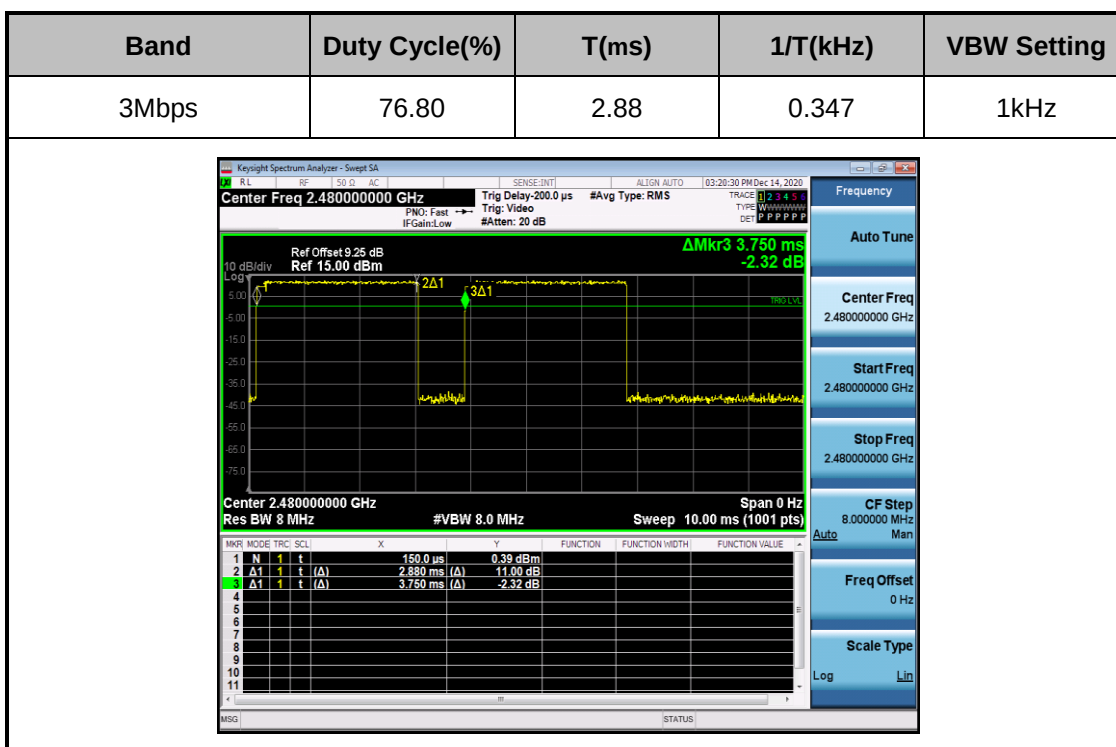


#### 4.8.3 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

#### 4.8.4 Test Result of Radiated Spurious at Band Edges

|                 |                                  |                     |            |
|-----------------|----------------------------------|---------------------|------------|
| Test Mode :     | Bluetooth (3Mbps) CH00 (2402MHz) | Temperature :       | 25~27℃     |
| Test Engineer : | Jack Liu                         | Relative Humidity : | 63~65%     |
| Frequency Range | 2.3GHz~2.405GHz                  | Polarization :      | Horizontal |

|                              |                        |
|------------------------------|------------------------|
| Test Site : 3m Chamber       | Temp/Humi : 25℃/64%    |
| Tested by : Jack             | Pol/Phase : HORIZONTAL |
| Test Mode : BT CH00(2402MHz) | Power rating: 120Wac   |

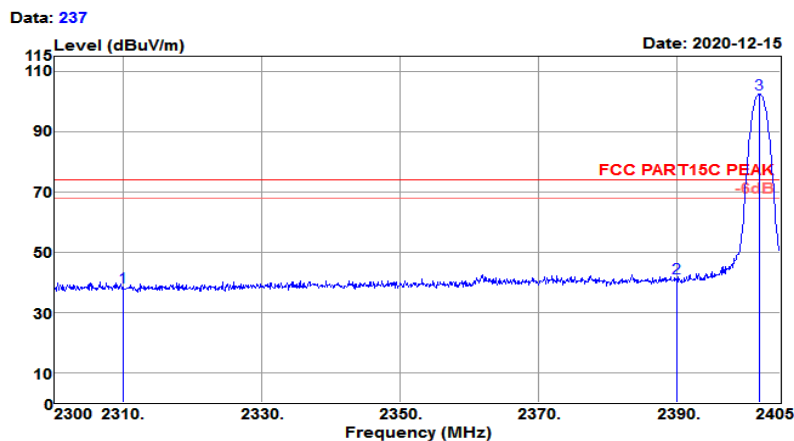


| Freq<br>MHz | Reading<br>level<br>dBuV | Antenna<br>factor<br>dB/m | Cable<br>loss<br>dB | Preamp<br>factor<br>dB | level<br>dBuV/m | Limit<br>level<br>dBuV/m | Over<br>limit<br>dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 2310.000    | 42.54                    | 27.38                     | 4.11                | 35.61                  | 38.42           | 74.00                    | -35.58              | Peak   |
| 2390.000    | 45.59                    | 27.56                     | 4.18                | 35.79                  | 41.54           | 74.00                    | -32.46              | Peak   |
| 2402.060    | 106.57                   | 27.58                     | 4.19                | 35.82                  | 102.52          | 74.00                    | 28.52               | Peak   |




|                 |                                  |                     |            |
|-----------------|----------------------------------|---------------------|------------|
| Test Mode :     | Bluetooth (3Mbps) CH00 (2402MHz) | Temperature :       | 25~27℃     |
| Test Engineer : | Jack Liu                         | Relative Humidity : | 63~65%     |
| Frequency Range | 2.3GHz~2.405GHz                  | Polarization :      | Horizontal |

|           |                    |               |              |
|-----------|--------------------|---------------|--------------|
| Test Site | : 3m Chamber       | Temp/Humi     | : 25℃ / 64%  |
| Tested by | : Jack             | Pol/Phase     | : HORIZONTAL |
| Test Mode | : BT CH00(2402MHz) | Power rating: | 120VAc       |

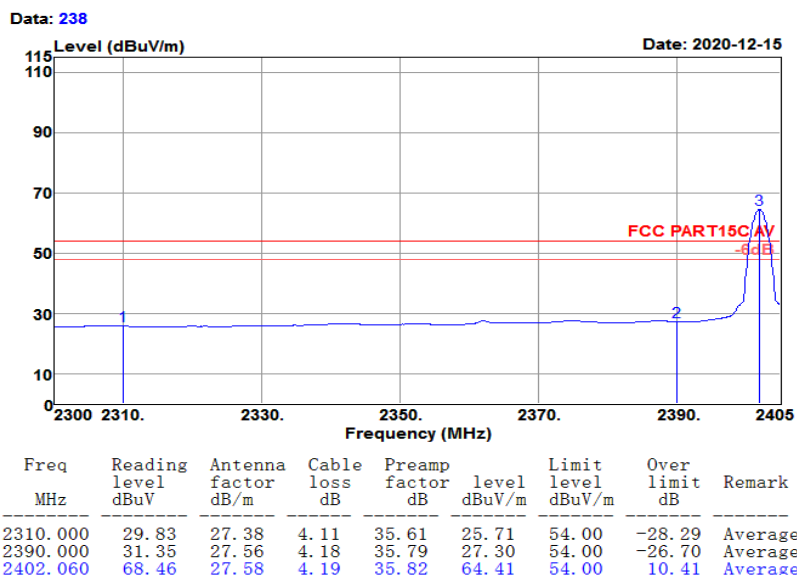

|                 |                                  |                     |          |
|-----------------|----------------------------------|---------------------|----------|
| Test Mode :     | Bluetooth (3Mbps) CH00 (2402MHz) | Temperature :       | 25~27℃   |
| Test Engineer : | Jack Liu                         | Relative Humidity : | 63~65%   |
| Frequency Range | 2.3GHz~2.405GHz                  | Polarization :      | Vertical |

|           |                    |               |            |
|-----------|--------------------|---------------|------------|
| Test Site | : 3m Chamber       | Temp/Humi     | : 25℃/64%  |
| Tested by | : Jack             | Pol/Phase     | : VERTICAL |
| Test Mode | : BT CH00(2402MHz) | Power rating: | 120VAc     |

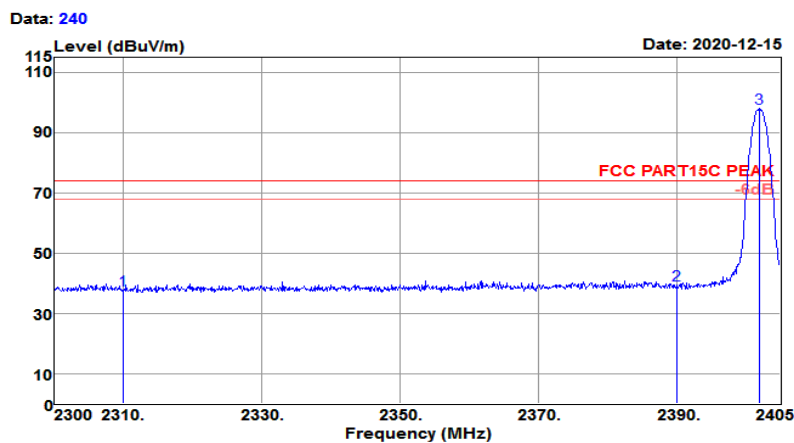

| Freq<br>MHz | Reading<br>level<br>dBuV | Antenna<br>factor<br>dB/m | Cable<br>loss<br>dB | Preamp<br>factor<br>dB | level<br>dBuV/m | Limit<br>level<br>dBuV/m | Over<br>limit<br>dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 2310.000    | 41.88                    | 27.38                     | 4.11                | 35.61                  | 37.76           | 74.00                    | -36.24              | Peak   |
| 2390.000    | 43.43                    | 27.56                     | 4.18                | 35.79                  | 39.38           | 74.00                    | -34.62              | Peak   |
| 2402.060    | 102.00                   | 27.58                     | 4.19                | 35.82                  | 97.95           | 74.00                    | 23.95               | Peak   |

|                 |                                  |                     |          |
|-----------------|----------------------------------|---------------------|----------|
| Test Mode :     | Bluetooth (3Mbps) CH00 (2402MHz) | Temperature :       | 25~27℃   |
| Test Engineer : | Jack Liu                         | Relative Humidity : | 63~65%   |
| Frequency Range | 2.3GHz~2.405GHz                  | Polarization :      | Vertical |

Test Site : 3m Chamber

Temp/Humi : 25℃/64%


Tested by : Jack

Pol/Phase : VERTICAL

Test Mode : BT CH00(2402MHz)

Power rating: 120VAc


Data: 241

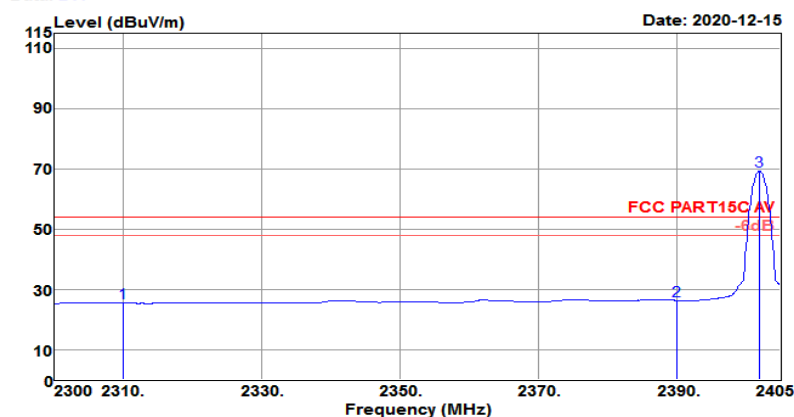

| Freq<br>MHz | Reading<br>level<br>dBuV | Antenna<br>factor<br>dB/m | Cable<br>loss<br>dB | Preamp<br>factor<br>dB | level<br>dBuV/m | Limit<br>level<br>dBuV/m | Over<br>limit<br>dB | Remark  |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 2310.000    | 29.68                    | 27.38                     | 4.11                | 35.61                  | 25.56           | 54.00                    | -28.44              | Average |
| 2390.000    | 30.35                    | 27.56                     | 4.18                | 35.79                  | 26.30           | 54.00                    | -27.70              | Average |
| 2401.955    | 73.34                    | 27.58                     | 4.19                | 35.82                  | 69.29           | 54.00                    | 15.29               | Average |

|                 |                                  |                     |            |
|-----------------|----------------------------------|---------------------|------------|
| Test Mode :     | Bluetooth (3Mbps) CH78 (2480MHz) | Temperature :       | 25~27℃     |
| Test Engineer : | Jack Liu                         | Relative Humidity : | 63~65%     |
| Frequency Range | 2.477GHz~2.51GHz                 | Polarization :      | Horizontal |

|           |                    |               |              |
|-----------|--------------------|---------------|--------------|
| Test Site | : 3m Chamber       | Temp/Humi     | : 25℃ / 64%  |
| Tested by | : Jack             | Pol/Phase     | : HORIZONTAL |
| Test Mode | : BT CH78(2480MHz) | Power rating: | : 120VAc     |

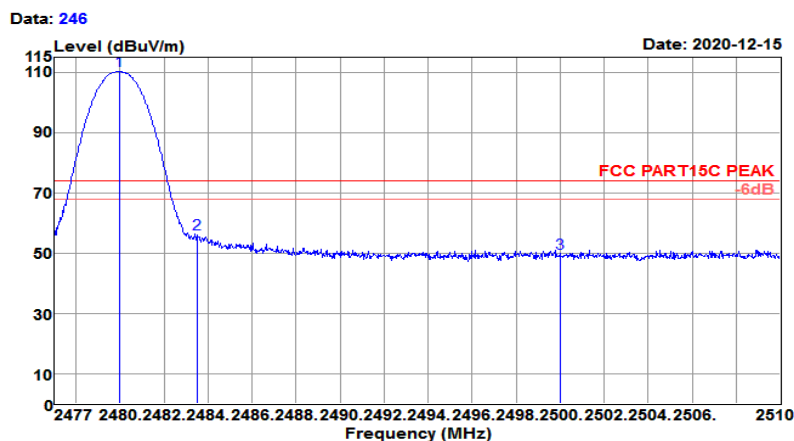


| Freq<br>MHz | Reading<br>level<br>dBuV | Antenna<br>factor<br>dB/m | Cable<br>loss<br>dB | Preamp<br>factor<br>dB | level<br>dBuV/m | Limit<br>level<br>dBuV/m | Over<br>limit<br>dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 2480.003    | 114.38                   | 27.76                     | 4.26                | 35.99                  | 110.41          | 74.00                    | 36.41               | Peak   |
| 2483.500    | 60.21                    | 27.76                     | 4.26                | 36.00                  | 56.23           | 74.00                    | -17.77              | Peak   |
| 2500.000    | 53.90                    | 27.80                     | 4.28                | 36.04                  | 49.94           | 74.00                    | -24.06              | Peak   |

|                 |                                  |                     |            |
|-----------------|----------------------------------|---------------------|------------|
| Test Mode :     | Bluetooth (3Mbps) CH78 (2480MHz) | Temperature :       | 25~27℃     |
| Test Engineer : | Jack Liu                         | Relative Humidity : | 63~65%     |
| Frequency Range | 2.477GHz~2.51GHz                 | Polarization :      | Horizontal |

|           |                    |              |              |
|-----------|--------------------|--------------|--------------|
| Test Site | : 3m Chamber       | Temp/Humi    | : 25℃/64%    |
| Tested by | : Jack             | Pol/Phase    | : HORIZONTAL |
| Test Mode | : BT CH78(2480MHz) | Power rating | : 120VAc     |


Data: 247

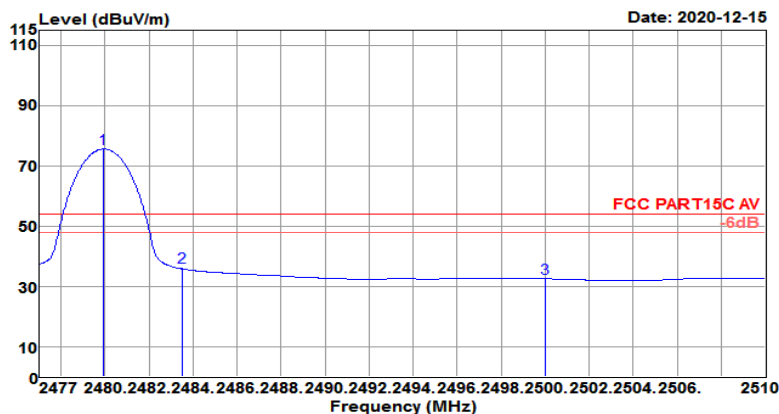

| Freq<br>MHz | Reading<br>level<br>dBuV | Antenna<br>factor<br>dB/m | Cable<br>loss<br>dB | Preamp<br>factor<br>dB | level<br>dBuV/m | Limit<br>level<br>dBuV/m | Over<br>limit<br>dB | Remark  |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 2479.937    | 79.50                    | 27.76                     | 4.26                | 35.99                  | 75.53           | 54.00                    | 21.53               | Average |
| 2483.500    | 40.16                    | 27.76                     | 4.26                | 36.00                  | 36.18           | 54.00                    | -17.82              | Average |
| 2500.000    | 36.49                    | 27.80                     | 4.28                | 36.04                  | 32.53           | 54.00                    | -21.47              | Average |

|                 |                                  |                     |          |
|-----------------|----------------------------------|---------------------|----------|
| Test Mode :     | Bluetooth (3Mbps) CH78 (2480MHz) | Temperature :       | 25~27℃   |
| Test Engineer : | Jack Liu                         | Relative Humidity : | 63~65%   |
| Frequency Range | 2.477GHz~2.51GHz                 | Polarization :      | Vertical |

|           |                    |               |            |
|-----------|--------------------|---------------|------------|
| Test Site | : 3m Chamber       | Temp/Humi     | : 25℃/64%  |
| Tested by | : Jack             | Pol/Phase     | : VERTICAL |
| Test Mode | : BT CH78(2480MHz) | Power rating: | 120VAc     |

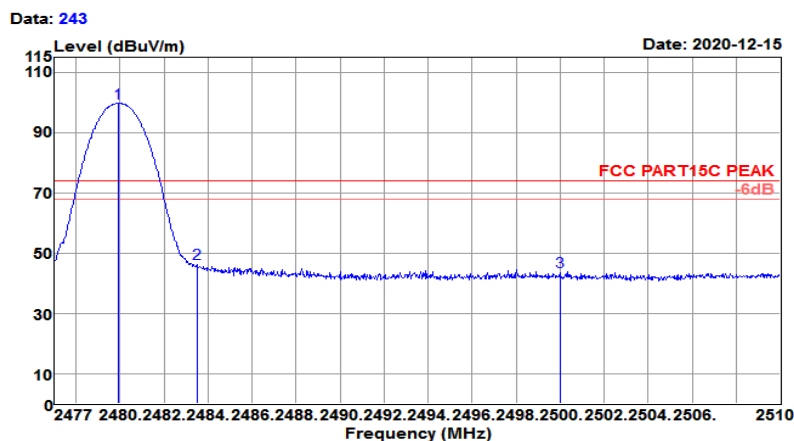

| Freq<br>MHz | Reading<br>level<br>dBuV | Antenna<br>factor<br>dB/m | Cable<br>loss<br>dB | Preamp<br>factor<br>dB | level<br>dBuV/m | Limit<br>level<br>dBuV/m | Over<br>limit<br>dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 2479.904    | 103.77                   | 27.76                     | 4.26                | 35.99                  | 99.80           | 74.00                    | 25.80               | Peak   |
| 2483.500    | 50.41                    | 27.76                     | 4.26                | 36.00                  | 46.43           | 74.00                    | -27.57              | Peak   |
| 2500.000    | 47.75                    | 27.80                     | 4.28                | 36.04                  | 43.79           | 74.00                    | -30.21              | Peak   |

|                 |                                  |                     |          |
|-----------------|----------------------------------|---------------------|----------|
| Test Mode :     | Bluetooth (3Mbps) CH78 (2480MHz) | Temperature :       | 25~27℃   |
| Test Engineer : | Jack Liu                         | Relative Humidity : | 63~65%   |
| Frequency Range | 2.477GHz~2.51GHz                 | Polarization :      | Vertical |

Test Site : 3m Chamber

Temp/Humi : 25℃/64%


Tested by : Jack

Pol/Phase : VERTICAL

Test Mode : BT CH78(2480MHz)

Power rating: 120VAc

Data: 244

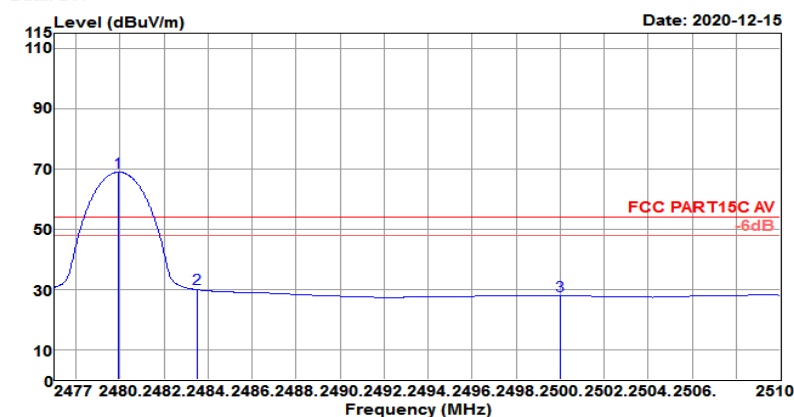


| Freq<br>MHz | Reading<br>level<br>dBuV | Antenna<br>factor<br>dB/m | Cable<br>loss<br>dB | Preamp<br>factor<br>dB | level<br>dBuV/m | Limit<br>level<br>dBuV/m | Over<br>limit<br>dB | Remark  |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 2479.904    | 72.84                    | 27.76                     | 4.26                | 35.99                  | 68.87           | 54.00                    | 14.87               | Average |
| 2483.500    | 34.14                    | 27.76                     | 4.26                | 36.00                  | 30.16           | 54.00                    | -23.84              | Average |
| 2500.000    | 31.86                    | 27.80                     | 4.28                | 36.04                  | 27.90           | 54.00                    | -26.10              | Average |

## 4.8.1 Test Result of Radiated Spurious Emission (1GHz ~ 10<sup>th</sup> Harmonic)

|                 |                                  |                     |            |
|-----------------|----------------------------------|---------------------|------------|
| Test Mode :     | Bluetooth (3Mbps) CH00 (2402MHz) | Temperature :       | 25~27℃     |
| Test Engineer : | Jack Liu                         | Relative Humidity : | 63~65%     |
| Frequency Range | 1GHz~3GHz                        | Polarization :      | Horizontal |

|                              |                        |
|------------------------------|------------------------|
| Test Site : 3m Chamber       | Temp/Humi : 25℃/64%    |
| Tested by : Jack             | Pol/Phase : HORIZONTAL |
| Test Mode : BT CH00(2402MHz) | Power rating: 120VAC   |

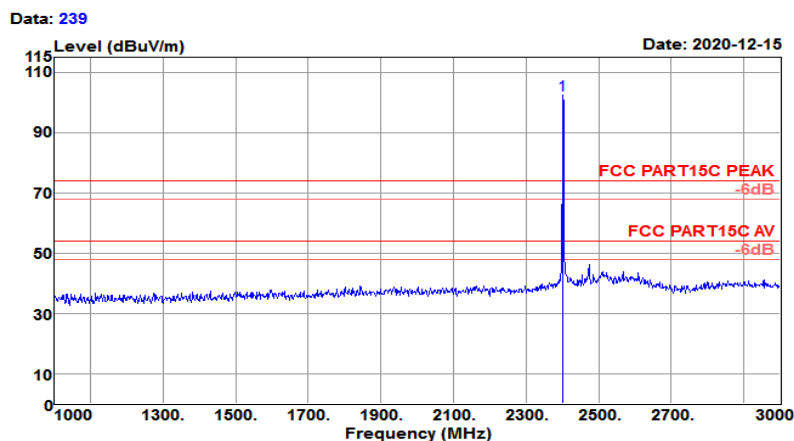


| Freq<br>MHz | Reading<br>level<br>dBuV | Antenna<br>factor<br>dB/m | Cable<br>loss<br>dB | Preamp<br>factor<br>dB | level<br>dBuV/m | Limit<br>level<br>dBuV/m | Over<br>limit<br>dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 2402.000    | 106.59                   | 27.58                     | 4.19                | 35.82                  | 102.54          | 74.00                    | 28.54               | Peak   |



|                 |                                 |                     |            |
|-----------------|---------------------------------|---------------------|------------|
| Test Mode :     | Bluetooth (3Mbps)CH00 (2402MHz) | Temperature :       | 25~27℃     |
| Test Engineer : | Jack Liu                        | Relative Humidity : | 63~65%     |
| Frequency Range | 3GHz~18GHz                      | Polarization :      | Horizontal |

|           |                    |               |              |
|-----------|--------------------|---------------|--------------|
| Test Site | : 3m Chamber       | Temp/Humi     | : 25℃/64%    |
| Tested by | : Jack             | Pol/Phase     | : HORIZONTAL |
| Test Mode | : BT CH00(2402MHz) | Power rating: | 120VAc       |

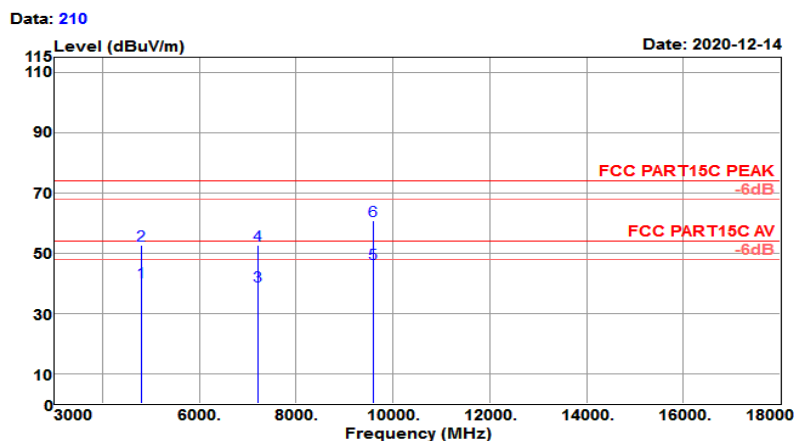


| Freq<br>MHz | Reading<br>level<br>dBuV | Antenna<br>factor<br>dB/m | Cable<br>loss<br>dB | Preamp<br>factor<br>dB | level<br>dBuV/m | Limit<br>level<br>dBuV/m | Over<br>limit<br>dB | Remark  |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 4804.000    | 39.51                    | 30.93                     | 6.09                | 36.03                  | 40.50           | 54.00                    | -13.50              | Average |
| 4804.000    | 51.48                    | 30.93                     | 6.09                | 36.03                  | 52.47           | 74.00                    | -21.53              | Peak    |
| 7206.000    | 28.63                    | 35.39                     | 9.22                | 34.25                  | 38.99           | 54.00                    | -15.01              | Average |
| 7206.000    | 42.10                    | 35.39                     | 9.22                | 34.25                  | 52.46           | 74.00                    | -21.54              | Peak    |
| 9608.000    | 28.17                    | 38.39                     | 12.26               | 32.19                  | 46.63           | 54.00                    | -7.37               | Average |
| 9608.000    | 42.14                    | 38.39                     | 12.26               | 32.19                  | 60.60           | 74.00                    | -13.40              | Peak    |

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit

|                 |                                  |                     |          |
|-----------------|----------------------------------|---------------------|----------|
| Test Mode :     | Bluetooth (3Mbps) CH00 (2402MHz) | Temperature :       | 25~27℃   |
| Test Engineer : | Jack Liu                         | Relative Humidity : | 63~65%   |
| Frequency Range | 1GHz~3GHz                        | Polarization :      | Vertical |

|           |                    |               |            |
|-----------|--------------------|---------------|------------|
| Test Site | : 3m Chamber       | Temp/Humi     | : 25℃/64%  |
| Tested by | : Jack             | Pol/Phase     | : VERTICAL |
| Test Mode | : BT CH00(2402MHz) | Power rating: | 120VAc     |

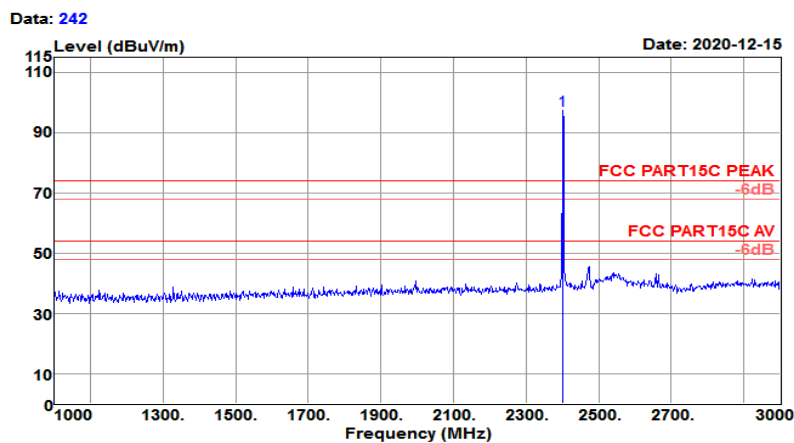


| Freq<br>MHz | Reading<br>level<br>dBuV | Antenna<br>factor<br>dB/m | Cable<br>loss<br>dB | Preamp<br>factor<br>dB | level<br>dBuV/m | Limit<br>level<br>dBuV/m | Over<br>limit<br>dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 2402.000    | 101.48                   | 27.58                     | 4.19                | 35.82                  | 97.43           | 74.00                    | 23.43               | Peak   |

|                 |                                  |                     |          |
|-----------------|----------------------------------|---------------------|----------|
| Test Mode :     | Bluetooth (3Mbps) CH00 (2402MHz) | Temperature :       | 25~27℃   |
| Test Engineer : | Jack Liu                         | Relative Humidity : | 63~65%   |
| Frequency Range | 3GHz~18GHz                       | Polarization :      | Vertical |

|           |                    |               |            |
|-----------|--------------------|---------------|------------|
| Test Site | : 3m Chamber       | Temp/Humi     | : 25℃/64%  |
| Tested by | : Jack             | Pol/Phase     | : VERTICAL |
| Test Mode | : BT CH00(2402MHz) | Power rating: | : 120Wac   |

Data: 208

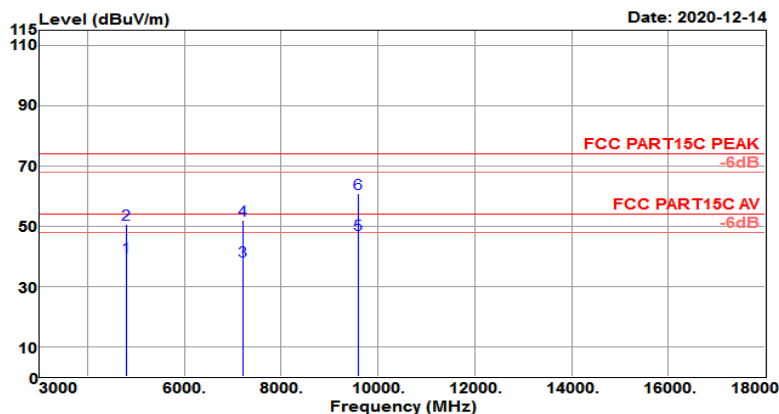

| Freq<br>MHz | Reading<br>level<br>dBuV | Antenna<br>factor<br>dB/m | Cable<br>loss<br>dB | Preamp<br>factor<br>dB | level<br>dBuV/m | Limit<br>level<br>dBuV/m | Over<br>limit<br>dB | Remark  |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 4804.000    | 38.84                    | 30.93                     | 6.09                | 36.03                  | 39.83           | 54.00                    | -14.17              | Average |
| 4804.000    | 49.41                    | 30.93                     | 6.09                | 36.03                  | 50.40           | 74.00                    | -23.60              | Peak    |
| 7206.000    | 28.13                    | 35.39                     | 9.22                | 34.25                  | 38.49           | 54.00                    | -15.51              | Average |
| 7206.000    | 41.45                    | 35.39                     | 9.22                | 34.25                  | 51.81           | 74.00                    | -22.19              | Peak    |
| 9608.000    | 28.75                    | 38.39                     | 12.26               | 32.19                  | 47.21           | 54.00                    | -6.79               | Average |
| 9608.000    | 42.23                    | 38.39                     | 12.26               | 32.19                  | 60.69           | 74.00                    | -13.31              | Peak    |

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

|                 |                                  |                     |            |
|-----------------|----------------------------------|---------------------|------------|
| Test Mode :     | Bluetooth (3Mbps) CH39 (2441MHz) | Temperature :       | 25~27℃     |
| Test Engineer : | Jack Liu                         | Relative Humidity : | 63~65%     |
| Frequency Range | 1GHz~3GHz                        | Polarization :      | Horizontal |

Test Site : 3m Chamber

Temp/Humi : 25℃/64%


Tested by : Jack

Pol/Phase : HORIZONTAL

Test Mode : BT CH39(2441MHz)

Power rating: 120VAc


Data: 192

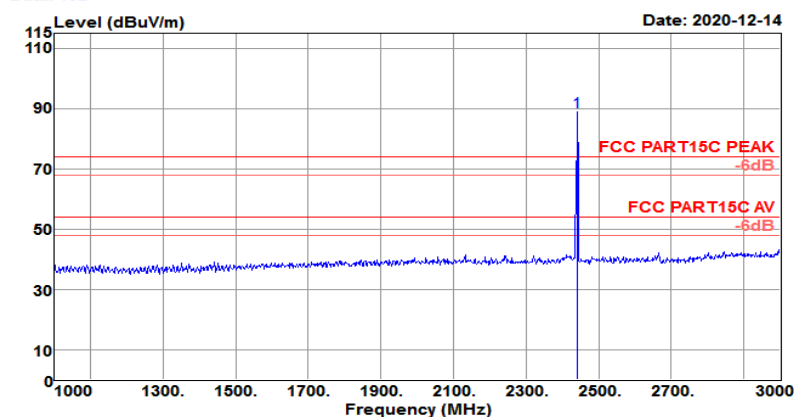

| Freq<br>MHz | Reading<br>level<br>dBuV | Antenna<br>factor<br>dB/m | Cable<br>loss<br>dB | Preamp<br>factor<br>dB | level<br>dBuV/m | Limit<br>level<br>dBuV/m | Over<br>limit<br>dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 2441.000    | 92.86                    | 27.67                     | 4.22                | 35.91                  | 88.84           | 74.00                    | 14.84               | Peak   |

|                 |                                  |                     |            |
|-----------------|----------------------------------|---------------------|------------|
| Test Mode :     | Bluetooth (3Mbps) CH39 (2441MHz) | Temperature :       | 25~27℃     |
| Test Engineer : | Jack Liu                         | Relative Humidity : | 63~65%     |
| Frequency Range | 3GHz~18GHz                       | Polarization :      | Horizontal |

|           |                    |               |              |
|-----------|--------------------|---------------|--------------|
| Test Site | : 3m Chamber       | Temp/Humi     | : 25℃/64%    |
| Tested by | : Jack             | Pol/Phase     | : HORIZONTAL |
| Test Mode | : BT CH39(2441MHz) | Power rating: | : 120VAc     |

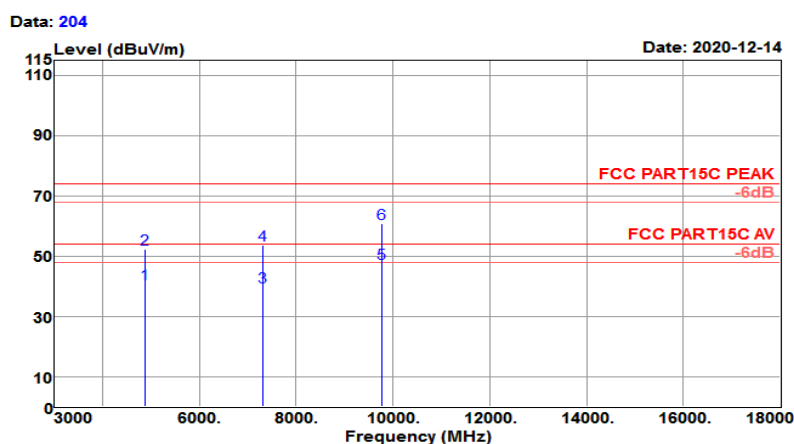


| Freq<br>MHz | Reading<br>level<br>dBuV | Antenna<br>factor<br>dB/m | Cable<br>loss<br>dB | Preamp<br>factor<br>dB | level<br>dBuV/m | Limit<br>level<br>dBuV/m | Over<br>limit<br>dB | Remark  |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 4882.000    | 39.67                    | 31.03                     | 6.08                | 35.98                  | 40.80           | 54.00                    | -13.20              | Average |
| 4882.000    | 51.29                    | 31.03                     | 6.08                | 35.98                  | 52.42           | 74.00                    | -21.58              | Peak    |
| 7323.000    | 29.04                    | 35.68                     | 9.20                | 34.29                  | 39.63           | 54.00                    | -14.37              | Average |
| 7323.000    | 43.07                    | 35.68                     | 9.20                | 34.29                  | 53.66           | 74.00                    | -20.34              | Peak    |
| 9764.000    | 28.63                    | 38.51                     | 12.50               | 32.03                  | 47.61           | 54.00                    | -6.39               | Average |
| 9764.000    | 41.89                    | 38.51                     | 12.50               | 32.03                  | 60.87           | 74.00                    | -13.13              | Peak    |

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

|                 |                                  |                     |          |
|-----------------|----------------------------------|---------------------|----------|
| Test Mode :     | Bluetooth (3Mbps) CH39 (2441MHz) | Temperature :       | 25~27℃   |
| Test Engineer : | Jack Liu                         | Relative Humidity : | 63~65%   |
| Frequency Range | 1GHz~3GHz                        | Polarization :      | Vertical |

|           |                    |               |            |
|-----------|--------------------|---------------|------------|
| Test Site | : 3m Chamber       | Temp/Humi     | : 25℃/64%  |
| Tested by | : Jack             | Pol/Phase     | : VERTICAL |
| Test Mode | : BT CH39(2441MHz) | Power rating: | 120VAc     |

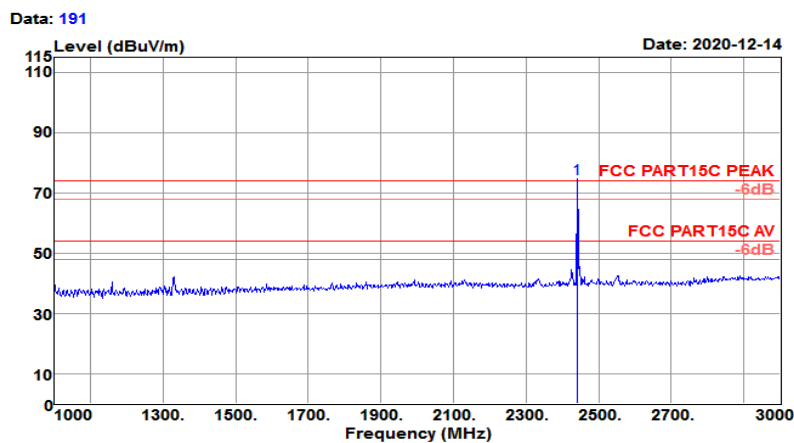


| Freq<br>MHz | Reading<br>level<br>dBuV | Antenna<br>factor<br>dB/m | Cable<br>loss<br>dB | Preamp<br>factor<br>dB | level<br>dBuV/m | Limit<br>level<br>dBuV/m | Over<br>limit<br>dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 2441.000    | 78.77                    | 27.67                     | 4.22                | 35.91                  | 74.75           | 74.00                    | 0.75                | Peak   |

|                 |                                  |                     |          |
|-----------------|----------------------------------|---------------------|----------|
| Test Mode :     | Bluetooth (3Mbps) CH39 (2441MHz) | Temperature :       | 25~27℃   |
| Test Engineer : | Jack Liu                         | Relative Humidity : | 63~65%   |
| Frequency Range | 3GHz~18GHz                       | Polarization :      | Vertical |

|           |                    |               |            |
|-----------|--------------------|---------------|------------|
| Test Site | : 3m Chamber       | Temp/Humi     | : 25℃/64%  |
| Tested by | : Jack             | Pol/Phase     | : VERTICAL |
| Test Mode | : BT CH39(2441MHz) | Power rating: | : 120VAc   |

Data: 206

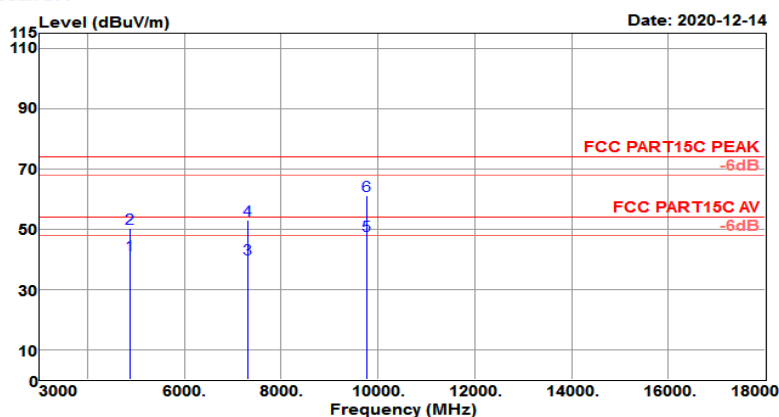


| Freq<br>MHz | Reading<br>level<br>dBuV | Antenna<br>factor<br>dB/m | Cable<br>loss<br>dB | Preamp<br>factor<br>dB | level<br>dBuV/m | Limit<br>level<br>dBuV/m | Over<br>limit<br>dB | Remark  |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 4882.000    | 40.26                    | 31.03                     | 6.08                | 35.98                  | 41.39           | 54.00                    | -12.61              | Average |
| 4882.000    | 49.12                    | 31.03                     | 6.08                | 35.98                  | 50.25           | 74.00                    | -23.75              | Peak    |
| 7323.000    | 29.52                    | 35.68                     | 9.20                | 34.29                  | 40.11           | 54.00                    | -13.89              | Average |
| 7323.000    | 42.18                    | 35.68                     | 9.20                | 34.29                  | 52.77           | 74.00                    | -21.23              | Peak    |
| 9764.000    | 28.94                    | 38.51                     | 12.50               | 32.03                  | 47.92           | 54.00                    | -6.08               | Average |
| 9764.000    | 42.09                    | 38.51                     | 12.50               | 32.03                  | 61.07           | 74.00                    | -12.93              | Peak    |

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

|                 |                                  |                     |            |
|-----------------|----------------------------------|---------------------|------------|
| Test Mode :     | Bluetooth (3Mbps) CH78 (2480MHz) | Temperature :       | 25~27℃     |
| Test Engineer : | Jack Liu                         | Relative Humidity : | 63~65%     |
| Frequency Range | 1GHz~3GHz                        | Polarization :      | Horizontal |

|           |                    |               |              |
|-----------|--------------------|---------------|--------------|
| Test Site | : 3m Chamber       | Temp/Humi     | : 25℃/64%    |
| Tested by | : Jack             | Pol/Phase     | : HORIZONTAL |
| Test Mode | : BT CH78(2480MHz) | Power rating: | 120VAc       |

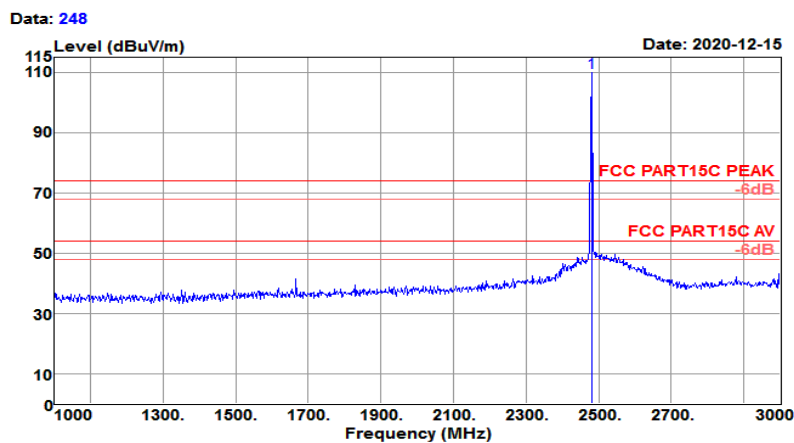


| Freq<br>MHz | Reading<br>level<br>dBuV | Antenna<br>factor<br>dB/m | Cable<br>loss<br>dB | Preamp<br>factor<br>dB | level<br>dBuV/m | Limit<br>level<br>dBuV/m | Over<br>limit<br>dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 2480.000    | 113.94                   | 27.76                     | 4.26                | 35.99                  | 109.97          | 74.00                    | 35.97               | Peak   |



|                 |                                  |                     |            |
|-----------------|----------------------------------|---------------------|------------|
| Test Mode :     | Bluetooth (3Mbps) CH78 (2480MHz) | Temperature :       | 25~27℃     |
| Test Engineer : | Jack Liu                         | Relative Humidity : | 63~65%     |
| Frequency Range | 3GHz~18GHz                       | Polarization :      | Horizontal |

|           |                    |               |              |
|-----------|--------------------|---------------|--------------|
| Test Site | : 3m Chamber       | Temp/Humi     | : 25℃/64%    |
| Tested by | : Jack             | Pol/Phase     | : HORIZONTAL |
| Test Mode | : BT CH78(2480MHz) | Power rating: | 120VAc       |

Data: 202

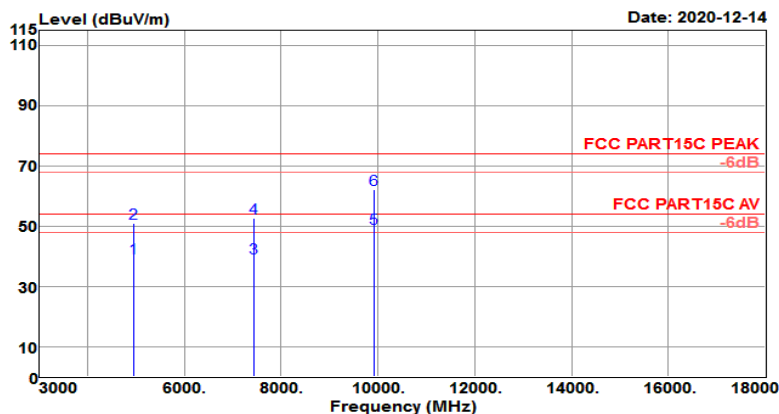


| Freq<br>MHz | Reading<br>level<br>dBuV | Antenna<br>factor<br>dB/m | Cable<br>loss<br>dB | Preamp<br>factor<br>dB | level<br>dBuV/m | Limit<br>level<br>dBuV/m | Over<br>limit<br>dB | Remark  |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 4960.000    | 38.21                    | 31.14                     | 6.07                | 35.93                  | 39.49           | 54.00                    | -14.51              | Average |
| 4960.000    | 49.53                    | 31.14                     | 6.07                | 35.93                  | 50.81           | 74.00                    | -23.19              | Peak    |
| 7440.000    | 28.83                    | 35.96                     | 9.04                | 34.32                  | 39.51           | 54.00                    | -14.49              | Average |
| 7440.000    | 41.94                    | 35.96                     | 9.04                | 34.32                  | 52.62           | 74.00                    | -21.38              | Peak    |
| 9920.000    | 29.36                    | 38.64                     | 13.24               | 31.87                  | 49.37           | 54.00                    | -4.63               | Average |
| 9920.000    | 42.01                    | 38.64                     | 13.24               | 31.87                  | 62.02           | 74.00                    | -11.98              | Peak    |

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

|                 |                                  |                     |          |
|-----------------|----------------------------------|---------------------|----------|
| Test Mode :     | Bluetooth (3Mbps) CH78 (2480MHz) | Temperature :       | 25~27℃   |
| Test Engineer : | Jack Liu                         | Relative Humidity : | 63~65%   |
| Frequency Range | 1GHz~3GHz                        | Polarization :      | Vertical |


|           |                    |               |            |
|-----------|--------------------|---------------|------------|
| Test Site | : 3m Chamber       | Temp/Humi     | : 25℃/64%  |
| Tested by | : Jack             | Pol/Phase     | : VERTICAL |
| Test Mode | : BT CH78(2480MHz) | Power rating: | 120VAc     |

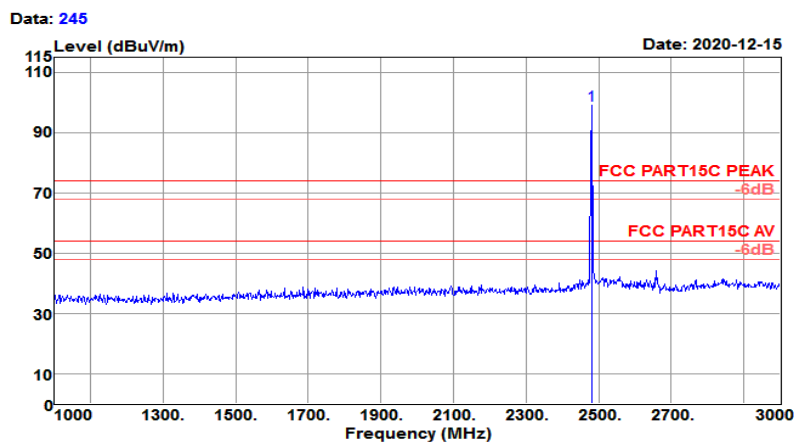

| Freq<br>MHz | Reading<br>level<br>dBuV | Antenna<br>factor<br>dB/m | Cable<br>loss<br>dB | Preamp<br>factor<br>dB | level<br>dBuV/m | Limit<br>level<br>dBuV/m | Over<br>limit<br>dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 2480.000    | 102.94                   | 27.76                     | 4.26                | 35.99                  | 98.97           | 74.00                    | 24.97               | Peak   |

|                 |                                  |                     |          |
|-----------------|----------------------------------|---------------------|----------|
| Test Mode :     | Bluetooth (3Mbps) CH78 (2480MHz) | Temperature :       | 25~27℃   |
| Test Engineer : | Jack Liu                         | Relative Humidity : | 63~65%   |
| Frequency Range | 3GHz~18GHz                       | Polarization :      | Vertical |

|           |                    |              |            |
|-----------|--------------------|--------------|------------|
| Test Site | : 3m Chamber       | Temp/Humi    | : 25℃/64%  |
| Tested by | : Jack             | Pol/Phase    | : VERTICAL |
| Test Mode | : BT CH78(2480MHz) | Power rating | : 120Wac   |

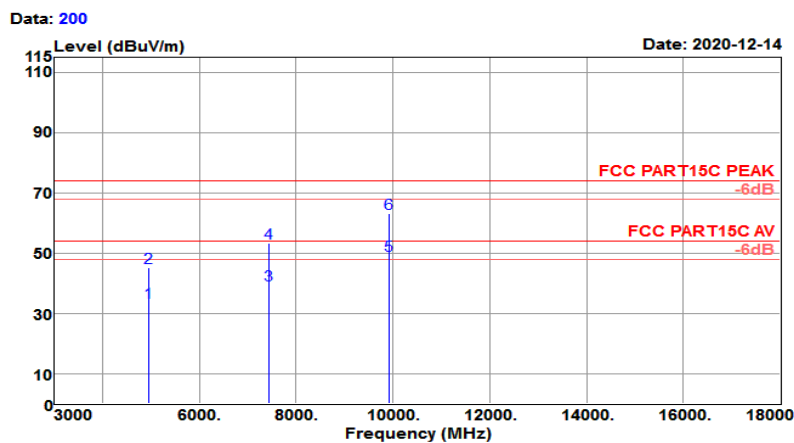


| Freq<br>MHz | Reading<br>level<br>dBuV | Antenna<br>factor<br>dB/m | Cable<br>loss<br>dB | Preamp<br>factor<br>dB | level<br>dBuV/m | Limit<br>level<br>dBuV/m | Over<br>limit<br>dB | Remark  |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 4960.000    | 32.38                    | 31.14                     | 6.07                | 35.93                  | 33.66           | 54.00                    | -20.34              | Average |
| 4960.000    | 43.70                    | 31.14                     | 6.07                | 35.93                  | 44.98           | 74.00                    | -29.02              | Peak    |
| 7440.000    | 28.81                    | 35.96                     | 9.04                | 34.32                  | 39.49           | 54.00                    | -14.51              | Average |
| 7440.000    | 42.61                    | 35.96                     | 9.04                | 34.32                  | 53.29           | 74.00                    | -20.71              | Peak    |
| 9920.000    | 29.33                    | 38.64                     | 13.24               | 31.87                  | 49.34           | 54.00                    | -4.66               | Average |
| 9920.000    | 43.12                    | 38.64                     | 13.24               | 31.87                  | 63.13           | 74.00                    | -10.87              | Peak    |

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

#### 4.8.2 Test Result of Radiated Spurious Emission (30MHz ~ 1GHz)

|                 |                                  |                     |            |
|-----------------|----------------------------------|---------------------|------------|
| Test Mode :     | Bluetooth (3Mbps) CH00 (2402MHz) | Temperature :       | 25~27℃     |
| Test Engineer : | Jack Liu                         | Relative Humidity : | 63~65%     |
| Frequency Range | 30MHz~1GHz                       | Polarization :      | Horizontal |


|           |                    |              |              |
|-----------|--------------------|--------------|--------------|
| Test Site | : 3m Chamber       | Temp/Humi    | : 25℃/64%    |
| Tested by | : Jack             | Pol/Phase    | : HORIZONTAL |
| Test Mode | : BT CH00(2402MHz) | Power rating | : 120VAc     |

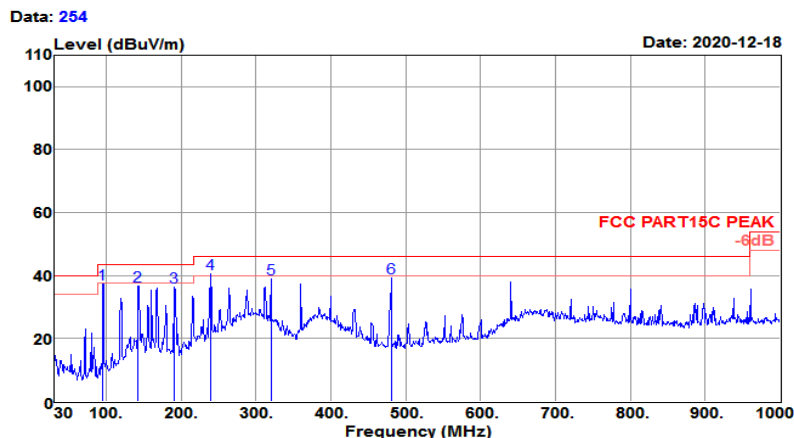

| Freq<br>MHz | Reading<br>level<br>dBuV | Antenna<br>factor<br>dB/m | Cable<br>loss<br>dB | Preamp<br>factor<br>dB | level<br>dBuV/m | Limit<br>level<br>dBuV/m | Over<br>limit<br>dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 94.990      | 59.36                    | 8.70                      | 1.87                | 32.49                  | 37.44           | 43.50                    | -6.06               | QP     |
| 142.520     | 52.75                    | 14.13                     | 2.31                | 32.48                  | 36.71           | 43.50                    | -6.79               | QP     |
| 191.020     | 55.03                    | 11.05                     | 2.68                | 32.47                  | 36.29           | 43.50                    | -7.21               | QP     |
| 239.520     | 57.39                    | 12.58                     | 3.02                | 32.48                  | 40.51           | 46.00                    | -5.49               | QP     |
| 320.030     | 53.42                    | 14.44                     | 3.51                | 32.50                  | 38.87           | 46.00                    | -7.13               | QP     |
| 480.080     | 50.00                    | 17.66                     | 4.33                | 32.61                  | 39.38           | 46.00                    | -6.62               | QP     |

|                 |                                  |                     |          |
|-----------------|----------------------------------|---------------------|----------|
| Test Mode :     | Bluetooth (3Mbps) CH00 (2402MHz) | Temperature :       | 25~27℃   |
| Test Engineer : | Jack Liu                         | Relative Humidity : | 63~65%   |
| Frequency Range | 30MHz~1GHz                       | Polarization :      | Vertical |

|           |                    |              |            |
|-----------|--------------------|--------------|------------|
| Test Site | : 3m Chamber       | Temp/Humi    | : 25℃/64%  |
| Tested by | : Jack             | Pol/Phase    | : VERTICAL |
| Test Mode | : BT CH00(2402MHz) | Power rating | : 120VAc   |

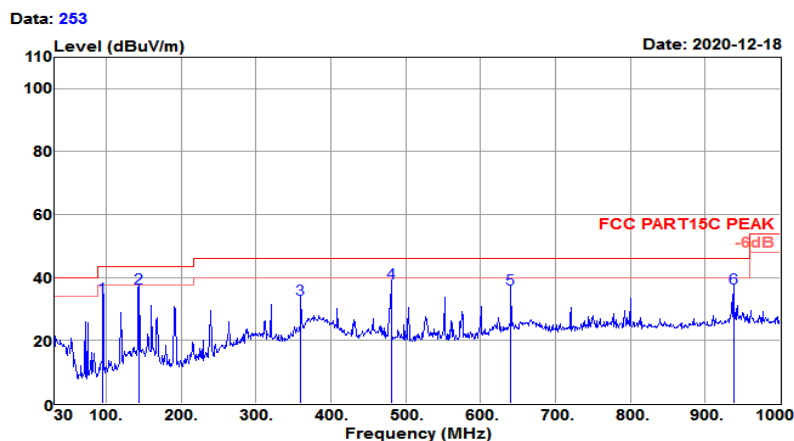

| Freq<br>MHz | Reading<br>level<br>dBuV | Antenna<br>factor<br>dB/m | Cable<br>loss<br>dB | Preamp<br>factor<br>dB | level<br>dBuV/m | Limit<br>level<br>dBuV/m | Over<br>limit<br>dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 94.990      | 55.58                    | 8.70                      | 1.87                | 32.49                  | 33.66           | 43.50                    | -9.84               | QP     |
| 143.490     | 52.55                    | 14.17                     | 2.32                | 32.48                  | 36.56           | 43.50                    | -6.94               | QP     |
| 359.800     | 46.80                    | 15.00                     | 3.74                | 32.53                  | 33.01           | 46.00                    | -12.99              | QP     |
| 480.080     | 49.02                    | 17.66                     | 4.33                | 32.61                  | 38.40           | 46.00                    | -7.60               | QP     |
| 640.130     | 43.37                    | 20.56                     | 5.03                | 32.67                  | 36.29           | 46.00                    | -9.71               | QP     |
| 937.920     | 38.41                    | 24.18                     | 6.14                | 32.15                  | 36.58           | 46.00                    | -9.42               | QP     |

## 4.9 AC Conducted Emission Measurement

### 4.9.1 Limit of AC Conducted Emission

FCC §15.207

IC RSS-GEN 8.8

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of emission (MHz) | Conducted limit (dBμV) |           |
|-----------------------------|------------------------|-----------|
|                             | Quasi-peak             | Average   |
| 0.15-0.5                    | 66 to 56*              | 56 to 46* |
| 0.5-5                       | 56                     | 46        |
| 5-30                        | 60                     | 50        |


\*Decreases with the logarithm of the frequency.

### 4.9.2 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 4.9.3 Test Result of AC Conducted Emission


|                 |                           |                     |         |
|-----------------|---------------------------|---------------------|---------|
| Test Mode :     | Mode 1                    | Temperature :       | 21~23°C |
| Test Engineer : | Jack Liu                  | Relative Humidity : | 41~43%  |
| Test Voltage :  | 120Vac / 60Hz             | Phase :             | Line    |
| Function Type : | Bluetooth Link + Lighting |                     |         |

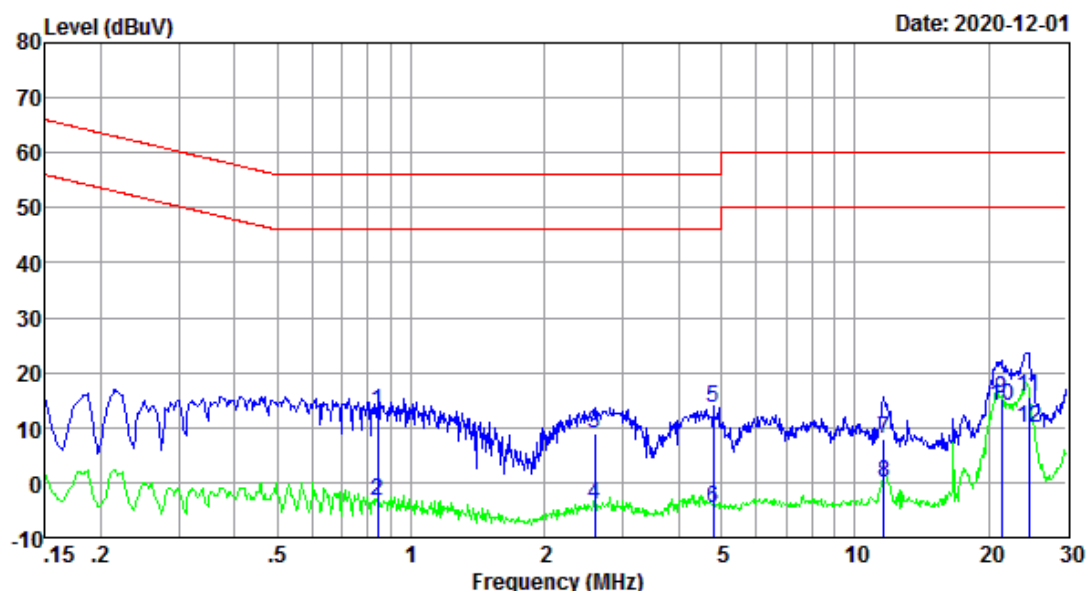

| Freq<br>MHz | Reading<br>level<br>dBuV | LISN/ISN<br>factor<br>dB | Cable<br>loss<br>dB | Result<br>level<br>dBuV | Limit<br>level<br>dBuV | Over<br>limit<br>dB | Remark  |
|-------------|--------------------------|--------------------------|---------------------|-------------------------|------------------------|---------------------|---------|
| 0.839       | 3.40                     | 9.57                     | 0.01                | 12.98                   | 56.00                  | -43.02              | QP      |
| 0.839       | -13.10                   | 9.57                     | 0.01                | -3.52                   | 46.00                  | -49.52              | Average |
| 2.594       | -0.81                    | 9.59                     | 0.03                | 8.81                    | 56.00                  | -47.19              | QP      |
| 2.594       | -13.71                   | 9.59                     | 0.03                | -4.09                   | 46.00                  | -50.09              | Average |
| 4.797       | 3.80                     | 9.66                     | 0.04                | 13.50                   | 56.00                  | -42.50              | QP      |
| 4.797       | -14.40                   | 9.66                     | 0.04                | -4.70                   | 46.00                  | -50.70              | Average |
| 11.621      | -2.20                    | 9.92                     | 0.10                | 7.82                    | 60.00                  | -52.18              | QP      |
| 11.621      | -10.00                   | 9.92                     | 0.10                | 0.02                    | 50.00                  | -49.98              | Average |
| 21.373      | 4.99                     | 10.28                    | 0.13                | 15.40                   | 60.00                  | -44.60              | QP      |
| 21.373      | 3.49                     | 10.28                    | 0.13                | 13.90                   | 50.00                  | -36.10              | Average |
| 24.659      | 5.10                     | 10.44                    | 0.12                | 15.66                   | 60.00                  | -44.34              | QP      |
| 24.659      | -0.60                    | 10.44                    | 0.12                | 9.96                    | 50.00                  | -40.04              | Average |

Result Level= Reading Level + LISN Factor + Cable Loss

|                 |                           |                     |         |
|-----------------|---------------------------|---------------------|---------|
| Test Mode :     | Mode 1                    | Temperature :       | 21~23°C |
| Test Engineer : | Jack Liu                  | Relative Humidity : | 41~43%  |
| Test Voltage :  | 120Vac / 60Hz             | Phase :             | Neutral |
| Function Type : | Bluetooth Link + Lighting |                     |         |

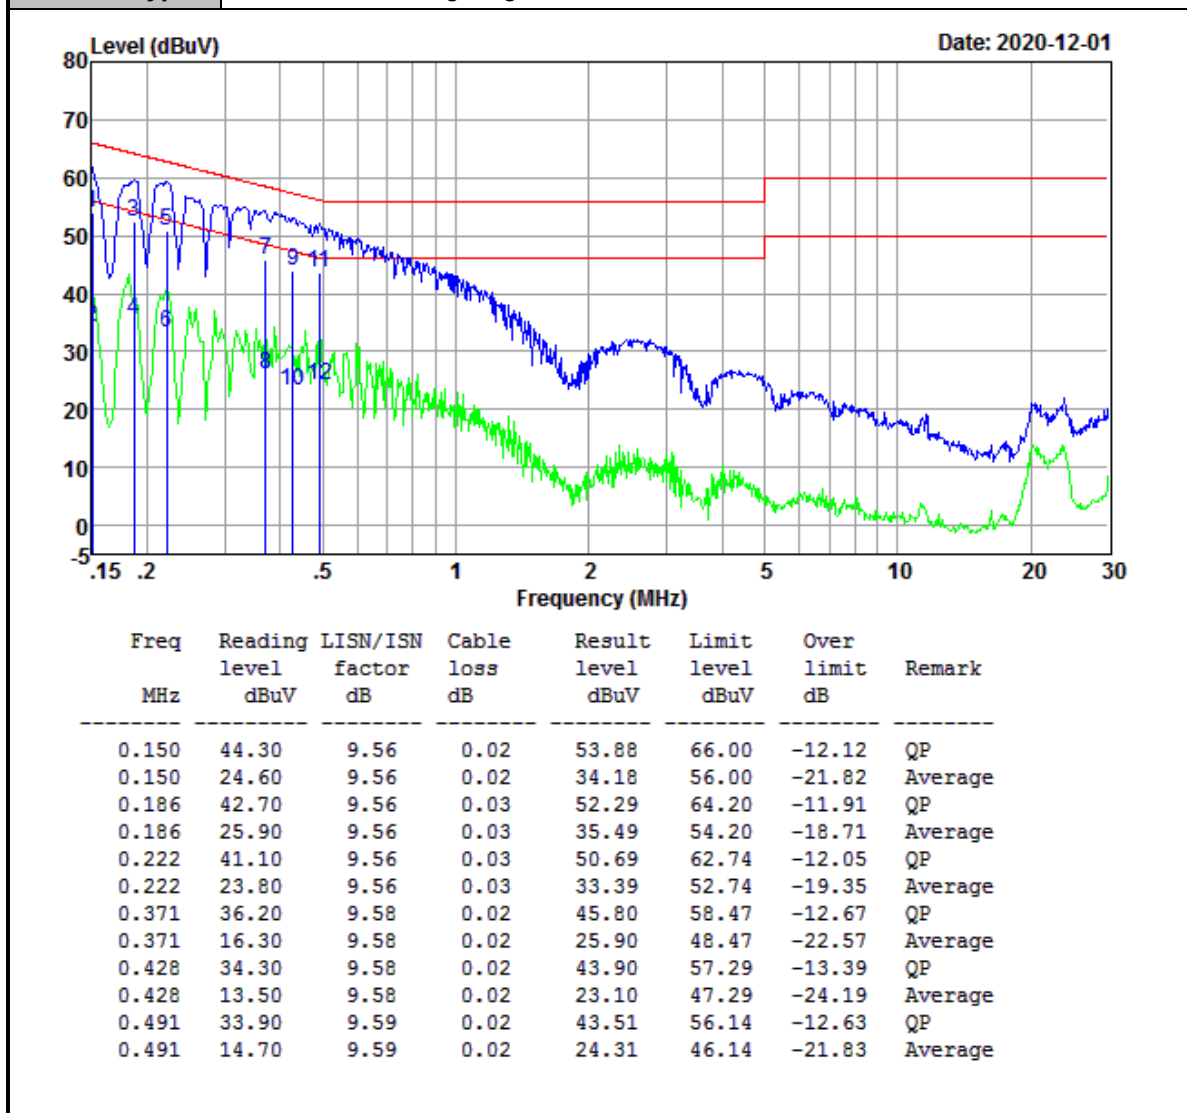

Result Level= Reading Level + LISN Factor + Cable Loss



## **4.10 Antenna Requirements**

### **4.10.1 Standard Applicable**

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded..

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

### **4.10.2 Antenna Connected Construction**

An Monopole Antenna type design is used.

### **4.10.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 5 List of Measuring Equipment

| Instrument                    | Manufacturer | Model No. | Serial No. | Calibration Date | Due Date   | Remark    |
|-------------------------------|--------------|-----------|------------|------------------|------------|-----------|
| Spectrum Analyzer             | Keysight     | N9010A    | MY56070788 | 2020-01-15       | 2021-01-14 | Conducted |
| Power Sensor                  | Keysight     | U2021XA   | MY56510025 | 2020-01-16       | 2021-01-15 | Conducted |
| Power Sensor                  | Keysight     | U2021XA   | MY57030005 | 2020-01-16       | 2021-01-15 | Conducted |
| Power Sensor                  | Keysight     | U2021XA   | MY56510018 | 2020-01-16       | 2021-01-15 | Conducted |
| Power Sensor                  | Keysight     | U2021XA   | MY56480002 | 2020-01-16       | 2021-01-15 | Conducted |
| Thermal Chamber               | Howkin       | UHL-34    | 19111801   | 2020-05-09       | 2021-05-08 | Conducted |
| Base Station                  | R&S          | CMW 270   | 101231     | 2020-01-16       | 2021-01-15 | Conducted |
| Signal Generator (Interferer) | Keysight     | N5182B    | MY56200384 | 2020-02-21       | 2021-02-20 | Conducted |
| Signal Generator (Blocker)    | Keysight     | N5171B    | MY56200661 | 2020-01-15       | 2021-01-14 | Conducted |

| Instrument        | Manufacturer  | Model No.     | Serial No. | Calibration Date | Due Date   | Remark    |
|-------------------|---------------|---------------|------------|------------------|------------|-----------|
| Spectrum Analyzer | R&S           | FSV 40        | 101433     | 2020-01-16       | 2021-01-15 | Radiation |
| Amplifier         | Sonoma        | 310           | 363917     | 2020-01-15       | 2021-01-14 | Radiation |
| Amplifier         | Schwarzbeck   | BBV 9718      | 327        | 2020-01-15       | 2021-01-14 | Radiation |
| Amplifier         | Narda         | TTA1840-35-HG | 2034380    | 2020-05-22       | 2021-05-21 | Radiation |
| Loop Antenna      | Schwarzbeck   | FMZB 1519B    | 1519B-051  | 2020-02-14       | 2023-02-13 | Radiation |
| Broadband Antenna | Schwarzbeck   | VULB 9168     | 9168-757   | 2018-08-31       | 2021-08-30 | Radiation |
| Horn Antenna      | Schwarzbeck   | BBHA 9120 D   | 1677       | 2020-02-14       | 2023-02-13 | Radiation |
| Horn Antenna      | COM-POWER     | AH-1840       | 101117     | 2018-06-20       | 2021-06-19 | Radiation |
| Test Software     | Audix         | E3            | 6.111221a  | N/A              | N/A        | Radiation |
| Filter            | Micro-Tronics | BRM 50702     | G266       | N/A              | N/A        | Radiation |

| Instrument        | Manufacturer | Model No. | Serial No. | Calibration Date | Due Date   | Remark    |
|-------------------|--------------|-----------|------------|------------------|------------|-----------|
| LISN              | R&S          | ENV216    | 102125     | 2020-01-08       | 2021-01-07 | Conducted |
| LISN              | R&S          | ENV432    | 101327     | 2020-01-08       | 2021-01-07 | Conducted |
| EMI Test Receiver | R&S          | ESR3      | 102143     | 2020-01-16       | 2021-01-15 | Conducted |
| EMI Test Software | Audix        | E3        | N/A        | N/A              | N/A        | Conducted |

N/A: No Calibration Required

## 6 Uncertainty of Evaluation

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| MEASUREMENT         | FREQUENCY     | UNCERTAINTY |
|---------------------|---------------|-------------|
| Conducted emissions | 9kHz~30MHz    | 2.42dB      |
| Radiated emission   | 30MHz ~ 1GMHz | 2.50dB      |
|                     | 1GHz ~ 18GHz  | 3.51dB      |
|                     | 18GHz ~ 40GHz | 3.96dB      |

| MEASUREMENT                | UNCERTAINTY          |
|----------------------------|----------------------|
| Occupied Channel Bandwidth | $\pm 196.4\text{Hz}$ |
| RF output power, conducted | $\pm 2.31\text{dB}$  |
| Power density, conducted   | $\pm 2.31\text{dB}$  |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .


## Appendix A: 20dB Emission Bandwidth

### Test Result


| TestMode | Antenna | Channel | 20db EBW[MHz] | FL[MHz]  | FH[MHz]  | Limit[MHz] | Verdict |
|----------|---------|---------|---------------|----------|----------|------------|---------|
| DH5      | Ant1    | 2402    | 0.939         | 2401.502 | 2402.441 | ---        | PASS    |
|          |         | 2441    | 0.936         | 2440.505 | 2441.441 | ---        | PASS    |
|          |         | 2480    | 0.942         | 2479.499 | 2480.441 | ---        | PASS    |
| 2DH5     | Ant1    | 2402    | 1.326         | 2401.292 | 2402.618 | ---        | PASS    |
|          |         | 2441    | 1.365         | 2440.277 | 2441.642 | ---        | PASS    |
|          |         | 2480    | 1.320         | 2479.298 | 2480.618 | ---        | PASS    |
| 3DH5     | Ant1    | 2402    | 1.329         | 2401.298 | 2402.627 | ---        | PASS    |
|          |         | 2441    | 1.344         | 2440.286 | 2441.630 | ---        | PASS    |
|          |         | 2480    | 1.302         | 2479.313 | 2480.615 | ---        | PASS    |

## Test Graphs




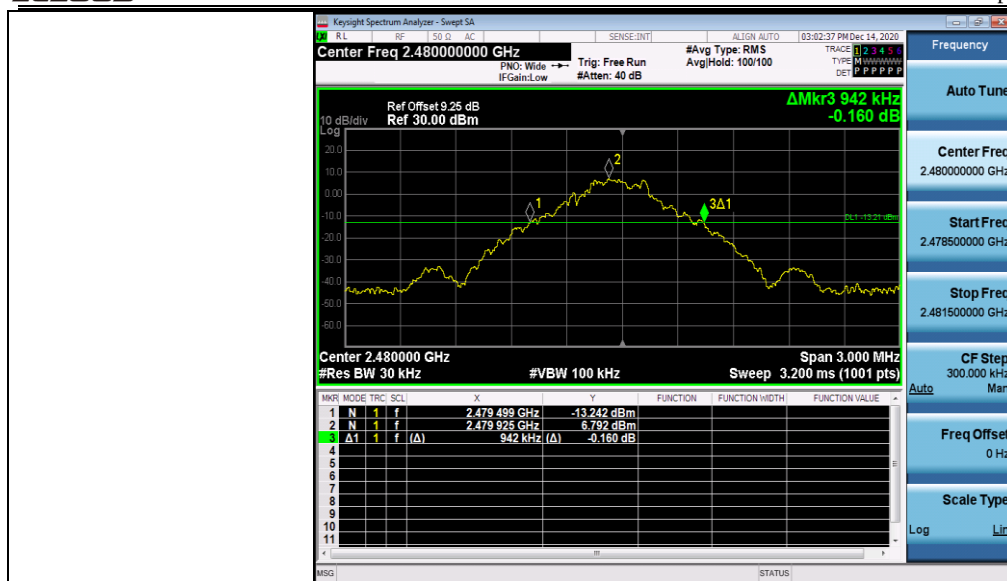


2DH5\_Ant1\_2402

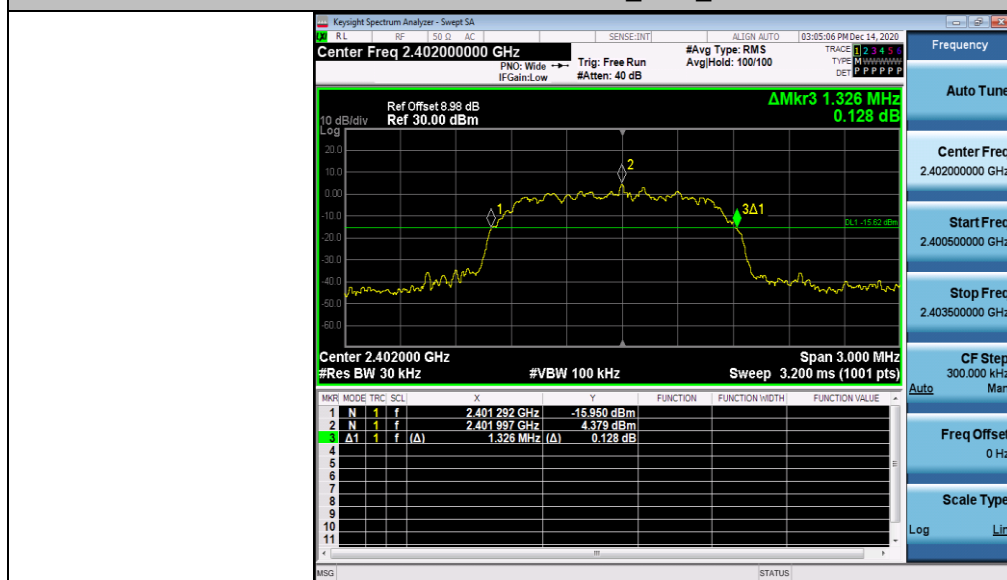

2DH5\_Ant1\_2441

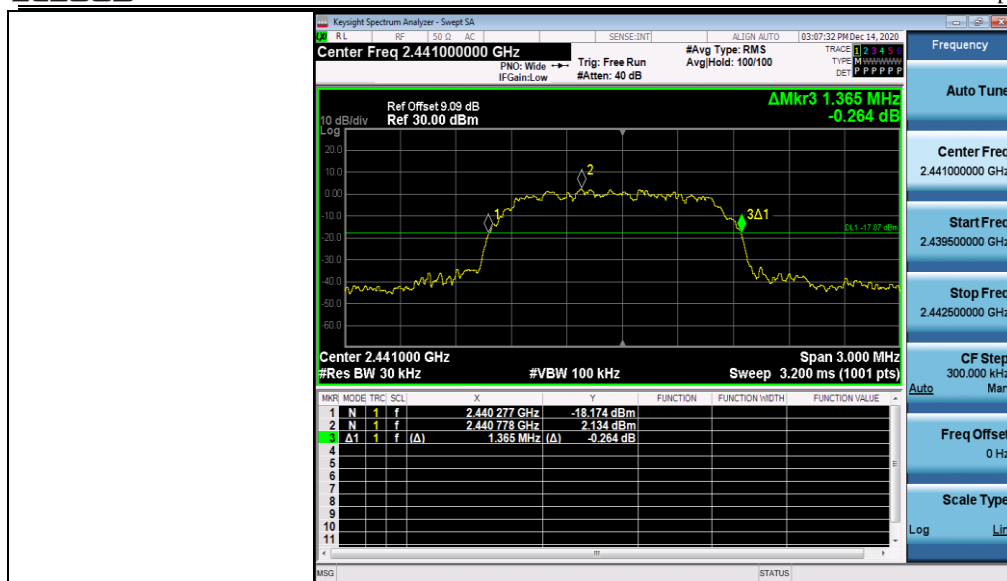


2DH5\_Ant1\_2480

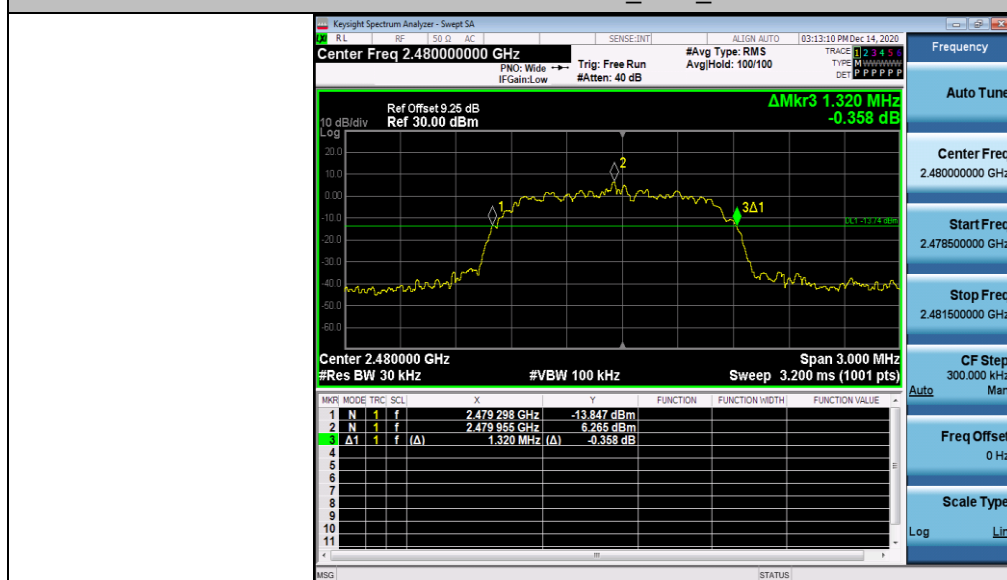


3DH5\_Ant1\_2402



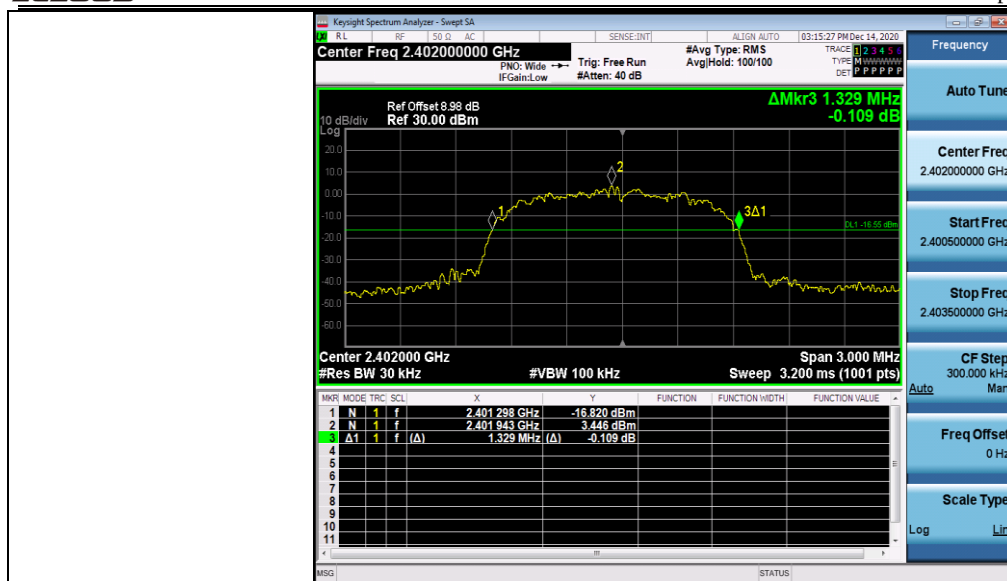

3DH5\_Ant1\_2441

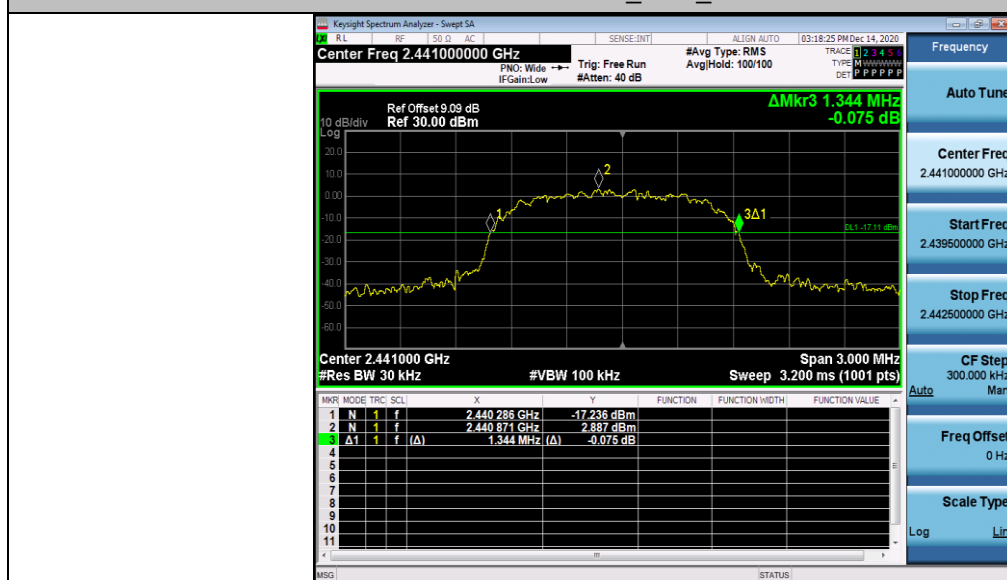

3DH5\_Ant1\_2480



## Appendix B: Occupied Channel Bandwidth

### Test Result


| TestMode | Antenna | Channel | OCB [MHz] | FL[MHz]  | FH[MHz]  | Limit[MHz] | Verdict |
|----------|---------|---------|-----------|----------|----------|------------|---------|
| DH5      | Ant1    | 2402    | 0.80962   | 2401.555 | 2402.364 | ---        | PASS    |
|          |         | 2441    | 0.80340   | 2440.558 | 2441.361 | ---        | PASS    |
|          |         | 2480    | 0.81558   | 2479.549 | 2480.365 | ---        | PASS    |
| 2DH5     | Ant1    | 2402    | 1.1828    | 2401.367 | 2402.550 | ---        | PASS    |
|          |         | 2441    | 1.1865    | 2440.365 | 2441.552 | ---        | PASS    |
|          |         | 2480    | 1.1836    | 2479.366 | 2480.550 | ---        | PASS    |
| 3DH5     | Ant1    | 2402    | 1.1770    | 2401.370 | 2402.547 | ---        | PASS    |
|          |         | 2441    | 1.1795    | 2440.369 | 2441.549 | ---        | PASS    |
|          |         | 2480    | 1.1957    | 2479.355 | 2480.550 | ---        | PASS    |

## Test Graphs

DH5\_Ant1\_2402




DH5\_Ant1\_2441

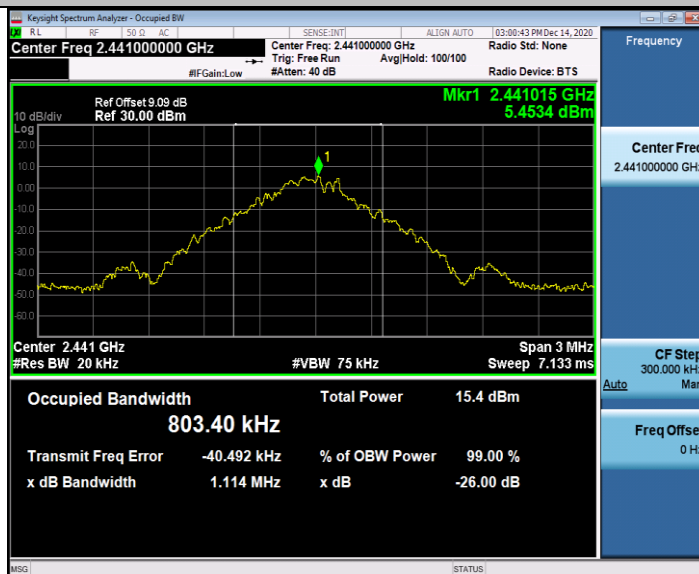

DH5\_Ant1\_2480



2DH5\_Ant1\_2402

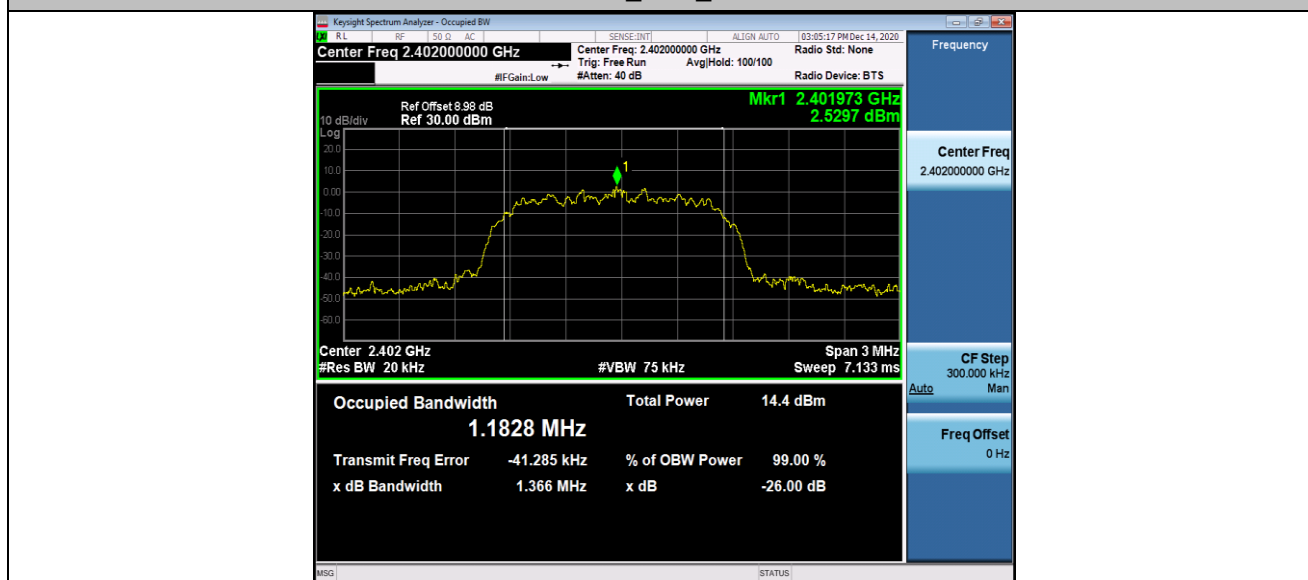

2DH5\_Ant1\_2441




2DH5\_Ant1\_2480



3DH5\_Ant1\_2402



3DH5\_Ant1\_2441

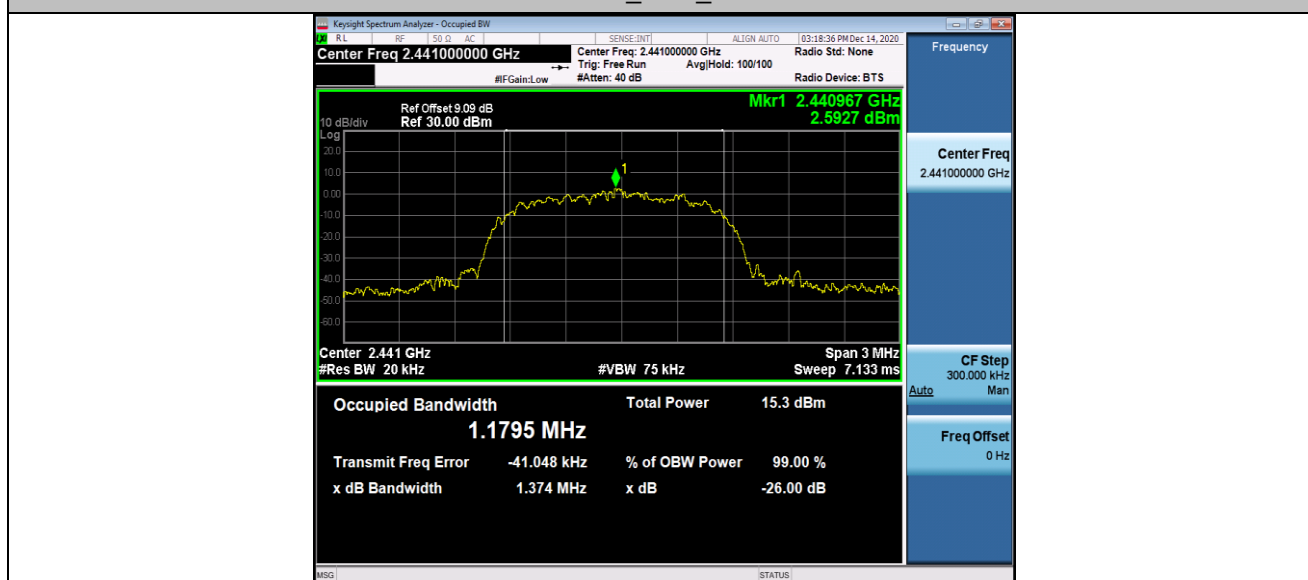

3DH5\_Ant1\_2480






## Appendix C: Maximum conducted output power

### Test Result


| TestMode | Antenna | Channel | Result[dBm] | EIRP [dBm] | Limit[dBm] | Verdict |
|----------|---------|---------|-------------|------------|------------|---------|
| DH5      | Ant1    | 2402    | 8.29        | 9.49       | <=20.97    | PASS    |
|          |         | 2441    | 9.26        | 10.46      | <=20.97    | PASS    |
|          |         | 2480    | 9.63        | 10.83      | <=20.97    | PASS    |
| 2DH5     | Ant1    | 2402    | 10.48       | 11.68      | <=20.97    | PASS    |
|          |         | 2441    | 11.29       | 12.49      | <=20.97    | PASS    |
|          |         | 2480    | 11.62       | 12.82      | <=20.97    | PASS    |
| 3DH5     | Ant1    | 2402    | 10.83       | 12.03      | <=20.97    | PASS    |
|          |         | 2441    | 11.66       | 12.86      | <=20.97    | PASS    |
|          |         | 2480    | 11.88       | 13.08      | <=20.97    | PASS    |

## Test Graphs


DH5\_Ant1\_2402

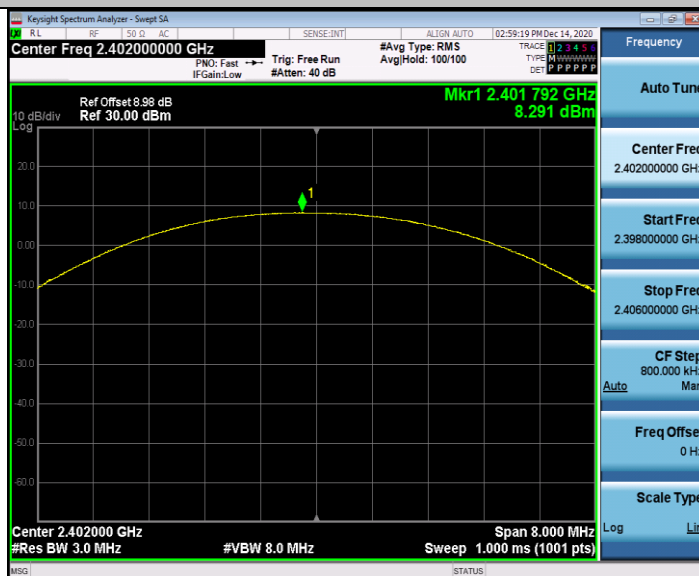


DH5\_Ant1\_2441

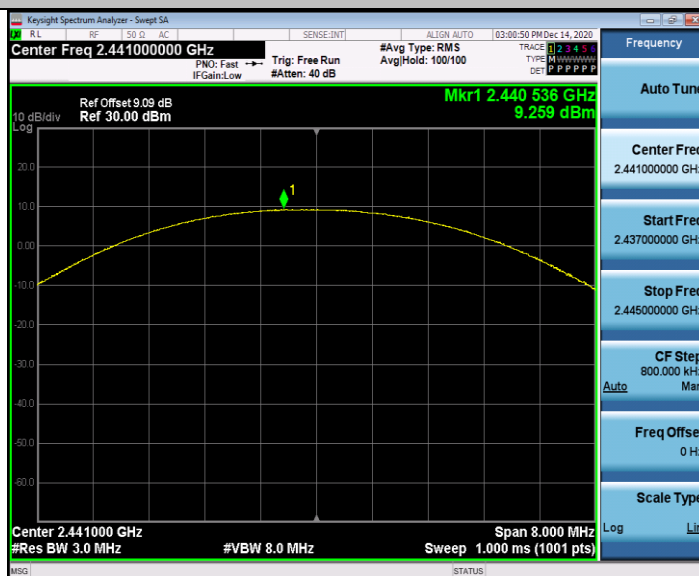


DH5\_Ant1\_2480

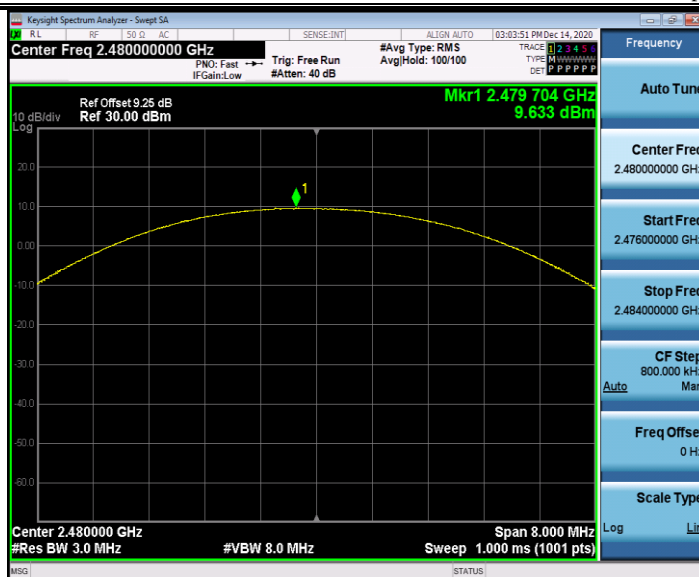


2DH5\_Ant1\_2402

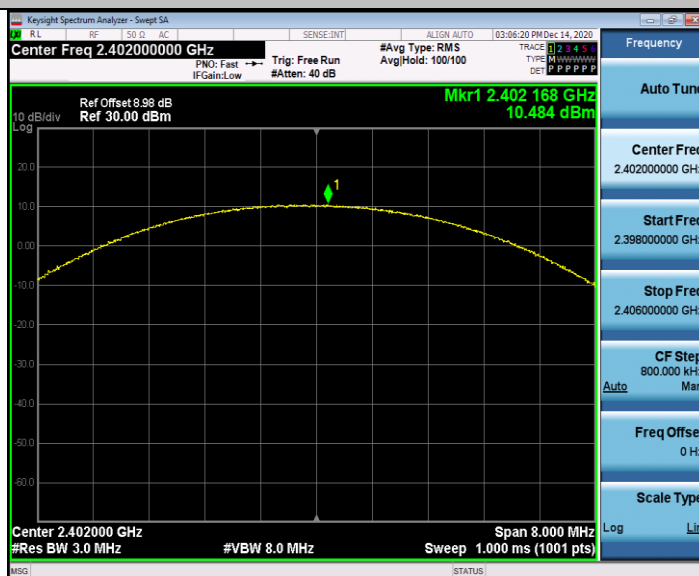


2DH5\_Ant1\_2441

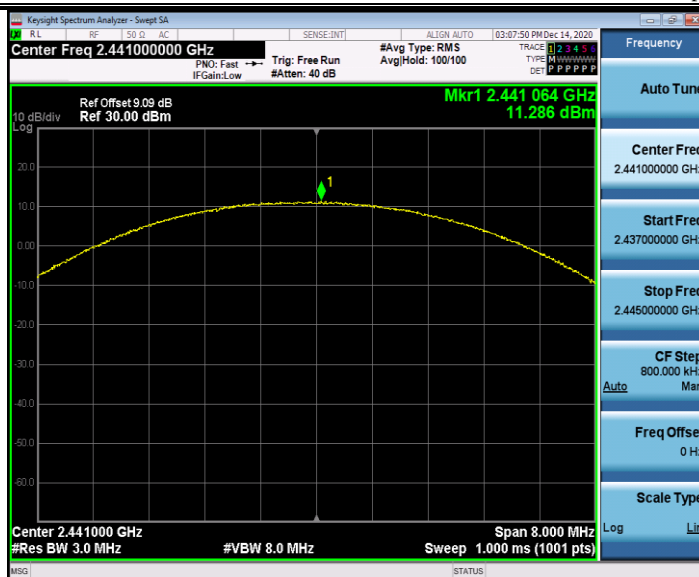


2DH5\_Ant1\_2480

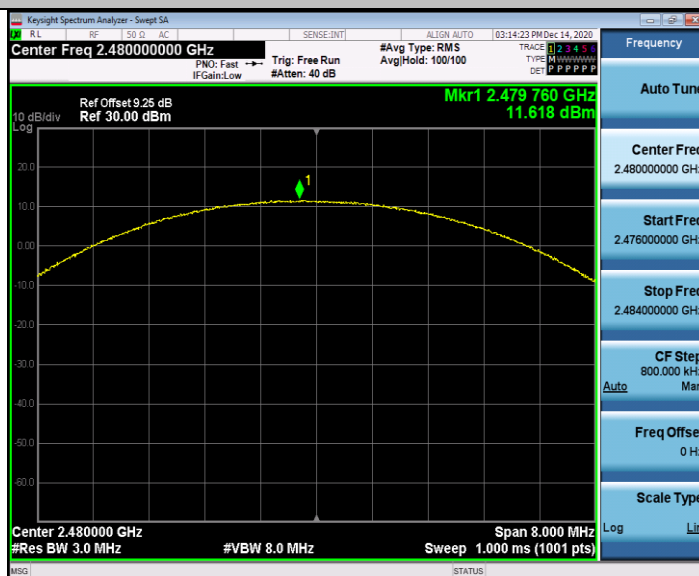


3DH5\_Ant1\_2402

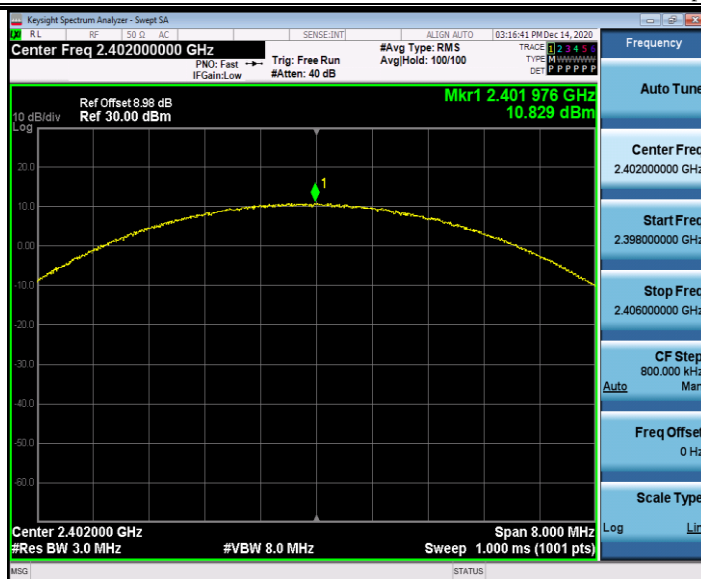

3DH5\_Ant1\_2441

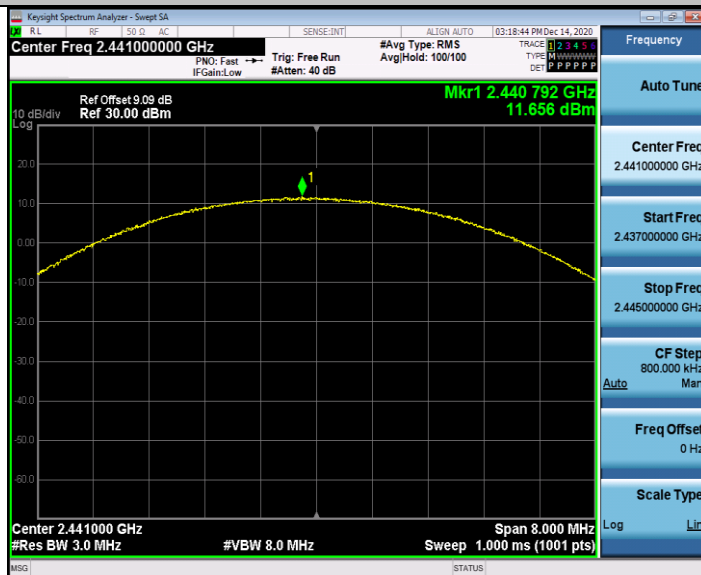

3DH5\_Ant1\_2480

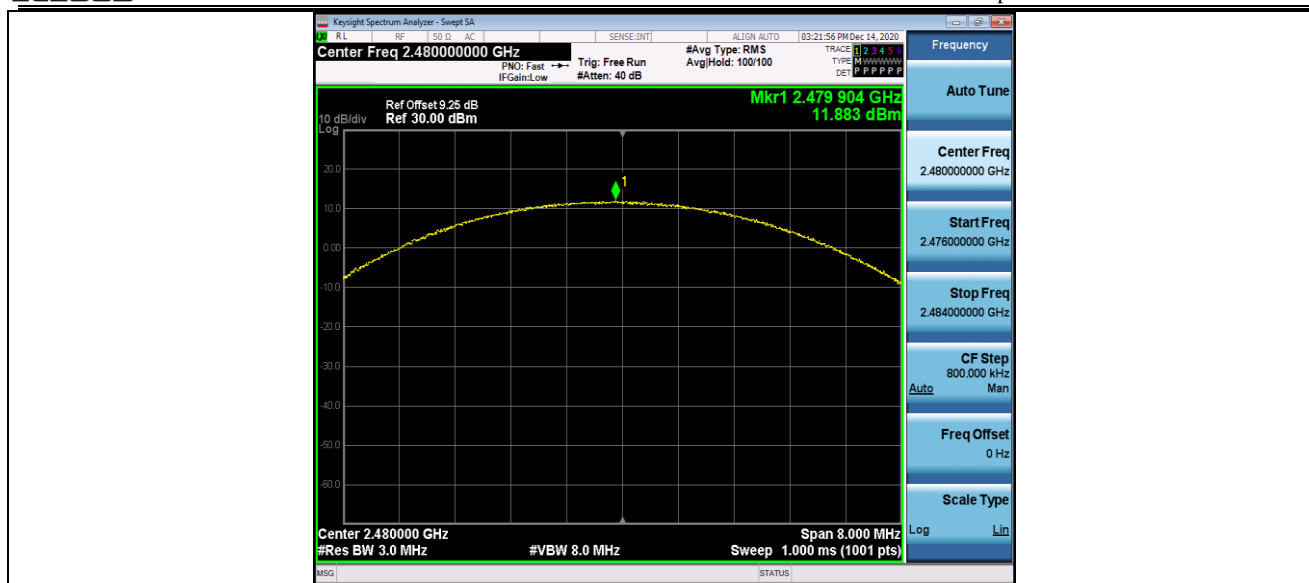

## Appendix D: Carrier frequency separation

### Test Result

| TestMode | Antenna | Channel  | Result[MHz] | Limit[MHz]   | Verdict |
|----------|---------|----------|-------------|--------------|---------|
| DH5      | Ant1    | Hop_2441 | 0.714       | $\geq 0.628$ | PASS    |
| 2DH5     | Ant1    | Hop_2441 | 1.166       | $\geq 0.910$ | PASS    |
| 3DH5     | Ant1    | Hop_2441 | 1.050       | $\geq 0.896$ | PASS    |

## Test Graphs

### DH5\_Ant1\_Hop




### 2DH5\_Ant1\_Hop



### 3DH5\_Ant1\_Hop



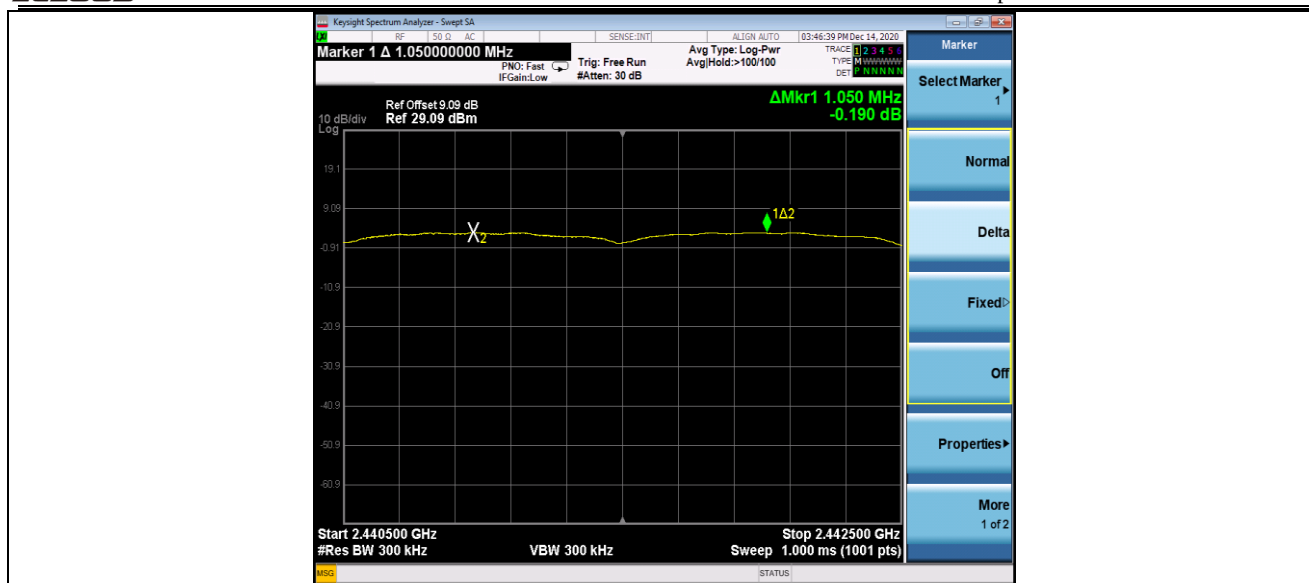



## Appendix E: Time of occupancy

### Test Result


| TestMode | Antenna | Channel  | BurstWidth<br>[ms] | TotalHops<br>[Num] | Result[s] | Limit[s] | Verdict |
|----------|---------|----------|--------------------|--------------------|-----------|----------|---------|
| DH1      | Ant1    | Hop_2441 | 2.88               | 60                 | 0.173     | <=0.4    | PASS    |
| DH3      | Ant1    | Hop_2441 | 1.63               | 130                | 0.212     | <=0.4    | PASS    |
| DH5      | Ant1    | Hop_2441 | 2.88               | 80                 | 0.23      | <=0.4    | PASS    |
| 2DH1     | Ant1    | Hop_2441 | 0.39               | 140                | 0.054     | <=0.4    | PASS    |
| 2DH3     | Ant1    | Hop_2441 | 1.64               | 100                | 0.164     | <=0.4    | PASS    |
| 2DH5     | Ant1    | Hop_2441 | 2.89               | 70                 | 0.202     | <=0.4    | PASS    |
| 3DH1     | Ant1    | Hop_2441 | 0.39               | 110                | 0.043     | <=0.4    | PASS    |
| 3DH3     | Ant1    | Hop_2441 | 1.64               | 180                | 0.295     | <=0.4    | PASS    |
| 3DH5     | Ant1    | Hop_2441 | 2.89               | 90                 | 0.26      | <=0.4    | PASS    |

## Test Graphs

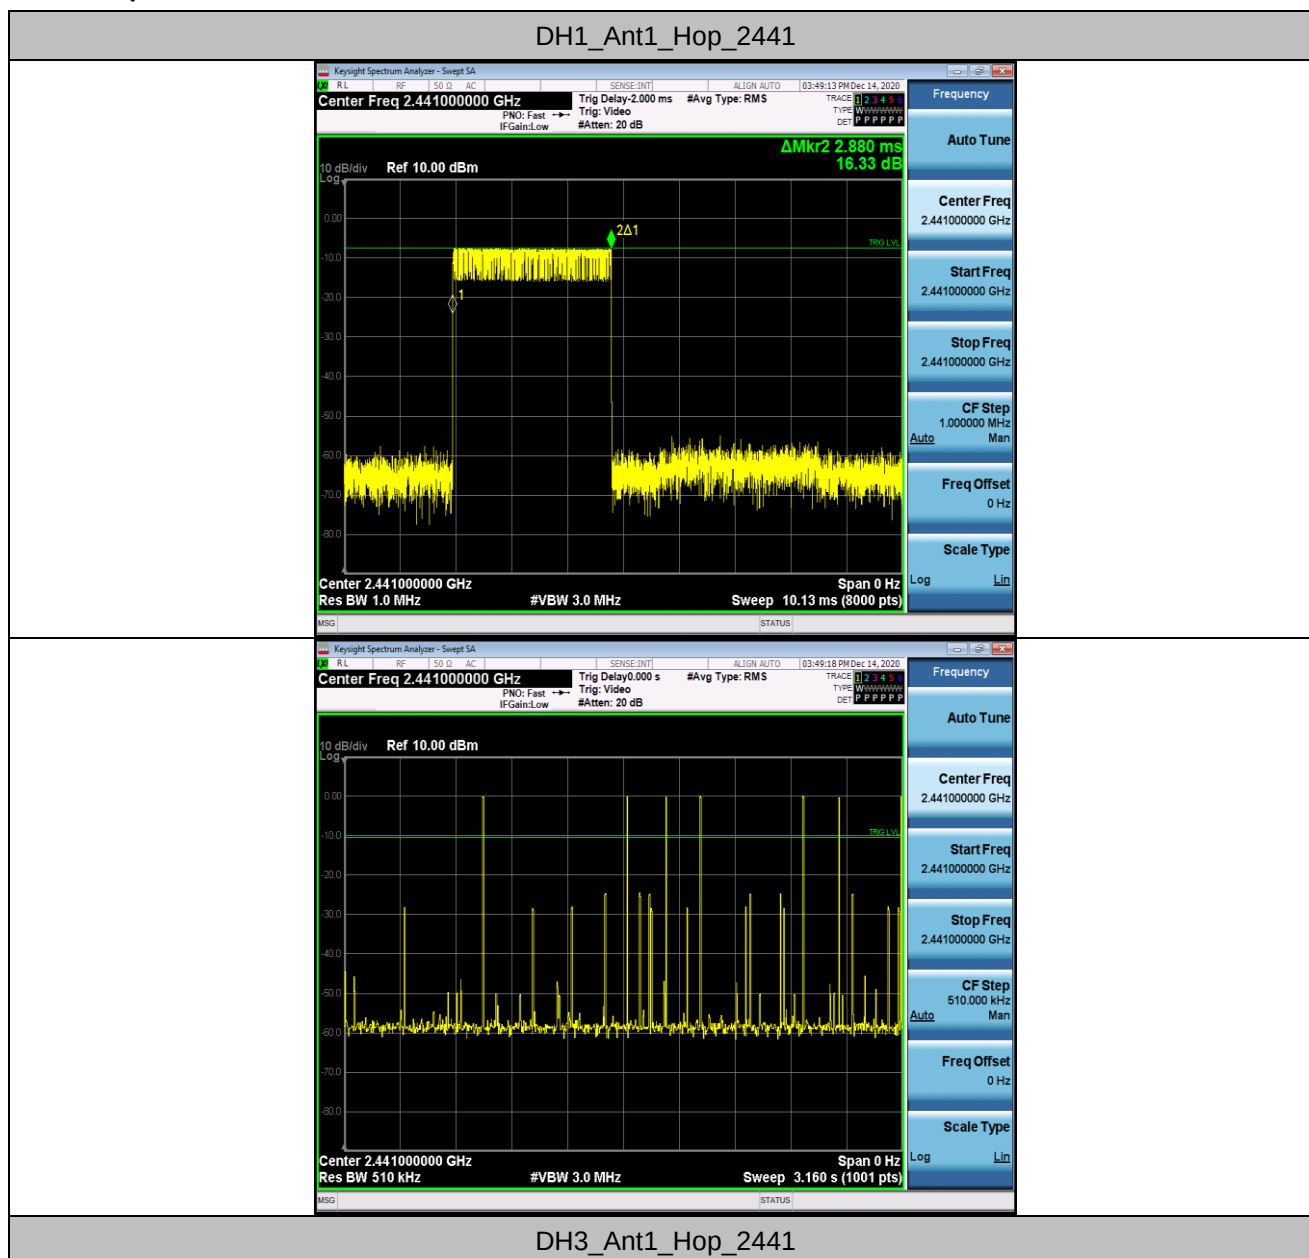


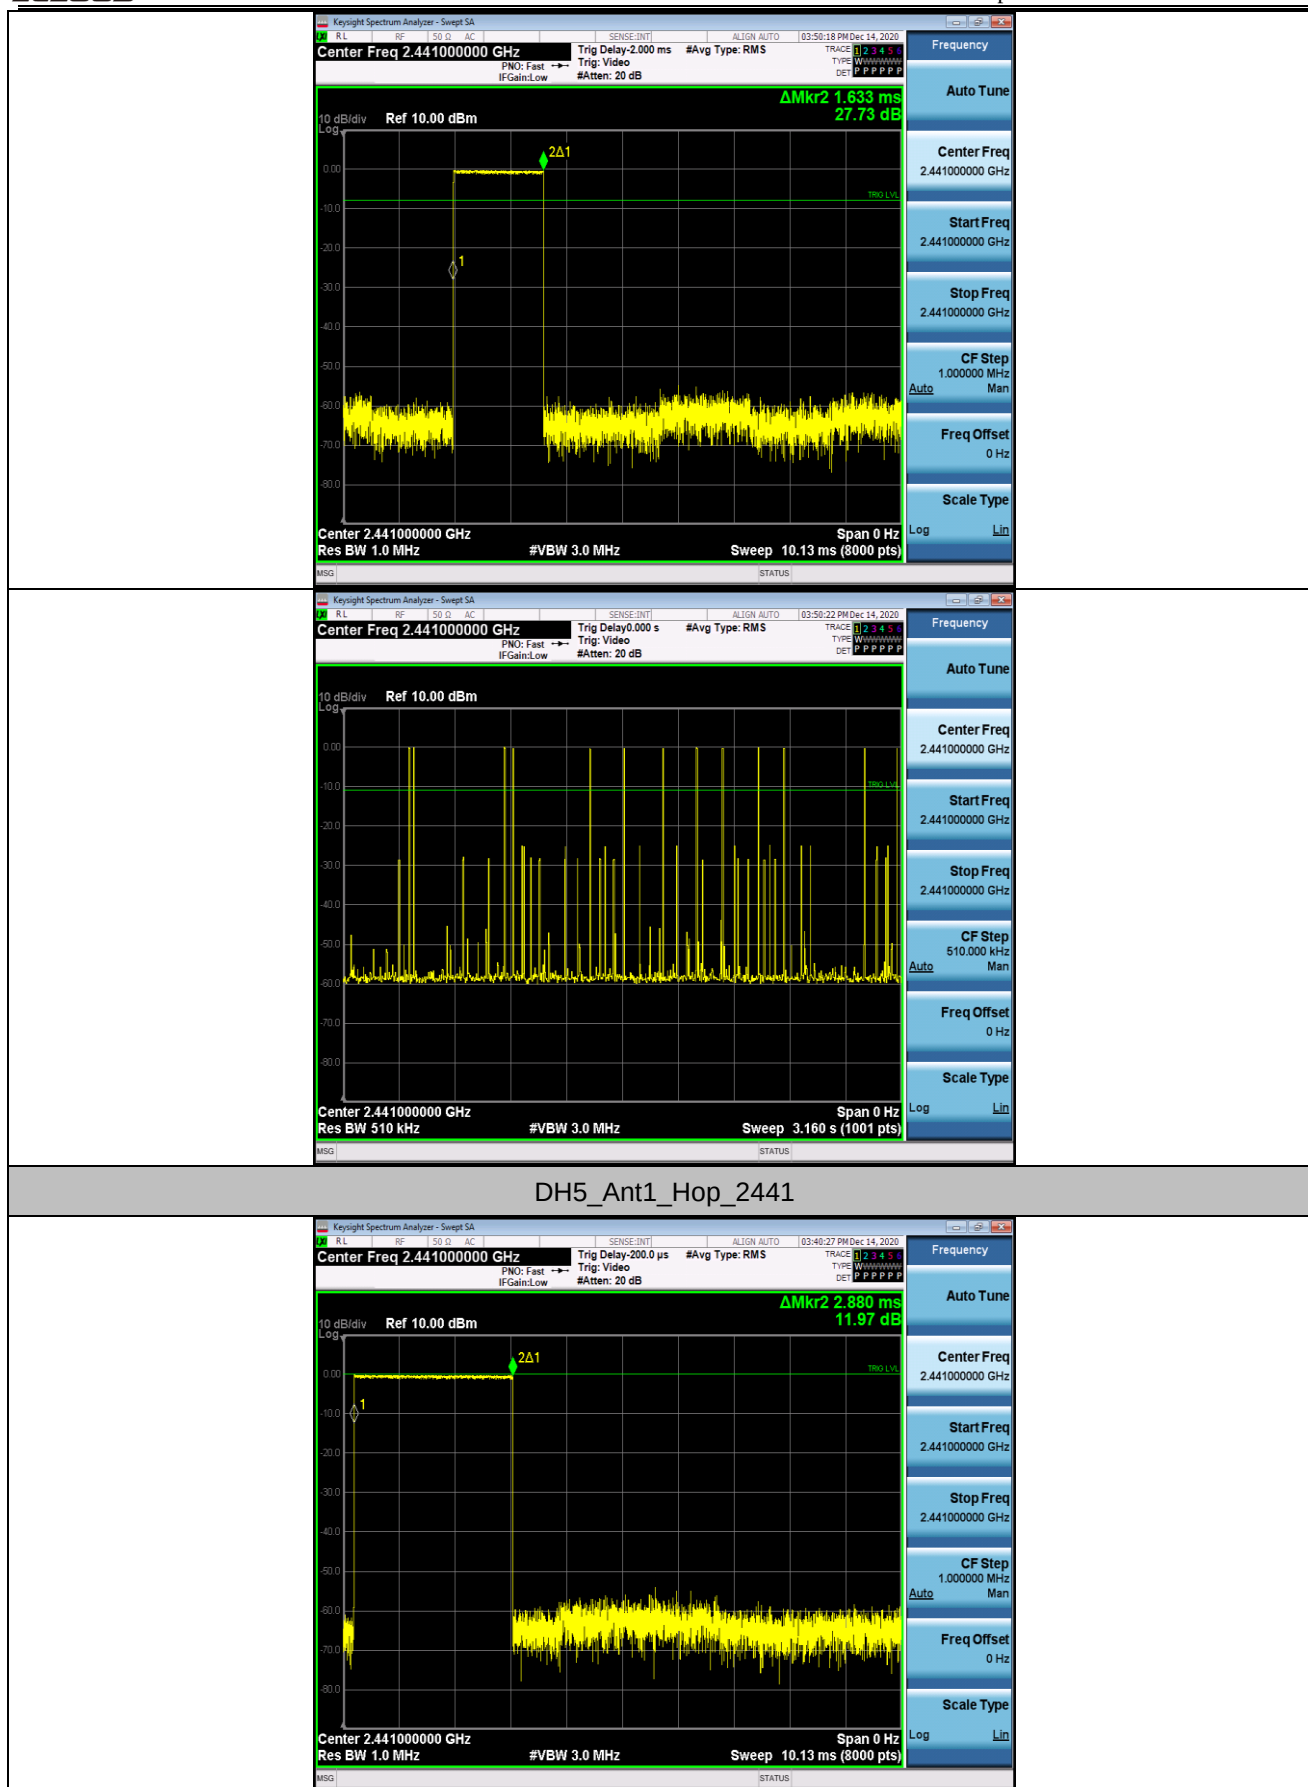



DH5\_Ant1\_Hop\_2441

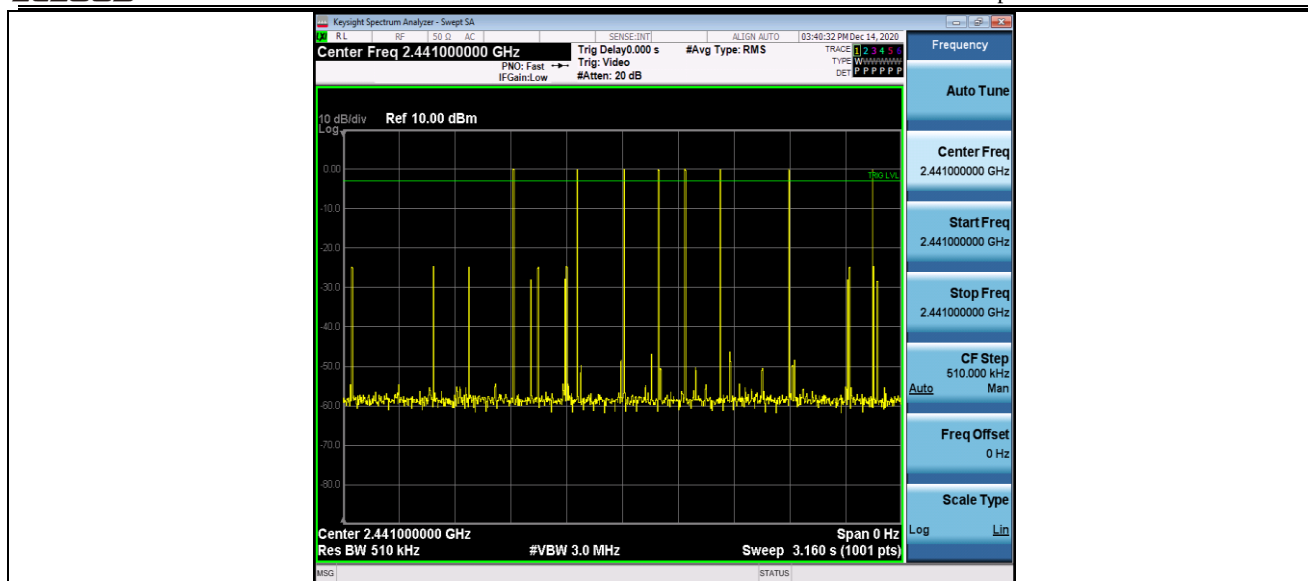

### 2DH1\_Ant1\_Hop\_2441

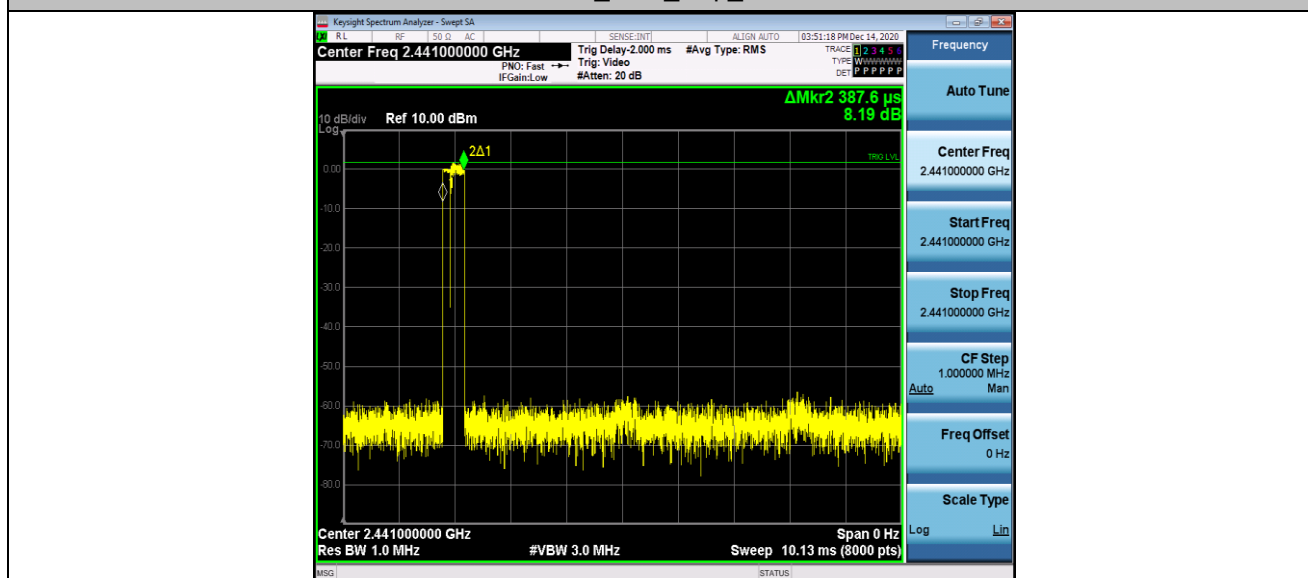

## 2DH3\_Ant1\_Hop\_2441

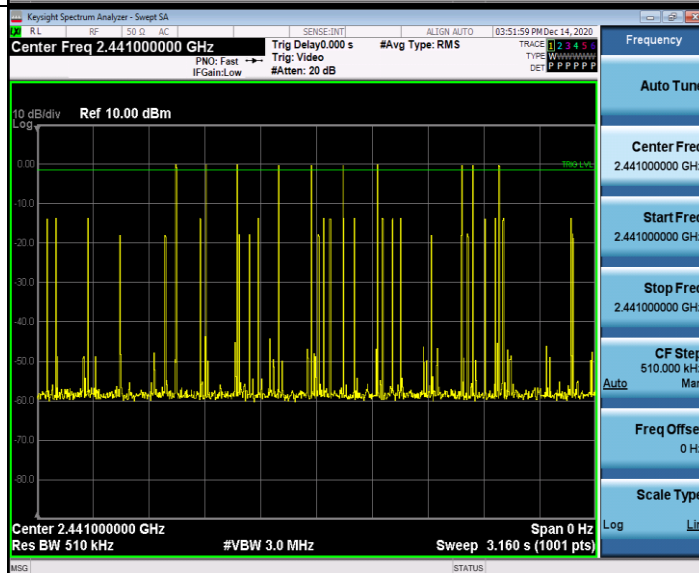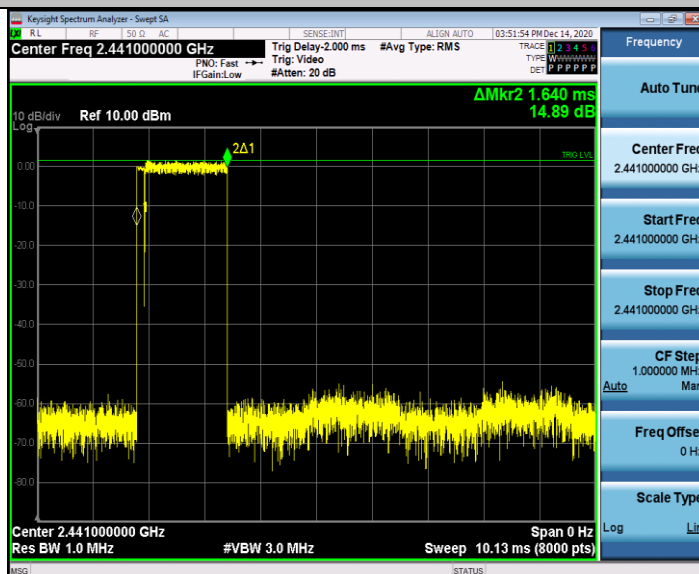

## 2DH5\_Ant1\_Hop\_2441