

Test Plot 1#: DECT 1900_Head Left Cheek_Middle**DUT: Wireless Headset; Type: CP-HS-WL-562-N-US; Serial: 18070600521**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:24.8

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.284$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0284 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.463 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.0320 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0276 W/kg

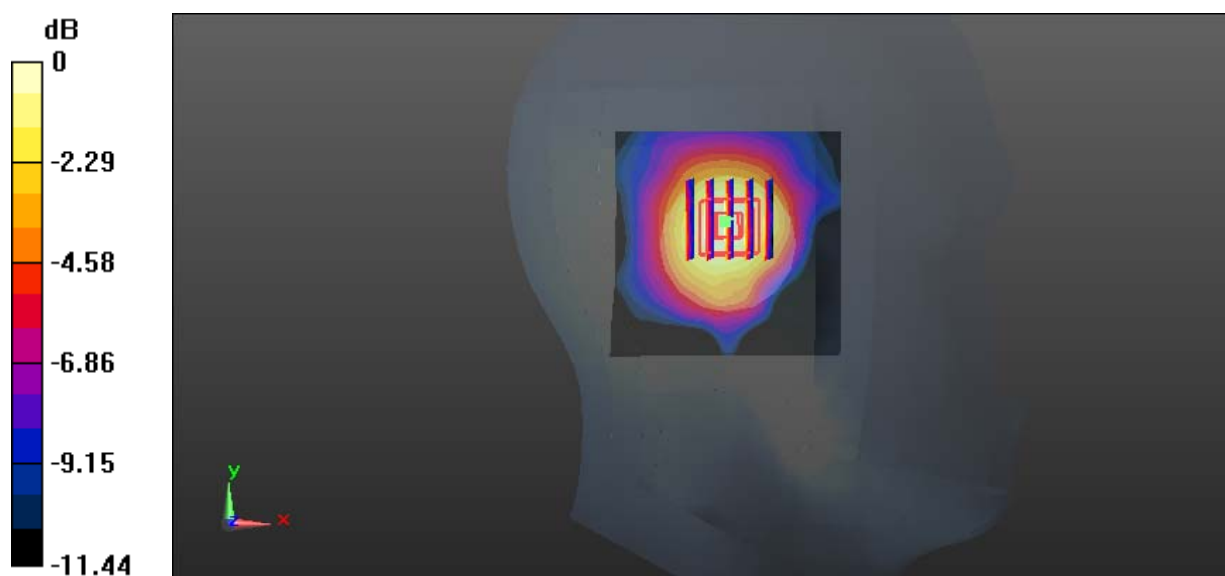

0 dB = 0.0276 W/kg = -15.59 dBW/kg

Test Plot 2#: DECT 1900_Head Right Cheek_Middle**DUT: Wireless Headset; Type: CP-HS-WL-562-N-US; Serial: 18070600521**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:24.8

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.284$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0241 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.230 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0270 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.010 W/kg

Maximum value of SAR (measured) = 0.0231 W/kg

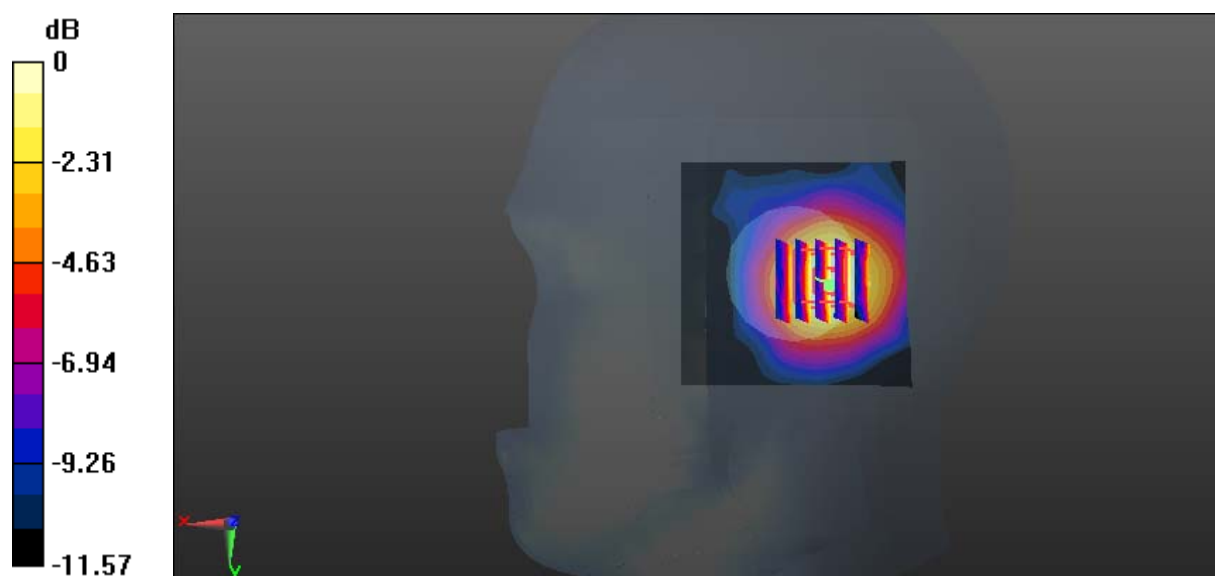

0 dB = 0.0231 W/kg = -16.36 dBW/kg

Test Plot 3#: DECT 1900_Head Left Cheek_Middle**DUT: Wireless Headset; Type: CP-HS-WL-561-N-US; Serial: 18070600522**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:24.8

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.284$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0299 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.464 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0340 W/kg

SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0289 W/kg

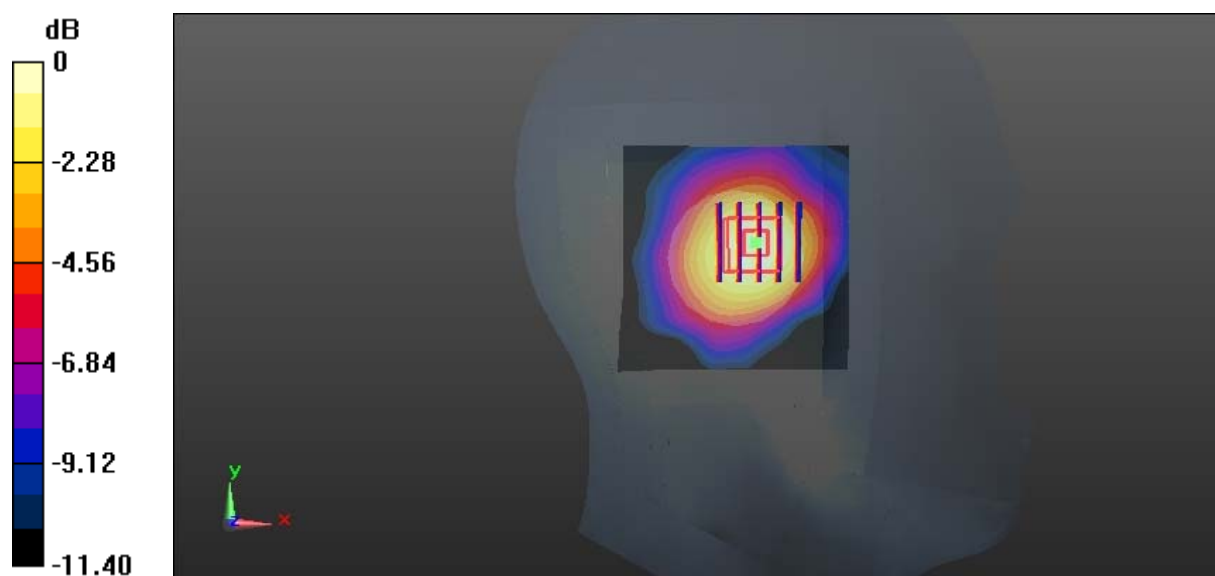

0 dB = 0.0289 W/kg = -15.39 dBW/kg

Test Plot 4#: DECT 1900_Head Right Cheek_Middle**DUT: Wireless Headset; Type: CP-HS-WL-561-N-US; Serial: 18070600522**

Communication System: GFSK; Frequency: 1924.992 MHz; Duty Cycle: 1:24.8

Medium parameters used: $f = 1924.992$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.284$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0201 W/kg


Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.530 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.0220 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00821 W/kg

Maximum value of SAR (measured) = 0.0177 W/kg

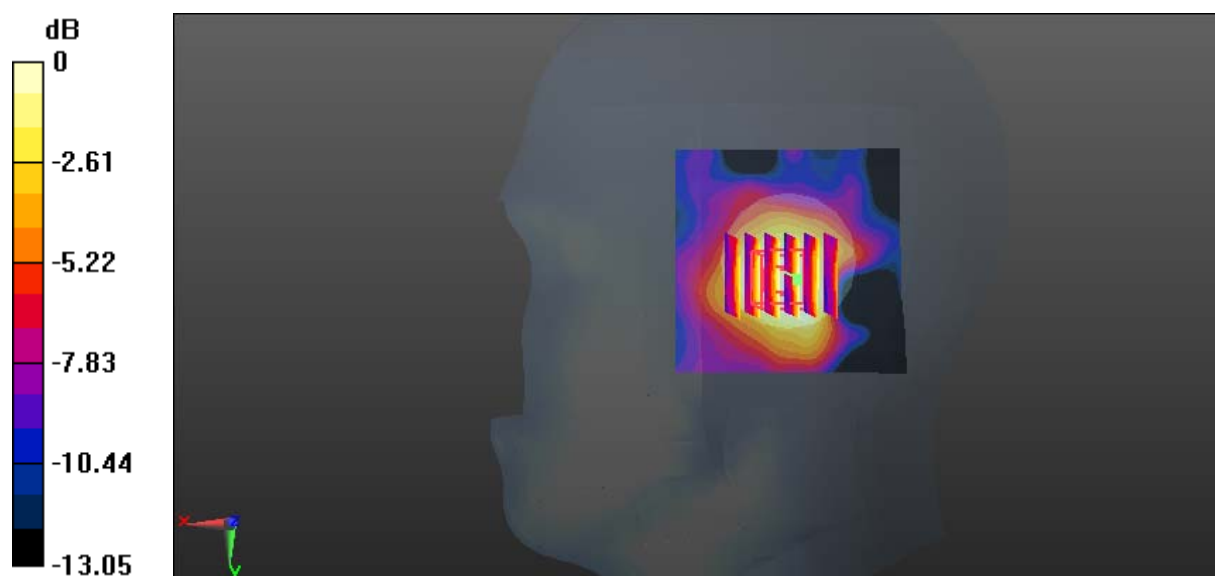

0 dB = 0.0177 W/kg = -17.52 dBW/kg