

WA-P-LA-02-210 Specification

1. Explanation of part number :

WA - P - LA - 02 - 210
(1) (2) (3) (4) (5)

(1) Product Type : Wireless Antenna

(2) Material: FPCB

(3) Frequency : 2400-2500MHz&5100-5800MHz

(4) Coaxial Cable Type : 00

(5) Suffix : 210

2. Electrical Specification :

2-1. Frequency Band:

Frequency Band	MHz
WIFI	2400-2500

2-2. Impedance

50 ohm nominal

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±

ANGLES=± HOLEDIA=±



INPAQ TECHNOLOGY CO., LTD.

SCALE :

UNIT : mm

DRAWN BY : 李美娟

CHECKED BY : 李志强

DESIGNED BY: 范东亚

APPROVED BY : 唐龙

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE : WA-P-LA-02-210 Specification

DOCUMENT
NO.

ENS000111210

SPEC REV.
P0

2-3 VSWR:

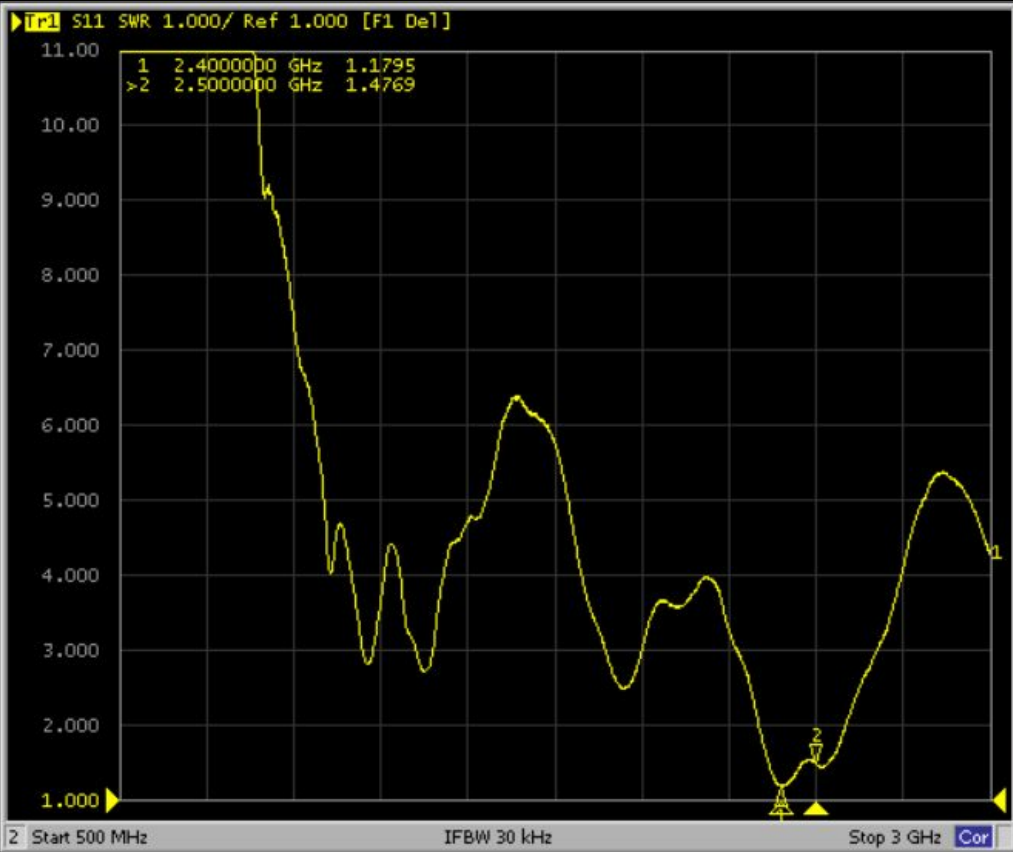Frequency Band				
	2400	2500		
2-3-1. Typical Value:	≤ 1.7	≤ 2.0		
2-3-2 Measuring Method	1. A 50Ω coaxial cable is connected to the PCB. Then this cable is connected to a network analyzer to measure the VSWR. 2. Keeping this jig away from metal at least 20 cm.			
2-3-3 Picture				

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±

ANGLES=± HOLEDIA=±

SCALE :

UNIT : mm

DRAWN BY : 李美娟

CHECKED BY : 李志强

DESIGNED BY: 范东亚

APPROVED BY : 唐龙

TITLE : WA-P-LA-02-210 Specification



INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.

ENS000111210


SPEC REV.
P0

2-4. Gain and Efficiency

2-4.1 Measure method

1. Using a low loss coaxial cable to link a standard handset jig
2. Fixed this handset jig on chamber's rotator plane
3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
4. Using another standard gain horn antenna to calibrated those data

2-4.2 Chamber definition

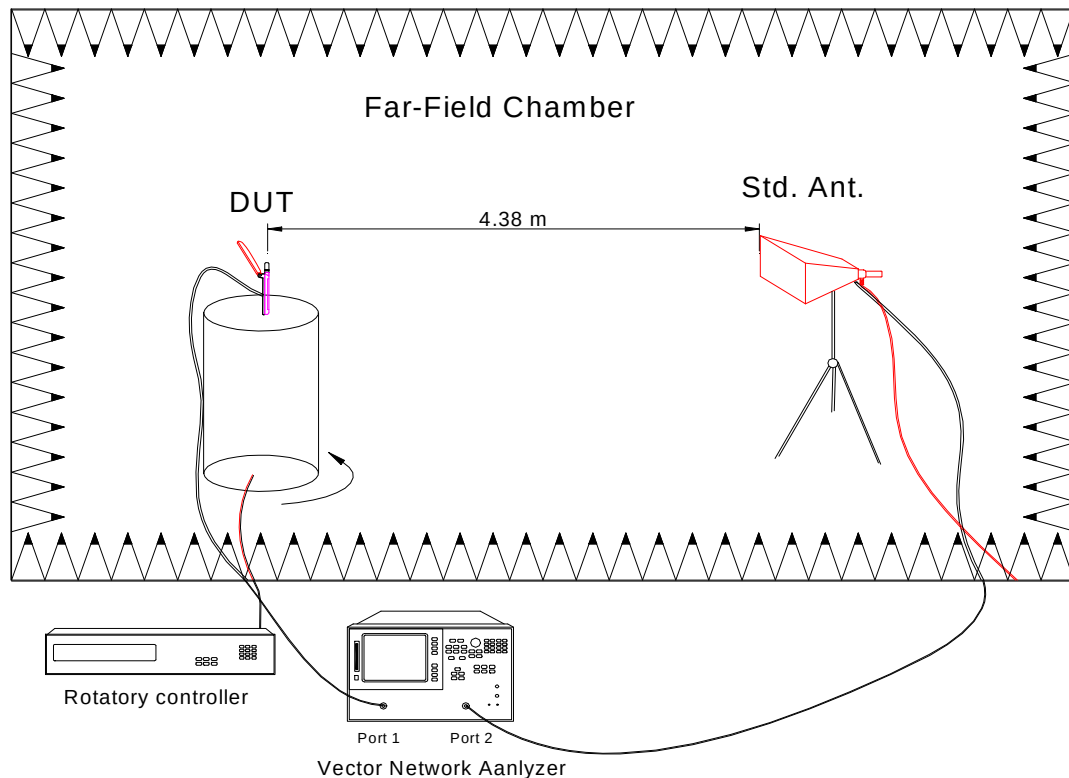

1. An anechoic chamber (8mx4mx3.5m) which satisfied far-field condition was applied to avoid multi-path effect
2. The quiet room region is 40cmx40cmx40cm at the center of rotator
3. The distance between DUT and standard antenna is 4.38 m
4. Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±

ANGLES=± HOLEDIA=±

SCALE :

UNIT : mm

DRAWN BY : 李美娟

CHECKED BY : 李志强

DESIGNED BY: 范东亚

APPROVED BY : 唐龙

TITLE : WA-P-LA-02-210 Specification



INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.

ENS000111210

SPEC REV.
P0

2-4.3 Gain and Efficiency

Freq(MHZ)	Efficiency (%)	Efficiency (dB)	Peak Gain (dBi)
2400	31.6	-5.0	2.8
2410	34.7	-4.6	2.9
2420	39.8	-4.0	2.7
2430	44.7	-3.5	2.9
2440	43.7	-3.6	2.6
2450	42.7	-3.7	3.0
2460	44.7	-3.5	2.8
2470	47.9	-3.2	2.7
2480	43.7	-3.6	2.9

3. Mechanical Specification:

3-1. Mechanical Configuration (Unit: mm)

The appearance of the antenna is according to drawing Figure 3-1-1

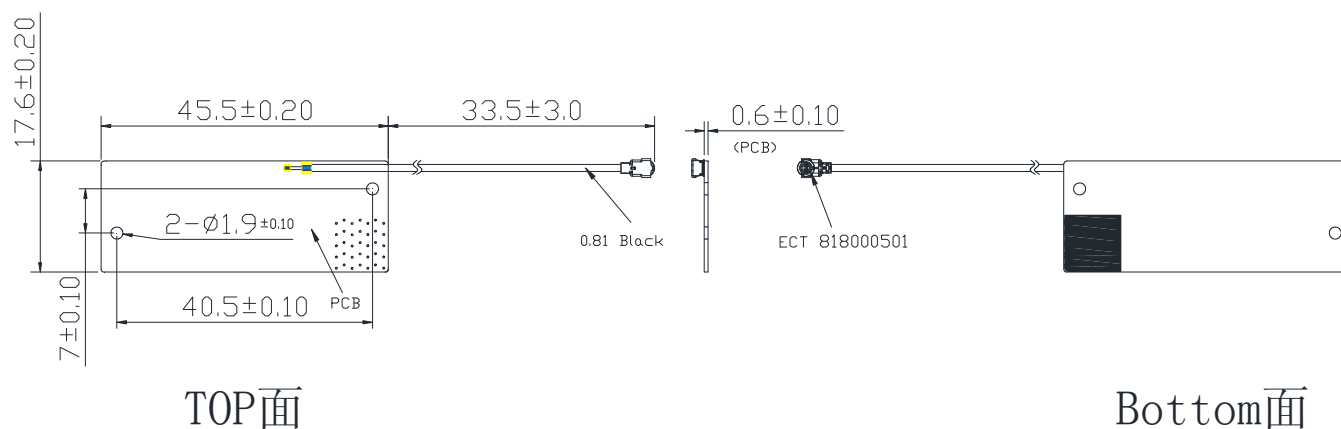


Figure 3-1-1 The antenna drawing

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±

ANGLES=± HOLEDIA=±

SCALE :

UNIT : mm

DRAWN BY : 李美娟

CHECKED BY : 李志强

DESIGNED BY: 范东亚

APPROVED BY : 唐龙

TITLE : WA-P-LA-02-210 Specification



INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT NO.

ENS000111210

SPEC REV.
P0