

page 2

2.1 PC-Board 2260

The PCB-board 2260 will be used for single (SR-T) and dual (DR-T) chamber devices.

PC Board
10pol feedthrough
Schematic file SCH-0186_0B_DRT.pdf





2.2 PC-Board 2270

The PCB-board 2270 will be used for CRT devices with single lead (HF-T) and with quadrupolar lead (HFT QP).


PC Board
12pol feedthrough
Schematic file SCH-0185_0B_CRT.pdf



1.2 Photos – Equipment Internal

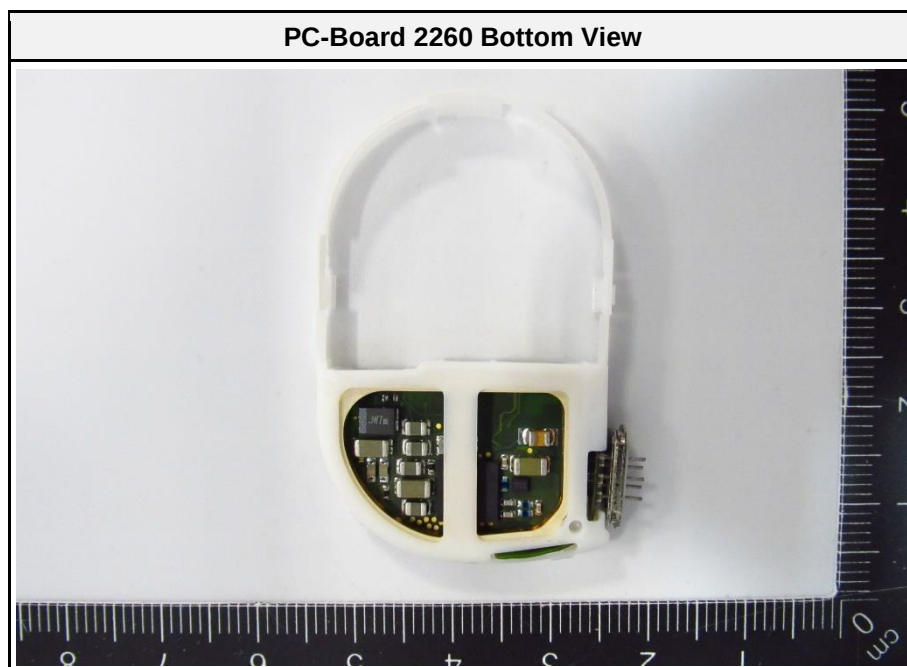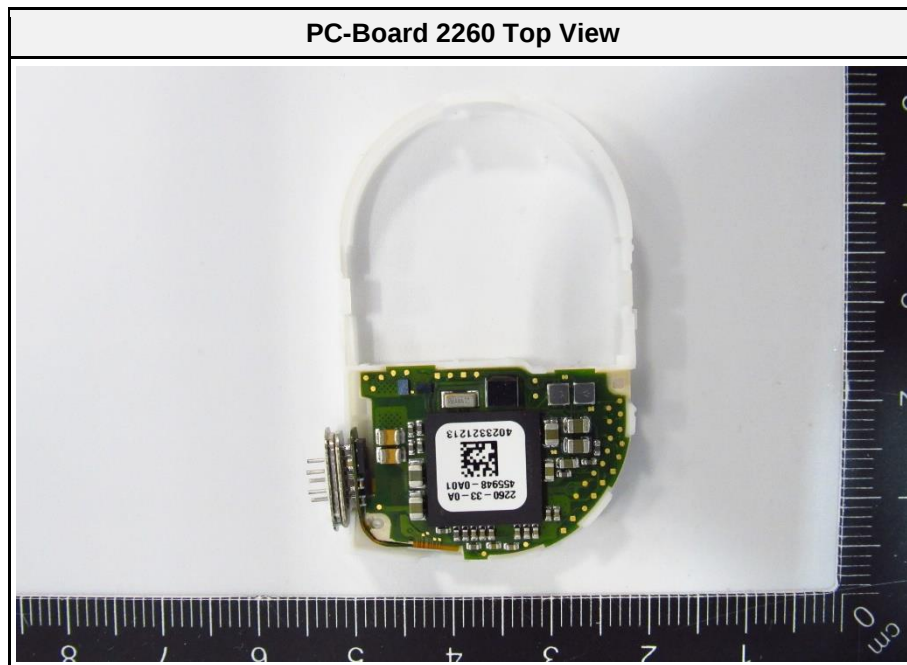

PC-Board 2270 Top View

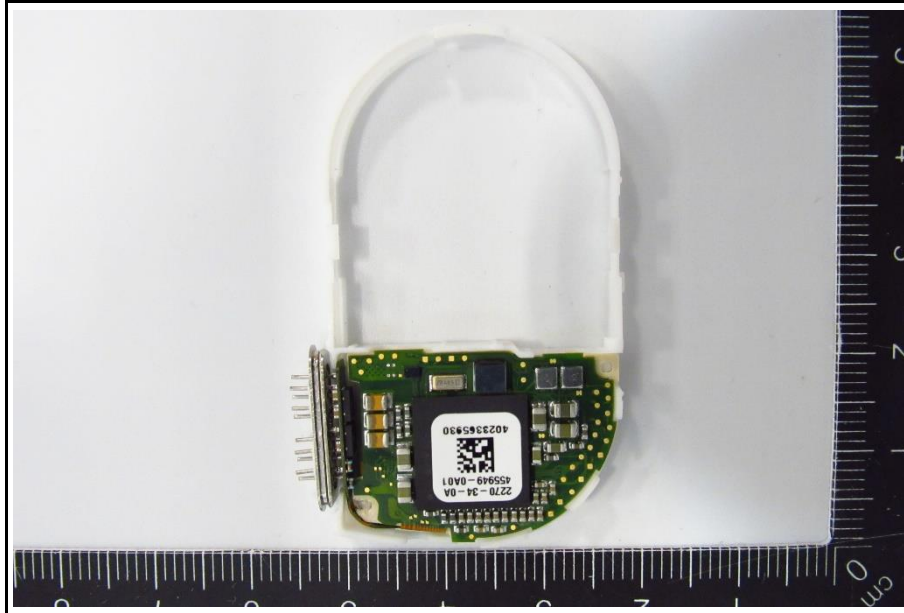

PC-Board 2270 Bottom View

